

FCC Test Report

Report No.: RFBBQZ-WTW-P21020267-1

FCC ID: PY320400511

Test Model: NBR750

Received Date: Jan. 27, 2021

Test Date: Jan. 28 to Apr. 09, 2021

Issued Date: May 03, 2021

**Applicant and
Manufacturer:** NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards and References	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedures	21
4.1.4 Deviation from Test Standard	22
4.1.5 Test Setup	22
4.1.6 EUT Operating Conditions	23
4.1.7 Test Results	24
4.2 Conducted Emission Measurement	38
4.2.1 Limits of Conducted Emission Measurement	38
4.2.2 Test Instruments	38
4.2.3 Test Procedures	39
4.2.4 Deviation from Test Standard	39
4.2.5 Test Setup	39
4.2.6 EUT Operating Conditions	39
4.2.7 Test Results	40
4.3 6dB Bandwidth Measurement	42
4.3.1 Limits of 6dB Bandwidth Measurement	42
4.3.2 Test Setup	42
4.3.3 Test Instruments	42
4.3.4 Test Procedure	42
4.3.5 Deviation from Test Standard	42
4.3.6 EUT Operating Conditions	42
4.3.7 Test Result	43
4.4 Conducted Output Power Measurement	45
4.4.1 Limits of Conducted Output Power Measurement	45
4.4.2 Test Setup	45
4.4.3 Test Instruments	45
4.4.4 Test Procedures	45
4.4.5 Deviation from Test Standard	45
4.4.6 EUT Operating Conditions	45
4.4.7 Test Results	46
4.5 Power Spectral Density Measurement	50
4.5.1 Limits of Power Spectral Density Measurement	50
4.5.2 Test Setup	50
4.5.3 Test Instruments	50
4.5.4 Test Procedure	50
4.5.5 Deviation from Test Standard	50
4.5.6 EUT Operating Condition	50

4.5.7 Test Results	51
4.6 Conducted Out of Band Emission Measurement	53
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	53
4.6.2 Test Setup.....	53
4.6.3 Test Instruments	53
4.6.4 Test Procedure	53
4.6.5 Deviation from Test Standard	53
4.6.6 EUT Operating Condition	53
4.6.7 Test Results	53
5 Pictures of Test Arrangements.....	62
Annex A - Band-Edge Measurement.....	63
Appendix – Information of the Testing Laboratories	67

Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P21020267-1	Original release.	May 03, 2021

1 Certificate of Conformity

Product: 5G Orbi Router

Brand: NETGEAR

Test Model: NBR750

Sample Status: Engineering sample

**Applicant and
Manufacturer:** NETGEAR, Inc.

Test Date: Jan. 28 to Apr. 09, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Vivian Huang , **Date:** May 03, 2021
Vivian Hunag / Specialist

Approved by : Clark Lin , **Date:** May 03, 2021
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.88dB at 0.34531MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.2dB at 2484.80MHz and 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

Note:

- For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.5 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	5G Orbi Router
Brand	NETGEAR
Test Model	NBR750
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462 GHz 5GHz: 5.18~ 5.24 GHz, 5.745 ~ 5.825 GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 4 802.11ac (VHT80), 802.11ax (HE80): 2
Output Power	CDD Mode: 2.412 ~ 2.462 GHz: 874.084 mW 5.18 ~ 5.24 GHz: 791.922 mW 5.745 ~ 5.825 GHz: 943.449 mW Beamforming Mode: 2.412 ~ 2.462 GHz: 630.295 mW 5.18 ~ 5.24 GHz: 791.922 mW 5.745 ~ 5.825 GHz: 830.137 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1
Data Cable Supplied	NA

Note:

1. The EUT contains certified WWAN module which FCC ID: XMR2020RM502QAE.
2. There are WLAN, Bluetooth and WWAN technology used for the EUT. The EUT has four radios as following table:

Radio 1	Radio 2	Radio 3	Radio 4
WLAN 2.4GHz	WLAN 5GHz (Low Band)	WLAN 5GHz (High Band)	WWAN(5G NR + LTE)

3. Simultaneously transmission condition.

Condition	Technology			
1	WLAN 2.4GHz	WLAN 5GHz (Low Band)	WLAN 5GHz (High Band)	WWAN(5G NR + LTE)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT must be supplied with a power adapter and following different models could be chosen:

No.	Brand	Model No.	P/N	Spec.
1	NETGEAR	2ABN042F	332-10888-02	Input: 100-240Vac, 1.3A, 50/60Hz Output: 12Vdc, 3.5A DC Output cable: Unshielded, 1.8m
2	NETGEAR	AD2150F10	332-11093-02	Input: 100-120Vac, 1.0A, 50/60Hz Output: 12Vdc, 3.5A DC Output cable: Unshielded, 1.8m

Note: From the above models, the worst radiated emission test and conducted emission test were found in **Adapter 1**. Therefore only the test data of the model was recorded in this report.

5. The directional antenna gain, please refer to the following table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)	Antenna Type	Connector Type
2.4~2.4835	4.37	Dipole	i-pex(MHF)
5.15 ~ 5.25	4.48		
5.725 ~ 5.85	6.78		

Note: More detailed information, please refer to antenna specification.

6. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
5GHz Band (Low Band)		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
5GHz Band (High Band)		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n/ VHT mode is the same as the 802.11ax mode or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)

7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

8. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20 and 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40 and 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE $<$ 1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1	DSSS	DBPSK	1Mb/s

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1	DSSS	DBPSK	1Mb/s

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
VHT20 (Output power only)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40 (Output power only)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0
Beamforming Mode (output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	24deg. C, 67%RH	120Vac, 60Hz	Tom Yang
RE<1G	23deg. C, 69%RH	120Vac, 60Hz	Sampson Chen
PLC	25deg. C, 71%RH	120Vac, 60Hz	Sampson Chen
APCM	25deg. C, 60%RH	120Vac, 60Hz	Eric Peng

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is < 98 %, duty factor shall be considered.

802.11b: Duty cycle = 1.374 ms /2.103 ms=0.653, Duty factor = $10 * \log (1/\text{Duty cycle}) = 1.85 \text{ dB}$

802.11g: Duty cycle = 1.976 ms /2.104 ms=0.939, Duty factor = $10 * \log (1/\text{Duty cycle}) = 0.27 \text{ dB}$

802.11ax (HE20): Duty cycle = 5.452 ms /5.7 ms=0.956, Duty factor = $10 * \log (1/\text{Duty cycle}) = 0.19 \text{ dB}$

802.11ax (HE40): Duty cycle = 5.447 ms /5.778 ms=0.943, Duty factor = $10 * \log (1/\text{Duty cycle}) = 0.26 \text{ dB}$

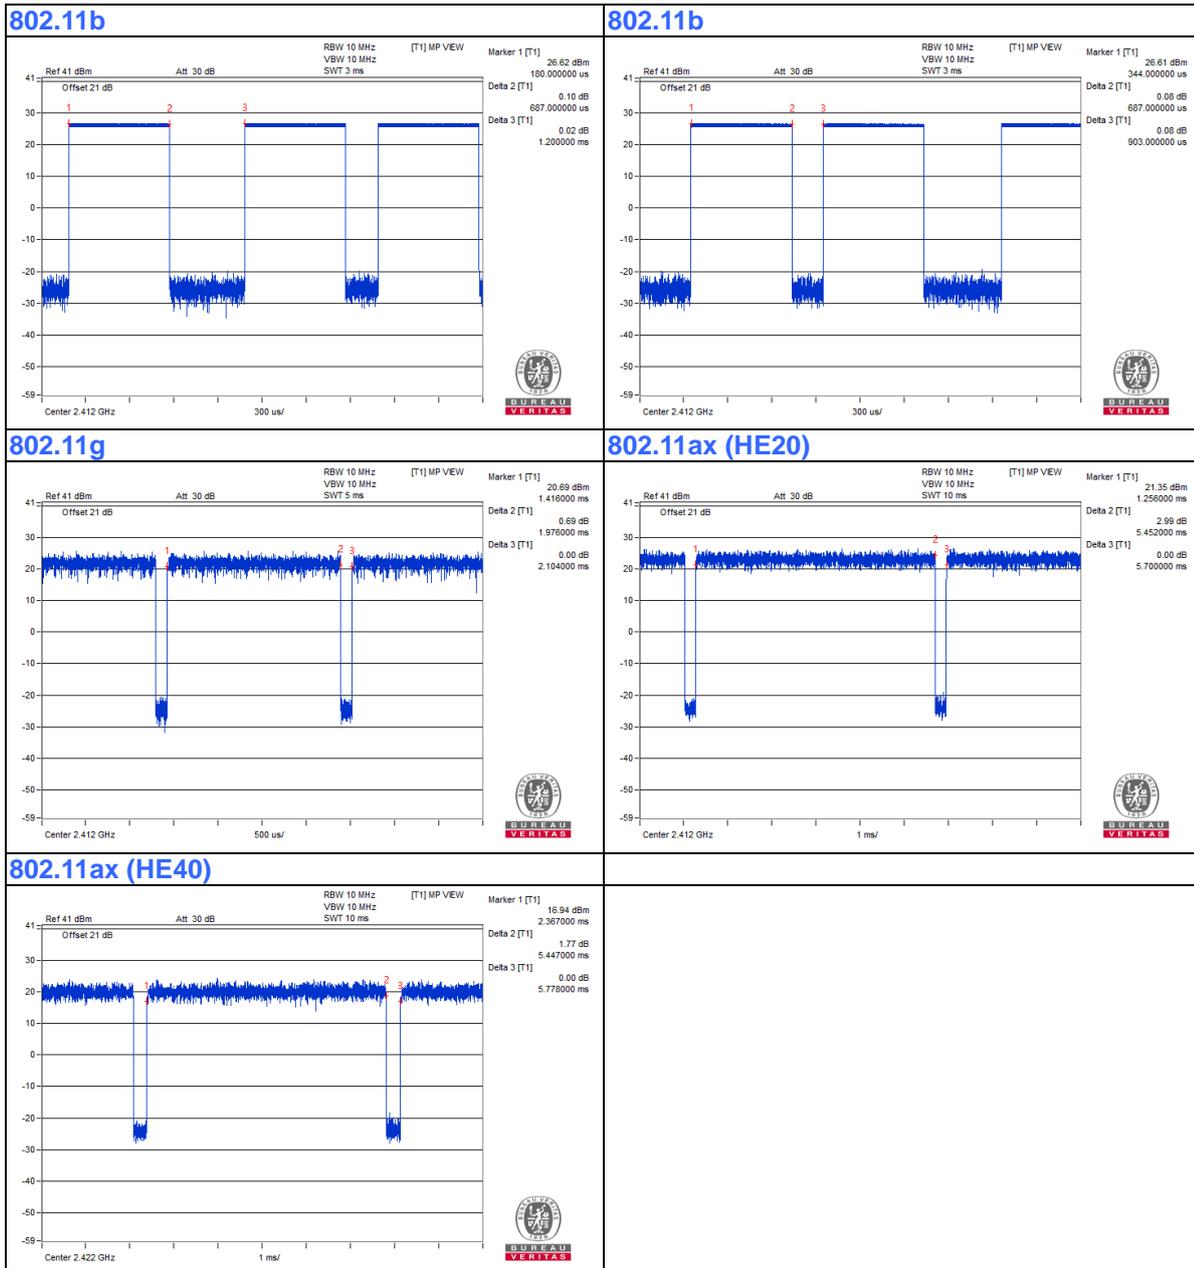

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	P88G	G1WJL42	NA	Provided by Lab
B.	Switch	D-Link	DGS-1005D	DR8WC92000523	NA	Provided by Lab
C.	Nano SIM Card	keysight	NA	NA	NA	Provided by Lab

Note:

- All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	DC Cable	1	1.8	No	0	Supplied by client

3.4.1 Configuration of System under Test

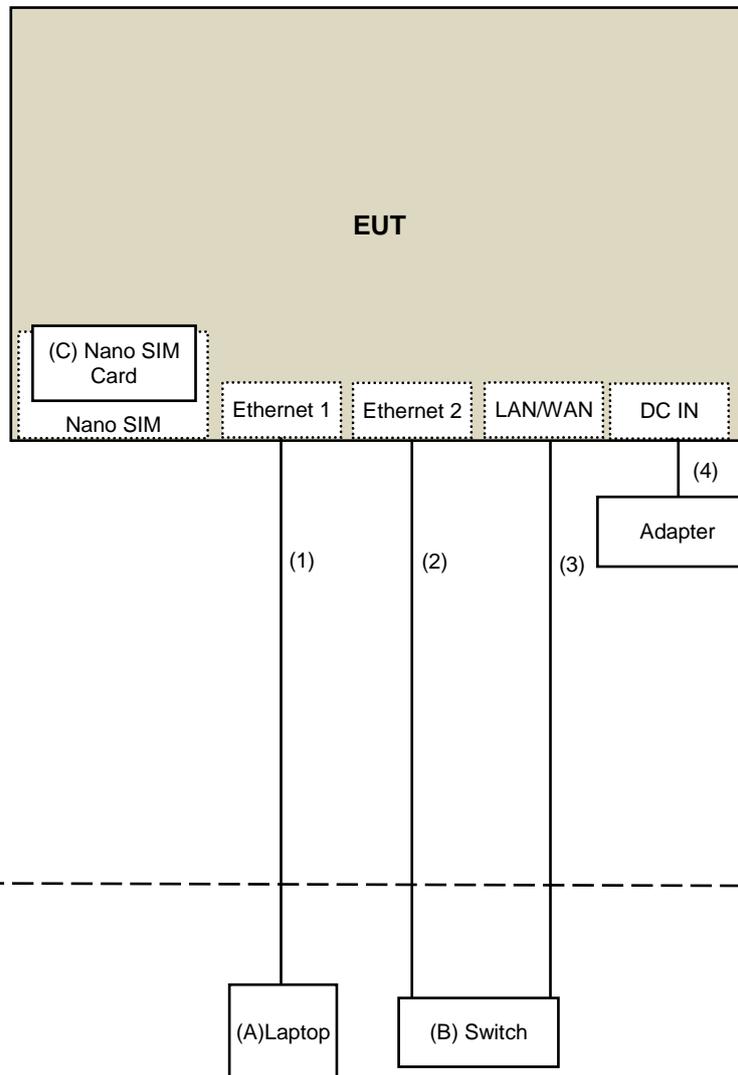

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated emission (Below 1GHz) test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 01, 2020	Nov. 30, 2021
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Mar. 05, 2021	Mar. 04, 2022
RF Cable	5D-FB	LOOPCAB-001	Jan. 07, 2021	Jan. 06, 2022
RF Cable	5D-FB	LOOPCAB-002	Jan. 07, 2021	Jan. 06, 2022
Pre-Amplifier EMCI	EMC330N	980701	Mar. 10, 2021	Mar. 09, 2022
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 06, 2020	Nov. 05, 2021
RF Cable	8D	966-4-1	Mar. 17, 2021	Mar. 16, 2022
RF Cable	8D	966-4-2	Mar. 17, 2021	Mar. 16, 2022
RF Cable	8D	966-4-3	Mar. 17, 2021	Mar. 16, 2022
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	Jan. 11, 2021	Jan. 10, 2022
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Apr. 09, 2021

For Radiated emission (Above 1GHz) & BandEdge test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 01, 2020	Nov. 30, 2021
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 22, 2020	Nov. 21, 2021
Pre-Amplifier EMCI	EMC 12630 SE	980638	Apr. 08, 2020	Apr. 07, 2021
RF Cable	EMC104-SM-SM-1200	160922	Dec. 25, 2020	Dec. 24, 2021
RF Cable	EMC104-SM-SM-2000	180502	Apr. 29, 2020	Apr. 28, 2021
RF Cable	EMC104-SM-SM-6000	180418	Apr. 29, 2020	Apr. 28, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 11, 2021	Jan. 10, 2022
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 22, 2020	Nov. 21, 2021
RF Cable	EMC102-KM-KM-1200	160924	Jan. 11, 2021	Jan. 10, 2022
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Jan. 28 to Mar. 04, 2021

For other test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Apr. 06, 2021

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

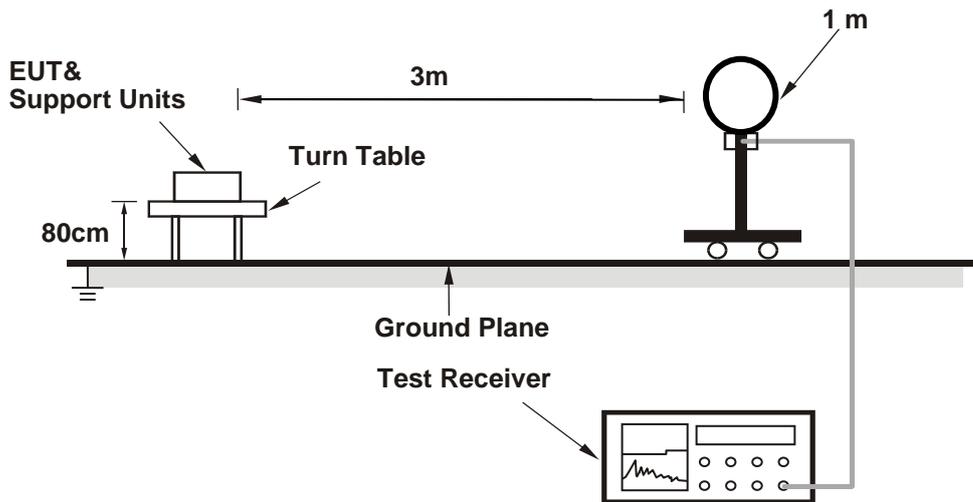

For Radiated emission 30MHz to 1GHz

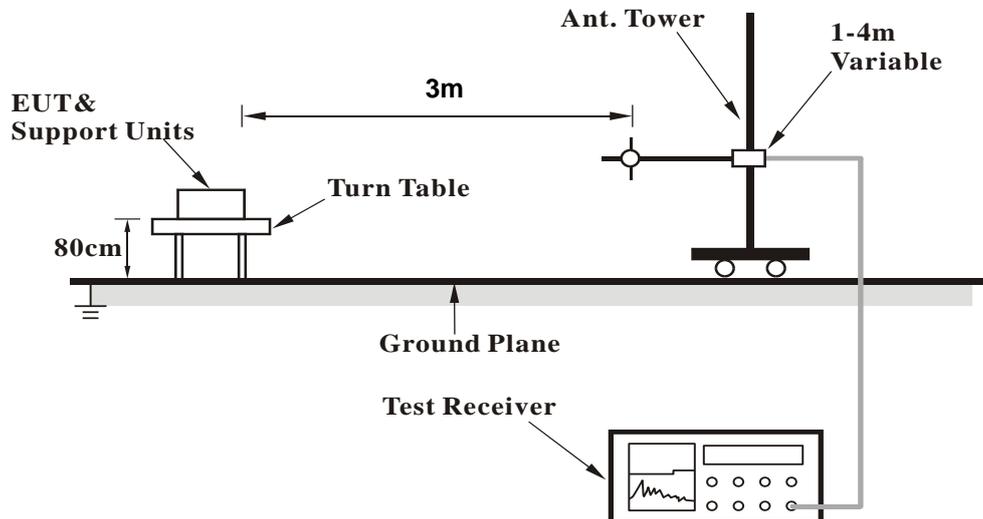

For Radiated emission above 1GHz

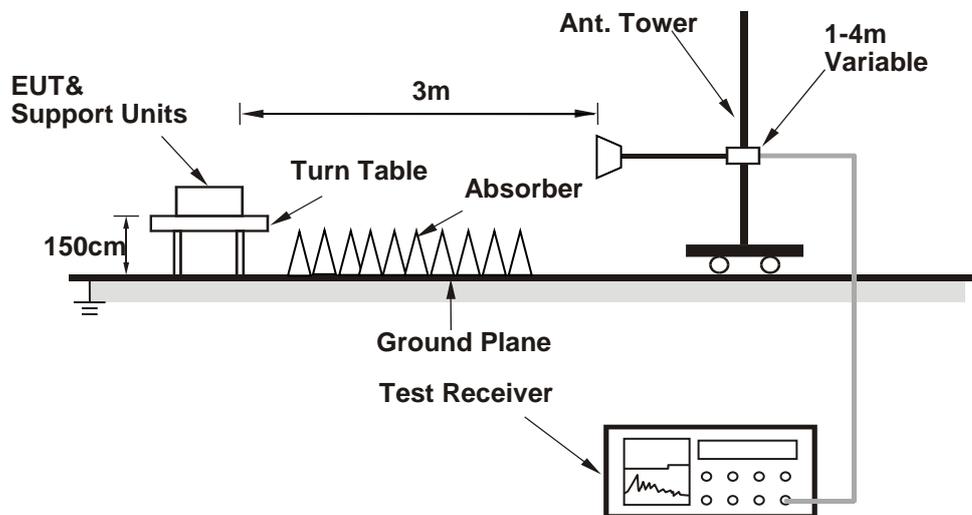

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop which is placed on remote site.
- b. Controlling software (QSPR (5.0-00140)) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2358.05	54.3 PK	74.0	-19.7	1.22 H	4	58.7	-4.4
2	2358.05	42.8 AV	54.0	-11.2	1.22 H	4	47.2	-4.4
3	*2412.00	111.5 PK			1.22 H	4	115.9	-4.4
4	*2412.00	109.3 AV			1.22 H	4	113.7	-4.4
5	4824.00	46.8 PK	74.0	-27.2	1.37 H	191	46.7	0.1
6	4824.00	44.7 AV	54.0	-9.3	1.37 H	191	44.6	0.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.81	56.8 PK	74.0	-17.2	2.08 V	155	61.2	-4.4
2	2387.81	49.5 AV	54.0	-4.5	2.08 V	155	53.9	-4.4
3	*2412.00	121.5 PK			2.08 V	155	125.9	-4.4
4	*2412.00	119.8 AV			2.08 V	155	124.2	-4.4
5	4824.00	51.2 PK	74.0	-22.8	3.10 V	268	51.1	0.1
6	4824.00	50.1 AV	54.0	-3.9	3.10 V	268	50.0	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	111.7 PK			1.18 H	5	116.1	-4.4
2	*2437.00	109.4 AV			1.18 H	5	113.8	-4.4
3	4874.00	38.7 PK	74.0	-35.3	1.37 H	207	38.6	0.1
4	4874.00	36.3 AV	54.0	-17.7	1.37 H	207	36.2	0.1
5	7311.00	43.0 PK	74.0	-31.0	2.01 H	338	36.7	6.3
6	7311.00	33.2 AV	54.0	-20.8	2.01 H	338	26.9	6.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.3 PK			2.36 V	156	125.7	-4.4
2	*2437.00	119.2 AV			2.36 V	156	123.6	-4.4
3	4874.00	41.7 PK	74.0	-32.3	1.04 V	168	41.6	0.1
4	4874.00	39.3 AV	54.0	-14.7	1.04 V	168	39.2	0.1
5	7311.00	41.6 PK	74.0	-32.4	1.09 V	173	35.3	6.3
6	7311.00	31.0 AV	54.0	-23.0	1.09 V	173	24.7	6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.4 PK			1.16 H	3	115.8	-4.4
2	*2462.00	109.0 AV			1.16 H	3	113.4	-4.4
3	2483.50	57.4 PK	74.0	-16.6	1.16 H	3	61.9	-4.5
4	2483.50	50.6 AV	54.0	-3.4	1.16 H	3	55.1	-4.5
5	4924.00	38.8 PK	74.0	-35.2	1.38 H	196	38.5	0.3
6	4924.00	36.5 AV	54.0	-17.5	1.38 H	196	36.2	0.3
7	7386.00	42.7 PK	74.0	-31.3	2.04 H	334	36.1	6.6
8	7386.00	33.1 AV	54.0	-20.9	2.04 H	334	26.5	6.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	121.7 PK			2.31 V	153	126.1	-4.4
2	*2462.00	119.5 AV			2.31 V	153	123.9	-4.4
3	2486.44	60.4 PK	74.0	-13.6	2.31 V	153	64.9	-4.5
4	2486.44	52.4 AV	54.0	-1.6	2.31 V	153	56.9	-4.5
5	4924.00	42.0 PK	74.0	-32.0	1.07 V	154	41.7	0.3
6	4924.00	39.6 AV	54.0	-14.4	1.07 V	154	39.3	0.3
7	7386.00	42.1 PK	74.0	-31.9	1.08 V	167	35.5	6.6
8	7386.00	31.4 AV	54.0	-22.6	1.08 V	167	24.8	6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.8 PK	74.0	-17.2	1.32 H	6	61.3	-4.5
2	2390.00	44.5 AV	54.0	-9.5	1.32 H	6	49.0	-4.5
3	*2412.00	106.9 PK			1.32 H	6	111.3	-4.4
4	*2412.00	98.3 AV			1.32 H	6	102.7	-4.4
5	4824.00	37.8 PK	74.0	-36.2	1.36 H	203	37.7	0.1
6	4824.00	28.2 AV	54.0	-25.8	1.36 H	203	28.1	0.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	2.25 V	158	71.4	-4.5
2	2390.00	53.7 AV	54.0	-0.3	2.25 V	158	58.2	-4.5
3	*2412.00	118.7 PK			2.25 V	158	123.1	-4.4
4	*2412.00	109.5 AV			2.25 V	158	113.9	-4.4
5	4824.00	38.0 PK	74.0	-36.0	1.14 V	183	37.9	0.1
6	4824.00	30.7 AV	54.0	-23.3	1.14 V	183	30.6	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	49.2 PK	74.0	-24.8	1.31 H	7	53.7	-4.5
2	2390.00	38.6 AV	54.0	-15.4	1.31 H	7	43.1	-4.5
3	*2437.00	110.7 PK			1.31 H	7	115.1	-4.4
4	*2437.00	102.5 AV			1.31 H	7	106.9	-4.4
5	2483.50	53.7 PK	74.0	-20.3	1.31 H	7	58.2	-4.5
6	2483.50	41.6 AV	54.0	-12.4	1.31 H	7	46.1	-4.5
7	4874.00	39.4 PK	74.0	-34.6	1.34 H	206	39.3	0.1
8	4874.00	28.9 AV	54.0	-25.1	1.34 H	206	28.8	0.1
9	7311.00	43.4 PK	74.0	-30.6	2.03 H	322	37.1	6.3
10	7311.00	32.1 AV	54.0	-21.9	2.03 H	322	25.8	6.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	2.05 V	157	62.0	-4.5
2	2390.00	46.6 AV	54.0	-7.4	2.05 V	157	51.1	-4.5
3	*2437.00	123.0 PK			2.05 V	157	127.4	-4.4
4	*2437.00	113.9 AV			2.05 V	157	118.3	-4.4
5	2483.50	65.3 PK	74.0	-8.7	2.05 V	157	69.8	-4.5
6	2483.50	51.0 AV	54.0	-3.0	2.05 V	157	55.5	-4.5
7	4874.00	38.3 PK	74.0	-35.7	1.10 V	174	38.2	0.1
8	4874.00	30.4 AV	54.0	-23.6	1.10 V	174	30.3	0.1
9	7311.00	41.7 PK	74.0	-32.3	1.04 V	179	35.4	6.3
10	7311.00	30.4 AV	54.0	-23.6	1.04 V	179	24.1	6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.1 PK			1.13 H	7	111.5	-4.4
2	*2462.00	97.7 AV			1.13 H	7	102.1	-4.4
3	2483.50	55.5 PK	74.0	-18.5	1.13 H	7	60.0	-4.5
4	2483.50	43.4 AV	54.0	-10.6	1.13 H	7	47.9	-4.5
5	4924.00	37.5 PK	74.0	-36.5	1.36 H	197	37.2	0.3
6	4924.00	27.8 AV	54.0	-26.2	1.36 H	197	27.5	0.3
7	7386.00	40.9 PK	74.0	-33.1	1.99 H	317	34.3	6.6
8	7386.00	31.1 AV	54.0	-22.9	1.99 H	317	24.5	6.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.0 PK			2.30 V	155	122.4	-4.4
2	*2462.00	108.4 AV			2.30 V	155	112.8	-4.4
3	2483.50	67.1 PK	74.0	-6.9	2.30 V	155	71.6	-4.5
4	2483.50	53.7 AV	54.0	-0.3	2.30 V	155	58.2	-4.5
5	4924.00	38.2 PK	74.0	-35.8	1.11 V	179	37.9	0.3
6	4924.00	30.7 AV	54.0	-23.3	1.11 V	179	30.4	0.3
7	7386.00	40.8 PK	74.0	-33.2	1.02 V	193	34.2	6.6
8	7386.00	29.5 AV	54.0	-24.5	1.02 V	193	22.9	6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	58.2 PK	74.0	-15.8	1.16 H	12	62.6	-4.4
2	2389.00	44.8 AV	54.0	-9.2	1.16 H	12	49.2	-4.4
3	*2412.00	108.7 PK			1.16 H	12	113.1	-4.4
4	*2412.00	96.3 AV			1.16 H	12	100.7	-4.4
5	4824.00	37.5 PK	74.0	-36.5	1.34 H	199	37.4	0.1
6	4824.00	27.8 AV	54.0	-26.2	1.34 H	199	27.7	0.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	2.33 V	162	71.7	-4.5
2	2390.00	53.7 AV	54.0	-0.3	2.33 V	162	58.2	-4.5
3	*2412.00	121.1 PK			2.33 V	162	125.5	-4.4
4	*2412.00	107.8 AV			2.33 V	162	112.2	-4.4
5	4824.00	38.3 PK	74.0	-35.7	1.07 V	155	38.2	0.1
6	4824.00	31.1 AV	54.0	-22.9	1.07 V	155	31.0	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.1 PK	74.0	-23.9	1.32 H	17	54.6	-4.5
2	2390.00	39.7 AV	54.0	-14.3	1.32 H	17	44.2	-4.5
3	*2437.00	110.7 PK			1.32 H	17	115.1	-4.4
4	*2437.00	101.6 AV			1.32 H	17	106.0	-4.4
5	2484.57	55.9 PK	74.0	-18.1	1.32 H	17	60.4	-4.5
6	2484.57	43.6 AV	54.0	-10.4	1.32 H	17	48.1	-4.5
7	4874.00	39.4 PK	74.0	-34.6	1.32 H	203	39.3	0.1
8	4874.00	28.9 AV	54.0	-25.1	1.32 H	203	28.8	0.1
9	7311.00	43.8 PK	74.0	-30.2	1.98 H	328	37.5	6.3
10	7311.00	32.6 AV	54.0	-21.4	1.98 H	328	26.3	6.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.3 PK	74.0	-9.7	2.08 V	156	68.8	-4.5
2	2390.00	47.2 AV	54.0	-6.8	2.08 V	156	51.7	-4.5
3	*2437.00	124.3 PK			2.08 V	156	128.7	-4.4
4	*2437.00	112.1 AV			2.08 V	156	116.5	-4.4
5	2484.80	68.1 PK	74.0	-5.9	2.08 V	156	72.6	-4.5
6	2484.80	53.8 AV	54.0	-0.2	2.08 V	156	58.3	-4.5
7	4874.00	38.1 PK	74.0	-35.9	1.06 V	166	38.0	0.1
8	4874.00	30.4 AV	54.0	-23.6	1.06 V	166	30.3	0.1
9	7311.00	41.5 PK	74.0	-32.5	1.02 V	194	35.2	6.3
10	7311.00	30.2 AV	54.0	-23.8	1.02 V	194	23.9	6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.8 PK			1.37 H	1	111.2	-4.4
2	*2462.00	95.0 AV			1.37 H	1	99.4	-4.4
3	2485.00	56.5 PK	74.0	-17.5	1.37 H	1	61.0	-4.5
4	2485.00	43.1 AV	54.0	-10.9	1.37 H	1	47.6	-4.5
5	4924.00	37.9 PK	74.0	-36.1	1.34 H	193	37.6	0.3
6	4924.00	27.9 AV	54.0	-26.1	1.34 H	193	27.6	0.3
7	7386.00	41.3 PK	74.0	-32.7	2.02 H	324	34.7	6.6
8	7386.00	31.5 AV	54.0	-22.5	2.02 H	324	24.9	6.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.5 PK			2.30 V	157	123.9	-4.4
2	*2462.00	106.4 AV			2.30 V	157	110.8	-4.4
3	2483.50	65.7 PK	74.0	-8.3	2.30 V	157	70.2	-4.5
4	2483.50	53.6 AV	54.0	-0.4	2.30 V	157	58.1	-4.5
5	4924.00	38.2 PK	74.0	-35.8	1.08 V	163	37.9	0.3
6	4924.00	30.7 AV	54.0	-23.3	1.08 V	163	30.4	0.3
7	7386.00	40.7 PK	74.0	-33.3	1.06 V	204	34.1	6.6
8	7386.00	29.5 AV	54.0	-24.5	1.06 V	204	22.9	6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.8 PK	74.0	-17.2	1.16 H	7	61.3	-4.5
2	2390.00	43.9 AV	54.0	-10.1	1.16 H	7	48.4	-4.5
3	*2422.00	104.1 PK			1.16 H	7	108.5	-4.4
4	*2422.00	92.8 AV			1.16 H	7	97.2	-4.4
5	4844.00	37.6 PK	74.0	-36.4	1.35 H	180	37.5	0.1
6	4844.00	27.6 AV	54.0	-26.4	1.35 H	180	27.5	0.1
7	7266.00	41.5 PK	74.0	-32.5	1.98 H	321	35.3	6.2
8	7266.00	31.3 AV	54.0	-22.7	1.98 H	321	25.1	6.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	2.29 V	159	71.4	-4.5
2	2390.00	53.8 AV	54.0	-0.2	2.29 V	159	58.3	-4.5
3	*2422.00	116.3 PK			2.29 V	159	120.7	-4.4
4	*2422.00	104.8 AV			2.29 V	159	109.2	-4.4
5	4844.00	38.1 PK	74.0	-35.9	1.08 V	178	38.0	0.1
6	4844.00	30.8 AV	54.0	-23.2	1.08 V	178	30.7	0.1
7	7266.00	40.6 PK	74.0	-33.4	1.05 V	192	34.4	6.2
8	7266.00	29.7 AV	54.0	-24.3	1.05 V	192	23.5	6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.1 PK	74.0	-21.9	1.19 H	13	56.6	-4.5
2	2390.00	40.6 AV	54.0	-13.4	1.19 H	13	45.1	-4.5
3	*2437.00	104.6 PK			1.19 H	13	109.0	-4.4
4	*2437.00	93.5 AV			1.19 H	13	97.9	-4.4
5	2485.43	55.8 PK	74.0	-18.2	1.19 H	13	60.3	-4.5
6	2485.43	43.4 AV	54.0	-10.6	1.19 H	13	47.9	-4.5
7	4874.00	38.8 PK	74.0	-35.2	1.27 H	203	38.7	0.1
8	4874.00	28.4 AV	54.0	-25.6	1.27 H	203	28.3	0.1
9	7311.00	44.3 PK	74.0	-29.7	1.95 H	319	38.0	6.3
10	7311.00	32.3 AV	54.0	-21.7	1.95 H	319	26.0	6.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	2.06 V	159	66.0	-4.5
2	2390.00	49.3 AV	54.0	-4.7	2.06 V	159	53.8	-4.5
3	*2437.00	118.6 PK			2.06 V	159	123.0	-4.4
4	*2437.00	105.8 AV			2.06 V	159	110.2	-4.4
5	2484.74	66.8 PK	74.0	-7.2	2.06 V	159	71.3	-4.5
6	2484.74	53.7 AV	54.0	-0.3	2.06 V	159	58.2	-4.5
7	4874.00	38.8 PK	74.0	-35.2	1.12 V	182	38.7	0.1
8	4874.00	30.9 AV	54.0	-23.1	1.12 V	182	30.8	0.1
9	7311.00	41.0 PK	74.0	-33.0	1.06 V	187	34.7	6.3
10	7311.00	29.8 AV	54.0	-24.2	1.06 V	187	23.5	6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	102.5 PK			1.42 H	352	106.9	-4.4
2	*2452.00	91.0 AV			1.42 H	352	95.4	-4.4
3	2488.00	55.8 PK	74.0	-18.2	1.42 H	352	60.3	-4.5
4	2488.00	43.5 AV	54.0	-10.5	1.42 H	352	48.0	-4.5
5	4904.00	37.5 PK	74.0	-36.5	1.34 H	190	37.3	0.2
6	4904.00	27.4 AV	54.0	-26.6	1.34 H	190	27.2	0.2
7	7356.00	41.8 PK	74.0	-32.2	1.98 H	322	35.4	6.4
8	7356.00	31.7 AV	54.0	-22.3	1.98 H	322	25.3	6.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	115.4 PK			2.32 V	159	119.8	-4.4
2	*2452.00	103.1 AV			2.32 V	159	107.5	-4.4
3	2483.50	66.3 PK	74.0	-7.7	2.32 V	159	70.8	-4.5
4	2483.50	53.7 AV	54.0	-0.3	2.32 V	159	58.2	-4.5
5	4904.00	37.9 PK	74.0	-36.1	1.04 V	165	37.7	0.2
6	4904.00	30.4 AV	54.0	-23.6	1.04 V	165	30.2	0.2
7	7356.00	40.4 PK	74.0	-33.6	1.03 V	197	34.0	6.4
8	7356.00	29.5 AV	54.0	-24.5	1.03 V	197	23.1	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.


Below 1GHz Data:

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.02	32.1 QP	40.0	-7.9	3.00 H	327	45.9	-13.8
2	86.19	33.7 QP	40.0	-6.3	2.00 H	269	52.1	-18.4
3	104.59	37.3 QP	43.5	-6.2	3.00 H	0	53.0	-15.7
4	125.01	40.2 QP	43.5	-3.3	3.00 H	89	53.9	-13.7
5	299.56	34.2 QP	46.0	-11.8	1.00 H	118	44.9	-10.7
6	600.14	35.3 QP	46.0	-10.7	1.00 H	12	37.5	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

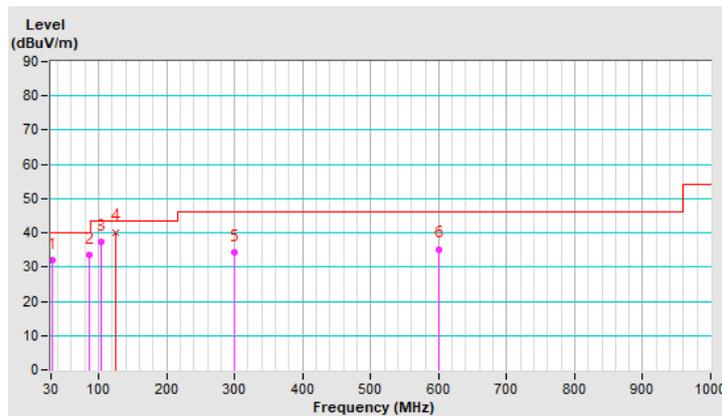


RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.99	37.0 QP	40.0	-3.0	1.00 V	179	50.8	-13.8
2	52.94	36.7 QP	40.0	-3.3	1.00 V	269	49.2	-12.5
3	62.74	36.8 QP	40.0	-3.2	1.50 V	294	50.3	-13.5
4	84.20	35.9 QP	40.0	-4.1	2.00 V	105	54.0	-18.1
5	125.01	36.8 QP	43.5	-6.7	1.00 V	291	50.5	-13.7
6	302.04	36.0 QP	46.0	-10.0	1.50 V	347	46.6	-10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

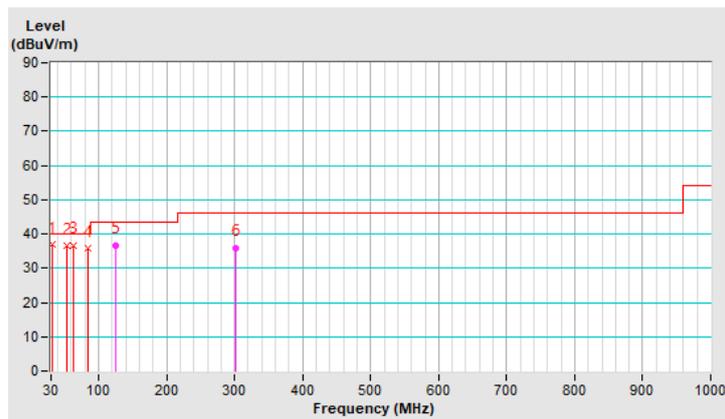

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 20, 2020	Oct. 19, 2021
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 27, 2020	Oct. 26, 2021
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 26, 2021	Mar. 25, 2022
50 ohms Terminator	50	3	Oct. 26, 2020	Oct. 25, 2021
RF Cable	5D-FB	COCCAB-001	Sep. 26, 2020	Sep. 25, 2021
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 29, 2020	Aug. 28, 2021
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Apr. 09, 2021

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

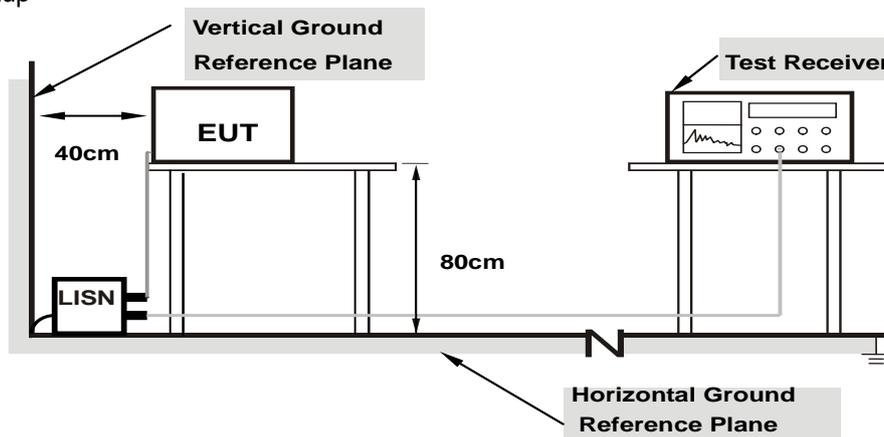

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.96	38.19	28.28	48.15	38.24	65.79	55.79	-17.64	-17.55
2	0.18516	9.98	32.40	22.27	42.38	32.25	64.25	54.25	-21.87	-22.00
3	0.34531	10.01	36.88	32.18	46.89	42.19	59.07	49.07	-12.18	-6.88
4	0.43125	10.02	25.97	20.57	35.99	30.59	57.23	47.23	-21.24	-16.64
5	0.61094	10.03	22.17	15.57	32.20	25.60	56.00	46.00	-23.80	-20.40
6	10.24219	10.74	18.77	12.75	29.51	23.49	60.00	50.00	-30.49	-26.51

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

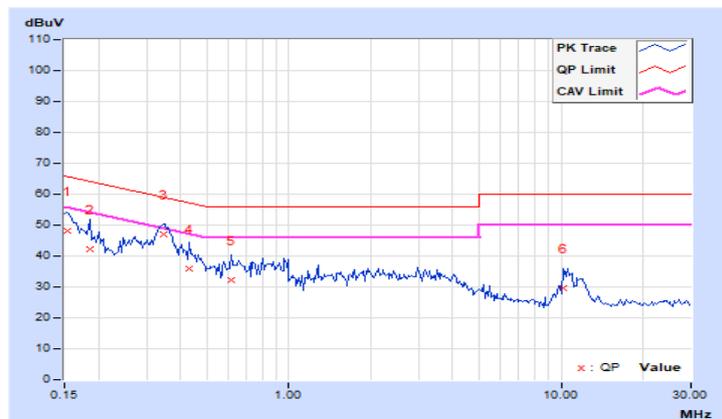


RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.94	38.93	29.20	48.87	39.14	66.00	56.00	-17.13	-16.86
2	0.15781	9.95	36.73	27.06	46.68	37.01	65.58	55.58	-18.90	-18.57
3	0.35313	10.00	36.36	31.90	46.36	41.90	58.89	48.89	-12.53	-6.99
4	0.73984	10.04	19.93	13.53	29.97	23.57	56.00	46.00	-26.03	-22.43
5	0.95469	10.07	21.13	14.58	31.20	24.65	56.00	46.00	-24.80	-21.35
6	3.83594	10.24	21.10	14.90	31.34	25.14	56.00	46.00	-24.66	-20.86

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

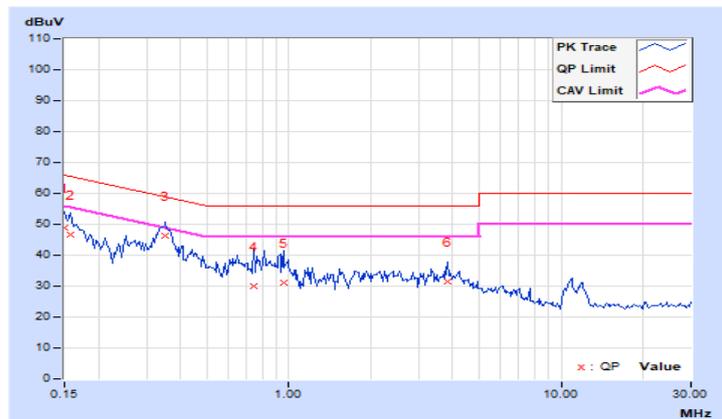


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup

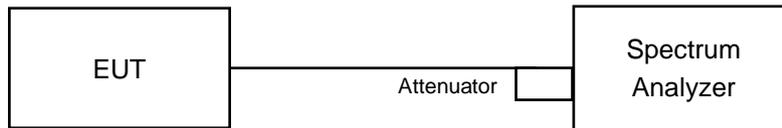

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	7.63	8.13	0.5	PASS
6	2437	8.06	7.63	0.5	PASS
11	2462	9.02	8.55	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.98	16.34	0.5	PASS
6	2437	16.38	16.35	0.5	PASS
11	2462	15.93	16.37	0.5	PASS

802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	18.79	18.88	0.5	PASS
6	2437	19.07	18.85	0.5	PASS
11	2462	18.85	18.77	0.5	PASS

802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	36.78	37.97	0.5	PASS
6	2437	38.36	38.11	0.5	PASS
9	2452	37.13	37.99	0.5	PASS

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH1

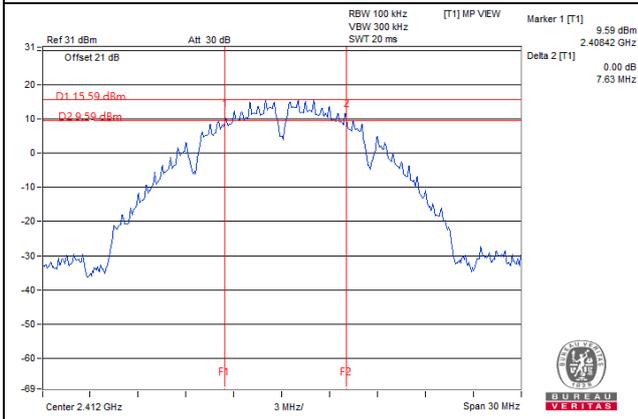


802.11g / Chain 0 : CH11

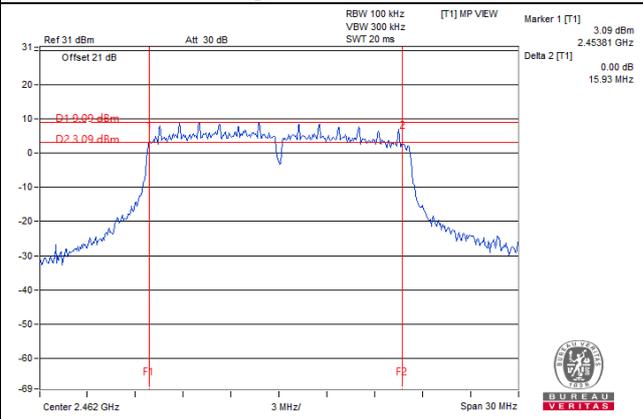

802.11ax (HE20) / Chain 1 : CH11

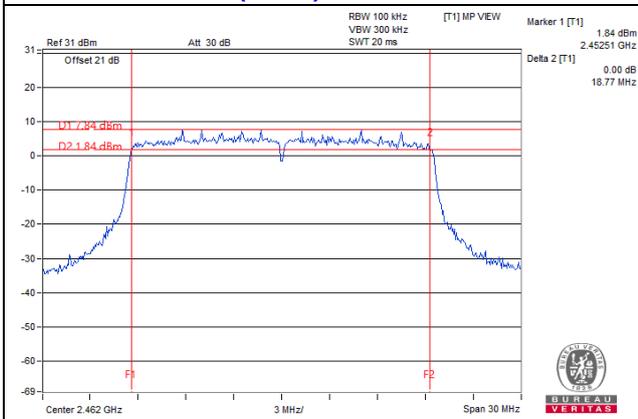

802.11ax (HE40) / Chain 0 : CH3

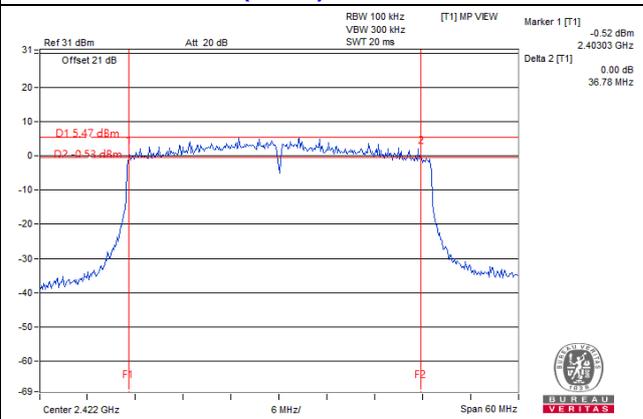

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup

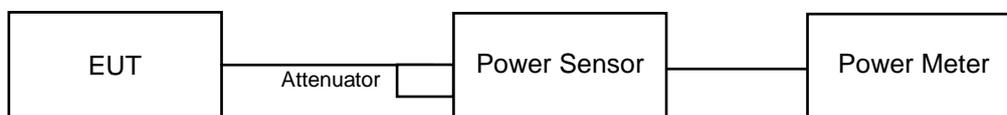

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	26.45	26.36	874.084	29.42	30	Pass
6	2437	26.37	26.22	852.304	29.31	30	Pass
11	2462	26.04	25.94	794.436	29.00	30	Pass

802.11g

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	21.27	21.42	272.643	24.36	30	Pass
6	2437	25.76	25.60	739.782	28.69	30	Pass
11	2462	20.30	20.27	213.566	23.30	30	Pass

VHT20

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.16	20.31	211.152	23.25	30	Pass
6	2437	24.74	24.75	596.39	27.76	30	Pass
11	2462	18.59	18.51	143.235	21.56	30	Pass

VHT40

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	19.52	19.39	176.433	22.47	30	Pass
6	2437	21.01	20.90	249.21	23.97	30	Pass
9	2452	17.91	17.79	121.919	20.86	30	Pass

802.11ax (HE20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.43	20.55	223.909	23.50	30	Pass
6	2437	25.02	24.95	630.295	28.00	30	Pass
11	2462	18.88	18.79	152.951	21.85	30	Pass

802.11ax (HE40)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	19.82	19.65	188.197	22.75	30	Pass
6	2437	21.26	21.15	263.976	24.22	30	Pass
9	2452	18.11	18.02	128.101	21.08	30	Pass

Beamforming Mode

VHT20

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.16	20.31	211.152	23.25	30	Pass
6	2437	24.74	24.75	596.39	27.76	30	Pass
11	2462	18.59	18.51	143.235	21.56	30	Pass

Note: Directional gain = 4.37dBi < 6dBi , so the power limit shall not be reduced

VHT40

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	19.52	19.39	176.433	22.47	30	Pass
6	2437	21.01	20.90	249.21	23.97	30	Pass
9	2452	17.91	17.79	121.919	20.86	30	Pass

Note: Directional gain = 4.37dBi < 6dBi , so the power limit shall not be reduced

802.11ax (HE20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.43	20.55	223.909	23.50	30	Pass
6	2437	25.02	24.95	630.295	28.00	30	Pass
11	2462	18.88	18.79	152.951	21.85	30	Pass

Note: Directional gain = 4.37dBi < 6dBi , so the power limit shall not be reduced

802.11ax (HE40)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	19.82	19.65	188.197	22.75	30	Pass
6	2437	21.26	21.15	263.976	24.22	30	Pass
9	2452	18.11	18.02	128.101	21.08	30	Pass


Note: Directional gain = 4.37dBi < 6dBi , so the power limit shall not be reduced

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup

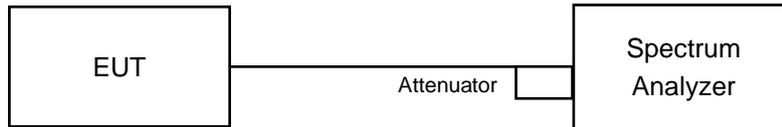

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- a) Measure the duty cycle (x).
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least 1.5 times the OBW.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq 3 \times \text{RBW}$.
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to "free run".
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $10 \log(1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1					
1	2412	-10.66	-10.81	1.85	0.25849	-5.88	8	PASS
6	2437	-12.38	-9.66	1.85	0.254	-5.95	8	PASS
11	2462	-10.73	-10.44	1.85	0.26769	-5.72	8	PASS

- Note:** 1. Directional gain = 4.37dBi < 6dBi , so the power density limit shall not be reduced.
 2. Refer to section 3.3 for duty cycle spectrum plot.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1					
1	2412	-13.27	-11.77	0.27	0.12099	-9.17	8	PASS
6	2437	-10.39	-9.45	0.27	0.21819	-6.61	8	PASS
11	2462	-12.58	-13.02	0.27	0.1119	-9.51	8	PASS

- Note:** 1. Directional gain = 4.37dBi < 6dBi , so the power density limit shall not be reduced.
 2. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE20)


Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1					
1	2412	-16.30	-16.79	0.19	0.0464	-13.33	8	PASS
6	2437	-13.84	-13.07	0.19	0.09474	-10.23	8	PASS
11	2462	-17.52	-17.16	0.19	0.03861	-14.13	8	PASS

- Note:** 1. Directional gain = 4.37dBi < 6dBi , so the power density limit shall not be reduced.
 2. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1					
3	2422	-19.07	-19.88	0.26	0.02405	-16.19	8	PASS
6	2437	-17.56	-17.52	0.26	0.03738	-14.27	8	PASS
9	2452	-19.73	-21.16	0.26	0.019409	-17.12	8	PASS

- Note:**
1. Directional gain = 4.37dBi < 6dBi , so the power density limit shall not be reduced.
 2. Refer to section 3.3 for duty cycle spectrum plot.

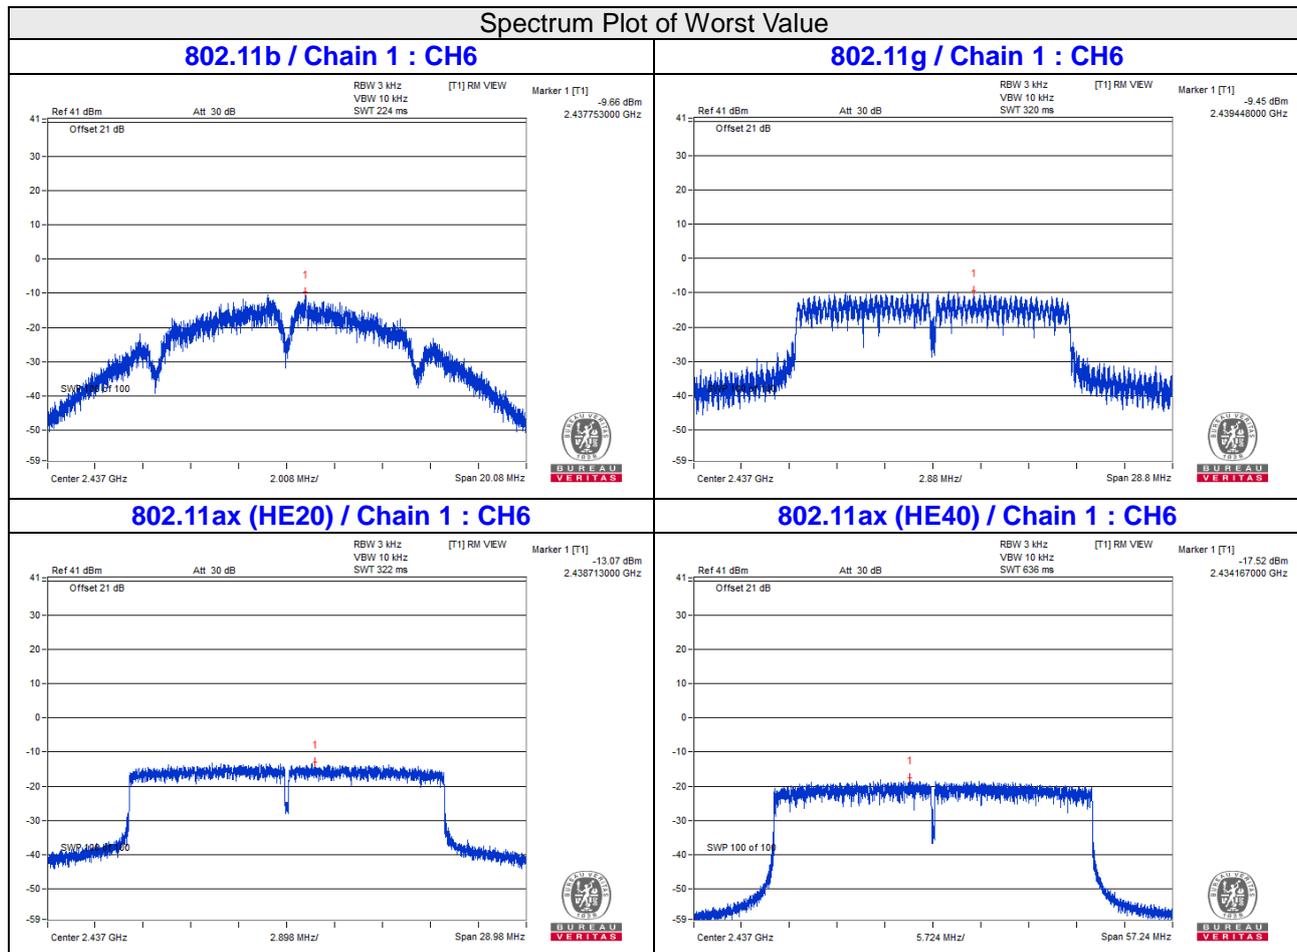


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup

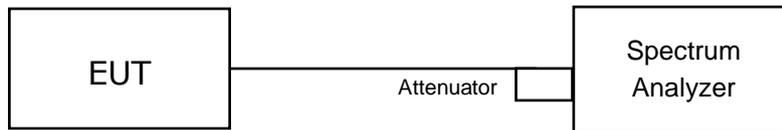

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b

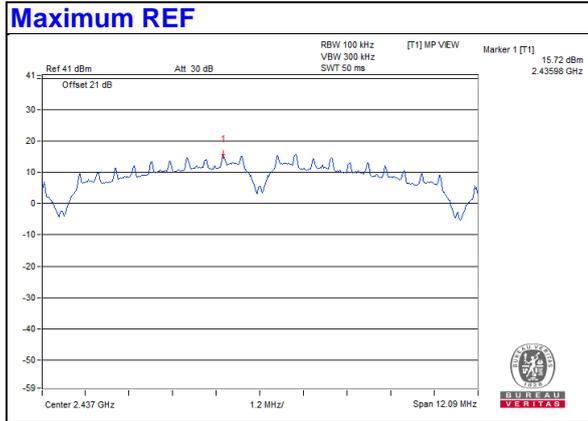


Chain 0


CH 1

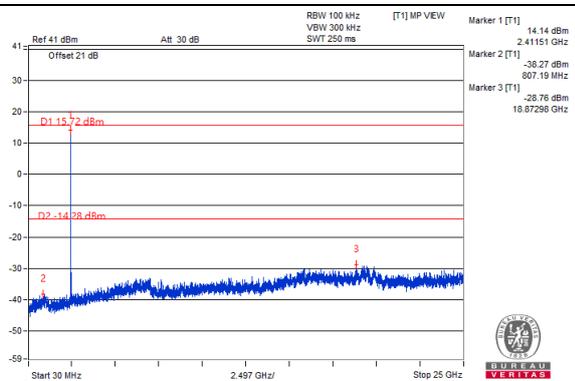


CH 6

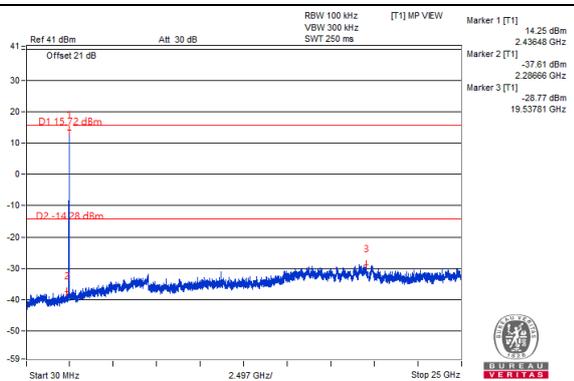


CH 11

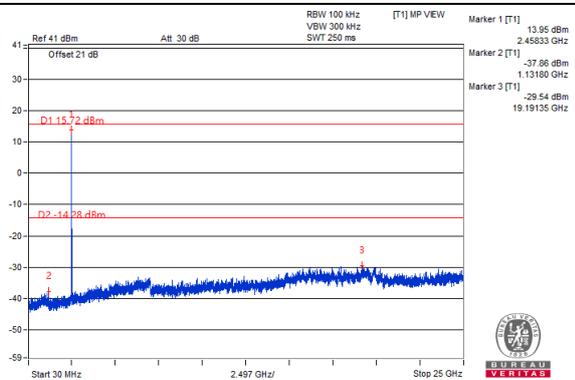

CH 1 Band edge

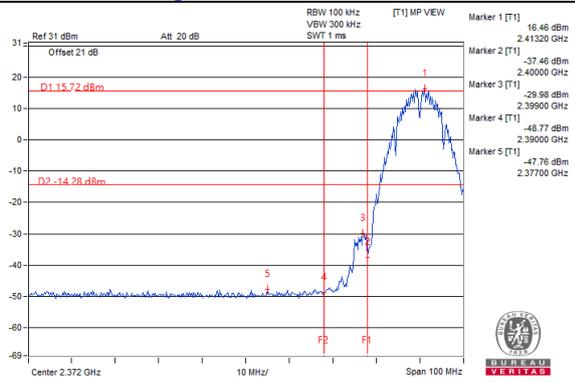


CH 11 Band edge

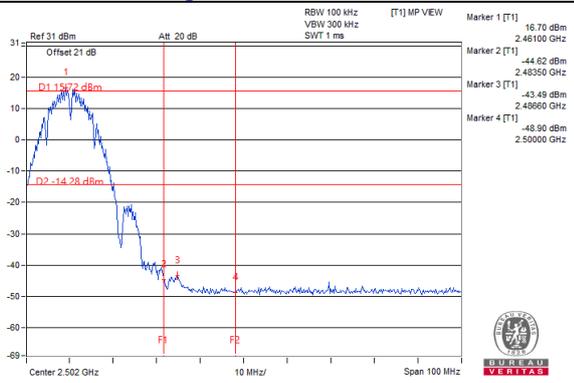


Chain 1



CH 1

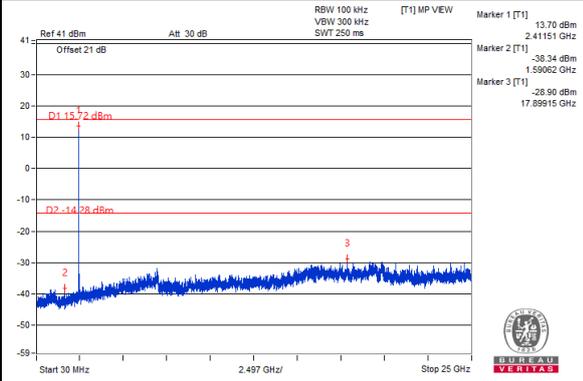


CH 6

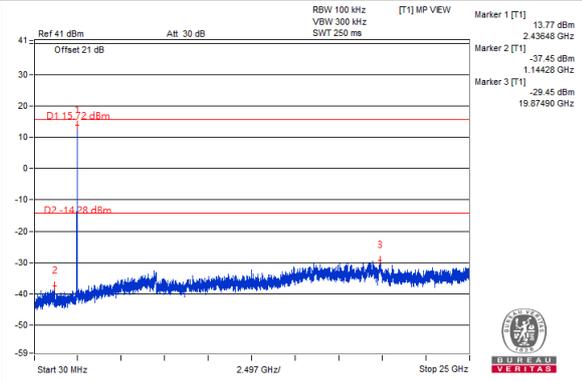


CH 11

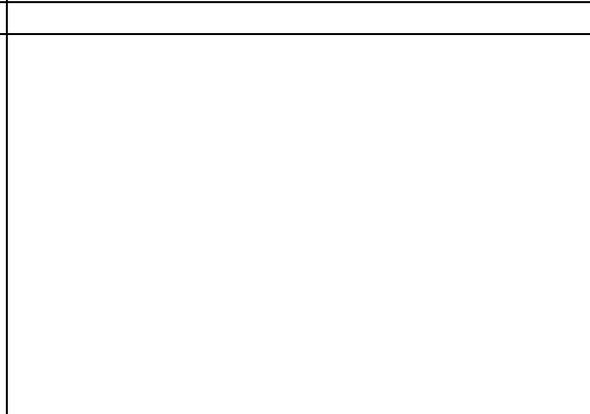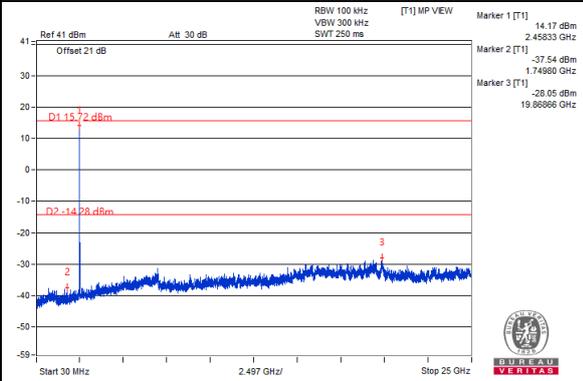


CH 1 Band edge

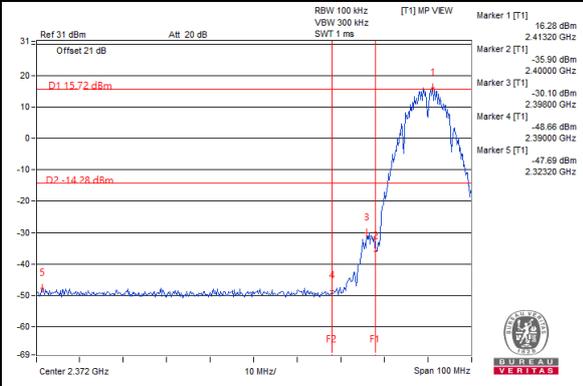

CH 11 Band edge

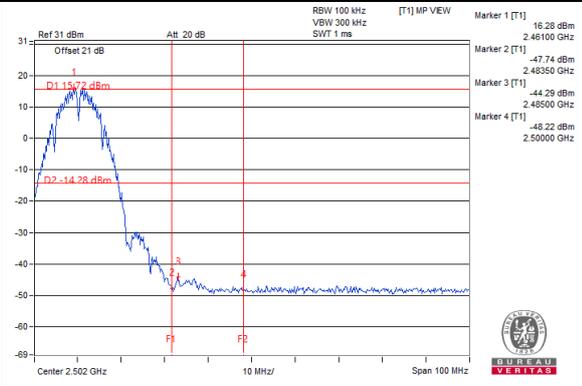


802.11g

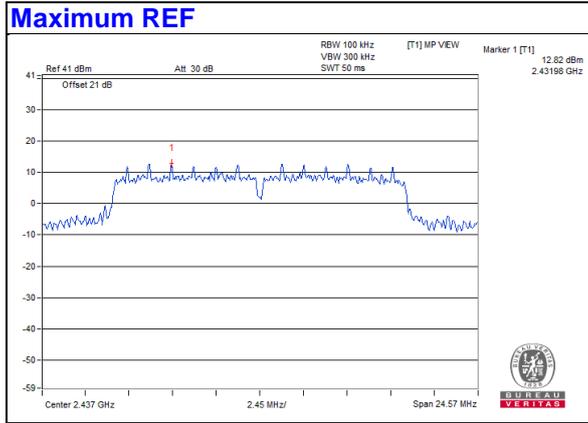


Chain 0


CH 1

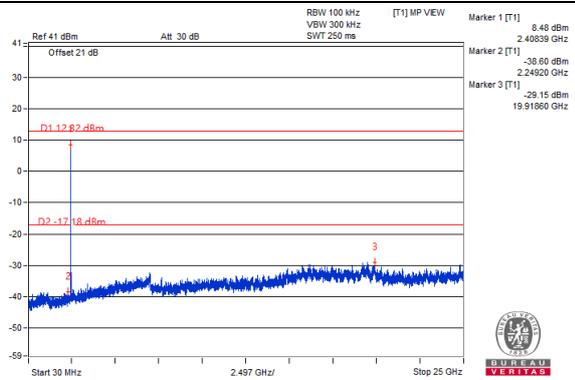


CH 6

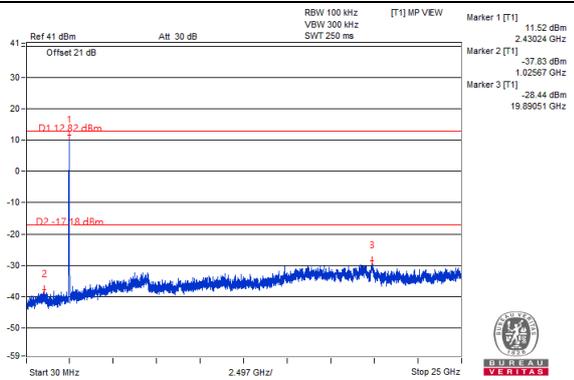


CH 11

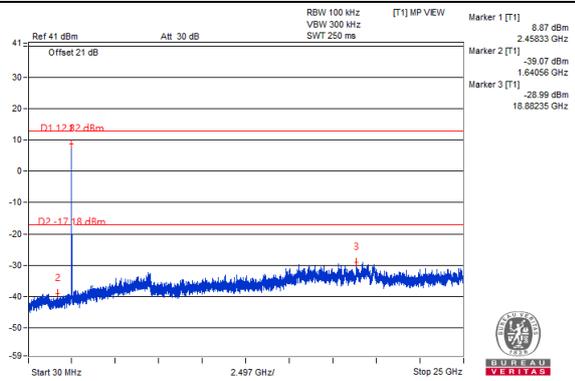


CH 11 Band edge









CH 1 Band edge

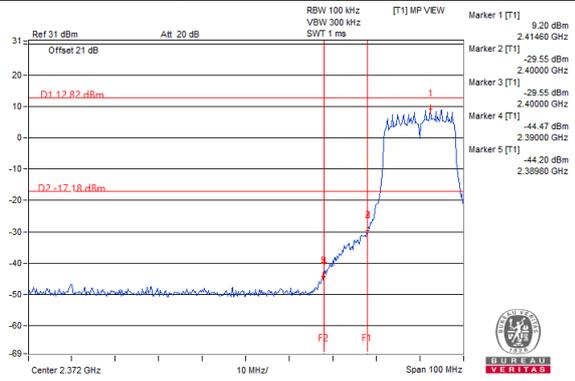


CH 11 Band edge

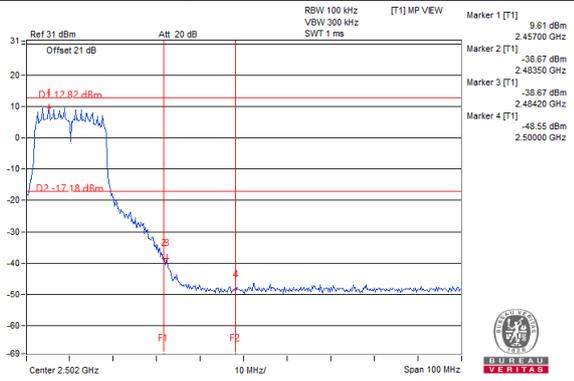

Chain 1

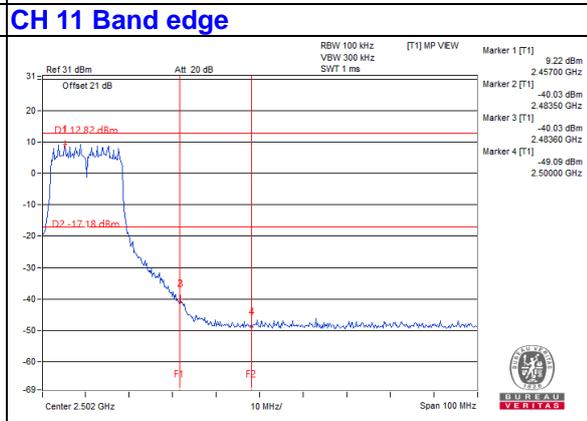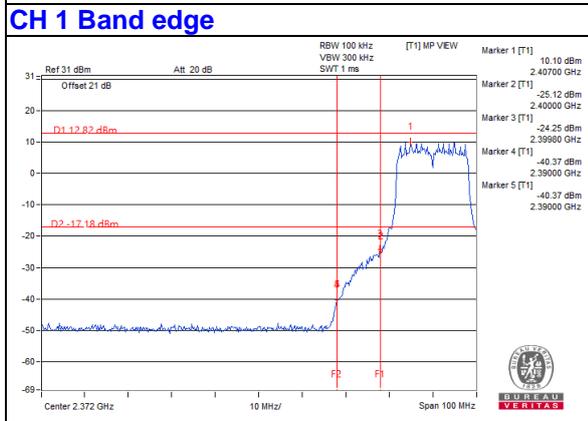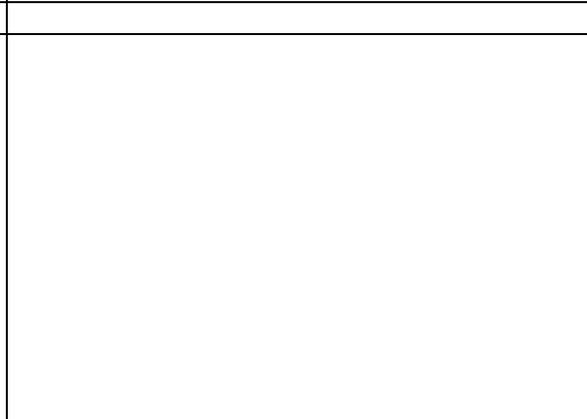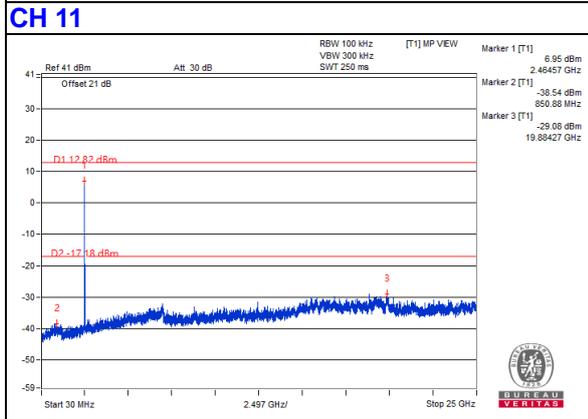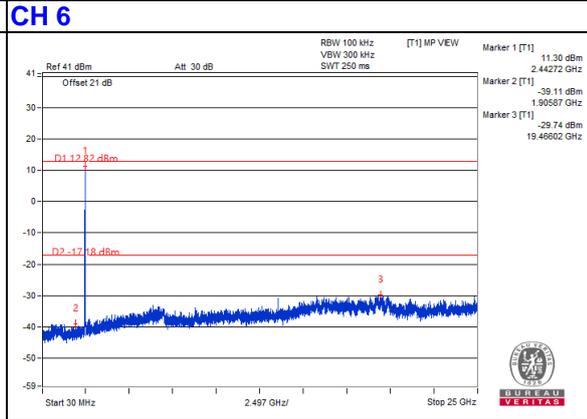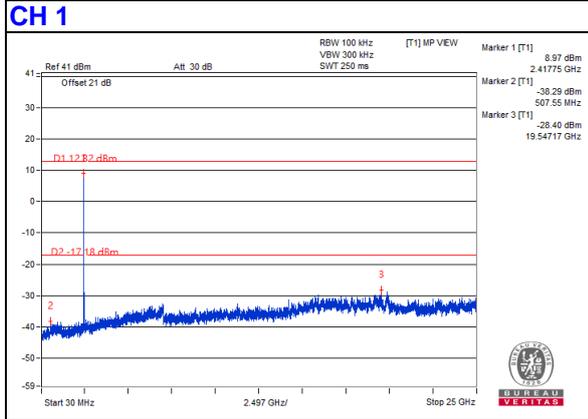


802.11ax (HE20)

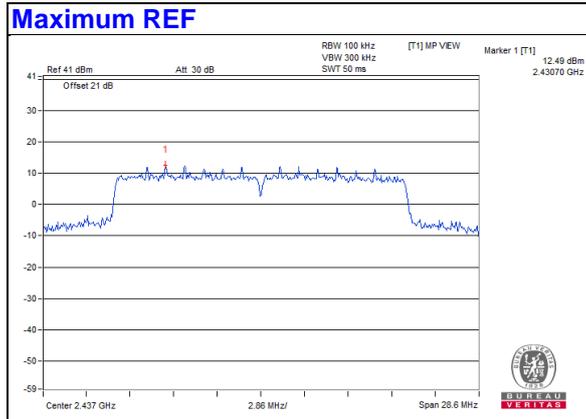


Chain 0


CH 1

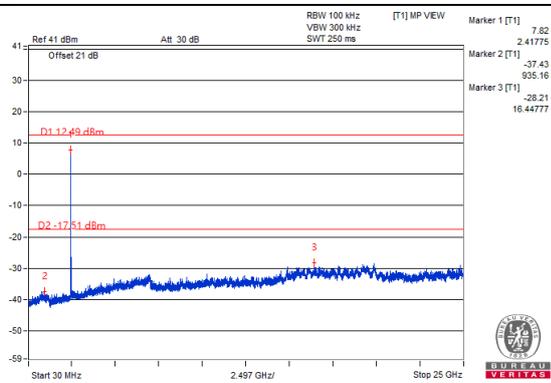


CH 6

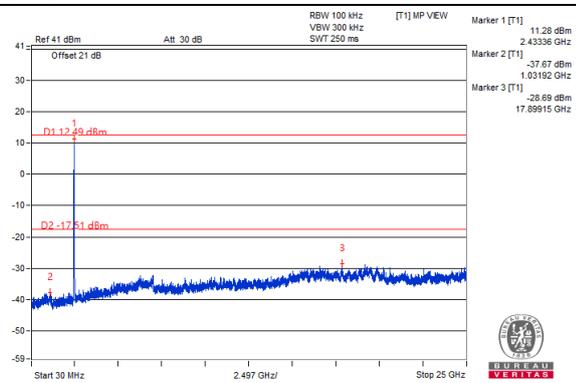


CH 11

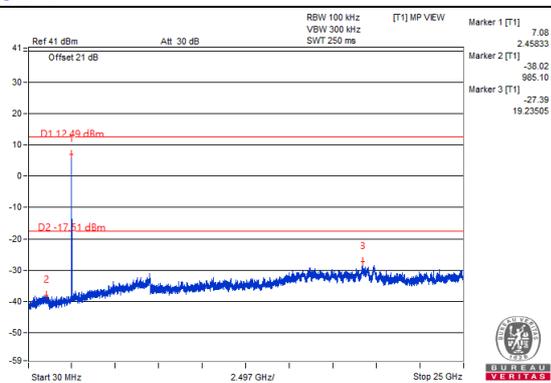







CH 1 Band edge

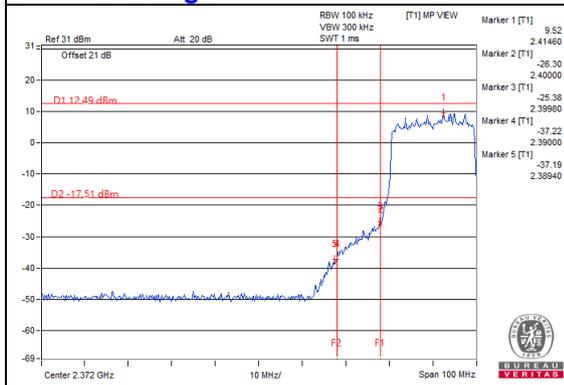


CH 11 Band edge

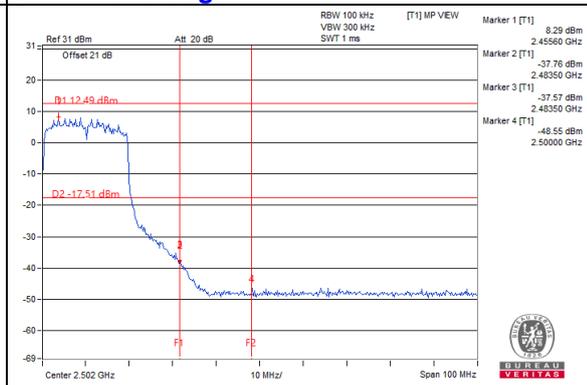

Chain 1

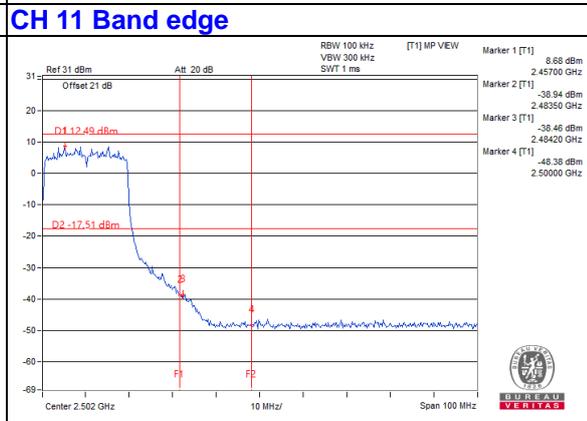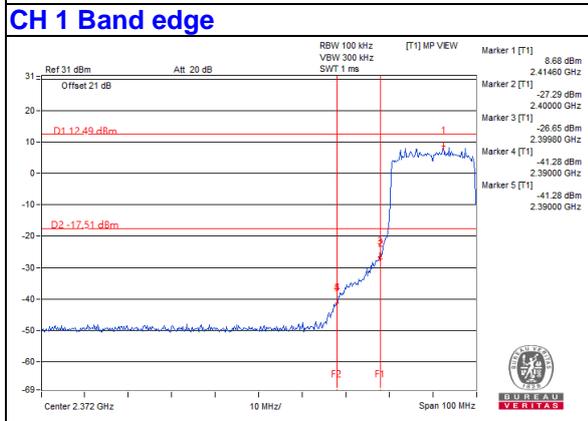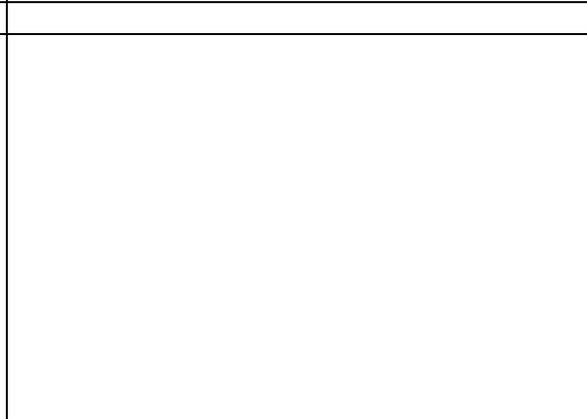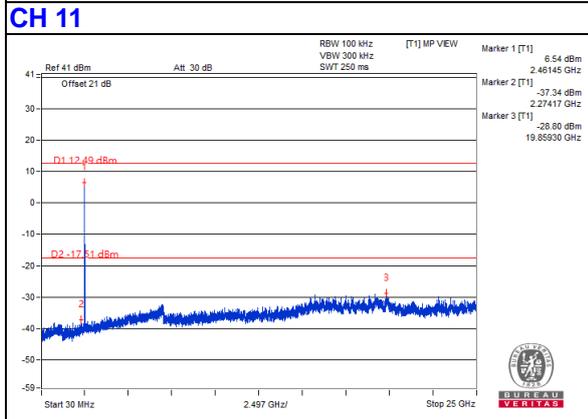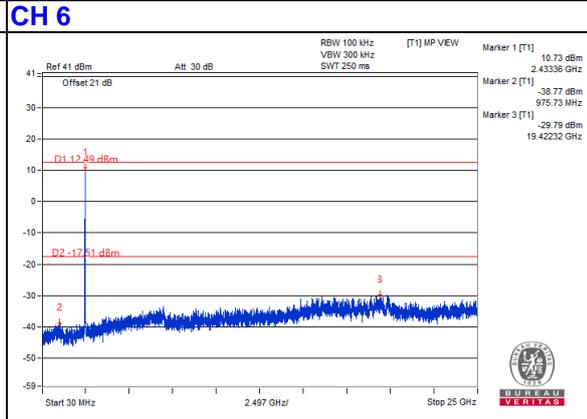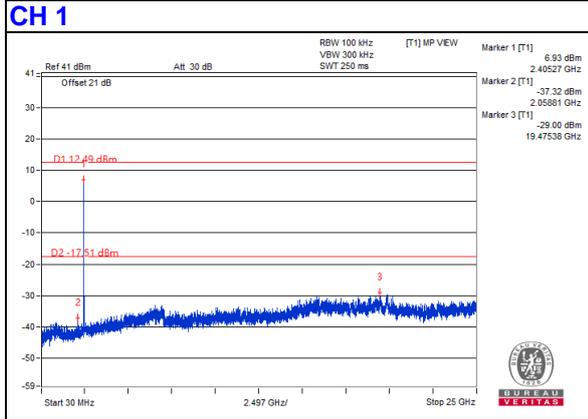


802.11ax (HE40)

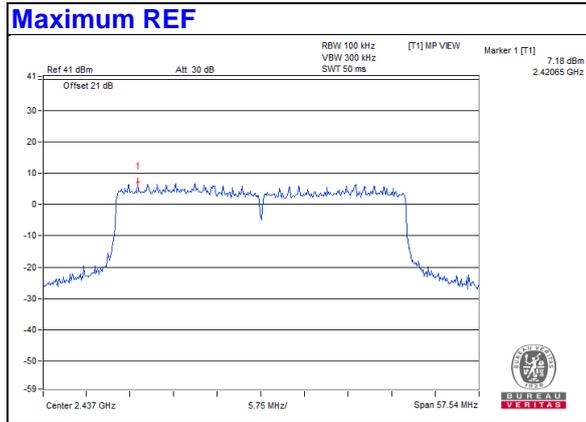


Chain 0


CH 3

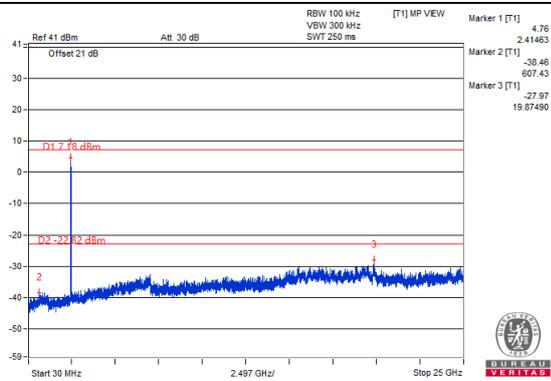


CH 6

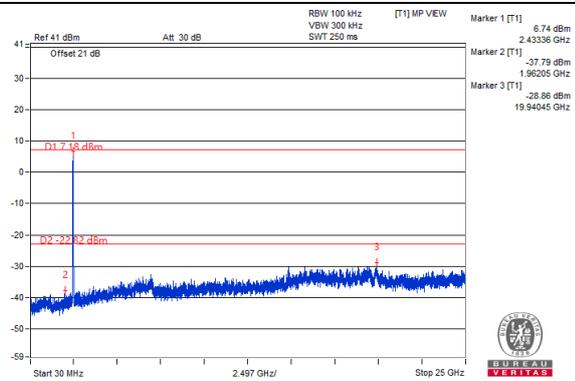


CH 9

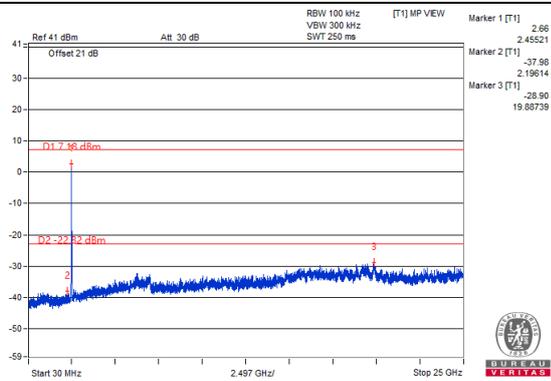

CH 3 Band edge

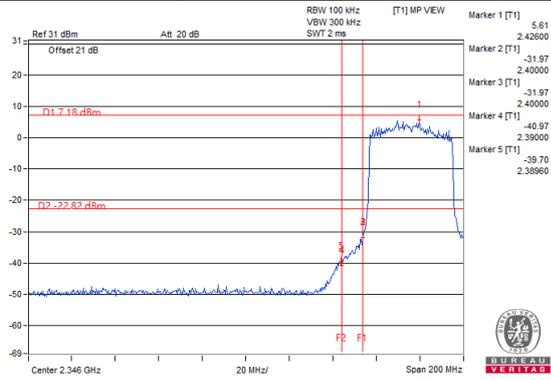


CH 9 Band edge

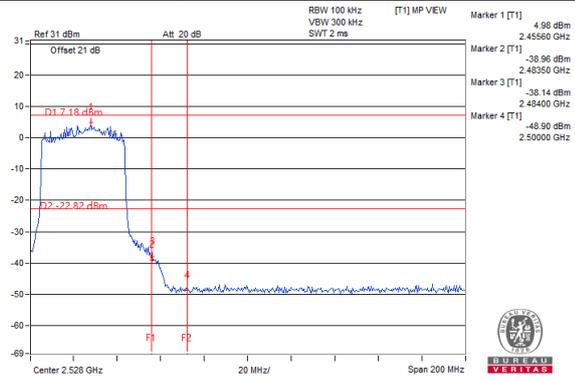


Chain 1



CH 3

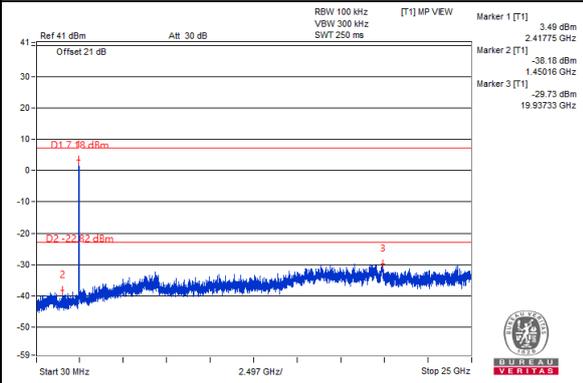


CH 6

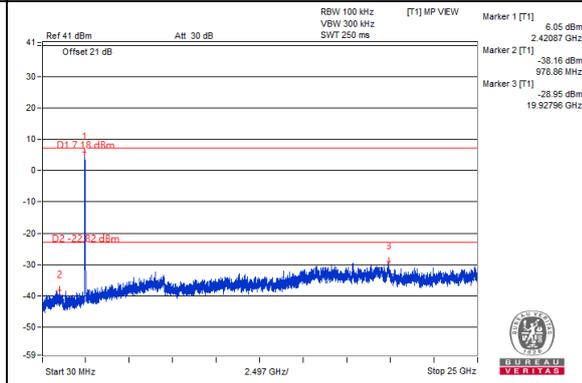


CH 9

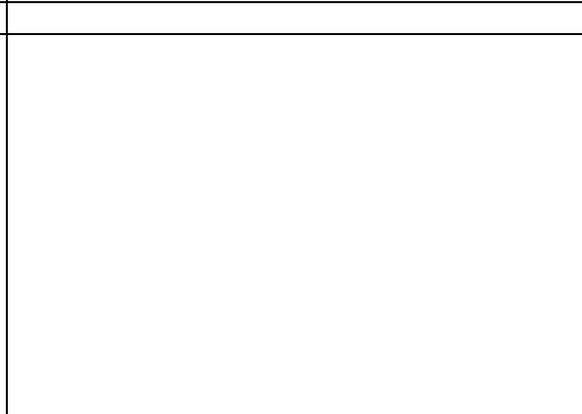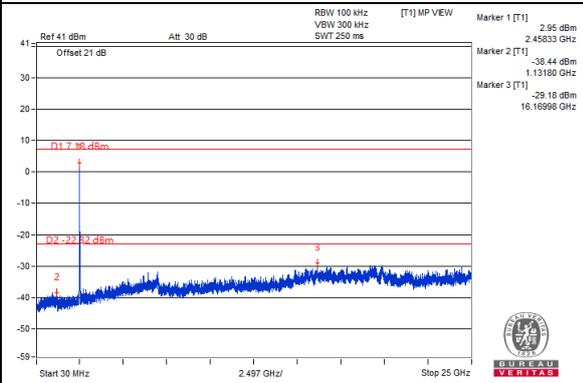

CH 3 Band edge

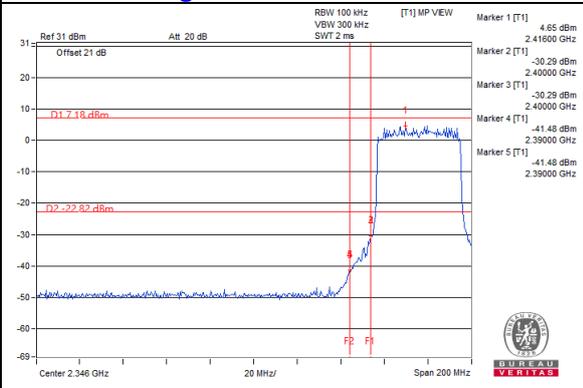


CH 9 Band edge

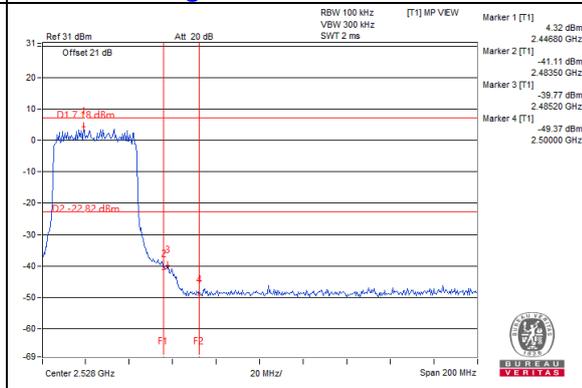

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement

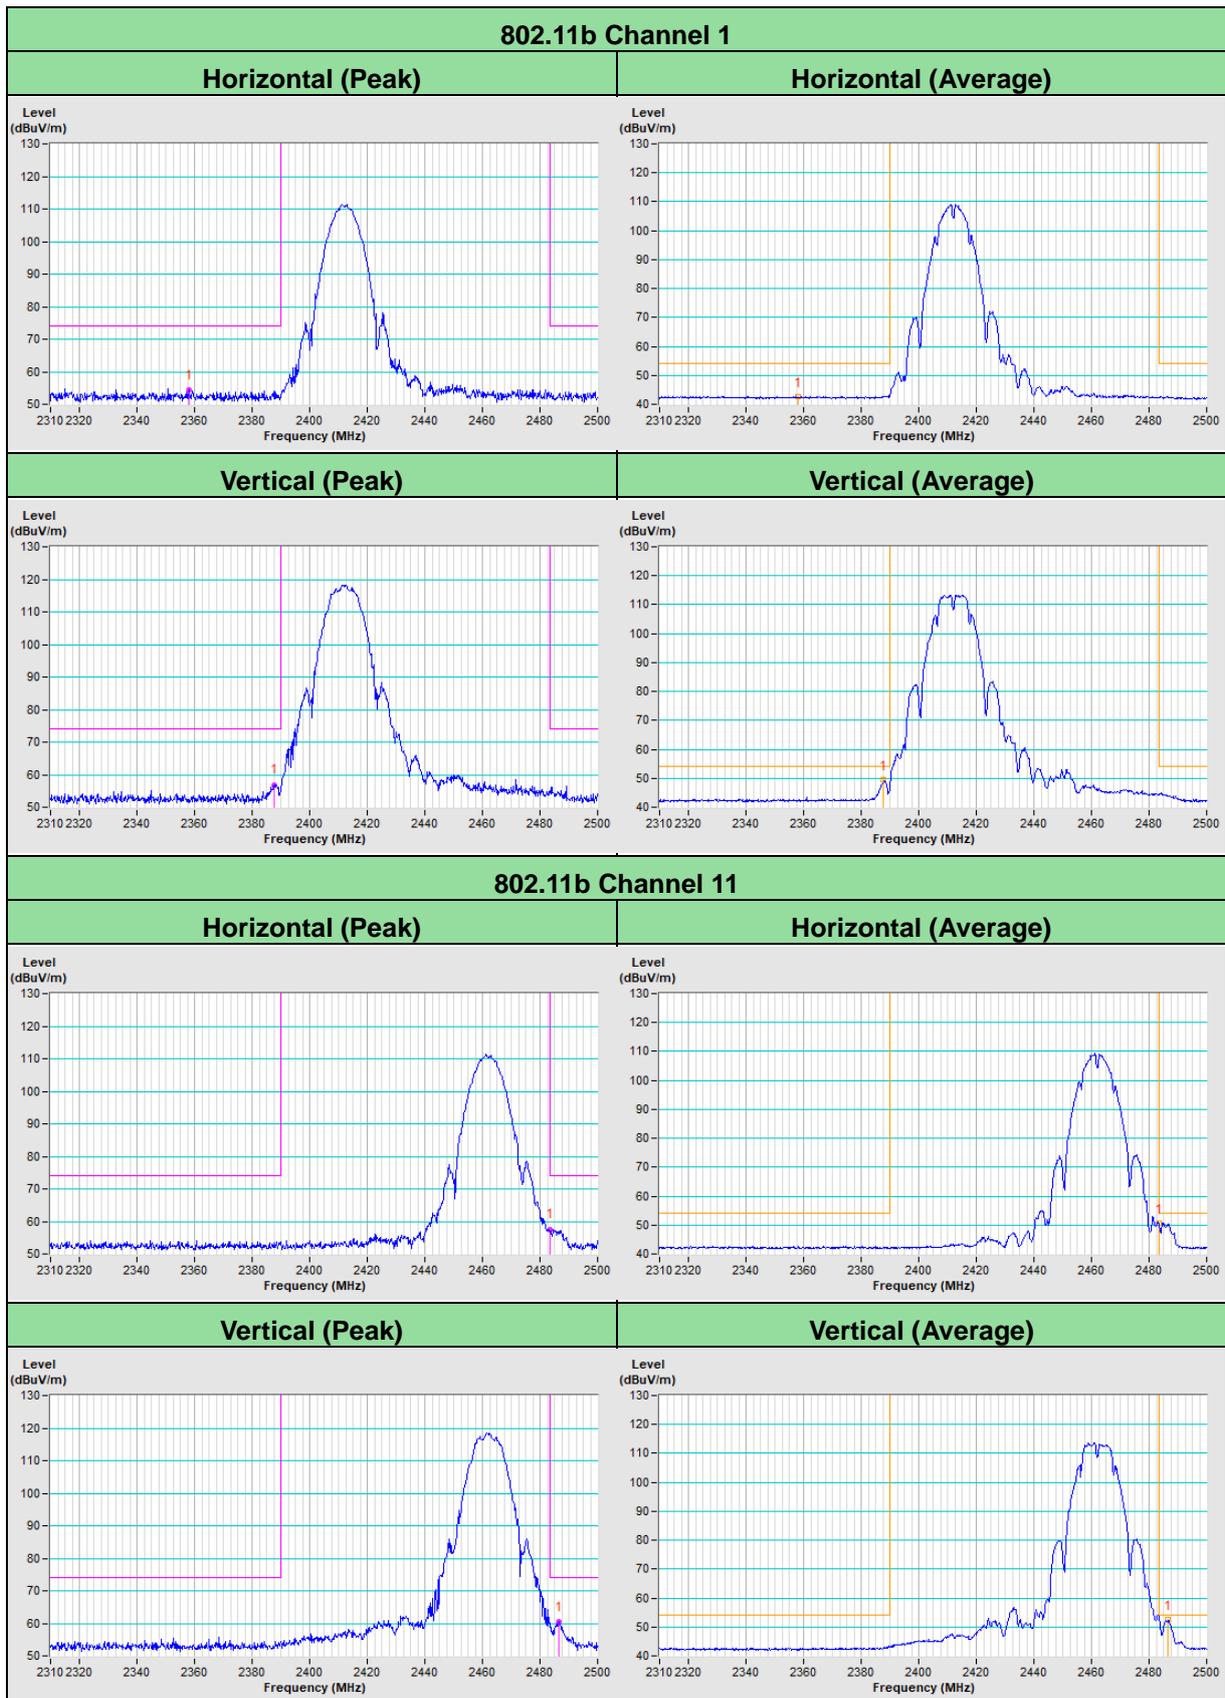


802.11g Channel 1

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

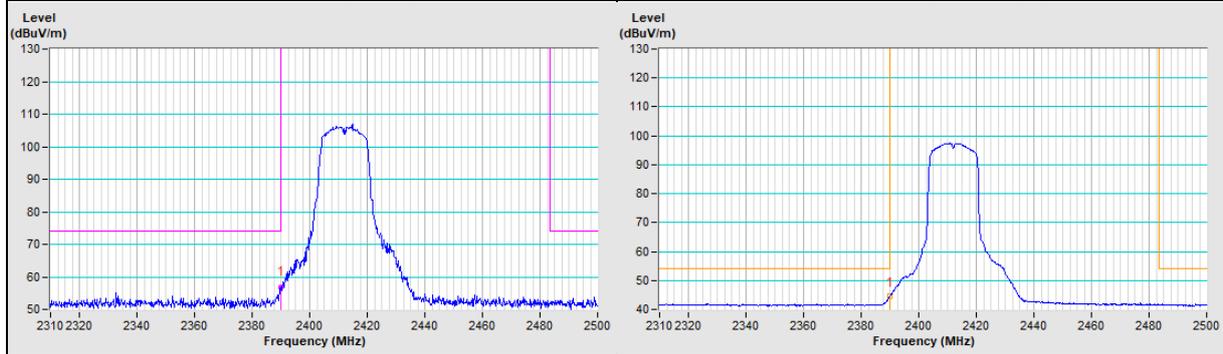


Vertical (Peak)	Vertical (Average)
-----------------	--------------------

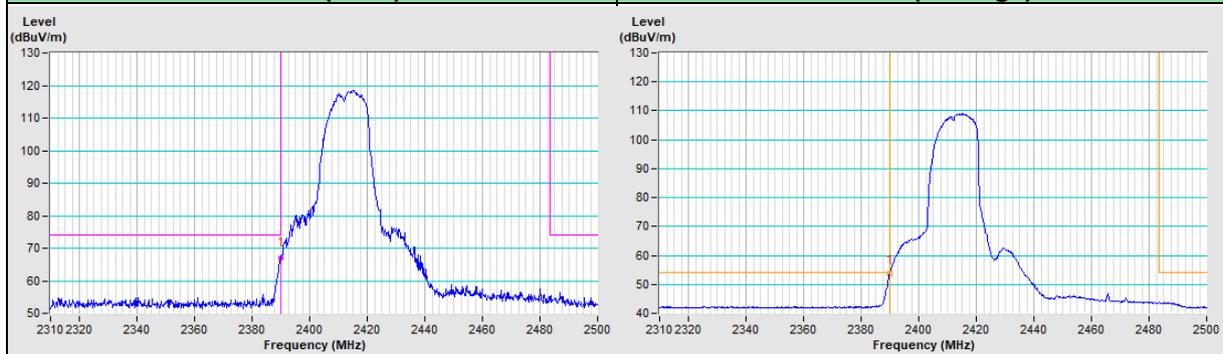


802.11g Channel 11

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

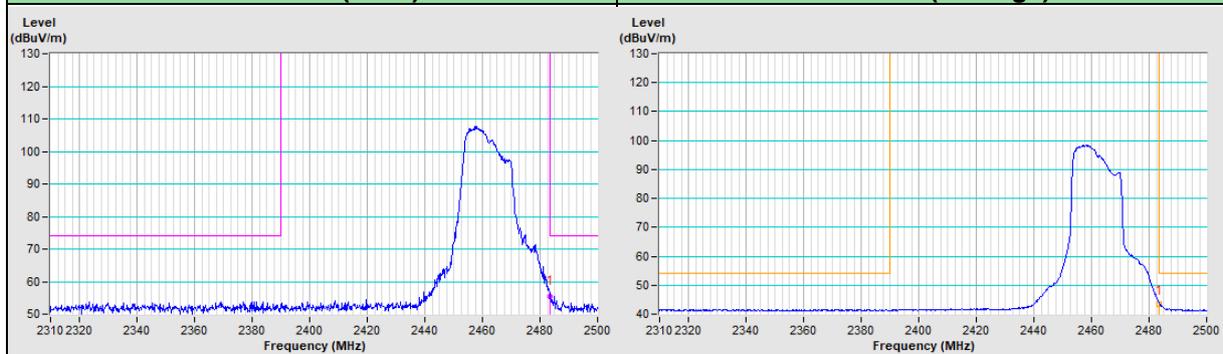


Vertical (Peak)	Vertical (Average)
-----------------	--------------------

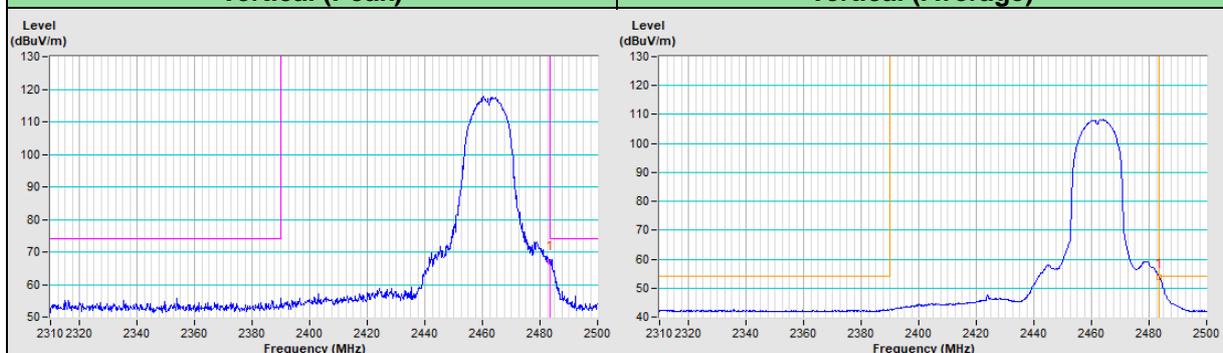


802.11ax (HE20) Channel 1

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

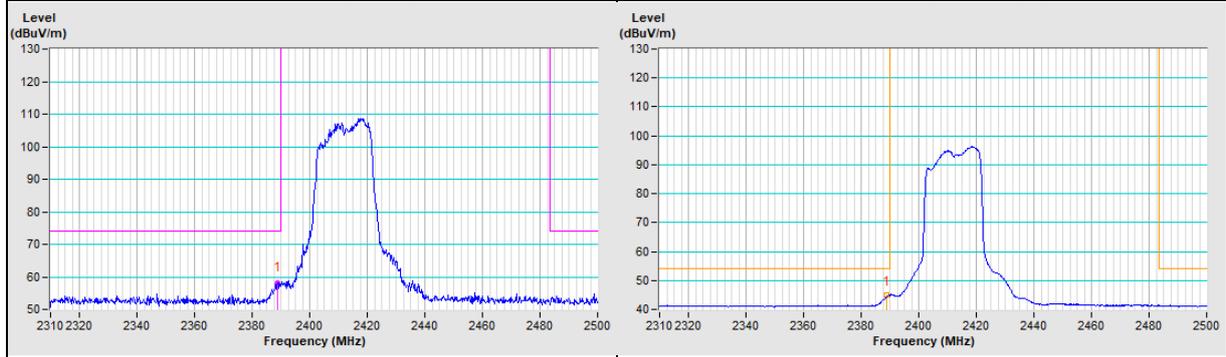


Vertical (Peak)	Vertical (Average)
-----------------	--------------------

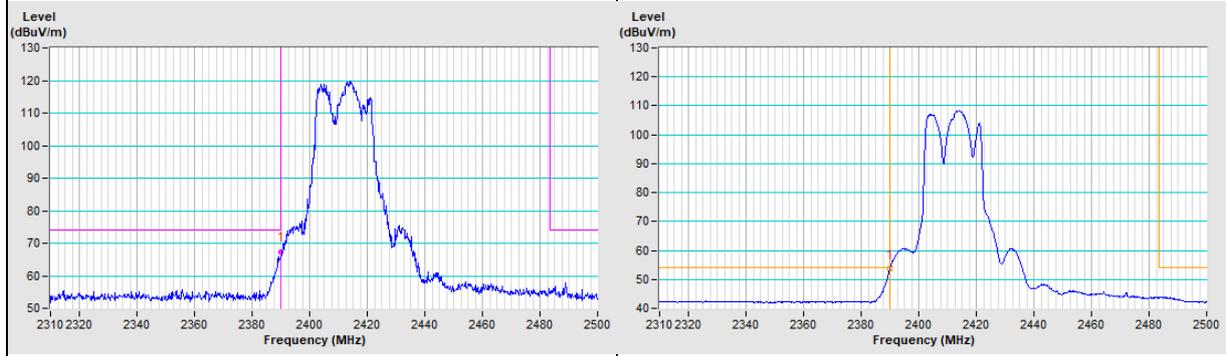


802.11ax (HE20) Channel 11

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

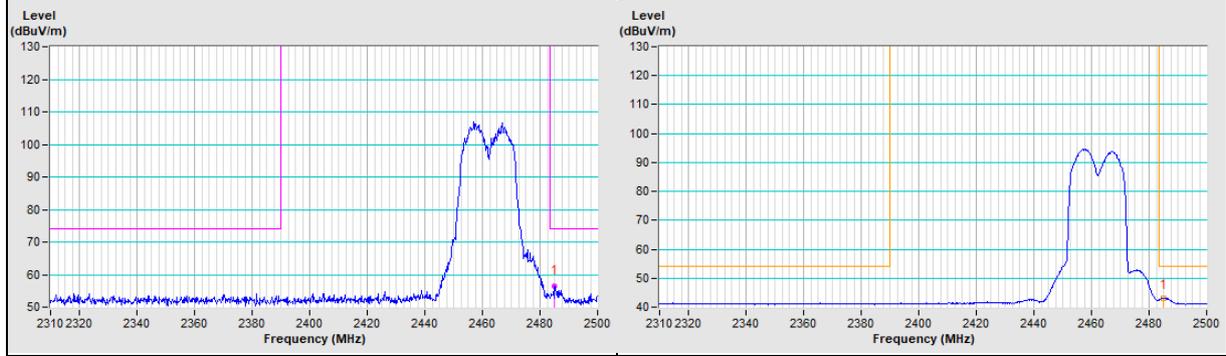


Vertical (Peak)	Vertical (Average)
-----------------	--------------------

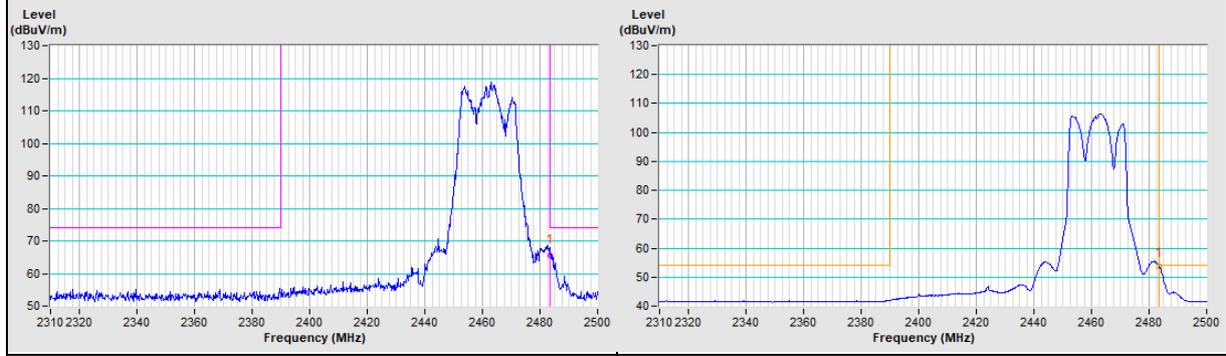


802.11ax (HE40) Channel 3

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

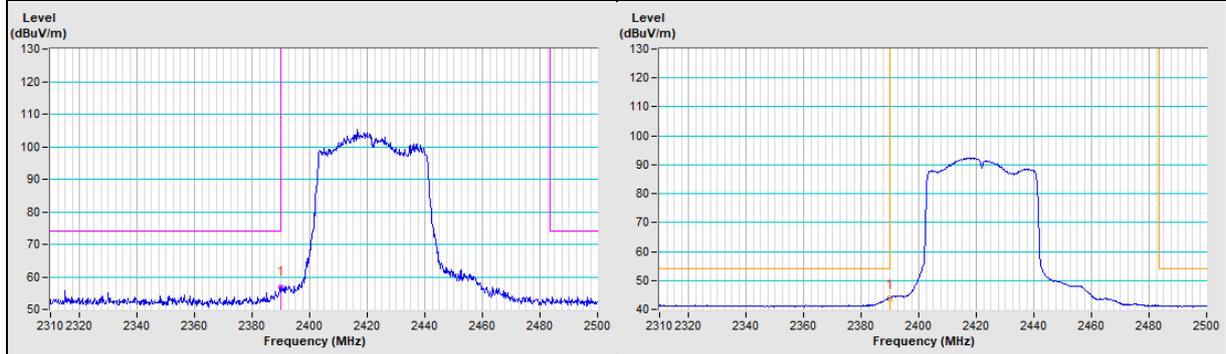


Vertical (Peak)	Vertical (Average)
-----------------	--------------------

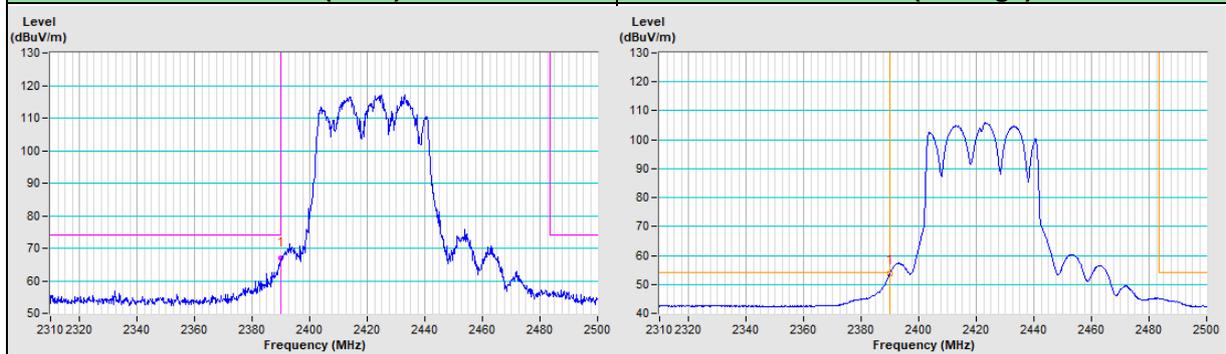


802.11ax (HE40) Channel 9

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

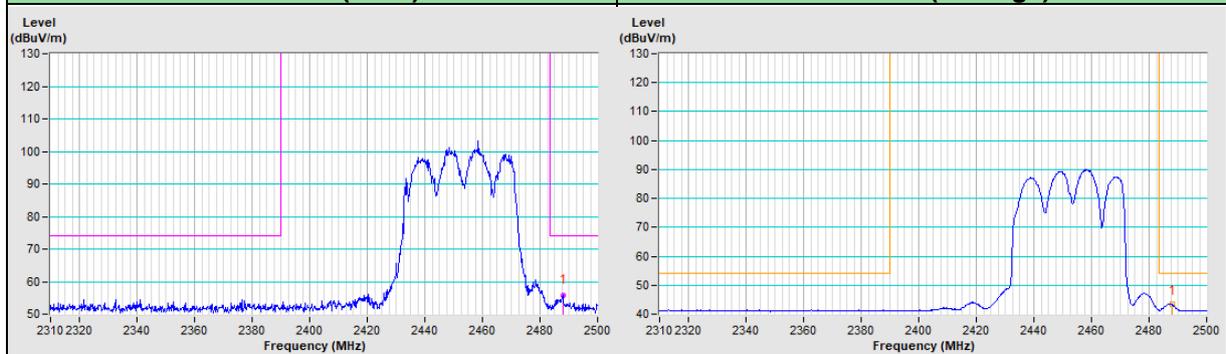

Vertical (Peak)	Vertical (Average)
-----------------	--------------------

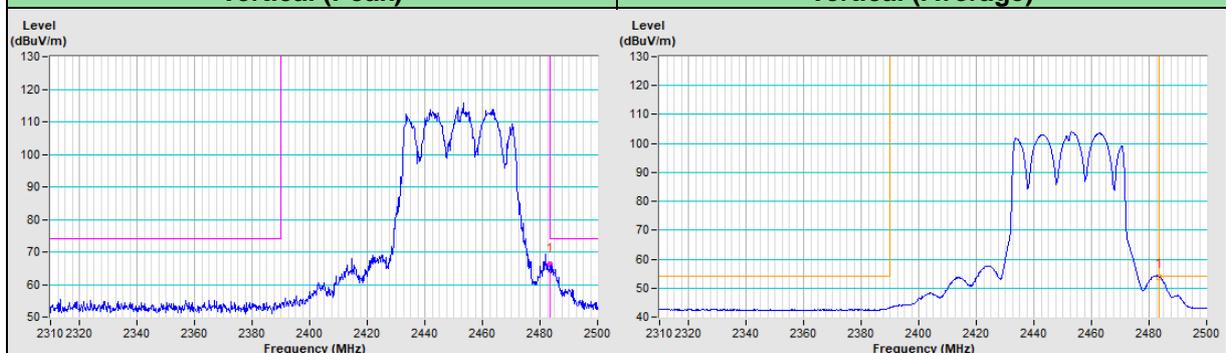

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---