





FR1 n77 / 100MHz / DFT-S OFDM / 16QAM

Lowest Band Edge / Full RB

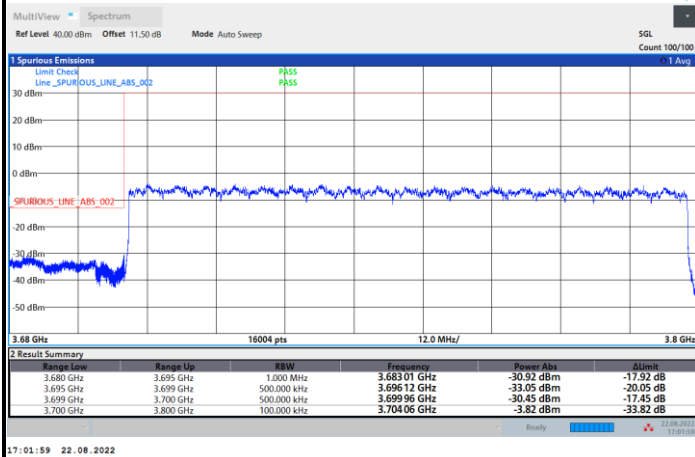


Highest Band Edge / Full RB

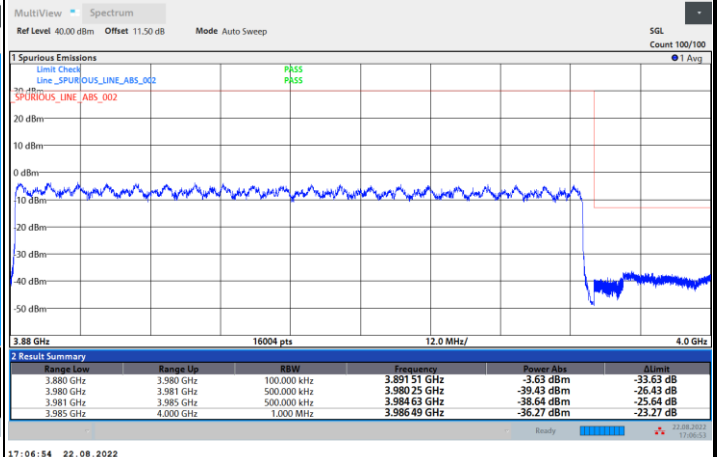


FR1 n77 / 100MHz / DFT-S OFDM / 64QAM

Lowest Band Edge / Full RB

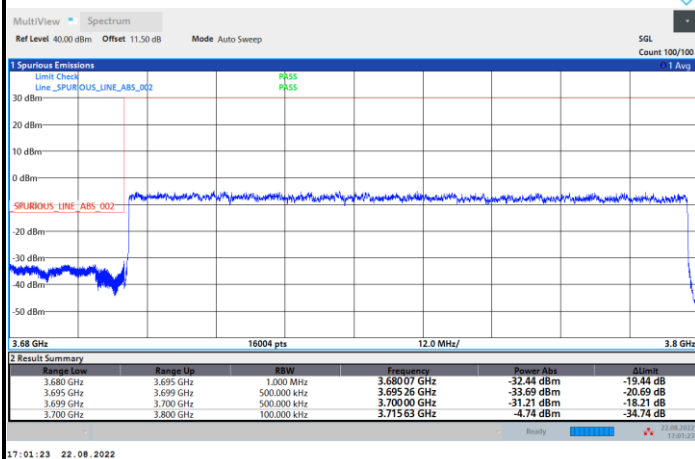


Highest Band Edge / Full RB

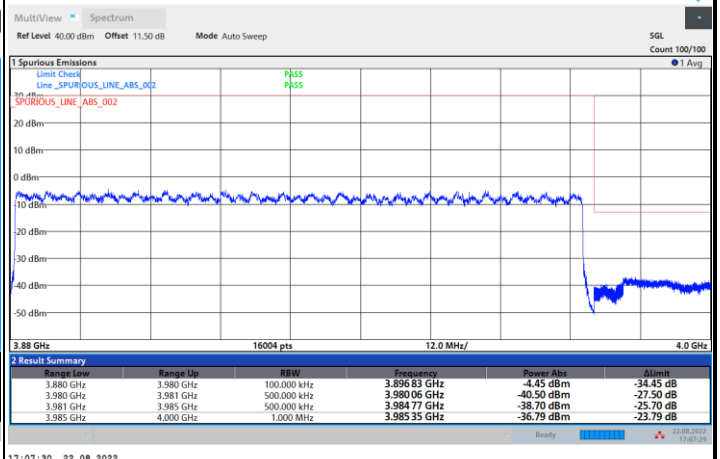




FR1 n77 / 100MHz / DFT-S OFDM / 256QAM

Lowest Band Edge / Full RB

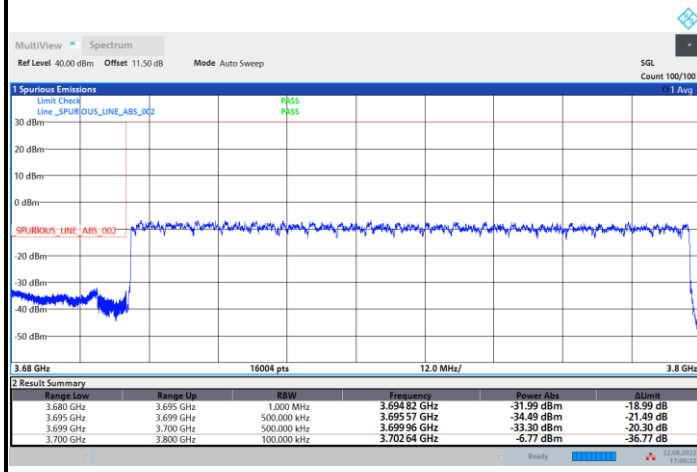


Highest Band Edge / Full RB

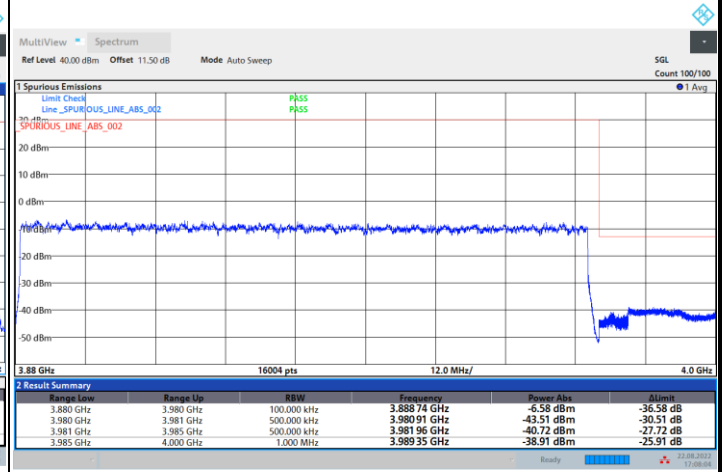


FR1 n77 / 100MHz / CP OFDM / QPSK / Full RB

Lowest Band Edge

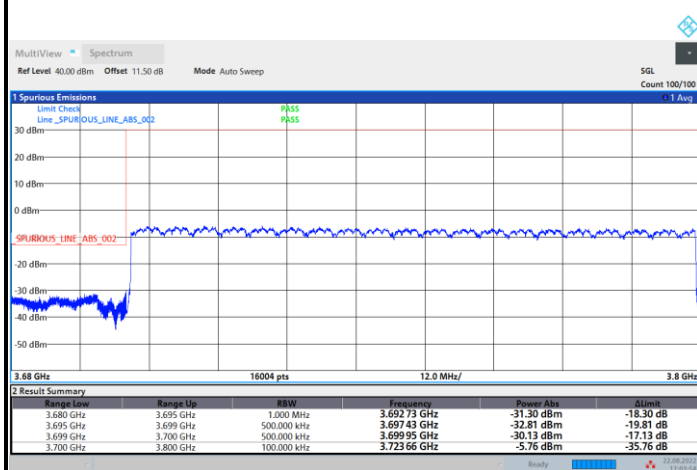

Highest Band Edge

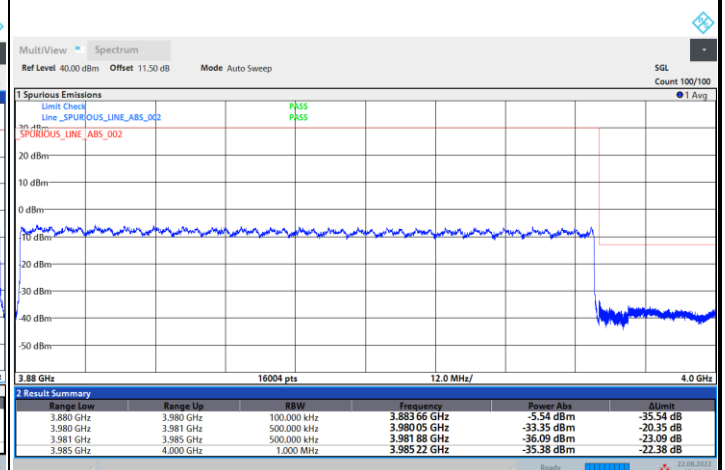





Conducted Spurious Emission

FR1 n77 / 10MHz / DFT-S OFDM / QPSK / 1RB1


Lowest Channel

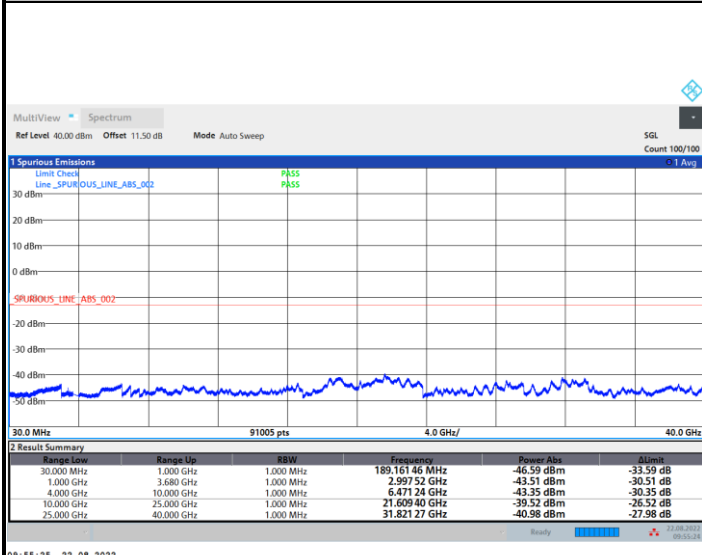

Middle Channel

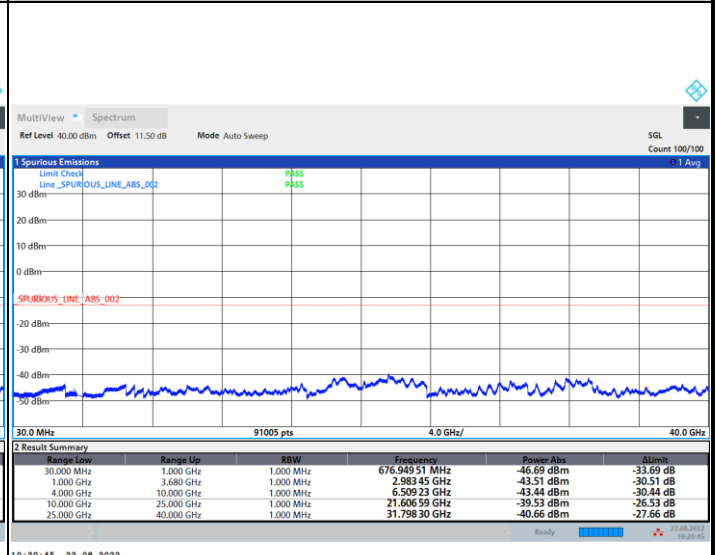

Highest Channel

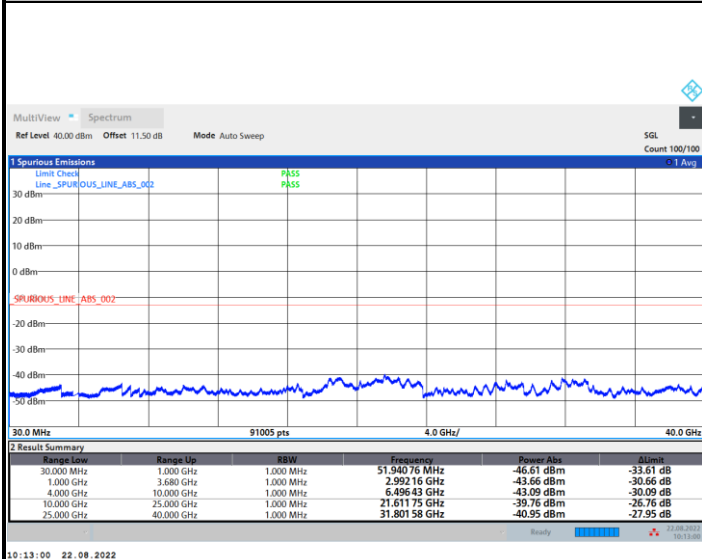

Frequency Stability

Test Conditions		FR1 n77 (PI/2 BPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 20MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0025	PASS
40	Normal Voltage	0.0007	
30	Normal Voltage	0.0008	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0007	
0	Normal Voltage	0.0021	
-10	Normal Voltage	0.0012	
-20	Normal Voltage	0.0009	
-30	Normal Voltage	0.0040	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0004	

Note:

1. Normal Voltage = 3.85 V. ; Battery End Point (BEP) = 3.40 V. ; Maximum Voltage = 4.40 V.
2. The frequency fundamental emissions stay within the authorized frequency block.

Appendix B. Test Results of Radiated Test

<Internal Antenna>

<Ant. 1>

5G NR n77 HPUE

5G NR n77_HPUE / 20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7403	-40.65	-13	-27.65	-71.55	-47.95	1.94	11.39	H
	11104	-35.35	-13	-22.35	-72.48	-41.58	2.24	10.62	H
	14805	-28.73	-13	-15.73	-71.65	-36.77	2.58	12.77	H
	18506	-57.25	-13	-44.25	-69.13	-69.45	3.24	17.59	H
	22208	-58.53	-13	-45.53	-74.26	-71.72	3.52	18.86	H
	25909	-54.05	-13	-41.05	-72.87	-67.06	3.92	19.08	H
	7403	-40.29	-13	-27.29	-71.29	-47.59	1.94	11.39	V
	11104	-35.13	-13	-22.13	-72.21	-41.36	2.24	10.62	V
	14805	-27.62	-13	-14.62	-71.65	-35.66	2.58	12.77	V
	18506	-58.91	-13	-45.91	-70.57	-71.11	3.24	17.59	V
	22208	-57.26	-13	-44.26	-72.59	-70.45	3.52	18.86	V
	25909	-58.62	-13	-45.62	-77.13	-71.63	3.92	19.08	V
Middle	7663	-41.16	-13	-28.16	-71.77	-48.75	1.89	11.63	H
	11494	-34.69	-13	-21.69	-72.23	-41.24	2.40	11.09	H
	15325	-29.19	-13	-16.19	-70.91	-39.03	2.64	14.63	H
	19156	-51.77	-13	-38.77	-63.6	-63.60	3.25	17.22	H
	22988	-51.63	-13	-38.63	-68.57	-64.52	3.57	18.60	H
	26819	-53.31	-13	-40.31	-73.55	-66.28	3.92	19.05	H
	7663	-41.00	-13	-28.00	-71.83	-48.59	1.89	11.63	V
	11494	-34.08	-13	-21.08	-71.74	-40.63	2.40	11.09	V
	15325	-28.96	-13	-15.96	-71.38	-38.80	2.64	14.63	V
	19156	-52.66	-13	-39.66	-64.25	-64.49	3.25	17.22	V
	22988	-56.63	-13	-43.63	-73.24	-69.52	3.57	18.60	V
	26819	-54.19	-13	-41.19	-74.04	-67.16	3.92	19.05	V



Highest	7923	-40.67	-13	-27.67	-71.91	-47.96	1.95	11.39	H
	11884	-32.80	-13	-19.80	-71.94	-40.57	2.56	12.48	H
	15845	-30.96	-13	-17.96	-71.32	-42.40	2.78	16.37	H
	19806	-42.89	-13	-29.89	-55.37	-54.98	3.20	17.44	H
	23768	-42.83	-13	-29.83	-60.13	-55.47	3.74	18.54	H
	27729	-42.05	-13	-29.05	-62.55	-55.54	3.95	19.59	H
	7923	-39.08	-13	-26.08	-70.67	-46.37	1.95	11.39	V
	11884	-32.97	-13	-19.97	-71.68	-40.74	2.56	12.48	V
	15845	-30.86	-13	-17.86	-71.44	-42.30	2.78	16.37	V
	19806	-44.97	-13	-31.97	-57.16	-57.06	3.20	17.44	V
	23768	-47.93	-13	-34.93	-64.87	-60.57	3.74	18.54	V
	27729	-53.14	-13	-40.14	-73.3	-66.63	3.95	19.59	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 5>

5G NR n77 HPUE (SRS)

5G NR n77_HPUE / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7663	-41.21	-13	-28.21	-71.82	-48.80	1.89	11.63	H
	11494	-34.51	-13	-21.51	-72.05	-41.06	2.40	11.09	H
	15325	-29.31	-13	-16.31	-71.03	-39.15	2.64	14.63	H
	19156	-58.54	-13	-45.54	-70.37	-70.37	3.25	17.22	H
	22987	-53.90	-13	-40.90	-70.84	-66.79	3.57	18.61	H
	26818	-55.80	-13	-42.80	-76.05	-68.77	3.92	19.05	H
	7663	-40.94	-13	-27.94	-71.76	-48.53	1.89	11.63	V
	11494	-34.34	-13	-21.34	-72	-40.89	2.40	11.09	V
	15325	-28.62	-13	-15.62	-71.04	-38.46	2.64	14.63	V
	19156	-55.61	-13	-42.61	-67.2	-67.44	3.25	17.22	V
	22987	-51.81	-13	-38.81	-68.41	-64.70	3.57	18.61	V
	26818	-56.50	-13	-43.50	-76.36	-69.47	3.92	19.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 6>

5G NR n77 HPUE (SRS)

5G NR n77_HPUE / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7663	-41.35	-13	-28.35	-71.96	-48.94	1.89	11.63	H
	11494	-34.55	-13	-21.55	-72.09	-41.10	2.40	11.09	H
	15325	-29.52	-13	-16.52	-71.24	-39.36	2.64	14.63	H
	19156	-57.98	-13	-44.98	-69.81	-69.81	3.25	17.22	H
	22987	-53.97	-13	-40.97	-70.91	-66.86	3.57	18.61	H
	26818	-56.42	-13	-43.42	-76.65	-69.39	3.92	19.05	H
	7663	-41.09	-13	-28.09	-71.92	-48.68	1.89	11.63	V
	11494	-34.49	-13	-21.49	-72.15	-41.04	2.40	11.09	V
	15325	-28.93	-13	-15.93	-71.35	-38.77	2.64	14.63	V
	19156	-57.54	-13	-44.54	-69.13	-69.37	3.25	17.22	V
	22987	-52.23	-13	-39.23	-68.83	-65.12	3.57	18.61	V
	26818	-57.01	-13	-44.01	-76.85	-69.98	3.92	19.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 2 + Ant. 1>

EN-DC 2A-n77A HPUE

EN-DC 2A-n77A_HPUE / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7662	-40.97	-13	-27.97	-71.58	-48.56	1.89	11.63	H
	11493	-34.44	-13	-21.44	-71.98	-40.98	2.40	11.09	H
	15325	-29.27	-13	-16.27	-70.99	-39.11	2.64	14.63	H
	19156	-58.89	-13	-45.89	-70.72	-70.72	3.25	17.22	H
	22987	-58.03	-13	-45.03	-74.97	-70.92	3.57	18.61	H
	26818	-57.07	-13	-44.07	-77.31	-70.04	3.92	19.05	H
	7662	-40.92	-13	-27.92	-71.75	-48.51	1.89	11.63	V
	11493	-34.34	-13	-21.34	-72	-40.88	2.40	11.09	V
	15325	-28.81	-13	-15.81	-71.23	-38.65	2.64	14.63	V
	19156	-58.40	-13	-45.40	-69.99	-70.23	3.25	17.22	V
	22987	-54.93	-13	-41.93	-71.54	-67.82	3.57	18.61	V
	26818	-56.70	-13	-43.70	-76.55	-69.67	3.92	19.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC 66A-n77A HPUE

EN-DC 66A-n77A_HPUE / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7662	-41.00	-13	-28.00	-71.61	-48.59	1.89	11.63	H
	11493	-34.24	-13	-21.24	-71.78	-40.78	2.40	11.09	H
	15325	-29.19	-13	-16.19	-70.91	-39.03	2.64	14.63	H
	19156	-58.69	-13	-45.69	-70.52	-70.52	3.25	17.22	H
	22987	-58.10	-13	-45.10	-75.04	-70.99	3.57	18.61	H
	26818	-54.30	-13	-41.30	-74.54	-67.27	3.92	19.05	H
	7662	-40.82	-13	-27.82	-71.64	-48.41	1.89	11.63	V
	11493	-34.65	-13	-21.65	-72.31	-41.19	2.40	11.09	V
	15325	-28.48	-13	-15.48	-70.9	-38.32	2.64	14.63	V
	19156	-59.56	-13	-46.56	-71.15	-71.39	3.25	17.22	V
	22987	-57.27	-13	-44.27	-73.88	-70.16	3.57	18.61	V
	26818	-55.45	-13	-42.45	-75.3	-68.42	3.92	19.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC 30A-n77A HPUE

EN-DC 30A-n77A_HPUE / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7662	-41.18	-13	-28.18	-71.79	-48.77	1.89	11.63	H
	11493	-34.74	-13	-21.74	-72.28	-41.28	2.40	11.09	H
	15325	-30.28	-13	-17.28	-72	-40.12	2.64	14.63	H
	19156	-59.81	-13	-46.81	-71.64	-71.64	3.25	17.22	H
	22987	-57.48	-13	-44.48	-74.42	-70.37	3.57	18.61	H
	26818	-56.97	-13	-43.97	-77.21	-69.94	3.92	19.05	H
	7662	-40.99	-13	-27.99	-71.81	-48.58	1.89	11.63	V
	11493	-34.56	-13	-21.56	-72.22	-41.10	2.40	11.09	V
	15325	-29.13	-13	-16.13	-71.55	-38.97	2.64	14.63	V
	19156	-57.80	-13	-44.80	-69.39	-69.63	3.25	17.22	V
	22987	-57.59	-13	-44.59	-74.2	-70.48	3.57	18.61	V
	26818	-56.45	-13	-43.45	-76.3	-69.42	3.92	19.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 1 + Ant. 2>

EN-DC 5A-n77A HPUE

EN-DC 5A-n77A_HPUE / 20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7402	-40.46	-13	-27.46	-71.37	-47.77	1.94	11.40	H
	11103	-34.87	-13	-21.87	-72	-41.10	2.24	10.62	H
	14805	-29.06	-13	-16.06	-71.97	-37.10	2.58	12.77	H
	18506	-60.72	-13	-47.72	-72.6	-72.92	3.24	17.59	H
	22207	-60.12	-13	-47.12	-75.85	-73.31	3.52	18.86	H
	25908	-57.04	-13	-44.04	-75.86	-70.05	3.92	19.08	H
	7402	-40.50	-13	-27.50	-71.5	-47.81	1.94	11.40	V
	11103	-35.41	-13	-22.41	-72.49	-41.64	2.24	10.62	V
	14805	-27.63	-13	-14.63	-71.66	-35.67	2.58	12.77	V
	18506	-54.08	-13	-41.08	-65.74	-66.28	3.24	17.59	V
	22207	-56.88	-13	-43.88	-72.21	-70.07	3.52	18.86	V
	25908	-54.67	-13	-41.67	-73.18	-67.68	3.92	19.08	V
Middle	7662	-40.89	-13	-27.89	-71.51	-48.48	1.89	11.63	H
	11493	-34.68	-13	-21.68	-72.22	-41.22	2.40	11.09	H
	15325	-29.46	-13	-16.46	-71.18	-39.30	2.64	14.63	H
	19156	-58.84	-13	-45.84	-70.67	-70.67	3.25	17.22	H
	22987	-56.79	-13	-43.79	-73.73	-69.68	3.57	18.61	H
	26818	-50.04	-13	-37.04	-70.28	-63.01	3.92	19.05	H
	7662	-40.51	-13	-27.51	-71.33	-48.10	1.89	11.63	V
	11493	-34.59	-13	-21.59	-72.25	-41.13	2.40	11.09	V
	15325	-29.24	-13	-16.24	-71.66	-39.08	2.64	14.63	V
	19156	-56.81	-13	-43.81	-68.4	-68.64	3.25	17.22	V
	22987	-53.73	-13	-40.73	-70.34	-66.62	3.57	18.61	V
	26818	-47.41	-13	-34.41	-67.26	-60.38	3.92	19.05	V



Highest	7922	-41.08	-13	-28.08	-72.31	-48.38	1.95	11.40	H
	11883	-32.74	-13	-19.74	-71.87	-40.51	2.56	12.48	H
	15845	-31.13	-13	-18.13	-71.49	-42.57	2.78	16.37	H
	19806	-61.70	-13	-48.70	-74.18	-73.79	3.20	17.44	H
	23767	-55.76	-13	-42.76	-73.06	-68.41	3.74	18.54	H
	27728	-46.75	-13	-33.75	-67.25	-60.24	3.95	19.59	H
	7922	-38.28	-13	-25.28	-69.87	-45.58	1.95	11.40	V
	11883	-32.72	-13	-19.72	-71.43	-40.49	2.56	12.48	V
	15845	-31.08	-13	-18.08	-71.66	-42.52	2.78	16.37	V
	19806	-60.83	-13	-47.83	-73.02	-72.92	3.20	17.44	V
	23767	-50.79	-13	-37.79	-67.73	-63.44	3.74	18.54	V
	27728	-35.70	-13	-22.70	-55.86	-49.19	3.95	19.59	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EN-DC 12A-n77A HPUE**

EN-DC 12A-n77A_HPUE / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7662	-40.67	-13	-27.67	-71.28	-48.26	1.89	11.63	H
	11493	-34.83	-13	-21.83	-72.37	-41.37	2.40	11.09	H
	15325	-29.31	-13	-16.31	-71.03	-39.15	2.64	14.63	H
	19156	-60.12	-13	-47.12	-71.95	-71.95	3.25	17.22	H
	22987	-57.90	-13	-44.90	-74.84	-70.79	3.57	18.61	H
	26818	-51.14	-13	-38.14	-71.38	-64.11	3.92	19.05	H
	7662	-39.79	-13	-26.79	-70.61	-47.38	1.89	11.63	V
	11493	-34.48	-13	-21.48	-72.14	-41.02	2.40	11.09	V
	15325	-28.78	-13	-15.78	-71.2	-38.62	2.64	14.63	V
	19156	-56.25	-13	-43.25	-67.84	-68.08	3.25	17.22	V
	22987	-54.47	-13	-41.47	-71.08	-67.36	3.57	18.61	V
	26818	-48.22	-13	-35.22	-68.07	-61.19	3.92	19.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EN-DC 14A-n77A HPUE**

EN-DC 14A-n77A_HPUE / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7662	-39.86	-13	-26.86	-70.48	-47.45	1.89	11.63	H
	11493	-34.60	-13	-21.60	-72.14	-41.14	2.40	11.09	H
	15325	-29.38	-13	-16.38	-71.1	-39.22	2.64	14.63	H
	19156	-61.22	-13	-48.22	-73.05	-73.05	3.25	17.22	H
	22987	-59.02	-13	-46.02	-75.96	-71.91	3.57	18.61	H
	26818	-49.37	-13	-36.37	-69.61	-62.34	3.92	19.05	H
	7662	-40.33	-13	-27.33	-71.16	-47.92	1.89	11.63	V
	11493	-34.44	-13	-21.44	-72.1	-40.98	2.40	11.09	V
	15325	-28.91	-13	-15.91	-71.33	-38.75	2.64	14.63	V
	19156	-55.54	-13	-42.54	-67.13	-67.37	3.25	17.22	V
	22987	-55.03	-13	-42.03	-71.64	-67.92	3.57	18.61	V
	26818	-47.62	-13	-34.62	-67.47	-60.59	3.92	19.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<External Antenna>

<Ant. 2 + Ant. 1>

EN-DC 66A-n77A HPUE

EN-DC 66A-n77A HPUE / 20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7402	-40.68	-13	-27.68	-71.58	-47.99	1.94	11.40	H
	11103	-35.12	-13	-22.12	-72.25	-41.35	2.24	10.62	H
	14805	-28.99	-13	-15.99	-71.91	-37.03	2.58	12.77	H
	18506	-60.01	-13	-47.01	-71.89	-72.21	3.24	17.59	H
	22207	-59.16	-13	-46.16	-74.89	-72.35	3.52	18.86	H
	25908	-58.15	-13	-45.15	-76.97	-71.16	3.92	19.08	H
	7402	-41.06	-13	-28.06	-72.06	-48.37	1.94	11.40	V
	11103	-35.39	-13	-22.39	-72.47	-41.62	2.24	10.62	V
	14805	-27.87	-13	-14.87	-71.9	-35.91	2.58	12.77	V
	18506	-58.83	-13	-45.83	-70.48	-71.03	3.24	17.59	V
	22207	-60.55	-13	-47.55	-75.88	-73.74	3.52	18.86	V
	25908	-56.37	-13	-43.37	-74.9	-69.38	3.92	19.08	V
Middle	7662	-41.92	-13	-28.92	-71.53	-49.51	1.89	11.63	H
	11493	-34.42	-13	-21.42	-71.96	-40.96	2.40	11.09	H
	15325	-29.48	-13	-16.48	-71.2	-39.32	2.64	14.63	H
	19156	-56.31	-13	-43.31	-68.14	-68.14	3.25	17.22	H
	22987	-59.18	-13	-46.18	-76.12	-72.07	3.57	18.61	H
	26818	-56.28	-13	-43.28	-76.53	-69.25	3.92	19.05	H
	7662	-40.87	-13	-27.87	-71.7	-48.46	1.89	11.63	V
	11493	-34.18	-13	-21.18	-71.84	-40.72	2.40	11.09	V
	15325	-28.80	-13	-15.80	-71.22	-38.64	2.64	14.63	V
	19156	-56.94	-13	-43.94	-68.53	-68.77	3.25	17.22	V
	22987	-58.35	-13	-45.35	-74.95	-71.24	3.57	18.61	V
	26818	-57.56	-13	-44.56	-77.41	-70.53	3.92	19.05	V



Highest	7922	-40.43	-13	-27.43	-71.67	-47.73	1.95	11.40	H
	11883	-32.71	-13	-19.71	-71.85	-40.48	2.56	12.48	H
	15845	-30.79	-13	-17.79	-71.15	-42.23	2.78	16.37	H
	19806	-53.80	-13	-40.80	-66.29	-65.89	3.20	17.44	H
	23767	-55.19	-13	-42.19	-72.49	-67.84	3.74	18.54	H
	27728	-54.43	-13	-41.43	-74.93	-67.92	3.95	19.59	H
	7922	-40.31	-13	-27.31	-71.9	-47.61	1.95	11.40	V
	11883	-33.15	-13	-20.15	-70.56	-40.92	2.56	12.48	V
	15845	-30.81	-13	-17.81	-71.39	-42.25	2.78	16.37	V
	19806	-44.32	-13	-31.32	-56.52	-56.41	3.20	17.44	V
	23767	-52.97	-13	-39.97	-69.91	-65.62	3.74	18.54	V
	27728	-51.25	-13	-38.25	-71.41	-64.74	3.95	19.59	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 1 + Ant. 2>

EN-DC 5A-n77A HPUE

EN-DC 5A-n77A_HPUE / 20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7402	-41.41	-13	-28.41	-72.32	-48.72	1.94	11.40	H
	11103	-35.29	-13	-22.29	-72.42	-41.52	2.24	10.62	H
	14805	-29.28	-13	-16.28	-72.19	-37.32	2.58	12.77	H
	18506	-59.42	-13	-46.42	-71.3	-71.62	3.24	17.59	H
	22207	-58.79	-13	-45.79	-74.52	-71.98	3.52	18.86	H
	25908	-57.87	-13	-44.87	-76.7	-70.88	3.92	19.08	H
	7402	-41.18	-13	-28.18	-72.18	-48.49	1.94	11.40	V
	11103	-35.42	-13	-22.42	-72.5	-41.65	2.24	10.62	V
	14805	-27.89	-13	-14.89	-71.92	-35.93	2.58	12.77	V
	18506	-58.88	-13	-45.88	-70.53	-71.08	3.24	17.59	V
	22207	-59.50	-13	-46.50	-74.83	-72.69	3.52	18.86	V
	25908	-55.81	-13	-42.81	-74.34	-68.82	3.92	19.08	V
Middle	7662	-40.95	-13	-27.95	-71.56	-48.54	1.89	11.63	H
	11493	-34.78	-13	-21.78	-72.32	-41.32	2.40	11.09	H
	15325	-29.55	-13	-16.55	-71.27	-39.39	2.64	14.63	H
	19156	-59.05	-13	-46.05	-70.88	-70.88	3.25	17.22	H
	22987	-54.24	-13	-41.24	-71.18	-67.13	3.57	18.61	H
	26818	-49.94	-13	-36.94	-70.16	-62.91	3.92	19.05	H
	7662	-41.52	-13	-28.52	-72.34	-49.11	1.89	11.63	V
	11493	-34.50	-13	-21.50	-72.16	-41.04	2.40	11.09	V
	15325	-28.85	-13	-15.85	-71.27	-38.69	2.64	14.63	V
	19156	-58.12	-13	-45.12	-69.71	-69.95	3.25	17.22	V
	22987	-52.08	-13	-39.08	-68.68	-64.97	3.57	18.61	V
	26818	-51.05	-13	-38.05	-70.91	-64.02	3.92	19.05	V



Highest	7922	-41.52	-13	-28.52	-72.75	-48.82	1.95	11.40	H
	11883	-33.37	-13	-20.37	-72.5	-41.14	2.56	12.48	H
	15845	-31.44	-13	-18.44	-71.8	-42.88	2.78	16.37	H
	19806	-58.11	-13	-45.11	-70.6	-70.20	3.20	17.44	H
	23767	-55.04	-13	-42.04	-72.34	-67.69	3.74	18.54	H
	27728	-49.58	-13	-36.58	-70.08	-63.07	3.95	19.59	H
	7922	-40.88	-13	-27.88	-72.74	-48.18	1.95	11.40	V
	11883	-33.66	-13	-20.66	-72.37	-41.43	2.56	12.48	V
	15845	-31.50	-13	-18.50	-72.08	-42.94	2.78	16.37	V
	19806	-58.80	-13	-45.80	-71	-70.89	3.20	17.44	V
	23767	-54.19	-13	-41.19	-71.13	-66.84	3.74	18.54	V
	27728	-42.20	-13	-29.20	-62.36	-55.69	3.95	19.59	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.