




Plots of Injected signal (AWGN) level

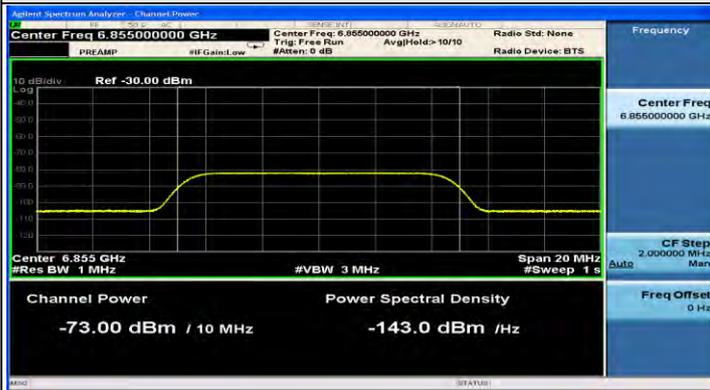


802.11be (EHT20) / CH181

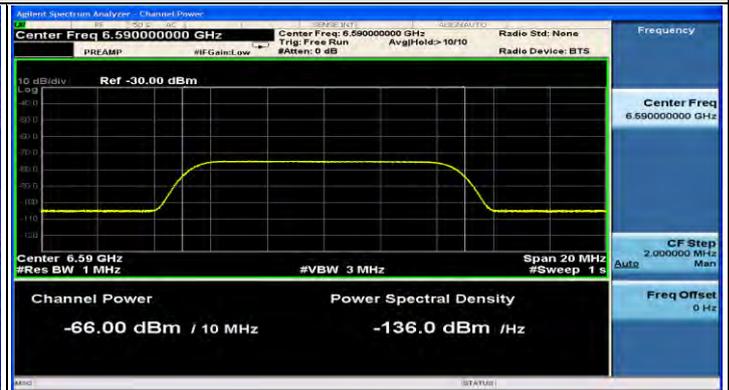

802.11be (EHT320) / CH159 (Low Edge)

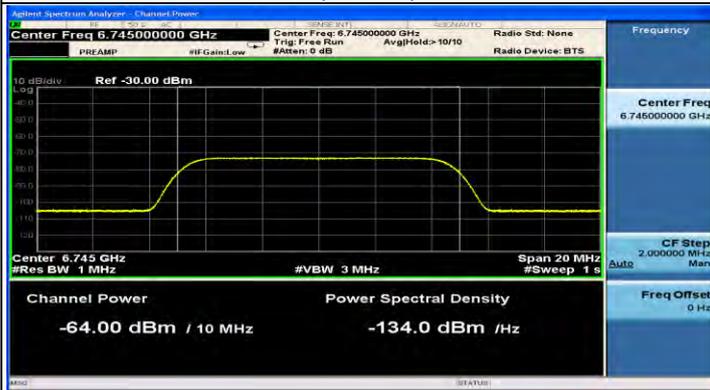


802.11be (EHT320) / CH159 (Middle)

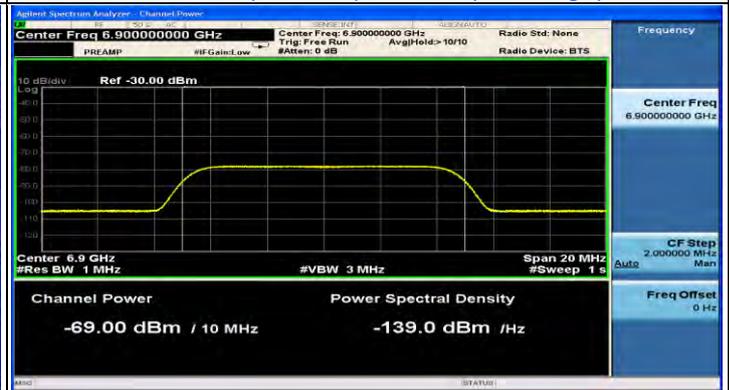


802.11be (EHT320) / CH159 (High Edge)


Plots of EUT ceased transmission in the time domain

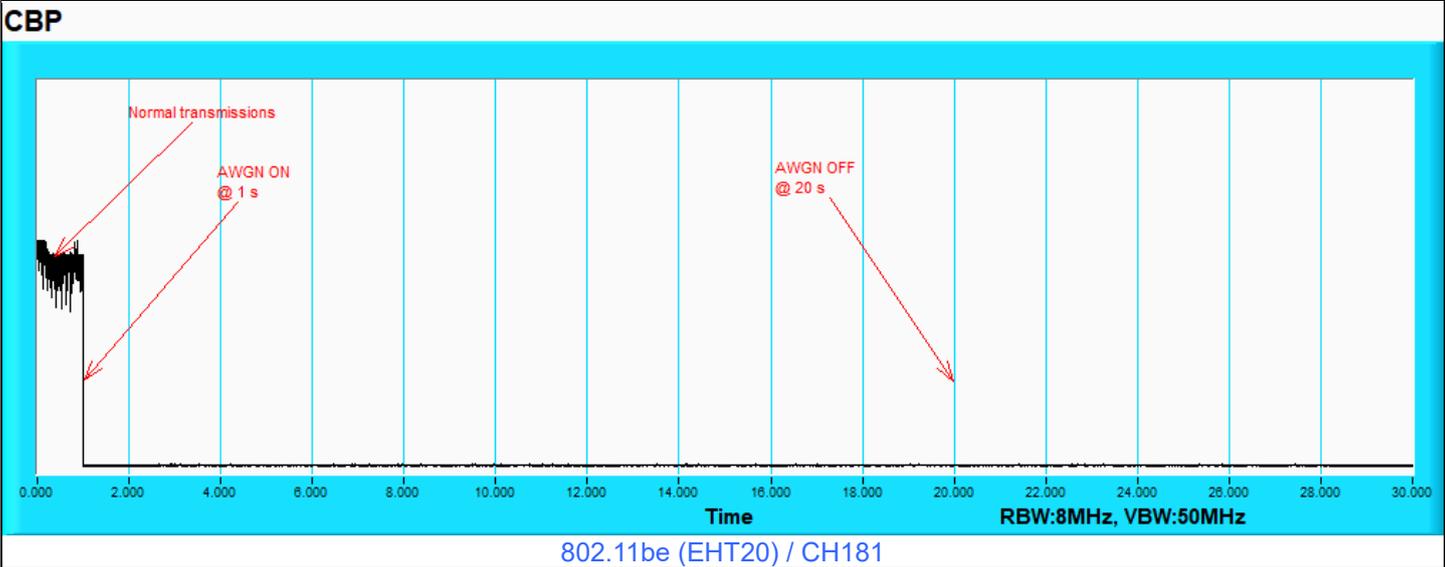


Plots of EUT ceased transmission in the time domain

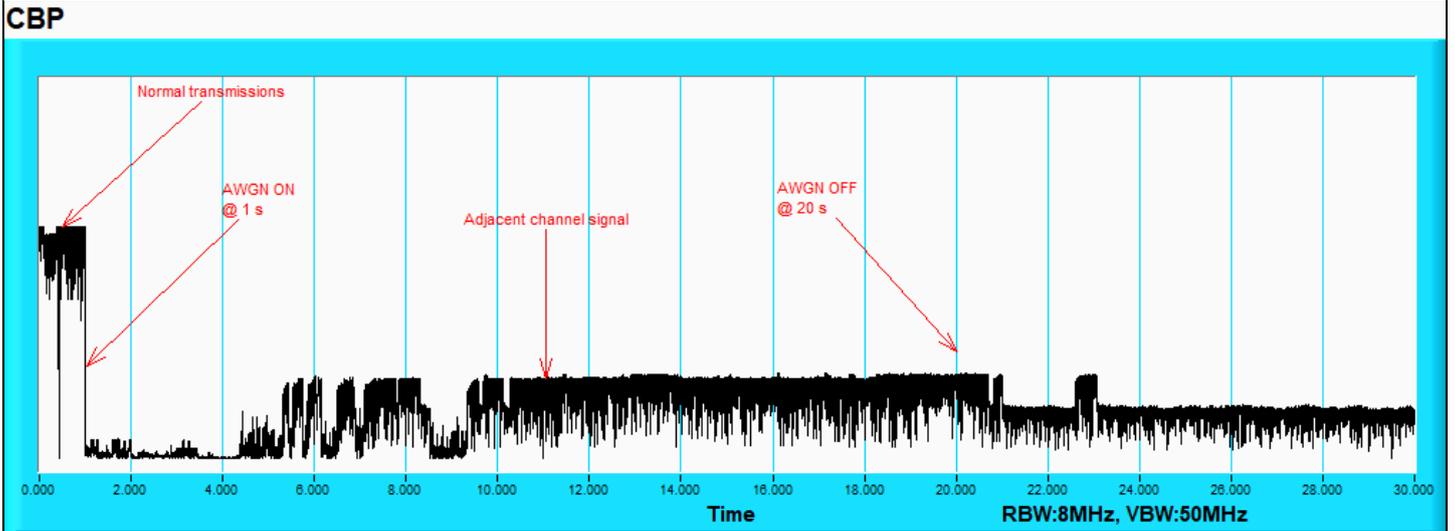

802.11be (EHT320) / CH159(Low Edge)

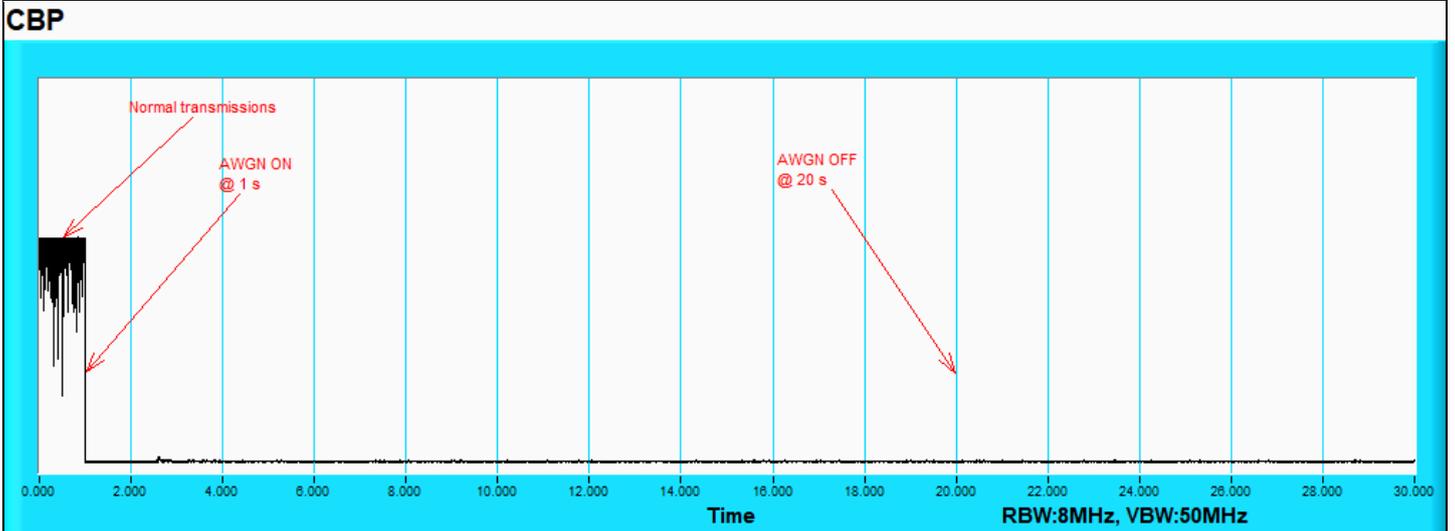

802.11be (EHT320) / CH159(Middle)

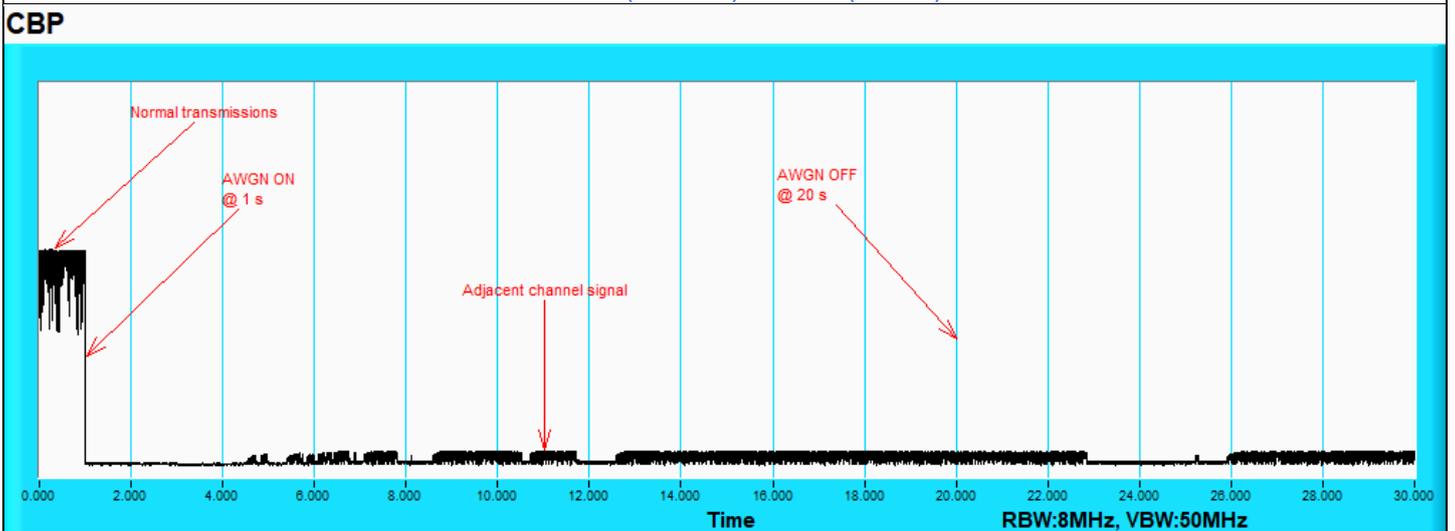


802.11be (EHT320) / CH159(High Edge)

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	193	6915	6915	-72	1.45	0	-73.45	-62	OFF
					-77	1.45	0	-78.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
	320	191	6905	6750	-66	1.45	0	-67.45	-62	OFF
					-69	1.45	0	-70.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
					-65	1.45	0	-66.45	-62	OFF
					-73	1.45	0	-74.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
	7060				-69	1.45	0	-70.45	-62	OFF
					-72	1.45	0	-73.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6915	v	v	v	v	v	v	v			
320	6750	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass
	6905	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass
	7060	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass

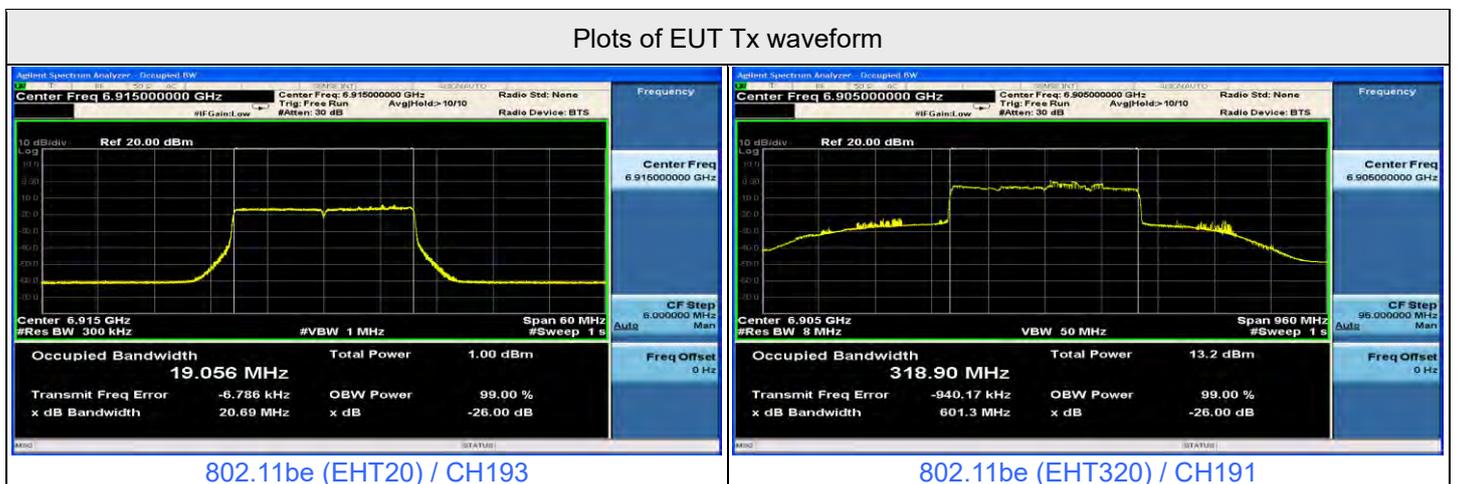


Plots of Injected signal (AWGN) level

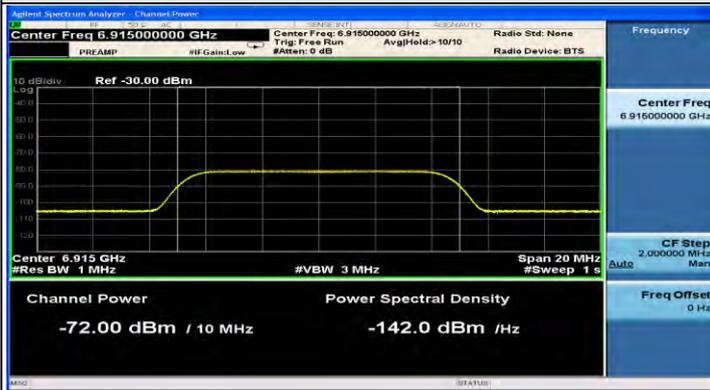


802.11be (EHT20) / CH193

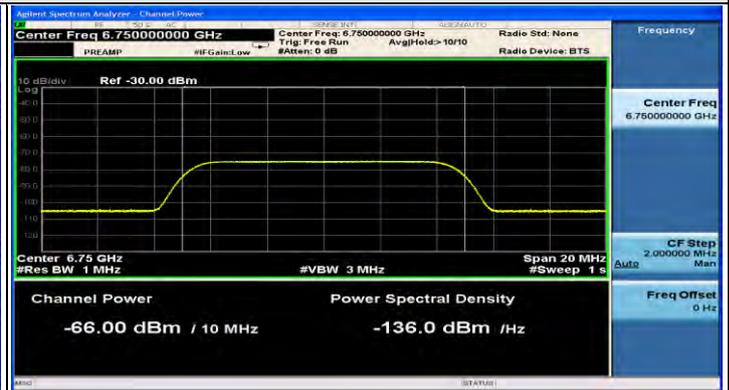

802.11be (EHT320) / CH191(Low Edge)

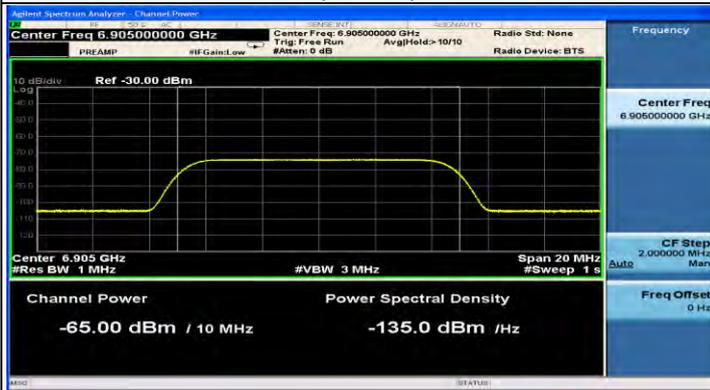


802.11be (EHT320) / CH191(Middle)

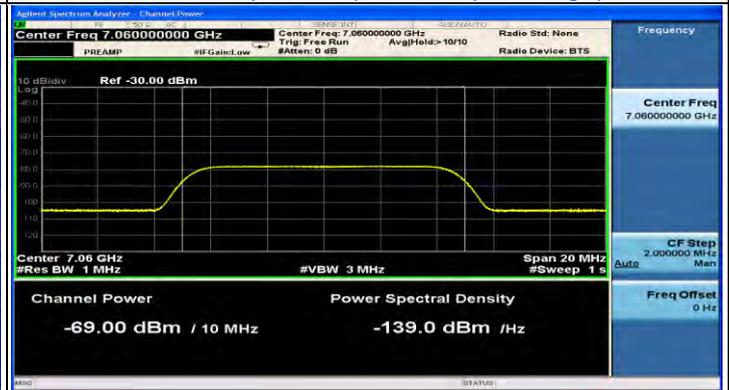




802.11be (EHT320) / CH191(High Edge)

Plots of EUT ceased transmission in the time domain

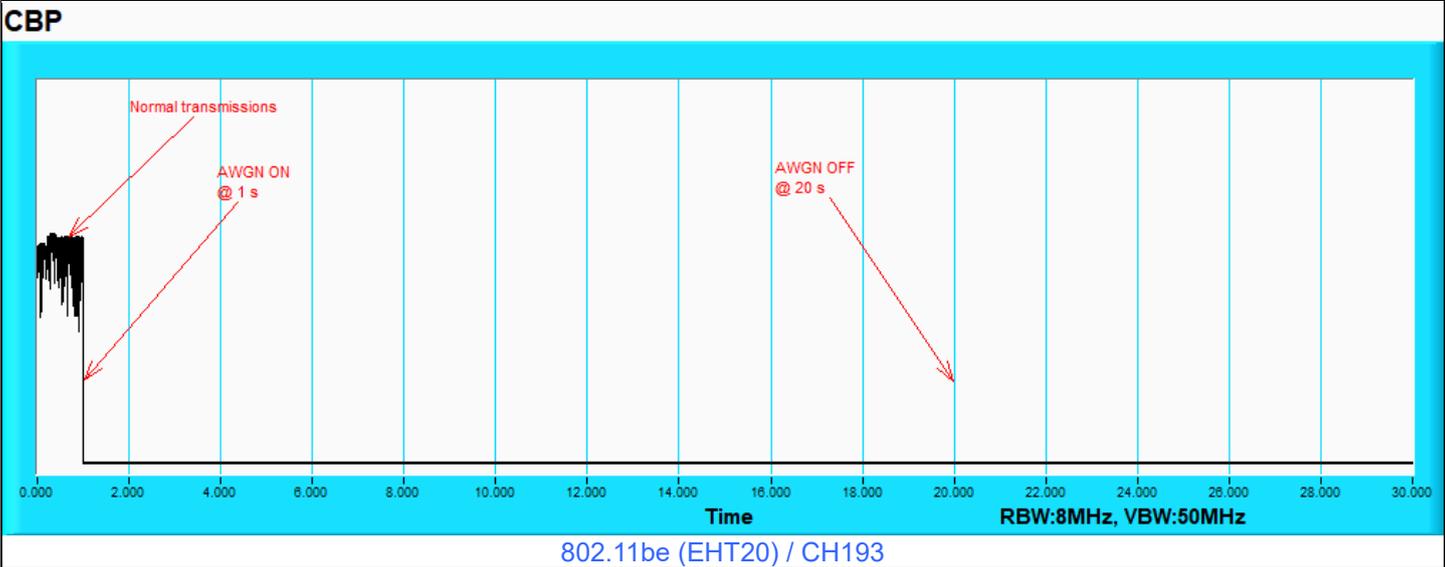

802.11be (EHT20) / CH193

Plots of EUT ceased transmission in the time domain

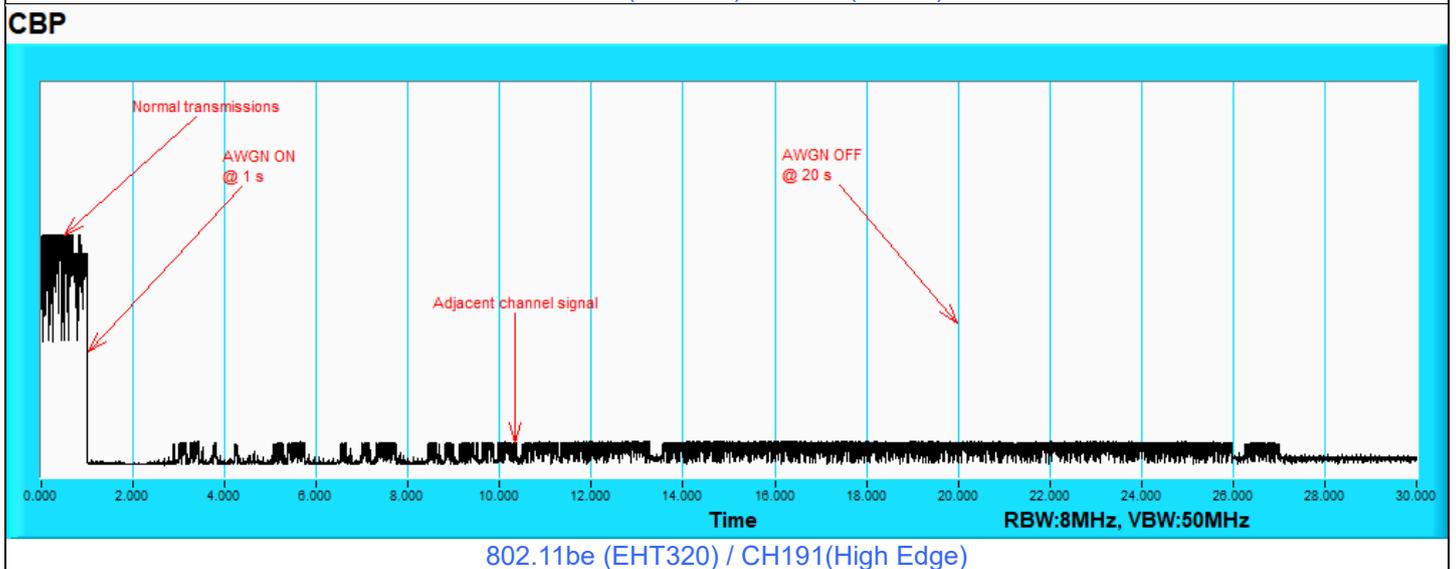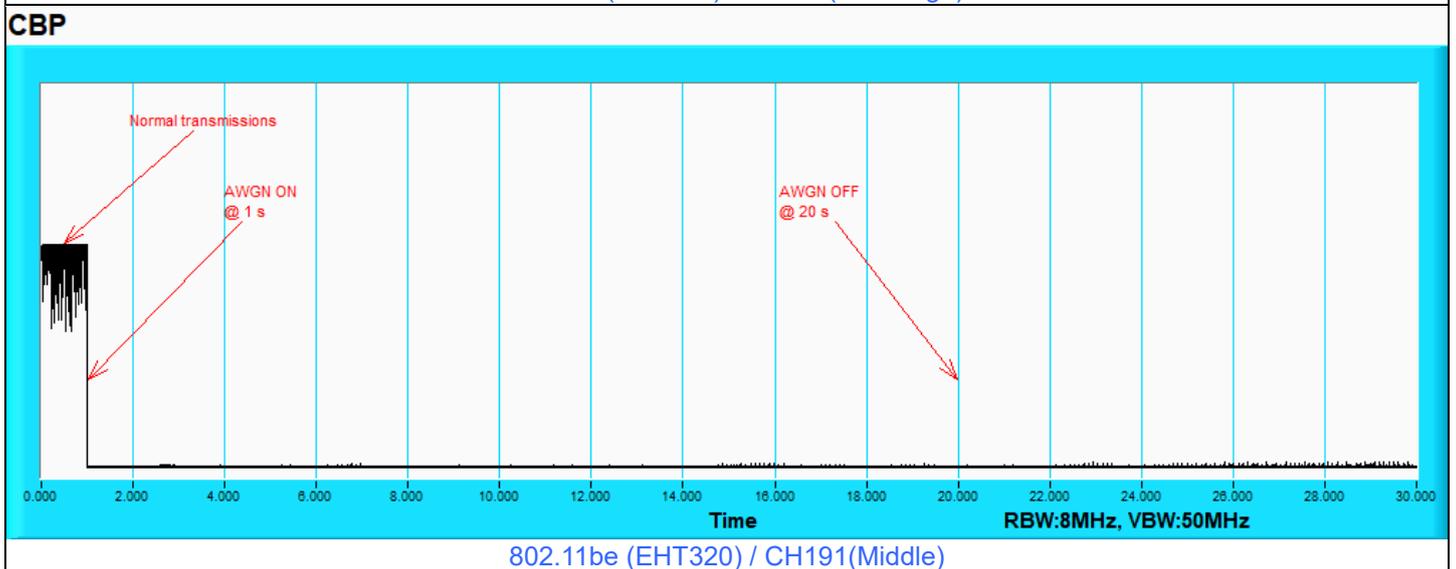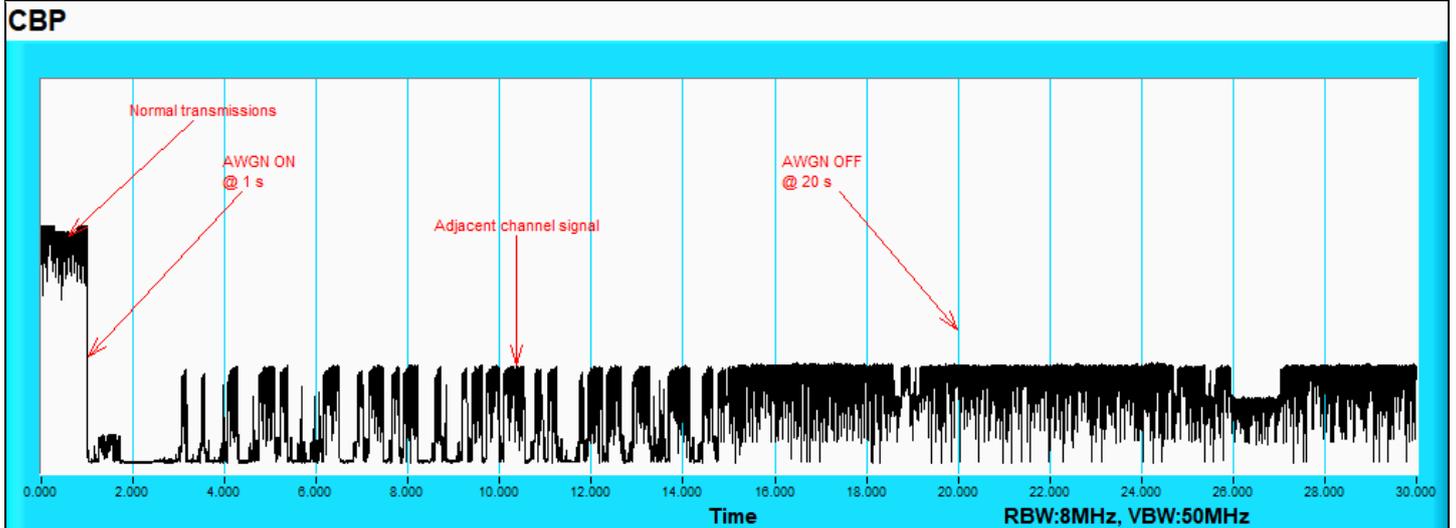

Mode B

Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
Orbi 11BE WiFi 7 Tri-band Satellite	NETGEAR	RBE870	OpenWrt 19.07-SNAPSHOT r0+12951-63a10c0061 / LuCI branch git-24.152.07967-63a10c0 Kernel Version:5.4.213

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	33	6115	6115	-71	1.45	0	-72.45	-62	OFF
					-78	1.45	0	-79.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
	320	63	6265	6110	-68	1.45	0	-69.45	-62	OFF
					-77	1.45	0	-78.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
	320	63	6265	6420	-62	1.45	0	-63.45	-62	OFF
					-68	1.45	0	-69.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
					-63	1.45	0	-64.45	-62	OFF
					-72	1.45	0	-73.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6115	v	v	v	v	v	v	v			
320	6110	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass
	6265	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass
	6420	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform




Plots of Injected signal (AWGN) level

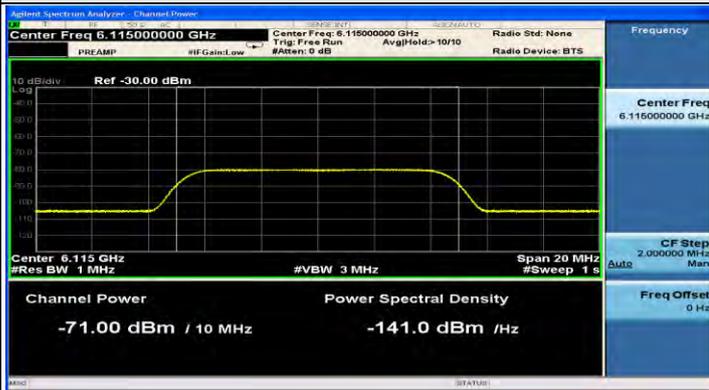


802.11be (EHT20) / CH33

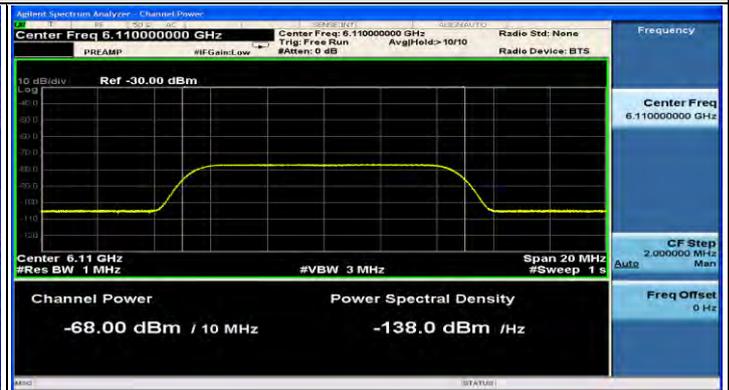

802.11be (EHT320) / CH63(Low Edge)

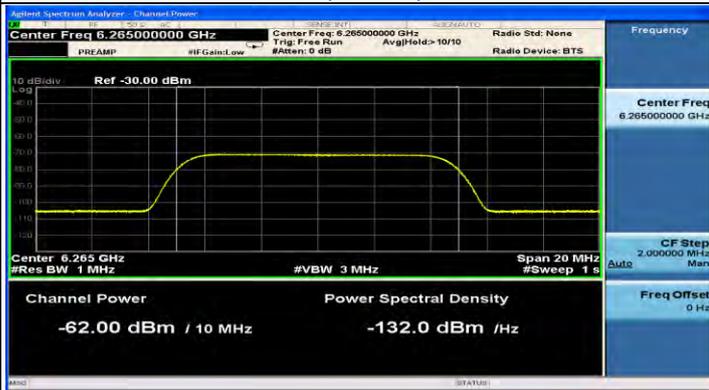


802.11be (EHT320) / CH63(Middle)

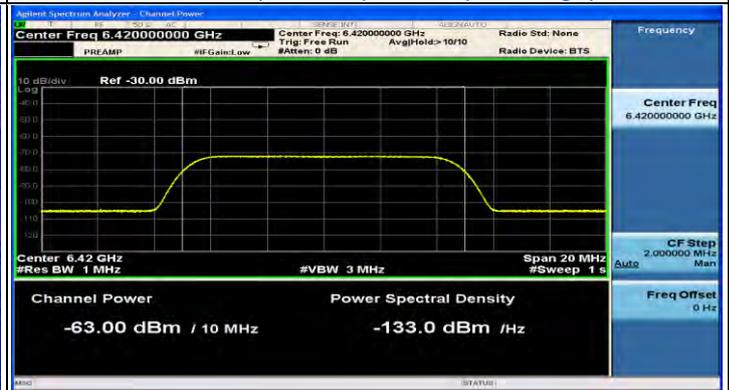


802.11be (EHT320) / CH63(High Edge)


Plots of EUT ceased transmission in the time domain

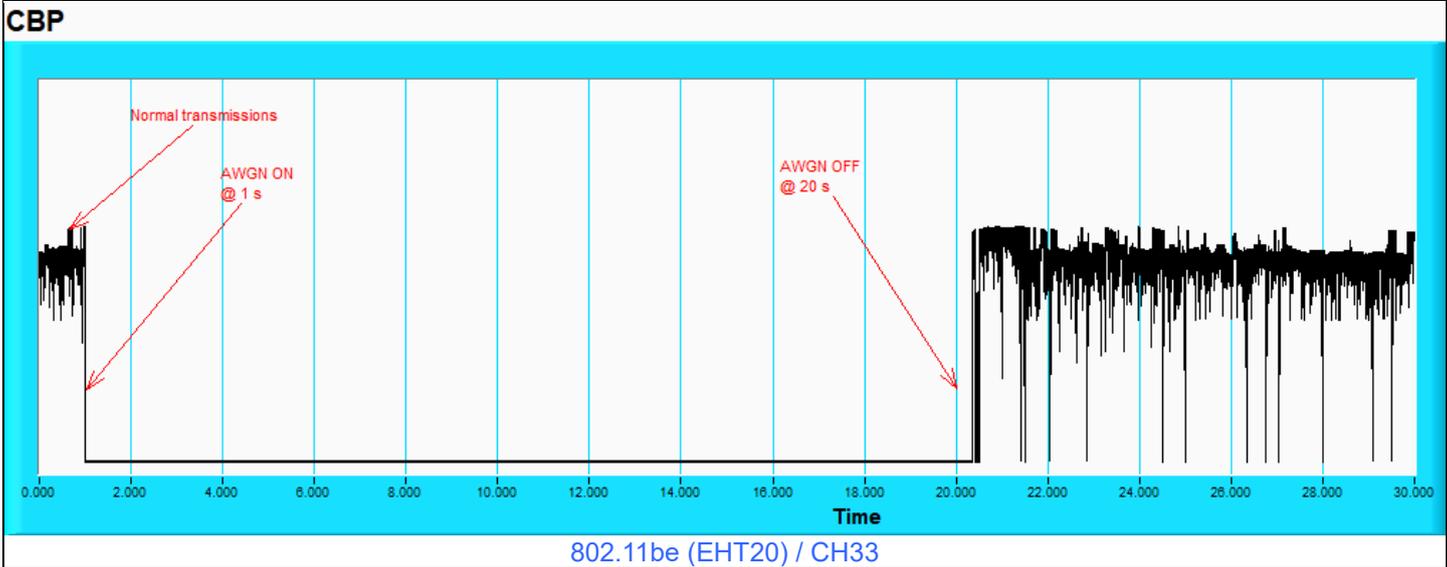


Plots of EUT ceased transmission in the time domain

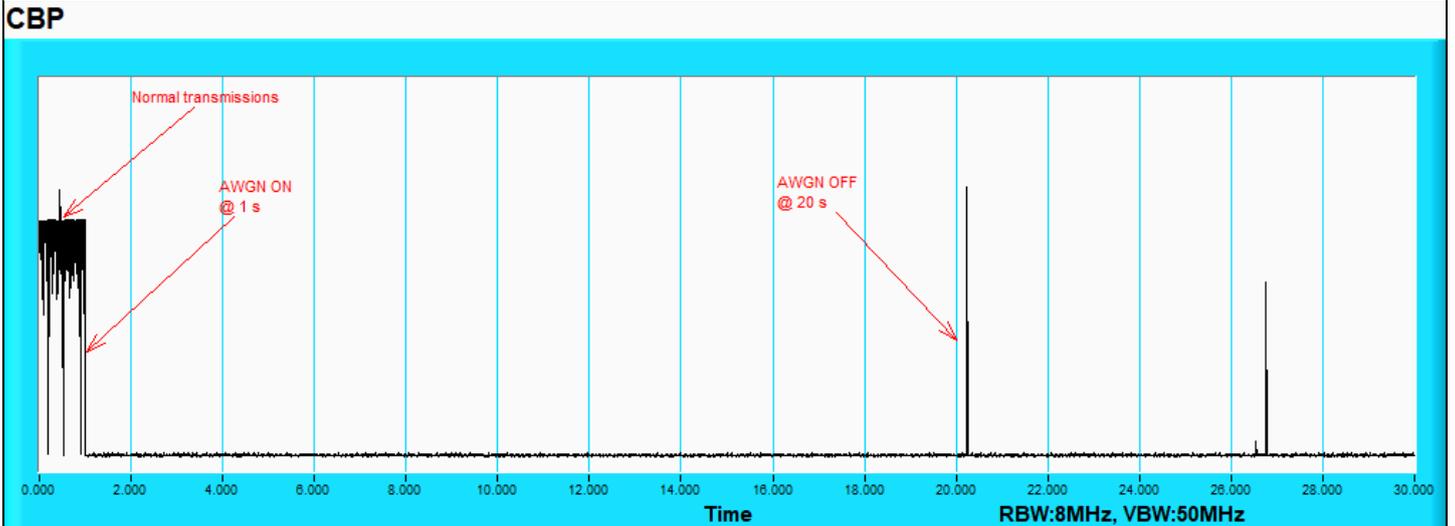

802.11be (EHT320) / CH63(Low Edge)

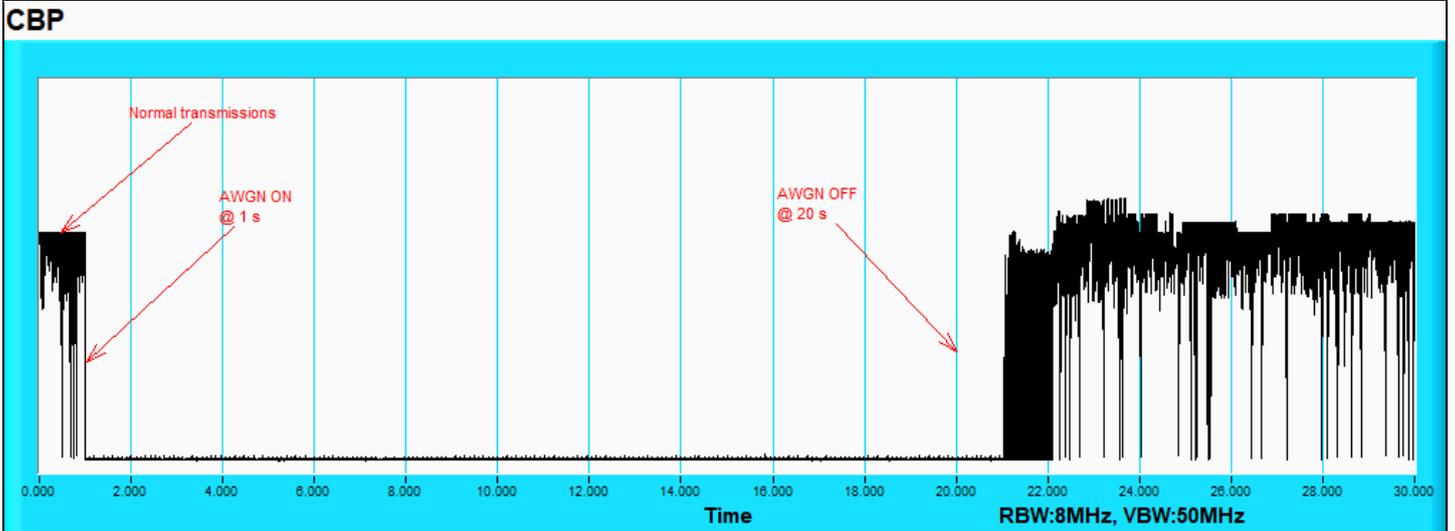

802.11be (EHT320) / CH63(Middle)

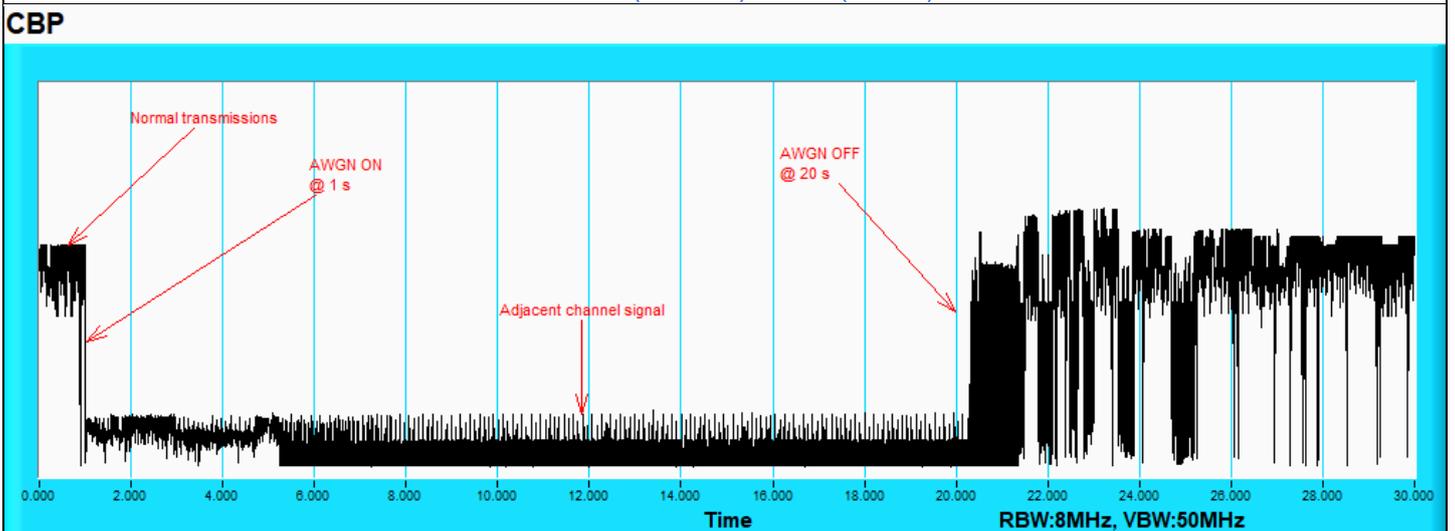


802.11be (EHT320) / CH63(High Edge)

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	97	6435	6435	-72	1.45	0	-73.45	-62	OFF
					-79	1.45	0	-80.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
	320	95	6425	6270	-61	1.45	0	-62.45	-62	OFF
					-69	1.45	0	-70.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
				6425	-64	1.45	0	-65.45	-62	OFF
					-72	1.45	0	-73.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
	6580	-62	1.45	0	-63.45	-62	OFF			
		-72	1.45	0	-73.45	-62	Minimal			
		-80.55	1.45	0	-82	-62	ON			


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6435	v	v	v	v	v	v	v			
320	6270	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass
	6425	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass
	6580	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass

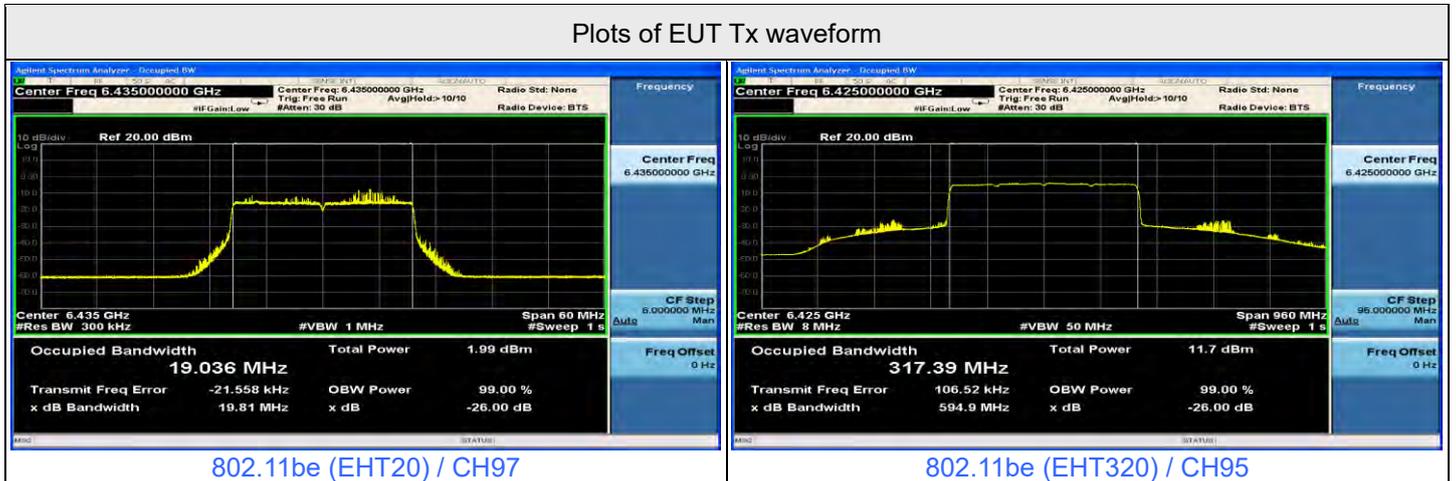


Plots of Injected signal (AWGN) level

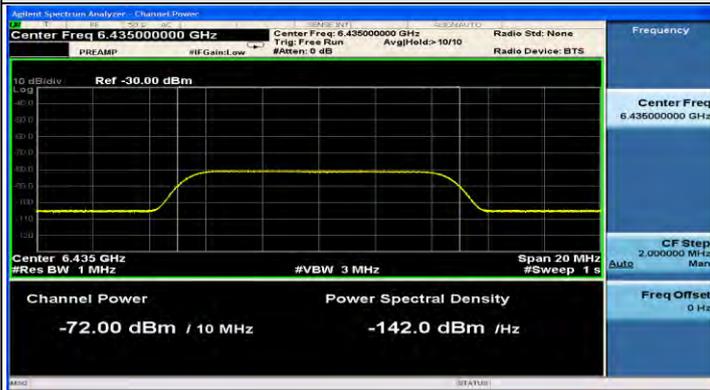


802.11be (EHT20) / CH97

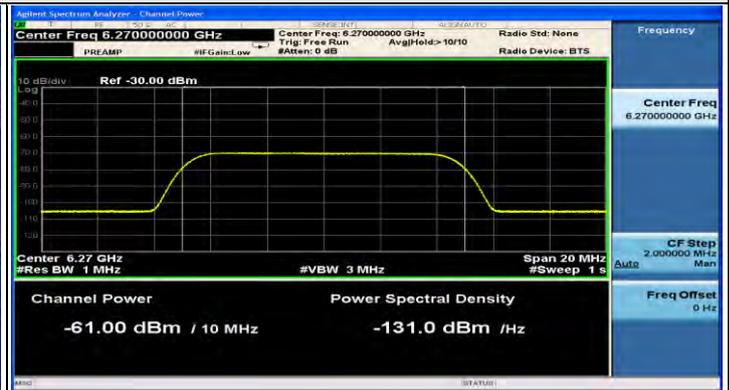

802.11be (EHT320) / CH95(Low Edge)

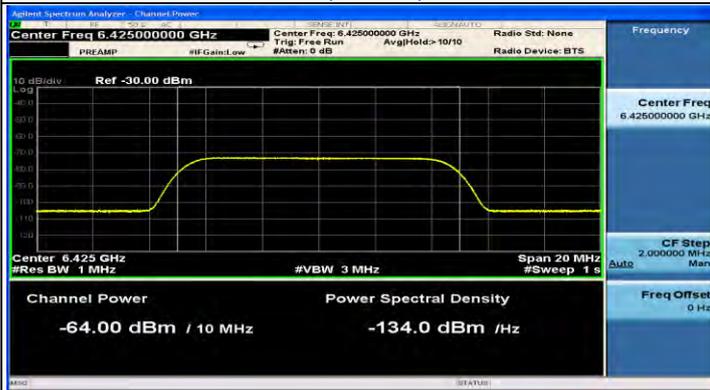


802.11be (EHT320) / CH95(Middle)

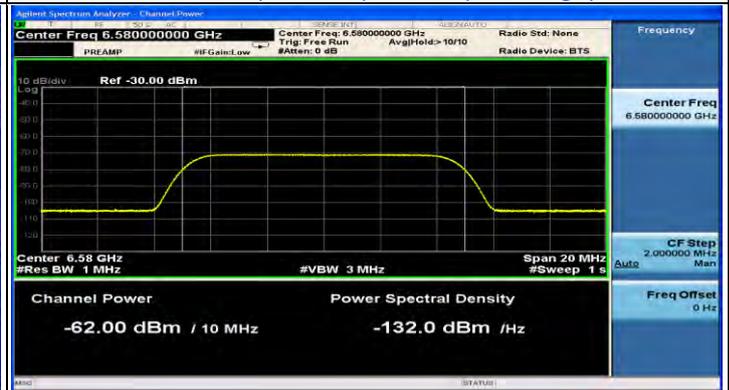


802.11be (EHT320) / CH95(High Edge)


Plots of EUT ceased transmission in the time domain

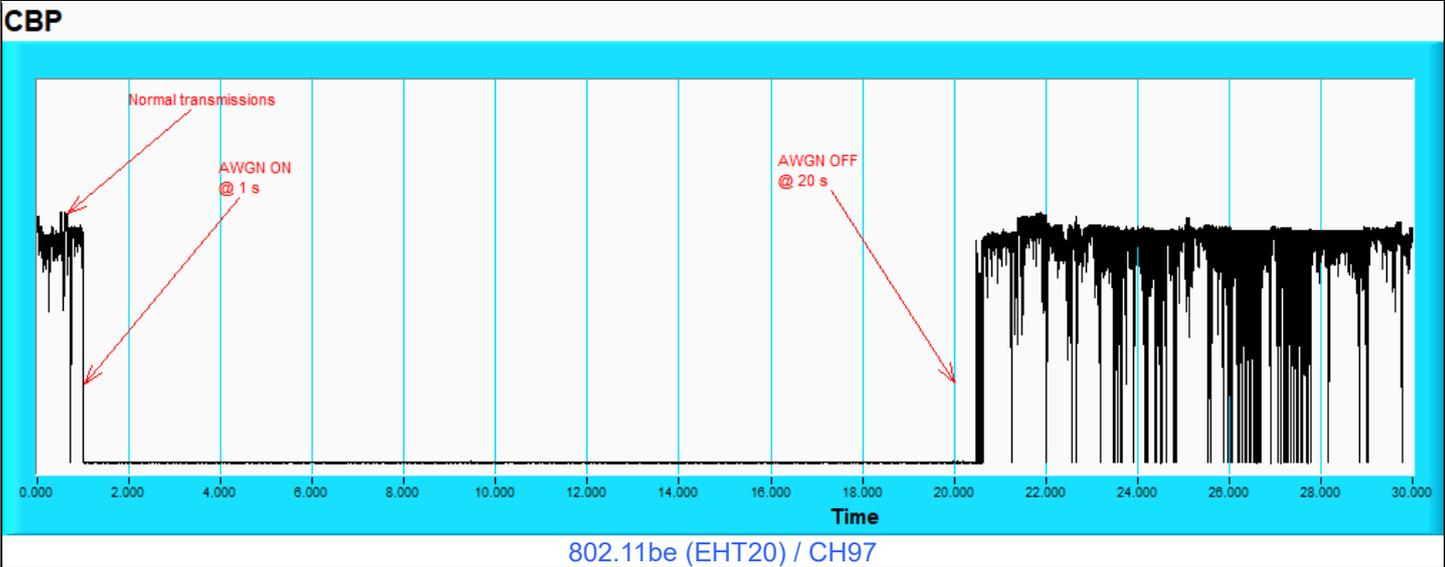


Plots of EUT ceased transmission in the time domain

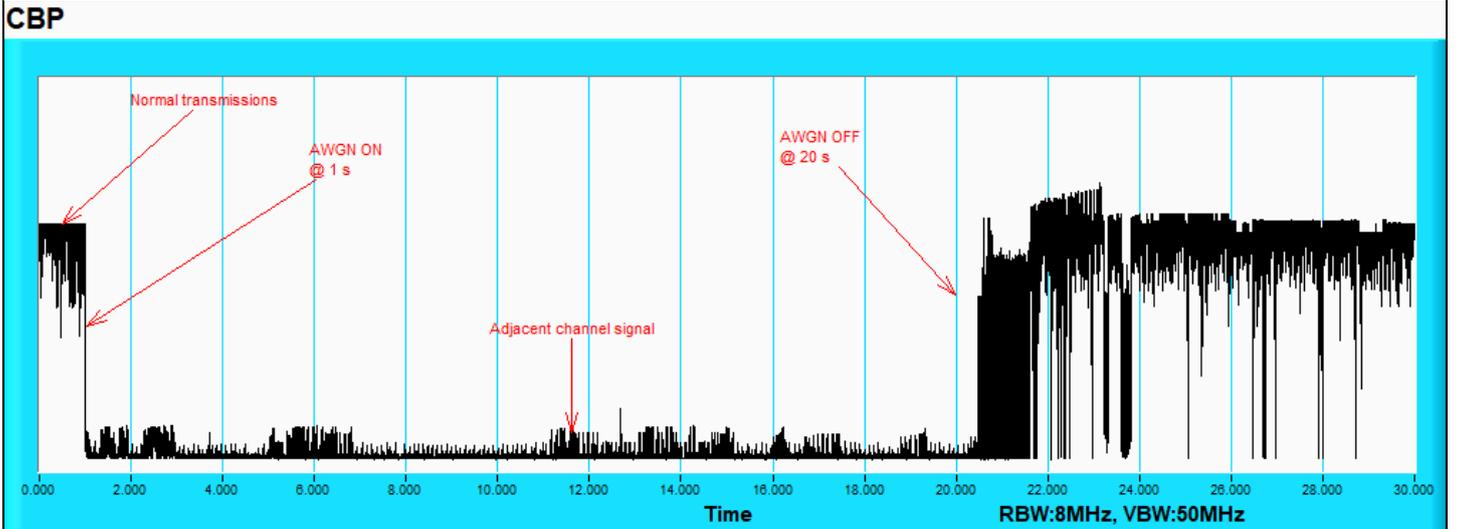

802.11be (EHT320) / CH95(Low Edge)

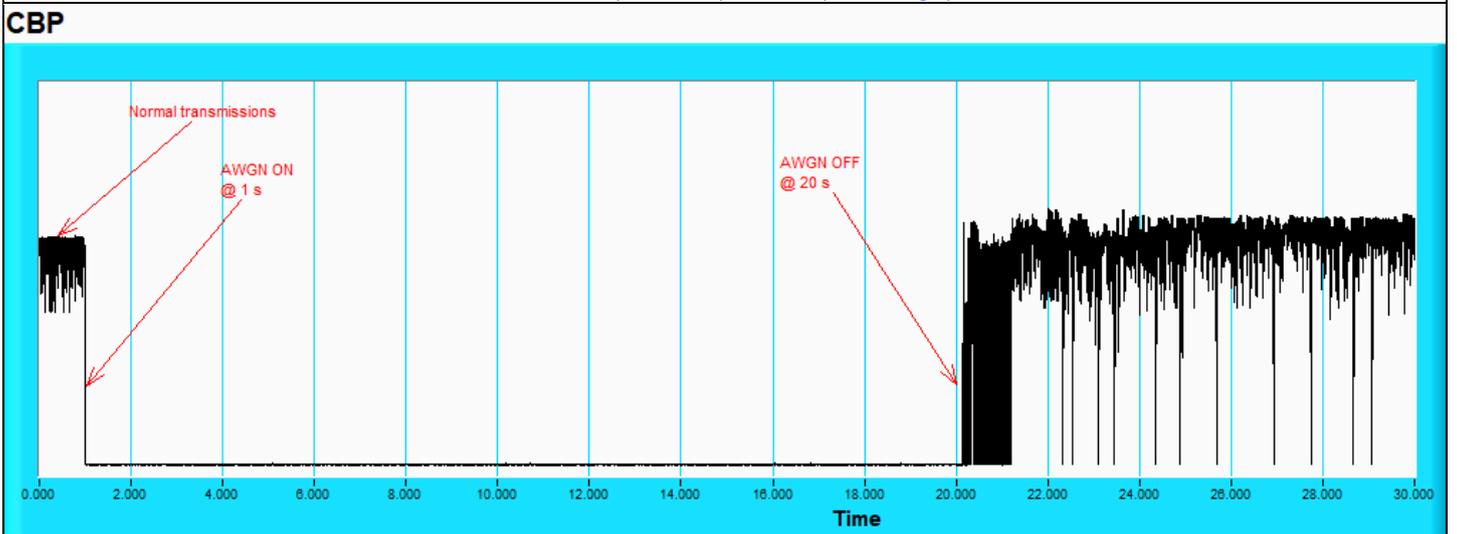

802.11be (EHT320) / CH95(Middle)

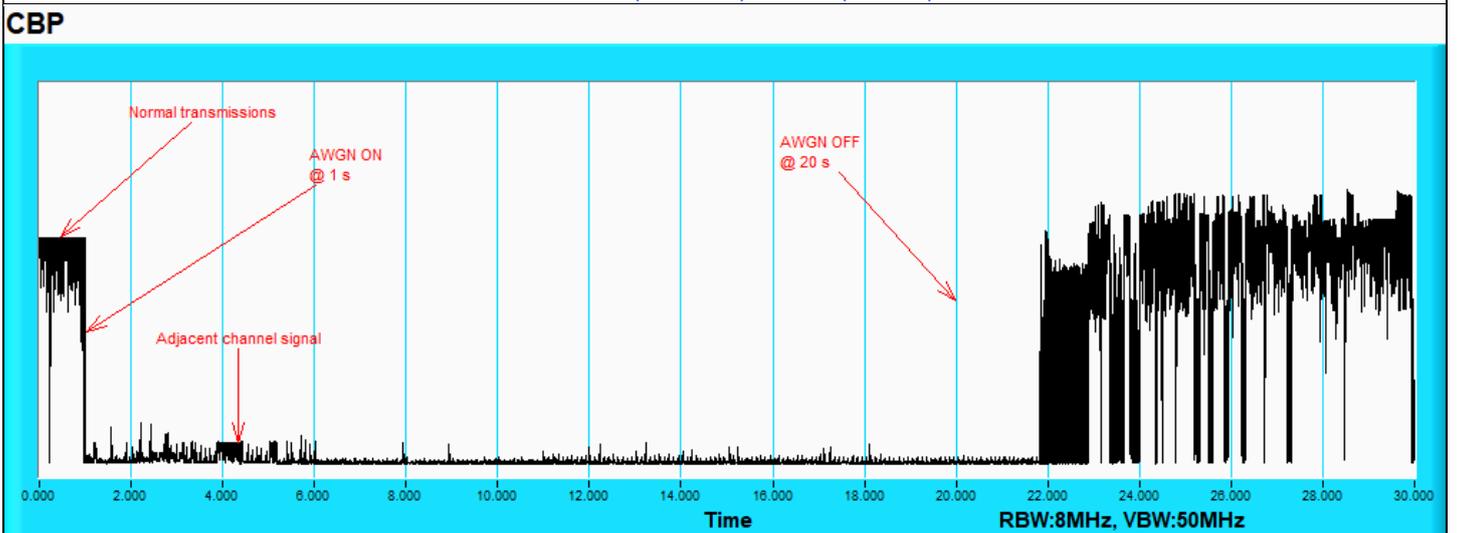


802.11be (EHT320) / CH95(High Edge)

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	181	6855	6855	-68	1.45	0	-69.45	-62	OFF
					-78	1.45	0	-79.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
	320	159	6745	6590	-62	1.45	0	-63.45	-62	OFF
					-70	1.45	0	-71.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
					-62	1.45	0	-63.45	-62	OFF
					-69	1.45	0	-70.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
	6900	6745	-64	1.45	0	-65.45	-62	OFF		
			-75	1.45	0	-76.45	-62	Minimal		
			-80.55	1.45	0	-82	-62	ON		


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6855	v	v	v	v	v	v	v			
320	6590	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass
	6745	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass
	6900	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass

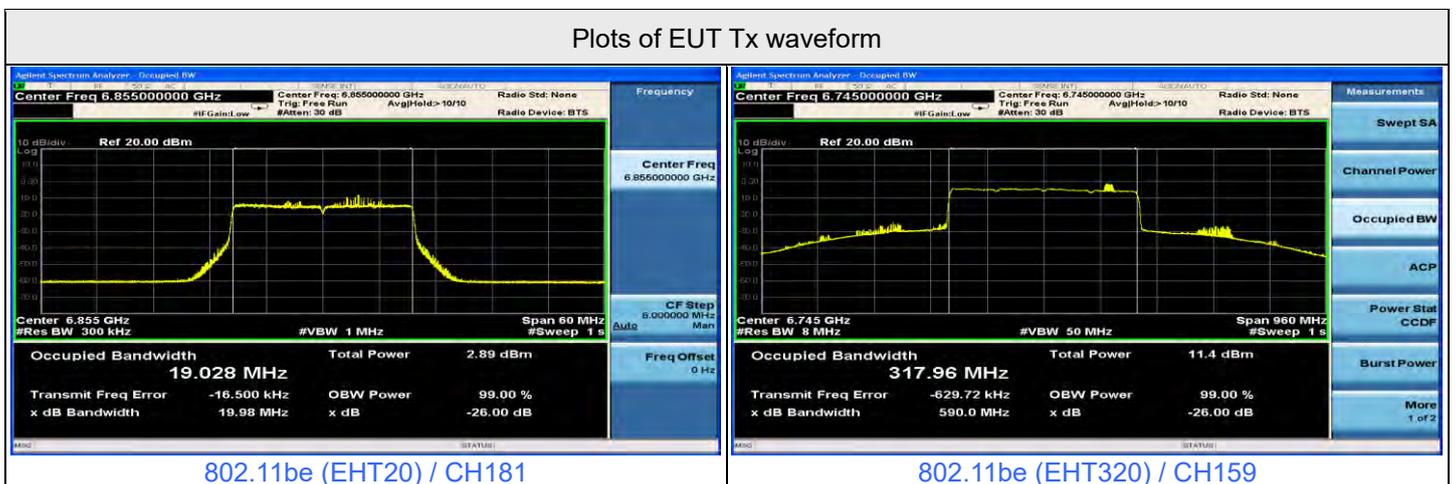


Plots of Injected signal (AWGN) level

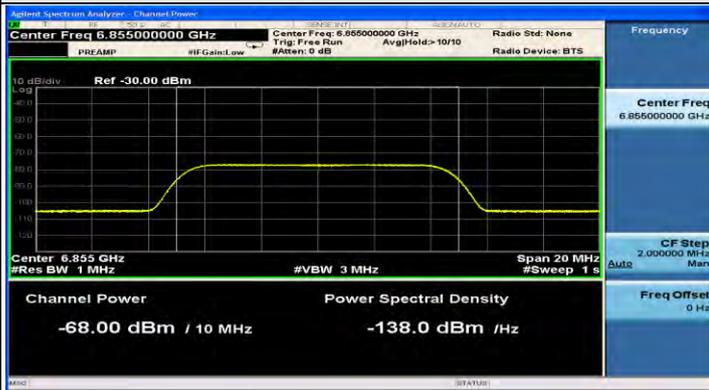


802.11be (EHT20) / CH181

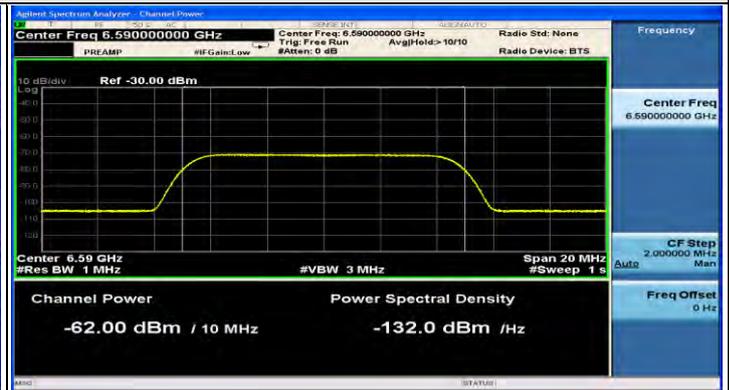

802.11be (EHT320) / CH159(Low Edge)

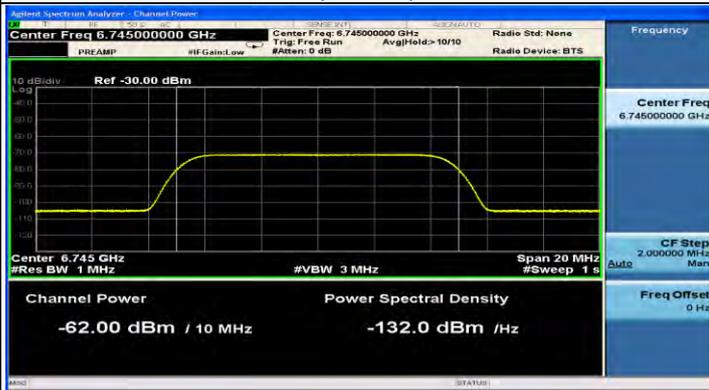


802.11be (EHT320) / CH159(Middle)

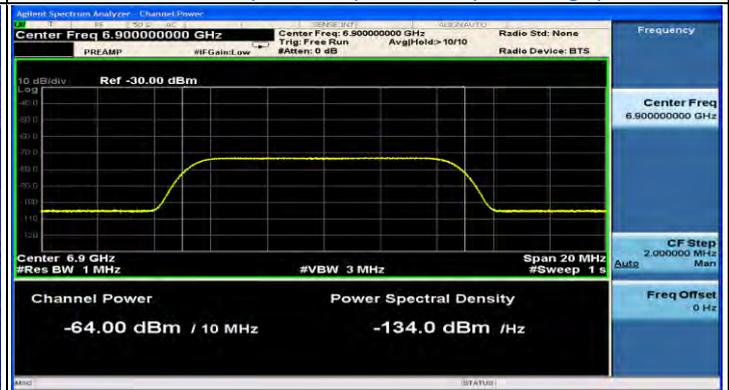


802.11be (EHT320) / CH159(High Edge)

Plots of EUT ceased transmission in the time domain

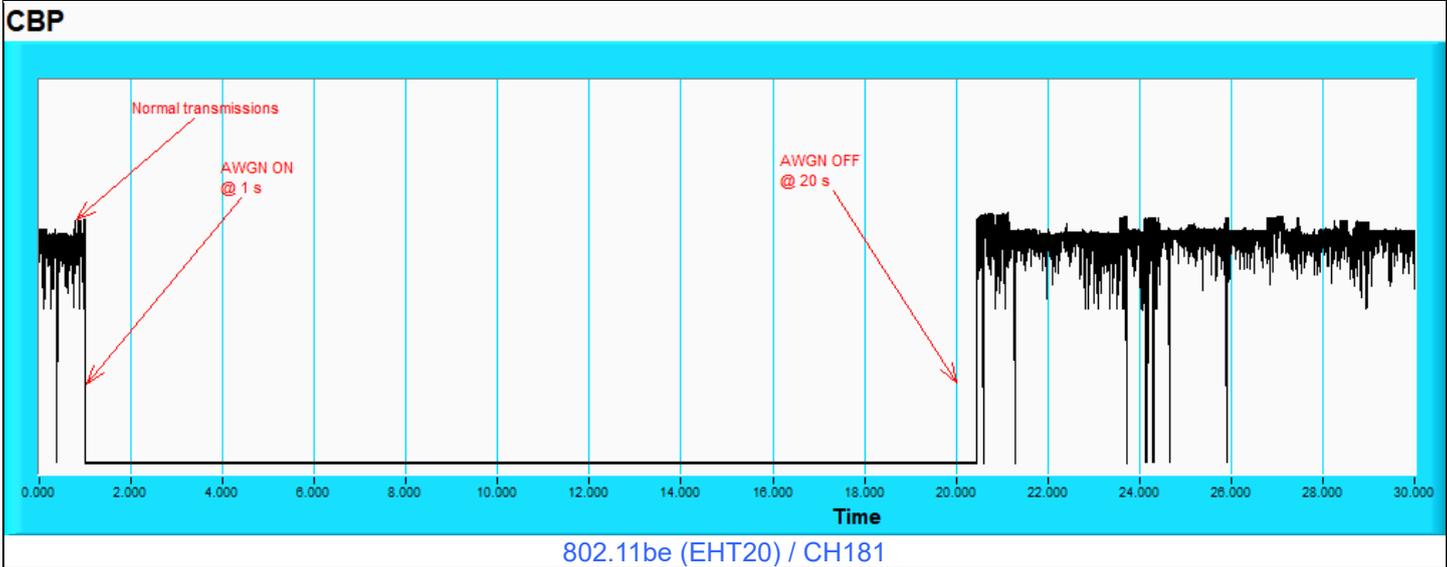


802.11be (EHT20) / CH181


Plots of EUT ceased transmission in the time domain

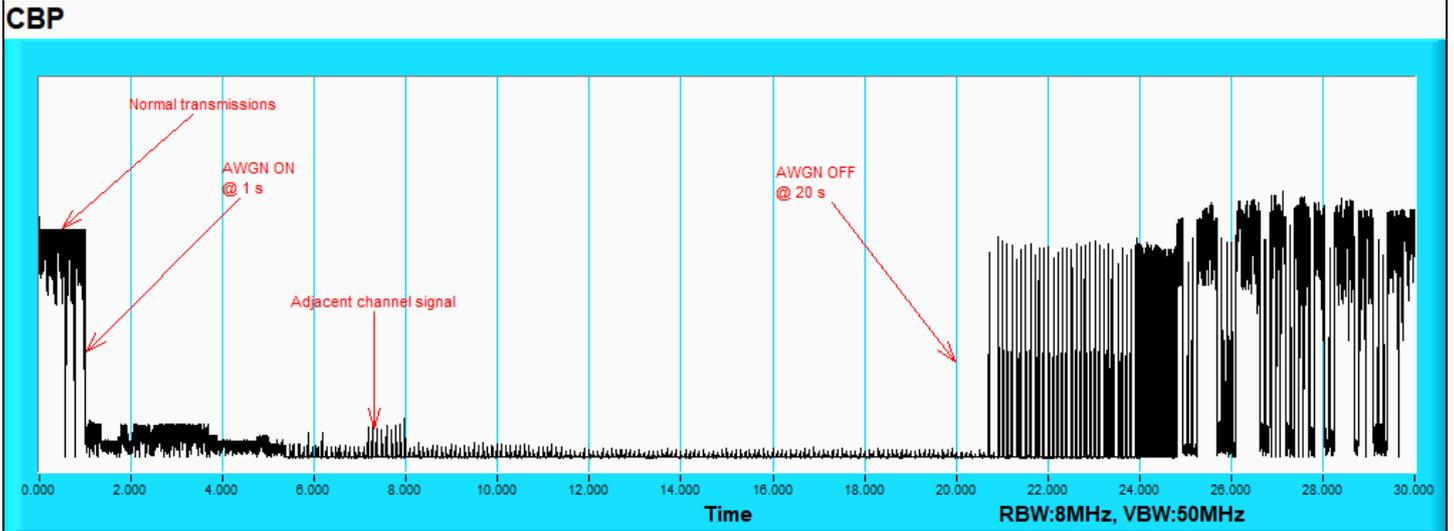

802.11be (EHT320) / CH159(Low Edge)

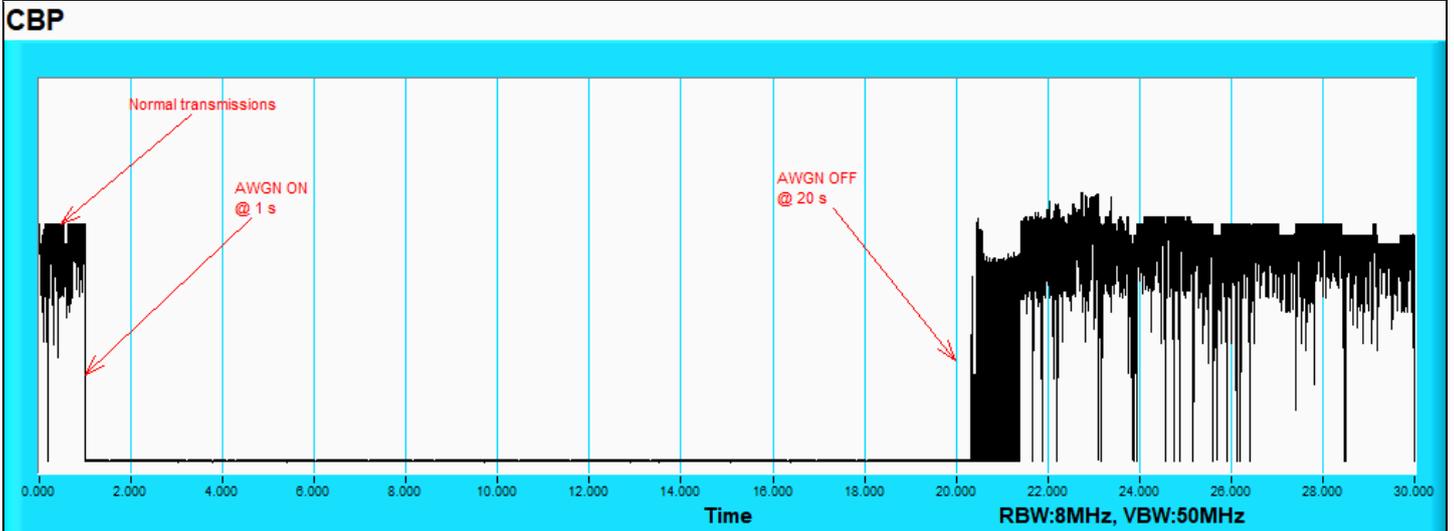

802.11be (EHT320) / CH159(Middle)

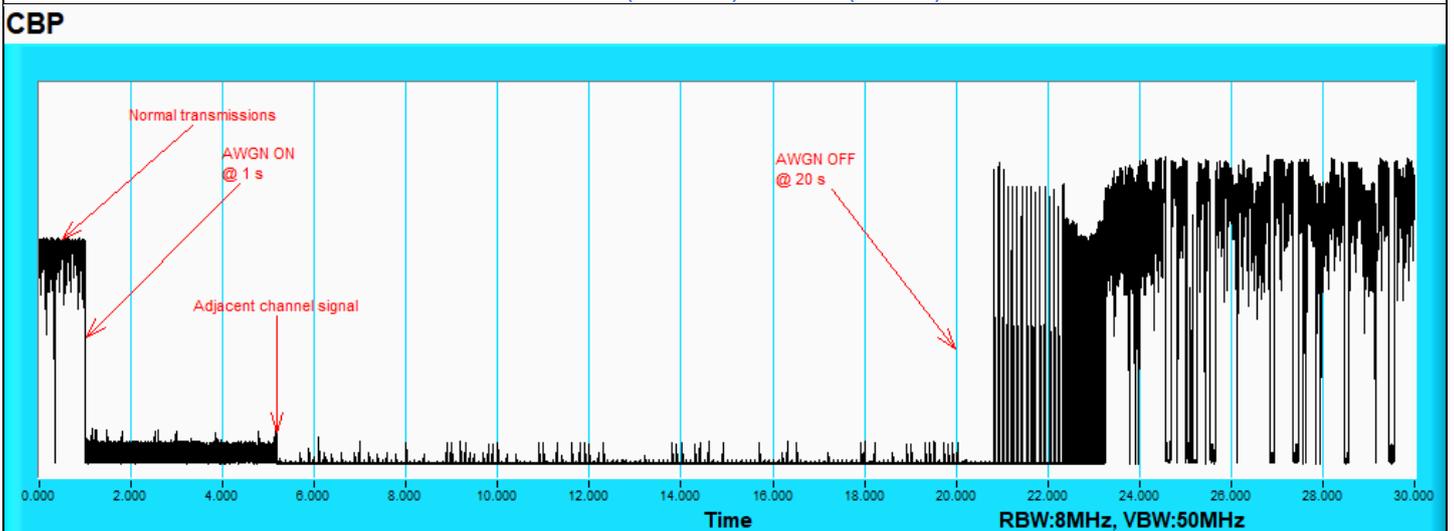

802.11be (EHT320) / CH159(High Edge)




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	193	6915	6915	-70	1.45	0	-71.45	-62	OFF
					-77	1.45	0	-78.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
	320	191	6905	6750	-62	1.45	0	-63.45	-62	OFF
					-69	1.45	0	-70.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
	320	191	6905	6905	-63	1.45	0	-64.45	-62	OFF
					-73	1.45	0	-74.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON
	320	191	6905	7060	-62	1.45	0	-63.45	-62	OFF
					-72	1.45	0	-73.45	-62	Minimal
					-80.55	1.45	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6915	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

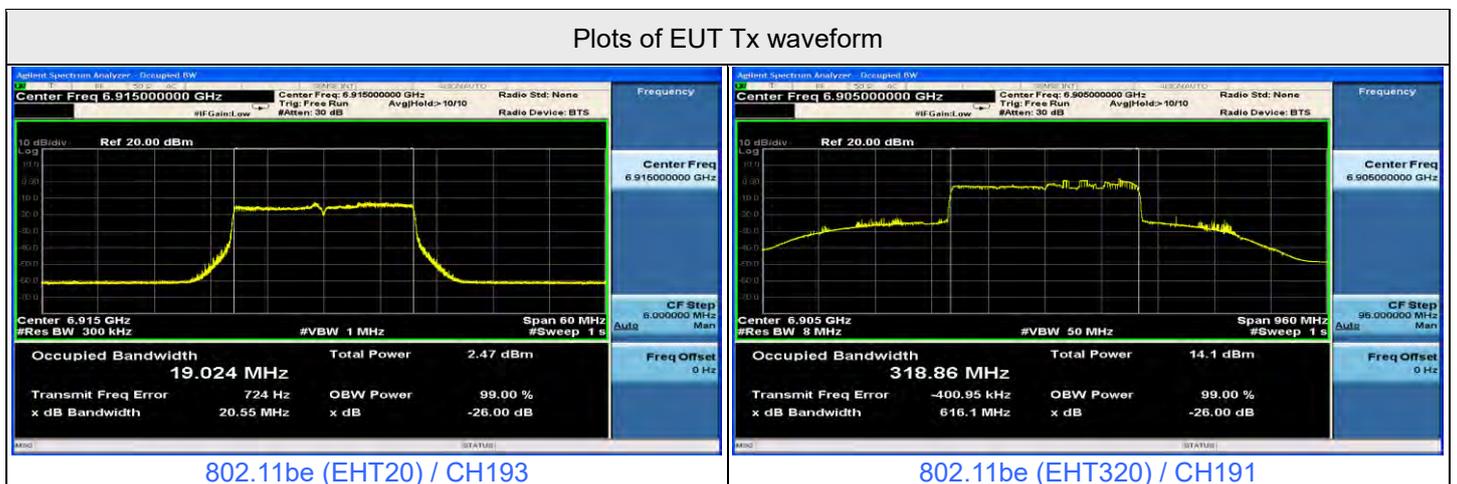


Plots of Injected signal (AWGN) level

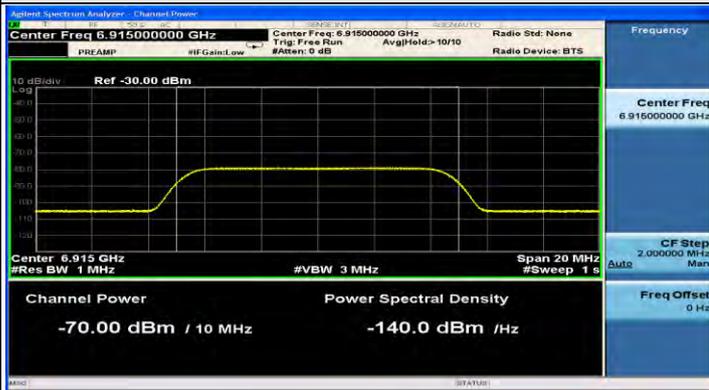


802.11be (EHT20) / CH193

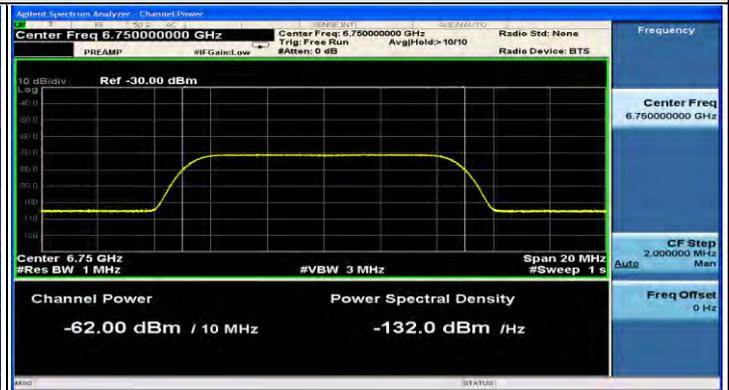

802.11be (EHT320) / CH191(Low Edge)

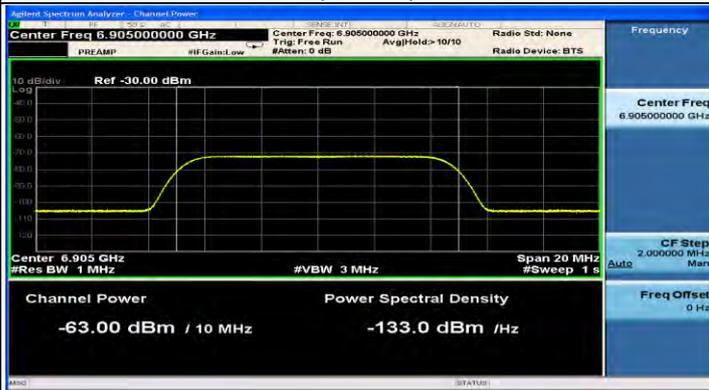


802.11be (EHT320) / CH191(Middle)

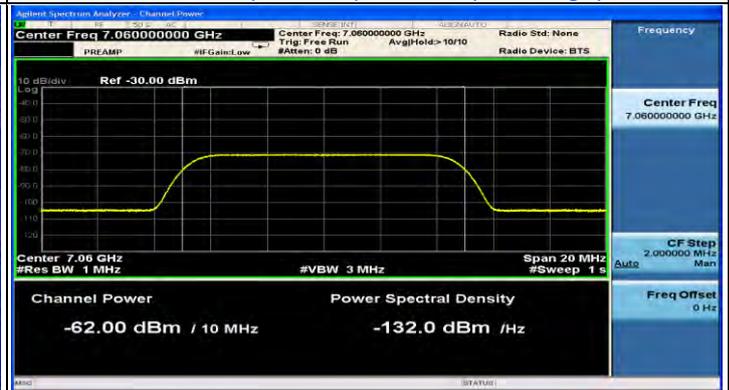


802.11be (EHT320) / CH191(High Edge)

Plots of EUT ceased transmission in the time domain

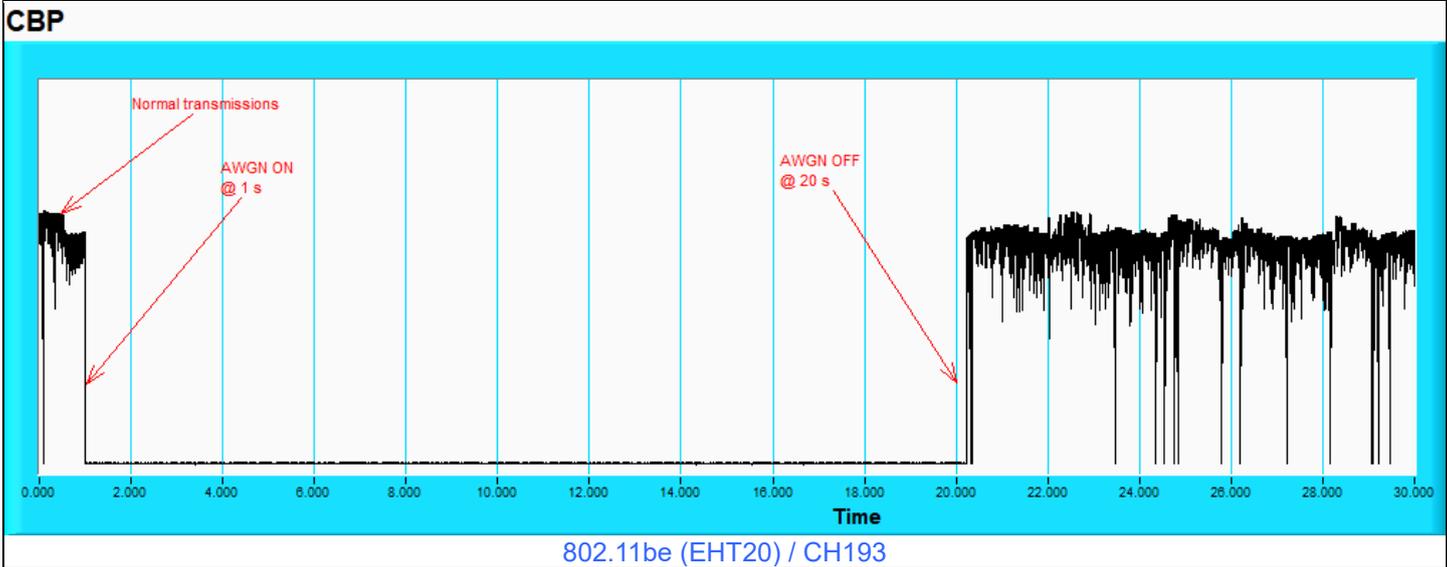


802.11be (EHT20) / CH193


Plots of EUT ceased transmission in the time domain

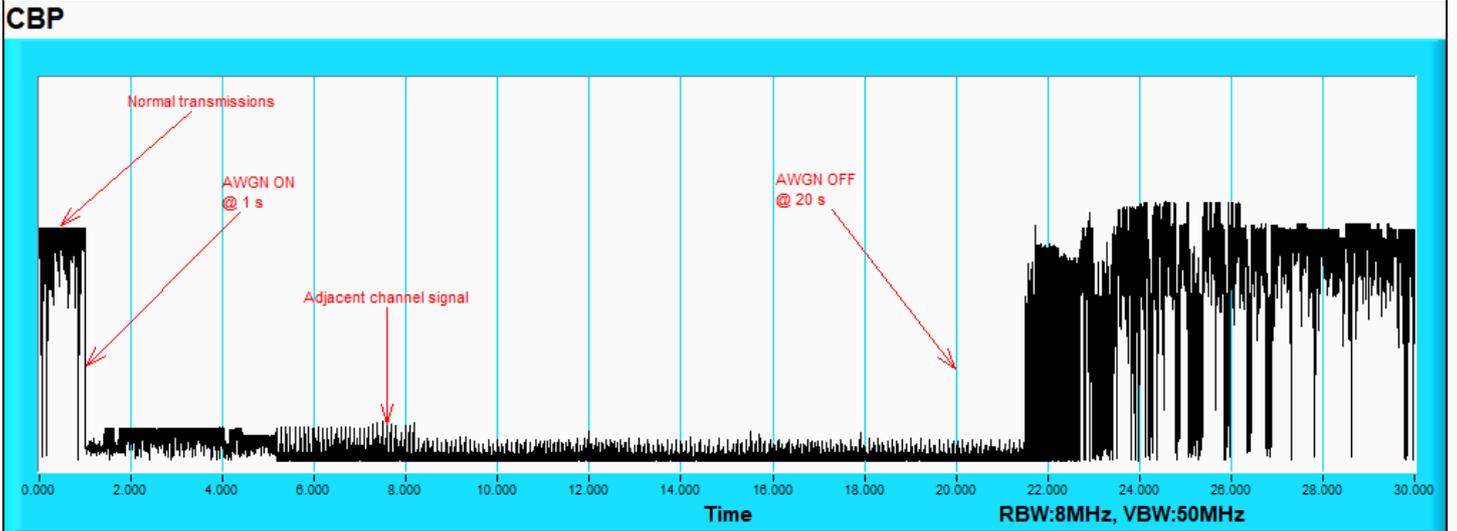

802.11be (EHT320) / CH191(Low Edge)

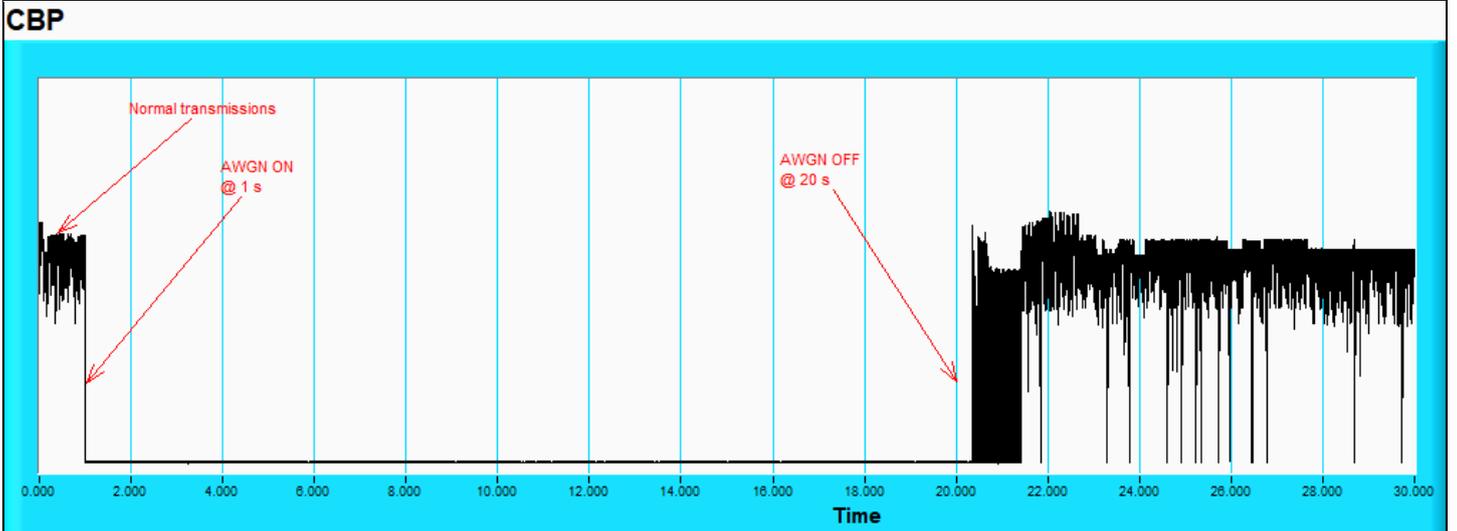


802.11be (EHT320) / CH191(Middle)

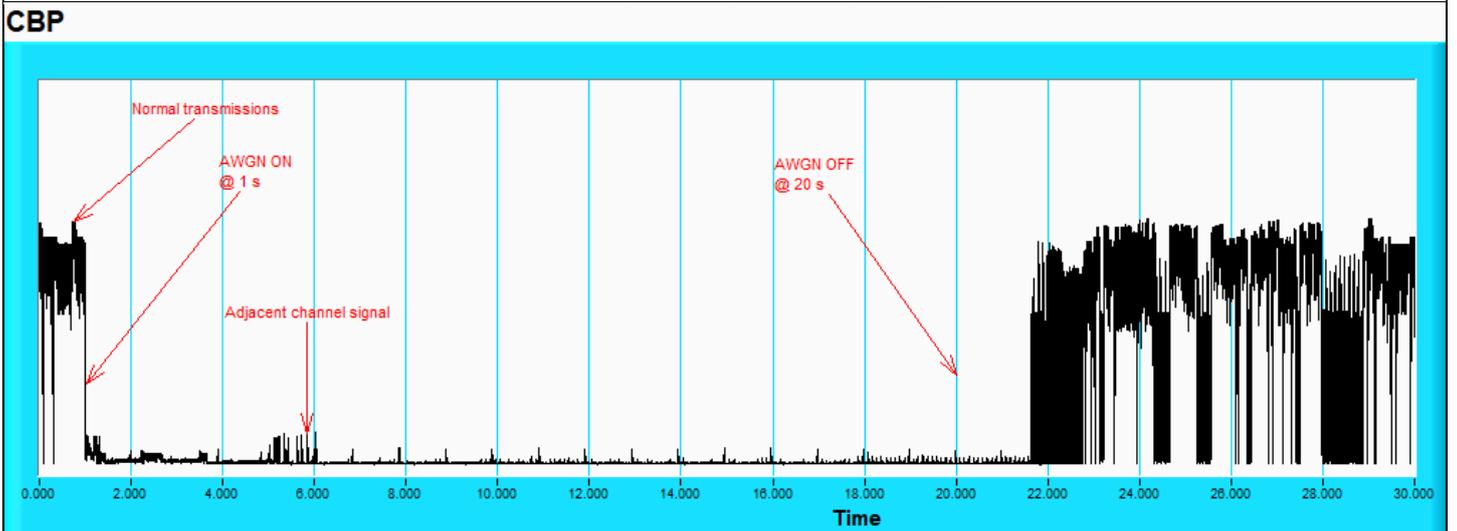

802.11be (EHT320) / CH191(High Edge)

For Verify bandwidth reduction

Plots of EUT ceased transmission in the frequency domain

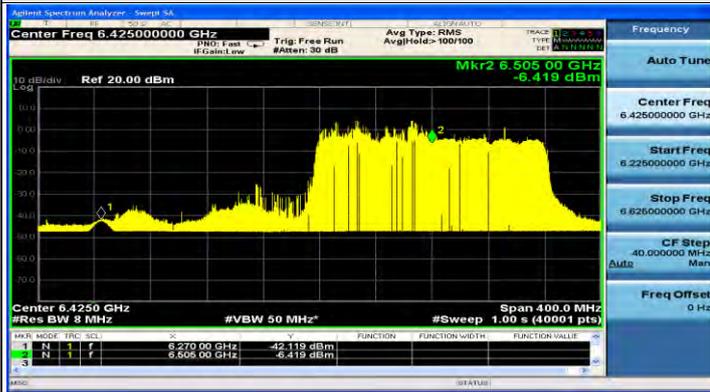


802.11be (EHT320) / CH95(Low Edge)

A 10 MHz AWGN signal (centered at 6270 MHz) is injected.
 The channel reduces to a 160 MHz channel centered around 6505 MHz.



802.11be (EHT320) / CH95(Middle)

A 10 MHz AWGN signal (centered at 6425 MHz) is injected.
 The channel completely ceases operation.

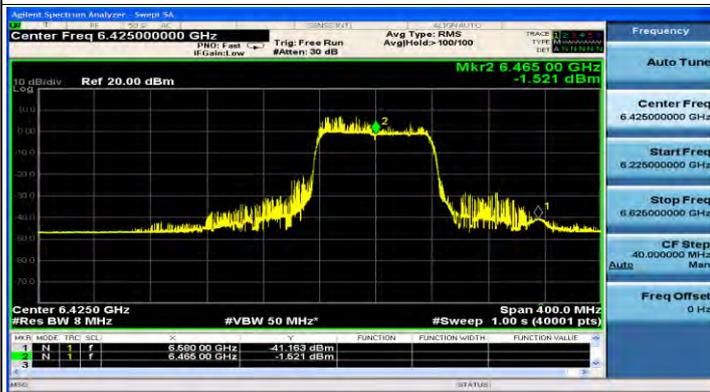

802.11be (EHT320) / CH95(High Edge)

A 10 MHz AWGN signal (centered at 6580 MHz) is injected.
 The channel reduces to a 80 MHz channel centered around 6465 MHz.

7.7 AC Power Conducted Emissions

Mode A


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.68	35.51	24.69	45.19	34.37	66.00	56.00	-20.81	-21.63
2	0.17400	9.69	34.07	23.79	43.76	33.48	64.77	54.77	-21.01	-21.29
3	0.20600	9.70	31.84	23.45	41.54	33.15	63.37	53.37	-21.83	-20.22
4	0.25742	9.73	29.59	23.76	39.32	33.49	61.51	51.51	-22.19	-18.02
5	0.42577	9.82	29.94	21.20	39.76	31.02	57.33	47.33	-17.57	-16.31
6	0.84200	9.84	27.94	20.36	37.78	30.20	56.00	46.00	-18.22	-15.80

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

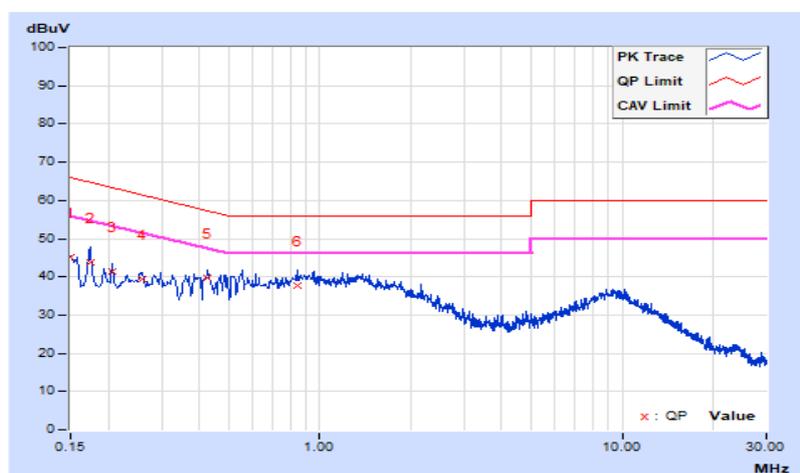


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16200	9.68	35.45	24.18	45.13	33.86	65.36	55.36	-20.23	-21.50
2	0.17800	9.69	36.05	22.76	45.74	32.45	64.58	54.58	-18.84	-22.13
3	0.43800	9.84	33.53	27.50	43.37	37.34	57.10	47.10	-13.73	-9.76
4	0.91000	9.89	29.68	23.56	39.57	33.45	56.00	46.00	-16.43	-12.55
5	1.33000	9.92	28.86	21.45	38.78	31.37	56.00	46.00	-17.22	-14.63
6	1.57000	9.93	25.97	21.91	35.90	31.84	56.00	46.00	-20.10	-14.16

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

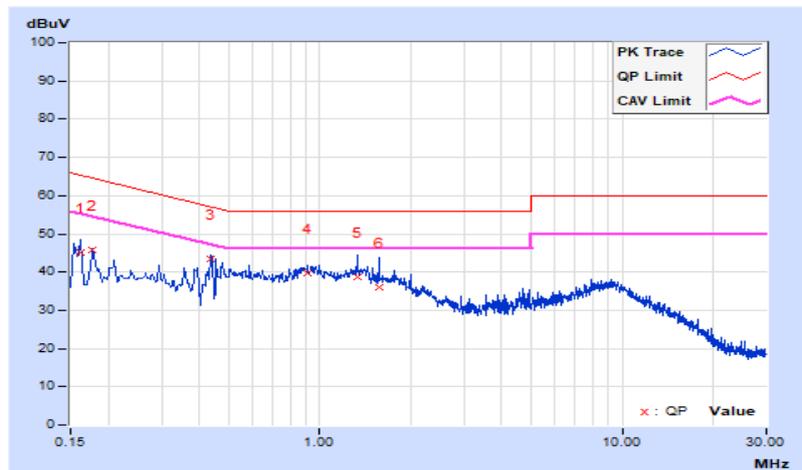


Mode B

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.68	35.17	24.86	44.85	34.54	65.78	55.78	-20.93	-21.24
2	0.17800	9.69	31.35	23.44	41.04	33.13	64.58	54.58	-23.54	-21.45
3	0.20200	9.70	29.95	21.34	39.65	31.04	63.53	53.53	-23.88	-22.49
4	0.22565	9.72	27.83	22.42	37.55	32.14	62.61	52.61	-25.06	-20.47
5	0.44200	9.82	29.61	20.12	39.43	29.94	57.02	47.02	-17.59	-17.08
6	0.88200	9.84	27.84	21.36	37.68	31.20	56.00	46.00	-18.32	-14.80

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

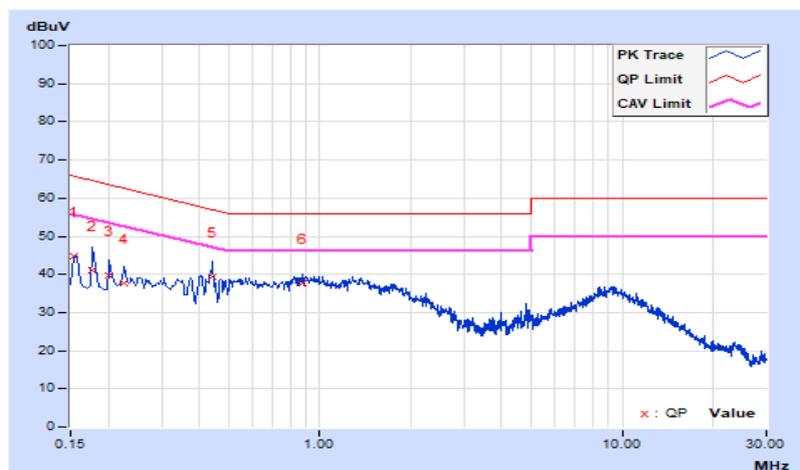


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.68	34.56	24.60	44.24	34.28	66.00	56.00	-21.76	-21.72
2	0.16190	9.68	35.09	23.13	44.77	32.81	65.37	55.37	-20.60	-22.56
3	0.19000	9.70	31.31	21.93	41.01	31.63	64.04	54.04	-23.03	-22.41
4	0.30600	9.77	27.86	22.21	37.63	31.98	60.08	50.08	-22.45	-18.10
5	0.44999	9.84	32.10	26.89	41.94	36.73	56.88	46.88	-14.94	-10.15
6	0.65400	9.87	26.21	22.86	36.08	32.73	56.00	46.00	-19.92	-13.27

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

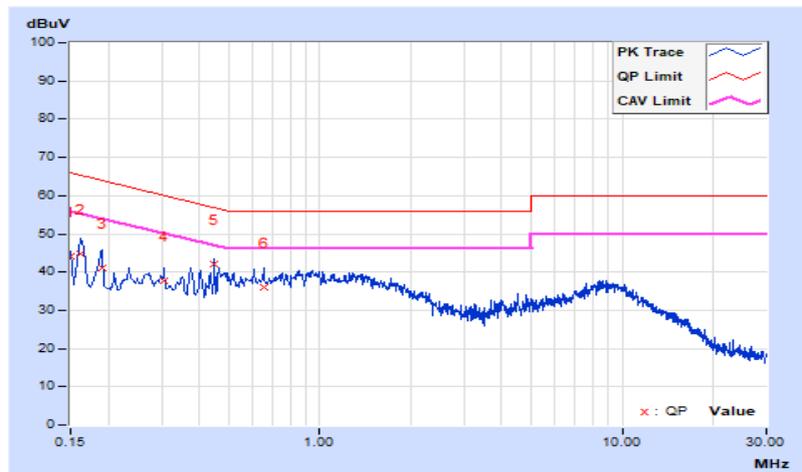

7.8 Unwanted Emissions below 1 GHz


Mode A

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.03	30.5 QP	40.0	-9.5	1.99 H	279	40.4	-9.9
2	146.68	27.1 QP	43.5	-16.4	1.99 H	234	35.8	-8.7
3	202.91	25.2 QP	43.5	-18.3	1.49 H	256	36.7	-11.5
4	344.90	37.4 QP	46.0	-8.6	1.00 H	133	44.0	-6.6
5	491.10	36.2 QP	46.0	-9.8	1.49 H	143	39.9	-3.7
6	714.62	40.4 QP	46.0	-5.6	1.00 H	41	39.3	1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

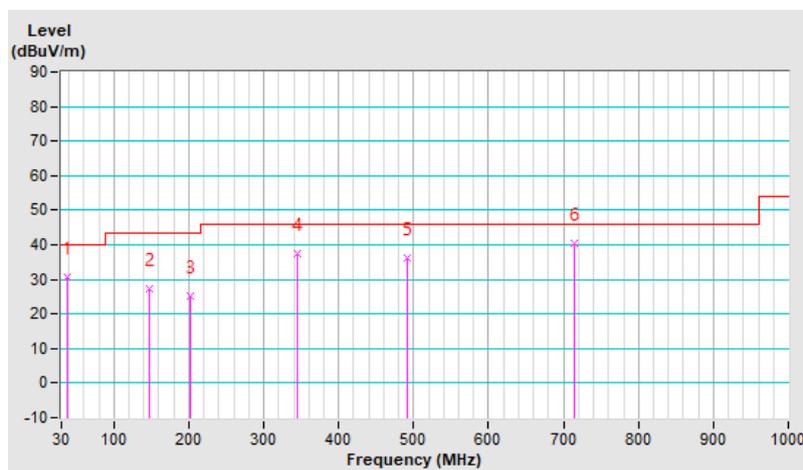


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.52	33.2 QP	40.0	-6.8	1.01 V	240	42.5	-9.3
2	162.14	28.8 QP	43.5	-14.7	1.01 V	310	37.3	-8.5
3	343.49	41.2 QP	46.0	-4.8	1.50 V	175	47.8	-6.6
4	447.52	41.4 QP	46.0	-4.6	1.01 V	353	45.8	-4.4
5	495.32	38.9 QP	46.0	-7.1	1.50 V	31	42.6	-3.7
6	710.41	42.0 QP	46.0	-4.0	1.01 V	254	41.1	0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

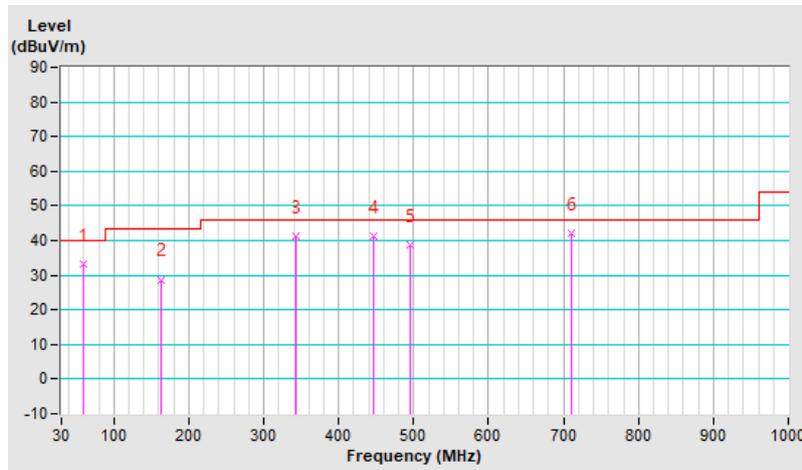


Mode B

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	150.90	26.0 QP	43.5	-17.5	1.00 H	253	34.7	-8.7
2	360.36	35.3 QP	46.0	-10.7	1.00 H	128	41.4	-6.1
3	451.74	36.3 QP	46.0	-9.7	1.50 H	166	40.7	-4.4
4	513.59	38.4 QP	46.0	-7.6	1.00 H	48	41.7	-3.3
5	555.77	34.2 QP	46.0	-11.8	1.00 H	153	36.8	-2.6
6	782.10	35.2 QP	46.0	-10.8	1.50 H	284	32.4	2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

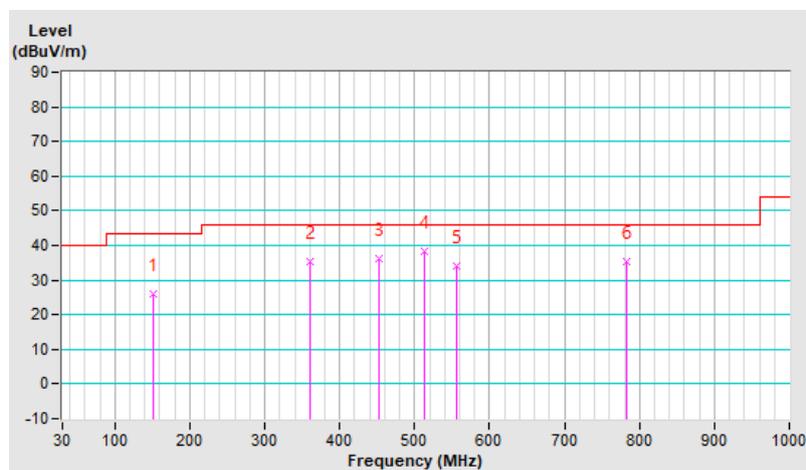


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.52	34.6 QP	40.0	-5.4	1.00 V	282	43.9	-9.3
2	162.14	27.6 QP	43.5	-15.9	1.00 V	324	36.1	-8.5
3	356.14	36.3 QP	46.0	-9.7	1.00 V	205	42.7	-6.4
4	434.87	39.5 QP	46.0	-6.5	1.00 V	358	44.2	-4.7
5	485.48	41.5 QP	46.0	-4.5	1.49 V	16	45.4	-3.9
6	782.10	37.8 QP	46.0	-8.2	1.49 V	204	35.0	2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

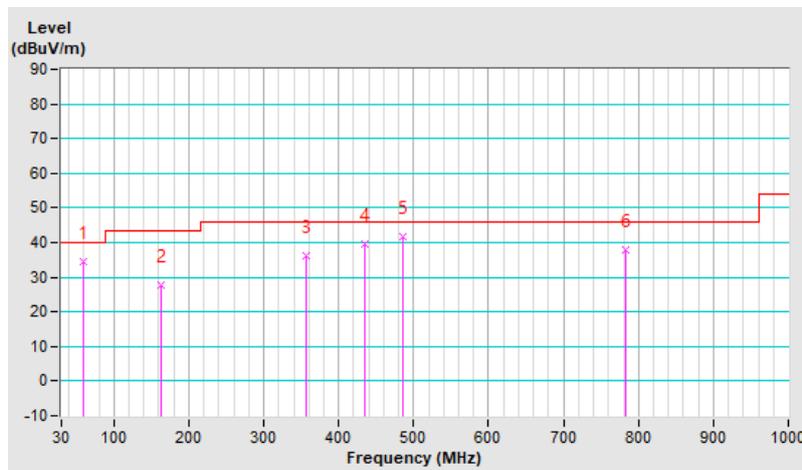

7.9 Unwanted Emissions above 1 GHz

NSS1

RF Mode	802.11a	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee/Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.78 H	16	37.8	13.9
2	#5925.00	38.5 AV	68.2	-29.7	1.78 H	16	24.6	13.9
3	*6115.00	104.8 PK			1.78 H	16	59.3	45.5
4	*6115.00	94.7 AV			1.78 H	16	49.2	45.5
5	12230.00	60.2 PK	74.0	-13.8	1.92 H	292	39.2	21.0
6	12230.00	47.0 AV	54.0	-7.0	1.92 H	292	26.0	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	2.25 V	193	38.0	13.9
2	#5925.00	38.6 AV	68.2	-29.6	2.25 V	193	24.7	13.9
3	*6115.00	108.9 PK			2.25 V	193	63.4	45.5
4	*6115.00	99.0 AV			2.25 V	193	53.5	45.5
5	12230.00	60.6 PK	74.0	-13.4	2.28 V	195	39.6	21.0
6	12230.00	47.2 AV	54.0	-6.8	2.28 V	195	26.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	104.0 PK			1.62 H	19	58.0	46.0
2	*6255.00	94.5 AV			1.62 H	19	48.5	46.0
3	12510.00	60.1 PK	74.0	-13.9	1.81 H	291	39.2	20.9
4	12510.00	46.7 AV	54.0	-7.3	1.81 H	291	25.8	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	108.3 PK			1.88 V	191	62.3	46.0
2	*6255.00	98.5 AV			1.88 V	191	52.5	46.0
3	12510.00	60.4 PK	74.0	-13.6	2.30 V	187	39.5	20.9
4	12510.00	47.0 AV	54.0	-7.0	2.30 V	187	26.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	104.3 PK			2.00 H	20	57.2	47.1
2	*6415.00	95.1 AV			2.00 H	20	48.0	47.1
3	#12830.00	61.1 PK	88.2	-27.1	1.89 H	282	39.3	21.8
4	#12830.00	47.9 AV	68.2	-20.3	1.89 H	282	26.1	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.1 PK			1.95 V	195	61.0	47.1
2	*6415.00	98.5 AV			1.95 V	195	51.4	47.1
3	#12830.00	61.4 PK	88.2	-26.8	2.21 V	192	39.6	21.8
4	#12830.00	48.1 AV	68.2	-20.1	2.21 V	192	26.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.2 PK			1.79 H	20	57.1	47.1
2	*6435.00	94.9 AV			1.79 H	20	47.8	47.1
3	#12870.00	61.3 PK	88.2	-26.9	1.82 H	285	39.2	22.1
4	#12870.00	48.1 AV	68.2	-20.1	1.82 H	285	26.0	22.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.0 PK			1.92 V	196	60.9	47.1
2	*6435.00	98.6 AV			1.92 V	196	51.5	47.1
3	#12870.00	61.6 PK	88.2	-26.6	2.25 V	195	39.5	22.1
4	#12870.00	48.3 AV	68.2	-19.9	2.25 V	195	26.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	104.8 PK			1.94 H	19	57.4	47.4
2	*6475.00	95.4 AV			1.94 H	19	48.0	47.4
3	#12950.00	61.5 PK	88.2	-26.7	1.85 H	293	39.3	22.2
4	#12950.00	48.0 AV	68.2	-20.2	1.85 H	293	25.8	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.5 PK			1.88 V	195	61.1	47.4
2	*6475.00	99.2 AV			1.88 V	195	51.8	47.4
3	#12950.00	61.8 PK	88.2	-26.4	2.21 V	187	39.6	22.2
4	#12950.00	48.3 AV	68.2	-19.9	2.21 V	187	26.1	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.4 PK			1.77 H	4	56.7	47.7
2	*6515.00	95.2 AV			1.77 H	4	47.5	47.7
3	#13030.00	61.6 PK	88.2	-26.6	1.82 H	282	39.2	22.4
4	#13030.00	48.4 AV	68.2	-19.8	1.82 H	282	26.0	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.9 PK			2.04 V	196	60.2	47.7
2	*6515.00	98.6 AV			2.04 V	196	50.9	47.7
3	#13030.00	61.9 PK	88.2	-26.3	2.22 V	187	39.5	22.4
4	#13030.00	48.6 AV	68.2	-19.6	2.22 V	187	26.2	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	104.5 PK			1.64 H	6	56.6	47.9
2	*6535.00	95.4 AV			1.64 H	6	47.5	47.9
3	#13070.00	61.7 PK	88.2	-26.5	1.89 H	279	39.3	22.4
4	#13070.00	48.2 AV	68.2	-20.0	1.89 H	279	25.8	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.4 PK			2.00 V	197	60.5	47.9
2	*6535.00	99.0 AV			2.00 V	197	51.1	47.9
3	#13070.00	62.0 PK	88.2	-26.2	2.21 V	188	39.6	22.4
4	#13070.00	48.5 AV	68.2	-19.7	2.21 V	188	26.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	104.9 PK			1.52 H	7	56.9	48.0
2	*6695.00	95.8 AV			1.52 H	7	47.8	48.0
3	13390.00	62.7 PK	74.0	-11.3	1.92 H	287	39.2	23.5
4	13390.00	49.2 AV	54.0	-4.8	1.92 H	287	25.7	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.6 PK			1.99 V	216	60.6	48.0
2	*6695.00	99.3 AV			1.99 V	216	51.3	48.0
3	13390.00	63.0 PK	74.0	-11.0	2.21 V	185	39.5	23.5
4	13390.00	49.6 AV	54.0	-4.4	2.21 V	185	26.1	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.1 PK			1.45 H	8	57.0	48.1
2	*6855.00	96.3 AV			1.45 H	8	48.2	48.1
3	#13710.00	63.0 PK	88.2	-25.2	1.92 H	292	39.2	23.8
4	#13710.00	49.6 AV	68.2	-18.6	1.92 H	292	25.8	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.7 PK			1.87 V	201	60.6	48.1
2	*6855.00	99.3 AV			1.87 V	201	51.2	48.1
3	#13710.00	63.4 PK	88.2	-24.8	2.25 V	189	39.6	23.8
4	#13710.00	50.0 AV	68.2	-18.2	2.25 V	189	26.2	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	105.3 PK			1.57 H	9	57.0	48.3
2	*6875.00	96.1 AV			1.57 H	9	47.8	48.3
3	#13750.00	63.4 PK	88.2	-24.8	1.92 H	287	39.5	23.9
4	#13750.00	49.9 AV	68.2	-18.3	1.92 H	287	26.0	23.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.5 PK			1.87 V	200	60.2	48.3
2	*6875.00	99.2 AV			1.87 V	200	50.9	48.3
3	#13750.00	63.6 PK	88.2	-24.6	2.22 V	189	39.7	23.9
4	#13750.00	50.1 AV	68.2	-18.1	2.22 V	189	26.2	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	106.2 PK			1.53 H	11	56.5	49.7
2	*6995.00	97.1 AV			1.53 H	11	47.4	49.7
3	#13990.00	63.9 PK	88.2	-24.3	1.82 H	285	39.2	24.7
4	#13990.00	50.5 AV	68.2	-17.7	1.82 H	285	25.8	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	108.9 PK			2.00 V	201	59.2	49.7
2	*6995.00	99.6 AV			2.00 V	201	49.9	49.7
3	#13990.00	64.2 PK	88.2	-24.0	2.19 V	187	39.5	24.7
4	#13990.00	50.8 AV	68.2	-17.4	2.19 V	187	26.1	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	106.4 PK			1.48 H	13	57.0	49.4
2	*7095.00	97.1 AV			1.48 H	13	47.7	49.4
3	#14190.00	64.4 PK	88.2	-23.8	1.88 H	287	39.3	25.1
4	#14190.00	50.8 AV	68.2	-17.4	1.88 H	287	25.7	25.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	108.1 PK			1.98 V	197	58.7	49.4
2	*7095.00	98.9 AV			1.98 V	197	49.5	49.4
3	#14190.00	64.7 PK	88.2	-23.5	2.22 V	195	39.6	25.1
4	#14190.00	51.2 AV	68.2	-17.0	2.22 V	195	26.1	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	105.3 PK			1.38 H	14	55.7	49.6
2	*7115.00	96.0 AV			1.38 H	14	46.4	49.6
3	#7125.00	82.7 PK	88.2	-5.5	1.38 H	14	65.1	17.6
4	#7125.00	62.6 AV	68.2	-5.6	1.38 H	14	45.0	17.6
5	#14230.00	64.3 PK	88.2	-23.9	1.88 H	285	39.2	25.1
6	#14230.00	50.9 AV	68.2	-17.3	1.88 H	285	25.8	25.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	108.4 PK			1.97 V	197	58.8	49.6
2	*7115.00	98.9 AV			1.97 V	197	49.3	49.6
3	#7125.00	82.9 PK	88.2	-5.3	1.97 V	197	65.3	17.6
4	#7125.00	62.8 AV	68.2	-5.4	1.97 V	197	45.2	17.6
5	#14230.00	64.7 PK	88.2	-23.5	2.22 V	185	39.6	25.1
6	#14230.00	51.3 AV	68.2	-16.9	2.22 V	185	26.2	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	2.10 H	166	37.6	13.9
2	#5925.00	38.3 AV	68.2	-29.9	2.10 H	166	24.4	13.9
3	*6115.00	105.6 PK			2.10 H	166	60.1	45.5
4	*6115.00	92.8 AV			2.10 H	166	47.3	45.5
5	12230.00	60.2 PK	74.0	-13.8	1.89 H	288	39.2	21.0
6	12230.00	47.1 AV	54.0	-6.9	1.89 H	288	26.1	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	2.38 V	252	38.0	13.9
2	#5925.00	38.8 AV	68.2	-29.4	2.38 V	252	24.9	13.9
3	*6115.00	110.9 PK			2.38 V	252	65.4	45.5
4	*6115.00	98.6 AV			2.38 V	252	53.1	45.5
5	12230.00	60.5 PK	74.0	-13.5	2.33 V	195	39.5	21.0
6	12230.00	47.4 AV	54.0	-6.6	2.33 V	195	26.4	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	105.7 PK			2.10 H	163	90.9	14.8
2	*6255.00	92.9 AV			2.10 H	163	78.1	14.8
3	12510.00	60.3 PK	74.0	-13.7	1.80 H	288	39.4	20.9
4	12510.00	47.0 AV	54.0	-7.0	1.80 H	288	26.1	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	110.7 PK			2.39 V	254	64.7	46.0
2	*6255.00	98.5 AV			2.39 V	254	52.5	46.0
3	12510.00	60.2 PK	74.0	-13.8	2.36 V	190	39.3	20.9
4	12510.00	47.4 AV	54.0	-6.6	2.36 V	190	26.5	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	105.9 PK			2.01 H	171	58.8	47.1
2	*6415.00	92.9 AV			2.01 H	171	45.8	47.1
3	#12830.00	60.0 PK	88.2	-28.2	1.88 H	290	38.2	21.8
4	#12830.00	46.8 AV	68.2	-21.4	1.88 H	290	25.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.7 PK			2.33 V	249	63.6	47.1
2	*6415.00	98.6 AV			2.33 V	249	51.5	47.1
3	#12830.00	60.2 PK	88.2	-28.0	2.36 V	190	38.4	21.8
4	#12830.00	47.3 AV	68.2	-20.9	2.36 V	190	25.5	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	105.4 PK			2.10 H	163	58.3	47.1
2	*6435.00	92.7 AV			2.10 H	163	45.6	47.1
3	#12870.00	60.0 PK	88.2	-28.2	1.88 H	293	37.9	22.1
4	#12870.00	46.9 AV	68.2	-21.3	1.88 H	293	24.8	22.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.8 PK			2.40 V	248	63.7	47.1
2	*6435.00	98.5 AV			2.40 V	248	51.4	47.1
3	#12870.00	60.4 PK	88.2	-27.8	2.36 V	199	38.3	22.1
4	#12870.00	47.3 AV	68.2	-20.9	2.36 V	199	25.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	105.6 PK			2.09 H	165	58.2	47.4
2	*6475.00	92.5 AV			2.09 H	165	45.1	47.4
3	#12950.00	60.1 PK	88.2	-28.1	1.80 H	279	37.9	22.2
4	#12950.00	47.0 AV	68.2	-21.2	1.80 H	279	24.8	22.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.8 PK			2.44 V	259	63.4	47.4
2	*6475.00	98.7 AV			2.44 V	259	51.3	47.4
3	#12950.00	60.5 PK	88.2	-27.7	2.19 V	193	38.3	22.2
4	#12950.00	47.6 AV	68.2	-20.6	2.19 V	193	25.4	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	105.2 PK			2.01 H	166	57.5	47.7
2	*6515.00	92.6 AV			2.01 H	166	44.9	47.7
3	#13030.00	60.0 PK	88.2	-28.2	1.88 H	289	37.6	22.4
4	#13030.00	46.8 AV	68.2	-21.4	1.88 H	289	24.4	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	110.7 PK			2.42 V	259	63.0	47.7
2	*6515.00	98.7 AV			2.42 V	259	51.0	47.7
3	#13030.00	60.4 PK	88.2	-27.8	2.36 V	190	38.0	22.4
4	#13030.00	47.2 AV	68.2	-21.0	2.36 V	190	24.8	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.4 PK			2.10 H	163	57.5	47.9
2	*6535.00	92.5 AV			2.10 H	163	44.6	47.9
3	#13070.00	60.4 PK	88.2	-27.8	1.89 H	282	38.0	22.4
4	#13070.00	47.0 AV	68.2	-21.2	1.89 H	282	24.6	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.7 PK			2.39 V	254	62.8	47.9
2	*6535.00	98.5 AV			2.39 V	254	50.6	47.9
3	#13070.00	60.4 PK	88.2	-27.8	2.19 V	199	38.0	22.4
4	#13070.00	47.5 AV	68.2	-20.7	2.19 V	199	25.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	105.7 PK			2.04 H	177	57.7	48.0
2	*6695.00	92.9 AV			2.04 H	177	44.9	48.0
3	13390.00	60.4 PK	74.0	-13.6	1.81 H	283	36.9	23.5
4	13390.00	47.0 AV	54.0	-7.0	1.81 H	283	23.5	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.7 PK			2.39 V	255	62.7	48.0
2	*6695.00	98.5 AV			2.39 V	255	50.5	48.0
3	13390.00	60.4 PK	74.0	-13.6	2.36 V	198	36.9	23.5
4	13390.00	47.2 AV	54.0	-6.8	2.36 V	198	23.7	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.5 PK			2.06 H	164	57.4	48.1
2	*6855.00	92.6 AV			2.06 H	164	44.5	48.1
3	#13710.00	60.0 PK	88.2	-28.2	1.88 H	289	36.2	23.8
4	#13710.00	46.8 AV	68.2	-21.4	1.88 H	289	23.0	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.7 PK			2.33 V	258	62.6	48.1
2	*6855.00	98.5 AV			2.33 V	258	50.4	48.1
3	#13710.00	60.6 PK	88.2	-27.6	2.39 V	198	36.8	23.8
4	#13710.00	47.3 AV	68.2	-20.9	2.39 V	198	23.5	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	105.9 PK			2.12 H	163	57.6	48.3
2	*6875.00	92.9 AV			2.12 H	163	44.6	48.3
3	#13750.00	59.9 PK	88.2	-28.3	1.99 H	284	36.0	23.9
4	#13750.00	46.8 AV	68.2	-21.4	1.99 H	284	22.9	23.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	110.7 PK			2.48 V	256	62.4	48.3
2	*6875.00	98.5 AV			2.48 V	256	50.2	48.3
3	#13750.00	60.3 PK	88.2	-27.9	2.39 V	199	36.4	23.9
4	#13750.00	47.7 AV	68.2	-20.5	2.39 V	199	23.8	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	105.7 PK			2.01 H	165	56.0	49.7
2	*6995.00	92.9 AV			2.01 H	165	43.2	49.7
3	#13990.00	60.2 PK	88.2	-28.0	1.83 H	279	35.5	24.7
4	#13990.00	47.1 AV	68.2	-21.1	1.83 H	279	22.4	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.8 PK			2.36 V	255	61.1	49.7
2	*6995.00	98.7 AV			2.36 V	255	49.0	49.7
3	#13990.00	60.6 PK	88.2	-27.6	2.38 V	195	35.9	24.7
4	#13990.00	47.6 AV	68.2	-20.6	2.38 V	195	22.9	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	105.6 PK			2.12 H	163	56.2	49.4
2	*7095.00	92.7 AV			2.12 H	163	43.3	49.4
3	#14190.00	60.0 PK	88.2	-28.2	1.88 H	290	34.9	25.1
4	#14190.00	46.7 AV	68.2	-21.5	1.88 H	290	21.6	25.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	110.8 PK			2.33 V	254	61.4	49.4
2	*7095.00	98.5 AV			2.33 V	254	49.1	49.4
3	#14190.00	60.4 PK	88.2	-27.8	2.36 V	199	35.3	25.1
4	#14190.00	47.2 AV	68.2	-21.0	2.36 V	199	22.1	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.8 PK			2.02 H	170	43.2	49.6
2	*7115.00	80.2 AV			2.02 H	170	30.6	49.6
3	#7125.00	77.6 PK	88.2	-10.6	2.02 H	170	60.0	17.6
4	#7125.00	65.5 AV	68.2	-2.7	2.02 H	170	47.9	17.6
5	#14230.00	64.1 PK	88.2	-24.1	1.79 H	286	39.0	25.1
6	#14230.00	51.0 AV	68.2	-17.2	1.79 H	286	25.9	25.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.8 PK			2.08 V	249	46.2	49.6
2	*7115.00	83.1 AV			2.08 V	249	33.5	49.6
3	#7125.00	80.8 PK	88.2	-7.4	2.08 V	249	63.2	17.6
4	#7125.00	67.8 AV	68.2	-0.4	2.08 V	249	50.2	17.6
5	#14230.00	64.6 PK	88.2	-23.6	2.44 V	196	39.5	25.1
6	#14230.00	51.4 AV	68.2	-16.8	2.44 V	196	26.3	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	2.10 H	159	37.5	13.9
2	#5925.00	38.1 AV	68.2	-30.1	2.10 H	159	24.2	13.9
3	*6125.00	105.4 PK			2.10 H	159	59.9	45.5
4	*6125.00	92.5 AV			2.10 H	159	47.0	45.5
5	12250.00	60.2 PK	74.0	-13.8	1.90 H	285	39.2	21.0
6	12250.00	46.8 AV	54.0	-7.2	1.90 H	285	25.8	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	2.26 V	194	38.0	13.9
2	#5925.00	38.7 AV	68.2	-29.5	2.26 V	194	24.8	13.9
3	*6125.00	111.3 PK			2.26 V	194	65.8	45.5
4	*6125.00	98.2 AV			2.26 V	194	52.7	45.5
5	12250.00	60.2 PK	74.0	-13.8	2.40 V	199	39.2	21.0
6	12250.00	47.2 AV	54.0	-6.8	2.40 V	199	26.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	105.9 PK			2.11 H	162	60.1	45.8
2	*6245.00	92.9 AV			2.11 H	162	47.1	45.8
3	12490.00	60.2 PK	74.0	-13.8	1.88 H	289	39.3	20.9
4	12490.00	47.0 AV	54.0	-7.0	1.88 H	289	26.1	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	110.8 PK			2.30 V	215	65.0	45.8
2	*6245.00	98.7 AV			2.30 V	215	52.9	45.8
3	12490.00	60.4 PK	74.0	-13.6	2.36 V	199	39.5	20.9
4	12490.00	47.5 AV	54.0	-6.5	2.36 V	199	26.6	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	105.9 PK			2.16 H	163	58.9	47.0
2	*6405.00	92.5 AV			2.16 H	163	45.5	47.0
3	#12810.00	60.0 PK	88.2	-28.2	1.85 H	294	38.3	21.7
4	#12810.00	46.7 AV	68.2	-21.5	1.85 H	294	25.0	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.1 PK			2.31 V	240	64.1	47.0
2	*6405.00	98.9 AV			2.31 V	240	51.9	47.0
3	#12810.00	60.6 PK	88.2	-27.6	2.31 V	199	38.9	21.7
4	#12810.00	47.5 AV	68.2	-20.7	2.31 V	199	25.8	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	105.7 PK			2.09 H	168	58.6	47.1
2	*6445.00	92.9 AV			2.09 H	168	45.8	47.1
3	#12890.00	60.1 PK	88.2	-28.1	1.84 H	285	37.9	22.2
4	#12890.00	47.0 AV	68.2	-21.2	1.84 H	285	24.8	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	110.9 PK			2.37 V	250	63.8	47.1
2	*6445.00	98.8 AV			2.37 V	250	51.7	47.1
3	#12890.00	60.4 PK	88.2	-27.8	2.21 V	198	38.2	22.2
4	#12890.00	47.6 AV	68.2	-20.6	2.21 V	198	25.4	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	105.7 PK			2.11 H	169	58.2	47.5
2	*6485.00	92.8 AV			2.11 H	169	45.3	47.5
3	#12890.00	60.0 PK	88.2	-28.2	1.99 H	279	37.8	22.2
4	#12890.00	47.2 AV	68.2	-21.0	1.99 H	279	25.0	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.9 PK			2.37 V	255	63.4	47.5
2	*6485.00	98.9 AV			2.37 V	255	51.4	47.5
3	#12890.00	60.6 PK	88.2	-27.6	2.34 V	190	38.4	22.2
4	#12890.00	47.5 AV	68.2	-20.7	2.34 V	190	25.3	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	105.8 PK			2.18 H	177	58.0	47.8
2	*6525.00	93.0 AV			2.18 H	177	45.2	47.8
3	#13050.00	60.1 PK	88.2	-28.1	1.86 H	284	37.6	22.5
4	#13050.00	47.2 AV	68.2	-21.0	1.86 H	284	24.7	22.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	111.1 PK			2.40 V	249	63.3	47.8
2	*6525.00	99.2 AV			2.40 V	249	51.4	47.8
3	#13050.00	60.4 PK	88.2	-27.8	2.36 V	198	37.9	22.5
4	#13050.00	47.5 AV	68.2	-20.7	2.36 V	198	25.0	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	105.9 PK			2.11 H	167	57.8	48.1
2	*6565.00	93.1 AV			2.11 H	167	45.0	48.1
3	#13130.00	60.0 PK	88.2	-28.2	1.88 H	285	37.4	22.6
4	#13130.00	47.0 AV	68.2	-21.2	1.88 H	285	24.4	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	111.2 PK			2.26 V	200	63.1	48.1
2	*6565.00	98.8 AV			2.26 V	200	50.7	48.1
3	#13130.00	60.7 PK	88.2	-27.5	2.38 V	199	38.1	22.6
4	#13130.00	47.6 AV	68.2	-20.6	2.38 V	199	25.0	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	105.9 PK			2.11 H	163	57.7	48.2
2	*6725.00	93.0 AV			2.11 H	163	44.8	48.2
3	#13450.00	60.0 PK	88.2	-28.2	1.84 H	291	36.5	23.5
4	#13450.00	47.2 AV	68.2	-21.0	1.84 H	291	23.7	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.8 PK			2.40 V	241	62.6	48.2
2	*6725.00	98.8 AV			2.40 V	241	50.6	48.2
3	#13450.00	60.6 PK	88.2	-27.6	2.39 V	199	37.1	23.5
4	#13450.00	47.5 AV	68.2	-20.7	2.39 V	199	24.0	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	105.8 PK			2.13 H	169	57.6	48.2
2	*6845.00	93.0 AV			2.13 H	169	44.8	48.2
3	#13690.00	60.1 PK	88.2	-28.1	1.90 H	289	36.3	23.8
4	#13690.00	47.0 AV	68.2	-21.2	1.90 H	289	23.2	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	111.1 PK			2.39 V	255	62.9	48.2
2	*6845.00	98.8 AV			2.39 V	255	50.6	48.2
3	#13690.00	60.6 PK	88.2	-27.6	2.36 V	190	36.8	23.8
4	#13690.00	47.5 AV	68.2	-20.7	2.36 V	190	23.7	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	105.8 PK			2.11 H	170	57.4	48.4
2	*6885.00	93.1 AV			2.11 H	170	44.7	48.4
3	#13770.00	60.0 PK	88.2	-28.2	1.85 H	291	35.9	24.1
4	#13770.00	47.0 AV	68.2	-21.2	1.85 H	291	22.9	24.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	110.8 PK			2.45 V	255	62.4	48.4
2	*6885.00	98.8 AV			2.45 V	255	50.4	48.4
3	#13770.00	60.6 PK	88.2	-27.6	2.41 V	196	36.5	24.1
4	#13770.00	47.7 AV	68.2	-20.5	2.41 V	196	23.6	24.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	105.8 PK			2.19 H	169	56.0	49.8
2	*7005.00	93.2 AV			2.19 H	169	43.4	49.8
3	#14010.00	60.1 PK	88.2	-28.1	1.90 H	281	35.4	24.7
4	#14010.00	47.0 AV	68.2	-21.2	1.90 H	281	22.3	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	111.2 PK			2.36 V	250	61.4	49.8
2	*7005.00	98.9 AV			2.36 V	250	49.1	49.8
3	#14010.00	60.6 PK	88.2	-27.6	2.36 V	190	35.9	24.7
4	#14010.00	47.8 AV	68.2	-20.4	2.36 V	190	23.1	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	106.2 PK			2.11 H	167	56.8	49.4
2	*7085.00	93.2 AV			2.11 H	167	43.8	49.4
3	#7125.00	57.5 PK	88.2	-30.7	2.11 H	167	39.9	17.6
4	#7125.00	44.4 AV	68.2	-23.8	2.11 H	167	26.8	17.6
5	#14170.00	60.0 PK	88.2	-28.2	1.92 H	283	35.0	25.0
6	#14170.00	46.8 AV	68.2	-21.4	1.92 H	283	21.8	25.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.2 PK			2.07 V	208	61.8	49.4
2	*7085.00	98.7 AV			2.07 V	208	49.3	49.4
3	#7125.00	58.5 PK	88.2	-29.7	2.07 V	208	40.9	17.6
4	#7125.00	46.0 AV	68.2	-22.2	2.07 V	208	28.4	17.6
5	#14170.00	60.3 PK	88.2	-27.9	2.19 V	190	35.3	25.0
6	#14170.00	47.2 AV	68.2	-21.0	2.19 V	190	22.2	25.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	2.15 H	163	37.4	13.9
2	#5925.00	38.2 AV	68.2	-30.0	2.15 H	163	24.3	13.9
3	*6145.00	105.7 PK			2.15 H	163	60.3	45.4
4	*6145.00	93.2 AV			2.15 H	163	47.8	45.4
5	12290.00	60.0 PK	74.0	-14.0	1.90 H	285	39.0	21.0
6	12290.00	46.8 AV	54.0	-7.2	1.90 H	285	25.8	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.8 PK	88.2	-36.4	2.34 V	257	37.9	13.9
2	#5925.00	38.9 AV	68.2	-29.3	2.34 V	257	25.0	13.9
3	*6145.00	110.3 PK			2.34 V	257	64.9	45.4
4	*6145.00	97.6 AV			2.34 V	257	52.2	45.4
5	12290.00	60.6 PK	74.0	-13.4	2.44 V	196	39.6	21.0
6	12290.00	47.6 AV	54.0	-6.4	2.44 V	196	26.6	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	106.1 PK			2.17 H	169	60.4	45.7
2	*6225.00	93.0 AV			2.17 H	169	47.3	45.7
3	12450.00	60.0 PK	74.0	-14.0	1.95 H	284	39.1	20.9
4	12450.00	47.3 AV	54.0	-6.7	1.95 H	284	26.4	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.8 PK			2.34 V	255	65.1	45.7
2	*6225.00	99.1 AV			2.34 V	255	53.4	45.7
3	12450.00	60.7 PK	74.0	-13.3	2.30 V	194	39.8	20.9
4	12450.00	47.9 AV	54.0	-6.1	2.30 V	194	27.0	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	105.8 PK			2.08 H	163	58.8	47.0
2	*6385.00	93.0 AV			2.08 H	163	46.0	47.0
3	#12770.00	59.9 PK	88.2	-28.3	1.93 H	278	38.2	21.7
4	#12770.00	46.8 AV	68.2	-21.4	1.93 H	278	25.1	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.9 PK			2.38 V	259	63.9	47.0
2	*6385.00	98.9 AV			2.38 V	259	51.9	47.0
3	#12770.00	60.6 PK	88.2	-27.6	2.30 V	199	38.9	21.7
4	#12770.00	47.5 AV	68.2	-20.7	2.30 V	199	25.8	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	105.8 PK			2.11 H	163	58.5	47.3
2	*6465.00	92.7 AV			2.11 H	163	45.4	47.3
3	#12930.00	60.0 PK	88.2	-28.2	1.82 H	290	37.8	22.2
4	#12930.00	46.9 AV	68.2	-21.3	1.82 H	290	24.7	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.0 PK			2.44 V	260	63.7	47.3
2	*6465.00	98.8 AV			2.44 V	260	51.5	47.3
3	#12930.00	60.6 PK	88.2	-27.6	2.31 V	194	38.4	22.2
4	#12930.00	47.5 AV	68.2	-20.7	2.31 V	194	25.3	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	105.9 PK			2.17 H	164	58.0	47.9
2	*6545.00	93.0 AV			2.17 H	164	45.1	47.9
3	#13090.00	60.1 PK	88.2	-28.1	1.92 H	285	37.5	22.6
4	#13090.00	46.9 AV	68.2	-21.3	1.92 H	285	24.3	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.2 PK			2.31 V	260	63.3	47.9
2	*6545.00	98.8 AV			2.31 V	260	50.9	47.9
3	#13090.00	60.8 PK	88.2	-27.4	2.41 V	190	38.2	22.6
4	#13090.00	47.8 AV	68.2	-20.4	2.41 V	190	25.2	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	105.4 PK			2.12 H	169	57.4	48.0
2	*6625.00	92.9 AV			2.12 H	169	44.9	48.0
3	13250.00	60.0 PK	74.0	-14.0	1.88 H	290	37.3	22.7
4	13250.00	46.9 AV	54.0	-7.1	1.88 H	290	24.2	22.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.8 PK			2.33 V	258	62.8	48.0
2	*6625.00	98.9 AV			2.33 V	258	50.9	48.0
3	13250.00	60.4 PK	74.0	-13.6	2.36 V	199	37.7	22.7
4	13250.00	47.6 AV	54.0	-6.4	2.36 V	199	24.9	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	106.1 PK			2.13 H	169	58.0	48.1
2	*6705.00	93.2 AV			2.13 H	169	45.1	48.1
3	#13410.00	60.1 PK	88.2	-28.1	1.90 H	285	36.6	23.5
4	#13410.00	47.0 AV	68.2	-21.2	1.90 H	285	23.5	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.3 PK			2.34 V	258	63.2	48.1
2	*6705.00	99.0 AV			2.34 V	258	50.9	48.1
3	#13410.00	60.8 PK	88.2	-27.4	2.41 V	189	37.3	23.5
4	#13410.00	47.6 AV	68.2	-20.6	2.41 V	189	24.1	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	105.9 PK			2.19 H	169	57.6	48.3
2	*6785.00	93.0 AV			2.19 H	169	44.7	48.3
3	#13570.00	60.5 PK	88.2	-27.7	1.99 H	285	36.8	23.7
4	#13570.00	47.4 AV	68.2	-20.8	1.99 H	285	23.7	23.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.8 PK			2.40 V	256	62.5	48.3
2	*6785.00	98.9 AV			2.40 V	256	50.6	48.3
3	#13570.00	60.7 PK	88.2	-27.5	2.41 V	198	37.0	23.7
4	#13570.00	47.6 AV	68.2	-20.6	2.41 V	198	23.9	23.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	105.9 PK			2.16 H	169	57.7	48.2
2	*6865.00	92.5 AV			2.16 H	169	44.3	48.2
3	#13730.00	60.1 PK	88.2	-28.1	1.88 H	285	36.2	23.9
4	#13730.00	47.0 AV	68.2	-21.2	1.88 H	285	23.1	23.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.2 PK			2.40 V	259	63.0	48.2
2	*6865.00	99.0 AV			2.40 V	259	50.8	48.2
3	#13730.00	60.7 PK	88.2	-27.5	2.19 V	198	36.8	23.9
4	#13730.00	47.6 AV	68.2	-20.6	2.19 V	198	23.7	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	106.4 PK			2.25 H	162	57.3	49.1
2	*6945.00	93.6 AV			2.25 H	162	44.5	49.1
3	#13890.00	60.2 PK	88.2	-28.0	1.85 H	292	36.0	24.2
4	#13890.00	47.5 AV	68.2	-20.7	1.85 H	292	23.3	24.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.5 PK			2.13 V	208	63.4	49.1
2	*6945.00	99.3 AV			2.13 V	208	50.2	49.1
3	#13890.00	61.1 PK	88.2	-27.1	2.22 V	195	36.9	24.2
4	#13890.00	48.2 AV	68.2	-20.0	2.22 V	195	24.0	24.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	107.9 PK			1.63 H	13	58.2	49.7
2	*7025.00	95.7 AV			1.63 H	13	46.0	49.7
3	#7125.00	57.1 PK	88.2	-31.1	1.63 H	13	39.5	17.6
4	#7125.00	44.6 AV	68.2	-23.6	1.63 H	13	27.0	17.6
5	#14050.00	61.3 PK	88.2	-26.9	1.95 H	289	36.4	24.9
6	#14050.00	48.8 AV	68.2	-19.4	1.95 H	289	23.9	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.4 PK			2.16 V	210	61.7	49.7
2	*7025.00	99.9 AV			2.16 V	210	50.2	49.7
3	#7125.00	57.6 PK	88.2	-30.6	2.16 V	210	40.0	17.6
4	#7125.00	44.8 AV	68.2	-23.4	2.16 V	210	27.2	17.6
5	#14050.00	61.7 PK	88.2	-26.5	2.19 V	192	36.8	24.9
6	#14050.00	48.9 AV	68.2	-19.3	2.19 V	192	24.0	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	2.11 H	160	37.4	13.9
2	#5925.00	38.2 AV	68.2	-30.0	2.11 H	160	24.3	13.9
3	*6185.00	105.2 PK			2.11 H	160	59.8	45.4
4	*6185.00	92.8 AV			2.11 H	160	47.4	45.4
5	12370.00	60.0 PK	74.0	-14.0	1.85 H	283	39.1	20.9
6	12370.00	46.9 AV	54.0	-7.1	1.85 H	283	26.0	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	2.18 V	193	37.8	13.9
2	#5925.00	38.6 AV	68.2	-29.6	2.18 V	193	24.7	13.9
3	*6185.00	111.7 PK			2.18 V	193	66.3	45.4
4	*6185.00	99.1 AV			2.18 V	193	53.7	45.4
5	12370.00	60.1 PK	74.0	-13.9	2.33 V	195	39.2	20.9
6	12370.00	47.0 AV	54.0	-7.0	2.33 V	195	26.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.6 PK			2.11 H	149	58.8	46.8
2	*6345.00	92.7 AV			2.11 H	149	45.9	46.8
3	12690.00	60.0 PK	74.0	-14.0	1.85 H	288	38.3	21.7
4	12690.00	46.6 AV	54.0	-7.4	1.85 H	288	24.9	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.4 PK			2.14 V	199	64.6	46.8
2	*6345.00	98.3 AV			2.14 V	199	51.5	46.8
3	12690.00	60.5 PK	74.0	-13.5	2.46 V	190	38.8	21.7
4	12690.00	47.3 AV	54.0	-6.7	2.46 V	190	25.6	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.2 PK			2.08 H	155	57.5	47.7
2	*6505.00	92.4 AV			2.08 H	155	44.7	47.7
3	#13010.00	60.1 PK	88.2	-28.1	1.89 H	288	37.7	22.4
4	#13010.00	46.8 AV	68.2	-21.4	1.89 H	288	24.4	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	111.5 PK			2.19 V	199	63.8	47.7
2	*6505.00	98.7 AV			2.19 V	199	51.0	47.7
3	#13010.00	60.4 PK	88.2	-27.8	2.44 V	195	38.0	22.4
4	#13010.00	47.3 AV	68.2	-20.9	2.44 V	195	24.9	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.6 PK			2.11 H	163	57.6	48.0
2	*6665.00	92.8 AV			2.11 H	163	44.8	48.0
3	13330.00	60.2 PK	74.0	-13.8	1.89 H	285	37.1	23.1
4	13330.00	46.7 AV	54.0	-7.3	1.89 H	285	23.6	23.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	111.5 PK			2.18 V	190	63.5	48.0
2	*6665.00	98.8 AV			2.18 V	190	50.8	48.0
3	13330.00	60.4 PK	74.0	-13.6	2.31 V	196	37.3	23.1
4	13330.00	47.5 AV	54.0	-6.5	2.31 V	196	24.4	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.6 PK			2.16 H	159	57.3	48.3
2	*6825.00	92.7 AV			2.16 H	159	44.4	48.3
3	#13650.00	60.1 PK	88.2	-28.1	1.82 H	284	36.3	23.8
4	#13650.00	46.8 AV	68.2	-21.4	1.82 H	284	23.0	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.0 PK			2.20 V	195	62.7	48.3
2	*6825.00	98.3 AV			2.20 V	195	50.0	48.3
3	#13650.00	60.4 PK	88.2	-27.8	2.33 V	196	36.6	23.8
4	#13650.00	47.5 AV	68.2	-20.7	2.33 V	196	23.7	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.5 PK			2.18 H	155	55.8	49.7
2	*6985.00	92.6 AV			2.18 H	155	42.9	49.7
3	#7125.00	72.5 PK	88.2	-15.7	2.18 H	155	54.9	17.6
4	#7125.00	53.1 AV	68.2	-15.1	2.18 H	155	35.5	17.6
5	#13970.00	60.0 PK	88.2	-28.2	1.90 H	272	35.4	24.6
6	#13970.00	46.3 AV	68.2	-21.9	1.90 H	272	21.7	24.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	111.8 PK			2.18 V	193	62.1	49.7
2	*6985.00	99.4 AV			2.18 V	193	49.7	49.7
3	#7125.00	73.2 PK	88.2	-15.0	2.18 V	193	55.6	17.6
4	#7125.00	55.0 AV	68.2	-13.2	2.18 V	193	37.4	17.6
5	#13970.00	60.4 PK	88.2	-27.8	2.33 V	187	35.8	24.6
6	#13970.00	47.6 AV	68.2	-20.6	2.33 V	187	23.0	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	2.21 H	169	37.5	13.9
2	#5925.00	38.1 AV	68.2	-30.1	2.21 H	169	24.2	13.9
3	*6265.00	105.5 PK			2.21 H	169	59.5	46.0
4	*6265.00	92.8 AV			2.21 H	169	46.8	46.0
5	12530.00	60.0 PK	74.0	-14.0	1.76 H	275	39.0	21.0
6	12530.00	46.5 AV	54.0	-7.5	1.76 H	275	25.5	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	2.17 V	196	38.0	13.9
2	#5925.00	39.3 AV	68.2	-28.9	2.17 V	196	25.4	13.9
3	*6265.00	110.9 PK			2.17 V	196	64.9	46.0
4	*6265.00	98.6 AV			2.17 V	196	52.6	46.0
5	12530.00	60.3 PK	74.0	-13.7	2.33 V	196	39.3	21.0
6	12530.00	47.4 AV	54.0	-6.6	2.33 V	196	26.4	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	105.6 PK			2.14 H	168	58.5	47.1
2	*6425.00	92.8 AV			2.14 H	168	45.7	47.1
3	#12850.00	59.9 PK	88.2	-28.3	1.88 H	285	37.9	22.0
4	#12850.00	46.7 AV	68.2	-21.5	1.88 H	285	24.7	22.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	111.5 PK			2.11 V	198	64.4	47.1
2	*6425.00	98.5 AV			2.11 V	198	51.4	47.1
3	#12850.00	60.3 PK	88.2	-27.9	2.16 V	194	38.3	22.0
4	#12850.00	47.5 AV	68.2	-20.7	2.16 V	194	25.5	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320) Beamforming	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	105.8 PK			2.10 H	162	57.7	48.1
2	*6585.00	92.7 AV			2.10 H	162	44.6	48.1
3	#13170.00	60.3 PK	88.2	-27.9	1.85 H	288	37.7	22.6
4	#13170.00	46.9 AV	68.2	-21.3	1.85 H	288	24.3	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.5 PK			2.17 V	199	63.4	48.1
2	*6585.00	98.3 AV			2.17 V	199	50.2	48.1
3	#13170.00	60.5 PK	88.2	-27.7	2.41 V	195	37.9	22.6
4	#13170.00	47.4 AV	68.2	-20.8	2.41 V	195	24.8	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320) Beamforming	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	105.3 PK			2.23 H	170	57.0	48.3
2	*6745.00	92.4 AV			2.23 H	170	44.1	48.3
3	#13490.00	60.0 PK	88.2	-28.2	1.85 H	274	36.4	23.6
4	#13490.00	46.6 AV	68.2	-21.6	1.85 H	274	23.0	23.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.5 PK			2.31 V	198	63.2	48.3
2	*6745.00	98.8 AV			2.31 V	198	50.5	48.3
3	#13490.00	60.5 PK	88.2	-27.7	2.26 V	192	36.9	23.6
4	#13490.00	47.4 AV	68.2	-20.8	2.26 V	192	23.8	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320) Beamforming	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	108.4 PK			2.10 H	159	59.8	48.6
2	*6905.00	95.3 AV			2.10 H	159	46.7	48.6
3	#7125.00	72.2 PK	88.2	-16.0	2.10 H	159	54.6	17.6
4	#7125.00	54.7 AV	68.2	-13.5	2.10 H	159	37.1	17.6
5	7250.00	60.8 PK	74.0	-13.2	2.10 H	159	42.9	17.9
6	7250.00	47.4 AV	54.0	-6.6	2.10 H	159	29.5	17.9
7	#13810.00	63.0 PK	88.2	-25.2	1.99 H	283	38.9	24.1
8	#13810.00	50.0 AV	68.2	-18.2	1.99 H	283	25.9	24.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	112.0 PK			2.17 V	196	63.4	48.6
2	*6905.00	98.3 AV			2.17 V	196	49.7	48.6
3	#7125.00	74.6 PK	88.2	-13.6	2.17 V	196	57.0	17.6
4	#7125.00	56.9 AV	68.2	-11.3	2.17 V	196	39.3	17.6
5	7250.00	61.3 PK	74.0	-12.7	2.17 V	196	43.4	17.9
6	7250.00	49.1 AV	54.0	-4.9	2.17 V	196	31.2	17.9
7	#13810.00	60.3 PK	88.2	-27.9	2.39 V	198	36.2	24.1
8	#13810.00	47.5 AV	68.2	-20.7	2.39 V	198	23.4	24.1

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

NSS1 Plot of Band Edge


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

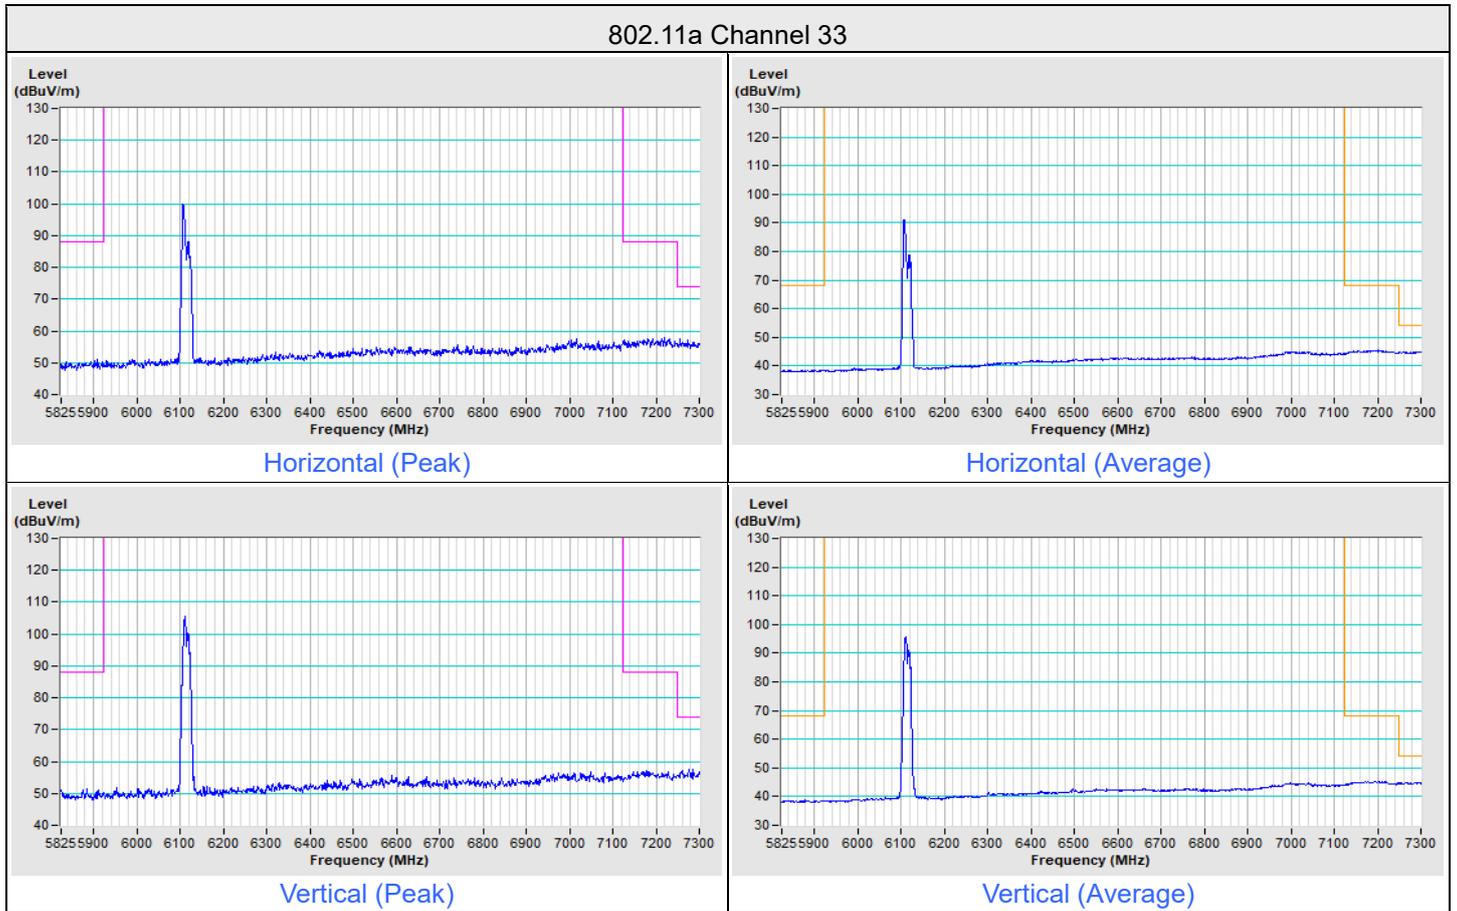


802.11a Channel 233

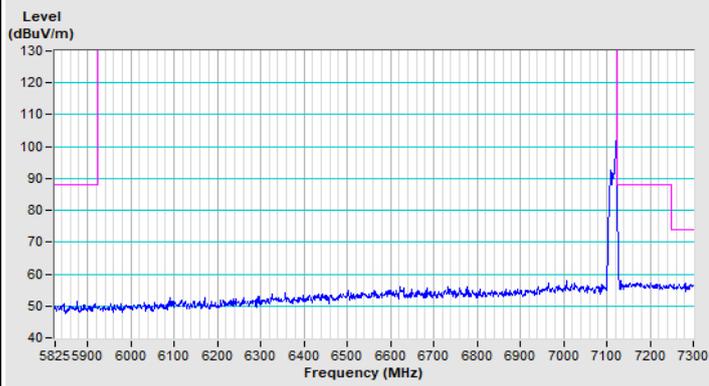


Horizontal (Peak)

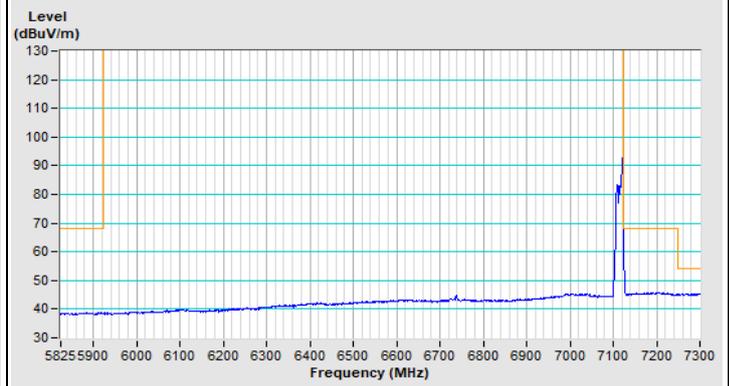

Horizontal (Average)

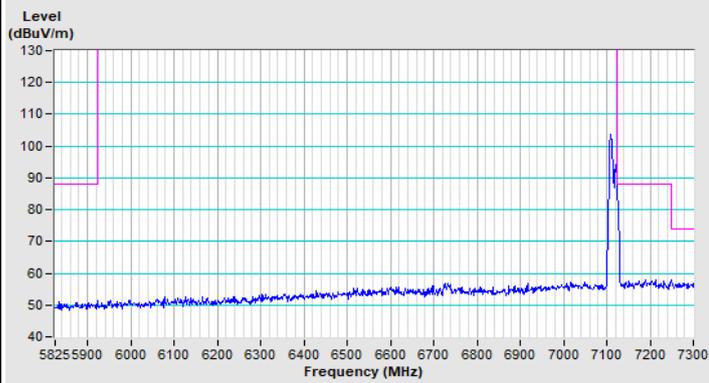


Vertical (Peak)

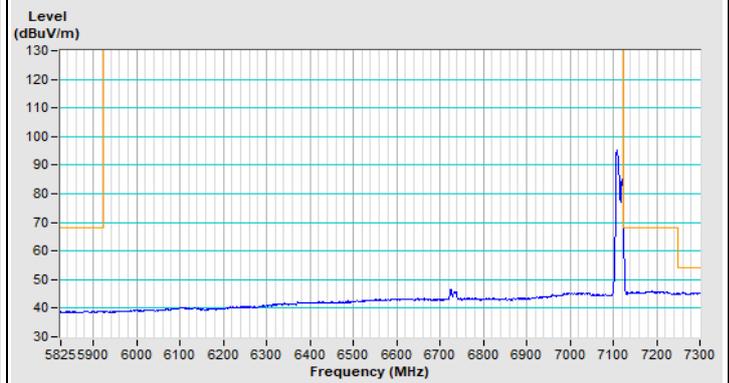


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Beamforming Channel 33

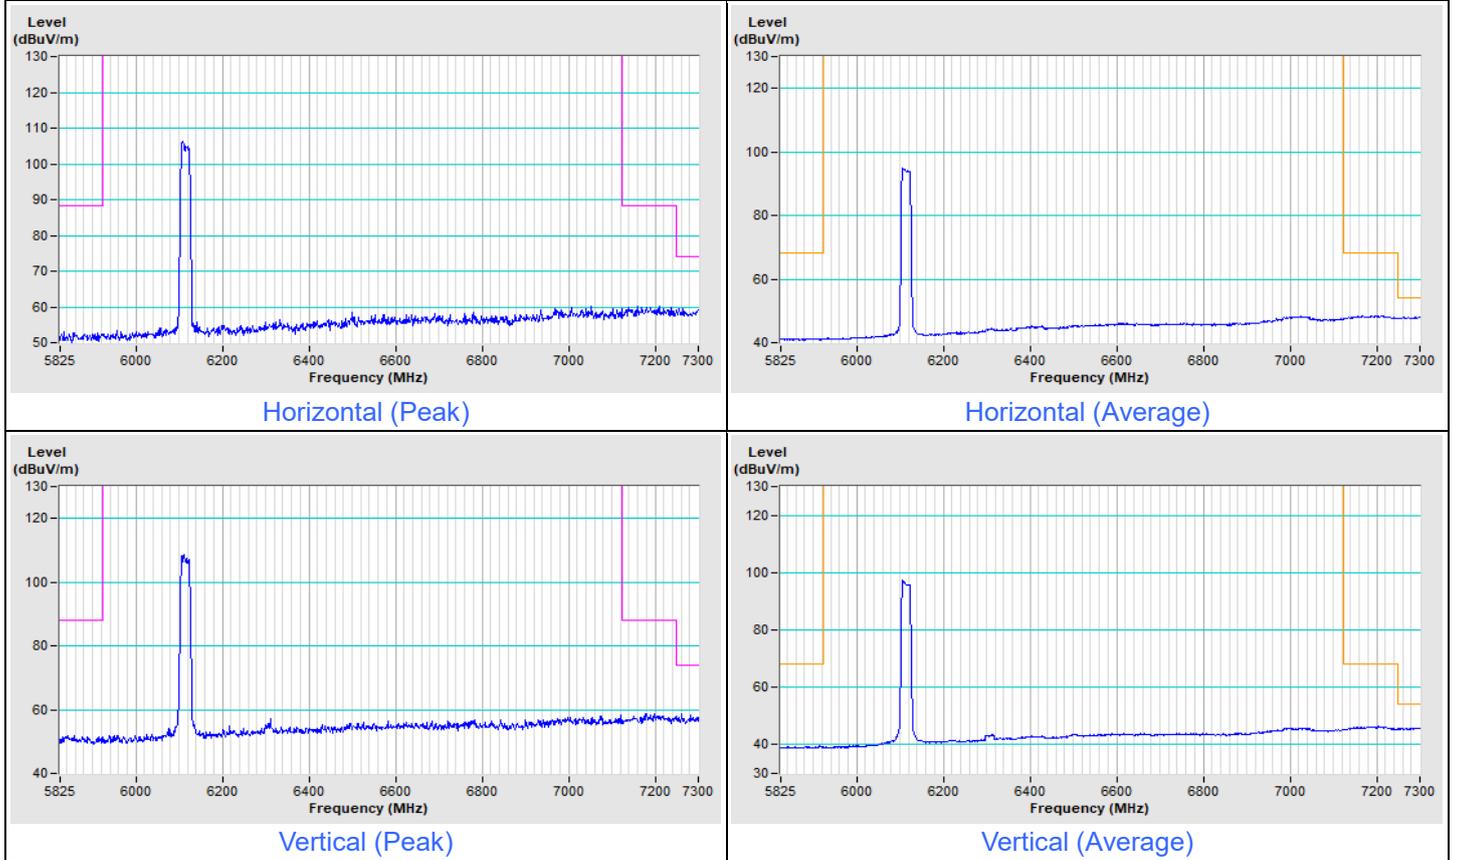


802.11be (EHT20) Beamforming Channel 233

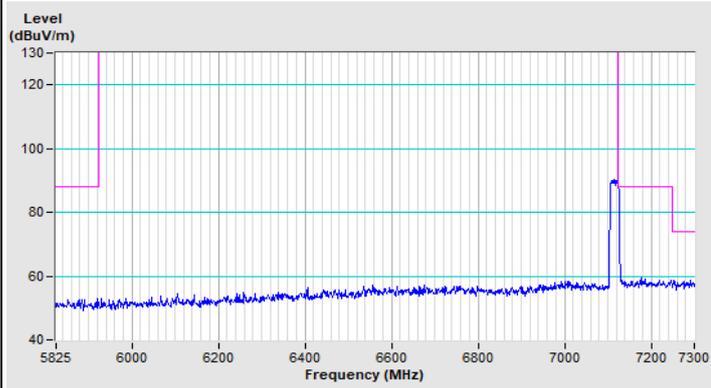


Horizontal (Peak)

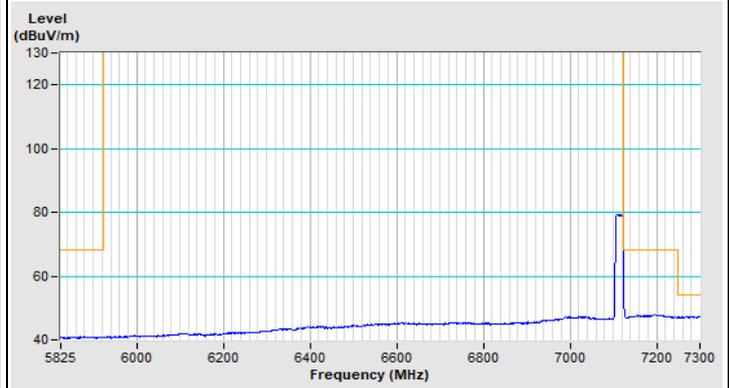

Horizontal (Average)

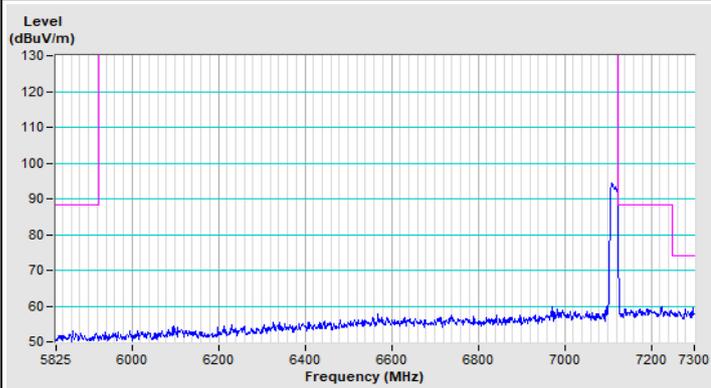


Vertical (Peak)

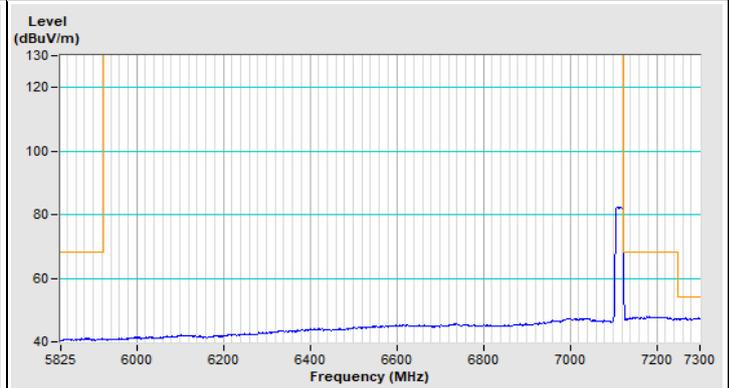


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Beamforming Channel 35

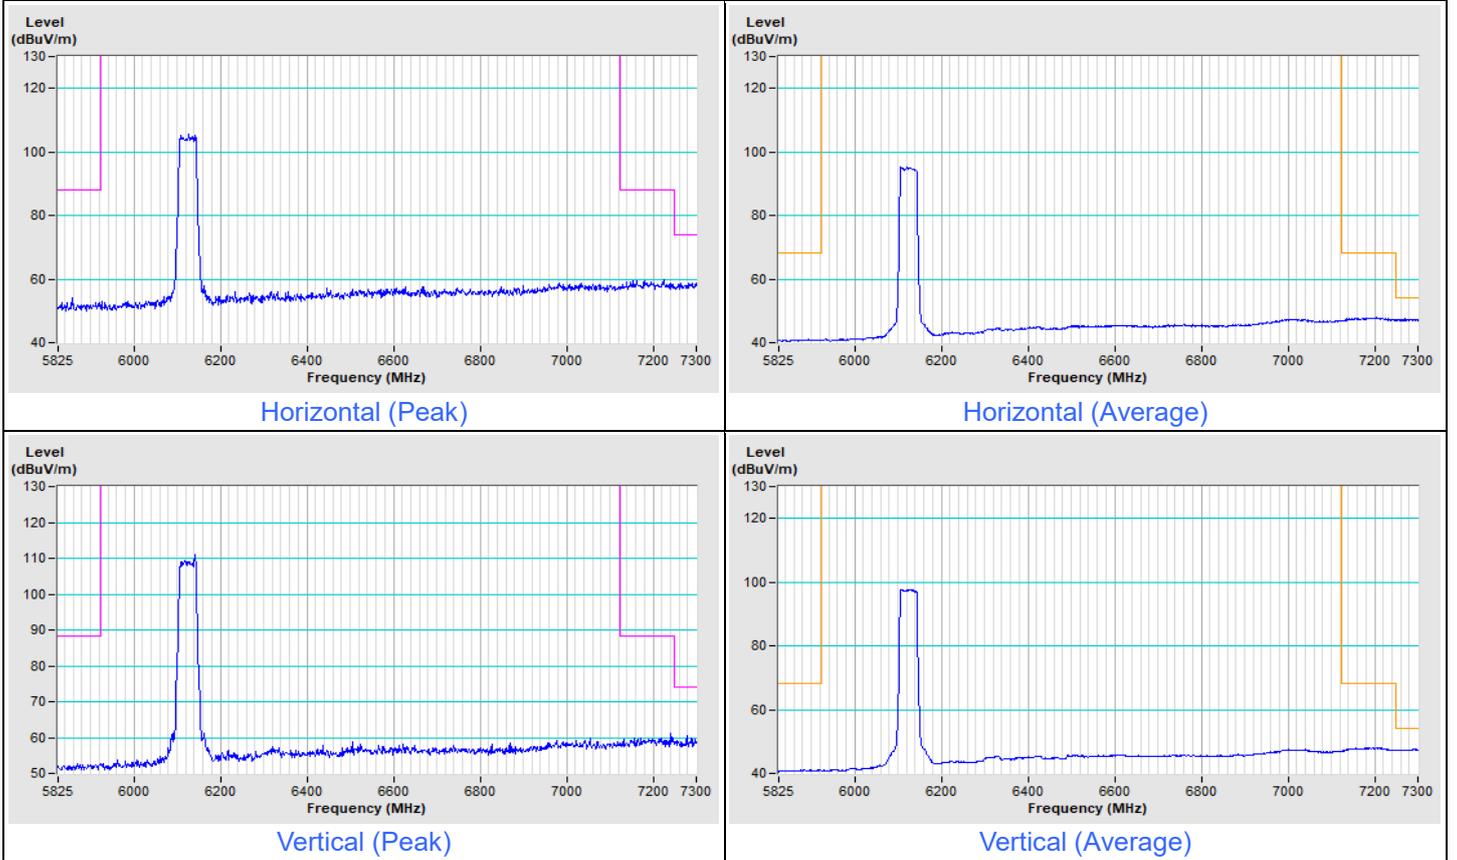


802.11be (EHT40) Beamforming Channel 227

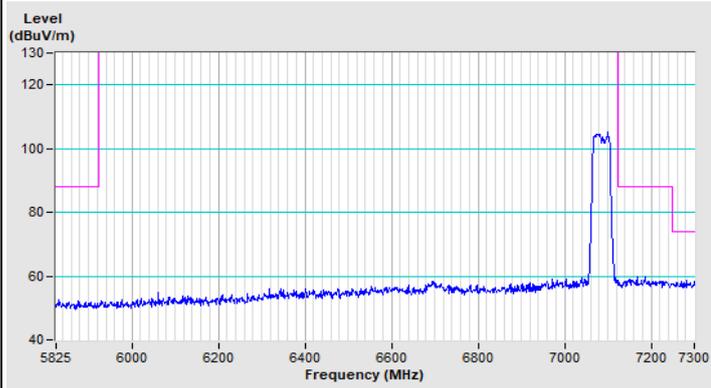


Horizontal (Peak)

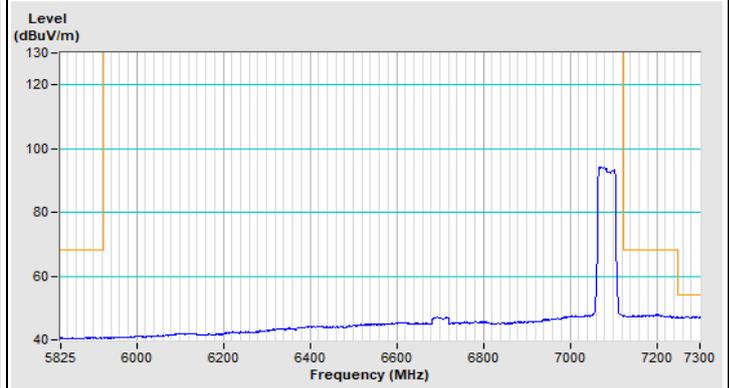

Horizontal (Average)

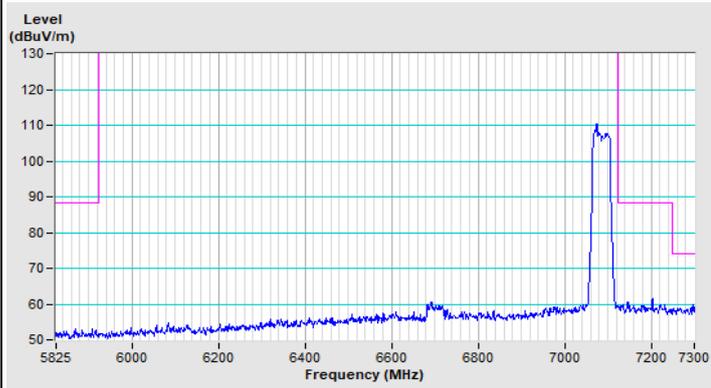


Vertical (Peak)

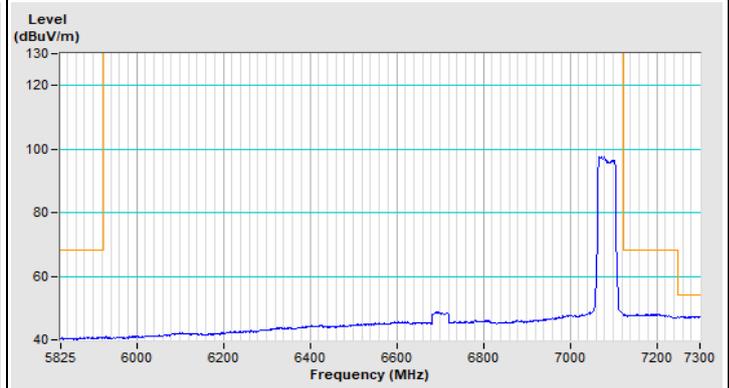


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Beamforming Channel 39

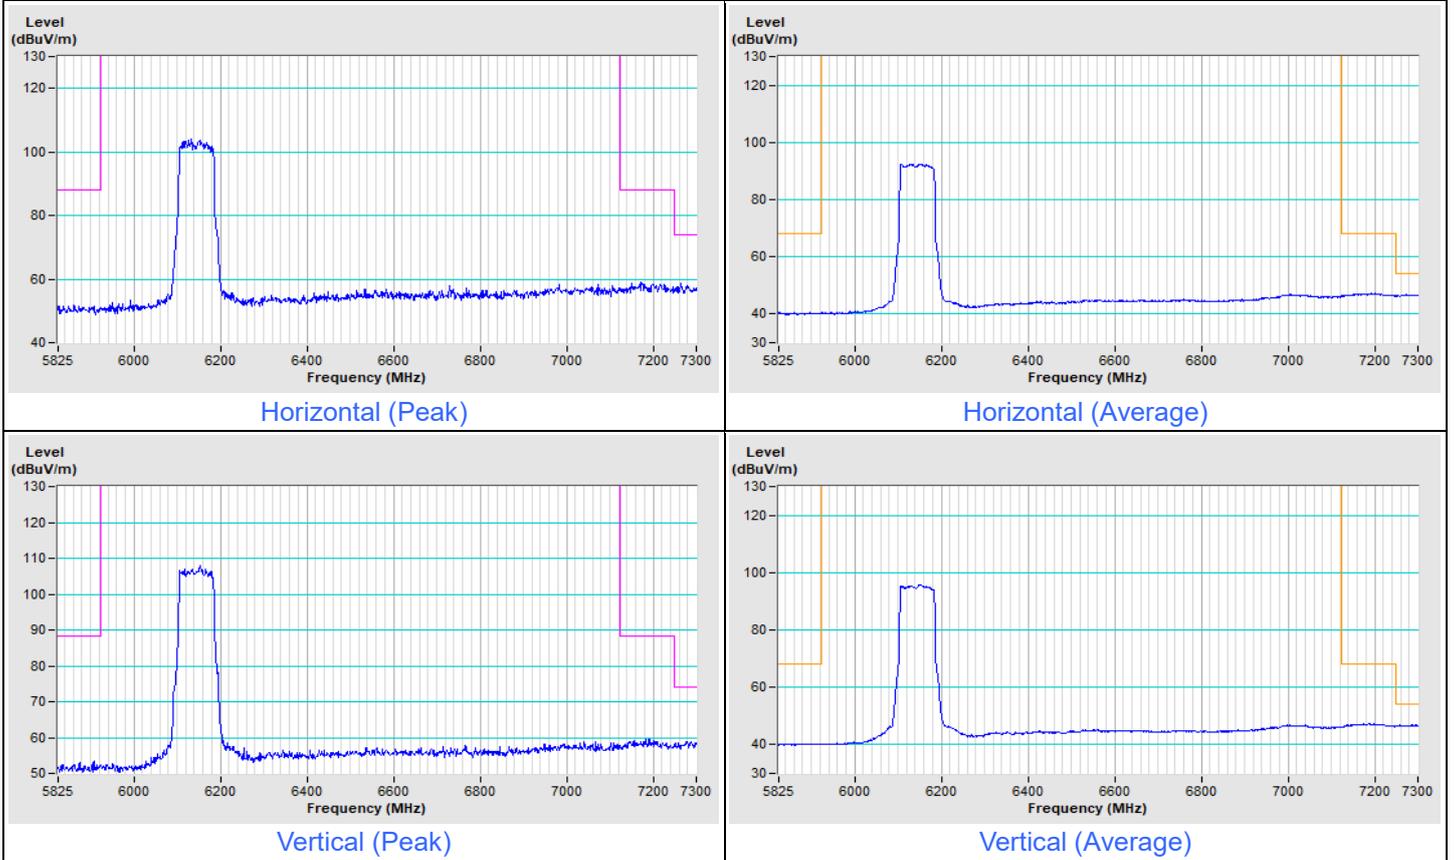


802.11be (EHT80) Beamforming Channel 215

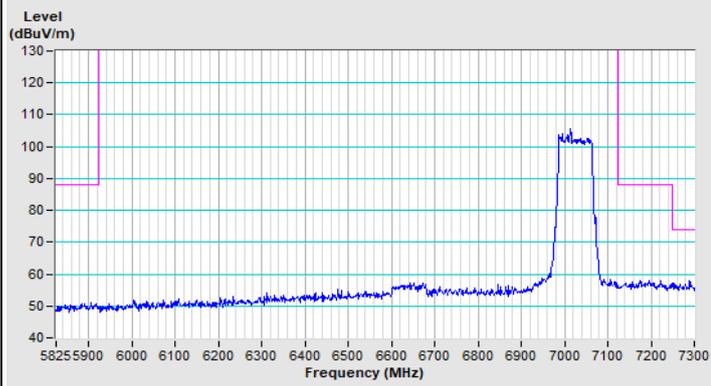


Horizontal (Peak)

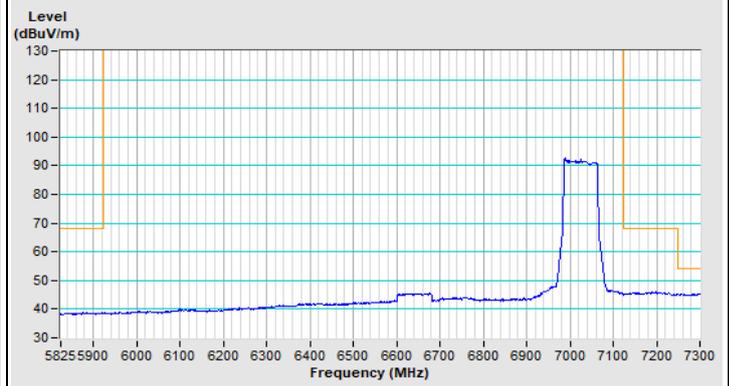

Horizontal (Average)

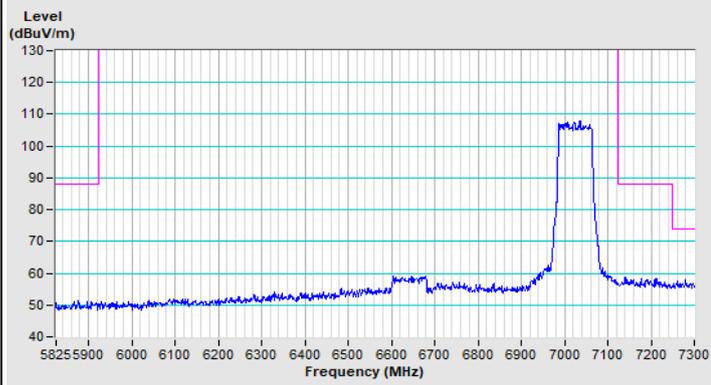


Vertical (Peak)

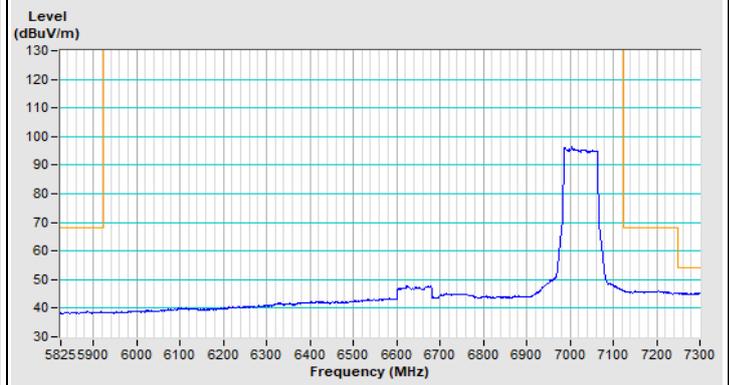


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Beamforming Channel 47

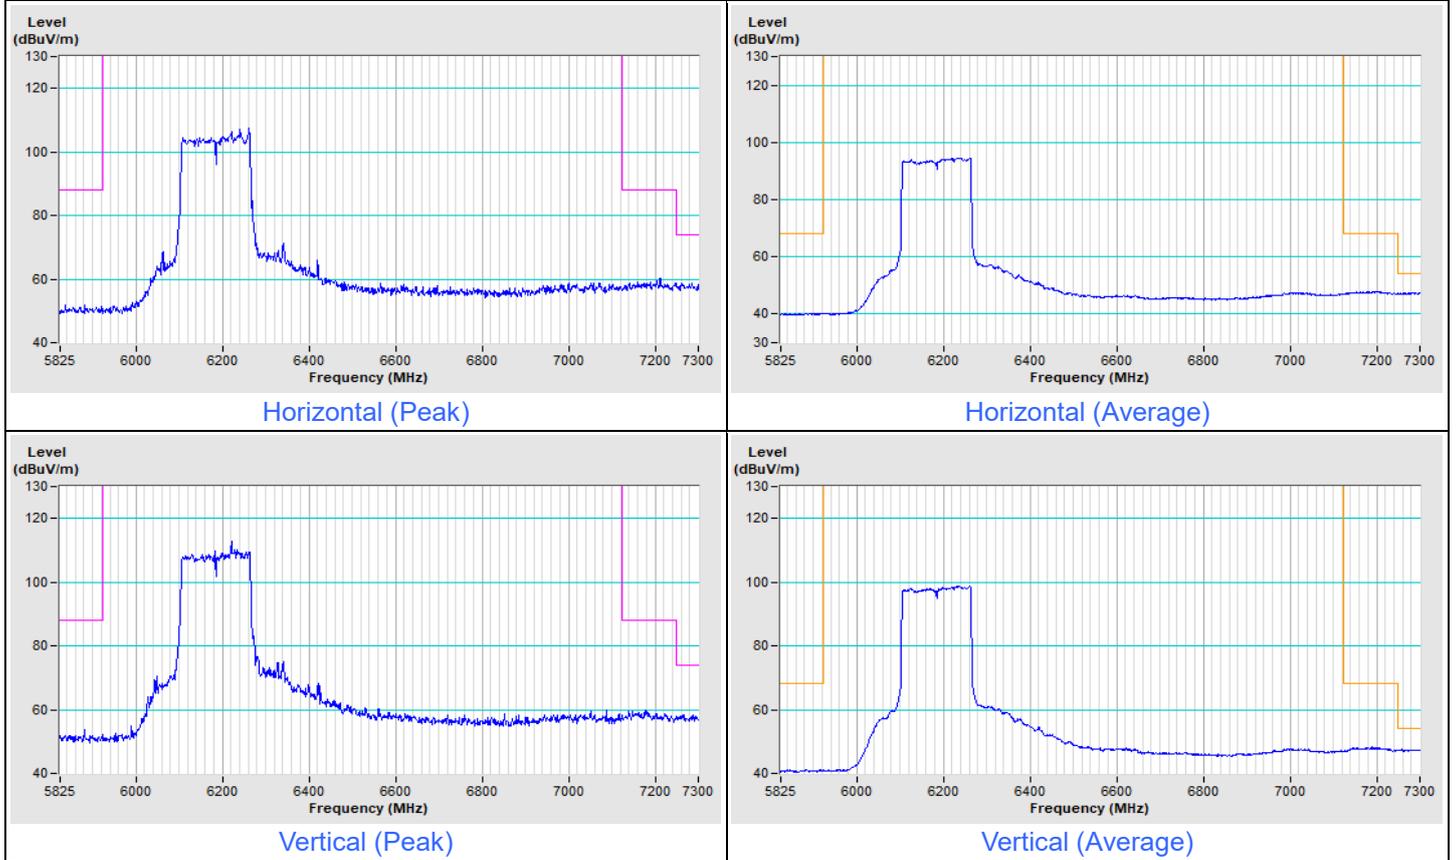


802.11be (EHT160) Beamforming Channel 207

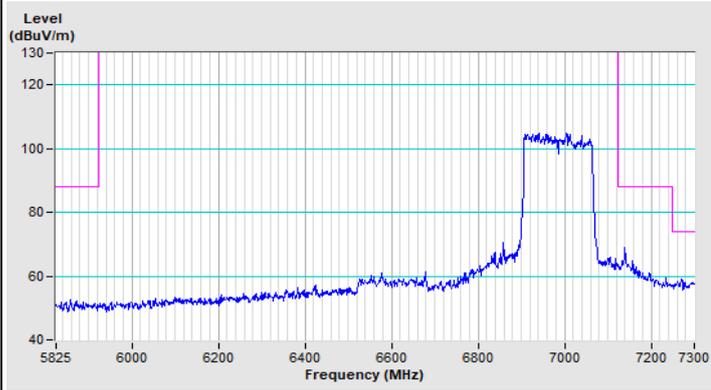


Horizontal (Peak)

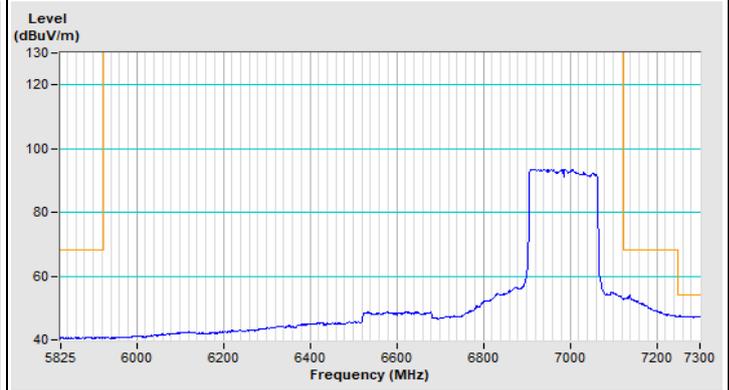

Horizontal (Average)

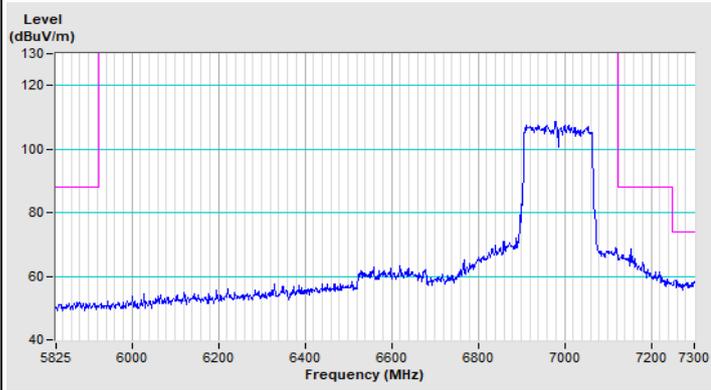

Vertical (Peak)

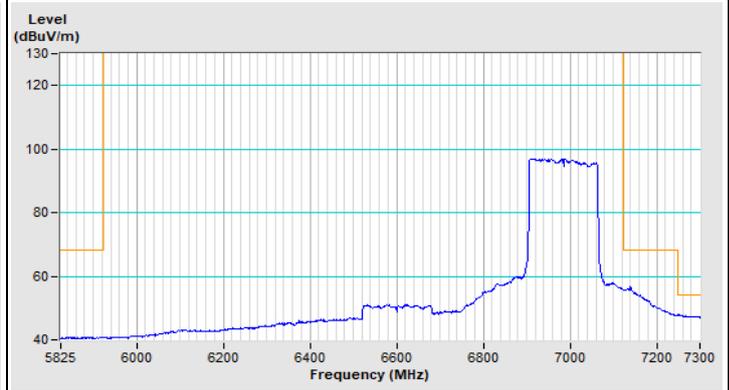


Vertical (Average)




Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Beamforming Channel 63

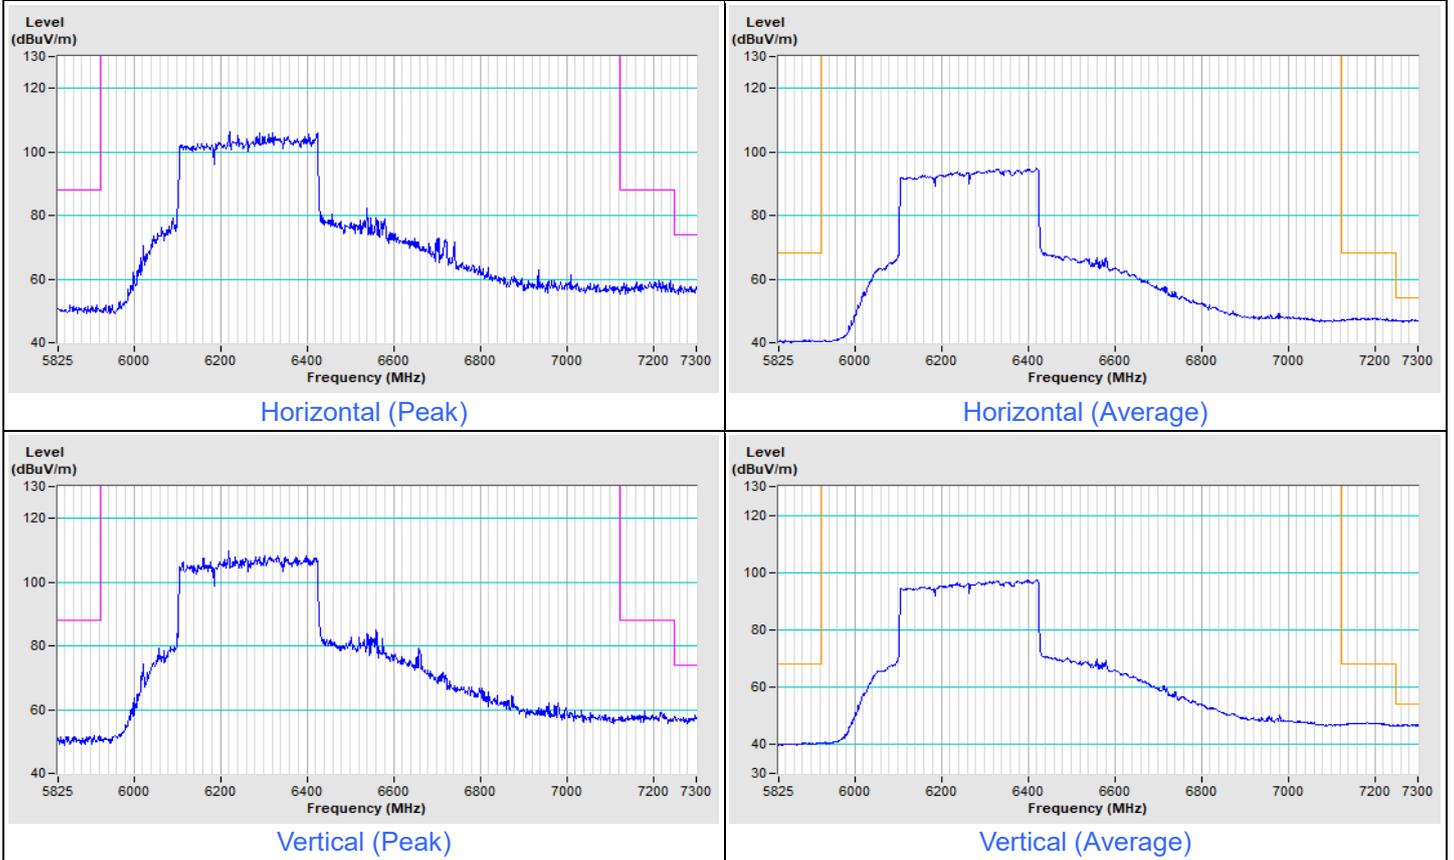


802.11be (EHT320) Beamforming Channel 191

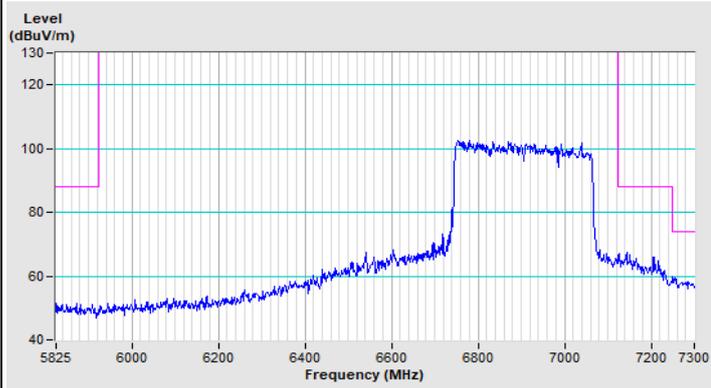


Horizontal (Peak)

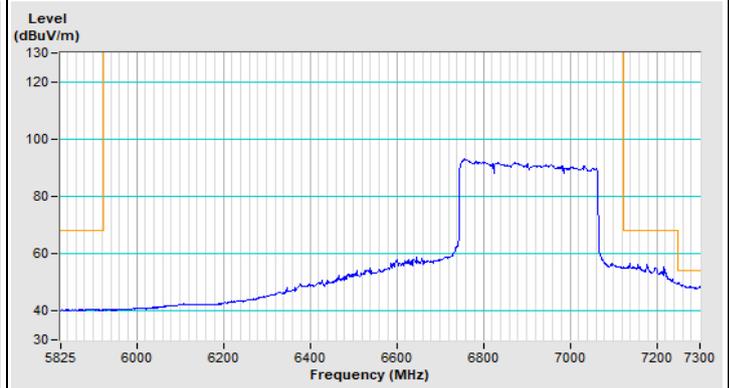

Horizontal (Average)

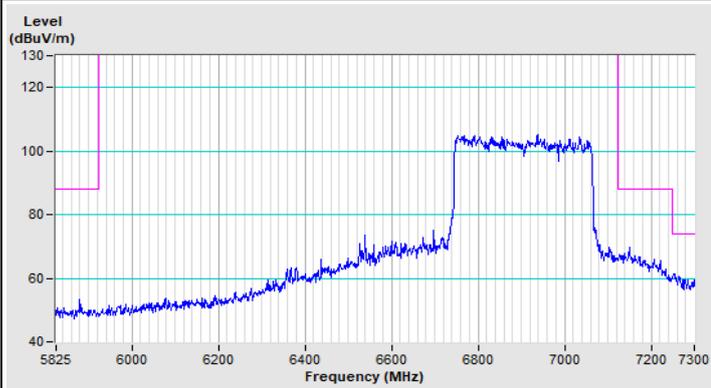

Vertical (Peak)

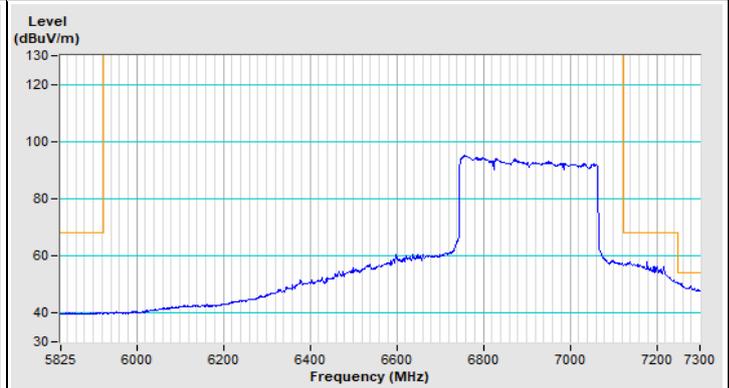

Vertical (Average)

NSS4

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	2.05 H	169	37.8	13.9
2	#5925.00	38.5 AV	68.2	-29.7	2.05 H	169	24.6	13.9
3	*6115.00	105.7 PK			2.05 H	169	60.2	45.5
4	*6115.00	92.8 AV			2.05 H	169	47.3	45.5
5	12230.00	60.2 PK	74.0	-13.8	1.82 H	285	39.2	21.0
6	12230.00	47.0 AV	54.0	-7.0	1.82 H	285	26.0	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.0 PK	88.2	-36.2	2.19 V	193	38.1	13.9
2	#5925.00	38.7 AV	68.2	-29.5	2.19 V	193	24.8	13.9
3	*6115.00	110.9 PK			2.19 V	193	65.4	45.5
4	*6115.00	98.4 AV			2.19 V	193	52.9	45.5
5	12230.00	60.6 PK	74.0	-13.4	2.30 V	192	39.6	21.0
6	12230.00	47.3 AV	54.0	-6.7	2.30 V	192	26.3	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	107.8 PK			1.97 H	7	61.8	46.0
2	*6255.00	95.0 AV			1.97 H	7	49.0	46.0
3	12510.00	60.1 PK	74.0	-13.9	1.95 H	282	39.2	20.9
4	12510.00	47.0 AV	54.0	-7.0	1.95 H	282	26.1	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	111.5 PK			2.25 V	198	65.5	46.0
2	*6255.00	99.9 AV			2.25 V	198	53.9	46.0
3	12510.00	60.5 PK	74.0	-13.5	2.28 V	193	39.6	20.9
4	12510.00	47.2 AV	54.0	-6.8	2.28 V	193	26.3	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.1 PK			1.96 H	9	61.0	47.1
2	*6415.00	95.3 AV			1.96 H	9	48.2	47.1
3	#12830.00	61.0 PK	88.2	-27.2	1.88 H	287	39.2	21.8
4	#12830.00	47.5 AV	68.2	-20.7	1.88 H	287	25.7	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.7 PK			2.12 V	196	64.6	47.1
2	*6415.00	100.1 AV			2.12 V	196	53.0	47.1
3	#12830.00	61.3 PK	88.2	-26.9	2.35 V	182	39.5	21.8
4	#12830.00	47.9 AV	68.2	-20.3	2.35 V	182	26.1	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	107.2 PK			1.88 H	15	60.1	47.1
2	*6435.00	94.2 AV			1.88 H	15	47.1	47.1
3	#12870.00	61.4 PK	88.2	-26.8	1.92 H	292	39.3	22.1
4	#12870.00	48.1 AV	68.2	-20.1	1.92 H	292	26.0	22.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	111.3 PK			2.09 V	192	64.2	47.1
2	*6435.00	99.4 AV			2.09 V	192	52.3	47.1
3	#12870.00	61.7 PK	88.2	-26.5	2.35 V	187	39.6	22.1
4	#12870.00	48.3 AV	68.2	-19.9	2.35 V	187	26.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.4 PK			1.84 H	7	60.0	47.4
2	*6475.00	94.4 AV			1.84 H	7	47.0	47.4
3	#12950.00	61.5 PK	88.2	-26.7	1.92 H	287	39.3	22.2
4	#12950.00	48.2 AV	68.2	-20.0	1.92 H	287	26.0	22.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	111.1 PK			2.13 V	191	63.7	47.4
2	*6475.00	98.7 AV			2.13 V	191	51.3	47.4
3	#12950.00	61.8 PK	88.2	-26.4	2.25 V	184	39.6	22.2
4	#12950.00	48.4 AV	68.2	-19.8	2.25 V	184	26.2	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	108.7 PK			1.83 H	18	61.0	47.7
2	*6515.00	95.4 AV			1.83 H	18	47.7	47.7
3	#13030.00	61.6 PK	88.2	-26.6	1.89 H	288	39.2	22.4
4	#13030.00	48.2 AV	68.2	-20.0	1.89 H	288	25.8	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.4 PK			2.13 V	195	63.7	47.7
2	*6515.00	98.9 AV			2.13 V	195	51.2	47.7
3	#13030.00	61.9 PK	88.2	-26.3	2.21 V	192	39.5	22.4
4	#13030.00	48.5 AV	68.2	-19.7	2.21 V	192	26.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.1 PK			1.98 H	16	60.2	47.9
2	*6535.00	95.4 AV			1.98 H	16	47.5	47.9
3	#13070.00	61.6 PK	88.2	-26.6	1.92 H	295	39.2	22.4
4	#13070.00	48.1 AV	68.2	-20.1	1.92 H	295	25.7	22.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.8 PK			2.10 V	200	63.9	47.9
2	*6535.00	98.8 AV			2.10 V	200	50.9	47.9
3	#13070.00	61.9 PK	88.2	-26.3	2.15 V	185	39.5	22.4
4	#13070.00	48.5 AV	68.2	-19.7	2.15 V	185	26.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.0 PK			1.96 H	9	60.0	48.0
2	*6695.00	94.9 AV			1.96 H	9	46.9	48.0
3	13390.00	62.8 PK	74.0	-11.2	1.89 H	288	39.3	23.5
4	13390.00	49.5 AV	54.0	-4.5	1.89 H	288	26.0	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.9 PK			2.10 V	189	62.9	48.0
2	*6695.00	99.0 AV			2.10 V	189	51.0	48.0
3	13390.00	63.1 PK	74.0	-10.9	2.26 V	189	39.6	23.5
4	13390.00	49.7 AV	54.0	-4.3	2.26 V	189	26.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.4 PK			2.03 H	12	59.3	48.1
2	*6855.00	95.3 AV			2.03 H	12	47.2	48.1
3	#13710.00	63.0 PK	88.2	-25.2	1.87 H	287	39.2	23.8
4	#13710.00	49.6 AV	68.2	-18.6	1.87 H	287	25.8	23.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.5 PK			1.81 V	186	62.4	48.1
2	*6855.00	98.4 AV			1.81 V	186	50.3	48.1
3	#13710.00	63.3 PK	88.2	-24.9	2.21 V	184	39.5	23.8
4	#13710.00	49.9 AV	68.2	-18.3	2.21 V	184	26.1	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.0 PK			2.15 H	12	59.7	48.3
2	*6875.00	95.4 AV			2.15 H	12	47.1	48.3
3	#13750.00	63.2 PK	88.2	-25.0	1.95 H	294	39.3	23.9
4	#13750.00	49.9 AV	68.2	-18.3	1.95 H	294	26.0	23.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.1 PK			2.05 V	212	62.8	48.3
2	*6875.00	99.2 AV			2.05 V	212	50.9	48.3
3	#13750.00	63.5 PK	88.2	-24.7	2.29 V	188	39.6	23.9
4	#13750.00	50.1 AV	68.2	-18.1	2.29 V	188	26.2	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.7 PK			2.05 H	12	60.0	49.7
2	*6995.00	96.3 AV			2.05 H	12	46.6	49.7
3	#13990.00	64.0 PK	88.2	-24.2	1.88 H	285	39.3	24.7
4	#13990.00	50.5 AV	68.2	-17.7	1.88 H	285	25.8	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	112.4 PK			2.13 V	213	62.7	49.7
2	*6995.00	101.3 AV			2.13 V	213	51.6	49.7
3	#13990.00	64.3 PK	88.2	-23.9	2.28 V	188	39.6	24.7
4	#13990.00	50.8 AV	68.2	-17.4	2.28 V	188	26.1	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	108.9 PK			2.00 H	16	59.5	49.4
2	*7095.00	95.7 AV			2.00 H	16	46.3	49.4
3	#14190.00	64.4 PK	88.2	-23.8	1.89 H	287	39.3	25.1
4	#14190.00	51.1 AV	68.2	-17.1	1.89 H	287	26.0	25.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	111.9 PK			2.12 V	211	62.5	49.4
2	*7095.00	100.2 AV			2.12 V	211	50.8	49.4
3	#14190.00	64.7 PK	88.2	-23.5	2.25 V	182	39.6	25.1
4	#14190.00	51.3 AV	68.2	-16.9	2.25 V	182	26.2	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) Beamforming	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	91.1 PK			2.20 H	13	41.5	49.6
2	*7115.00	77.8 AV			2.20 H	13	28.2	49.6
3	#7125.00	75.6 PK	88.2	-12.6	2.20 H	13	58.0	17.6
4	#7125.00	62.9 AV	68.2	-5.3	2.20 H	13	45.3	17.6
5	#14230.00	64.1 PK	88.2	-24.1	1.95 H	295	39.0	25.1
6	#14230.00	50.7 AV	68.2	-17.5	1.95 H	295	25.6	25.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.1 PK			2.12 V	211	44.5	49.6
2	*7115.00	82.4 AV			2.12 V	211	32.8	49.6
3	#7125.00	81.4 PK	88.2	-6.8	2.12 V	211	63.8	17.6
4	#7125.00	67.8 AV	68.2	-0.4	2.12 V	211	50.2	17.6
5	#14230.00	64.3 PK	88.2	-23.9	2.23 V	189	39.2	25.1
6	#14230.00	50.9 AV	68.2	-17.3	2.23 V	189	25.8	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.99 H	167	38.0	13.9
2	#5925.00	38.6 AV	68.2	-29.6	1.99 H	167	24.7	13.9
3	*6125.00	107.2 PK			1.99 H	167	61.7	45.5
4	*6125.00	94.0 AV			1.99 H	167	48.5	45.5
5	12250.00	60.2 PK	74.0	-13.8	1.89 H	287	39.2	21.0
6	12250.00	46.8 AV	54.0	-7.2	1.89 H	287	25.8	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	2.29 V	193	38.2	13.9
2	#5925.00	38.8 AV	68.2	-29.4	2.29 V	193	24.9	13.9
3	*6125.00	112.0 PK			2.29 V	193	66.5	45.5
4	*6125.00	98.4 AV			2.29 V	193	52.9	45.5
5	12250.00	60.5 PK	74.0	-13.5	2.39 V	182	39.5	21.0
6	12250.00	47.2 AV	54.0	-6.8	2.39 V	182	26.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	107.6 PK			2.04 H	162	61.8	45.8
2	*6245.00	93.8 AV			2.04 H	162	48.0	45.8
3	12490.00	60.1 PK	74.0	-13.9	1.79 H	282	39.2	20.9
4	12490.00	46.7 AV	54.0	-7.3	1.79 H	282	25.8	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	112.0 PK			2.25 V	194	66.2	45.8
2	*6245.00	98.0 AV			2.25 V	194	52.2	45.8
3	12490.00	60.5 PK	74.0	-13.5	2.31 V	189	39.6	20.9
4	12490.00	47.2 AV	54.0	-6.8	2.31 V	189	26.3	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	108.0 PK			1.90 H	16	61.0	47.0
2	*6405.00	94.8 AV			1.90 H	16	47.8	47.0
3	#12810.00	60.7 PK	88.2	-27.5	1.88 H	297	39.0	21.7
4	#12810.00	47.4 AV	68.2	-20.8	1.88 H	297	25.7	21.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.4 PK			2.04 V	191	65.4	47.0
2	*6405.00	99.3 AV			2.04 V	191	52.3	47.0
3	#12810.00	61.2 PK	88.2	-27.0	2.21 V	182	39.5	21.7
4	#12810.00	47.8 AV	68.2	-20.4	2.21 V	182	26.1	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	108.3 PK			2.00 H	17	61.2	47.1
2	*6445.00	95.1 AV			2.00 H	17	48.0	47.1
3	#12890.00	61.3 PK	88.2	-26.9	1.91 H	281	39.1	22.2
4	#12890.00	47.9 AV	68.2	-20.3	1.91 H	281	25.7	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	112.0 PK			2.02 V	195	64.9	47.1
2	*6445.00	99.4 AV			2.02 V	195	52.3	47.1
3	#12890.00	61.7 PK	88.2	-26.5	2.19 V	185	39.5	22.2
4	#12890.00	48.4 AV	68.2	-19.8	2.19 V	185	26.2	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	108.2 PK			1.95 H	15	60.7	47.5
2	*6485.00	95.5 AV			1.95 H	15	48.0	47.5
3	#12970.00	61.5 PK	88.2	-26.7	1.96 H	287	39.2	22.3
4	#12970.00	48.0 AV	68.2	-20.2	1.96 H	287	25.7	22.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	112.3 PK			2.11 V	189	64.8	47.5
2	*6485.00	99.4 AV			2.11 V	189	51.9	47.5
3	#12970.00	61.9 PK	88.2	-26.3	2.26 V	192	39.6	22.3
4	#12970.00	48.6 AV	68.2	-19.6	2.26 V	192	26.3	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	108.8 PK			1.98 H	15	61.0	47.8
2	*6525.00	95.6 AV			1.98 H	15	47.8	47.8
3	#13050.00	61.7 PK	88.2	-26.5	1.98 H	297	39.2	22.5
4	#13050.00	48.1 AV	68.2	-20.1	1.98 H	297	25.6	22.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	111.9 PK			2.26 V	189	64.1	47.8
2	*6525.00	99.8 AV			2.26 V	189	52.0	47.8
3	#13050.00	62.0 PK	88.2	-26.2	2.21 V	182	39.5	22.5
4	#13050.00	48.6 AV	68.2	-19.6	2.21 V	182	26.1	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	109.2 PK			1.99 H	7	61.1	48.1
2	*6565.00	95.9 AV			1.99 H	7	47.8	48.1
3	#13130.00	61.8 PK	88.2	-26.4	1.87 H	287	39.2	22.6
4	#13130.00	48.3 AV	68.2	-19.9	1.87 H	287	25.7	22.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	112.0 PK			2.24 V	191	63.9	48.1
2	*6565.00	99.4 AV			2.24 V	191	51.3	48.1
3	#13130.00	62.2 PK	88.2	-26.0	2.28 V	188	39.6	22.6
4	#13130.00	48.8 AV	68.2	-19.4	2.28 V	188	26.2	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	108.9 PK			2.04 H	9	60.7	48.2
2	*6725.00	95.8 AV			2.04 H	9	47.6	48.2
3	#13450.00	62.8 PK	88.2	-25.4	1.92 H	295	39.3	23.5
4	#13450.00	49.3 AV	68.2	-18.9	1.92 H	295	25.8	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	111.9 PK			2.14 V	212	63.7	48.2
2	*6725.00	99.2 AV			2.14 V	212	51.0	48.2
3	#13450.00	63.0 PK	88.2	-25.2	2.29 V	192	39.5	23.5
4	#13450.00	49.6 AV	68.2	-18.6	2.29 V	192	26.1	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	109.2 PK			2.09 H	11	61.0	48.2
2	*6845.00	95.8 AV			2.09 H	11	47.6	48.2
3	#13690.00	62.9 PK	88.2	-25.3	1.88 H	283	39.1	23.8
4	#13690.00	49.5 AV	68.2	-18.7	1.88 H	283	25.7	23.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	112.2 PK			2.14 V	212	64.0	48.2
2	*6845.00	100.0 AV			2.14 V	212	51.8	48.2
3	#13690.00	63.4 PK	88.2	-24.8	2.28 V	181	39.6	23.8
4	#13690.00	49.9 AV	68.2	-18.3	2.28 V	181	26.1	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	109.0 PK			2.10 H	13	60.6	48.4
2	*6885.00	95.4 AV			2.10 H	13	47.0	48.4
3	#13770.00	63.3 PK	88.2	-24.9	1.95 H	297	39.2	24.1
4	#13770.00	49.9 AV	68.2	-18.3	1.95 H	297	25.8	24.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	112.0 PK			2.23 V	211	63.6	48.4
2	*6885.00	98.9 AV			2.23 V	211	50.5	48.4
3	#13770.00	63.6 PK	88.2	-24.6	2.28 V	192	39.5	24.1
4	#13770.00	50.2 AV	68.2	-18.0	2.28 V	192	26.1	24.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	109.9 PK			2.08 H	12	60.1	49.8
2	*7005.00	96.9 AV			2.08 H	12	47.1	49.8
3	#14010.00	63.9 PK	88.2	-24.3	1.88 H	285	39.2	24.7
4	#14010.00	50.5 AV	68.2	-17.7	1.88 H	285	25.8	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	113.3 PK			2.15 V	210	63.5	49.8
2	*7005.00	100.8 AV			2.15 V	210	51.0	49.8
3	#14010.00	64.2 PK	88.2	-24.0	2.29 V	193	39.5	24.7
4	#14010.00	50.9 AV	68.2	-17.3	2.29 V	193	26.2	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40) Beamforming	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.4 PK			2.04 H	14	60.0	49.4
2	*7085.00	96.4 AV			2.04 H	14	47.0	49.4
3	#7125.00	57.8 PK	88.2	-30.4	2.04 H	14	40.2	17.6
4	#7125.00	45.4 AV	68.2	-22.8	2.04 H	14	27.8	17.6
5	#14170.00	64.5 PK	88.2	-23.7	1.88 H	289	39.5	25.0
6	#14170.00	51.0 AV	68.2	-17.2	1.88 H	289	26.0	25.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	113.8 PK			2.09 V	210	64.4	49.4
2	*7085.00	100.7 AV			2.09 V	210	51.3	49.4
3	#7125.00	58.6 PK	88.2	-29.6	2.09 V	210	41.0	17.6
4	#7125.00	45.8 AV	68.2	-22.4	2.09 V	210	28.2	17.6
5	#14170.00	64.7 PK	88.2	-23.5	2.23 V	196	39.7	25.0
6	#14170.00	51.2 AV	68.2	-17.0	2.23 V	196	26.2	25.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.91 H	164	38.0	13.9
2	#5925.00	38.4 AV	68.2	-29.8	1.91 H	164	24.5	13.9
3	*6145.00	106.0 PK			1.91 H	164	60.6	45.4
4	*6145.00	92.9 AV			1.91 H	164	47.5	45.4
5	12290.00	60.2 PK	74.0	-13.8	1.89 H	297	39.2	21.0
6	12290.00	46.8 AV	54.0	-7.2	1.89 H	297	25.8	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.2 PK	88.2	-36.0	2.16 V	194	38.3	13.9
2	#5925.00	38.5 AV	68.2	-29.7	2.16 V	194	24.6	13.9
3	*6145.00	110.7 PK			2.16 V	194	65.3	45.4
4	*6145.00	97.3 AV			2.16 V	194	51.9	45.4
5	12290.00	60.5 PK	74.0	-13.5	2.29 V	180	39.5	21.0
6	12290.00	47.1 AV	54.0	-6.9	2.29 V	180	26.1	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	106.4 PK			1.83 H	161	60.7	45.7
2	*6225.00	93.2 AV			1.83 H	161	47.5	45.7
3	12450.00	60.2 PK	74.0	-13.8	1.85 H	285	39.3	20.9
4	12450.00	46.6 AV	54.0	-7.4	1.85 H	285	25.7	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.7 PK			2.13 V	197	65.0	45.7
2	*6225.00	97.2 AV			2.13 V	197	51.5	45.7
3	12450.00	60.5 PK	74.0	-13.5	2.21 V	185	39.6	20.9
4	12450.00	47.0 AV	54.0	-7.0	2.21 V	185	26.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.5 PK			2.03 H	15	60.5	47.0
2	*6385.00	94.0 AV			2.03 H	15	47.0	47.0
3	#12770.00	60.9 PK	88.2	-27.3	1.82 H	289	39.2	21.7
4	#12770.00	47.5 AV	68.2	-20.7	1.82 H	289	25.8	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.0 PK			2.02 V	197	65.0	47.0
2	*6385.00	98.6 AV			2.02 V	197	51.6	47.0
3	#12770.00	61.2 PK	88.2	-27.0	2.15 V	192	39.5	21.7
4	#12770.00	47.8 AV	68.2	-20.4	2.15 V	192	26.1	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.0 PK			1.80 H	9	60.7	47.3
2	*6465.00	94.4 AV			1.80 H	9	47.1	47.3
3	#12930.00	61.4 PK	88.2	-26.8	1.85 H	285	39.2	22.2
4	#12930.00	47.9 AV	68.2	-20.3	1.85 H	285	25.7	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.0 PK			2.10 V	192	64.7	47.3
2	*6465.00	98.9 AV			2.10 V	192	51.6	47.3
3	#12930.00	61.8 PK	88.2	-26.4	2.22 V	182	39.6	22.2
4	#12930.00	48.4 AV	68.2	-19.8	2.22 V	182	26.2	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	108.5 PK			1.64 H	6	60.6	47.9
2	*6545.00	95.3 AV			1.64 H	6	47.4	47.9
3	#13090.00	61.8 PK	88.2	-26.4	1.92 H	297	39.2	22.6
4	#13090.00	48.4 AV	68.2	-19.8	1.92 H	297	25.8	22.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.7 PK			2.15 V	194	63.8	47.9
2	*6545.00	98.7 AV			2.15 V	194	50.8	47.9
3	#13090.00	62.2 PK	88.2	-26.0	2.22 V	185	39.6	22.6
4	#13090.00	48.7 AV	68.2	-19.5	2.22 V	185	26.1	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	108.0 PK			1.63 H	10	60.0	48.0
2	*6625.00	95.0 AV			1.63 H	10	47.0	48.0
3	13250.00	61.9 PK	74.0	-12.1	1.87 H	294	39.2	22.7
4	13250.00	48.5 AV	54.0	-5.5	1.87 H	294	25.8	22.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	111.0 PK			1.97 V	209	63.0	48.0
2	*6625.00	98.4 AV			1.97 V	209	50.4	48.0
3	13250.00	62.2 PK	74.0	-11.8	2.22 V	182	39.5	22.7
4	13250.00	48.8 AV	54.0	-5.2	2.22 V	182	26.1	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.1 PK			1.50 H	8	61.0	48.1
2	*6705.00	95.3 AV			1.50 H	8	47.2	48.1
3	#13410.00	62.8 PK	88.2	-25.4	1.89 H	284	39.3	23.5
4	#13410.00	49.5 AV	68.2	-18.7	1.89 H	284	26.0	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.6 PK			2.01 V	188	63.5	48.1
2	*6705.00	98.6 AV			2.01 V	188	50.5	48.1
3	#13410.00	63.1 PK	88.2	-25.1	2.35 V	192	39.6	23.5
4	#13410.00	49.7 AV	68.2	-18.5	2.35 V	192	26.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	108.0 PK			1.69 H	13	59.7	48.3
2	*6785.00	94.6 AV			1.69 H	13	46.3	48.3
3	#13570.00	63.2 PK	88.2	-25.0	1.88 H	288	39.5	23.7
4	#13570.00	49.5 AV	68.2	-18.7	1.88 H	288	25.8	23.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.8 PK			2.08 V	189	62.5	48.3
2	*6785.00	98.3 AV			2.08 V	189	50.0	48.3
3	#13570.00	63.4 PK	88.2	-24.8	2.29 V	193	39.7	23.7
4	#13570.00	49.8 AV	68.2	-18.4	2.29 V	193	26.1	23.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	108.2 PK			1.70 H	12	60.0	48.2
2	*6865.00	95.2 AV			1.70 H	12	47.0	48.2
3	#13730.00	63.1 PK	88.2	-25.1	1.95 H	287	39.2	23.9
4	#13730.00	49.6 AV	68.2	-18.6	1.95 H	287	25.7	23.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.8 PK			2.11 V	190	62.6	48.2
2	*6865.00	99.0 AV			2.11 V	190	50.8	48.2
3	#13730.00	63.4 PK	88.2	-24.8	2.26 V	181	39.5	23.9
4	#13730.00	49.9 AV	68.2	-18.3	2.26 V	181	26.0	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.1 PK			1.73 H	14	60.0	49.1
2	*6945.00	95.8 AV			1.73 H	14	46.7	49.1
3	#13890.00	63.4 PK	88.2	-24.8	1.88 H	289	39.2	24.2
4	#13890.00	49.9 AV	68.2	-18.3	1.88 H	289	25.7	24.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.4 PK			2.09 V	210	63.3	49.1
2	*6945.00	99.6 AV			2.09 V	210	50.5	49.1
3	#13890.00	63.8 PK	88.2	-24.4	2.35 V	184	39.6	24.2
4	#13890.00	50.2 AV	68.2	-18.0	2.35 V	184	26.0	24.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80) Beamforming	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.2 PK			1.59 H	13	58.5	49.7
2	*7025.00	95.5 AV			1.59 H	13	45.8	49.7
3	#7125.00	57.6 PK	88.2	-30.6	1.59 H	13	40.0	17.6
4	#7125.00	44.2 AV	68.2	-24.0	1.59 H	13	26.6	17.6
5	#14050.00	64.2 PK	88.2	-24.0	1.88 H	299	39.3	24.9
6	#14050.00	50.7 AV	68.2	-17.5	1.88 H	299	25.8	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.7 PK			2.03 V	208	62.0	49.7
2	*7025.00	99.0 AV			2.03 V	208	49.3	49.7
3	#7125.00	58.7 PK	88.2	-29.5	2.03 V	208	41.1	17.6
4	#7125.00	44.8 AV	68.2	-23.4	2.03 V	208	27.2	17.6
5	#14050.00	64.5 PK	88.2	-23.7	2.36 V	190	39.6	24.9
6	#14050.00	51.0 AV	68.2	-17.2	2.36 V	190	26.1	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	2.12 H	164	37.8	13.9
2	#5925.00	38.4 AV	68.2	-29.8	2.12 H	164	24.5	13.9
3	*6185.00	105.9 PK			2.12 H	164	60.5	45.4
4	*6185.00	92.6 AV			2.12 H	164	47.2	45.4
5	12370.00	60.0 PK	74.0	-14.0	1.95 H	287	39.1	20.9
6	12370.00	46.6 AV	54.0	-7.4	1.95 H	287	25.7	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	2.26 V	192	38.0	13.9
2	#5925.00	38.6 AV	68.2	-29.6	2.26 V	192	24.7	13.9
3	*6185.00	110.9 PK			2.26 V	192	65.5	45.4
4	*6185.00	97.2 AV			2.26 V	192	51.8	45.4
5	12370.00	60.4 PK	74.0	-13.6	2.45 V	189	39.5	20.9
6	12370.00	47.2 AV	54.0	-6.8	2.45 V	189	26.3	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.8 PK			1.91 H	10	59.0	46.8
2	*6345.00	93.0 AV			1.91 H	10	46.2	46.8
3	12690.00	60.9 PK	74.0	-13.1	1.87 H	297	39.2	21.7
4	12690.00	47.5 AV	54.0	-6.5	1.87 H	297	25.8	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.2 PK			2.13 V	192	63.4	46.8
2	*6345.00	97.5 AV			2.13 V	192	50.7	46.8
3	12690.00	61.3 PK	74.0	-12.7	2.35 V	188	39.6	21.7
4	12690.00	48.0 AV	54.0	-6.0	2.35 V	188	26.3	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.3 PK			1.85 H	9	59.6	47.7
2	*6505.00	94.1 AV			1.85 H	9	46.4	47.7
3	#13010.00	61.6 PK	88.2	-26.6	1.85 H	289	39.2	22.4
4	#13010.00	48.3 AV	68.2	-19.9	1.85 H	289	25.9	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.9 PK			1.98 V	191	63.2	47.7
2	*6505.00	98.5 AV			1.98 V	191	50.8	47.7
3	#13010.00	61.9 PK	88.2	-26.3	2.21 V	189	39.5	22.4
4	#13010.00	48.8 AV	68.2	-19.4	2.21 V	189	26.4	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.0 PK			1.86 H	11	59.0	48.0
2	*6665.00	94.2 AV			1.86 H	11	46.2	48.0
3	13330.00	62.3 PK	74.0	-11.7	1.95 H	288	39.2	23.1
4	13330.00	48.7 AV	54.0	-5.3	1.95 H	288	25.6	23.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.1 PK			2.01 V	188	62.1	48.0
2	*6665.00	97.8 AV			2.01 V	188	49.8	48.0
3	13330.00	62.6 PK	74.0	-11.4	2.31 V	187	39.5	23.1
4	13330.00	49.3 AV	54.0	-4.7	2.31 V	187	26.2	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.5 PK			1.82 H	11	59.2	48.3
2	*6825.00	94.6 AV			1.82 H	11	46.3	48.3
3	#13650.00	63.0 PK	88.2	-25.2	1.88 H	293	39.2	23.8
4	#13650.00	49.5 AV	68.2	-18.7	1.88 H	293	25.7	23.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.9 PK			2.02 V	184	62.6	48.3
2	*6825.00	98.7 AV			2.02 V	184	50.4	48.3
3	#13650.00	63.4 PK	88.2	-24.8	2.28 V	193	39.6	23.8
4	#13650.00	50.0 AV	68.2	-18.2	2.28 V	193	26.2	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160) Beamforming	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.5 PK			1.87 H	10	57.8	49.7
2	*6985.00	95.9 AV			1.87 H	10	46.2	49.7
3	#7125.00	64.6 PK	88.2	-23.6	1.87 H	10	47.0	17.6
4	#7125.00	49.1 AV	68.2	-19.1	1.87 H	10	31.5	17.6
5	#13970.00	63.8 PK	88.2	-24.4	1.92 H	285	39.2	24.6
6	#13970.00	50.3 AV	68.2	-17.9	1.92 H	285	25.7	24.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.7 PK			1.97 V	186	61.0	49.7
2	*6985.00	98.6 AV			1.97 V	186	48.9	49.7
3	#7125.00	66.4 PK	88.2	-21.8	1.97 V	186	48.8	17.6
4	#7125.00	49.8 AV	68.2	-18.4	1.97 V	186	32.2	17.6
5	#13970.00	64.1 PK	88.2	-24.1	2.23 V	191	39.5	24.6
6	#13970.00	50.7 AV	68.2	-17.5	2.23 V	191	26.1	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.92 H	11	37.8	13.9
2	#5925.00	38.6 AV	68.2	-29.6	1.92 H	11	24.7	13.9
3	*6265.00	106.2 PK			1.92 H	11	60.2	46.0
4	*6265.00	93.2 AV			1.92 H	11	47.2	46.0
5	12530.00	60.2 PK	74.0	-13.8	1.95 H	297	39.2	21.0
6	12530.00	46.9 AV	54.0	-7.1	1.95 H	297	25.9	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.2 PK	88.2	-36.0	2.04 V	193	38.3	13.9
2	#5925.00	38.8 AV	68.2	-29.4	2.04 V	193	24.9	13.9
3	*6265.00	110.4 PK			2.04 V	193	64.4	46.0
4	*6265.00	97.4 AV			2.04 V	193	51.4	46.0
5	12530.00	60.6 PK	74.0	-13.4	2.25 V	192	39.6	21.0
6	12530.00	47.2 AV	54.0	-6.8	2.25 V	192	26.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	106.1 PK			1.95 H	12	59.0	47.1
2	*6425.00	93.6 AV			1.95 H	12	46.5	47.1
3	#12850.00	61.2 PK	88.2	-27.0	1.95 H	297	39.2	22.0
4	#12850.00	47.9 AV	68.2	-20.3	1.95 H	297	25.9	22.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.7 PK			2.01 V	193	63.6	47.1
2	*6425.00	98.4 AV			2.01 V	193	51.3	47.1
3	#12850.00	61.6 PK	88.2	-26.6	2.28 V	193	39.6	22.0
4	#12850.00	48.2 AV	68.2	-20.0	2.28 V	193	26.2	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320) Beamforming	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.5 PK			1.77 H	8	59.4	48.1
2	*6585.00	95.0 AV			1.77 H	8	46.9	48.1
3	#13170.00	61.7 PK	88.2	-26.5	1.85 H	282	39.1	22.6
4	#13170.00	48.2 AV	68.2	-20.0	1.85 H	282	25.6	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.1 PK			1.99 V	192	63.0	48.1
2	*6585.00	99.3 AV			1.99 V	192	51.2	48.1
3	#13170.00	62.1 PK	88.2	-26.1	2.26 V	192	39.5	22.6
4	#13170.00	48.7 AV	68.2	-19.5	2.26 V	192	26.1	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320) Beamforming	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	108.2 PK			1.77 H	9	59.9	48.3
2	*6745.00	94.9 AV			1.77 H	9	46.6	48.3
3	#13490.00	62.8 PK	88.2	-25.4	1.87 H	287	39.2	23.6
4	#13490.00	49.3 AV	68.2	-18.9	1.87 H	287	25.7	23.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.9 PK			1.95 V	204	62.6	48.3
2	*6745.00	98.4 AV			1.95 V	204	50.1	48.3
3	#13490.00	63.1 PK	88.2	-25.1	2.28 V	197	39.5	23.6
4	#13490.00	49.6 AV	68.2	-18.6	2.28 V	197	26.0	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320) Beamforming	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.0 PK			1.68 H	12	58.4	48.6
2	*6905.00	95.1 AV			1.68 H	12	46.5	48.6
3	#7125.00	69.9 PK	88.2	-18.3	1.68 H	12	52.3	17.6
4	#7125.00	54.0 AV	68.2	-14.2	1.68 H	12	36.4	17.6
5	7250.00	63.5 PK	74.0	-10.5	1.68 H	12	45.6	17.9
6	7250.00	48.9 AV	54.0	-5.1	1.68 H	12	31.0	17.9
7	#13810.00	63.3 PK	88.2	-24.9	1.92 H	284	39.2	24.1
8	#13810.00	49.8 AV	68.2	-18.4	1.92 H	284	25.7	24.1


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.2 PK			1.88 V	206	61.6	48.6
2	*6905.00	98.6 AV			1.88 V	206	50.0	48.6
3	#7125.00	73.9 PK	88.2	-14.3	1.88 V	206	56.3	17.6
4	#7125.00	56.2 AV	68.2	-12.0	1.88 V	206	38.6	17.6
5	7250.00	66.1 PK	74.0	-7.9	1.88 V	206	48.2	17.9
6	7250.00	53.9 AV	54.0	-0.1	1.88 V	206	36.0	17.9
7	#13810.00	63.6 PK	88.2	-24.6	2.27 V	193	39.5	24.1
8	#13810.00	50.2 AV	68.2	-18.0	2.27 V	193	26.1	24.1

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

NSS4 Plot of Band Edge


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

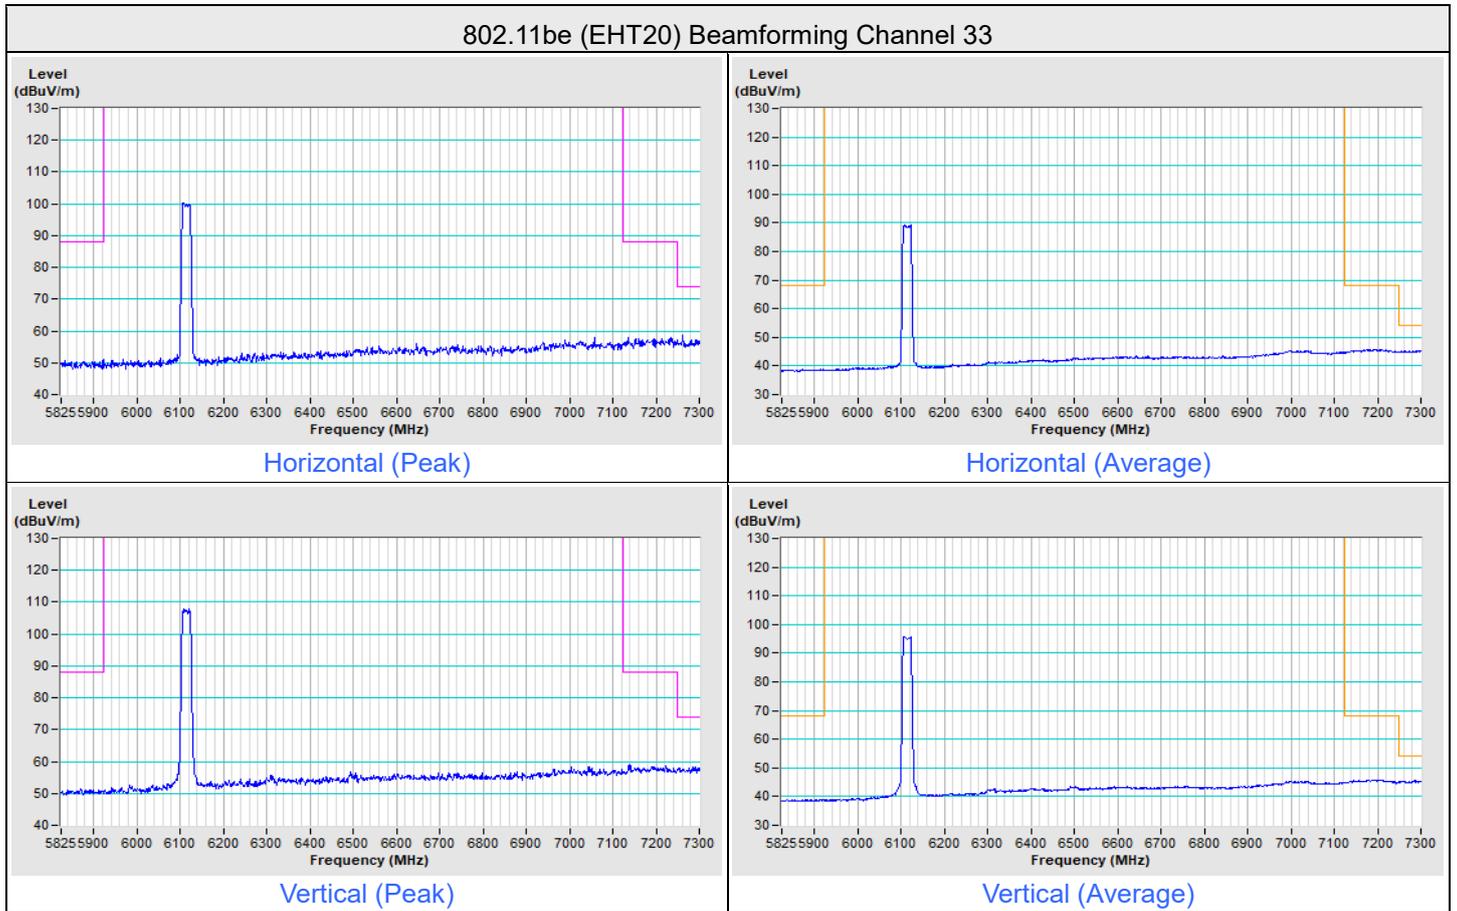


802.11be (EHT20) Beamforming Channel 233

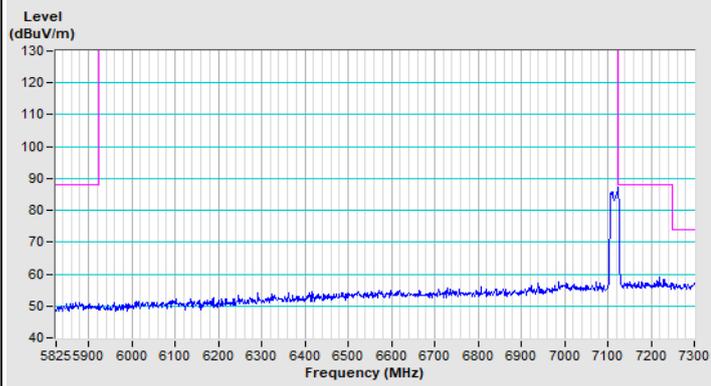


Horizontal (Peak)

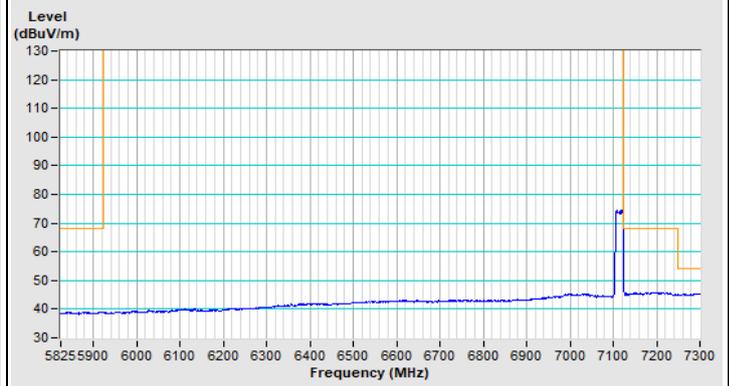

Horizontal (Average)

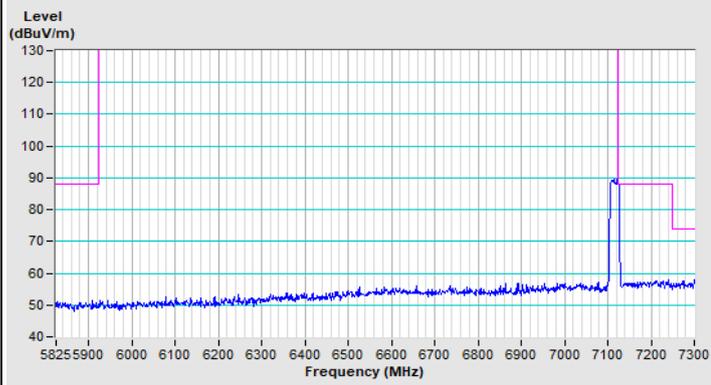


Vertical (Peak)

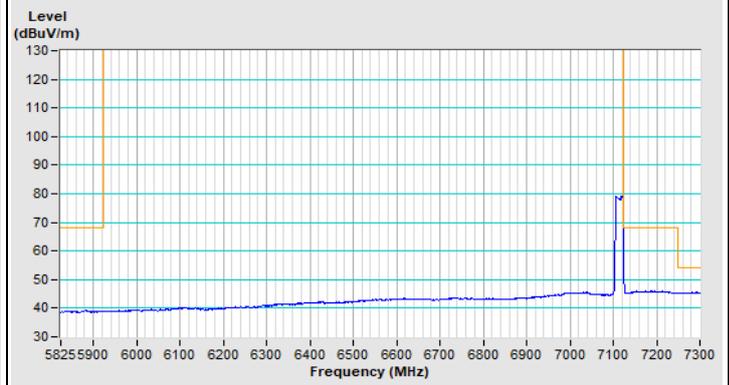


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Beamforming Channel 35

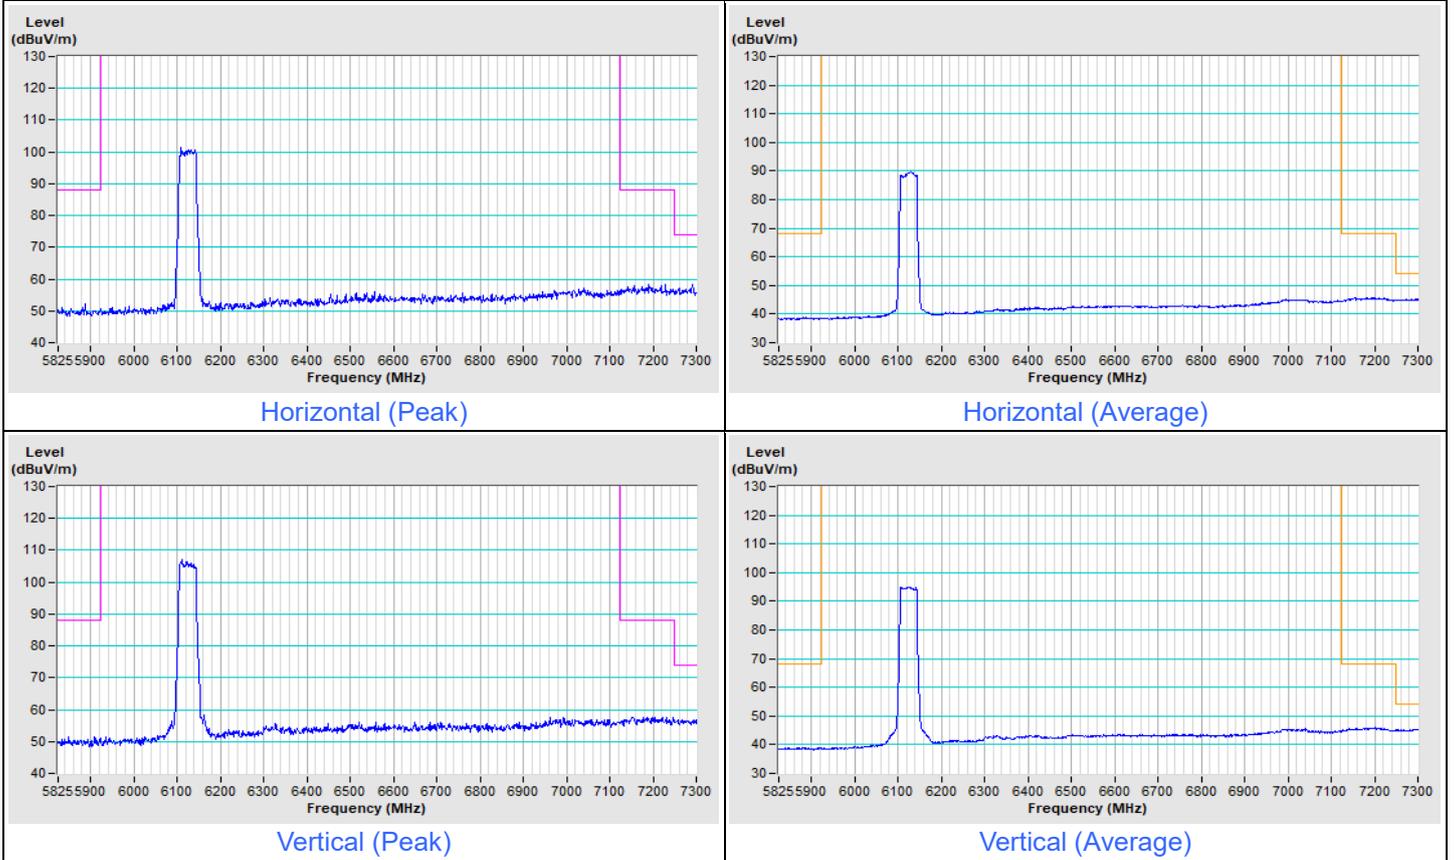


802.11be (EHT40) Beamforming Channel 227

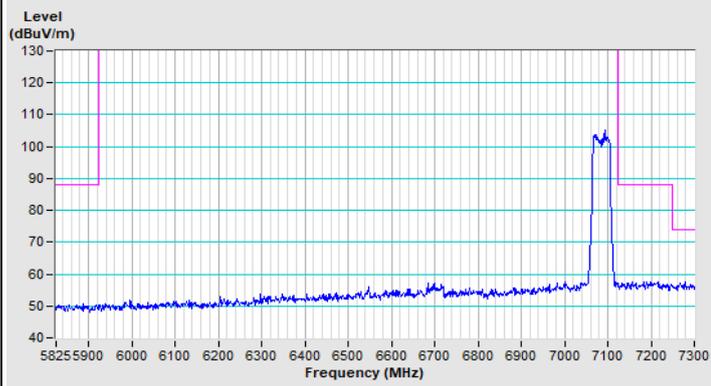


Horizontal (Peak)

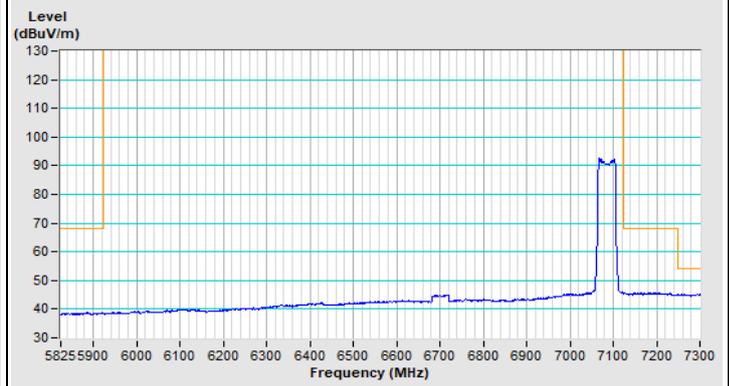

Horizontal (Average)

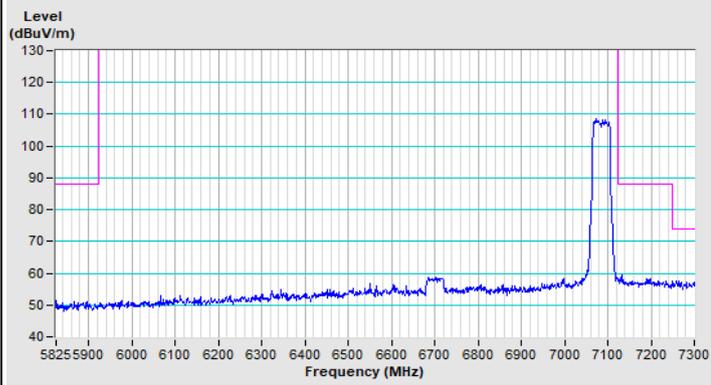


Vertical (Peak)

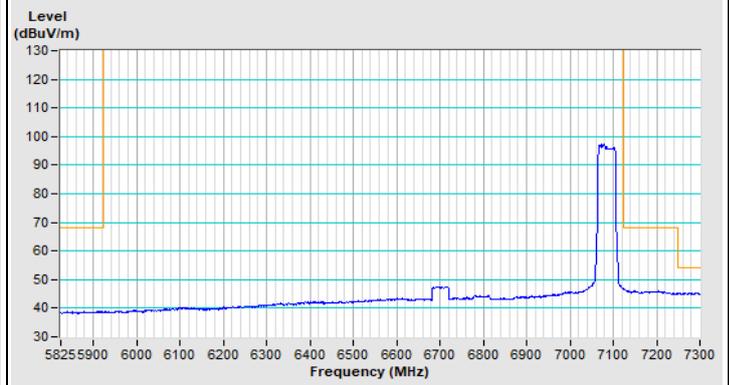


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Beamforming Channel 39

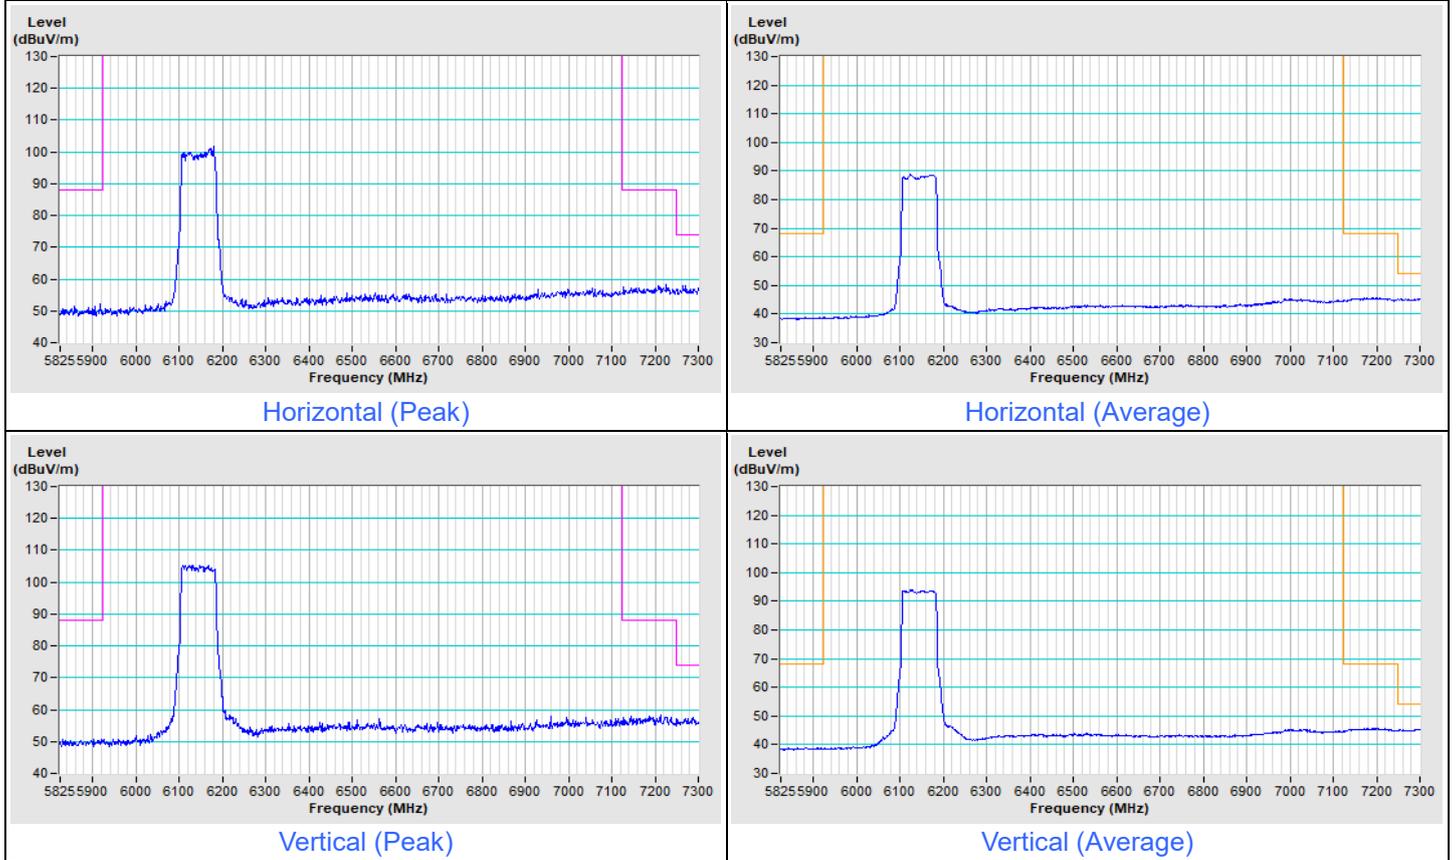


802.11be (EHT80) Beamforming Channel 215

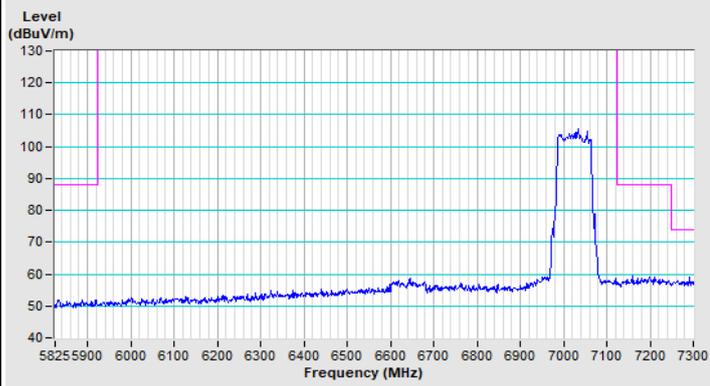


Horizontal (Peak)

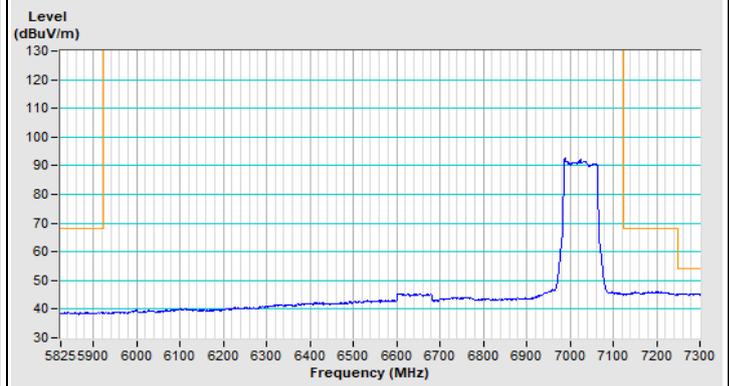

Horizontal (Average)

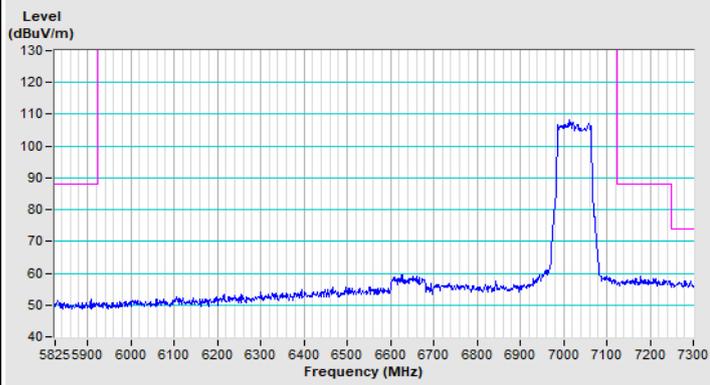

Vertical (Peak)

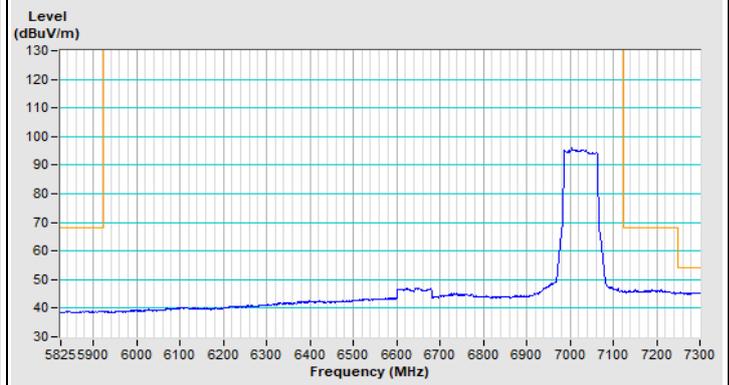


Vertical (Average)




Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Beamforming Channel 47

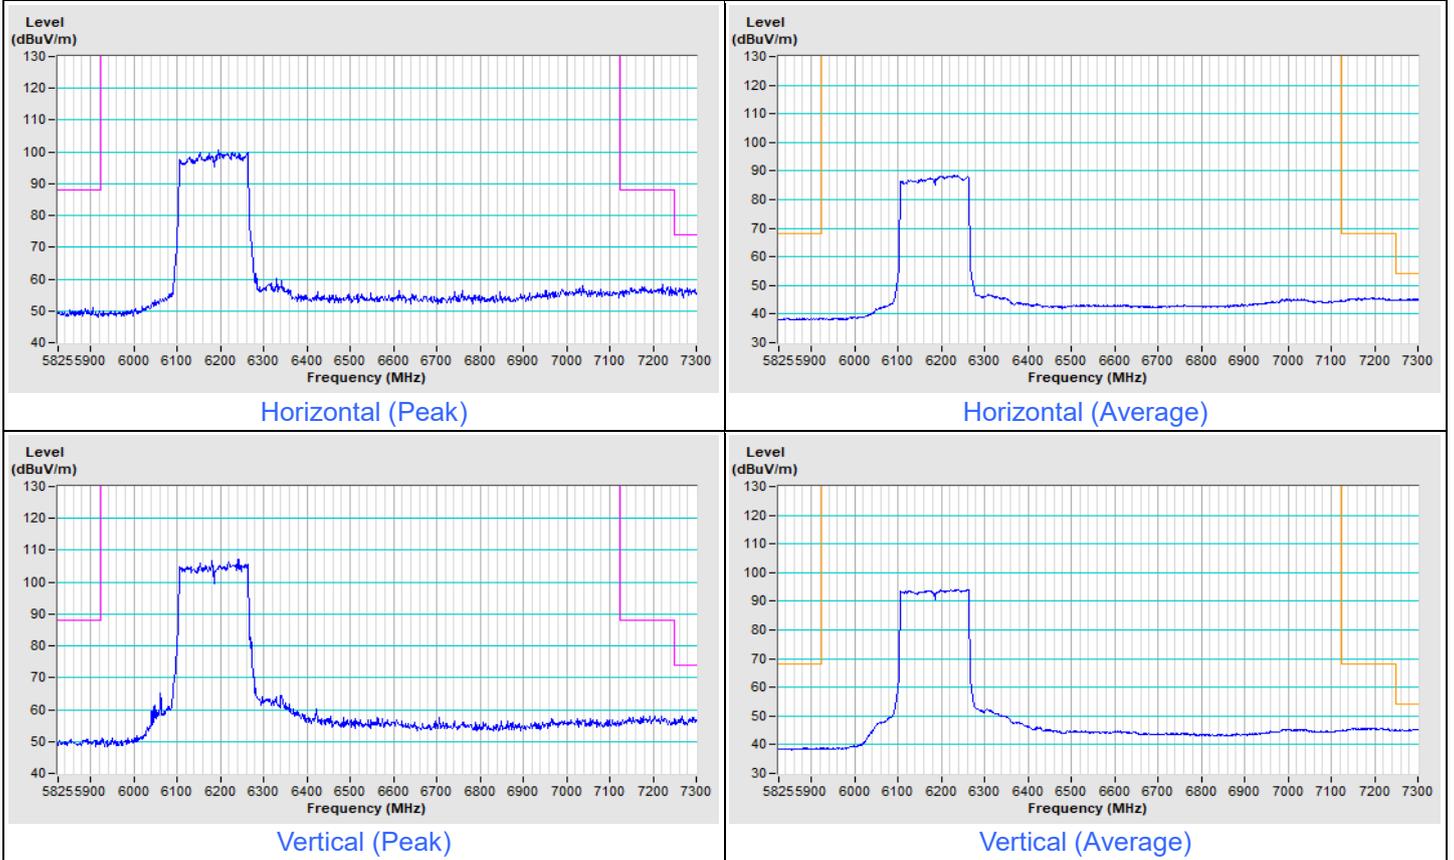


802.11be (EHT160) Beamforming Channel 207

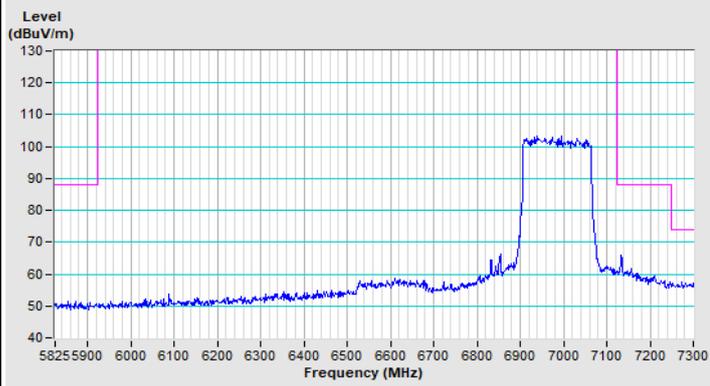


Horizontal (Peak)

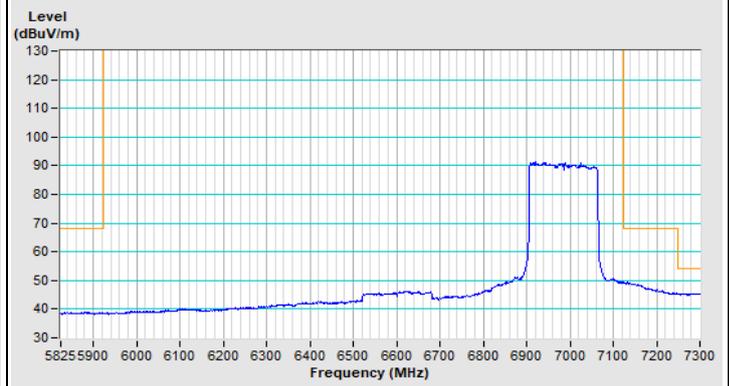

Horizontal (Average)

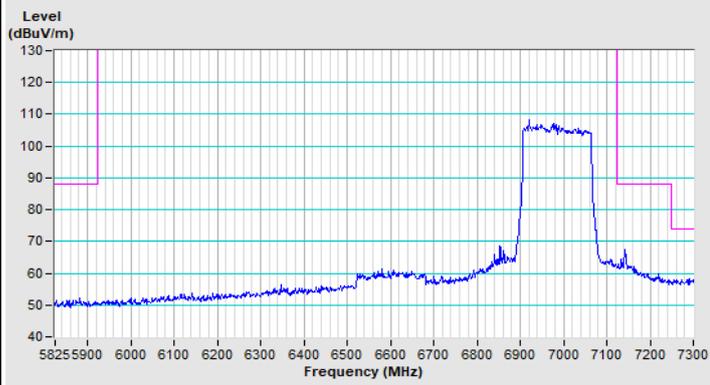


Vertical (Peak)

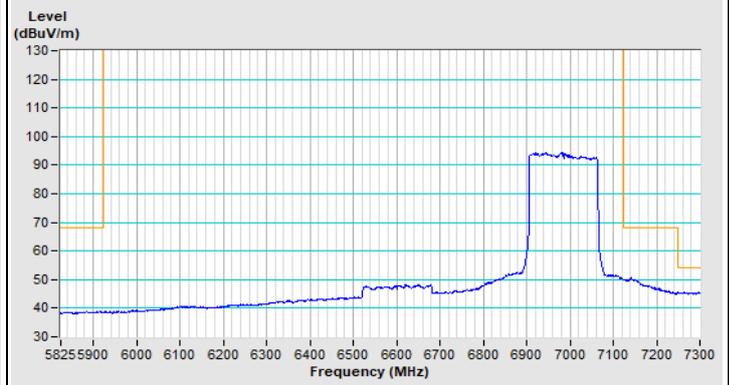


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Beamforming Channel 63

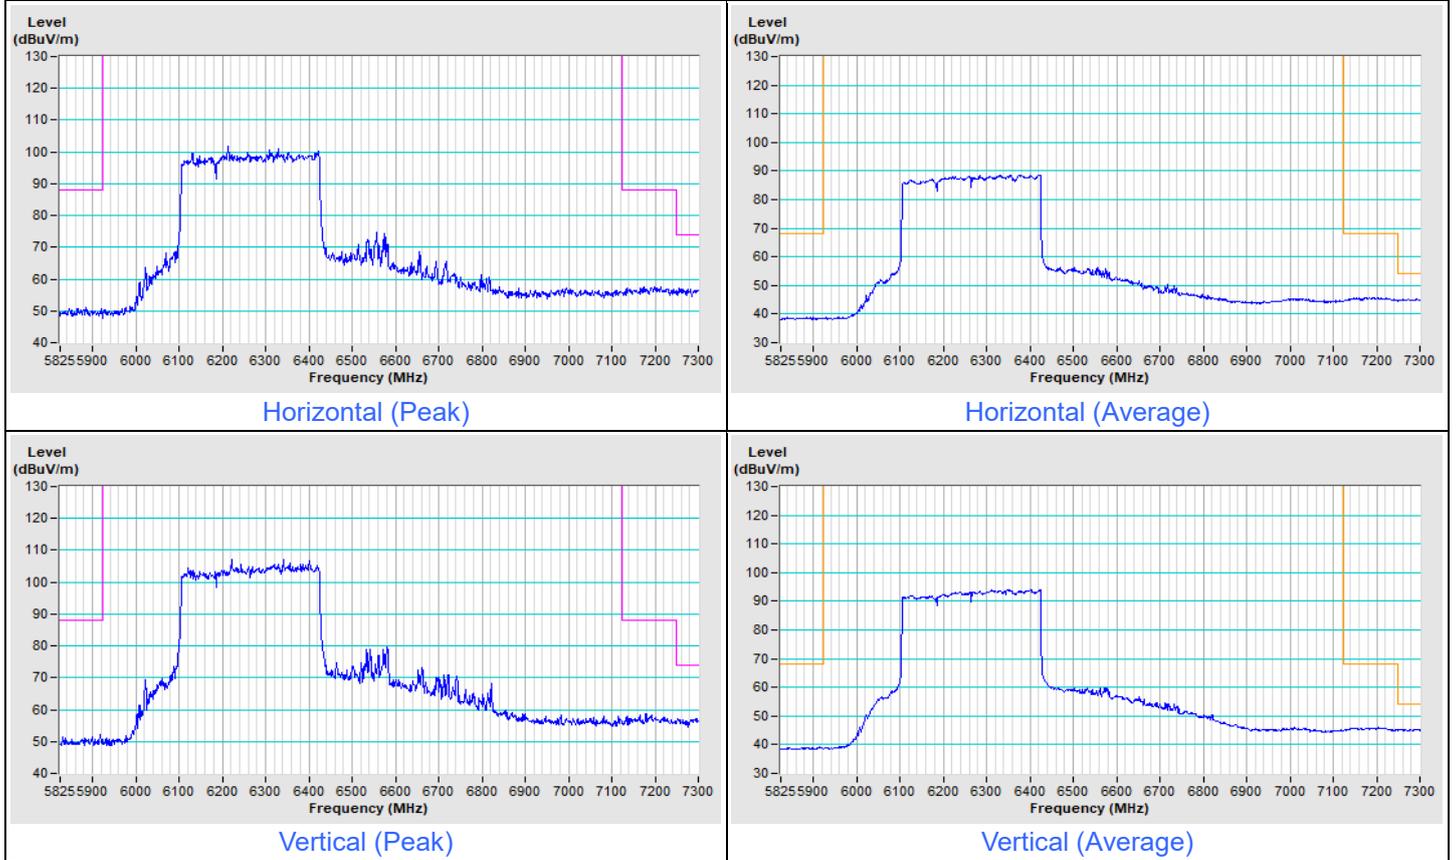


802.11be (EHT320) Beamforming Channel 191

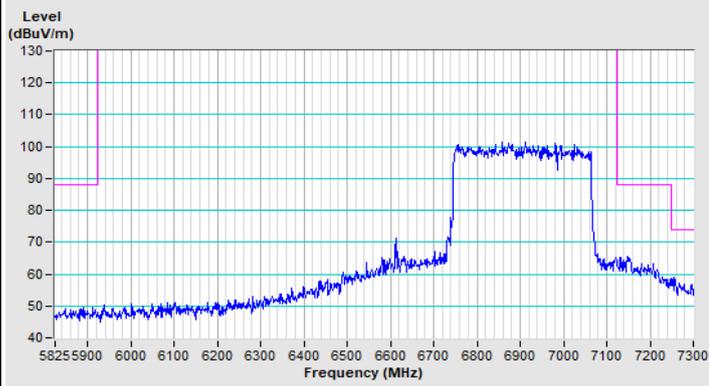


Horizontal (Peak)

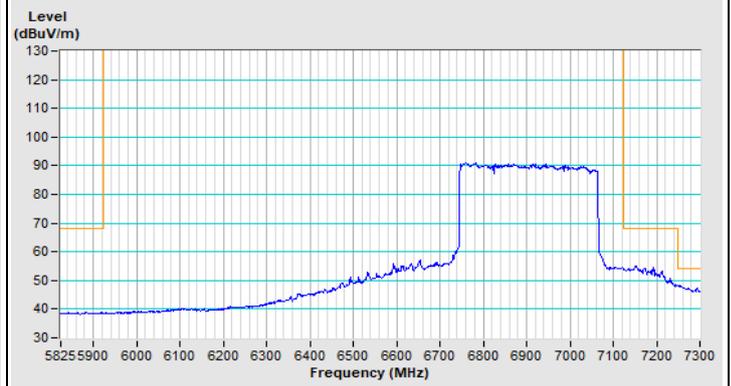

Horizontal (Average)

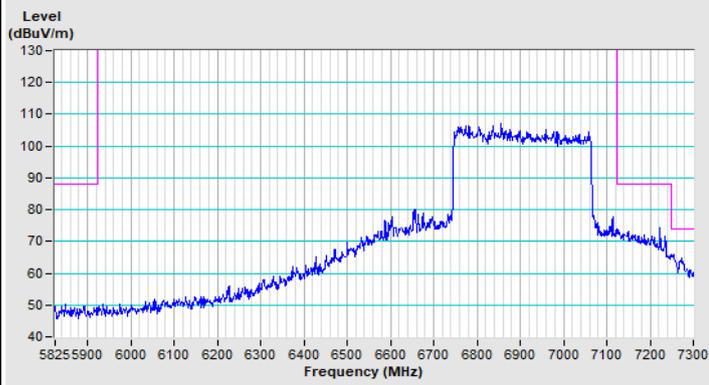

Vertical (Peak)

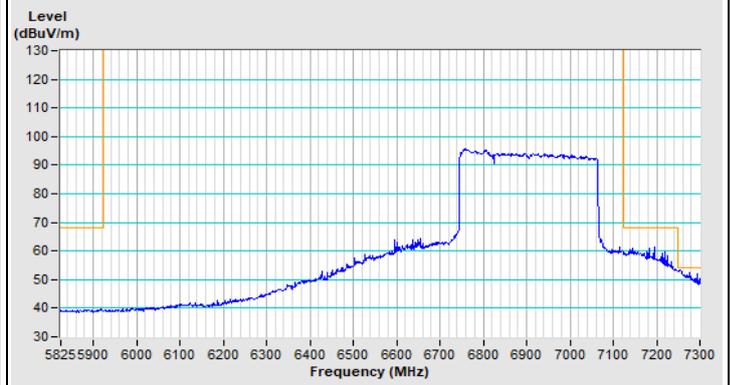

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---