





Plots of EUT Tx waveform

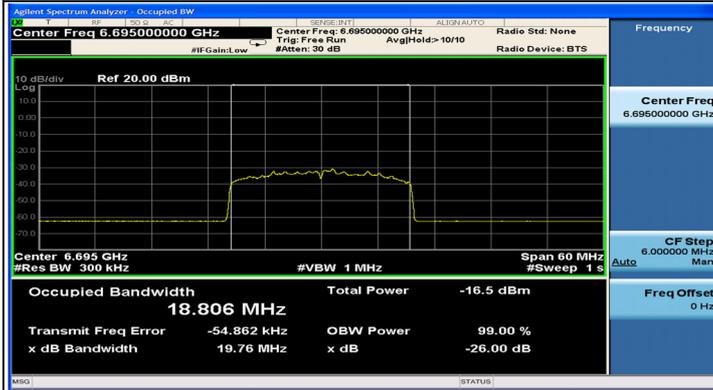


802.11be (EHT20) / CH149

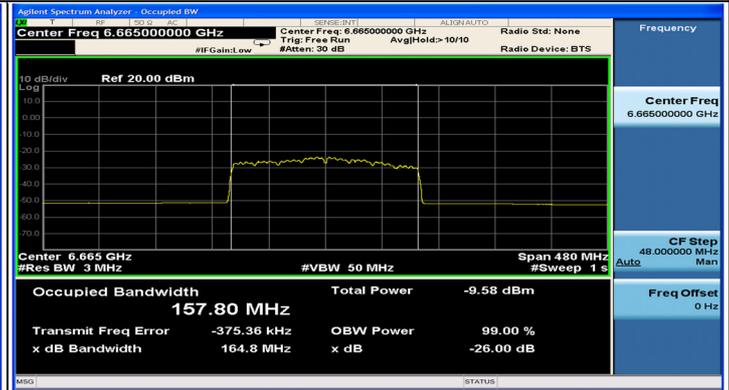


802.11be (EHT160) / CH143


Plots of Injected signal (AWGN) level

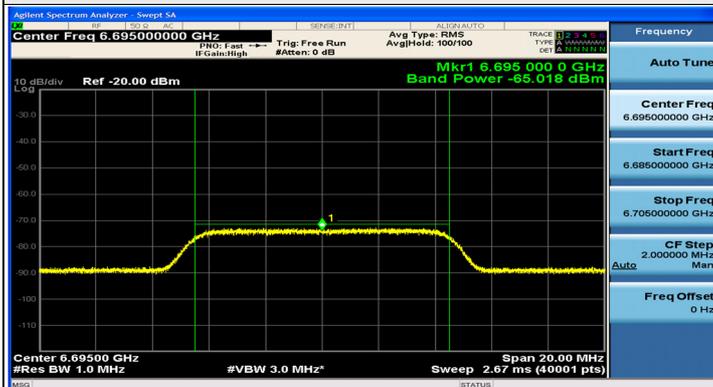


802.11be (EHT20) / CH149

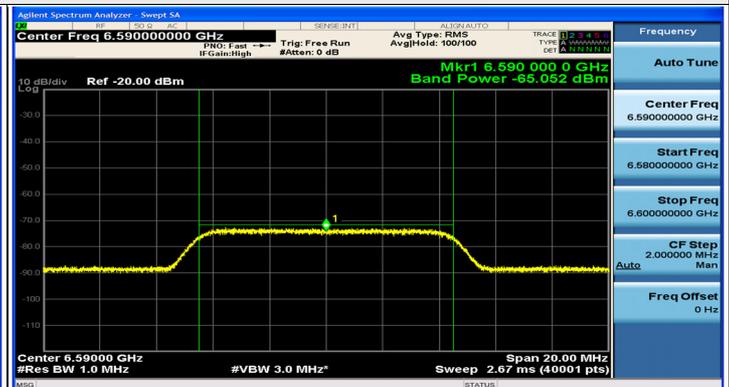

802.11be (EHT160) / CH143 (Low Edge)

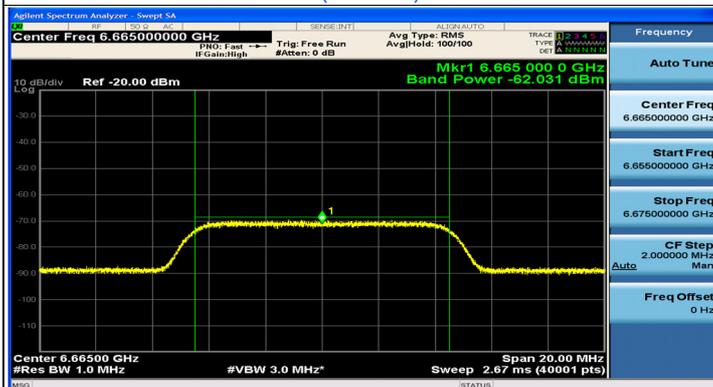


802.11be (EHT160) / CH143 (Middle)

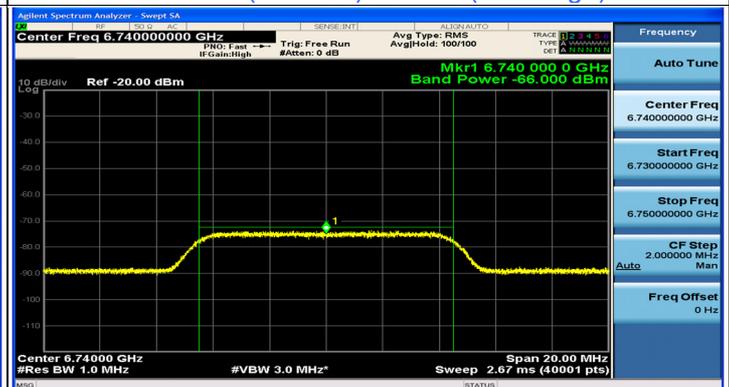

802.11be (EHT160) / CH143 (High Edge)


Plots of EUT ceased transmission in the time domain

CBP

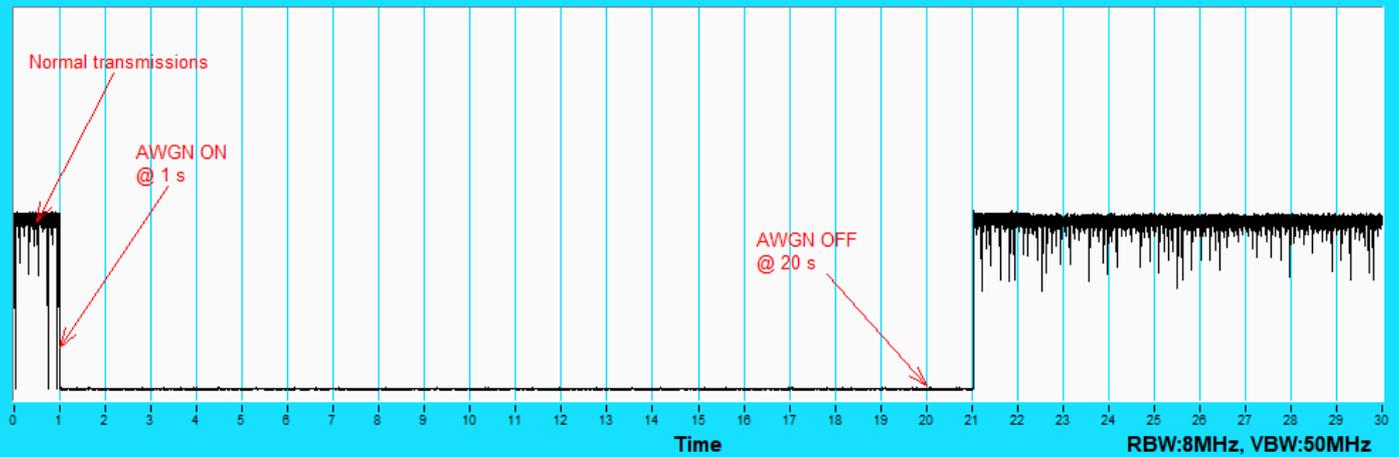


802.11be (EHT20) / CH149

CBP

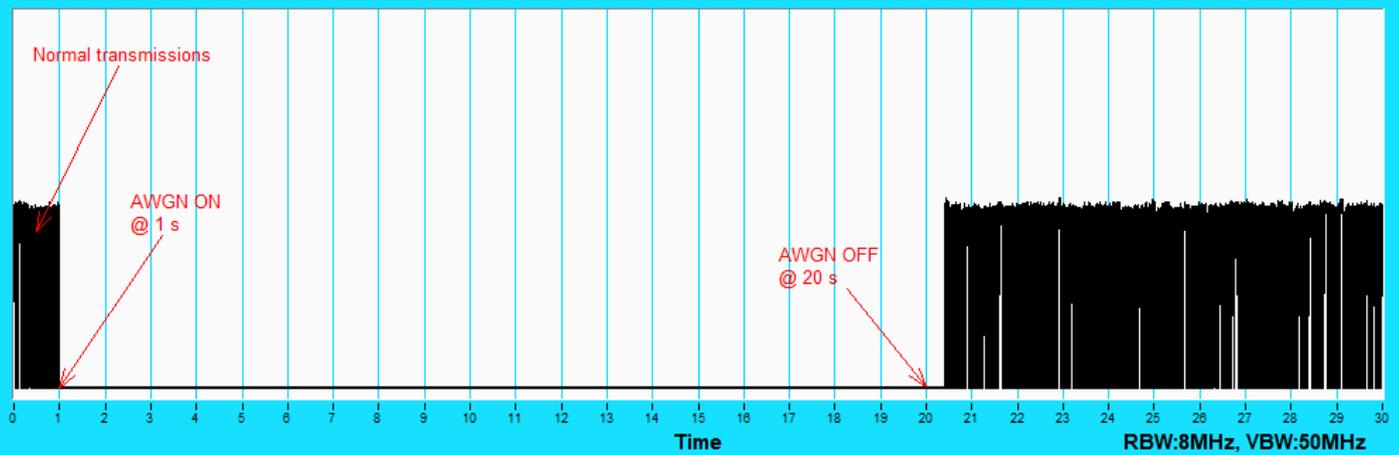

802.11be (EHT160) / CH143(Low Edge)

CBP

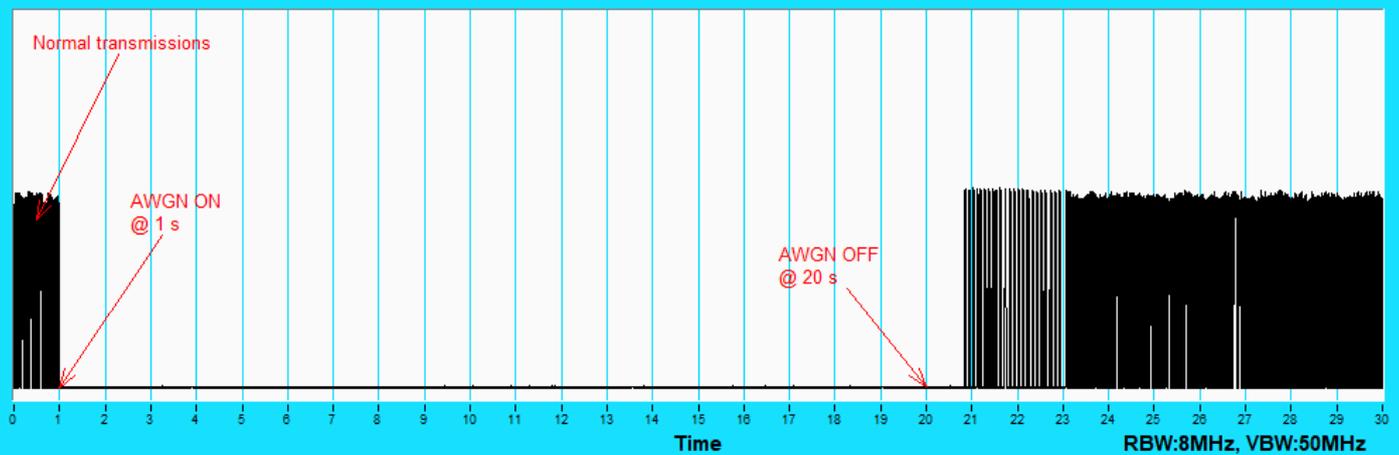

802.11be (EHT160) / CH143(Middle)

Plots of EUT ceased transmission in the time domain

CBP



For U-NII-8

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-65	3.22	0	-68.22	-62	OFF
					-68	3.22	0	-71.22	-62	Minimal
					-78.78	3.22	0	-82	-62	ON
	160	207	6985	6910	-65	3.22	0	-68.22	-62	OFF
					-67	3.22	0	-70.22	-62	Minimal
					-78.78	3.22	0	-82	-62	ON
				6985	-62	3.22	0	-65.22	-62	OFF
					-64	3.22	0	-67.22	-62	Minimal
					-78.78	3.22	0	-82	-62	ON
		7060	-64	3.22	0	-67.22	-62	OFF		
			-66	3.22	0	-69.22	-62	Minimal		
			-78.78	3.22	0	-82	-62	ON		


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6910	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6985	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass



Plots of EUT Tx waveform

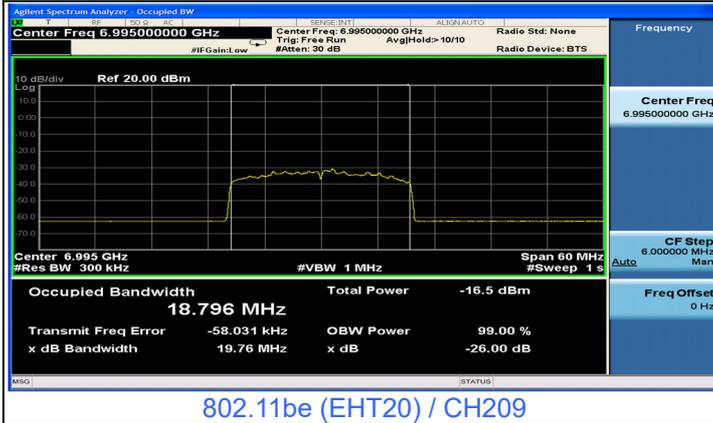


802.11be (EHT20) / CH209

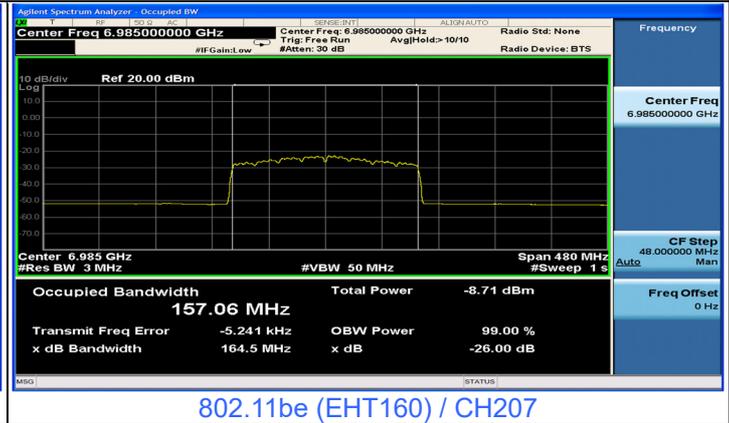

802.11be (EHT160) / CH207


Plots of Injected signal (AWGN) level

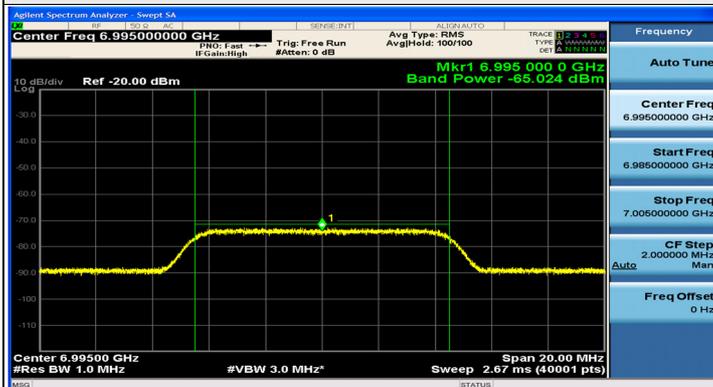


802.11be (EHT20) / CH209



802.11be (EHT160) / CH207 (Low Edge)

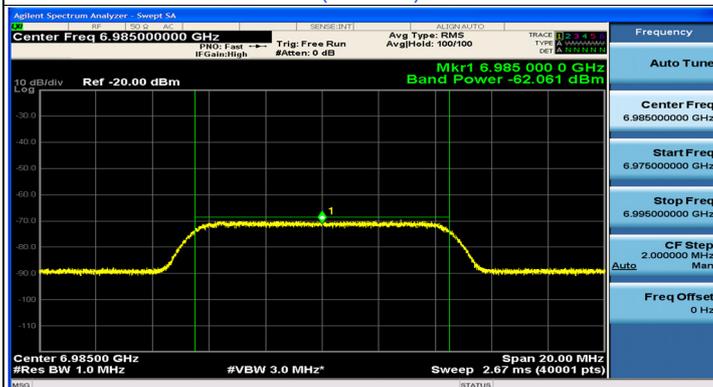


802.11be (EHT160) / CH207 (Middle)

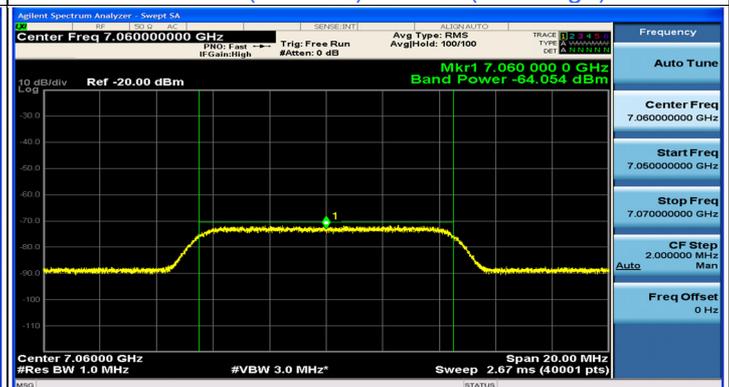

802.11be (EHT160) / CH207 (High Edge)


Plots of EUT ceased transmission in the time domain

CBP

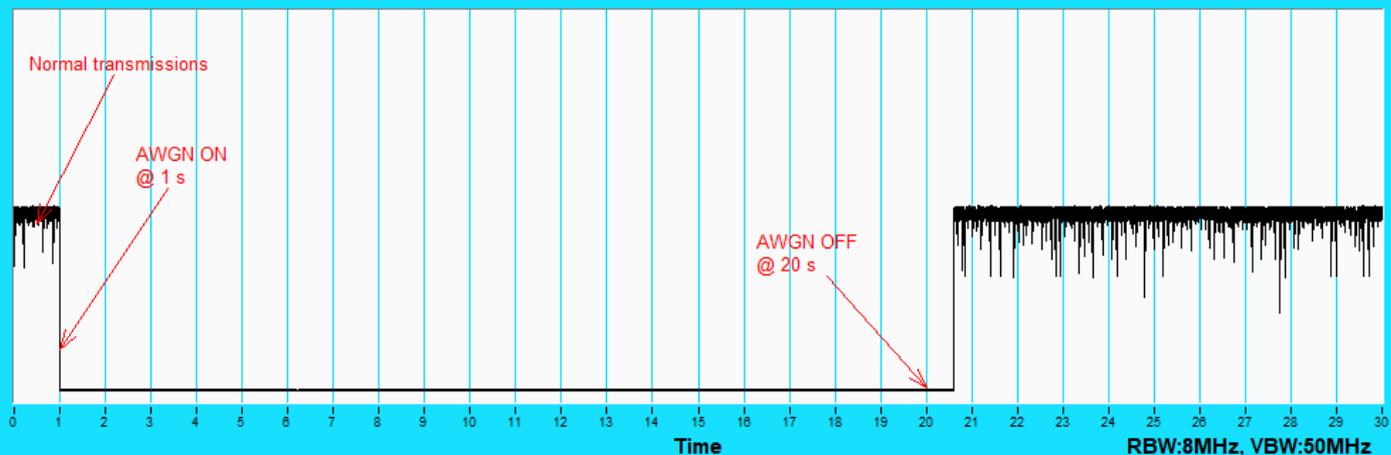


802.11be (EHT20) / CH209

CBP

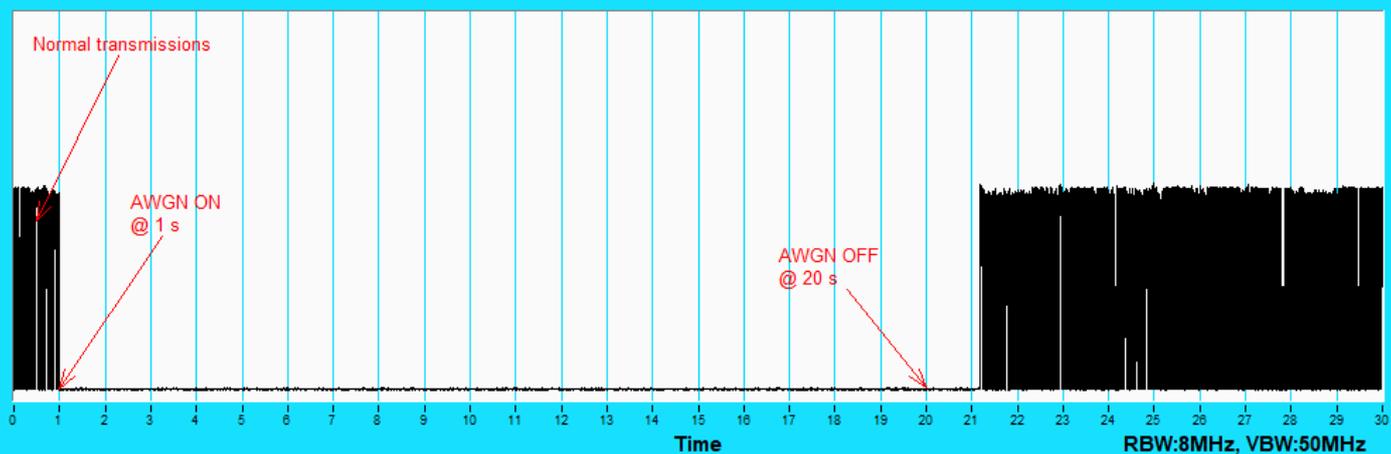

802.11be (EHT160) / CH207(Low Edge)


CBP

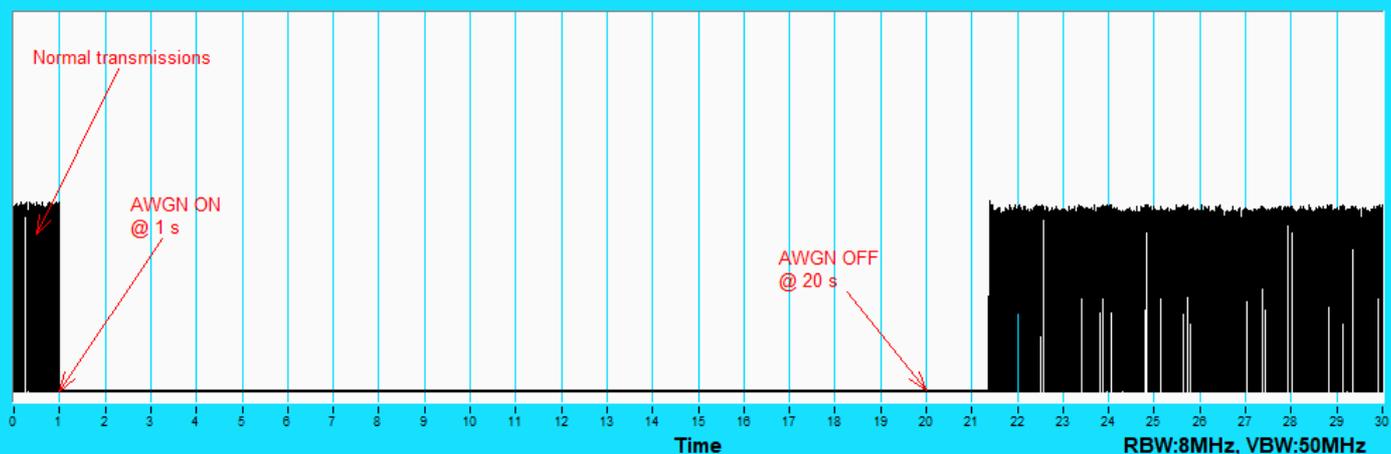

802.11be (EHT160) / CH207(Middle)

Plots of EUT ceased transmission in the time domain

CBP

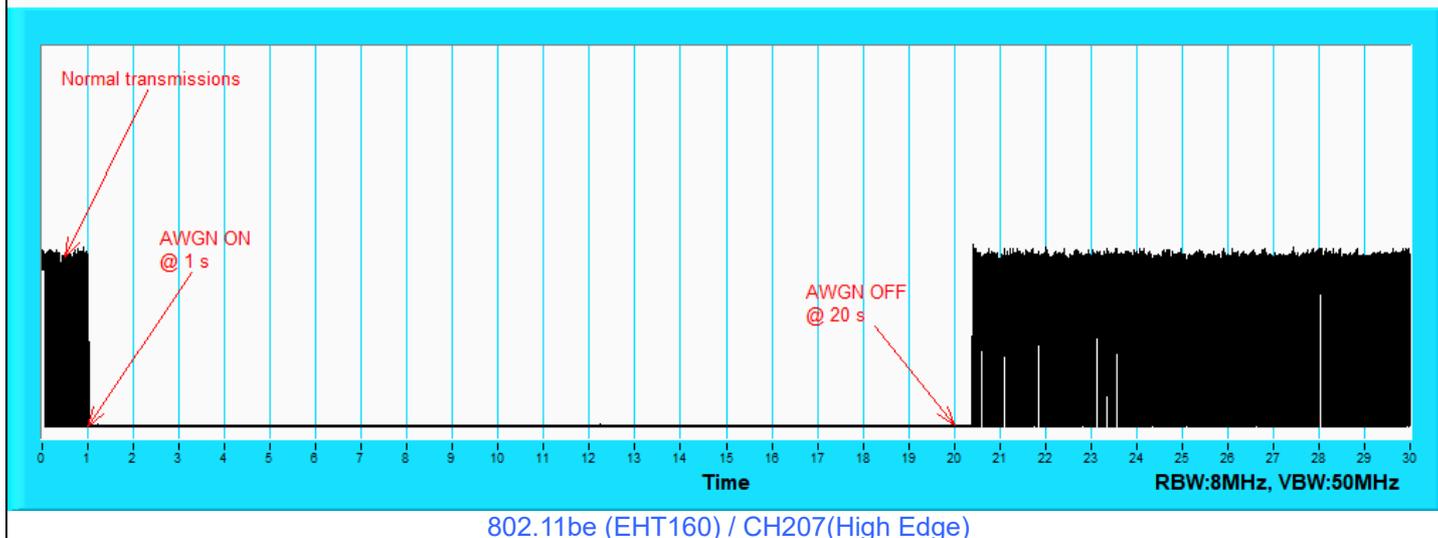


7.7 AC Power Conducted Emissions

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 71 % RH
Tested By	Luis Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	9.69	36.52	23.26	46.21	32.95	65.16	55.16	-18.95	-22.21
2	0.20200	9.71	30.03	14.34	39.74	24.05	63.53	53.53	-23.79	-29.48
3	0.24600	9.71	25.55	10.74	35.26	20.45	61.89	51.89	-26.63	-31.44
4	0.54200	9.74	19.06	11.88	28.80	21.62	56.00	46.00	-27.20	-24.38
5	3.41000	9.83	26.01	16.53	35.84	26.36	56.00	46.00	-20.16	-19.64
6	20.92200	10.08	20.22	11.14	30.30	21.22	60.00	50.00	-29.70	-28.78

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

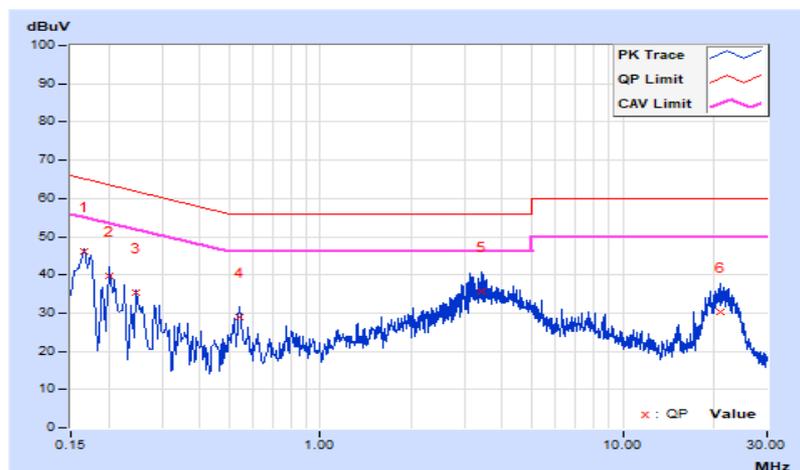


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 71 % RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	9.66	36.90	18.81	46.56	28.47	65.16	55.16	-18.60	-26.69
2	0.19000	9.66	29.30	17.33	38.96	26.99	64.04	54.04	-25.08	-27.05
3	0.21748	9.67	23.49	7.20	33.16	16.87	62.91	52.91	-29.75	-36.04
4	0.26600	9.68	23.00	6.64	32.68	16.32	61.24	51.24	-28.56	-34.92
5	3.33400	9.84	25.24	16.80	35.08	26.64	56.00	46.00	-20.92	-19.36
6	21.90200	10.30	20.24	10.59	30.54	20.89	60.00	50.00	-29.46	-29.11

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

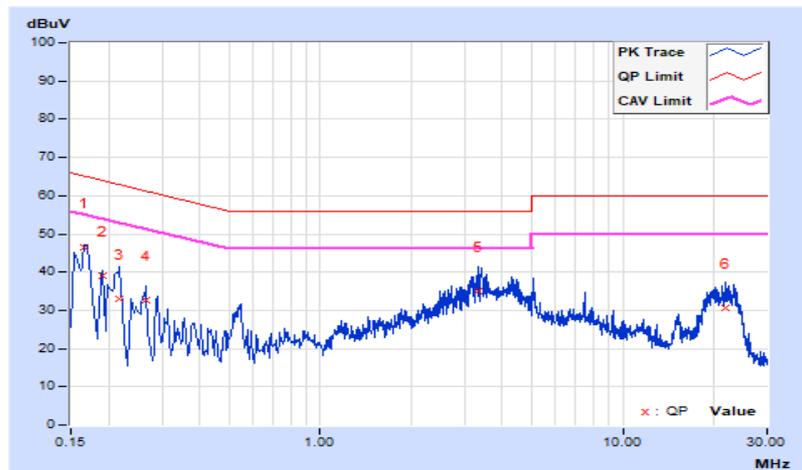


7.8 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.65	36.4 QP	40.0	-3.6	1.49 H	87	45.6	-9.2
2	80.61	33.5 QP	40.0	-6.5	1.99 H	330	47.0	-13.5
3	107.32	34.5 QP	43.5	-9.0	1.49 H	105	46.8	-12.3
4	164.96	33.2 QP	43.5	-10.3	1.99 H	240	41.9	-8.7
5	239.46	34.4 QP	46.0	-11.6	1.00 H	27	44.3	-9.9
6	432.06	32.9 QP	46.0	-13.1	1.99 H	293	37.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

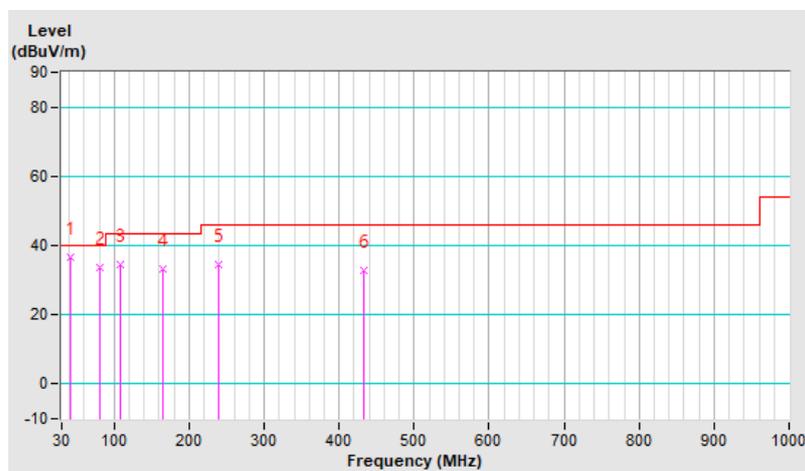


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	110.13	37.1 QP	43.5	-6.4	1.00 V	301	49.1	-12.0
2	166.36	37.2 QP	43.5	-6.3	1.00 V	246	46.0	-8.8
3	239.46	28.4 QP	46.0	-17.6	1.00 V	351	38.3	-9.9
4	298.51	28.7 QP	46.0	-17.3	1.49 V	228	36.0	-7.3
5	432.06	31.7 QP	46.0	-14.3	1.49 V	245	36.5	-4.8
6	849.58	32.9 QP	46.0	-13.1	1.00 V	335	29.1	3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

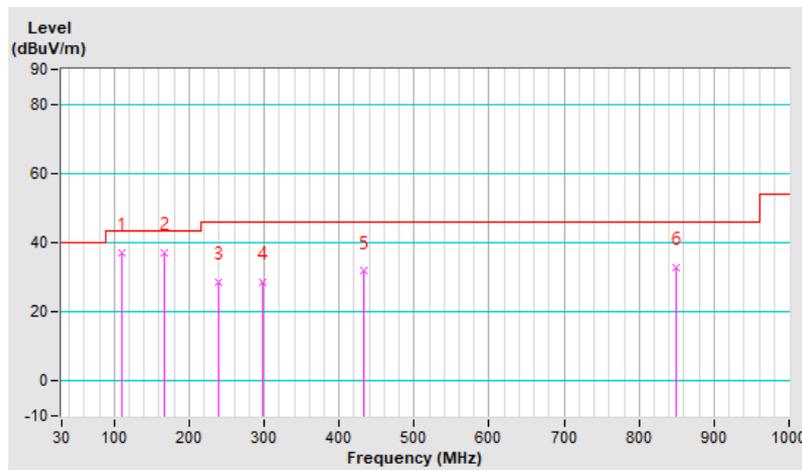

7.9 Unwanted Emissions above 1 GHz

NSS1

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.8 PK	88.2	-36.4	2.40 H	259	37.7	14.1
2	#5925.00	38.8 AV	68.2	-29.4	2.40 H	259	24.7	14.1
3	*5955.00	104.2 PK			2.40 H	259	59.1	45.1
4	*5955.00	93.3 AV			2.40 H	259	48.2	45.1
5	11910.00	60.5 PK	74.0	-13.5	1.85 H	142	39.7	20.8
6	11910.00	47.1 AV	54.0	-6.9	1.85 H	142	26.3	20.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	2.44 V	194	37.4	14.1
2	#5925.00	38.4 AV	68.2	-29.8	2.44 V	194	24.3	14.1
3	*5955.00	102.0 PK			2.44 V	194	56.9	45.1
4	*5955.00	92.2 AV			2.44 V	194	47.1	45.1
5	11910.00	60.0 PK	74.0	-14.0	2.36 V	164	39.2	20.8
6	11910.00	46.5 AV	54.0	-7.5	2.36 V	164	25.7	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	104.1 PK			2.42 H	258	58.8	45.3
2	*6175.00	93.1 AV			2.42 H	258	47.8	45.3
3	12350.00	60.4 PK	74.0	-13.6	1.88 H	143	39.5	20.9
4	12350.00	47.0 AV	54.0	-7.0	1.88 H	143	26.1	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	102.1 PK			2.45 V	196	56.8	45.3
2	*6175.00	92.4 AV			2.45 V	196	47.1	45.3
3	12350.00	59.8 PK	74.0	-14.2	2.30 V	152	38.9	20.9
4	12350.00	46.3 AV	54.0	-7.7	2.30 V	152	25.4	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	104.1 PK			2.44 H	255	57.3	46.8
2	*6415.00	93.1 AV			2.44 H	255	46.3	46.8
3	#12830.00	60.4 PK	88.2	-27.8	1.88 H	141	38.6	21.8
4	#12830.00	47.0 AV	68.2	-21.2	1.88 H	141	25.2	21.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	102.2 PK			2.45 V	199	55.4	46.8
2	*6415.00	92.5 AV			2.45 V	199	45.7	46.8
3	#12830.00	60.0 PK	88.2	-28.2	2.39 V	166	38.2	21.8
4	#12830.00	46.2 AV	68.2	-22.0	2.39 V	166	24.4	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	2.40 H	258	37.6	14.1
2	#5925.00	38.7 AV	68.2	-29.5	2.40 H	258	24.6	14.1
3	*5955.00	106.0 PK			2.40 H	258	60.9	45.1
4	*5955.00	93.1 AV			2.40 H	258	48.0	45.1
5	11910.00	60.4 PK	74.0	-13.6	1.89 H	145	39.6	20.8
6	11910.00	46.9 AV	54.0	-7.1	1.89 H	145	26.1	20.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	2.45 V	195	37.4	14.1
2	#5925.00	38.4 AV	68.2	-29.8	2.45 V	195	24.3	14.1
3	*5955.00	104.4 PK			2.45 V	195	59.3	45.1
4	*5955.00	91.8 AV			2.45 V	195	46.7	45.1
5	11910.00	60.0 PK	74.0	-14.0	2.33 V	169	39.2	20.8
6	11910.00	46.8 AV	54.0	-7.2	2.33 V	169	26.0	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	105.9 PK			2.44 H	256	60.6	45.3
2	*6175.00	92.9 AV			2.44 H	256	47.6	45.3
3	12350.00	60.3 PK	74.0	-13.7	1.90 H	144	39.4	20.9
4	12350.00	46.8 AV	54.0	-7.2	1.90 H	144	25.9	20.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	104.5 PK			2.49 V	196	59.2	45.3
2	*6175.00	91.7 AV			2.49 V	196	46.4	45.3
3	12350.00	59.9 PK	74.0	-14.1	2.28 V	163	39.0	20.9
4	12350.00	46.7 AV	54.0	-7.3	2.28 V	163	25.8	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.1 PK			2.45 H	261	59.3	46.8
2	*6415.00	93.2 AV			2.45 H	261	46.4	46.8
3	#12830.00	60.3 PK	88.2	-27.9	1.85 H	144	38.5	21.8
4	#12830.00	46.8 AV	68.2	-21.4	1.85 H	144	25.0	21.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	104.5 PK			2.42 V	193	57.7	46.8
2	*6415.00	91.6 AV			2.42 V	193	44.8	46.8
3	#12830.00	59.6 PK	88.2	-28.6	2.36 V	162	37.8	21.8
4	#12830.00	46.5 AV	68.2	-21.7	2.36 V	162	24.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	2.34 H	258	37.8	14.1
2	#5925.00	38.9 AV	68.2	-29.3	2.34 H	258	24.8	14.1
3	*5965.00	105.8 PK			2.34 H	258	60.8	45.0
4	*5965.00	92.3 AV			2.34 H	258	47.3	45.0
5	11930.00	60.3 PK	74.0	-13.7	1.98 H	145	39.5	20.8
6	11930.00	46.8 AV	54.0	-7.2	1.98 H	145	26.0	20.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	2.46 V	175	37.6	14.1
2	#5925.00	38.8 AV	68.2	-29.4	2.46 V	175	24.7	14.1
3	*5965.00	103.7 PK			2.46 V	175	58.7	45.0
4	*5965.00	91.5 AV			2.46 V	175	46.5	45.0
5	11930.00	59.6 PK	74.0	-14.4	2.39 V	172	38.8	20.8
6	11930.00	46.5 AV	54.0	-7.5	2.39 V	172	25.7	20.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	105.9 PK			2.33 H	256	60.6	45.3
2	*6165.00	92.4 AV			2.33 H	256	47.1	45.3
3	12330.00	60.4 PK	74.0	-13.6	1.99 H	140	39.5	20.9
4	12330.00	46.9 AV	54.0	-7.1	1.99 H	140	26.0	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	103.5 PK			2.46 V	202	58.2	45.3
2	*6165.00	91.2 AV			2.46 V	202	45.9	45.3
3	12330.00	59.9 PK	74.0	-14.1	2.31 V	168	39.0	20.9
4	12330.00	46.7 AV	54.0	-7.3	2.31 V	168	25.8	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	105.9 PK			2.39 H	255	59.2	46.7
2	*6405.00	92.4 AV			2.39 H	255	45.7	46.7
3	#12810.00	60.5 PK	88.2	-27.7	1.99 H	142	38.8	21.7
4	#12810.00	46.7 AV	68.2	-21.5	1.99 H	142	25.0	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	103.7 PK			2.42 V	195	57.0	46.7
2	*6405.00	90.2 AV			2.42 V	195	43.5	46.7
3	#12810.00	60.2 PK	88.2	-28.0	2.35 V	181	38.5	21.7
4	#12810.00	46.5 AV	68.2	-21.7	2.35 V	181	24.8	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.1 PK	88.2	-30.1	2.35 H	259	44.0	14.1
2	#5925.00	44.7 AV	68.2	-23.5	2.35 H	259	30.6	14.1
3	*5985.00	105.9 PK			2.35 H	259	60.9	45.0
4	*5985.00	92.4 AV			2.35 H	259	47.4	45.0
5	11970.00	60.4 PK	74.0	-13.6	1.98 H	150	39.6	20.8
6	11970.00	46.8 AV	54.0	-7.2	1.98 H	150	26.0	20.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.9 PK	88.2	-30.3	2.53 V	163	43.8	14.1
2	#5925.00	44.4 AV	68.2	-23.8	2.53 V	163	30.3	14.1
3	*5985.00	103.5 PK			2.53 V	163	58.5	45.0
4	*5985.00	91.0 AV			2.53 V	163	46.0	45.0
5	11970.00	60.0 PK	74.0	-14.0	2.29 V	182	39.2	20.8
6	11970.00	46.6 AV	54.0	-7.4	2.29 V	182	25.8	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	105.9 PK			2.41 H	255	60.6	45.3
2	*6145.00	92.6 AV			2.41 H	255	47.3	45.3
3	12290.00	60.5 PK	74.0	-13.5	1.89 H	142	39.6	20.9
4	12290.00	46.9 AV	54.0	-7.1	1.89 H	142	26.0	20.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	103.8 PK			2.48 V	175	58.5	45.3
2	*6145.00	90.5 AV			2.48 V	175	45.2	45.3
3	12290.00	60.2 PK	74.0	-13.8	2.38 V	177	39.3	20.9
4	12290.00	46.7 AV	54.0	-7.3	2.38 V	177	25.8	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	105.8 PK			2.33 H	258	59.1	46.7
2	*6385.00	92.3 AV			2.33 H	258	45.6	46.7
3	#12770.00	60.5 PK	88.2	-27.7	1.99 H	145	38.8	21.7
4	#12770.00	46.8 AV	68.2	-21.4	1.99 H	145	25.1	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	104.2 PK			2.45 V	173	57.5	46.7
2	*6385.00	90.5 AV			2.45 V	173	43.8	46.7
3	#12770.00	60.2 PK	88.2	-28.0	2.31 V	180	38.5	21.7
4	#12770.00	46.5 AV	68.2	-21.7	2.31 V	180	24.8	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.9 PK	88.2	-23.3	2.39 H	257	50.8	14.1
2	#5925.00	49.6 AV	68.2	-18.6	2.39 H	257	35.5	14.1
3	*6025.00	105.8 PK			2.39 H	257	60.7	45.1
4	*6025.00	92.5 AV			2.39 H	257	47.4	45.1
5	12050.00	60.6 PK	74.0	-13.4	1.96 H	143	39.7	20.9
6	12050.00	46.9 AV	54.0	-7.1	1.96 H	143	26.0	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.1 PK	88.2	-24.1	2.48 V	178	50.0	14.1
2	#5925.00	49.1 AV	68.2	-19.1	2.48 V	178	35.0	14.1
3	*6025.00	103.1 PK			2.48 V	178	58.0	45.1
4	*6025.00	90.9 AV			2.48 V	178	45.8	45.1
5	12050.00	60.4 PK	74.0	-13.6	2.35 V	187	39.5	20.9
6	12050.00	46.6 AV	54.0	-7.4	2.35 V	187	25.7	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.7 PK			2.33 H	260	60.4	45.3
2	*6185.00	92.5 AV			2.33 H	260	47.2	45.3
3	12370.00	60.5 PK	74.0	-13.5	1.94 H	147	39.6	20.9
4	12370.00	46.9 AV	54.0	-7.1	1.94 H	147	26.0	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	104.0 PK			2.45 V	180	58.7	45.3
2	*6185.00	91.3 AV			2.45 V	180	46.0	45.3
3	12370.00	60.2 PK	74.0	-13.8	2.31 V	195	39.3	20.9
4	12370.00	46.6 AV	54.0	-7.4	2.31 V	195	25.7	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.8 PK			2.40 H	261	60.3	46.5
2	*6345.00	94.0 AV			2.40 H	261	47.5	46.5
3	12690.00	60.2 PK	74.0	-13.8	1.95 H	152	38.2	22.0
4	12690.00	46.7 AV	54.0	-7.3	1.95 H	152	24.7	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.6 PK			2.45 V	176	58.1	46.5
2	*6345.00	92.6 AV			2.45 V	176	46.1	46.5
3	12690.00	60.0 PK	74.0	-14.0	2.23 V	179	38.0	22.0
4	12690.00	46.5 AV	54.0	-7.5	2.23 V	179	24.5	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.0 PK			2.48 H	255	57.1	46.9
2	*6435.00	93.2 AV			2.48 H	255	46.3	46.9
3	#12870.00	60.4 PK	88.2	-27.8	1.88 H	149	38.2	22.2
4	#12870.00	47.3 AV	68.2	-20.9	1.88 H	149	25.1	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.0 PK			2.49 V	190	55.1	46.9
2	*6435.00	92.1 AV			2.49 V	190	45.2	46.9
3	#12870.00	59.9 PK	88.2	-28.3	2.28 V	170	37.7	22.2
4	#12870.00	46.3 AV	68.2	-21.9	2.28 V	170	24.1	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	104.5 PK			2.44 H	261	57.3	47.2
2	*6475.00	93.2 AV			2.44 H	261	46.0	47.2
3	#12950.00	60.6 PK	88.2	-27.6	1.81 H	133	38.3	22.3
4	#12950.00	47.0 AV	68.2	-21.2	1.81 H	133	24.7	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.4 PK			2.41 V	196	55.2	47.2
2	*6475.00	92.4 AV			2.41 V	196	45.2	47.2
3	#12950.00	60.0 PK	88.2	-28.2	2.33 V	161	37.7	22.3
4	#12950.00	46.2 AV	68.2	-22.0	2.33 V	161	23.9	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.4 PK			2.39 H	258	56.9	47.5
2	*6515.00	93.5 AV			2.39 H	258	46.0	47.5
3	#13030.00	60.3 PK	88.2	-27.9	1.90 H	144	37.9	22.4
4	#13030.00	46.9 AV	68.2	-21.3	1.90 H	144	24.5	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.2 PK			2.46 V	198	54.7	47.5
2	*6515.00	92.4 AV			2.46 V	198	44.9	47.5
3	#13030.00	60.1 PK	88.2	-28.1	2.30 V	160	37.7	22.4
4	#13030.00	46.2 AV	68.2	-22.0	2.30 V	160	23.8	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	106.2 PK			2.45 H	252	59.3	46.9
2	*6435.00	93.3 AV			2.45 H	252	46.4	46.9
3	#12870.00	60.2 PK	88.2	-28.0	1.85 H	142	38.0	22.2
4	#12870.00	46.6 AV	68.2	-21.6	1.85 H	142	24.4	22.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.5 PK			2.46 V	190	57.6	46.9
2	*6435.00	91.7 AV			2.46 V	190	44.8	46.9
3	#12870.00	59.6 PK	88.2	-28.6	2.23 V	165	37.4	22.2
4	#12870.00	46.7 AV	68.2	-21.5	2.23 V	165	24.5	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	105.8 PK			2.42 H	258	58.6	47.2
2	*6475.00	92.8 AV			2.42 H	258	45.6	47.2
3	#12950.00	60.2 PK	88.2	-28.0	1.85 H	144	37.9	22.3
4	#12950.00	46.8 AV	68.2	-21.4	1.85 H	144	24.5	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	104.3 PK			2.44 V	193	57.1	47.2
2	*6475.00	91.6 AV			2.44 V	193	44.4	47.2
3	#12950.00	60.1 PK	88.2	-28.1	2.36 V	162	37.8	22.3
4	#12950.00	46.2 AV	68.2	-22.0	2.36 V	162	23.9	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	106.1 PK			2.44 H	258	58.6	47.5
2	*6515.00	93.2 AV			2.44 H	258	45.7	47.5
3	#13030.00	60.3 PK	88.2	-27.9	1.90 H	144	37.9	22.4
4	#13030.00	46.8 AV	68.2	-21.4	1.90 H	144	24.4	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.6 PK			2.49 V	199	57.1	47.5
2	*6515.00	91.5 AV			2.49 V	199	44.0	47.5
3	#13030.00	59.7 PK	88.2	-28.5	2.19 V	162	37.3	22.4
4	#13030.00	46.5 AV	68.2	-21.7	2.19 V	162	24.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	105.9 PK			2.31 H	255	58.9	47.0
2	*6445.00	92.4 AV			2.31 H	255	45.4	47.0
3	#12890.00	60.5 PK	88.2	-27.7	1.99 H	145	38.1	22.4
4	#12890.00	46.9 AV	68.2	-21.3	1.99 H	145	24.5	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	103.2 PK			2.43 V	187	56.2	47.0
2	*6445.00	90.5 AV			2.43 V	187	43.5	47.0
3	#12890.00	60.2 PK	88.2	-28.0	2.28 V	187	37.8	22.4
4	#12890.00	46.9 AV	68.2	-21.3	2.28 V	187	24.5	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	105.8 PK			2.30 H	266	58.5	47.3
2	*6485.00	92.4 AV			2.30 H	266	45.1	47.3
3	#12970.00	60.2 PK	88.2	-28.0	1.99 H	140	37.8	22.4
4	#12970.00	46.7 AV	68.2	-21.5	1.99 H	140	24.3	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	103.6 PK			2.39 V	185	56.3	47.3
2	*6485.00	90.7 AV			2.39 V	185	43.4	47.3
3	#12970.00	60.1 PK	88.2	-28.1	2.23 V	180	37.7	22.4
4	#12970.00	46.6 AV	68.2	-21.6	2.23 V	180	24.2	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	105.7 PK			2.40 H	252	58.1	47.6
2	*6525.00	92.4 AV			2.40 H	252	44.8	47.6
3	#13050.00	60.2 PK	88.2	-28.0	1.90 H	142	37.6	22.6
4	#13050.00	46.7 AV	68.2	-21.5	1.90 H	142	24.1	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	104.1 PK			2.42 V	191	56.5	47.6
2	*6525.00	91.2 AV			2.42 V	191	43.6	47.6
3	#13050.00	60.1 PK	88.2	-28.1	2.39 V	186	37.5	22.6
4	#13050.00	46.6 AV	68.2	-21.6	2.39 V	186	24.0	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	105.7 PK			2.33 H	260	58.5	47.2
2	*6465.00	92.2 AV			2.33 H	260	45.0	47.2
3	#12930.00	60.2 PK	88.2	-28.0	1.94 H	152	37.8	22.4
4	#12930.00	46.8 AV	68.2	-21.4	1.94 H	152	24.4	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	104.0 PK			2.43 V	169	56.8	47.2
2	*6465.00	90.7 AV			2.43 V	169	43.5	47.2
3	#12930.00	60.0 PK	88.2	-28.2	2.22 V	181	37.6	22.4
4	#12930.00	46.6 AV	68.2	-21.6	2.22 V	181	24.2	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.9 PK			2.45 H	246	60.4	47.5
2	*6505.00	95.8 AV			2.45 H	246	48.3	47.5
3	#13010.00	60.3 PK	88.2	-27.9	1.92 H	145	37.9	22.4
4	#13010.00	46.6 AV	68.2	-21.6	1.92 H	145	24.2	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.0 PK			2.43 V	185	58.5	47.5
2	*6505.00	93.7 AV			2.43 V	185	46.2	47.5
3	#13010.00	59.9 PK	88.2	-28.3	2.29 V	177	37.5	22.4
4	#13010.00	46.4 AV	68.2	-21.8	2.29 V	177	24.0	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	104.4 PK			2.44 H	256	56.7	47.7
2	*6535.00	93.5 AV			2.44 H	256	45.8	47.7
3	#13070.00	60.2 PK	88.2	-28.0	1.90 H	138	37.7	22.5
4	#13070.00	47.3 AV	68.2	-20.9	1.90 H	138	24.8	22.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	102.2 PK			2.46 V	190	54.5	47.7
2	*6535.00	92.1 AV			2.46 V	190	44.4	47.7
3	#13070.00	59.8 PK	88.2	-28.4	2.33 V	169	37.3	22.5
4	#13070.00	46.3 AV	68.2	-21.9	2.33 V	169	23.8	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	104.2 PK			2.44 H	253	56.7	47.5
2	*6695.00	93.6 AV			2.44 H	253	46.1	47.5
3	13390.00	60.4 PK	74.0	-13.6	1.89 H	144	36.9	23.5
4	13390.00	47.0 AV	54.0	-7.0	1.89 H	144	23.5	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.4 PK			2.49 V	190	54.9	47.5
2	*6695.00	92.0 AV			2.49 V	190	44.5	47.5
3	13390.00	59.7 PK	74.0	-14.3	2.33 V	160	36.2	23.5
4	13390.00	46.4 AV	54.0	-7.6	2.33 V	160	22.9	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	104.3 PK			2.41 H	255	56.1	48.2
2	*6855.00	93.2 AV			2.41 H	255	45.0	48.2
3	#13710.00	60.6 PK	88.2	-27.6	1.88 H	139	36.8	23.8
4	#13710.00	47.5 AV	68.2	-20.7	1.88 H	139	23.7	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	102.1 PK			2.48 V	190	53.9	48.2
2	*6855.00	92.0 AV			2.48 V	190	43.8	48.2
3	#13710.00	59.7 PK	88.2	-28.5	2.30 V	169	35.9	23.8
4	#13710.00	46.3 AV	68.2	-21.9	2.30 V	169	22.5	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	106.3 PK			2.41 H	255	58.6	47.7
2	*6535.00	93.2 AV			2.41 H	255	45.5	47.7
3	#13070.00	60.5 PK	88.2	-27.7	1.90 H	144	38.0	22.5
4	#13070.00	46.8 AV	68.2	-21.4	1.90 H	144	24.3	22.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	104.3 PK			2.40 V	192	56.6	47.7
2	*6535.00	91.7 AV			2.40 V	192	44.0	47.7
3	#13070.00	60.0 PK	88.2	-28.2	2.39 V	162	37.5	22.5
4	#13070.00	46.2 AV	68.2	-22.0	2.39 V	162	23.7	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.3 PK			2.48 H	250	58.8	47.5
2	*6695.00	93.2 AV			2.48 H	250	45.7	47.5
3	13390.00	60.2 PK	74.0	-13.8	1.88 H	139	36.7	23.5
4	13390.00	46.8 AV	54.0	-7.2	1.88 H	139	23.3	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	104.5 PK			2.44 V	193	57.0	47.5
2	*6695.00	91.7 AV			2.44 V	193	44.2	47.5
3	13390.00	59.8 PK	74.0	-14.2	2.31 V	170	36.3	23.5
4	13390.00	46.4 AV	54.0	-7.6	2.31 V	170	22.9	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.3 PK			2.42 H	255	58.1	48.2
2	*6855.00	93.2 AV			2.42 H	255	45.0	48.2
3	#13710.00	60.5 PK	88.2	-27.7	1.85 H	152	36.7	23.8
4	#13710.00	46.6 AV	68.2	-21.6	1.85 H	152	22.8	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	104.5 PK			2.49 V	194	56.3	48.2
2	*6855.00	91.7 AV			2.49 V	194	43.5	48.2
3	#13710.00	59.7 PK	88.2	-28.5	2.31 V	166	35.9	23.8
4	#13710.00	46.6 AV	68.2	-21.6	2.31 V	166	22.8	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	105.7 PK			2.30 H	253	57.9	47.8
2	*6565.00	92.3 AV			2.30 H	253	44.5	47.8
3	#13130.00	60.5 PK	88.2	-27.7	1.94 H	145	37.8	22.7
4	#13130.00	46.9 AV	68.2	-21.3	1.94 H	145	24.2	22.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	104.1 PK			2.42 V	195	56.3	47.8
2	*6565.00	90.9 AV			2.42 V	195	43.1	47.8
3	#13130.00	60.3 PK	88.2	-27.9	2.32 V	172	37.6	22.7
4	#13130.00	46.7 AV	68.2	-21.5	2.32 V	172	24.0	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	105.8 PK			2.30 H	261	58.3	47.5
2	*6725.00	92.5 AV			2.30 H	261	45.0	47.5
3	#13450.00	60.4 PK	88.2	-27.8	1.94 H	155	36.9	23.5
4	#13450.00	46.8 AV	68.2	-21.4	1.94 H	155	23.3	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	104.0 PK			2.39 V	185	56.5	47.5
2	*6725.00	91.5 AV			2.39 V	185	44.0	47.5
3	#13450.00	60.3 PK	88.2	-27.9	2.29 V	180	36.8	23.5
4	#13450.00	46.7 AV	68.2	-21.5	2.29 V	180	23.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	105.8 PK			2.40 H	259	57.6	48.2
2	*6845.00	92.4 AV			2.40 H	259	44.2	48.2
3	#13690.00	60.4 PK	88.2	-27.8	1.99 H	142	36.6	23.8
4	#13690.00	46.7 AV	68.2	-21.5	1.99 H	142	22.9	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	103.7 PK			2.29 V	188	55.5	48.2
2	*6845.00	90.7 AV			2.29 V	188	42.5	48.2
3	#13690.00	60.2 PK	88.2	-28.0	2.29 V	181	36.4	23.8
4	#13690.00	46.6 AV	68.2	-21.6	2.29 V	181	22.8	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	105.7 PK			2.45 H	260	58.0	47.7
2	*6545.00	92.5 AV			2.45 H	260	44.8	47.7
3	#13090.00	60.6 PK	88.2	-27.6	1.99 H	152	38.0	22.6
4	#13090.00	46.9 AV	68.2	-21.3	1.99 H	152	24.3	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	104.0 PK			2.48 V	192	56.3	47.7
2	*6545.00	91.3 AV			2.48 V	192	43.6	47.7
3	#13090.00	60.4 PK	88.2	-27.8	2.28 V	177	37.8	22.6
4	#13090.00	46.8 AV	68.2	-21.4	2.28 V	177	24.2	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.7 PK			2.31 H	256	58.2	47.5
2	*6705.00	92.4 AV			2.31 H	256	44.9	47.5
3	#13410.00	60.5 PK	88.2	-27.7	1.88 H	142	37.0	23.5
4	#13410.00	46.9 AV	68.2	-21.3	1.88 H	142	23.4	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	104.0 PK			2.46 V	178	56.5	47.5
2	*6705.00	91.0 AV			2.46 V	178	43.5	47.5
3	#13410.00	60.2 PK	88.2	-28.0	2.35 V	177	36.7	23.5
4	#13410.00	46.7 AV	68.2	-21.5	2.35 V	177	23.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	105.9 PK			2.30 H	261	57.7	48.2
2	*6865.00	92.5 AV			2.30 H	261	44.3	48.2
3	#13730.00	60.5 PK	88.2	-27.7	1.99 H	148	36.5	24.0
4	#13730.00	46.7 AV	68.2	-21.5	1.99 H	148	22.7	24.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	104.2 PK			2.42 V	180	56.0	48.2
2	*6865.00	91.0 AV			2.42 V	180	42.8	48.2
3	#13730.00	60.2 PK	88.2	-28.0	2.31 V	182	36.2	24.0
4	#13730.00	46.5 AV	68.2	-21.7	2.31 V	182	22.5	24.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.9 PK			2.30 H	258	57.2	47.7
2	*6665.00	93.3 AV			2.30 H	258	45.6	47.7
3	13330.00	60.2 PK	74.0	-13.8	1.87 H	155	37.2	23.0
4	13330.00	46.5 AV	54.0	-7.5	1.87 H	155	23.5	23.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	102.7 PK			2.45 V	181	55.0	47.7
2	*6665.00	91.3 AV			2.45 V	181	43.6	47.7
3	13330.00	60.0 PK	74.0	-14.0	2.31 V	175	37.0	23.0
4	13330.00	46.3 AV	54.0	-7.7	2.31 V	175	23.3	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	108.0 PK			2.41 H	264	59.8	48.2
2	*6825.00	94.8 AV			2.41 H	264	46.6	48.2
3	#13650.00	60.5 PK	88.2	-27.7	1.99 H	153	36.7	23.8
4	#13650.00	46.5 AV	68.2	-21.7	1.99 H	153	22.7	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.4 PK			2.60 V	170	57.2	48.2
2	*6825.00	93.3 AV			2.60 V	170	45.1	48.2
3	#13650.00	60.3 PK	88.2	-27.9	2.26 V	188	36.5	23.8
4	#13650.00	46.3 AV	68.2	-21.9	2.26 V	188	22.5	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.5 PK			2.48 H	269	56.2	48.3
2	*6875.00	93.6 AV			2.48 H	269	45.3	48.3
3	#13750.00	60.8 PK	88.2	-27.4	1.90 H	139	36.8	24.0
4	#13750.00	47.4 AV	68.2	-20.8	1.90 H	139	23.4	24.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.9 PK			2.49 V	199	53.6	48.3
2	*6875.00	91.8 AV			2.49 V	199	43.5	48.3
3	#13750.00	60.2 PK	88.2	-28.0	2.33 V	159	36.2	24.0
4	#13750.00	46.4 AV	68.2	-21.8	2.33 V	159	22.4	24.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.3 PK			2.39 H	255	55.0	49.3
2	*6995.00	93.1 AV			2.39 H	255	43.8	49.3
3	#13990.00	60.3 PK	88.2	-27.9	1.84 H	140	35.5	24.8
4	#13990.00	47.2 AV	68.2	-21.0	1.84 H	140	22.4	24.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.2 PK			2.39 V	199	52.9	49.3
2	*6995.00	92.4 AV			2.39 V	199	43.1	49.3
3	#13990.00	60.1 PK	88.2	-28.1	2.30 V	169	35.3	24.8
4	#13990.00	46.5 AV	68.2	-21.7	2.30 V	169	21.7	24.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	104.2 PK			2.40 H	246	54.2	50.0
2	*7115.00	93.2 AV			2.40 H	246	43.2	50.0
3	#7125.00	61.0 PK	88.2	-27.2	2.40 H	246	43.2	17.8
4	#7125.00	46.6 AV	68.2	-21.6	2.40 H	246	28.8	17.8
5	#14230.00	60.4 PK	88.2	-27.8	1.90 H	133	35.2	25.2
6	#14230.00	47.0 AV	68.2	-21.2	1.90 H	133	21.8	25.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.1 PK			2.46 V	195	52.1	50.0
2	*7115.00	92.3 AV			2.46 V	195	42.3	50.0
3	#7125.00	61.1 PK	88.2	-27.1	2.46 V	195	43.3	17.8
4	#7125.00	46.4 AV	68.2	-21.8	2.46 V	195	28.6	17.8
5	#14230.00	60.0 PK	88.2	-28.2	2.33 V	159	34.8	25.2
6	#14230.00	46.8 AV	68.2	-21.4	2.33 V	159	21.6	25.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	106.1 PK			2.45 H	263	57.8	48.3
2	*6875.00	93.3 AV			2.45 H	263	45.0	48.3
3	#13750.00	60.2 PK	88.2	-28.0	1.89 H	151	36.2	24.0
4	#13750.00	46.7 AV	68.2	-21.5	1.89 H	151	22.7	24.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.5 PK			2.45 V	199	56.2	48.3
2	*6875.00	91.9 AV			2.45 V	199	43.6	48.3
3	#13750.00	59.6 PK	88.2	-28.6	2.27 V	163	35.6	24.0
4	#13750.00	46.4 AV	68.2	-21.8	2.27 V	163	22.4	24.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	106.2 PK			2.41 H	256	56.9	49.3
2	*6995.00	93.2 AV			2.41 H	256	43.9	49.3
3	#13990.00	60.5 PK	88.2	-27.7	1.90 H	144	35.7	24.8
4	#13990.00	46.8 AV	68.2	-21.4	1.90 H	144	22.0	24.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.5 PK			2.46 V	199	55.2	49.3
2	*6995.00	91.9 AV			2.46 V	199	42.6	49.3
3	#13990.00	59.8 PK	88.2	-28.4	2.36 V	162	35.0	24.8
4	#13990.00	46.6 AV	68.2	-21.6	2.36 V	162	21.8	24.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	106.0 PK			2.40 H	258	56.0	50.0
2	*7115.00	93.2 AV			2.40 H	258	43.2	50.0
3	#7125.00	76.0 PK	88.2	-12.2	2.40 H	258	58.2	17.8
4	#7125.00	67.2 AV	68.2	-1.0	2.40 H	258	49.4	17.8
5	#14230.00	60.2 PK	88.2	-28.0	1.90 H	144	35.0	25.2
6	#14230.00	46.6 AV	68.2	-21.6	1.90 H	144	21.4	25.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	104.0 PK			2.46 V	196	54.0	50.0
2	*7115.00	92.0 AV			2.46 V	196	42.0	50.0
3	#7125.00	70.1 PK	88.2	-18.1	2.46 V	196	52.3	17.8
4	#7125.00	62.8 AV	68.2	-5.4	2.46 V	196	45.0	17.8
5	#14230.00	59.7 PK	88.2	-28.5	2.36 V	169	34.5	25.2
6	#14230.00	46.2 AV	68.2	-22.0	2.36 V	169	21.0	25.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	105.7 PK			2.30 H	255	57.5	48.2
2	*6885.00	92.1 AV			2.30 H	255	43.9	48.2
3	#13770.00	60.5 PK	88.2	-27.7	1.97 H	145	36.4	24.1
4	#13770.00	46.8 AV	68.2	-21.4	1.97 H	145	22.7	24.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	104.4 PK			2.41 V	189	56.2	48.2
2	*6885.00	90.8 AV			2.41 V	189	42.6	48.2
3	#13770.00	60.3 PK	88.2	-27.9	2.35 V	175	36.2	24.1
4	#13770.00	46.6 AV	68.2	-21.6	2.35 V	175	22.5	24.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	105.7 PK			2.39 H	263	56.4	49.3
2	*7005.00	92.2 AV			2.39 H	263	42.9	49.3
3	#14010.00	60.4 PK	88.2	-27.8	1.89 H	144	35.6	24.8
4	#14010.00	46.9 AV	68.2	-21.3	1.89 H	144	22.1	24.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	103.8 PK			2.38 V	180	54.5	49.3
2	*7005.00	91.1 AV			2.38 V	180	41.8	49.3
3	#14010.00	60.5 PK	88.2	-27.7	2.29 V	178	35.7	24.8
4	#14010.00	46.8 AV	68.2	-21.4	2.29 V	178	22.0	24.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	105.9 PK			2.34 H	258	56.2	49.7
2	*7085.00	92.4 AV			2.34 H	258	42.7	49.7
3	#7125.00	57.7 PK	88.2	-30.5	2.34 H	258	39.9	17.8
4	#7125.00	44.3 AV	68.2	-23.9	2.34 H	258	26.5	17.8
5	#14170.00	60.6 PK	88.2	-27.6	1.96 H	139	35.6	25.0
6	#14170.00	46.8 AV	68.2	-21.4	1.96 H	139	21.8	25.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	104.5 PK			2.50 V	188	54.8	49.7
2	*7085.00	91.7 AV			2.50 V	188	42.0	49.7
3	#7125.00	57.4 PK	88.2	-30.8	2.50 V	188	39.6	17.8
4	#7125.00	44.0 AV	68.2	-24.2	2.50 V	188	26.2	17.8
5	#14170.00	60.5 PK	88.2	-27.7	2.32 V	172	35.5	25.0
6	#14170.00	46.7 AV	68.2	-21.5	2.32 V	172	21.7	25.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	105.8 PK			2.33 H	260	56.8	49.0
2	*6945.00	92.5 AV			2.33 H	260	43.5	49.0
3	#13890.00	60.7 PK	88.2	-27.5	1.99 H	152	36.3	24.4
4	#13890.00	46.9 AV	68.2	-21.3	1.99 H	152	22.5	24.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	104.5 PK			2.42 V	182	55.5	49.0
2	*6945.00	91.3 AV			2.42 V	182	42.3	49.0
3	#13890.00	60.5 PK	88.2	-27.7	2.25 V	185	36.1	24.4
4	#13890.00	46.7 AV	68.2	-21.5	2.25 V	185	22.3	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	105.8 PK			2.38 H	259	56.5	49.3
2	*7025.00	92.6 AV			2.38 H	259	43.3	49.3
3	#7125.00	57.2 PK	88.2	-31.0	2.38 H	259	39.4	17.8
4	#7125.00	44.3 AV	68.2	-23.9	2.38 H	259	26.5	17.8
5	#14050.00	60.5 PK	88.2	-27.7	1.99 H	152	35.6	24.9
6	#14050.00	46.7 AV	68.2	-21.5	1.99 H	152	21.8	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	104.2 PK			2.41 V	190	54.9	49.3
2	*7025.00	91.5 AV			2.41 V	190	42.2	49.3
3	#7125.00	57.0 PK	88.2	-31.2	2.41 V	190	39.2	17.8
4	#7125.00	44.1 AV	68.2	-24.1	2.41 V	190	26.3	17.8
5	#14050.00	60.3 PK	88.2	-27.9	2.39 V	188	35.4	24.9
6	#14050.00	46.6 AV	68.2	-21.6	2.39 V	188	21.7	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.8 PK			2.34 H	258	56.5	49.3
2	*6985.00	92.3 AV			2.34 H	258	43.0	49.3
3	#7125.00	63.9 PK	88.2	-24.3	2.34 H	258	46.1	17.8
4	#7125.00	49.0 AV	68.2	-19.2	2.34 H	258	31.2	17.8
5	#13970.00	60.5 PK	88.2	-27.7	1.95 H	144	35.8	24.7
6	#13970.00	46.9 AV	68.2	-21.3	1.95 H	144	22.2	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.1 PK			2.49 V	173	55.8	49.3
2	*6985.00	91.3 AV			2.49 V	173	42.0	49.3
3	#7125.00	73.9 PK	88.2	-14.3	2.49 V	173	56.1	17.8
4	#7125.00	60.3 AV	68.2	-7.9	2.49 V	173	42.5	17.8
5	#13970.00	60.3 PK	88.2	-27.9	2.38 V	177	35.6	24.7
6	#13970.00	46.7 AV	68.2	-21.5	2.38 V	177	22.0	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

NSS2

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.8 PK	88.2	-35.4	3.11 H	109	38.7	14.1
2	#5925.00	39.7 AV	68.2	-28.5	3.11 H	109	25.6	14.1
3	*5955.00	105.6 PK			3.11 H	109	60.5	45.1
4	*5955.00	92.6 AV			3.11 H	109	47.5	45.1
5	11910.00	60.2 PK	74.0	-13.8	1.99 H	141	39.4	20.8
6	11910.00	46.8 AV	54.0	-7.2	1.99 H	141	26.0	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.4 PK	88.2	-35.8	2.15 V	106	38.3	14.1
2	#5925.00	39.3 AV	68.2	-28.9	2.15 V	106	25.2	14.1
3	*5955.00	104.3 PK			2.15 V	106	59.2	45.1
4	*5955.00	91.6 AV			2.15 V	106	46.5	45.1
5	11910.00	59.8 PK	74.0	-14.2	2.33 V	119	39.0	20.8
6	11910.00	46.4 AV	54.0	-7.6	2.33 V	119	25.6	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	105.7 PK			3.15 H	112	60.4	45.3
2	*6175.00	92.5 AV			3.15 H	112	47.2	45.3
3	12350.00	60.3 PK	74.0	-13.7	1.95 H	144	39.4	20.9
4	12350.00	46.7 AV	54.0	-7.3	1.95 H	144	25.8	20.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	104.4 PK			2.16 V	109	59.1	45.3
2	*6175.00	91.5 AV			2.16 V	109	46.2	45.3
3	12350.00	59.7 PK	74.0	-14.3	2.36 V	112	38.8	20.9
4	12350.00	46.3 AV	54.0	-7.7	2.36 V	112	25.4	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	105.7 PK			3.10 H	108	58.9	46.8
2	*6415.00	92.6 AV			3.10 H	108	45.8	46.8
3	#12830.00	60.1 PK	88.2	-28.1	1.96 H	144	38.3	21.8
4	#12830.00	46.7 AV	68.2	-21.5	1.96 H	144	24.9	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	104.3 PK			2.11 V	106	57.5	46.8
2	*6415.00	91.5 AV			2.11 V	106	44.7	46.8
3	#12830.00	59.8 PK	88.2	-28.4	2.40 V	118	38.0	21.8
4	#12830.00	46.2 AV	68.2	-22.0	2.40 V	118	24.4	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.9 PK	88.2	-31.3	3.09 H	110	42.8	14.1
2	#5925.00	43.4 AV	68.2	-24.8	3.09 H	110	29.3	14.1
3	*5965.00	105.7 PK			3.09 H	110	60.7	45.0
4	*5965.00	92.7 AV			3.09 H	110	47.7	45.0
5	11930.00	60.3 PK	74.0	-13.7	1.95 H	147	39.5	20.8
6	11930.00	46.7 AV	54.0	-7.3	1.95 H	147	25.9	20.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.9 PK	88.2	-32.3	2.17 V	108	41.8	14.1
2	#5925.00	43.0 AV	68.2	-25.2	2.17 V	108	28.9	14.1
3	*5965.00	104.4 PK			2.17 V	108	59.4	45.0
4	*5965.00	91.6 AV			2.17 V	108	46.6	45.0
5	11930.00	59.7 PK	74.0	-14.3	2.39 V	120	38.9	20.8
6	11930.00	46.2 AV	54.0	-7.8	2.39 V	120	25.4	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	105.7 PK			3.09 H	110	60.4	45.3
2	*6165.00	92.6 AV			3.09 H	110	47.3	45.3
3	12330.00	60.4 PK	74.0	-13.6	1.95 H	144	39.5	20.9
4	12330.00	46.9 AV	54.0	-7.1	1.95 H	144	26.0	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	104.2 PK			2.19 V	109	58.9	45.3
2	*6165.00	91.5 AV			2.19 V	109	46.2	45.3
3	12330.00	59.6 PK	74.0	-14.4	2.18 V	130	38.7	20.9
4	12330.00	46.2 AV	54.0	-7.8	2.18 V	130	25.3	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	105.8 PK			3.13 H	112	59.1	46.7
2	*6405.00	92.8 AV			3.13 H	112	46.1	46.7
3	#12810.00	60.4 PK	88.2	-27.8	1.96 H	139	38.7	21.7
4	#12810.00	46.9 AV	68.2	-21.3	1.96 H	139	25.2	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	104.2 PK			2.21 V	110	57.5	46.7
2	*6405.00	91.7 AV			2.21 V	110	45.0	46.7
3	#12810.00	59.7 PK	88.2	-28.5	2.39 V	117	38.0	21.7
4	#12810.00	46.2 AV	68.2	-22.0	2.39 V	117	24.5	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.3 PK	88.2	-14.9	2.44 H	262	59.2	14.1
2	#5925.00	53.6 AV	68.2	-14.6	2.44 H	262	39.5	14.1
3	*5985.00	108.9 PK			2.44 H	262	63.9	45.0
4	*5985.00	96.7 AV			2.44 H	262	51.7	45.0
5	11970.00	60.5 PK	74.0	-13.5	2.25 H	152	39.7	20.8
6	11970.00	46.8 AV	54.0	-7.2	2.25 H	152	26.0	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.9 PK	88.2	-15.3	2.30 V	107	58.8	14.1
2	#5925.00	53.3 AV	68.2	-14.9	2.30 V	107	39.2	14.1
3	*5985.00	106.4 PK			2.30 V	107	61.4	45.0
4	*5985.00	93.9 AV			2.30 V	107	48.9	45.0
5	11970.00	60.3 PK	74.0	-13.7	2.21 V	115	39.5	20.8
6	11970.00	46.6 AV	54.0	-7.4	2.21 V	115	25.8	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	109.1 PK			2.40 H	260	63.8	45.3
2	*6145.00	96.5 AV			2.40 H	260	51.2	45.3
3	12290.00	60.4 PK	74.0	-13.6	2.28 H	155	39.5	20.9
4	12290.00	46.6 AV	54.0	-7.4	2.28 H	155	25.7	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	106.8 PK			2.32 V	111	61.5	45.3
2	*6145.00	94.8 AV			2.32 V	111	49.5	45.3
3	12290.00	60.1 PK	74.0	-13.9	2.28 V	119	39.2	20.9
4	12290.00	46.4 AV	54.0	-7.6	2.28 V	119	25.5	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	108.7 PK			2.37 H	257	62.0	46.7
2	*6385.00	96.5 AV			2.37 H	257	49.8	46.7
3	#12770.00	60.3 PK	88.2	-27.9	2.32 H	161	38.6	21.7
4	#12770.00	46.6 AV	68.2	-21.6	2.32 H	161	24.9	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	106.8 PK			2.29 V	108	60.1	46.7
2	*6385.00	94.8 AV			2.29 V	108	48.1	46.7
3	#12770.00	60.1 PK	88.2	-28.1	2.28 V	118	38.4	21.7
4	#12770.00	46.3 AV	68.2	-21.9	2.28 V	118	24.6	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.3 PK	88.2	-17.9	2.48 H	261	56.2	14.1
2	#5925.00	54.3 AV	68.2	-13.9	2.48 H	261	40.2	14.1
3	*6025.00	106.3 PK			2.48 H	261	61.2	45.1
4	*6025.00	94.8 AV			2.48 H	261	49.7	45.1
5	12050.00	60.5 PK	74.0	-13.5	2.35 H	146	39.6	20.9
6	12050.00	46.8 AV	54.0	-7.2	2.35 H	146	25.9	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.3 PK	88.2	-20.9	2.56 V	117	53.2	14.1
2	#5925.00	52.6 AV	68.2	-15.6	2.56 V	117	38.5	14.1
3	*6025.00	103.4 PK			2.56 V	117	58.3	45.1
4	*6025.00	91.2 AV			2.56 V	117	46.1	45.1
5	12050.00	60.2 PK	74.0	-13.8	2.28 V	117	39.3	20.9
6	12050.00	46.6 AV	54.0	-7.4	2.28 V	117	25.7	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	106.0 PK			2.46 H	261	60.7	45.3
2	*6185.00	93.1 AV			2.46 H	261	47.8	45.3
3	12370.00	60.4 PK	74.0	-13.6	2.31 H	148	39.5	20.9
4	12370.00	46.7 AV	54.0	-7.3	2.31 H	148	25.8	20.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	103.5 PK			2.35 V	115	58.2	45.3
2	*6185.00	90.8 AV			2.35 V	115	45.5	45.3
3	12370.00	60.1 PK	74.0	-13.9	2.28 V	118	39.2	20.9
4	12370.00	46.4 AV	54.0	-7.6	2.28 V	118	25.5	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.6 PK			2.46 H	258	60.1	46.5
2	*6345.00	94.3 AV			2.46 H	258	47.8	46.5
3	12690.00	60.4 PK	74.0	-13.6	2.31 H	144	38.4	22.0
4	12690.00	46.5 AV	54.0	-7.5	2.31 H	144	24.5	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.5 PK			2.35 V	111	58.0	46.5
2	*6345.00	91.7 AV			2.35 V	111	45.2	46.5
3	12690.00	60.1 PK	74.0	-13.9	2.23 V	105	38.1	22.0
4	12690.00	46.2 AV	54.0	-7.8	2.23 V	105	24.2	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	105.7 PK			3.16 H	110	58.8	46.9
2	*6435.00	92.5 AV			3.16 H	110	45.6	46.9
3	#12870.00	60.3 PK	88.2	-27.9	1.97 H	142	38.1	22.2
4	#12870.00	46.8 AV	68.2	-21.4	1.97 H	142	24.6	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.2 PK			2.11 V	103	57.3	46.9
2	*6435.00	91.5 AV			2.11 V	103	44.6	46.9
3	#12870.00	59.7 PK	88.2	-28.5	2.39 V	115	37.5	22.2
4	#12870.00	46.3 AV	68.2	-21.9	2.39 V	115	24.1	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	105.7 PK			3.09 H	108	58.5	47.2
2	*6475.00	92.8 AV			3.09 H	108	45.6	47.2
3	#12950.00	60.3 PK	88.2	-27.9	1.93 H	138	38.0	22.3
4	#12950.00	46.9 AV	68.2	-21.3	1.93 H	138	24.6	22.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	104.5 PK			2.19 V	108	57.3	47.2
2	*6475.00	91.3 AV			2.19 V	108	44.1	47.2
3	#12950.00	59.7 PK	88.2	-28.5	2.40 V	123	37.4	22.3
4	#12950.00	46.2 AV	68.2	-22.0	2.40 V	123	23.9	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	105.7 PK			3.09 H	110	58.2	47.5
2	*6515.00	92.7 AV			3.09 H	110	45.2	47.5
3	#13030.00	60.5 PK	88.2	-27.7	1.97 H	145	38.1	22.4
4	#13030.00	46.9 AV	68.2	-21.3	1.97 H	145	24.5	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.4 PK			2.16 V	112	56.9	47.5
2	*6515.00	91.8 AV			2.16 V	112	44.3	47.5
3	#13030.00	59.7 PK	88.2	-28.5	2.36 V	111	37.3	22.4
4	#13030.00	46.2 AV	68.2	-22.0	2.36 V	111	23.8	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	105.6 PK			3.16 H	113	58.6	47.0
2	*6445.00	92.7 AV			3.16 H	113	45.7	47.0
3	#12890.00	60.4 PK	88.2	-27.8	1.98 H	147	38.0	22.4
4	#12890.00	46.9 AV	68.2	-21.3	1.98 H	147	24.5	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	104.6 PK			2.14 V	103	57.6	47.0
2	*6445.00	91.5 AV			2.14 V	103	44.5	47.0
3	#12890.00	59.7 PK	88.2	-28.5	2.36 V	111	37.3	22.4
4	#12890.00	46.2 AV	68.2	-22.0	2.36 V	111	23.8	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	105.9 PK			3.13 H	114	58.6	47.3
2	*6485.00	92.8 AV			3.13 H	114	45.5	47.3
3	#12970.00	60.5 PK	88.2	-27.7	1.92 H	139	38.1	22.4
4	#12970.00	46.6 AV	68.2	-21.6	1.92 H	139	24.2	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	104.4 PK			2.14 V	108	57.1	47.3
2	*6485.00	91.7 AV			2.14 V	108	44.4	47.3
3	#12970.00	59.6 PK	88.2	-28.6	2.45 V	119	37.2	22.4
4	#12970.00	46.8 AV	68.2	-21.4	2.45 V	119	24.4	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	105.8 PK			3.19 H	115	58.2	47.6
2	*6525.00	92.6 AV			3.19 H	115	45.0	47.6
3	#13050.00	60.4 PK	88.2	-27.8	1.99 H	146	37.8	22.6
4	#13050.00	46.9 AV	68.2	-21.3	1.99 H	146	24.3	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	104.5 PK			2.17 V	109	56.9	47.6
2	*6525.00	91.7 AV			2.17 V	109	44.1	47.6
3	#13050.00	59.9 PK	88.2	-28.3	2.28 V	136	37.3	22.6
4	#13050.00	46.6 AV	68.2	-21.6	2.28 V	136	24.0	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.5 PK			2.44 H	261	63.3	47.2
2	*6465.00	97.8 AV			2.44 H	261	50.6	47.2
3	#12930.00	60.5 PK	88.2	-27.7	2.32 H	155	38.1	22.4
4	#12930.00	46.7 AV	68.2	-21.5	2.32 H	155	24.3	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.7 PK			2.26 V	109	61.5	47.2
2	*6465.00	95.7 AV			2.26 V	109	48.5	47.2
3	#12930.00	60.2 PK	88.2	-28.0	2.28 V	118	37.8	22.4
4	#12930.00	46.5 AV	68.2	-21.7	2.28 V	118	24.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.9 PK			2.44 H	261	60.4	47.5
2	*6505.00	95.7 AV			2.44 H	261	48.2	47.5
3	#13010.00	60.3 PK	88.2	-27.9	2.29 H	151	37.9	22.4
4	#13010.00	46.5 AV	68.2	-21.7	2.29 H	151	24.1	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.5 PK			2.35 V	118	58.0	47.5
2	*6505.00	93.5 AV			2.35 V	118	46.0	47.5
3	#13010.00	59.9 PK	88.2	-28.3	2.28 V	117	37.5	22.4
4	#13010.00	46.2 AV	68.2	-22.0	2.28 V	117	23.8	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.8 PK			3.13 H	108	58.1	47.7
2	*6535.00	92.8 AV			3.13 H	108	45.1	47.7
3	#13070.00	60.4 PK	88.2	-27.8	1.96 H	145	37.9	22.5
4	#13070.00	46.9 AV	68.2	-21.3	1.96 H	145	24.4	22.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	104.2 PK			2.11 V	104	56.5	47.7
2	*6535.00	91.5 AV			2.11 V	104	43.8	47.7
3	#13070.00	59.6 PK	88.2	-28.6	2.44 V	126	37.1	22.5
4	#13070.00	46.3 AV	68.2	-21.9	2.44 V	126	23.8	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	105.7 PK			3.13 H	109	58.2	47.5
2	*6695.00	92.7 AV			3.13 H	109	45.2	47.5
3	13390.00	60.3 PK	74.0	-13.7	1.93 H	144	36.8	23.5
4	13390.00	46.8 AV	54.0	-7.2	1.93 H	144	23.3	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	104.4 PK			2.19 V	104	56.9	47.5
2	*6695.00	91.4 AV			2.19 V	104	43.9	47.5
3	13390.00	59.6 PK	74.0	-14.4	2.31 V	112	36.1	23.5
4	13390.00	46.2 AV	54.0	-7.8	2.31 V	112	22.7	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.8 PK			3.13 H	106	57.6	48.2
2	*6855.00	92.5 AV			3.13 H	106	44.3	48.2
3	#13710.00	60.3 PK	88.2	-27.9	1.96 H	144	36.5	23.8
4	#13710.00	46.9 AV	68.2	-21.3	1.96 H	144	23.1	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	104.3 PK			2.19 V	107	56.1	48.2
2	*6855.00	91.5 AV			2.19 V	107	43.3	48.2
3	#13710.00	59.9 PK	88.2	-28.3	2.39 V	118	36.1	23.8
4	#13710.00	46.5 AV	68.2	-21.7	2.39 V	118	22.7	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	105.8 PK			3.16 H	108	58.0	47.8
2	*6565.00	92.8 AV			3.16 H	108	45.0	47.8
3	#13130.00	60.5 PK	88.2	-27.7	1.90 H	145	37.8	22.7
4	#13130.00	46.9 AV	68.2	-21.3	1.90 H	145	24.2	22.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	104.5 PK			2.20 V	117	56.7	47.8
2	*6565.00	91.7 AV			2.20 V	117	43.9	47.8
3	#13130.00	59.8 PK	88.2	-28.4	2.44 V	128	37.1	22.7
4	#13130.00	46.2 AV	68.2	-22.0	2.44 V	128	23.5	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	105.9 PK			3.08 H	105	58.4	47.5
2	*6725.00	92.6 AV			3.08 H	105	45.1	47.5
3	#13450.00	60.5 PK	88.2	-27.7	1.90 H	136	37.0	23.5
4	#13450.00	46.8 AV	68.2	-21.4	1.90 H	136	23.3	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	104.4 PK			2.13 V	105	56.9	47.5
2	*6725.00	91.8 AV			2.13 V	105	44.3	47.5
3	#13450.00	59.7 PK	88.2	-28.5	2.31 V	118	36.2	23.5
4	#13450.00	46.2 AV	68.2	-22.0	2.31 V	118	22.7	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	105.9 PK			3.13 H	105	57.7	48.2
2	*6845.00	92.9 AV			3.13 H	105	44.7	48.2
3	#13690.00	60.4 PK	88.2	-27.8	1.99 H	145	36.6	23.8
4	#13690.00	46.9 AV	68.2	-21.3	1.99 H	145	23.1	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	104.5 PK			2.19 V	114	56.3	48.2
2	*6845.00	91.6 AV			2.19 V	114	43.4	48.2
3	#13690.00	59.6 PK	88.2	-28.6	2.39 V	125	35.8	23.8
4	#13690.00	46.1 AV	68.2	-22.1	2.39 V	125	22.3	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.1 PK			2.46 H	253	61.4	47.7
2	*6545.00	96.3 AV			2.46 H	253	48.6	47.7
3	#13090.00	60.3 PK	88.2	-27.9	2.28 H	153	37.7	22.6
4	#13090.00	46.6 AV	68.2	-21.6	2.28 H	153	24.0	22.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.5 PK			2.25 V	105	59.8	47.7
2	*6545.00	94.5 AV			2.25 V	105	46.8	47.7
3	#13090.00	60.1 PK	88.2	-28.1	2.22 V	112	37.5	22.6
4	#13090.00	46.3 AV	68.2	-21.9	2.22 V	112	23.7	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.4 PK			2.42 H	257	61.9	47.5
2	*6705.00	97.0 AV			2.42 H	257	49.5	47.5
3	#13410.00	60.4 PK	88.2	-27.8	2.32 H	151	36.9	23.5
4	#13410.00	46.6 AV	68.2	-21.6	2.32 H	151	23.1	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.6 PK			2.23 V	103	60.1	47.5
2	*6705.00	95.6 AV			2.23 V	103	48.1	47.5
3	#13410.00	60.2 PK	88.2	-28.0	2.26 V	117	36.7	23.5
4	#13410.00	46.4 AV	68.2	-21.8	2.26 V	117	22.9	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	109.2 PK			2.38 H	264	61.0	48.2
2	*6865.00	96.6 AV			2.38 H	264	48.4	48.2
3	#13730.00	60.4 PK	88.2	-27.8	2.25 H	150	36.4	24.0
4	#13730.00	46.5 AV	68.2	-21.7	2.25 H	150	22.5	24.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.4 PK			2.25 V	111	59.2	48.2
2	*6865.00	95.1 AV			2.25 V	111	46.9	48.2
3	#13730.00	60.1 PK	88.2	-28.1	2.28 V	119	36.1	24.0
4	#13730.00	46.3 AV	68.2	-21.9	2.28 V	119	22.3	24.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.8 PK			2.50 H	266	59.1	47.7
2	*6665.00	94.1 AV			2.50 H	266	46.4	47.7
3	13330.00	60.2 PK	74.0	-13.8	2.25 H	145	37.2	23.0
4	13330.00	46.5 AV	54.0	-7.5	2.25 H	145	23.5	23.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.7 PK			2.31 V	122	57.0	47.7
2	*6665.00	92.3 AV			2.31 V	122	44.6	47.7
3	13330.00	60.0 PK	74.0	-14.0	2.29 V	119	37.0	23.0
4	13330.00	46.3 AV	54.0	-7.7	2.29 V	119	23.3	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.4 PK			2.41 H	263	59.2	48.2
2	*6825.00	94.7 AV			2.41 H	263	46.5	48.2
3	#13650.00	60.2 PK	88.2	-28.0	2.38 H	148	36.4	23.8
4	#13650.00	46.5 AV	68.2	-21.7	2.38 H	148	22.7	23.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.2 PK			2.31 V	132	57.0	48.2
2	*6825.00	92.4 AV			2.31 V	132	44.2	48.2
3	#13650.00	59.9 PK	88.2	-28.3	2.22 V	112	36.1	23.8
4	#13650.00	46.3 AV	68.2	-21.9	2.22 V	112	22.5	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	105.8 PK			3.16 H	105	57.5	48.3
2	*6875.00	92.8 AV			3.16 H	105	44.5	48.3
3	#13750.00	60.4 PK	88.2	-27.8	1.93 H	133	36.4	24.0
4	#13750.00	46.7 AV	68.2	-21.5	1.93 H	133	22.7	24.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.5 PK			2.19 V	103	56.2	48.3
2	*6875.00	91.5 AV			2.19 V	103	43.2	48.3
3	#13750.00	59.9 PK	88.2	-28.3	2.25 V	120	35.9	24.0
4	#13750.00	46.5 AV	68.2	-21.7	2.25 V	120	22.5	24.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	105.7 PK			3.09 H	110	56.4	49.3
2	*6995.00	92.6 AV			3.09 H	110	43.3	49.3
3	#13990.00	60.4 PK	88.2	-27.8	1.90 H	147	35.6	24.8
4	#13990.00	46.9 AV	68.2	-21.3	1.90 H	147	22.1	24.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.2 PK			2.19 V	108	54.9	49.3
2	*6995.00	91.5 AV			2.19 V	108	42.2	49.3
3	#13990.00	59.6 PK	88.2	-28.6	2.40 V	125	34.8	24.8
4	#13990.00	46.3 AV	68.2	-21.9	2.40 V	125	21.5	24.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	96.8 PK			3.11 H	109	46.8	50.0
2	*7115.00	83.3 AV			3.11 H	109	33.3	50.0
3	#7125.00	74.8 PK	88.2	-13.4	3.11 H	109	57.0	17.8
4	#7125.00	68.1 AV	68.2	-0.1	3.11 H	109	50.3	17.8
5	#14230.00	60.4 PK	88.2	-27.8	1.90 H	147	35.2	25.2
6	#14230.00	46.6 AV	68.2	-21.6	1.90 H	147	21.4	25.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.7 PK			2.16 V	107	45.7	50.0
2	*7115.00	82.3 AV			2.16 V	107	32.3	50.0
3	#7125.00	71.5 PK	88.2	-16.7	2.16 V	107	53.7	17.8
4	#7125.00	64.9 AV	68.2	-3.3	2.16 V	107	47.1	17.8
5	#14230.00	60.0 PK	88.2	-28.2	2.36 V	111	34.8	25.2
6	#14230.00	46.2 AV	68.2	-22.0	2.36 V	111	21.0	25.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	105.8 PK			3.17 H	114	57.6	48.2
2	*6885.00	92.8 AV			3.17 H	114	44.6	48.2
3	#13770.00	60.5 PK	88.2	-27.7	1.93 H	147	36.4	24.1
4	#13770.00	46.7 AV	68.2	-21.5	1.93 H	147	22.6	24.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	104.4 PK			2.13 V	101	56.2	48.2
2	*6885.00	91.7 AV			2.13 V	101	43.5	48.2
3	#13770.00	59.5 PK	88.2	-28.7	2.49 V	125	35.4	24.1
4	#13770.00	46.1 AV	68.2	-22.1	2.49 V	125	22.0	24.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	105.4 PK			3.16 H	115	56.1	49.3
2	*7005.00	92.3 AV			3.16 H	115	43.0	49.3
3	#14010.00	60.5 PK	88.2	-27.7	1.96 H	143	35.7	24.8
4	#14010.00	46.8 AV	68.2	-21.4	1.96 H	143	22.0	24.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	104.5 PK			2.16 V	110	55.2	49.3
2	*7005.00	91.8 AV			2.16 V	110	42.5	49.3
3	#14010.00	59.7 PK	88.2	-28.5	2.31 V	120	34.9	24.8
4	#14010.00	46.2 AV	68.2	-22.0	2.31 V	120	21.4	24.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	105.8 PK			3.19 H	115	56.1	49.7
2	*7085.00	92.7 AV			3.19 H	115	43.0	49.7
3	#7125.00	61.0 PK	88.2	-27.2	3.19 H	115	43.2	17.8
4	#7125.00	46.8 AV	68.2	-21.4	3.19 H	115	29.0	17.8
5	#14170.00	60.4 PK	88.2	-27.8	1.96 H	144	35.4	25.0
6	#14170.00	46.8 AV	68.2	-21.4	1.96 H	144	21.8	25.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	104.4 PK			2.19 V	118	54.7	49.7
2	*7085.00	91.5 AV			2.19 V	118	41.8	49.7
3	#7125.00	59.7 PK	88.2	-28.5	2.19 V	118	41.9	17.8
4	#7125.00	45.2 AV	68.2	-23.0	2.19 V	118	27.4	17.8
5	#14170.00	59.6 PK	88.2	-28.6	2.39 V	117	34.6	25.0
6	#14170.00	46.2 AV	68.2	-22.0	2.39 V	117	21.2	25.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.0 PK			2.37 H	259	60.0	49.0
2	*6945.00	96.7 AV			2.37 H	259	47.7	49.0
3	#13890.00	60.2 PK	88.2	-28.0	2.23 H	153	35.8	24.4
4	#13890.00	46.5 AV	68.2	-21.7	2.23 H	153	22.1	24.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.2 PK			2.27 V	105	58.2	49.0
2	*6945.00	95.1 AV			2.27 V	105	46.1	49.0
3	#13890.00	59.9 PK	88.2	-28.3	2.22 V	118	35.5	24.4
4	#13890.00	46.3 AV	68.2	-21.9	2.22 V	118	21.9	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	109.0 PK			2.43 H	262	59.7	49.3
2	*7025.00	97.0 AV			2.43 H	262	47.7	49.3
3	#7125.00	60.5 PK	88.2	-27.7	2.43 H	262	42.7	17.8
4	#7125.00	46.1 AV	68.2	-22.1	2.43 H	262	28.3	17.8
5	#14050.00	60.3 PK	88.2	-27.9	2.31 H	148	35.4	24.9
6	#14050.00	46.4 AV	68.2	-21.8	2.31 H	148	21.5	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	107.8 PK			2.51 V	170	58.5	49.3
2	*7025.00	95.8 AV			2.51 V	170	46.5	49.3
3	#7125.00	60.3 PK	88.2	-27.9	2.51 V	170	42.5	17.8
4	#7125.00	45.9 AV	68.2	-22.3	2.51 V	170	28.1	17.8
5	#14050.00	60.1 PK	88.2	-28.1	2.25 V	117	35.2	24.9
6	#14050.00	46.3 AV	68.2	-21.9	2.25 V	117	21.4	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.8 PK			2.57 H	266	58.5	49.3
2	*6985.00	95.1 AV			2.57 H	266	45.8	49.3
3	#7125.00	69.8 PK	88.2	-18.4	2.57 H	266	52.0	17.8
4	#7125.00	53.6 AV	68.2	-14.6	2.57 H	266	35.8	17.8
5	#13970.00	60.2 PK	88.2	-28.0	2.25 H	152	35.5	24.7
6	#13970.00	46.5 AV	68.2	-21.7	2.25 H	152	21.8	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.9 PK			2.50 V	170	55.6	49.3
2	*6985.00	93.5 AV			2.50 V	170	44.2	49.3
3	#7125.00	64.8 PK	88.2	-23.4	2.50 V	170	47.0	17.8
4	#7125.00	49.7 AV	68.2	-18.5	2.50 V	170	31.9	17.8
5	#13970.00	60.0 PK	88.2	-28.2	2.30 V	117	35.3	24.7
6	#13970.00	46.3 AV	68.2	-21.9	2.30 V	117	21.6	24.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


NSS1

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

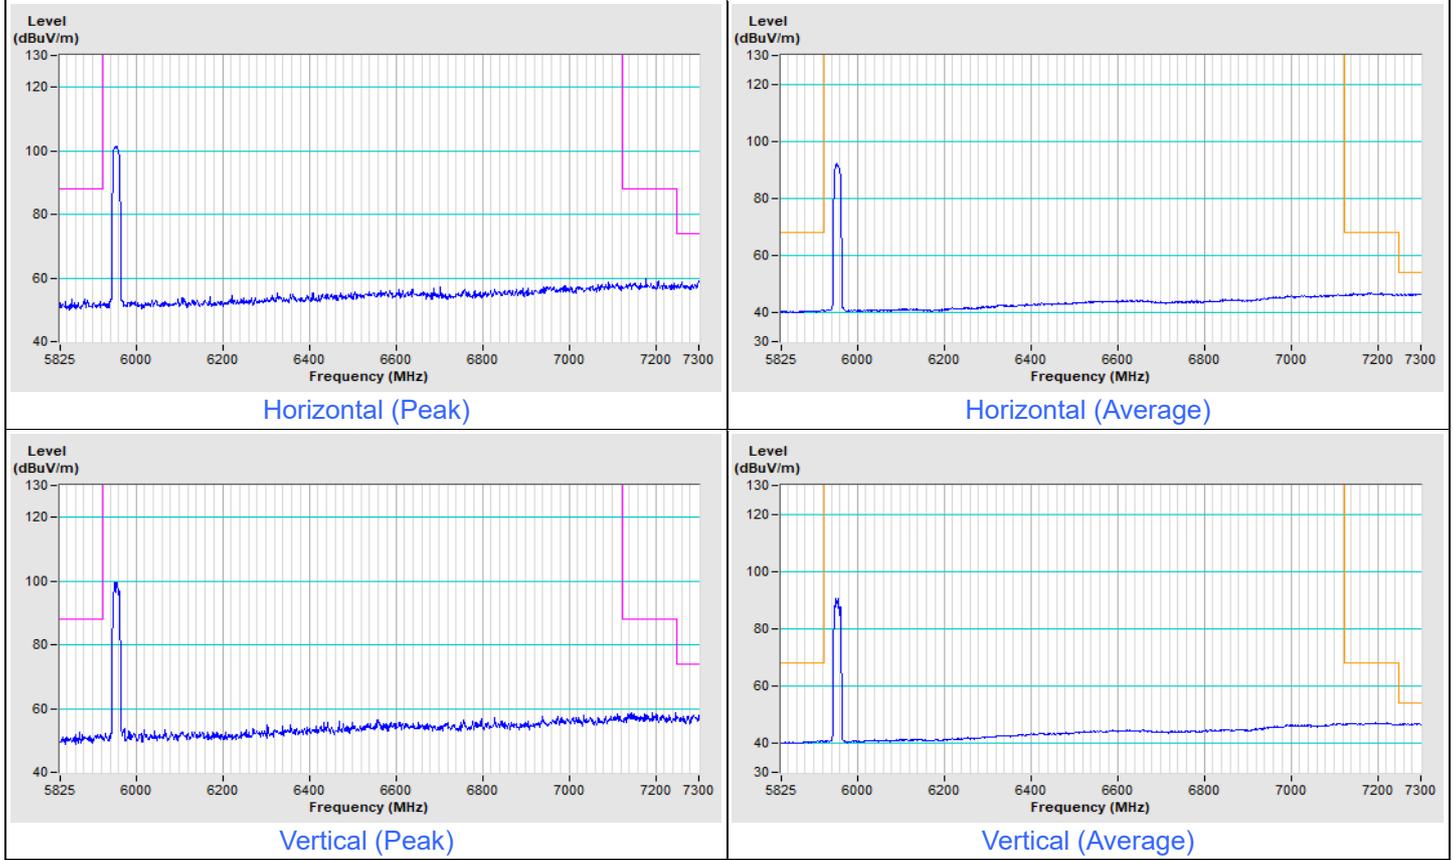


802.11a Channel 233

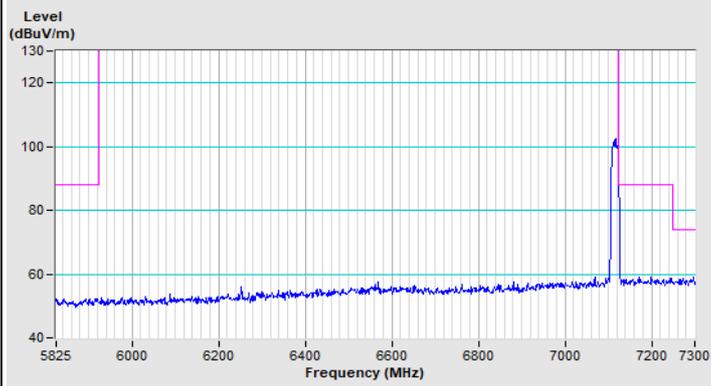


Horizontal (Peak)

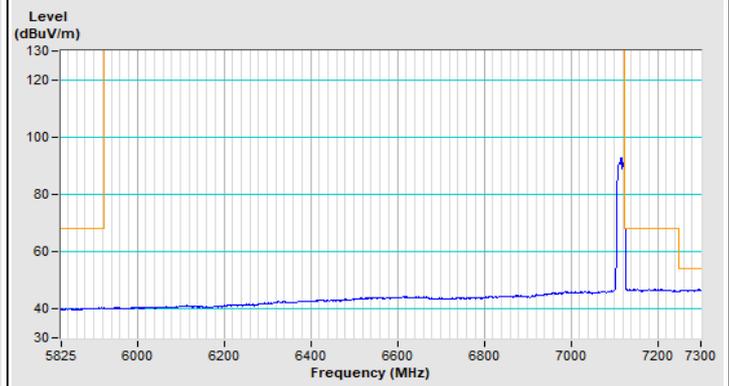

Horizontal (Average)

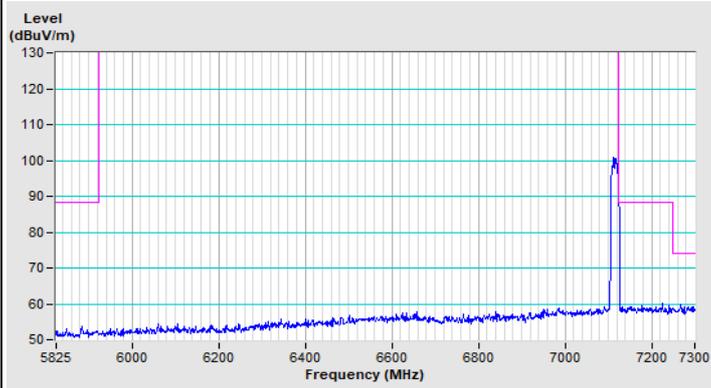


Vertical (Peak)

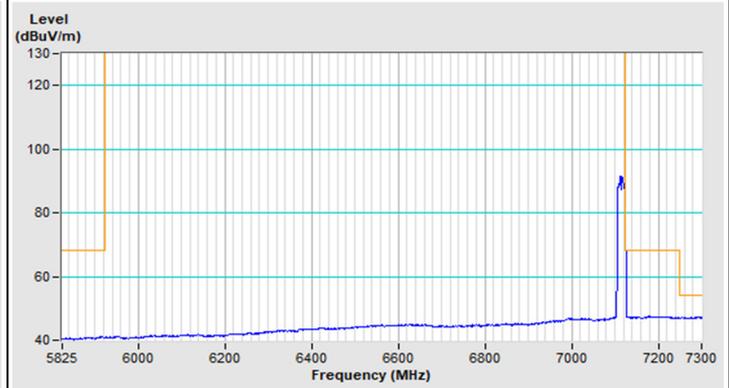

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 1

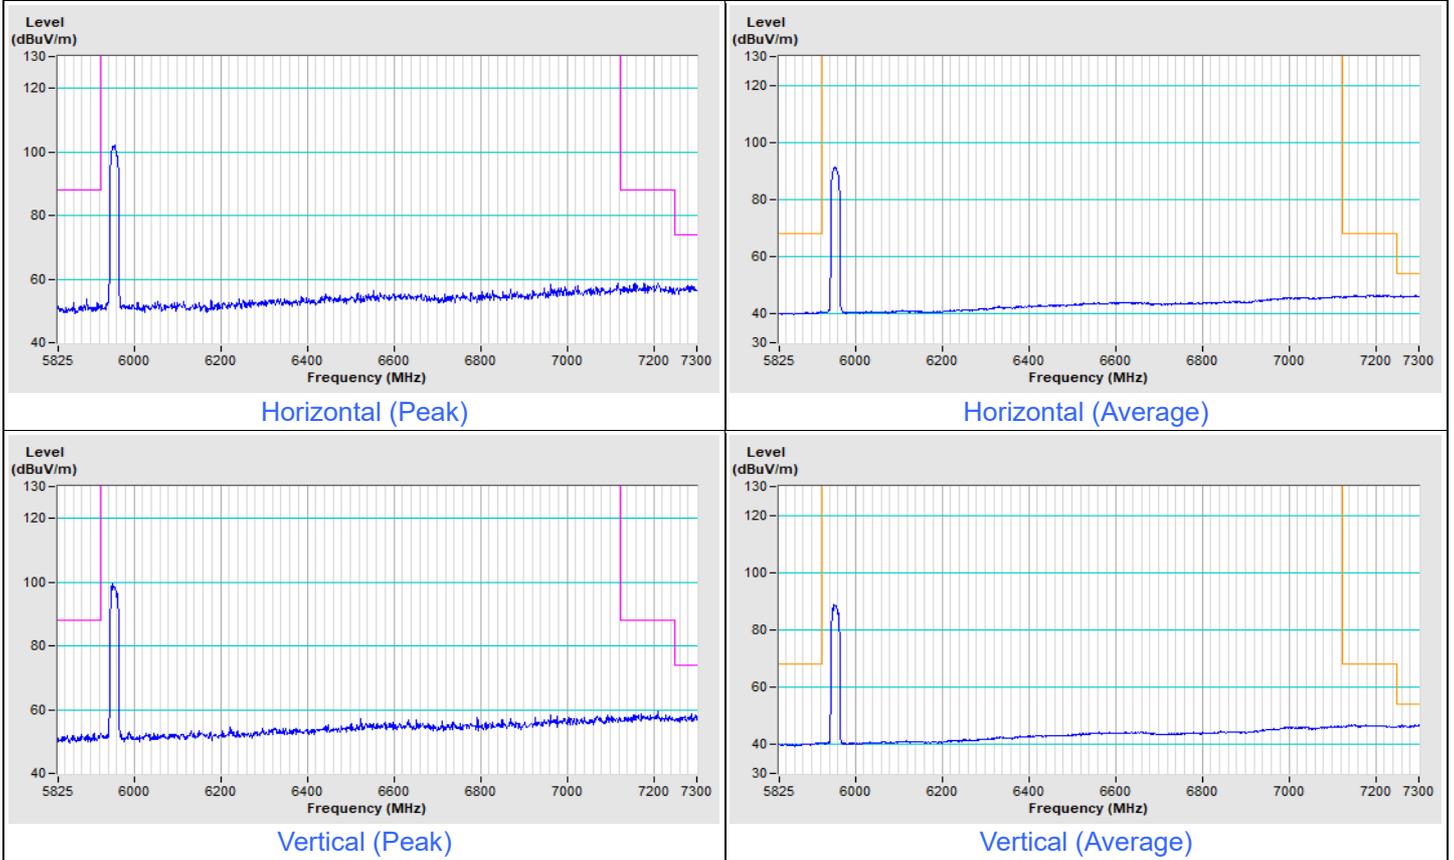





802.11be (EHT20) Channel 233

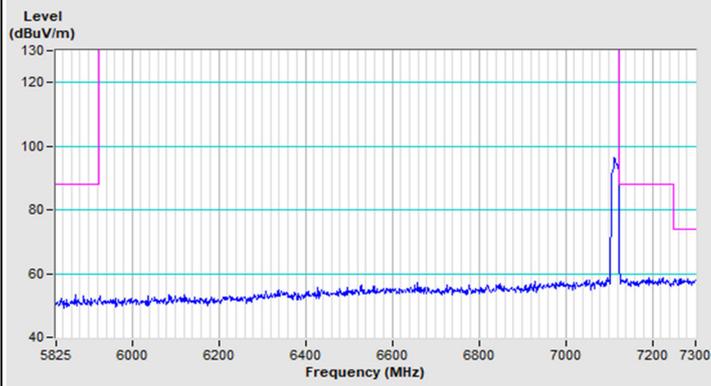


Horizontal (Peak)

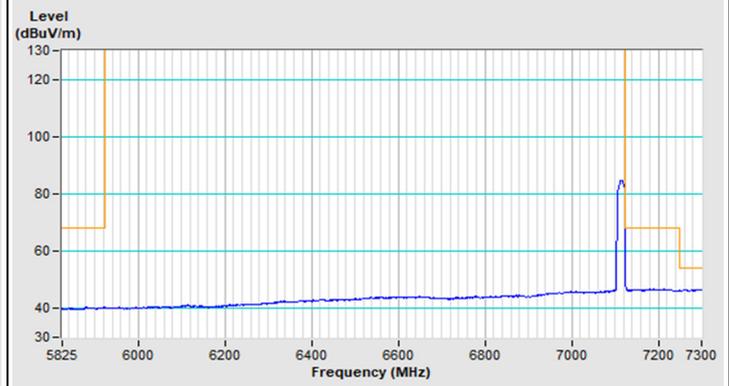

Horizontal (Average)

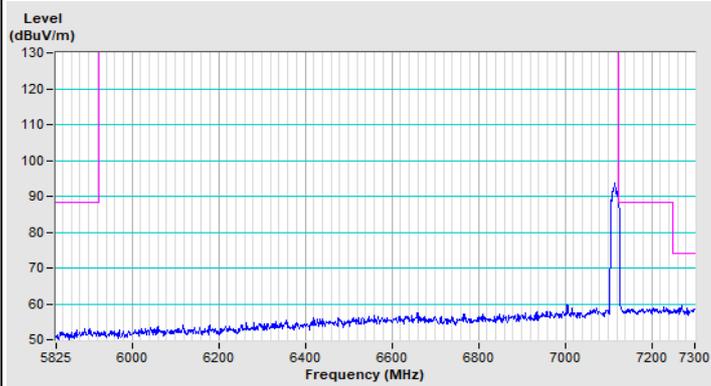


Vertical (Peak)

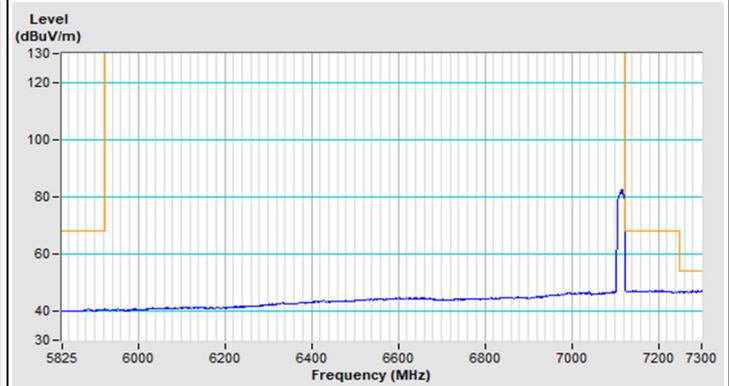


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

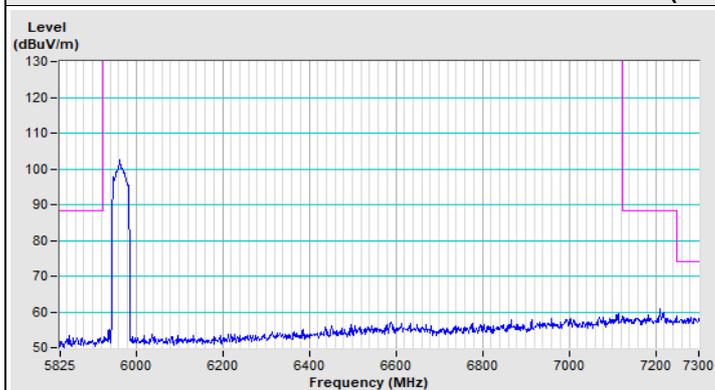


Horizontal (Peak)

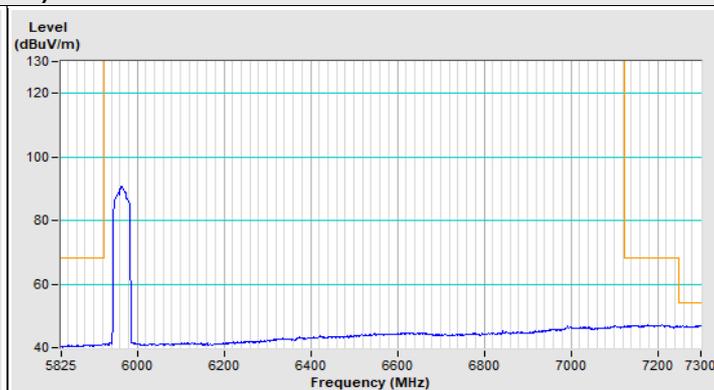

Horizontal (Average)




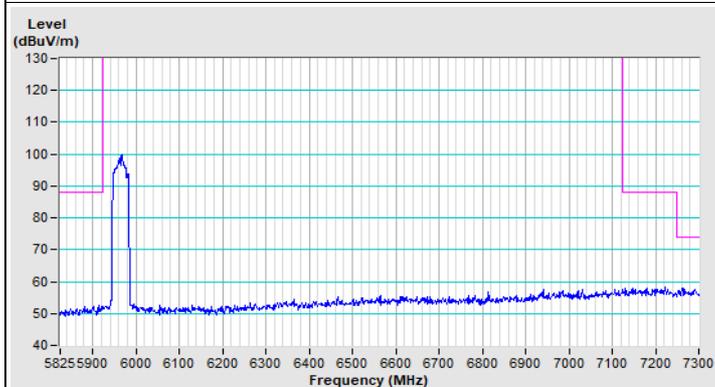


Vertical (Peak)

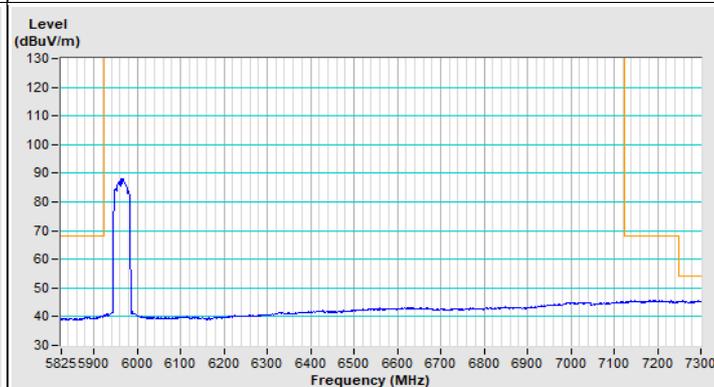


Vertical (Average)

802.11be (EHT40) Channel 227

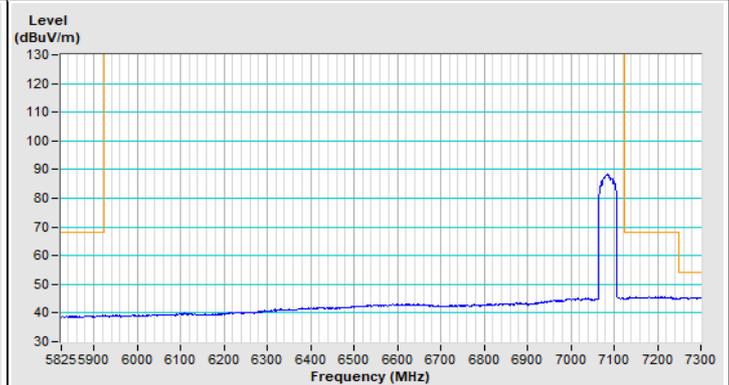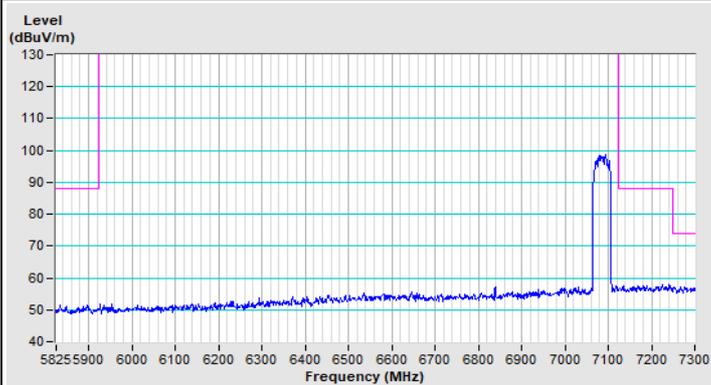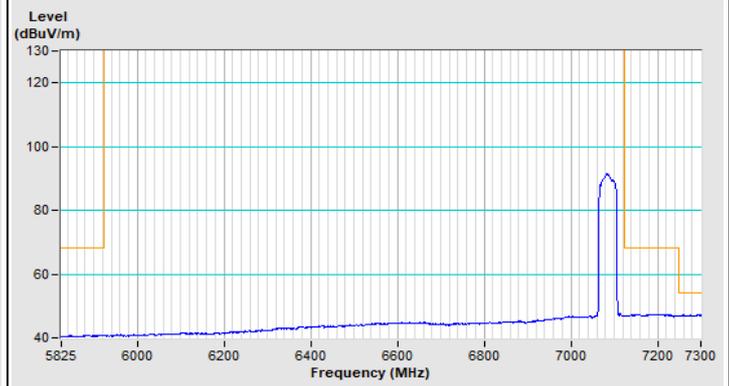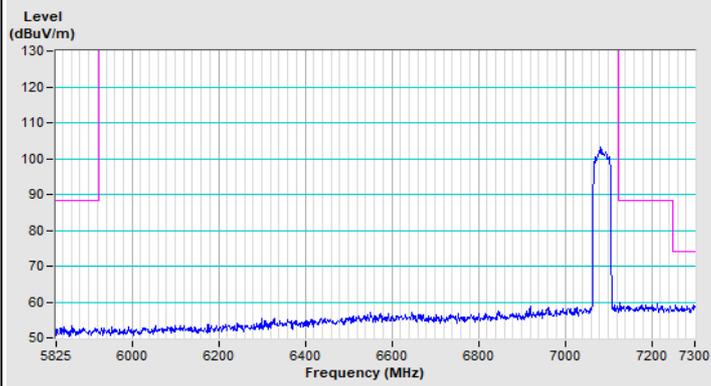


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

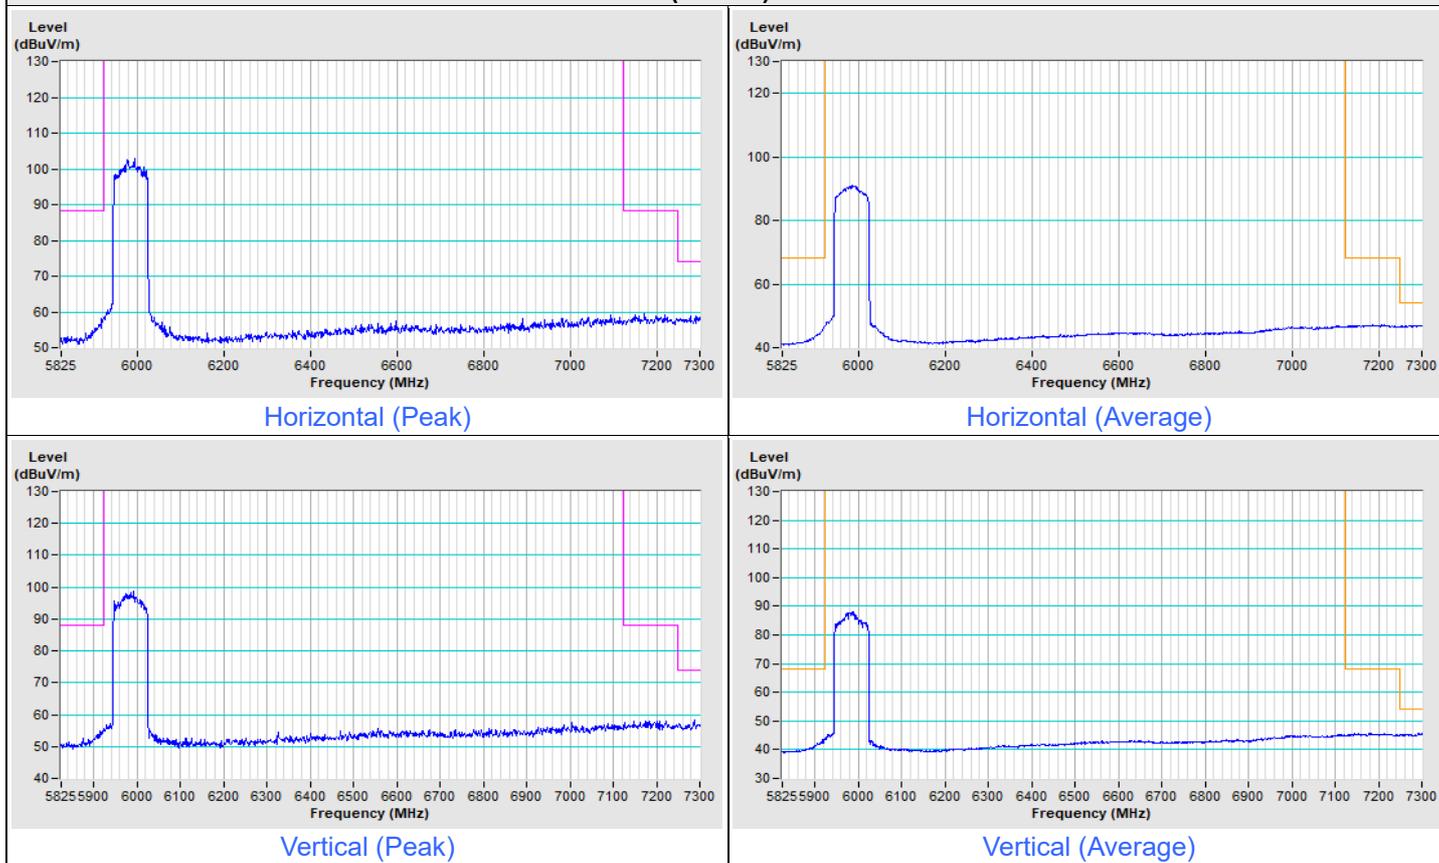


802.11be (EHT80) Channel 215

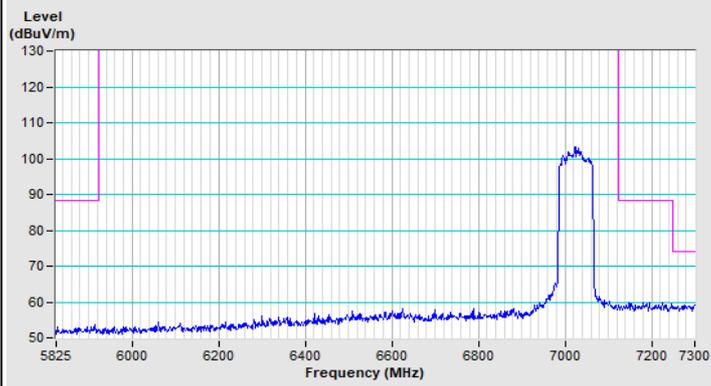


Horizontal (Peak)

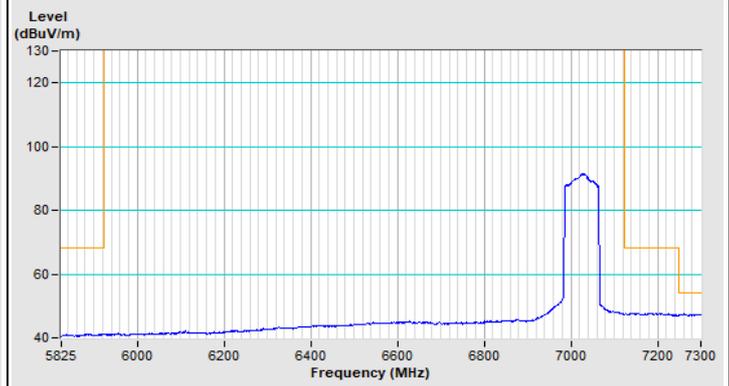

Horizontal (Average)

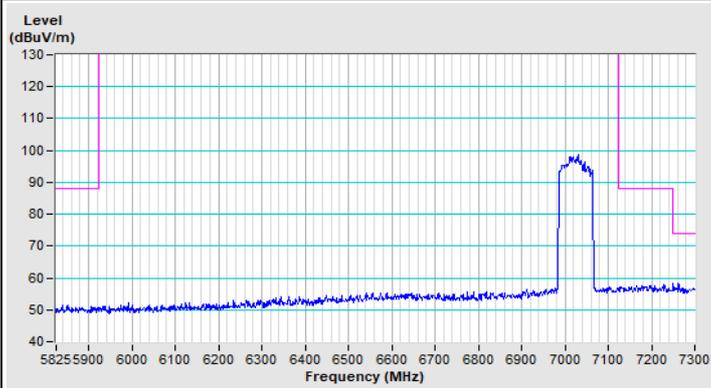


Vertical (Peak)

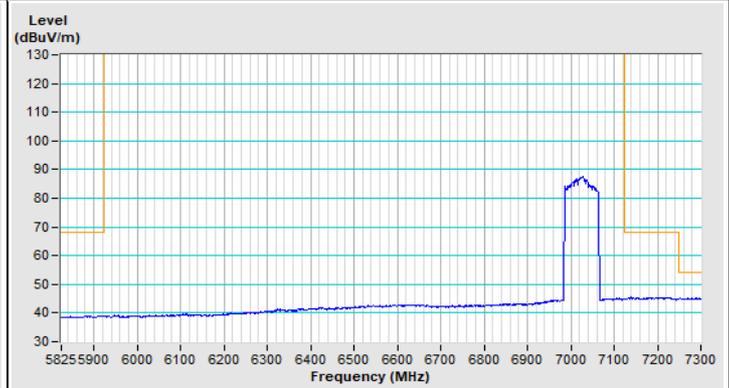


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

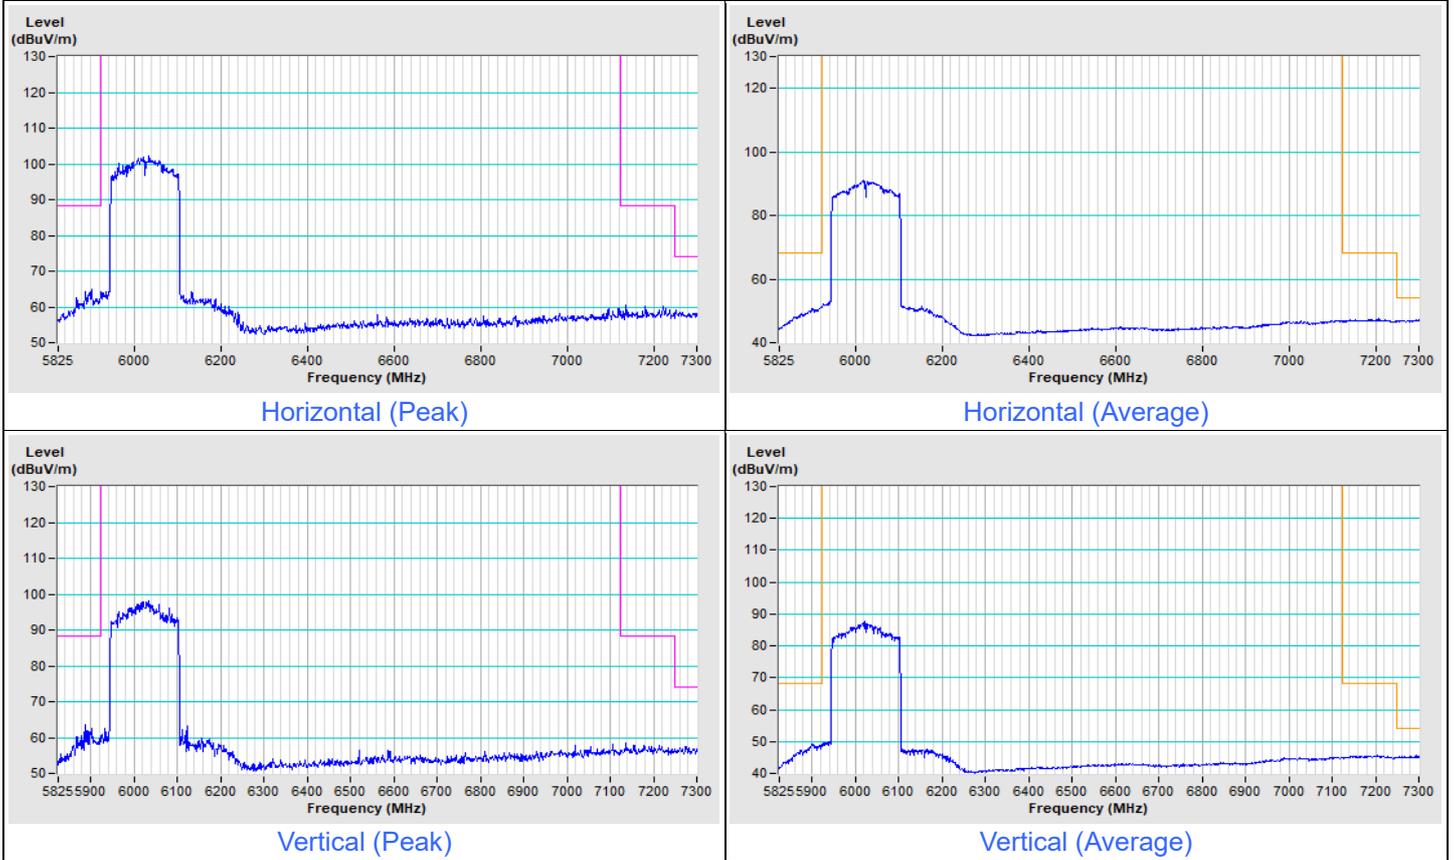


802.11be (EHT160) Channel 207

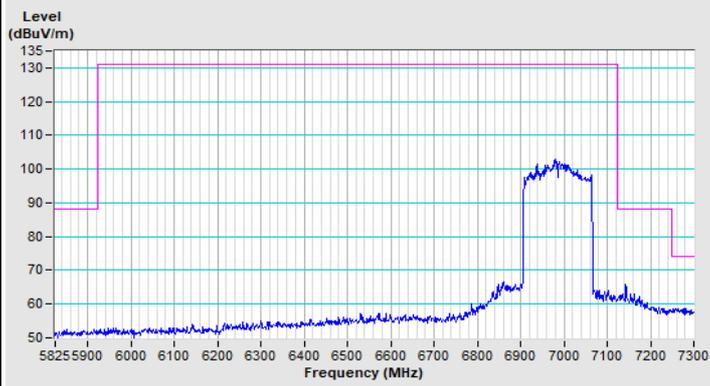


Horizontal (Peak)

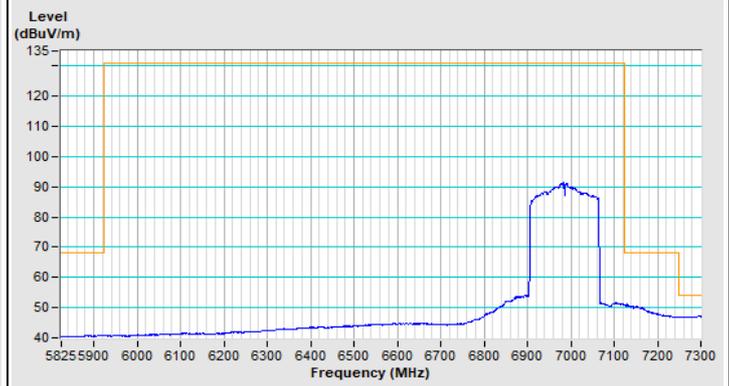

Horizontal (Average)

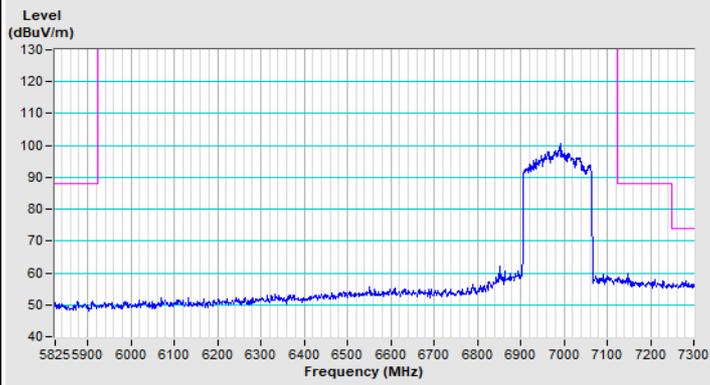


Vertical (Peak)

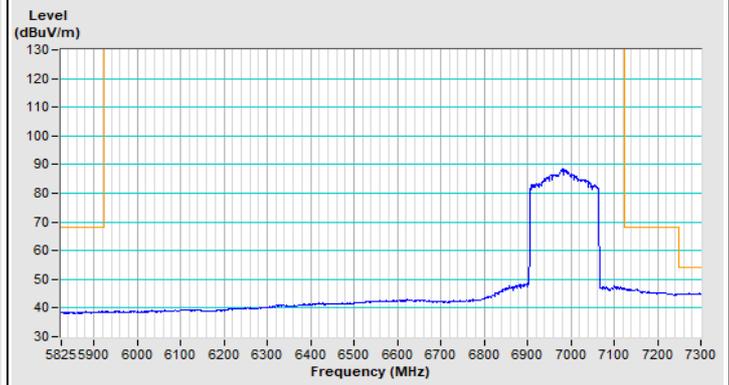


Vertical (Average)

NSS2


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

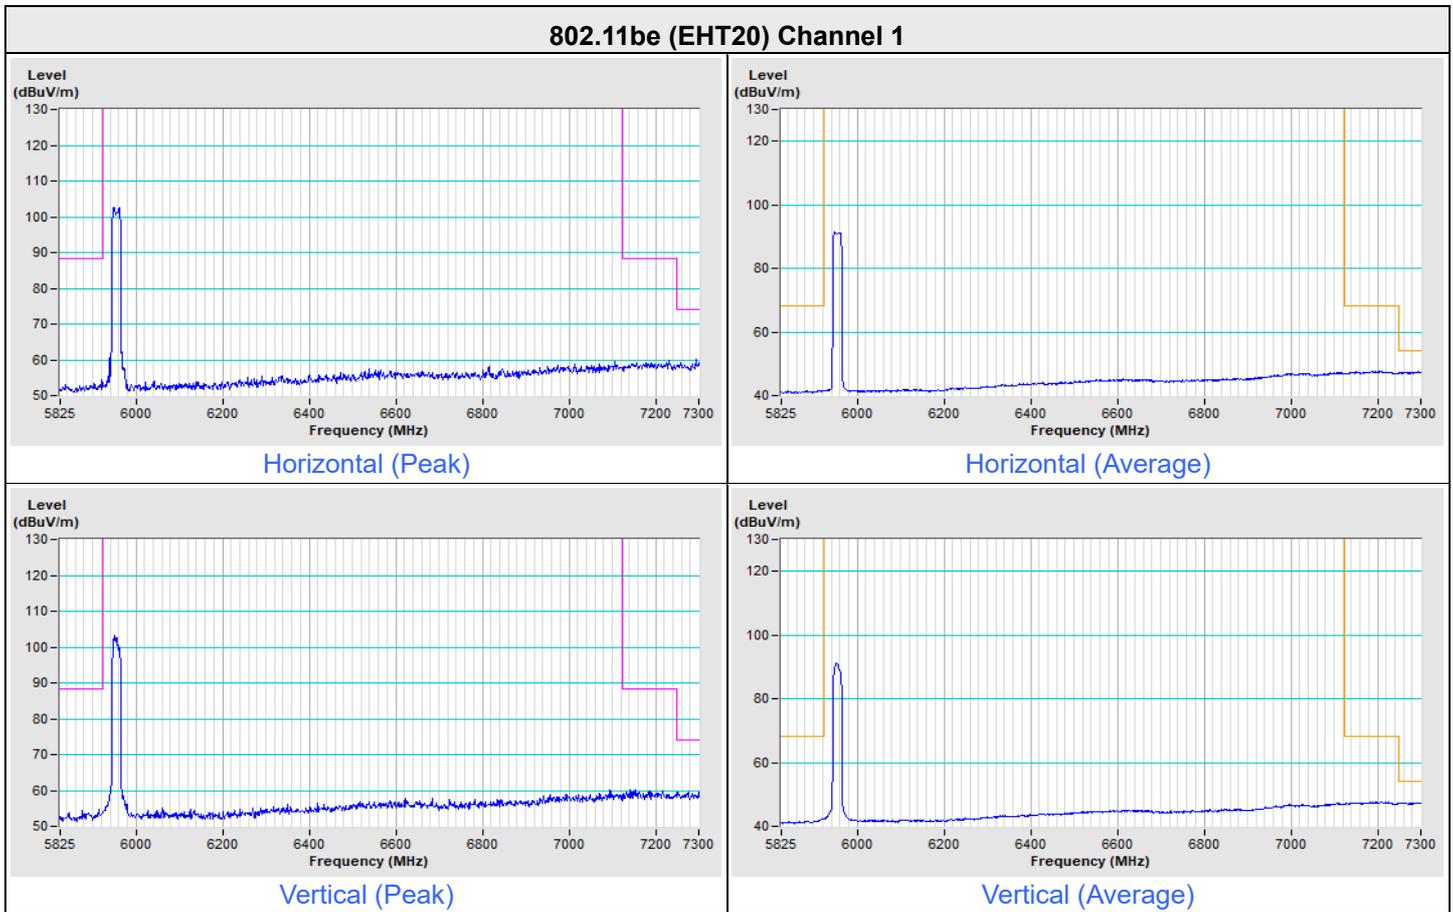


802.11be (EHT20) Channel 233

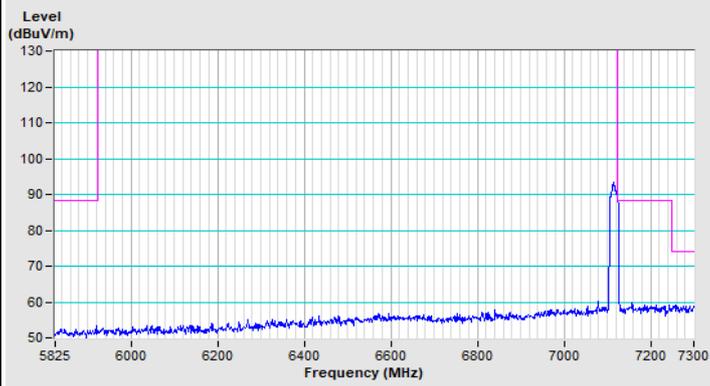


Horizontal (Peak)

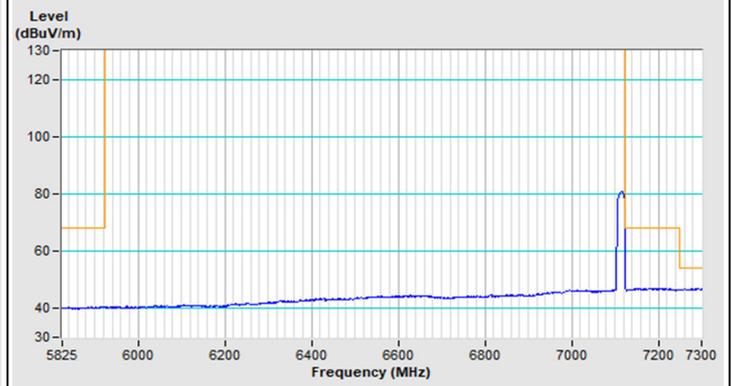

Horizontal (Average)

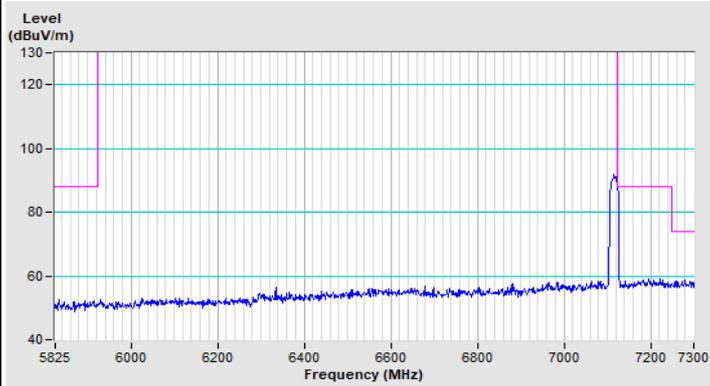


Vertical (Peak)

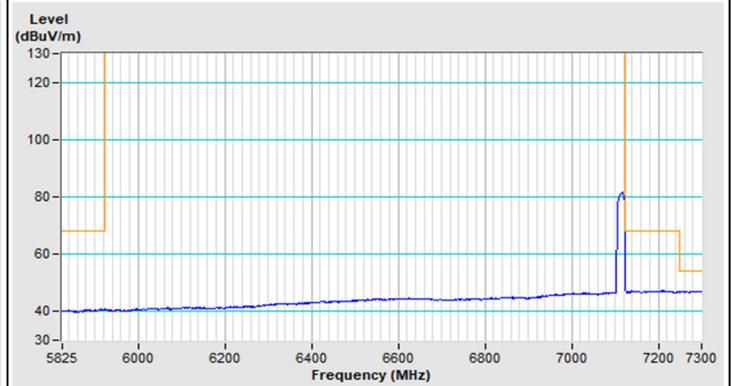


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

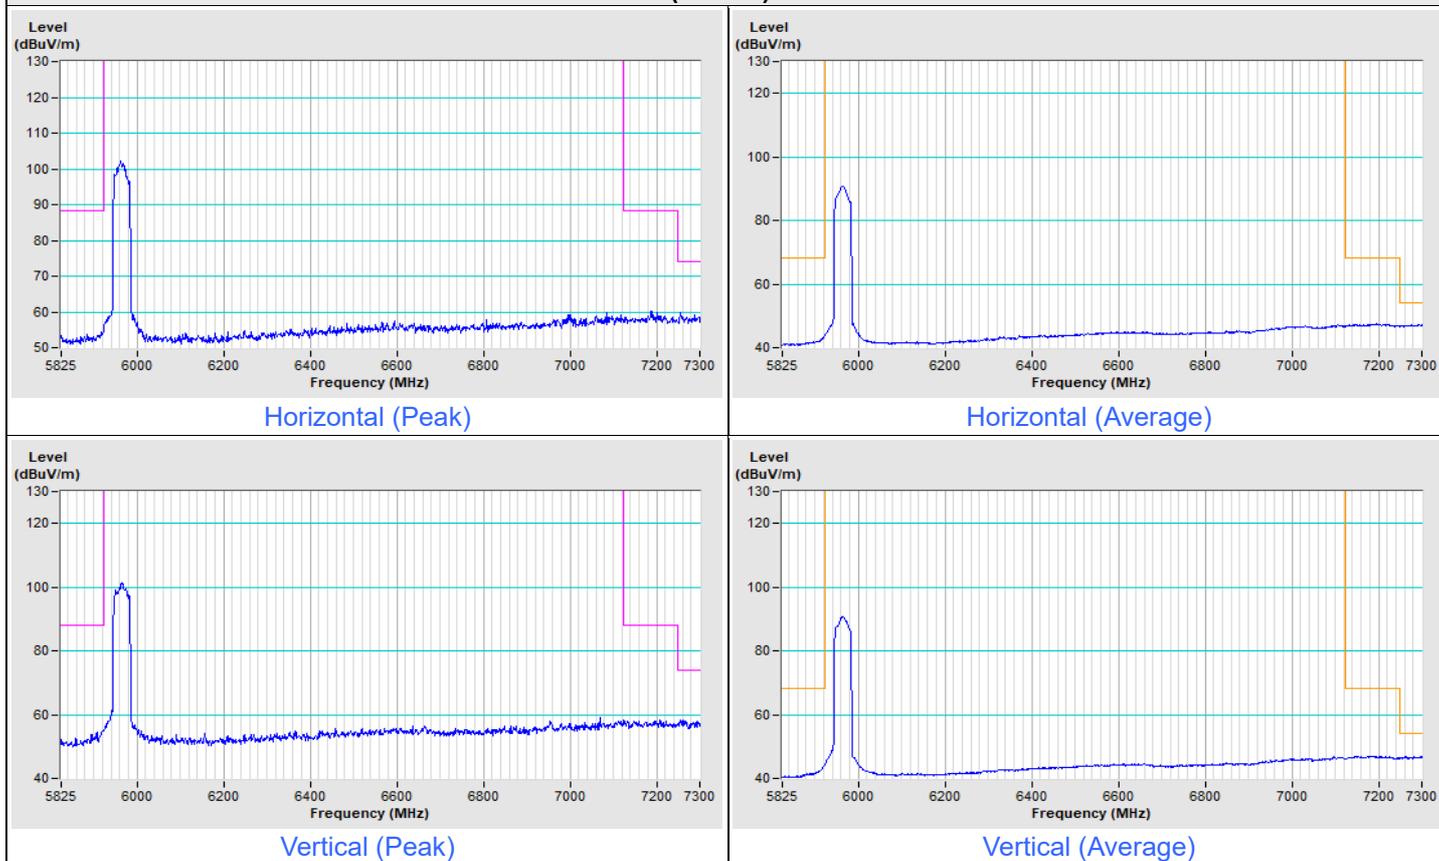


802.11be (EHT40) Channel 227

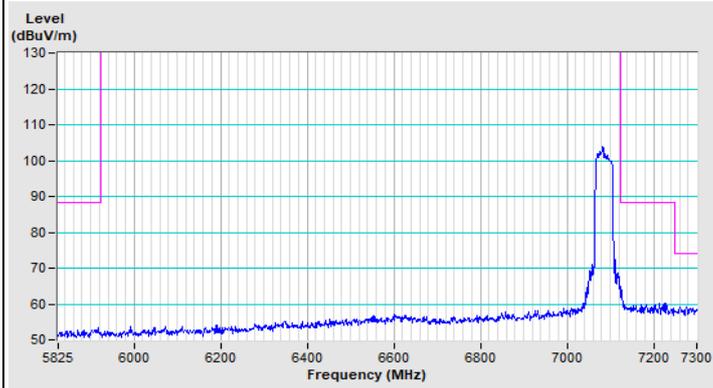


Horizontal (Peak)

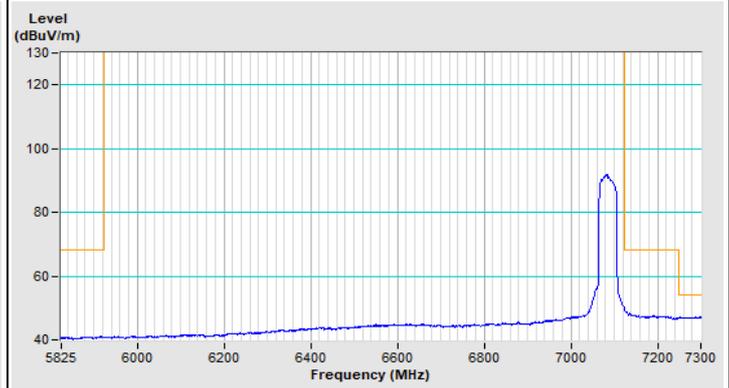

Horizontal (Average)

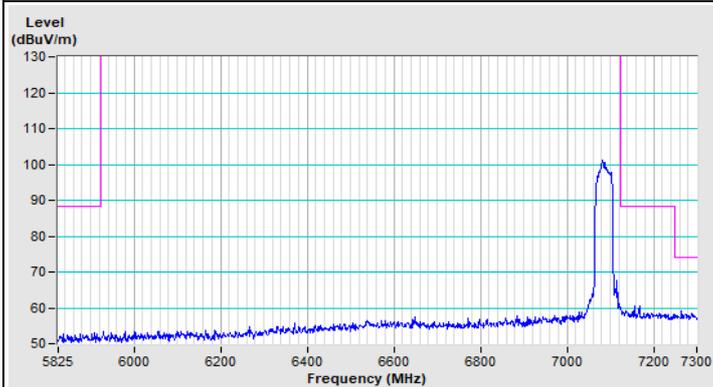


Vertical (Peak)

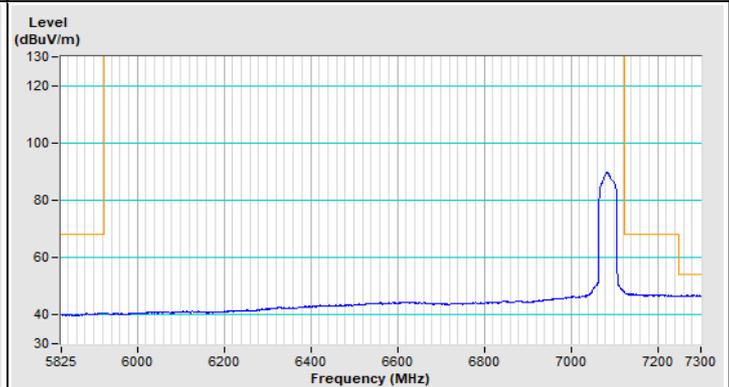


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

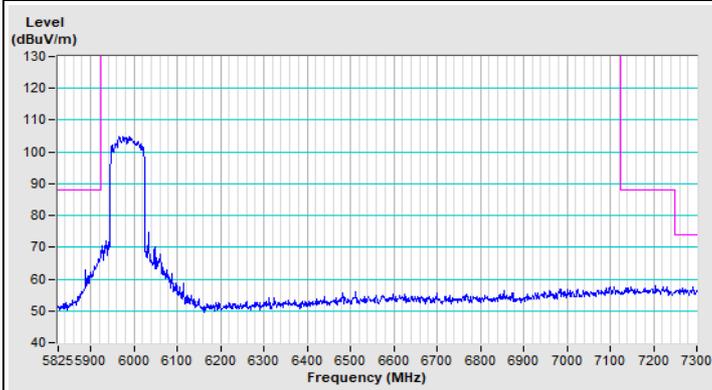


Horizontal (Peak)

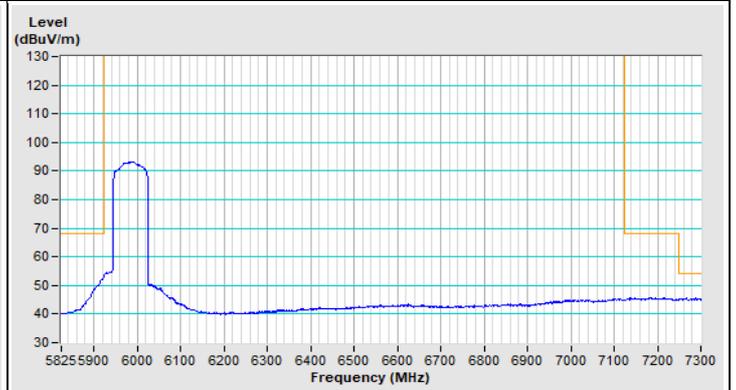

Horizontal (Average)

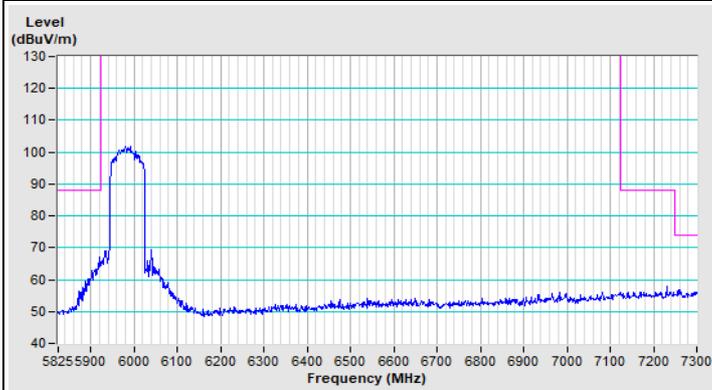


Vertical (Peak)

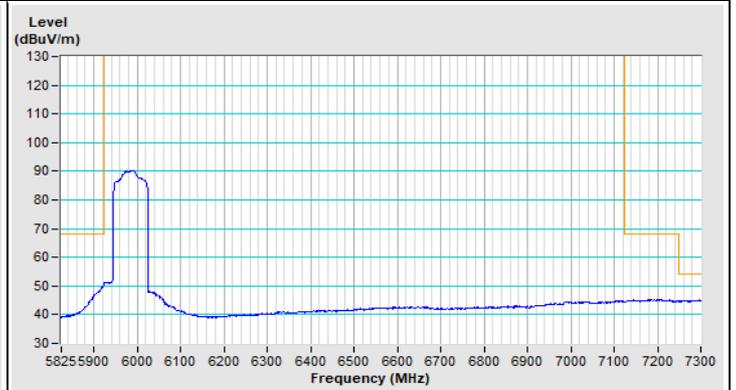


Vertical (Average)


802.11be (EHT80) Channel 215

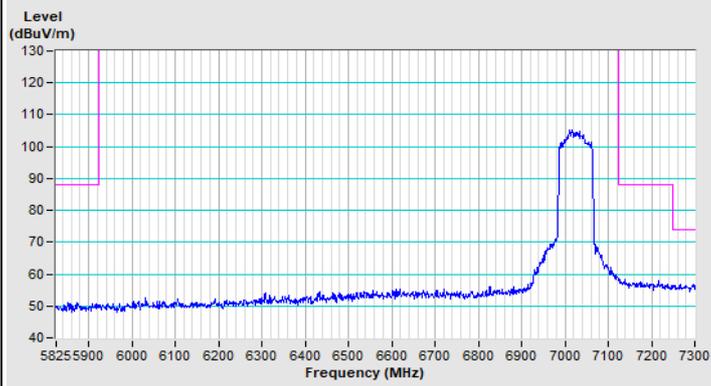


Horizontal (Peak)

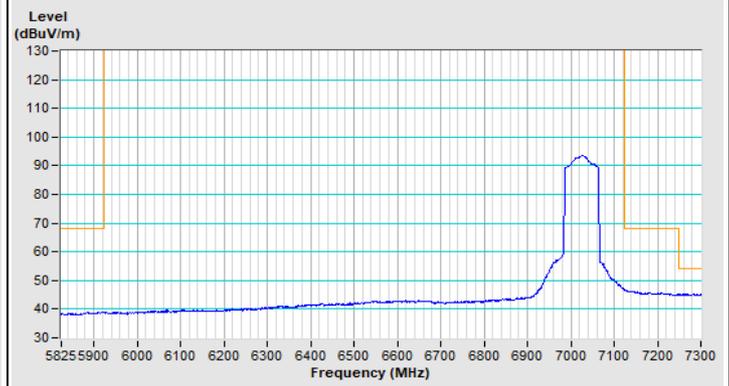

Horizontal (Average)

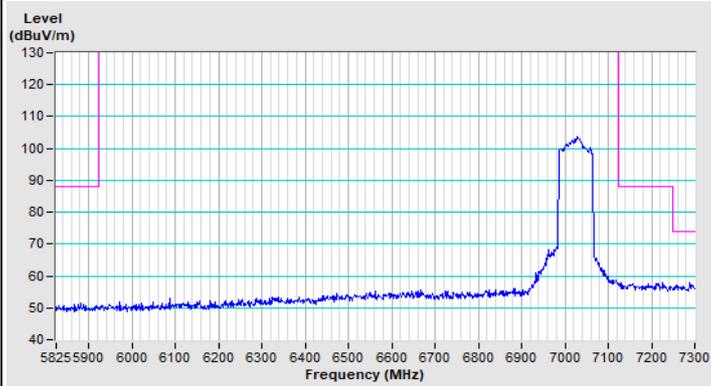


Vertical (Peak)

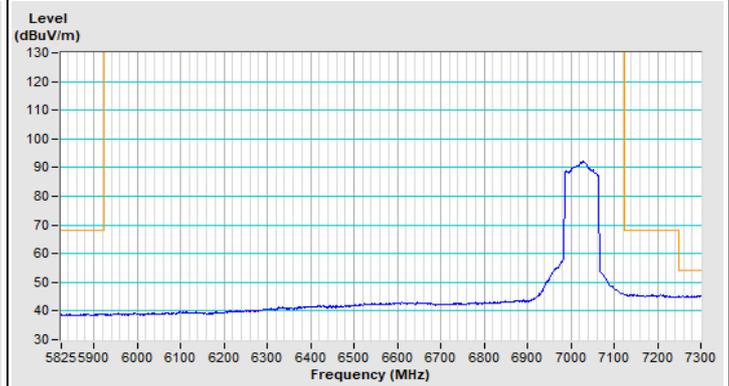


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

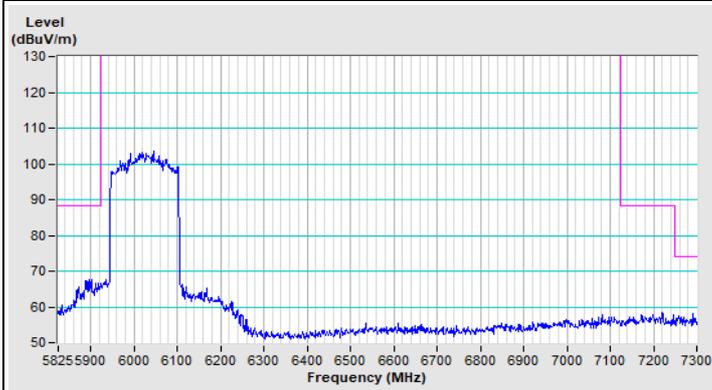


Horizontal (Peak)

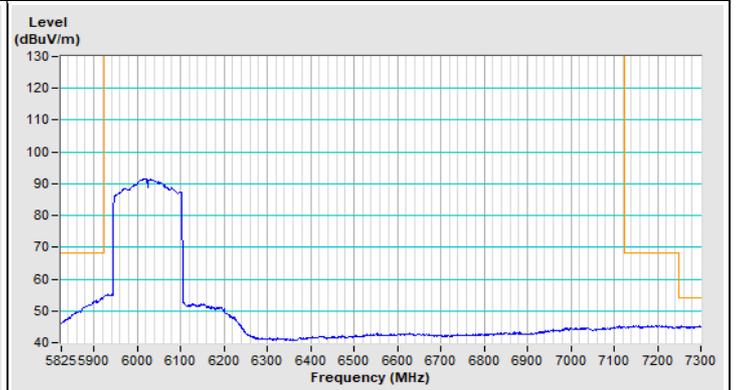

Horizontal (Average)

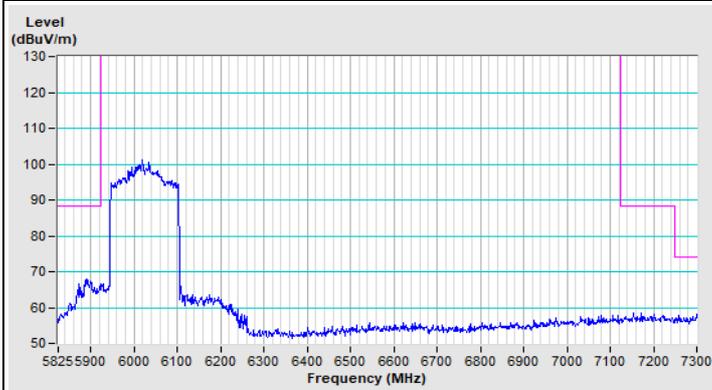


Vertical (Peak)

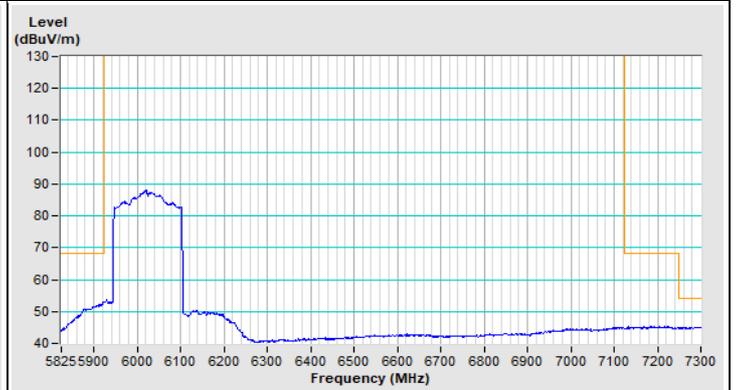


Vertical (Average)


802.11be (EHT160) Channel 207

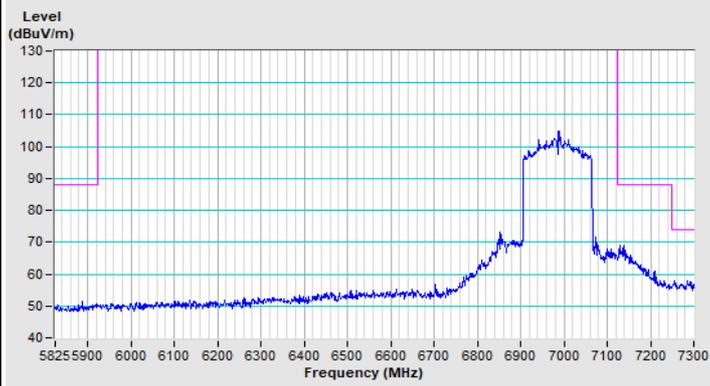


Horizontal (Peak)

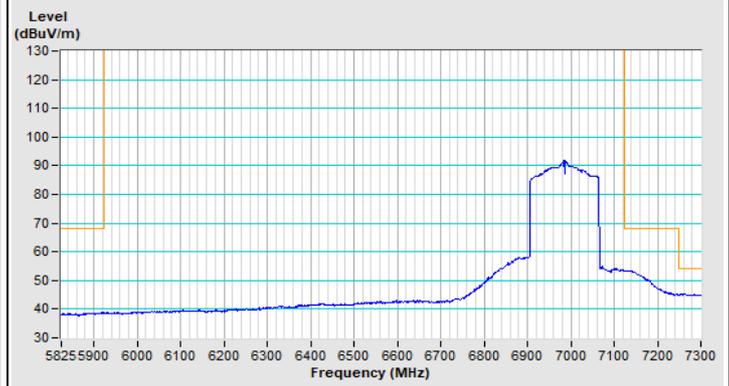

Horizontal (Average)

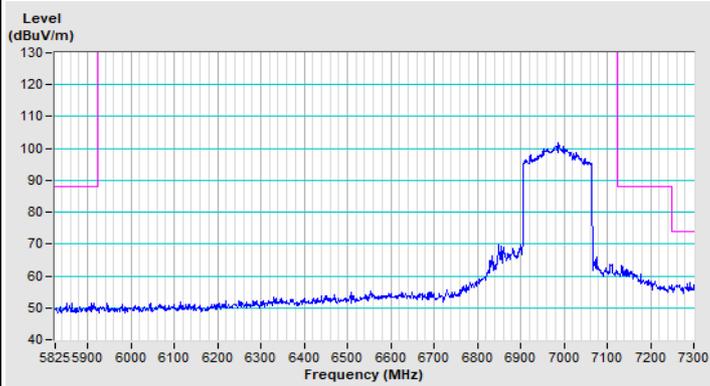

Vertical (Peak)

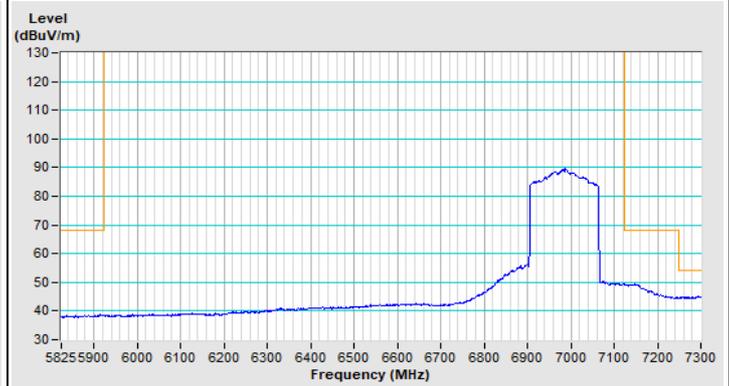

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---