



FCC 47 CFR PART 15 SUBPART B

TEST REPORT

FOR

CDMA + WIFI + LTE MOBILE HOTSPOT

MODEL NUMBER: AC778S

FCC ID: PY3AC778S

REPORT NUMBER: 13U15465-1 REVISION A

ISSUE DATE: SEPTEMBER 30, 2013

Prepared for

**NETGEAR INC
2200 FARADAY AVE.
CARLSBAD, CA 92008**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	9/5/2013	Initial	P.Kim
A	9/30/2013	Update the setup block diagram	P.Kim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	<i>6</i>
5.2. <i>PRELIMINARY TEST CONFIGURATIONS.....</i>	<i>7</i>
5.3. <i>MODE(S) OF OPERATION INVESTIGATED.....</i>	<i>7</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>7</i>
5.5. <i>MODIFICATIONS</i>	<i>7</i>
5.6. <i>DETAILS OF TESTED SYSTEM</i>	<i>8</i>
6. TEST AND MEASUREMENT EQUIPMENT	10
7. APPLICABLE LIMITS AND TEST RESULTS	11
7.1. <i>RADIATED EMISSIONS.....</i>	<i>11</i>
7.2. <i>AC MAINS LINE CONDUCTED EMISSIONS</i>	<i>15</i>
8. SETUP PHOTOS.....	19

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: NETGEAR INC
2200 FARADAY AVE.
CARLSBAD, CA 92008

EUT DESCRIPTION: CDMA BC0/1/10 (1xRTT, REV A);
LTE B25(1900)/B26/B41(2600). MOBILE HOTSPOT

MODEL: AC778S

SERIAL NUMBER: FS3282004304020E

DATE TESTED: SEPTEMBER 4, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART B	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



PHILIP KIM
WISE PROGRAM MANAGER
UL Verification Services Inc.

Tested By:



ROLLY ALEGRE
WISE LABORATORY TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.csemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

CDMA BC0/1/10 (1xRTT, Rev A); LTE B25(1900)/B26/B41(2600). 1 TX ant. Mobile hotspot.

GENERAL INFORMATION

AC Adapter Power Requirements	100-240 VAC / 50-60 Hz, 1A
List of frequencies generated or used by the EUT	19.2MHz(processor); 26MHz(WIFI radio)

SUBASSEMBLIES

The EUT was constructed using the following subassemblies:

Subassembly Description	Model Number	Serial Number
PC	X1060256	1S1871FU1L3AWB P6
AC Adapter	08K8204	11S08K8204Z1Z6L V3BW5ND
USB Cable	N/A	N/A

5.2. PRELIMINARY TEST CONFIGURATIONS

The following configurations were investigated during preliminary testing:

EUT Configuration	Description
Configuration 1	The EUT standalone with DC power supply.
Configuration 2	The EUT connected to the AC mains with an AC adapter.
Configuration 3	The EUT connected to the AC mains with an AC adapter, Laptop, USB cable.

The worst-case configuration was determined to be Configuration 3 and was used for the basis of testing in this report. The worst-case orientation was determined to be in the vertical landscape position.

5.3. MODE(S) OF OPERATION INVESTIGATED

Mode	Description
Configuration 1	EUT standalone with radio module in standby mode.
Configuration 2	EUT connected to AC power supply; radio module in standby mode.
Configuration 3	The EUT connected to the AC mains with an AC adapter, Laptop, Serial cable; radio module in standby mode.

5.4. SOFTWARE AND FIRMWARE

The EUT is linked with CMW500 Test Set and radio module in idle mode.

5.5. MODIFICATIONS

No modifications were made during testing.

5.6. DETAILS OF TESTED SYSTEM

SUPPORT EQUIPMENT & PERIPHERALS

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	S/N	FCC ID
Laptop	Lenovo	T420	C9LMQS027429	DoC
AC adapter	N/A	N/A	N/A	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC Power	1	2-Prong	Un-Shielded	1.5m	N/A
2	USB	1	USB	Un-shielded	1m	N/A

TEST SETUP

The EUT is connected to a laptop computer during the tests. Test software exercised the radio card.

TEST SETUP DIAGRAM

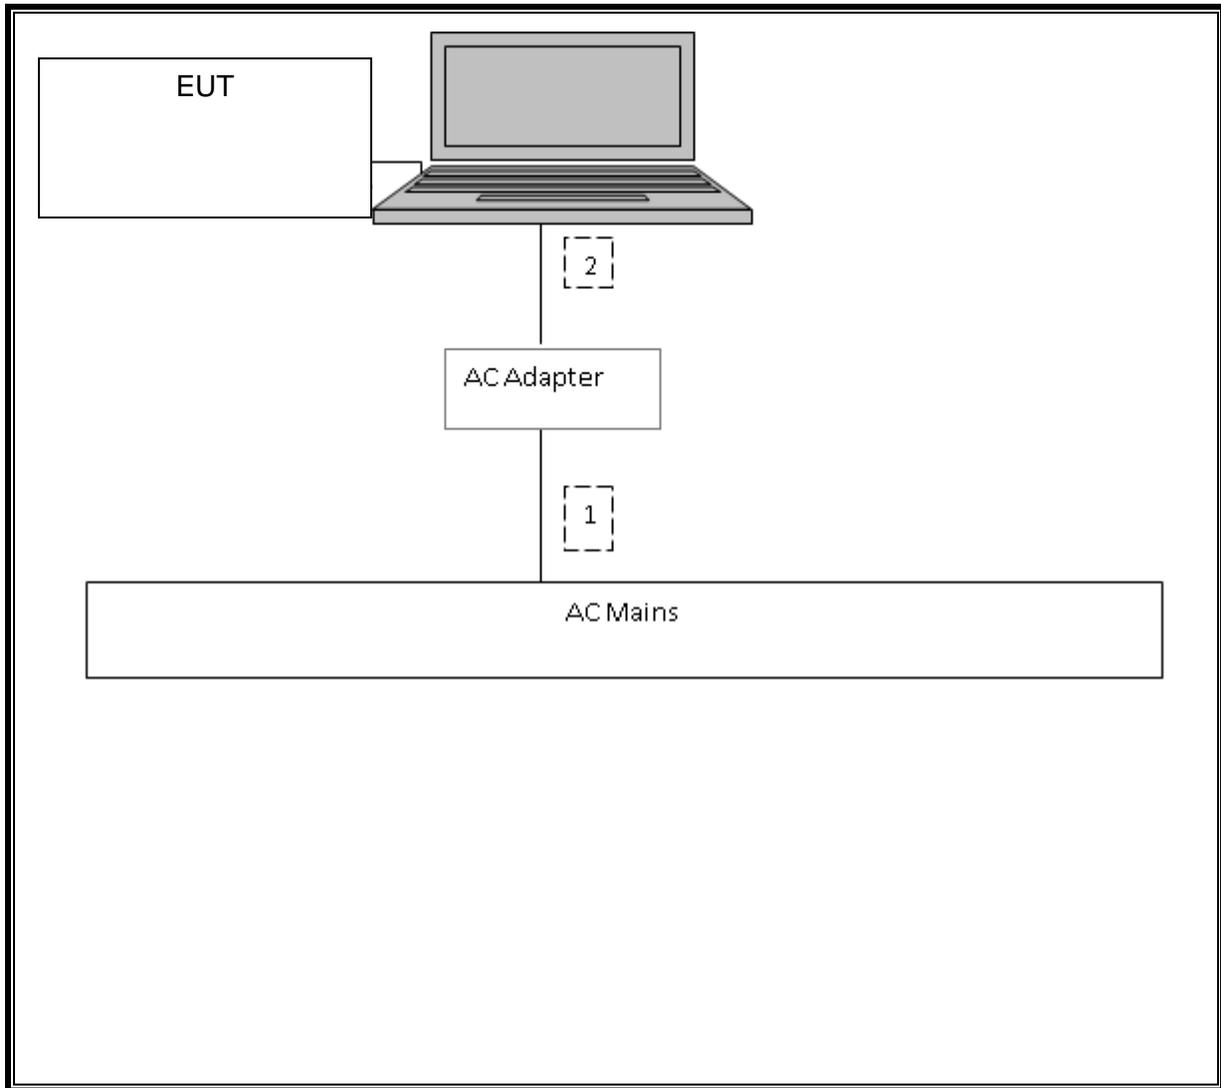

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Spectrum Analyzer, 44 GHz	Agilent/HP	E4446A	US42070220	04/01/14
Preamplifier, 1300 MHz	Agilent/HP	8447D	1937A02062	01/16/14
Antenna, Bilog, 30MHz-1GHz	Sunol Sciences	JB1	A0022704	08/14/14
Preamplifier, 26.5 GHz	Agilent/HP	8449B	3008A00931	10/22/13
Antenna, Horn, 18 GHz	ETS	3117	35234	02/21/14
EMI Test Receiver, 30 MHz	R&S	ESHS 20	827129/006	08/08/14
LISN, 30 MHz	FCC	50/250-25-2	114	01/14/14
LISN, 10 kHz-30MHz	Solar	8012-50-R-24-BNC	837990	C.N.R

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.4

The highest clock frequency generated or used in the EUT is 26MHz, therefore the frequency range was investigated from 30 MHz to 1 GHz.

LIMIT


§15.109 (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Limits for radiated disturbance of Class B ITE at measuring distance of 3 m	
Frequency range (MHz)	Quasi-peak limits (dB μ V/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960 MHz	54

Note: The lower limit shall apply at the transition frequency.

RESULTS

RADIATED EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

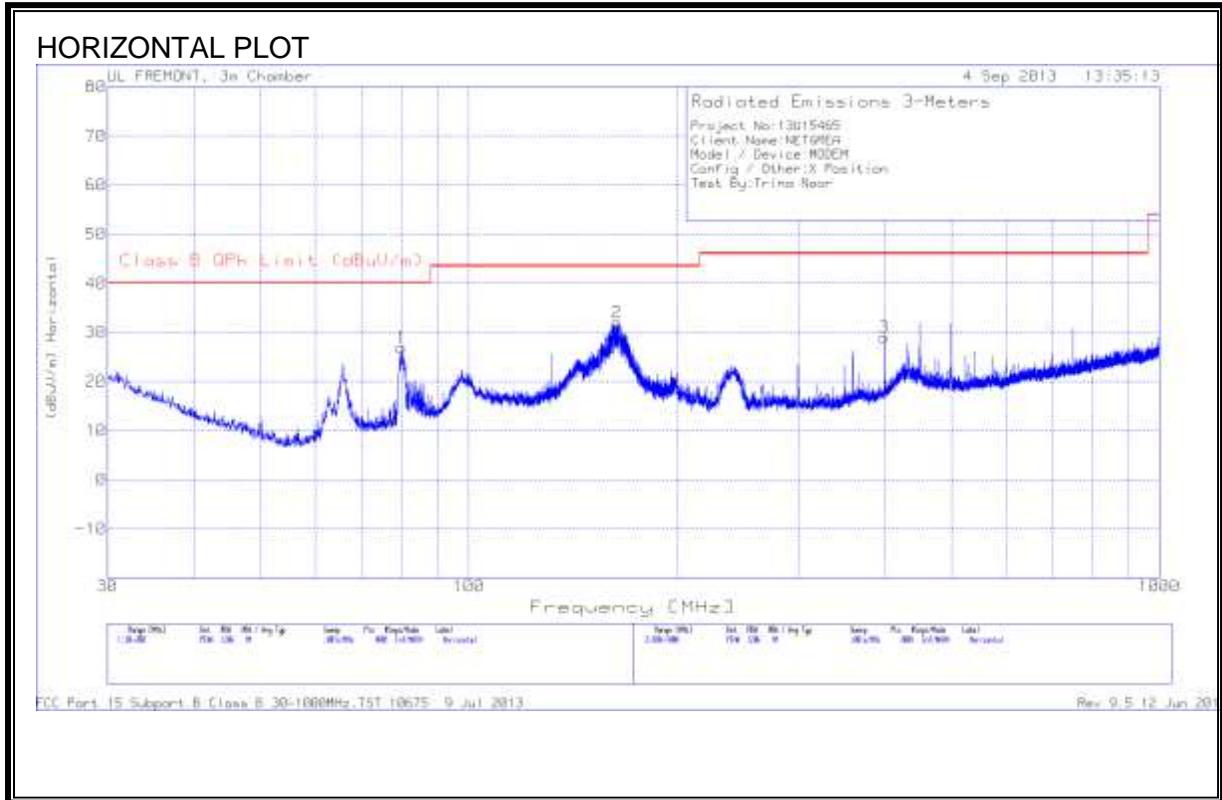

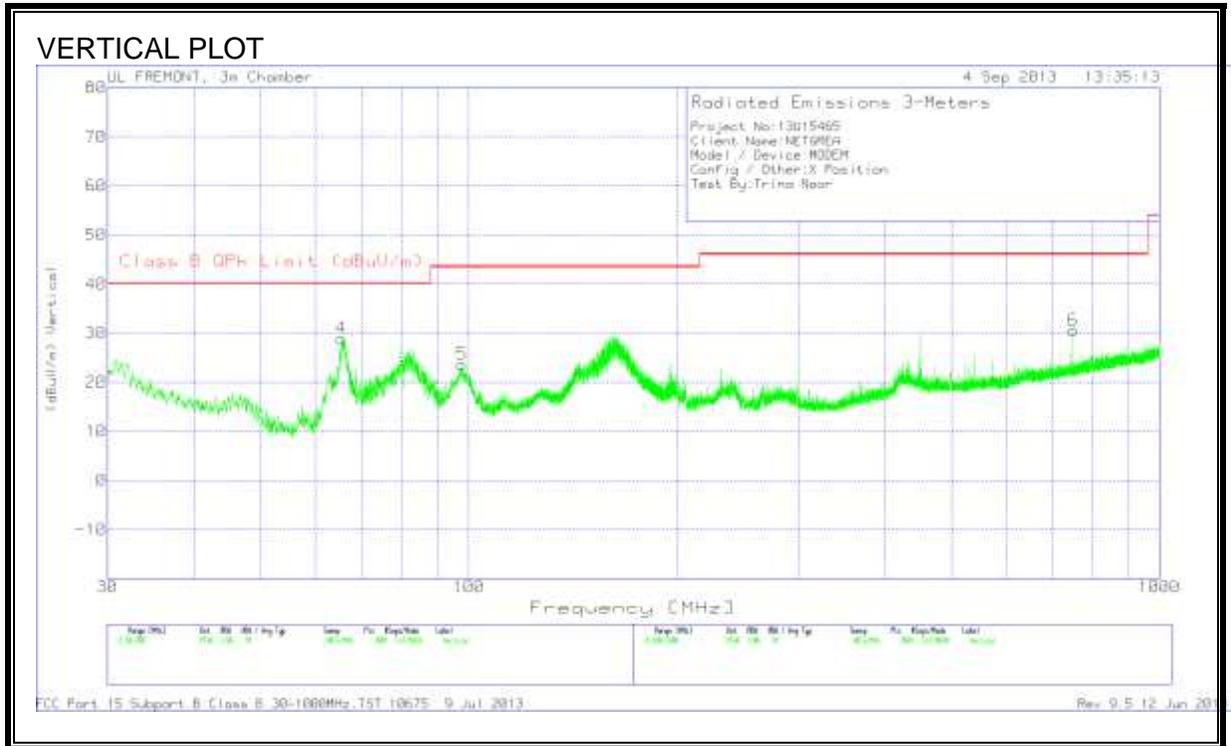

HORIZONTAL AND VERTICAL DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
1	79.98	46.23	PK	7.6	-27	26.83	40	-13.17	99	Horz
2	164.045	46.29	PK	11.9	-26.2	31.99	43.52	-11.53	200	Horz
4	65.445	48.43	PK	7.7	-27.2	28.93	40	-11.07	99	Vert
5	97.83	40.97	PK	9.5	-26.8	23.67	43.52	-19.85	99	Vert
3	399.3	39.23	PK	15.5	-25.7	29.03	46.02	-16.99	99	Horz
6	750	34.71	PK	20.6	-24.8	30.51	46.02	-15.51	201	Vert

PK - Peak detector

FCC Part 15 Subpart B Class B 30-1000MHz.TST 10675 9 Jul 2013Rev 9.5 12 Jun 2013

7.2. AC MAINS LINE CONDUCTED EMISSIONS

TEST PROCEDURE

ANSI C63.4

LIMIT

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:
1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.159	42.16	PK	.1	0	42.26	65.5	-23.24	-	-
2	.159	29.75	Av	.1	0	29.85	-	-	55.5	-25.65
3	.5325	13.06	PK	.1	0	13.16	56	-42.84	-	-
4	.5325	2.84	Av	.1	0	2.94	-	-	46	-43.06
5	4.8165	15.12	PK	.1	.1	15.32	56	-40.68	-	-
6	4.8165	1.24	Av	.1	.1	1.44	-	-	46	-44.56
7	25.8	17.49	PK	.5	.3	18.29	60	-41.71	-	-
8	25.8	5.21	Av	.5	.3	6.01	-	-	50	-43.99

Line-L2 .15 - 30MHz


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
9	.15	37.03	PK	.1	0	37.13	66	-28.87	-	-
10	.15	19.98	Av	.1	0	20.08	-	-	56	-35.92
11	.528	18.23	PK	.1	0	18.33	56	-37.67	-	-
12	.528	8.65	Av	.1	0	8.75	-	-	46	-37.25
13	3.399	16.89	PK	.1	.1	17.09	56	-38.91	-	-
14	3.399	6.41	Av	.1	.1	6.61	-	-	46	-39.39
15	18.249	19.18	PK	.2	.2	19.58	60	-40.42	-	-
16	18.249	6.79	Av	.2	.2	7.19	-	-	50	-42.81

PK - Peak detector

Av - average detection

LINE 1 RESULTS

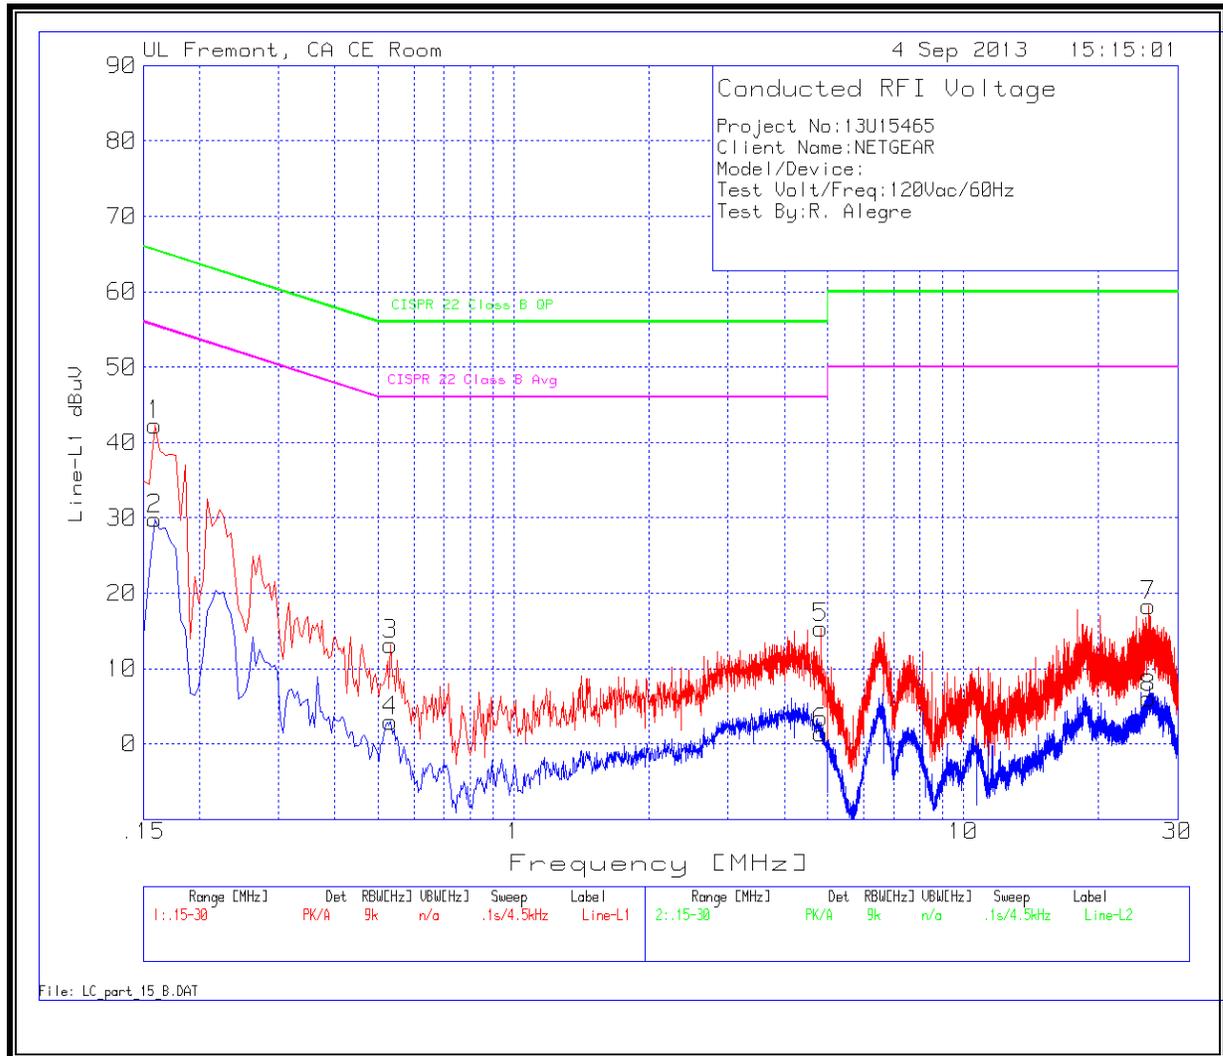

LINE 2 RESULTS

