



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	NETGEAR, Inc.
Applicant Address	350 East Plumeria Drive, San Jose, California 95134, USA
FCC ID	PY3UPWL6031H5

Product Name	Wireless module
Brand Name	NETGEAR
Model No.	UPWL6031H5
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Apr. 18, 2013
Final Test Date	Dec. 30, 2013
Submission Type	Class II Change
Operating Mode	Master

### Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a (5250 ~ 5350MHz / 5470 ~ 5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03, KDB 662911 D01 v02

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Product Information .....	6
3.6. Table for Test Modes .....	7
3.7. Table for Testing Locations.....	8
3.8. Table for Class II Change .....	8
3.9. Table for Supporting Units .....	8
3.10. Table for Parameters of Test Software Setting .....	9
3.11. EUT Operation during Test .....	9
3.12. Duty Cycle .....	10
3.13. Test Configurations .....	12
<b>4. TEST RESULT .....</b>	<b>14</b>
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	18
4.3. Maximum Conducted Output Power Measurement.....	30
4.4. Power Spectral Density Measurement .....	33
4.5. Peak Excursion Measurement .....	40
4.6. Radiated Emissions Measurement .....	46
4.7. Band Edge Emissions Measurement .....	70
4.8. Frequency Stability Measurement .....	77
4.9. Antenna Requirements .....	79
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>80</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>82</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A8</b>
<b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>B1 ~ B3</b>
<b>APPENDIX C. 20DB BANDWIDTH REPORT.....</b>	<b>C1 ~ C4</b>



## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR381333	Rev. 01	Initial issue of report	Jan. 09, 2014



## 1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless module  
Brand Name : NETGEAR  
Model No. : UPWL6031H5  
Applicant : NETGEAR, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 18, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads "Sam Chen". The signature is written in a cursive style and is positioned above a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.85 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.18 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.13 dB
4.5	15.407(a)	Peak Excursion	Complies	2.18 dB
4.6	15.407(b)	Radiated Emissions	Complies	0.04 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.05 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	12 for 20MHz bandwidth ; 5 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (20MHz): 18.08 MHz ; MCS0 (40MHz): 36.80 MHz
Maximum Conducted Output Power	Band 2: MCS0 (20MHz): 22.65 dBm ; MCS0 (40MHz): 23.82 dBm Band 3: MCS0 (20MHz): 21.98 dBm ; MCS0 (40MHz): 23.64 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

##### IEEE 802.11a

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	12
Channel Band Width (99%)	17.12 MHz
Maximum Conducted Output Power	Band 2: 22.50 dBm ; Band 3: 22.10 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna and Band width**

Antenna	Three (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11a	V	X
IEEE 802.11n	V	V

**IEEE 11n Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS0-23
802.11n (HT40)	3	MCS0-23

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

**3.2. Accessories**


N/A

### 3.3. Table for Filed Antenna

Ant.	Chain	Brand	Model No.	Antenna Type	Connector	Gain (dBi)	
						5GHz Band 2	5GHz Band 3
1	1	WNC	81.EZY15.GJM	PCB Antenna	I-PEX	3.3	3.7
2	2	WNC	81.EZY15.GJN	PCB Antenna	I-PEX	3.3	3.7
3	3	WNC	81.EZY15.GJP	PCB Antenna	I-PEX	3.3	3.7

Note: The EUT has three antennas

Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

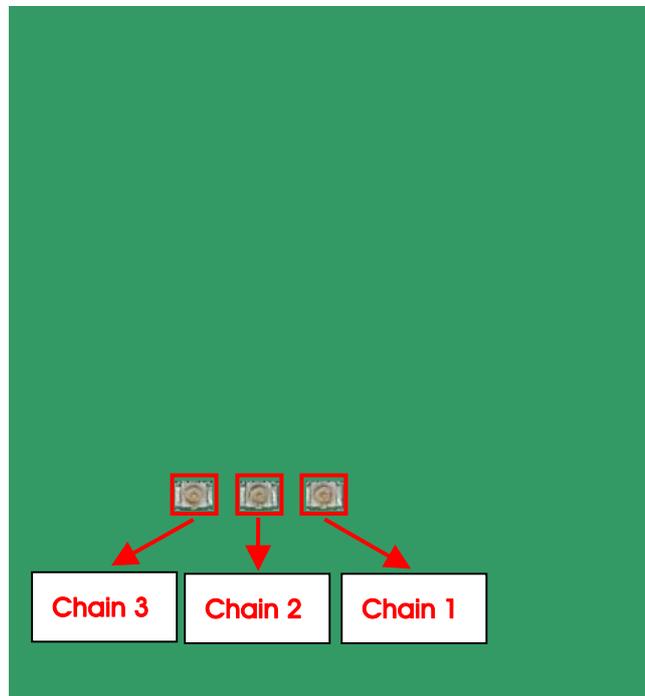

### 3.4. Table for Carrier Frequencies

The EUT has two bandwidth system.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140.

For 40MHz bandwidth systems, use Channel 54, 62, 102, 110, 134.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz	116	5580 MHz
	102	5510 MHz	132	5660 MHz
	104	5520 MHz	134	5670 MHz
	108	5540 MHz	136	5680 MHz
	110	5550 MHz	140	5700 MHz
	112	5560 MHz	-	-

### 3.5. Table for Product Information

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
TPC Function	<input checked="" type="checkbox"/> With TPC	<input type="checkbox"/> Without TPC
Weather Band (5600~5650MHz)	<input type="checkbox"/> With 5600~5650MHz	<input checked="" type="checkbox"/> Without 5600~5650MHz
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming

### 3.6. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	CTX		-	-	-
Max. Conducted Output Power	11n 20MHz	Band 2-3	MCS0	52/60/64/100/116/140	1+2+3
	11n 40MHz	Band 2-3	MCS0	54/62/102/110/134	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/116/140	1+2+3
Power Spectral Density	11n 20MHz	Band 2-3	MCS0	52/60/64/100/116/140	1+2+3
	11n 40MHz	Band 2-3	MCS0	54/62/102/110/134	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/116/140	1+2+3
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11n 20MHz	Band 2-3	MCS0	52/60/64/100/116/140	1+2+3
	11n 40MHz	Band 2-3	MCS0	54/62/102/110/134	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/116/140	1+2+3
Peak Excursion	11n 20MHz	Band 2-3	MCS0	52/60/64/100/116/140	1+2+3
	11n 40MHz	Band 2-3	MCS0	54/62/102/110/134	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/116/140	1+2+3
Radiated Emission Below 1GHz	CTX		-	-	-
Radiated Emission Above 1GHz	11n 20MHz	Band 2-3	MCS0	52/60/64/100/116/140	1+2+3
	11n 40MHz	Band 2-3	MCS0	54/62/102/110/134	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/116/140	1+2+3
Band Edge Emission	11n 20MHz	Band 2-3	MCS0	52/60/64/100/116/140	1+2+3
	11n 40MHz	Band 2-3	MCS0	54/62/102/110/134	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/116/140	1+2+3
Frequency Stability	Un-modulation		-	60/100	N/A

### 3.7. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.8. Table for Class II Change

This product is an extension of original one reported under Sporton project number: 341860.

Below is the table for the change of the product with respect to the original one.

Modifications	Description
Adding 5GHz Band 2 and Band 3 (5250~5350 MHz, 5470~5725 MHz) for this device.	AC Power Line Conducted Emissions
	26dB Spectrum Bandwidth & 99% Occupied Bandwidth
	Maximum Conducted Output Power
	Power Spectral Density
	Peak Excursion
	Radiated Emissions above 1GHz
	Band Edge Emissions
	Frequency Stability

### 3.9. Table for Supporting Units

For Test Site No: 03CH01-CB and TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D420	E2KWM3945ABG
Fixture	PEGATRON	B83G R2.01	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Fixture	PEGATRON	B83G R2.01	N/A

### 3.10. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	DOS					
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
MCS0 20MHz	70	70	71	68	70	67

#### Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	DOS				
Frequency	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz
MCS0 40MHz	80	42	42	80	80

#### Power Parameters of IEEE 802.11a


Test Software Version	DOS					
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
802.11a	68	69	70	67	68	70

### 3.11. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


### 3.12. Duty Cycle

#### IEEE 802.11n MCS0 20MHz

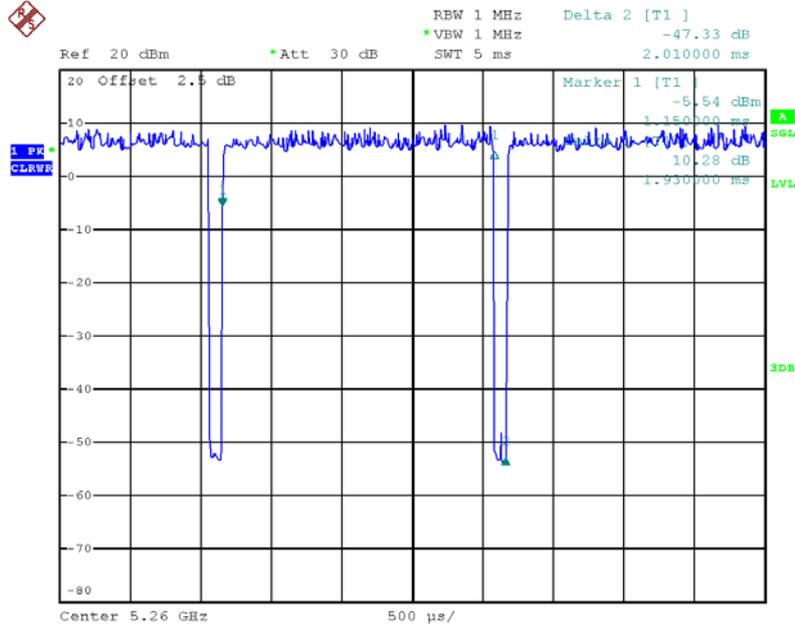


Date: 28.DEC.2013 16:48:03

#### IEEE 802.11n MCS0 40MHz

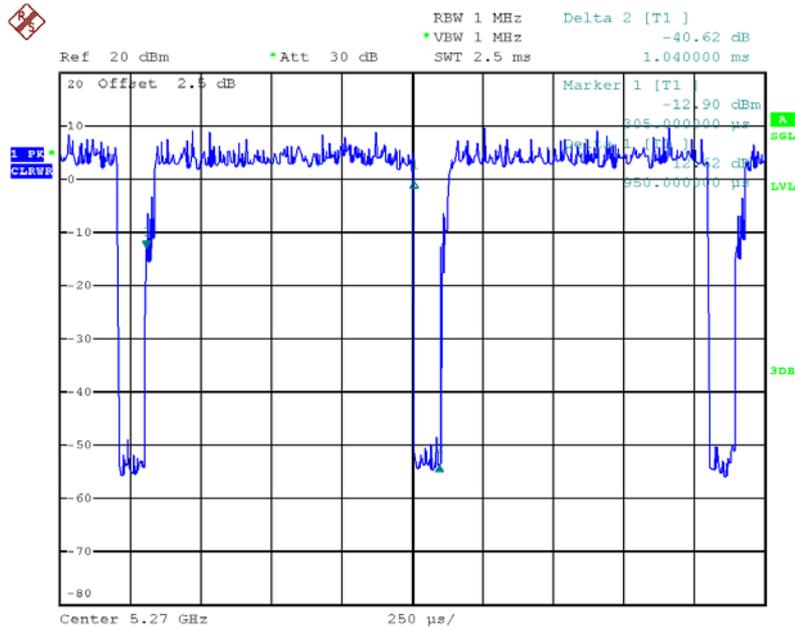

Date: 28.DEC.2013 16:49:09


IEEE 802.11a

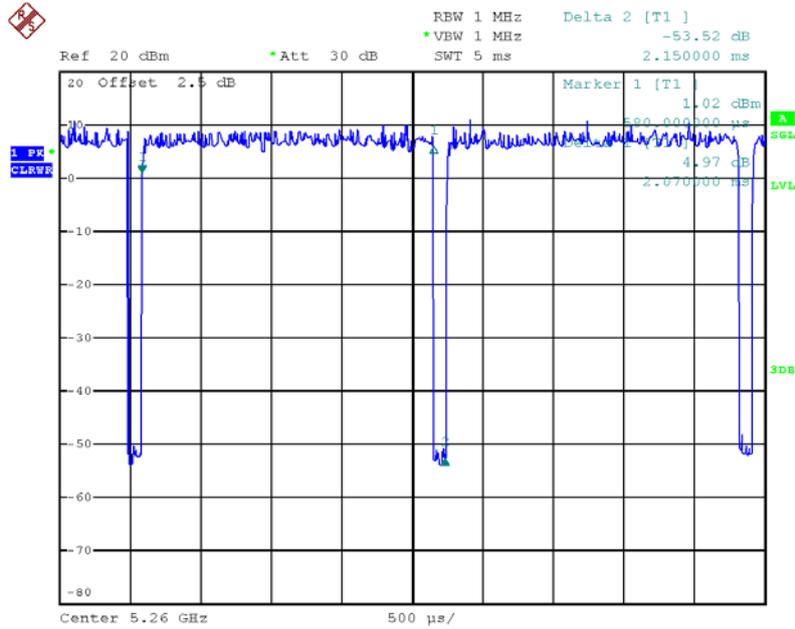

Date: 28.DEC.2013 16:46:48


### 3.13. Test Configurations

#### 3.13.1. AC Power Line Conduction Emissions Test Configuration

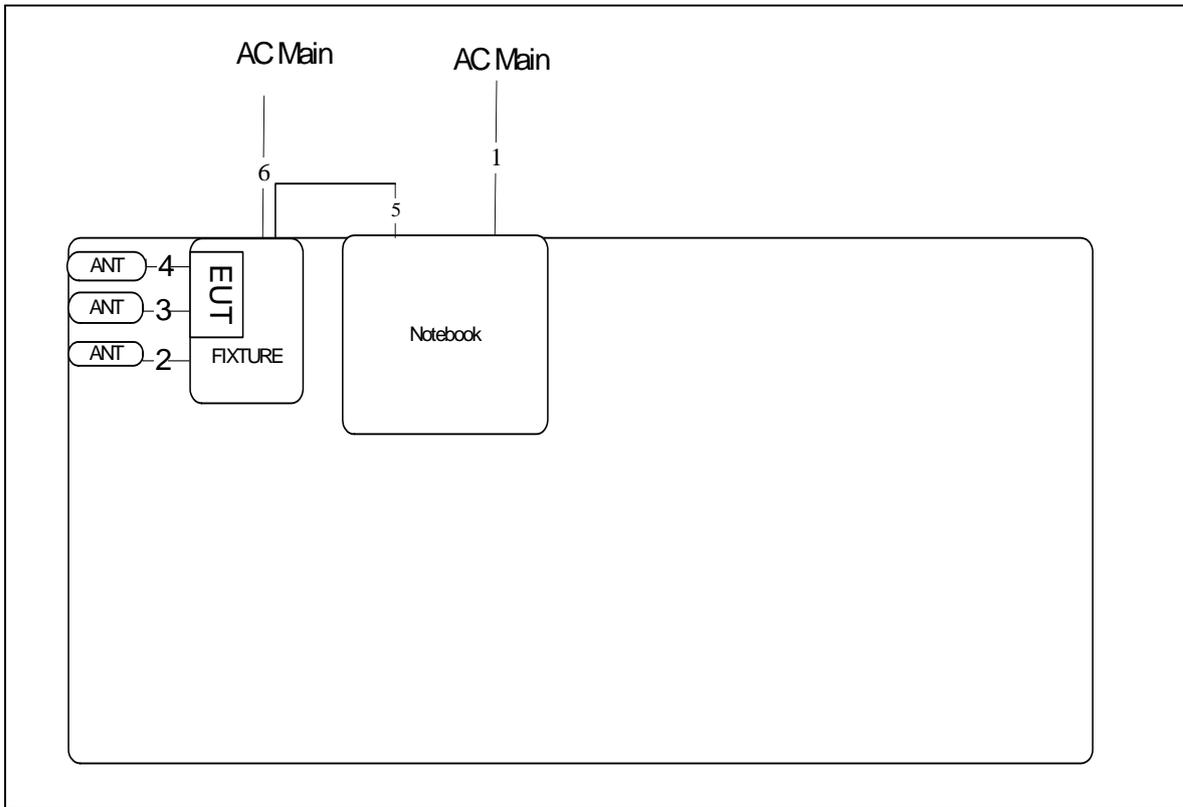

Item	Connection	Shielded	Length(m)
1	Power Cable	No	2.6m
2	Ant Cable	Yes	0.8m
3	Ant Cable	Yes	0.12m
4	Ant Cable	Yes	0.10m
5	UART to USB Cable	Yes	1.9m
6	Power Cable	No	1.8m

### 3.13.2. Radiation Emissions Test Configuration

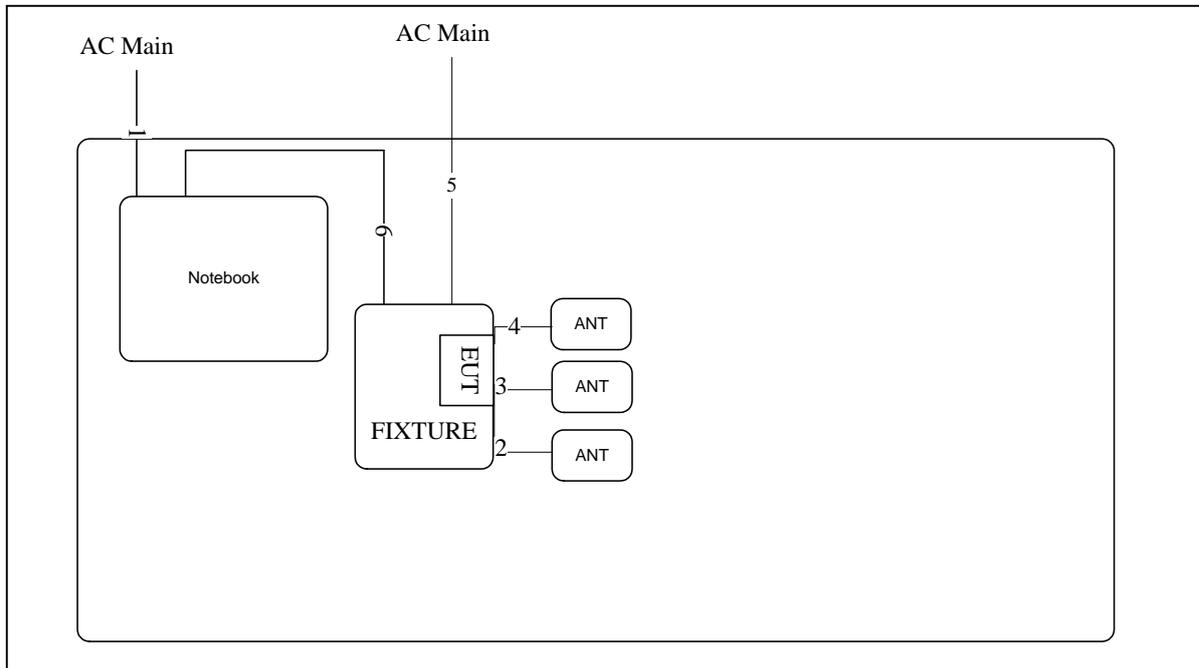

Item	Connection	Shielded	Length(m)
1	Power Cable	No	2.6m
2	Ant Cable	Yes	0.8m
3	Ant Cable	Yes	0.12m
4	Ant Cable	Yes	0.10m
5	Power Cable	No	1.8m
6	UART to USB Cable	Yes	1.9m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

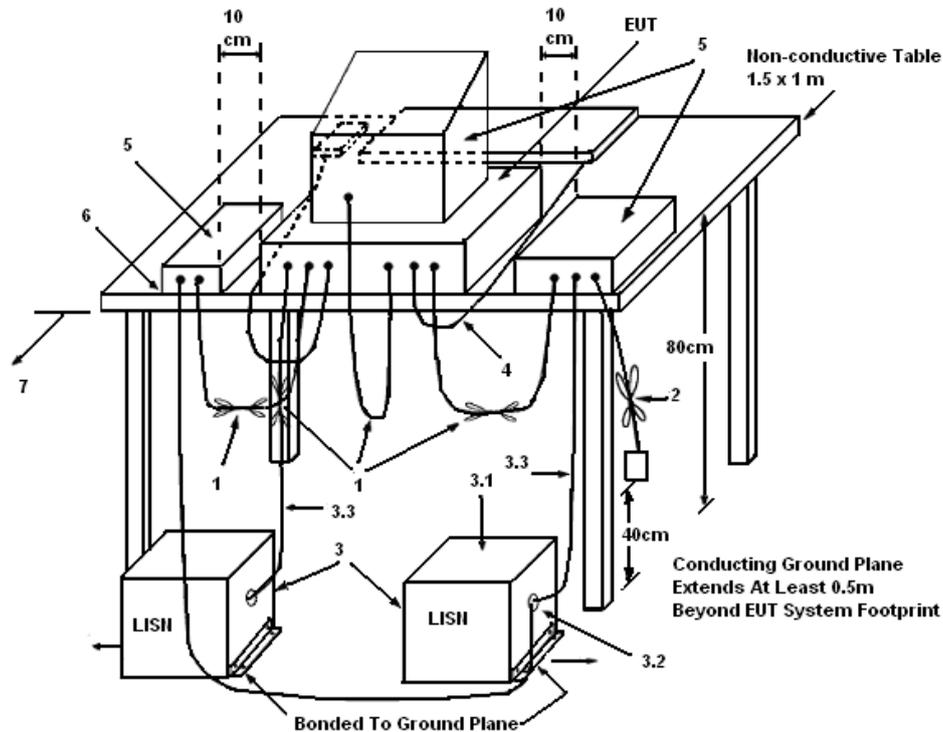

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	53%
Test Engineer	Ryo Fan	Phase	Line
Configuration	CTX		

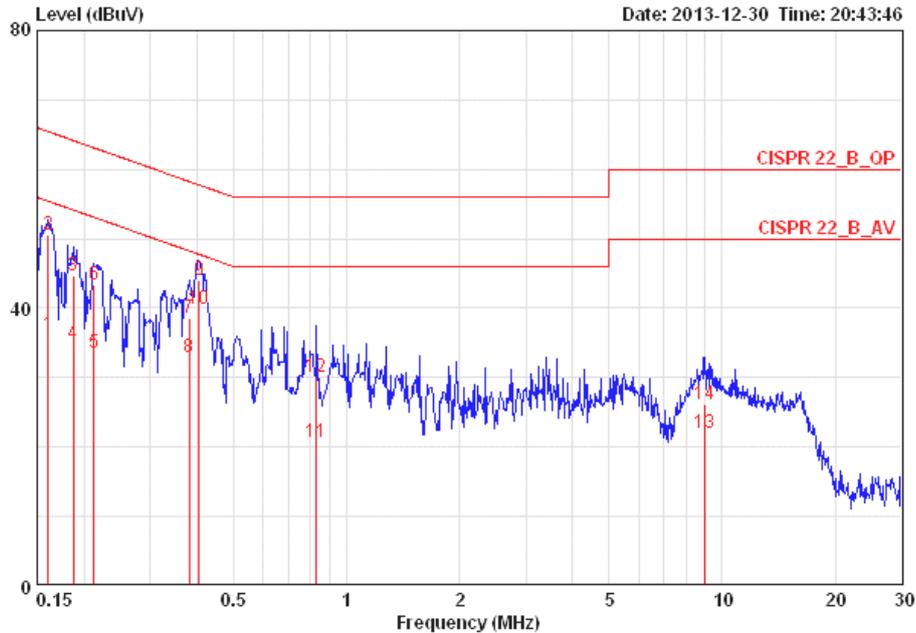

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.16070	36.21	-19.21	55.43	35.87	0.16	0.18	AVERAGE	LINE
2	0.16070	50.50	-14.92	65.43	50.16	0.16	0.18	QP	LINE
3	0.18739	44.62	-19.54	64.15	44.27	0.15	0.20	QP	LINE
4	0.18739	34.78	-19.38	54.15	34.43	0.15	0.20	AVERAGE	LINE
5	0.21279	33.50	-19.60	53.10	33.15	0.15	0.20	AVERAGE	LINE
6	0.21279	43.33	-19.77	63.10	42.98	0.15	0.20	QP	LINE
7	0.38113	38.50	-19.75	58.25	38.15	0.15	0.20	QP	LINE
8	0.38113	32.94	-15.31	48.25	32.59	0.15	0.20	AVERAGE	LINE
9	0.40400	43.94	-13.83	57.77	43.59	0.15	0.20	QP	LINE
10	0.40400	39.92	-7.85	47.77	39.57	0.15	0.20	AVERAGE	LINE
11	0.83047	20.68	-25.32	46.00	20.32	0.16	0.20	AVERAGE	LINE
12	0.83047	30.07	-25.93	56.00	29.71	0.16	0.20	QP	LINE
13	9.011	22.03	-27.97	50.00	21.41	0.32	0.30	AVERAGE	LINE
14	9.011	26.16	-33.84	60.00	25.54	0.32	0.30	QP	LINE

Temperature	24°C	Humidity	53%
Test Engineer	Ryo Fan	Phase	Neutral
Configuration	CTX		

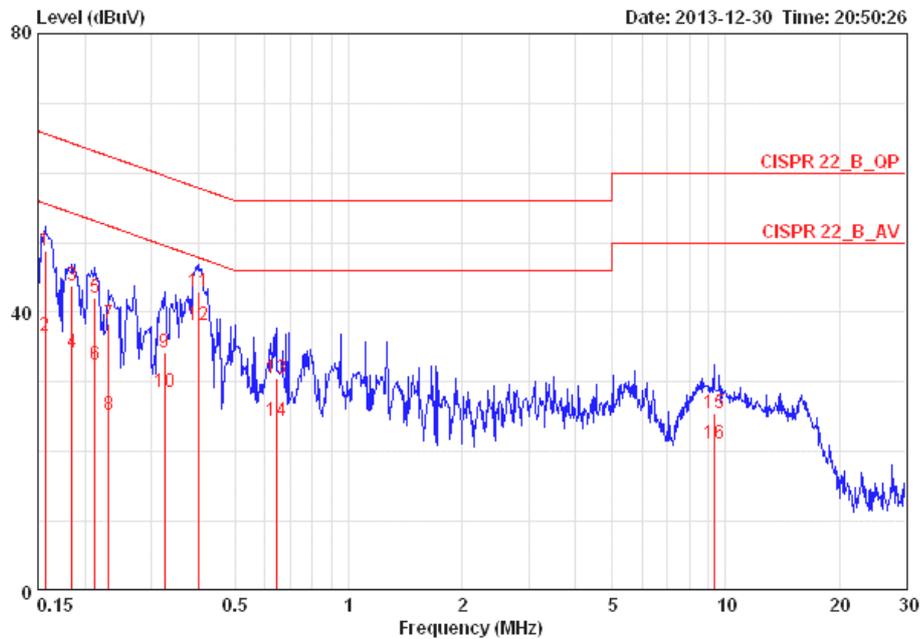

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15650	48.75	-16.90	65.65	48.49	0.08	0.18	QP	NEUTRAL
2	0.15650	36.64	-19.01	55.65	36.38	0.08	0.18	AVERAGE	NEUTRAL
3	0.18443	43.84	-20.44	64.28	43.57	0.08	0.19	QP	NEUTRAL
4	0.18443	34.30	-19.98	54.28	34.03	0.08	0.19	AVERAGE	NEUTRAL
5	0.21279	42.16	-20.94	63.10	41.88	0.08	0.20	QP	NEUTRAL
6	0.21279	32.49	-20.61	53.10	32.21	0.08	0.20	AVERAGE	NEUTRAL
7	0.23162	38.30	-24.09	62.39	38.02	0.08	0.20	QP	NEUTRAL
8	0.23162	25.28	-27.11	52.39	25.00	0.08	0.20	AVERAGE	NEUTRAL
9	0.32512	34.26	-25.31	59.57	33.98	0.08	0.20	QP	NEUTRAL
10	0.32512	28.49	-21.08	49.57	28.21	0.08	0.20	AVERAGE	NEUTRAL
11	0.40187	43.01	-14.80	57.81	42.73	0.08	0.20	QP	NEUTRAL
12	0.40187	38.11	-9.70	47.81	37.83	0.08	0.20	AVERAGE	NEUTRAL
13	0.64398	30.50	-25.50	56.00	30.22	0.08	0.20	QP	NEUTRAL
14	0.64398	24.32	-21.68	46.00	24.04	0.08	0.20	AVERAGE	NEUTRAL
15	9.302	25.49	-34.51	60.00	24.95	0.23	0.32	QP	NEUTRAL
16	9.302	21.18	-28.82	50.00	20.64	0.23	0.32	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	26°C	Humidity	63%
Test Engineer	David Tseng	Configurations	IEEE 802.11n

##### Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	24.80	18.08
60	5300 MHz	22.72	17.92
64	5320 MHz	26.08	18.08
100	5500 MHz	25.76	17.92
116	5580 MHz	25.92	17.92
140	5700 MHz	25.76	17.92

##### Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
54	5270 MHz	41.60	36.48
62	5310 MHz	39.04	36.48
102	5510 MHz	39.04	36.80
110	5550 MHz	39.04	36.48
134	5670 MHz	38.72	36.48

<b>Temperature</b>	26°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	David Tseng	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3**


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	22.72	17.12
60	5300 MHz	20.48	16.96
64	5320 MHz	24.16	16.96
100	5500 MHz	26.08	17.12
116	5580 MHz	25.76	17.12
140	5700 MHz	23.84	16.96

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5260 MHz**

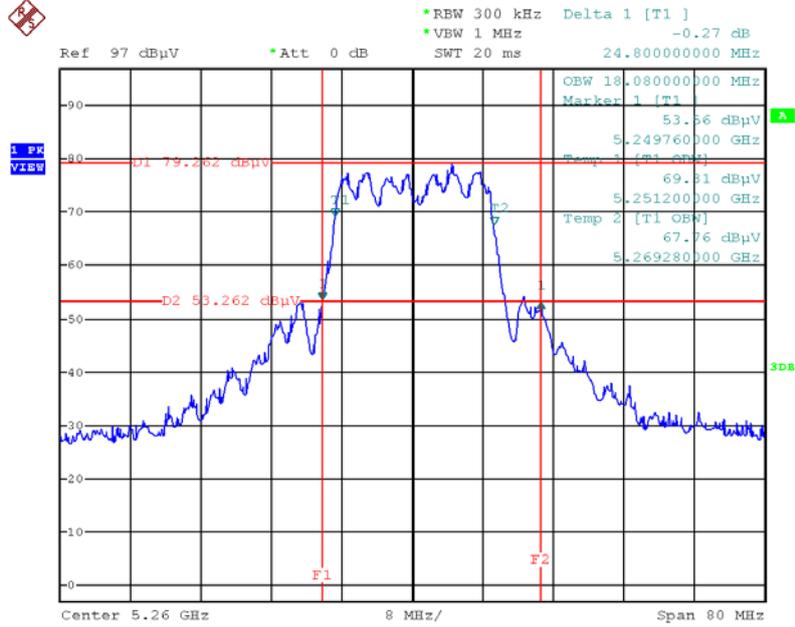


Date: 28.DEC.2013 15:52:02

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5300 MHz**

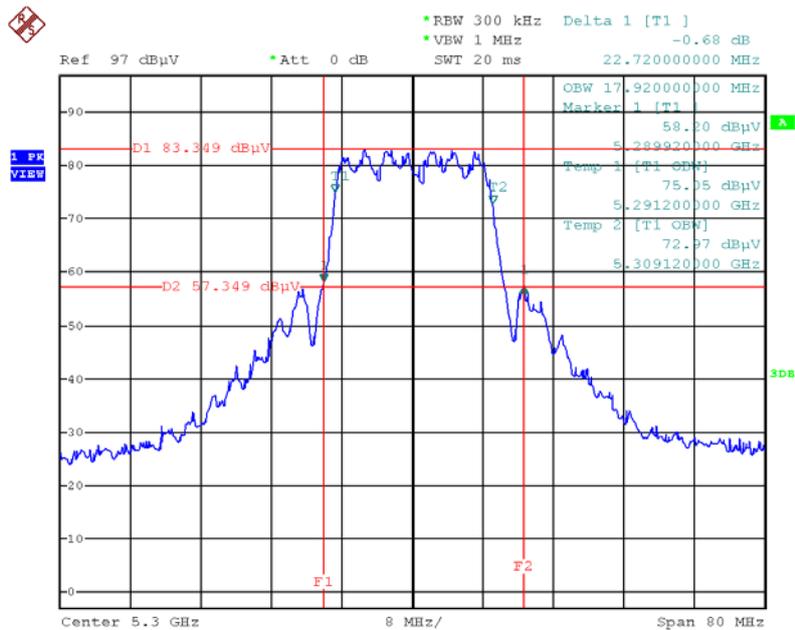


Date: 28.DEC.2013 15:52:48

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5320 MHz**

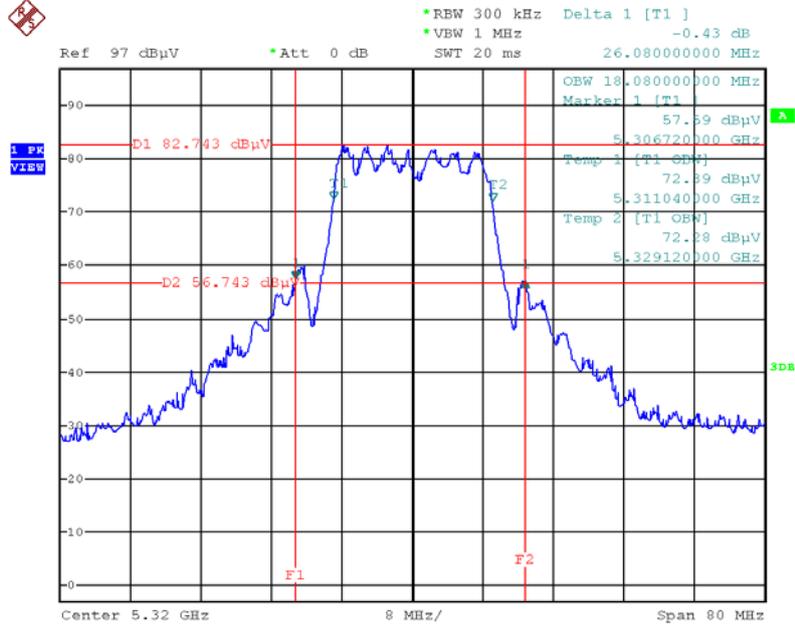


Date: 28.DEC.2013 15:53:47

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5500 MHz**

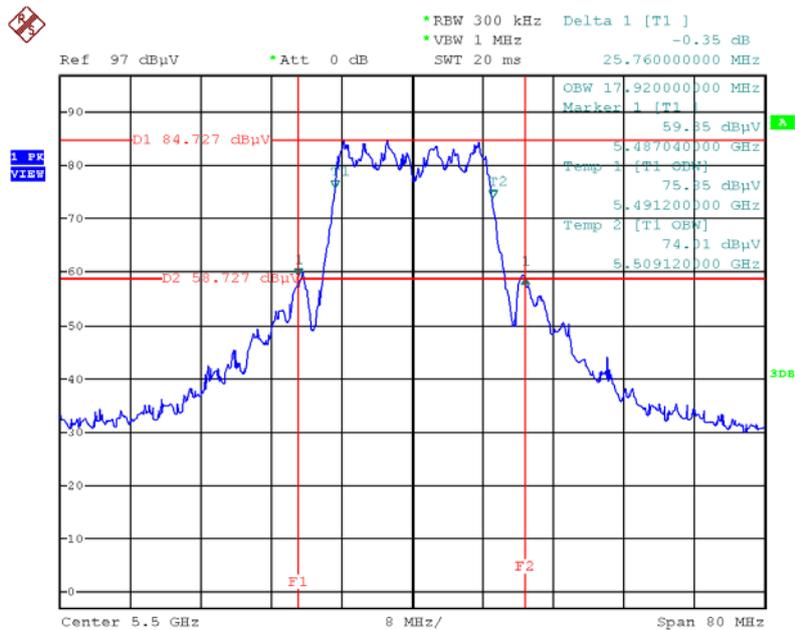


Date: 28.DEC.2013 15:54:26

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5580 MHz**

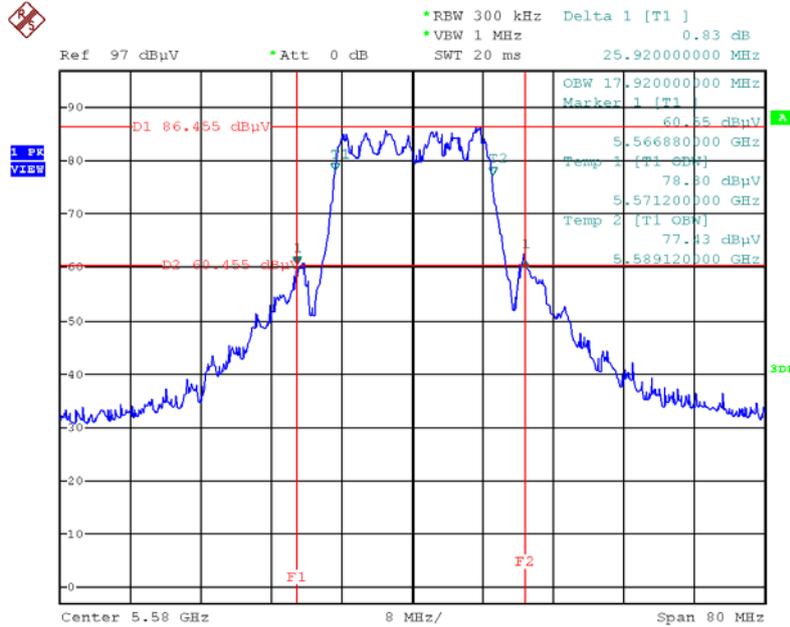


Date: 28.DEC.2013 15:55:11

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5700 MHz**

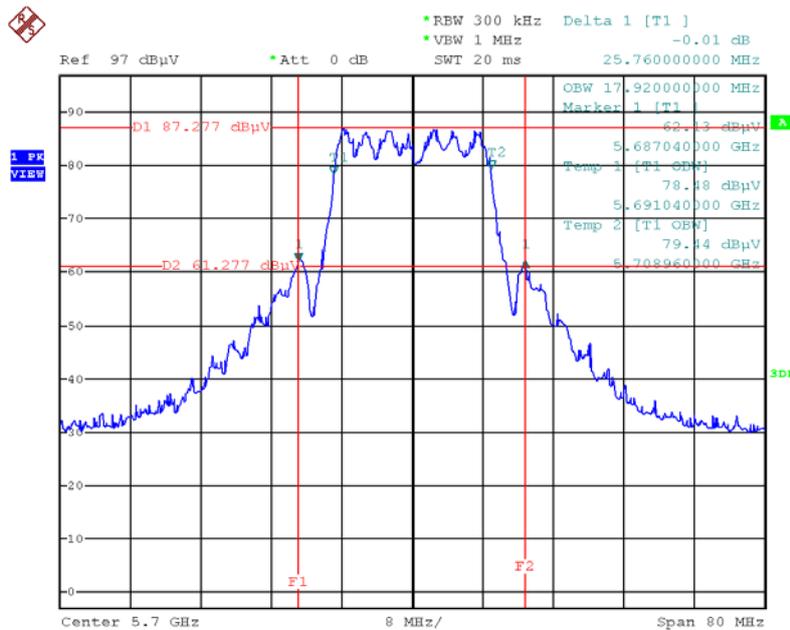


Date: 28.DEC.2013 15:55:50

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5270 MHz**

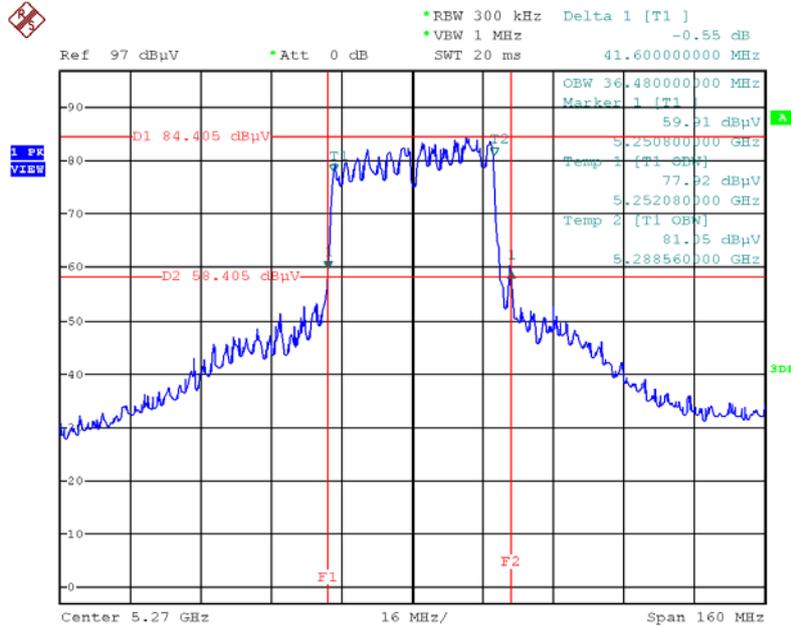


Date: 28.DEC.2013 15:57:06

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5310 MHz**

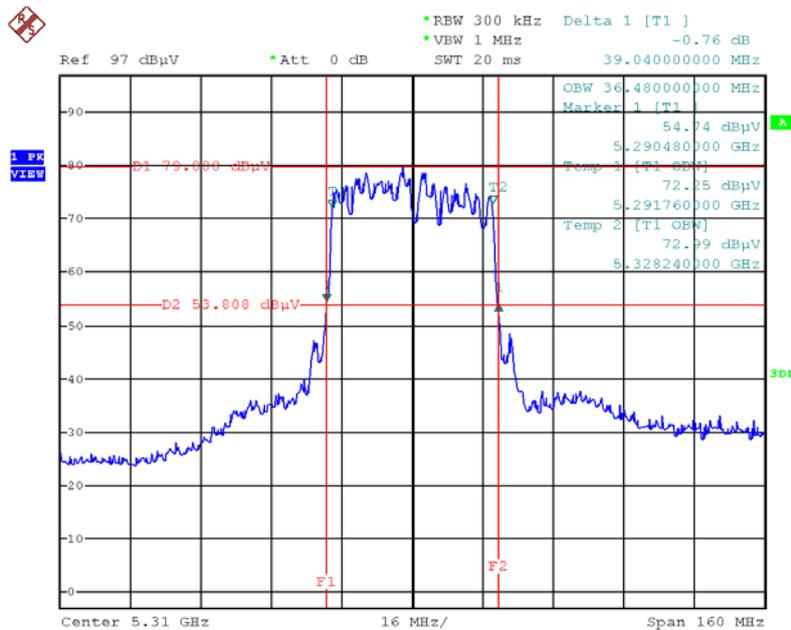


Date: 28.DEC.2013 15:58:24

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5510 MHz**

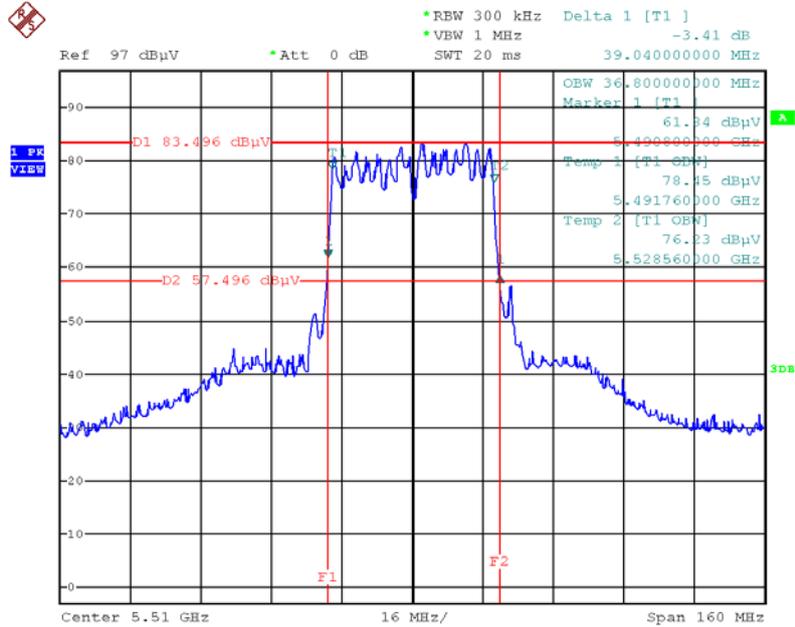


Date: 28.DEC.2013 15:59:33

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5550 MHz**

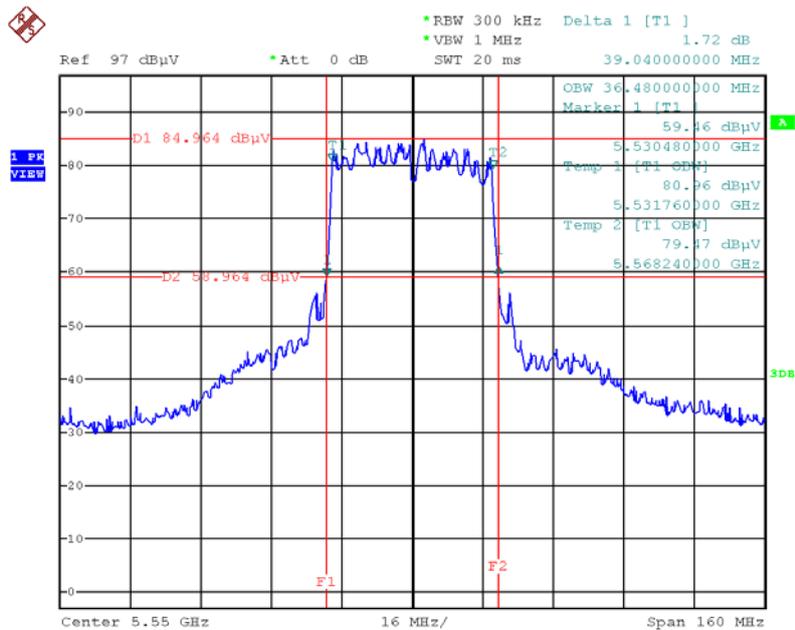


Date: 28.DEC.2013 16:01:06

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5670 MHz**

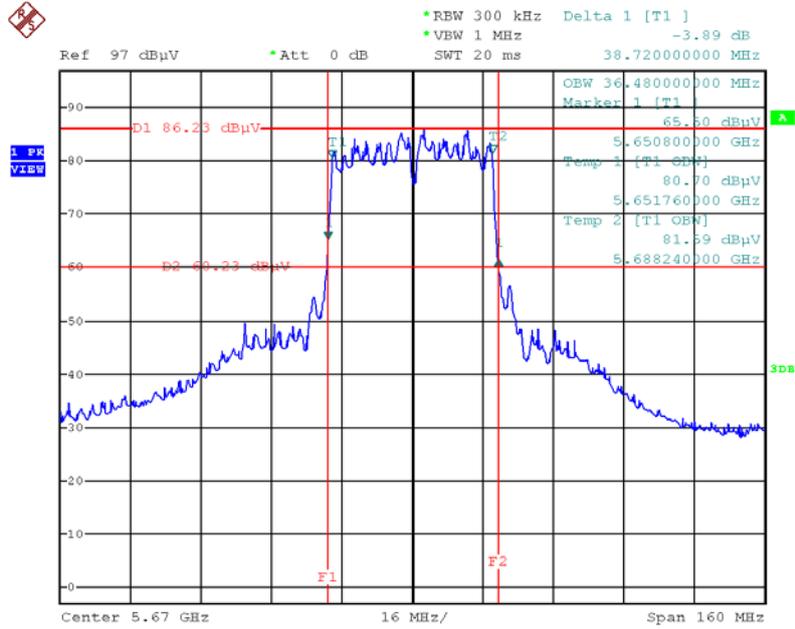


Date: 28.DEC.2013 16:03:35

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5260 MHz**

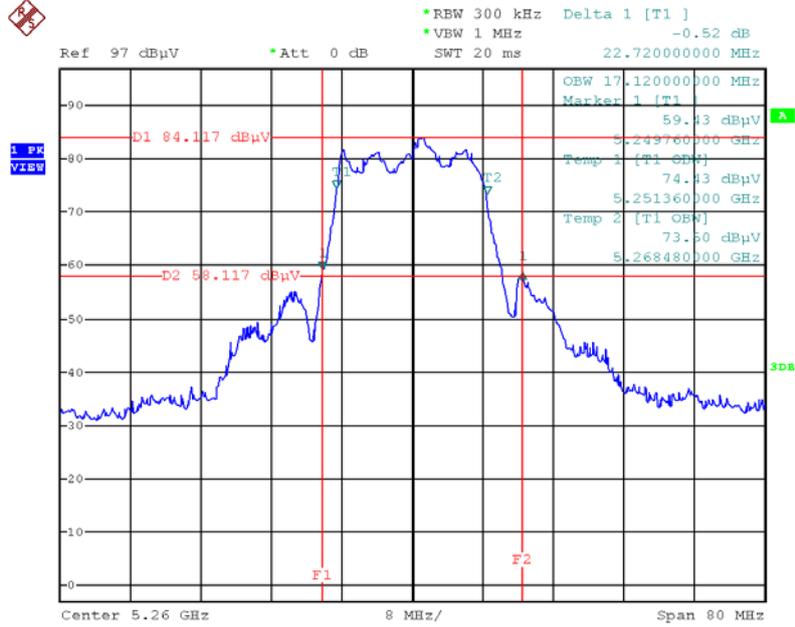


Date: 28.DEC.2013 15:44:28

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5300 MHz**

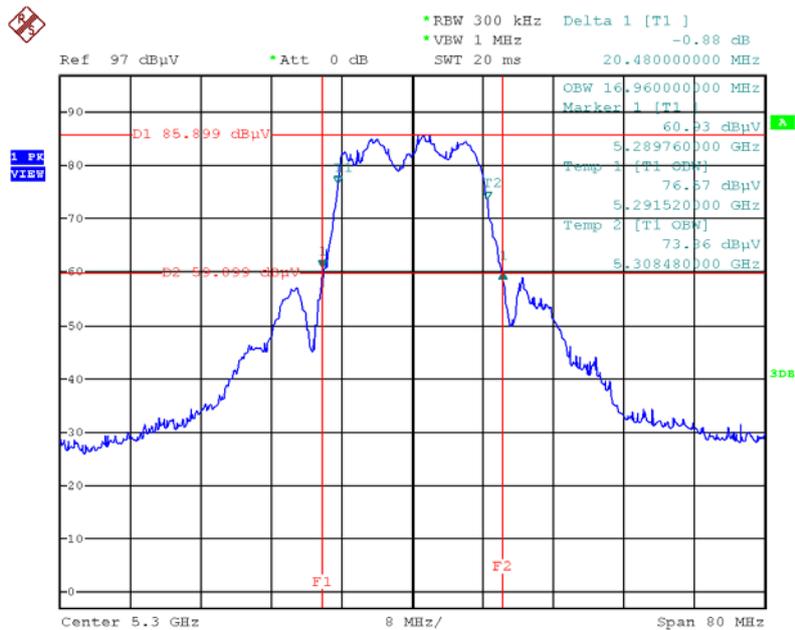


Date: 28.DEC.2013 15:46:00

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5320 MHz**

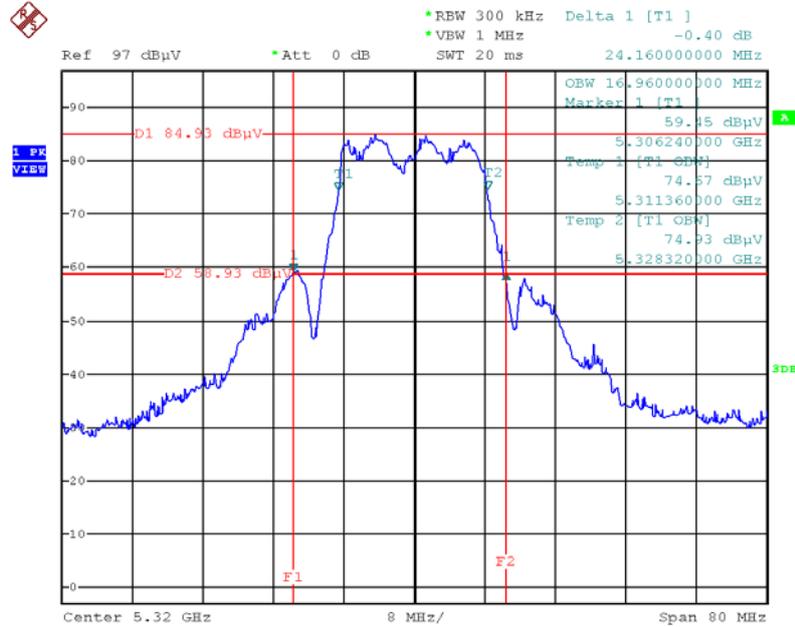


Date: 28.DEC.2013 15:46:51

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5500 MHz**

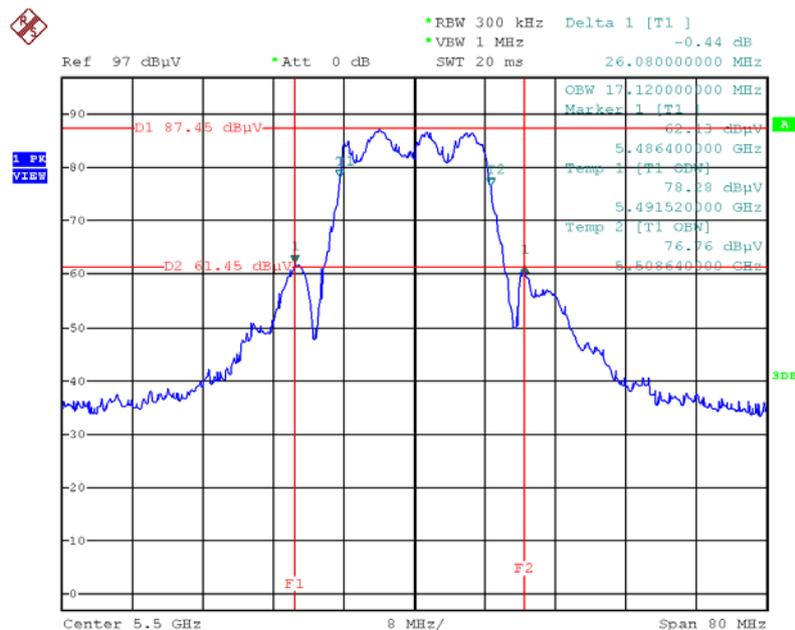


Date: 28.DEC.2013 15:48:02

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5580 MHz**

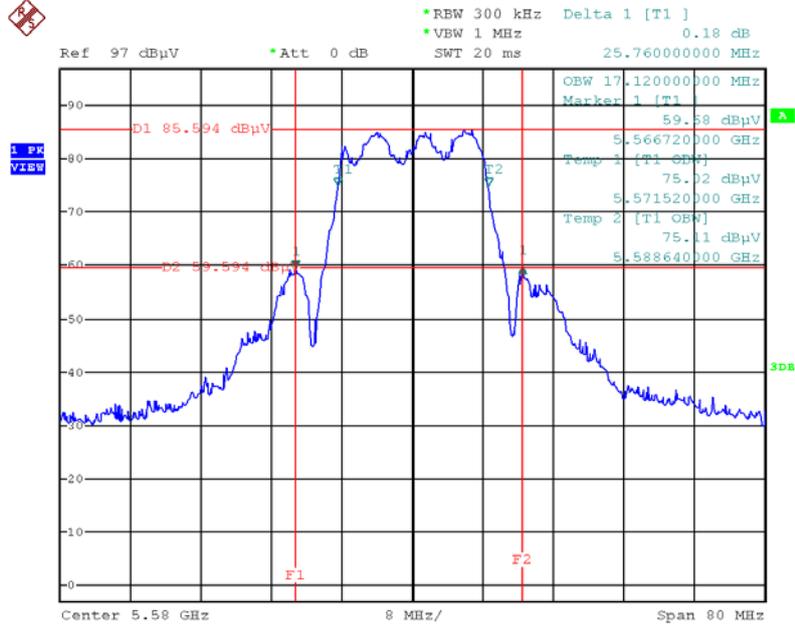

Date: 28.DEC.2013 15:49:37

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5700 MHz**

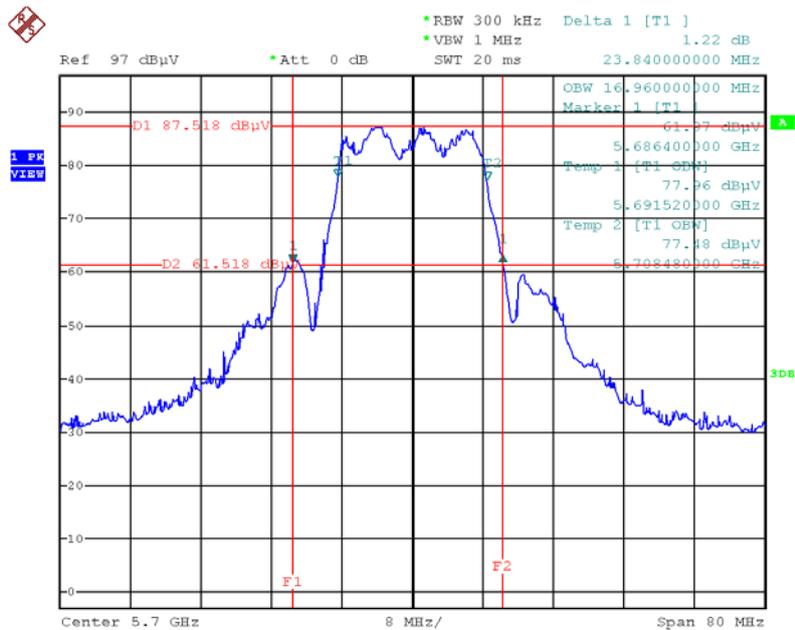

Date: 28.DEC.2013 15:50:29

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	AVERAGE

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power =>(3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout



#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	63%
Test Engineer	David Tseng	Configurations	IEEE 802.11n
Test Date	Dec. 28, 2013		

##### Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
52	5260 MHz	17.00	18.55	17.95	22.65	24.00	Complies
60	5300 MHz	16.83	18.43	17.77	22.50	24.00	Complies
64	5320 MHz	17.16	18.19	17.75	22.49	24.00	Complies
100	5500 MHz	16.37	17.22	16.19	21.39	24.00	Complies
116	5580 MHz	17.03	17.59	16.98	21.98	24.00	Complies
140	5700 MHz	16.16	17.32	16.32	21.40	24.00	Complies

##### Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
54	5270 MHz	18.59	19.33	19.19	23.82	24.00	Complies
62	5310 MHz	10.38	11.73	8.63	15.20	24.00	Complies
102	5510 MHz	9.58	9.75	7.94	13.93	24.00	Complies
110	5550 MHz	18.75	18.78	19.08	23.64	24.00	Complies
134	5670 MHz	18.87	18.80	18.79	23.59	24.00	Complies

<b>Temperature</b>	26°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	David Tseng	<b>Configurations</b>	IEEE 802.11a
<b>Test Date</b>	Dec. 28, 2013		

**Configuration IEEE 802.11a**

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
52	5260 MHz	16.87	18.55	17.02	22.32	24.00	<b>Complies</b>
60	5300 MHz	16.74	18.65	17.32	22.42	24.00	<b>Complies</b>
64	5320 MHz	17.23	18.25	17.66	22.50	24.00	<b>Complies</b>
100	5500 MHz	15.82	17.26	16.12	21.22	24.00	<b>Complies</b>
116	5580 MHz	16.11	17.33	16.32	21.39	24.00	<b>Complies</b>
140	5700 MHz	17.12	17.50	17.35	22.10	24.00	<b>Complies</b>

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.25-5.35 GHz	11
5.470-5.725 GHz	11

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

#### 4.4.4. Test Setup Layout

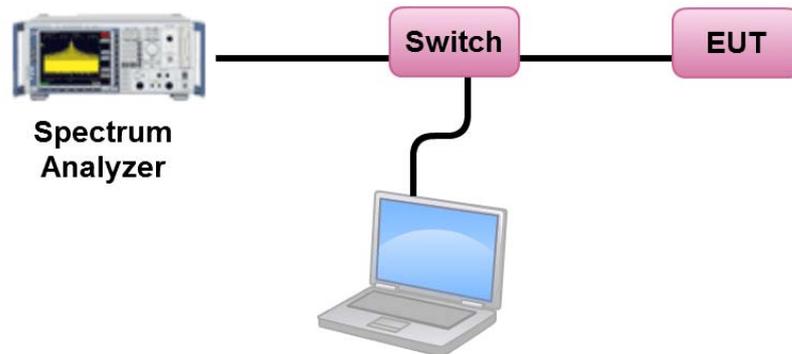

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	63%
Test Engineer	David Tseng	Configurations	IEEE 802.11n
Test Date	Dec. 28, 2013		

##### Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	8.78	8.93	Complies
60	5300 MHz	8.65	8.93	Complies
64	5320 MHz	8.52	8.93	Complies
100	5500 MHz	7.85	8.93	Complies
116	5580 MHz	8.42	8.93	Complies
140	5700 MHz	7.44	8.93	Complies

Note:

Directional gain =  $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.07\text{dBi} > 6\text{dBi}$ , so Band2 Limit =  $11 - (8.07 - 6) = 8.93\text{dBm/MHz}$ .

Directional gain =  $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.07\text{dBi} > 6\text{dBi}$ , so Band3 Limit =  $11 - (8.07 - 6) = 8.93\text{dBm/MHz}$ .

##### Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270 MHz	8.48	8.93	Complies
62	5310 MHz	-1.22	8.93	Complies
102	5510 MHz	-0.77	8.93	Complies
110	5550 MHz	8.29	8.93	Complies
134	5670 MHz	7.29	8.93	Complies

Note:

Directional gain =  $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.07\text{dBi} > 6\text{dBi}$ , so Band2 Limit =  $11 - (8.07 - 6) = 8.93\text{dBm/MHz}$ .

Directional gain =  $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.07\text{dBi} > 6\text{dBi}$ , so Band3 Limit =  $11 - (8.07 - 6) = 8.93\text{dBm/MHz}$ .

Temperature	26°C	Humidity	63%
Test Engineer	David Tseng	Configurations	IEEE 802.11a
Test Date	Dec. 28, 2013		

**Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3**

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	8.66	8.93	Complies
60	5300 MHz	8.65	8.93	Complies
64	5320 MHz	8.80	8.93	Complies
100	5500 MHz	8.21	8.93	Complies
116	5580 MHz	8.30	8.93	Complies
140	5700 MHz	8.15	8.93	Complies

Note:


Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{ss}) = 8.07 \text{ dBi} > 6 \text{ dBi}$ , so Band2 Limit =  $11 - (8.07 - 6) = 8.93 \text{ dBm/MHz}$ .

Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{ss}) = 8.07 \text{ dBi} > 6 \text{ dBi}$ , so Band3 Limit =  $11 - (8.07 - 6) = 8.93 \text{ dBm/MHz}$ .


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3  
/ 5260 MHz

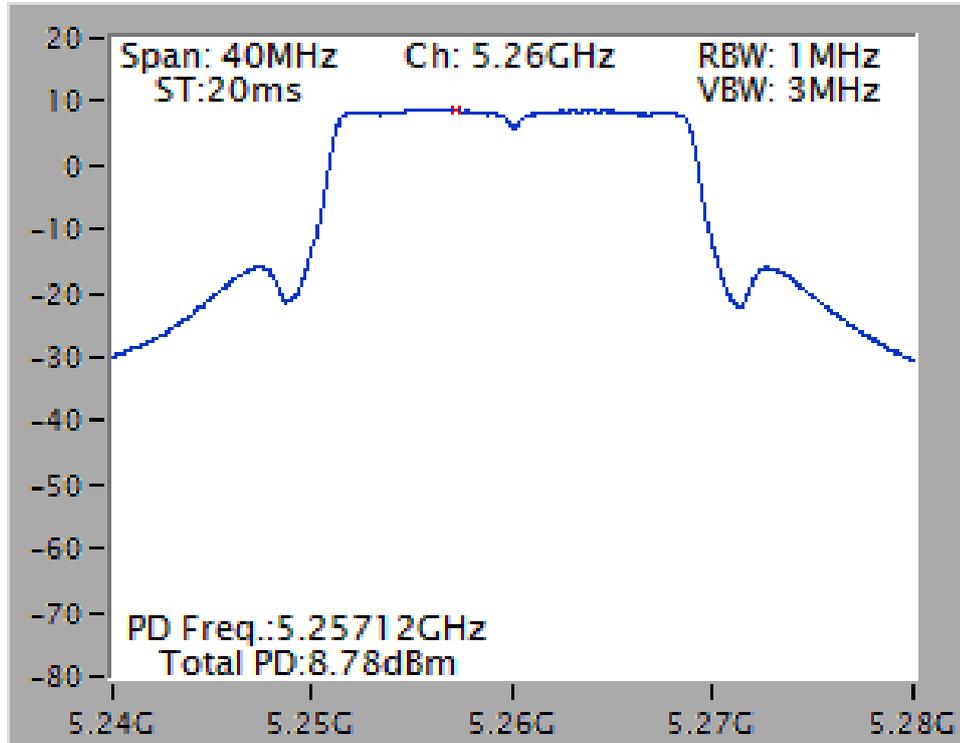


Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3  
/ 5580 MHz

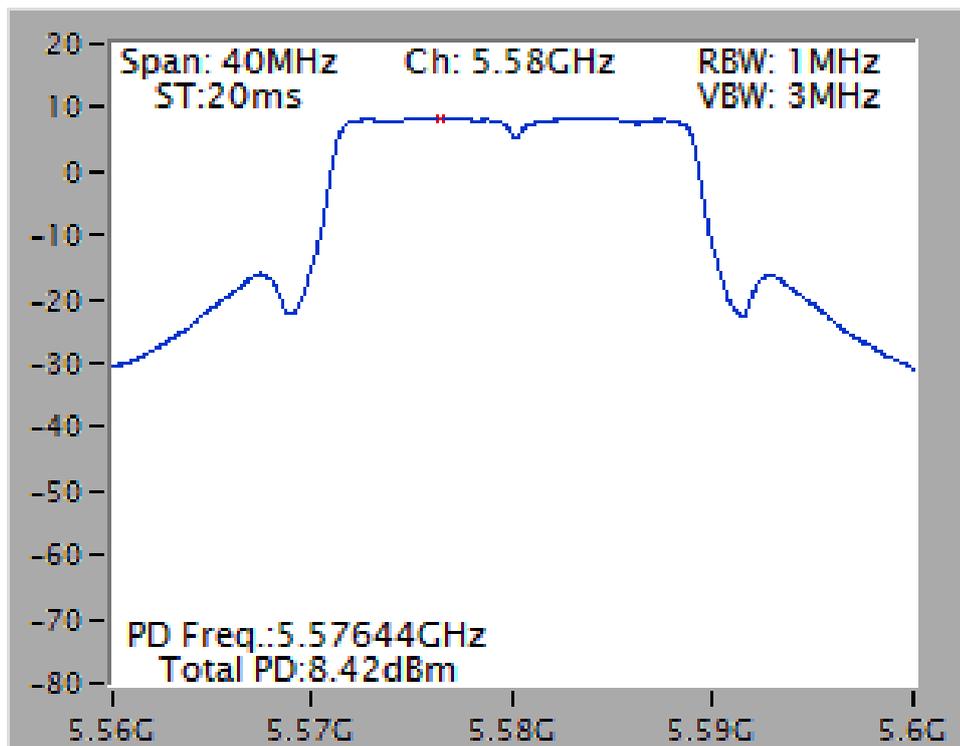


Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3  
/ 5270 MHz

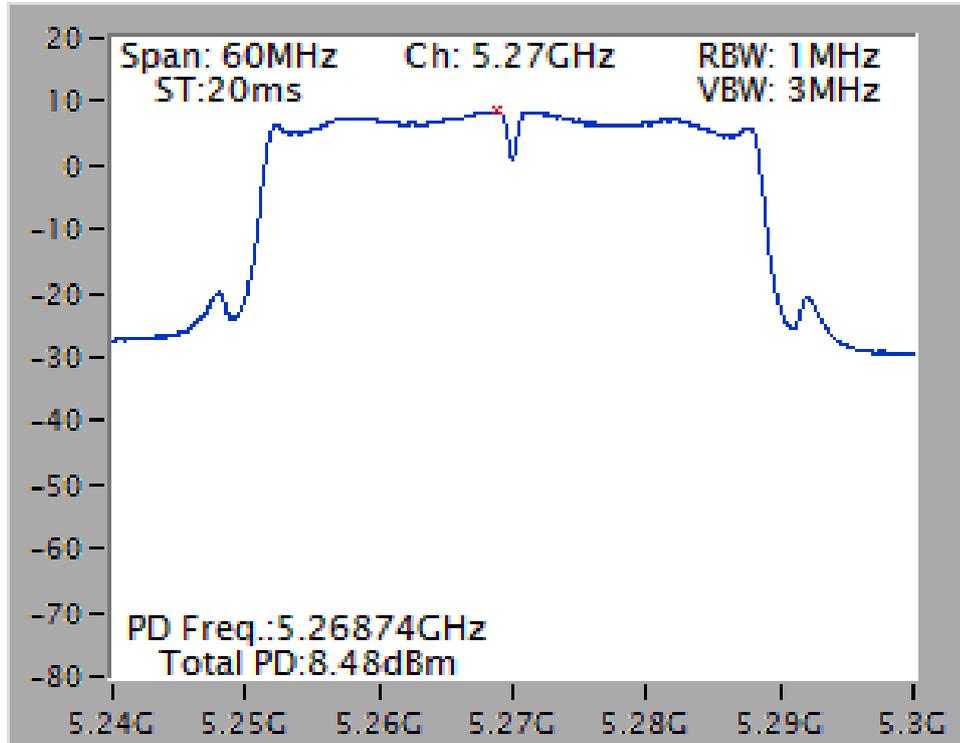


Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3  
/ 5550 MHz

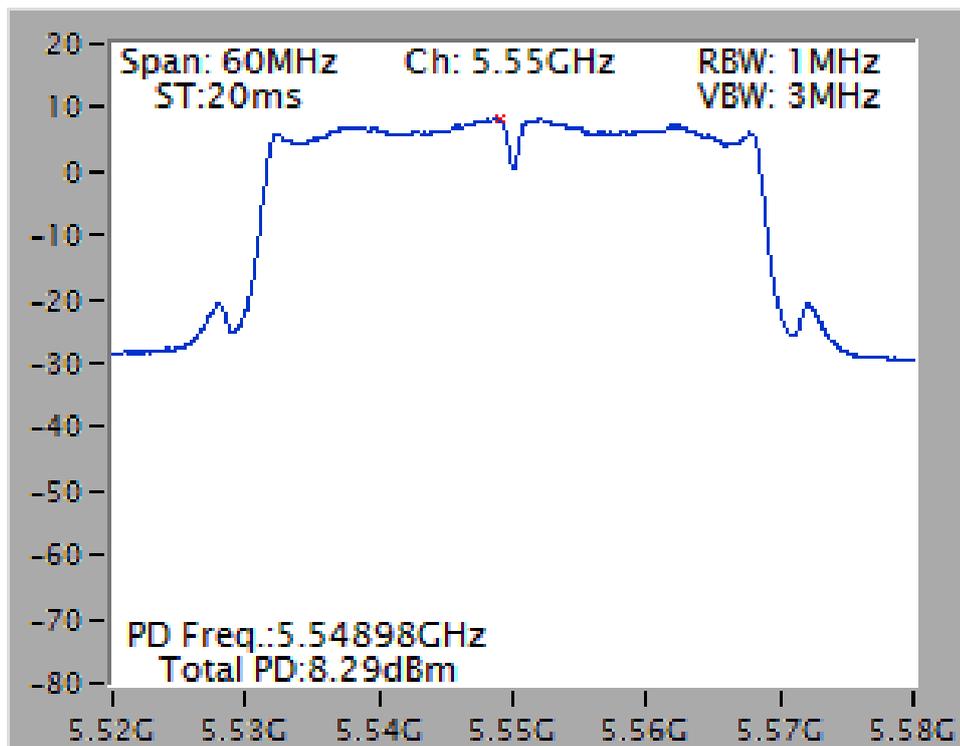

Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5320 MHz

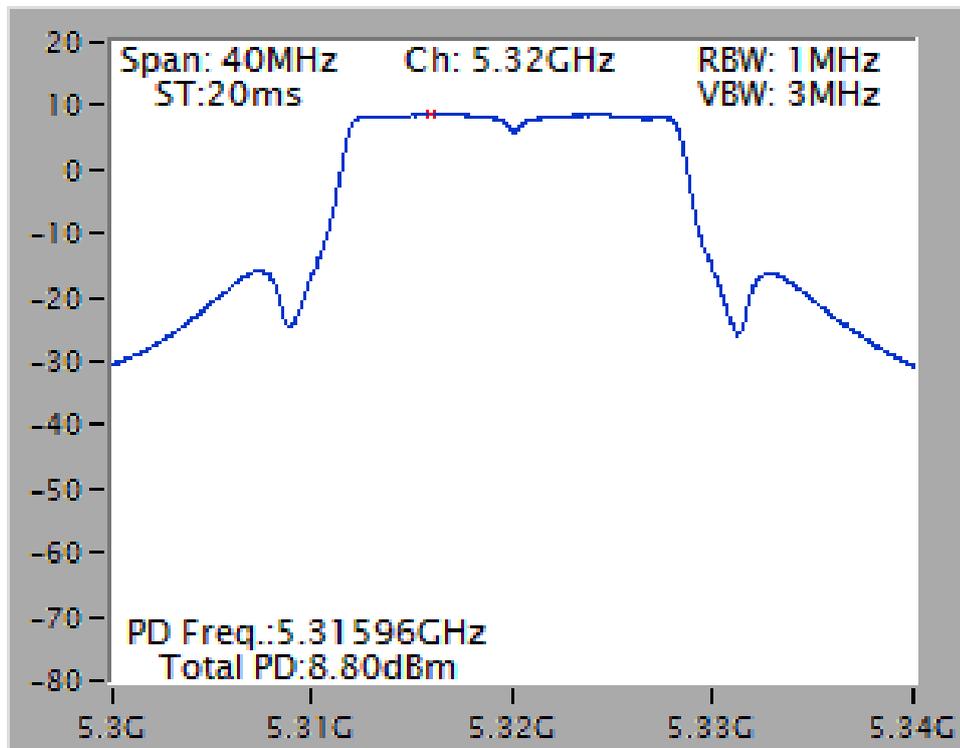

Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5580 MHz

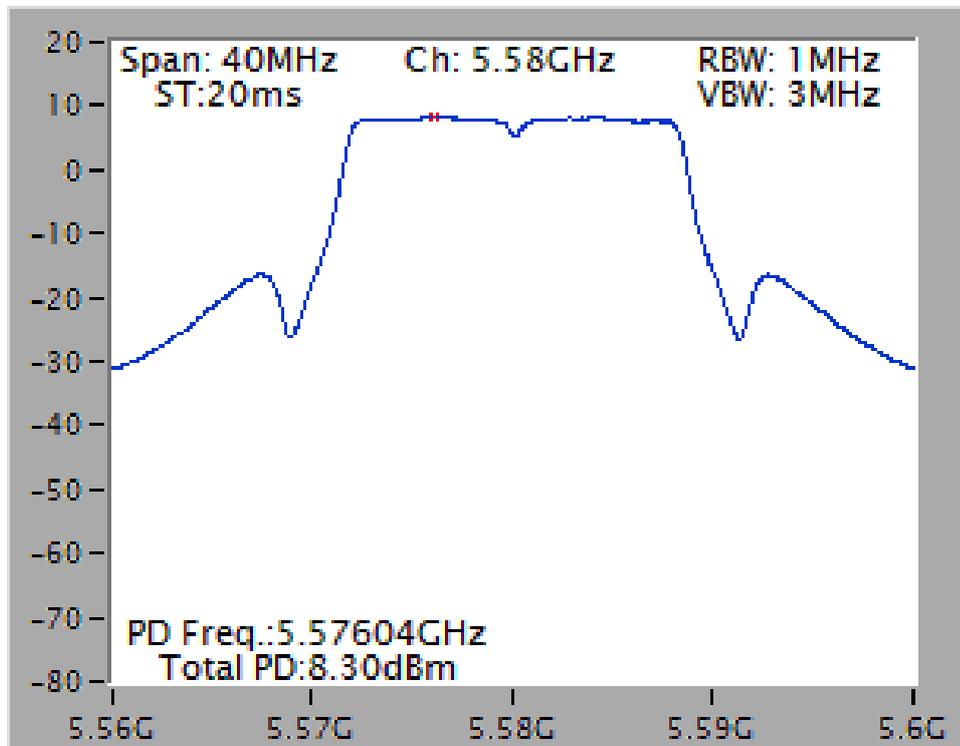

## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (Peak Trace) / 1 MHz (Average Trace)
VBW	≥ 3 MHz (Peak Trace) / ≥ 3 MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

### 4.5.3. Test Procedures

1. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
2. Delta Mark trace A Maximum frequency and trace B same frequency.
3. Repeat the above procedure until measurements for all frequencies were complete.
4. Testing each modulation mode on a single channel in single operating band at single output port.  
All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM). All bandwidth modes need test.

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Peak Excursion

<b>Temperature</b>	26°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	David Tseng	<b>Configurations</b>	IEEE 802.11n

##### Configuration IEEE 802.11n 20MHz / Chain 1 + Chain 2 + Chain 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5260MHz	8.91	13	Complies
QPSK (MCS1)	5260MHz	8.81	13	Complies
16QAM (MCS3)	5260MHz	9.91	13	Complies
64QAM (MCS5)	5260MHz	10.82	13	Complies
BPSK (MCS0)	5580MHz	8.64	13	Complies
QPSK (MCS1)	5580MHz	9.83	13	Complies
16QAM (MCS3)	5580MHz	9.55	13	Complies
64QAM (MCS5)	5580MHz	10.21	13	Complies

##### Configuration IEEE 802.11n 40MHz / Chain 1 + Chain 2 + Chain 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5270MHz	8.79	13	Complies
QPSK (MCS1)	5270MHz	9.21	13	Complies
16QAM (MCS3)	5270MHz	10.06	13	Complies
64QAM (MCS5)	5270MHz	10.69	13	Complies
BPSK (MCS0)	5550MHz	9.04	13	Complies
QPSK (MCS1)	5550MHz	10.03	13	Complies
16QAM (MCS3)	5550MHz	9.79	13	Complies
64QAM (MCS5)	5550MHz	10.72	13	Complies

<b>Temperature</b>	26°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	David Tseng	<b>Configurations</b>	IEEE 802.11a


**Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3**

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (6Mbps)	5320MHz	9.19	13	Complies
QPSK (12Mbps)	5320MHz	8.93	13	Complies
16QAM (24Mbps)	5320MHz	10.00	13	Complies
64QAM (48Mbps)	5320MHz	10.08	13	Complies
BPSK (6Mbps)	5700MHz	8.71	13	Complies
QPSK (12Mbps)	5700MHz	9.73	13	Complies
16QAM (24Mbps)	5700MHz	10.23	13	Complies
64QAM (48Mbps)	5700MHz	10.63	13	Complies

Note: All the test values were listed in the report.


For plots, only the modulation with worse result was shown.

**Peak Excursion Plot on Configuration IEEE 802.11n 20MHz / Chain 1 + Chain 2 + Chain 3  
/ 64QAM (MCS5) / 5260 MHz**

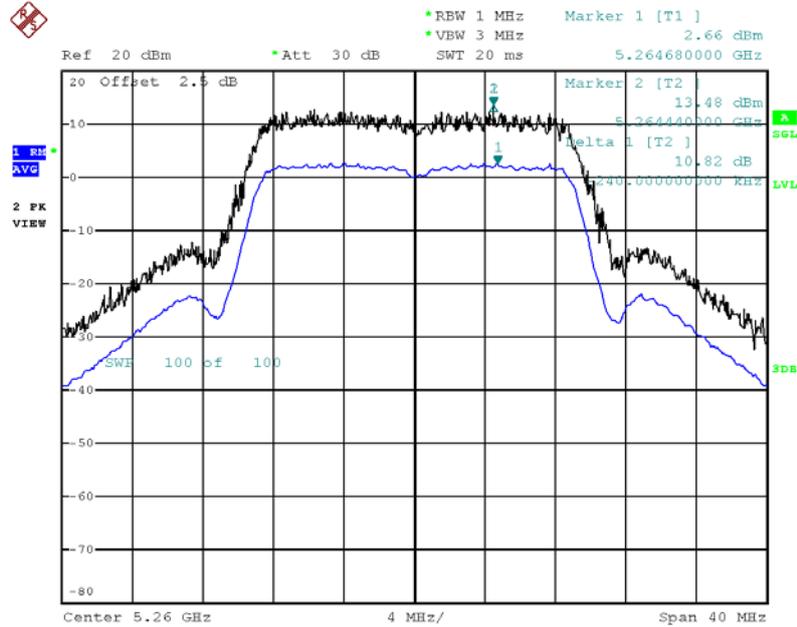


Date: 28.DEC.2013 16:24:13

**Peak Excursion Plot on Configuration IEEE 802.11n 20MHz / Chain 1 + Chain 2 + Chain 3  
/ 64QAM (MCS5) / 5580 MHz**

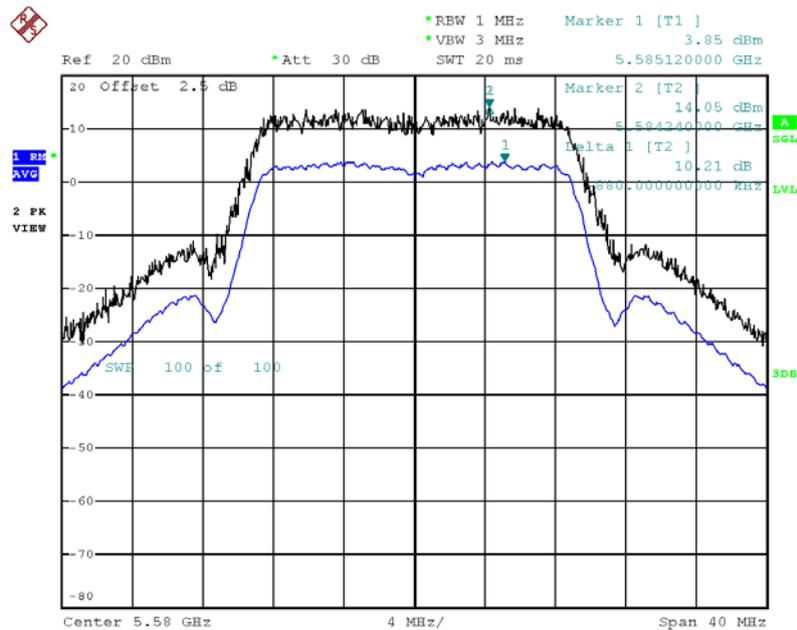


Date: 28.DEC.2013 16:26:55

**Peak Excursion Plot on Configuration IEEE 802.11n 40MHz / Chain 1 + Chain 2 + Chain 3  
/ 64QAM (MCS5) / 5270 MHz**

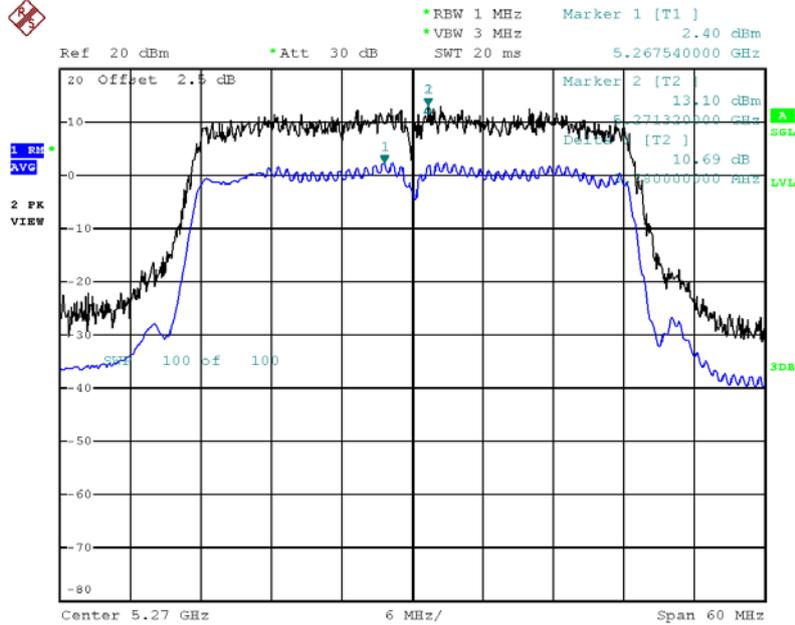


Date: 28.DEC.2013 16:35:51

**Peak Excursion Plot on Configuration IEEE 802.11n 40MHz / Chain 1 + Chain 2 + Chain 3  
/ 64QAM (MCS5) / 5550 MHz**

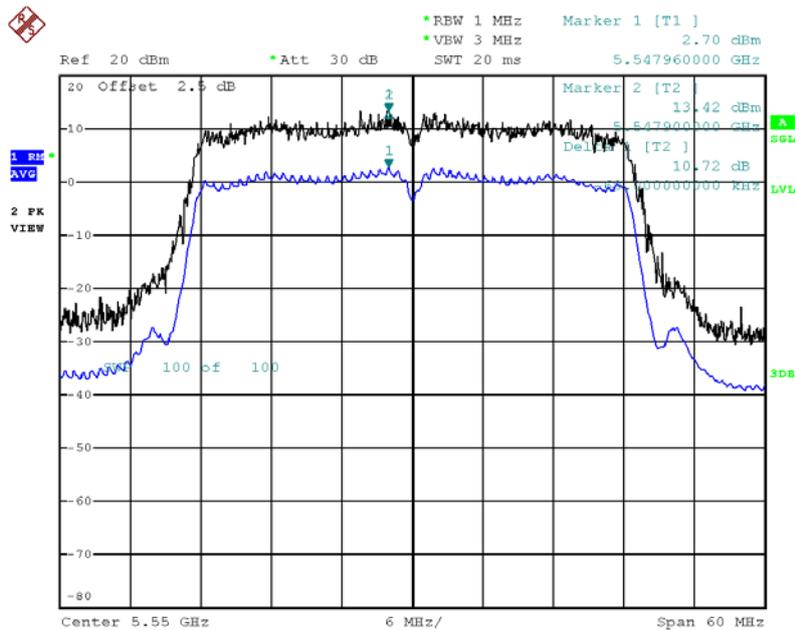


Date: 28.DEC.2013 16:43:31

**Peak Excursion Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 64QAM (48Mbps) / 5320 MHz**

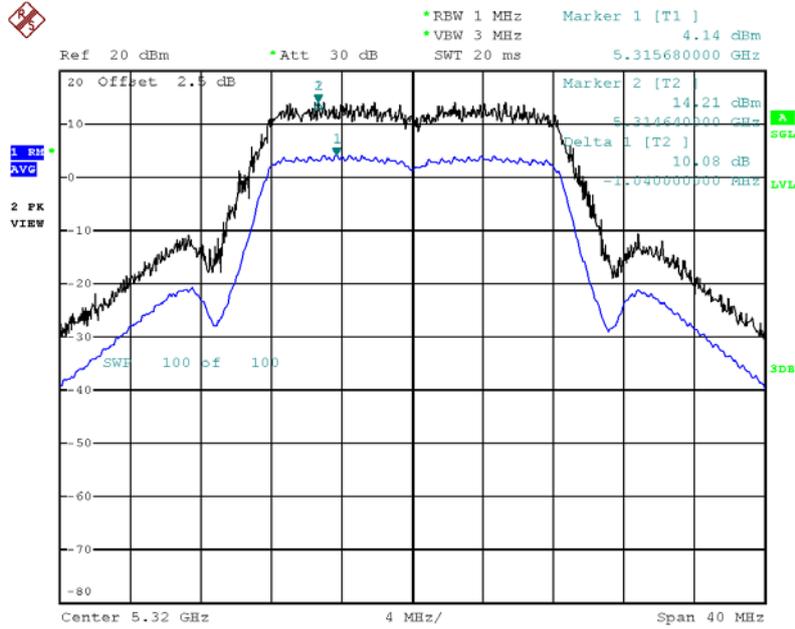

Date: 28.DEC.2013 16:15:23

**Peak Excursion Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 64QAM (48Mbps) / 5700 MHz**

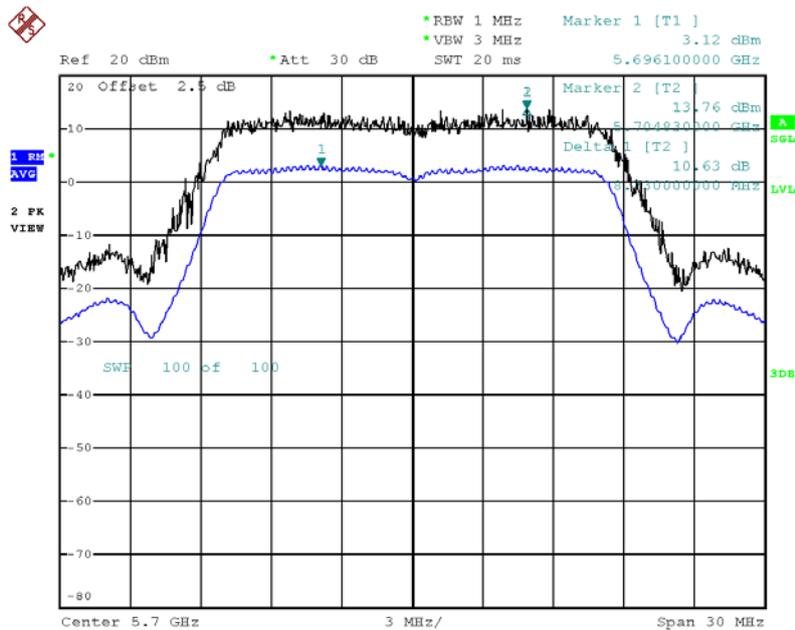

Date: 28.DEC.2013 16:19:02

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

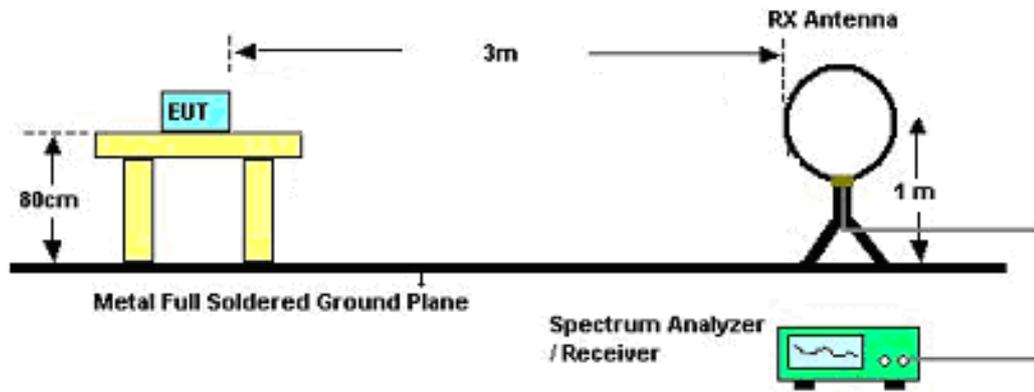

For Radiated Emissions: 30MHz~1GHz

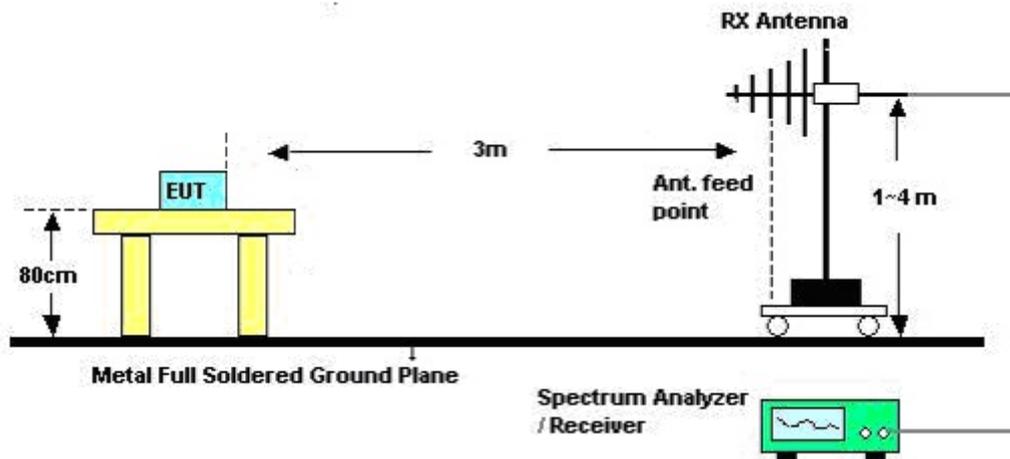

For Radiated Emissions: Above 1GHz

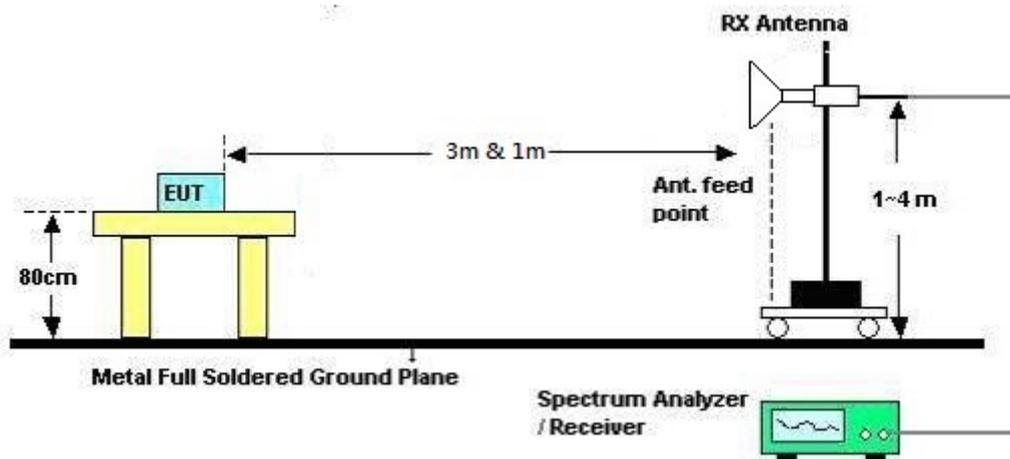

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	CTX
Test Date	May 14, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	CTX

Horizontal

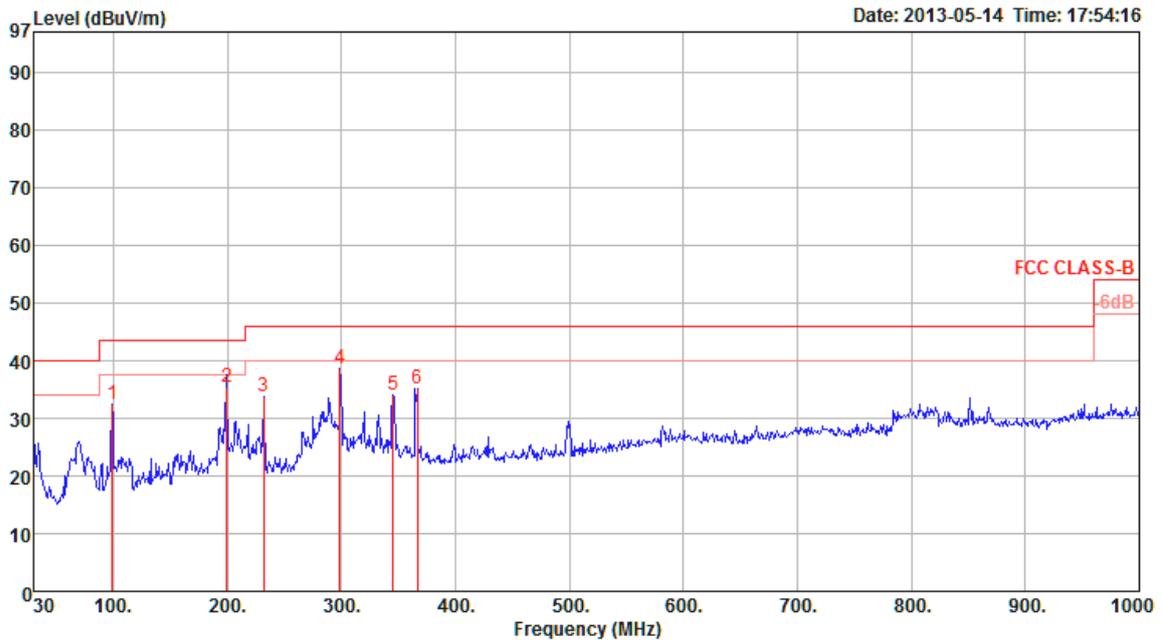

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	98.87	32.33	43.50	-11.17	47.47	1.49	27.82	11.19	Peak	0	100	HORIZONTAL
2	199.75	35.47	43.50	-8.03	50.23	2.09	27.25	10.40	Peak	0	100	HORIZONTAL
3	231.76	33.85	46.00	-12.15	47.12	2.29	27.02	11.46	Peak	0	100	HORIZONTAL
4	298.69	38.77	46.00	-7.23	49.29	2.51	26.83	13.80	Peak	0	100	HORIZONTAL
5	345.25	33.92	46.00	-12.08	43.03	2.77	27.04	15.16	Peak	0	100	HORIZONTAL
6	366.59	35.19	46.00	-10.81	43.82	2.86	27.19	15.70	Peak	0	100	HORIZONTAL

**Vertical**

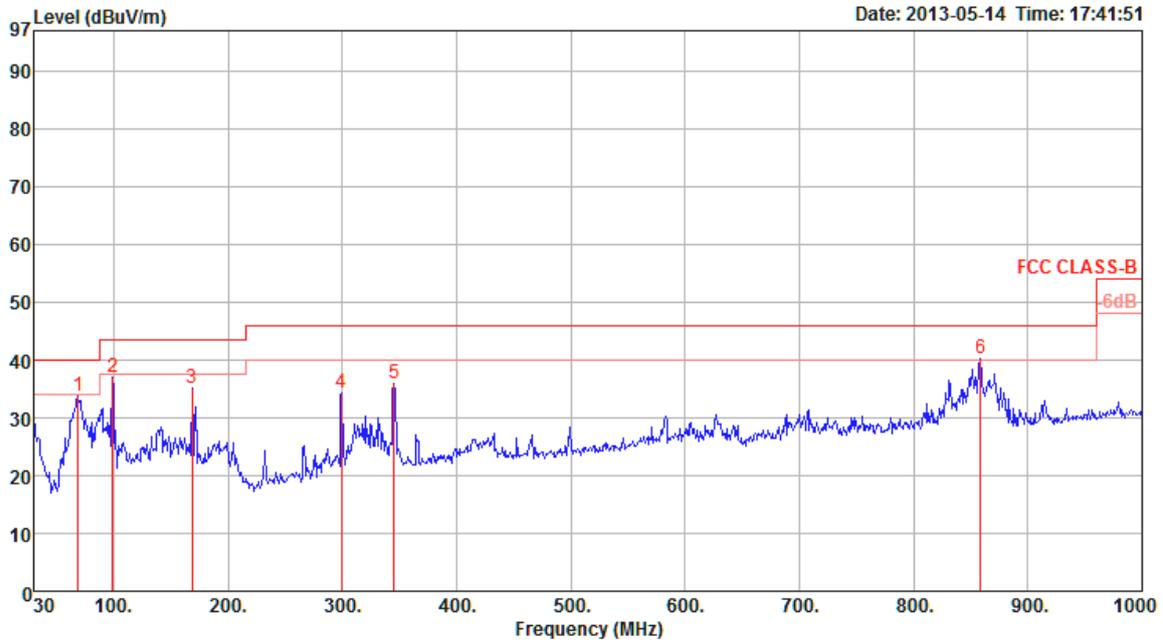

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	68.80	33.88	40.00	-6.12	53.75	1.26	27.94	6.81	Peak	0	400	VERTICAL
2	98.87	37.02	43.50	-6.48	52.16	1.49	27.82	11.19	Peak	0	400	VERTICAL
3	168.71	35.11	43.50	-8.39	50.25	1.94	27.41	10.33	Peak	0	400	VERTICAL
4	299.66	34.44	46.00	-11.56	44.96	2.51	26.83	13.80	Peak	0	400	VERTICAL
5	345.25	36.05	46.00	-9.95	45.16	2.77	27.04	15.16	Peak	0	400	VERTICAL
6 p	858.38	40.13	46.00	-5.87	41.31	4.46	26.89	21.25	Peak	0	400	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz CH 52 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 14, 2013		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4995.96	67.39	74.00	-6.61	65.62	3.39	33.39	35.01	Peak	139	360	HORIZONTAL
2	4999.97	53.22	54.00	-0.78	51.45	3.39	33.39	35.01	Average	139	360	HORIZONTAL
3	15778.72	48.61	54.00	-5.39	40.48	6.14	37.41	35.42	Average	166	244	HORIZONTAL
4	15788.37	66.33	74.00	-7.67	58.20	6.14	37.41	35.42	Peak	166	244	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.97	59.14	74.00	-14.86	57.36	3.39	33.40	35.01	Peak	100	327	VERTICAL
2	5000.13	47.10	54.00	-6.90	45.32	3.39	33.40	35.01	Average	100	327	VERTICAL
3	15779.29	44.42	54.00	-9.58	36.29	6.14	37.41	35.42	Average	124	183	VERTICAL
4	15779.84	60.90	74.00	-13.10	52.77	6.14	37.41	35.42	Peak	124	183	VERTICAL

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz CH 60 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5030.61	53.68	54.00	-0.32	51.84	3.40	33.45	35.01	Average	125	0	HORIZONTAL
2	5042.15	67.21	74.00	-6.79	65.33	3.40	33.49	35.01	Peak	125	0	HORIZONTAL
3	10599.36	41.51	54.00	-12.49	33.54	5.01	38.38	35.42	Average	142	71	HORIZONTAL
4	10599.55	57.40	74.00	-16.60	49.43	5.01	38.38	35.42	Peak	142	71	HORIZONTAL
5	15898.65	45.93	54.00	-8.07	37.93	6.15	37.29	35.44	Average	127	245	HORIZONTAL
6	15908.24	63.40	74.00	-10.60	55.40	6.15	37.29	35.44	Peak	127	245	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.00	47.90	54.00	-6.10	46.12	3.39	33.40	35.01	Average	100	324	VERTICAL
2	5004.49	60.40	74.00	-13.60	58.62	3.39	33.40	35.01	Peak	100	324	VERTICAL
3	10598.94	59.60	74.00	-14.40	51.63	5.01	38.38	35.42	Peak	145	305	VERTICAL
4	10599.23	45.38	54.00	-8.62	37.41	5.01	38.38	35.42	Average	145	305	VERTICAL
5	15898.65	60.96	74.00	-13.04	52.96	6.15	37.29	35.44	Peak	119	226	VERTICAL
6	15903.27	44.55	54.00	-9.45	36.55	6.15	37.29	35.44	Average	119	226	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz CH 64 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5034.18	52.76	54.00	-1.24	50.92	3.40	33.45	35.01	Average	130	353	HORIZONTAL
2	5035.95	66.79	74.00	-7.21	64.95	3.40	33.45	35.01	Peak	130	353	HORIZONTAL
3	10638.62	49.74	74.00	-24.26	41.75	5.01	38.37	35.39	Peak	100	61	HORIZONTAL
4	10639.36	37.55	54.00	-16.45	29.56	5.01	38.37	35.39	Average	100	61	HORIZONTAL
5	15954.74	50.47	74.00	-23.53	42.53	6.15	37.23	35.44	Peak	100	289	HORIZONTAL
6	15958.14	38.28	54.00	-15.72	30.34	6.15	37.23	35.44	Average	100	289	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5035.63	59.32	74.00	-14.68	57.47	3.40	33.46	35.01	Peak	100	323	VERTICAL
2	5035.79	45.41	54.00	-8.59	43.56	3.40	33.46	35.01	Average	100	323	VERTICAL
3	10638.11	53.80	74.00	-20.20	45.81	5.01	38.37	35.39	Peak	160	130	VERTICAL
4	10638.49	41.58	54.00	-12.42	33.59	5.01	38.37	35.39	Average	160	130	VERTICAL
5	15963.49	38.24	54.00	-15.76	30.30	6.15	37.23	35.44	Average	100	184	VERTICAL
6	15964.97	50.89	74.00	-23.11	42.96	6.15	37.22	35.44	Peak	100	184	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz CH 100 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5062.50	49.96	54.00	-4.04	45.25	6.07	33.84	35.20	Average	116	178	HORIZONTAL
2	5063.50	63.65	74.00	-10.35	58.94	6.07	33.84	35.20	Peak	116	178	HORIZONTAL
3	10998.44	42.73	54.00	-11.27	29.10	8.93	39.50	34.80	Average	100	47	HORIZONTAL
4	11002.80	55.36	74.00	-18.64	41.73	8.93	39.50	34.80	Peak	100	47	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5064.70	58.63	74.00	-15.37	53.92	6.07	33.84	35.20	Peak	100	84	VERTICAL
2	5064.80	44.80	54.00	-9.20	40.09	6.07	33.84	35.20	Average	100	84	VERTICAL
3	11001.30	55.09	74.00	-18.91	41.46	8.93	39.50	34.80	Peak	100	251	VERTICAL
4	11006.90	43.20	54.00	-10.80	29.56	8.94	39.50	34.80	Average	100	251	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz CH 116 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5060.00	53.92	54.00	-0.08	49.21	6.07	33.84	35.20	Average	132	357	HORIZONTAL
2	5070.90	68.65	74.00	-5.35	63.94	6.07	33.84	35.20	Peak	132	357	HORIZONTAL
3	11158.16	55.17	74.00	-18.83	41.52	9.04	39.50	34.89	Peak	100	107	HORIZONTAL
4	11162.56	42.81	54.00	-11.19	29.16	9.04	39.50	34.89	Average	100	107	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5062.20	63.19	74.00	-10.81	58.48	6.07	33.84	35.20	Peak	110	74	VERTICAL
2	5070.80	48.87	54.00	-5.13	44.16	6.07	33.84	35.20	Average	110	74	VERTICAL
3	11161.68	45.91	54.00	-8.09	32.26	9.04	39.50	34.89	Average	153	186	VERTICAL
4	11161.80	59.18	74.00	-14.82	45.53	9.04	39.50	34.89	Peak	153	186	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz CH 140 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5397.08	50.71	54.00	-3.29	45.13	6.29	34.49	35.20	Average	40	357	HORIZONTAL
2	5408.08	64.99	74.00	-9.01	59.37	6.29	34.53	35.20	Peak	121	357	HORIZONTAL
3	11396.64	41.05	54.00	-12.95	27.40	9.19	39.50	35.04	Average	100	133	HORIZONTAL
4	11403.84	53.26	74.00	-20.74	39.61	9.19	39.50	35.04	Peak	100	133	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5380.36	45.18	54.00	-8.82	39.64	6.28	34.46	35.20	Average	126	72	VERTICAL
2	5388.06	58.14	74.00	-15.86	52.57	6.28	34.49	35.20	Peak	126	72	VERTICAL
3	11396.28	53.49	74.00	-20.51	39.84	9.19	39.50	35.04	Peak	100	240	VERTICAL
4	11396.76	42.00	54.00	-12.00	28.35	9.19	39.50	35.04	Average	100	240	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz CH 54 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.00	52.14	54.00	-1.86	47.61	6.03	33.70	35.20	Average	132	2	HORIZONTAL
2	5005.40	65.76	74.00	-8.24	61.22	6.04	33.70	35.20	Peak	132	2	HORIZONTAL
3	15818.68	56.03	74.00	-17.97	43.07	10.80	37.69	35.53	Peak	100	76	HORIZONTAL
4	15818.88	43.92	54.00	-10.08	30.96	10.80	37.69	35.53	Average	100	76	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.00	46.18	54.00	-7.82	41.65	6.03	33.70	35.20	Average	100	89	VERTICAL
2	5007.10	60.54	74.00	-13.46	55.97	6.04	33.73	35.20	Peak	100	89	VERTICAL
3	15802.08	56.29	74.00	-17.71	43.31	10.80	37.72	35.54	Peak	100	251	VERTICAL
4	15813.76	44.26	54.00	-9.74	31.30	10.80	37.69	35.53	Average	8960	251	VERTICAL

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz CH 62 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10622.04	42.61	54.00	-11.39	29.20	8.65	39.88	35.12	Average	100	219	HORIZONTAL
2	10623.88	54.78	74.00	-19.22	41.37	8.65	39.88	35.12	Peak	100	219	HORIZONTAL
3	15923.16	57.30	74.00	-16.70	44.47	10.81	37.53	35.51	Peak	100	265	HORIZONTAL
4	15937.40	44.62	54.00	-9.38	31.81	10.81	37.51	35.51	Average	100	265	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10621.64	42.59	54.00	-11.41	29.18	8.65	39.88	35.12	Average	100	93	VERTICAL
2	10624.48	55.76	74.00	-18.24	42.35	8.65	39.88	35.12	Peak	100	93	VERTICAL
3	15923.76	44.76	54.00	-9.24	31.93	10.81	37.53	35.51	Average	100	192	VERTICAL
4	15936.72	56.97	74.00	-17.03	44.16	10.81	37.51	35.51	Peak	100	192	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz CH 102 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11029.72	54.10	74.00	-19.90	40.46	8.95	39.50	34.81	Peak	100	256	HORIZONTAL
2	11029.84	41.14	54.00	-12.86	27.50	8.95	39.50	34.81	Average	100	256	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11021.24	53.88	74.00	-20.12	40.25	8.94	39.50	34.81	Peak	100	136	VERTICAL
2	11021.48	41.03	54.00	-12.97	27.40	8.94	39.50	34.81	Average	100	136	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz CH 110 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5062.20	53.83	54.00	-0.17	49.12	6.07	33.84	35.20	Average	124	178	HORIZONTAL
2	5065.60	68.95	74.00	-5.05	64.24	6.07	33.84	35.20	Peak	124	178	HORIZONTAL
3	11101.08	42.58	54.00	-11.42	28.95	8.99	39.50	34.86	Average	100	139	HORIZONTAL
4	11101.56	53.56	74.00	-20.44	39.93	8.99	39.50	34.86	Peak	100	139	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5090.10	48.30	54.00	-5.70	43.53	6.10	33.87	35.20	Average	100	84	VERTICAL
2	5092.10	62.88	74.00	-11.12	58.11	6.10	33.87	35.20	Peak	100	84	VERTICAL
3	11111.70	44.15	54.00	-9.85	30.51	9.00	39.50	34.86	Average	175	190	VERTICAL
4	11111.76	58.06	74.00	-15.94	44.42	9.00	39.50	34.86	Peak	175	190	VERTICAL

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz CH 134 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5376.42	66.70	74.00	-7.30	61.17	6.27	34.46	35.20	Peak	136	357	HORIZONTAL
2	5377.72	51.90	54.00	-2.10	46.36	6.28	34.46	35.20	Average	136	357	HORIZONTAL
3	11336.56	41.44	54.00	-12.56	27.79	9.14	39.50	34.99	Average	100	110	HORIZONTAL
4	11345.96	53.80	74.00	-20.20	40.16	9.15	39.50	35.01	Peak	100	110	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5372.00	45.36	54.00	-8.64	39.83	6.27	34.46	35.20	Average	102	3	VERTICAL
2	5372.88	59.94	74.00	-14.06	54.41	6.27	34.46	35.20	Peak	102	3	VERTICAL
3	11340.52	54.95	74.00	-19.05	41.30	9.14	39.50	34.99	Peak	100	216	VERTICAL
4	11346.76	42.52	54.00	-11.48	28.88	9.15	39.50	35.01	Average	100	216	VERTICAL

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11a CH 52 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5019.00	67.33	74.00	-6.67	62.76	6.04	33.73	35.20	Peak	130	359	HORIZONTAL
2	5020.40	53.96	54.00	-0.04	49.39	6.04	33.73	35.20	Average	130	359	HORIZONTAL
3	15779.36	46.84	54.00	-7.16	33.83	10.80	37.75	35.54	Average	100	123	HORIZONTAL
4	15779.40	59.46	74.00	-14.54	46.45	10.80	37.75	35.54	Peak	100	123	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4976.80	48.56	54.00	-5.44	44.08	6.01	33.67	35.20	Average	100	88	VERTICAL
2	4976.80	61.26	74.00	-12.74	56.78	6.01	33.67	35.20	Peak	100	88	VERTICAL
3	15784.16	65.67	74.00	-8.33	52.66	10.80	37.75	35.54	Peak	106	182	VERTICAL
4	15784.20	49.53	54.00	-4.47	36.52	10.80	37.75	35.54	Average	106	182	VERTICAL

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11a CH 60 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013 ~ Aug. 15, 2013		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5050.16	67.63	74.00	-6.37	65.75	3.40	33.49	35.01	Peak	128	358	HORIZONTAL
2	5051.12	53.34	54.00	-0.66	51.46	3.40	33.49	35.01	Average	128	358	HORIZONTAL
3	10589.82	39.21	54.00	-14.79	31.26	5.01	38.38	35.44	Average	100	119	HORIZONTAL
4	10596.63	50.88	74.00	-23.12	42.93	5.01	38.38	35.44	Peak	100	119	HORIZONTAL
5	15878.04	63.27	74.00	-10.73	55.25	6.14	37.32	35.44	Peak	119	272	HORIZONTAL
6	15891.35	44.98	54.00	-9.02	36.97	6.15	37.30	35.44	Average	119	272	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5028.21	61.32	74.00	-12.68	59.47	3.40	33.46	35.01	Peak	100	326	VERTICAL
2	5029.17	49.15	54.00	-4.85	47.30	3.40	33.46	35.01	Average	100	326	VERTICAL
3	10594.81	61.74	74.00	-12.26	53.79	5.01	38.38	35.44	Peak	162	302	VERTICAL
4	10594.95	47.64	54.00	-6.36	39.69	5.01	38.38	35.44	Average	162	302	VERTICAL
5	15888.54	42.53	54.00	-11.47	34.52	6.15	37.30	35.44	Average	136	190	VERTICAL
6	15888.54	59.47	74.00	-14.53	51.46	6.15	37.30	35.44	Peak	136	190	VERTICAL

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11a CH 64 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 15, 2013		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5032.66	51.59	54.00	-2.41	49.75	3.40	33.45	35.01	Average	116	330	HORIZONTAL
2	5045.16	65.80	74.00	-8.20	63.92	3.40	33.49	35.01	Peak	116	330	HORIZONTAL
3	10634.76	38.53	54.00	-15.47	30.54	5.01	38.37	35.39	Average	100	285	HORIZONTAL
4	10640.38	51.22	74.00	-22.78	43.23	5.01	38.37	35.39	Peak	100	285	HORIZONTAL
5	15954.47	50.31	74.00	-23.69	42.37	6.15	37.23	35.44	Peak	100	133	HORIZONTAL
6	15959.13	38.48	54.00	-15.52	30.54	6.15	37.23	35.44	Average	100	133	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5035.29	61.46	74.00	-12.54	59.61	3.40	33.46	35.01	Peak	100	327	VERTICAL
2	5040.27	47.43	54.00	-6.57	45.58	3.40	33.46	35.01	Average	100	327	VERTICAL
3	10634.57	57.86	74.00	-16.14	49.87	5.01	38.37	35.39	Peak	172	90	VERTICAL
4	10634.95	43.71	54.00	-10.29	35.72	5.01	38.37	35.39	Average	172	90	VERTICAL
5	15968.46	38.76	54.00	-15.24	30.83	6.15	37.22	35.44	Average	100	248	VERTICAL
6	15968.75	50.25	74.00	-23.75	42.32	6.15	37.22	35.44	Peak	100	248	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11a CH 100 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 15, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5051.44	66.38	74.00	-7.62	64.50	3.40	33.49	35.01	Peak	127	0	HORIZONTAL
2	5051.60	53.14	54.00	-0.86	51.26	3.40	33.49	35.01	Average	127	0	HORIZONTAL
3	10994.97	37.91	54.00	-16.09	29.68	5.01	38.32	35.10	Average	100	244	HORIZONTAL
4	10997.82	50.88	74.00	-23.12	42.65	5.01	38.32	35.10	Peak	100	244	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5092.95	48.24	54.00	-5.76	46.26	3.42	33.58	35.02	Average	100	326	VERTICAL
2	5093.75	60.84	74.00	-13.16	58.86	3.42	33.58	35.02	Peak	100	326	VERTICAL
3	10997.95	56.79	74.00	-17.21	48.58	5.01	38.30	35.10	Peak	140	158	VERTICAL
4	10998.37	43.93	54.00	-10.07	35.72	5.01	38.30	35.10	Average	140	158	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11a CH 116 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5084.20	53.73	54.00	-0.27	48.97	6.09	33.87	35.20	Average	134	353	HORIZONTAL
2	5086.40	67.89	74.00	-6.11	63.13	6.09	33.87	35.20	Peak	134	353	HORIZONTAL
3	11155.62	42.81	54.00	-11.19	29.17	9.03	39.50	34.89	Average	100	167	HORIZONTAL
4	11159.04	55.76	74.00	-18.24	42.11	9.04	39.50	34.89	Peak	100	167	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5088.40	62.91	74.00	-11.09	58.15	6.09	33.87	35.20	Peak	100	84	VERTICAL
2	5090.20	49.72	54.00	-4.28	44.95	6.10	33.87	35.20	Average	100	84	VERTICAL
3	11158.92	48.11	54.00	-5.89	34.46	9.04	39.50	34.89	Average	141	25	VERTICAL
4	11159.76	61.75	74.00	-12.25	48.10	9.04	39.50	34.89	Peak	141	25	VERTICAL

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11a CH 140 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 15, 2013		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5052.56	50.57	54.00	-3.43	48.69	3.40	33.49	35.01	Average	129	354	HORIZONTAL
2	5068.43	64.19	74.00	-9.81	62.27	3.41	33.52	35.01	Peak	129	354	HORIZONTAL
3	11396.06	50.90	74.00	-23.10	42.37	5.10	38.68	35.25	Peak	100	260	HORIZONTAL
4	11397.95	38.42	54.00	-15.58	29.87	5.10	38.70	35.25	Average	100	260	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5099.04	58.14	74.00	-15.86	56.16	3.42	33.58	35.02	Peak	100	323	VERTICAL
2	5100.16	44.53	54.00	-9.47	42.55	3.42	33.58	35.02	Average	100	323	VERTICAL
3	11397.85	44.62	54.00	-9.38	36.07	5.10	38.70	35.25	Average	148	172	VERTICAL
4	11398.81	58.52	74.00	-15.48	49.97	5.10	38.70	35.25	Peak	148	172	VERTICAL

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.7.5. Test Deviation

There is no deviation with the original standard.

### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

##### Channel 52

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5255.99	123.31			86.00	3.46	33.85	0.00	Peak	128	358	HORIZONTAL
2	5265.61	111.14			73.80	3.46	33.88	0.00	Average	128	358	HORIZONTAL
3	5350.00	49.06	54.00	-4.94	11.54	3.49	34.03	0.00	Average	128	358	HORIZONTAL
4	5350.00	60.92	74.00	-13.08	23.40	3.49	34.03	0.00	Peak	128	358	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5260 MHz.

##### Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5295.83	109.23			71.85	3.47	33.91	0.00	Average	156	3	HORIZONTAL
2	5305.45	122.19			84.77	3.48	33.94	0.00	Peak	156	3	HORIZONTAL
3	5350.64	51.39	54.00	-2.61	13.87	3.49	34.03	0.00	Average	156	3	HORIZONTAL
4	5356.09	65.38	74.00	-8.62	27.86	3.49	34.03	0.00	Peak	156	3	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

##### Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5315.19	107.53			70.08	3.48	33.97	0.00	Average	125	1	HORIZONTAL
2	5315.51	120.05			82.60	3.48	33.97	0.00	Peak	125	1	HORIZONTAL
3	5350.32	53.86	54.00	-0.14	16.34	3.49	34.03	0.00	Average	125	1	HORIZONTAL
4	5350.64	68.50	74.00	-5.50	30.98	3.49	34.03	0.00	Peak	125	1	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz CH 100, 140 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

**Channel 100**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5424.80	53.60	54.00	-0.40	12.73	6.31	34.56	0.00	Average	131	357	HORIZONTAL
2	5424.80	65.25	74.00	-8.75	24.38	6.31	34.56	0.00	Peak	131	357	HORIZONTAL
3	5465.20	52.66	54.00	-1.34	11.69	6.34	34.63	0.00	Average	131	357	HORIZONTAL
4	5465.60	65.56	74.00	-8.44	24.59	6.34	34.63	0.00	Peak	131	357	HORIZONTAL
5	5495.20	117.96			76.91	6.35	34.70	0.00	Peak	131	357	HORIZONTAL
6	5505.20	105.43			64.36	6.36	34.71	0.00	Average	131	357	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

**Channel 140**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5695.20	104.38			63.09	6.43	34.86	0.00	Average	131	0	HORIZONTAL
2	5695.60	117.72			76.43	6.43	34.86	0.00	Peak	131	0	HORIZONTAL
3	5725.00	53.74	54.00	-0.26	12.40	6.45	34.89	0.00	Average	131	0	HORIZONTAL
4	5725.60	68.95	74.00	-5.05	27.61	6.45	34.89	0.00	Peak	131	0	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz CH 54, 62 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

**Channel 54**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5260.00	120.48			80.05	6.21	34.22	0.00	Peak	142	0	HORIZONTAL
2	5260.40	104.68			64.25	6.21	34.22	0.00	Average	142	0	HORIZONTAL
3	5350.40	53.86	54.00	-0.14	13.18	6.26	34.42	0.00	Average	142	0	HORIZONTAL
4	5350.40	66.40	74.00	-7.60	25.72	6.26	34.42	0.00	Peak	142	0	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

**Channel 62**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5300.40	109.21			68.66	6.23	34.32	0.00	Peak	142	360	HORIZONTAL
2	5305.20	94.51			53.96	6.23	34.32	0.00	Average	142	360	HORIZONTAL
3	5350.00	53.90	54.00	-0.10	13.22	6.26	34.42	0.00	Average	142	360	HORIZONTAL
4	5350.40	66.00	74.00	-8.00	25.32	6.26	34.42	0.00	Peak	142	360	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz CH 102, 110, 134 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 14, 2013		

### Channel 102

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5460.00	50.37	54.00	-3.63	9.41	6.33	34.63	0.00 Average	110	342	HORIZONTAL
2	5460.00	63.94	74.00	-10.06	22.98	6.33	34.63	0.00 Peak	110	342	HORIZONTAL
3	5469.60	67.92	68.30	-0.38	26.91	6.34	34.67	0.00 Peak	110	342	HORIZONTAL
4	5507.60	94.27			53.20	6.36	34.71	0.00 Average	110	342	HORIZONTAL
5	5512.00	110.01			68.94	6.36	34.71	0.00 Peak	110	342	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5510 MHz.

### Channel 110

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5457.60	53.50	54.00	-0.50	12.54	6.33	34.63	0.00 Average	135	341	HORIZONTAL
2	5458.80	67.00	74.00	-7.00	26.04	6.33	34.63	0.00 Peak	135	341	HORIZONTAL
3	5467.20	67.56	74.00	-6.44	26.55	6.34	34.67	0.00 Peak	135	341	HORIZONTAL
4	5467.60	53.95	54.00	-0.05	12.94	6.34	34.67	0.00 Average	135	341	HORIZONTAL
5	5552.40	106.00			64.87	6.38	34.75	0.00 Average	135	341	HORIZONTAL
6	5552.40	121.50			80.37	6.38	34.75	0.00 Peak	135	341	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5550 MHz.

### Channel 134

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5667.20	102.98			61.72	6.43	34.83	0.00 Average	129	335	HORIZONTAL
2	5672.00	118.92			77.64	6.43	34.85	0.00 Peak	129	335	HORIZONTAL
3	5727.40	53.78	54.00	-0.22	12.44	6.45	34.89	0.00 Average	129	335	HORIZONTAL
4	5727.80	68.07	74.00	-5.93	26.73	6.45	34.89	0.00 Peak	129	335	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11a CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 13, 2013		

### Channel 52

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5147.00	50.23	54.00	-3.77	11.22	5.99	33.02	0.00	100	6	VERTICAL	Average
2	5147.90	61.90	74.00	-12.10	22.89	5.99	33.02	0.00	100	6	VERTICAL	Peak
3	5257.60	108.89			69.73	6.06	33.10	0.00	100	6	VERTICAL	Average
4	5258.20	118.69			79.53	6.06	33.10	0.00	100	6	VERTICAL	Peak
5	5357.50	49.67	54.00	-4.33	10.10	6.12	33.45	0.00	100	6	VERTICAL	Average
6	5366.50	64.39	74.00	-9.61	24.82	6.12	33.45	0.00	100	6	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5260 MHz.

### Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5297.40	120.33			81.00	6.08	33.25	0.00	100	2	VERTICAL	Peak
2	5297.60	109.29			69.96	6.08	33.25	0.00	100	2	VERTICAL	Average
3	5352.80	53.15	54.00	-0.85	13.64	6.11	33.40	0.00	100	2	VERTICAL	Average
4	5354.40	65.80	74.00	-8.20	26.23	6.12	33.45	0.00	100	2	VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5316.00	120.01			80.62	6.09	33.30	0.00	102	0	VERTICAL	Peak
2	5316.80	108.04			68.65	6.09	33.30	0.00	102	0	VERTICAL	Average
3	5356.00	67.88	74.00	-6.12	28.31	6.12	33.45	0.00	102	0	VERTICAL	Peak
4	5356.60	53.44	54.00	-0.56	13.87	6.12	33.45	0.00	102	0	VERTICAL	Average

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11a CH 100, 140 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	Aug. 13, 2013		

**Channel 100**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5456.40	51.71	54.00	-2.29	11.79	6.17	33.75	0.00	100	0 VERTICAL	Average
2	5456.40	65.57	74.00	-8.43	25.65	6.17	33.75	0.00	100	0 VERTICAL	Peak
3	5466.10	67.12	74.00	-6.88	27.14	6.18	33.80	0.00	100	0 VERTICAL	Peak
4	5466.90	53.30	54.00	-0.70	13.32	6.18	33.80	0.00	100	0 VERTICAL	Average
5	5496.30	117.91			77.81	6.20	33.90	0.00	100	0 VERTICAL	Peak
6	5496.60	106.13			66.03	6.20	33.90	0.00	100	0 VERTICAL	Average

Item 5, 6 are the fundamental frequency at 5500 MHz.

**Channel 140**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5695.90	104.37			63.90	6.33	34.14	0.00	110	344 VERTICAL	Average
2	5695.90	115.28			74.81	6.33	34.14	0.00	110	344 VERTICAL	Peak
3	5725.00	53.35	54.00	-0.65	12.82	6.35	34.18	0.00	110	344 VERTICAL	Average
4	5726.40	69.85	74.00	-4.15	29.32	6.35	34.18	0.00	110	344 VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $-30^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

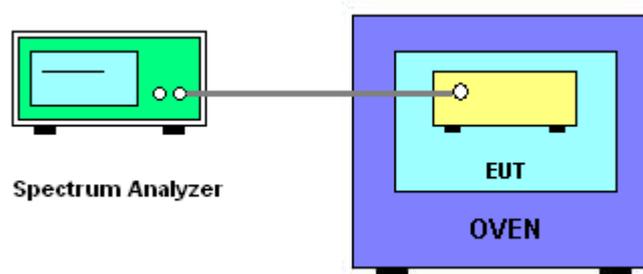

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

<b>Temperature</b>	26°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	David Tseng	<b>Test Date</b>	Dec. 28, 2013

#### Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)	
	5300 MHz	5500 MHz
126.50	5300.0414	5500.0294
110.00	5300.0426	5500.0268
93.50	5300.0422	5500.0266
Max. Deviation (MHz)	<b>0.042600</b>	<b>0.029400</b>
Max. Deviation (ppm)	<b>8.04</b>	<b>5.35</b>

#### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)	
	5300 MHz	5500 MHz
-30	5300.0418	5500.0268
-20	5300.0416	5500.0270
-10	5300.0416	5500.0268
0	5300.0416	5500.0266
10	5300.0218	5500.0212
20	5300.0226	5500.0198
30	5300.0220	5500.0202
40	5300.0226	5500.0212
50	5300.0224	5500.0214
Max. Deviation (MHz)	<b>0.041800</b>	<b>0.027000</b>
Max. Deviation (ppm)	<b>7.89</b>	<b>4.91</b>

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
Artificial Mains Network	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 24, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Nov. 26, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	$\pm 0.173$	dB	K=1	0.086
Cable loss	$\pm 0.174$	dB	K=2	0.087
Antenna gain	$\pm 0.169$	dB	K=2	0.084
Site imperfection	$\pm 0.433$	dB	Triangular	0.214
Pre-amplifier gain	$\pm 0.366$	dB	K=2	0.183
Transmitter antenna	$\pm 1.200$	dB	Rectangular	0.600
Signal generator	$\pm 0.461$	dB	Rectangular	0.231
Mismatch	$\pm 0.080$	dB	U-shape	0.040
Spectrum analyzer	$\pm 0.500$	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

**Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

**Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

### Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	±0.038	dB	K=2	0.019
Attenuator	±0.047	dB	K=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726