



TEST REPORT

Product Name : 802.11a/g ProSafe Dual Band Wireless Access Point
Model Number : WAG302
Brand Name : NETGEAR
FCC ID : PY3WAG302

Applicant : Netgear Incorporated
Address : 4500 Great America Parkway Santa Clara,
CA95054 U.S.A

Received Date : May 23, 2005
Tested Date : January 20 ~ March 14, 2005 ; May 23~27, 2005

Issued by

Compliance Certification Services Inc.
Hsinchu Lab.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung HsingRd.,
ChuTung Chen, Hsinchu, Taiwan 310, R.O.C

TEL: (03) 591-8012

FAX: (03) 582-5720

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as seperately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.
6. **This report is modified from EC05-01-048.**





Test Report Certification

Product Name : 802.11a/g ProSafe Dual Band Wireless Access Point
Model Number : WAG302
Brand Name : NETGEAR
FCC ID : PY3WAG302
Applicant : Netgear Incorporated

Measurement Standard :

FCC 47 C.F.R. Part 15, Subpart B and Subpart C (2004)
 ANSI C63.4 (2003)

Tested By : Alan Fan, **Date** : May 30, 2005
Approved By : C.F. Wu, **Date** : May 30, 2005
 (C.F. Wu, Manager)



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



TABLE OF CONTENTS

| TITLE | PAGE NO. |
|--|------------|
| 1. GENERAL INFORMATION | 5 |
| 1.1 General Statement..... | 5 |
| 1.2 General Description of EUT & Power..... | 5-6 |
| 1.3 Tested Channel | 7 |
| 1.4 Description of Peripherals..... | 8 |
| 1.5 EUT & Peripherals Setup Diagram..... | 9 |
| 1.6 EUT Operating Procedure..... | 10 |
| 1.7 Description of Laboratory | 11 |
| 1.8 Summary of Test Results..... | 11 |
| 2. CONDUCTED POWERLINE TEST..... | 12 |
| 2.1 Test Equipments | 12 |
| 2.2 Test Setup | 12 |
| 2.3 Conducted Power Line Emission Limit..... | 13 |
| 2.4 Test Procedure | 13 |
| 2.5 Uncertainty of Conducted Emission | 13 |
| 2.6 Conducted RF Voltage Measurement..... | 14-15 |
| 2.7 Photos of Conduction Test..... | 16 |
| 3. RADIATED EMISSION TEST | 17 |
| 3.1 Test Equipments | 17 |
| 3.2 Test Setup | 17 |
| 3.3 Radiation Limit..... | 18 |
| 3.4 Test Procedures..... | 19 |
| 3.5 Uncertainty of Radiated Emission | 19 |
| 3.6 Radiated RF Noise Measurement | 20-116 |
| 3.7 Photos of Open Site | 117-124 |
| 4. 6dB BANDWIDTH MEASUREMENT | 125 |
| 4.1 Test Equipments | 125 |
| 4.2 Test Setup | 125 |
| 4.3 Limits of 6dB Bandwidth Measurement..... | 125 |
| 4.4 Test Procedure | 125 |
| 4.5 Uncertainty of Conducted Emission | 125 |
| 4.6 Test Results..... | 126-127 |
| 4.7 Photo of 6db Bandwidth Measurement..... | 128-131 |



TABLE OF CONTENTS

| TITLE | PAGE NO. |
|---|------------|
| 5. MAXIMUM PEAK OUTPUT POWER | 132 |
| 5.1 Test Equipments | 132 |
| 5.2 Test Setup | 132 |
| 5.3 Limits of Maximum Peak Output Power | 132 |
| 5.4 Test Procedure | 132 |
| 5.5 Uncertainty of Conducted Emission | 133 |
| 5.6 Test Results | 133-132 |
| 5.7 Photo of Maximum Peak Output Power Measurement | 135-138 |
| 6. POWER SPECTRAL DENSITY MEASUREMENT | 139 |
| 6.1 Test Equipments | 139 |
| 6.2 Test Setup | 139 |
| 6.3 Limits of Power Spectral Density Measurement | 139 |
| 6.4 Test Procedure | 140 |
| 6.5 Uncertainty of Conducted Emission | 140 |
| 6.6 Test Results | 140-141 |
| 6.7 Photo of Power Spectral Density Measurement | 142-145 |
| 7. BAND EDGE MEASUREMENT | 146 |
| 7.1 Test Equipments | 146 |
| 7.2 Test Setup | 146 |
| 7.3 Limits of Band Edge Emissions Measurement | 146 |
| 7.4 Test Procedure | 146 |
| 7.5 Uncertainty of Conducted Emission | 146 |
| 7.6 Test Results | 147-150 |
| 7.7 Photo of Band edge Measurement | 151-155 |
| 8. ANTENNA REQUIREMENT | 156 |
| 8.1 Standard Applicable | 156 |
| 8.2 Antenna Connected Construction | 156 |
| 9. RF EXPOSURE EVALUATION | 157 |
| 9.1 Friis Formula | 157 |
| 9.2 EUT Operating Condition | 157 |
| 9.3 Test Result of RF Exposure Evaluation | 158 |
| 9.3.1 Antenna Gain | 158 |
| 9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance | 158-161 |



1. GENERAL INFORMATION

1.1 General Statement

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to National or International std.

1.2 General Description of EUT & Power

| | |
|-----------------------------------|---|
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point |
| Model Number | WAG302 |
| Operating Frequency | <ul style="list-style-type: none"> ◆IEEE 802.11a USA(FCC) : 5.725GHz ~ 5.850GHz ◆IEEE 802.11b/g ISM Band USA(FCC) : 2.4GHz ~ 2.4835GHz (CH1 ~ CH11) |
| Channel Number | 11 channel for 802.11b/g 1 channel for Super G (Channel 6) 5 channel for Normal 802.11a, 2 channel for Super A |
| Channel Spacing | 20MHz for 802.11a ; 5MHz for 802.11 b/g |
| Modulation | <ul style="list-style-type: none"> ◆IEEE 802.11a (OFDM) : 48/54 Mbps (QAM-64), 24/36 Mbps (QAM-16), 12/18 Mbps (QPSK), 6/9 Mbps (BPSK) ◆IEEE 802.11g (OFDM / DSSS) : 48/54 Mbps (QAM-64), 24/36 Mbps (QAM-16), 12/18 Mbps (QPSK) , 6/9 Mbps (BPSK) , 5.5/11 Mbps (CCK) , 2 Mbps (DQPSK) , 1 Mbps (DBPSK) ◆IEEE 802.11b (DSSS) : 5.5/11 Mbps (CCK) , 2 Mbps (DQPSK), 1 Mbps (DBPSK) |
| Advanced Mode | Super A/G mode |
| Frequency Selection | BY SOFTWARE |
| Transmitter Classification | mobile device |
| Antenna Type | Dipole Antenna at 5GHz, Antenna Gain : 5dBi at 5GHz 2.4GHz refer to the antenna list |
| Power Source | 12VDC (From adapter) |

Power Adapter :

| No. | Manufacturer | Model No. | P/N | Input Power | Output Power |
|-----|--------------|-----------|-------------|-------------------|--------------|
| 1 | NETGEAR | DV-151A-1 | PWR-012-112 | 120VAC, 60Hz, 22W | 12VDC, 1.2A |



2.4GHz use antenna list (2.4GHz Ant. Port):

| Antenna | Netegar Antenna Model | Manufacture Model | Antenna Type. | Antenna gain | Collocate Cable type |
|---------|-----------------------|-------------------|---------------------|--------------|-----------------------------|
| 1 | SNW0007A | WANSHIH WSS007 | 1/2λ Dipole | 5 dBi | ----- |
| 2 | ANT24O5 | SENAO NAP-2405(N) | Ceiling | 5 dBi | ACC-10314-01,02,03,04 or 05 |
| 3 | ANT24P9 | SENAO NAP-2409(N) | GP Omni-directional | 9 dBi | ACC-10314-04 or05 |
| 4 | ANT24P12 | SENAO NAP-2412(N) | GP Omni-directional | 12 dBi | ACC-10314-04 or05 |
| 5 | ANT24D18 | SENAO NAP-2418(N) | Patch | 18 dBi | ACC-10314-05 |

Antenna Cable : (1) Cable 1 (ACC-10314-01) : 1.5m (Attenuation:1.1dB) (+ Ant 2)

(2) Cable 2 (ACC-10314-04) : 10m (Attenuation:6.1dB) (+ Ant 4)

(3) Cable 3 (ACC-10314-05) : 30m (Attenuation:18dB) (+ Ant 5)

After evaluated the samples, for modes (worst case) are chosen as a representative.

2.4GHz use antenna cable list (2.4GHz Ant. Port):

| Antenna Cable Type | Length | Attenuation at 2.4GHz |
|--------------------|--------|-----------------------|
| ACC-10314-01 | 1.5 m | 1.1 dB |
| ACC-10314-02 | 3 m | 2.0 dB |
| ACC-10314-03 | 5 m | 3.2 dB |
| ACC-10314-04 | 10 m | 6.1 dB |
| ACC-10314-05 | 30 m | 18 dB |

After evaluated the samples, for modes (worst case) are chosen as a representative.

Note: 1. A 2.4GHz transceiver and a 5GHz transceiver were contained in the EUT. The transceivers could operate simultaneously.

2. The test data of 5dBi 1/2 λ dipole antenna were transferred from test report EC05-01-048FRF.



1.3 Tested Channel

The following channel were evaluated in this test report.

5.725~5.850GHz

For normal 802.11a mode

| Channel | Carrier center frequency fc (MHz) |
|---------|-----------------------------------|
| Low | 5745 |
| ----- | 5765 |
| Middle | 5785 |
| ----- | 5805 |
| High | 5825 |

For Super A mode

| Channel | Carrier center frequency fc (MHz) |
|---------|-----------------------------------|
| Low | 5760 |
| Middle | N/A |
| High | 5800 |

2.4~2.4835GHz

For 802.11b / normal 802.11g mode

| Channel | Carrier center frequency fc (MHz) |
|---------|-----------------------------------|
| 1 | 2412 |
| 2 | 2417 |
| 3 | 2422 |
| 4 | 2427 |
| 5 | 2432 |
| 6 | 2437 |
| 7 | 2442 |
| 8 | 2447 |
| 9 | 2452 |
| 10 | 2457 |
| 11 | 2462 |

For Super G mode

| Channel | Carrier center frequency fc (MHz) |
|---------|-----------------------------------|
| 6 | 2437 |



1.4 Description of Peripherals

(1) Notebook PC

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : N800V
SERIAL NUMBER : 5Y33KSQZM0W4 1YR
FCC : DOC
INPUT POWER : 18.5VDC,65W,3.5A
POWER CORD : Unshielded, Detachable, 1.8m

Adapter

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : PPP009L
SERIAL NUMBER : 4809673805
INPUT POWER : 100-240VAC 50/60Hz,1.6A
OUTPUT POWER : 18.5VDC, 65W, 3.5A

(2) Notebook PC

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : N800V
SERIAL NUMBER : 5Y31KSQZD1TJ 1YR
FCC : DOC
INPUT POWER : 18.5VDC,65W,3.5A
POWER CORD : Unshielded, Detachable, 1.8m


Adapter

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : PPP009L
SERIAL NUMBER : 4809672405
INPUT POWER : 100-240VAC 50/60Hz,1.6A
OUTPUT POWER : 18.5VDC, 65W, 3.5A

(3) Double 108 Mbps Wireless USB 2.0 Adapter WG111U

MANUFACTURER : NETGEAR CORP.
MODEL NUMBER : WG111U
FCC ID : PY3WG111U
POWER SOURCE : 5VDC (From USB interface of Notebook)

1.5 EUT & Peripherals Setup Diagram

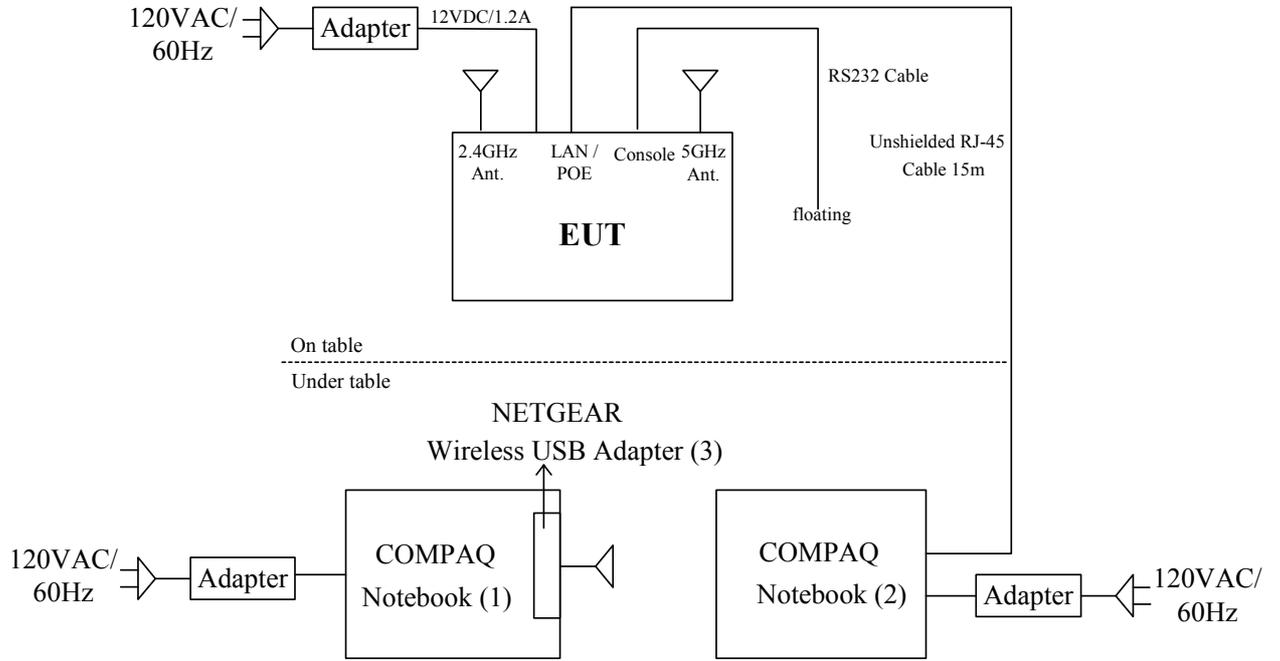

The indicated numbers (1)(2).....,please refer to item 1.4



1.6 EUT Operating Procedure

1. Set up all computers like the setup diagram.
2. The “**Terminating machine**” software was used for testing.
 - (1) **TX Mode :**
 - ⇒ **Tx Data Rate:6Mbps** (802.11a Mode) **108Mbps** (SuperA Mode)
 - ⇒ **Adjust Power:** 802.11b Mode Channel 1 (2412MHz) = **17.0**
802.11b Mode Channel 6 (2442MHz) = **19.0**
802.11b Mode Channel 11 (2462MHz) = **17.0**
 - Adjust Power:** 802.11g Mode Channel 1 (2412MHz) = **13.0**
802.11g Mode Channel 6 (2442MHz) = **15.0**
802.11g Mode Channel 11 (2462MHz) = **14.0**
 - Adjust Power:** 802.11a Mode Channel Low (5745MHz) = **14.0**
802.11a Mode Channel Middle (5785MHz) = **14.0**
802.11a Mode Channel High (5825MHz) = **14.0**
 - Adjust Power:** Super A Mode Channel Low (5760MHz) = **14.0**
Super A Mode Channel High (5800MHz) = **14.0**
 - Adjust Power:** Super G Mode Channel Middle (2437MHz) = **17.0**
 - (2) **RX Mode :**
 - ⇒ **Continue <R>x**
3. Notebook (1) ping 192.168.0.228 -t -l 5000 to EUT.
4. Notebook (2) ping 192.168.0.228 -t -l 5000 to EUT.
5. Notebook (1) ping 192.168.0.120 -t -l 5000 to Notebook (2)
6. Notebook (2) ping 192.168.0.121 -t -l 5000 to Notebook (1)
7. All of the function are under run.
8. Start test.



1.7 Description of Laboratory

SITE DESCRIPTION

FCC Certificate NO. : 90585
 BSMI Certificate NO. : SL2-IN-E-0002
 NVLAP Lab Code : 200118-0
 CNLA Certificate NO. : CNLA-ZL97018E
 VCCI Certificate NO. : R-1189, C-1250
 TÜV Rheinland Certificate NO. : 10008375

NAME OF SITE : Compliance Certification Services Inc. Hsinchu Lab.
 SITE LOCATION : Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd.,
 Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.

1.8 Summary of Test Results

The EUT has been tested according to the following specifications :

| APPLIED STANDARD : FCC 47 C.F.R. Part 15, Subpart B and Subpart C | | | |
|--|--|---------------|-------------------------------|
| Standard Section | Test Item and Limit | Result | REMARK |
| 15.107 15.207 | AC Power Conducted Emission Limit : Sec 15.107 | PASS | Meet the requirement of limit |
| 15.247(a)(2) | Spectrum Bandwidth of a Orthogonal Frequency Division Multiplex System Limit : 6dB bandwidth > 500KHz | PASS | Meet the requirement of limit |
| 15.247(b) | Maximum Peak Output Power Limit : max. 30dBm | PASS | Meet the requirement of limit |
| 15.109 15.205 15.209 | Transmitter Radiated Emissions Limit : Table 15.209 | PASS | Meet the requirement of limit |
| 15.247(e) | Power Spectral Density Limit : max. 8dBm | PASS | Meet the requirement of limit |
| 15.247(d) | Out of Band Emission and Restricted Band Radiation Limit:20dB less than peak value of fundamental frequency Restricted band Limit:Table 15.209 | PASS | Meet the requirement of limit |




2. CONDUCTED POWERLINE TEST

2.1 Test Equipments

The following test equipments are used during the conducted powerline tests :

| Manufacturer or Type | Model No. | Serial No. | Date of Calibration | Calibration Period | Remark |
|--------------------------------|-----------|------------------------|--|--------------------|---------|
| HP SPECTRUM ANALYZER & DISPLAY | 8594E | 3801A05627 | April 26, 2004 | 1 Year | PRETEST |
| SOLAR ISOLATION TRANSFORMER | 7032-1 | N/A | N/A | N/A | FINAL |
| EMCO L.I.S.N. | 3850/2 | 9311-1025 9401-1028 | January 10, 2005 For Characteristic impedance | 1 Year | FINAL |
| | | | May 18, 2004 For Insertion loss | | |
| R & S TEST RECEIVER | ESHS 30 | 838550/003 | February 11, 2004 | 1 Year | FINAL |
| KEENE SHIELDED ROOM | 5983 | No.1 | N/A | N/A | FINAL |
| R & S PULSE LIMIT | EHS3Z2 | 357.8810.52 | July 10, 2004 | 1 Year | FINAL |
| N TYPE COAXIAL CABLE | ----- | ----- | July 10, 2004 | 1 Year | FINAL |
| 50Ω TERMINATOR | ----- | ----- | July 10, 2004 | 1 Year | FINAL |

2.2 Test Setup

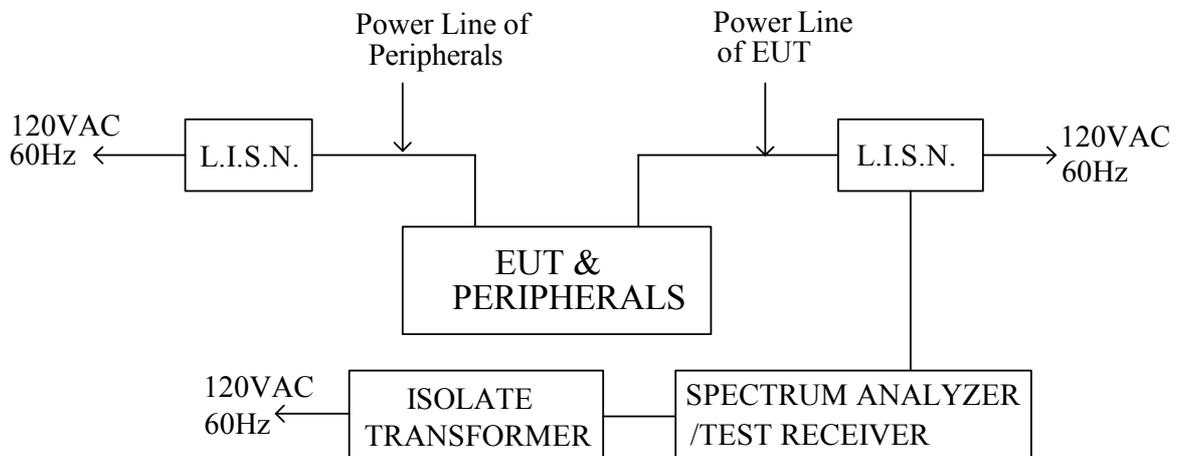



2.3 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

| Frequency (MHz) | Maximum RF Line Voltage (dB μ v) | | | |
|--------------------|--------------------------------------|------|---------|-------|
| | CLASS A | | CLASS B | |
| | Q.P. | Ave. | Q.P. | Ave. |
| 0.15 - 0.50 | 79 | 66 | 66-56 | 56-46 |
| 0.50 - 5.00 | 73 | 60 | 56 | 46 |
| 5.00 - 30.0 | 73 | 60 | 60 | 50 |

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 Test Procedure

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room. The EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.36 dB.




2.6 Conducted RF Voltage Measurement

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/25 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 14.8°C, 78% |

LINE

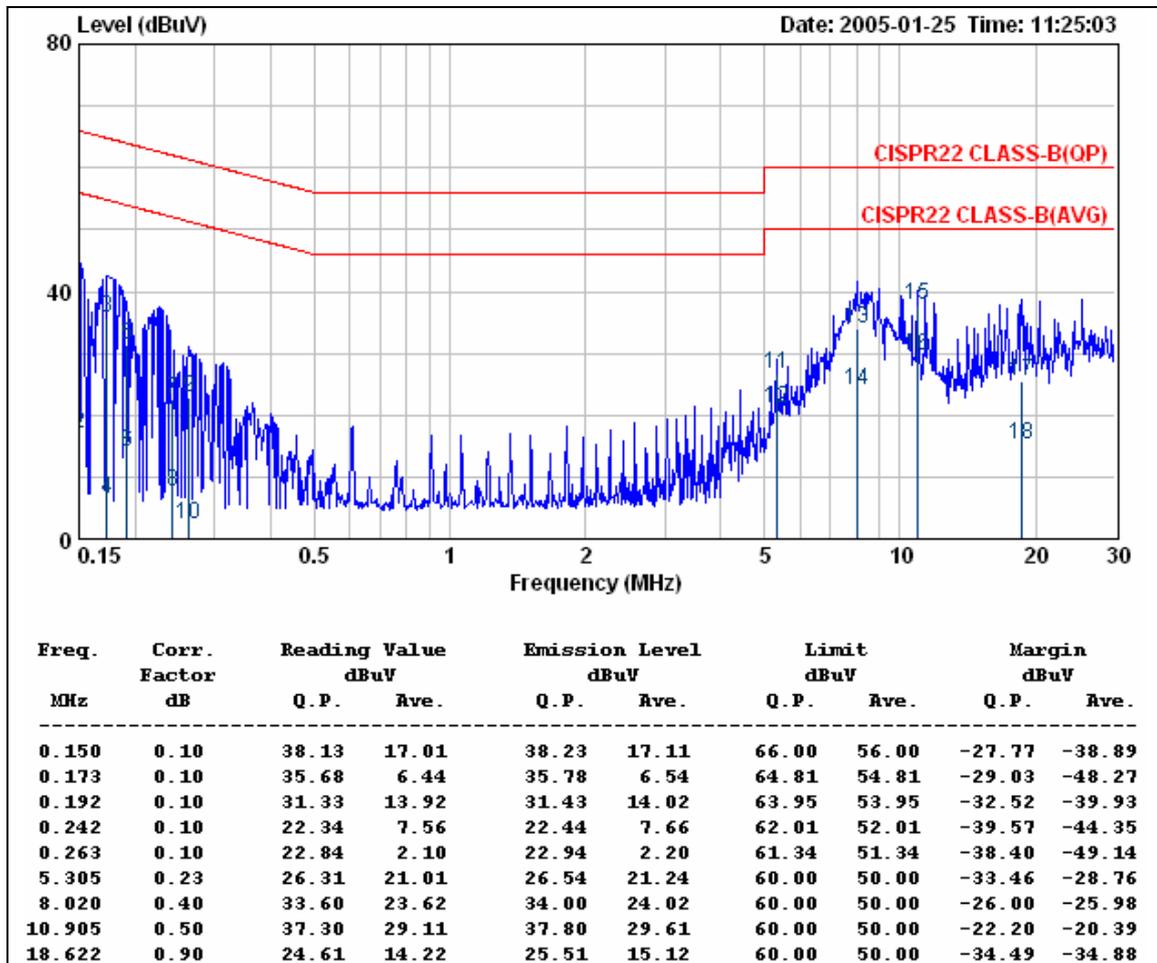

REMARKS :


1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. All emission below 1GH at 802.11a/b/g and Super A/G mode are all the same, so the 802.11g mode chosen as representative in final test.
4. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
5. After preliminary scan, for modes (worst case) are chosen as a representative.



The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/25 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 14.8°C, 78% |

NEUTRAL

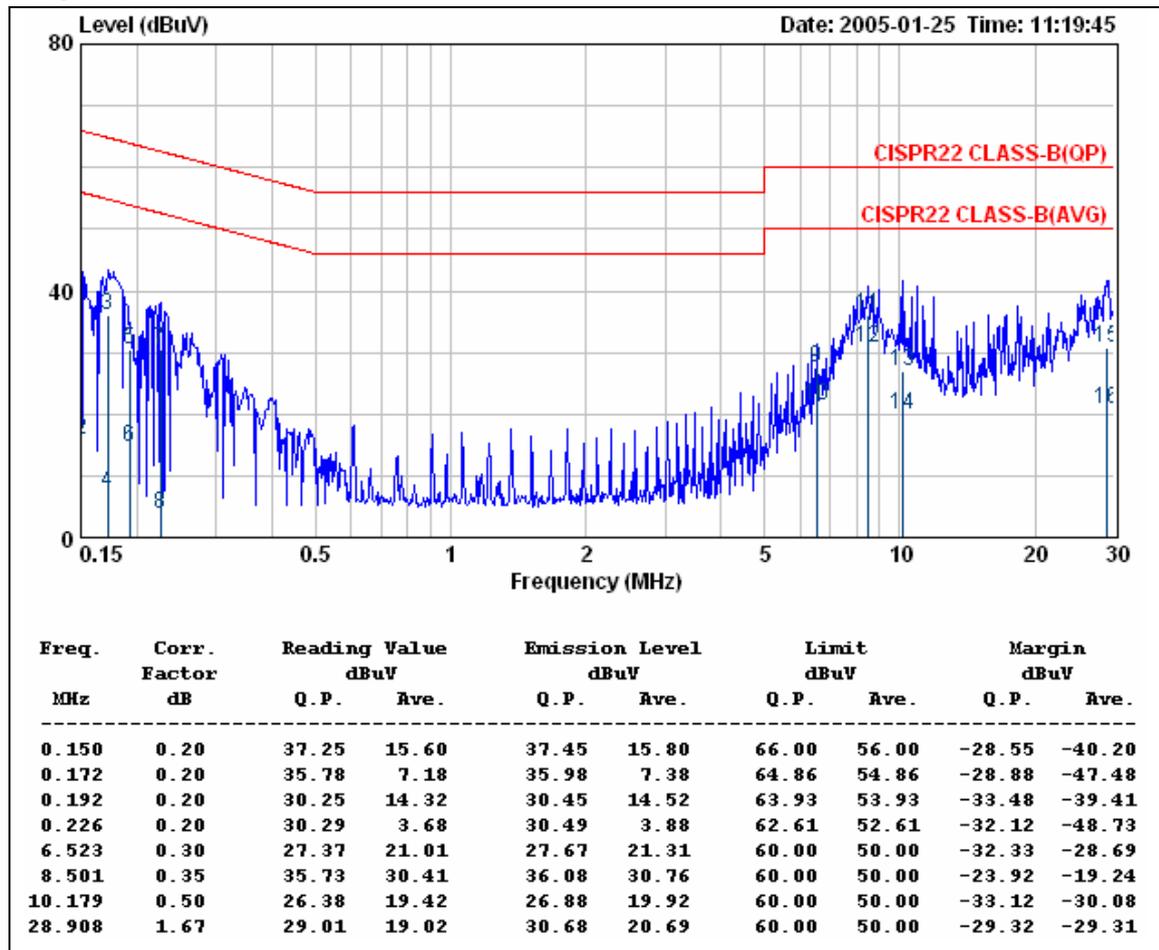

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. All emission below 1GHz at 802.11a/b/g and Super A/G mode are all the same, so the 802.11g mode chosen as representative in final test.
4. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
5. After preliminary scan, for modes (worst case) are chosen as a representative.

2.7 Photos of Conduction Test



3. RADIATED EMISSION TEST


3.1 Test Equipments

The following test equipments are utilized in making the measurements contained in this report.


| Manufacturer or Type | Model No | Serial No | Date of Calibration | Calibration Period | Remark |
|-----------------------|-------------|------------|---------------------|--------------------|--------|
| CHASE BI-LOG ANTENNA | CBL6112B | 2421 | June 15, 2004 | 1 Year | FINAL |
| R/S SPECTRUM ANALYZER | FSEK30 | 835253/002 | September 06, 2004 | 1 Year | FINAL |
| OPEN SITE | ----- | No.2 | May 07, 2005 | 1 Year | FINAL |
| N TYPE COAXIAL CABLE | CHA9525 | 4 | June 03, 2004 | 1 Year | FINAL |
| Horn Antenna | AH-118 | 10089 | April 09, 2004 | 1 Year | FINAL |
| HP Pre-amplifier | 8449B | 3008A01471 | November 24, 2004 | 1 Year | FINAL |
| HP High pass filter | 84300/80038 | 002 | CAL. ON USE | 1 Year | FINAL |
| Horn Antenna | AH-840 | 3077 | February 25, 2004 | 1 Year | FINAL |

3.2 Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission below 1GHz.

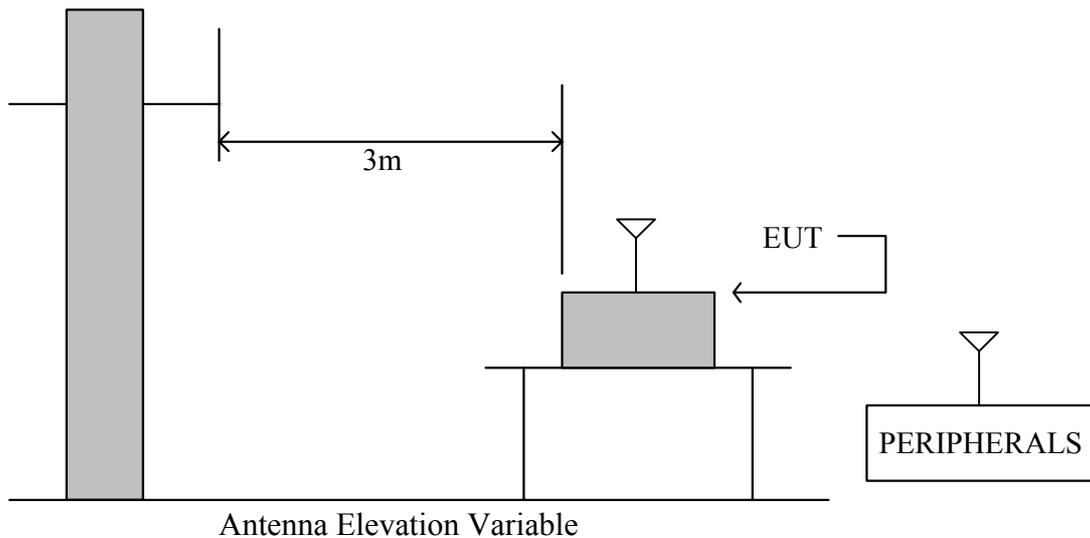

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

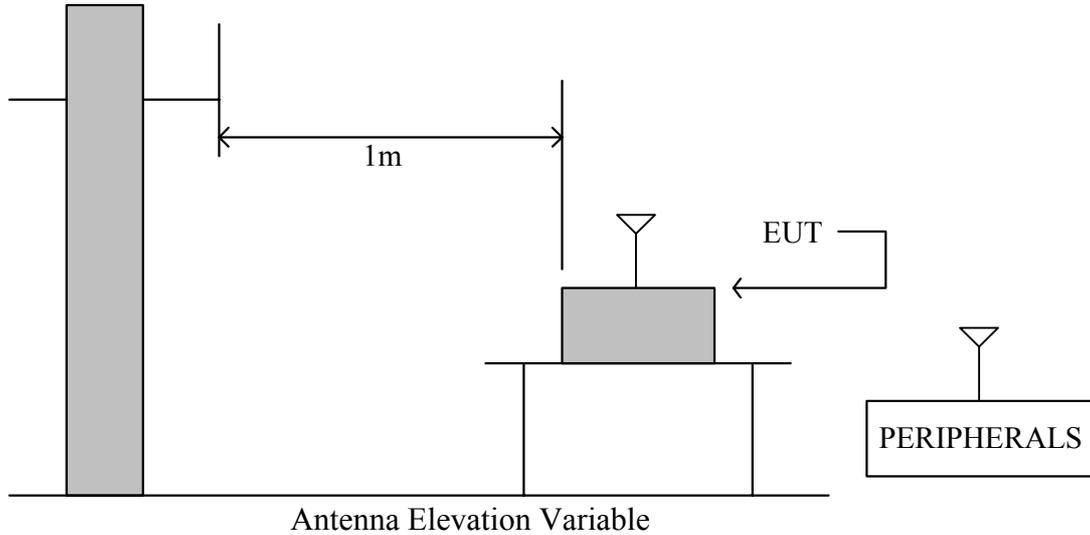

3.3 Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (Meters) | Radiated (dB μ V/M) | Radiated (μ V/M) |
|-----------------|-------------------|-------------------------|-----------------------|
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radiofrequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.



3.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1GHz, the EUT was set 1 meters away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

3.5 Uncertainty of Radiated Emission

The uncertainty of radiated emission is ± 2.72 dB.



3.6 Radiated RF Noise Measurement

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

| | | | |
|---------------------|---|----------------------------|------------|
| Company | Netgear Incorporated | Test Date | 2005/05/25 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 25°C, 76% |

| Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading at 3m(dBμV) | | Limits (dBμV/m) | Emission Level at 3m(dBμV/m) | |
|-----------------|-----------------------|-----------------|---------------------------|----------|-----------------|------------------------------|----------|
| | | | Horizontal | Vertical | | Horizontal | Vertical |
| 132.00 | 12.98 | 2.32 | 5.00 | 12.00 | 43.50 | 20.30 | 27.30 |
| 149.99 | 11.90 | 2.53 | 8.20 | 11.50 | 43.50 | 22.63 | 25.93 |
| 199.96 | 11.20 | 3.14 | 8.50 | 12.10 | 43.50 | 22.84 | 26.44 |
| 210.79 | 11.61 | 3.33 | 6.50 | 6.30 | 43.50 | 21.44 | 21.24 |
| 225.00 | 12.15 | 3.58 | 6.00 | 6.60 | 46.00 | 21.73 | 22.33 |
| 250.00 | 13.10 | 4.01 | 4.80 | 9.50 | 46.00 | 21.91 | 26.61 |
| 263.99 | 13.41 | 4.09 | 13.50 | 13.00 | 46.00 | 31.00 | 30.50 |
| 395.99 | 16.89 | 4.83 | 19.80 | 23.20 | 46.00 | 41.52 | 44.92 |
| 527.99 | 19.00 | 5.32 | 5.00 | 5.50 | 46.00 | 29.31 | 29.81 |
| 659.99 | 20.22 | 6.02 | 16.00 | 18.40 | 46.00 | 42.24 | 44.64 |
| 791.99 | 21.53 | 6.76 | 10.00 | 13.00 | 46.00 | 38.29 | 41.29 |
| 923.99 | 22.72 | 7.34 | 10.80 | 13.00 | 46.00 | 40.86 | 43.06 |

REMARKS :

1. Emission level (dBμV/m) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).
2. All emission below 1GHz at 802.11a/b/g and Super A/G mode are all the same, so the 802.11g mode chosen as representative in final test.
3. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
4. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
5. After preliminary scan, for modes (worst case) are chosen as a representative.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| Low (5745MHz) RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|------------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 1915.23 | 46.55 | 31.50 | 3.31 | 35.35 | 9.50 | 0.00 | 36.52 | 74.00 | -37.48 | P | 1.01 |
| 1915.23 | 33.25 | 31.50 | 3.31 | 35.35 | 9.50 | 0.00 | 23.22 | 54.00 | -30.78 | A | 1.01 |
| 3830.25 | 48.45 | 32.19 | 4.65 | 35.07 | 9.50 | 0.00 | 40.73 | 74.00 | -33.27 | P | 1.02 |
| 3830.25 | 32.02 | 32.19 | 4.65 | 35.07 | 9.50 | 0.00 | 24.30 | 54.00 | -29.70 | A | 1.02 |
| 7660.11 | 44.74 | 39.67 | 7.03 | 36.08 | 9.50 | 0.00 | 45.85 | 74.00 | -28.15 | P | 1.01 |
| 7660.11 | 33.19 | 39.67 | 7.03 | 36.08 | 9.50 | 0.00 | 34.30 | 54.00 | -19.70 | A | 1.01 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| Low (5745MHz) RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|------------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 1915.54 | 48.12 | 31.51 | 3.31 | 35.35 | 9.50 | 0.00 | 38.09 | 74.00 | -35.91 | P | 1.00 |
| 1915.54 | 36.88 | 31.51 | 3.31 | 35.35 | 9.50 | 0.00 | 26.85 | 54.00 | -27.15 | A | 1.00 |
| 3829.98 | 43.21 | 32.19 | 4.65 | 35.07 | 9.50 | 0.00 | 35.49 | 74.00 | -38.51 | P | 1.00 |
| 3829.98 | 32.61 | 32.19 | 4.65 | 35.07 | 9.50 | 0.00 | 24.89 | 54.00 | -29.11 | A | 1.00 |
| 7659.88 | 43.50 | 39.67 | 7.03 | 36.08 | 9.50 | 0.00 | 44.61 | 74.00 | -29.39 | P | 1.01 |
| 7659.88 | 33.25 | 39.67 | 7.03 | 36.08 | 9.50 | 0.00 | 34.36 | 54.00 | -19.64 | A | 1.01 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| Middle (5785MHz) RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|---------------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 1928.03 | 45.89 | 31.61 | 3.33 | 35.34 | 9.50 | 0.00 | 35.98 | 74.00 | -38.02 | P | 1.01 |
| 1928.03 | 35.26 | 31.61 | 3.33 | 35.34 | 9.50 | 0.00 | 25.35 | 54.00 | -28.65 | A | 1.01 |
| 3856.49 | 46.98 | 32.26 | 4.68 | 35.04 | 9.50 | 0.00 | 39.37 | 74.00 | -34.63 | P | 1.00 |
| 3856.49 | 35.87 | 32.26 | 4.68 | 35.04 | 9.50 | 0.00 | 28.26 | 54.00 | -25.74 | A | 1.00 |
| 7712.89 | 46.78 | 39.66 | 7.06 | 36.24 | 9.50 | 0.00 | 47.76 | 74.00 | -26.24 | P | 1.00 |
| 7712.89 | 35.11 | 39.66 | 7.06 | 36.24 | 9.50 | 0.00 | 36.09 | 54.00 | -17.91 | A | 1.00 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| Middle (5785MHz) RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|---------------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 1927.98 | 47.89 | 31.61 | 3.33 | 35.34 | 9.50 | 0.00 | 37.98 | 74.00 | -36.02 | P | 1.01 |
| 1927.98 | 36.89 | 31.61 | 3.33 | 35.34 | 9.50 | 0.00 | 26.98 | 54.00 | -27.02 | A | 1.01 |
| 3856.01 | 46.12 | 32.25 | 4.68 | 35.04 | 9.50 | 0.00 | 38.51 | 74.00 | -35.49 | P | 1.04 |
| 3856.01 | 34.78 | 32.25 | 4.68 | 35.04 | 9.50 | 0.00 | 27.17 | 54.00 | -26.83 | A | 1.04 |
| 7713.98 | 44.25 | 39.66 | 7.06 | 36.24 | 9.50 | 0.00 | 45.23 | 74.00 | -28.77 | P | 1.00 |
| 7713.98 | 33.85 | 39.66 | 7.06 | 36.24 | 9.50 | 0.00 | 34.83 | 54.00 | -19.17 | A | 1.00 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| High (5825MHz) RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 1942.88 | 44.28 | 31.73 | 3.34 | 35.33 | 9.50 | 0.00 | 34.52 | 74.00 | -39.48 | P | 1.00 |
| 1942.88 | 33.89 | 31.73 | 3.34 | 35.33 | 9.50 | 0.00 | 24.13 | 54.00 | -29.87 | A | 1.00 |
| 3883.20 | 46.52 | 32.32 | 4.71 | 35.02 | 9.50 | 0.00 | 39.03 | 74.00 | -34.97 | P | 1.02 |
| 3883.20 | 34.71 | 32.32 | 4.71 | 35.02 | 9.50 | 0.00 | 27.22 | 54.00 | -26.78 | A | 1.02 |
| 7766.14 | 44.23 | 39.65 | 7.10 | 36.40 | 9.50 | 0.00 | 45.07 | 74.00 | -28.93 | P | 1.02 |
| 7766.14 | 33.46 | 39.65 | 7.10 | 36.40 | 9.50 | 0.00 | 34.30 | 54.00 | -19.70 | A | 1.02 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| High (5825MHz) RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 1941.98 | 46.87 | 31.72 | 3.34 | 35.33 | 9.50 | 0.00 | 37.10 | 74.00 | -36.90 | P | 1.02 |
| 1941.98 | 35.59 | 31.72 | 3.34 | 35.33 | 9.50 | 0.00 | 25.82 | 54.00 | -28.18 | A | 1.02 |
| 3883.27 | 45.12 | 32.32 | 4.71 | 35.02 | 9.50 | 0.00 | 37.63 | 74.00 | -36.37 | P | 1.00 |
| 3883.27 | 33.69 | 32.32 | 4.71 | 35.02 | 9.50 | 0.00 | 26.20 | 54.00 | -27.80 | A | 1.00 |
| 7766.58 | 45.28 | 39.65 | 7.10 | 36.40 | 9.50 | 0.00 | 46.12 | 74.00 | -27.88 | P | 1.00 |
| 7766.58 | 33.89 | 39.65 | 7.10 | 36.40 | 9.50 | 0.00 | 34.73 | 54.00 | -19.27 | A | 1.00 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4824.11 | 44.89 | 34.44 | 2.82 | 35.61 | 9.50 | 0.00 | 37.49 | 74 | -36.51 | P | 1.0 |
| 4824.11 | 32.65 | 34.44 | 2.82 | 35.61 | 9.50 | 0.00 | 25.25 | 54 | -28.75 | A | 1.0 |
| 7236.05 | 43.57 | 39.81 | 4.79 | 35.65 | 9.50 | 0.00 | 43.02 | 74 | -30.98 | P | 1.0 |
| 7236.05 | 32.54 | 39.81 | 4.79 | 35.65 | 9.50 | 0.00 | 31.99 | 54 | -22.01 | A | 1.0 |
| 9647.88 | 43.89 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 42.39 | 74 | -31.61 | P | 1.0 |
| 9647.88 | 32.19 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 30.69 | 54 | -23.31 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4824.16 | 44.98 | 34.44 | 2.82 | 35.16 | 9.50 | 0.00 | 37.58 | 74 | -36.42 | P | 1.0 |
| 4824.16 | 32.54 | 34.44 | 2.82 | 35.16 | 9.50 | 0.00 | 25.14 | 54 | -28.86 | A | 1.0 |
| 7237.55 | 42.86 | 39.80 | 4.80 | 35.65 | 9.50 | 0.00 | 42.31 | 74 | -31.69 | P | 1.0 |
| 7237.55 | 31.25 | 39.80 | 4.80 | 35.65 | 9.50 | 0.00 | 30.70 | 54 | -23.30 | A | 1.0 |
| 9648.83 | 43.58 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 42.08 | 74 | -31.92 | P | 1.0 |
| 9648.83 | 31.54 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 30.04 | 54 | -23.96 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4873.83 | 44.89 | 34.77 | 2.73 | 35.20 | 9.50 | 0.00 | 37.69 | 74 | -36.31 | P | 1.0 |
| 4873.83 | 32.54 | 34.77 | 2.73 | 35.20 | 9.50 | 0.00 | 25.34 | 54 | -28.66 | A | 1.0 |
| 7312.22 | 42.85 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 42.31 | 74 | -31.69 | P | 1.0 |
| 7312.22 | 31.25 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 30.71 | 54 | -23.29 | A | 1.0 |
| 9747.94 | 43.88 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 42.21 | 74 | -31.79 | P | 1.0 |
| 9747.94 | 32.14 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 30.47 | 54 | -23.53 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4873.16 | 44.80 | 34.76 | 2.73 | 35.20 | 9.50 | 0.00 | 37.59 | 74 | -36.41 | P | 1.0 |
| 4873.16 | 31.16 | 34.76 | 2.73 | 35.20 | 9.50 | 0.00 | 23.95 | 54 | -30.05 | A | 1.0 |
| 7311.55 | 43.73 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 43.19 | 74 | -30.81 | P | 1.0 |
| 7311.55 | 31.34 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 30.80 | 54 | -23.20 | A | 1.0 |
| 9747.61 | 44.70 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 43.03 | 74 | -30.97 | P | 1.0 |
| 9747.61 | 31.87 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 30.20 | 54 | -23.80 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4923.27 | 44.68 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 37.67 | 74 | -36.33 | P | 1.0 |
| 4923.27 | 32.56 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 25.55 | 54 | -28.45 | A | 1.0 |
| 7387.99 | 41.58 | 39.74 | 4.86 | 35.62 | 9.50 | 0.00 | 41.06 | 74 | -32.94 | P | 1.0 |
| 7387.99 | 32.16 | 39.74 | 4.86 | 35.62 | 9.50 | 0.00 | 31.64 | 54 | -22.36 | A | 1.0 |
| 9848.16 | 42.46 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 40.62 | 74 | -33.38 | P | 1.0 |
| 9848.16 | 32.62 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 30.78 | 54 | -23.22 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4923.11 | 44.61 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 37.60 | 74 | -36.40 | P | 1.0 |
| 4923.11 | 32.14 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 25.13 | 54 | -28.87 | A | 1.0 |
| 7387.05 | 43.58 | 39.75 | 4.85 | 35.62 | 9.50 | 0.00 | 43.06 | 74 | -30.94 | P | 1.0 |
| 7387.05 | 32.74 | 39.75 | 4.85 | 35.62 | 9.50 | 0.00 | 32.22 | 54 | -21.78 | A | 1.0 |
| 9847.83 | 43.74 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 41.90 | 74 | -32.10 | P | 1.0 |
| 9847.83 | 32.68 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 30.84 | 54 | -23.16 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4824.13 | 45.63 | 34.44 | 2.82 | 35.61 | 9.50 | 0.00 | 38.23 | 74 | -35.77 | P | 1.0 |
| 4824.13 | 32.47 | 34.44 | 2.82 | 35.61 | 9.50 | 0.00 | 25.07 | 54 | -28.93 | A | 1.0 |
| 7236.05 | 42.58 | 39.81 | 4.79 | 35.65 | 9.50 | 0.00 | 42.03 | 74 | -31.97 | P | 1.0 |
| 7236.05 | 32.14 | 39.81 | 4.79 | 35.65 | 9.50 | 0.00 | 31.59 | 54 | -22.41 | A | 1.0 |
| 9647.88 | 43.28 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 41.78 | 74 | -32.22 | P | 1.0 |
| 9647.88 | 33.24 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 31.74 | 54 | -22.26 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 2 (ANT2405) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4824.16 | 45.32 | 34.44 | 2.82 | 35.16 | 9.50 | 0.00 | 37.92 | 74 | -36.08 | P | 1.0 |
| 4824.16 | 33.21 | 34.44 | 2.82 | 35.16 | 9.50 | 0.00 | 25.81 | 54 | -28.19 | A | 1.0 |
| 7237.55 | 42.58 | 39.80 | 4.80 | 35.65 | 9.50 | 0.00 | 42.03 | 74 | -31.97 | P | 1.0 |
| 7237.55 | 32.61 | 39.80 | 4.80 | 35.65 | 9.50 | 0.00 | 32.06 | 54 | -21.94 | A | 1.0 |
| 9648.83 | 41.87 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 40.37 | 74 | -33.63 | P | 1.0 |
| 9648.83 | 32.48 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 30.98 | 54 | -23.02 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 2 (ANT2405) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4873.83 | 43.98 | 34.77 | 2.73 | 35.20 | 9.50 | 0.00 | 36.78 | 74 | -37.22 | P | 1.0 |
| 4873.83 | 32.54 | 34.77 | 2.73 | 35.20 | 9.50 | 0.00 | 25.34 | 54 | -28.66 | A | 1.0 |
| 7312.22 | 42.21 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 41.67 | 74 | -32.33 | P | 1.0 |
| 7312.22 | 32.24 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 31.70 | 54 | -22.30 | A | 1.0 |
| 9747.94 | 41.25 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 39.58 | 74 | -34.42 | P | 1.0 |
| 9747.94 | 31.25 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 29.58 | 54 | -24.42 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 2 (ANT2405) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4873.16 | 43.74 | 34.76 | 2.73 | 35.20 | 9.50 | 0.00 | 36.53 | 74 | -37.47 | P | 1.0 |
| 4873.16 | 32.41 | 34.76 | 2.73 | 35.20 | 9.50 | 0.00 | 25.20 | 54 | -28.80 | A | 1.0 |
| 7311.55 | 43.87 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 43.33 | 74 | -30.67 | P | 1.0 |
| 7311.55 | 32.25 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 31.71 | 54 | -22.29 | A | 1.0 |
| 9747.61 | 43.85 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 42.18 | 74 | -31.82 | P | 1.0 |
| 9747.61 | 32.11 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 30.44 | 54 | -23.56 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 2 (ANT2405) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4923.27 | 46.87 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 39.86 | 74 | -34.14 | P | 1.0 |
| 4923.27 | 33.47 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 26.46 | 54 | -27.54 | A | 1.0 |
| 7387.99 | 42.69 | 39.74 | 4.86 | 35.62 | 9.50 | 0.00 | 42.17 | 74 | -31.83 | P | 1.0 |
| 7387.99 | 32.58 | 39.74 | 4.86 | 35.62 | 9.50 | 0.00 | 32.06 | 54 | -21.94 | A | 1.0 |
| 9848.16 | 43.78 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 41.94 | 74 | -32.06 | P | 1.0 |
| 9848.16 | 36.52 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 34.68 | 54 | -19.32 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 2 (ANT2405) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4923.11 | 44.52 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 37.51 | 74 | -36.49 | P | 1.0 |
| 4923.11 | 33.14 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 26.13 | 54 | -27.87 | A | 1.0 |
| 7387.05 | 42.68 | 39.75 | 4.85 | 35.62 | 9.50 | 0.00 | 42.16 | 74 | -31.84 | P | 1.0 |
| 7387.05 | 32.56 | 39.75 | 4.85 | 35.62 | 9.50 | 0.00 | 32.04 | 54 | -21.96 | A | 1.0 |
| 9847.83 | 43.74 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 41.90 | 74 | -32.10 | P | 1.0 |
| 9847.83 | 32.69 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 30.85 | 54 | -23.15 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 2 (ANT2405) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4823.98 | 44.35 | 34.44 | 2.82 | 35.61 | 9.50 | 0.00 | 36.95 | 74 | -37.05 | P | 1.0 |
| 4823.98 | 33.25 | 34.44 | 2.82 | 35.61 | 9.50 | 0.00 | 25.85 | 54 | -28.15 | A | 1.0 |
| 7236.05 | 43.58 | 39.81 | 4.79 | 35.65 | 9.50 | 0.00 | 43.03 | 74 | -30.97 | P | 1.0 |
| 7236.05 | 32.55 | 39.81 | 4.79 | 35.65 | 9.50 | 0.00 | 32.00 | 54 | -22.00 | A | 1.0 |
| 9647.88 | 42.98 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 41.48 | 74 | -32.52 | P | 1.0 |
| 9647.88 | 32.57 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 31.07 | 54 | -22.93 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4824.16 | 45.21 | 34.44 | 2.82 | 35.16 | 9.50 | 0.00 | 37.81 | 74 | -36.19 | P | 1.0 |
| 4824.16 | 32.57 | 34.44 | 2.82 | 35.16 | 9.50 | 0.00 | 25.17 | 54 | -28.83 | A | 1.0 |
| 7237.55 | 41.36 | 39.80 | 4.80 | 35.65 | 9.50 | 0.00 | 40.81 | 74 | -33.19 | P | 1.0 |
| 7237.55 | 32.47 | 39.80 | 4.80 | 35.65 | 9.50 | 0.00 | 31.92 | 54 | -22.08 | A | 1.0 |
| 9648.83 | 40.36 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 38.86 | 74 | -35.14 | P | 1.0 |
| 9648.83 | 32.64 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 31.14 | 54 | -22.86 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4873.83 | 44.36 | 34.77 | 2.73 | 35.20 | 9.50 | 0.00 | 37.16 | 74 | -36.84 | P | 1.0 |
| 4873.83 | 33.58 | 34.77 | 2.73 | 35.20 | 9.50 | 0.00 | 26.38 | 54 | -27.62 | A | 1.0 |
| 7312.22 | 41.25 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 40.71 | 74 | -33.29 | P | 1.0 |
| 7312.22 | 31.25 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 30.71 | 54 | -23.29 | A | 1.0 |
| 9747.94 | 41.58 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 39.91 | 74 | -34.09 | P | 1.0 |
| 9747.94 | 32.78 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 31.11 | 54 | -22.89 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4873.16 | 41.63 | 34.76 | 2.73 | 35.20 | 9.50 | 0.00 | 34.42 | 74 | -39.58 | P | 1.0 |
| 4873.16 | 32.58 | 34.76 | 2.73 | 35.20 | 9.50 | 0.00 | 25.37 | 54 | -28.63 | A | 1.0 |
| 7311.55 | 42.74 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 42.20 | 74 | -31.80 | P | 1.0 |
| 7311.55 | 32.65 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 32.11 | 54 | -21.89 | A | 1.0 |
| 9747.61 | 42.68 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 41.01 | 74 | -32.99 | P | 1.0 |
| 9747.61 | 33.46 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 31.79 | 54 | -22.21 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4923.27 | 45.96 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 38.95 | 74 | -35.05 | P | 1.0 |
| 4923.27 | 32.64 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 25.63 | 54 | -28.37 | A | 1.0 |
| 7387.99 | 42.87 | 39.74 | 4.86 | 35.62 | 9.50 | 0.00 | 42.35 | 74 | -31.65 | P | 1.0 |
| 7387.99 | 31.54 | 39.74 | 4.86 | 35.62 | 9.50 | 0.00 | 31.02 | 54 | -22.98 | A | 1.0 |
| 9848.16 | 42.87 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 41.03 | 74 | -32.97 | P | 1.0 |
| 9848.16 | 36.46 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 34.62 | 54 | -19.38 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4923.11 | 43.27 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 36.26 | 74 | -37.74 | P | 1.0 |
| 4923.11 | 32.46 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 25.45 | 54 | -28.55 | A | 1.0 |
| 7387.05 | 42.37 | 39.75 | 4.85 | 35.62 | 9.50 | 0.00 | 41.85 | 74 | -32.15 | P | 1.0 |
| 7387.05 | 32.54 | 39.75 | 4.85 | 35.62 | 9.50 | 0.00 | 32.02 | 54 | -21.98 | A | 1.0 |
| 9847.83 | 42.87 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 41.03 | 74 | -32.97 | P | 1.0 |
| 9847.83 | 33.58 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 31.74 | 54 | -22.26 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4824.15 | 43.25 | 34.44 | 2.82 | 35.61 | 9.50 | 0.00 | 35.85 | 74 | -38.15 | P | 1.0 |
| 4824.15 | 32.54 | 34.44 | 2.82 | 35.61 | 9.50 | 0.00 | 25.14 | 54 | -28.86 | A | 1.0 |
| 7236.05 | 42.58 | 39.81 | 4.79 | 35.65 | 9.50 | 0.00 | 42.03 | 74 | -31.97 | P | 1.0 |
| 7236.05 | 33.41 | 39.81 | 4.79 | 35.65 | 9.50 | 0.00 | 32.86 | 54 | -21.14 | A | 1.0 |
| 9647.88 | 43.12 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 41.62 | 74 | -32.38 | P | 1.0 |
| 9647.88 | 32.47 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 30.97 | 54 | -23.03 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4824.16 | 44.35 | 34.44 | 2.82 | 35.16 | 9.50 | 0.00 | 36.95 | 74 | -37.05 | P | 1.0 |
| 4824.16 | 33.37 | 34.44 | 2.82 | 35.16 | 9.50 | 0.00 | 25.97 | 54 | -28.03 | A | 1.0 |
| 7237.55 | 42.87 | 39.80 | 4.80 | 35.65 | 9.50 | 0.00 | 42.32 | 74 | -31.68 | P | 1.0 |
| 7237.55 | 32.81 | 39.80 | 4.80 | 35.65 | 9.50 | 0.00 | 32.26 | 54 | -21.74 | A | 1.0 |
| 9648.83 | 40.83 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 39.33 | 74 | -34.67 | P | 1.0 |
| 9648.83 | 33.74 | 38.54 | 5.90 | 36.44 | 9.50 | 0.00 | 32.24 | 54 | -21.76 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4873.83 | 43.28 | 34.77 | 2.73 | 35.20 | 9.50 | 0.00 | 36.08 | 74 | -37.92 | P | 1.0 |
| 4873.83 | 33.58 | 34.77 | 2.73 | 35.20 | 9.50 | 0.00 | 26.38 | 54 | -27.62 | A | 1.0 |
| 7312.22 | 41.87 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 41.33 | 74 | -32.67 | P | 1.0 |
| 7312.22 | 32.54 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 32.00 | 54 | -22.00 | A | 1.0 |
| 9747.94 | 42.36 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 40.69 | 74 | -33.31 | P | 1.0 |
| 9747.94 | 33.57 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 31.90 | 54 | -22.10 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4873.16 | 42.57 | 34.76 | 2.73 | 35.20 | 9.50 | 0.00 | 35.36 | 74 | -38.64 | P | 1.0 |
| 4873.16 | 33.54 | 34.76 | 2.73 | 35.20 | 9.50 | 0.00 | 26.33 | 54 | -27.67 | A | 1.0 |
| 7311.55 | 41.63 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 41.09 | 74 | -32.91 | P | 1.0 |
| 7311.55 | 32.54 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 32.00 | 54 | -22.00 | A | 1.0 |
| 9747.61 | 42.87 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 41.20 | 74 | -32.80 | P | 1.0 |
| 9747.61 | 33.11 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 31.44 | 54 | -22.56 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4923.27 | 46.87 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 39.86 | 74 | -34.14 | P | 1.0 |
| 4923.27 | 33.54 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 26.53 | 54 | -27.47 | A | 1.0 |
| 7387.99 | 43.63 | 39.74 | 4.86 | 35.62 | 9.50 | 0.00 | 43.11 | 74 | -30.89 | P | 1.0 |
| 7387.99 | 32.58 | 39.74 | 4.86 | 35.62 | 9.50 | 0.00 | 32.06 | 54 | -21.94 | A | 1.0 |
| 9848.16 | 43.74 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 41.90 | 74 | -32.10 | P | 1.0 |
| 9848.16 | 37.50 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 35.66 | 54 | -18.34 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4923.11 | 44.57 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 37.56 | 74 | -36.44 | P | 1.0 |
| 4923.11 | 33.54 | 35.09 | 2.64 | 35.24 | 9.50 | 0.00 | 26.53 | 54 | -27.47 | A | 1.0 |
| 7387.05 | 43.27 | 39.75 | 4.85 | 35.62 | 9.50 | 0.00 | 42.75 | 74 | -31.25 | P | 1.0 |
| 7387.05 | 33.54 | 39.75 | 4.85 | 35.62 | 9.50 | 0.00 | 33.02 | 54 | -20.98 | A | 1.0 |
| 9847.83 | 43.60 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 41.76 | 74 | -32.24 | P | 1.0 |
| 9847.83 | 31.57 | 38.52 | 5.90 | 36.76 | 9.50 | 0.00 | 29.73 | 54 | -24.27 | A | 1.0 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. All emission above 1GHz at 802.11b/g are all the same, so the 802.11g mode chosen as representative in Final test.
9. Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/28 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 18.1°C, 85% |

| Low (5760MHz) RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|------------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 1920.02 | 46.85 | 31.54 | 3.32 | 35.35 | 9.50 | 0.00 | 36.86 | 74 | -37.14 | P | 1.00 |
| 1920.02 | 33.54 | 31.54 | 3.32 | 35.35 | 9.50 | 0.00 | 23.55 | 54 | -30.45 | A | 1.00 |
| 3840.12 | 48.12 | 32.22 | 4.66 | 35.06 | 9.50 | 0.00 | 40.44 | 74 | -33.56 | P | 1.02 |
| 3840.12 | 33.12 | 32.22 | 4.66 | 35.06 | 9.50 | 0.00 | 25.44 | 54 | -28.56 | A | 1.02 |
| 7679.92 | 44.85 | 39.66 | 7.04 | 36.14 | 9.50 | 0.00 | 45.91 | 74 | -28.09 | P | 1.00 |
| 7679.92 | 34.78 | 39.66 | 7.04 | 36.14 | 9.50 | 0.00 | 35.84 | 54 | -18.16 | A | 1.00 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For Super A mode.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/28 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 18.1°C, 85% |

| Low (5760MHz) RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|------------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 1920.15 | 47.56 | 31.55 | 3.32 | 35.35 | 9.50 | 0.00 | 37.58 | 74 | -36.42 | P | 1.00 |
| 1920.15 | 35.74 | 31.55 | 3.32 | 35.35 | 9.50 | 0.00 | 25.76 | 54 | -28.24 | A | 1.00 |
| 3840.11 | 44.25 | 32.22 | 4.66 | 35.06 | 9.50 | 0.00 | 36.57 | 74 | -37.43 | P | 1.03 |
| 3840.11 | 33.57 | 32.22 | 4.66 | 35.06 | 9.50 | 0.00 | 25.89 | 54 | -28.11 | A | 1.03 |
| 7679.25 | 44.58 | 39.66 | 7.04 | 36.14 | 9.50 | 0.00 | 45.64 | 74 | -28.36 | P | 1.00 |
| 7679.25 | 32.79 | 39.66 | 7.04 | 36.14 | 9.50 | 0.00 | 33.85 | 54 | -20.15 | A | 1.00 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For Super A mode.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/28 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 18.1°C, 85% |

| High (5800MHz) RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 1933.45 | 45.65 | 31.65 | 3.33 | 35.34 | 9.50 | 0.00 | 35.80 | 74 | -38.20 | P | 1.00 |
| 1933.45 | 34.12 | 31.65 | 3.33 | 35.34 | 9.50 | 0.00 | 24.27 | 54 | -29.73 | A | 1.00 |
| 3866.11 | 47.98 | 32.28 | 4.69 | 35.03 | 9.50 | 0.00 | 40.41 | 74 | -33.59 | P | 1.02 |
| 3866.11 | 33.61 | 32.28 | 4.69 | 35.03 | 9.50 | 0.00 | 26.04 | 54 | -27.96 | A | 1.02 |
| 7732.47 | 45.12 | 39.65 | 7.07 | 36.30 | 9.50 | 0.00 | 46.05 | 74 | -27.95 | P | 1.00 |
| 7732.47 | 34.77 | 39.65 | 7.07 | 36.30 | 9.50 | 0.00 | 35.70 | 54 | -18.30 | A | 1.00 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For Super A mode.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/28 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 18.1°C, 85% |

| High (5800MHz) RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 1933.25 | 47.25 | 31.65 | 3.33 | 35.34 | 9.50 | 0.00 | 37.39 | 74 | -36.61 | P | 1.00 |
| 1933.25 | 35.88 | 31.65 | 3.33 | 35.34 | 9.50 | 0.00 | 26.02 | 54 | -27.98 | A | 1.00 |
| 3866.44 | 44.26 | 32.28 | 4.69 | 35.03 | 9.50 | 0.00 | 36.70 | 74 | -37.30 | P | 1.06 |
| 3866.44 | 33.84 | 32.28 | 4.69 | 35.03 | 9.50 | 0.00 | 26.28 | 54 | -27.72 | A | 1.06 |
| 7732.56 | 45.69 | 39.65 | 7.07 | 36.30 | 9.50 | 0.00 | 46.62 | 74 | -27.38 | P | 1.02 |
| 7732.56 | 33.47 | 39.65 | 7.07 | 36.30 | 9.50 | 0.00 | 34.40 | 54 | -19.60 | A | 1.02 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For Super A mode.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| (2437MHz) RX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|--------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4874.12 | 45.20 | 34.77 | 2.73 | 35.30 | 9.50 | 0.00 | 38.00 | 74 | -36.00 | P | 1.12 |
| 4874.12 | 33.55 | 34.77 | 2.73 | 35.30 | 9.50 | 0.00 | 26.35 | 54 | -27.65 | A | 1.12 |
| 7311.98 | 43.99 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 43.45 | 74 | -30.55 | P | 1.05 |
| 7311.98 | 32.99 | 39.78 | 4.82 | 35.64 | 9.50 | 0.00 | 32.45 | 54 | -21.55 | A | 1.05 |
| 9748.01 | 44.89 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 43.22 | 74 | -30.78 | P | 1.02 |
| 9748.01 | 33.15 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 31.48 | 54 | -22.52 | A | 1.02 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak):
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Super G mode.
9. Super G mode, there are only one Antenna 1 (SNW0007A 1/2λ Dipole) : Antenna gain is 5dBi.



The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| (2437MHz) RX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|--------------|----------------|-----------|------------|--|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4873.98 | 46.25 | 34.77 | 2.73 | 35.20 | 9.50 | 0.00 | 39.05 | 74 | -34.95 | P | 1.13 |
| 4873.98 | 34.02 | 34.77 | 2.73 | 35.20 | 9.50 | 0.00 | 26.82 | 54 | -27.18 | A | 1.13 |
| 7312.88 | 44.01 | 39.77 | 4.83 | 35.64 | 9.50 | 0.00 | 43.47 | 74 | -30.53 | P | 1.06 |
| 7312.88 | 33.15 | 39.77 | 4.83 | 35.64 | 9.50 | 0.00 | 32.61 | 54 | -21.39 | A | 1.06 |
| 9747.97 | 45.15 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 43.48 | 74 | -30.52 | P | 1.08 |
| 9747.97 | 34.10 | 38.53 | 5.90 | 36.60 | 9.50 | 0.00 | 32.43 | 54 | -21.57 | A | 1.08 |

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Super G mode.
9. Super G mode, there are only one Antenna 1 (SNW0007A 1/2λ Dipole) : Antenna gain is 5dBi.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| Low (5745MHz) TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|------------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 3830.00 | 45.49 | 32.19 | 4.65 | 35.07 | 9.50 | 0.00 | 37.77 | 74.00 | -36.23 | P | 1.00 |
| * 3830.00 | 35.29 | 32.19 | 4.65 | 35.07 | 9.50 | 0.00 | 27.57 | 54.00 | -26.43 | A | 1.00 |
| * 3922.00 | 46.28 | 32.41 | 4.74 | 34.98 | 9.50 | 0.00 | 38.96 | 74.00 | -35.04 | P | 1.18 |
| * 3922.00 | 35.38 | 32.41 | 4.74 | 34.98 | 9.50 | 0.00 | 28.06 | 54.00 | -25.94 | A | 1.18 |
| * 4801.24 | 46.04 | 34.29 | 5.08 | 35.14 | 9.50 | 0.00 | 40.76 | 74.00 | -33.24 | P | 1.23 |
| * 4801.24 | 36.10 | 34.29 | 5.08 | 35.14 | 9.50 | 0.00 | 30.82 | 54.00 | -23.18 | A | 1.23 |
| 5724.34 | 36.00 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 69.21 | 79.81 | -10.60 | P | 1.10 |
| 5724.34 | 23.03 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 56.24 | 71.92 | -15.68 | A | 1.10 |
| 5724.90 | 36.89 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 70.10 | 79.81 | -9.70 | P | 1.10 |
| 5724.90 | 23.71 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 56.92 | 71.92 | -14.99 | A | 1.10 |
| 5743.64 | 66.54 | 36.69 | 6.08 | 0.00 | 9.50 | 0.00 | 99.81 | Fundamental Frequency | | P | 1.00 |
| 5743.64 | 58.65 | 36.69 | 6.08 | 0.00 | 9.50 | 0.00 | 91.92 | | | A | 1.00 |
| * 7566.10 | 48.22 | 39.69 | 6.96 | 35.80 | 9.50 | 0.00 | 49.57 | 74.00 | -24.43 | P | 1.05 |
| * 7566.10 | 37.20 | 39.69 | 6.96 | 35.80 | 9.50 | 0.00 | 38.55 | 54.00 | -15.45 | A | 1.05 |
| * 11491.95 | 58.05 | 40.09 | 8.97 | 35.70 | 9.50 | 1.20 | 63.11 | 74.00 | -10.89 | P | 1.00 |
| * 11491.95 | 43.76 | 40.09 | 8.97 | 35.70 | 9.50 | 1.20 | 48.82 | 54.00 | -5.18 | A | 1.00 |
| 17237.15 | 51.30 | 47.12 | 9.47 | 35.21 | 9.50 | 0.59 | 63.77 | 79.81 | -16.03 | P | 1.03 |
| 17237.15 | 38.29 | 47.12 | 9.47 | 35.21 | 9.50 | 0.59 | 50.76 | 71.92 | -21.15 | A | 1.03 |
| * 22899.60 | ----- | ----- | ----- | ----- | 9.50 | 0.70 | ----- | ----- | ----- | ----- | 1.00 |
| 28718.20 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| 34461.84 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 40205.48 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 45949.12 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 51692.76 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 57436.40 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level – Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11a mode at 6Mbps.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| Low (5745MHz) TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|------------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 3830.00 | 45.56 | 32.19 | 4.65 | 35.07 | 9.50 | 0.00 | 37.84 | 74.00 | -36.16 | P | 1.00 |
| * 3830.00 | 36.30 | 32.19 | 4.65 | 35.07 | 9.50 | 0.00 | 28.58 | 54.00 | -25.42 | A | 1.00 |
| * 3922.00 | 59.86 | 32.41 | 4.74 | 34.98 | 9.50 | 0.00 | 52.54 | 74.00 | -21.46 | P | 1.00 |
| * 3922.00 | 54.29 | 32.41 | 4.74 | 34.98 | 9.50 | 0.00 | 46.97 | 54.00 | -7.03 | A | 1.00 |
| * 4803.36 | 49.74 | 34.30 | 5.08 | 35.14 | 9.50 | 0.00 | 44.48 | 74.00 | -29.52 | P | 1.05 |
| * 4803.36 | 39.04 | 34.30 | 5.08 | 35.14 | 9.50 | 0.00 | 33.78 | 54.00 | -20.22 | A | 1.05 |
| 5724.34 | 49.47 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 82.68 | 93.05 | -10.36 | P | 1.02 |
| 5724.34 | 36.40 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 69.61 | 85.15 | -15.53 | A | 1.02 |
| 5724.90 | 49.71 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 82.92 | 93.05 | -10.12 | P | 1.02 |
| 5724.90 | 37.28 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 70.49 | 85.15 | -14.65 | A | 1.02 |
| 5743.53 | 79.78 | 36.69 | 6.08 | 0.00 | 9.50 | 0.00 | 113.05 | Fundamental Frequency | | P | 1.00 |
| 5743.53 | 71.88 | 36.69 | 6.08 | 0.00 | 9.50 | 0.00 | 105.15 | | | A | 1.00 |
| * 7566.10 | 62.14 | 39.69 | 6.96 | 35.80 | 9.50 | 0.00 | 63.49 | 74.00 | -10.51 | P | 1.05 |
| * 7566.10 | 50.77 | 39.69 | 6.96 | 35.80 | 9.50 | 0.00 | 52.12 | 54.00 | -1.88 | A | 1.05 |
| * 11492.45 | 52.91 | 40.09 | 8.97 | 35.70 | 9.50 | 1.20 | 57.97 | 74.00 | -16.03 | P | 1.02 |
| * 11492.45 | 39.67 | 40.09 | 8.97 | 35.70 | 9.50 | 1.20 | 44.73 | 54.00 | -9.27 | A | 1.02 |
| 17234.14 | 45.49 | 47.10 | 9.47 | 35.21 | 9.50 | 0.59 | 57.94 | 93.05 | -35.10 | P | 1.00 |
| 17234.14 | 33.85 | 47.10 | 9.47 | 35.21 | 9.50 | 0.59 | 46.30 | 85.15 | -38.84 | A | 1.00 |
| * 22899.60 | ----- | ----- | ----- | ----- | 9.50 | 0.70 | ----- | ----- | ----- | ----- | 1.00 |
| 28717.65 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| 34461.18 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 40204.71 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 45948.24 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 51691.77 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 57435.30 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
- For normal 802.11a mode at 6Mbps.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| Middle (5785MHz) TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|---------------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 3856.88 | 45.12 | 32.26 | 4.68 | 35.04 | 9.50 | 0.00 | 37.51 | 74.00 | -36.49 | P | 1.01 |
| * 3856.88 | 34.84 | 32.26 | 4.68 | 35.04 | 9.50 | 0.00 | 27.23 | 54.00 | -26.77 | A | 1.01 |
| * 3964.65 | 46.15 | 32.52 | 4.79 | 34.94 | 9.50 | 0.00 | 39.02 | 74.00 | -34.98 | P | 1.20 |
| * 3964.65 | 35.39 | 32.52 | 4.79 | 34.94 | 9.50 | 0.00 | 28.26 | 54.00 | -25.74 | A | 1.20 |
| * 4842.56 | 47.68 | 34.56 | 5.09 | 35.17 | 9.50 | 0.00 | 42.66 | 74.00 | -31.34 | P | 1.16 |
| * 4842.56 | 35.70 | 34.56 | 5.09 | 35.17 | 9.50 | 0.00 | 30.68 | 54.00 | -23.32 | A | 1.16 |
| 5781.88 | 66.80 | 36.75 | 6.13 | 0.00 | 9.50 | 0.00 | 100.18 | Fundamental Frequency | | P | 1.00 |
| 5781.88 | 58.51 | 36.75 | 6.13 | 0.00 | 9.50 | 0.00 | 91.89 | | | A | 1.00 |
| * 7712.85 | 46.25 | 39.66 | 7.06 | 36.24 | 9.50 | 0.00 | 47.23 | 74.00 | -26.77 | P | 1.02 |
| * 7712.85 | 34.87 | 39.66 | 7.06 | 36.24 | 9.50 | 0.00 | 35.85 | 54.00 | -18.15 | A | 1.02 |
| * 11572.26 | 58.63 | 40.27 | 9.01 | 35.71 | 9.50 | 1.14 | 63.84 | 74.00 | -10.16 | P | 1.00 |
| * 11572.26 | 44.43 | 40.27 | 9.01 | 35.71 | 9.50 | 1.14 | 49.64 | 54.00 | -4.36 | A | 1.00 |
| 17351.68 | 48.87 | 47.81 | 9.49 | 35.12 | 9.50 | 0.64 | 71.69 | 80.18 | -8.48 | P | 1.04 |
| 17351.68 | 36.78 | 47.81 | 9.49 | 35.12 | 9.50 | 0.64 | 59.60 | 71.89 | -12.28 | A | 1.04 |
| 23127.52 | ----- | ----- | ----- | ----- | 9.50 | 2.84 | ----- | ----- | ----- | ----- | 1.00 |
| 28909.40 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| 34691.28 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 40473.16 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 46255.04 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 52036.92 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 57818.80 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11a mode at 6Mbps.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| Middle (5785MHz) TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|---------------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 3856.88 | 46.97 | 32.26 | 4.68 | 35.04 | 9.50 | 0.00 | 39.36 | 74.00 | -34.64 | P | 1.01 |
| * 3856.88 | 35.49 | 32.26 | 4.68 | 35.04 | 9.50 | 0.00 | 27.88 | 54.00 | -26.12 | A | 1.01 |
| * 3964.65 | 60.42 | 32.52 | 4.79 | 34.94 | 9.50 | 0.00 | 53.29 | 74.00 | -20.71 | P | 1.00 |
| * 3964.65 | 50.12 | 32.52 | 4.79 | 34.94 | 9.50 | 0.00 | 42.99 | 54.00 | -11.01 | A | 1.00 |
| * 4842.56 | 56.20 | 34.56 | 5.09 | 35.17 | 9.50 | 0.00 | 51.18 | 74.00 | -22.82 | P | 1.06 |
| * 4842.56 | 45.88 | 34.56 | 5.09 | 35.17 | 9.50 | 0.00 | 40.86 | 54.00 | -13.14 | A | 1.06 |
| 5778.50 | 80.39 | 36.75 | 6.12 | 0.00 | 9.50 | 0.00 | 113.76 | Fundamental Frequency | | P | 1.00 |
| 5778.50 | 72.22 | 36.75 | 6.12 | 0.00 | 9.50 | 0.00 | 105.59 | | | A | 1.00 |
| * 7712.85 | 58.58 | 39.66 | 7.06 | 36.24 | 9.50 | 0.00 | 59.56 | 74.00 | -14.44 | P | 1.00 |
| * 7712.85 | 47.05 | 39.66 | 7.06 | 36.24 | 9.50 | 0.00 | 48.03 | 54.00 | -5.97 | A | 1.00 |
| * 11572.25 | 53.14 | 40.27 | 9.01 | 35.71 | 9.50 | 1.14 | 58.35 | 74.00 | -15.65 | P | 1.01 |
| * 11572.25 | 40.16 | 40.27 | 9.01 | 35.71 | 9.50 | 1.14 | 45.37 | 54.00 | -8.63 | A | 1.01 |
| 17355.00 | 44.22 | 47.83 | 9.49 | 35.12 | 9.50 | 0.64 | 57.57 | 93.76 | -36.19 | P | 1.00 |
| 17355.00 | 33.78 | 47.83 | 9.49 | 35.12 | 9.50 | 0.64 | 47.13 | 85.59 | -38.46 | A | 1.00 |
| * 23114.00 | ----- | ----- | ----- | ----- | 9.50 | 2.62 | ----- | ----- | ----- | ----- | 1.00 |
| 28892.50 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| 34671.00 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 40449.50 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 46228.00 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 52006.50 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 57785.00 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark "*" means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11a mode at 6Mbps.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| High (5825MHz) TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 3883.30 | 45.25 | 32.32 | 4.71 | 35.02 | 9.50 | 0.00 | 37.76 | 74.00 | -36.24 | P | 1.00 |
| * 3883.30 | 34.78 | 32.32 | 4.71 | 35.02 | 9.50 | 0.00 | 27.29 | 54.00 | -26.71 | A | 1.00 |
| * 3999.87 | 45.06 | 32.60 | 4.82 | 34.90 | 9.50 | 0.00 | 38.08 | 74.00 | -35.92 | P | 1.15 |
| * 3999.87 | 34.90 | 32.60 | 4.82 | 34.90 | 9.50 | 0.00 | 27.92 | 54.00 | -26.08 | A | 1.15 |
| * 4880.31 | 43.86 | 34.81 | 5.10 | 35.20 | 9.50 | 0.00 | 39.07 | 74.00 | -34.93 | P | 1.15 |
| * 4880.31 | 33.98 | 34.81 | 5.10 | 35.20 | 9.50 | 0.00 | 29.19 | 54.00 | -24.81 | A | 1.15 |
| 5819.67 | 65.64 | 36.81 | 6.17 | 0.00 | 9.50 | 0.00 | 99.12 | Fundamental Frequency | | P | 1.00 |
| 5819.67 | 57.46 | 36.81 | 6.17 | 0.00 | 9.50 | 0.00 | 90.94 | | | A | 1.00 |
| 5850.10 | 38.41 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 71.98 | 79.12 | -7.14 | P | 1.07 |
| 5850.10 | 27.00 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 60.57 | 70.94 | -10.37 | A | 1.07 |
| 5852.86 | 39.40 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 72.98 | 79.12 | -6.15 | P | 1.07 |
| 5852.86 | 27.00 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 60.58 | 70.94 | -10.37 | A | 1.07 |
| * 7644.05 | 46.34 | 39.67 | 7.02 | 36.03 | 9.50 | 0.00 | 47.49 | 74.00 | -26.51 | P | 1.00 |
| * 7644.05 | 34.28 | 39.67 | 7.02 | 36.03 | 9.50 | 0.00 | 35.43 | 54.00 | -18.57 | A | 1.00 |
| * 11652.00 | 58.22 | 40.46 | 9.05 | 35.73 | 9.50 | 1.08 | 63.58 | 74.00 | -10.42 | P | 1.00 |
| * 11652.00 | 44.50 | 40.46 | 9.05 | 35.73 | 9.50 | 1.08 | 49.86 | 54.00 | -4.14 | A | 1.00 |
| 17475.00 | 45.79 | 48.55 | 9.52 | 35.02 | 9.50 | 0.69 | 60.03 | 79.12 | -19.10 | P | 1.00 |
| 17475.00 | 34.50 | 48.55 | 9.52 | 35.02 | 9.50 | 0.69 | 48.74 | 70.94 | -22.21 | A | 1.00 |
| 23278.68 | ----- | ----- | ----- | ----- | 9.50 | 5.38 | ----- | ----- | ----- | ----- | 1.00 |
| 29098.35 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| 34918.02 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 40737.69 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 46557.36 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 52377.03 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 58196.70 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11a mode at 6Mbps.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/27 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 19.4°C, 86% |

| High (5825MHz) TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 3883.30 | 45.02 | 32.32 | 4.71 | 35.02 | 9.50 | 0.00 | 37.53 | 74.00 | -36.47 | P | 1.00 |
| * 3883.30 | 36.23 | 32.32 | 4.71 | 35.02 | 9.50 | 0.00 | 28.74 | 54.00 | -25.26 | A | 1.00 |
| * 4001.18 | 57.47 | 32.60 | 4.82 | 34.90 | 9.50 | 0.00 | 50.49 | 74.00 | -23.51 | P | 1.00 |
| * 4001.18 | 49.15 | 32.60 | 4.82 | 34.90 | 9.50 | 0.00 | 42.17 | 54.00 | -11.83 | A | 1.00 |
| * 4880.31 | 55.60 | 34.81 | 5.10 | 35.20 | 9.50 | 0.00 | 50.81 | 74.00 | -23.19 | P | 1.00 |
| * 4880.31 | 45.45 | 34.81 | 5.10 | 35.20 | 9.50 | 0.00 | 40.66 | 54.00 | -13.34 | A | 1.00 |
| 5821.73 | 78.36 | 36.81 | 6.18 | 0.00 | 9.50 | 0.00 | 111.85 | Fundamental Frequency | | P | 1.00 |
| 5821.73 | 70.54 | 36.81 | 6.18 | 0.00 | 9.50 | 0.00 | 104.03 | | | A | 1.00 |
| 5850.10 | 40.96 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 74.53 | 91.85 | -17.32 | P | 1.02 |
| 5850.10 | 28.34 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 61.91 | 84.03 | -22.12 | A | 1.02 |
| 5852.86 | 39.85 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 73.43 | 91.85 | -18.42 | P | 1.02 |
| 5852.86 | 28.34 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 61.92 | 84.03 | -22.11 | A | 1.02 |
| * 7641.17 | 56.02 | 39.67 | 7.01 | 36.02 | 9.50 | 0.00 | 57.18 | 74.00 | -16.82 | P | 1.00 |
| * 7641.17 | 46.89 | 39.67 | 7.01 | 36.02 | 9.50 | 0.00 | 48.05 | 54.00 | -5.95 | A | 1.00 |
| * 11649.31 | 51.80 | 40.46 | 9.04 | 35.73 | 9.50 | 1.08 | 57.15 | 74.00 | -16.85 | P | 1.01 |
| * 11649.31 | 39.03 | 40.46 | 9.04 | 35.73 | 9.50 | 1.08 | 44.38 | 54.00 | -9.62 | A | 1.01 |
| 17474.81 | 46.85 | 48.55 | 9.51 | 35.02 | 9.50 | 0.69 | 61.08 | 91.85 | -30.77 | P | 1.00 |
| 17474.81 | 34.63 | 48.55 | 9.51 | 35.02 | 9.50 | 0.69 | 48.86 | 84.03 | -35.17 | A | 1.00 |
| 23286.92 | ----- | ----- | ----- | ----- | 9.50 | 5.52 | ----- | ----- | ----- | ----- | 1.00 |
| 29108.65 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| 34930.38 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 40752.11 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 46573.84 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 52395.57 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 58217.30 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For normal 802.11a mode at 6Mbps.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 22.50 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 48.38 | 74.00 | -25.62 | P | 1.00 |
| * 2389.90 | 8.00 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 33.88 | 54.00 | -20.12 | A | 1.00 |
| 2399.90 | 33.30 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 59.18 | 79.54 | -20.36 | P | 1.00 |
| 2399.90 | 23.80 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 49.68 | 72.75 | -23.07 | A | 1.00 |
| 2413.22 | 73.67 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 99.54 | Fundamental Frequency | | P | 1.00 |
| 2413.22 | 66.88 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 92.75 | | | A | 1.00 |
| * 4823.72 | 50.41 | 34.44 | 2.82 | 35.16 | 9.50 | 2.01 | 45.01 | 74.00 | -28.99 | P | 1.00 |
| * 4823.72 | 38.12 | 34.44 | 2.82 | 35.16 | 9.50 | 2.01 | 32.72 | 54.00 | -21.28 | A | 1.00 |
| 7235.72 | 44.14 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 45.59 | 79.54 | -33.95 | P | 1.00 |
| 7235.72 | 31.37 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 32.82 | 72.75 | -39.93 | A | 1.00 |
| 9647.71 | 45.89 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 45.00 | 79.54 | -34.54 | P | 1.00 |
| 9647.71 | 33.19 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 32.30 | 72.75 | -40.54 | A | 1.00 |
| * 12060.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14472.60 | --- | --- | --- | --- | 9.50 | 0.67 | --- | --- | --- | --- | 1.00 |
| 16884.70 | --- | --- | --- | --- | 9.50 | 0.43 | --- | --- | --- | --- | 1.00 |
| * 19296.80 | --- | --- | --- | --- | 9.50 | 1.96 | --- | --- | --- | --- | 1.00 |
| 21708.90 | --- | --- | --- | --- | 9.50 | 0.82 | --- | --- | --- | --- | 1.00 |
| 24121.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 36.80 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 62.68 | 74.00 | -11.32 | P | 1.00 |
| * 2389.90 | 23.00 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 48.88 | 54.00 | -5.12 | A | 1.00 |
| 2399.90 | 49.80 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 75.68 | 94.22 | -18.54 | P | 1.00 |
| 2399.90 | 39.50 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 65.38 | 87.32 | -21.94 | A | 1.00 |
| 2413.29 | 88.35 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 114.22 | Fundamental Frequency | | P | 1.00 |
| 2413.29 | 81.45 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 107.32 | | | A | 1.00 |
| * 4823.88 | 58.11 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 52.71 | 74.00 | -21.29 | P | 1.00 |
| * 4823.88 | 46.70 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 41.30 | 54.00 | -12.70 | A | 1.00 |
| 7235.72 | 50.49 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 51.94 | 94.22 | -42.28 | P | 1.00 |
| 7235.72 | 40.76 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 42.21 | 87.32 | -45.11 | A | 1.00 |
| 9647.71 | 49.01 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 48.12 | 94.22 | -46.10 | P | 1.00 |
| 9647.71 | 42.28 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 41.39 | 87.32 | -45.93 | A | 1.00 |
| * 12060.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14472.60 | --- | --- | --- | --- | 9.50 | 0.67 | --- | --- | --- | --- | 1.00 |
| 16884.70 | --- | --- | --- | --- | 9.50 | 0.43 | --- | --- | --- | --- | 1.00 |
| * 19296.80 | --- | --- | --- | --- | 9.50 | 1.96 | --- | --- | --- | --- | 1.00 |
| 21708.90 | --- | --- | --- | --- | 9.50 | 0.82 | --- | --- | --- | --- | 1.00 |
| 24121.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | --- | --- | --- | 1.00 |

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11b mode at 11Mbps.
 - Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2438.36 | 75.80 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 101.65 | Fundamental Frequency | | P | 1.00 |
| 2438.36 | 68.78 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 94.63 | | | A | 1.00 |
| * 4874.05 | 53.00 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 47.60 | 74.00 | -26.40 | P | 1.00 |
| * 4874.05 | 40.79 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 35.39 | 54.00 | -18.61 | A | 1.00 |
| * 7312.19 | 52.16 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 53.62 | 74.00 | -20.38 | P | 1.00 |
| * 7312.19 | 41.47 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 42.93 | 54.00 | -11.07 | A | 1.00 |
| 9747.76 | 52.06 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 50.94 | 81.65 | -30.71 | P | 1.00 |
| 9747.76 | 46.27 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 45.15 | 74.63 | -29.48 | A | 1.00 |
| * 12180.55 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14616.66 | --- | --- | --- | --- | 9.50 | 0.61 | --- | --- | --- | --- | 1.00 |
| 17052.77 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19488.88 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21924.99 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24361.10 | --- | --- | --- | --- | 9.50 | 2.52 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2438.36 | 91.19 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 117.04 | Fundamental Frequency | | P | 1.00 |
| 2438.36 | 85.81 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 111.66 | | | A | 1.00 |
| * 4876.00 | 59.71 | 34.78 | 2.72 | 35.20 | 9.50 | 1.80 | 54.31 | 74.00 | -19.69 | P | 1.00 |
| * 4876.00 | 47.95 | 34.78 | 2.72 | 35.20 | 9.50 | 1.80 | 42.55 | 54.00 | -11.45 | A | 1.00 |
| * 7311.30 | 52.24 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 53.70 | 74.00 | -20.30 | P | 1.00 |
| * 7311.30 | 42.01 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 43.47 | 54.00 | -10.53 | A | 1.00 |
| 9748.06 | 51.94 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 50.82 | 97.04 | -46.22 | P | 1.00 |
| 9748.06 | 46.65 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 45.53 | 91.66 | -46.13 | A | 1.00 |
| * 12172.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14607.00 | --- | --- | --- | --- | 9.50 | 0.61 | --- | --- | --- | --- | 1.00 |
| 17041.50 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19476.00 | --- | --- | --- | --- | 9.50 | 2.17 | --- | --- | --- | --- | 1.00 |
| 21910.50 | --- | --- | --- | --- | 9.50 | 0.74 | --- | --- | --- | --- | 1.00 |
| 24345.00 | --- | --- | --- | --- | 9.50 | 2.55 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2463.03 | 71.74 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 97.58 | Fundamental Frequency | | P | 1.00 |
| 2463.03 | 64.99 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 90.83 | | | A | 1.00 |
| * 2483.50 | 19.30 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 45.13 | 74.00 | -28.87 | P | 1.00 |
| * 2483.50 | 4.20 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 30.03 | 54.00 | -23.97 | A | 1.00 |
| * 2483.60 | 19.00 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 44.83 | 74.00 | -29.17 | P | 1.00 |
| * 2483.60 | 5.70 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 31.53 | 54.00 | -22.47 | A | 1.00 |
| * 4923.88 | 52.01 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 46.61 | 74.00 | -27.39 | P | 1.00 |
| * 4923.88 | 37.31 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 31.91 | 54.00 | -22.09 | A | 1.00 |
| * 7386.33 | 46.22 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 47.70 | 74.00 | -26.30 | P | 1.00 |
| * 7386.33 | 35.18 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 36.66 | 54.00 | -17.34 | A | 1.00 |
| 9847.68 | 45.60 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 44.25 | 77.58 | -33.33 | P | 1.00 |
| 9847.68 | 32.15 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 30.80 | 70.83 | -50.83 | A | 1.00 |
| * 12308.85 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14770.62 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17232.39 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19694.16 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22155.93 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24617.70 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2463.29 | 87.84 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 113.68 | Fundamental Frequency | | P | 1.00 |
| 2463.29 | 80.89 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 106.73 | | | A | 1.00 |
| * 2483.50 | 33.60 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 59.43 | 74.00 | -14.57 | P | 1.00 |
| * 2483.50 | 19.40 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 45.23 | 54.00 | -8.77 | A | 1.00 |
| * 2488.20 | 35.30 | 31.71 | 3.61 | 0.00 | 9.50 | 0.00 | 61.13 | 74.00 | -12.87 | P | 1.00 |
| * 2488.20 | 21.50 | 31.71 | 3.61 | 0.00 | 9.50 | 0.00 | 47.33 | 54.00 | -6.67 | A | 1.00 |
| * 4923.88 | 61.99 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 56.59 | 74.00 | -17.41 | P | 1.00 |
| * 4923.88 | 48.15 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 42.75 | 54.00 | -11.25 | A | 1.00 |
| * 7385.38 | 47.62 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 49.10 | 74.00 | -24.90 | P | 1.00 |
| * 7385.38 | 35.40 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 36.88 | 54.00 | -17.12 | A | 1.00 |
| 9847.81 | 44.80 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 43.45 | 93.68 | -50.23 | P | 1.00 |
| 9847.81 | 32.18 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 30.83 | 86.73 | -55.90 | A | 1.00 |
| * 12308.30 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14769.96 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17231.62 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19693.28 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22154.94 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24616.60 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 30.70 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 56.58 | 74.00 | -17.42 | P | 1.00 |
| * 2389.90 | 9.40 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 35.28 | 54.00 | -18.72 | A | 1.00 |
| 2399.90 | 44.20 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 70.08 | 74.44 | -4.37 | P | 1.00 |
| 2399.90 | 24.80 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 50.68 | 66.02 | -15.35 | A | 1.00 |
| 2405.59 | 68.57 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 94.44 | Fundamental Frequency | | P | 1.00 |
| 2405.59 | 60.15 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 86.02 | | | A | 1.00 |
| * 4823.86 | 42.84 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 37.44 | 74.00 | -36.56 | P | 1.00 |
| * 4823.86 | 31.44 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 26.04 | 54.00 | -27.96 | A | 1.00 |
| 7236.00 | 41.36 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 42.81 | 74.44 | -31.63 | P | 1.00 |
| 7236.00 | 29.54 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 30.99 | 66.02 | -35.03 | A | 1.00 |
| 9648.00 | 44.82 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 43.93 | 74.44 | -30.51 | P | 1.00 |
| 9648.00 | 33.42 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 32.53 | 66.02 | -33.49 | A | 1.00 |
| * 12060.00 | --- | --- | --- | --- | 9.50 | 0.80 | --- | ----- | ----- | ----- | 1.00 |
| * 14472.00 | --- | --- | --- | --- | 9.50 | 0.67 | --- | ----- | ----- | ----- | 1.00 |
| 16884.00 | --- | --- | --- | --- | 9.50 | 0.43 | --- | ----- | ----- | ----- | 1.00 |
| * 19296.00 | --- | --- | --- | --- | 9.50 | 1.96 | --- | ----- | ----- | ----- | 1.00 |
| 21708.00 | --- | --- | --- | --- | 9.50 | 0.82 | --- | ----- | ----- | ----- | 1.00 |
| 24120.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 43.00 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 68.88 | 74.00 | -5.12 | P | 1.00 |
| * 2389.90 | 26.20 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 52.08 | 54.00 | -1.92 | A | 1.00 |
| 2399.90 | 59.80 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 85.68 | 89.50 | -3.83 | P | 1.00 |
| 2399.90 | 41.90 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 67.78 | 81.43 | -13.66 | A | 1.00 |
| 2405.52 | 83.63 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 109.50 | Fundamental Frequency | | P | 1.00 |
| 2405.52 | 75.56 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 101.43 | | | A | 1.00 |
| * 4821.49 | 52.50 | 34.42 | 2.82 | 35.16 | 9.50 | 2.01 | 47.10 | 74.00 | -26.90 | P | 1.00 |
| * 4821.49 | 38.55 | 34.42 | 2.82 | 35.16 | 9.50 | 2.01 | 33.15 | 54.00 | -20.85 | A | 1.00 |
| 7235.72 | 46.31 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 47.76 | 89.50 | -41.74 | P | 1.00 |
| 7235.72 | 33.09 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 34.54 | 81.43 | -46.89 | A | 1.00 |
| 9647.85 | 45.37 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 44.48 | 89.50 | -45.02 | P | 1.00 |
| 9647.85 | 33.73 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 32.84 | 81.43 | -48.59 | A | 1.00 |
| * 12067.00 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14480.40 | --- | --- | --- | --- | 9.50 | 0.68 | --- | --- | --- | --- | 1.00 |
| 16893.80 | --- | --- | --- | --- | 9.50 | 0.44 | --- | --- | --- | --- | 1.00 |
| * 19307.20 | --- | --- | --- | --- | 9.50 | 1.97 | --- | --- | --- | --- | 1.00 |
| 21720.60 | --- | --- | --- | --- | 9.50 | 0.81 | --- | --- | --- | --- | 1.00 |
| 24134.00 | --- | --- | --- | --- | 9.50 | 2.89 | --- | --- | --- | --- | 1.00 |

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
 - For normal 802.11g mode at 6Mbps.
 - Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2430.31 | 71.14 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 97.00 | Fundamental Frequency | | P | 1.00 |
| 2430.31 | 63.40 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 89.26 | | | A | 1.00 |
| * 4874.68 | 41.56 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 36.16 | 74.00 | -37.84 | P | 1.00 |
| * 4874.68 | 31.25 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 25.85 | 54.00 | -28.15 | A | 1.00 |
| * 7311.77 | 42.45 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 43.91 | 74.00 | -30.09 | P | 1.00 |
| * 7311.77 | 31.74 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 33.20 | 54.00 | -20.80 | A | 1.00 |
| 9747.61 | 43.38 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 42.26 | 77.00 | -34.74 | P | 1.00 |
| 9747.61 | 32.78 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 31.66 | 69.26 | -37.60 | A | 1.00 |
| * 12184.45 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14621.34 | --- | --- | --- | --- | 9.50 | 0.60 | --- | --- | --- | --- | 1.00 |
| 17058.23 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19495.12 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21932.01 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24368.90 | --- | --- | --- | --- | 9.50 | 2.51 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2431.41 | 86.27 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 112.13 | Fundamental Frequency | | P | 1.00 |
| 2431.41 | 78.55 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 104.41 | | | A | 1.00 |
| * 4876.33 | 51.84 | 34.78 | 2.72 | 35.20 | 9.50 | 1.79 | 46.44 | 74.00 | -27.56 | P | 1.00 |
| * 4876.33 | 38.04 | 34.78 | 2.72 | 35.20 | 9.50 | 1.79 | 32.64 | 54.00 | -21.36 | A | 1.00 |
| * 7310.97 | 43.18 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 44.64 | 74.00 | -29.36 | P | 1.00 |
| * 7310.97 | 31.06 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 32.52 | 54.00 | -21.48 | A | 1.00 |
| 9747.69 | 44.23 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 43.11 | 92.13 | -49.02 | P | 1.00 |
| 9747.69 | 32.43 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 31.31 | 84.41 | -53.10 | A | 1.00 |
| * 12184.15 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14620.98 | --- | --- | --- | --- | 9.50 | 0.60 | --- | --- | --- | --- | 1.00 |
| 17057.81 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19494.64 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21931.47 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24368.30 | --- | --- | --- | --- | 9.50 | 2.51 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2455.52 | 67.47 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 93.31 | Fundamental Frequency | | P | 1.00 |
| 2455.52 | 59.63 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 85.47 | | | A | 1.00 |
| * 2483.50 | 24.30 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 50.13 | 74.00 | -23.87 | P | 1.00 |
| * 2483.50 | 8.70 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 34.53 | 54.00 | -19.47 | A | 1.00 |
| * 2483.60 | 24.30 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 50.13 | 74.00 | -23.87 | P | 1.00 |
| * 2483.60 | 8.30 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 34.13 | 54.00 | -19.87 | A | 1.00 |
| * 4925.33 | 45.42 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 40.02 | 74.00 | -33.98 | P | 1.00 |
| * 4925.33 | 33.22 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 27.82 | 54.00 | -26.18 | A | 1.00 |
| * 7386.33 | 43.69 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 45.17 | 74.00 | -28.83 | P | 1.00 |
| * 7386.33 | 31.42 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 32.90 | 54.00 | -21.10 | A | 1.00 |
| 9847.68 | 44.27 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 42.92 | 73.31 | -30.39 | P | 1.00 |
| 9847.68 | 32.81 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 31.46 | 65.47 | -34.04 | A | 1.00 |
| * 12308.85 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14770.62 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17232.39 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19694.16 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22155.93 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24617.70 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2455.19 | 84.01 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 109.86 | Fundamental Frequency | | P | 1.00 |
| 2455.19 | 76.25 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 102.10 | | | A | 1.00 |
| * 2483.50 | 43.90 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 69.73 | 74.00 | -4.27 | P | 1.00 |
| * 2483.50 | 25.90 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 51.73 | 54.00 | -2.27 | A | 1.00 |
| * 2483.60 | 43.60 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 69.43 | 74.00 | -4.57 | P | 1.00 |
| * 2483.60 | 25.80 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 51.63 | 54.00 | -2.37 | A | 1.00 |
| * 4925.40 | 52.09 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 46.69 | 74.00 | -27.31 | P | 1.00 |
| * 4925.40 | 39.24 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 33.84 | 54.00 | -20.16 | A | 1.00 |
| * 7386.05 | 43.69 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 45.17 | 74.00 | -28.83 | P | 1.00 |
| * 7386.05 | 31.54 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 33.02 | 54.00 | -20.98 | A | 1.00 |
| 9847.81 | 45.03 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 43.68 | 89.86 | -46.18 | P | 1.00 |
| 9847.81 | 33.21 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 31.86 | 82.10 | -50.24 | A | 1.00 |
| * 12309.40 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14771.28 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17233.16 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19695.04 | --- | --- | --- | --- | 9.50 | 2.40 | --- | --- | --- | --- | 1.00 |
| * 22156.92 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24618.80 | --- | --- | --- | --- | 9.50 | 2.13 | --- | --- | --- | --- | 1.00 |

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
 - For normal 802.11g mode at 6Mbps.
 - Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2386.21 | 39.34 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 65.22 | 74.00 | -8.78 | P | 1.00 |
| * 2386.21 | 20.00 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 45.88 | 54.00 | -8.12 | A | 1.00 |
| 2399.90 | 47.31 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 73.19 | 89.95 | -16.76 | P | 1.00 |
| 2399.90 | 40.38 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 66.26 | 83.70 | -17.44 | A | 1.00 |
| 2411.23 | 84.08 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 109.95 | Fundamental Frequency | | P | 1.00 |
| 2411.23 | 77.83 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 103.70 | | | A | 1.00 |
| * 4823.72 | 49.89 | 34.44 | 2.82 | 35.16 | 9.50 | 2.01 | 44.49 | 74 | -29.51 | P | 1.00 |
| * 4823.72 | 38.34 | 34.44 | 2.82 | 35.16 | 9.50 | 2.01 | 32.94 | 54 | -21.06 | A | 1.00 |
| 7235.72 | 43.87 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 45.32 | 74 | -28.68 | P | 1.00 |
| 7235.72 | 32.01 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 33.46 | 54 | -20.54 | A | 1.00 |
| 9647.71 | 45.67 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 44.78 | 74 | -29.22 | P | 1.00 |
| 9647.71 | 32.68 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 31.79 | 54 | -22.21 | A | 1.00 |
| * 12060.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14472.60 | --- | --- | --- | --- | 9.50 | 0.67 | --- | --- | --- | --- | 1.00 |
| 16884.70 | --- | --- | --- | --- | 9.50 | 0.43 | --- | --- | --- | --- | 1.00 |
| * 19296.80 | --- | --- | --- | --- | 9.50 | 1.96 | --- | --- | --- | --- | 1.00 |
| 21708.90 | --- | --- | --- | --- | 9.50 | 0.82 | --- | --- | --- | --- | 1.00 |
| 24121.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | --- | --- | --- | 1.00 |

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11b mode at 11Mbps.
 - Antenna 2 (ANT2405) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2386.21 | 41.64 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 67.52 | 74.00 | -6.48 | P | 1.00 |
| * 2386.21 | 22.80 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 48.68 | 54.00 | -5.32 | A | 1.00 |
| 2399.90 | 49.72 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 75.60 | 92.45 | -16.85 | P | 1.00 |
| 2399.90 | 42.56 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 68.44 | 85.66 | -17.22 | A | 1.00 |
| 2413.41 | 86.58 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 112.45 | Fundamental Frequency | | P | 1.00 |
| 2413.41 | 79.79 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 105.66 | | | A | 1.00 |
| * 4823.88 | 58.32 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 52.92 | 74 | -21.08 | P | 1.00 |
| * 4823.88 | 46.28 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 40.88 | 54 | -13.12 | A | 1.00 |
| 7235.72 | 49.99 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 51.44 | 74 | -22.56 | P | 1.00 |
| 7235.72 | 40.63 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 42.08 | 54 | -11.92 | A | 1.00 |
| 9647.71 | 48.87 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 47.98 | 74 | -26.02 | P | 1.00 |
| 9647.71 | 42.54 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 41.65 | 54 | -12.35 | A | 1.00 |
| * 12060.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14472.60 | --- | --- | --- | --- | 9.50 | 0.67 | --- | --- | --- | --- | 1.00 |
| 16884.70 | --- | --- | --- | --- | 9.50 | 0.43 | --- | --- | --- | --- | 1.00 |
| * 19296.80 | --- | --- | --- | --- | 9.50 | 1.96 | --- | --- | --- | --- | 1.00 |
| 21708.90 | --- | --- | --- | --- | 9.50 | 0.82 | --- | --- | --- | --- | 1.00 |
| 24121.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 2 (ANT24O5) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2438.25 | 87.20 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 113.05 | Fundamental Frequency | | P | 1.00 |
| 2438.25 | 80.11 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 105.96 | | | A | 1.00 |
| * 4874.05 | 53.21 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 47.81 | 74 | -26.19 | P | 1.00 |
| * 4874.05 | 41.36 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 35.96 | 54 | -18.04 | A | 1.00 |
| * 7312.19 | 52.36 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 53.82 | 74 | -20.18 | P | 1.00 |
| * 7312.19 | 42.32 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 43.78 | 54 | -10.22 | A | 1.00 |
| 9747.76 | 52.57 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 51.45 | 74 | -22.55 | P | 1.00 |
| 9747.76 | 45.31 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 44.19 | 54 | -9.81 | A | 1.00 |
| * 12180.55 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14616.66 | --- | --- | --- | --- | 9.50 | 0.61 | --- | --- | --- | --- | 1.00 |
| 17052.77 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19488.88 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21924.99 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24361.10 | --- | --- | --- | --- | 9.50 | 2.52 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 2 (ANT2405) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2438.25 | 88.14 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 113.99 | Fundamental Frequency | | P | 1.00 |
| 2438.25 | 81.05 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 106.90 | | | A | 1.00 |
| * 4876.00 | 59.54 | 34.78 | 2.72 | 35.20 | 9.50 | 1.80 | 54.14 | 74 | -19.86 | P | 1.00 |
| * 4876.00 | 47.63 | 34.78 | 2.72 | 35.20 | 9.50 | 1.80 | 42.23 | 54 | -11.77 | A | 1.00 |
| * 7311.30 | 52.42 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 53.88 | 74 | -20.12 | P | 1.00 |
| * 7311.30 | 42.63 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 44.09 | 54 | -9.91 | A | 1.00 |
| 9748.06 | 51.88 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 50.76 | 74 | -23.24 | P | 1.00 |
| 9748.06 | 46.78 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 45.66 | 54 | -8.34 | A | 1.00 |
| * 12172.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14607.00 | --- | --- | --- | --- | 9.50 | 0.61 | --- | --- | --- | --- | 1.00 |
| 17041.50 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19476.00 | --- | --- | --- | --- | 9.50 | 2.17 | --- | --- | --- | --- | 1.00 |
| 21910.50 | --- | --- | --- | --- | 9.50 | 0.74 | --- | --- | --- | --- | 1.00 |
| 24345.00 | --- | --- | --- | --- | 9.50 | 2.55 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 2 (ANT24O5) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2463.42 | 82.77 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 108.61 | Fundamental Frequency | | P | 1.00 |
| 2463.42 | 76.16 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 102.00 | | | A | 1.00 |
| * 2483.50 | 40.67 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 66.50 | 74.00 | -7.50 | P | 1.00 |
| * 2483.50 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 2483.60 | 37.51 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 63.34 | 74.00 | -10.66 | P | 1.00 |
| * 2483.60 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 4923.88 | 52.68 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 47.28 | 74 | -26.72 | P | 1.00 |
| * 4923.88 | 38.21 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 32.81 | 54 | -21.19 | A | 1.00 |
| * 7386.33 | 46.57 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 48.05 | 74 | -25.95 | P | 1.00 |
| * 7386.33 | 35.66 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 37.14 | 54 | -16.86 | A | 1.00 |
| 9847.68 | 45.61 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 44.26 | 74 | -29.74 | P | 1.00 |
| 9847.68 | 32.57 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 31.22 | 54 | -22.78 | A | 1.00 |
| * 12308.85 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14770.62 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17232.39 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19694.16 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22155.93 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24617.70 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 2 (ANT24O5) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2463.26 | 84.18 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 110.02 | Fundamental Frequency | | P | 1.00 |
| 2463.26 | 77.47 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 103.31 | | | A | 1.00 |
| * 2483.50 | 38.98 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 64.81 | 74.00 | -9.19 | P | 1.00 |
| * 2483.50 | 25.41 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 51.24 | 54.00 | -2.76 | A | 1.00 |
| * 2483.60 | 37.80 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 63.63 | 74.00 | -10.37 | P | 1.00 |
| * 2483.60 | 27.00 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 52.83 | 54.00 | -1.17 | A | 1.00 |
| * 4923.88 | 62.31 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 56.91 | 74 | -17.09 | P | 1.00 |
| * 4923.88 | 49.25 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 43.85 | 54 | -10.15 | A | 1.00 |
| * 7385.38 | 47.58 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 49.06 | 74 | -24.94 | P | 1.00 |
| * 7385.38 | 35.74 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 37.22 | 54 | -16.78 | A | 1.00 |
| 9847.81 | 44.25 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 42.90 | 74 | -31.10 | P | 1.00 |
| 9847.81 | 32.69 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 31.34 | 54 | -22.66 | A | 1.00 |
| * 12308.30 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14769.96 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17231.62 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19693.28 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22154.94 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24616.60 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
- For 802.11b mode at 11Mbps.
- Antenna 2 (ANT24O5) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 41.00 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 66.88 | 74.00 | -7.12 | P | 1.00 |
| * 2389.90 | 21.90 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 47.78 | 54.00 | -6.22 | A | 1.00 |
| 2399.90 | 56.00 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 81.88 | 84.98 | -3.11 | P | 1.00 |
| 2399.90 | 37.70 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 63.58 | 76.53 | -12.96 | A | 1.00 |
| 2405.54 | 79.11 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 104.98 | Fundamental Frequency | | P | 1.00 |
| 2405.54 | 70.66 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 96.53 | | | A | 1.00 |
| * 4823.86 | 42.56 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 37.16 | 74 | -36.84 | P | 1.00 |
| * 4823.86 | 31.66 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 26.26 | 54 | -27.74 | A | 1.00 |
| 7236.00 | 42.31 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 43.76 | 74 | -30.24 | P | 1.00 |
| 7236.00 | 30.25 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 31.70 | 54 | -22.30 | A | 1.00 |
| 9648.00 | 43.26 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 42.37 | 74 | -31.63 | P | 1.00 |
| 9648.00 | 32.74 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 31.85 | 54 | -22.15 | A | 1.00 |
| * 12060.00 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14472.00 | --- | --- | --- | --- | 9.50 | 0.67 | --- | --- | --- | --- | 1.00 |
| 16884.00 | --- | --- | --- | --- | 9.50 | 0.43 | --- | --- | --- | --- | 1.00 |
| * 19296.00 | --- | --- | --- | --- | 9.50 | 1.96 | --- | --- | --- | --- | 1.00 |
| 21708.00 | --- | --- | --- | --- | 9.50 | 0.82 | --- | --- | --- | --- | 1.00 |
| 24120.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 2 (ANT2405) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 44.59 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 70.47 | 74.00 | -3.53 | P | 1.00 |
| * 2389.90 | 24.50 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 50.38 | 54.00 | -3.62 | A | 1.00 |
| 2399.90 | 58.90 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 84.78 | 87.37 | -2.60 | P | 1.00 |
| 2399.90 | 42.80 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 68.68 | 79.22 | -10.55 | A | 1.00 |
| 2405.45 | 81.50 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 107.37 | Fundamental Frequency | | P | 1.00 |
| 2405.45 | 73.35 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 99.22 | | | A | 1.00 |
| * 4821.49 | 51.88 | 34.42 | 2.82 | 35.16 | 9.50 | 2.01 | 46.48 | 74 | -27.52 | P | 1.00 |
| * 4821.49 | 38.24 | 34.42 | 2.82 | 35.16 | 9.50 | 2.01 | 32.84 | 54 | -21.16 | A | 1.00 |
| 7235.72 | 45.78 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 47.23 | 74 | -26.77 | P | 1.00 |
| 7235.72 | 33.58 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 35.03 | 54 | -18.97 | A | 1.00 |
| 9647.85 | 45.31 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 44.42 | 74 | -29.58 | P | 1.00 |
| 9647.85 | 32.68 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 31.79 | 54 | -22.21 | A | 1.00 |
| * 12067.00 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14480.40 | --- | --- | --- | --- | 9.50 | 0.68 | --- | --- | --- | --- | 1.00 |
| 16893.80 | --- | --- | --- | --- | 9.50 | 0.44 | --- | --- | --- | --- | 1.00 |
| * 19307.20 | --- | --- | --- | --- | 9.50 | 1.97 | --- | --- | --- | --- | 1.00 |
| 21720.60 | --- | --- | --- | --- | 9.50 | 0.81 | --- | --- | --- | --- | 1.00 |
| 24134.00 | --- | --- | --- | --- | 9.50 | 2.89 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
- For normal 802.11g mode at 6Mbps.
- Antenna 2 (ANT24O5) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2439.25 | 81.52 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 107.37 | Fundamental Frequency | | P | 1.00 |
| 2439.25 | 73.67 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 99.52 | | | A | 1.00 |
| * 4874.68 | 42.13 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 36.73 | 74 | -37.27 | P | 1.00 |
| * 4874.68 | 32.74 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 27.34 | 54 | -26.66 | A | 1.00 |
| * 7311.77 | 41.85 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 43.31 | 74 | -30.69 | P | 1.00 |
| * 7311.77 | 32.54 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 34.00 | 54 | -20.00 | A | 1.00 |
| 9747.61 | 43.58 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 42.46 | 74 | -31.54 | P | 1.00 |
| 9747.61 | 33.88 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 32.76 | 54 | -21.24 | A | 1.00 |
| * 12184.45 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14621.34 | --- | --- | --- | --- | 9.50 | 0.60 | --- | --- | --- | --- | 1.00 |
| 17058.23 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19495.12 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21932.01 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24368.90 | --- | --- | --- | --- | 9.50 | 2.51 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 2 (ANT2405) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2433.90 | 83.20 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 109.06 | Fundamental Frequency | | P | 1.00 |
| 2433.90 | 75.61 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 101.47 | | | A | 1.00 |
| * 4876.33 | 43.54 | 34.78 | 2.72 | 35.20 | 9.50 | 1.79 | 38.14 | 74 | -35.86 | P | 1.00 |
| * 4876.33 | 37.96 | 34.78 | 2.72 | 35.20 | 9.50 | 1.79 | 32.56 | 54 | -21.44 | A | 1.00 |
| * 7310.97 | 43.28 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 44.74 | 74 | -29.26 | P | 1.00 |
| * 7310.97 | 31.85 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 33.31 | 54 | -20.69 | A | 1.00 |
| 9747.69 | 43.74 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 42.62 | 74 | -31.38 | P | 1.00 |
| 9747.69 | 33.24 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 32.12 | 54 | -21.88 | A | 1.00 |
| * 12184.15 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14620.98 | --- | --- | --- | --- | 9.50 | 0.60 | --- | --- | --- | --- | 1.00 |
| 17057.81 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19494.64 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21931.47 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24368.30 | --- | --- | --- | --- | 9.50 | 2.51 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 2 (ANT24O5) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2455.38 | 80.02 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 105.86 | Fundamental Frequency | | P | 1.00 |
| 2455.38 | 71.86 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 97.70 | | | A | 1.00 |
| * 2483.50 | 40.41 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 66.24 | 74.00 | -7.76 | P | 1.00 |
| * 2483.50 | 27.00 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 52.83 | 54.00 | -1.17 | A | 1.00 |
| * 2483.60 | 40.13 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 65.96 | 74.00 | -8.04 | P | 1.00 |
| * 2483.60 | 27.00 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 52.83 | 54.00 | -1.17 | A | 1.00 |
| * 4925.33 | 44.85 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 39.45 | 74 | -34.55 | P | 1.00 |
| * 4925.33 | 33.54 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 28.14 | 54 | -25.86 | A | 1.00 |
| * 7386.33 | 43.69 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 45.17 | 74 | -28.83 | P | 1.00 |
| * 7386.33 | 32.51 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 33.99 | 54 | -20.01 | A | 1.00 |
| 9847.68 | 45.52 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 44.17 | 74 | -29.83 | P | 1.00 |
| 9847.68 | 31.87 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 30.52 | 54 | -23.48 | A | 1.00 |
| * 12308.85 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14770.62 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17232.39 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19694.16 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22155.93 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24617.70 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
- For normal 802.11g mode at 6Mbps.
- Antenna 2 (ANT24O5) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2455.39 | 81.46 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 107.30 | Fundamental Frequency | | P | 1.00 |
| 2455.39 | 73.31 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 99.15 | | | A | 1.00 |
| * 2483.50 | 40.07 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 65.90 | 74.00 | -8.10 | P | 1.00 |
| * 2483.50 | 27.00 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 52.83 | 54.00 | -1.17 | A | 1.00 |
| * 2483.60 | 42.00 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 67.83 | 74.00 | -6.17 | P | 1.00 |
| * 2483.60 | 27.00 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 52.83 | 54.00 | -1.17 | A | 1.00 |
| * 4925.40 | 52.61 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 47.21 | 74 | -26.79 | P | 1.00 |
| * 4925.40 | 39.54 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 34.14 | 54 | -19.86 | A | 1.00 |
| * 7386.05 | 44.21 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 45.69 | 74 | -28.31 | P | 1.00 |
| * 7386.05 | 32.51 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 33.99 | 54 | -20.01 | A | 1.00 |
| 9847.81 | 44.87 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 43.52 | 74 | -30.48 | P | 1.00 |
| 9847.81 | 32.64 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 31.29 | 54 | -22.71 | A | 1.00 |
| * 12309.40 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14771.28 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17233.16 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19695.04 | --- | --- | --- | --- | 9.50 | 2.40 | --- | --- | --- | --- | 1.00 |
| * 22156.92 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24618.80 | --- | --- | --- | --- | 9.50 | 2.13 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
- For normal 802.11g mode at 6Mbps.
- Antenna 2 (ANT24O5) : Antenna gain is 5dBi ; Cable 1 (ACC-10314-01) : 1.5m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|--|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) | |
| * 2386.21 | 35.69 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 61.57 | 74.00 | -12.43 | P | 1.00 | |
| * 2386.21 | 23.48 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 49.36 | 54.00 | -4.64 | A | 1.00 | |
| 2399.90 | 36.75 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 62.63 | 74.00 | -11.37 | P | 1.00 | |
| 2399.90 | 23.48 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 49.36 | 54.00 | -4.64 | A | 1.00 | |
| 2412.92 | 45.31 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 71.18 | Fundamental Frequency | | P | 1.00 | |
| 2412.92 | 35.52 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 61.39 | | | A | 1.00 | |
| * 4823.72 | 49.85 | 34.44 | 2.82 | 35.16 | 9.50 | 2.01 | 44.45 | 74 | -29.55 | P | 1.00 | |
| * 4823.72 | 38.74 | 34.44 | 2.82 | 35.16 | 9.50 | 2.01 | 33.34 | 54 | -20.66 | A | 1.00 | |
| 7235.72 | 43.58 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 45.03 | 74 | -28.97 | P | 1.00 | |
| 7235.72 | 33.51 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 34.96 | 54 | -19.04 | A | 1.00 | |
| 9647.71 | 44.85 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 43.96 | 74 | -30.04 | P | 1.00 | |
| 9647.71 | 32.64 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 31.75 | 54 | -22.25 | A | 1.00 | |
| * 12060.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 | |
| * 14472.60 | --- | --- | --- | --- | 9.50 | 0.67 | --- | --- | --- | --- | 1.00 | |
| 16884.70 | --- | --- | --- | --- | 9.50 | 0.43 | --- | --- | --- | --- | 1.00 | |
| * 19296.80 | --- | --- | --- | --- | 9.50 | 1.96 | --- | --- | --- | --- | 1.00 | |
| 21708.90 | --- | --- | --- | --- | 9.50 | 0.82 | --- | --- | --- | --- | 1.00 | |
| 24121.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | --- | --- | --- | 1.00 | |

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11b mode at 11Mbps.
 - Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2386.21 | 36.46 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 62.34 | 74.00 | -11.66 | P | 1.00 |
| * 2386.21 | 27.00 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 52.88 | 54.00 | -1.12 | A | 1.00 |
| 2399.90 | 38.70 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 64.58 | 75.91 | -11.33 | P | 1.00 |
| 2399.90 | 28.34 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 54.22 | 69.95 | -15.73 | A | 1.00 |
| 2413.41 | 70.04 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 95.91 | Fundamental Frequency | | P | 1.00 |
| 2413.41 | 64.08 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 89.95 | | | A | 1.00 |
| * 4823.88 | 59.63 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 54.23 | 74 | -19.77 | P | 1.00 |
| * 4823.88 | 45.21 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 39.81 | 54 | -14.19 | A | 1.00 |
| 7235.72 | 49.82 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 51.27 | 74 | -22.73 | P | 1.00 |
| 7235.72 | 40.35 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 41.80 | 54 | -12.20 | A | 1.00 |
| 9647.71 | 48.52 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 47.63 | 74 | -26.37 | P | 1.00 |
| 9647.71 | 43.25 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 42.36 | 54 | -11.64 | A | 1.00 |
| * 12060.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14472.60 | --- | --- | --- | --- | 9.50 | 0.67 | --- | --- | --- | --- | 1.00 |
| 16884.70 | --- | --- | --- | --- | 9.50 | 0.43 | --- | --- | --- | --- | 1.00 |
| * 19296.80 | --- | --- | --- | --- | 9.50 | 1.96 | --- | --- | --- | --- | 1.00 |
| 21708.90 | --- | --- | --- | --- | 9.50 | 0.82 | --- | --- | --- | --- | 1.00 |
| 24121.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | --- | --- | --- | 1.00 |

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
 - For 802.11b mode at 11Mbps.
 - Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2438.25 | 53.62 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 79.47 | Fundamental Frequency | | P | 1.00 |
| 2438.25 | 46.70 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 72.55 | | | A | 1.00 |
| * 4874.05 | 52.87 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 47.47 | 74 | -26.53 | P | 1.00 |
| * 4874.05 | 41.36 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 35.96 | 54 | -18.04 | A | 1.00 |
| * 7312.19 | 53.25 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 54.71 | 74 | -19.29 | P | 1.00 |
| * 7312.19 | 41.87 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 43.33 | 54 | -10.67 | A | 1.00 |
| 9747.76 | 53.88 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 52.76 | 74 | -21.24 | P | 1.00 |
| 9747.76 | 44.89 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 43.77 | 54 | -10.23 | A | 1.00 |
| * 12180.55 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14616.66 | --- | --- | --- | --- | 9.50 | 0.61 | --- | --- | --- | --- | 1.00 |
| 17052.77 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19488.88 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21924.99 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24361.10 | --- | --- | --- | --- | 9.50 | 2.52 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2438.34 | 74.98 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 100.83 | Fundamental Frequency | | P | 1.00 |
| 2438.34 | 68.07 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 93.92 | | | A | 1.00 |
| * 4876.00 | 58.98 | 34.78 | 2.72 | 35.20 | 9.50 | 1.80 | 53.58 | 74 | -20.42 | P | 1.00 |
| * 4876.00 | 46.87 | 34.78 | 2.72 | 35.20 | 9.50 | 1.80 | 41.47 | 54 | -12.53 | A | 1.00 |
| * 7311.30 | 52.71 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 54.17 | 74 | -19.83 | P | 1.00 |
| * 7311.30 | 43.21 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 44.67 | 54 | -9.33 | A | 1.00 |
| 9748.06 | 52.84 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 51.72 | 74 | -22.28 | P | 1.00 |
| 9748.06 | 45.87 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 44.75 | 54 | -9.25 | A | 1.00 |
| * 12172.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14607.00 | --- | --- | --- | --- | 9.50 | 0.61 | --- | --- | --- | --- | 1.00 |
| 17041.50 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19476.00 | --- | --- | --- | --- | 9.50 | 2.17 | --- | --- | --- | --- | 1.00 |
| 21910.50 | --- | --- | --- | --- | 9.50 | 0.74 | --- | --- | --- | --- | 1.00 |
| 24345.00 | --- | --- | --- | --- | 9.50 | 2.55 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 $Level = Reading + AF + Cable - Preamp + Filter - Dist$, $Margin = Level - Limit$
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2463.42 | 44.41 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 70.25 | Fundamental Frequency | | P | 1.00 |
| 2463.42 | 37.01 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 62.85 | | | A | 1.00 |
| * 2483.50 | 36.21 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 62.04 | 74.00 | -11.96 | P | 1.00 |
| * 2483.50 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 2483.60 | 36.03 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 61.86 | 74.00 | -12.14 | P | 1.00 |
| * 2483.60 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 4923.88 | 53.24 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 47.84 | 74 | -26.16 | P | 1.00 |
| * 4923.88 | 38.47 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 33.07 | 54 | -20.93 | A | 1.00 |
| * 7386.33 | 45.63 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 47.11 | 74 | -26.89 | P | 1.00 |
| * 7386.33 | 36.33 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 37.81 | 54 | -16.19 | A | 1.00 |
| 9847.68 | 47.21 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 45.86 | 74 | -28.14 | P | 1.00 |
| 9847.68 | 30.56 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 29.21 | 54 | -24.79 | A | 1.00 |
| * 12308.85 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14770.62 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17232.39 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19694.16 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22155.93 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24617.70 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2459.17 | 68.97 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 94.81 | Fundamental Frequency | | P | 1.00 |
| 2459.17 | 62.05 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 87.89 | | | A | 1.00 |
| * 2483.50 | 36.02 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 61.85 | 74.00 | -12.15 | P | 1.00 |
| * 2483.50 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 2483.60 | 35.85 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 61.68 | 74.00 | -12.32 | P | 1.00 |
| * 2483.60 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 4923.88 | 62.35 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 56.95 | 74 | -17.05 | P | 1.00 |
| * 4923.88 | 48.65 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 43.25 | 54 | -10.75 | A | 1.00 |
| * 7385.38 | 48.52 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 50.00 | 74 | -24.00 | P | 1.00 |
| * 7385.38 | 34.66 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 36.14 | 54 | -17.86 | A | 1.00 |
| 9847.81 | 44.52 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 43.17 | 74 | -30.83 | P | 1.00 |
| 9847.81 | 33.57 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 32.22 | 54 | -21.78 | A | 1.00 |
| * 12308.30 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14769.96 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17231.62 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19693.28 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22154.94 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24616.60 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 25.79 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 51.67 | 74.00 | -22.33 | P | 1.00 |
| * 2389.90 | 13.48 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 39.36 | 54.00 | -14.64 | A | 1.00 |
| 2399.90 | 26.18 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 52.06 | 74.00 | -21.94 | P | 1.00 |
| 2399.90 | 13.48 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 39.36 | 54.00 | -14.64 | A | 1.00 |
| 2407.96 | 40.38 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 66.25 | Fundamental Frequency | | P | 1.00 |
| 2407.96 | 31.80 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 57.67 | | | A | 1.00 |
| * 4823.86 | 41.85 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 36.45 | 74 | -37.55 | P | 1.00 |
| * 4823.86 | 32.54 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 27.14 | 54 | -26.86 | A | 1.00 |
| 7236.00 | 41.30 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 42.75 | 74 | -31.25 | P | 1.00 |
| 7236.00 | 31.42 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 32.87 | 54 | -21.13 | A | 1.00 |
| 9648.00 | 42.60 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 41.71 | 74 | -32.29 | P | 1.00 |
| 9648.00 | 32.74 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 31.85 | 54 | -22.15 | A | 1.00 |
| * 12060.00 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14472.00 | --- | --- | --- | --- | 9.50 | 0.67 | --- | --- | --- | --- | 1.00 |
| 16884.00 | --- | --- | --- | --- | 9.50 | 0.43 | --- | --- | --- | --- | 1.00 |
| * 19296.00 | --- | --- | --- | --- | 9.50 | 1.96 | --- | --- | --- | --- | 1.00 |
| 21708.00 | --- | --- | --- | --- | 9.50 | 0.82 | --- | --- | --- | --- | 1.00 |
| 24120.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 30.09 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 55.97 | 74.00 | -18.03 | P | 1.00 |
| * 2389.90 | 15.41 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 41.29 | 54.00 | -12.71 | A | 1.00 |
| 2399.90 | 44.49 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 70.37 | 74.00 | -3.63 | P | 1.00 |
| 2399.90 | 25.52 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 51.40 | 61.89 | -10.50 | A | 1.00 |
| 2405.45 | 64.28 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 90.15 | Fundamental Frequency | | P | 1.00 |
| 2405.45 | 56.02 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 81.89 | | | A | 1.00 |
| * 4821.49 | 52.31 | 34.42 | 2.82 | 35.16 | 9.50 | 2.01 | 46.91 | 74 | -27.09 | P | 1.00 |
| * 4821.49 | 37.87 | 34.42 | 2.82 | 35.16 | 9.50 | 2.01 | 32.47 | 54 | -21.53 | A | 1.00 |
| 7235.72 | 46.74 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 48.19 | 74 | -25.81 | P | 1.00 |
| 7235.72 | 32.87 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 34.32 | 54 | -19.68 | A | 1.00 |
| 9647.85 | 44.85 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 43.96 | 74 | -30.04 | P | 1.00 |
| 9647.85 | 33.64 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 32.75 | 54 | -21.25 | A | 1.00 |
| * 12067.00 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14480.40 | --- | --- | --- | --- | 9.50 | 0.68 | --- | --- | --- | --- | 1.00 |
| 16893.80 | --- | --- | --- | --- | 9.50 | 0.44 | --- | --- | --- | --- | 1.00 |
| * 19307.20 | --- | --- | --- | --- | 9.50 | 1.97 | --- | --- | --- | --- | 1.00 |
| 21720.60 | --- | --- | --- | --- | 9.50 | 0.81 | --- | --- | --- | --- | 1.00 |
| 24134.00 | --- | --- | --- | --- | 9.50 | 2.89 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2439.25 | 45.25 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 71.10 | Fundamental Frequency | | P | 1.00 |
| 2439.25 | 35.98 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 61.83 | | | A | 1.00 |
| * 4874.68 | 41.25 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 35.85 | 74 | -38.15 | P | 1.00 |
| * 4874.68 | 32.49 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 27.09 | 54 | -26.91 | A | 1.00 |
| * 7311.77 | 40.85 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 42.31 | 74 | -31.69 | P | 1.00 |
| * 7311.77 | 33.24 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 34.70 | 54 | -19.30 | A | 1.00 |
| 9747.61 | 42.87 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 41.75 | 74 | -32.25 | P | 1.00 |
| 9747.61 | 32.50 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 31.38 | 54 | -22.62 | A | 1.00 |
| * 12184.45 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14621.34 | --- | --- | --- | --- | 9.50 | 0.60 | --- | --- | --- | --- | 1.00 |
| 17058.23 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19495.12 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21932.01 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24368.90 | --- | --- | --- | --- | 9.50 | 2.51 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2433.90 | 69.41 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 95.27 | Fundamental Frequency | | P | 1.00 |
| 2433.90 | 61.46 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 87.32 | | | A | 1.00 |
| * 4876.33 | 53.47 | 34.78 | 2.72 | 35.20 | 9.50 | 1.79 | 48.07 | 74 | -25.93 | P | 1.00 |
| * 4876.33 | 37.25 | 34.78 | 2.72 | 35.20 | 9.50 | 1.79 | 31.85 | 54 | -22.15 | A | 1.00 |
| * 7310.97 | 42.74 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 44.20 | 74 | -29.80 | P | 1.00 |
| * 7310.97 | 30.88 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 32.34 | 54 | -21.66 | A | 1.00 |
| 9747.69 | 42.57 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 41.45 | 74 | -32.55 | P | 1.00 |
| 9747.69 | 32.74 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 31.62 | 54 | -22.38 | A | 1.00 |
| * 12184.15 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14620.98 | --- | --- | --- | --- | 9.50 | 0.60 | --- | --- | --- | --- | 1.00 |
| 17057.81 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19494.64 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21931.47 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24368.30 | --- | --- | --- | --- | 9.50 | 2.51 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2454.55 | 43.99 | 31.75 | 3.60 | 0.00 | 9.50 | 0.00 | 69.84 | Fundamental Frequency | | P | 1.00 |
| 2454.55 | 33.71 | 31.75 | 3.60 | 0.00 | 9.50 | 0.00 | 59.56 | | | A | 1.00 |
| * 2483.50 | 34.24 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 60.07 | 74.00 | -13.93 | P | 1.00 |
| * 2483.50 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 2483.60 | 34.79 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 60.62 | 74.00 | -13.38 | P | 1.00 |
| * 2483.60 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 4925.33 | 45.25 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 39.85 | 74 | -34.15 | P | 1.00 |
| * 4925.33 | 32.47 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 27.07 | 54 | -26.93 | A | 1.00 |
| * 7386.33 | 42.36 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 43.84 | 74 | -30.16 | P | 1.00 |
| * 7386.33 | 31.57 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 33.05 | 54 | -20.95 | A | 1.00 |
| 9847.68 | 46.54 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 45.19 | 74 | -28.81 | P | 1.00 |
| 9847.68 | 32.47 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 31.12 | 54 | -22.88 | A | 1.00 |
| * 12308.85 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14770.62 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17232.39 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19694.16 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22155.93 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24617.70 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2455.57 | 67.46 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 93.30 | Fundamental Frequency | | P | 1.00 |
| 2455.57 | 59.73 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 85.57 | | | A | 1.00 |
| * 2483.50 | 36.08 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 61.91 | 74.00 | -12.09 | P | 1.00 |
| * 2483.50 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 2483.60 | 35.94 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 61.77 | 74.00 | -12.23 | P | 1.00 |
| * 2483.60 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 4925.40 | 53.24 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 47.84 | 74 | -26.16 | P | 1.00 |
| * 4925.40 | 38.98 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 33.58 | 54 | -20.42 | A | 1.00 |
| * 7386.05 | 43.25 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 44.73 | 74 | -29.27 | P | 1.00 |
| * 7386.05 | 33.24 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 34.72 | 54 | -19.28 | A | 1.00 |
| 9847.81 | 43.74 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 42.39 | 74 | -31.61 | P | 1.00 |
| 9847.81 | 31.25 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 29.90 | 54 | -24.10 | A | 1.00 |
| * 12309.40 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14771.28 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17233.16 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19695.04 | --- | --- | --- | --- | 9.50 | 2.40 | --- | --- | --- | --- | 1.00 |
| * 22156.92 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24618.80 | --- | --- | --- | --- | 9.50 | 2.13 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 4 (ANT24P12) : Antenna gain is 12dBi ; Cable 2 (ACC-10314-04) : 10m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|--|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) | |
| * 2386.21 | 35.75 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 61.63 | 74.00 | -12.37 | P | 1.00 | |
| * 2386.21 | 23.48 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 49.36 | 54.00 | -4.64 | A | 1.00 | |
| 2399.90 | 36.00 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 61.88 | 74.00 | -12.12 | P | 1.00 | |
| 2399.90 | 23.48 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 49.36 | 57.04 | -7.68 | A | 1.00 | |
| 2410.32 | 57.47 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 83.34 | Fundamental Frequency | | P | 1.00 | |
| 2410.32 | 51.17 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 77.04 | | | A | 1.00 | |
| * 4823.72 | 50.74 | 34.44 | 2.82 | 35.16 | 9.50 | 2.01 | 45.34 | 74 | -28.66 | P | 1.00 | |
| * 4823.72 | 39.41 | 34.44 | 2.82 | 35.16 | 9.50 | 2.01 | 34.01 | 54 | -19.99 | A | 1.00 | |
| 7235.72 | 44.57 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 46.02 | 74 | -27.98 | P | 1.00 | |
| 7235.72 | 34.74 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 36.19 | 54 | -17.81 | A | 1.00 | |
| 9647.71 | 44.63 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 43.74 | 74 | -30.26 | P | 1.00 | |
| 9647.71 | 33.47 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 32.58 | 54 | -21.42 | A | 1.00 | |
| * 12060.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 | |
| * 14472.60 | --- | --- | --- | --- | 9.50 | 0.67 | --- | --- | --- | --- | 1.00 | |
| 16884.70 | --- | --- | --- | --- | 9.50 | 0.43 | --- | --- | --- | --- | 1.00 | |
| * 19296.80 | --- | --- | --- | --- | 9.50 | 1.96 | --- | --- | --- | --- | 1.00 | |
| 21708.90 | --- | --- | --- | --- | 9.50 | 0.82 | --- | --- | --- | --- | 1.00 | |
| 24121.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | --- | --- | --- | 1.00 | |

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11b mode at 11Mbps.
 - Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2386.21 | 37.23 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 63.11 | 74.00 | -10.89 | P | 1.00 |
| * 2386.21 | 23.48 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 49.36 | 54.00 | -4.64 | A | 1.00 |
| 2399.90 | 40.73 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 66.61 | 81.01 | -14.40 | P | 1.00 |
| 2399.90 | 30.52 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 56.40 | 73.89 | -17.49 | A | 1.00 |
| 2413.17 | 75.14 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 101.01 | Fundamental Frequency | | P | 1.00 |
| 2413.17 | 68.02 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 93.89 | | | A | 1.00 |
| * 4823.88 | 60.35 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 54.95 | 74 | -19.05 | P | 1.00 |
| * 4823.88 | 46.24 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 40.84 | 54 | -13.16 | A | 1.00 |
| 7235.72 | 49.81 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 51.26 | 74 | -22.74 | P | 1.00 |
| 7235.72 | 41.25 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 42.70 | 54 | -11.30 | A | 1.00 |
| 9647.71 | 48.33 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 47.44 | 74 | -26.56 | P | 1.00 |
| 9647.71 | 42.45 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 41.56 | 54 | -12.44 | A | 1.00 |
| * 12060.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14472.60 | --- | --- | --- | --- | 9.50 | 0.67 | --- | --- | --- | --- | 1.00 |
| 16884.70 | --- | --- | --- | --- | 9.50 | 0.43 | --- | --- | --- | --- | 1.00 |
| * 19296.80 | --- | --- | --- | --- | 9.50 | 1.96 | --- | --- | --- | --- | 1.00 |
| 21708.90 | --- | --- | --- | --- | 9.50 | 0.82 | --- | --- | --- | --- | 1.00 |
| 24121.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2436.26 | 58.94 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 84.80 | Fundamental Frequency | | P | 1.00 |
| 2436.26 | 52.72 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 78.58 | | | A | 1.00 |
| * 4874.05 | 53.14 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 47.74 | 74 | -26.26 | P | 1.00 |
| * 4874.05 | 46.24 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 40.84 | 54 | -13.16 | A | 1.00 |
| * 7312.19 | 53.24 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 54.70 | 74 | -19.30 | P | 1.00 |
| * 7312.19 | 42.63 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 44.09 | 54 | -9.91 | A | 1.00 |
| 9747.76 | 52.43 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 51.31 | 74 | -22.69 | P | 1.00 |
| 9747.76 | 42.15 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 41.03 | 54 | -12.97 | A | 1.00 |
| * 12180.55 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14616.66 | --- | --- | --- | --- | 9.50 | 0.61 | --- | --- | --- | --- | 1.00 |
| 17052.77 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19488.88 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21924.99 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24361.10 | --- | --- | --- | --- | 9.50 | 2.52 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2438.27 | 77.31 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 103.16 | Fundamental Frequency | | P | 1.00 |
| 2438.27 | 70.17 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 96.02 | | | A | 1.00 |
| * 4876.00 | 58.24 | 34.78 | 2.72 | 35.20 | 9.50 | 1.80 | 52.84 | 74 | -21.16 | P | 1.00 |
| * 4876.00 | 46.74 | 34.78 | 2.72 | 35.20 | 9.50 | 1.80 | 41.34 | 54 | -12.66 | A | 1.00 |
| * 7311.30 | 51.36 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 52.82 | 74 | -21.18 | P | 1.00 |
| * 7311.30 | 44.25 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 45.71 | 54 | -8.29 | A | 1.00 |
| 9748.06 | 53.24 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 52.12 | 74 | -21.88 | P | 1.00 |
| 9748.06 | 46.27 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 45.15 | 54 | -8.85 | A | 1.00 |
| * 12172.50 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14607.00 | --- | --- | --- | --- | 9.50 | 0.61 | --- | --- | --- | --- | 1.00 |
| 17041.50 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19476.00 | --- | --- | --- | --- | 9.50 | 2.17 | --- | --- | --- | --- | 1.00 |
| 21910.50 | --- | --- | --- | --- | 9.50 | 0.74 | --- | --- | --- | --- | 1.00 |
| 24345.00 | --- | --- | --- | --- | 9.50 | 2.55 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2463.42 | 53.98 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 79.82 | Fundamental Frequency | | P | 1.00 |
| 2463.42 | 47.56 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 73.40 | | | A | 1.00 |
| * 2483.50 | 34.78 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 60.61 | 74.00 | -13.39 | P | 1.00 |
| * 2483.50 | 21.00 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 46.83 | 54.00 | -7.17 | A | 1.00 |
| * 2483.60 | 34.18 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 60.01 | 74.00 | -13.99 | P | 1.00 |
| * 2483.60 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 4923.88 | 54.32 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 48.92 | 74 | -25.08 | P | 1.00 |
| * 4923.88 | 39.64 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 34.24 | 54 | -19.76 | A | 1.00 |
| * 7386.33 | 46.27 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 47.75 | 74 | -26.25 | P | 1.00 |
| * 7386.33 | 35.27 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 36.75 | 54 | -17.25 | A | 1.00 |
| 9847.68 | 46.21 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 44.86 | 74 | -29.14 | P | 1.00 |
| 9847.68 | 33.24 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 31.89 | 54 | -22.11 | A | 1.00 |
| * 12308.85 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14770.62 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17232.39 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19694.16 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22155.93 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24617.70 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2463.26 | 73.10 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 98.94 | Fundamental Frequency | | P | 1.00 |
| 2463.26 | 66.18 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 92.02 | | | A | 1.00 |
| * 2483.50 | 35.69 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 61.52 | 74.00 | -12.48 | P | 1.00 |
| * 2483.50 | 23.49 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.32 | 54.00 | -4.68 | A | 1.00 |
| * 2483.60 | 36.18 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 62.01 | 74.00 | -11.99 | P | 1.00 |
| * 2483.60 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 4923.88 | 53.24 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 47.84 | 74 | -26.16 | P | 1.00 |
| * 4923.88 | 46.72 | 35.10 | 2.64 | 35.24 | 9.50 | 1.60 | 41.32 | 54 | -12.68 | A | 1.00 |
| * 7385.38 | 47.24 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 48.72 | 74 | -25.28 | P | 1.00 |
| * 7385.38 | 33.54 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 35.02 | 54 | -18.98 | A | 1.00 |
| 9847.81 | 43.25 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 41.90 | 74 | -32.10 | P | 1.00 |
| 9847.81 | 32.55 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 31.20 | 54 | -22.80 | A | 1.00 |
| * 12308.30 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14769.96 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17231.62 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19693.28 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22154.94 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24616.60 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 18.00 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 43.88 | 74.00 | -30.12 | P | 1.00 |
| * 2389.90 | 8.30 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 34.18 | 54.00 | -19.82 | A | 1.00 |
| 2399.90 | 25.00 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 50.88 | 74.00 | -23.12 | P | 1.00 |
| 2399.90 | 11.40 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 37.28 | 54.00 | -16.72 | A | 1.00 |
| 2405.54 | 51.58 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 77.45 | Fundamental Frequency | | P | 1.00 |
| 2405.54 | 43.03 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 68.90 | | | A | 1.00 |
| * 4823.86 | 42.34 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 36.94 | 74 | -37.06 | P | 1.00 |
| * 4823.86 | 33.74 | 34.44 | 2.82 | 35.16 | 9.50 | 2.00 | 28.34 | 54 | -25.66 | A | 1.00 |
| 7236.00 | 42.34 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 43.79 | 74 | -30.21 | P | 1.00 |
| 7236.00 | 32.45 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 33.90 | 54 | -20.10 | A | 1.00 |
| 9648.00 | 43.87 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 42.98 | 74 | -31.02 | P | 1.00 |
| 9648.00 | 33.25 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 32.36 | 54 | -21.64 | A | 1.00 |
| * 12060.00 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14472.00 | --- | --- | --- | --- | 9.50 | 0.67 | --- | --- | --- | --- | 1.00 |
| 16884.00 | --- | --- | --- | --- | 9.50 | 0.43 | --- | --- | --- | --- | 1.00 |
| * 19296.00 | --- | --- | --- | --- | 9.50 | 1.96 | --- | --- | --- | --- | 1.00 |
| 21708.00 | --- | --- | --- | --- | 9.50 | 0.82 | --- | --- | --- | --- | 1.00 |
| 24120.00 | --- | --- | --- | --- | 9.50 | 2.91 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH1 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 28.00 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 53.88 | 74.00 | -20.12 | P | 1.00 |
| * 2389.90 | 13.00 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 38.88 | 54.00 | -15.12 | A | 1.00 |
| 2399.90 | 46.00 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 71.88 | 75.12 | -3.24 | P | 1.00 |
| 2399.90 | 28.00 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 53.88 | 67.04 | -13.16 | A | 1.00 |
| 2410.14 | 69.25 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 95.12 | Fundamental Frequency | | P | 1.00 |
| 2410.14 | 61.17 | 31.79 | 3.58 | 0.00 | 9.50 | 0.00 | 87.04 | | | A | 1.00 |
| * 4821.49 | 53.24 | 34.42 | 2.82 | 35.16 | 9.50 | 2.01 | 47.84 | 74 | -26.16 | P | 1.00 |
| * 4821.49 | 38.54 | 34.42 | 2.82 | 35.16 | 9.50 | 2.01 | 33.14 | 54 | -20.86 | A | 1.00 |
| 7235.72 | 47.25 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 48.70 | 74 | -25.30 | P | 1.00 |
| 7235.72 | 33.54 | 39.81 | 4.79 | 35.65 | 9.50 | 2.00 | 34.99 | 54 | -19.01 | A | 1.00 |
| 9647.85 | 45.63 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 44.74 | 74 | -29.26 | P | 1.00 |
| 9647.85 | 33.87 | 38.54 | 5.90 | 36.44 | 9.50 | 0.61 | 32.98 | 54 | -21.02 | A | 1.00 |
| * 12067.00 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| * 14480.40 | --- | --- | --- | --- | 9.50 | 0.68 | --- | --- | --- | --- | 1.00 |
| 16893.80 | --- | --- | --- | --- | 9.50 | 0.44 | --- | --- | --- | --- | 1.00 |
| * 19307.20 | --- | --- | --- | --- | 9.50 | 1.97 | --- | --- | --- | --- | 1.00 |
| 21720.60 | --- | --- | --- | --- | 9.50 | 0.81 | --- | --- | --- | --- | 1.00 |
| 24134.00 | --- | --- | --- | --- | 9.50 | 2.89 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2430.38 | 55.07 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 80.93 | Fundamental Frequency | | P | 1.00 |
| 2430.38 | 46.40 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 72.26 | | | A | 1.00 |
| * 4874.68 | 42.35 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 36.95 | 74 | -37.05 | P | 1.00 |
| * 4874.68 | 32.87 | 34.77 | 2.73 | 35.20 | 9.50 | 1.80 | 27.47 | 54 | -26.53 | A | 1.00 |
| * 7311.77 | 41.36 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 42.82 | 74 | -31.18 | P | 1.00 |
| * 7311.77 | 33.87 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 35.33 | 54 | -18.67 | A | 1.00 |
| 9747.61 | 43.57 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 42.45 | 74 | -31.55 | P | 1.00 |
| 9747.61 | 33.53 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 32.41 | 54 | -21.59 | A | 1.00 |
| * 12184.45 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14621.34 | --- | --- | --- | --- | 9.50 | 0.60 | --- | --- | --- | --- | 1.00 |
| 17058.23 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19495.12 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21932.01 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24368.90 | --- | --- | --- | --- | 9.50 | 2.51 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH6 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2430.47 | 73.00 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 98.86 | Fundamental Frequency | | P | 1.00 |
| 2430.47 | 64.78 | 31.77 | 3.59 | 0.00 | 9.50 | 0.00 | 90.64 | | | A | 1.00 |
| * 4876.33 | 53.21 | 34.78 | 2.72 | 35.20 | 9.50 | 1.79 | 47.81 | 74 | -26.19 | P | 1.00 |
| * 4876.33 | 34.25 | 34.78 | 2.72 | 35.20 | 9.50 | 1.79 | 28.85 | 54 | -25.15 | A | 1.00 |
| * 7310.97 | 42.58 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 44.04 | 74 | -29.96 | P | 1.00 |
| * 7310.97 | 31.25 | 39.78 | 4.82 | 35.64 | 9.50 | 2.00 | 32.71 | 54 | -21.29 | A | 1.00 |
| 9747.69 | 43.64 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 42.52 | 74 | -31.48 | P | 1.00 |
| 9747.69 | 33.74 | 38.53 | 5.90 | 36.60 | 9.50 | 0.55 | 32.62 | 54 | -21.38 | A | 1.00 |
| * 12184.15 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14620.98 | --- | --- | --- | --- | 9.50 | 0.60 | --- | --- | --- | --- | 1.00 |
| 17057.81 | --- | --- | --- | --- | 9.50 | 0.52 | --- | --- | --- | --- | 1.00 |
| * 19494.64 | --- | --- | --- | --- | 9.50 | 2.19 | --- | --- | --- | --- | 1.00 |
| 21931.47 | --- | --- | --- | --- | 9.50 | 0.73 | --- | --- | --- | --- | 1.00 |
| 24368.30 | --- | --- | --- | --- | 9.50 | 2.51 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2464.25 | 51.18 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 77.02 | Fundamental Frequency | | P | 1.00 |
| 2464.25 | 42.80 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 68.64 | | | A | 1.00 |
| * 2483.50 | 35.05 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 60.88 | 74.00 | -13.12 | P | 1.00 |
| * 2483.50 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 2483.60 | 34.57 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 60.40 | 74.00 | -13.60 | P | 1.00 |
| * 2483.60 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 4925.33 | 46.35 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 40.95 | 74 | -33.05 | P | 1.00 |
| * 4925.33 | 33.47 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 28.07 | 54 | -25.93 | A | 1.00 |
| * 7386.33 | 43.54 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 45.02 | 74 | -28.98 | P | 1.00 |
| * 7386.33 | 32.61 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 34.09 | 54 | -19.91 | A | 1.00 |
| 9847.68 | 46.51 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 45.16 | 74 | -28.84 | P | 1.00 |
| 9847.68 | 33.58 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 32.23 | 54 | -21.77 | A | 1.00 |
| * 12308.85 | --- | --- | --- | --- | 9.50 | 0.80 | --- | --- | --- | --- | 1.00 |
| 14770.62 | --- | --- | --- | --- | 9.50 | 0.48 | --- | --- | --- | --- | 1.00 |
| 17232.39 | --- | --- | --- | --- | 9.50 | 0.59 | --- | --- | --- | --- | 1.00 |
| * 19694.16 | --- | --- | --- | --- | 9.50 | 2.39 | --- | --- | --- | --- | 1.00 |
| * 22155.93 | --- | --- | --- | --- | 9.50 | 0.70 | --- | --- | --- | --- | 1.00 |
| 24617.70 | --- | --- | --- | --- | 9.50 | 2.14 | --- | --- | --- | --- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| CH11 TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 2455.48 | 69.64 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 95.48 | Fundamental Frequency | | P | 1.00 |
| 2455.48 | 61.70 | 31.74 | 3.60 | 0.00 | 9.50 | 0.00 | 87.54 | | | A | 1.00 |
| * 2483.50 | 35.98 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 61.81 | 74.00 | -12.19 | P | 1.00 |
| * 2483.50 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 2483.60 | 35.27 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 61.10 | 74.00 | -12.90 | P | 1.00 |
| * 2483.60 | 23.48 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.31 | 54.00 | -4.69 | A | 1.00 |
| * 4925.40 | 52.37 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 46.97 | 74 | -27.03 | P | 1.00 |
| * 4925.40 | 39.87 | 35.11 | 2.63 | 35.24 | 9.50 | 1.60 | 34.47 | 54 | -19.53 | A | 1.00 |
| * 7386.05 | 43.57 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 45.05 | 74 | -28.95 | P | 1.00 |
| * 7386.05 | 33.77 | 39.75 | 4.85 | 35.62 | 9.50 | 2.00 | 35.25 | 54 | -18.75 | A | 1.00 |
| 9847.81 | 43.53 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | -42.18 | 74 | -31.82 | P | 1.00 |
| 9847.81 | 32.71 | 38.52 | 5.90 | 36.76 | 9.50 | 0.49 | 31.36 | 54 | -22.64 | A | 1.00 |
| * 12309.40 | ----- | ----- | ----- | ----- | 9.50 | 0.80 | ----- | ----- | ----- | ----- | 1.00 |
| 14771.28 | ----- | ----- | ----- | ----- | 9.50 | 0.48 | ----- | ----- | ----- | ----- | 1.00 |
| 17233.16 | ----- | ----- | ----- | ----- | 9.50 | 0.59 | ----- | ----- | ----- | ----- | 1.00 |
| * 19695.04 | ----- | ----- | ----- | ----- | 9.50 | 2.40 | ----- | ----- | ----- | ----- | 1.00 |
| * 22156.92 | ----- | ----- | ----- | ----- | 9.50 | 0.70 | ----- | ----- | ----- | ----- | 1.00 |
| 24618.80 | ----- | ----- | ----- | ----- | 9.50 | 2.13 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For normal 802.11g mode at 6Mbps.
- Antenna 5 (ANT24D18) : Antenna gain is 18dBi ; Cable 3 (ACC-10314-05) : 30m (For 2.4GHz)



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/28 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 18.1°C, 85% |

| Low (5760MHz) TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|------------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 3839.96 | 45.78 | 32.22 | 4.66 | 35.06 | 9.50 | 0.00 | 38.10 | 74.00 | -35.90 | P | 1.00 |
| * 3839.96 | 34.98 | 32.22 | 4.66 | 35.06 | 9.50 | 0.00 | 27.30 | 54.00 | -26.70 | A | 1.00 |
| * 3935.88 | 47.12 | 32.45 | 4.76 | 34.96 | 9.50 | 0.00 | 39.86 | 74.00 | -34.14 | P | 1.19 |
| * 3935.88 | 36.54 | 32.45 | 4.76 | 34.96 | 9.50 | 0.00 | 29.28 | 54.00 | -24.72 | A | 1.19 |
| * 4818.02 | 47.70 | 34.40 | 5.08 | 35.15 | 9.50 | 0.00 | 42.53 | 74.00 | -31.47 | P | 1.02 |
| * 4818.02 | 37.61 | 34.40 | 5.08 | 35.15 | 9.50 | 0.00 | 32.44 | 54.00 | -21.56 | A | 1.02 |
| 5724.34 | 39.39 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 72.60 | 85.17 | -12.57 | P | 1.00 |
| 5724.34 | 27.00 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 60.21 | 75.16 | -14.95 | A | 1.00 |
| 5724.90 | 39.55 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 72.76 | 85.17 | -12.41 | P | 1.00 |
| 5724.90 | 27.00 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 60.21 | 75.16 | -14.95 | A | 1.00 |
| 5755.86 | 71.87 | 36.71 | 6.09 | 0.00 | 9.50 | 0.00 | 105.17 | Fundamental Frequency | | P | 1.00 |
| 5755.86 | 61.86 | 36.71 | 6.09 | 0.00 | 9.50 | 0.00 | 95.16 | | | A | 1.00 |
| * 7580.04 | 48.26 | 39.68 | 6.97 | 35.84 | 9.50 | 0.00 | 49.58 | 74.00 | -24.42 | P | 1.00 |
| * 7580.04 | 37.16 | 39.68 | 6.97 | 35.84 | 9.50 | 0.00 | 38.48 | 54.00 | -15.52 | A | 1.00 |
| * 11512.42 | 56.00 | 40.13 | 8.98 | 35.70 | 9.50 | 1.19 | 61.09 | 74.00 | -12.91 | P | 1.00 |
| * 11512.42 | 41.67 | 40.13 | 8.98 | 35.70 | 9.50 | 1.19 | 46.76 | 54.00 | -7.24 | A | 1.00 |
| 17280.00 | 45.16 | 47.38 | 9.48 | 35.18 | 9.50 | 0.61 | 57.95 | 85.17 | -27.22 | P | 1.00 |
| 17280.00 | 34.78 | 47.38 | 9.48 | 35.18 | 9.50 | 0.61 | 47.57 | 75.16 | -27.59 | A | 1.00 |
| * 22899.60 | ----- | ----- | ----- | ----- | 9.50 | 0.70 | ----- | ----- | ----- | ----- | 1.00 |
| 28779.30 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| 34535.16 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 40291.02 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 46046.88 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 51802.74 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 57558.60 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For Super A mode at 108Mbps.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/28 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 18.1°C, 85% |

| Low (5760MHz) TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|------------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 3839.96 | 44.85 | 32.22 | 4.66 | 35.06 | 9.50 | 0.00 | 37.17 | 74.00 | -36.83 | P | 1.00 |
| * 3839.96 | 33.74 | 32.22 | 4.66 | 35.06 | 9.50 | 0.00 | 26.06 | 54.00 | -27.94 | A | 1.00 |
| * 3935.26 | 50.69 | 32.44 | 4.76 | 34.96 | 9.50 | 0.00 | 43.43 | 74.00 | -30.57 | P | 1.00 |
| * 3935.26 | 41.58 | 32.44 | 4.76 | 34.96 | 9.50 | 0.00 | 34.32 | 54.00 | -19.68 | A | 1.00 |
| * 4817.90 | 58.99 | 34.40 | 5.08 | 35.15 | 9.50 | 0.00 | 53.82 | 74.00 | -20.18 | P | 1.10 |
| * 4817.90 | 48.59 | 34.40 | 5.08 | 35.15 | 9.50 | 0.00 | 43.42 | 54.00 | -10.58 | A | 1.10 |
| 5724.34 | 47.36 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 80.57 | 88.71 | -8.14 | P | 1.00 |
| 5724.34 | 36.24 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 69.45 | 80.63 | -11.18 | A | 1.00 |
| 5724.90 | 46.73 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 79.94 | 88.71 | -8.77 | P | 1.00 |
| 5724.90 | 36.24 | 36.66 | 6.05 | 0.00 | 9.50 | 0.00 | 69.45 | 80.63 | -11.18 | A | 1.00 |
| 5755.84 | 75.41 | 36.71 | 6.09 | 0.00 | 9.50 | 0.00 | 108.71 | Fundamental Frequency | | P | 1.00 |
| 5755.84 | 67.33 | 36.71 | 6.09 | 0.00 | 9.50 | 0.00 | 100.63 | | | A | 1.00 |
| * 7579.99 | 55.49 | 39.68 | 6.97 | 35.84 | 9.50 | 0.00 | 56.81 | 74.00 | -17.19 | P | 1.01 |
| * 7579.99 | 45.63 | 39.68 | 6.97 | 35.84 | 9.50 | 0.00 | 46.95 | 54.00 | -7.05 | A | 1.01 |
| * 11512.48 | 50.66 | 40.13 | 8.98 | 35.70 | 9.50 | 1.19 | 55.75 | 74.00 | -18.25 | P | 1.02 |
| * 11512.48 | 37.54 | 40.13 | 8.98 | 35.70 | 9.50 | 1.19 | 42.63 | 54.00 | -11.37 | A | 1.02 |
| 17280.12 | 45.12 | 47.38 | 9.48 | 35.18 | 9.50 | 0.61 | 57.91 | 88.71 | -30.80 | P | 1.00 |
| 17280.12 | 34.88 | 47.38 | 9.48 | 35.18 | 9.50 | 0.61 | 47.67 | 80.63 | -32.96 | A | 1.00 |
| * 22899.60 | ----- | ----- | ----- | ----- | 9.50 | 0.70 | ----- | ----- | ----- | ----- | 1.00 |
| 28779.20 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| 34535.04 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 40290.88 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 46046.72 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 51802.56 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 57558.40 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For Super A mode at 108Mbps.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/28 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 18.1°C, 85% |

| High (5800MHz) TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|-------------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBµV) | AF (dBµV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 3966.45 | 44.12 | 32.52 | 4.79 | 34.93 | 9.50 | 0.00 | 36.99 | 74.00 | -37.01 | P | 1.02 |
| * 3966.45 | 34.69 | 32.52 | 4.79 | 34.93 | 9.50 | 0.00 | 27.56 | 54.00 | -26.44 | A | 1.02 |
| * 3976.98 | 46.58 | 32.54 | 4.80 | 34.92 | 9.50 | 0.00 | 39.50 | 74.00 | -34.50 | P | 1.16 |
| * 3976.98 | 35.17 | 32.54 | 4.80 | 34.92 | 9.50 | 0.00 | 28.09 | 54.00 | -25.91 | A | 1.16 |
| * 4832.87 | 46.96 | 34.50 | 5.09 | 35.17 | 9.50 | 0.00 | 41.88 | 74.00 | -32.12 | P | 1.03 |
| * 4832.87 | 35.88 | 34.50 | 5.09 | 35.17 | 9.50 | 0.00 | 30.80 | 54.00 | -23.20 | A | 1.03 |
| 5795.26 | 62.91 | 36.77 | 6.14 | 0.00 | 9.50 | 0.00 | 96.32 | Fundamental Frequency | | P | 1.00 |
| 5795.26 | 54.23 | 36.77 | 6.14 | 0.00 | 9.50 | 0.00 | 87.64 | | A | 1.00 | |
| 5850.10 | 39.25 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 72.82 | 76.32 | -3.50 | P | 1.03 |
| 5850.10 | 27.00 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 60.57 | 67.64 | -7.07 | A | 1.03 |
| 5855.66 | 38.57 | 36.87 | 6.22 | 0.00 | 9.50 | 0.00 | 72.16 | 76.32 | -4.17 | P | 1.03 |
| 5855.66 | 27.00 | 36.87 | 6.22 | 0.00 | 9.50 | 0.00 | 60.59 | 67.64 | -7.06 | A | 1.03 |
| * 7604.42 | 50.30 | 39.68 | 6.99 | 35.91 | 9.50 | 0.00 | 51.55 | 74.00 | -22.45 | P | 1.00 |
| * 7604.42 | 43.85 | 39.68 | 6.99 | 35.91 | 9.50 | 0.00 | 45.10 | 54.00 | -8.90 | A | 1.00 |
| * 11592.35 | 56.42 | 40.32 | 9.02 | 35.72 | 9.50 | 1.13 | 61.67 | 74.00 | -12.33 | P | 1.00 |
| * 11592.35 | 43.13 | 40.32 | 9.02 | 35.72 | 9.50 | 1.13 | 48.38 | 54.00 | -5.62 | A | 1.00 |
| 17398.26 | 45.70 | 48.09 | 9.50 | 35.08 | 9.50 | 0.66 | 59.37 | 76.32 | -16.96 | P | 1.01 |
| 17398.26 | 34.18 | 48.09 | 9.50 | 35.08 | 9.50 | 0.66 | 47.85 | 67.64 | -19.80 | A | 1.01 |
| 23181.04 | ----- | ----- | ----- | ----- | 9.50 | 3.74 | ----- | ----- | ----- | ----- | 1.00 |
| 28976.30 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| 34771.56 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 40566.82 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 46362.08 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 52157.34 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 57952.60 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For Super A mode at 108Mbps.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/28 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 18.1°C, 85% |

| High (5800MHz) TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|-------------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 3866.59 | 45.38 | 32.28 | 4.69 | 35.03 | 9.50 | 0.00 | 37.82 | 74.00 | -36.18 | P | 1.04 |
| * 3866.59 | 37.07 | 32.28 | 4.69 | 35.03 | 9.50 | 0.00 | 29.51 | 54.00 | -24.49 | A | 1.04 |
| * 3977.22 | 46.75 | 32.55 | 4.80 | 34.92 | 9.50 | 0.00 | 39.67 | 74.00 | -34.33 | P | 1.14 |
| * 3977.22 | 35.78 | 32.55 | 4.80 | 34.92 | 9.50 | 0.00 | 28.70 | 54.00 | -25.30 | A | 1.14 |
| * 4832.87 | 53.79 | 34.50 | 5.09 | 35.17 | 9.50 | 0.00 | 48.71 | 74.00 | -25.29 | P | 1.12 |
| * 4832.87 | 43.15 | 34.50 | 5.09 | 35.17 | 9.50 | 0.00 | 38.07 | 54.00 | -15.93 | A | 1.12 |
| 5795.61 | 76.40 | 36.77 | 6.14 | 0.00 | 9.50 | 0.00 | 109.82 | Fundamental Frequency | | P | 1.00 |
| 5795.61 | 67.18 | 36.77 | 6.14 | 0.00 | 9.50 | 0.00 | 100.60 | | | A | 1.00 |
| 5850.10 | 39.75 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 73.32 | 89.82 | -16.49 | P | 1.04 |
| 5850.10 | 27.00 | 36.86 | 6.21 | 0.00 | 9.50 | 0.00 | 60.57 | 80.60 | -20.02 | A | 1.04 |
| 5855.66 | 39.81 | 36.87 | 6.22 | 0.00 | 9.50 | 0.00 | 73.40 | 89.82 | -16.42 | P | 1.04 |
| 5855.66 | 27.00 | 36.87 | 6.22 | 0.00 | 9.50 | 0.00 | 60.59 | 80.60 | -20.01 | A | 1.04 |
| * 7604.42 | 46.04 | 39.68 | 6.99 | 35.91 | 9.50 | 0.00 | 47.29 | 74.00 | -26.71 | P | 1.50 |
| * 7604.42 | 35.08 | 39.68 | 6.99 | 35.91 | 9.50 | 0.00 | 36.33 | 54.00 | -17.67 | A | 1.50 |
| * 11598.37 | 49.44 | 40.34 | 9.02 | 35.72 | 9.50 | 1.12 | 54.70 | 74.00 | -19.30 | P | 1.06 |
| * 11598.37 | 37.68 | 40.34 | 9.02 | 35.72 | 9.50 | 1.12 | 42.94 | 54.00 | -11.06 | A | 1.06 |
| 17398.62 | 45.71 | 48.09 | 9.50 | 35.08 | 9.50 | 0.66 | 59.38 | 89.82 | -30.44 | P | 1.00 |
| 17398.62 | 33.86 | 48.09 | 9.50 | 35.08 | 9.50 | 0.66 | 47.53 | 80.60 | -33.07 | A | 1.00 |
| 23182.44 | ----- | ----- | ----- | ----- | 9.50 | 3.76 | ----- | ----- | ----- | ----- | 1.00 |
| 28978.05 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| 34773.66 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 40569.27 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 46364.88 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 52160.49 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |
| * 57956.10 | ----- | ----- | ----- | ----- | 9.50 | 0.00 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For Super A mode at 108Mbps.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| (2437MHz) TX | | | | Measurement Distance at 1m Horizontal polarity | | | | | | | |
|--------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 25.00 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 50.88 | 74.00 | -23.12 | P | 1.01 |
| * 2389.90 | 11.70 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 37.58 | 54.00 | -16.42 | A | 1.01 |
| 2399.90 | 35.00 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 60.88 | 75.62 | -14.75 | P | 1.01 |
| 2399.90 | 19.80 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 45.68 | 66.20 | -20.53 | A | 1.01 |
| 2440.73 | 69.77 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 95.62 | Fundamental Frequency | | P | 1.00 |
| 2440.73 | 60.35 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 86.20 | | | A | 1.00 |
| * 2483.50 | 22.80 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 48.63 | 74.00 | -25.37 | P | 1.01 |
| * 2483.50 | 6.70 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 32.53 | 54.00 | -21.47 | A | 1.01 |
| * 2483.60 | 19.30 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 45.13 | 74.00 | -28.87 | P | 1.01 |
| * 2483.60 | 6.60 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 32.43 | 54.00 | -21.57 | A | 1.01 |
| 3053.27 | 48.07 | 31.67 | 3.89 | 35.85 | 9.50 | 0.00 | 38.28 | 75.62 | -37.34 | P | 1.00 |
| 3053.27 | 36.75 | 31.67 | 3.89 | 35.85 | 9.50 | 0.00 | 26.96 | 66.20 | -39.24 | A | 1.00 |
| * 4876.58 | 44.94 | 34.79 | 5.10 | 35.20 | 9.50 | 1.79 | 41.92 | 74.00 | -32.08 | P | 1.00 |
| * 4876.58 | 33.52 | 34.79 | 5.10 | 35.20 | 9.50 | 1.79 | 30.50 | 54.00 | -23.50 | A | 1.00 |
| * 7312.72 | 45.26 | 39.77 | 6.79 | 35.64 | 9.50 | 2.00 | 48.69 | 74.00 | -25.31 | P | 1.03 |
| * 7312.72 | 33.19 | 39.77 | 6.79 | 35.64 | 9.50 | 2.00 | 36.62 | 54.00 | -17.38 | A | 1.03 |
| 9746.84 | 44.37 | 38.53 | 8.33 | 36.59 | 9.50 | 0.55 | 45.68 | 75.62 | -29.94 | P | 1.02 |
| 9746.84 | 33.52 | 38.53 | 8.33 | 36.59 | 9.50 | 0.55 | 34.83 | 66.20 | -31.37 | A | 1.02 |
| * 12175.45 | 44.12 | 41.32 | 9.25 | 35.62 | 9.50 | 0.80 | 50.36 | 75.62 | -25.26 | P | 1.00 |
| * 12175.45 | 33.05 | 41.32 | 9.25 | 35.62 | 9.50 | 0.80 | 39.29 | 66.20 | -26.91 | A | 1.00 |
| * 12203.65 | ----- | ----- | ----- | ----- | 9.50 | 0.80 | ----- | ----- | ----- | ----- | 1.00 |
| 14644.38 | ----- | ----- | ----- | ----- | 9.50 | 0.58 | ----- | ----- | ----- | ----- | 1.00 |
| 17085.11 | ----- | ----- | ----- | ----- | 9.50 | 0.53 | ----- | ----- | ----- | ----- | 1.00 |
| * 19525.84 | ----- | ----- | ----- | ----- | 9.50 | 2.23 | ----- | ----- | ----- | ----- | 1.00 |
| 21966.57 | ----- | ----- | ----- | ----- | 9.50 | 0.71 | ----- | ----- | ----- | ----- | 1.00 |
| 24407.30 | ----- | ----- | ----- | ----- | 9.50 | 2.45 | ----- | ----- | ----- | ----- | 1.00 |

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For Super G mode at 108Mbps.
 - Super G mode, there are only one Antenna 1 (SNW0007A 1/2λ Dipole) : Antenna gain is 5dBi.



The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

| (2437MHz) TX | | | | Measurement Distance at 1m Vertical polarity | | | | | | | |
|--------------|----------------|-----------|------------|--|-----------|-------------|----------------|-----------------------|-------------|--------------|----------------|
| Freq. (MHz) | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| * 2389.90 | 40.10 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 65.98 | 74.00 | -8.02 | P | 1.11 |
| * 2389.90 | 27.00 | 31.81 | 3.57 | 0.00 | 9.50 | 0.00 | 52.88 | 54.00 | -1.12 | A | 1.11 |
| 2399.90 | 49.70 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 75.58 | 90.79 | -15.22 | P | 1.11 |
| 2399.90 | 34.90 | 31.80 | 3.58 | 0.00 | 9.50 | 0.00 | 60.78 | 81.87 | -21.10 | A | 1.11 |
| 2440.88 | 84.94 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 110.79 | Fundamental Frequency | | P | 1.00 |
| 2440.88 | 76.02 | 31.76 | 3.59 | 0.00 | 9.50 | 0.00 | 101.87 | | | A | 1.00 |
| * 2483.50 | 37.20 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 63.03 | 74.00 | -10.97 | P | 1.11 |
| * 2483.50 | 23.60 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.43 | 54.00 | -4.57 | A | 1.11 |
| * 2483.60 | 39.60 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 65.43 | 74.00 | -8.57 | P | 1.11 |
| * 2483.60 | 23.50 | 31.72 | 3.61 | 0.00 | 9.50 | 0.00 | 49.33 | 54.00 | -4.67 | A | 1.11 |
| 3050.82 | 72.30 | 31.67 | 3.89 | 35.85 | 9.50 | 0.00 | 62.51 | 90.79 | -28.28 | P | 1.10 |
| 3050.82 | 61.92 | 31.67 | 3.89 | 35.85 | 9.50 | 0.00 | 52.13 | 81.87 | -29.74 | A | 1.10 |
| * 4876.44 | 47.91 | 34.78 | 5.10 | 35.20 | 9.50 | 1.79 | 44.89 | 74.00 | -29.11 | P | 1.10 |
| * 4876.44 | 37.48 | 34.78 | 5.10 | 35.20 | 9.50 | 1.79 | 34.46 | 54.00 | -19.54 | A | 1.10 |
| * 7317.47 | 46.00 | 39.77 | 6.80 | 35.64 | 9.50 | 2.00 | 49.43 | 74.00 | -24.57 | P | 1.11 |
| * 7317.47 | 34.73 | 39.77 | 6.80 | 35.64 | 9.50 | 2.00 | 38.16 | 54.00 | -15.84 | A | 1.11 |
| 9750.01 | 44.03 | 38.52 | 8.33 | 36.60 | 9.50 | 0.55 | 45.33 | 90.79 | -45.46 | P | 1.05 |
| 9750.01 | 33.88 | 38.52 | 8.33 | 36.60 | 9.50 | 0.55 | 35.18 | 81.87 | -46.69 | A | 1.05 |
| * 12204.40 | ----- | ----- | ----- | ----- | 9.50 | 0.80 | ----- | ----- | ----- | ----- | 1.00 |
| 14645.28 | ----- | ----- | ----- | ----- | 9.50 | 0.58 | ----- | ----- | ----- | ----- | 1.00 |
| 17086.16 | ----- | ----- | ----- | ----- | 9.50 | 0.53 | ----- | ----- | ----- | ----- | 1.00 |
| * 19527.04 | ----- | ----- | ----- | ----- | 9.50 | 2.23 | ----- | ----- | ----- | ----- | 1.00 |
| 21967.92 | ----- | ----- | ----- | ----- | 9.50 | 0.71 | ----- | ----- | ----- | ----- | 1.00 |
| 24408.80 | ----- | ----- | ----- | ----- | 9.50 | 2.45 | ----- | ----- | ----- | ----- | 1.00 |

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
 - For Super G mode at 108Mbps.
 - Super G mode, there are only one Antenna 1 (SNW0007A 1/2λ Dipole) : Antenna gain is 5dBi.

3.7 Photos of Open Site

Antenna 1 (SNW0007A 1/2λ Dipole 5dBi)





Antenna 2 (ANT24O5 Ceiling 5dBi)





Antenna 4 (ANT24P12 GP Omni-directional 12dBi)





Antenna 5 (ANT24D18 Patch 18dBi)







4. 6dB BANDWIDTH MEASUREMENT


4.1 Test Equipments

| Description & Manufacturer | Model No. | Serial No. | Date Of Calibration | Calibration Period |
|--------------------------------------|-----------|------------|-----------------------|--------------------|
| ROHDE & SCHWARZ SPECTRUM ANALYZER | FSEK30 | 835253/002 | September 06, 2004 | 1 Year |

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 Test Setup



4.3 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500KHz

4.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 1MHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 200 KHz.



4.6 Test Results

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/28 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 18.1°C, 85% |

| Channel | Channel Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-------------------------|---------------------|---------------------|-------------|
| Low | 5745 | 16.43 | 0.5 | PASS |
| Middle | 5785 | 16.39 | 0.5 | PASS |
| High | 5825 | 16.39 | 0.5 | PASS |

Note : For normal 802.11a Mode

| Channel | Channel Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-------------------------|---------------------|---------------------|-------------|
| 1 | 2412 | 12.75 | 0.5 | PASS |
| 6 | 2437 | 12.18 | 0.5 | PASS |
| 11 | 2462 | 11.26 | 0.5 | PASS |

Note : For 802.11b Mode

| Channel | Channel Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-------------------------|---------------------|---------------------|-------------|
| 1 | 2412 | 16.47 | 0.5 | PASS |
| 6 | 2437 | 16.39 | 0.5 | PASS |
| 11 | 2462 | 16.43 | 0.5 | PASS |

Note : For normal 802.11g Mode



| Channel | Channel Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-------------------------|---------------------|---------------------|-------------|
| Low | 5760 | 32.63 | 0.5 | PASS |
| High | 5800 | 32.55 | 0.5 | PASS |


Note : For Super A mode

| Channel | Channel Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-------------------------|---------------------|---------------------|-------------|
| 6 | 2437 | 32.30 | 0.5 | PASS |


Note : For Super G mode




4.7 Photo of 6db Bandwidth Measurement

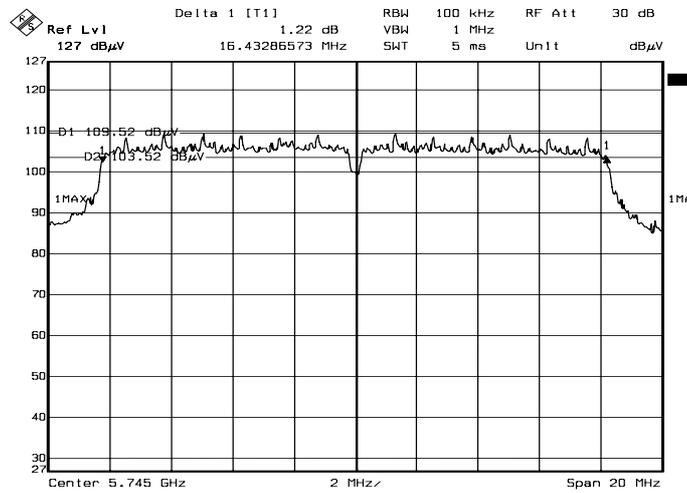

Channel Low

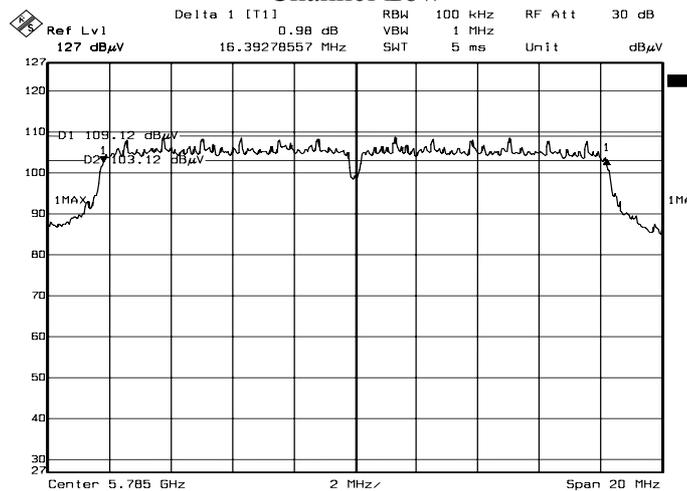


Channel Middle

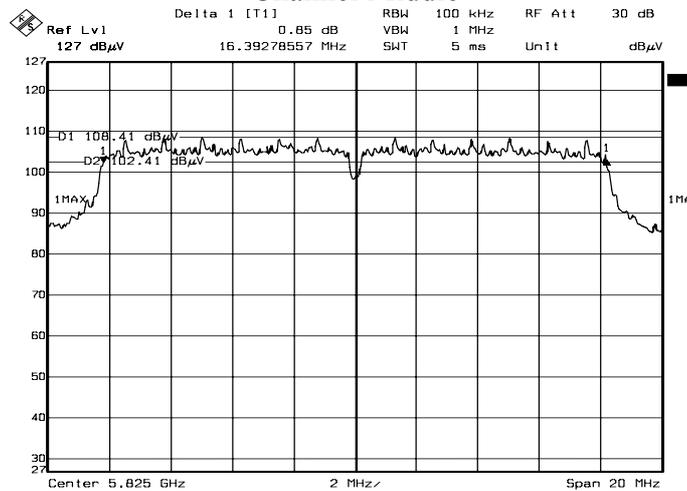


Channel High


Note: For normal 802.11a Mode

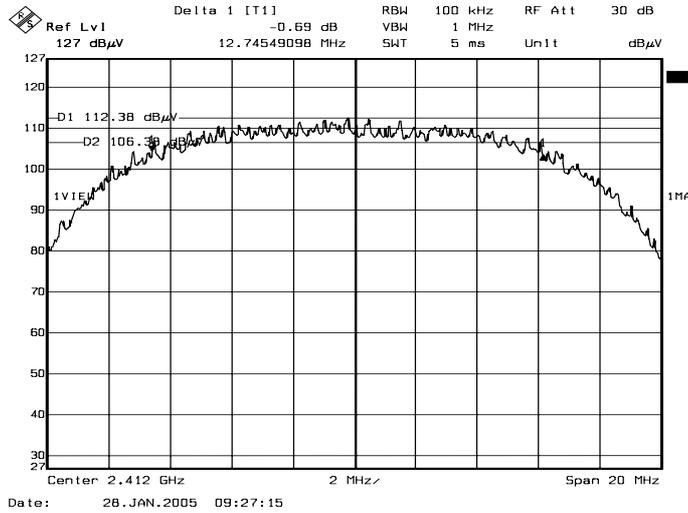

Channel 1

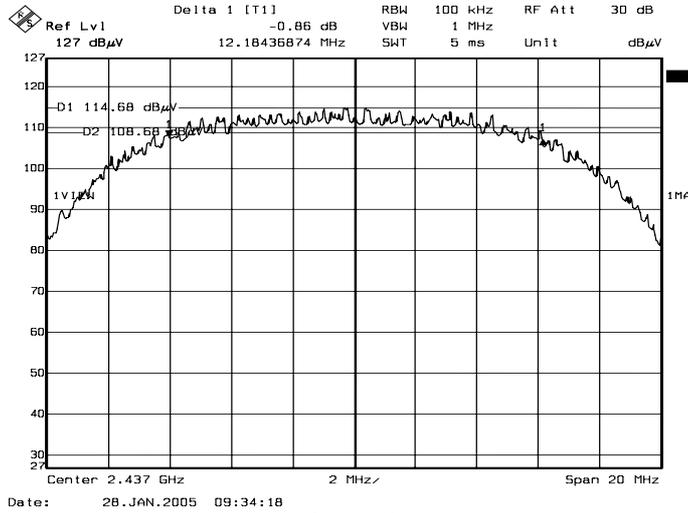


Channel 6

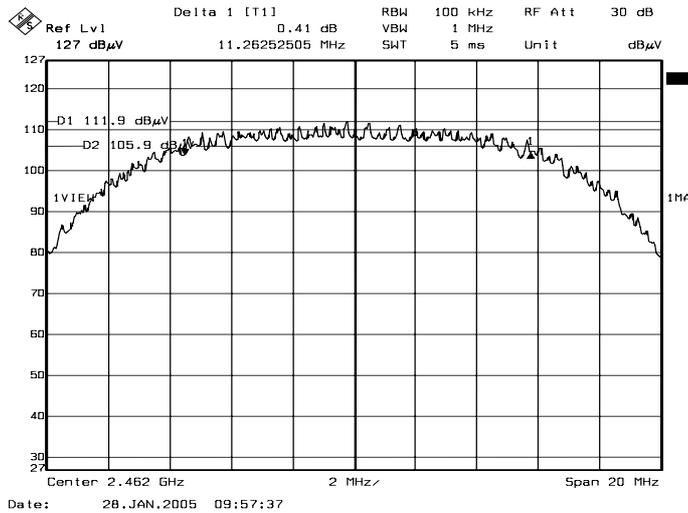


Channel 11


Note: For 802.11b Mode

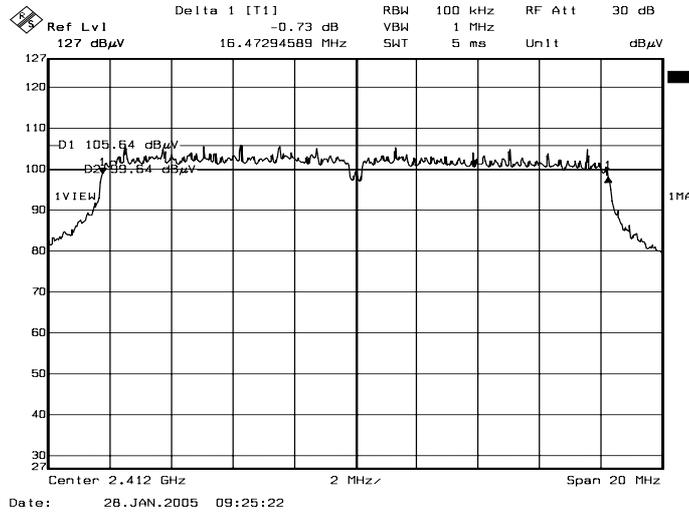

Channel 1

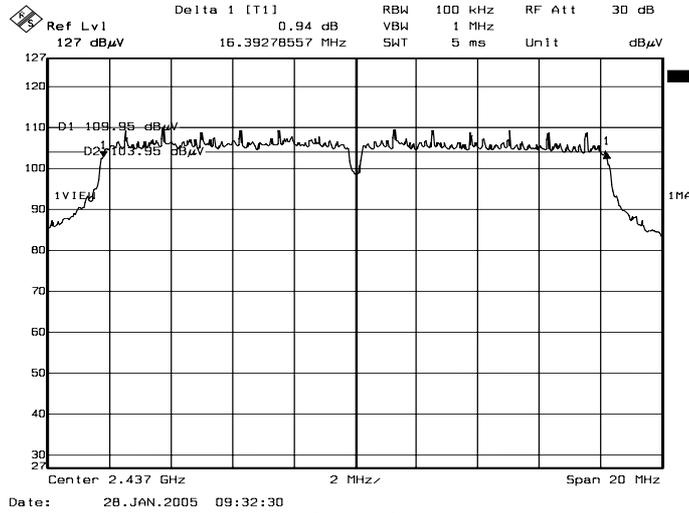


Channel 6

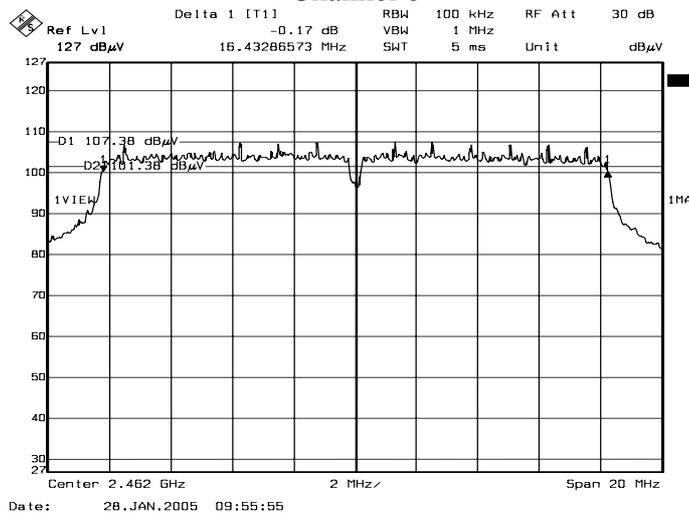


Channel 11

Note: For normal 802.11g Mode

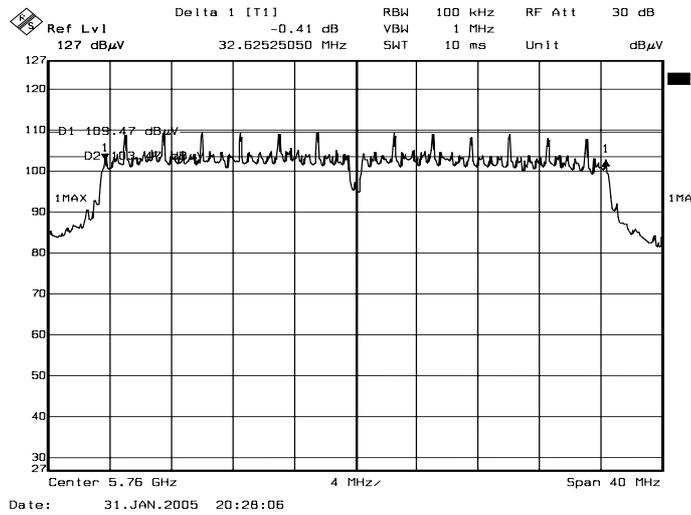


Channel Low

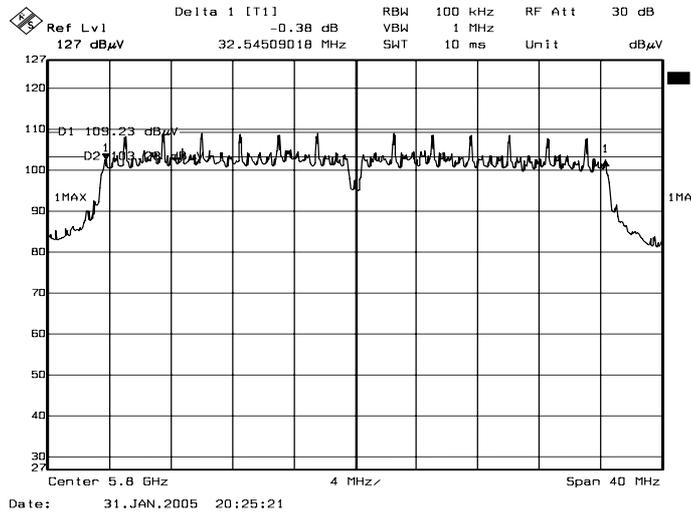

Channel High

Note: For Super A mode

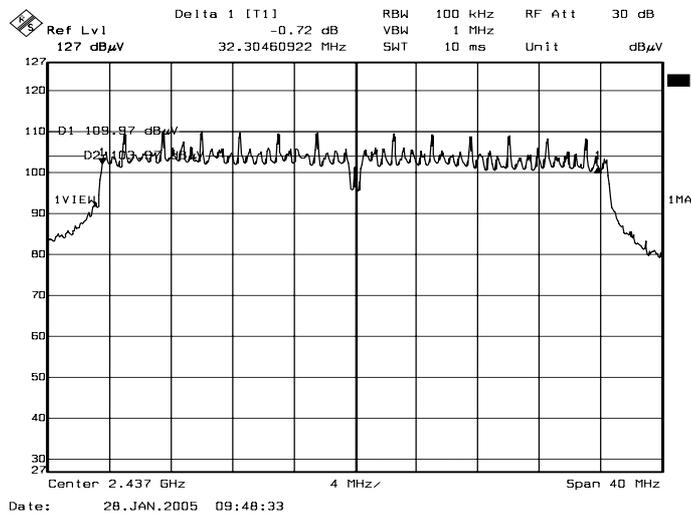

Channel 6

Note: For Super G mode



5. MAXIMUM PEAK OUTPUT POWER

5.1 Test Equipments

| Description & Manufacturer | Model No. | Serial No. | Date Of Calibration | Calibration Period |
|-----------------------------------|-----------|------------|---------------------|--------------------|
| ROHDE & SCHWARZ SPECTRUM ANALYZER | FSEK30 | 835253/002 | September 06, 2004 | 1 Year |
| Agilent ATTENUATOR | 8491B | 57321 | CAL. ON USE | 1 Year |

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 Test Setup



5.3 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

5.4 Test Procedure

1. The spectrum shall be set as follows :
Span : 1.5 times channel integration bandwidth.
RBW : 1MHz
VBW : 3MHz
Detector : Peak
Sweep : Single trace
2. Compute the combined power of all signal responses contained in the trace by covering all the data points.
3. For 99% occupied BW, place the markers at the frequency at which 0.5% of the power lies to the right of the right marker and 0.5% of the power lies to the left of the left marker.
4. The peak output power is the channel power integrated over 99% bandwidth.



5.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.82dB.

5.6 Test Results

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/28 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 18.1°C, 85% |

| Channel | Channel Frequency (MHz) | Peak Power Output (dBm) | Peak Power Limit (dBm) | Pass / Fail |
|---------|-------------------------|-------------------------|------------------------|-------------|
| Low | 5745 | 19.90 | 30 | PASS |
| Middle | 5785 | 19.73 | 30 | PASS |
| High | 5825 | 19.53 | 30 | PASS |

Note :

1. For normal 802.11a mode.
2. At final test to get the worst-case emission at 6Mbps.
3. Cable loss = 1.0dB.
4. The results are calculated as the following equation :

$$\text{Peak Power Output} = \text{Peak Power Reading} + \text{Cable loss}$$

| Channel | Channel Frequency (MHz) | Peak Power Output (dBm) | Peak Power Limit (dBm) | Pass / Fail |
|---------|-------------------------|-------------------------|------------------------|-------------|
| 1 | 2412 | 19.50 | 30 | PASS |
| 6 | 2437 | 22.07 | 30 | PASS |
| 11 | 2462 | 19.48 | 30 | PASS |

Note :

1. For 802.11b mode.
2. At final test to get the worst-case emission at 11Mbps.
3. Cable loss = 1.0dB.
4. The results are calculated as the following equation :

$$\text{Peak Power Output} = \text{Peak Power Reading} + \text{Cable loss}$$
5. For all 2.4GHz antenna.



| Channel | Channel Frequency (MHz) | Peak Power Output (dBm) | Peak Power Limit (dBm) | Pass / Fail |
|---------|-------------------------|-------------------------|------------------------|-------------|
| 1 | 2412 | 17.03 | 30 | PASS |
| 6 | 2437 | 20.22 | 30 | PASS |
| 11 | 2462 | 17.99 | 30 | PASS |

Note :

1. For normal 802.11g mode.
2. At final test to get the worst-case emission at 6Mbps.
3. Cable loss = 1.0dB.
4. The results are calculated as the following equation :
Peak Power Output = Peak Power Reading + Cable loss
5. For all 2.4GHz antenna.

| Channel | Channel Frequency (MHz) | Peak Power Output (dBm) | Peak Power Limit (dBm) | Pass / Fail |
|---------|-------------------------|-------------------------|------------------------|-------------|
| Low | 5760 | 19.63 | 30 | PASS |
| High | 5800 | 19.31 | 30 | PASS |

Note :

1. For Super A mode.
2. At final test to get the worst-case emission at 108Mbps.
3. Cable loss = 1.0dB.
4. The results are calculated as the following equation :
Peak Power Output = Peak Power Reading + Cable loss

Super G mode, there are only one Antenna 1 (SNW0007A 1/2λ Dipole) : Antenna gain is 5dBi


| Channel | Channel Frequency (MHz) | Peak Power Output (dBm) | Peak Power Limit (dBm) | Pass / Fail |
|---------|-------------------------|-------------------------|------------------------|-------------|
| 6 | 2437 | 20.61 | 30 | PASS |

Note :


1. For Super G mode.
2. At final test to get the worst-case emission at 108Mbps.
3. Cable loss =1.0dB.
4. The results are calculated as the following equation :
Peak Power Output = Peak Power Reading + Cable loss




5.7 Photo of Maximum Peak Output Power Measurement

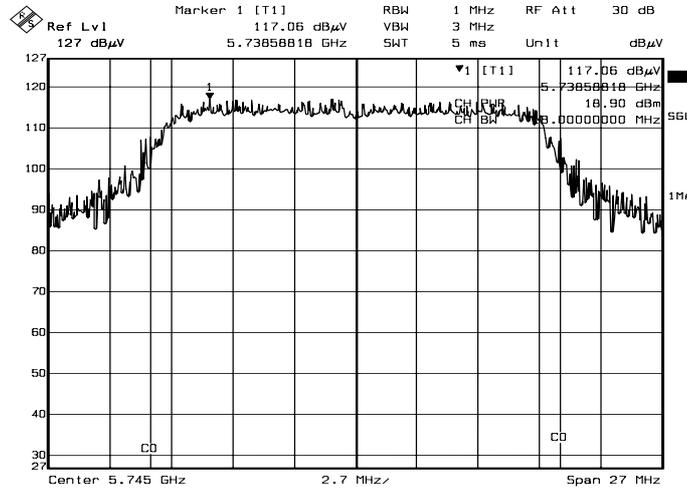

Channel Low

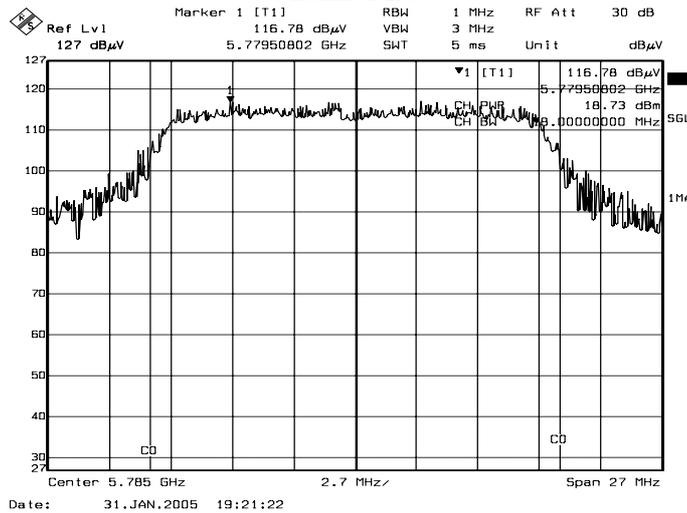


Channel Middle

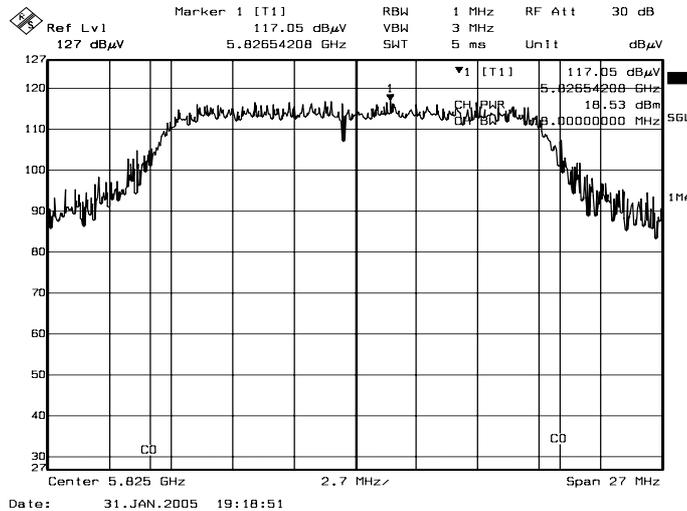


Channel High

Note: For normal 802.11a Mode

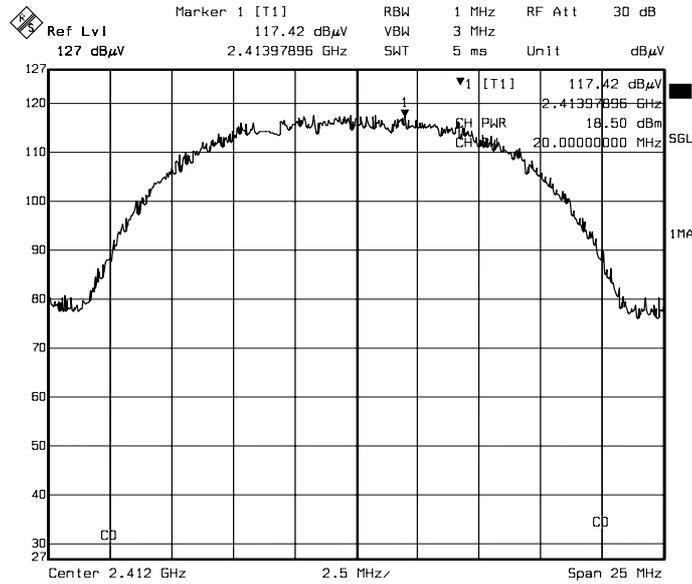


Date: 28.JAN.2005 12:47:28

Channel 1

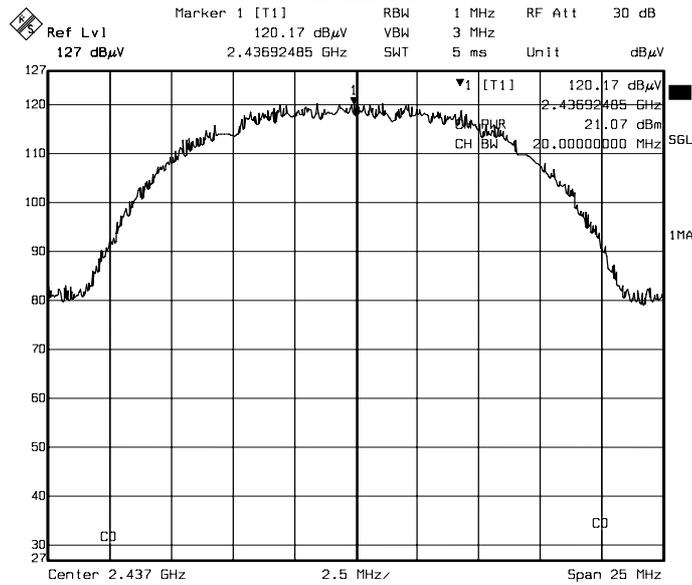

Date: 28.JAN.2005 12:51:06


Channel 6

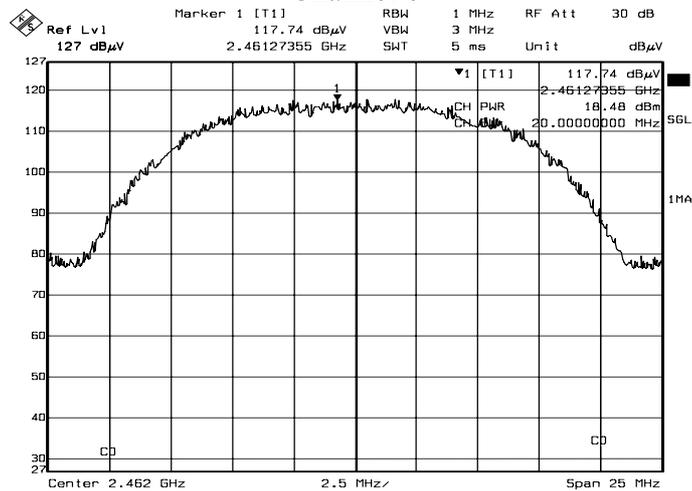


Date: 28.JAN.2005 12:54:41

Channel 11


Note: For 802.11b Mode

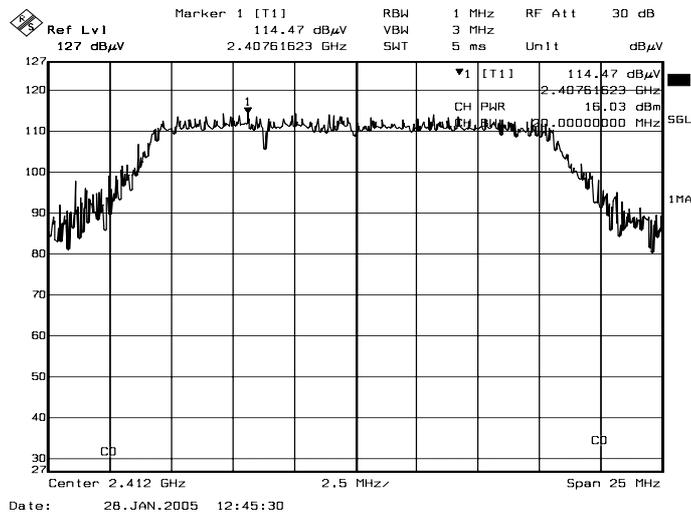

Channel 1

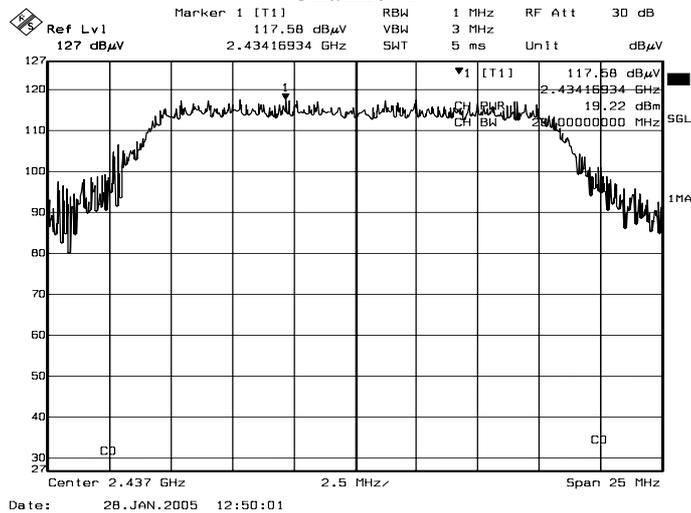


Channel 6

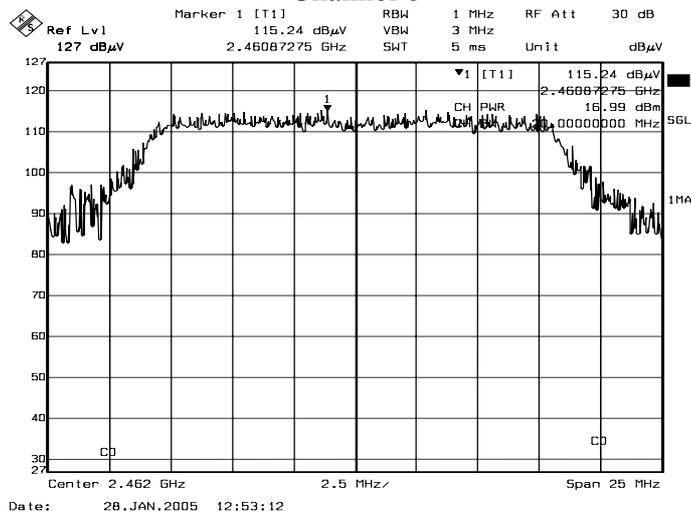


Channel 11

Note: For normal 802.11g Mode

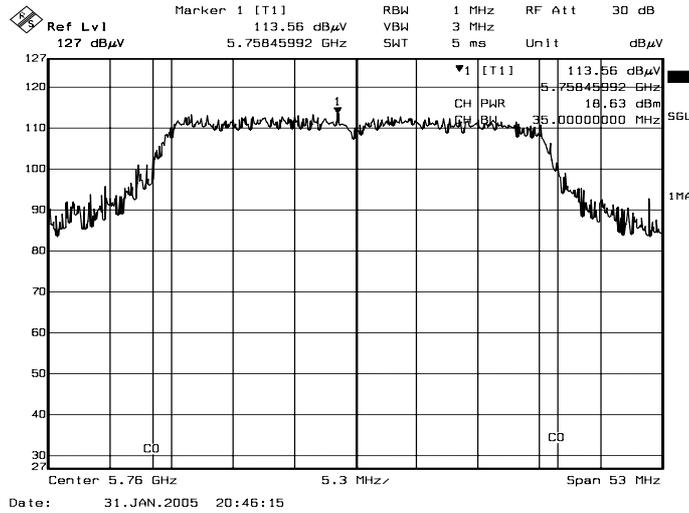


Channel Low

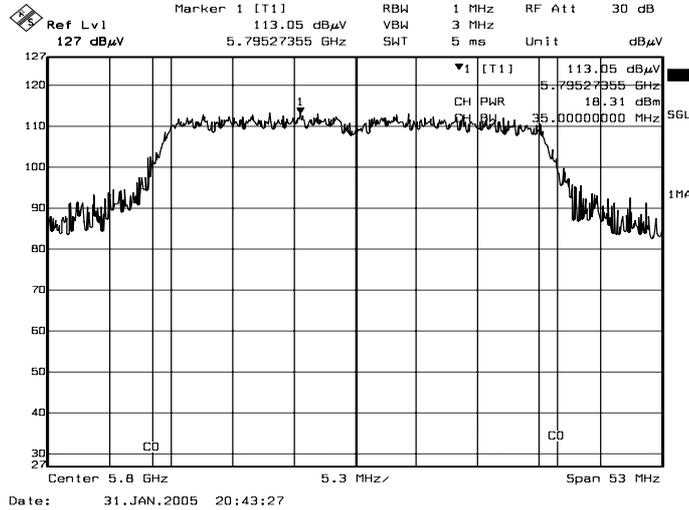

Channel High

Note: For Super A mode

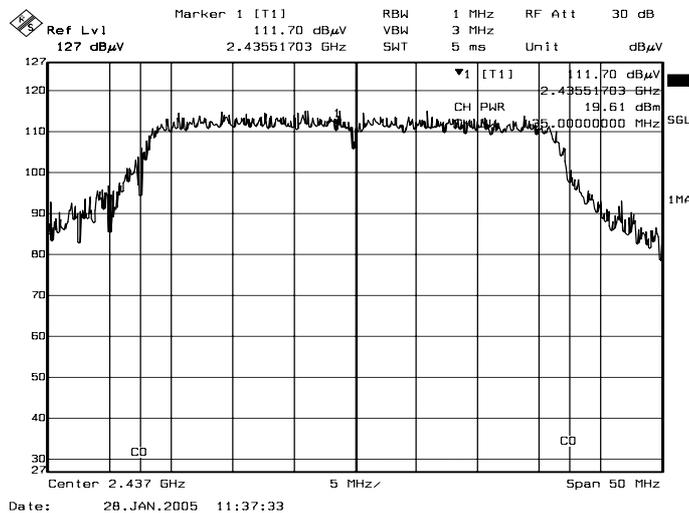

Channel 6

Note: For Super G mode



6. POWER SPECTRAL DENSITY MEASUREMENT


6.1 Test Equipments

| Description & Manufacturer | Model No. | Serial No. | Date Of Calibration | Calibration Period |
|--------------------------------------|-----------|------------|-----------------------|--------------------|
| ROHDE & SCHWARZ SPECTRUM ANALYZER | FSEK30 | 835253/002 | September 06, 2004 | 1 Year |

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 Test Setup

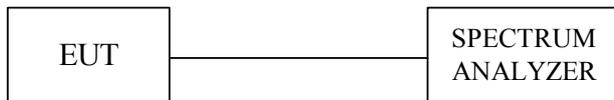

6.3 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3KHz.



6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3KHz RBW and 30KHz VBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

6.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.82 dB.

6.6 Test Results

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/28 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 18.1°C, 85% |

| Channel | Channel Frequency (MHz) | Final RF Power Level in 3KHz BW (dBm) | Maximum Limit (dBm) | Pass / Fail |
|---------|-------------------------|---------------------------------------|---------------------|-------------|
| Low | 5745 | -13.79 | 8 | PASS |
| Middle | 5785 | -12.69 | 8 | PASS |
| High | 5825 | -10.29 | 8 | PASS |

Note : For 6Mbps (normal 802.11a mode) at final test to get the worst-case emission at 6Mbps.

| Channel | Channel Frequency (MHz) | Final RF Power Level in 3KHz BW (dBm) | Maximum Limit (dBm) | Pass / Fail |
|---------|-------------------------|---------------------------------------|---------------------|-------------|
| 1 | 2412 | -11.30 | 8 | PASS |
| 6 | 2437 | -8.16 | 8 | PASS |
| 11 | 2462 | -9.27 | 8 | PASS |

Note : For 11Mbps (802.11b mode) at final test to get the worst-case emission at 11Mbps.



| Channel | Channel Frequency (MHz) | Final RF Power Level in 3KHz BW (dBm) | Maxmum Limit (dBm) | Pass / Fail |
|---------|-------------------------|---------------------------------------|--------------------|-------------|
| 1 | 2412 | -15.45 | 8 | PASS |
| 6 | 2437 | -12.82 | 8 | PASS |
| 11 | 2462 | -14.12 | 8 | PASS |

Note : For 6Mbps (normal 802.11g mode) at final test to get the worst-case emission at 6Mbps.

| Channel | Channel Frequency (MHz) | Final RF Power Level in 3KHz BW (dBm) | Maxmum Limit (dBm) | Pass / Fail |
|---------|-------------------------|---------------------------------------|--------------------|-------------|
| Low | 5760 | -14.30 | 8 | PASS |
| High | 5800 | -14.81 | 8 | PASS |




Note : For 108Mbps (Super A mode) at final test to get the worst-case emission at 108Mbps.

| Channel | Channel Frequency (MHz) | Final RF Power Level in 3KHz BW (dBm) | Maxmum Limit (dBm) | Pass / Fail |
|---------|-------------------------|---------------------------------------|--------------------|-------------|
| 6 | 2437 | -12.59 | 8 | PASS |

Note : For 108Mbps (Super G mode) at final test to get the worst-case emission at 108Mbps.




6.7 Photo of Power Spectral Density Measurement

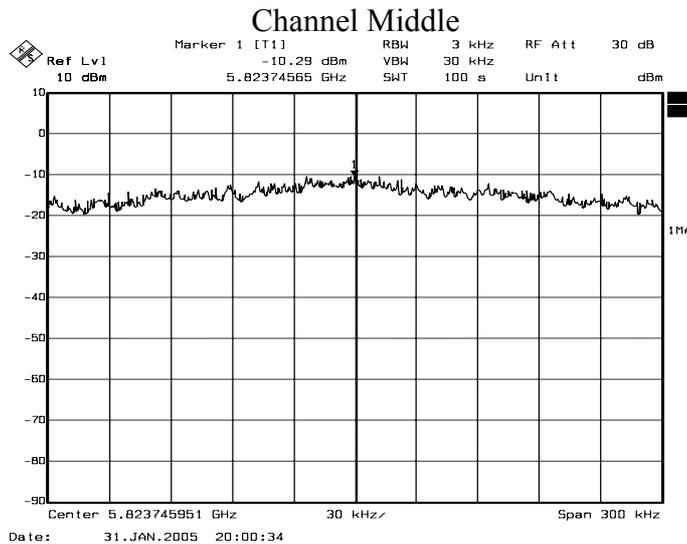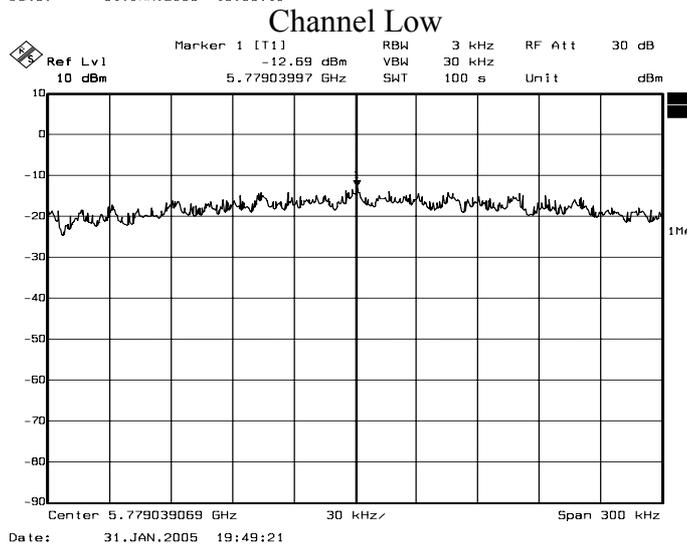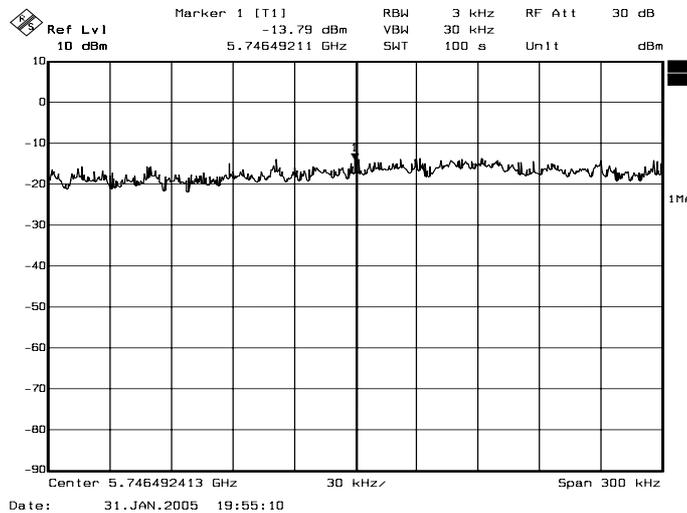


Channel High


Note: For normal 802.11a Mode

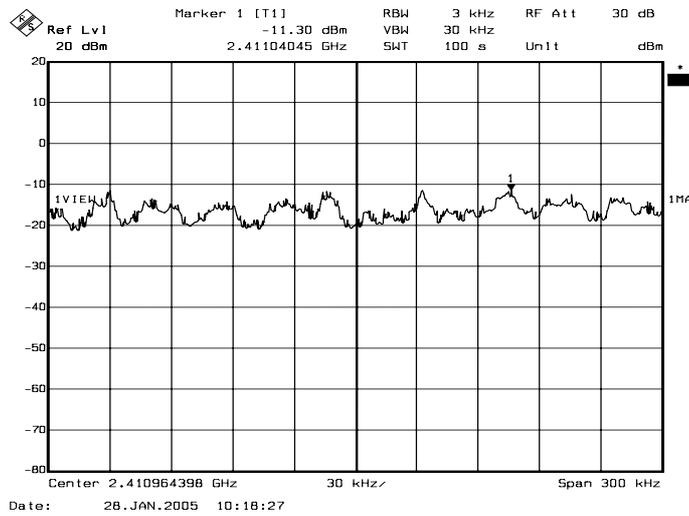

Channel 1

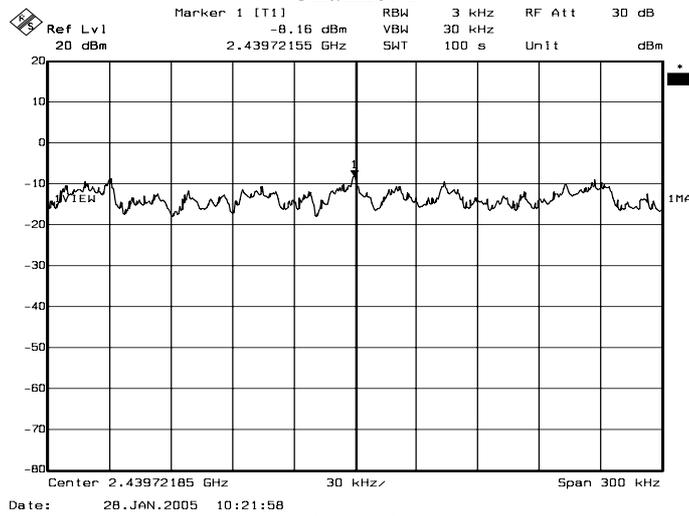


Channel 6

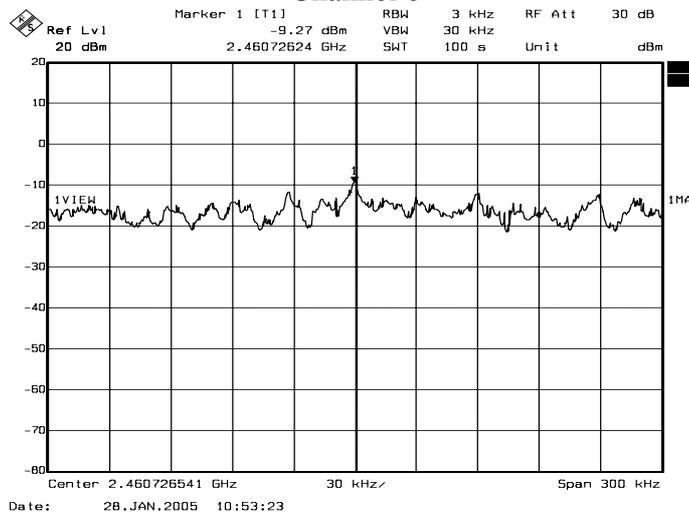


Channel 11


Note: For 802.11b Mode

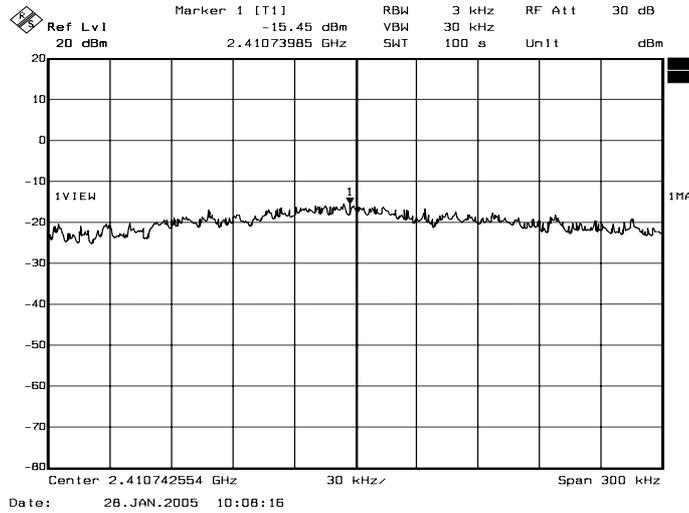

Channel 1

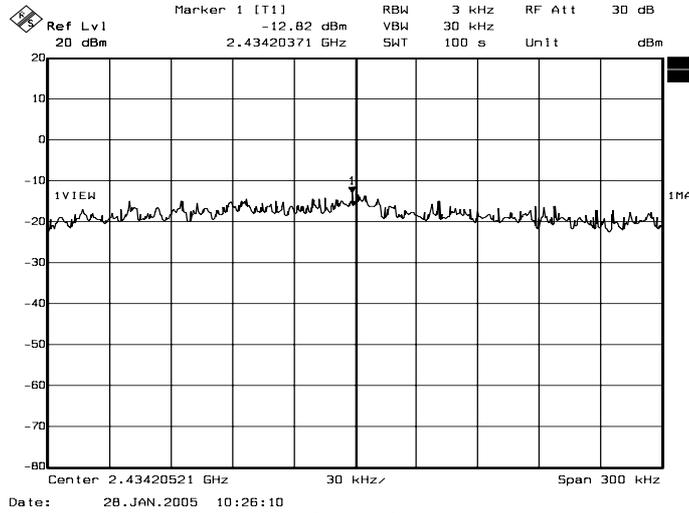


Channel 6

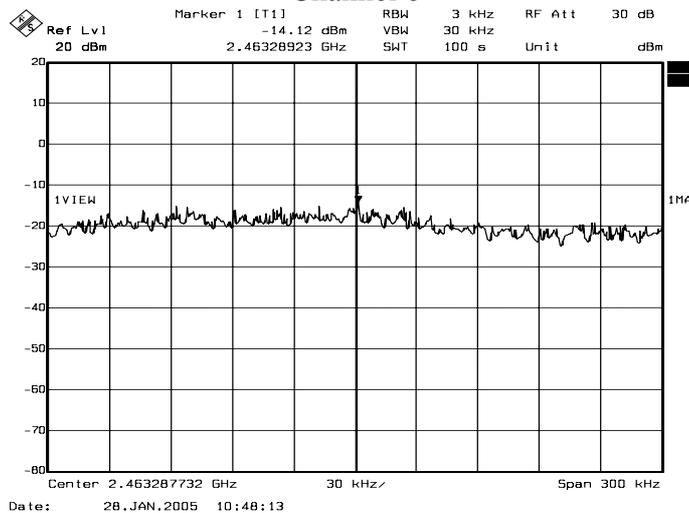


Channel 11

Note: For normal 802.11g Mode

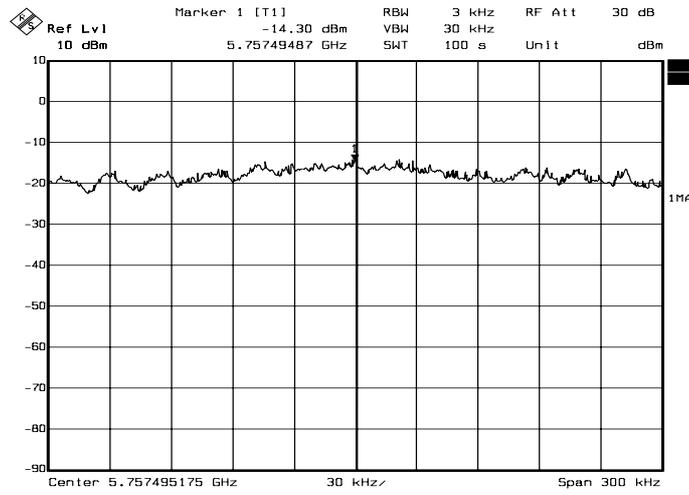


Channel Low

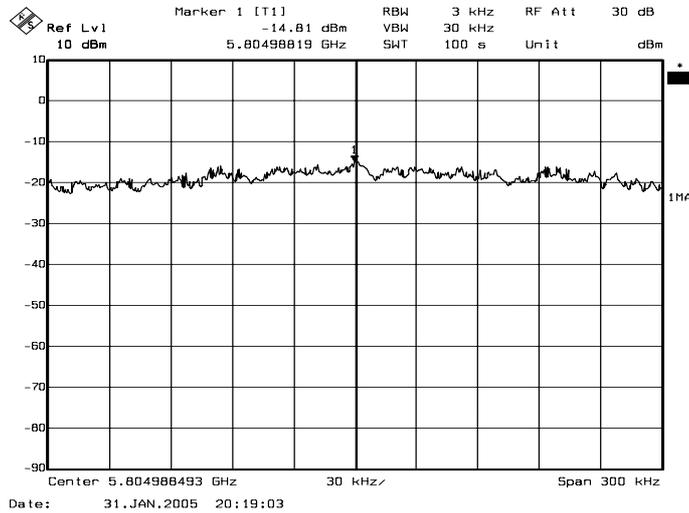

Channel High

Note: For Super A mode

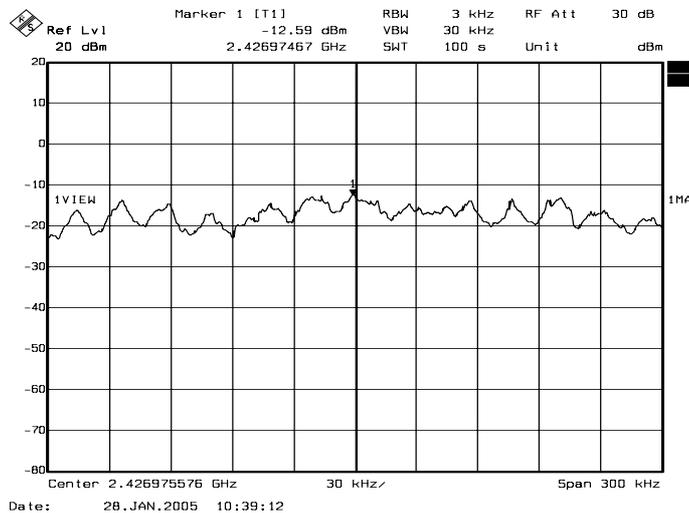

Channel 6

Note: For Super G mode



7. BAND EDGE MEASUREMENT


7.1 Test Equipments

| Description & Manufacturer | Model No. | Serial No. | Date Of Calibration | Calibration Period |
|--------------------------------------|-----------|------------|-----------------------|--------------------|
| ROHDE & SCHWARZ SPECTRUM ANALYZER | FSEK30 | 835253/002 | September 06, 2004 | 1 Year |

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 Test Setup



7.3 Limits of Band Edge Emissions Measurement

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.4 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW and VBW to 1MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW and VBW to 100kHz, to measure the conducted peak band edge.

7.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.82 dB.



7.6 Test Results

A. Conducted

Refer to 7.7 photo of out band Emission measurement

B. Radiated

| | | | |
|---------------------|---|----------------------------|-------------|
| Company | Netgear Incorporated | Test Date | 2005/01/26 |
| Product Name | 802.11a/g ProSafe Dual Band Wireless Access Point | Test By | Alan Fan |
| Model Name | WAG302 | TEMP & Humidity | 15.9°C, 83% |

For normal 802.11a mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

| Band edge Frequency (MHz) | | Measured radiated band edge field strength (dBuV/m) | | Radiated band edge field strength limit (dBuV/m) | | Test result |
|---------------------------------|----|---|----------|--|----------|----------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 5724.90 | PK | 70.10 | 82.92 | 79.81 | 93.05 | PASS |
| | AV | 56.92 | 70.49 | 71.92 | 85.15 | |
| 5850.01 | PK | 71.98 | 74.53 | 79.12 | 91.85 | PASS |
| | AV | 60.57 | 61.91 | 70.94 | 84.03 | |

Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)

For 802.11b mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

| Band edge Frequency (MHz) | | Measured radiated band edge field strength (dBuV/m) | | Radiated band edge field strength limit (dBuV/m) | | Test result |
|---------------------------------|----|---|----------|--|----------|----------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 2399.90 | PK | 59.18 | 75.68 | 79.54 | 94.22 | PASS |
| | AV | 49.68 | 65.38 | 72.75 | 87.32 | |
| 2483.50 | PK | 45.13 | 59.43 | 74.00 | 74.00 | PASS |
| | AV | 30.03 | 45.23 | 54.00 | 54.00 | |



Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)

For normal 802.11g mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

| Band edge Frequency (MHz) | | Measured radiated band edge field strength (dBuV/m) | | Radiated band edge field strength limit (dBuV/m) | | Test result |
|---------------------------|----|---|----------|--|----------|-------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 2399.90 | PK | 70.08 | 85.68 | 74.44 | 89.50 | PASS |
| | AV | 50.68 | 67.78 | 66.02 | 81.43 | |
| 2483.50 | PK | 50.13 | 69.73 | 74.00 | 74.00 | PASS |
| | AV | 34.53 | 51.73 | 54.00 | 54.00 | |

Antenna 2 (ANT24O5) : Antenna gain is 5dBi

Cable 1 (ACC-10314-01) 1.5m : Attenuation 1.1dB (For 2.4GHz)

For 802.11b mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

| Band edge Frequency (MHz) | | Measured radiated band edge field strength (dBuV/m) | | Radiated band edge field strength limit (dBuV/m) | | Test result |
|---------------------------|----|---|----------|--|----------|-------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 2399.90 | PK | 73.19 | 75.60 | 89.95 | 92.45 | PASS |
| | AV | 66.26 | 68.44 | 83.70 | 85.66 | |
| 2483.50 | PK | 66.50 | 64.81 | 74.00 | 74.00 | PASS |
| | AV | 49.31 | 51.24 | 54.00 | 54.00 | |

Antenna 2 (ANT24O5) : Antenna gain is 5dBi

Cable 1 (ACC-10314-01) 1.5m : Attenuation 1.1dB (For 2.4GHz)

For normal 802.11g mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

| Band edge Frequency (MHz) | | Measured radiated band edge field strength (dBuV/m) | | Radiated band edge field strength limit (dBuV/m) | | Test result |
|---------------------------|----|---|----------|--|----------|-------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 2399.90 | PK | 81.88 | 84.78 | 84.98 | 87.37 | PASS |
| | AV | 63.58 | 68.68 | 76.53 | 79.22 | |
| 2483.50 | PK | 66.24 | 65.90 | 74.00 | 74.00 | PASS |
| | AV | 52.83 | 52.83 | 54.00 | 54.00 | |



Antenna 4 (ANT24P12) : Antenna gain is 12dBi

Cable 2 (ACC-10314-04) 10m : Attenuation 6.1dB (For 2.4GHz)

For 802.11b mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

| Band edge Frequency (MHz) | | Measured radiated band edge field strength (dBuV/m) | | Radiated band edge field strength limit (dBuV/m) | | Test result |
|---------------------------|----|---|----------|--|----------|-------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 2399.90 | PK | 62.63 | 64.58 | 74.00 | 75.91 | PASS |
| | AV | 49.36 | 54.22 | 54.00 | 69.95 | |
| 2483.50 | PK | 62.04 | 61.85 | 74.00 | 74.00 | PASS |
| | AV | 49.31 | 49.31 | 54.00 | 54.00 | |

Antenna 4 (ANT24P12) : Antenna gain is 12dBi

Cable 2 (ACC-10314-04) 10m : Attenuation 6.1dB (For 2.4GHz)

For normal 802.11g mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

| Band edge Frequency (MHz) | | Measured radiated band edge field strength (dBuV/m) | | Radiated band edge field strength limit (dBuV/m) | | Test result |
|---------------------------|----|---|----------|--|----------|-------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 2399.90 | PK | 52.06 | 70.37 | 74.00 | 74.00 | PASS |
| | AV | 39.36 | 51.40 | 54.00 | 61.89 | |
| 2483.50 | PK | 60.07 | 61.91 | 74.00 | 74.00 | PASS |
| | AV | 49.31 | 49.31 | 54.00 | 54.00 | |

Antenna 5 (ANT24D18) : Antenna gain is 18dBi ;

Cable 3 (ACC-10314-05) 30m : Attenuation 18dB (For 2.4GHz)

For 802.11b mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

| Band edge Frequency (MHz) | | Measured radiated band edge field strength (dBuV/m) | | Radiated band edge field strength limit (dBuV/m) | | Test result |
|---------------------------|----|---|----------|--|----------|-------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 2399.90 | PK | 61.88 | 66.61 | 74.00 | 81.01 | PASS |
| | AV | 49.36 | 56.40 | 57.04 | 73.89 | |
| 2483.50 | PK | 60.61 | 61.52 | 74.00 | 74.00 | PASS |
| | AV | 46.83 | 49.32 | 54.00 | 54.00 | |



Antenna 5 (ANT24D18) : Antenna gain is 18dBi ;
 Cable 3 (ACC-10314-05) 30m : Attenuation 18dB (For 2.4GHz)
 For normal 802.11g mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

| Band edge Frequency (MHz) | | Measured radiated band edge field strength (dBuV/m) | | Radiated band edge field strength limit (dBuV/m) | | Test result |
|---------------------------|----|---|----------|--|----------|-------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 2399.90 | PK | 50.88 | 71.88 | 74.00 | 75.12 | PASS |
| | AV | 37.28 | 53.88 | 54.00 | 67.04 | |
| 2483.50 | PK | 60.88 | 61.81 | 74.00 | 74.00 | PASS |
| | AV | 49.31 | 49.31 | 54.00 | 54.00 | |

For Super A mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

| Band edge Frequency (MHz) | | Measured radiated band edge field strength (dBuV/m) | | Radiated band edge field strength limit (dBuV/m) | | Test result |
|---------------------------|----|---|----------|--|----------|-------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 5724.90 | PK | 72.76 | 79.94 | 85.17 | 88.71 | PASS |
| | AV | 60.21 | 69.45 | 75.16 | 80.63 | |
| 5850.01 | PK | 72.82 | 73.32 | 76.32 | 89.82 | PASS |
| | AV | 60.57 | 60.57 | 67.64 | 80.60 | |

Super G mode, there are only one Antenna 1 (SNW0007A 1/2λ Dipole) : Antenna gain is 5dBi

For Super G mode


Refer to the section 3.6, the measured radiated band edge emissions are listed below :

| Band edge Frequency (MHz) | | Measured radiated band edge field strength (dBuV/m) | | Radiated band edge field strength limit (dBuV/m) | | Test result |
|---------------------------|----|---|----------|--|----------|-------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 2399.90 | PK | 60.88 | 75.58 | 75.62 | 90.79 | PASS |
| | AV | 45.68 | 60.78 | 66.20 | 81.87 | |
| 2483.50 | PK | 48.63 | 63.03 | 74.00 | 74.00 | PASS |
| | AV | 32.53 | 49.43 | 54.00 | 54.00 | |

Note : Radiated band edge field strength is measured according to measurement procedure ANSI C63.4-2003.




7.7 Photo of Band edge Measurement

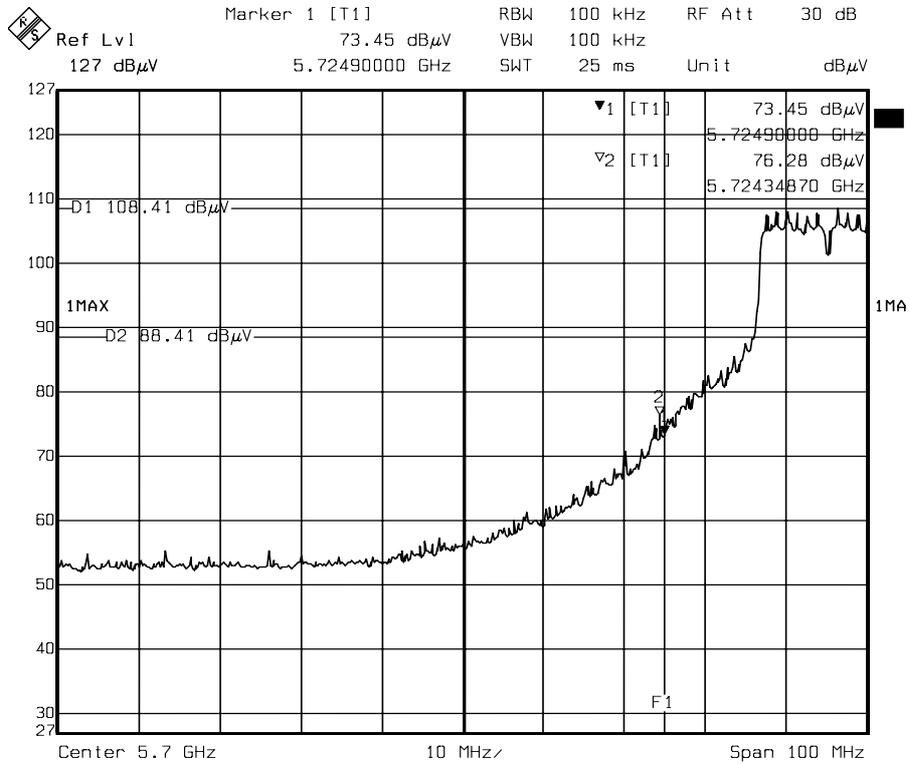

Date: 31.JAN.2005 19:04:00


Lower Band edge (Peak)

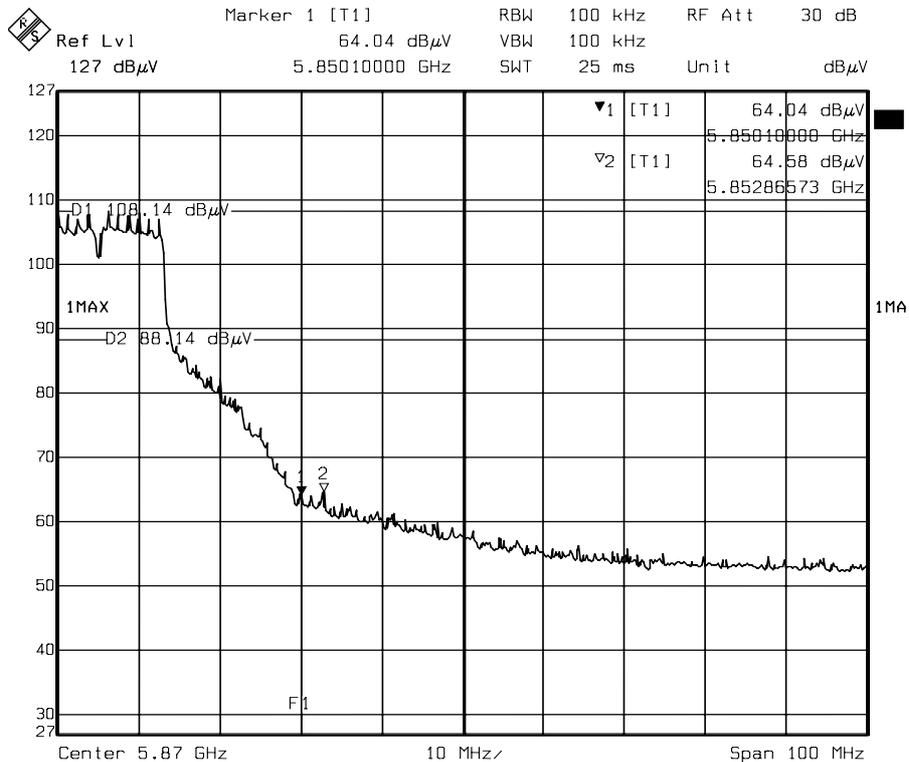


Date: 31.JAN.2005 19:08:15

Higher Band edge (Peak)

Note: For normal 802.11a Mode

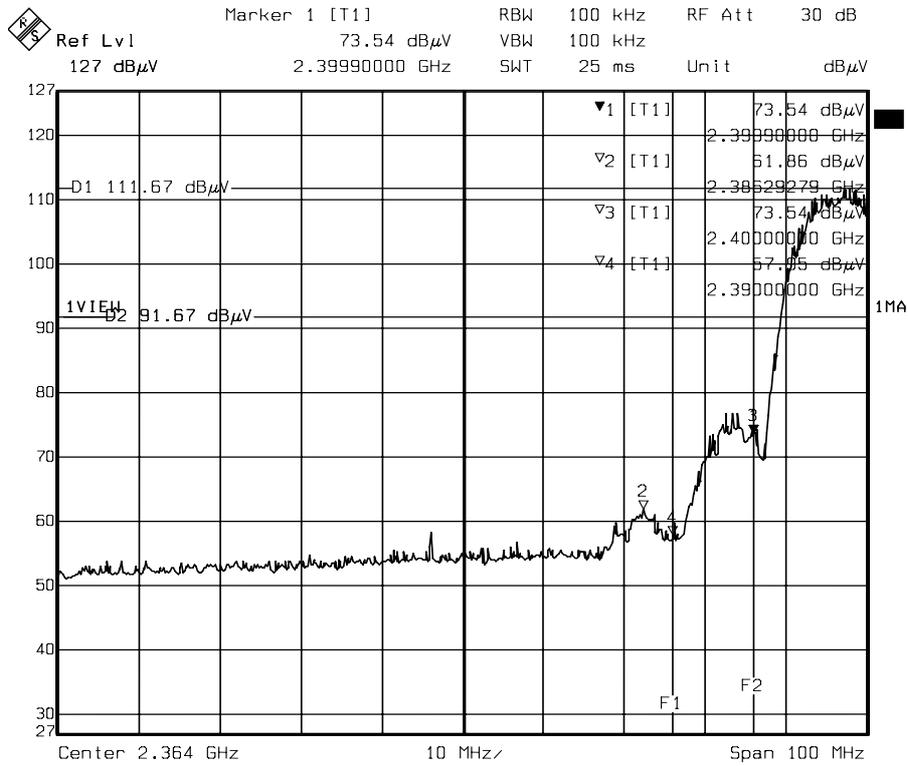


Lower Band edge (Peak)

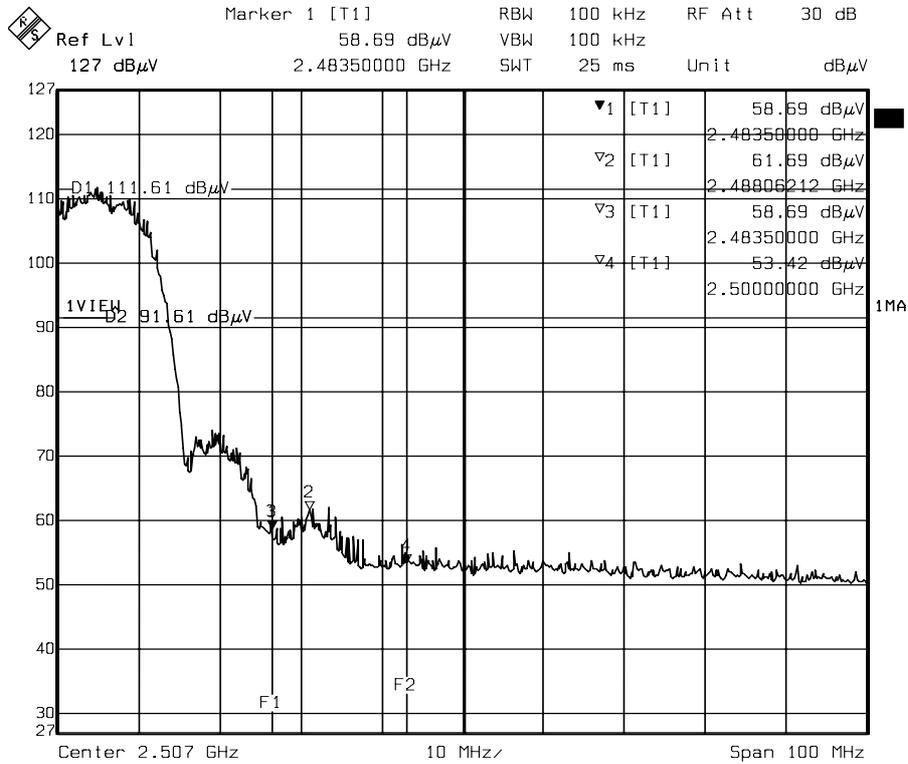


Higher Band edge (Peak)

Note: For 802.11b Mode

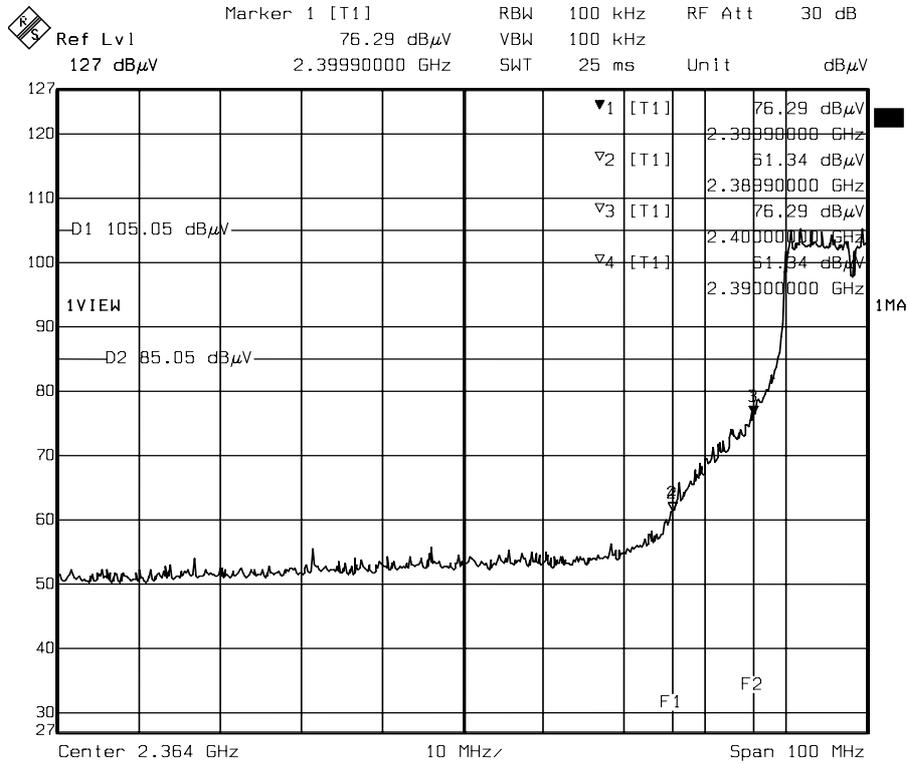

Date: 28.JAN.2005 13:05:08


Lower Band edge (Peak)

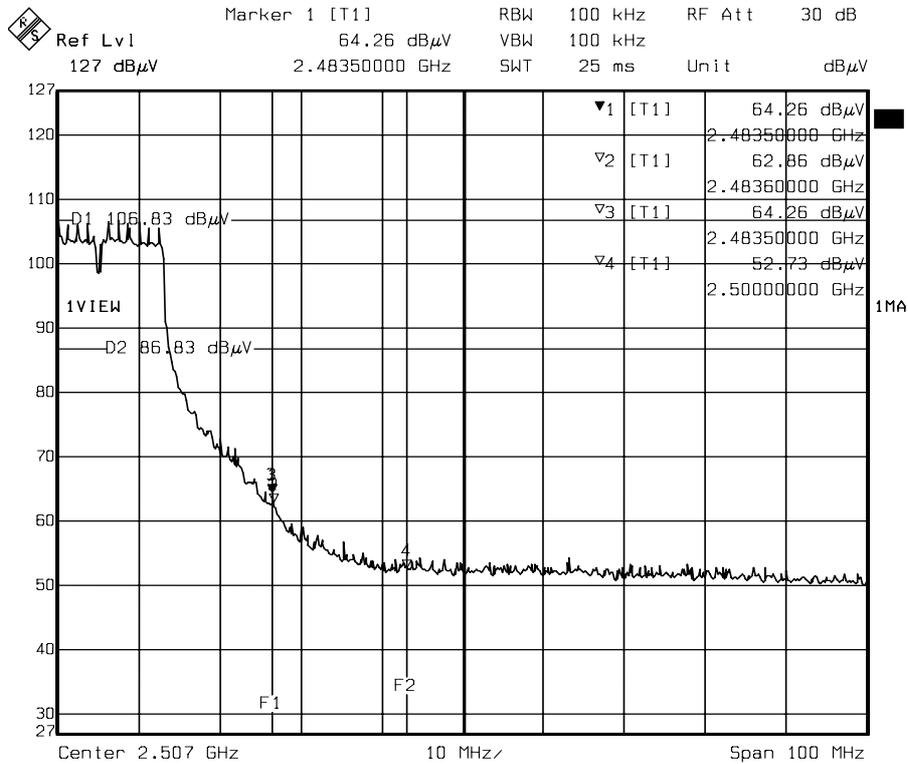

Date: 28.JAN.2005 13:01:13


Higher Band edge (Peak)

Note: For normal 802.11g Mode

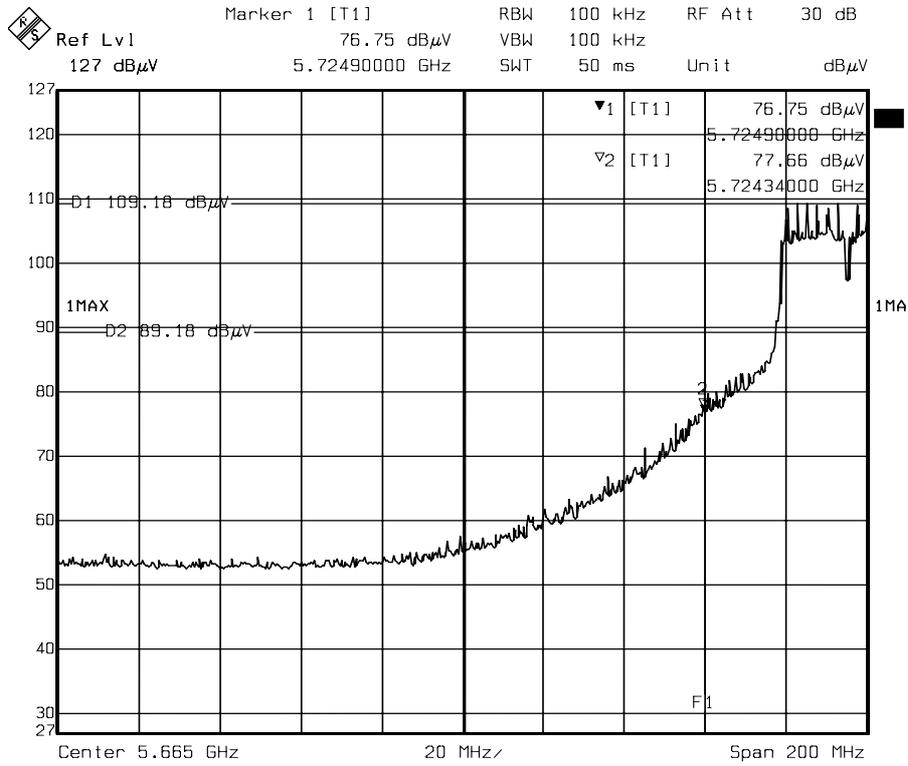

Date: 31.JAN.2005 20:59:21


Lower Band edge (Peak)

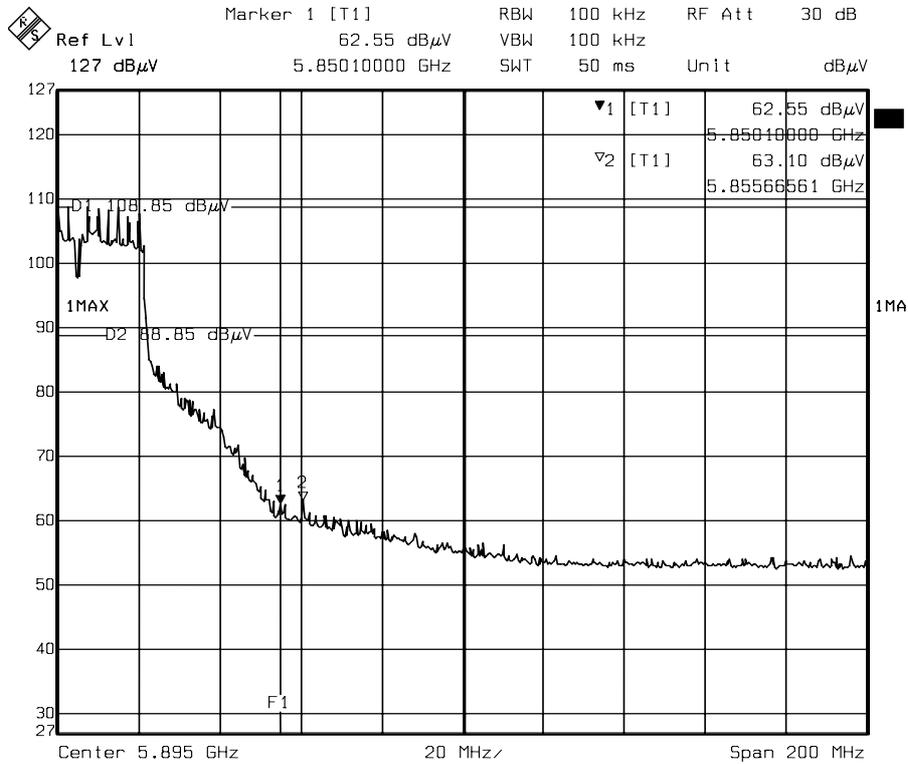

Date: 31.JAN.2005 21:13:18


Higher Band edge (Peak)

Note: For Super A mode

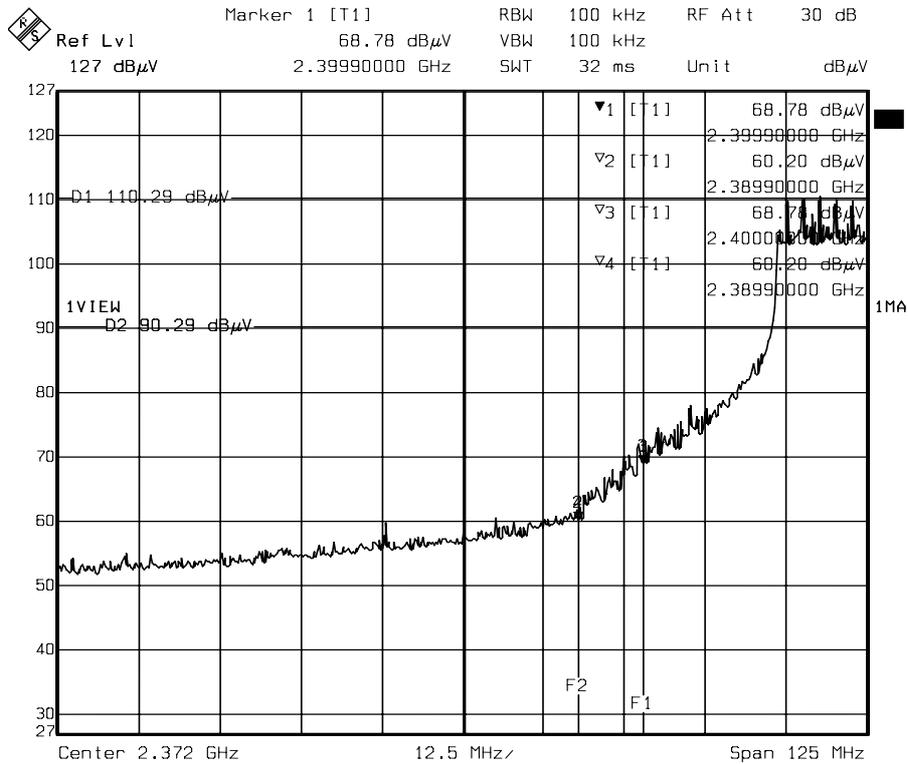

Date: 28.JAN.2005 13:13:53

Higher Band edge (Peak)

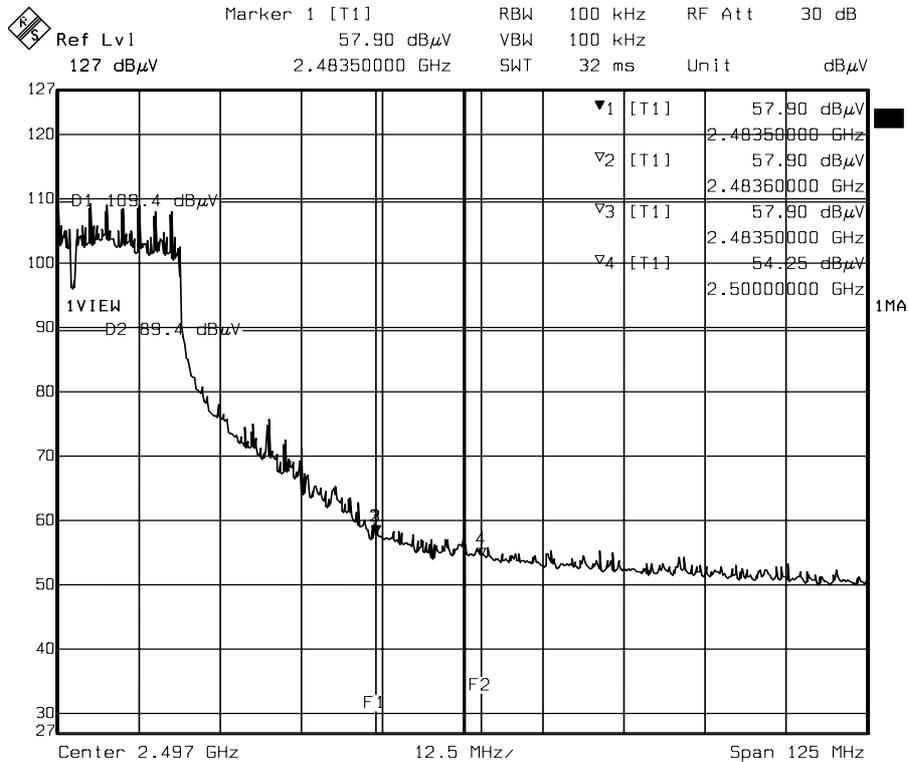

Date: 28.JAN.2005 13:16:28

Higher Band edge (Peak)

Note: For Super G mode



8. ANTENNA REQUIREMENT

8.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.2 Antenna Connected Construction

The antenna used for this product is Dipole antenna. The antenna connector is reverse SMA connector and the peak Gain of this antenna is only 5dBi at 5GHz.

The antenna (1) used for this product is Dipole antenna. The antenna connector is reverse SMA connector and the peak Gain of this antenna is only 5dBi at 2.4GHz.

The antenna (2) used in this product is Ceiling stand ANT24O5 antenna. And the maximum Gain of the antenna is only 5dBi at 2.4GHz. The Antenna connector is reverse SMA connector.

The antenna (4) used in this product is GP Omni directional stand ANT24P12 antenna. And the maximum Gain of the antenna is only 12dBi at 2.4GHz. The Antenna connector is special connector; with a adapter near antenna connector is special N-type connector and near EUT is reverse SMA connector.

The antenna (5) used in this product is Patch stand ANT24D18 antenna. And the maximum Gain of the antenna is only 18dBi at 2.4GHz. The Antenna connector is special connector; with a adapter near antenna connector is special N-type connector and near EUT is reverse SMA connector.



9. RF EXPOSURE EVALUATION

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Average Time |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------|
| (A) Limits for Occupational / Control Exposures | | | | |
| 300-1,500 | -- | -- | F/300 | 6 |
| 1,500-100,000 | -- | -- | 5 | 6 |
| (B) Limits for General Population / Uncontrol Exposures | | | | |
| 300-1,500 | -- | -- | F/1500 | 6 |
| 1,500-100,000 | -- | -- | 1 | 30 |

9.1 Friis Formula

Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

r = distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance “r” where the MPE limit is reached.

9.2 EUT Operating Condition

A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.



9.3 Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

9.3.1 Antenna Gain

1. Antenna Gain (5GHz) : The maximum Gain measured in fully anechoic chamber is 5dBi linear scale.
2. Antenna (1) Gain (2.4GHz) : The maximum Gain measured in fully anechoic chamber is 5dBi linear scale.
3. Antenna (2) Gain (2.4GHz) : The maximum Gain measured in fully anechoic chamber is 5dBi linear scale.
4. Antenna (4) Gain (2.4GHz) : The maximum Gain measured in fully anechoic chamber is 12dBi linear scale.
5. Antenna (5) Gain (2.4GHz) : The maximum Gain measured in fully anechoic chamber is 18dBi linear scale.

9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance

For normal 802.11a mode(6Mbps)

| Channel | Channel Frequency (MHz) | Output Power to Antenna (dBm) | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|---------|-------------------------|-------------------------------|---|------------------------------|
| Low | 5745 | 19.90 | 0.061479 | 1 |
| Middle | 5785 | 19.73 | 0.059119 | 1 |
| High | 5825 | 19.53 | 0.056459 | 1 |

Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)

For 802.11b mode(11Mbps)

| Channel | Channel Frequency (MHz) | Output Power to Antenna (dBm) | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|---------|-------------------------|-------------------------------|---|------------------------------|
| 1 | 2412 | 19.50 | 0.056070 | 1 |
| 6 | 2437 | 22.07 | 0.101328 | 1 |
| 11 | 2462 | 19.48 | 0.055812 | 1 |



Antenna 1 (SNW0007A) : Antenna gain is 5dBi (For 2.4GHz)
For normal 802.11g mode(6Mbps)

| Channel | Channel Frequency (MHz) | Output Power to Antenna (dBm) | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|---------|-------------------------|-------------------------------|---|------------------------------|
| 1 | 2412 | 17.03 | 0.031749 | 1 |
| 6 | 2437 | 20.22 | 0.052569 | 1 |
| 11 | 2462 | 17.99 | 0.039603 | 1 |

Antenna 2 (ANT24O5) : Antenna gain is 5dBi ;
Cable 1 (ACC-10314-01) 1.5m : Attenuation 1.1dB (For 2.4GHz)
For 802.11b mode(11Mbps)

| Channel | Channel Frequency (MHz) | Output Power (max) (dBm) | Antenna Cable loss (dB) | Input Power to Antenna (dBm) | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|---------|-------------------------|--------------------------|-------------------------|------------------------------|---|------------------------------|
| 1 | 2412 | 19.50 | 1.1 | 18.40 | 0.043524 | 1 |
| 6 | 2437 | 22.07 | 1.1 | 20.97 | 0.078656 | 1 |
| 11 | 2462 | 19.48 | 1.1 | 18.38 | 0.043324 | 1 |

Antenna 2 (ANT24O5) : Antenna gain is 5dBi ;
Cable 1 (ACC-10314-01) 1.5m : Attenuation 1.1dB (For 2.4GHz)
For normal 802.11g mode(6Mbps)

| Channel | Channel Frequency (MHz) | Output Power (max) (dBm) | Antenna Cable loss (dB) | Input Power to Antenna (dBm) | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|---------|-------------------------|--------------------------|-------------------------|------------------------------|---|------------------------------|
| 1 | 2412 | 17.03 | 1.1 | 15.93 | 0.024645 | 1 |
| 6 | 2437 | 20.22 | 1.1 | 19.12 | 0.051372 | 1 |
| 11 | 2462 | 17.99 | 1.1 | 16.89 | 0.030742 | 1 |

Antenna 4 (ANT24P12) : Antenna gain is 12dBi ;
Cable 2 (ACC-10314-04) 10m : Attenuation 6.1dB (For 2.4GHz)
For 802.11b mode(11Mbps)

| Channel | Channel Frequency (MHz) | Output Power (max) (dBm) | Antenna Cable loss (dB) | Input Power to Antenna (dBm) | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|---------|-------------------------|--------------------------|-------------------------|------------------------------|---|------------------------------|
| 1 | 2412 | 19.50 | 6.1 | 13.40 | 0.068981 | 1 |
| 6 | 2437 | 22.07 | 6.1 | 15.97 | 0.124661 | 1 |
| 11 | 2462 | 19.48 | 6.1 | 13.38 | 0.068664 | 1 |



Antenna 4 (ANT24P12) : Antenna gain is 12dBi ;
 Cable 2 (ACC-10314-04) 10m : Attenuation 6.1dB (For 2.4GHz)
 For normal 802.11g mode(6Mbps)

| Channel | Channel Frequency (MHz) | Output Power (max) (dBm) | Antenna Cable loss (dB) | Input Power to Antenna (dBm) | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|---------|-------------------------|--------------------------|-------------------------|------------------------------|---|------------------------------|
| 1 | 2412 | 17.03 | 6.1 | 10.93 | 0.039060 | 1 |
| 6 | 2437 | 20.22 | 6.1 | 14.12 | 0.081420 | 1 |
| 11 | 2462 | 17.99 | 6.1 | 11.99 | 0.049857 | 1 |

Antenna 5 (ANT24D18) : Antenna gain is 18dBi ;
 Cable 3 (ACC-10314-05) 30m : Attenuation 18dB (For 2.4GHz)
 For 802.11b mode(11Mbps)

| Channel | Channel Frequency (MHz) | Output Power (max) (dBm) | Antenna Cable loss (dB) | Input Power to Antenna (dBm) | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|---------|-------------------------|--------------------------|-------------------------|------------------------------|---|------------------------------|
| 1 | 2412 | 19.50 | 18 | 1.50 | 0.017731 | 1 |
| 6 | 2437 | 22.07 | 18 | 4.07 | 0.032043 | 1 |
| 11 | 2462 | 19.48 | 18 | 1.48 | 0.017649 | 1 |

Antenna 5 (ANT24D18) : Antenna gain is 18dBi ;
 Cable 3 (ACC-10314-05) 30m : Attenuation 18dB (For 2.4GHz)
 For normal 802.11g mode(6Mbps)

| Channel | Channel Frequency (MHz) | Output Power (max) (dBm) | Antenna Cable loss (dB) | Input Power to Antenna (dBm) | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|---------|-------------------------|--------------------------|-------------------------|------------------------------|---|------------------------------|
| 1 | 2412 | 17.03 | 18 | -0.97 | 0.010040 | 1 |
| 6 | 2437 | 20.22 | 18 | 2.22 | 0.020928 | 1 |
| 11 | 2462 | 17.99 | 18 | -0.01 | 0.012524 | 1 |

For Super A mode(108Mbps)

| Channel | Channel Frequency (MHz) | Output Power to Antenna (dBm) | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|---------|-------------------------|-------------------------------|---|------------------------------|
| Low | 5760 | 19.63 | 0.057774 | 1 |
| High | 5800 | 19.31 | 0.053670 | 1 |



Super G mode, there are only one Antenna 1 (SNW0007A 1/2λ Dipole) : Antenna gain is 5dBi.
For Super G mode (108Mbps)

| Channel | Channel Frequency (MHz) | Output Power to Antenna (dBm) | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|---------|-------------------------|-------------------------------|---|------------------------------|
| 6 | 2437 | 20.61 | 0.072399 | 1 |

Note : The power density Pd (4th column) at a distance of 20cm calculated from the friis transmission formula is far below the limit of 1 mW/cm² . The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.