


EUT : WGR-615V(new)
 Power : 110V 60Hz(linear)
 Test Mode : 802.11g CH L0
 Memo :


Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

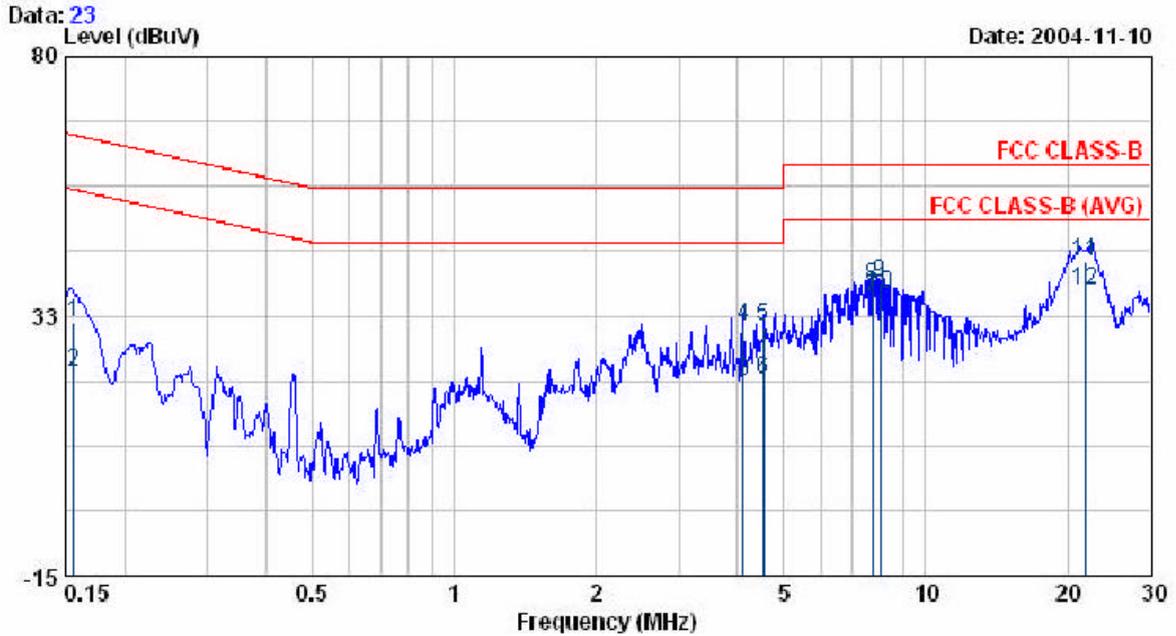

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.156	30.81	0.40	31.21	65.68	-34.47	QP
0.156	21.84	0.40	22.24	55.68	-33.44	AVERAGE
4.099	20.00	0.58	20.58	46.00	-25.42	AVERAGE
4.099	29.84	0.58	30.42	56.00	-25.58	QP
4.543	30.00	0.59	30.59	56.00	-25.41	QP
4.543	20.37	0.59	20.96	46.00	-25.04	AVERAGE
7.720	35.20	0.68	35.88	50.00	-14.12	AVERAGE
7.720	37.35	0.68	38.03	60.00	-21.97	QP
8.008	37.78	0.69	38.47	60.00	-21.54	QP
8.008	35.66	0.69	36.35	50.00	-13.65	AVERAGE
21.789	41.42	0.92	42.34	60.00	-17.66	QP
21.789	36.42	0.92	37.34	50.00	-12.66	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(linear)
 Test Mode : 802.11g CH L0
 Memo :


Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

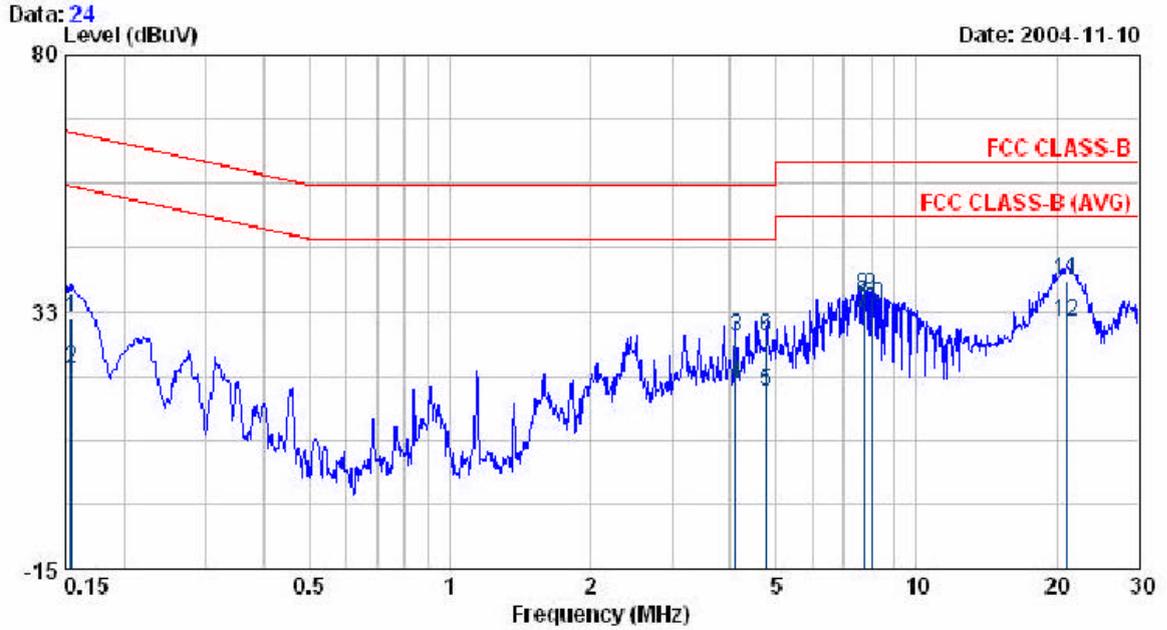

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.155	30.72	0.40	31.12	65.74	-34.62	QP
0.155	21.60	0.40	22.00	55.74	-33.74	AVERAGE
4.100	27.31	0.58	27.89	56.00	-28.11	QP
4.100	18.42	0.58	19.00	46.00	-27.00	AVERAGE
4.780	17.08	0.58	17.66	46.00	-28.34	AVERAGE
4.780	27.25	0.58	27.83	56.00	-28.17	QP
7.723	31.87	0.61	32.48	50.00	-17.52	AVERAGE
7.723	34.79	0.61	35.40	60.00	-24.60	QP
8.011	34.88	0.61	35.49	60.00	-24.51	QP
8.011	33.11	0.61	33.72	50.00	-16.28	AVERAGE
20.998	37.34	0.96	38.30	60.00	-21.70	QP
20.998	29.50	0.96	30.46	50.00	-19.54	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(linear)
 Test Mode : 802.11g CH MID
 Memo :


Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

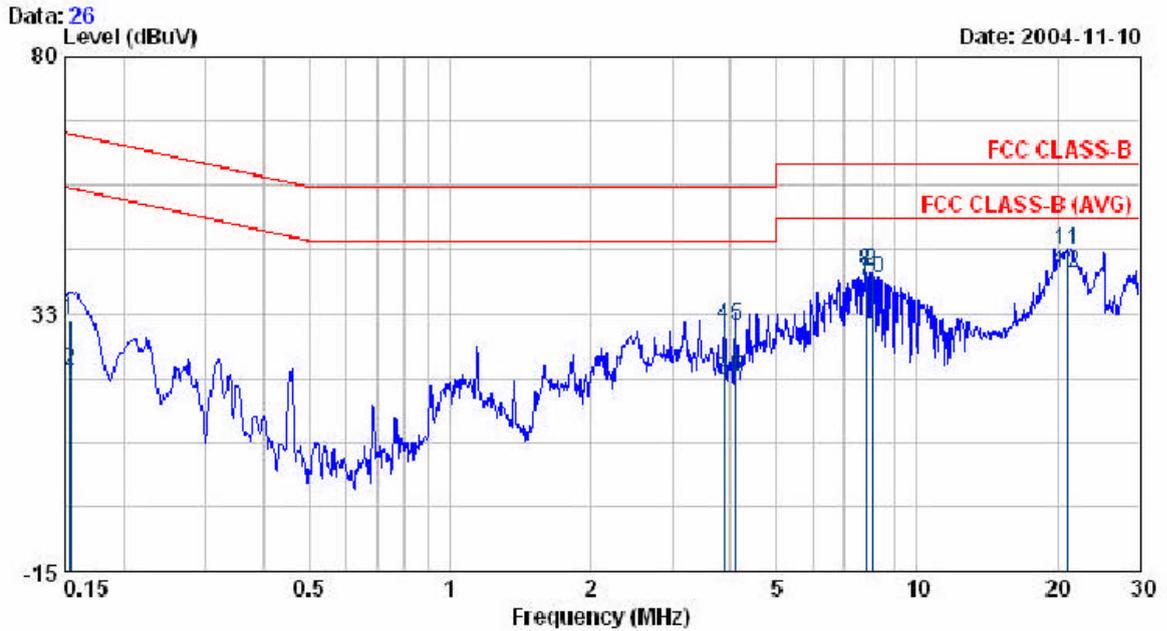

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.154	31.03	0.40	31.43	65.79	-34.36	QP
0.154	21.41	0.40	21.81	55.79	-33.98	AVERAGE
3.863	19.62	0.57	20.19	46.00	-25.81	AVERAGE
3.863	29.71	0.57	30.28	56.00	-25.72	QP
4.105	29.81	0.58	30.39	56.00	-25.61	QP
4.105	20.24	0.58	20.82	46.00	-25.18	AVERAGE
7.797	37.88	0.68	38.56	50.00	-11.44	AVERAGE
7.797	39.62	0.68	40.30	60.00	-19.70	QP
8.014	39.79	0.69	40.48	60.00	-19.52	QP
8.014	38.26	0.69	38.95	50.00	-11.05	AVERAGE
21.010	43.20	0.90	44.10	60.00	-15.90	QP
21.010	39.10	0.90	40.00	50.00	-10.00	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz (linear)
 Test Mode : 802.11g CH MID
 Memo :


Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

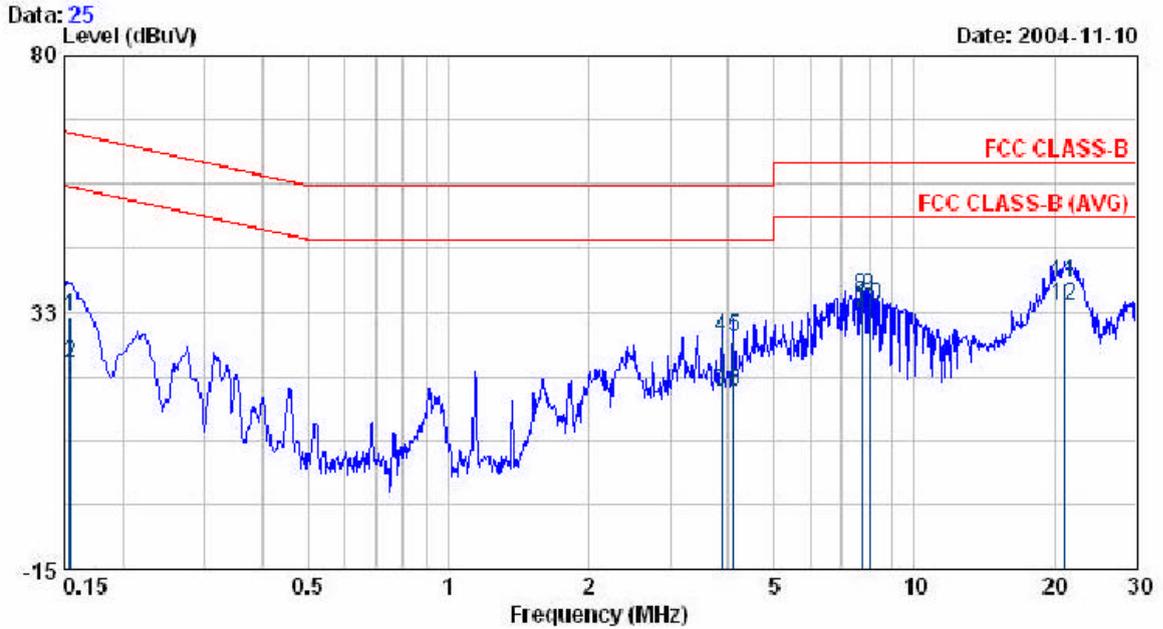

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.155	31.10	0.40	31.50	65.74	-34.24	QP
0.155	22.67	0.40	23.07	55.74	-32.67	AVERAGE
3.862	17.20	0.57	17.77	46.00	-28.23	AVERAGE
3.862	27.36	0.57	27.93	56.00	-28.07	QP
4.105	27.36	0.58	27.94	56.00	-28.06	QP
4.105	17.15	0.58	17.73	46.00	-28.27	AVERAGE
7.725	31.81	0.61	32.42	50.00	-17.58	AVERAGE
7.725	34.91	0.61	35.52	60.00	-24.48	QP
8.012	35.02	0.61	35.63	60.00	-24.37	QP
8.012	33.05	0.61	33.66	50.00	-16.34	AVERAGE
21.005	36.83	0.96	37.79	60.00	-22.21	QP
21.005	32.86	0.96	33.82	50.00	-16.18	AVERAGE


EUT : WGR-615V(new)
 Power : 110W 60Hz(linear)
 Test Mode : 802.11g CH HI
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

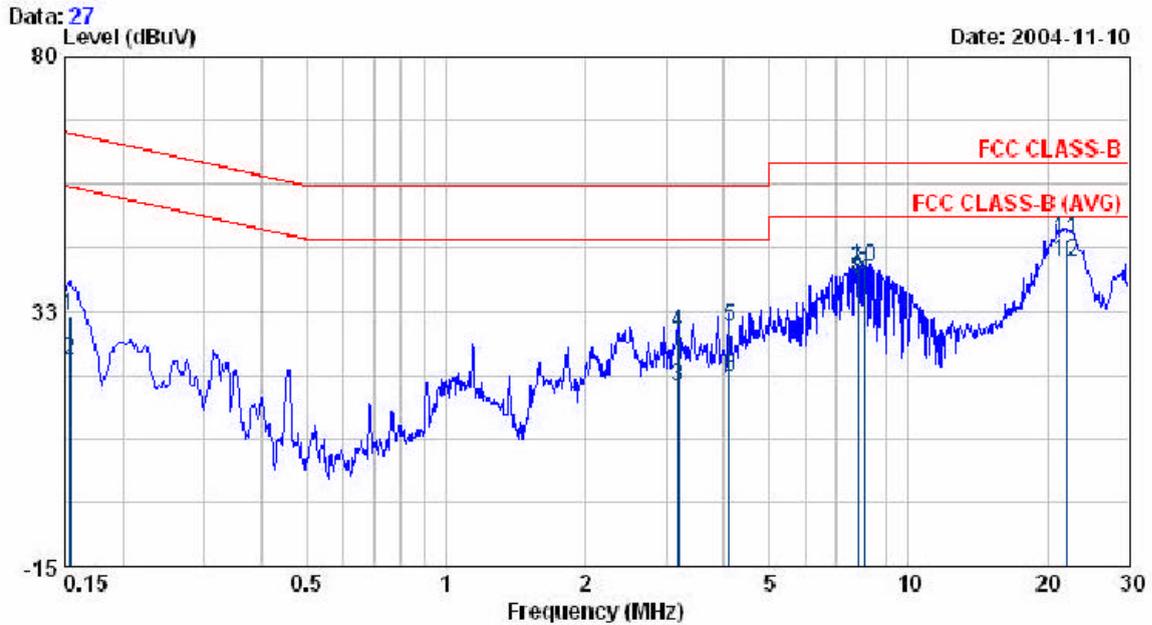

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.154	31.32	0.40	31.72	65.78	-34.06	QP
0.154	22.90	0.40	23.30	55.78	-32.48	AVERAGE
3.181	17.90	0.56	18.46	46.00	-27.54	AVERAGE
3.181	27.93	0.56	28.49	56.00	-27.51	QP
4.104	29.08	0.58	29.66	56.00	-26.34	QP
4.104	19.65	0.58	20.23	46.00	-25.77	AVERAGE
7.799	39.60	0.68	40.28	60.00	-19.72	QP
7.799	37.87	0.68	38.55	50.00	-11.45	AVERAGE
8.015	38.49	0.69	39.18	50.00	-10.82	AVERAGE
8.015	39.95	0.69	40.64	60.00	-19.36	QP
21.950	44.81	0.92	45.73	60.00	-14.27	QP
21.950	40.85	0.92	41.77	50.00	-8.23	AVERAGE

EUT	: WGR-615V(new)	Pol/Phase	: LINE
Power	: 110V 60Hz(linear)	Temperature	: 26 °C
Test Mode	: 802.11g CH HI	Humidity	: 58 %
Memo	:		

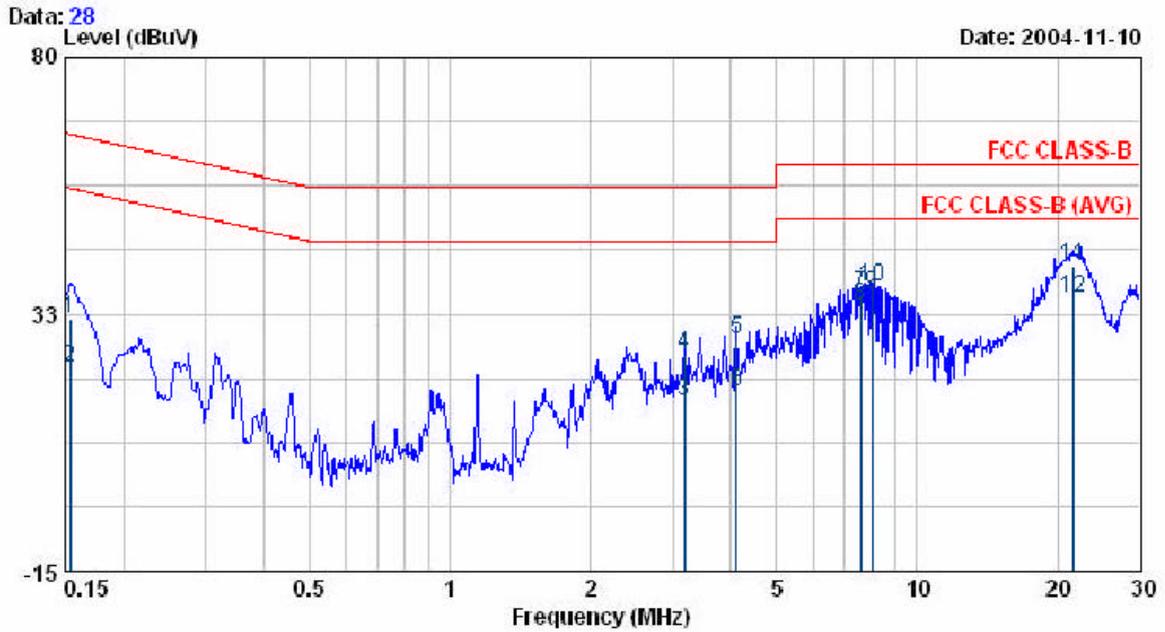


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.154	31.10	0.40	31.50	65.77	-34.27	QP
0.154	22.08	0.40	22.48	55.77	-33.29	AVERAGE
3.181	15.80	0.56	16.36	46.00	-29.64	AVERAGE
3.181	24.58	0.56	25.14	56.00	-30.86	QP
4.100	27.08	0.58	27.66	56.00	-28.34	QP
4.100	17.54	0.58	18.12	46.00	-27.88	AVERAGE
7.582	35.56	0.61	36.17	60.00	-23.83	QP
7.582	33.46	0.61	34.07	50.00	-15.93	AVERAGE
8.015	35.46	0.61	36.07	50.00	-13.93	AVERAGE
8.015	36.91	0.61	37.52	60.00	-22.48	QP
21.589	40.35	1.01	41.36	60.00	-18.64	QP
21.589	34.59	1.01	35.60	50.00	-14.40	AVERAGE

Test mode 2: Adaptor Model: MU18-2120150-A1

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11b CH L0
 Memo :


Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

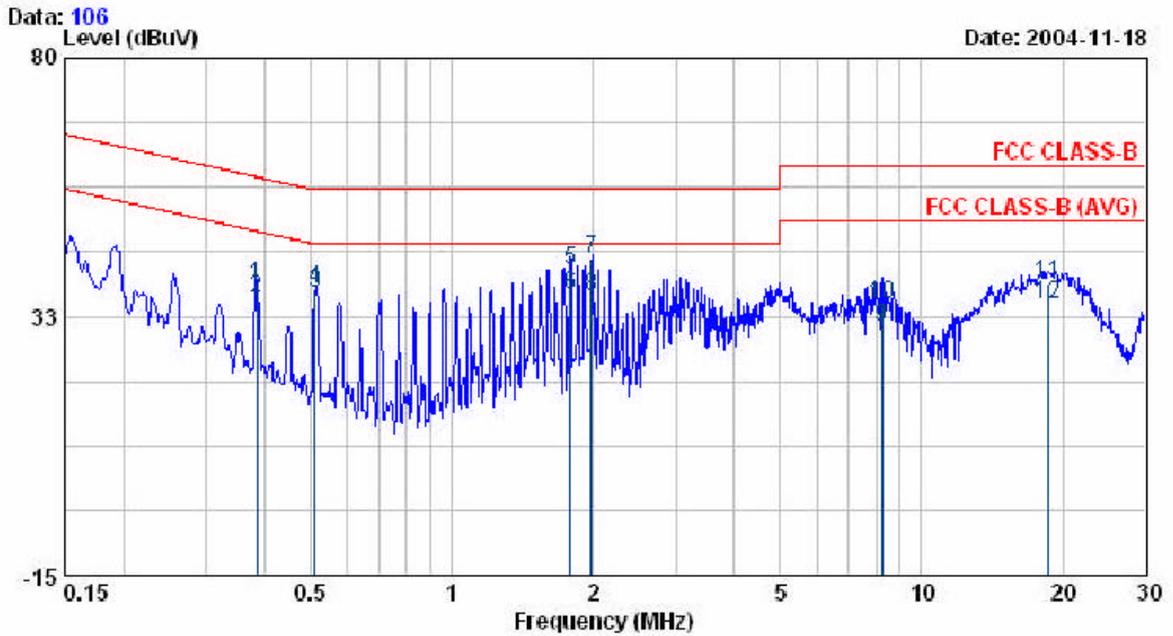

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.384	37.88	0.46	38.34	58.19	-19.85	QP
0.384	35.26	0.46	35.72	48.19	-12.47	AVERAGE
0.511	36.32	0.47	36.79	46.00	-9.21	AVERAGE
0.511	37.14	0.47	37.61	56.00	-18.39	QP
1.791	40.62	0.54	41.16	56.00	-14.84	QP
1.791	36.04	0.54	36.58	46.00	-9.42	AVERAGE
1.983	42.53	0.54	43.07	56.00	-12.93	QP
1.983	35.77	0.54	36.31	46.00	-9.69	AVERAGE
8.262	29.90	0.69	30.59	50.00	-19.41	AVERAGE
8.262	33.98	0.69	34.67	60.00	-25.33	QP
18.614	37.63	0.84	38.47	60.00	-21.53	QP
18.614	33.90	0.84	34.74	50.00	-15.26	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11b CH L0
 Memo :


Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

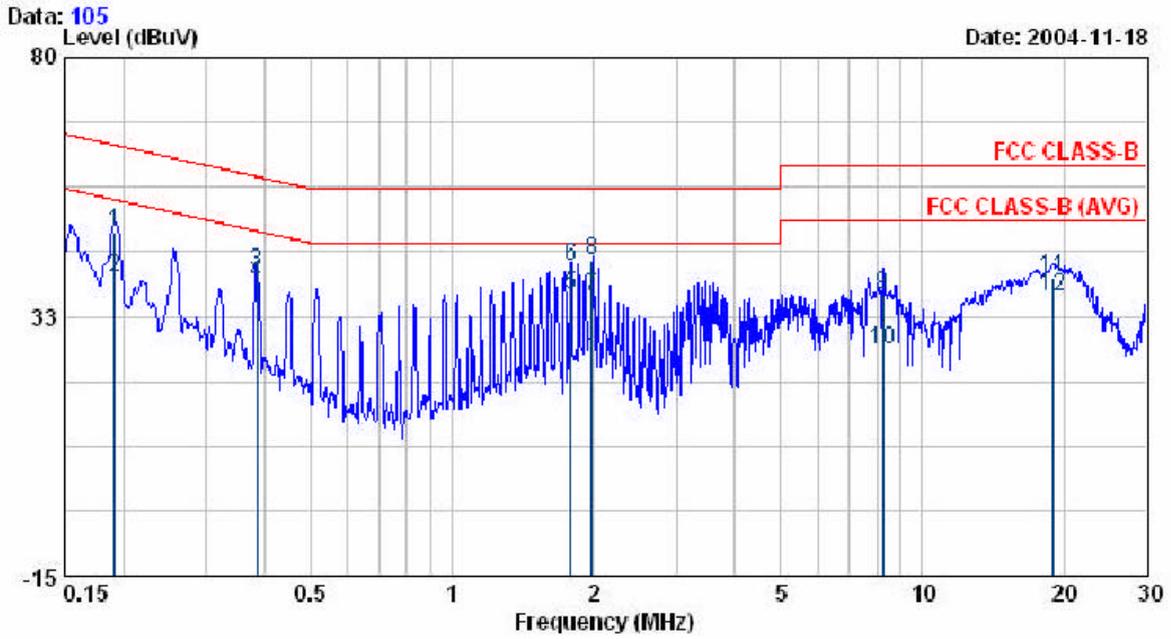

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.192	47.48	0.41	47.89	63.96	-16.06	QP
0.192	39.10	0.41	39.51	53.96	-14.44	AVERAGE
0.385	40.14	0.46	40.60	58.18	-17.58	QP
0.385	38.17	0.46	38.63	48.18	-9.55	AVERAGE
1.792	35.82	0.54	36.36	46.00	-9.64	AVERAGE
1.792	41.09	0.54	41.63	56.00	-14.37	QP
1.983	35.50	0.54	36.04	46.00	-9.96	AVERAGE
1.983	42.17	0.54	42.71	56.00	-13.29	QP
8.257	35.74	0.61	36.35	60.00	-23.65	QP
8.257	25.69	0.61	26.30	50.00	-23.70	AVERAGE
19.063	38.95	0.85	39.80	60.00	-20.20	QP
19.063	35.26	0.85	36.11	50.00	-13.89	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz (switch)
 Test Mode : 802.11b CH MID
 Memo :


Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

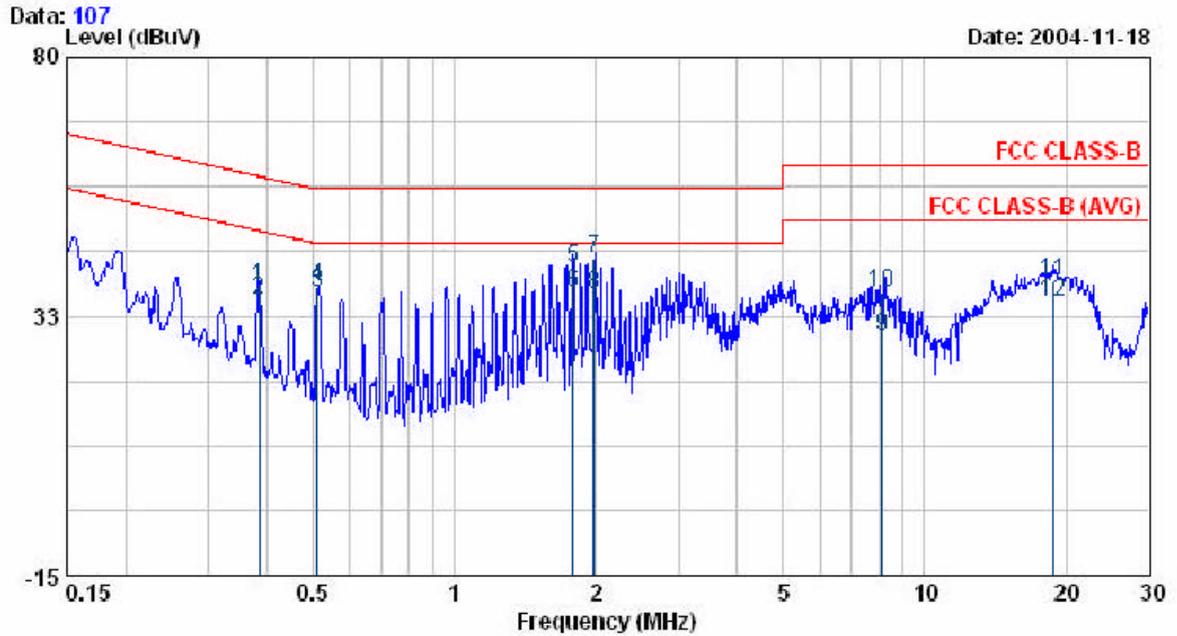

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.385	37.55	0.46	38.01	58.18	-20.17	QP
0.385	35.16	0.46	35.62	48.18	-12.56	AVERAGE
0.512	36.51	0.47	36.98	46.00	-9.02	AVERAGE
0.512	37.28	0.47	37.75	56.00	-18.25	QP
1.791	40.83	0.54	41.37	56.00	-14.63	QP
1.791	36.30	0.54	36.84	46.00	-9.16	AVERAGE
1.982	42.63	0.54	43.17	56.00	-12.83	QP
1.982	35.90	0.54	36.44	46.00	-9.56	AVERAGE
8.121	28.04	0.69	28.73	50.00	-21.27	AVERAGE
8.121	36.14	0.69	36.83	60.00	-23.17	QP
18.739	37.92	0.85	38.77	60.00	-21.23	QP
18.739	34.16	0.85	35.01	50.00	-14.99	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11b CH MID
 Memo :


Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

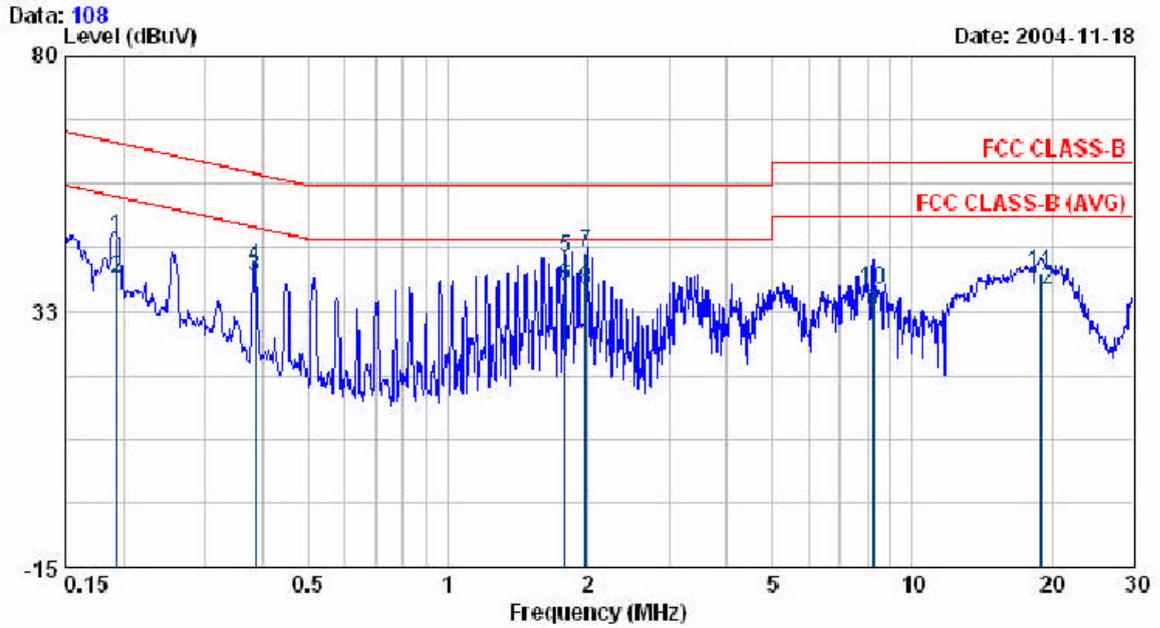

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.193	45.85	0.42	46.27	63.89	-17.62	QP
0.193	38.10	0.42	38.52	53.89	-15.37	AVERAGE
0.384	38.32	0.46	38.78	48.19	-9.42	AVERAGE
0.384	40.24	0.46	40.70	58.19	-17.50	QP
1.791	41.82	0.54	42.36	56.00	-13.64	QP
1.791	36.54	0.54	37.08	46.00	-8.92	AVERAGE
1.982	42.82	0.54	43.36	56.00	-12.64	QP
1.982	35.79	0.54	36.33	46.00	-9.67	AVERAGE
8.251	31.72	0.61	32.33	50.00	-17.67	AVERAGE
8.251	35.79	0.61	36.40	60.00	-23.60	QP
19.059	38.93	0.85	39.78	60.00	-20.22	QP
19.059	35.55	0.85	36.40	50.00	-13.60	AVERAGE


EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11b CH HI
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

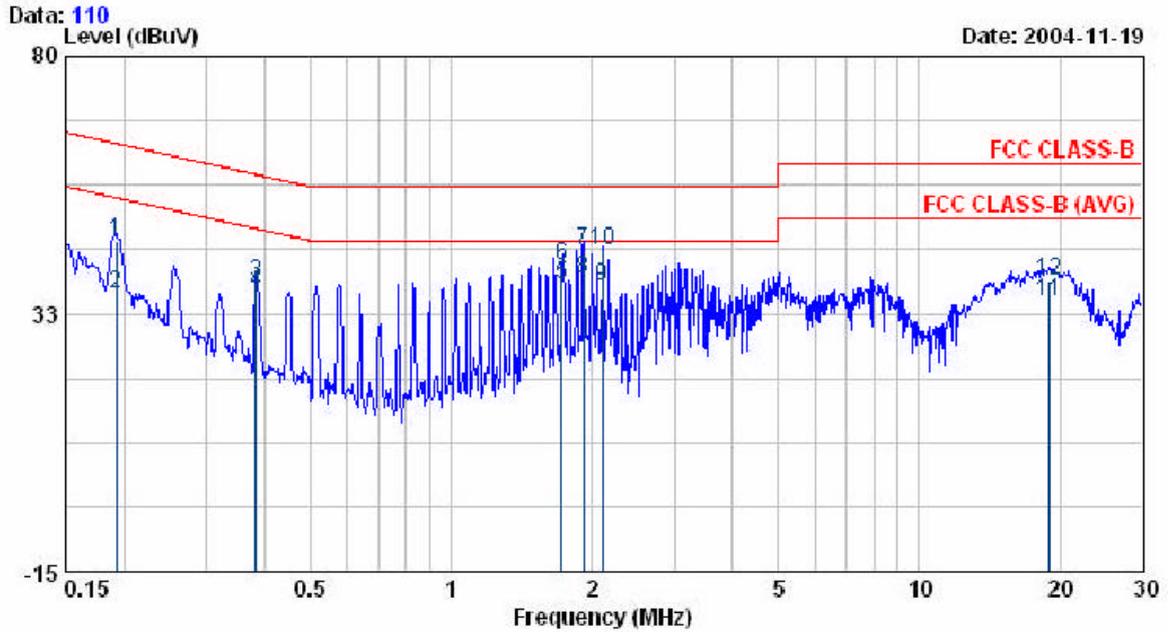

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.192	45.48	0.41	45.89	63.94	-18.05	QP
0.192	35.73	0.41	36.14	53.94	-17.80	AVERAGE
0.383	37.83	0.46	38.29	58.21	-19.92	QP
0.383	36.12	0.46	36.58	48.21	-11.63	AVERAGE
1.726	37.31	0.54	37.85	46.00	-8.15	AVERAGE
1.726	40.68	0.54	41.22	56.00	-14.78	QP
1.919	43.46	0.54	44.00	56.00	-12.00	QP
1.919	38.46	0.54	39.00	46.00	-7.00	AVERAGE
2.111	37.04	0.54	37.58	46.00	-8.42	AVERAGE
2.111	43.69	0.54	44.23	56.00	-11.77	QP
19.061	33.95	0.85	34.80	50.00	-15.20	AVERAGE
19.061	37.67	0.85	38.52	60.00	-21.48	QP

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch) Pol/Phase : LINE
 Test Mode : 802.11b CH HI Temperature : 26 °C
 Memo : Humidity : 58 %

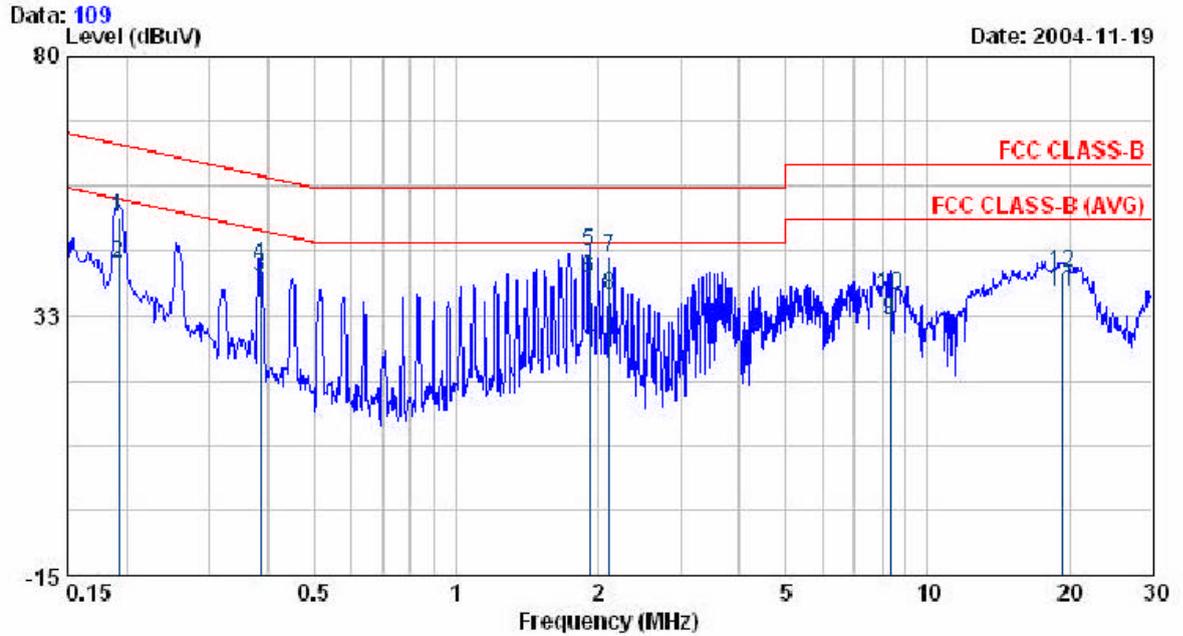

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.192	49.85	0.41	50.26	63.94	-13.68	QP
0.192	41.73	0.41	42.14	53.94	-11.80	AVERAGE
0.384	39.10	0.46	39.56	48.19	-8.64	AVERAGE
0.384	41.12	0.46	41.58	58.19	-16.62	QP
1.920	43.77	0.54	44.31	56.00	-11.69	QP
1.920	38.70	0.54	39.24	46.00	-6.76	AVERAGE
2.112	42.48	0.54	43.02	56.00	-12.98	QP
2.112	35.58	0.54	36.12	46.00	-9.88	AVERAGE
8.316	31.12	0.61	31.73	50.00	-18.27	AVERAGE
8.316	35.61	0.61	36.22	60.00	-23.78	QP
19.321	35.90	0.86	36.76	50.00	-13.24	AVERAGE
19.321	39.58	0.86	40.44	60.00	-19.56	QP