


EUT : WGR-615V(new)  
 Power : 110V 60Hz(switch)  
 Test Mode : 802.11g CH L0  
 Memo :


Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 58 %

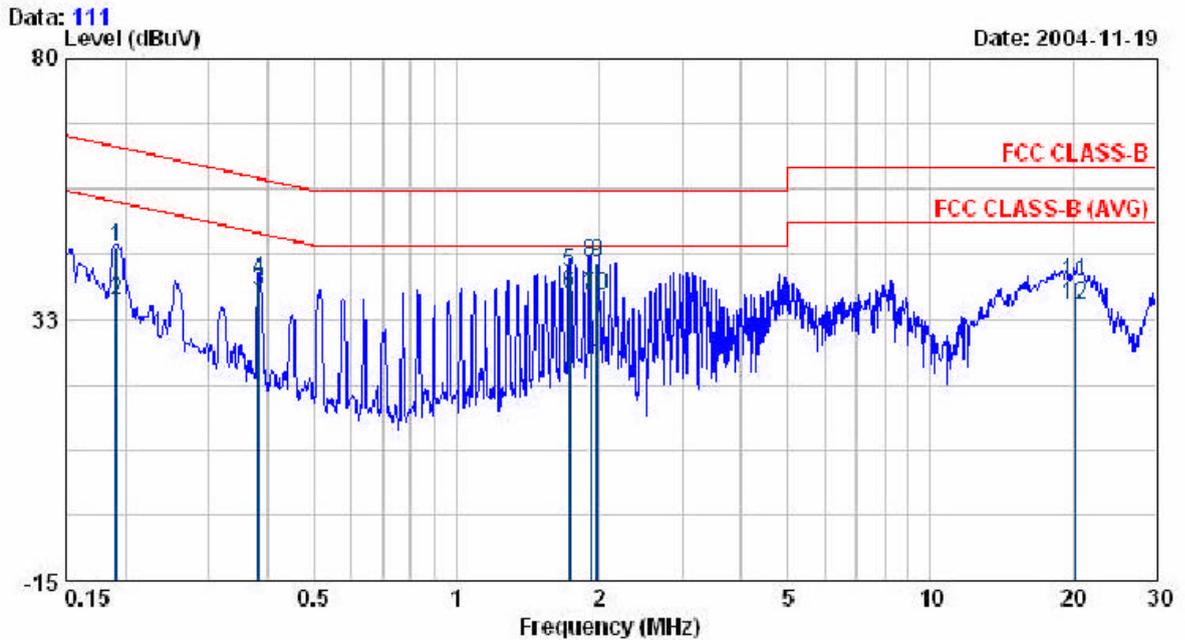

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.192	45.13	0.41	45.54	63.95	-18.40	QP
0.192	35.41	0.41	35.82	53.95	-18.12	AVERAGE
0.384	37.20	0.46	37.66	48.20	-10.55	AVERAGE
0.384	39.11	0.46	39.57	58.20	-18.64	QP
1.728	40.38	0.54	40.92	56.00	-15.08	QP
1.728	36.67	0.54	37.21	46.00	-8.79	AVERAGE
1.920	36.47	0.54	37.01	46.00	-8.99	AVERAGE
1.920	42.36	0.54	42.90	56.00	-13.10	QP
1.984	42.15	0.54	42.69	56.00	-13.31	QP
1.984	36.29	0.54	36.83	46.00	-9.17	AVERAGE
20.347	38.44	0.88	39.32	60.00	-20.68	QP
20.347	34.13	0.88	35.01	50.00	-14.99	AVERAGE

EUT : WGR-615V(new)  
 Power : 110V 60Hz(switch)  
 Test Mode : 802.11g CH L0  
 Memo :


Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 58 %

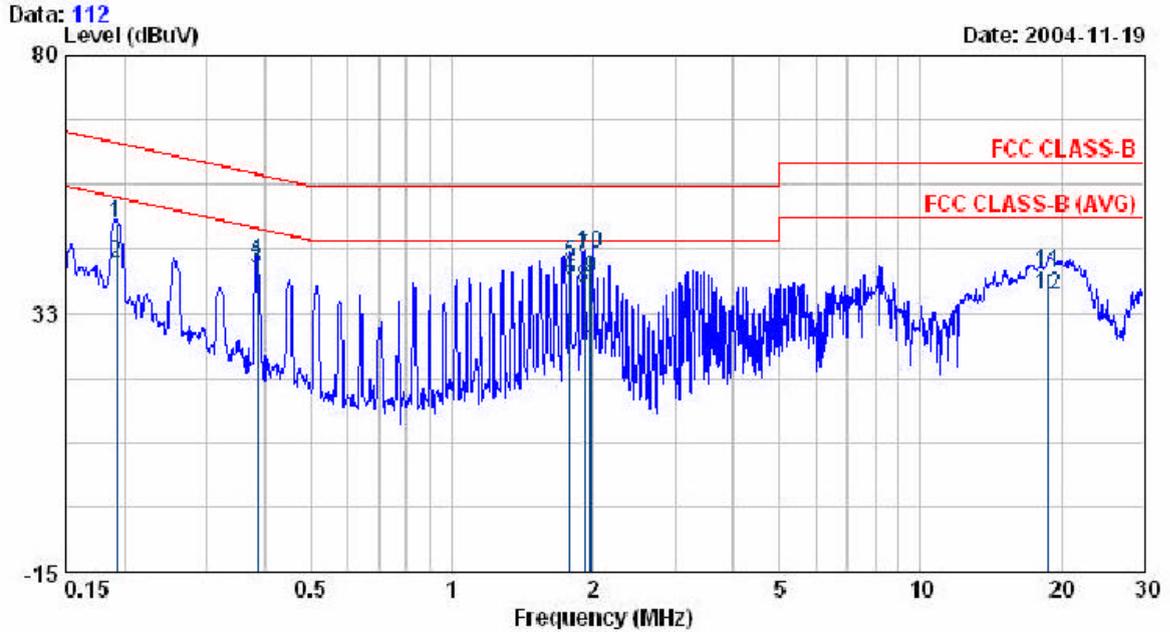

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.192	48.53	0.41	48.94	63.94	-15.00	QP
0.192	41.30	0.41	41.71	53.94	-12.23	AVERAGE
0.385	40.12	0.46	40.58	48.16	-7.59	AVERAGE
0.385	41.46	0.46	41.92	58.16	-16.25	QP
1.791	41.04	0.54	41.58	56.00	-14.42	QP
1.791	37.99	0.54	38.53	46.00	-7.47	AVERAGE
1.919	42.06	0.54	42.60	56.00	-13.40	QP
1.919	36.61	0.54	37.15	46.00	-8.85	AVERAGE
1.984	38.44	0.54	38.98	46.00	-7.02	AVERAGE
1.984	43.08	0.54	43.62	56.00	-12.38	QP
18.809	39.26	0.85	40.11	60.00	-19.89	QP
18.809	34.90	0.85	35.75	50.00	-14.25	AVERAGE

EUT : WGR-615V(new)  
 Power : 110V 60Hz(switch)  
 Test Mode : 802.11g CH MID  
 Memo :


Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 58 %

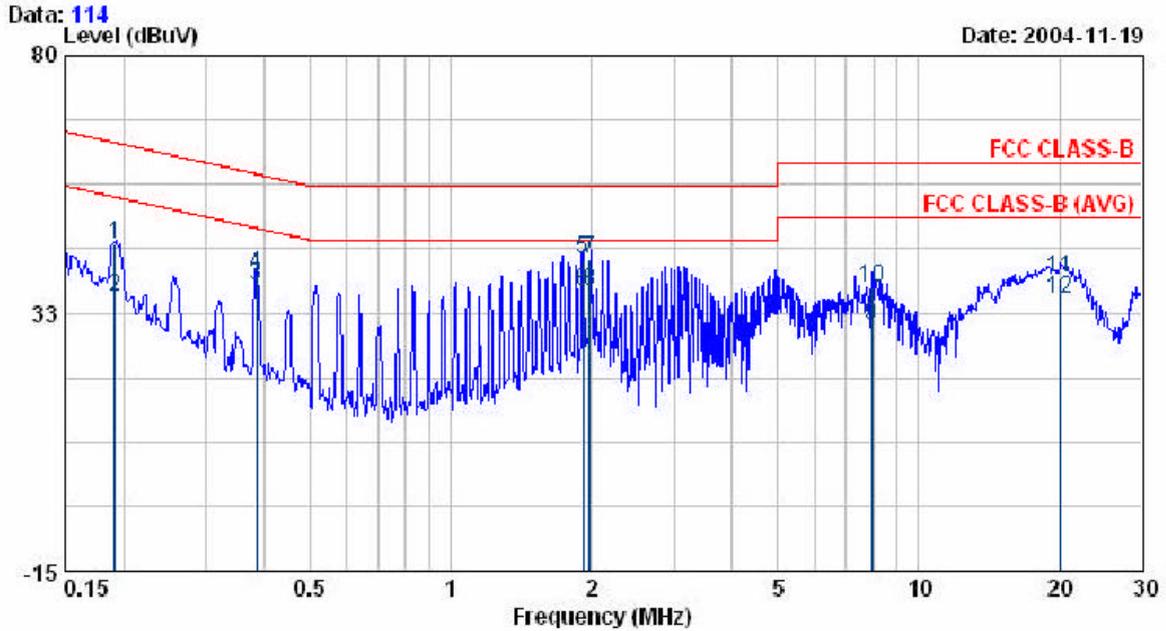

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.192	44.84	0.41	45.25	63.96	-18.70	QP
0.192	34.95	0.41	35.36	53.96	-18.59	AVERAGE
0.384	37.11	0.46	37.57	48.19	-10.63	AVERAGE
0.384	39.04	0.46	39.50	58.19	-18.70	QP
1.919	42.05	0.54	42.59	56.00	-13.41	QP
1.919	36.09	0.54	36.63	46.00	-9.37	AVERAGE
1.984	41.83	0.54	42.37	56.00	-13.63	QP
1.984	35.87	0.54	36.41	46.00	-9.59	AVERAGE
7.936	29.42	0.68	30.10	50.00	-19.90	AVERAGE
7.936	36.48	0.68	37.16	60.00	-22.84	QP
20.154	38.15	0.88	39.03	60.00	-20.97	QP
20.154	34.18	0.88	35.06	50.00	-14.94	AVERAGE

EUT : WGR-615V(new)  
 Power : 110V 60Hz(switch)  
 Test Mode : 802.11g CH MID  
 Memo :


Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 58 %

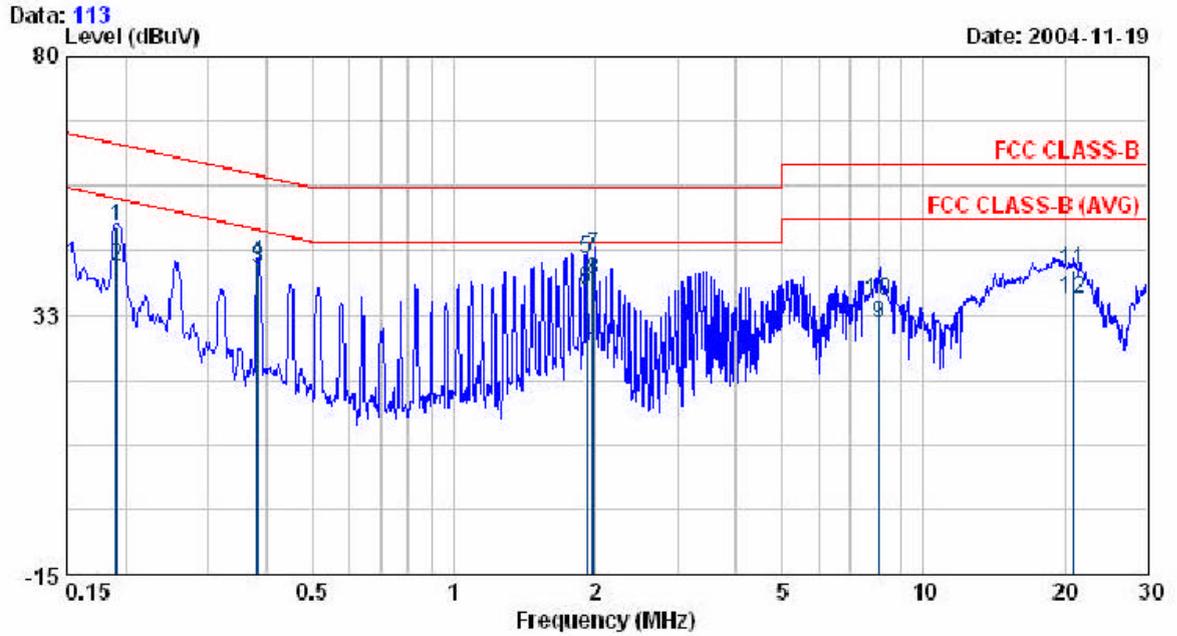

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.192	48.40	0.41	48.81	63.96	-15.14	QP
0.192	41.12	0.41	41.53	53.96	-12.42	AVERAGE
0.384	40.51	0.46	40.97	48.20	-7.24	AVERAGE
0.384	41.71	0.46	42.17	58.20	-16.04	QP
1.919	42.08	0.54	42.62	56.00	-13.38	QP
1.919	36.55	0.54	37.09	46.00	-8.91	AVERAGE
1.983	43.05	0.54	43.59	56.00	-12.41	QP
1.983	38.37	0.54	38.91	46.00	-7.09	AVERAGE
8.061	30.38	0.61	30.99	50.00	-19.01	AVERAGE
8.061	34.56	0.61	35.17	60.00	-24.83	QP
20.923	39.67	0.96	40.63	60.00	-19.37	QP
20.923	34.51	0.96	35.47	50.00	-14.53	AVERAGE

EUT : WGR-615V(new)  
 Power : 110V 60Hz(switch)  
 Test Mode : 802.11g CH HI  
 Memo :


Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 58 %

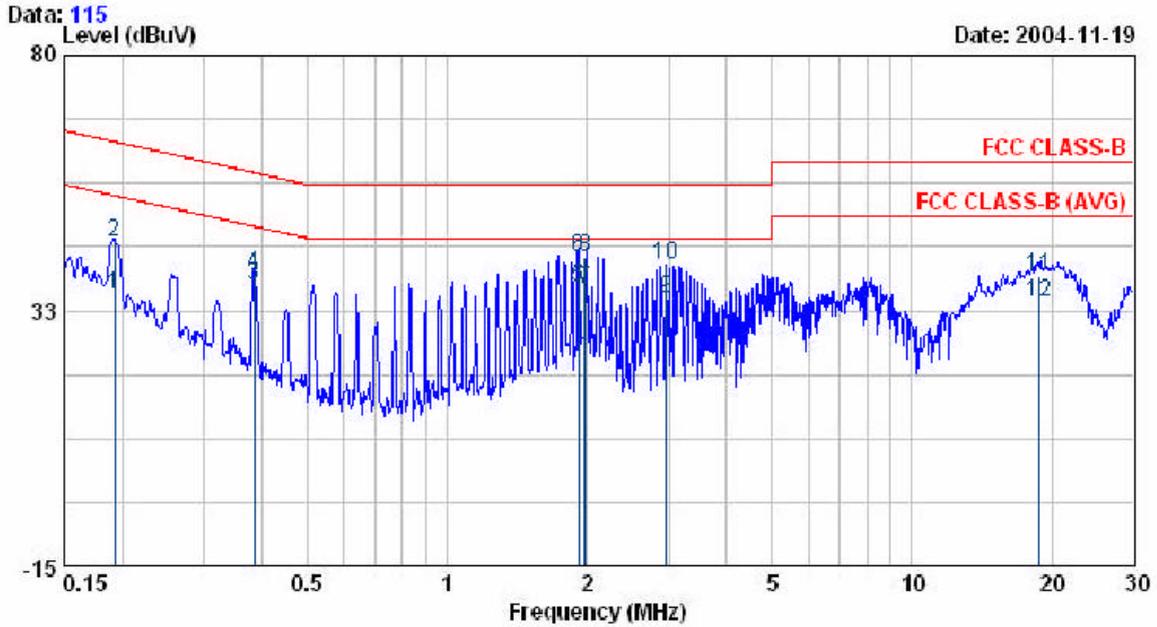

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.193	35.87	0.41	35.48	53.92	-18.44	AVERAGE
0.193	44.83	0.41	45.24	63.92	-18.68	QP
0.385	36.82	0.46	37.28	48.18	-10.90	AVERAGE
0.385	38.82	0.46	39.28	58.18	-18.90	QP
1.919	36.18	0.54	36.72	46.00	-9.28	AVERAGE
1.919	42.01	0.54	42.55	56.00	-13.45	QP
1.984	35.86	0.54	36.40	46.00	-9.60	AVERAGE
1.984	41.82	0.54	42.36	56.00	-13.64	QP
2.962	34.31	0.50	34.81	46.00	-11.19	Average
2.962	40.36	0.50	40.86	56.00	-15.14	QP
18.875	38.05	0.85	38.90	60.00	-21.10	QP
18.875	33.30	0.85	34.15	50.00	-15.85	AVERAGE

EUT : WGR-615V(new)  
 Power : 110V 60Hz (switch)  
 Test Mode : 802.11g CH HI  
 Memo :


Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 58 %

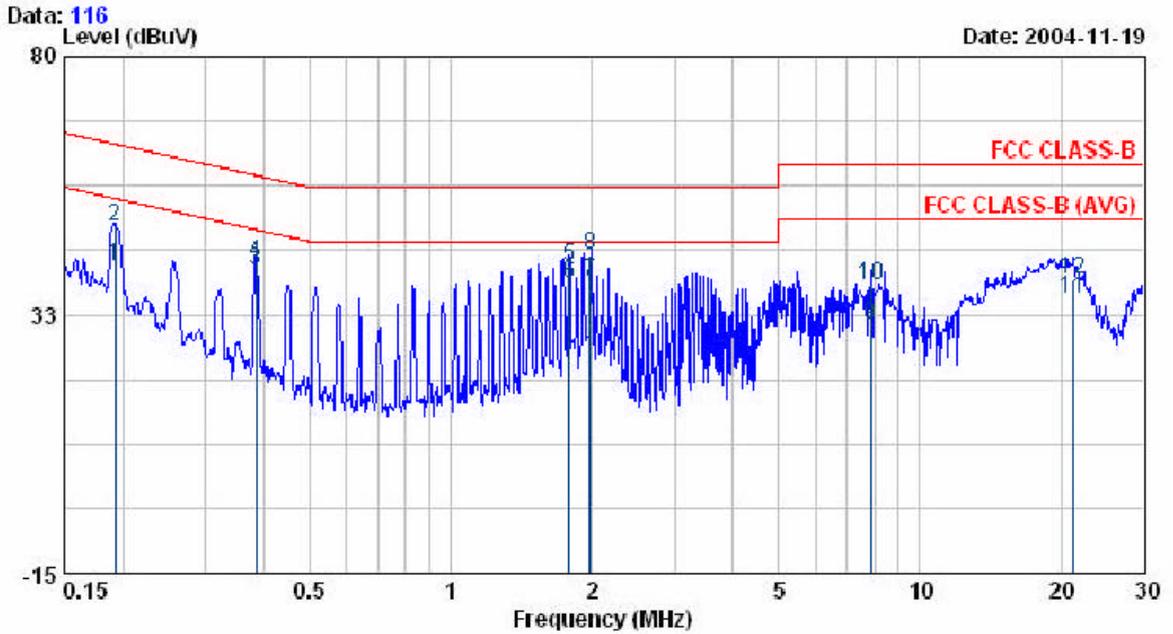

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.193	41.00	0.41	41.41	53.92	-12.51	AVERAGE
0.193	48.27	0.41	48.68	63.92	-15.24	QP
0.384	40.36	0.46	40.82	48.20	-7.38	AVERAGE
0.384	41.60	0.46	42.06	58.20	-16.14	QP
1.791	40.73	0.54	41.27	56.00	-14.73	QP
1.791	37.72	0.54	38.26	46.00	-7.74	AVERAGE
1.983	38.19	0.54	38.73	46.00	-7.27	AVERAGE
1.983	42.83	0.54	43.37	56.00	-12.63	QP
7.871	29.89	0.61	30.50	50.00	-19.50	AVERAGE
7.871	37.33	0.61	37.94	60.00	-22.06	QP
21.241	34.43	0.98	35.41	50.00	-14.59	AVERAGE
21.241	38.04	0.98	39.02	60.00	-20.98	QP

Test mode 3: Adaptor Model: ADS6818-1812-W 1215


EUT	: WGR-615V(new)	Pol/Phase	: NEUTRAL
Power	: 110V 60Hz (switch)	Temperature	: 26 °C
Test Mode	: 802.11b CH L0	Humidity	: 58 %
Memo	:		

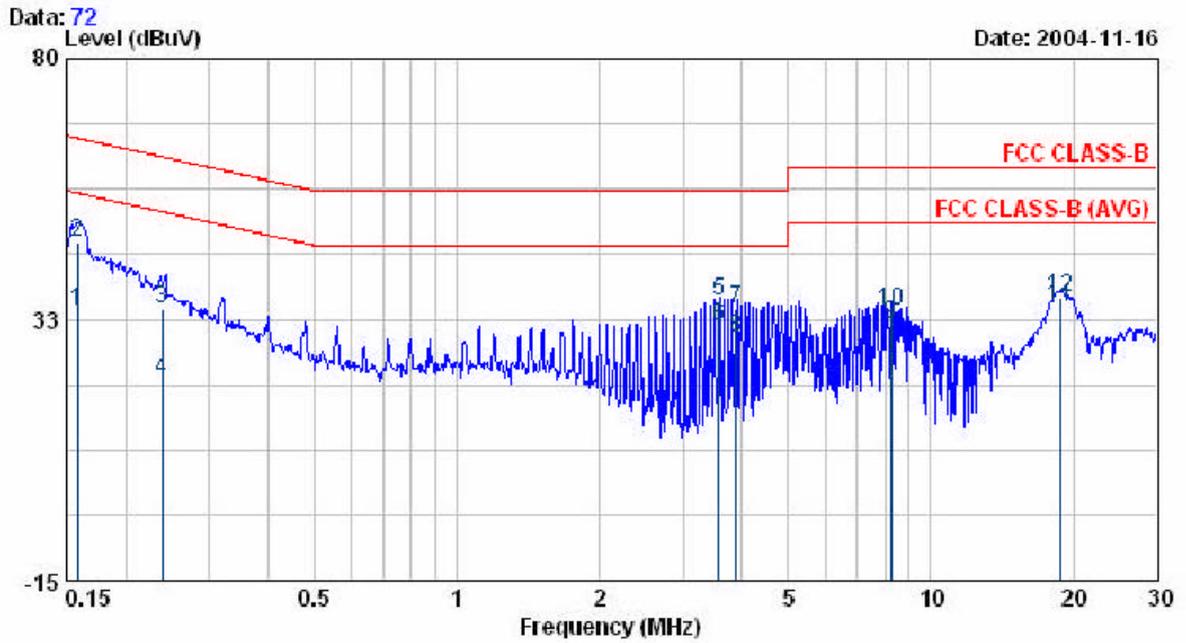

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.159	33.49	0.40	33.89	55.54	-21.65	AVERAGE
0.159	46.04	0.40	46.44	65.54	-19.10	QP
0.239	33.92	0.43	34.35	62.12	-27.77	QP
0.239	21.19	0.43	21.62	52.12	-30.50	AVERAGE
3.573	35.15	0.57	35.72	56.00	-20.28	QP
3.573	30.74	0.57	31.31	46.00	-14.69	AVERAGE
3.890	33.73	0.57	34.30	56.00	-21.70	QP
3.890	28.68	0.57	29.25	46.00	-16.75	AVERAGE
8.257	31.08	0.69	31.77	50.00	-18.23	AVERAGE
8.257	33.25	0.69	33.94	60.00	-26.06	QP
18.815	33.89	0.85	34.74	50.00	-15.26	AVERAGE
18.815	35.54	0.85	36.39	60.00	-23.61	QP

EUT : WGR-615V(new)  
 Power : 110V 60Hz (switch)  
 Test Mode : 802.11b CH L0  
 Memo :


Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 58 %

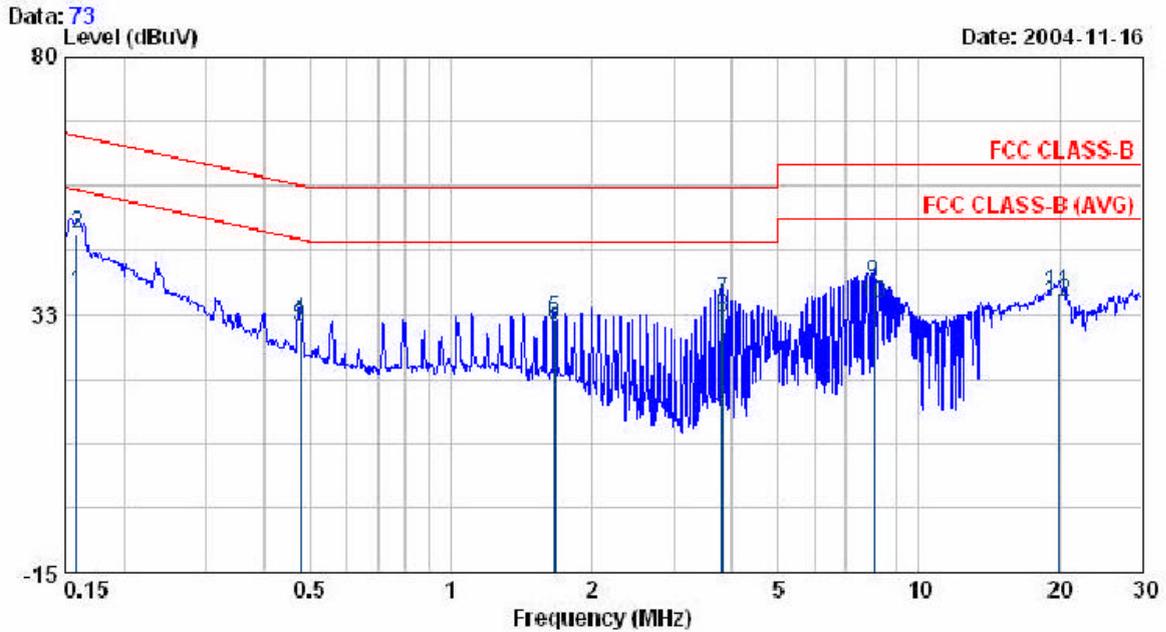

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.159	36.00	0.40	36.40	55.52	-19.11	AVERAGE
0.159	47.05	0.40	47.45	65.52	-18.06	QP
0.476	29.78	0.47	30.25	46.40	-16.15	AVERAGE
0.476	30.70	0.47	31.17	56.40	-25.23	QP
1.668	31.24	0.53	31.77	56.00	-24.23	QP
1.668	29.89	0.53	30.42	46.00	-15.58	AVERAGE
3.811	34.55	0.57	35.12	56.00	-20.88	QP
3.811	31.43	0.57	32.00	46.00	-14.00	AVERAGE
8.017	37.75	0.61	38.36	60.00	-21.64	QP
8.017	33.95	0.61	34.56	50.00	-15.44	AVERAGE
19.924	35.62	0.87	36.49	60.00	-23.51	QP
19.924	34.02	0.87	34.89	50.00	-15.11	AVERAGE


EUT : WGR-615V(new)  
 Power : 110V 60Hz(switch)  
 Test Mode : 802.11b CH MID  
 Memo :

Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 58 %

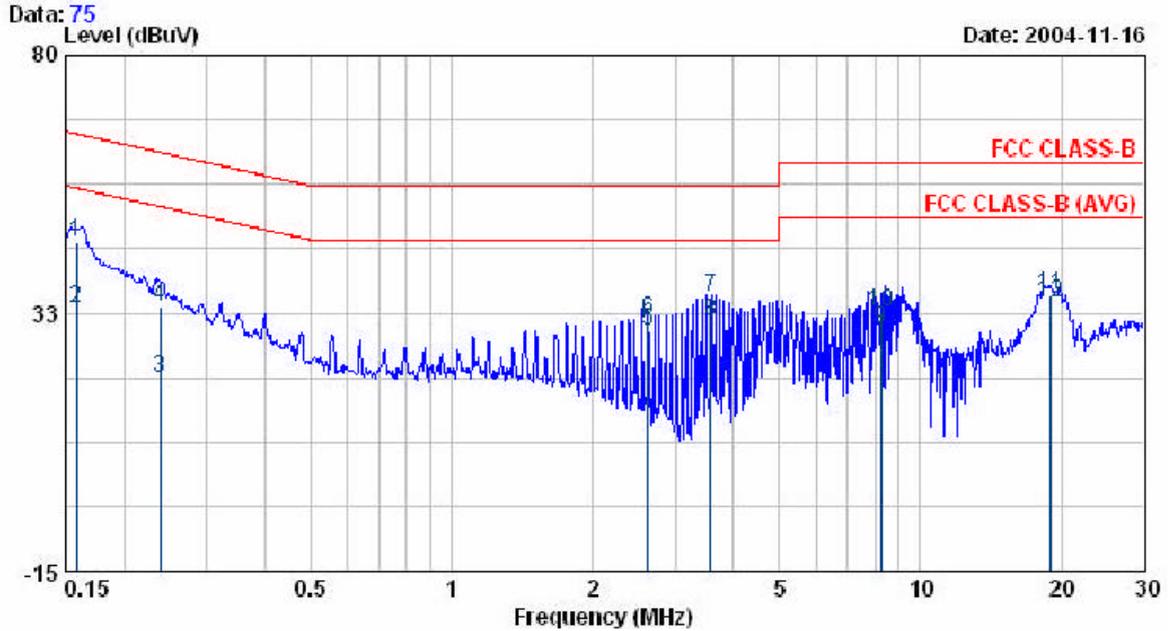

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.159	45.32	0.40	45.72	65.54	-19.81	QP
0.159	33.13	0.40	33.53	55.54	-22.00	AVERAGE
0.238	20.13	0.43	20.56	52.16	-31.60	AVERAGE
0.238	33.46	0.43	33.89	62.16	-28.27	QP
2.621	28.62	0.55	29.17	46.00	-16.83	AVERAGE
2.621	30.88	0.55	31.43	56.00	-24.57	QP
3.573	35.03	0.57	35.60	56.00	-20.40	QP
3.573	30.48	0.57	31.05	46.00	-14.95	AVERAGE
8.258	28.85	0.69	29.54	50.00	-20.46	AVERAGE
8.258	31.83	0.69	32.52	60.00	-27.48	QP
19.052	34.97	0.85	35.82	60.00	-24.18	QP
19.052	33.57	0.85	34.42	50.00	-15.58	AVERAGE


EUT : WGR-615V(new)  
 Power : 110V 60Hz(switch) Pol/Phase : LINE  
 Test Mode : 802.11b CH MID Temperature : 26 °C  
 Memo : Humidity : 58 %

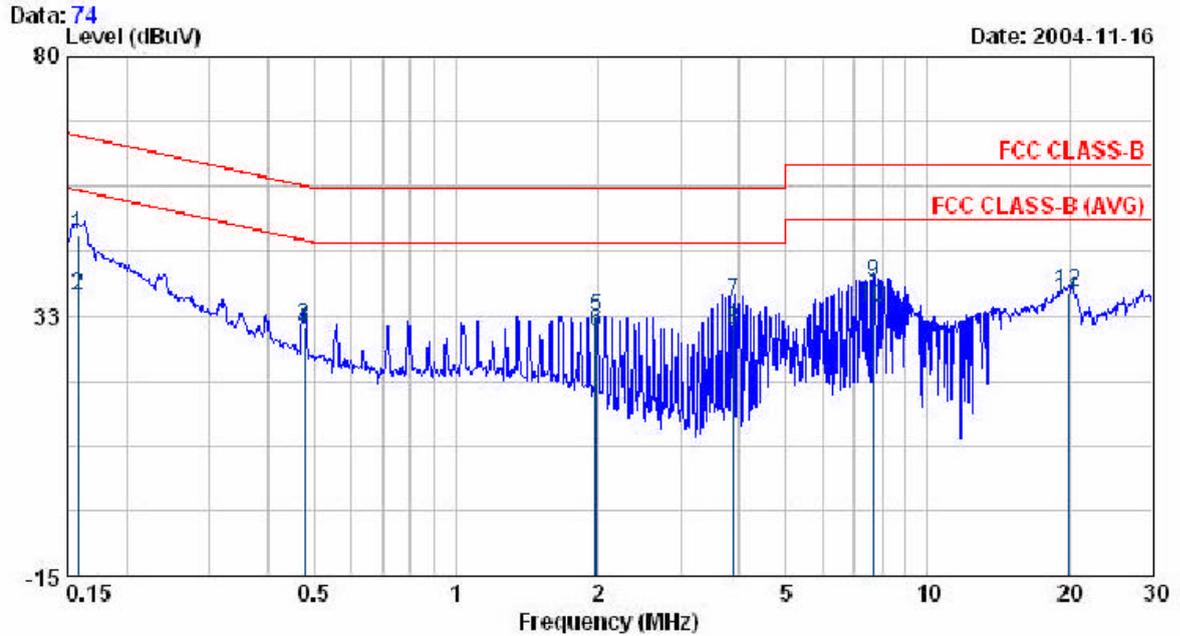

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.158	46.72	0.40	47.12	65.55	-18.42	QP
0.158	35.87	0.40	36.27	55.55	-19.27	AVERAGE
0.477	30.25	0.47	30.72	56.39	-25.68	QP
0.477	29.35	0.47	29.82	46.39	-16.58	AVERAGE
1.984	31.64	0.54	32.18	56.00	-23.82	QP
1.984	29.10	0.54	29.64	46.00	-16.36	AVERAGE
3.889	34.40	0.57	34.97	56.00	-21.03	QP
3.889	29.42	0.57	29.99	46.00	-16.01	AVERAGE
7.700	38.14	0.61	38.75	60.00	-21.25	QP
7.700	33.49	0.61	34.10	50.00	-15.90	AVERAGE
19.925	34.71	0.87	35.58	50.00	-14.42	AVERAGE
19.925	36.04	0.87	36.91	60.00	-23.09	QP


EUT : WGR-615V(new)  
 Power : 110V 60Hz(switch)  
 Test Mode : 802.11b CH HI  
 Memo :

Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 58 %

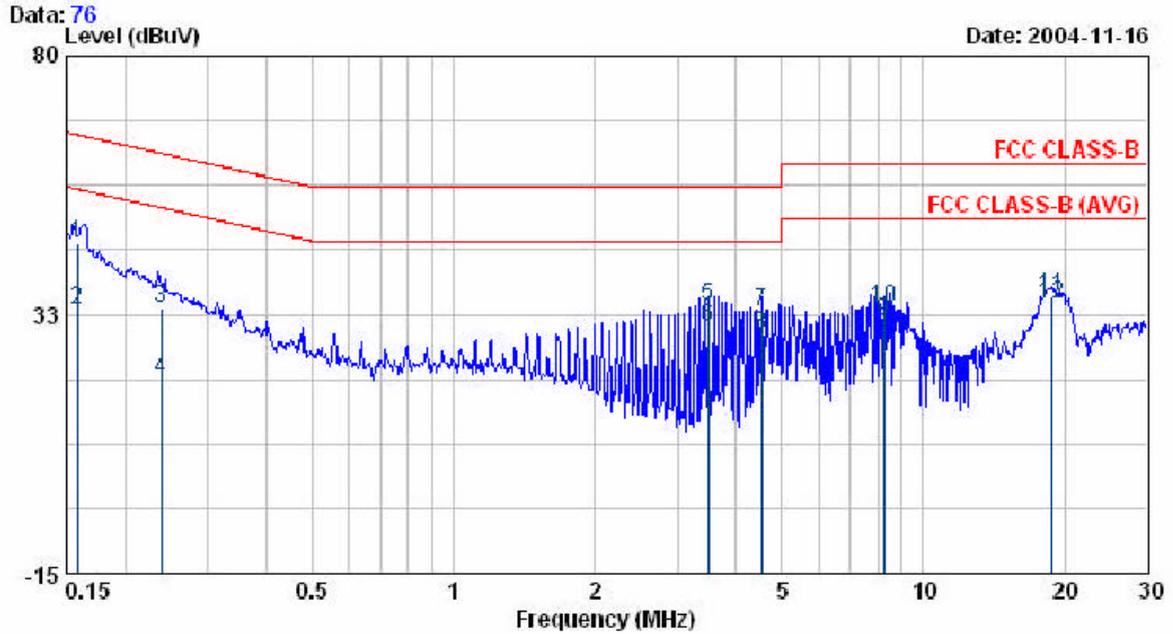

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.158	45.14	0.40	45.54	65.55	-20.01	QP
0.158	32.95	0.40	33.35	55.55	-22.20	AVERAGE
0.239	33.36	0.43	33.79	62.13	-28.35	QP
0.239	20.06	0.43	20.49	52.13	-31.65	AVERAGE
3.495	33.44	0.57	34.01	56.00	-21.99	QP
3.495	29.75	0.57	30.32	46.00	-15.68	AVERAGE
4.525	32.46	0.59	33.05	56.00	-22.95	QP
4.525	28.18	0.59	28.77	46.00	-17.23	AVERAGE
8.256	30.62	0.69	31.31	50.00	-18.69	AVERAGE
8.256	33.12	0.69	33.81	60.00	-26.19	QP
18.814	35.06	0.85	35.91	60.00	-24.09	QP
18.814	33.48	0.85	34.33	50.00	-15.67	AVERAGE

EUT : WGR-615V(new)  
 Power : 110W 60Hz(switch) Pol/Phase : LINE  
 Test Mode : 802.11b CH HI Temperature : 26 °C  
 Memo : Humidity : 58 %

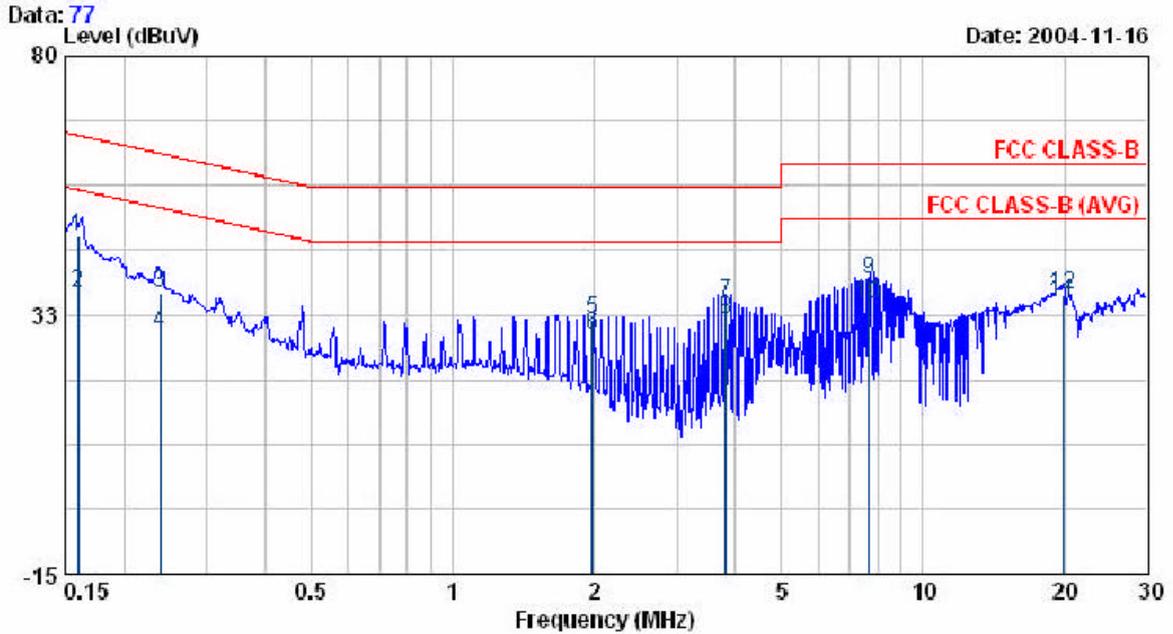

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.160	46.51	0.40	46.91	65.47	-18.56	QP
0.160	36.00	0.40	36.40	55.47	-19.07	AVERAGE
0.239	36.05	0.43	36.48	62.13	-25.65	QP
0.239	28.90	0.43	29.33	52.13	-22.80	AVERAGE
1.986	31.14	0.54	31.68	56.00	-24.32	QP
1.986	28.33	0.54	28.87	46.00	-17.13	AVERAGE
3.811	34.30	0.57	34.87	56.00	-21.13	QP
3.811	30.98	0.57	31.55	46.00	-14.45	AVERAGE
7.701	38.19	0.61	38.80	60.00	-21.20	QP
7.701	33.71	0.61	34.32	50.00	-15.68	AVERAGE
19.847	33.94	0.87	34.81	50.00	-15.19	AVERAGE
19.847	35.40	0.87	36.27	60.00	-23.73	QP