


EUT : WGR-615V(new)
 Power : 110W 60Hz(switch)
 Test Mode : 802.11g CH L0
 Memo :


Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

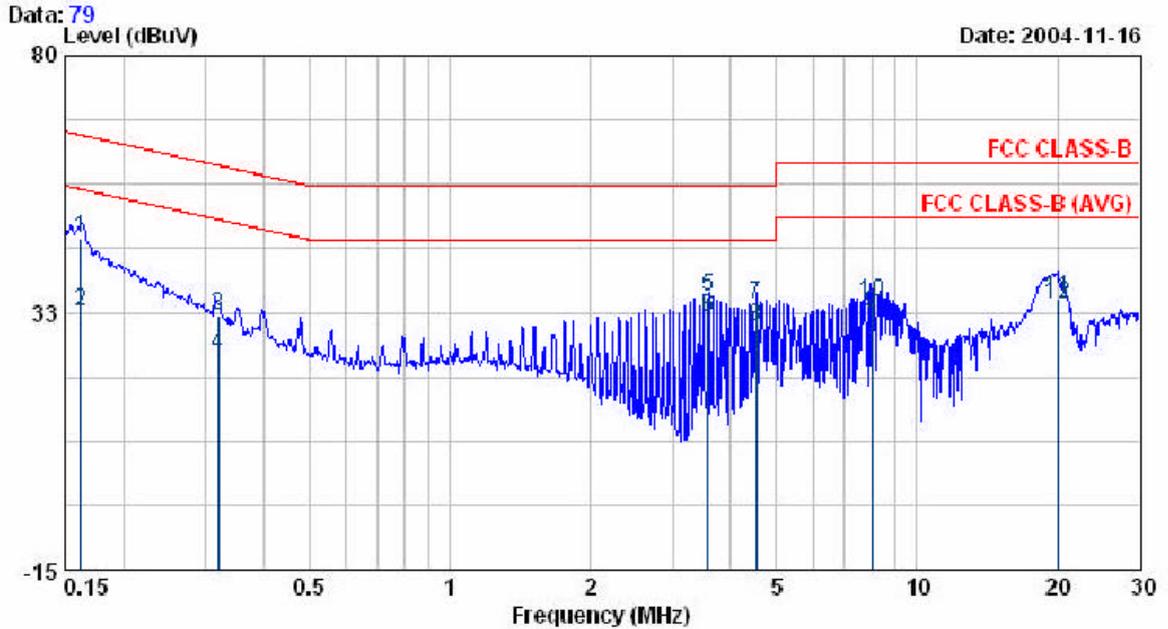

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.162	45.69	0.40	46.09	65.37	-19.28	QP
0.162	32.25	0.40	32.65	55.37	-22.72	AVERAGE
0.319	31.60	0.44	32.04	59.75	-27.70	QP
0.319	24.29	0.44	24.73	49.75	-25.01	AVERAGE
3.575	34.80	0.57	35.37	56.00	-20.63	QP
3.575	31.03	0.57	31.60	46.00	-14.40	AVERAGE
4.527	33.47	0.59	34.06	56.00	-21.94	QP
4.527	29.18	0.59	29.77	46.00	-16.23	AVERAGE
8.022	31.63	0.69	32.32	50.00	-17.68	AVERAGE
8.022	33.60	0.69	34.29	60.00	-25.71	QP
20.015	34.38	0.87	35.25	60.00	-24.75	QP
20.015	33.25	0.87	34.12	50.00	-15.88	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11g CH LO
 Memo :


Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

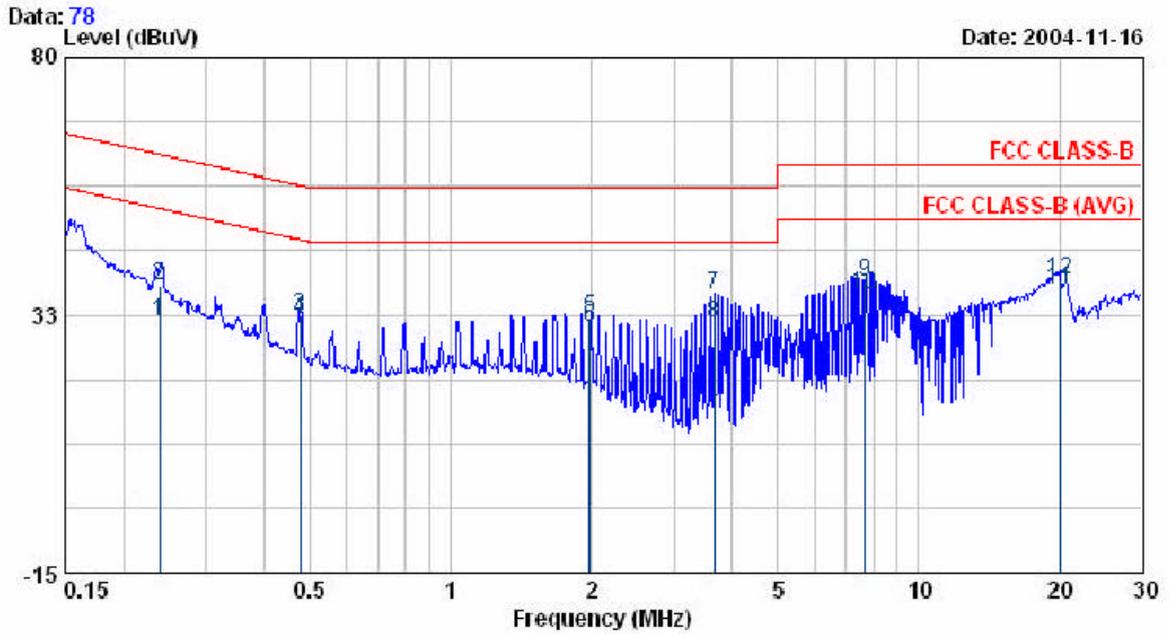

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.239	31.00	0.43	31.43	52.15	-20.72	AVERAGE
0.239	37.46	0.43	37.89	62.15	-24.26	QP
0.477	31.95	0.47	32.42	56.39	-23.97	QP
0.477	31.06	0.47	31.53	46.39	-14.86	AVERAGE
1.985	31.31	0.54	31.85	56.00	-24.15	QP
1.985	29.55	0.54	30.09	46.00	-15.91	AVERAGE
3.653	35.45	0.57	36.02	56.00	-19.98	QP
3.653	30.50	0.57	31.07	46.00	-14.93	AVERAGE
7.701	38.13	0.61	38.74	60.00	-21.26	QP
7.701	35.52	0.61	36.13	50.00	-13.87	AVERAGE
20.007	36.32	0.87	37.19	50.00	-12.81	AVERAGE
20.007	38.10	0.87	38.97	60.00	-21.03	QP

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11g CH MID
 Memo :


Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

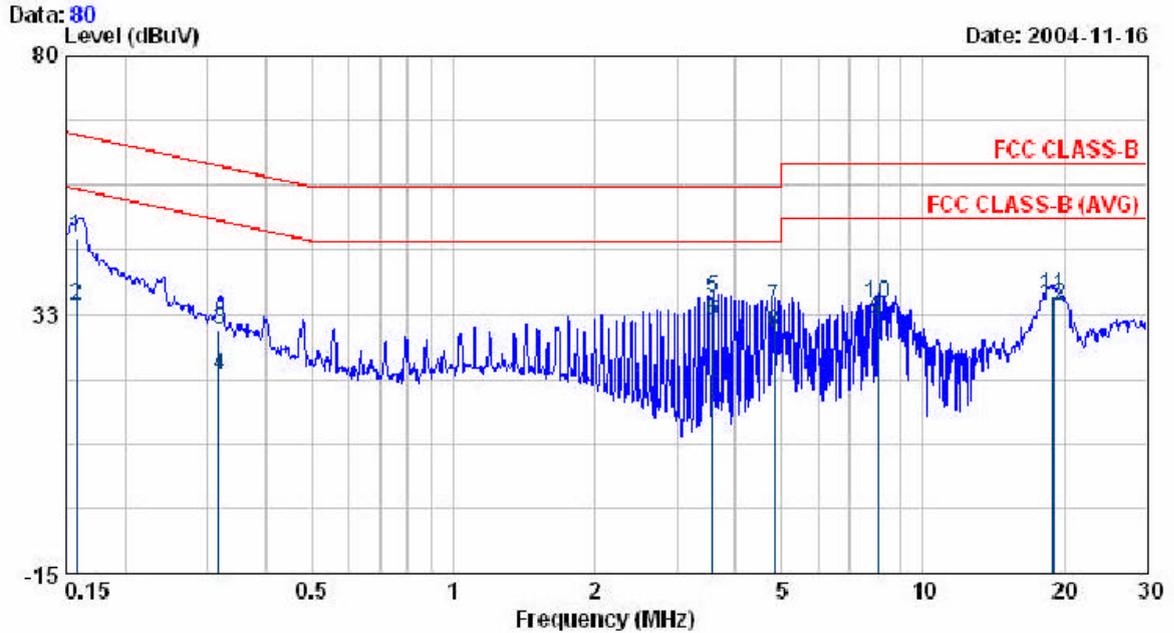

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.158	46.04	0.40	46.44	65.55	-19.11	QP
0.158	33.50	0.40	33.90	55.55	-21.65	AVERAGE
0.317	29.24	0.44	29.68	59.79	-30.10	QP
0.317	20.80	0.44	21.24	49.79	-28.54	AVERAGE
3.573	34.95	0.57	35.52	56.00	-20.48	QP
3.573	30.57	0.57	31.14	46.00	-14.86	AVERAGE
4.844	32.96	0.60	33.56	56.00	-22.44	QP
4.844	28.58	0.60	29.18	46.00	-16.82	AVERAGE
8.020	30.46	0.69	31.15	50.00	-18.85	AVERAGE
8.020	33.66	0.69	34.35	60.00	-25.65	QP
18.977	35.10	0.85	35.95	60.00	-24.05	QP
18.977	33.13	0.85	33.98	50.00	-16.02	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11g CH MID
 Memo :


Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

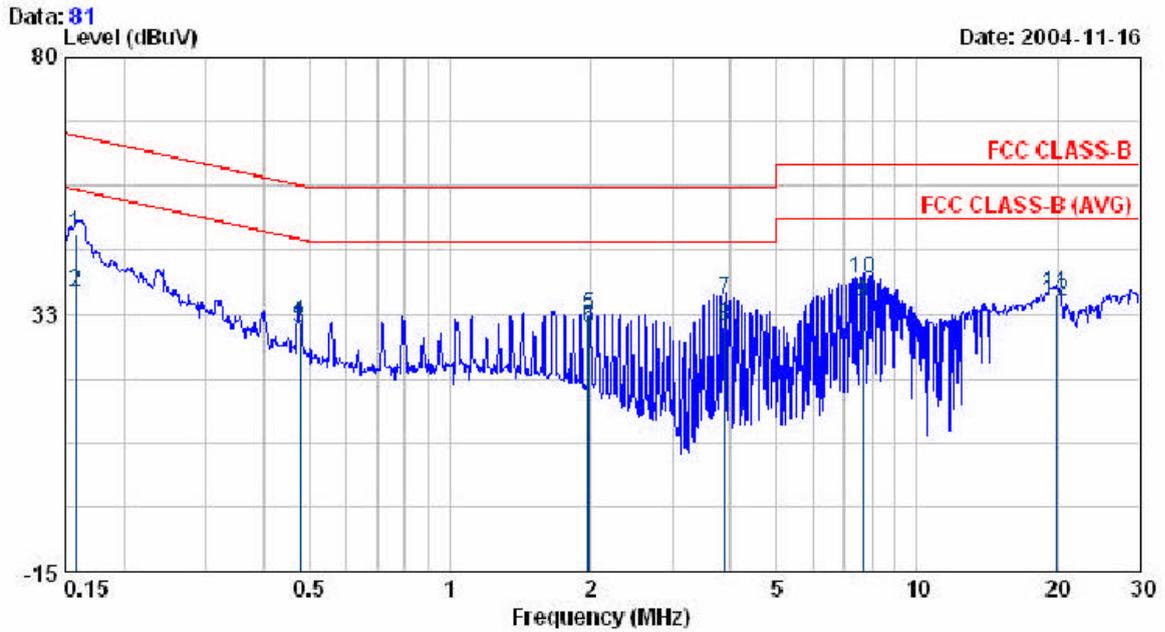

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.159	46.79	0.40	47.19	65.54	-18.35	QP
0.159	36.04	0.40	36.44	55.54	-19.10	AVERAGE
0.476	29.59	0.47	30.06	46.41	-16.35	AVERAGE
0.476	30.51	0.47	30.98	56.41	-25.43	QP
1.985	31.78	0.54	32.32	56.00	-23.68	QP
1.985	29.26	0.54	29.80	46.00	-16.20	AVERAGE
3.891	34.65	0.57	35.22	56.00	-20.78	QP
3.891	29.61	0.57	30.18	46.00	-15.82	AVERAGE
7.702	33.77	0.61	34.38	50.00	-15.62	AVERAGE
7.702	38.23	0.61	38.84	60.00	-21.16	QP
19.850	35.42	0.87	36.29	60.00	-23.71	QP
19.850	33.87	0.87	34.74	50.00	-15.26	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11g CH HI
 Memo :


Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

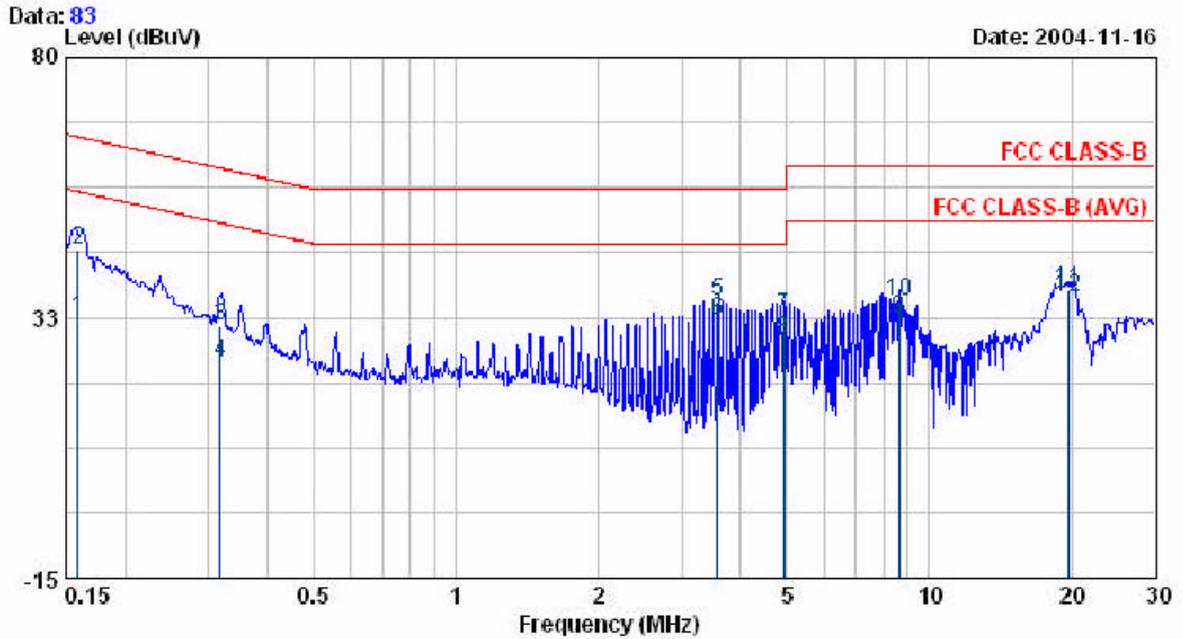

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.159	32.04	0.40	32.44	55.51	-23.07	AVERAGE
0.159	44.58	0.40	44.98	65.51	-20.53	QP
0.318	30.44	0.44	30.88	59.77	-28.88	QP
0.318	23.74	0.44	24.18	49.77	-25.58	AVERAGE
3.574	34.74	0.57	35.31	56.00	-20.69	QP
3.574	31.30	0.57	31.87	46.00	-14.13	AVERAGE
4.922	32.21	0.61	32.82	56.00	-23.18	QP
4.922	27.73	0.61	28.34	46.00	-17.66	AVERAGE
8.655	31.48	0.70	32.18	50.00	-17.82	AVERAGE
8.655	34.69	0.70	35.39	60.00	-24.61	QP
19.691	36.76	0.87	37.63	60.00	-22.37	QP
19.691	35.33	0.87	36.20	50.00	-13.80	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz (switch)
 Test Mode : 802.11g CH HI
 Memo :


Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

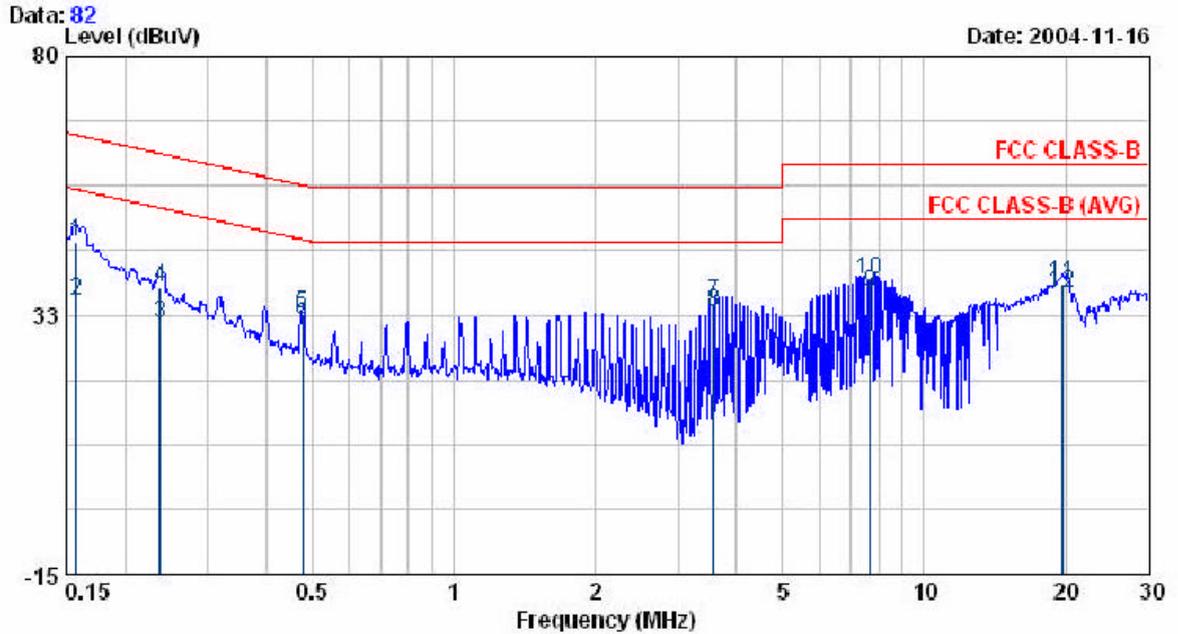

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.158	45.66	0.40	46.06	65.58	-19.52	QP
0.158	34.79	0.40	35.19	55.58	-20.39	AVERAGE
0.238	30.65	0.43	31.08	52.18	-21.10	AVERAGE
0.238	37.28	0.43	37.71	62.18	-24.47	QP
0.477	32.06	0.47	32.53	56.40	-23.87	QP
0.477	31.14	0.47	31.61	46.40	-14.79	AVERAGE
3.573	34.20	0.57	34.77	56.00	-21.23	QP
3.573	32.28	0.57	32.85	46.00	-13.15	AVERAGE
7.702	35.73	0.61	36.34	50.00	-13.66	AVERAGE
7.702	38.25	0.61	38.86	60.00	-21.14	QP
19.691	37.22	0.87	38.09	60.00	-21.91	QP
19.691	35.74	0.87	36.61	50.00	-13.39	AVERAGE

Test mode 4: Adaptor Model: DSA-0151F-12 A


EUT	: WGR-615V(new)	Pol/Phase	: NEUTRAL
Power	: 110V 60Hz(switch)	Temperature	: 26 °C
Test Mode	: 802.11b CH L0	Humidity	: 58 %
Memo	:		

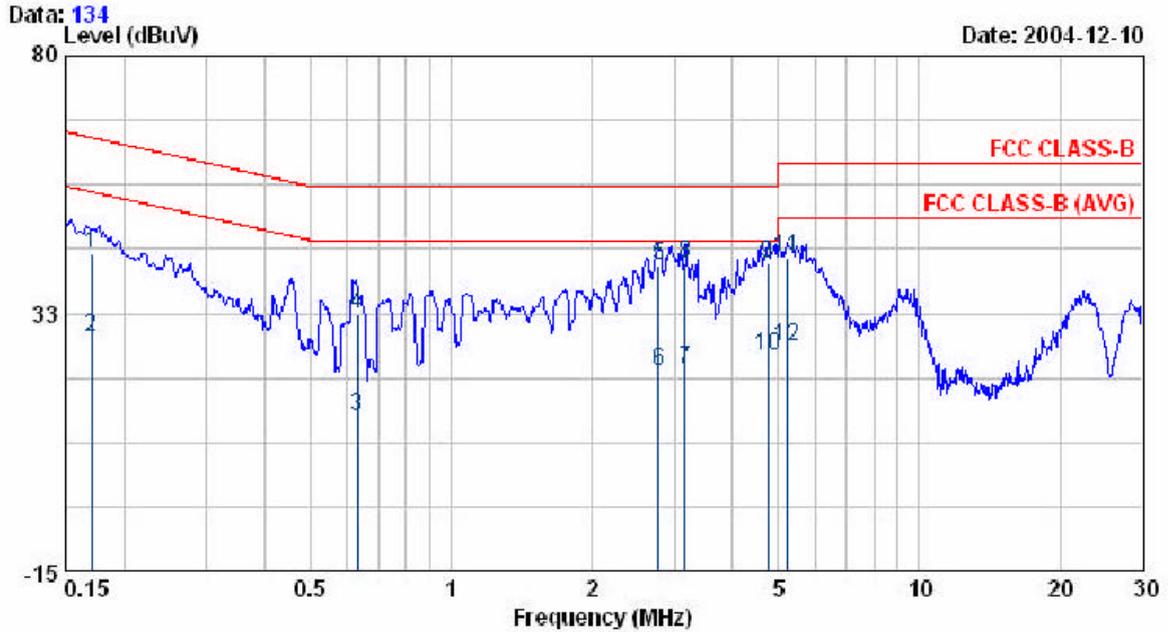

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.171	43.26	0.25	43.51	64.92	-21.42	QP
0.171	27.90	0.25	28.15	54.92	-26.78	AVERAGE
0.630	13.09	0.45	13.54	46.00	-32.46	AVERAGE
0.630	31.76	0.45	32.21	56.00	-23.79	QP
2.771	41.02	0.50	41.52	56.00	-14.48	QP
2.771	21.35	0.50	21.85	46.00	-24.15	AVERAGE
3.163	21.65	0.50	22.15	46.00	-23.85	AVERAGE
3.163	41.31	0.50	41.81	56.00	-14.19	QP
4.753	41.07	0.50	41.57	56.00	-14.43	QP
4.753	24.26	0.50	24.76	46.00	-21.24	AVERAGE
5.209	42.31	0.50	42.81	60.00	-17.19	QP
5.209	26.08	0.50	26.58	50.00	-23.42	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11b CH LO
 Memo :

Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

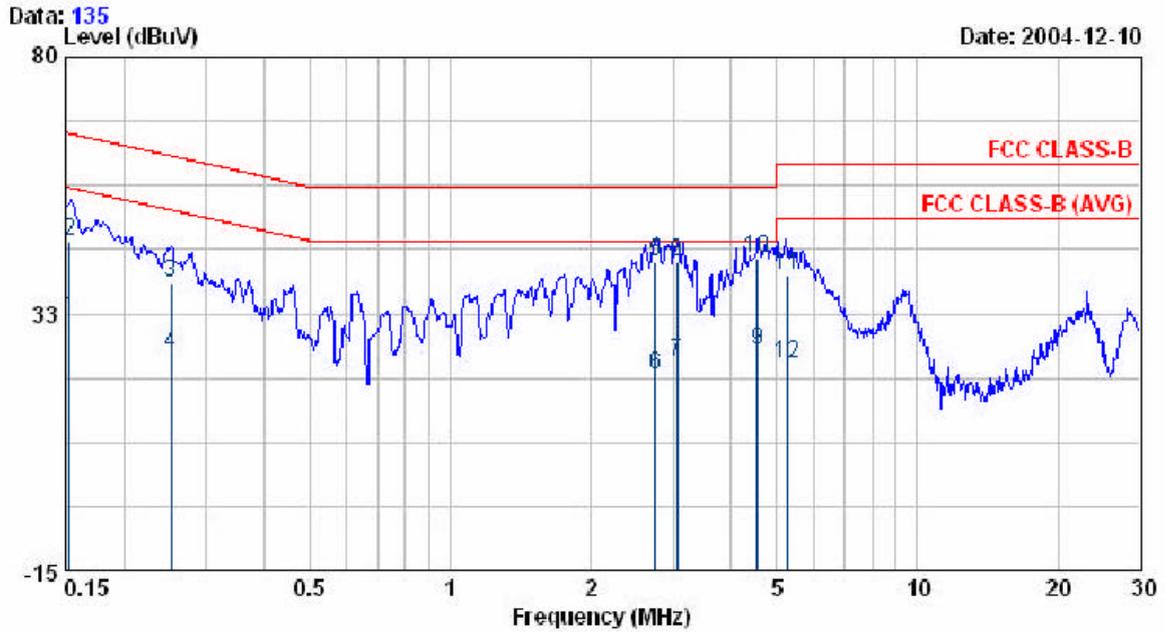


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.153	31.44	0.28	31.72	55.81	-24.10	AVERAGE
0.153	45.53	0.28	45.81	65.81	-20.01	QP
0.252	37.89	0.30	38.19	61.69	-23.50	QP
0.252	24.70	0.30	25.00	51.69	-26.69	AVERAGE
2.755	41.64	0.50	42.14	56.00	-13.86	QP
2.755	20.64	0.50	21.14	46.00	-24.86	AVERAGE
3.067	22.99	0.50	23.49	46.00	-22.51	AVERAGE
3.067	41.42	0.50	41.92	56.00	-14.08	QP
4.548	25.34	0.49	25.83	46.00	-20.17	AVERAGE
4.548	42.11	0.49	42.60	56.00	-13.40	QP
5.279	39.18	0.47	39.65	60.00	-20.35	QP
5.279	22.98	0.47	23.45	50.00	-26.55	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11b CH MID
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

Data: 137
 Level (dBuV)

Date: 2004-12-10

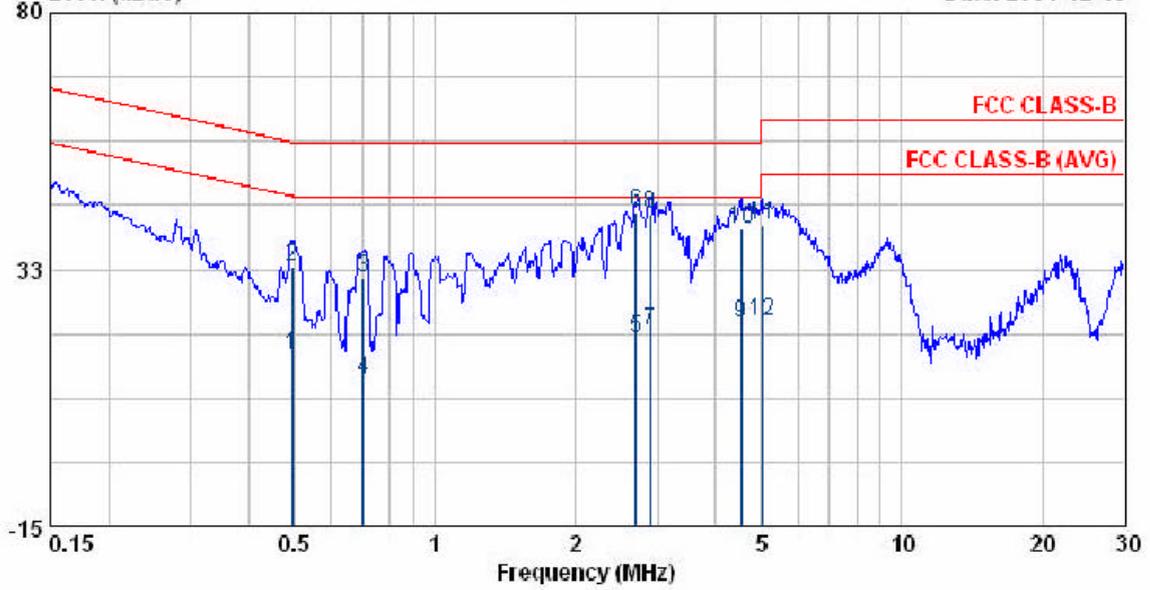

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.496	16.33	0.48	16.81	46.07	-29.27	AVERAGE
0.496	32.52	0.48	33.00	56.07	-23.08	QP
0.703	30.57	0.44	31.01	56.00	-24.99	QP
0.703	11.57	0.44	12.01	46.00	-33.99	AVERAGE
2.703	19.33	0.50	19.83	46.00	-26.17	AVERAGE
2.703	42.48	0.50	42.98	56.00	-13.02	QP
2.898	20.83	0.50	21.33	46.00	-24.67	AVERAGE
2.898	42.23	0.50	42.73	56.00	-13.27	QP
4.524	21.99	0.50	22.49	46.00	-23.51	AVERAGE
4.524	39.36	0.50	39.86	56.00	-16.14	QP
5.031	40.30	0.50	40.80	60.00	-19.20	QP
5.081	22.37	0.50	22.87	50.00	-27.13	AVERAGE


EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11b CH MID
 Memo :

Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

Data: 136

Level (dBuV)

Date: 2004-12-10

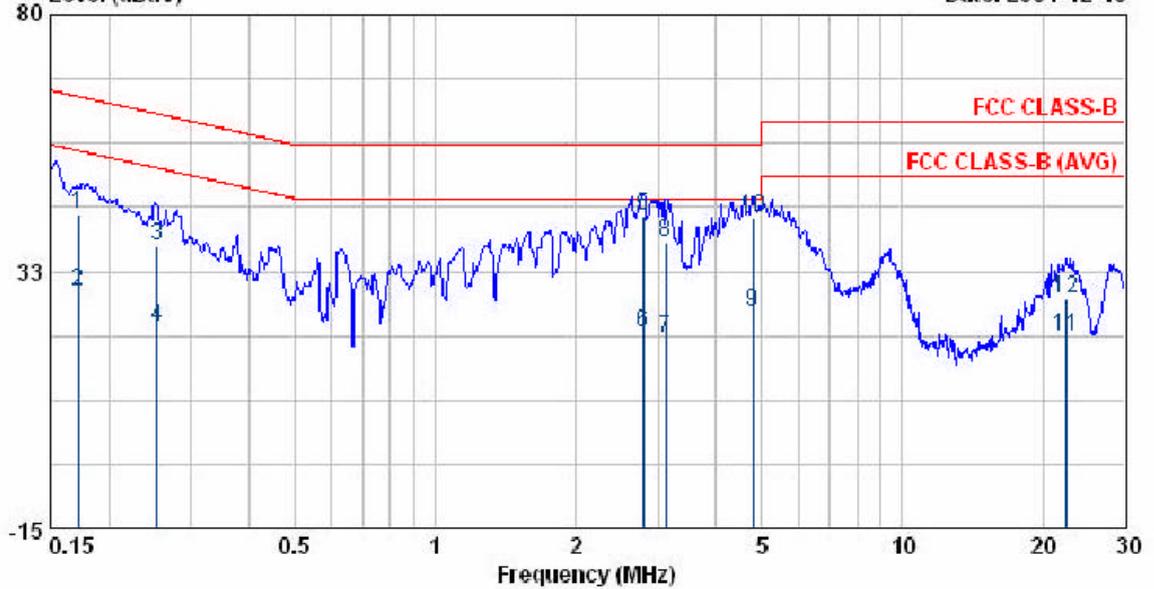

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.172	42.78	0.24	43.02	64.84	-21.82	QP
0.172	28.60	0.24	28.84	54.84	-26.00	AVERAGE
0.254	36.80	0.30	37.10	61.63	-24.53	QP
0.254	21.95	0.30	22.25	51.63	-29.38	AVERAGE
2.784	42.11	0.50	42.61	56.00	-13.39	QP
2.784	20.59	0.50	21.09	46.00	-24.91	AVERAGE
3.126	19.77	0.50	20.27	46.00	-25.73	AVERAGE
3.126	37.53	0.50	38.03	56.00	-17.97	QP
4.786	24.48	0.48	24.96	46.00	-21.04	AVERAGE
4.786	41.83	0.48	42.31	56.00	-13.69	QP
22.453	19.62	0.91	20.53	50.00	-29.47	AVERAGE
22.453	26.47	0.91	27.38	60.00	-32.62	QP


EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11b CH HI
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

Data: 138

Level (dBuV)

Date: 2004-12-10

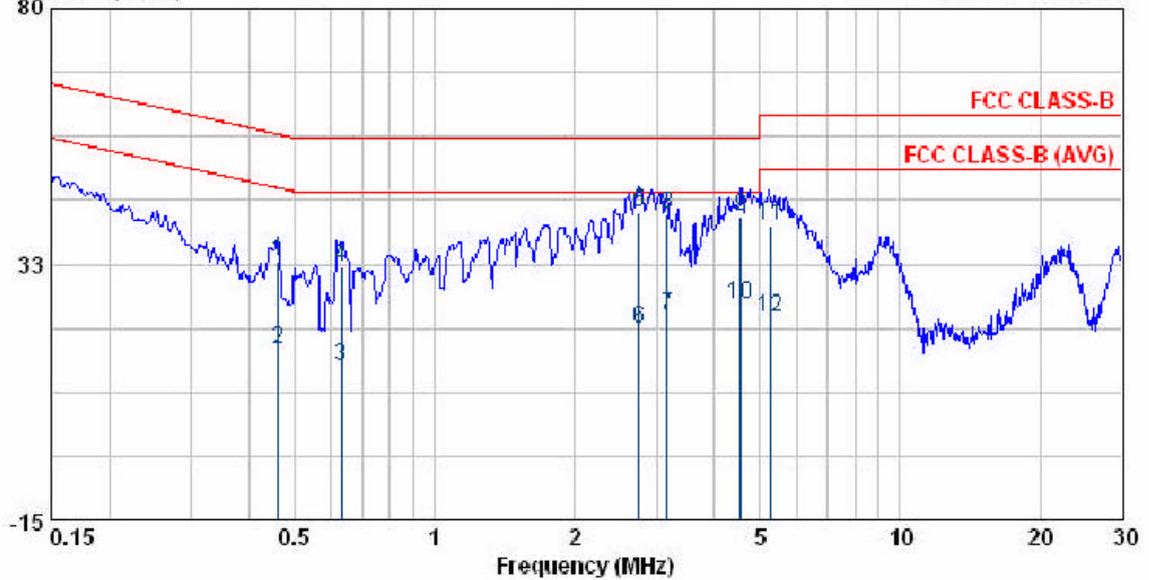

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.461	32.66	0.48	33.14	56.67	-23.52	QP
0.461	16.05	0.48	16.53	46.67	-30.13	AVERAGE
0.630	13.18	0.45	13.63	46.00	-32.37	AVERAGE
0.630	31.65	0.45	32.10	56.00	-23.90	QP
2.752	41.71	0.50	42.21	56.00	-13.79	QP
2.752	19.83	0.50	20.33	46.00	-25.67	AVERAGE
3.158	22.55	0.50	23.05	46.00	-22.95	AVERAGE
3.158	41.37	0.50	41.87	56.00	-14.13	QP
4.563	41.01	0.50	41.51	56.00	-14.49	QP
4.563	24.47	0.50	24.97	46.00	-21.03	AVERAGE
5.256	39.01	0.50	39.51	60.00	-20.49	QP
5.256	22.14	0.50	22.64	50.00	-27.36	AVERAGE


EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11b CH HI
 Memo :

Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

Data: 139

Level (dBuV)

Date: 2004-12-10

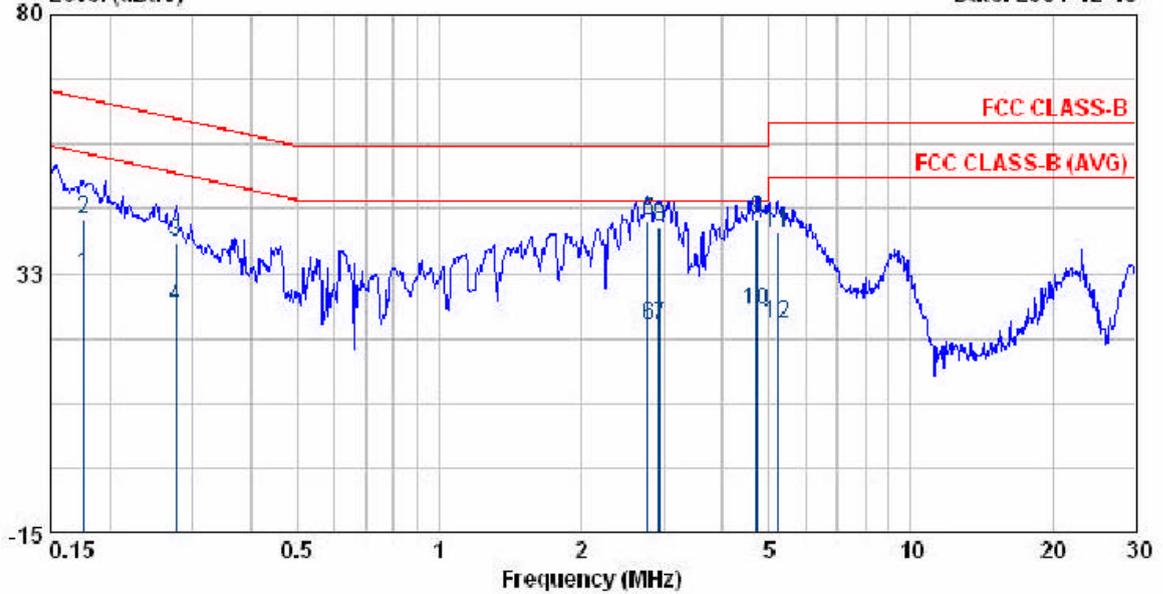

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.176	32.05	0.24	32.29	54.67	-22.39	AVERAGE
0.176	42.04	0.24	42.28	64.67	-22.40	QP
0.277	37.77	0.34	38.11	60.91	-22.80	QP
0.277	25.98	0.34	26.32	50.91	-24.59	AVERAGE
2.772	41.72	0.50	42.22	56.00	-13.78	QP
2.772	22.58	0.50	23.08	46.00	-22.92	AVERAGE
2.930	22.51	0.50	23.01	46.00	-22.99	AVERAGE
2.930	40.43	0.50	40.93	56.00	-15.07	QP
4.727	42.06	0.48	42.54	56.00	-13.46	QP
4.727	25.30	0.48	25.78	46.00	-20.22	AVERAGE
5.209	39.52	0.47	39.99	60.00	-20.01	QP
5.209	22.98	0.47	23.45	50.00	-26.55	AVERAGE