


EUT : WGR615V2  
 Power : AC 110V  
 Test Mode : 802.11g CH L0  
 Memo : AD-121A2

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 58 %

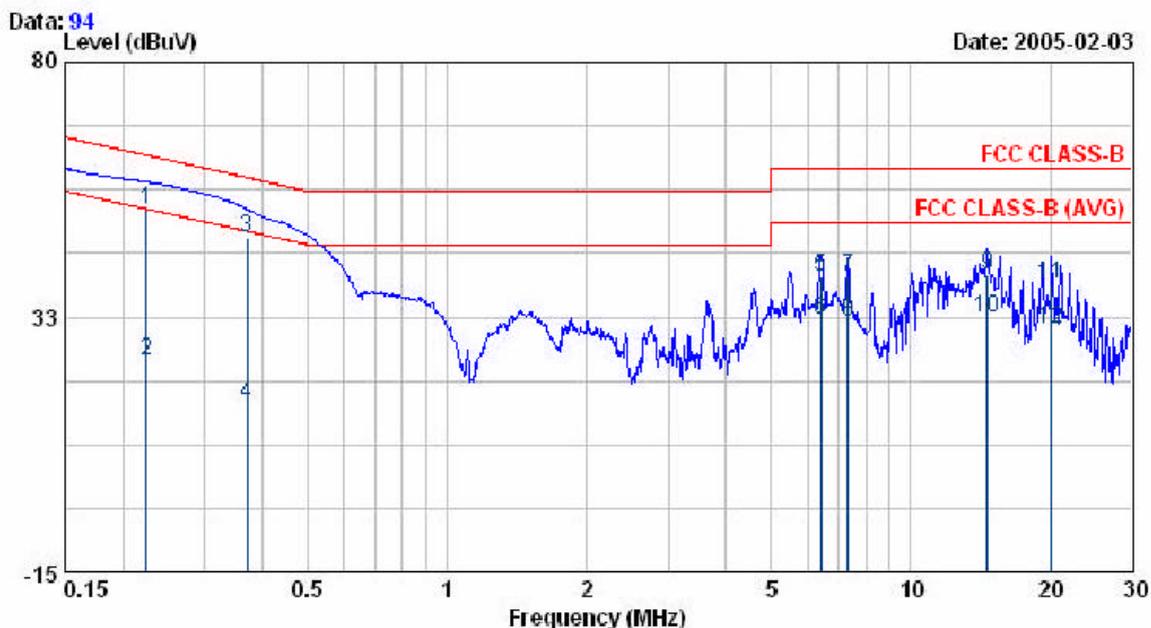

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.225  | 52.20      | 0.25   | 52.45 | 62.64 | -10.19     | QP      |
| 0.225  | 24.07      | 0.25   | 24.32 | 52.64 | -28.32     | AVERAGE |
| 0.371  | 46.78      | 0.47   | 47.25 | 58.47 | -11.23     | QP      |
| 0.371  | 15.85      | 0.47   | 16.32 | 48.47 | -32.16     | AVERAGE |
| 6.414  | 39.53      | 0.50   | 40.03 | 60.00 | -19.97     | QP      |
| 6.414  | 31.37      | 0.50   | 31.87 | 50.00 | -18.13     | AVERAGE |
| 7.325  | 39.32      | 0.50   | 39.82 | 60.00 | -20.18     | QP      |
| 7.325  | 31.24      | 0.50   | 31.74 | 50.00 | -18.26     | AVERAGE |
| 14.644 | 39.69      | 0.78   | 40.47 | 60.00 | -19.53     | QP      |
| 14.644 | 31.43      | 0.78   | 32.21 | 50.00 | -17.79     | AVERAGE |
| 20.097 | 37.80      | 0.70   | 38.50 | 60.00 | -21.50     | QP      |
| 20.097 | 29.63      | 0.70   | 30.33 | 50.00 | -19.67     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss


EUT : WGR615V2  
 Power : AC 110V  
 Test Mode : BQ2.11g CH L0  
 Memo : AD-121A2

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

Data: 93

Level (dBuV)

Date: 2005-02-03

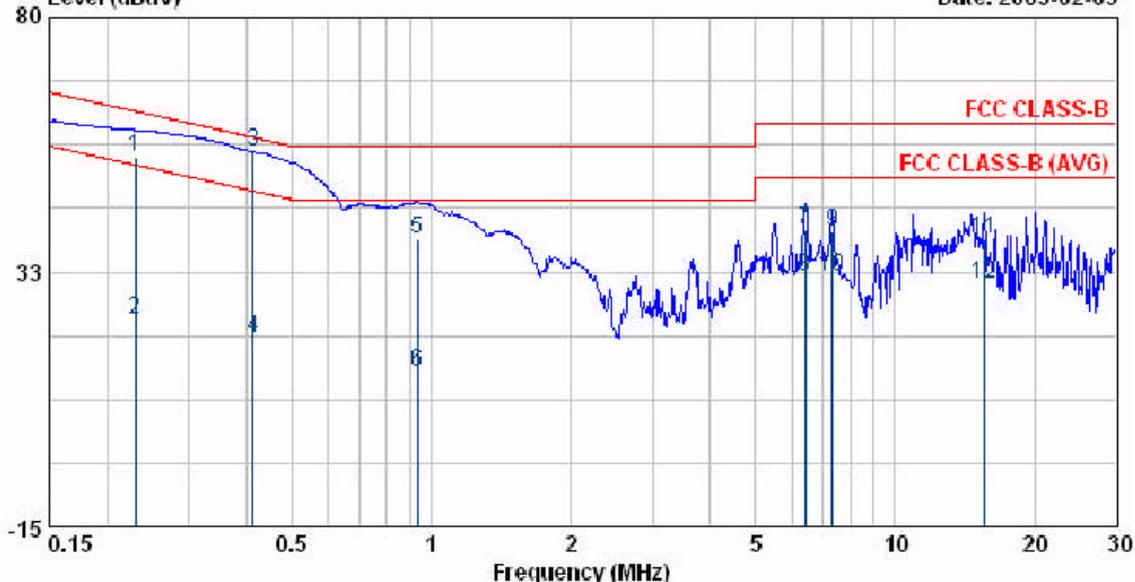


| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.230  | 53.70      | 0.26   | 53.96 | 62.44 | -8.47      | QP      |
| 0.230  | 23.49      | 0.26   | 23.75 | 52.44 | -28.68     | AVERAGE |
| 0.413  | 54.40      | 0.50   | 54.90 | 57.59 | -2.70      | QP      |
| 0.413  | 19.78      | 0.50   | 20.28 | 47.59 | -27.32     | AVERAGE |
| 0.933  | 38.13      | 0.41   | 38.54 | 56.00 | -17.46     | QP      |
| 0.933  | 13.32      | 0.41   | 13.73 | 46.00 | -32.27     | AVERAGE |
| 6.420  | 39.76      | 0.45   | 40.21 | 60.00 | -19.79     | QP      |
| 6.420  | 31.08      | 0.45   | 31.53 | 50.00 | -18.47     | AVERAGE |
| 7.326  | 39.57      | 0.43   | 40.00 | 60.00 | -20.00     | QP      |
| 7.326  | 31.21      | 0.43   | 31.64 | 50.00 | -18.36     | AVERAGE |
| 15.537 | 37.70      | 0.79   | 38.49 | 60.00 | -21.51     | QP      |
| 15.537 | 29.53      | 0.79   | 30.32 | 50.00 | -19.68     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGR615V2  
 Power : AC 110V  
 Test Mode : 802.11g CH MID  
 Memo : AD-121A2

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 58 %

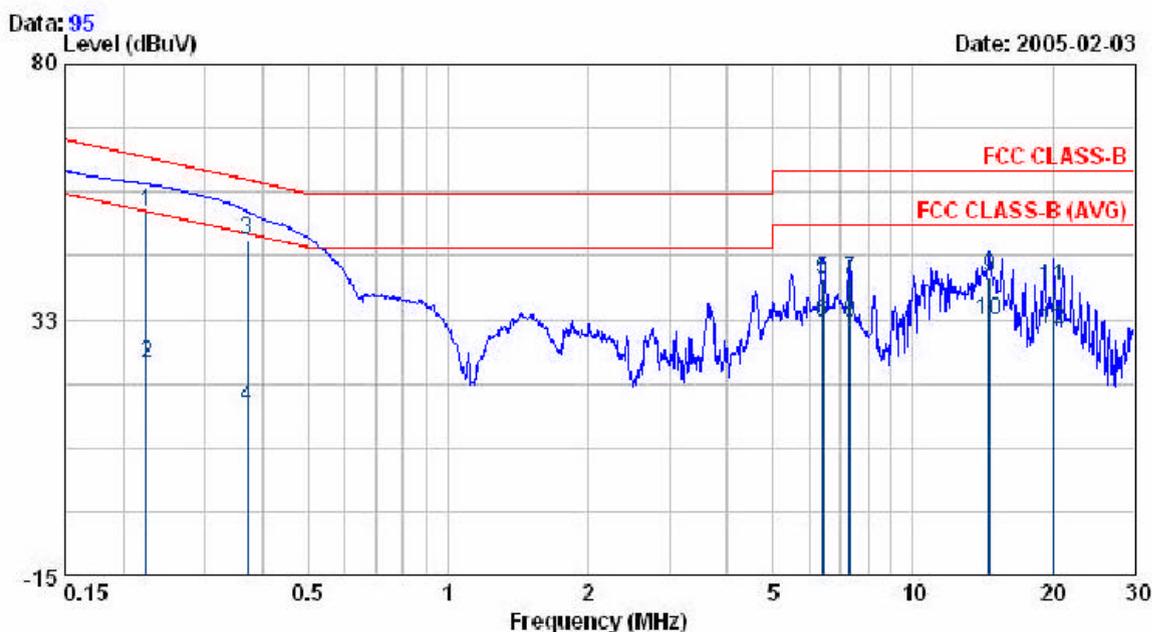


| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.225  | 52.31      | 0.25   | 52.56 | 62.64 | -10.08     | QP      |
| 0.225  | 24.13      | 0.25   | 24.38 | 52.64 | -28.26     | AVERAGE |
| 0.371  | 46.88      | 0.47   | 47.35 | 58.47 | -11.13     | QP      |
| 0.371  | 15.93      | 0.47   | 16.40 | 48.47 | -32.08     | AVERAGE |
| 6.414  | 39.53      | 0.50   | 40.03 | 60.00 | -19.97     | QP      |
| 6.414  | 31.37      | 0.50   | 31.87 | 50.00 | -18.13     | AVERAGE |
| 7.325  | 39.41      | 0.50   | 39.91 | 60.00 | -20.09     | QP      |
| 7.325  | 31.33      | 0.50   | 31.83 | 50.00 | -18.17     | AVERAGE |
| 14.644 | 39.51      | 0.78   | 40.29 | 60.00 | -19.71     | QP      |
| 14.644 | 31.43      | 0.78   | 32.21 | 50.00 | -17.79     | AVERAGE |
| 20.097 | 37.93      | 0.70   | 38.63 | 60.00 | -21.37     | QP      |
| 20.097 | 29.71      | 0.70   | 30.41 | 50.00 | -19.59     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGR615V2  
 Power : AC 110V  
 Test Mode : 802.11g CH MID  
 Memo : AD-121A2

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

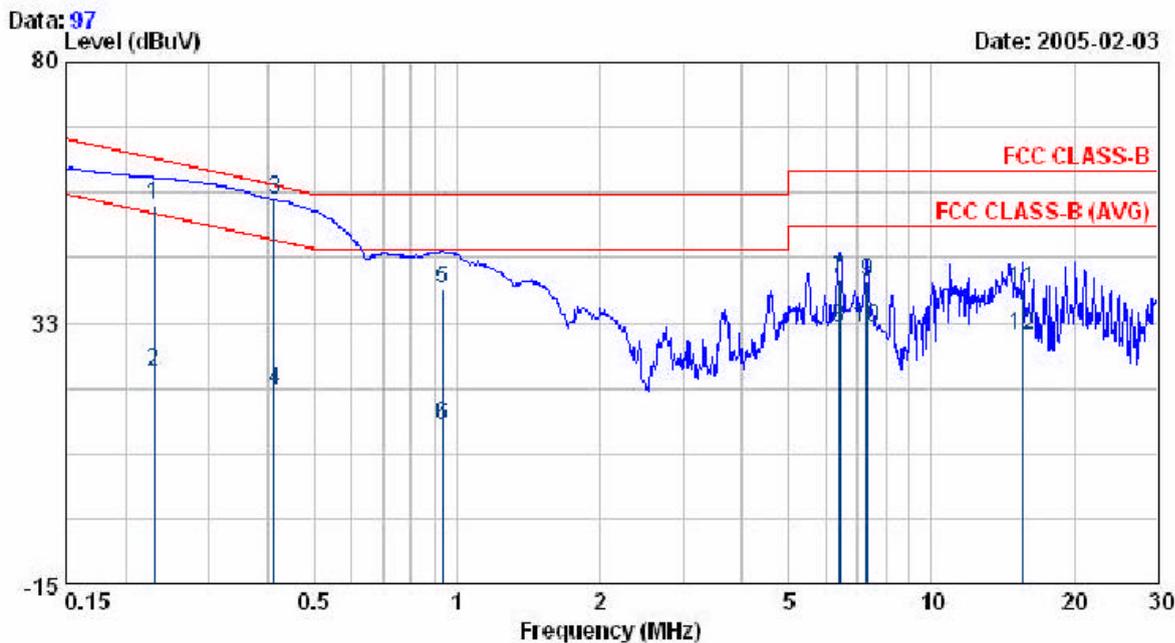


| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.230  | 53.70      | 0.26   | 53.96 | 62.44 | -8.47      | QP      |
| 0.230  | 23.49      | 0.26   | 23.75 | 52.44 | -28.68     | AVERAGE |
| 0.413  | 54.40      | 0.50   | 54.90 | 57.59 | -2.70      | QP      |
| 0.413  | 19.78      | 0.50   | 20.28 | 47.59 | -27.32     | AVERAGE |
| 0.933  | 38.13      | 0.41   | 38.54 | 56.00 | -17.46     | QP      |
| 0.933  | 13.32      | 0.41   | 13.73 | 46.00 | -32.27     | AVERAGE |
| 6.420  | 39.76      | 0.45   | 40.21 | 60.00 | -19.79     | QP      |
| 6.420  | 31.08      | 0.45   | 31.53 | 50.00 | -18.47     | AVERAGE |
| 7.326  | 39.57      | 0.43   | 40.00 | 60.00 | -20.00     | QP      |
| 7.326  | 31.21      | 0.43   | 31.64 | 50.00 | -18.36     | AVERAGE |
| 15.537 | 37.70      | 0.79   | 38.49 | 60.00 | -21.51     | QP      |
| 15.537 | 29.53      | 0.79   | 30.32 | 50.00 | -19.68     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGR615V2  
 Power : AC 110V  
 Test Mode : 802.11g CH HI  
 Memo : AD-121A2

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 58 %

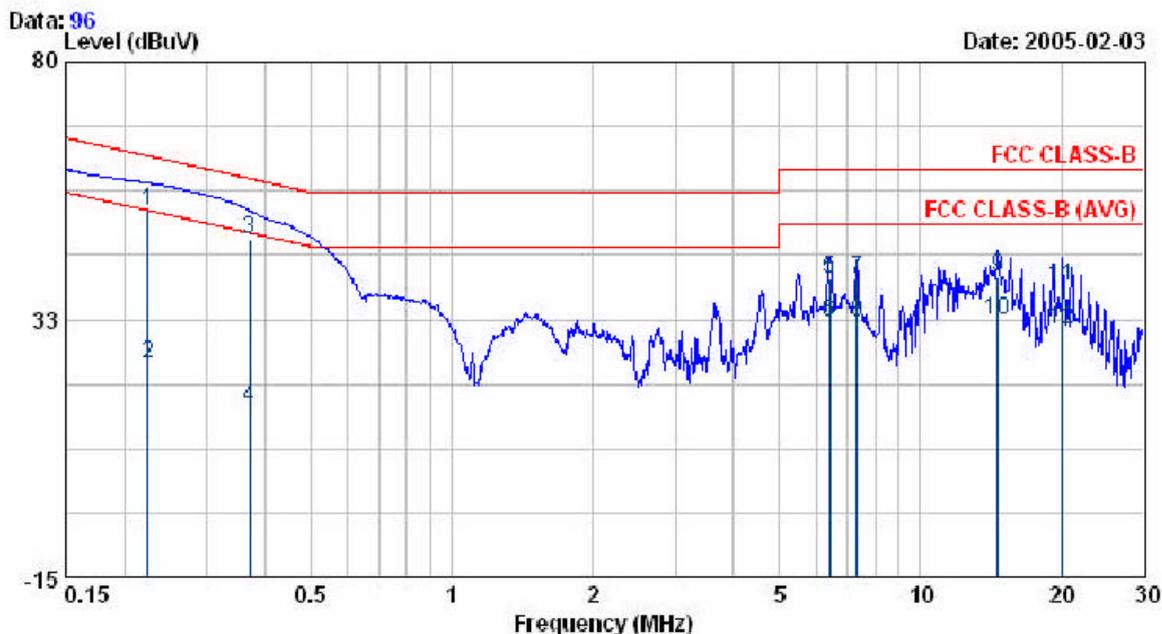

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.225  | 52.41      | 0.25   | 52.66 | 62.64 | -9.98      | QP      |
| 0.225  | 24.21      | 0.25   | 24.46 | 52.64 | -28.18     | AVERAGE |
| 0.371  | 46.76      | 0.47   | 47.23 | 58.47 | -11.25     | QP      |
| 0.371  | 15.87      | 0.47   | 16.34 | 48.47 | -32.14     | AVERAGE |
| 6.414  | 39.63      | 0.50   | 40.13 | 60.00 | -19.87     | QP      |
| 6.414  | 31.37      | 0.50   | 31.87 | 50.00 | -18.13     | AVERAGE |
| 7.325  | 39.48      | 0.50   | 39.98 | 60.00 | -20.02     | QP      |
| 7.325  | 31.33      | 0.50   | 31.83 | 50.00 | -18.17     | AVERAGE |
| 14.644 | 39.51      | 0.78   | 40.29 | 60.00 | -19.71     | QP      |
| 14.644 | 31.52      | 0.78   | 32.30 | 50.00 | -17.70     | AVERAGE |
| 20.097 | 37.95      | 0.70   | 38.65 | 60.00 | -21.35     | QP      |
| 20.097 | 29.71      | 0.70   | 30.41 | 50.00 | -19.59     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss


EUT : WGR615V2  
 Power : AC 110V  
 Test Mode : 802.11g CH HI  
 Memo : AD-121A2

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

Data: 98

Level (dBuV)

Date: 2005-02-03

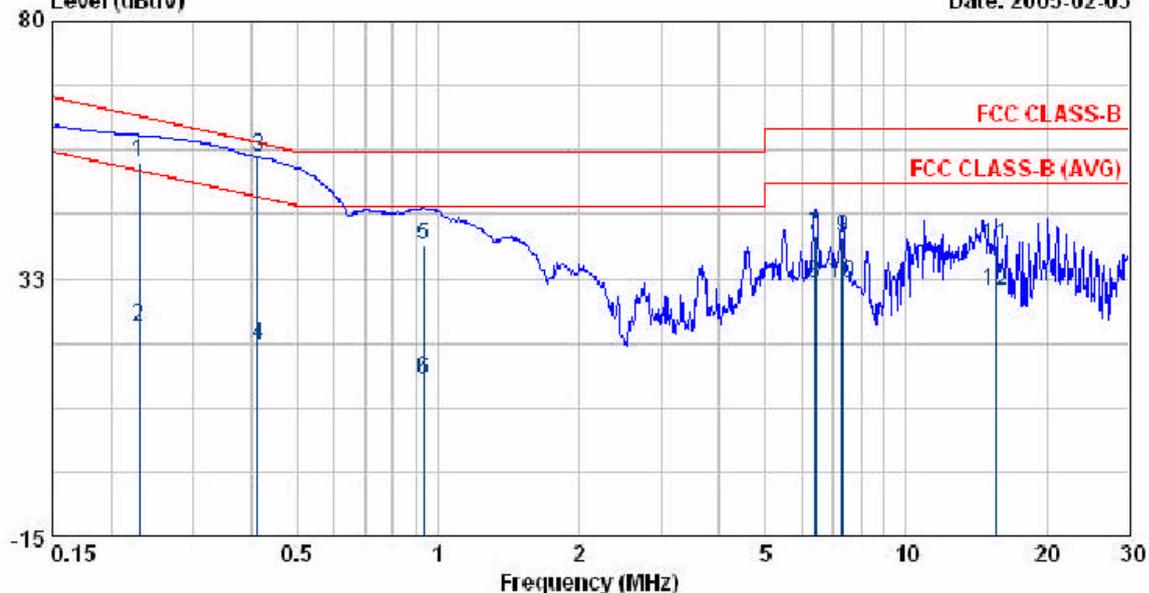

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.230  | 53.70      | 0.26   | 53.96 | 62.44 | -8.47      | QP      |
| 0.230  | 23.49      | 0.26   | 23.75 | 52.44 | -28.68     | AVERAGE |
| 0.413  | 54.40      | 0.50   | 54.90 | 57.59 | -2.70      | QP      |
| 0.413  | 19.78      | 0.50   | 20.28 | 47.59 | -27.32     | AVERAGE |
| 0.933  | 38.23      | 0.41   | 38.64 | 56.00 | -17.36     | QP      |
| 0.933  | 13.45      | 0.41   | 13.86 | 46.00 | -32.14     | AVERAGE |
| 6.420  | 39.76      | 0.45   | 40.21 | 60.00 | -19.79     | QP      |
| 6.420  | 31.08      | 0.45   | 31.53 | 50.00 | -18.47     | AVERAGE |
| 7.326  | 39.63      | 0.43   | 40.06 | 60.00 | -19.94     | QP      |
| 7.326  | 31.22      | 0.43   | 31.65 | 50.00 | -18.35     | AVERAGE |
| 15.537 | 37.70      | 0.79   | 38.49 | 60.00 | -21.51     | QP      |
| 15.537 | 29.53      | 0.79   | 30.32 | 50.00 | -19.68     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss