


Test mode 3: Adaptor Model: 481212003CT

EUT	: WGR615V2	Pol/Phase	: NEUTRAL
Power	: AC 110V	Temperature	: 25 °C
Test Mode	: 802.11b CH L0	Humidity	: 58 %
Memo	: 481212003CT		

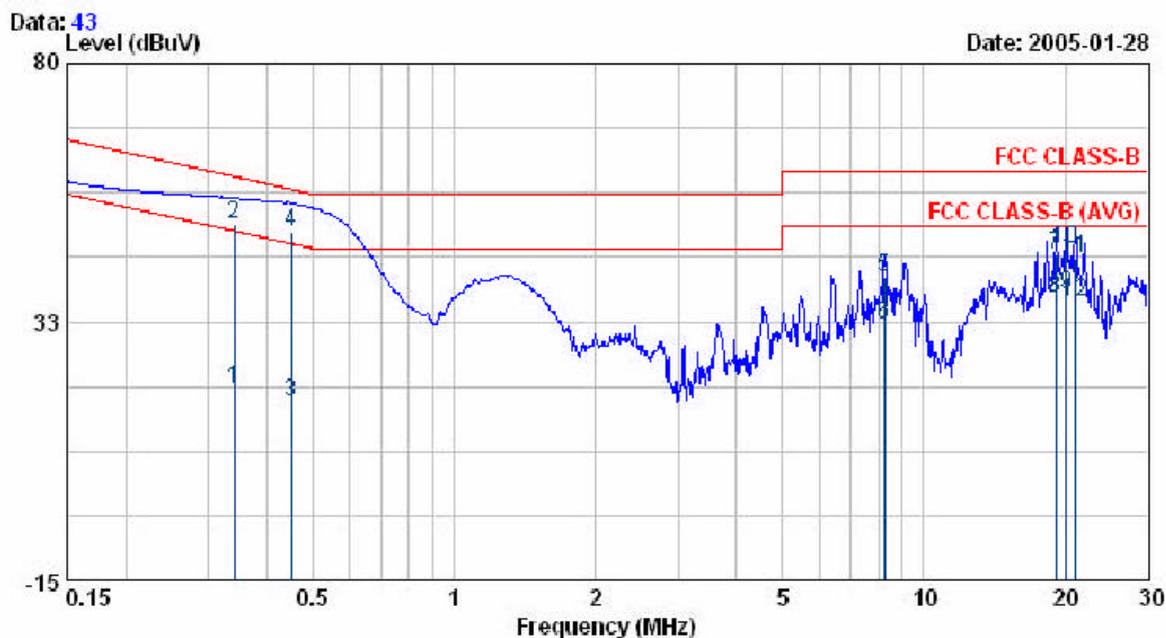

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.341	19.55	0.43	19.98	49.17	-29.19	AVERAGE
0.341	49.87	0.43	50.30	59.17	-8.87	QP
0.452	17.20	0.49	17.69	46.85	-29.16	AVERAGE
0.452	48.38	0.49	48.87	56.85	-7.98	QP
8.237	40.25	0.50	40.75	60.00	-19.25	QP
8.237	31.61	0.50	32.11	50.00	-17.89	AVERAGE
19.156	44.23	0.71	44.94	60.00	-15.06	QP
19.156	36.16	0.71	36.87	50.00	-13.13	AVERAGE
20.092	36.95	0.70	37.65	50.00	-12.35	AVERAGE
20.092	45.15	0.70	45.85	60.00	-14.15	QP
21.027	43.55	0.72	44.27	60.00	-15.73	QP
21.027	35.42	0.72	36.14	50.00	-13.86	AVERAGE

Remarks: 1. Level = Read Level + Factor
2. Factor = LISN(ISN) Factor + Cable Loss


EUT : WGR615V2
 Power : AC 110V
 Test Mode : 802.11b CH L0
 Memo : 481212003CT

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 58 %

Data: 42

Level (dBuV)

Date: 2005-01-28

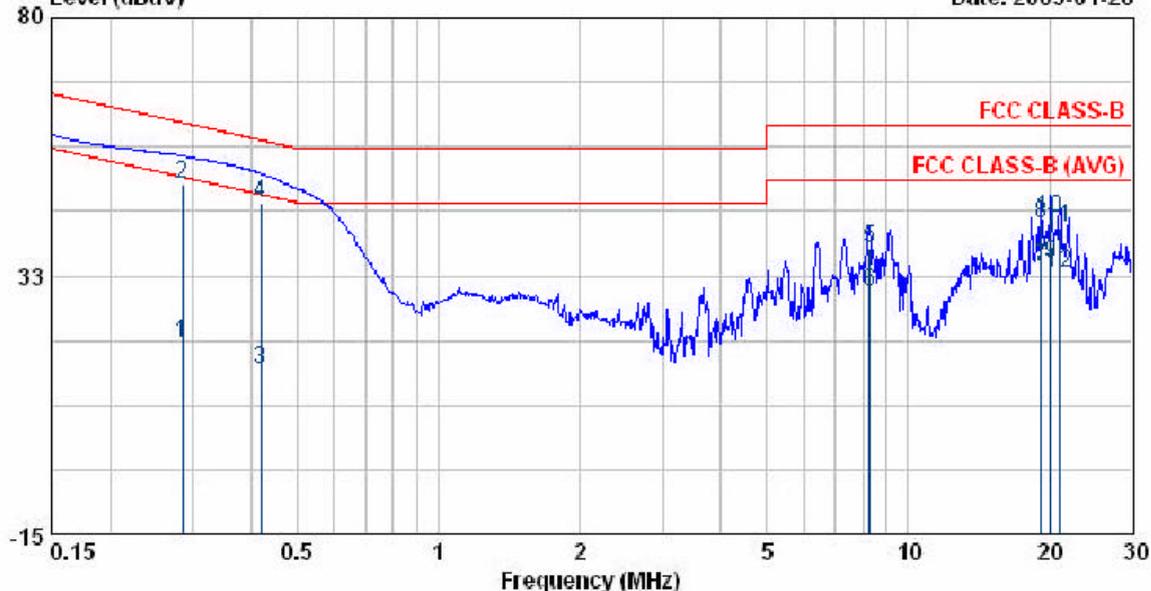


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.285	19.90	0.35	20.25	50.68	-30.43	AVERAGE
0.285	48.90	0.35	49.25	60.68	-11.43	QP
0.418	14.73	0.50	15.23	47.48	-32.26	AVERAGE
0.418	45.31	0.50	45.81	57.48	-11.68	QP
8.281	37.02	0.42	37.44	60.00	-22.56	QP
8.281	28.95	0.42	29.37	50.00	-20.63	AVERAGE
19.158	33.18	0.71	33.89	50.00	-16.11	AVERAGE
19.158	41.40	0.71	42.11	60.00	-17.89	QP
20.094	33.88	0.71	34.59	50.00	-15.41	AVERAGE
20.094	42.33	0.71	43.04	60.00	-16.96	QP
21.013	40.53	0.79	41.32	60.00	-18.68	QP
21.013	32.29	0.79	33.08	50.00	-16.92	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGR615V2
 Power : AC 110V
 Test Mode : 802.11b CH MID
 Memo : 481212003CT

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 58 %

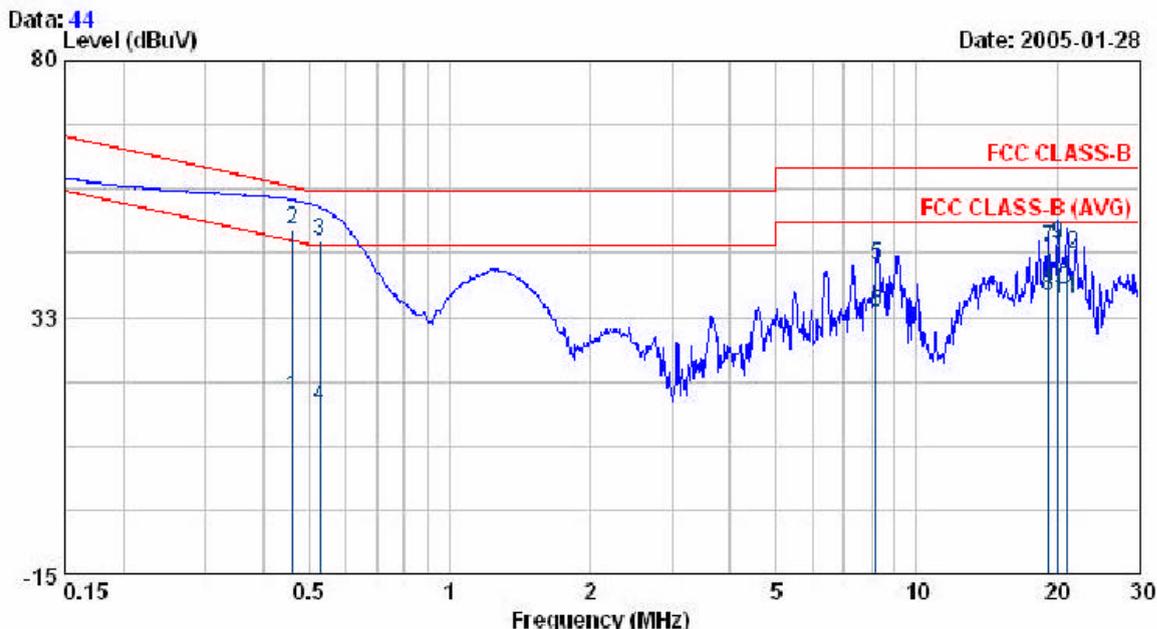


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.461	17.40	0.48	17.88	46.67	-28.79	AVERAGE
0.461	48.31	0.48	48.79	56.67	-7.88	QP
0.529	46.25	0.47	46.72	56.00	-9.28	QP
0.529	15.40	0.47	15.87	46.00	-30.13	AVERAGE
8.214	41.49	0.50	41.99	60.00	-18.01	QP
8.214	32.83	0.50	33.33	50.00	-16.67	AVERAGE
19.159	44.51	0.71	45.22	60.00	-14.78	QP
19.159	35.84	0.71	36.55	50.00	-13.45	AVERAGE
20.094	45.13	0.70	45.83	60.00	-14.17	QP
20.094	36.81	0.70	37.51	50.00	-12.49	AVERAGE
21.022	35.17	0.72	35.89	50.00	-14.11	AVERAGE
21.022	43.45	0.72	44.17	60.00	-15.83	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(1SN) Factor + Cable Loss

EUT : WGR615V2
 Power : AC 110V
 Test Mode : 802.11b CH MID
 Memo : 481212003CT

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 58 %

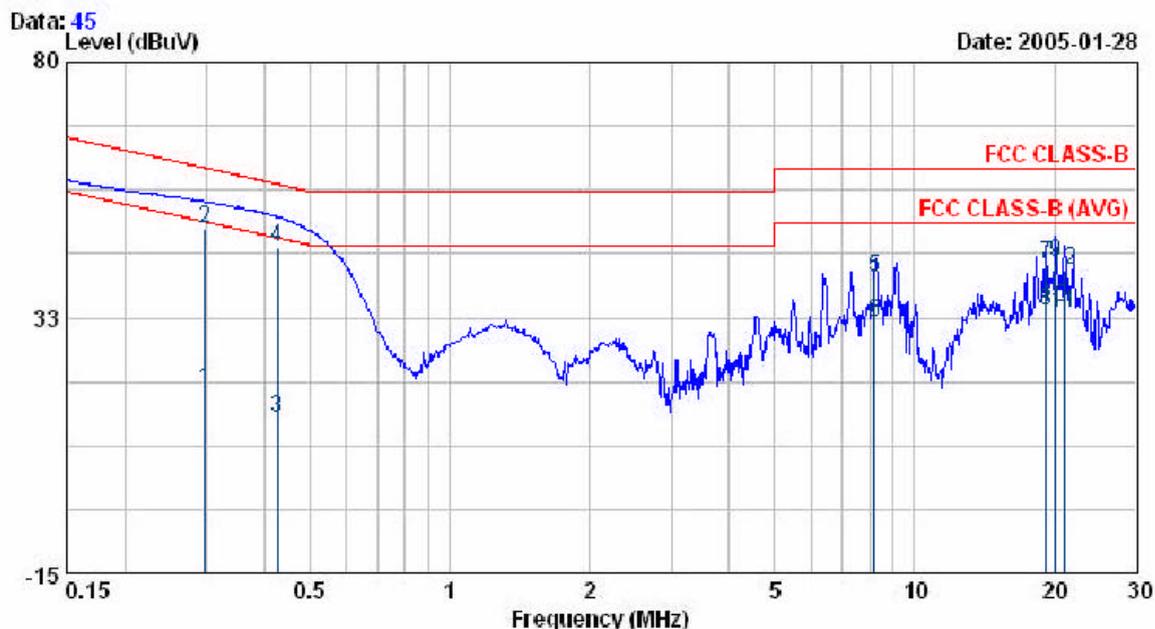


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.297	18.60	0.37	18.97	50.32	-31.35	AVERAGE
0.297	48.69	0.37	49.06	60.32	-11.26	QP
0.426	13.56	0.49	14.05	47.33	-33.27	AVERAGE
0.426	45.09	0.49	45.58	57.33	-11.74	QP
8.214	39.46	0.42	39.88	60.00	-20.12	QP
8.214	31.27	0.42	31.69	50.00	-18.31	AVERAGE
19.158	41.69	0.71	42.40	60.00	-17.60	QP
19.158	33.08	0.71	33.79	50.00	-16.21	AVERAGE
20.089	41.99	0.71	42.70	60.00	-17.30	QP
20.089	33.84	0.71	34.55	50.00	-15.45	AVERAGE
21.004	32.48	0.79	33.27	50.00	-16.73	AVERAGE
21.004	40.74	0.79	41.53	60.00	-18.47	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGR615V2
 Power : AC 110V
 Test Mode : 802.11b CH HI
 Memo : 481212003CT

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 58 %

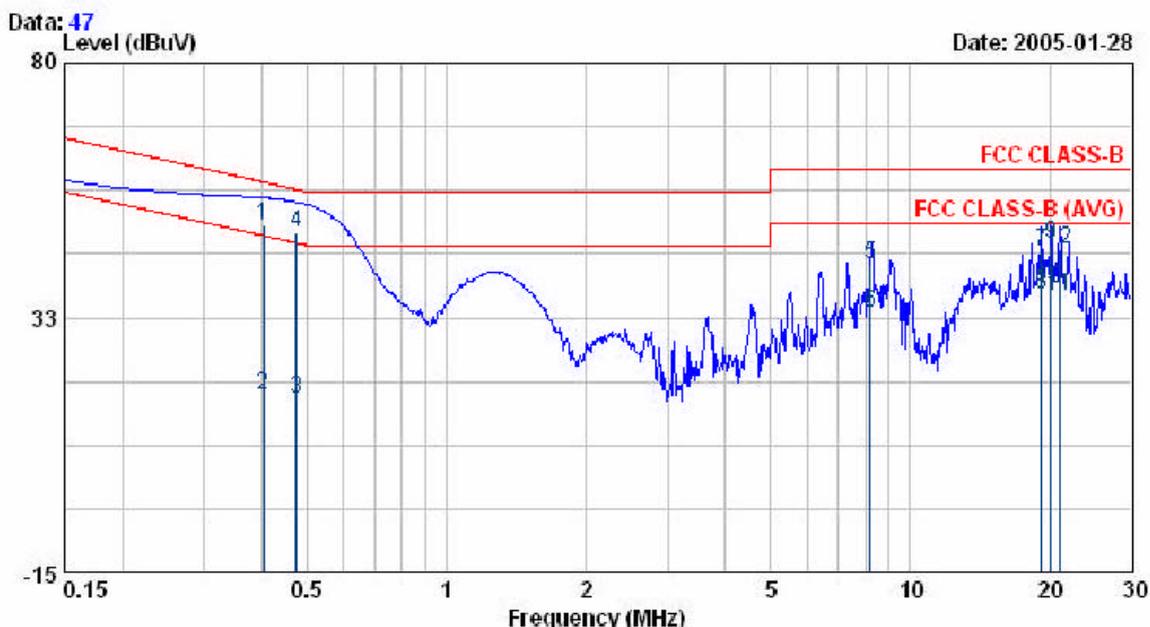


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.403	49.10	0.50	49.60	57.79	-8.19	QP
0.403	17.60	0.50	18.10	47.79	-29.69	AVERAGE
0.474	16.80	0.48	17.28	46.45	-29.17	AVERAGE
0.474	47.96	0.48	48.44	56.45	-8.01	QP
8.212	41.96	0.50	42.48	60.00	-17.52	QP
8.212	32.99	0.50	33.49	50.00	-16.51	AVERAGE
19.164	44.09	0.71	44.80	60.00	-15.20	QP
19.164	36.01	0.71	36.72	50.00	-13.28	AVERAGE
20.100	45.59	0.70	46.29	60.00	-13.71	QP
20.100	37.21	0.70	37.91	50.00	-12.09	AVERAGE
21.006	35.89	0.72	36.61	50.00	-13.39	AVERAGE
21.006	44.33	0.72	45.05	60.00	-14.95	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGR615V2
 Power : AC 110V
 Test Mode : 802.11b CH HI
 Memo : 481212008CT

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 58 %

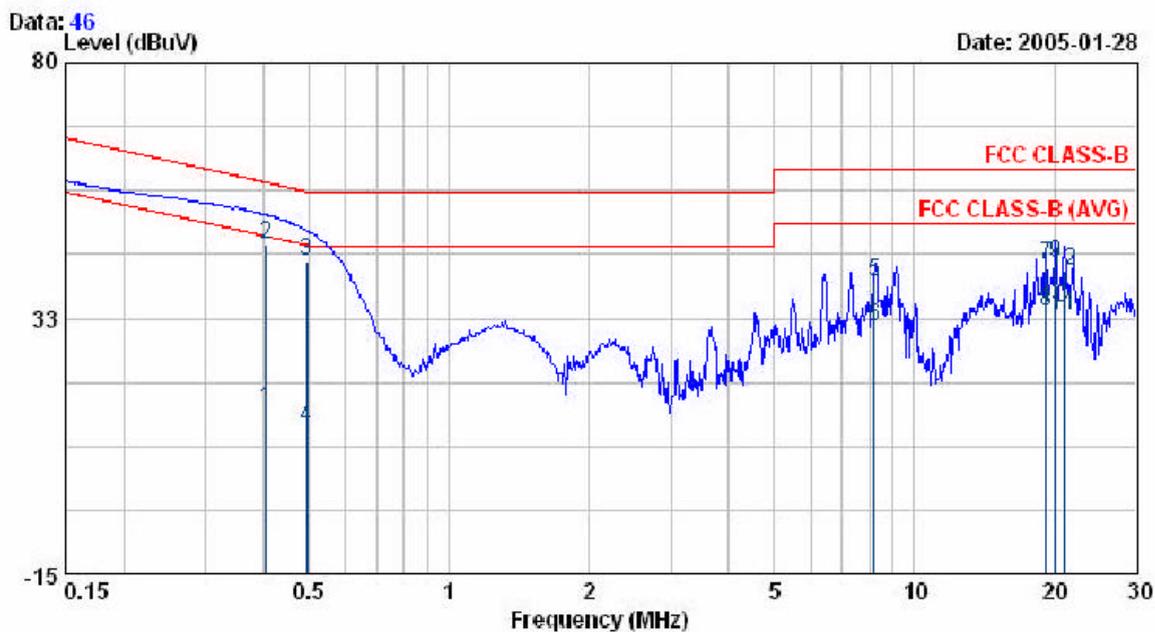

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.404	15.01	0.50	15.51	47.77	-32.26	AVERAGE
0.404	45.63	0.50	46.13	57.77	-11.64	QP
0.494	42.51	0.48	42.99	56.10	-13.11	QP
0.494	11.60	0.48	12.08	46.10	-34.02	AVERAGE
8.209	38.98	0.42	39.40	60.00	-20.60	QP
8.209	30.53	0.42	30.95	50.00	-19.05	AVERAGE
19.160	41.67	0.71	42.38	60.00	-17.62	QP
19.160	32.88	0.71	33.59	50.00	-16.41	AVERAGE
20.098	42.21	0.71	42.92	60.00	-17.08	QP
20.098	33.58	0.71	34.29	50.00	-15.71	AVERAGE
20.981	32.37	0.79	33.16	50.00	-16.84	AVERAGE
20.981	40.51	0.79	41.30	60.00	-18.70	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss