



Bandwidth of Channel 1: 9.64MHz



Bandwidth of Channel 6: 9.60MHz

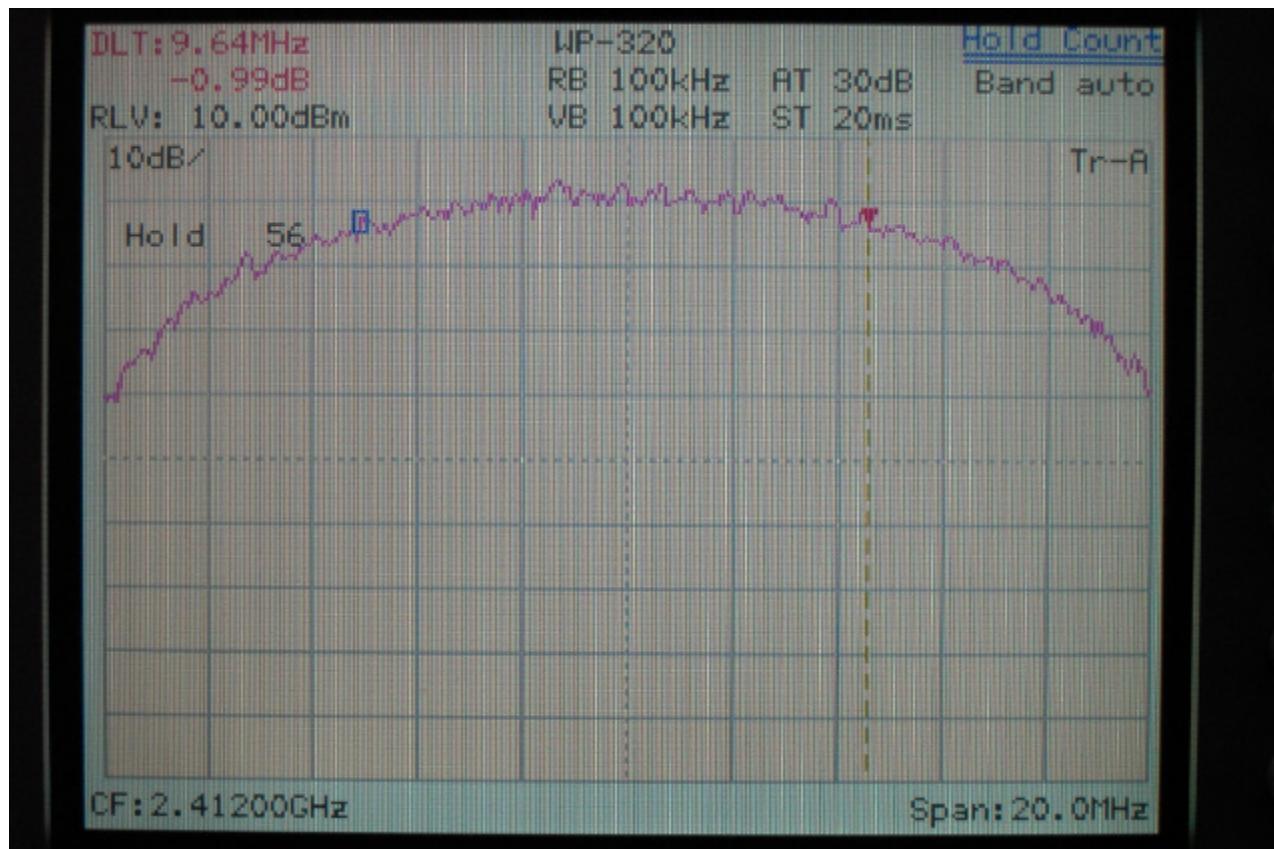


Bandwidth of Channel 11: 9.68MHz

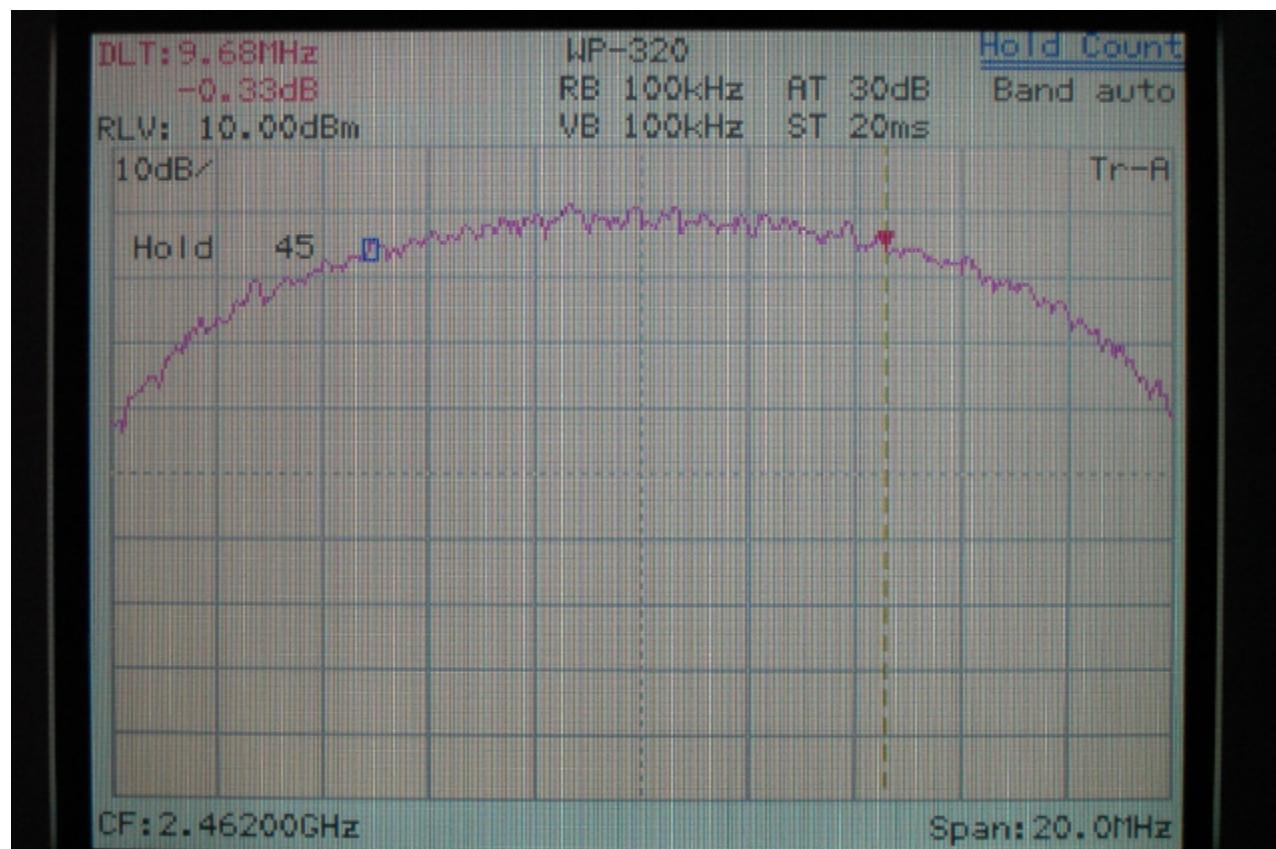

VII. Section 15.247(b): Power Output

7.1 Test Condition & Setup

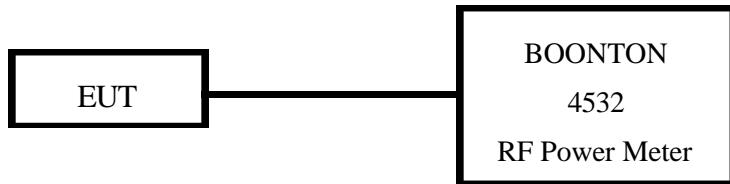

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every tests. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

7.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.
RF Power Meter	4532	BOONTON	117501

7.3 Test Result

Formula: Signal generator + |Cable loss| = Output peak power

Channel	Signal Generator	Cable Loss	Limit	Output peak power	
	dBm	dBm	(DTS)	dBm	mW
CH 1	17.53	0.7	100mW	18.23	66.52
CH 6	17.41	0.7	100mW	18.11	64.71
CH 11	17.26	0.7	100mW	17.96	62.51

Note:

The limit is vary according to the equipment class, listed below:

1. Digital Transmission System (DTS): 100mW
2. Spread Spectrum Transmitter (DSS): 1W

VIII. Section 15.247 (C): Spurious Emissions (Radiated)

8.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, Schwarzeck whole range Small Biconical antenna (Model No.: BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/CMT Horn Antenna (Model 3115 / RA42-K-F-4B-C) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the <1.4> test method:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

FIa (dB μ V/m) = FIr (dB μ V) + Correction Factors

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

For frequency between 1GHz to 25GHz

FIa (dB μ V/m) = FIr (dB μ V) + Correction Factor

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

8.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	H P	3520A00242	06/28/02	06/28/03
RF Filter Section	85460A	H P	3448A00217	06/28/02	06/28/03
Small Biconical Antenna and Balun	BBVU9135 UBAA9114	Schwarzeck 127		05/07/02	05/07/03
Switch/Control Unit (> 30MHz)	3488A	HP	N/A	11/20/02	11/20/03
Auto Switch Box (> 30MHz)	ASB-01	TRC	9904-01	11/20/02	11/20/03
Spectrum Analyzer	8564E	HP	US36433002	08/01/02	08/01/03
Microwave Preamplifier	83051A	HP	3232A00347	08/01/02	08/01/03
Horn Antenna	3115	EMCO	9704 – 5178	08/01/02	08/01/03
Horn Antenna	RA42-K-F-4B-C	CMT	961505-003	02/01/03	02/01/04
Anechoic Chamber (cable calibrated together)				05/20/02	05/20/03

The level of confidence of 95% , the uncertainty of measurement of radiated emission is \pm 3.44dB .

8.3 Test Result of Spurious Radiated Emissions

EUT's transmit only

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Testing room : Temperature : 21.30° C Humidity : 61.30% RH

Table 4 Radiated Emissions for 30MHz 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBmV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
100.32	27.97	1.00	234	-0.30	27.67	43.50	-15.53
200.36	34.90	1.00	67	-2.68	32.22	43.50	-11.28
232.54	33.26	1.07	138	-2.82	30.44	46.00	-15.56
260.05	35.95	1.00	167	-2.88	33.07	46.00	-12.93
282.20	36.43	1.00	227	-2.62	33.81	46.00	-12.19
390.14	33.35	1.00	80	0.09	33.44	46.00	-12.56

Table 5 Radiated Emissions For 30MHz 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBmV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
134.27	32.06	1.00	221	-1.76	30.30	43.50	-11.44
234.31	34.15	1.00	354	-2.81	31.34	46.00	-11.85
259.99	32.44	1.07	353	-2.88	29.56	46.00	-16.44
389.81	34.20	1.00	22	0.07	34.27	46.00	-11.73
563.50	27.51	1.00	170	7.37	34.88	46.00	-18.49
720.12	21.33	1.00	181	12.14	33.47	46.00	-12.53

Note: 1. Margin = Amplitude – limit, if margin is minus means under limit.

2. Corrected Amplitude = Reading Amplitude + Correction Factors

3. Correction factor = Antenna factor + [Cable Loss – Amplitude gain]

Table 6 Radiated Emissions For 1GHz 25GHz [Horizontal] [CH 1]

Radiated Emission				Corrected Amplitude (dB μ V/m)	FCC Class B (3m)		Margin (dB)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)		Limit (dB μ V/m)				
					Peak	Average			
4823.99	1.00	311	3.76	43.20	---	74.00	53.96	-10.76	
7238.19	1.00	56	10.10	51.37	39.04	74.00	53.96	-14.92	
9650.42	1.00	222	11.47	47.41	---	74.00	53.96	-6.55	

Table 7 Radiated Emissions For 1GHz 25GHz [Vertical] [CH 1]

Radiated Emission				Corrected Amplitude (Db μ V/m)	FCC Class B (3m)		Margin (Db)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (Db)		Limit (Db μ V/m)				
					Peak	Average			
4823.99	1.00	161	3.76	40.87	---	74.00	53.96	-13.09	
7235.48	1.00	69	10.08	45.02	---	74.00	53.96	-8.94	
9652.15	1.00	300	11.48	44.92	---	74.00	53.96	-9.04	

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Table 8 Radiated Emissions For 1GHz 25GHz [Horizontal] [CH 6]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4874.05	1.00	96	3.96	41.90	---	74.00	53.96	-12.06
7310.05	1.00	136	10.29	52.07	38.56	74.00	53.96	-15.40
9747.09	1.00	104	11.89	46.33	---	74.00	53.96	-7.63

Table 9 Radiated Emissions For 1GHz 25GHz [Vertical] [CH 6]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4861.96	1.00	51	3.91	39.35	---	74.00	53.96	-14.61
7313.16	1.00	35	10.30	45.91	---	74.00	53.96	-8.05
9747.09	1.00	41	11.89	45.49	---	74.00	53.96	-8.47

Table 10 Radiated Emissions For 1GHz 25GHz [Horizontal] [CH 11]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4924.10	1.00	134	4.12	39.73	---	74.00	53.96	-14.23
7384.42	1.00	26	10.42	51.69	39.86	74.00	53.96	-14.10
9848.93	1.00	120	11.93	45.70	---	74.00	53.96	-8.26

Table 11 Radiated Emissions For 1GHz 25GHz [Vertical] [CH 11]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4837.44	1.00	55	3.77	39.38	---	74.00	53.96	-14.58
7387.38	1.00	123	10.42	46.69	---	74.00	53.96	-7.27
9848.93	1.00	89	11.93	44.70	---	74.00	53.96	-9.26