




FCC SAR TEST REPORT

FCC ID : PY7-48130K
Brand Name : Sony
Applicant : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa,
Shinagawa-ku, Tokyo, 140-0002, Japan
Manufacturer : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa,
Shinagawa-ku, Tokyo, 140-0002, Japan
Standard : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Apr. 01, 2019 and testing was started from Apr. 07, 2019 and completed on Apr. 18, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information	5
3.1 General Information	5
3.2 Device Serial Number	5
3.3 General LTE SAR Test and Reporting Considerations	6
4. RF Exposure Limits.....	9
4.1 Uncontrolled Environment.....	9
4.2 Controlled Environment.....	9
5. Specific Absorption Rate (SAR).....	10
5.1 Introduction	10
5.2 SAR Definition.....	10
6. System Description and Setup	11
6.1 E-Field Probe	12
6.2 Data Acquisition Electronics (DAE)	12
6.3 Phantom.....	13
6.4 Device Holder.....	14
7. Measurement Procedures	15
7.1 Spatial Peak SAR Evaluation.....	15
7.2 Power Reference Measurement.....	16
7.3 Area Scan	16
7.4 Zoom Scan.....	17
7.5 Volume Scan Procedures.....	17
7.6 Power Drift Monitoring.....	17
8. Test Equipment List.....	18
9. System Verification	19
9.1 Tissue Simulating Liquids.....	19
9.2 Tissue Verification	20
9.3 System Performance Check Results.....	21
10. RF Exposure Positions	23
10.1 Ear and handset reference point.....	23
10.2 Definition of the cheek position	24
10.3 Definition of the tilt position	25
10.4 Body Worn Accessory	25
10.5 Product Specific Exposure	26
10.6 Wireless Router.....	26
11. Conducted RF Output Power (Unit: dBm).....	27
12. RF Exposure Conditions	103
13. SAR Test Results	104
13.1 Head SAR	106
13.2 Hotspot SAR	109
13.3 Body Worn Accessory SAR.....	112
13.4 Product Specific SAR.....	114
13.5 Repeated SAR Measurement	115
14. Simultaneous Transmission Analysis.....	116
14.1 Head Exposure Conditions	117
14.2 Hotspot Exposure Conditions.....	118
14.3 Body-Worn Accessory Exposure Conditions	120
14.4 Product Specific Exposure Conditions	121
15. Supplemental tuner tests results.....	122
15.1 Supplemental Head SAR results.....	122
15.2 Supplemental Body SAR results	123
16. Uncertainty Assessment	124
17. References.....	124
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Antenna Location & Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA8O2421-03	01	Initial issue of report	May 10, 2019



1. Statement of Compliance

Applicant Name	Sony Mobile Communications Inc.			
EUT Description	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS and NFC			
Brand Name	Sony			
FCC ID	PY7-48130K			
HW Version	A			
SW Version	2.37			
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	NII	DSS
Head (1g SAR W/kg)	0.31	0.39	0.29	0.20
Body-Worn (1g SAR W/kg)	0.56	0.08	0.08	0.02
Wireless Router (1g SAR W/kg)	0.95	0.21		0.05
Product Specific (10g SAR W/kg)	3.02		0.69	
Highest Simultaneous Transmission (1g SAR W/kg)	Head: 0.95 Body-worn: 0.69 Hotspot: 0.95	Head: 0.84 Body-worn: 0.69 Hotspot: 0.95	Head: 0.95 Body-worn: 0.69 Hotspot: N/A	Head: 0.95 Body-worn: 0.69 Hotspot: 0.95
Highest Simultaneous Transmission (10g SAR W/kg)			Product Specific: 3.45	
Test Result	Pass			
Remark:				
1. This device 2.4GHz WLAN support Hotspot operation and Bluetooth support tethering applications.				
2. When hotspot mode is active which the power will be reduced of LTE B2/B4/B5/B13/B25/B26/B66, detail descriptions of the power reduction mechanism are included in the operational description.				
3. The device employs sensors to detect different usage conditions, when operating in near-body or handheld condition by end user, the device will reduced maximum output powers on the LTE B2/B4/B12/B17/B25/B66 and detail descriptions of the power reduction mechanism are included in the operational description.				
4. This device implements antenna tuning techniques in the LTE 2, 4, 5, 13, 25, 26, 66. SAR test proposal was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing and this design will provide the highest power at different user scenarios and would not influence to the antenna characteristics other than impedance matching, The detail descriptions of the antenna tuner are included in the operational description and supplemental data for additional information on section15				

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body, 4.0 W/kg for Product Specific) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang

Report Producer: Wan Liu

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 941225 D07 941225 D07 UMPC Mini Tablet v01r02

3. Equipment Under Test (EUT) Information

3.1 General Information

Wireless Technologies	Frequency	Operating Mode	
GSM	850 1900	· GSM Voice · GPRS (GMSK) · EDGE (8PSK)	Multi-Slot Class: Class 33
	Does device support dual transfer mode? (Yes)		
W-CDMA (UMTS)	Band 2 Band 4 Band 5	· UMTS Rel.99(Voice & Data) · HSDPA Rel.5 · HSUPA Rel.6 · HSPA+ Rel.7 (downlink only) · DC-HSDPA Rel.8	
LTE (FDD)	Band 2 Band 4 Band 5 Band 7 Band 12 Band 13 Band 17 Band 25 Band 26 Band 66	· QPSK · 16QAM · 64QAM · Rel 14 Carrier Aggregation Downlink Only (the detail refer to section 11)	
LTE (TDD)	Band 41		
WiFi	2.4GHz: 2412 MHz ~ 2472 MHz	· 11b · 11g · 11n (HT20)	
	5GHz: 5.2GHz: 5180 MHz ~ 5240 MHz 5.3GHz: 5260 MHz ~ 5320 MHz 5.5GHz: 5500 MHz ~ 5720 MHz 5.8GHz: 5745 MHz ~ 5825 MHz	· 11a · 11n (HT20) · 11n (HT40) · 11ac (VHT20) · 11ac (VHT40) · 11ac (VHT80)	
Bluetooth	2.4GHz	· BR / EDR / LE	
NFC	13.56MHz	· ASK	

3.2 Device Serial Number

Band	SN
WWAN	QV71004G1S
	QV71004E1S
	QV71005W1S
	QV71005R1S
WLAN	BH97002AFU
	QV71007L1S

Note: Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

3.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																																		
FCC ID	PY7-48130K																																																																																	
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz																																																																																	
Channel Bandwidth	LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																																	
uplink modulations used	QPSK / 16QAM / 64QAM																																																																																	
LTE Voice / Data requirements	Voice and Data																																																																																	
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>												Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																																		
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																											
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																												
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																											
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																											
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																											
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																											
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																											
256 QAM	≥ 1						≤ 5																																																																											
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																																	
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																																	
Power reduction applied to satisfy SAR compliance	Yes, when operating in hotspot mode that LTE B2/B4/B5/B13/B25/B26/B66 power reduction applied to satisfy SAR compliance.																																																																																	
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 11.																																																																																	
LTE Carrier Aggregation Additional Information	This device supports maximum of 5 carriers in the downlink only. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																																	
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																																																																		
LTE Band 2																																																																																		
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																																																							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																																						
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860																																																																						
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880																																																																						
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900																																																																						

LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5		
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq.(MHz)				
L	23205		779.5			23230		782				
M	23230		782									
H	23255		784.5									
LTE Band 17												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq. (MHz)				
L	23755		706.5			23780		709				
M	23790		710			23790		710				
H	23825		713.5			23800		711				
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905

LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L M	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H M	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

6.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	Sep. 05, 2018	Sep. 04, 2019
SPEAG	835MHz System Validation Kit	D835V2	499	Sep. 06, 2018	Sep. 05, 2019
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 19, 2018	Nov. 18, 2019
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 11, 2018	Sep. 10, 2019
SPEAG	2450MHz System Validation Kit	D2450V2	929	Mar. 06, 2019	Mar. 05, 2020
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 31, 2018	Aug. 30, 2019
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2018	Sep. 26, 2019
SPEAG	Data Acquisition Electronics	DAE3	495	May. 24, 2018	May. 23, 2019
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 19, 2018	Sep. 18, 2019
SPEAG	Data Acquisition Electronics	DAE4	854	Jun. 14, 2018	Jun. 13, 2019
SPEAG	Data Acquisition Electronics	DAE4	918	Jun. 20, 2018	Jun. 19, 2019
SPEAG	Data Acquisition Electronics	DAE4	1424	Jan. 24, 2019	Jan. 23, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 24, 2018	Sep. 23, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Jan. 15, 2019	Jan. 14, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3976	Jan. 29, 2019	Jan. 28, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 26, 2018	Jul. 25, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	7515	Oct. 03, 2018	Oct. 02, 2019
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2018	Nov. 11, 2019
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2018	Nov. 11, 2019
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 17, 2018	Apr. 16, 2019
Anritsu	Radio Communication Analyzer	MT8820C	6201381766	Jun. 21, 2018	Jun. 20, 2019
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 21, 2018	May. 20, 2019
R&S	BT Base Station	CBT32	100519	May. 30, 2018	May. 29, 2019
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 11, 2018	Dec. 10, 2019
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 19, 2018	Sep. 18, 2019
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2018	Sep. 18, 2019
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 11, 2018	Sep. 10, 2019
Anritsu	Power Meter	ML2495A	1419002	May. 18, 2018	May. 17, 2019
Anritsu	Power Sensor	MA2411B	1339124	May. 18, 2018	May. 17, 2019
Anritsu	Power Meter	ML2495A	1240001	Sep. 13, 2018	Sep. 12, 2019
Anritsu	Power Sensor	MA2411B	1207349	Sep. 13, 2018	Sep. 12, 2019
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 28, 2018	Aug. 27, 2019
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 23, 2018	Jun. 22, 2019
Mini-Circuits	Power Amplifier	ZVE-8G+	070501814	Oct. 08, 2018	Oct. 07, 2019
Mini-Circuits	Power Amplifier	ZVE-8G+	6382	Aug. 09, 2018	Aug. 08, 2019
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

9. System Verification

9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	HSL	22.3	0.896	40.922	0.89	41.90	0.67	-2.33	±5	2019/4/10
750	HSL	22.6	0.895	42.776	0.89	41.90	0.56	2.09	±5	2019/4/16
750	MSL	22.8	0.976	54.303	0.96	55.50	1.67	-2.16	±5	2019/4/9
835	HSL	22.6	0.877	42.080	0.90	41.50	-2.56	1.40	±5	2019/4/9
835	HSL	22.6	0.877	41.597	0.90	41.50	-2.56	0.23	±5	2019/4/16
835	MSL	22.8	0.986	57.485	0.97	55.20	1.65	4.14	±5	2019/4/8
1750	HSL	22.3	1.396	40.138	1.37	40.10	1.90	0.09	±5	2019/4/10
1750	MSL	22.4	1.477	55.038	1.49	53.40	-0.87	3.07	±5	2019/4/11
1750	MSL	22.4	1.479	54.554	1.49	53.40	-0.74	2.16	±5	2019/4/16
1900	HSL	22.3	1.437	38.661	1.40	40.00	2.64	-3.35	±5	2019/4/10
1900	MSL	22.4	1.536	53.112	1.52	53.30	1.05	-0.35	±5	2019/4/11
2450	HSL	22.2	1.771	38.264	1.80	39.20	-1.61	-2.39	±5	2019/4/16
2450	MSL	22.2	2.001	53.046	1.95	52.70	2.62	0.66	±5	2019/4/16
2600	HSL	22.4	1.999	38.571	1.96	39.00	1.99	-1.10	±5	2019/4/7
2600	MSL	22.5	2.209	52.880	2.16	52.50	2.27	0.72	±5	2019/4/7
5250	HSL	22.6	4.721	36.625	4.71	35.95	0.23	1.88	±5	2019/4/16
5250	MSL	22.2	5.239	47.006	5.36	48.95	-2.26	-3.97	±5	2019/4/17
5600	HSL	22.6	5.083	36.149	5.07	35.50	0.26	1.83	±5	2019/4/16
5600	MSL	22.2	5.675	46.469	5.77	48.50	-1.65	-4.19	±5	2019/4/17
5750	HSL	22.6	5.246	35.932	5.22	35.35	0.50	1.65	±5	2019/4/16
5750	MSL	22.3	5.907	46.777	5.94	48.28	-0.56	-3.11	±5	2019/4/18

9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/4/10	750	HSL	250	D750V3-1012	ES3DV3 - SN3270	DAE3 Sn577	2.04	8.47	8.16	-3.66
2019/4/16	750	HSL	250	D750V3-1012	ES3DV3 - SN3270	DAE3 Sn577	2.01	8.47	8.04	-5.08
2019/4/9	750	MSL	250	D750V3-1012	ES3DV3 - SN3270	DAE3 Sn577	2.24	8.76	8.96	2.28
2019/4/9	835	HSL	250	D835V2-499	ES3DV3 - SN3270	DAE3 Sn577	2.24	9.59	8.96	-6.57
2019/4/16	835	HSL	250	D835V2-499	ES3DV3 - SN3270	DAE3 Sn577	2.24	9.59	8.96	-6.57
2019/4/8	835	MSL	250	D835V2-499	ES3DV3 - SN3270	DAE3 Sn577	2.60	9.82	10.4	5.91
2019/4/10	1750	HSL	250	D1750V2-1068	ES3DV3 - SN3270	DAE3 Sn577	9.20	37.10	36.8	-0.81
2019/4/11	1750	MSL	250	D1750V2-1068	ES3DV3 - SN3270	DAE3 Sn577	9.52	37.00	38.08	2.92
2019/4/16	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3976	DAE4 Sn1424	8.94	37.00	35.76	-3.35
2019/4/10	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE3 Sn577	9.87	40.20	39.48	-1.79
2019/4/11	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE3 Sn577	10.60	40.20	42.4	5.47
2019/4/16	2450	HSL	250	D2450V2-929	ES3DV3 - SN3270	DAE3 Sn577	13.40	52.10	53.6	2.88
2019/4/16	2450	MSL	250	D2450V2-929	ES3DV3 - SN3270	DAE3 Sn577	13.60	51.20	54.4	6.25
2019/4/7	2600	HSL	250	D2600V2-1008	EX3DV4 - SN3728	DAE4 Sn854	15.10	56.40	60.4	7.09
2019/4/7	2600	MSL	250	D2600V2-1008	EX3DV4 - SN3728	DAE4 Sn854	14.10	55.30	56.4	1.99
2019/4/16	5250	HSL	100	D5GHzV2-1006	EX3DV4 - SN3728	DAE4 Sn854	7.62	80.70	76.2	-5.58
2019/4/17	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN7306	DAE3 Sn495	7.24	78.30	72.4	-7.54
2019/4/16	5600	HSL	100	D5GHzV2-1006	EX3DV4 - SN3728	DAE4 Sn854	8.44	83.30	84.4	1.32
2019/4/17	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN7306	DAE3 Sn495	7.97	81.00	79.7	-1.60
2019/4/16	5750	HSL	100	D5GHzV2-1006	EX3DV4 - SN3728	DAE4 Sn854	8.33	80.40	83.3	3.61
2019/4/18	5750	MSL	100	D5GHzV2-1006	EX3DV4 - SN7515	DAE4 Sn918	7.15	77.40	71.5	-7.62

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019/4/16	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3976	DAE4 Sn1424	4.86	19.60	19.44	-0.82
2019/4/11	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE3 Sn577	5.62	21.50	22.48	4.56
2019/4/17	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN7306	DAE3 Sn495	2.05	21.70	20.5	-5.53
2019/4/17	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN7306	DAE3 Sn495	2.20	22.50	22	-2.22
2019/4/18	5750	MSL	100	D5GHzV2-1006	EX3DV4 - SN7515	DAE4 Sn918	1.98	21.30	19.8	-7.04

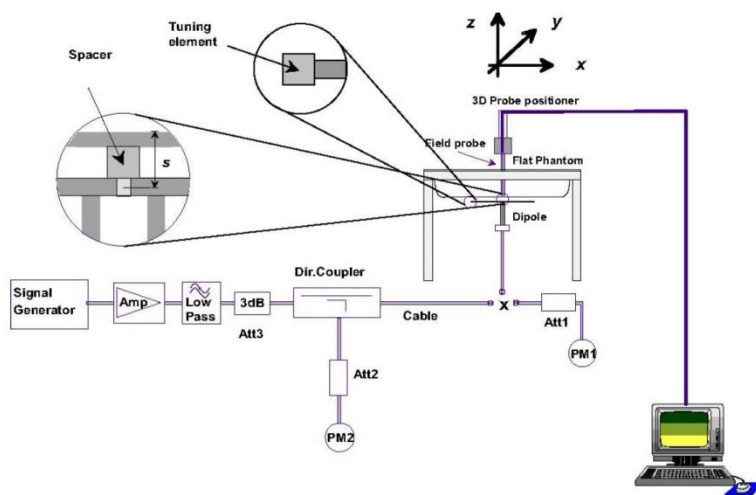

Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

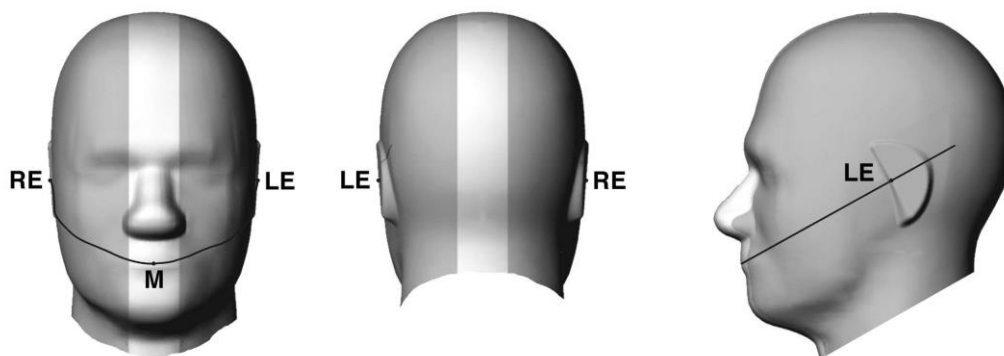


Fig 9.1.1 Front, back, and side views of SAM twin phantom



Fig 9.1.2 Close-up side view of phantom showing the ear region.

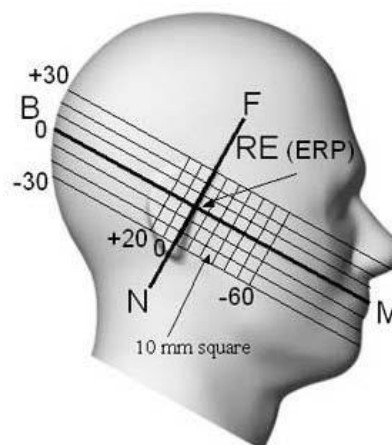


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

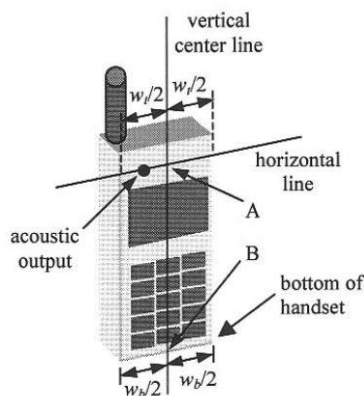


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

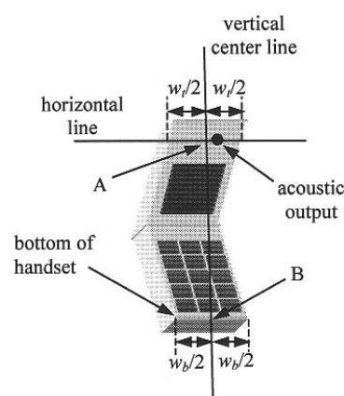


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

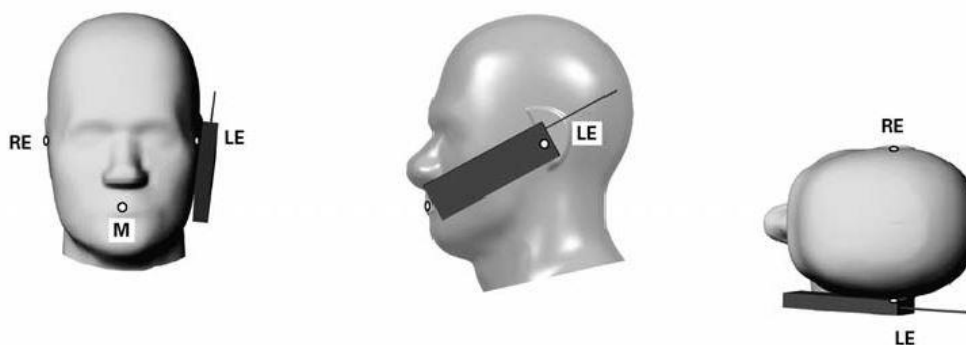


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

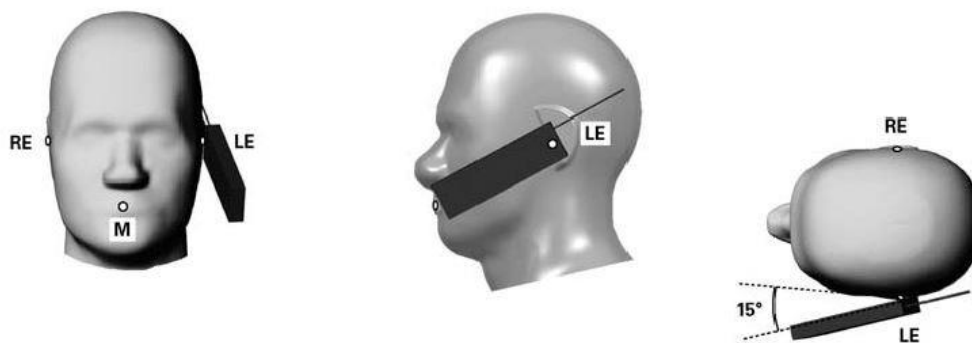


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

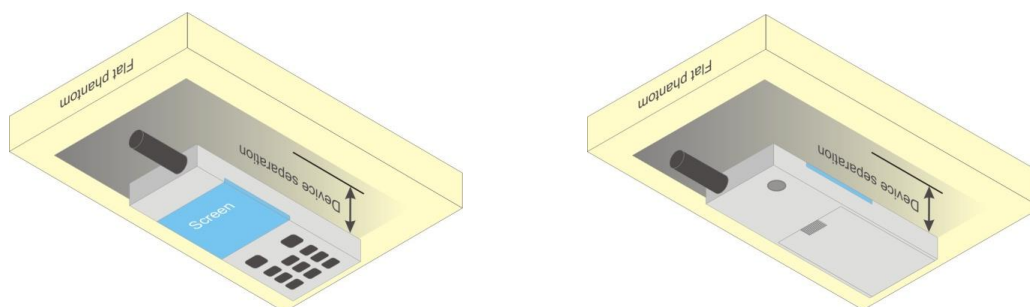


Fig 9.4 Body Worn Position



10.5 Product Specific Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

10.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

11. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

- For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
- Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table above, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 * \log [\sum (\text{power of each slot, in mW}) / 8]$$

- Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

<At-head / Hotspot / Near-body / Product Specific power mode>

GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot		31.22	31.21	31.20	32.20	22.22	22.21	22.20	23.20
GPRS 1 Tx slot		31.23	31.22	31.18	32.20	22.23	22.22	22.18	23.20
GPRS 2 Tx slots		29.36	29.21	28.87	30.20	23.36	23.21	22.87	24.20
GPRS 3 Tx slots		27.41	26.93	27.03	28.20	23.15	22.67	22.77	23.94
GPRS 4 Tx slots		26.26	26.08	26.05	27.20	23.26	23.08	23.05	24.20
EDGE 1 Tx slot		26.69	26.73	26.76	28.00	17.69	17.73	17.76	19.00
EDGE 2 Tx slots		25.22	25.25	25.24	26.50	19.22	19.25	19.24	20.50
EDGE 3 Tx slots		23.32	23.33	23.34	24.50	19.06	19.07	19.08	20.24
EDGE 4 Tx slots		22.42	22.37	22.20	23.50	19.42	19.37	19.20	20.50
DTM Multi-slot class 5	GSM 1 Tx slot	29.15	29.05	28.94	30.20	23.06	22.95	22.83	24.18
	GPRS 1 Tx slot	29.01	28.89	28.76	30.20				
DTM Multi-slot class 9	GSM 1 Tx slot	29.19	29.04	28.95	30.20	23.11	22.95	22.85	24.18
	GPRS 1 Tx slot	29.08	28.89	28.78	30.20				
DTM Multi-slot class 11	GSM 1 Tx slot	27.26	27.12	27.04	28.20	22.93	22.77	22.73	23.94
	GPRS 2 Tx slots	27.15	26.99	26.97	28.20				
DTM Multi-slot class 5	GSM 1 Tx slot	29.16	28.97	28.82	30.20	21.64	21.47	21.37	22.71
	EDGE 1 Tx slot	25.34	25.24	25.23	26.50				
DTM Multi-slot class 9	GSM 1 Tx slot	29.17	29.03	29.01	30.20	21.62	21.49	21.42	22.71
	EDGE 1 Tx slot	25.25	25.14	24.95	26.50				
DTM Multi-slot class 11	GSM 1 Tx slot	27.20	27.10	27.05	28.20	20.82	20.72	20.63	21.85
	EDGE 2 Tx slots	23.44	23.34	23.20	24.50				

GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		27.20	27.63	27.45	28.20	18.20	18.63	18.45	19.20
GPRS 1 Tx slot		27.21	27.65	27.48	28.20	18.21	18.65	18.48	19.20
GPRS 2 Tx slots		25.34	25.58	25.56	26.20	19.34	19.58	19.56	20.20
GPRS 3 Tx slots		23.27	23.59	23.53	24.20	19.01	19.33	19.27	19.94
GPRS 4 Tx slots		22.27	22.58	22.53	23.20	19.27	19.58	19.53	20.20
EDGE 1 Tx slot		25.70	26.11	26.01	27.00	16.70	17.11	17.01	18.00
EDGE 2 Tx slots		24.27	24.26	24.32	25.50	18.27	18.26	18.32	19.50
EDGE 3 Tx slots		22.17	22.22	22.20	23.50	17.91	17.96	17.94	19.24
EDGE 4 Tx slots		21.16	21.24	21.23	22.50	18.16	18.24	18.23	19.50
DTM Multi-slot class 5	GSM 1 Tx slot	25.36	25.45	25.41	26.20	19.22	19.33	19.26	20.18
	GPRS 1 Tx slot	25.11	25.24	25.15	26.20				
DTM Multi-slot class 9	GSM 1 Tx slot	25.40	25.55	25.53	26.20	19.27	19.42	19.40	20.18
	GPRS 1 Tx slot	25.18	25.32	25.31	26.20				
DTM Multi-slot class 11	GSM 1 Tx slot	23.44	23.47	23.46	24.20	19.01	19.10	19.05	19.94
	GPRS 2 Tx slots	23.18	23.31	23.24	24.20				
DTM Multi-slot class 5	GSM 1 Tx slot	25.46	25.49	25.39	26.20	18.87	18.97	18.91	19.84
	EDGE 1 Tx slot	24.24	24.43	24.41	25.50				
DTM Multi-slot class 9	GSM 1 Tx slot	25.21	25.24	25.17	26.20	18.65	18.75	18.71	19.84
	EDGE 1 Tx slot	24.05	24.25	24.25	25.50				
DTM Multi-slot class 11	GSM 1 Tx slot	23.23	23.26	23.25	24.20	18.31	18.42	18.36	19.49
	EDGE 2 Tx slots	22.20	22.35	22.27	23.50				

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.


<At-head / Hotspot / Near-body / Product Specific power mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	18.76	18.93	18.80	19.20	19.30	19.36	19.31	19.70	23.88	23.98	24.02	24.70
3GPP Rel 99	RMC 12.2Kbps	18.78	18.97	18.84	19.20	19.32	19.49	19.40	19.70	23.91	24.00	24.07	24.70
3GPP Rel 6	HSDPA Subtest-1	17.67	17.81	17.73	18.50	18.13	18.37	18.26	19.00	22.87	22.89	23.00	24.00
3GPP Rel 6	HSDPA Subtest-2	17.65	17.76	17.68	18.50	18.16	18.39	18.27	19.00	22.86	22.88	22.95	24.00
3GPP Rel 6	HSDPA Subtest-3	17.15	17.35	17.18	18.00	17.70	17.88	17.77	18.50	22.34	22.38	22.44	23.50
3GPP Rel 6	HSDPA Subtest-4	17.15	17.36	17.18	18.00	17.67	17.86	17.76	18.50	22.36	22.38	22.42	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	17.66	17.80	17.62	18.50	18.12	18.34	18.24	19.00	22.85	22.88	23.00	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	17.63	17.76	17.65	18.50	18.13	18.35	18.26	19.00	22.83	22.84	22.98	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	17.13	17.34	17.15	18.00	17.69	17.89	17.75	18.50	22.31	22.35	22.45	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	17.14	17.34	17.16	18.00	17.68	17.85	17.73	18.50	22.32	22.32	22.43	23.50
3GPP Rel 6	HSUPA Subtest-1	17.69	17.82	17.74	18.50	18.19	18.34	18.26	19.00	22.77	22.90	22.99	24.00
3GPP Rel 6	HSUPA Subtest-2	15.64	15.86	15.72	16.50	16.13	16.36	16.24	17.00	20.75	20.87	20.89	22.00
3GPP Rel 6	HSUPA Subtest-3	16.71	16.80	16.77	17.50	17.21	17.41	17.32	18.00	21.76	21.89	21.97	23.00
3GPP Rel 6	HSUPA Subtest-4	15.68	15.85	15.78	16.50	16.22	16.40	16.30	17.00	20.88	20.97	21.03	22.00
3GPP Rel 6	HSUPA Subtest-5	17.70	17.90	17.80	18.50	18.30	18.40	18.33	19.00	23.00	23.02	23.10	24.00

<LTE Conducted Power>

General Note:

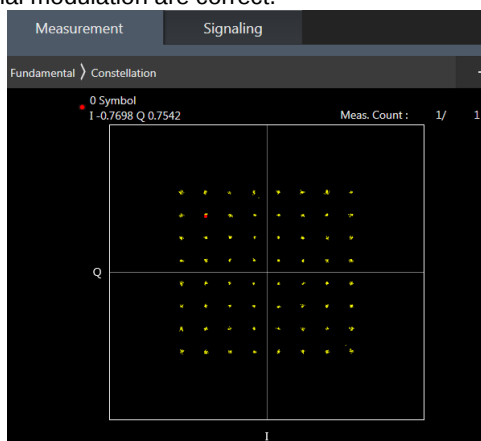1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2/4/5/17 SAR test was covered by Band 25/66/26/12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.



64QAM



16QAM



<LTE Band 2>

<At-head power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	24.43	24.53	24.36	25	0
20	QPSK	1	49	24.28	24.42	24.24		
20	QPSK	1	99	24.33	24.42	24.45		
20	QPSK	50	0	23.52	23.59	23.51	24	1
20	QPSK	50	24	23.51	23.62	23.29		
20	QPSK	50	50	23.55	23.63	23.25		
20	QPSK	100	0	23.52	23.60	23.11		
20	16QAM	1	0	23.19	23.28	23.12	24	1
20	16QAM	1	49	23.07	23.20	23.12		
20	16QAM	1	99	23.08	23.21	23.25		
20	16QAM	50	0	22.00	22.11	22.04	23	2
20	16QAM	50	24	22.01	22.12	22.07		
20	16QAM	50	50	22.03	22.14	22.11		
20	16QAM	100	0	22.02	22.10	22.06		
20	64QAM	1	0	22.14	22.25	22.07	23	2
20	64QAM	1	49	22.04	22.17	22.08		
20	64QAM	1	99	22.05	22.16	22.21		
20	64QAM	50	0	21.01	21.09	21.07	22	3
20	64QAM	50	24	21.02	21.11	21.08		
20	64QAM	50	50	21.06	21.15	21.12		
20	64QAM	100	0	21.04	21.11	21.09		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	24.40	24.50	24.44	25	0
15	QPSK	1	37	24.29	24.44	24.02		
15	QPSK	1	74	24.39	24.46	24.39		
15	QPSK	36	0	23.50	23.59	23.36	24	1
15	QPSK	36	20	23.51	23.61	23.15		
15	QPSK	36	39	23.50	23.60	23.33		
15	QPSK	75	0	23.51	23.59	23.16		
15	16QAM	1	0	23.17	23.29	23.20	24	1
15	16QAM	1	37	23.07	23.26	23.15		
15	16QAM	1	74	23.14	23.23	23.20		
15	16QAM	36	0	21.96	22.06	22.02	23	2
15	16QAM	36	20	21.99	22.10	22.07		
15	16QAM	36	39	21.96	22.11	22.09		
15	16QAM	75	0	21.99	22.10	22.09		
15	64QAM	1	0	22.15	22.27	22.21	23	2
15	64QAM	1	37	22.03	22.20	22.12		
15	64QAM	1	74	22.13	22.23	22.18		
15	64QAM	36	0	20.99	21.10	21.08	22	3
15	64QAM	36	20	21.00	21.14	21.12		
15	64QAM	36	39	21.01	21.14	21.14		
15	64QAM	75	0	20.97	21.08	21.09		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	24.17	24.28	24.07	25	0
10	QPSK	1	25	24.25	24.33	23.98		
10	QPSK	1	49	24.21	24.35	24.34		



FCC SAR TEST REPORT

Report No. : FA802421-03

10	QPSK	25	0	23.35	23.47	23.00	24	1
10	QPSK	25	12	23.39	23.46	23.10		
10	QPSK	25	25	23.31	23.43	23.42		
10	QPSK	50	0	23.35	23.45	23.09		
10	16QAM	1	0	23.00	23.06	23.18	24	1
10	16QAM	1	25	23.01	23.15	23.10		
10	16QAM	1	49	23.00	23.13	23.09		
10	16QAM	25	0	21.86	22.01	21.94	23	2
10	16QAM	25	12	21.88	22.02	21.99		
10	16QAM	25	25	21.84	21.98	21.96		
10	16QAM	50	0	21.86	22.00	21.97		
10	64QAM	1	0	21.94	22.04	22.11	23	2
10	64QAM	1	25	21.98	22.12	22.03		
10	64QAM	1	49	21.97	22.09	22.08		
10	64QAM	25	0	20.88	21.02	20.98	22	3
10	64QAM	25	12	20.89	21.04	21.00		
10	64QAM	25	25	20.82	20.99	20.98		
10	64QAM	50	0	20.86	21.01	20.97		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	24.22	24.27	24.01	25	0
5	QPSK	1	12	24.25	24.36	24.35		
5	QPSK	1	24	24.22	24.34	24.33		
5	QPSK	12	0	23.37	23.39	23.30	24	1
5	QPSK	12	7	23.42	23.50	23.49		
5	QPSK	12	13	23.40	23.49	23.50		
5	QPSK	25	0	23.38	23.42	23.38		
5	16QAM	1	0	23.00	23.03	23.02	24	1
5	16QAM	1	12	23.03	23.15	23.14		
5	16QAM	1	24	22.99	23.15	23.14		
5	16QAM	12	0	21.86	21.95	21.89	23	2
5	16QAM	12	7	21.92	21.99	22.06		
5	16QAM	12	13	21.91	22.03	22.03		
5	16QAM	25	0	21.87	21.94	21.92		
5	64QAM	1	0	22.02	22.00	21.97	23	2
5	64QAM	1	12	21.99	22.12	22.09		
5	64QAM	1	24	21.96	22.13	22.09		
5	64QAM	12	0	20.92	21.00	20.97	22	3
5	64QAM	12	7	20.98	21.04	21.09		
5	64QAM	12	13	20.95	21.09	21.06		
5	64QAM	25	0	20.92	20.99	20.92		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	24.26	24.24	24.31	25	0
3	QPSK	1	8	24.40	24.46	24.44		
3	QPSK	1	14	24.32	24.43	24.37		
3	QPSK	8	0	23.41	23.43	23.43	24	1
3	QPSK	8	4	23.45	23.48	23.47		
3	QPSK	8	7	23.45	23.54	23.49		
3	QPSK	15	0	23.42	23.44	23.48		
3	16QAM	1	0	23.06	23.04	23.05	24	1
3	16QAM	1	8	23.16	23.29	23.21		
3	16QAM	1	14	23.11	23.18	23.12		
3	16QAM	8	0	21.99	22.03	22.01	23	2
3	16QAM	8	4	22.07	22.05	22.05		
3	16QAM	8	7	22.04	22.14	22.05		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	16QAM	15	0	21.97	21.98	22.03		
3	64QAM	1	0	21.98	21.97	22.05	23	2
3	64QAM	1	8	22.14	22.22	22.17		
3	64QAM	1	14	22.06	22.17	22.12		
3	64QAM	8	0	20.97	20.99	21.06	22	3
3	64QAM	8	4	21.04	21.05	21.08		
3	64QAM	8	7	21.05	21.11	21.08		
3	64QAM	15	0	20.96	20.97	21.02		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	24.18	24.24	24.22	25	0
1.4	QPSK	1	3	24.28	24.35	24.33		
1.4	QPSK	1	5	24.23	24.33	24.27		
1.4	QPSK	3	0	24.20	24.27	24.29		
1.4	QPSK	3	1	24.25	24.32	24.34		
1.4	QPSK	3	3	24.24	24.33	24.30		
1.4	QPSK	6	0	23.32	23.36	23.35	24	1
1.4	16QAM	1	0	22.98	23.00	23.02	24	1
1.4	16QAM	1	3	23.06	23.17	23.11		
1.4	16QAM	1	5	23.01	23.11	23.08		
1.4	16QAM	3	0	22.81	22.79	22.79		
1.4	16QAM	3	1	22.84	22.87	22.86		
1.4	16QAM	3	3	22.76	22.91	22.85		
1.4	16QAM	6	0	21.88	21.95	21.98	23	2
1.4	64QAM	1	0	21.95	22.01	21.99	23	2
1.4	64QAM	1	3	22.04	22.10	22.07		
1.4	64QAM	1	5	21.98	22.06	21.99		
1.4	64QAM	3	0	21.97	21.98	21.99		
1.4	64QAM	3	1	22.02	22.03	22.07		
1.4	64QAM	3	3	21.92	22.06	22.00		
1.4	64QAM	6	0	20.90	20.89	20.91	22	3



<Hotspot mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.99	18.85	18.88	19.5	0
20	QPSK	1	49	18.84	18.85	18.88		
20	QPSK	1	99	18.84	18.87	18.92		
20	QPSK	50	0	19.04	19.01	19.07	19.5	0
20	QPSK	50	24	19.04	19.01	19.09		
20	QPSK	50	50	19.06	19.07	19.14		
20	QPSK	100	0	19.06	19.03	19.10		
20	16QAM	1	0	18.72	18.60	18.65	19.5	0
20	16QAM	1	49	18.57	18.62	18.66		
20	16QAM	1	99	18.62	18.65	18.69		
20	16QAM	50	0	18.53	18.52	18.56	19.5	0
20	16QAM	50	24	18.55	18.55	18.60		
20	16QAM	50	50	18.58	18.56	18.64		
20	16QAM	100	0	18.56	18.54	18.59		
20	64QAM	1	0	18.70	18.54	18.62	19.5	0
20	64QAM	1	49	18.56	18.61	18.65		
20	64QAM	1	99	18.58	18.64	18.71		
20	64QAM	50	0	18.58	18.55	18.60	19.5	0
20	64QAM	50	24	18.59	18.56	18.62		
20	64QAM	50	50	18.60	18.60	18.66		
20	64QAM	100	0	18.58	18.56	18.62		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.94	18.92	18.98	19.5	0
15	QPSK	1	37	18.89	18.88	18.94		
15	QPSK	1	74	18.96	18.91	18.99		
15	QPSK	36	0	19.03	19.01	19.07	19.5	0
15	QPSK	36	20	19.05	19.04	19.13		
15	QPSK	36	39	19.07	19.07	19.12		
15	QPSK	75	0	19.06	19.03	19.10		
15	16QAM	1	0	18.77	18.69	18.82	19.5	0
15	16QAM	1	37	18.60	18.67	18.72		
15	16QAM	1	74	18.75	18.69	18.77		
15	16QAM	36	0	18.53	18.51	18.57	19.5	0
15	16QAM	36	20	18.55	18.55	18.61		
15	16QAM	36	39	18.56	18.55	18.63		
15	16QAM	75	0	18.54	18.54	18.58		
15	64QAM	1	0	18.72	18.65	18.74	19.5	0
15	64QAM	1	37	18.59	18.65	18.67		
15	64QAM	1	74	18.69	18.65	18.71		
15	64QAM	36	0	18.56	18.54	18.59	19.5	0
15	64QAM	36	20	18.60	18.57	18.65		
15	64QAM	36	39	18.59	18.61	18.65		
15	64QAM	75	0	18.56	18.55	18.62		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.83	18.75	18.97	19.5	0
10	QPSK	1	25	18.88	18.85	18.89		
10	QPSK	1	49	18.81	18.81	18.87		
10	QPSK	25	0	18.96	18.93	19.00	19.5	0
10	QPSK	25	12	18.98	18.96	19.04		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

10	QPSK	25	25	18.92	18.92	18.98		
10	QPSK	50	0	18.98	18.93	19.01		
10	16QAM	1	0	18.57	18.55	18.73		
10	16QAM	1	25	18.62	18.61	18.66	19.5	0
10	16QAM	1	49	18.58	18.60	18.70		
10	16QAM	25	0	18.49	18.45	18.53		
10	16QAM	25	12	18.51	18.46	18.56	19.5	0
10	16QAM	25	25	18.44	18.42	18.51		
10	16QAM	50	0	18.48	18.42	18.52		
10	64QAM	1	0	18.60	18.55	18.69	19.5	0
10	64QAM	1	25	18.59	18.62	18.62		
10	64QAM	1	49	18.56	18.59	18.64		
10	64QAM	25	0	18.51	18.48	18.55	19.5	0
10	64QAM	25	12	18.52	18.49	18.57		
10	64QAM	25	25	18.45	18.44	18.52		
10	64QAM	50	0	18.50	18.47	18.53		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.90	18.77	18.82	19.5	0
5	QPSK	1	12	18.89	18.86	18.93		
5	QPSK	1	24	18.88	18.88	18.94		
5	QPSK	12	0	18.99	18.91	18.96	19.5	0
5	QPSK	12	7	19.05	18.96	19.07		
5	QPSK	12	13	19.02	18.99	19.07		
5	QPSK	25	0	19.01	18.93	18.96		
5	16QAM	1	0	18.65	18.52	18.65	19.5	0
5	16QAM	1	12	18.66	18.64	18.73		
5	16QAM	1	24	18.63	18.62	18.68		
5	16QAM	12	0	18.50	18.42	18.49	19.5	0
5	16QAM	12	7	18.55	18.44	18.61		
5	16QAM	12	13	18.54	18.50	18.59		
5	16QAM	25	0	18.52	18.44	18.52		
5	64QAM	1	0	18.65	18.50	18.61	19.5	0
5	64QAM	1	12	18.66	18.63	18.70		
5	64QAM	1	24	18.62	18.65	18.70		
5	64QAM	12	0	18.55	18.47	18.54	19.5	0
5	64QAM	12	7	18.62	18.52	18.65		
5	64QAM	12	13	18.59	18.56	18.64		
5	64QAM	25	0	18.56	18.43	18.54		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.92	18.74	18.89	19.5	0
3	QPSK	1	8	19.00	18.96	18.98		
3	QPSK	1	14	18.94	18.91	18.92		
3	QPSK	8	0	19.00	18.87	18.99	19.5	0
3	QPSK	8	4	19.05	18.95	19.06		
3	QPSK	8	7	19.00	18.99	19.03		
3	QPSK	15	0	19.01	18.91	19.03		
3	16QAM	1	0	18.66	18.51	18.66	19.5	0
3	16QAM	1	8	18.73	18.74	18.79		
3	16QAM	1	14	18.66	18.64	18.74		
3	16QAM	8	0	18.54	18.45	18.56	19.5	0
3	16QAM	8	4	18.60	18.52	18.62		
3	16QAM	8	7	18.58	18.56	18.61		
3	16QAM	15	0	18.54	18.42	18.55		
3	64QAM	1	0	18.59	18.52	18.64	19.5	0



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	64QAM	1	8	18.72	18.68	18.75	19.5	0
3	64QAM	1	14	18.64	18.65	18.71		
3	64QAM	8	0	18.55	18.43	18.57		
3	64QAM	8	4	18.61	18.49	18.61		
3	64QAM	8	7	18.58	18.55	18.60		
3	64QAM	15	0	18.54	18.44	18.57		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.82	18.70	18.81	19.5	0
1.4	QPSK	1	3	18.92	18.85	18.92		
1.4	QPSK	1	5	18.87	18.79	18.86		
1.4	QPSK	3	0	18.84	18.74	18.86		
1.4	QPSK	3	1	18.89	18.80	18.91		
1.4	QPSK	3	3	18.88	18.81	18.85		
1.4	QPSK	6	0	18.94	18.82	18.95	19.5	0
1.4	16QAM	1	0	18.56	18.44	18.57	19.5	0
1.4	16QAM	1	3	18.65	18.65	18.68		
1.4	16QAM	1	5	18.59	18.61	18.65		
1.4	16QAM	3	0	18.38	18.26	18.39		
1.4	16QAM	3	1	18.40	18.32	18.43		
1.4	16QAM	3	3	18.37	18.38	18.44		
1.4	16QAM	6	0	18.51	18.41	18.52	19.5	0
1.4	64QAM	1	0	18.57	18.46	18.59	19.5	0
1.4	64QAM	1	3	18.66	18.61	18.67		
1.4	64QAM	1	5	18.55	18.57	18.59		
1.4	64QAM	3	0	18.57	18.44	18.60		
1.4	64QAM	3	1	18.64	18.49	18.63		
1.4	64QAM	3	3	18.56	18.54	18.58		
1.4	64QAM	6	0	18.46	18.35	18.45	19.5	0



<Near-body and Product specific mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.31	22.33	22.14	23	0
20	QPSK	1	49	22.18	22.23	22.05		
20	QPSK	1	99	22.20	22.23	22.18		
20	QPSK	50	0	22.37	22.39	22.21	23	0
20	QPSK	50	24	22.36	22.40	22.24		
20	QPSK	50	50	22.40	22.44	22.23		
20	QPSK	100	0	22.39	22.40	22.11	23	0
20	16QAM	1	0	22.07	22.12	21.88		
20	16QAM	1	49	21.95	22.00	21.83		
20	16QAM	1	99	21.99	22.01	21.96	23	0
20	16QAM	50	0	21.87	21.90	21.70		
20	16QAM	50	24	21.89	21.91	21.42		
20	16QAM	50	50	21.92	21.95	21.35	23	0
20	16QAM	100	0	21.89	21.91	21.48		
20	64QAM	1	0	22.03	22.05	21.86		
20	64QAM	1	49	21.96	21.99	21.50	23	0
20	64QAM	1	99	21.93	22.00	21.81		
20	64QAM	50	0	20.89	20.92	20.72		
20	64QAM	50	24	20.92	20.93	20.48	22	1
20	64QAM	50	50	20.91	20.97	20.37		
20	64QAM	100	0	20.89	20.91	20.52		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.28	22.34	22.27	23	0
15	QPSK	1	37	22.17	22.26	22.19		
15	QPSK	1	74	22.29	22.32	22.22		
15	QPSK	36	0	22.31	22.38	22.32	23	0
15	QPSK	36	20	22.35	22.43	22.21		
15	QPSK	36	39	22.37	22.42	22.34		
15	QPSK	75	0	22.35	22.42	22.25	23	0
15	16QAM	1	0	22.05	22.09	22.03		
15	16QAM	1	37	21.94	22.06	21.97		
15	16QAM	1	74	22.06	22.09	22.02	23	0
15	16QAM	36	0	21.81	21.88	21.50		
15	16QAM	36	20	21.85	21.93	21.32		
15	16QAM	36	39	21.85	21.92	21.42	23	0
15	16QAM	75	0	21.84	21.91	21.33		
15	64QAM	1	0	22.02	22.06	21.92		
15	64QAM	1	37	21.91	22.01	21.32	23	0
15	64QAM	1	74	22.00	22.02	21.75		
15	64QAM	36	0	20.85	20.92	20.57		
15	64QAM	36	20	20.90	20.95	20.37	22	1
15	64QAM	36	39	20.89	20.97	20.46		
15	64QAM	75	0	20.86	20.92	20.36		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.03	22.10	22.17	23	0
10	QPSK	1	25	22.12	22.17	22.09		
10	QPSK	1	49	22.05	22.13	22.10		
10	QPSK	25	0	22.22	22.26	22.16	23	0
10	QPSK	25	12	22.21	22.27	22.19		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

10	QPSK	25	25	22.15	22.24	22.18		
10	QPSK	50	0	22.18	22.24	22.14		
10	16QAM	1	0	21.79	21.82	21.97		
10	16QAM	1	25	21.86	21.94	21.90	23	0
10	16QAM	1	49	21.78	21.93	21.92		
10	16QAM	25	0	21.70	21.76	21.22		
10	16QAM	25	12	21.72	21.77	21.30	23	0
10	16QAM	25	25	21.66	21.74	21.50		
10	16QAM	50	0	21.66	21.76	21.23		
10	64QAM	1	0	21.79	21.81	21.46	23	0
10	64QAM	1	25	21.83	21.90	21.37		
10	64QAM	1	49	21.79	21.87	21.71		
10	64QAM	25	0	20.71	20.76	20.26	22	1
10	64QAM	25	12	20.73	20.80	20.33		
10	64QAM	25	25	20.67	20.73	20.52		
10	64QAM	50	0	20.70	20.75	20.33		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.03	22.10	22.04	23	0
5	QPSK	1	12	22.13	22.20	22.13		
5	QPSK	1	24	22.14	22.23	22.18		
5	QPSK	12	0	22.22	22.23	22.15	23	0
5	QPSK	12	7	22.30	22.28	22.28		
5	QPSK	12	13	22.26	22.29	22.27		
5	QPSK	25	0	22.25	22.25	22.18		
5	16QAM	1	0	21.79	21.85	21.87	23	0
5	16QAM	1	12	21.89	21.97	21.96		
5	16QAM	1	24	21.88	21.99	21.93		
5	16QAM	12	0	21.73	21.73	21.44	23	0
5	16QAM	12	7	21.80	21.79	21.62		
5	16QAM	12	13	21.75	21.80	21.75		
5	16QAM	25	0	21.75	21.76	21.49		
5	64QAM	1	0	21.78	21.82	21.45	23	0
5	64QAM	1	12	21.86	21.93	21.70		
5	64QAM	1	24	21.87	21.95	21.89		
5	64QAM	12	0	20.75	20.78	20.48	22	1
5	64QAM	12	7	20.84	20.85	20.68		
5	64QAM	12	13	20.80	20.86	20.79		
5	64QAM	25	0	20.74	20.76	20.52		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.04	22.04	22.05	23	0
3	QPSK	1	8	22.11	22.17	22.14		
3	QPSK	1	14	22.07	22.19	22.12		
3	QPSK	8	0	22.13	22.15	22.14	23	0
3	QPSK	8	4	22.21	22.19	22.23		
3	QPSK	8	7	22.18	22.25	22.20		
3	QPSK	15	0	22.15	22.19	22.19		
3	16QAM	1	0	21.73	21.82	21.82	23	0
3	16QAM	1	8	21.88	22.00	21.96		
3	16QAM	1	14	21.83	21.95	21.87		
3	16QAM	8	0	21.71	21.75	21.62	23	0
3	16QAM	8	4	21.77	21.80	21.75		
3	16QAM	8	7	21.72	21.86	21.81		
3	16QAM	15	0	21.66	21.74	21.66		
3	64QAM	1	0	21.74	21.72	21.64	23	0



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	64QAM	1	8	21.83	21.95	21.92		
3	64QAM	1	14	21.78	21.90	21.83		
3	64QAM	8	0	20.69	20.76	20.65		
3	64QAM	8	4	20.75	20.81	20.78	22	1
3	64QAM	8	7	20.73	20.88	20.80		
3	64QAM	15	0	20.69	20.75	20.68		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.97	21.95	21.94	23	0
1.4	QPSK	1	3	22.08	22.14	22.06		
1.4	QPSK	1	5	22.03	22.09	22.02		
1.4	QPSK	3	0	21.99	21.98	21.98		
1.4	QPSK	3	1	22.04	22.14	22.04		
1.4	QPSK	3	3	22.03	22.11	22.03		
1.4	QPSK	6	0	22.07	22.08	22.08	23	0
1.4	16QAM	1	0	21.68	21.71	21.77	23	0
1.4	16QAM	1	3	21.80	21.91	21.90		
1.4	16QAM	1	5	21.77	21.85	21.80		
1.4	16QAM	3	0	21.50	21.51	21.60		
1.4	16QAM	3	1	21.56	21.66	21.67		
1.4	16QAM	3	3	21.54	21.62	21.63		
1.4	16QAM	6	0	21.63	21.66	21.70	23	0
1.4	64QAM	1	0	21.68	21.70	21.64	23	0
1.4	64QAM	1	3	21.76	21.84	21.76		
1.4	64QAM	1	5	21.71	21.78	21.73		
1.4	64QAM	3	0	21.65	21.72	21.66		
1.4	64QAM	3	1	21.71	21.81	21.74		
1.4	64QAM	3	3	21.69	21.78	21.71		
1.4	64QAM	6	0	20.60	20.62	20.64	22	1

<LTE Band 4>
<At-head power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	24.49	24.52	24.57	25	0
20	QPSK	1	49	24.53	24.48	24.44		
20	QPSK	1	99	24.51	24.48	24.47		
20	QPSK	50	0	23.66	23.64	23.61	24	1
20	QPSK	50	24	23.66	23.63	23.62		
20	QPSK	50	50	23.64	23.59	23.56		
20	QPSK	100	0	23.67	23.65	23.59		
20	16QAM	1	0	23.29	23.30	23.33	24	1
20	16QAM	1	49	23.31	23.26	23.25		
20	16QAM	1	99	23.28	23.27	23.29		
20	16QAM	50	0	22.17	22.14	22.12	23	2
20	16QAM	50	24	22.18	22.14	22.12		
20	16QAM	50	50	22.12	22.11	22.09		
20	16QAM	100	0	22.12	22.16	22.07		
20	64QAM	1	0	22.25	22.30	22.33	23	2
20	64QAM	1	49	22.24	22.27	22.22		
20	64QAM	1	99	22.27	22.21	22.23		
20	64QAM	50	0	21.18	21.18	21.17	22	3
20	64QAM	50	24	21.20	21.17	21.15		
20	64QAM	50	50	21.17	21.14	21.09		
20	64QAM	100	0	21.15	21.15	21.13		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	24.46	24.56	24.52	25	0
15	QPSK	1	37	24.52	24.53	24.47		
15	QPSK	1	74	24.54	24.51	24.52		
15	QPSK	36	0	23.63	23.65	23.63	24	1
15	QPSK	36	20	23.66	23.64	23.60		
15	QPSK	36	39	23.63	23.57	23.61		
15	QPSK	75	0	23.64	23.62	23.59		
15	16QAM	1	0	23.23	23.31	23.35	24	1
15	16QAM	1	37	23.32	23.27	23.24		
15	16QAM	1	74	23.33	23.33	23.29		
15	16QAM	36	0	22.13	22.14	22.13	23	2
15	16QAM	36	20	22.16	22.16	22.18		
15	16QAM	36	39	22.11	22.13	22.12		
15	16QAM	75	0	22.13	22.13	22.11		
15	64QAM	1	0	22.19	22.32	22.33	23	2
15	64QAM	1	37	22.22	22.25	22.25		
15	64QAM	1	74	22.24	22.26	22.27		
15	64QAM	36	0	21.15	21.20	21.16	22	3
15	64QAM	36	20	21.20	21.20	21.20		
15	64QAM	36	39	21.17	21.17	21.16		
15	64QAM	75	0	21.15	21.15	21.15		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	24.44	24.42	24.38	25	0
10	QPSK	1	25	24.43	24.44	24.41		
10	QPSK	1	49	24.34	24.35	24.35		



FCC SAR TEST REPORT

Report No. : FA802421-03

10	QPSK	25	0	23.53	23.54	23.51	24	1
10	QPSK	25	12	23.55	23.56	23.52		
10	QPSK	25	25	23.48	23.46	23.47		
10	QPSK	50	0	23.52	23.50	23.50		
10	16QAM	1	0	23.19	23.20	23.16	24	1
10	16QAM	1	25	23.21	23.23	23.19		
10	16QAM	1	49	23.16	23.10	23.13		
10	16QAM	25	0	22.04	22.04	22.04	23	2
10	16QAM	25	12	22.04	22.06	22.05		
10	16QAM	25	25	21.97	21.96	21.97		
10	16QAM	50	0	22.00	22.02	22.00		
10	64QAM	1	0	22.15	22.18	22.19	23	2
10	64QAM	1	25	22.15	22.18	22.15		
10	64QAM	1	49	22.09	22.09	22.11		
10	64QAM	25	0	21.06	21.07	21.08	22	3
10	64QAM	25	12	21.08	21.08	21.07		
10	64QAM	25	25	20.99	21.00	21.02		
10	64QAM	50	0	21.03	21.06	21.04		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	24.36	24.38	24.39	25	0
5	QPSK	1	12	24.47	24.46	24.48		
5	QPSK	1	24	24.37	24.36	24.40		
5	QPSK	12	0	23.48	23.48	23.48	24	1
5	QPSK	12	7	23.58	23.53	23.59		
5	QPSK	12	13	23.52	23.46	23.54		
5	QPSK	25	0	23.52	23.44	23.52		
5	16QAM	1	0	23.14	23.16	23.15	24	1
5	16QAM	1	12	23.26	23.30	23.27		
5	16QAM	1	24	23.17	23.09	23.20		
5	16QAM	12	0	22.00	22.02	21.96	23	2
5	16QAM	12	7	22.10	22.03	22.10		
5	16QAM	12	13	22.06	21.98	22.05		
5	16QAM	25	0	22.04	21.99	22.02		
5	64QAM	1	0	22.13	22.14	22.15	23	2
5	64QAM	1	12	22.23	22.22	22.22		
5	64QAM	1	24	22.16	22.06	22.19		
5	64QAM	12	0	21.04	21.08	21.02	22	3
5	64QAM	12	7	21.18	21.10	21.21		
5	64QAM	12	13	21.09	21.04	21.12		
5	64QAM	25	0	21.04	21.03	21.09		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	24.30	24.36	24.35	25	0
3	QPSK	1	8	24.49	24.56	24.55		
3	QPSK	1	14	24.37	24.41	24.40		
3	QPSK	8	0	23.44	23.46	23.46	24	1
3	QPSK	8	4	23.51	23.53	23.57		
3	QPSK	8	7	23.48	23.55	23.53		
3	QPSK	15	0	23.50	23.47	23.52		
3	16QAM	1	0	23.03	23.10	23.10	24	1
3	16QAM	1	8	23.25	23.34	23.32		
3	16QAM	1	14	23.13	23.18	23.18		
3	16QAM	8	0	22.01	22.02	22.01	23	2
3	16QAM	8	4	22.09	22.08	22.13		
3	16QAM	8	7	22.05	22.09	22.11		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	16QAM	15	0	22.02	22.00	22.04		
3	64QAM	1	0	22.03	22.07	22.08		
3	64QAM	1	8	22.23	22.30	22.36	23	2
3	64QAM	1	14	22.07	22.16	22.19		
3	64QAM	8	0	21.02	21.04	21.05		
3	64QAM	8	4	21.11	21.09	21.19	22	3
3	64QAM	8	7	21.07	21.10	21.13		
3	64QAM	15	0	21.01	21.01	21.07		
Channel				19957	20175	20393	Tune-up limit	MPR
Frequency (MHz)				1710.7	1732.5	1754.3	(dBm)	(dB)
1.4	QPSK	1	0	24.23	24.26	24.27		
1.4	QPSK	1	3	24.38	24.43	24.45		
1.4	QPSK	1	5	24.34	24.38	24.39		
1.4	QPSK	3	0	24.30	24.31	24.31	25	0
1.4	QPSK	3	1	24.38	24.38	24.36		
1.4	QPSK	3	3	24.37	24.43	24.40		
1.4	QPSK	6	0	23.41	23.43	23.39	24	1
1.4	16QAM	1	0	22.97	23.02	23.02		
1.4	16QAM	1	3	23.17	23.22	23.22		
1.4	16QAM	1	5	23.09	23.11	23.16	24	1
1.4	16QAM	3	0	22.80	22.86	22.85		
1.4	16QAM	3	1	22.92	23.01	22.92		
1.4	16QAM	3	3	22.87	22.95	22.94		
1.4	16QAM	6	0	21.97	21.99	21.99	23	2
1.4	64QAM	1	0	22.00	22.05	22.04		
1.4	64QAM	1	3	22.16	22.20	22.24		
1.4	64QAM	1	5	22.06	22.13	22.18	23	2
1.4	64QAM	3	0	22.00	22.01	22.05		
1.4	64QAM	3	1	22.05	22.17	22.13		
1.4	64QAM	3	3	22.05	22.12	22.15		
1.4	64QAM	6	0	20.91	20.92	20.94	22	3



<Hotspot mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.50	19.50	19.60	20	0
20	QPSK	1	49	19.41	19.47	19.45		
20	QPSK	1	99	19.51	19.48	19.45		
20	QPSK	50	0	19.59	19.64	19.62	20	0
20	QPSK	50	24	19.58	19.67	19.61		
20	QPSK	50	50	19.56	19.64	19.59		
20	QPSK	100	0	19.59	19.64	19.63	20	0
20	16QAM	1	0	19.26	19.25	19.34		
20	16QAM	1	49	19.17	19.27	19.24		
20	16QAM	1	99	19.27	19.27	19.24	20	0
20	16QAM	50	0	19.08	19.15	19.14		
20	16QAM	50	24	19.09	19.15	19.13		
20	16QAM	50	50	19.05	19.13	19.12	20	0
20	16QAM	100	0	19.08	19.13	19.11		
20	64QAM	1	0	19.29	19.23	19.32		
20	64QAM	1	49	19.16	19.21	19.25	20	0
20	64QAM	1	99	19.24	19.22	19.22		
20	64QAM	50	0	19.13	19.18	19.15		
20	64QAM	50	24	19.13	19.19	19.14	20	0
20	64QAM	50	50	19.09	19.16	19.13		
20	64QAM	100	0	19.11	19.18	19.14		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	19.45	19.47	19.55	20	0
15	QPSK	1	37	19.45	19.53	19.52		
15	QPSK	1	74	19.44	19.54	19.54		
15	QPSK	36	0	19.57	19.66	19.63	20	0
15	QPSK	36	20	19.59	19.66	19.65		
15	QPSK	36	39	19.57	19.64	19.63		
15	QPSK	75	0	19.58	19.64	19.63	20	0
15	16QAM	1	0	19.23	19.21	19.34		
15	16QAM	1	37	19.15	19.25	19.30		
15	16QAM	1	74	19.22	19.32	19.32	20	0
15	16QAM	36	0	19.06	19.14	19.13		
15	16QAM	36	20	19.11	19.14	19.16		
15	16QAM	36	39	19.08	19.11	19.14	20	0
15	16QAM	75	0	19.06	19.15	19.14		
15	64QAM	1	0	19.22	19.21	19.29		
15	64QAM	1	37	19.16	19.23	19.26	20	0
15	64QAM	1	74	19.17	19.31	19.30		
15	64QAM	36	0	19.14	19.18	19.17		
15	64QAM	36	20	19.17	19.21	19.21	20	0
15	64QAM	36	39	19.12	19.17	19.18		
15	64QAM	75	0	19.11	19.18	19.15		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.32	19.42	19.38	20	0
10	QPSK	1	25	19.34	19.41	19.42		
10	QPSK	1	49	19.25	19.33	19.35		
10	QPSK	25	0	19.44	19.52	19.51	20	0
10	QPSK	25	12	19.45	19.53	19.55		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

10	QPSK	25	25	19.37	19.45	19.44		
10	QPSK	50	0	19.42	19.48	19.48		
10	16QAM	1	0	19.04	19.14	19.22		
10	16QAM	1	25	19.11	19.15	19.21	20	0
10	16QAM	1	49	19.00	19.06	19.15		
10	16QAM	25	0	18.95	19.01	19.07		
10	16QAM	25	12	18.95	18.99	19.08	20	0
10	16QAM	25	25	18.87	18.93	19.00		
10	16QAM	50	0	18.91	18.96	19.04		
10	64QAM	1	0	19.06	19.08	19.15	20	0
10	64QAM	1	25	19.07	19.13	19.15		
10	64QAM	1	49	18.99	19.03	19.08		
10	64QAM	25	0	18.97	19.02	19.03	20	0
10	64QAM	25	12	18.98	19.04	19.05		
10	64QAM	25	25	18.91	18.97	18.98		
10	64QAM	50	0	18.96	19.03	19.03		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	19.34	19.35	19.37	20	0
5	QPSK	1	12	19.37	19.43	19.43		
5	QPSK	1	24	19.33	19.36	19.36		
5	QPSK	12	0	19.46	19.48	19.43	20	0
5	QPSK	12	7	19.51	19.47	19.54		
5	QPSK	12	13	19.43	19.50	19.48		
5	QPSK	25	0	19.45	19.43	19.42	20	0
5	16QAM	1	0	19.08	19.09	19.16		
5	16QAM	1	12	19.15	19.18	19.24		
5	16QAM	1	24	19.08	19.09	19.10	20	0
5	16QAM	12	0	19.00	18.96	18.99		
5	16QAM	12	7	19.02	18.98	19.11		
5	16QAM	12	13	18.98	18.97	19.03	20	0
5	16QAM	25	0	18.96	18.92	18.98		
5	64QAM	1	0	19.07	19.04	19.16		
5	64QAM	1	12	19.15	19.17	19.17	20	0
5	64QAM	1	24	19.04	19.05	19.08		
5	64QAM	12	0	19.05	18.97	19.01		
5	64QAM	12	7	19.09	19.05	19.12	20	0
5	64QAM	12	13	19.01	19.07	19.07		
5	64QAM	25	0	18.99	18.96	18.98		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	19.24	19.34	19.37	20	0
3	QPSK	1	8	19.41	19.51	19.47		
3	QPSK	1	14	19.32	19.38	19.33		
3	QPSK	8	0	19.40	19.44	19.46	20	0
3	QPSK	8	4	19.47	19.49	19.52		
3	QPSK	8	7	19.44	19.49	19.48		
3	QPSK	15	0	19.45	19.43	19.49	20	0
3	16QAM	1	0	19.02	19.06	19.19		
3	16QAM	1	8	19.19	19.26	19.28		
3	16QAM	1	14	19.04	19.13	19.12	20	0
3	16QAM	8	0	18.99	18.96	19.09		
3	16QAM	8	4	19.04	18.99	19.13		
3	16QAM	8	7	19.02	19.05	19.11	20	0
3	16QAM	15	0	18.98	18.92	19.05		
3	64QAM	1	0	18.99	19.02	19.10		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	64QAM	1	8	19.18	19.22	19.24	20	0
3	64QAM	1	14	19.02	19.11	19.12		
3	64QAM	8	0	19.01	18.95	19.04		
3	64QAM	8	4	19.08	19.05	19.13		
3	64QAM	8	7	19.02	19.07	19.09		
3	64QAM	15	0	18.97	18.97	19.03		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	19.22	19.26	19.30	20	0
1.4	QPSK	1	3	19.38	19.46	19.41		
1.4	QPSK	1	5	19.30	19.33	19.32		
1.4	QPSK	3	0	19.24	19.32	19.34		
1.4	QPSK	3	1	19.35	19.38	19.40		
1.4	QPSK	3	3	19.35	19.40	19.36		
1.4	QPSK	6	0	19.39	19.38	19.43	20	0
1.4	16QAM	1	0	18.93	18.97	19.12	20	0
1.4	16QAM	1	3	19.10	19.22	19.24		
1.4	16QAM	1	5	19.01	19.18	19.16		
1.4	16QAM	3	0	18.74	18.85	18.95		
1.4	16QAM	3	1	18.86	18.92	18.97		
1.4	16QAM	3	3	18.85	18.93	18.94		
1.4	16QAM	6	0	18.97	19.01	19.04	20	0
1.4	64QAM	1	0	18.97	18.95	19.05	20	0
1.4	64QAM	1	3	19.13	19.15	19.14		
1.4	64QAM	1	5	19.09	19.06	19.10		
1.4	64QAM	3	0	18.97	18.99	19.06		
1.4	64QAM	3	1	19.11	19.14	19.10		
1.4	64QAM	3	3	19.01	19.07	19.09		
1.4	64QAM	6	0	18.93	18.88	18.94	20	0


<Near-body and Product specific mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.65	22.68	22.68		
20	QPSK	1	49	22.57	22.69	22.58	23	0
20	QPSK	1	99	22.63	22.67	22.60		
20	QPSK	50	0	22.73	22.84	22.73		
20	QPSK	50	24	22.72	22.83	22.73	23	0
20	QPSK	50	50	22.70	22.81	22.70		
20	QPSK	100	0	22.72	22.83	22.71		
20	16QAM	1	0	22.65	22.67	22.68	23	0
20	16QAM	1	49	22.55	22.66	22.57		
20	16QAM	1	99	22.65	22.66	22.59		
20	16QAM	50	0	21.94	22.07	21.97	23	0
20	16QAM	50	24	21.95	22.07	21.96		
20	16QAM	50	50	21.92	22.03	21.94		
20	16QAM	100	0	21.93	22.04	21.95	23	0
20	64QAM	1	0	22.11	22.11	22.15		
20	64QAM	1	49	22.06	22.13	22.02		
20	64QAM	1	99	22.12	22.11	22.06	22	1
20	64QAM	50	0	20.97	21.10	20.99		
20	64QAM	50	24	20.97	21.07	20.99		
20	64QAM	50	50	20.94	21.04	20.95	22	1
20	64QAM	100	0	20.94	21.06	20.96		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.60	22.76	22.63		
15	QPSK	1	37	22.59	22.68	22.59	23	0
15	QPSK	1	74	22.61	22.71	22.62		
15	QPSK	36	0	22.71	22.83	22.73	23	0
15	QPSK	36	20	22.73	22.83	22.76		
15	QPSK	36	39	22.70	22.79	22.72		
15	QPSK	75	0	22.71	22.83	22.73	23	0
15	16QAM	1	0	22.62	22.74	22.66		
15	16QAM	1	37	22.57	22.68	22.55		
15	16QAM	1	74	22.58	22.73	22.63	23	0
15	16QAM	36	0	21.93	22.03	21.96		
15	16QAM	36	20	21.96	22.06	21.98		
15	16QAM	36	39	21.92	22.03	21.94	23	0
15	16QAM	75	0	21.93	22.04	21.96		
15	64QAM	1	0	22.10	22.20	22.13		
15	64QAM	1	37	22.05	22.12	22.09	23	0
15	64QAM	1	74	22.06	22.20	22.14		
15	64QAM	36	0	20.96	21.09	21.01	22	1
15	64QAM	36	20	20.99	21.11	21.01		
15	64QAM	36	39	20.97	21.06	20.97		
15	64QAM	75	0	20.95	21.07	20.97	Tune-up limit (dBm)	MPR (dB)
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.47	22.54	22.50	23	0
10	QPSK	1	25	22.48	22.59	22.51		
10	QPSK	1	49	22.38	22.49	22.41		
10	QPSK	25	0	22.57	22.68	22.61	23	0
10	QPSK	25	12	22.59	22.69	22.63		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

10	QPSK	25	25	22.51	22.63	22.54		
10	QPSK	50	0	22.57	22.65	22.58		
10	16QAM	1	0	22.44	22.55	22.48		
10	16QAM	1	25	22.47	22.58	22.51	23	0
10	16QAM	1	49	22.41	22.51	22.42		
10	16QAM	25	0	21.81	21.93	21.84		
10	16QAM	25	12	21.83	21.91	21.86	23	0
10	16QAM	25	25	21.74	21.84	21.79		
10	16QAM	50	0	21.78	21.88	21.82		
10	64QAM	1	0	21.89	22.00	21.94	23	0
10	64QAM	1	25	21.94	22.04	21.98		
10	64QAM	1	49	21.87	21.97	21.93		
10	64QAM	25	0	20.82	20.94	20.85	22	1
10	64QAM	25	12	20.83	20.93	20.86		
10	64QAM	25	25	20.76	20.85	20.79		
10	64QAM	50	0	20.81	20.89	20.82		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.42	22.55	22.55	23	0
5	QPSK	1	12	22.50	22.61	22.64		
5	QPSK	1	24	22.44	22.53	22.54		
5	QPSK	12	0	22.57	22.65	22.67	23	0
5	QPSK	12	7	22.61	22.70	22.76		
5	QPSK	12	13	22.59	22.68	22.73		
5	QPSK	25	0	22.58	22.64	22.71	23	0
5	16QAM	1	0	22.41	22.52	22.53		
5	16QAM	1	12	22.49	22.61	22.63		
5	16QAM	1	24	22.40	22.49	22.52	23	0
5	16QAM	12	0	21.80	21.87	21.88		
5	16QAM	12	7	21.84	21.93	21.98		
5	16QAM	12	13	21.81	21.90	21.92	23	0
5	16QAM	25	0	21.79	21.87	21.92		
5	64QAM	1	0	21.93	22.00	22.04		
5	64QAM	1	12	21.99	22.09	22.08	23	0
5	64QAM	1	24	21.87	21.97	22.01		
5	64QAM	12	0	20.85	20.92	20.94		
5	64QAM	12	7	20.92	20.94	21.03	22	1
5	64QAM	12	13	20.86	20.94	20.98		
5	64QAM	25	0	20.83	20.86	20.95		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.23	22.36	22.35	23	0
3	QPSK	1	8	22.44	22.57	22.51		
3	QPSK	1	14	22.28	22.39	22.38		
3	QPSK	8	0	22.43	22.48	22.46	23	0
3	QPSK	8	4	22.48	22.53	22.57		
3	QPSK	8	7	22.46	22.54	22.53		
3	QPSK	15	0	22.44	22.48	22.54	23	0
3	16QAM	1	0	22.26	22.31	22.32		
3	16QAM	1	8	22.40	22.54	22.50		
3	16QAM	1	14	22.26	22.38	22.39	23	0
3	16QAM	8	0	21.71	21.75	21.76		
3	16QAM	8	4	21.76	21.80	21.86		
3	16QAM	8	7	21.74	21.79	21.82	23	0
3	16QAM	15	0	21.69	21.70	21.77		
3	64QAM	1	0	21.72	21.78	21.80	23	0



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	64QAM	1	8	21.91	22.00	21.99	22	1
3	64QAM	1	14	21.79	21.84	21.85		
3	64QAM	8	0	20.69	20.73	20.73		
3	64QAM	8	4	20.77	20.75	20.85		
3	64QAM	8	7	20.72	20.77	20.81		
3	64QAM	15	0	20.67	20.68	20.76		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.18	22.27	22.27	23	0
1.4	QPSK	1	3	22.35	22.46	22.48		
1.4	QPSK	1	5	22.24	22.34	22.36		
1.4	QPSK	3	0	22.23	22.31	22.35		
1.4	QPSK	3	1	22.30	22.42	22.38		
1.4	QPSK	3	3	22.25	22.42	22.44		
1.4	QPSK	6	0	22.34	22.38	22.43	23	0
1.4	16QAM	1	0	22.13	22.24	22.28	23	0
1.4	16QAM	1	3	22.31	22.42	22.45		
1.4	16QAM	1	5	22.18	22.37	22.39		
1.4	16QAM	3	0	21.98	22.06	22.09		
1.4	16QAM	3	1	22.08	22.21	22.14		
1.4	16QAM	3	3	22.03	22.15	22.15		
1.4	16QAM	6	0	21.63	21.69	21.73	23	0
1.4	64QAM	1	0	21.59	21.69	21.80	23	0
1.4	64QAM	1	3	21.77	21.90	21.95		
1.4	64QAM	1	5	21.73	21.82	21.90		
1.4	64QAM	3	0	21.70	21.72	21.79		
1.4	64QAM	3	1	21.73	21.87	21.85		
1.4	64QAM	3	3	21.73	21.82	21.89		
1.4	64QAM	6	0	20.58	20.63	20.66	22	1

<LTE Band 5>
<At-head power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.96	23.92	23.79	25	0
10	QPSK	1	25	23.81	23.74	23.80		
10	QPSK	1	49	23.76	23.80	23.69		
10	QPSK	25	0	22.99	22.91	22.84	24	1
10	QPSK	25	12	22.99	22.86	22.84		
10	QPSK	25	25	22.86	22.85	22.84		
10	QPSK	50	0	22.92	22.90	22.85		
10	16QAM	1	0	22.63	22.67	22.57	24	1
10	16QAM	1	25	22.58	22.51	22.56		
10	16QAM	1	49	22.59	22.63	22.54		
10	16QAM	25	0	21.41	21.41	21.44	23	2
10	16QAM	25	12	21.39	21.41	21.42		
10	16QAM	25	25	21.45	21.41	21.32		
10	16QAM	50	0	21.47	21.46	21.36		
10	64QAM	1	0	21.69	21.67	21.59	23	2
10	64QAM	1	25	21.53	21.56	21.56		
10	64QAM	1	49	21.52	21.67	21.45		
10	64QAM	25	0	20.42	20.38	20.39	22	3
10	64QAM	25	12	20.52	20.49	20.41		
10	64QAM	25	25	20.38	20.44	20.42		
10	64QAM	50	0	20.40	20.39	20.40		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.71	23.65	23.71	25	0
5	QPSK	1	12	23.79	23.74	23.85		
5	QPSK	1	24	23.84	23.79	23.76		
5	QPSK	12	0	22.88	22.77	22.85	24	1
5	QPSK	12	7	22.94	22.97	22.83		
5	QPSK	12	13	22.91	22.97	22.88		
5	QPSK	25	0	22.94	22.93	22.85		
5	16QAM	1	0	22.62	22.47	22.42	24	1
5	16QAM	1	12	22.61	22.62	22.64		
5	16QAM	1	24	22.59	22.60	22.58		
5	16QAM	12	0	21.34	21.33	21.29	23	2
5	16QAM	12	7	21.49	21.44	21.38		
5	16QAM	12	13	21.47	21.45	21.41		
5	16QAM	25	0	21.42	21.42	21.37		
5	64QAM	1	0	21.54	21.48	21.45	23	2
5	64QAM	1	12	21.69	21.62	21.60		
5	64QAM	1	24	21.57	21.60	21.61		
5	64QAM	12	0	20.46	20.32	20.34	22	3
5	64QAM	12	7	20.60	20.53	20.47		
5	64QAM	12	13	20.50	20.50	20.53		
5	64QAM	25	0	20.49	20.42	20.33		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.74	23.63	23.72	25	0
3	QPSK	1	8	23.95	23.79	23.90		
3	QPSK	1	14	23.87	23.83	23.87		



FCC SAR TEST REPORT

Report No. : FA802421-03

3	QPSK	8	0	22.86	22.75	22.74	24	1
3	QPSK	8	4	22.92	22.88	22.95		
3	QPSK	8	7	22.89	22.89	22.90		
3	QPSK	15	0	22.92	22.85	22.83	24	1
3	16QAM	1	0	22.52	22.41	22.39		
3	16QAM	1	8	22.70	22.64	22.67		
3	16QAM	1	14	22.67	22.65	22.63	23	2
3	16QAM	8	0	21.48	21.30	21.31		
3	16QAM	8	4	21.46	21.40	21.44		
3	16QAM	8	7	21.50	21.49	21.43	23	2
3	16QAM	15	0	21.41	21.42	21.31		
3	64QAM	1	0	21.61	21.42	21.47		
3	64QAM	1	8	21.74	21.65	21.64	22	3
3	64QAM	1	14	21.62	21.57	21.56		
3	64QAM	8	0	20.50	20.38	20.32		
3	64QAM	8	4	20.49	20.43	20.44	22	3
3	64QAM	8	7	20.53	20.45	20.49		
3	64QAM	15	0	20.45	20.38	20.41		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.71	23.60	23.68	25	0
1.4	QPSK	1	3	23.88	23.84	23.74		
1.4	QPSK	1	5	23.86	23.72	23.64		
1.4	QPSK	3	0	23.75	23.69	23.76		
1.4	QPSK	3	1	23.90	23.75	23.72		
1.4	QPSK	3	3	23.83	23.70	23.78		
1.4	QPSK	6	0	22.86	22.80	22.81	24	1
1.4	16QAM	1	0	22.52	22.43	22.50	24	1
1.4	16QAM	1	3	22.74	22.60	22.52		
1.4	16QAM	1	5	22.63	22.52	22.44		
1.4	16QAM	3	0	22.39	22.22	22.23		
1.4	16QAM	3	1	22.40	22.28	22.29		
1.4	16QAM	3	3	22.35	22.29	22.25		
1.4	16QAM	6	0	21.42	21.37	21.41	23	2
1.4	64QAM	1	0	21.54	21.42	21.42	23	2
1.4	64QAM	1	3	21.62	21.61	21.46		
1.4	64QAM	1	5	21.60	21.50	21.50		
1.4	64QAM	3	0	21.49	21.45	21.45		
1.4	64QAM	3	1	21.57	21.49	21.54		
1.4	64QAM	3	3	21.54	21.49	21.49		
1.4	64QAM	6	0	20.40	20.35	20.19	22	3



<Hotspot / Near-body / Product specific mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.59	23.55	23.48	25	0
10	QPSK	1	25	23.47	23.37	23.38		
10	QPSK	1	49	23.46	23.53	23.49		
10	QPSK	25	0	22.63	22.55	22.55	24	1
10	QPSK	25	12	22.66	22.56	22.55		
10	QPSK	25	25	22.58	22.50	22.45		
10	QPSK	50	0	22.56	22.55	22.59	24	1
10	16QAM	1	0	22.30	22.25	22.20		
10	16QAM	1	25	22.27	22.22	22.23		
10	16QAM	1	49	22.24	22.33	22.26	23	2
10	16QAM	25	0	21.25	21.21	21.16		
10	16QAM	25	12	21.17	21.23	21.13		
10	16QAM	25	25	21.15	21.13	21.10	23	2
10	16QAM	50	0	21.19	21.16	21.18		
10	64QAM	1	0	21.36	21.40	21.37		
10	64QAM	1	25	21.26	21.33	21.32	23	2
10	64QAM	1	49	21.41	21.38	21.37		
10	64QAM	25	0	20.26	20.21	20.23		
10	64QAM	25	12	20.21	20.17	20.18	22	3
10	64QAM	25	25	20.18	20.17	20.08		
10	64QAM	50	0	20.20	20.16	20.19		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.37	23.36	23.33	25	0
5	QPSK	1	12	23.49	23.46	23.48		
5	QPSK	1	24	23.47	23.52	23.50		
5	QPSK	12	0	22.55	22.45	22.52	24	1
5	QPSK	12	7	22.65	22.54	22.59		
5	QPSK	12	13	22.70	22.60	22.60		
5	QPSK	25	0	22.56	22.59	22.52	24	1
5	16QAM	1	0	22.17	22.14	22.12		
5	16QAM	1	12	22.28	22.25	22.31		
5	16QAM	1	24	22.27	22.24	22.28	23	2
5	16QAM	12	0	21.17	21.06	21.17		
5	16QAM	12	7	21.32	21.21	21.22		
5	16QAM	12	13	21.22	21.21	21.19	23	2
5	16QAM	25	0	21.28	21.18	21.13		
5	64QAM	1	0	21.27	21.31	21.25		
5	64QAM	1	12	21.36	21.39	21.37	23	2
5	64QAM	1	24	21.38	21.34	21.32		
5	64QAM	12	0	20.22	20.16	20.12		
5	64QAM	12	7	20.32	20.30	20.19	22	3
5	64QAM	12	13	20.36	20.26	20.22		
5	64QAM	25	0	20.21	20.20	20.16		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.37	23.35	23.30	25	0
3	QPSK	1	8	23.54	23.48	23.53		
3	QPSK	1	14	23.51	23.49	23.54		
3	QPSK	8	0	22.57	22.41	22.48	24	1
3	QPSK	8	4	22.67	22.57	22.56		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	QPSK	8	7	22.62	22.53	22.59		
3	QPSK	15	0	22.51	22.53	22.52		
3	16QAM	1	0	22.14	22.09	22.18		
3	16QAM	1	8	22.30	22.31	22.37	24	1
3	16QAM	1	14	22.33	22.25	22.21		
3	16QAM	8	0	21.18	21.10	21.12		
3	16QAM	8	4	21.24	21.24	21.25	23	2
3	16QAM	8	7	21.27	21.21	21.31		
3	16QAM	15	0	21.20	21.15	21.18		
3	64QAM	1	0	21.24	21.20	21.20	23	2
3	64QAM	1	8	21.36	21.48	21.43		
3	64QAM	1	14	21.42	21.43	21.40		
3	64QAM	8	0	20.15	20.17	20.15	22	3
3	64QAM	8	4	20.23	20.27	20.21		
3	64QAM	8	7	20.17	20.18	20.15		
3	64QAM	15	0	20.19	20.16	20.15		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.53	23.37	23.22	25	0
1.4	QPSK	1	3	23.47	23.53	23.55		
1.4	QPSK	1	5	23.58	23.50	23.42		
1.4	QPSK	3	0	23.49	23.37	23.19		
1.4	QPSK	3	1	23.51	23.45	23.24		
1.4	QPSK	3	3	23.56	23.43	23.48		
1.4	QPSK	6	0	22.63	22.53	22.44	24	1
1.4	16QAM	1	0	22.29	22.17	22.25	24	1
1.4	16QAM	1	3	22.36	22.35	22.36		
1.4	16QAM	1	5	22.28	22.29	22.29		
1.4	16QAM	3	0	22.17	22.12	22.07		
1.4	16QAM	3	1	22.25	22.13	22.24		
1.4	16QAM	3	3	22.21	22.19	22.23		
1.4	16QAM	6	0	21.23	21.15	21.23	23	2
1.4	64QAM	1	0	21.39	21.23	21.26	23	2
1.4	64QAM	1	3	21.46	21.38	21.42		
1.4	64QAM	1	5	21.40	21.31	21.37		
1.4	64QAM	3	0	21.34	21.27	21.33		
1.4	64QAM	3	1	21.36	21.35	21.37		
1.4	64QAM	3	3	21.34	21.25	21.26		
1.4	64QAM	6	0	20.19	20.13	20.12	22	3

<LTE Band 7>
<At-head / Hotspot / Near-body / Product specific power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.01	21.90	21.89	22.5	0
20	QPSK	1	49	22.02	21.88	21.87		
20	QPSK	1	99	22.14	21.98	21.95		
20	QPSK	50	0	22.12	22.07	22.04	22.5	0
20	QPSK	50	24	22.20	22.06	22.03		
20	QPSK	50	50	22.23	22.08	22.05		
20	QPSK	100	0	22.20	22.07	22.00	22.5	0
20	16QAM	1	0	21.76	21.68	21.71		
20	16QAM	1	49	21.82	21.70	21.67		
20	16QAM	1	99	21.90	21.76	21.79	22.5	0
20	16QAM	50	0	21.64	21.57	21.56		
20	16QAM	50	24	21.71	21.63	21.56		
20	16QAM	50	50	21.76	21.57	21.53	22.5	0
20	16QAM	100	0	21.69	21.56	21.50		
20	64QAM	1	0	21.72	21.62	21.67		
20	64QAM	1	49	21.75	21.69	21.64	22.5	0
20	64QAM	1	99	21.85	21.79	21.73		
20	64QAM	50	0	21.17	21.10	21.07		
20	64QAM	50	24	21.24	21.12	21.08	22	0.5
20	64QAM	50	50	21.29	21.12	21.04		
20	64QAM	100	0	21.22	21.11	21.05		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.00	21.91	21.91	22.5	0
15	QPSK	1	37	22.01	21.89	21.87		
15	QPSK	1	74	22.10	21.95	21.94		
15	QPSK	36	0	22.10	22.06	22.02	22.5	0
15	QPSK	36	20	22.17	22.06	22.06		
15	QPSK	36	39	22.20	22.06	22.05		
15	QPSK	75	0	22.15	22.04	22.04	22.5	0
15	16QAM	1	0	21.76	21.66	21.72		
15	16QAM	1	37	21.75	21.68	21.69		
15	16QAM	1	74	21.83	21.78	21.80	22.5	0
15	16QAM	36	0	21.60	21.56	21.52		
15	16QAM	36	20	21.68	21.58	21.56		
15	16QAM	36	39	21.70	21.56	21.54	22.5	0
15	16QAM	75	0	21.67	21.54	21.55		
15	64QAM	1	0	21.72	21.66	21.66		
15	64QAM	1	37	21.73	21.66	21.67	22.5	0
15	64QAM	1	74	21.83	21.72	21.75		
15	64QAM	36	0	21.15	21.10	21.07		
15	64QAM	36	20	21.22	21.12	21.09	22	0.5
15	64QAM	36	39	21.25	21.10	21.10		
15	64QAM	75	0	21.17	21.07	21.07		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	21.84	21.78	21.74	22.5	0
10	QPSK	1	25	21.85	21.79	21.74		
10	QPSK	1	49	21.87	21.79	21.78		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

10	QPSK	25	0	21.97	21.88	21.90	22.5	0
10	QPSK	25	12	21.99	21.91	21.89		
10	QPSK	25	25	21.97	21.90	21.88		
10	QPSK	50	0	21.98	21.91	21.88		
10	16QAM	1	0	21.60	21.56	21.52	22.5	0
10	16QAM	1	25	21.59	21.57	21.56		
10	16QAM	1	49	21.64	21.62	21.64		
10	16QAM	25	0	21.48	21.41	21.40	22.5	0
10	16QAM	25	12	21.52	21.42	21.41		
10	16QAM	25	25	21.50	21.40	21.39		
10	16QAM	50	0	21.49	21.42	21.37		
10	64QAM	1	0	21.59	21.54	21.49	22.5	0
10	64QAM	1	25	21.61	21.54	21.52		
10	64QAM	1	49	21.67	21.58	21.62		
10	64QAM	25	0	20.99	20.93	20.90	22	0.5
10	64QAM	25	12	21.02	20.94	20.91		
10	64QAM	25	25	21.00	20.93	20.92		
10	64QAM	50	0	20.99	20.94	20.92		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.79	21.83	21.74	22.5	0
5	QPSK	1	12	21.93	21.87	21.87		
5	QPSK	1	24	21.98	21.80	21.87		
5	QPSK	12	0	21.97	21.90	21.85	22.5	0
5	QPSK	12	7	22.08	21.94	22.00		
5	QPSK	12	13	22.08	21.92	22.00		
5	QPSK	25	0	22.02	21.91	21.88		
5	16QAM	1	0	21.55	21.61	21.57	22.5	0
5	16QAM	1	12	21.70	21.67	21.69		
5	16QAM	1	24	21.72	21.59	21.65		
5	16QAM	12	0	21.49	21.45	21.38	22.5	0
5	16QAM	12	7	21.55	21.49	21.51		
5	16QAM	12	13	21.59	21.44	21.49		
5	16QAM	25	0	21.53	21.44	21.43		
5	64QAM	1	0	21.53	21.60	21.55	22.5	0
5	64QAM	1	12	21.64	21.65	21.65		
5	64QAM	1	24	21.70	21.58	21.65		
5	64QAM	12	0	21.04	21.02	20.92	22	0.5
5	64QAM	12	7	21.12	21.03	21.06		
5	64QAM	12	13	21.14	21.02	21.05		
5	64QAM	25	0	21.04	20.95	20.93		

<LTE Band 12>
<At-head power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.89	23.73	23.67	25	0
10	QPSK	1	25	23.76	23.72	23.69		
10	QPSK	1	49	23.77	23.72	23.75		
10	QPSK	25	0	22.93	22.86	22.80	24	1
10	QPSK	25	12	22.89	22.96	22.83		
10	QPSK	25	25	22.92	22.87	22.80		
10	QPSK	50	0	22.89	22.88	22.87		
10	16QAM	1	0	22.62	22.49	22.56	24	1
10	16QAM	1	25	22.56	22.51	22.50		
10	16QAM	1	49	22.56	22.52	22.50		
10	16QAM	25	0	21.36	21.35	21.36	23	2
10	16QAM	25	12	21.45	21.39	21.31		
10	16QAM	25	25	21.43	21.41	21.34		
10	16QAM	50	0	21.37	21.45	21.36		
10	64QAM	1	0	21.51	21.44	21.50	23	2
10	64QAM	1	25	21.47	21.56	21.41		
10	64QAM	1	49	21.52	21.49	21.46		
10	64QAM	25	0	20.37	20.45	20.32	22	3
10	64QAM	25	12	20.48	20.41	20.42		
10	64QAM	25	25	20.42	20.45	20.34		
10	64QAM	50	0	20.43	20.47	20.32		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.67	23.71	23.66	25	0
5	QPSK	1	12	23.80	23.79	23.78		
5	QPSK	1	24	23.82	23.78	23.71		
5	QPSK	12	0	22.85	22.79	22.78	24	1
5	QPSK	12	7	23.07	22.90	22.82		
5	QPSK	12	13	23.00	22.93	22.92		
5	QPSK	25	0	23.00	22.92	22.72		
5	16QAM	1	0	22.45	22.44	22.47	24	1
5	16QAM	1	12	22.58	22.57	22.50		
5	16QAM	1	24	22.65	22.60	22.48		
5	16QAM	12	0	21.38	21.35	21.26	23	2
5	16QAM	12	7	21.52	21.43	21.36		
5	16QAM	12	13	21.49	21.39	21.34		
5	16QAM	25	0	21.43	21.40	21.33		
5	64QAM	1	0	21.49	21.44	21.45	23	2
5	64QAM	1	12	21.53	21.64	21.55		
5	64QAM	1	24	21.58	21.51	21.53		
5	64QAM	12	0	20.46	20.39	20.33	22	3
5	64QAM	12	7	20.59	20.48	20.38		
5	64QAM	12	13	20.49	20.52	20.41		
5	64QAM	25	0	20.47	20.37	20.33		
Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.87	23.69	23.68	25	0
3	QPSK	1	8	23.81	23.81	23.82		
3	QPSK	1	14	23.76	23.79	23.74		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	QPSK	8	0	22.99	22.92	22.82	24	1
3	QPSK	8	4	23.03	22.93	22.95		
3	QPSK	8	7	23.04	22.94	22.94		
3	QPSK	15	0	22.99	22.92	22.87	24	1
3	16QAM	1	0	22.57	22.48	22.45		
3	16QAM	1	8	22.73	22.69	22.63		
3	16QAM	1	14	22.59	22.61	22.54	23	2
3	16QAM	8	0	21.56	21.39	21.41		
3	16QAM	8	4	21.58	21.43	21.51		
3	16QAM	8	7	21.55	21.52	21.44	23	2
3	16QAM	15	0	21.50	21.39	21.33		
3	64QAM	1	0	21.52	21.52	21.47		
3	64QAM	1	8	21.71	21.67	21.62	22	3
3	64QAM	1	14	21.60	21.50	21.56		
3	64QAM	8	0	20.60	20.45	20.36		
3	64QAM	8	4	20.55	20.45	20.51	22	3
3	64QAM	8	7	20.54	20.50	20.45		
3	64QAM	15	0	20.54	20.40	20.35		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.79	23.69	23.63	25	0
1.4	QPSK	1	3	23.84	23.80	23.78		
1.4	QPSK	1	5	23.76	23.73	23.72		
1.4	QPSK	3	0	23.79	23.77	23.62		
1.4	QPSK	3	1	23.86	23.82	23.72		
1.4	QPSK	3	3	23.81	23.72	23.68		
1.4	QPSK	6	0	22.89	22.84	22.69	24	1
1.4	16QAM	1	0	22.56	22.54	22.37	24	1
1.4	16QAM	1	3	22.61	22.58	22.49		
1.4	16QAM	1	5	22.57	22.54	22.39		
1.4	16QAM	3	0	22.42	22.21	22.22		
1.4	16QAM	3	1	22.38	22.30	22.34		
1.4	16QAM	3	3	22.34	22.31	22.28		
1.4	16QAM	6	0	21.51	21.41	21.32	23	2
1.4	64QAM	1	0	21.51	21.42	21.39	23	2
1.4	64QAM	1	3	21.58	21.54	21.47		
1.4	64QAM	1	5	21.50	21.53	21.41		
1.4	64QAM	3	0	21.49	21.45	21.40		
1.4	64QAM	3	1	21.58	21.49	21.43		
1.4	64QAM	3	3	21.54	21.52	21.40		
1.4	64QAM	6	0	20.35	20.27	20.26	22	3



<Hotspot / Near-body / Product specific mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.74	23.62	23.61	25	0
10	QPSK	1	25	23.62	23.55	23.63		
10	QPSK	1	49	23.67	23.56	23.62		
10	QPSK	25	0	22.71	22.71	22.76	24	1
10	QPSK	25	12	22.75	22.80	22.86		
10	QPSK	25	25	22.78	22.74	22.76		
10	QPSK	50	0	22.79	22.71	22.82	24	1
10	16QAM	1	0	22.47	22.40	22.38		
10	16QAM	1	25	22.30	22.37	22.37		
10	16QAM	1	49	22.41	22.40	22.37	23	2
10	16QAM	25	0	21.28	21.25	21.25		
10	16QAM	25	12	21.31	21.27	21.37		
10	16QAM	25	25	21.32	21.27	21.33	23	2
10	16QAM	50	0	21.32	21.32	21.35		
10	64QAM	1	0	21.34	21.39	21.38		
10	64QAM	1	25	21.33	21.40	21.40	23	2
10	64QAM	1	49	21.40	21.31	21.36		
10	64QAM	25	0	20.28	20.25	20.35		
10	64QAM	25	12	20.33	20.29	20.39	22	3
10	64QAM	25	25	20.30	20.26	20.27		
10	64QAM	50	0	20.35	20.33	20.34		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.48	23.48	23.45	25	0
5	QPSK	1	12	23.63	23.61	23.52		
5	QPSK	1	24	23.57	23.55	23.51		
5	QPSK	12	0	22.70	22.60	22.59	24	1
5	QPSK	12	7	22.84	22.68	22.67		
5	QPSK	12	13	22.79	22.70	22.67		
5	QPSK	25	0	22.70	22.66	22.65	24	1
5	16QAM	1	0	22.31	22.33	22.20		
5	16QAM	1	12	22.46	22.46	22.27		
5	16QAM	1	24	22.36	22.40	22.33	23	2
5	16QAM	12	0	21.23	21.22	21.12		
5	16QAM	12	7	21.29	21.31	21.24		
5	16QAM	12	13	21.20	21.22	21.19	23	2
5	16QAM	25	0	21.23	21.25	21.21		
5	64QAM	1	0	21.23	21.20	21.21		
5	64QAM	1	12	21.41	21.42	21.27	23	2
5	64QAM	1	24	21.36	21.31	21.30		
5	64QAM	12	0	20.21	20.23	20.18		
5	64QAM	12	7	20.32	20.26	20.25	22	3
5	64QAM	12	13	20.33	20.27	20.27		
5	64QAM	25	0	20.24	20.25	20.17		
Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.50	23.43	23.43	25	0
3	QPSK	1	8	23.66	23.63	23.55		
3	QPSK	1	14	23.58	23.53	23.48		
3	QPSK	8	0	22.69	22.69	22.60	24	1
3	QPSK	8	4	22.74	22.74	22.63		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	QPSK	8	7	22.78	22.69	22.63		
3	QPSK	15	0	22.73	22.62	22.64		
3	16QAM	1	0	22.26	22.27	22.19		
3	16QAM	1	8	22.51	22.46	22.35	24	1
3	16QAM	1	14	22.34	22.28	22.22		
3	16QAM	8	0	21.30	21.31	21.19		
3	16QAM	8	4	21.38	21.30	21.27	23	2
3	16QAM	8	7	21.31	21.25	21.22		
3	16QAM	15	0	21.30	21.19	21.17		
3	64QAM	1	0	21.25	21.23	21.16	23	2
3	64QAM	1	8	21.42	21.40	21.34		
3	64QAM	1	14	21.31	21.41	21.22		
3	64QAM	8	0	20.26	20.23	20.15	22	3
3	64QAM	8	4	20.29	20.23	20.27		
3	64QAM	8	7	20.33	20.33	20.17		
3	64QAM	15	0	20.30	20.20	20.19		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.59	23.47	23.46	25	0
1.4	QPSK	1	3	23.67	23.62	23.42		
1.4	QPSK	1	5	23.53	23.51	23.45		
1.4	QPSK	3	0	23.56	23.49	23.37		
1.4	QPSK	3	1	23.57	23.54	23.42		
1.4	QPSK	3	3	23.52	23.56	23.43		
1.4	QPSK	6	0	22.70	22.59	22.54	24	1
1.4	16QAM	1	0	22.28	22.27	22.18	24	1
1.4	16QAM	1	3	22.36	22.41	22.30		
1.4	16QAM	1	5	22.35	22.35	22.16		
1.4	16QAM	3	0	22.07	22.04	21.99		
1.4	16QAM	3	1	22.15	22.04	22.06		
1.4	16QAM	3	3	22.11	22.14	21.96		
1.4	16QAM	6	0	21.27	21.24	21.18	23	2
1.4	64QAM	1	0	21.24	21.24	21.14	23	2
1.4	64QAM	1	3	21.40	21.37	21.26		
1.4	64QAM	1	5	21.32	21.29	21.19		
1.4	64QAM	3	0	21.24	21.22	21.13		
1.4	64QAM	3	1	21.34	21.35	21.23		
1.4	64QAM	3	3	21.30	21.24	21.17		
1.4	64QAM	6	0	20.20	20.16	20.11	22	3

<LTE Band 13>
<At-head power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		23.81		25	0
10	QPSK	1	25		23.78			
10	QPSK	1	49		23.80			
10	QPSK	25	0		22.98		24	1
10	QPSK	25	12		22.94			
10	QPSK	25	25		22.95			
10	QPSK	50	0		22.97		24	1
10	16QAM	1	0		22.45			
10	16QAM	1	25		22.50			
10	16QAM	1	49		22.55		23	2
10	16QAM	25	0		21.42			
10	16QAM	25	12		21.51			
10	16QAM	25	25		21.76		23	2
10	16QAM	50	0		21.40			
10	64QAM	1	0		21.51			
10	64QAM	1	25		21.55		23	2
10	64QAM	1	49		21.58			
10	64QAM	25	0		20.45			
10	64QAM	25	12		20.48		22	3
10	64QAM	25	25		20.50			
10	64QAM	50	0		20.43			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.74	23.74	23.74	25	0
5	QPSK	1	12	23.79	23.80	23.80		
5	QPSK	1	24	23.79	23.79	23.80		
5	QPSK	12	0	22.86	22.90	22.98	24	1
5	QPSK	12	7	23.00	22.95	23.01		
5	QPSK	12	13	22.96	22.92	22.94		
5	QPSK	25	0	22.99	22.96	22.92	24	1
5	16QAM	1	0	22.33	22.45	22.58		
5	16QAM	1	12	22.49	22.51	22.58		
5	16QAM	1	24	22.53	22.57	22.63	23	2
5	16QAM	12	0	21.34	21.33	21.50		
5	16QAM	12	7	21.38	21.42	21.48		
5	16QAM	12	13	21.41	21.67	21.37	23	2
5	16QAM	25	0	21.43	21.50	21.44		
5	64QAM	1	0	21.36	21.44	21.51		
5	64QAM	1	12	21.45	21.62	21.56	23	2
5	64QAM	1	24	21.58	21.60	21.58		
5	64QAM	12	0	20.39	20.43	20.48		
5	64QAM	12	7	20.51	20.46	20.54	22	3
5	64QAM	12	13	20.44	20.68	20.42		
5	64QAM	25	0	20.43	20.44	20.46		

<Hotspot / Near-body / Product specific mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		23.60		25	0
10	QPSK	1	25		23.57			
10	QPSK	1	49		23.54			
10	QPSK	25	0		22.73		24	1
10	QPSK	25	12		22.74			
10	QPSK	25	25		22.70			
10	QPSK	50	0		22.74			
10	16QAM	1	0		22.23		24	1
10	16QAM	1	25		22.27			
10	16QAM	1	49		22.32			
10	16QAM	25	0		21.19		23	2
10	16QAM	25	12		21.21			
10	16QAM	25	25		21.22			
10	16QAM	50	0		21.22			
10	64QAM	1	0		21.25		23	2
10	64QAM	1	25		21.24			
10	64QAM	1	49		21.30			
10	64QAM	25	0		20.26		22	3
10	64QAM	25	12		20.25			
10	64QAM	25	25		20.21			
10	64QAM	50	0		20.20			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.50	23.50	23.55	25	0
5	QPSK	1	12	23.53	23.59	23.54		
5	QPSK	1	24	23.54	23.55	23.54		
5	QPSK	12	0	22.73	22.68	22.81	24	1
5	QPSK	12	7	22.83	22.83	22.76		
5	QPSK	12	13	22.80	22.80	22.68		
5	QPSK	25	0	22.85	22.77	22.74	24	1
5	16QAM	1	0	22.22	22.26	22.32		
5	16QAM	1	12	22.29	22.44	22.43		
5	16QAM	1	24	22.33	22.44	22.36	23	2
5	16QAM	12	0	21.19	21.26	21.26		
5	16QAM	12	7	21.27	21.26	21.26		
5	16QAM	12	13	21.21	21.23	21.20		
5	16QAM	25	0	21.34	21.34	21.28	23	2
5	64QAM	1	0	21.19	21.26	21.31		
5	64QAM	1	12	21.32	21.42	21.38		
5	64QAM	1	24	21.38	21.42	21.29	22	3
5	64QAM	12	0	20.26	20.24	20.54		
5	64QAM	12	7	20.29	20.36	20.31		
5	64QAM	12	13	20.35	20.32	20.31		
5	64QAM	25	0	20.31	20.31	20.28		

<LTE Band 17>
<At-head power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.83	23.75	23.90	25	0
10	QPSK	1	25	23.78	23.83	23.77		
10	QPSK	1	49	23.73	23.86	23.88		
10	QPSK	25	0	22.67	22.69	22.69	24	1
10	QPSK	25	12	22.84	22.91	22.89		
10	QPSK	25	25	22.58	22.66	22.65		
10	QPSK	50	0	22.63	22.71	22.68		
10	16QAM	1	0	22.62	22.48	22.67	24	1
10	16QAM	1	25	22.60	22.63	22.55		
10	16QAM	1	49	22.57	22.70	22.66		
10	16QAM	25	0	21.14	21.18	21.17	23	2
10	16QAM	25	12	21.38	21.41	21.34		
10	16QAM	25	25	21.08	21.14	21.14		
10	16QAM	50	0	21.20	21.21	21.17		
10	64QAM	1	0	21.64	21.53	21.62	23	2
10	64QAM	1	25	21.59	21.50	21.56		
10	64QAM	1	49	21.55	21.65	21.70		
10	64QAM	25	0	20.23	20.20	20.21	22	3
10	64QAM	25	12	20.42	20.43	20.42		
10	64QAM	25	25	20.14	20.20	20.15		
10	64QAM	50	0	20.24	20.22	20.18		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.63	23.53	23.48	25	0
5	QPSK	1	12	23.85	23.81	23.81		
5	QPSK	1	24	23.71	23.65	23.61		
5	QPSK	12	0	22.89	22.85	22.89	24	1
5	QPSK	12	7	23.04	22.98	22.96		
5	QPSK	12	13	22.96	22.92	22.89		
5	QPSK	25	0	22.87	22.86	22.89		
5	16QAM	1	0	22.38	22.39	22.33	24	1
5	16QAM	1	12	22.67	22.67	22.67		
5	16QAM	1	24	22.48	22.41	22.36		
5	16QAM	12	0	21.41	21.41	21.29	23	2
5	16QAM	12	7	21.53	21.47	21.48		
5	16QAM	12	13	21.40	21.44	21.37		
5	16QAM	25	0	21.43	21.29	21.32		
5	64QAM	1	0	21.29	21.27	21.27	23	2
5	64QAM	1	12	21.61	21.60	21.56		
5	64QAM	1	24	21.44	21.35	21.35		
5	64QAM	12	0	20.45	20.39	20.47	22	3
5	64QAM	12	7	20.56	20.52	20.49		
5	64QAM	12	13	20.46	20.42	20.43		
5	64QAM	25	0	20.46	20.33	20.36		


<Hotspot / Near-body / Product specific mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.90	23.82	23.75		
10	QPSK	1	25	23.76	23.82	23.82	25	0
10	QPSK	1	49	23.82	23.78	23.77		
10	QPSK	25	0	22.75	22.71	22.76		
10	QPSK	25	12	22.92	22.86	22.86	24	1
10	QPSK	25	25	22.64	22.64	22.63		
10	QPSK	50	0	22.65	22.67	22.74		
10	16QAM	1	0	22.62	22.53	22.59	24	1
10	16QAM	1	25	22.55	22.57	22.62		
10	16QAM	1	49	22.63	22.60	22.60		
10	16QAM	25	0	21.21	21.23	21.26	23	2
10	16QAM	25	12	21.39	21.46	21.41		
10	16QAM	25	25	21.18	21.22	21.23		
10	16QAM	50	0	21.28	21.24	21.25	23	2
10	64QAM	1	0	21.58	21.57	21.47		
10	64QAM	1	25	21.57	21.62	21.52		
10	64QAM	1	49	21.54	21.48	21.49	22	3
10	64QAM	25	0	20.19	20.31	20.25		
10	64QAM	25	12	20.43	20.46	20.48		
10	64QAM	25	25	20.18	20.25	20.21	22	3
10	64QAM	50	0	20.29	20.22	20.21		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.55	23.53	23.51		
5	QPSK	1	12	23.78	23.81	23.76	25	0
5	QPSK	1	24	23.50	23.63	23.55		
5	QPSK	12	0	22.81	22.89	22.73		
5	QPSK	12	7	22.93	22.98	22.92	24	1
5	QPSK	12	13	22.88	22.95	22.83		
5	QPSK	25	0	22.86	22.85	22.83		
5	16QAM	1	0	22.31	22.38	22.31	24	1
5	16QAM	1	12	22.52	22.65	22.56		
5	16QAM	1	24	22.40	22.43	22.35		
5	16QAM	12	0	21.24	21.37	21.28	23	2
5	16QAM	12	7	21.44	21.51	21.46		
5	16QAM	12	13	21.33	21.44	21.32		
5	16QAM	25	0	21.32	21.45	21.37	23	2
5	64QAM	1	0	21.28	21.33	21.29		
5	64QAM	1	12	21.53	21.64	21.45		
5	64QAM	1	24	21.28	21.36	21.26	22	3
5	64QAM	12	0	20.28	20.41	20.32		
5	64QAM	12	7	20.46	20.53	20.53		
5	64QAM	12	13	20.38	20.47	20.38	22	3
5	64QAM	25	0	20.32	20.46	20.38		



<LTE Band 25>

<At-head power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	24.62	24.66	24.41		
20	QPSK	1	49	24.48	24.54	24.29	25	0
20	QPSK	1	99	24.49	24.61	24.30		
20	QPSK	50	0	23.63	23.69	23.45		
20	QPSK	50	24	23.66	23.73	23.47	24	1
20	QPSK	50	50	23.66	23.72	23.47		
20	QPSK	100	0	23.65	23.70	23.44		
20	16QAM	1	0	23.39	23.44	23.18	24	1
20	16QAM	1	49	23.27	23.34	23.10		
20	16QAM	1	99	23.28	23.41	23.09		
20	16QAM	50	0	22.12	22.16	21.93	23	2
20	16QAM	50	24	22.16	22.22	21.98		
20	16QAM	50	50	22.15	22.19	21.96		
20	16QAM	100	0	22.11	22.17	21.92	23	2
20	64QAM	1	0	22.37	22.40	22.14		
20	64QAM	1	49	22.22	22.30	22.02		
20	64QAM	1	99	22.22	22.39	22.07	22	3
20	64QAM	50	0	21.13	21.18	20.93		
20	64QAM	50	24	21.16	21.24	20.98		
20	64QAM	50	50	21.16	21.23	20.98	22	3
20	64QAM	100	0	21.15	21.19	20.93		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	24.44	24.65	24.38		
15	QPSK	1	37	24.42	24.55	24.30	25	0
15	QPSK	1	74	24.47	24.54	24.31		
15	QPSK	36	0	23.58	23.65	23.40	24	1
15	QPSK	36	20	23.58	23.74	23.48		
15	QPSK	36	39	23.62	23.71	23.45		
15	QPSK	75	0	23.62	23.71	23.45	24	1
15	16QAM	1	0	23.24	23.41	23.18		
15	16QAM	1	37	23.20	23.36	23.08		
15	16QAM	1	74	23.26	23.37	23.10	23	2
15	16QAM	36	0	22.05	22.15	21.91		
15	16QAM	36	20	22.12	22.23	21.96		
15	16QAM	36	39	22.10	22.18	21.93	23	2
15	16QAM	75	0	22.10	22.18	21.90		
15	64QAM	1	0	22.28	22.43	22.17		
15	64QAM	1	37	22.27	22.36	22.12	23	2
15	64QAM	1	74	22.29	22.37	22.10		
15	64QAM	36	0	21.17	21.25	21.00		
15	64QAM	36	20	21.22	21.30	21.08	22	3
15	64QAM	36	39	21.19	21.28	21.04		
15	64QAM	75	0	21.15	21.26	21.01		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	24.23	24.35	24.13		
10	QPSK	1	25	24.20	24.37	24.12	25	0
10	QPSK	1	49	24.19	24.37	24.11		



FCC SAR TEST REPORT

Report No. : FA802421-03

10	QPSK	25	0	23.37	23.51	23.26	24	1
10	QPSK	25	12	23.39	23.53	23.24		
10	QPSK	25	25	23.38	23.54	23.26		
10	QPSK	50	0	23.38	23.54	23.26		
10	16QAM	1	0	23.07	23.22	22.95	24	1
10	16QAM	1	25	23.00	23.17	22.87		
10	16QAM	1	49	22.96	23.16	22.91		
10	16QAM	25	0	21.87	22.03	21.80	23	2
10	16QAM	25	12	21.88	22.09	21.81		
10	16QAM	25	25	21.88	22.08	21.82		
10	16QAM	50	0	21.90	22.08	21.78		
10	64QAM	1	0	22.05	22.13	21.88	23	2
10	64QAM	1	25	21.98	22.12	21.86		
10	64QAM	1	49	21.95	22.17	21.87		
10	64QAM	25	0	20.89	21.07	20.80	22	3
10	64QAM	25	12	20.90	21.09	20.83		
10	64QAM	25	25	20.89	21.10	20.82		
10	64QAM	50	0	20.88	21.09	20.82		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	24.27	24.31	24.17	25	0
5	QPSK	1	12	24.30	24.44	24.18		
5	QPSK	1	24	24.36	24.49	24.20		
5	QPSK	12	0	23.37	23.44	23.26	24	1
5	QPSK	12	7	23.42	23.56	23.30		
5	QPSK	12	13	23.44	23.61	23.29		
5	QPSK	25	0	23.44	23.53	23.28		
5	16QAM	1	0	23.09	23.09	22.94	24	1
5	16QAM	1	12	23.10	23.25	22.94		
5	16QAM	1	24	23.12	23.27	22.93		
5	16QAM	12	0	21.89	22.02	21.75	23	2
5	16QAM	12	7	21.95	22.14	21.83		
5	16QAM	12	13	21.95	22.13	21.83		
5	16QAM	25	0	21.91	22.10	21.80		
5	64QAM	1	0	22.13	22.15	21.97	23	2
5	64QAM	1	12	22.14	22.28	21.98		
5	64QAM	1	24	22.19	22.31	21.98		
5	64QAM	12	0	21.02	21.14	20.91	22	3
5	64QAM	12	7	21.10	21.24	20.97		
5	64QAM	12	13	21.07	21.25	20.95		
5	64QAM	25	0	21.03	21.19	20.91		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	24.20	24.24	24.06	25	0
3	QPSK	1	8	24.31	24.47	24.23		
3	QPSK	1	14	24.28	24.42	24.14		
3	QPSK	8	0	23.37	23.47	23.21	24	1
3	QPSK	8	4	23.46	23.53	23.28		
3	QPSK	8	7	23.40	23.53	23.23		
3	QPSK	15	0	23.40	23.48	23.22		
3	16QAM	1	0	23.00	23.04	22.80	24	1
3	16QAM	1	8	23.15	23.28	22.98		
3	16QAM	1	14	23.02	23.15	22.83		
3	16QAM	8	0	21.90	22.10	21.78	23	2
3	16QAM	8	4	21.98	22.14	21.85		
3	16QAM	8	7	21.96	22.13	21.85		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	16QAM	15	0	21.91	22.09	21.79		
3	64QAM	1	0	22.06	22.10	21.91		
3	64QAM	1	8	22.22	22.38	22.09	23	2
3	64QAM	1	14	22.15	22.26	21.97		
3	64QAM	8	0	21.03	21.19	20.92		
3	64QAM	8	4	21.12	21.27	20.97	22	3
3	64QAM	8	7	21.06	21.21	20.94		
3	64QAM	15	0	21.07	21.17	20.89		
Channel				26047	26340	26683	Tune-up limit	MPR
Frequency (MHz)				1850.7	1880	1914.3	(dBm)	(dB)
1.4	QPSK	1	0	24.24	24.28	24.04		
1.4	QPSK	1	3	24.33	24.43	24.16		
1.4	QPSK	1	5	24.23	24.38	24.09		
1.4	QPSK	3	0	24.30	24.35	24.04	25	0
1.4	QPSK	3	1	24.31	24.40	24.10		
1.4	QPSK	3	3	24.27	24.39	24.12		
1.4	QPSK	6	0	23.40	23.48	23.20	24	1
1.4	16QAM	1	0	23.05	23.07	22.77		
1.4	16QAM	1	3	23.15	23.22	22.87		
1.4	16QAM	1	5	23.00	23.18	22.79	24	1
1.4	16QAM	3	0	22.88	22.93	22.61		
1.4	16QAM	3	1	22.91	23.00	22.64		
1.4	16QAM	3	3	22.84	22.96	22.57		
1.4	16QAM	6	0	21.97	22.08	21.77	23	2
1.4	64QAM	1	0	22.08	22.07	21.85		
1.4	64QAM	1	3	22.17	22.26	21.93		
1.4	64QAM	1	5	22.00	22.14	21.84	23	2
1.4	64QAM	3	0	22.07	22.18	21.87		
1.4	64QAM	3	1	22.12	22.23	21.90		
1.4	64QAM	3	3	22.08	22.17	21.85		
1.4	64QAM	6	0	20.95	21.08	20.79	22	3



<Hotspot mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	19.01	19.03	18.98	19.5	0
20	QPSK	1	49	18.89	18.93	18.97		
20	QPSK	1	99	18.90	18.92	19.09		
20	QPSK	50	0	19.02	19.03	19.10	19.5	0
20	QPSK	50	24	19.06	19.08	19.18		
20	QPSK	50	50	19.04	19.08	19.15		
20	QPSK	100	0	19.05	19.06	19.12	19.5	0
20	16QAM	1	0	18.76	18.77	18.75		
20	16QAM	1	49	18.64	18.72	18.76		
20	16QAM	1	99	18.69	18.72	18.86	19.5	0
20	16QAM	50	0	18.53	18.54	18.61		
20	16QAM	50	24	18.55	18.60	18.66		
20	16QAM	50	50	18.56	18.59	18.67	19.5	0
20	16QAM	100	0	18.54	18.55	18.64		
20	64QAM	1	0	18.71	18.76	18.71		
20	64QAM	1	49	18.62	18.70	18.74	19.5	0
20	64QAM	1	99	18.63	18.70	18.86		
20	64QAM	50	0	18.56	18.56	18.63		
20	64QAM	50	24	18.59	18.61	18.69	19.5	0
20	64QAM	50	50	18.57	18.62	18.69		
20	64QAM	100	0	18.56	18.57	18.65		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	18.92	18.98	19.00	19.5	0
15	QPSK	1	37	18.92	18.93	19.04		
15	QPSK	1	74	18.94	18.95	19.08		
15	QPSK	36	0	19.05	19.05	19.14	19.5	0
15	QPSK	36	20	19.08	19.12	19.17		
15	QPSK	36	39	19.08	19.11	19.16		
15	QPSK	75	0	19.06	19.09	19.15	19.5	0
15	16QAM	1	0	18.71	18.82	18.80		
15	16QAM	1	37	18.69	18.75	18.85		
15	16QAM	1	74	18.74	18.77	18.87	19.5	0
15	16QAM	36	0	18.54	18.55	18.64		
15	16QAM	36	20	18.58	18.61	18.72		
15	16QAM	36	39	18.56	18.61	18.70	19.5	0
15	16QAM	75	0	18.57	18.58	18.68		
15	64QAM	1	0	18.68	18.80	18.74		
15	64QAM	1	37	18.65	18.73	18.78	19.5	0
15	64QAM	1	74	18.69	18.74	18.81		
15	64QAM	36	0	18.58	18.58	18.70		
15	64QAM	36	20	18.62	18.66	18.77	19.5	0
15	64QAM	36	39	18.60	18.64	18.77		
15	64QAM	75	0	18.57	18.58	18.70		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	18.87	18.79	18.94	19.5	0
10	QPSK	1	25	18.78	18.77	18.85		
10	QPSK	1	49	18.74	18.77	18.93		
10	QPSK	25	0	18.90	18.89	19.00	19.5	0
10	QPSK	25	12	18.93	18.91	19.02		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

10	QPSK	25	25	18.91	18.91	19.04		
10	QPSK	50	0	18.93	18.92	19.04		
10	16QAM	1	0	18.63	18.57	18.69		
10	16QAM	1	25	18.54	18.56	18.64	19.5	0
10	16QAM	1	49	18.52	18.60	18.73		
10	16QAM	25	0	18.42	18.40	18.52		
10	16QAM	25	12	18.44	18.43	18.57	19.5	0
10	16QAM	25	25	18.42	18.45	18.56		
10	16QAM	50	0	18.40	18.43	18.56		
10	64QAM	1	0	18.57	18.54	18.65	19.5	0
10	64QAM	1	25	18.50	18.56	18.60		
10	64QAM	1	49	18.51	18.56	18.62		
10	64QAM	25	0	18.43	18.42	18.55	19.5	0
10	64QAM	25	12	18.45	18.43	18.58		
10	64QAM	25	25	18.44	18.46	18.58		
10	64QAM	50	0	18.46	18.44	18.58		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	18.76	18.72	18.86	19.5	0
5	QPSK	1	12	18.84	18.85	18.97		
5	QPSK	1	24	18.91	18.86	18.99		
5	QPSK	12	0	18.90	18.85	18.96	19.5	0
5	QPSK	12	7	18.97	18.98	19.03		
5	QPSK	12	13	18.98	18.99	19.11		
5	QPSK	25	0	18.95	18.91	19.00	19.5	0
5	16QAM	1	0	18.52	18.49	18.70		
5	16QAM	1	12	18.62	18.64	18.76		
5	16QAM	1	24	18.65	18.63	18.72	19.5	0
5	16QAM	12	0	18.41	18.37	18.51		
5	16QAM	12	7	18.48	18.51	18.54		
5	16QAM	12	13	18.49	18.49	18.58	19.5	0
5	16QAM	25	0	18.46	18.43	18.51		
5	64QAM	1	0	18.49	18.51	18.67		
5	64QAM	1	12	18.59	18.59	18.69	19.5	0
5	64QAM	1	24	18.59	18.63	18.69		
5	64QAM	12	0	18.45	18.39	18.52		
5	64QAM	12	7	18.54	18.53	18.61	19.5	0
5	64QAM	12	13	18.55	18.53	18.65		
5	64QAM	25	0	18.47	18.47	18.53		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	18.67	18.68	18.89	19.5	0
3	QPSK	1	8	18.91	18.92	19.03		
3	QPSK	1	14	18.84	18.85	19.00		
3	QPSK	8	0	18.89	18.84	19.02	19.5	0
3	QPSK	8	4	18.95	18.95	19.08		
3	QPSK	8	7	18.94	18.93	19.05		
3	QPSK	15	0	18.94	18.92	19.05	19.5	0
3	16QAM	1	0	18.46	18.43	18.63		
3	16QAM	1	8	18.68	18.66	18.78		
3	16QAM	1	14	18.60	18.61	18.71	19.5	0
3	16QAM	8	0	18.47	18.42	18.59		
3	16QAM	8	4	18.52	18.55	18.66		
3	16QAM	8	7	18.49	18.50	18.61	19.5	0
3	16QAM	15	0	18.44	18.45	18.57		
3	64QAM	1	0	18.43	18.47	18.61	19.5	0



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	64QAM	1	8	18.68	18.70	18.75	19.5	0
3	64QAM	1	14	18.61	18.58	18.72		
3	64QAM	8	0	18.45	18.41	18.57		
3	64QAM	8	4	18.54	18.57	18.65		
3	64QAM	8	7	18.53	18.51	18.61		
3	64QAM	15	0	18.49	18.48	18.58		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	18.67	18.67	18.88	19.5	0
1.4	QPSK	1	3	18.84	18.84	18.95		
1.4	QPSK	1	5	18.78	18.73	18.90		
1.4	QPSK	3	0	18.76	18.78	18.86		
1.4	QPSK	3	1	18.82	18.85	18.97		
1.4	QPSK	3	3	18.80	18.77	18.95		
1.4	QPSK	6	0	18.84	18.86	18.98	19.5	0
1.4	16QAM	1	0	18.45	18.46	18.61	19.5	0
1.4	16QAM	1	3	18.58	18.62	18.73		
1.4	16QAM	1	5	18.50	18.51	18.64		
1.4	16QAM	3	0	18.34	18.35	18.47		
1.4	16QAM	3	1	18.37	18.40	18.48		
1.4	16QAM	3	3	18.30	18.32	18.46		
1.4	16QAM	6	0	18.46	18.45	18.58	19.5	0
1.4	64QAM	1	0	18.42	18.42	18.57	19.5	0
1.4	64QAM	1	3	18.57	18.58	18.65		
1.4	64QAM	1	5	18.48	18.54	18.60		
1.4	64QAM	3	0	18.51	18.51	18.61		
1.4	64QAM	3	1	18.54	18.56	18.65		
1.4	64QAM	3	3	18.47	18.54	18.64		
1.4	64QAM	6	0	18.39	18.39	18.51	19.5	0



<Near-body and Product specific mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.36	22.47	22.38	23	0
20	QPSK	1	49	22.22	22.38	22.31		
20	QPSK	1	99	22.23	22.38	22.44		
20	QPSK	50	0	22.32	22.50	22.43	23	0
20	QPSK	50	24	22.38	22.58	22.49		
20	QPSK	50	50	22.37	22.54	22.49		
20	QPSK	100	0	22.36	22.53	22.43	23	0
20	16QAM	1	0	22.11	22.25	22.15		
20	16QAM	1	49	21.99	22.19	22.08		
20	16QAM	1	99	22.02	22.16	22.19	23	0
20	16QAM	50	0	21.85	21.99	21.90		
20	16QAM	50	24	21.88	22.05	21.92		
20	16QAM	50	50	21.88	22.04	21.99	23	0
20	16QAM	100	0	21.85	22.01	21.94		
20	64QAM	1	0	22.09	22.21	22.13		
20	64QAM	1	49	21.95	22.14	22.06	23	0
20	64QAM	1	99	21.97	22.13	22.13		
20	64QAM	50	0	20.87	21.02	20.93		
20	64QAM	50	24	20.91	21.06	20.96	22	1
20	64QAM	50	50	20.90	21.06	21.01		
20	64QAM	100	0	20.89	21.04	20.96		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	22.32	22.49	22.35	23	0
15	QPSK	1	37	22.35	22.41	22.26		
15	QPSK	1	74	22.36	22.43	22.41		
15	QPSK	36	0	22.45	22.53	22.38	23	0
15	QPSK	36	20	22.51	22.57	22.46		
15	QPSK	36	39	22.46	22.57	22.44		
15	QPSK	75	0	22.46	22.54	22.42	23	0
15	16QAM	1	0	22.11	22.26	22.11		
15	16QAM	1	37	22.08	22.21	22.06		
15	16QAM	1	74	22.14	22.22	22.19	23	0
15	16QAM	36	0	21.94	22.02	21.84		
15	16QAM	36	20	22.00	22.09	21.96		
15	16QAM	36	39	21.97	22.07	21.93	23	0
15	16QAM	75	0	21.97	22.05	21.92		
15	64QAM	1	0	22.12	22.25	22.08		
15	64QAM	1	37	22.06	22.18	22.03	23	0
15	64QAM	1	74	22.10	22.17	22.12		
15	64QAM	36	0	20.99	21.07	20.92		
15	64QAM	36	20	21.03	21.13	20.99	22	1
15	64QAM	36	39	21.00	21.11	20.97		
15	64QAM	75	0	20.96	21.06	20.93		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.18	22.25	22.16	23	0
10	QPSK	1	25	22.15	22.24	22.10		
10	QPSK	1	49	22.12	22.22	22.09		
10	QPSK	25	0	22.26	22.35	22.22	23	0
10	QPSK	25	12	22.27	22.38	22.25		



FCC SAR TEST REPORT

Report No. : FA802421-03

10	QPSK	25	25	22.26	22.36	22.25		
10	QPSK	50	0	22.26	22.37	22.26		
10	16QAM	1	0	21.95	22.06	21.97		
10	16QAM	1	25	21.90	22.04	21.90	23	0
10	16QAM	1	49	21.85	22.01	21.92		
10	16QAM	25	0	21.77	21.91	21.78		
10	16QAM	25	12	21.77	21.92	21.81	23	0
10	16QAM	25	25	21.76	21.91	21.81		
10	16QAM	50	0	21.75	21.90	21.80		
10	64QAM	1	0	21.89	22.00	21.84	23	0
10	64QAM	1	25	21.82	21.93	21.85		
10	64QAM	1	49	21.89	21.98	21.86		
10	64QAM	25	0	20.78	20.91	20.79	22	1
10	64QAM	25	12	20.79	20.92	20.83		
10	64QAM	25	25	20.78	20.94	20.82		
10	64QAM	50	0	20.79	20.92	20.82		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.15	22.13	22.22	23	0
5	QPSK	1	12	22.23	22.30	22.28		
5	QPSK	1	24	22.16	22.37	22.28		
5	QPSK	12	0	22.29	22.30	22.26	23	0
5	QPSK	12	7	22.32	22.41	22.36		
5	QPSK	12	13	22.35	22.39	22.41		
5	QPSK	25	0	22.30	22.37	22.30		
5	16QAM	1	0	21.92	21.98	21.95	23	0
5	16QAM	1	12	21.98	22.09	22.06		
5	16QAM	1	24	21.92	22.12	22.10		
5	16QAM	12	0	21.80	21.86	21.82	23	0
5	16QAM	12	7	21.84	21.97	21.90		
5	16QAM	12	13	21.87	21.96	21.97		
5	16QAM	25	0	21.79	21.91	21.83		
5	64QAM	1	0	21.93	21.88	21.91	23	0
5	64QAM	1	12	21.97	22.05	21.99		
5	64QAM	1	24	21.93	22.08	22.03		
5	64QAM	12	0	20.84	20.88	20.88	22	1
5	64QAM	12	7	20.88	20.99	20.93		
5	64QAM	12	13	20.88	21.02	21.01		
5	64QAM	25	0	20.80	20.93	20.85		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.15	22.15	22.12	23	0
3	QPSK	1	8	22.29	22.38	22.33		
3	QPSK	1	14	22.24	22.25	22.28		
3	QPSK	8	0	22.30	22.27	22.25	23	0
3	QPSK	8	4	22.36	22.40	22.39		
3	QPSK	8	7	22.31	22.35	22.38		
3	QPSK	15	0	22.30	22.37	22.36		
3	16QAM	1	0	21.91	21.92	21.93	23	0
3	16QAM	1	8	22.06	22.14	22.16		
3	16QAM	1	14	21.90	22.07	22.06		
3	16QAM	8	0	21.83	21.89	21.88	23	0
3	16QAM	8	4	21.91	21.99	21.99		
3	16QAM	8	7	21.89	21.96	21.98		
3	16QAM	15	0	21.81	21.92	21.92		
3	64QAM	1	0	21.87	21.89	21.87	23	0



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	64QAM	1	8	22.05	22.13	22.10	22	1
3	64QAM	1	14	21.91	22.00	22.01		
3	64QAM	8	0	20.83	20.89	20.85		
3	64QAM	8	4	20.90	20.99	20.99		
3	64QAM	8	7	20.88	20.95	20.95		
3	64QAM	15	0	20.82	20.93	20.91		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.03	22.07	22.17	23	0
1.4	QPSK	1	3	22.15	22.25	22.24		
1.4	QPSK	1	5	22.01	22.18	22.20		
1.4	QPSK	3	0	22.09	22.20	22.15		
1.4	QPSK	3	1	22.15	22.25	22.25		
1.4	QPSK	3	3	22.11	22.21	22.20		
1.4	QPSK	6	0	22.20	22.27	22.27	23	0
1.4	16QAM	1	0	21.79	21.91	21.89	23	0
1.4	16QAM	1	3	21.92	22.05	22.06		
1.4	16QAM	1	5	21.75	21.95	21.94		
1.4	16QAM	3	0	21.62	21.74	21.76		
1.4	16QAM	3	1	21.67	21.79	21.79		
1.4	16QAM	3	3	21.64	21.75	21.77		
1.4	16QAM	6	0	21.78	21.86	21.87	23	0
1.4	64QAM	1	0	21.79	21.79	21.84	23	0
1.4	64QAM	1	3	21.86	21.97	21.96		
1.4	64QAM	1	5	21.72	21.90	21.89		
1.4	64QAM	3	0	21.80	21.89	21.90		
1.4	64QAM	3	1	21.86	21.95	21.93		
1.4	64QAM	3	3	21.80	21.90	21.90		
1.4	64QAM	6	0	20.71	20.82	20.78	22	1

<LTE Band 26>
<At-head power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.84	23.92	23.87		
15	QPSK	1	37	23.91	23.80	23.72	25	0
15	QPSK	1	74	23.87	23.77	23.82	24	1
15	QPSK	36	0	23.02	22.97	22.98		
15	QPSK	36	20	23.09	23.07	22.96		
15	QPSK	36	39	22.98	23.00	22.90		
15	QPSK	75	0	22.99	23.03	22.92	24	1
15	16QAM	1	0	22.74	22.76	22.64		
15	16QAM	1	37	22.71	22.66	22.52		
15	16QAM	1	74	22.71	22.62	22.61	23	2
15	16QAM	36	0	21.55	21.42	21.42		
15	16QAM	36	20	21.53	21.55	21.53		
15	16QAM	36	39	21.52	21.45	21.41		
15	16QAM	75	0	21.55	21.57	21.45	23	2
15	64QAM	1	0	21.72	21.75	21.71		
15	64QAM	1	37	21.72	21.64	21.56		
15	64QAM	1	74	21.69	21.66	21.59	22	3
15	64QAM	36	0	20.57	20.40	20.48		
15	64QAM	36	20	20.57	20.45	20.56		
15	64QAM	36	39	20.51	20.44	20.44		
15	64QAM	75	0	20.51	20.54	20.45	Tune-up limit (dBm)	MPR (dB)
Channel				26740	26865	26990		
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.82	23.78	23.80	25	0
10	QPSK	1	25	23.75	23.80	23.76		
10	QPSK	1	49	23.84	23.82	23.87		
10	QPSK	25	0	22.91	22.94	22.76	24	1
10	QPSK	25	12	22.89	22.99	22.84		
10	QPSK	25	25	22.88	22.96	22.82		
10	QPSK	50	0	22.90	22.94	22.78		
10	16QAM	1	0	22.52	22.65	22.62	24	1
10	16QAM	1	25	22.63	22.55	22.53		
10	16QAM	1	49	22.73	22.63	22.59		
10	16QAM	25	0	21.47	21.47	21.35	23	2
10	16QAM	25	12	21.44	21.48	21.32		
10	16QAM	25	25	21.46	21.42	21.30		
10	16QAM	50	0	21.41	21.50	21.42		
10	64QAM	1	0	21.53	21.58	21.55	23	2
10	64QAM	1	25	21.55	21.59	21.41		
10	64QAM	1	49	21.66	21.56	21.52		
10	64QAM	25	0	20.48	20.49	20.40	22	3
10	64QAM	25	12	20.50	20.49	20.37		
10	64QAM	25	25	20.46	20.41	20.34		
10	64QAM	50	0	20.43	20.51	20.38		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.70	23.70	23.73		
5	QPSK	1	12	23.76	23.79	23.72	25	0
5	QPSK	1	24	23.80	23.81	23.75		



FCC SAR TEST REPORT

Report No. : FA802421-03

5	QPSK	12	0	22.83	22.82	22.72	24	1
5	QPSK	12	7	22.87	22.90	22.87		
5	QPSK	12	13	22.94	22.92	22.83		
5	QPSK	25	0	22.87	22.81	22.73		
5	16QAM	1	0	22.45	22.51	22.40	24	1
5	16QAM	1	12	22.65	22.60	22.48		
5	16QAM	1	24	22.63	22.63	22.47		
5	16QAM	12	0	21.34	21.42	21.35	23	2
5	16QAM	12	7	21.49	21.47	21.37		
5	16QAM	12	13	21.47	21.43	21.37		
5	16QAM	25	0	21.47	21.36	21.32		
5	64QAM	1	0	21.47	21.48	21.44	23	2
5	64QAM	1	12	21.58	21.55	21.52		
5	64QAM	1	24	21.63	21.57	21.41		
5	64QAM	12	0	20.41	20.33	20.34	22	3
5	64QAM	12	7	20.46	20.40	20.41		
5	64QAM	12	13	20.51	20.39	20.37		
5	64QAM	25	0	20.40	20.30	20.32		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.69	23.73	23.70	25	0
3	QPSK	1	8	23.82	23.90	23.84		
3	QPSK	1	14	23.76	23.81	23.71		
3	QPSK	8	0	22.89	22.84	22.84	24	1
3	QPSK	8	4	22.97	22.83	22.81		
3	QPSK	8	7	22.92	22.86	22.80		
3	QPSK	15	0	22.84	22.84	22.77		
3	16QAM	1	0	22.45	22.52	22.46	24	1
3	16QAM	1	8	22.66	22.69	22.55		
3	16QAM	1	14	22.47	22.62	22.41		
3	16QAM	8	0	21.50	21.47	21.34	23	2
3	16QAM	8	4	21.48	21.44	21.36		
3	16QAM	8	7	21.40	21.49	21.39		
3	16QAM	15	0	21.47	21.40	21.33		
3	64QAM	1	0	21.49	21.50	21.41	23	2
3	64QAM	1	8	21.64	21.58	21.57		
3	64QAM	1	14	21.48	21.51	21.40		
3	64QAM	8	0	20.49	20.44	20.36	22	3
3	64QAM	8	4	20.52	20.50	20.44		
3	64QAM	8	7	20.39	20.40	20.39		
3	64QAM	15	0	20.41	20.39	20.27		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.69	23.70	23.68	25	0
1.4	QPSK	1	3	23.83	23.89	23.77		
1.4	QPSK	1	5	23.70	23.75	23.68		
1.4	QPSK	3	0	23.75	23.77	23.74		
1.4	QPSK	3	1	23.69	23.81	23.73		
1.4	QPSK	3	3	23.69	23.76	23.66		
1.4	QPSK	6	0	22.84	22.74	22.79	24	1
1.4	16QAM	1	0	22.51	22.45	22.45	24	1
1.4	16QAM	1	3	22.61	22.54	22.44		
1.4	16QAM	1	5	22.45	22.52	22.38		
1.4	16QAM	3	0	22.36	22.22	22.26		
1.4	16QAM	3	1	22.34	22.27	22.24		
1.4	16QAM	3	3	22.32	22.34	22.13		

**FCC SAR TEST REPORT****Report No. : FA8O2421-03**

1.4	16QAM	6	0	21.39	21.36	21.37	23	2
1.4	64QAM	1	0	21.45	21.44	21.49	23	2
1.4	64QAM	1	3	21.56	21.53	21.42		
1.4	64QAM	1	5	21.51	21.40	21.39		
1.4	64QAM	3	0	21.40	21.41	21.42		
1.4	64QAM	3	1	21.55	21.47	21.52		
1.4	64QAM	3	3	21.48	21.45	21.44		
1.4	64QAM	6	0	20.41	20.34	20.28	22	3



<Hotspot / Near-body / Product specific mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.60	23.62	23.58		
15	QPSK	1	37	23.58	23.59	23.50	25	0
15	QPSK	1	74	23.66	23.65	23.55	24	1
15	QPSK	36	0	22.73	22.70	22.69		
15	QPSK	36	20	22.76	22.73	22.72		
15	QPSK	36	39	22.70	22.68	22.66		
15	QPSK	75	0	22.72	22.70	22.69	24	1
15	16QAM	1	0	22.41	22.42	22.40		
15	16QAM	1	37	22.39	22.38	22.31		
15	16QAM	1	74	22.49	22.44	22.35	23	2
15	16QAM	36	0	21.25	21.23	21.11		
15	16QAM	36	20	21.27	21.24	21.13		
15	16QAM	36	39	21.23	21.20	21.08		
15	16QAM	75	0	21.23	21.21	21.11	23	2
15	64QAM	1	0	21.36	21.38	21.36		
15	64QAM	1	37	21.37	21.36	21.31		
15	64QAM	1	74	21.45	21.40	21.35	22	3
15	64QAM	36	0	20.27	20.28	20.13		
15	64QAM	36	20	20.30	20.30	20.16		
15	64QAM	36	39	20.26	20.24	20.09		
15	64QAM	75	0	20.24	20.24	20.12	25	0
Channel				26740	26865	26990		
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.49	23.49	23.46	25	0
10	QPSK	1	25	23.51	23.47	23.43		
10	QPSK	1	49	23.48	23.45	23.39		
10	QPSK	25	0	22.58	22.62	22.54	24	1
10	QPSK	25	12	22.62	22.66	22.57		
10	QPSK	25	25	22.61	22.64	22.55		
10	QPSK	50	0	22.62	22.64	22.57		
10	16QAM	1	0	22.30	22.28	22.24	24	1
10	16QAM	1	25	22.31	22.31	22.21		
10	16QAM	1	49	22.30	22.29	22.19		
10	16QAM	25	0	21.12	21.11	21.05	23	2
10	16QAM	25	12	21.17	21.15	21.08		
10	16QAM	25	25	21.16	21.12	21.05		
10	16QAM	50	0	21.14	21.13	21.07		
10	64QAM	1	0	21.21	21.26	21.22	23	2
10	64QAM	1	25	21.29	21.25	21.22		
10	64QAM	1	49	21.29	21.26	21.19		
10	64QAM	25	0	20.15	20.12	20.07	22	3
10	64QAM	25	12	20.19	20.16	20.10		
10	64QAM	25	25	20.18	20.15	20.07		
10	64QAM	50	0	20.18	20.14	20.08		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.41	23.41	23.38		
5	QPSK	1	12	23.54	23.52	23.42	25	0
5	QPSK	1	24	23.59	23.47	23.45	24	1
5	QPSK	12	0	22.57	22.58	22.49		
5	QPSK	12	7	22.61	22.60	22.53		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

5	QPSK	12	13	22.61	22.64	22.55		
5	QPSK	25	0	22.61	22.57	22.49		
5	16QAM	1	0	22.22	22.20	22.15		
5	16QAM	1	12	22.33	22.32	22.26	24	1
5	16QAM	1	24	22.37	22.28	22.19		
5	16QAM	12	0	21.08	21.06	20.97		
5	16QAM	12	7	21.18	21.11	21.03	23	2
5	16QAM	12	13	21.17	21.12	21.06		
5	16QAM	25	0	21.13	21.06	21.00		
5	64QAM	1	0	21.21	21.19	21.16	23	2
5	64QAM	1	12	21.32	21.27	21.22		
5	64QAM	1	24	21.36	21.24	21.20		
5	64QAM	12	0	20.12	20.10	20.05	22	3
5	64QAM	12	7	20.21	20.13	20.11		
5	64QAM	12	13	20.21	20.15	20.12		
5	64QAM	25	0	20.15	20.08	20.03		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.41	23.46	23.39	25	0
3	QPSK	1	8	23.58	23.58	23.54		
3	QPSK	1	14	23.45	23.51	23.42		
3	QPSK	8	0	22.58	22.59	22.50	24	1
3	QPSK	8	4	22.63	22.61	22.61		
3	QPSK	8	7	22.61	22.62	22.54		
3	QPSK	15	0	22.60	22.55	22.52	24	1
3	16QAM	1	0	22.22	22.26	22.19		
3	16QAM	1	8	22.37	22.40	22.31		
3	16QAM	1	14	22.25	22.29	22.20	23	2
3	16QAM	8	0	21.18	21.12	21.12		
3	16QAM	8	4	21.24	21.12	21.14		
3	16QAM	8	7	21.18	21.12	21.09	23	2
3	16QAM	15	0	21.13	21.06	21.03		
3	64QAM	1	0	21.20	21.19	21.20		
3	64QAM	1	8	21.36	21.35	21.32	23	2
3	64QAM	1	14	21.28	21.27	21.18		
3	64QAM	8	0	20.16	20.12	20.08		
3	64QAM	8	4	20.21	20.15	20.11	22	3
3	64QAM	8	7	20.10	20.16	20.13		
3	64QAM	15	0	20.12	20.04	20.09		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.45	23.39	23.34	25	0
1.4	QPSK	1	3	23.52	23.50	23.43		
1.4	QPSK	1	5	23.38	23.36	23.32		
1.4	QPSK	3	0	23.47	23.41	23.40		
1.4	QPSK	3	1	23.51	23.44	23.41		
1.4	QPSK	3	3	23.46	23.43	23.38		
1.4	QPSK	6	0	22.53	22.49	22.50	24	1
1.4	16QAM	1	0	22.23	22.15	22.16	24	1
1.4	16QAM	1	3	22.29	22.29	22.24		
1.4	16QAM	1	5	22.18	22.16	22.14		
1.4	16QAM	3	0	22.03	21.98	21.96		
1.4	16QAM	3	1	22.07	22.00	21.99		
1.4	16QAM	3	3	22.01	21.99	21.92		
1.4	16QAM	6	0	21.12	21.05	21.10	23	2
1.4	64QAM	1	0	21.20	21.14	21.13	23	2



FCC SAR TEST REPORT

Report No. : FA8O2421-03

1.4	64QAM	1	3	21.25	21.26	21.18		
1.4	64QAM	1	5	21.17	21.18	21.07		
1.4	64QAM	3	0	21.16	21.11	21.16		
1.4	64QAM	3	1	21.21	21.17	21.19		
1.4	64QAM	3	3	21.16	21.15	21.11		
1.4	64QAM	6	0	20.07	20.02	20.03	22	3

<LTE Band 66>
<At-head power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	24.47	24.39	24.53	25	0
20	QPSK	1	49	24.40	24.35	24.47		
20	QPSK	1	99	24.37	24.34	24.47		
20	QPSK	50	0	23.63	23.56	23.64	24	1
20	QPSK	50	24	23.55	23.52	23.61		
20	QPSK	50	50	23.47	23.45	23.58		
20	QPSK	100	0	23.55	23.48	23.63		
20	16QAM	1	0	23.29	23.12	23.30	24	1
20	16QAM	1	49	23.19	23.16	23.22		
20	16QAM	1	99	23.15	23.17	23.26		
20	16QAM	50	0	22.13	22.07	22.12	23	2
20	16QAM	50	24	22.09	22.04	22.15		
20	16QAM	50	50	22.03	21.97	22.08		
20	16QAM	100	0	22.07	22.02	22.12		
20	64QAM	1	0	22.24	22.08	22.30	23	2
20	64QAM	1	49	22.16	22.10	22.22		
20	64QAM	1	99	22.11	22.09	22.22		
20	64QAM	50	0	21.15	21.10	21.13	22	3
20	64QAM	50	24	21.11	21.05	21.16		
20	64QAM	50	50	21.03	21.00	21.12		
20	64QAM	100	0	21.09	21.05	21.16		
Channel				132047	132322	132597		
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	24.52	24.47	24.51	25	0
15	QPSK	1	37	24.38	24.37	24.46		
15	QPSK	1	74	24.43	24.35	24.51		
15	QPSK	36	0	23.63	23.56	23.72	24	1
15	QPSK	36	20	23.56	23.53	23.67		
15	QPSK	36	39	23.53	23.47	23.58		
15	QPSK	75	0	23.58	23.51	23.64		
15	16QAM	1	0	23.32	23.30	23.34	24	1
15	16QAM	1	37	23.19	23.16	23.24		
15	16QAM	1	74	23.19	23.17	23.35		
15	16QAM	36	0	22.13	22.07	22.21	23	2
15	16QAM	36	20	22.08	22.04	22.17		
15	16QAM	36	39	22.01	21.97	22.10		
15	16QAM	75	0	22.06	22.04	22.16		
15	64QAM	1	0	22.28	22.22	22.28	23	2
15	64QAM	1	37	22.14	22.15	22.18		
15	64QAM	1	74	22.14	22.14	22.25		
15	64QAM	36	0	21.18	21.13	21.26	22	3
15	64QAM	36	20	21.13	21.11	21.21		
15	64QAM	36	39	21.10	21.04	21.14		
15	64QAM	75	0	21.11	21.09	21.19		
Channel				132022	132322	132622		
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	24.39	24.26	24.48	25	0
10	QPSK	1	25	24.35	24.29	24.40		
10	QPSK	1	49	24.31	24.26	24.50		



FCC SAR TEST REPORT

Report No. : FA802421-03

10	QPSK	25	0	23.49	23.41	23.56	24	1
10	QPSK	25	12	23.46	23.41	23.56		
10	QPSK	25	25	23.42	23.35	23.51		
10	QPSK	50	0	23.46	23.41	23.54		
10	16QAM	1	0	23.11	23.10	23.22	24	1
10	16QAM	1	25	23.14	23.07	23.19		
10	16QAM	1	49	23.14	23.05	23.27		
10	16QAM	25	0	22.00	21.92	22.07	23	2
10	16QAM	25	12	21.99	21.93	22.06		
10	16QAM	25	25	21.95	21.87	22.03		
10	16QAM	50	0	21.97	21.91	22.07		
10	64QAM	1	0	22.11	22.02	22.17	23	2
10	64QAM	1	25	22.09	22.02	22.15		
10	64QAM	1	49	22.07	22.03	22.23		
10	64QAM	25	0	21.03	20.96	21.09	22	3
10	64QAM	25	12	21.02	20.94	21.08		
10	64QAM	25	25	20.96	20.87	21.03		
10	64QAM	50	0	21.02	20.94	21.10		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	24.33	24.23	24.36	25	0
5	QPSK	1	12	24.43	24.34	24.44		
5	QPSK	1	24	24.44	24.41	24.49		
5	QPSK	12	0	23.51	23.37	23.46	24	1
5	QPSK	12	7	23.54	23.46	23.52		
5	QPSK	12	13	23.53	23.45	23.56		
5	QPSK	25	0	23.51	23.43	23.44		
5	16QAM	1	0	23.08	23.04	23.13	24	1
5	16QAM	1	12	23.19	23.12	23.24		
5	16QAM	1	24	23.21	23.14	23.31		
5	16QAM	12	0	22.05	21.89	21.99	23	2
5	16QAM	12	7	22.08	21.99	22.04		
5	16QAM	12	13	22.07	21.97	22.09		
5	16QAM	25	0	22.04	21.94	21.99		
5	64QAM	1	0	22.11	22.00	22.05	23	2
5	64QAM	1	12	22.17	22.09	22.18		
5	64QAM	1	24	22.18	22.16	22.21		
5	64QAM	12	0	21.09	20.94	21.05	22	3
5	64QAM	12	7	21.14	21.05	21.08		
5	64QAM	12	13	21.12	21.03	21.15		
5	64QAM	25	0	21.07	20.97	21.04		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	24.35	24.25	24.32	25	0
3	QPSK	1	8	24.52	24.41	24.51		
3	QPSK	1	14	24.44	24.32	24.42		
3	QPSK	8	0	23.50	23.42	23.47	24	1
3	QPSK	8	4	23.53	23.46	23.57		
3	QPSK	8	7	23.50	23.43	23.54		
3	QPSK	15	0	23.52	23.42	23.50		
3	16QAM	1	0	23.11	23.01	23.09	24	1
3	16QAM	1	8	23.28	23.17	23.32		
3	16QAM	1	14	23.21	23.12	23.20		
3	16QAM	8	0	22.07	21.99	22.04	23	2
3	16QAM	8	4	22.10	22.04	22.12		
3	16QAM	8	7	22.08	22.00	22.12		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	16QAM	15	0	22.06	21.97	22.02		
3	64QAM	1	0	22.12	22.00	22.10	23	2
3	64QAM	1	8	22.27	22.16	22.24		
3	64QAM	1	14	22.19	22.12	22.21		
3	64QAM	8	0	21.08	21.00	21.03	22	3
3	64QAM	8	4	21.12	21.03	21.15		
3	64QAM	8	7	21.12	21.02	21.11		
3	64QAM	15	0	21.05	20.96	21.01		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	24.33	24.23	24.28	25	0
1.4	QPSK	1	3	24.41	24.32	24.44		
1.4	QPSK	1	5	24.37	24.23	24.33		
1.4	QPSK	3	0	24.37	24.28	24.33		
1.4	QPSK	3	1	24.44	24.31	24.35		
1.4	QPSK	3	3	24.41	24.27	24.35		
1.4	QPSK	6	0	23.46	23.34	23.40	24	1
1.4	16QAM	1	0	23.13	23.04	23.07	24	1
1.4	16QAM	1	3	23.21	23.11	23.23		
1.4	16QAM	1	5	23.13	23.02	23.14		
1.4	16QAM	3	0	22.90	22.81	22.86		
1.4	16QAM	3	1	22.98	22.88	22.95		
1.4	16QAM	3	3	22.94	22.84	22.96		
1.4	16QAM	6	0	22.03	21.95	22.00	23	2
1.4	64QAM	1	0	22.09	22.00	22.03	23	2
1.4	64QAM	1	3	22.19	22.08	22.17		
1.4	64QAM	1	5	22.13	22.02	22.12		
1.4	64QAM	3	0	22.11	21.99	22.01		
1.4	64QAM	3	1	22.09	22.04	22.05		
1.4	64QAM	3	3	22.05	22.01	22.06		
1.4	64QAM	6	0	20.98	20.87	20.92	22	3



<Hotspot mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	19.35	19.50	19.43		
20	QPSK	1	49	19.36	19.40	19.40	20	0
20	QPSK	1	99	19.42	19.38	19.29		
20	QPSK	50	0	19.60	19.62	19.60		
20	QPSK	50	24	19.56	19.58	19.55	20	0
20	QPSK	50	50	19.49	19.53	19.47		
20	QPSK	100	0	19.51	19.56	19.54		
20	16QAM	1	0	19.14	19.26	19.25	20	0
20	16QAM	1	49	19.12	19.19	19.26		
20	16QAM	1	99	19.21	19.17	19.16		
20	16QAM	50	0	19.09	19.13	19.13	20	0
20	16QAM	50	24	19.03	19.07	19.11		
20	16QAM	50	50	18.97	19.03	19.06		
20	16QAM	100	0	19.01	19.06	19.08	20	0
20	64QAM	1	0	19.11	19.26	19.18		
20	64QAM	1	49	19.09	19.15	19.22		
20	64QAM	1	99	19.17	19.18	19.12	20	0
20	64QAM	50	0	19.11	19.15	19.15		
20	64QAM	50	24	19.06	19.13	19.07		
20	64QAM	50	50	19.02	19.05	18.99	20	0
20	64QAM	100	0	19.06	19.07	19.12		
Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	19.45	19.52	19.50		
15	QPSK	1	37	19.37	19.40	19.35	20	0
15	QPSK	1	74	19.35	19.40	19.34		
15	QPSK	36	0	19.58	19.60	19.61	20	0
15	QPSK	36	20	19.51	19.55	19.56		
15	QPSK	36	39	19.48	19.50	19.47		
15	QPSK	75	0	19.52	19.55	19.54	20	0
15	16QAM	1	0	19.23	19.32	19.37		
15	16QAM	1	37	19.14	19.17	19.21		
15	16QAM	1	74	19.09	19.19	19.20	20	0
15	16QAM	36	0	19.08	19.12	19.14		
15	16QAM	36	20	19.02	19.09	19.09		
15	16QAM	36	39	18.97	19.02	19.06	20	0
15	16QAM	75	0	19.02	19.08	19.09		
15	64QAM	1	0	19.22	19.31	19.31		
15	64QAM	1	37	19.06	19.16	19.14	20	0
15	64QAM	1	74	19.11	19.18	19.11		
15	64QAM	36	0	19.13	19.16	19.13	20	0
15	64QAM	36	20	19.08	19.10	19.08		
15	64QAM	36	39	19.01	19.07	19.02		
15	64QAM	75	0	19.05	19.09	19.13	Tune-up limit (dBm)	MPR (dB)
Channel				132022	132322	132622		
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	19.24	19.30	19.29	20	0
10	QPSK	1	25	19.22	19.25	19.24		
10	QPSK	1	49	19.23	19.25	19.25		
10	QPSK	25	0	19.34	19.39	19.43	20	0
10	QPSK	25	12	19.36	19.39	19.35		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

10	QPSK	25	25	19.29	19.33	19.30		
10	QPSK	50	0	19.35	19.38	19.35		
10	16QAM	1	0	18.99	19.08	19.11		
10	16QAM	1	25	19.00	19.09	19.06	20	0
10	16QAM	1	49	18.97	19.10	19.06		
10	16QAM	25	0	18.88	18.94	18.92		
10	16QAM	25	12	18.87	18.93	18.91	20	0
10	16QAM	25	25	18.81	18.88	18.84		
10	16QAM	50	0	18.85	18.94	18.88		
10	64QAM	1	0	18.97	19.05	19.04	20	0
10	64QAM	1	25	18.98	19.01	19.02		
10	64QAM	1	49	18.98	19.02	18.99		
10	64QAM	25	0	18.89	18.92	18.91	20	0
10	64QAM	25	12	18.89	18.93	18.89		
10	64QAM	25	25	18.84	18.87	18.85		
10	64QAM	50	0	18.88	18.93	18.90		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	19.12	19.22	19.29	20	0
5	QPSK	1	12	19.25	19.29	19.30		
5	QPSK	1	24	19.32	19.34	19.32		
5	QPSK	12	0	19.29	19.33	19.41	20	0
5	QPSK	12	7	19.38	19.42	19.42		
5	QPSK	12	13	19.38	19.42	19.40		
5	QPSK	25	0	19.34	19.39	19.40	20	0
5	16QAM	1	0	18.88	19.03	19.08		
5	16QAM	1	12	18.99	19.12	19.07		
5	16QAM	1	24	19.07	19.15	19.11	20	0
5	16QAM	12	0	18.80	18.88	18.91		
5	16QAM	12	7	18.89	18.98	18.92		
5	16QAM	12	13	18.90	18.97	18.90	20	0
5	16QAM	25	0	18.87	18.95	18.90		
5	64QAM	1	0	18.89	18.96	19.03		
5	64QAM	1	12	19.01	19.08	19.02	20	0
5	64QAM	1	24	19.04	19.08	19.00		
5	64QAM	12	0	18.87	18.91	18.95		
5	64QAM	12	7	18.96	19.01	18.96	20	0
5	64QAM	12	13	18.96	19.00	18.94		
5	64QAM	25	0	18.90	18.95	18.89		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	19.15	19.22	19.33	20	0
3	QPSK	1	8	19.33	19.36	19.34		
3	QPSK	1	14	19.22	19.29	19.27		
3	QPSK	8	0	19.26	19.39	19.39	20	0
3	QPSK	8	4	19.37	19.43	19.43		
3	QPSK	8	7	19.32	19.39	19.39		
3	QPSK	15	0	19.35	19.40	19.39	20	0
3	16QAM	1	0	18.91	19.04	19.07		
3	16QAM	1	8	19.05	19.17	19.12		
3	16QAM	1	14	19.01	19.08	19.01	20	0
3	16QAM	8	0	18.83	18.99	18.92		
3	16QAM	8	4	18.93	19.03	18.97		
3	16QAM	8	7	18.91	19.00	18.94	20	0
3	16QAM	15	0	18.87	18.97	18.94		
3	64QAM	1	0	18.90	18.96	19.01	20	0



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	64QAM	1	8	19.05	19.12	19.09	20	0
3	64QAM	1	14	19.02	19.07	19.01		
3	64QAM	8	0	18.86	18.95	18.93		
3	64QAM	8	4	18.95	19.01	18.95		
3	64QAM	8	7	18.92	19.00	18.90		
3	64QAM	15	0	18.90	18.94	18.90		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	19.08	19.15	19.13	20	0
1.4	QPSK	1	3	19.20	19.26	19.23		
1.4	QPSK	1	5	19.10	19.15	19.12		
1.4	QPSK	3	0	19.14	19.18	19.16		
1.4	QPSK	3	1	19.21	19.23	19.18		
1.4	QPSK	3	3	19.17	19.19	19.15		
1.4	QPSK	6	0	19.23	19.28	19.22	20	0
1.4	16QAM	1	0	18.85	19.02	18.92	20	0
1.4	16QAM	1	3	18.95	19.12	19.01		
1.4	16QAM	1	5	18.84	18.99	18.92		
1.4	16QAM	3	0	18.69	18.80	18.76		
1.4	16QAM	3	1	18.76	18.85	18.78		
1.4	16QAM	3	3	18.70	18.80	18.75		
1.4	16QAM	6	0	18.83	18.92	18.86	20	0
1.4	64QAM	1	0	18.83	18.99	18.89	20	0
1.4	64QAM	1	3	18.76	19.04	18.96		
1.4	64QAM	1	5	18.78	18.97	18.89		
1.4	64QAM	3	0	18.86	18.96	18.89		
1.4	64QAM	3	1	18.91	19.00	18.97		
1.4	64QAM	3	3	18.88	18.95	18.89		
1.4	64QAM	6	0	18.75	18.83	18.77	20	0



<Near-body and Product specific mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.49	22.39	22.50		
20	QPSK	1	49	22.50	22.38	22.41	23	0
20	QPSK	1	99	22.50	22.39	22.29		
20	QPSK	50	0	22.73	22.61	22.61		
20	QPSK	50	24	22.68	22.58	22.53	23	0
20	QPSK	50	50	22.61	22.49	22.47		
20	QPSK	100	0	22.66	22.55	22.55		
20	16QAM	1	0	22.50	22.40	22.54	23	0
20	16QAM	1	49	22.50	22.41	22.43		
20	16QAM	1	99	22.47	22.41	22.31		
20	16QAM	50	0	21.95	21.82	21.83	23	0
20	16QAM	50	24	21.91	21.79	21.78		
20	16QAM	50	50	21.84	21.72	21.69		
20	16QAM	100	0	21.89	21.76	21.77	23	0
20	64QAM	1	0	21.95	21.90	21.99		
20	64QAM	1	49	21.96	21.90	21.87		
20	64QAM	1	99	21.99	21.89	21.77	22	1
20	64QAM	50	0	20.97	20.82	20.85		
20	64QAM	50	24	20.93	20.81	20.80		
20	64QAM	50	50	20.87	20.77	20.73	22	1
20	64QAM	100	0	20.90	20.78	20.79		
Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	22.50	22.52	22.51		
15	QPSK	1	37	22.52	22.34	22.35	23	0
15	QPSK	1	74	22.50	22.41	22.32		
15	QPSK	36	0	22.72	22.62	22.61	23	0
15	QPSK	36	20	22.67	22.56	22.56		
15	QPSK	36	39	22.62	22.51	22.50		
15	QPSK	75	0	22.67	22.58	22.56	23	0
15	16QAM	1	0	22.53	22.54	22.54		
15	16QAM	1	37	22.50	22.36	22.38		
15	16QAM	1	74	22.47	22.41	22.39	23	0
15	16QAM	36	0	21.92	21.82	21.83		
15	16QAM	36	20	21.89	21.79	21.76		
15	16QAM	36	39	21.83	21.74	21.72	23	0
15	16QAM	75	0	21.88	21.78	21.79		
15	64QAM	1	0	22.05	22.01	22.01	23	0
15	64QAM	1	37	21.98	21.89	21.85		
15	64QAM	1	74	21.95	21.87	21.83		
15	64QAM	36	0	20.97	20.87	20.88	22	1
15	64QAM	36	20	20.93	20.83	20.81		
15	64QAM	36	39	20.88	20.77	20.75		
15	64QAM	75	0	20.88	20.80	20.78	Tune-up limit (dBm)	MPR (dB)
Channel				132022	132322	132622		
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.35	22.27	22.31	23	0
10	QPSK	1	25	22.31	22.24	22.25		
10	QPSK	1	49	22.31	22.24	22.21		
10	QPSK	25	0	22.44	22.39	22.38	23	0
10	QPSK	25	12	22.45	22.38	22.37		



FCC SAR TEST REPORT

Report No. : FA802421-03

10	QPSK	25	25	22.40	22.33	22.32		
10	QPSK	50	0	22.43	22.36	22.37		
10	16QAM	1	0	22.30	22.26	22.29		
10	16QAM	1	25	22.31	22.26	22.26	23	0
10	16QAM	1	49	22.30	22.24	22.24		
10	16QAM	25	0	21.70	21.61	21.60		
10	16QAM	25	12	21.69	21.59	21.60	23	0
10	16QAM	25	25	21.64	21.56	21.55		
10	16QAM	50	0	21.65	21.59	21.60		
10	64QAM	1	0	21.79	21.73	21.76	23	0
10	64QAM	1	25	21.78	21.74	21.75		
10	64QAM	1	49	21.80	21.73	21.77		
10	64QAM	25	0	20.70	20.62	20.62	22	1
10	64QAM	25	12	20.69	20.62	20.61		
10	64QAM	25	25	20.66	20.57	20.55		
10	64QAM	50	0	20.70	20.60	20.60		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.28	22.24	22.34	23	0
5	QPSK	1	12	22.35	22.28	22.38		
5	QPSK	1	24	22.40	22.33	22.43		
5	QPSK	12	0	22.43	22.33	22.48	23	0
5	QPSK	12	7	22.48	22.43	22.51		
5	QPSK	12	13	22.47	22.43	22.49		
5	QPSK	25	0	22.47	22.41	22.48	23	0
5	16QAM	1	0	22.24	22.22	22.36		
5	16QAM	1	12	22.36	22.30	22.40		
5	16QAM	1	24	22.38	22.34	22.41	23	0
5	16QAM	12	0	21.68	21.57	21.73		
5	16QAM	12	7	21.72	21.65	21.74		
5	16QAM	12	13	21.71	21.65	21.72	23	0
5	16QAM	25	0	21.67	21.63	21.71		
5	64QAM	1	0	21.72	21.69	21.86		
5	64QAM	1	12	21.84	21.77	21.87	23	0
5	64QAM	1	24	21.88	21.82	21.87		
5	64QAM	12	0	20.74	20.62	20.76		
5	64QAM	12	7	20.77	20.71	20.78	22	1
5	64QAM	12	13	20.77	20.72	20.77		
5	64QAM	25	0	20.71	20.63	20.73		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.26	22.17	22.32	23	0
3	QPSK	1	8	22.36	22.35	22.42		
3	QPSK	1	14	22.29	22.28	22.31		
3	QPSK	8	0	22.39	22.36	22.42	23	0
3	QPSK	8	4	22.44	22.39	22.47		
3	QPSK	8	7	22.41	22.36	22.45		
3	QPSK	15	0	22.41	22.36	22.44	23	0
3	16QAM	1	0	22.23	22.19	22.32		
3	16QAM	1	8	22.38	22.37	22.43		
3	16QAM	1	14	22.30	22.28	22.31	23	0
3	16QAM	8	0	21.70	21.64	21.73		
3	16QAM	8	4	21.73	21.69	21.75		
3	16QAM	8	7	21.71	21.65	21.71	23	0
3	16QAM	15	0	21.65	21.61	21.68		
3	64QAM	1	0	21.72	21.70	21.80	23	0



FCC SAR TEST REPORT

Report No. : FA8O2421-03

3	64QAM	1	8	21.85	21.82	21.90		
3	64QAM	1	14	21.77	21.74	21.82		
3	64QAM	8	0	20.69	20.65	20.74		
3	64QAM	8	4	20.73	20.69	20.76		
3	64QAM	8	7	20.69	20.66	20.73		
3	64QAM	15	0	20.67	20.61	20.69		
Channel				131979	132322	132665	Tune-up limit	MPR
Frequency (MHz)				1710.7	1745	1779.3	(dBm)	(dB)
1.4	QPSK	1	0	22.15	22.17	22.26		
1.4	QPSK	1	3	22.33	22.28	22.34		
1.4	QPSK	1	5	22.22	22.19	22.26		
1.4	QPSK	3	0	22.29	22.22	22.31		
1.4	QPSK	3	1	22.33	22.29	22.34		
1.4	QPSK	3	3	22.29	22.23	22.30		
1.4	QPSK	6	0	22.34	22.30	22.37	23	0
1.4	16QAM	1	0	22.18	22.18	22.29		
1.4	16QAM	1	3	22.32	22.29	22.38		
1.4	16QAM	1	5	22.24	22.20	22.28		
1.4	16QAM	3	0	22.05	21.96	22.07		
1.4	16QAM	3	1	22.07	22.03	22.11		
1.4	16QAM	3	3	22.04	22.01	22.03		
1.4	16QAM	6	0	21.66	21.60	21.69	23	0
1.4	64QAM	1	0	21.65	21.68	21.77		
1.4	64QAM	1	3	21.80	21.74	21.84		
1.4	64QAM	1	5	21.71	21.67	21.77		
1.4	64QAM	3	0	21.74	21.65	21.73		
1.4	64QAM	3	1	21.75	21.71	21.76		
1.4	64QAM	3	3	21.71	21.64	21.76		
1.4	64QAM	6	0	20.58	20.54	20.60	22	1

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

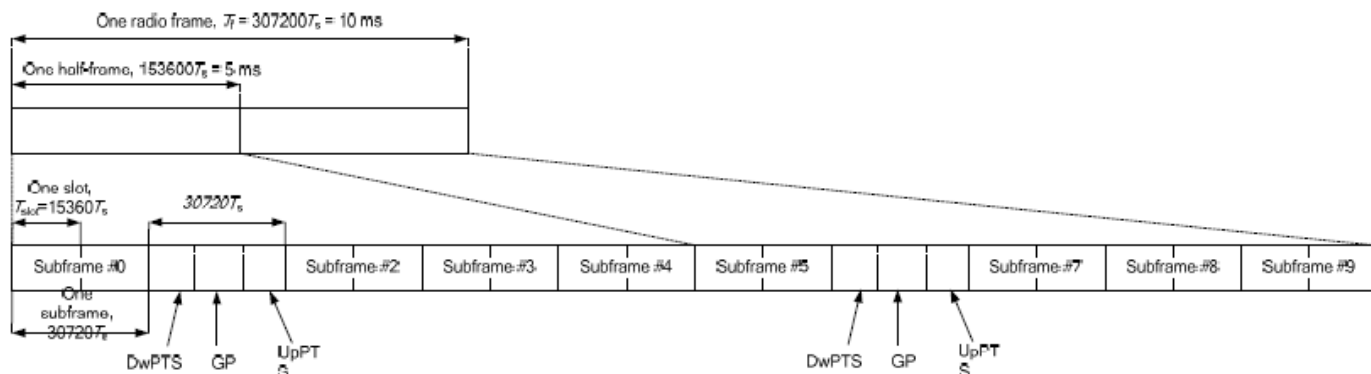


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Band 41>
<At-head / Hotspot / Near-body / Product specific power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490	22.5	0
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	22.06	21.93	21.97	22.14	21.75	22.5	0
20	QPSK	1	49	21.98	21.83	22.01	22.05	21.87		
20	QPSK	1	99	21.98	21.84	21.98	21.85	22.01		
20	QPSK	50	0	22.19	22.04	22.15	22.24	22.07	22.5	0
20	QPSK	50	24	22.19	22.00	22.14	22.19	22.01		
20	QPSK	50	50	22.15	21.94	22.14	22.11	22.06		
20	QPSK	100	0	22.17	21.98	22.14	22.20	22.00	22.5	0
20	16QAM	1	0	21.71	21.55	21.60	21.78	21.45		
20	16QAM	1	49	21.60	21.47	21.64	21.69	21.47		
20	16QAM	1	99	21.63	21.48	21.56	21.42	21.57	22.5	0
20	16QAM	50	0	21.70	21.57	21.65	21.77	21.51		
20	16QAM	50	24	21.70	21.56	21.70	21.73	21.54		
20	16QAM	50	50	21.71	21.48	21.69	21.63	21.59	22.5	0
20	16QAM	100	0	21.73	21.52	21.67	21.71	21.55		
20	64QAM	1	0	21.48	21.34	21.38	21.52	21.22		
20	64QAM	1	49	21.43	21.25	21.41	21.43	21.22	22.5	0
20	64QAM	1	99	21.42	21.25	21.34	21.17	21.34		
20	64QAM	50	0	21.20	21.05	21.17	21.28	21.00		
20	64QAM	50	24	21.23	21.05	21.18	21.23	21.06	22	0.5
20	64QAM	50	50	21.25	20.99	21.19	21.16	21.09		
20	64QAM	100	0	21.24	21.03	21.17	21.19	21.08		
Channel				39725	40173	40620	41068	41515	22.5	0
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	22.04	21.92	21.99	22.12	21.82	22.5	0
15	QPSK	1	37	21.96	21.80	21.96	22.03	21.79		
15	QPSK	1	74	22.03	21.81	22.06	21.89	21.93		
15	QPSK	36	0	22.09	21.98	22.11	22.16	21.94	22.5	0
15	QPSK	36	20	22.14	21.99	22.14	22.14	21.98		
15	QPSK	36	39	22.16	21.93	22.14	22.06	21.99		
15	QPSK	75	0	22.15	21.99	22.14	22.16	22.00	22.5	0
15	16QAM	1	0	21.67	21.53	21.62	21.75	21.39		
15	16QAM	1	37	21.58	21.48	21.67	21.59	21.49		
15	16QAM	1	74	21.65	21.42	21.64	21.53	21.52	22.5	0
15	16QAM	36	0	21.59	21.46	21.60	21.67	21.44		
15	16QAM	36	20	21.62	21.50	21.65	21.65	21.48		
15	16QAM	36	39	21.63	21.42	21.63	21.57	21.50	22.5	0
15	16QAM	75	0	21.68	21.53	21.70	21.68	21.52		
15	64QAM	1	0	21.44	21.29	21.37	21.51	21.14		
15	64QAM	1	37	21.35	21.29	21.43	21.34	21.25	22.5	0
15	64QAM	1	74	21.40	21.15	21.42	21.28	21.30		
15	64QAM	36	0	21.13	21.03	21.17	21.20	20.96		
15	64QAM	36	20	21.18	21.04	21.19	21.18	21.02	22	0.5
15	64QAM	36	39	21.17	20.96	21.20	21.10	21.04		
15	64QAM	75	0	21.19	21.04	21.19	21.18	21.02		
Channel				39700	40160	40620	41080	41540	22.5	0
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	21.86	21.80	21.91	21.90	21.76	22.5	0
10	QPSK	1	25	21.78	21.74	21.86	21.87	21.71		



FCC SAR TEST REPORT

Report No. : FA8O2421-03

10	QPSK	1	49	21.86	21.77	21.91	21.85	21.71	22.5	0
10	QPSK	25	0	21.96	21.91	22.02	22.02	21.85		
10	QPSK	25	12	21.99	21.91	22.02	22.01	21.86		
10	QPSK	25	25	21.94	21.87	21.98	21.97	21.80		
10	QPSK	50	0	21.97	21.90	22.01	22.03	21.86		
10	16QAM	1	0	21.51	21.35	21.47	21.46	21.30	22.5	0
10	16QAM	1	25	21.43	21.41	21.51	21.49	21.32		
10	16QAM	1	49	21.40	21.31	21.43	21.40	21.23		
10	16QAM	25	0	21.51	21.46	21.55	21.56	21.40	22.5	0
10	16QAM	25	12	21.53	21.45	21.54	21.57	21.41		
10	16QAM	25	25	21.49	21.40	21.52	21.51	21.34		
10	16QAM	50	0	21.50	21.47	21.56	21.55	21.40		
10	64QAM	1	0	21.23	21.12	21.32	21.30	21.14	22.5	0
10	64QAM	1	25	21.19	21.18	21.22	21.24	21.07		
10	64QAM	1	49	21.20	21.09	21.25	21.22	21.05		
10	64QAM	25	0	21.06	20.99	21.09	21.09	20.94	22	0.5
10	64QAM	25	12	21.07	21.01	21.10	21.13	20.95		
10	64QAM	25	25	21.03	20.97	21.06	21.07	20.89		
10	64QAM	50	0	21.03	20.95	21.06	21.05	20.89		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	21.78	21.86	21.91	21.92	21.70	22.5	0
5	QPSK	1	12	21.92	21.84	21.94	21.91	21.79		
5	QPSK	1	24	21.89	21.77	21.90	21.90	21.71		
5	QPSK	12	0	21.95	21.94	21.96	22.02	21.82	22.5	0
5	QPSK	12	7	22.03	21.98	22.02	22.06	21.89		
5	QPSK	12	13	22.00	21.94	22.04	22.04	21.89		
5	QPSK	25	0	22.00	21.91	21.96	22.02	21.85		
5	16QAM	1	0	21.42	21.47	21.49	21.49	21.35	22.5	0
5	16QAM	1	12	21.51	21.42	21.54	21.54	21.38		
5	16QAM	1	24	21.54	21.42	21.53	21.55	21.39		
5	16QAM	12	0	21.43	21.43	21.46	21.55	21.31	22.5	0
5	16QAM	12	7	21.54	21.47	21.53	21.56	21.38		
5	16QAM	12	13	21.53	21.44	21.55	21.52	21.37		
5	16QAM	25	0	21.55	21.47	21.53	21.57	21.42		
5	64QAM	1	0	21.23	21.27	21.28	21.31	21.13	22.5	0
5	64QAM	1	12	21.31	21.19	21.34	21.29	21.15		
5	64QAM	1	24	21.32	21.21	21.32	21.31	21.17		
5	64QAM	12	0	21.01	20.98	21.05	21.10	20.88	22	0.5
5	64QAM	12	7	21.09	21.01	21.08	21.10	20.97		
5	64QAM	12	13	21.10	21.01	21.11	21.10	20.94		
5	64QAM	25	0	21.07	21.01	21.06	21.12	20.96		

<LTE Carrier Aggregation combinations>
General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2CC Downlink Carrier Aggregation				3CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by Measurement Superset	Number	Combination	Restriction	Covered by Measurement Superset
1	2A-4A		3CC-1	1	2A-4A-5A		
2	2A-5A		3CC-1	2	2A-4A-7A		
3	2A-7A		3CC-2	3	2A-4A-12A		
4	2A-12A		3CC-3	4	2A-4A-13A		
5	2A-13A		3CC-4	5	2A-5A-66A		5CC-1
6	2A-29A	B29 SCC only		6	2A-13A-66A		
7	2A-66A		5CC-1	7	2A-2A-4A		
8	4A-5A		3CC-1	8	2A-4A-4A		
9	4A-7A		3CC-2	9	2A-2A-5A		5CC-1
10	4A-12A		3CC-3	10	2A-7A-7A		
11	4A-13A		3CC-4	11	2A-2A-12A		5CC-2
12	4A-29A	B29 SCC only		12	2A-2A-13A		
13	5A-7A		3CC-27	13	2A-12A-66A		5CC-2
14	5A-66A		5CC-1	14	2A-2A-66A		
15	7A-46A	B46 SCC only	5CC-4	15	2A-66A-66A		5CC-1
16	7A-66A		3CC-35	16	2A-5B		5CC-3
17	12A-66A		5CC-2	17	2A-7C		
18	13A-66A		3CC-6	18	2A-66B		
19	66A-29A	B29 SCC only		19	2A-66C		
20	2A-2A			20	2C-66A		
21	4A-4A			21	4A-4A-5A		
22	5A-5A			22	4A-7A-7A		
23	7A-7A			23	4A-4A-12A		
24	66A-66A			24	4A-4A-13A		
25	2C			25	4A-7C		
26	5B			26	4A-12B		
27	7B			27	5A-7A-7A		
28	7C			28	5A-5A-66A		
29	12B			29	5A-66A-66A		5CC-1
30	41C			30	5A-7C		
31	66B			31	5A-66B		
32	66C			32	5A-66C		
				33	5B-66A		5CC-3
				34	5B-66A-66A		5CC-3
				35	7A-66A-66A		
				36	7A-46C	B46 SCC only	5CC-4
				37	12A-66A-66A		5CC-2
				38	12A-66C		
				39	12B-66A		
				40	13A-66A-66A		
				41	13A-66B		
				42	13A-66C		
				43	66A-66B		
				44	66A-66C		
				45	66D		

4CC Downlink Carrier Aggregation				5CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by	Number	Combination	Restriction	Covered by
			Measurement Superset				Measurement Superset
1	2A-2A-5A-66A		5CC-1	1	2A-2A-5A-66A-66A		
2	2A-2A-66A-66A		5CC-1	2	2A-2A-12A-66A-66A		
3	2A-5A-66A-66A		5CC-1	3	2A-5B-66A-66A		
4	2A-2A-12A-66A		5CC-2	4	7A-46E	B46 SCC only	
5	2A-12A-66A-66A		5CC-2				
6	2A-5B-66A		5CC-3				
7	7A-46D	B46 SCC only	5CC-4				

<Power verification when LTE Carrier Aggregation Active>

General Note:

- According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		PCC						SCC				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		2	20	1880	18900	QPSK	1	0	29	10	722.5	9715	24.44	24.53
		4	20	1745	20300	QPSK	1	0	29	10	722.5	9715	24.52	24.57
		66	20	1770	132572	QPSK	1	0	29	10	722.5	9715	24.46	24.53
Intra-Band	Non-Contiguous	2	20	1880	18900	QPSK	1	0	2	5	1987.5	1175	24.44	24.53
		4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	24.51	24.57
		5	10	829	20450	QPSK	1	0	5	5	891.5	2625	23.87	23.96
		7	20	2510	20850	QPSK	50	50	7	5	2687.5	3425	22.15	22.23
		66	20	1770	132572	QPSK	1	0	66	5	2112.5	66461	24.53	24.53
	Contiguous	2	20	1880	18900	QPSK	1	0	2	20	1979.80	1098	24.43	24.53
		5	10	829	20450	QPSK	1	0	5	10	883.90	2549	23.90	23.96
		7	15	2507.5	20825	QPSK	36	39	7	5	2636.80	2918	22.17	22.20
		7	20	2510	20850	QPSK	50	50	7	20	2649.80	3048	22.13	22.23
		12	10	704	23060	QPSK	1	0	12	5	741.20	5132	23.81	23.89
		41	20	2636.5	41055	QPSK	50	0	41	20	2656.30	41253	22.17	22.24
		66	15	1717.5	132047	QPSK	1	0	66	5	2126.80	66604	24.51	24.52
		66	20	1770	132572	QPSK	1	0	66	20	2170.20	67038	24.52	24.53

<Three Carrier power verification>

Configure	PCC							SCC1				SCC2				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	5	10	881.5	2525	24.47	24.53
	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	7	20	2655	3100	24.43	24.53
	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	12	10	737.5	5095	24.47	24.53
	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	13	10	751	5230	24.45	24.53
	2	20	1880	18900	QPSK	1	0	13	10	751	5230	66	20	2155	66886	24.48	24.53
	2	20	1880	18900	QPSK	1	0	2	5	1987.5	1175	4	20	2132.5	2175	24.44	24.53
	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	4	5	2152.5	2375	24.43	24.53
	2	20	1880	18900	QPSK	1	0	7	20	2655	3100	7	5	2687.5	3425	24.48	24.53
	2	20	1880	18900	QPSK	1	0	2	5	1987.5	1175	13	10	751	5230	24.43	24.53
	2	20	1880	18900	QPSK	1	0	2	5	1987.5	1175	66	20	2155	66886	24.45	24.53
	2	20	1880	18900	QPSK	1	0	7	20	2655	3100	7	20	2674.8	3298	24.52	24.53
	2	20	1880	18900	QPSK	1	0	66	15	2155	66886	66	5	2164.3	66979	24.51	24.53
	2	20	1880	18900	QPSK	1	0	66	20	2155	66886	66	20	2174.8	67084	24.51	24.53
	2	20	1880	18900	QPSK	1	0	2	20	1979.8	1098	66	20	2155	66886	24.43	24.53
	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	5	10	881.5	2525	24.51	24.57
	4	20	1745	20300	QPSK	1	0	7	20	2655	3100	7	5	2687.5	3425	24.53	24.57
	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	12	10	737.5	5095	24.47	24.57
	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	13	10	751	5230	24.49	24.57
	4	20	1745	20300	QPSK	1	0	7	20	2655	3100	7	20	2674.8	3298	24.47	24.57
	4	20	1745	20300	QPSK	1	0	12	10	740	5120	12	5	732.8	5048	24.52	24.57
	5	10	829	20450	QPSK	1	0	7	20	2655	3100	7	5	2687.5	3425	23.88	23.96
	5	10	829	20450	QPSK	1	0	5	5	891.5	2625	66	20	2155	66886	23.92	23.96
	5	10	829	20450	QPSK	1	0	7	20	2655	3100	7	20	2674.8	3298	23.92	23.96
	5	10	829	20450	QPSK	1	0	66	15	2155	66886	66	5	2164.3	66979	23.91	23.96
	5	10	829	20450	QPSK	1	0	66	20	2155	66886	66	20	2174.8	67084	23.93	23.96
	7	20	2510	20850	QPSK	50	50	66	20	2155	66886	66	5	2197.5	67311	22.22	22.23
	12	10	704	23060	QPSK	1	0	66	20	2155	66886	66	20	2174.8	67084	23.83	23.89
	12	10	704	23060	QPSK	1	0	12	5	741.2	5132	66	20	2155	66886	23.80	23.89
	13	10	782	23230	QPSK	1	0	66	20	2155	66886	66	5	2197.5	67311	23.71	23.81
	13	10	782	23230	QPSK	1	0	66	15	2155	66886	66	5	2164.3	66979	23.80	23.81
	13	10	782	23230	QPSK	1	0	66	20	2155	66886	66	20	2174.8	67084	23.75	23.81
	66	20	1770	132572	QPSK	1	0	66	5	2112.5	66461	66	15	2121.8	66554	24.52	24.53
	66	20	1770	132572	QPSK	1	0	66	5	2112.5	66461	66	20	2100.8	66344	24.45	24.53
Intra-Band Contiguous	66	20	1770	132572	QPSK	1	0	66	20	2150.2	66838	66	20	2130.4	66640	24.49	24.53

<Five Carrier power verification>

Configure	PCC							SCC1				SCC2				SCC3				SCC4				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1880	18900	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	66	20	2155	66886	66	5	2197.5	67311	24.46	24.53
	2	20	1880	18900	QPSK	1	0	2	5	1987.5	1175	12	10	737.5	5095	66	20	2155	66886	66	5	2197.5	67311	24.48	24.53
	2	20	1880	18900	QPSK	1	0	5	10	876.6	2476	5	10	886.5	2575	66	20	2155	66886	66	5	2197.5	67311	24.53	24.53
	7	20	2510	20850	QPSK	50	50	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	46	20	5596.9	51259	22.20	22.23

<WLAN Conducted Power>**General Note:**

1. The maximum power in the tune-up exhibit that the single chain in SISO operation is the same single chain in MIMO operation.
2. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
3. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
4. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
5. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
6. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
7. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

<2.4GHz WLAN Chain 0>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	14.10	14.50	100.00
		6	2437	14.10	14.50	
		11	2462	14.00	14.50	
		12	2467	14.00	14.50	
		13	2472	11.20	12.63	
	802.11g 6Mbps	1	2412	10.10	10.41	97.36
		6	2437	14.70	15.00	
		11	2462	14.20	14.83	
		12	2467	11.70	12.06	
		13	2472	4.30	4.60	
	802.11n-HT20 MCS0	1	2412	3.50	4.18	98.80
		6	2437	14.70	15.00	
		11	2462	13.70	14.34	
		12	2467	9.10	9.26	
		13	2472	1.80	2.18	

<2.4GHz WLAN Chain 1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	13.60	14.00	100.00
		6	2437	13.70	14.00	
		11	2462	13.50	14.00	
		12	2467	13.70	14.00	
		13	2472	10.10	10.50	
	802.11g 6Mbps	1	2412	8.40	8.86	97.57
		6	2437	14.40	14.70	
		11	2462	14.20	14.70	
		12	2467	8.70	9.20	
		13	2472	4.20	4.60	
	802.11n-HT20 MCS0	1	2412	2.40	2.61	98.60
		6	2437	14.30	14.70	
		11	2462	13.70	14.04	
		12	2467	10.50	10.80	
		13	2472	1.00	1.87	

<5GHz WLAN Chain 0>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	13.60	14.00	97.57
		40	5200	13.50	14.00	
		44	5220	13.60	14.00	
		48	5240	13.40	14.00	
	802.11n-HT20 MCS0	36	5180	13.70	14.00	99.20
		40	5200	13.60	14.00	
		44	5220	13.70	14.00	
		48	5240	13.60	14.00	
	802.11n-HT40 MCS0	38	5190	13.70	14.00	97.97
		46	5230	13.70	14.00	
	802.11ac-VHT20 MCS0	36	5180	13.60	14.00	98.60
		40	5200	13.50	14.00	
		44	5220	13.60	14.00	
		48	5240	13.50	14.00	
	802.11ac-VHT40 MCS0	38	5190	13.60	14.00	98.77
		46	5230	13.60	14.00	
	802.11ac-VHT80 MCS0	42	5210	13.60	14.00	95.76

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	13.30	14.00	97.57
		56	5280	13.40	14.00	
		60	5300	13.50	14.00	
		64	5320	13.50	14.00	
	802.11n-HT20 MCS0	52	5260	13.60	14.00	99.20
		56	5280	13.60	14.00	
		60	5300	13.70	14.00	
		64	5320	13.70	14.00	
	802.11n-HT40 MCS0	54	5270	13.60	14.00	97.97
		62	5310	13.70	14.00	
	802.11ac-VHT20 MCS0	52	5260	13.50	14.00	98.60
		56	5280	13.50	14.00	
		60	5300	13.60	14.00	
		64	5320	13.60	14.00	
	802.11ac-VHT40 MCS0	54	5270	13.50	14.00	98.77
		62	5310	13.60	14.00	
	802.11ac-VHT80 MCS0	58	5290	13.60	14.00	95.76

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	13.40	14.00	97.57
		116	5580	13.40	14.00	
		124	5620	13.30	14.00	
		132	5660	13.30	14.00	
		144	5720	13.30	14.00	
	802.11n-HT20 MCS0	100	5500	13.60	14.00	99.20
		116	5580	13.60	14.00	
		124	5620	13.50	14.00	
		132	5660	13.50	14.00	
		144	5720	13.40	14.00	
	802.11n-HT40 MCS0	102	5510	13.60	14.00	97.97
		110	5550	13.60	14.00	
		126	5630	13.50	14.00	
		134	5670	13.70	14.00	
		142	5710	13.40	14.00	
	802.11ac-VHT20 MCS0	100	5500	13.30	14.00	98.60
		116	5580	13.50	14.00	
		124	5620	13.40	14.00	
		132	5660	13.40	14.00	
		144	5720	13.40	14.00	
	802.11ac-VHT40 MCS0	102	5510	13.30	14.00	98.77
		110	5550	13.30	14.00	
		126	5630	13.30	14.00	
		134	5670	13.40	14.00	
		142	5710	13.50	14.00	
	802.11ac-VHT80 MCS0	106	5530	13.50	14.00	95.76
		122	5610	13.70	14.00	
		138	5690	13.50	14.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	13.50	14.00	97.57
		157	5785	13.60	14.00	
		165	5825	13.50	14.00	
	802.11n-HT20 MCS0	149	5745	13.50	14.00	99.20
		157	5785	13.60	14.00	
		165	5825	13.60	14.00	
	802.11n-HT40 MCS0	151	5755	13.50	14.00	97.97
		159	5795	13.60	14.00	
	802.11ac-VHT20 MCS0	149	5745	13.50	14.00	98.60
		157	5785	13.30	14.00	
		165	5825	13.40	14.00	
	802.11ac-VHT40 MCS0	151	5755	13.40	14.00	98.77
		159	5795	13.30	14.00	
	802.11ac-VHT80 MCS0	155	5775	13.30	14.00	95.76

<5GHz WLAN Chain 1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	11.50	12.00	97.57
		40	5200	11.40	12.00	
		44	5220	11.40	12.00	
		48	5240	11.70	12.00	
	802.11n-HT20 MCS0	36	5180	11.60	12.00	99.20
		40	5200	11.50	12.00	
		44	5220	11.50	12.00	
		48	5240	11.40	12.00	
	802.11n-HT40 MCS0	38	5190	11.60	12.00	98.77
		46	5230	11.70	12.00	
	802.11ac-VHT20 MCS0	36	5180	11.50	12.00	98.80
		40	5200	11.40	12.00	
		44	5220	11.40	12.00	
		48	5240	11.40	12.00	
	802.11ac-VHT40 MCS0	38	5190	11.50	12.00	97.98
		46	5230	11.60	12.00	
	802.11ac-VHT80 MCS0	42	5210	11.60	12.00	96.60

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	11.50	12.00	97.57
		56	5280	11.40	12.00	
		60	5300	11.50	12.00	
		64	5320	11.50	12.00	
	802.11n-HT20 MCS0	52	5260	11.50	12.00	99.20
		56	5280	11.50	12.00	
		60	5300	11.60	12.00	
		64	5320	11.60	12.00	
	802.11n-HT40 MCS0	54	5270	11.60	12.00	98.77
		62	5310	11.60	12.00	
	802.11ac-VHT20 MCS0	52	5260	11.40	12.00	98.80
		56	5280	11.40	12.00	
		60	5300	11.50	12.00	
		64	5320	11.30	12.00	
	802.11ac-VHT40 MCS0	54	5270	11.50	12.00	97.98
		62	5310	11.50	12.00	
	802.11ac-VHT80 MCS0	58	5290	11.40	12.00	96.60

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	11.70	12.00	97.57
		116	5580	11.50	12.00	
		124	5620	11.40	12.00	
		132	5660	11.40	12.00	
		144	5720	11.40	12.00	
	802.11n-HT20 MCS0	100	5500	11.70	12.00	99.20
		116	5580	11.40	12.00	
		124	5620	11.50	12.00	
		132	5660	11.50	12.00	
		144	5720	11.60	12.00	
	802.11n-HT40 MCS0	102	5510	11.60	12.00	98.77
		110	5550	11.50	12.00	
		126	5630	11.50	12.00	
		134	5670	11.60	12.00	
		142	5710	11.60	12.00	
	802.11ac-VHT20 MCS0	100	5500	11.50	12.00	98.80
		116	5580	11.40	12.00	
		124	5620	11.30	12.00	
		132	5660	11.30	12.00	
		144	5720	11.50	12.00	
	802.11ac-VHT40 MCS0	102	5510	11.50	12.00	97.98
		110	5550	11.40	12.00	
		126	5630	11.40	12.00	
		134	5670	11.50	12.00	
		142	5710	11.50	12.00	
	802.11ac-VHT80 MCS0	106	5530	11.60	12.00	96.60
		122	5610	11.70	12.00	
		138	5690	11.60	12.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	11.50	12.00	97.57
		157	5785	11.50	12.00	
		165	5825	11.70	12.00	
	802.11n-HT20 MCS0	149	5745	11.70	12.00	99.20
		157	5785	11.60	12.00	
		165	5825	11.70	12.00	
	802.11n-HT40 MCS0	151	5755	11.40	12.00	98.77
		159	5795	11.60	12.00	
	802.11ac-VHT20 MCS0	149	5745	11.60	12.00	98.80
		157	5785	11.50	12.00	
		165	5825	11.60	12.00	
	802.11ac-VHT40 MCS0	151	5755	11.30	12.00	97.98
		159	5795	11.50	12.00	
	802.11ac-VHT80 MCS0	155	5775	11.40	12.00	96.60


<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)			Tune-up Limit		
			1Mbps	2Mbps	3Mbps	1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	10.85	7.43	7.50	12.73	10.38	10.38
	CH 39	2441	11.05	7.78	7.82	12.78	10.28	10.28
	CH 78	2480	10	6.83	6.94	11.67	9.75	9.75

Mode	Channel	Frequency (MHz)	Average power (dBm)		Tune-up Limit	
			1Mbps	2Mbps	1Mbps	2Mbps
LE	CH 00	2402	5.50	5.50	7.45	7.45
	CH 19	2440	5.80	5.90	7.19	7.19
	CH 39	2480	5.00	5.00	6.54	6.54

General Note:

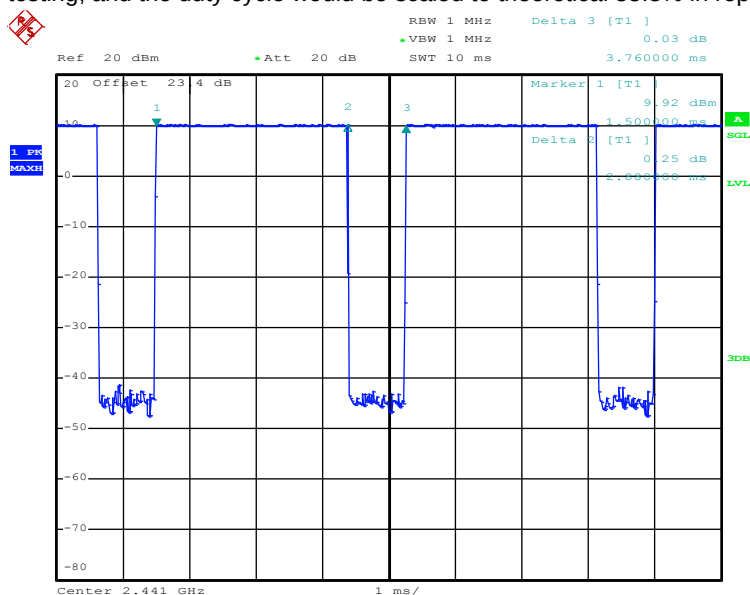- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 76.6% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.



12. RF Exposure Conditions

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN chain0	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
2.4GHz WLAN chain1	≤ 25mm	≤ 25mm	>25mm	>25mm	>25mm	≤ 25mm
5GHz WLAN chain1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN chain0	Yes	Yes	Yes	No	No	Yes
2.4GHz WLAN chain1	Yes	Yes	No	No	No	Yes
5GHz WLAN chain1	Yes	Yes	Yes	No	No	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge, The detail antenna location please refers to Appendix D.

13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold, for this device WWAN transmitter scaled to maximum output power is higher than 1.2W/kg of LTE B25/B66, therefore product specific SAR is necessary.
6. For 5GHz WLAN product specific SAR is necessary, due to an overall diagonal dimension is > 16 cm.
7. When hotspot mode is active which the power will be reduced of LTE B2/B4/B5/B13/B25/B26/B66, detail descriptions of the power reduction mechanism are included in the operational description.
8. The device employs sensors to detect different usage conditions, when operating in near-body or handheld condition by end user, the device will reduced maximum output powers on the LTE B2/B4/B12/B17/B25/B66 and detail descriptions of the power reduction mechanism are included in the operational description.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/4/5/17 SAR test was covered by Band 25/66/26/12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

13.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	128	824.2	26.26	27.20	1.242	0.08	0.137	0.170
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	128	824.2	26.26	27.20	1.242	0.15	0.077	0.096
01	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	128	824.2	26.26	27.20	1.242	0.06	0.165	0.205
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	128	824.2	26.26	27.20	1.242	0.12	0.087	0.108
02	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	661	1880	22.58	23.20	1.153	0.09	0.018	0.021
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	661	1880	22.58	23.20	1.153	-0.1	0.008	0.009
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	661	1880	22.58	23.20	1.153	-0.09	0.016	0.018
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	661	1880	22.58	23.20	1.153	0.05	0.009	0.010

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9400	1880	18.97	19.20	1.054	0.08	0.023	0.024
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9400	1880	18.97	19.20	1.054	0.09	0.015	0.016
03	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	18.97	19.20	1.054	0.1	0.028	0.030
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9400	1880	18.97	19.20	1.054	0.02	0.013	0.014
04	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1413	1732.6	19.49	19.70	1.050	0.14	0.203	0.213
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1413	1732.6	19.49	19.70	1.050	0.08	0.085	0.089
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1413	1732.6	19.49	19.70	1.050	0.15	0.094	0.099
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1413	1732.6	19.49	19.70	1.050	0.12	0.049	0.051
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4233	846.6	24.07	24.70	1.156	-0.04	0.225	0.260
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4233	846.6	24.07	24.70	1.156	0.07	0.115	0.133
05	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4233	846.6	24.07	24.70	1.156	0.03	0.267	0.309
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4233	846.6	24.07	24.70	1.156	-0.01	0.128	0.148

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	99	Right Cheek	0mm	20850	2510	22.14	22.50	1.086	-0.07	0.037	0.040
	LTE Band 7	20M	QPSK	50	50	Right Cheek	0mm	20850	2510	22.23	22.50	1.064	-0.03	0.039	0.042
	LTE Band 7	20M	QPSK	1	99	Right Tilted	0mm	20850	2510	22.14	22.50	1.086	0.04	0.022	0.024
	LTE Band 7	20M	QPSK	50	50	Right Tilted	0mm	20850	2510	22.23	22.50	1.064	0.01	0.023	0.024
06	LTE Band 7	20M	QPSK	1	99	Left Cheek	0mm	20850	2510	22.14	22.50	1.086	-0.18	0.042	0.046
	LTE Band 7	20M	QPSK	50	50	Left Cheek	0mm	20850	2510	22.23	22.50	1.064	-0.03	0.042	0.045
	LTE Band 7	20M	QPSK	1	99	Left Tilted	0mm	20850	2510	22.14	22.50	1.086	0.07	0.032	0.035
	LTE Band 7	20M	QPSK	50	50	Left Tilted	0mm	20850	2510	22.23	22.50	1.064	0.02	0.032	0.034
	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	23095	707.5	23.73	25.00	1.340	0.02	0.186	0.249
	LTE Band 12	10M	QPSK	25	12	Right Cheek	0mm	23095	707.5	22.96	24.00	1.271	0.02	0.159	0.202
	LTE Band 12	10M	QPSK	1	0	Right Tilted	0mm	23095	707.5	23.73	25.00	1.340	0.11	0.077	0.103
	LTE Band 12	10M	QPSK	25	12	Right Tilted	0mm	23095	707.5	22.96	24.00	1.271	0.04	0.069	0.088
07	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	23095	707.5	23.73	25.00	1.340	0.03	0.202	0.271
	LTE Band 12	10M	QPSK	25	12	Left Cheek	0mm	23095	707.5	22.96	24.00	1.271	0.03	0.172	0.219
	LTE Band 12	10M	QPSK	1	0	Left Tilted	0mm	23095	707.5	23.73	25.00	1.340	0.1	0.080	0.107
	LTE Band 12	10M	QPSK	25	12	Left Tilted	0mm	23095	707.5	22.96	24.00	1.271	0.12	0.072	0.091

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	23230	782	23.81	25.00	1.315	0.03	0.135	0.178
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	23230	782	22.98	24.00	1.265	0.02	0.109	0.138
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	23230	782	23.81	25.00	1.315	0.15	0.064	0.084
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	23230	782	22.98	24.00	1.265	-0.03	0.054	0.068
08	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	23230	782	23.81	25.00	1.315	0.04	0.164	0.216
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	23230	782	22.98	24.00	1.265	0.07	0.135	0.171
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	23230	782	23.81	25.00	1.315	0.07	0.077	0.101
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	23230	782	22.98	24.00	1.265	-0.01	0.067	0.085
	LTE Band 25	20M	QPSK	1	0	Right Cheek	0mm	26340	1880	24.66	25.00	1.081	0.17	0.086	0.093
	LTE Band 25	20M	QPSK	50	24	Right Cheek	0mm	26340	1880	23.73	24.00	1.064	0.14	0.060	0.064
	LTE Band 25	20M	QPSK	1	0	Right Tilted	0mm	26340	1880	24.66	25.00	1.081	0.11	0.051	0.055
	LTE Band 25	20M	QPSK	50	24	Right Tilted	0mm	26340	1880	23.73	24.00	1.064	0.1	0.040	0.043
09	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	26340	1880	24.66	25.00	1.081	0.18	0.087	0.094
	LTE Band 25	20M	QPSK	50	24	Left Cheek	0mm	26340	1880	23.73	24.00	1.064	0.13	0.070	0.074
	LTE Band 25	20M	QPSK	1	0	Left Tilted	0mm	26340	1880	24.66	25.00	1.081	0.15	0.041	0.044
	LTE Band 25	20M	QPSK	50	24	Left Tilted	0mm	26340	1880	23.73	24.00	1.064	0.15	0.036	0.038
	LTE Band 26	15M	QPSK	1	0	Right Cheek	0mm	26865	831.5	23.92	25.00	1.282	0.02	0.180	0.231
	LTE Band 26	15M	QPSK	36	20	Right Cheek	0mm	26865	831.5	23.07	24.00	1.239	-0.08	0.149	0.185
	LTE Band 26	15M	QPSK	1	0	Right Tilted	0mm	26865	831.5	23.92	25.00	1.282	0.05	0.105	0.135
	LTE Band 26	15M	QPSK	36	20	Right Tilted	0mm	26865	831.5	23.07	24.00	1.239	-0.18	0.086	0.107
10	LTE Band 26	15M	QPSK	1	0	Left Cheek	0mm	26865	831.5	23.92	25.00	1.282	-0.12	0.235	0.301
	LTE Band 26	15M	QPSK	36	20	Left Cheek	0mm	26865	831.5	23.07	24.00	1.239	-0.11	0.189	0.234
	LTE Band 26	15M	QPSK	1	0	Left Tilted	0mm	26865	831.5	23.92	25.00	1.282	0	0.111	0.142
	LTE Band 26	15M	QPSK	36	20	Left Tilted	0mm	26865	831.5	23.07	24.00	1.239	0.07	0.088	0.109
11	LTE Band 66	20M	QPSK	1	0	Right Cheek	0mm	132572	1770	24.53	25.00	1.114	0.11	0.143	0.159
	LTE Band 66	20M	QPSK	50	0	Right Cheek	0mm	132572	1770	23.64	24.00	1.086	0.13	0.115	0.125
	LTE Band 66	20M	QPSK	1	0	Right Tilted	0mm	132572	1770	24.53	25.00	1.114	0.11	0.052	0.058
	LTE Band 66	20M	QPSK	50	0	Right Tilted	0mm	132572	1770	23.64	24.00	1.086	0.14	0.044	0.048
	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	132572	1770	24.53	25.00	1.114	0.09	0.077	0.086
	LTE Band 66	20M	QPSK	50	0	Left Cheek	0mm	132572	1770	23.64	24.00	1.086	0.12	0.064	0.070
	LTE Band 66	20M	QPSK	1	0	Left Tilted	0mm	132572	1770	24.53	25.00	1.114	0.17	0.052	0.058
	LTE Band 66	20M	QPSK	50	0	Left Tilted	0mm	132572	1770	23.64	24.00	1.086	0.13	0.043	0.047

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	0mm	41055	2636.5	22.14	22.50	1.086	62.9	1.006	0.16	0.022	0.024
	LTE Band 41	20M	QPSK	50	0	Right Cheek	0mm	41055	2636.5	22.24	22.50	1.062	62.9	1.006	0.12	0.024	0.026
	LTE Band 41	20M	QPSK	1	0	Right Tilted	0mm	41055	2636.5	22.14	22.50	1.086	62.9	1.006	0.04	0.005	0.006
	LTE Band 41	20M	QPSK	50	0	Right Tilted	0mm	41055	2636.5	22.24	22.50	1.062	62.9	1.006	0.16	0.005	0.006
	LTE Band 41	20M	QPSK	1	0	Left Cheek	0mm	41055	2636.5	22.14	22.50	1.086	62.9	1.006	-0.13	0.046	0.050
12	LTE Band 41	20M	QPSK	50	0	Left Cheek	0mm	41055	2636.5	22.24	22.50	1.062	62.9	1.006	0.06	0.048	0.051
	LTE Band 41	20M	QPSK	1	0	Left Tilted	0mm	41055	2636.5	22.14	22.50	1.086	62.9	1.006	0.16	0.015	0.016
	LTE Band 41	20M	QPSK	50	0	Left Tilted	0mm	41055	2636.5	22.24	22.50	1.062	62.9	1.006	0.09	0.014	0.015

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Chain 0	6	2437	14.10	14.50	1.096	100	1.000	0.17	0.353	0.387
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Chain 0	6	2437	14.10	14.50	1.096	100	1.000	0.19	0.070	0.077
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Chain 0	6	2437	14.10	14.50	1.096	100	1.000	-0.07	0.114	0.125
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Chain 0	6	2437	14.10	14.50	1.096	100	1.000	0.15	0.023	0.025
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Chain 1	6	2437	13.70	14.00	1.072	100	1.000	0.18	0.010	0.011
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Chain 1	6	2437	13.70	14.00	1.072	100	1.000	0.08	0.007	0.008
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Chain 1	6	2437	13.70	14.00	1.072	100	1.000	0.16	0.009	0.009
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Chain 1	6	2437	13.70	14.00	1.072	100	1.000	0.12	0.006	0.007
14	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 0	58	5290	13.60	14.00	1.096	95.76	1.044	0.1	0.254	0.291
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 0	58	5290	13.60	14.00	1.096	95.76	1.044	-0.15	0.037	0.042
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 0	58	5290	13.60	14.00	1.096	95.76	1.044	0.17	0.085	0.097
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 0	58	5290	13.60	14.00	1.096	95.76	1.044	0.19	0.030	0.034
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 1	58	5290	11.40	12.00	1.148	96.6	1.035	-0.16	0.162	0.193
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 1	58	5290	11.40	12.00	1.148	96.6	1.035	0.16	0.143	0.170
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 1	58	5290	11.40	12.00	1.148	96.6	1.035	0.11	0.094	0.112
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 1	58	5290	11.40	12.00	1.148	96.6	1.035	0.15	0.092	0.109
15	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 0	122	5610	13.70	14.00	1.072	95.76	1.044	-0.16	0.205	0.229
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 0	122	5610	13.70	14.00	1.072	95.76	1.044	0.11	0.034	0.038
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 0	122	5610	13.70	14.00	1.072	95.76	1.044	0.14	0.075	0.084
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 0	122	5610	13.70	14.00	1.072	95.76	1.044	0.14	0.028	0.031
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 1	122	5610	11.70	12.00	1.072	96.6	1.035	0.19	0.156	0.173
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 1	122	5610	11.70	12.00	1.072	96.6	1.035	0.14	0.147	0.163
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 1	122	5610	11.70	12.00	1.072	96.6	1.035	-0.13	0.065	0.072
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 1	122	5610	11.70	12.00	1.072	96.6	1.035	-0.16	0.060	0.067
16	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 0	155	5775	13.30	14.00	1.175	95.76	1.044	0.13	0.135	0.166
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 0	155	5775	13.30	14.00	1.175	95.76	1.044	-0.15	0.033	0.040
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 0	155	5775	13.30	14.00	1.175	95.76	1.044	0.1	0.028	0.034
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 0	155	5775	13.30	14.00	1.175	95.76	1.044	-0.12	0.021	0.026
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 1	155	5775	11.40	12.00	1.148	96.6	1.035	0.11	0.080	0.095
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 1	155	5775	11.40	12.00	1.148	96.6	1.035	0.12	0.075	0.089
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 1	155	5775	11.40	12.00	1.148	96.6	1.035	-0.15	0.035	0.042
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 1	155	5775	11.40	12.00	1.148	96.6	1.035	0.19	0.024	0.029

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
17	Bluetooth	1Mbps	Right Cheek	0mm	39	2441	11.05	12.78	1.489	76.6	1.087	0.04	0.126	0.204
	Bluetooth	1Mbps	Right Tilted	0mm	39	2441	11.05	12.78	1.489	76.6	1.087	0.1	0.016	0.026
	Bluetooth	1Mbps	Left Cheek	0mm	39	2441	11.05	12.78	1.489	76.6	1.087	0.03	0.031	0.050
	Bluetooth	1Mbps	Left Tilted	0mm	39	2441	11.05	12.78	1.489	76.6	1.087	-0.1	0.005	0.008

13.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	128	824.2	26.26	27.20	1.242	-0.15	0.172	0.214
	GSM850	GPRS (4 Tx slots)	Back	10mm	128	824.2	26.26	27.20	1.242	0.04	0.177	0.220
18	GSM850	GPRS (4 Tx slots)	Left Side	10mm	128	824.2	26.26	27.20	1.242	-0.12	0.226	0.281
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	128	824.2	26.26	27.20	1.242	-0.07	0.118	0.147
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	128	824.2	26.26	27.20	1.242	0.04	0.109	0.135
	GSM1900	GPRS (4 Tx slots)	Front	10mm	661	1880	22.58	23.20	1.153	-0.09	0.422	0.487
	GSM1900	GPRS (4 Tx slots)	Back	10mm	661	1880	22.58	23.20	1.153	0	0.402	0.464
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	661	1880	22.58	23.20	1.153	-0.02	0.028	0.032
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	661	1880	22.58	23.20	1.153	-0.17	0.025	0.029
19	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	661	1880	22.58	23.20	1.153	-0.03	0.654	0.754

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	9400	1880	18.97	19.20	1.054	0.09	0.388	0.409
	WCDMA II	RMC 12.2Kbps	Back	10mm	9400	1880	18.97	19.20	1.054	0.16	0.353	0.372
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	9400	1880	18.97	19.20	1.054	-0.03	0.048	0.051
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	9400	1880	18.97	19.20	1.054	-0.11	0.031	0.033
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	18.97	19.20	1.054	-0.03	0.780	0.822
20	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9262	1852.4	18.78	19.20	1.102	0	0.859	0.946
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9538	1907.6	18.84	19.20	1.086	0	0.659	0.716
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1413	1732.6	19.49	19.70	1.050	0.11	0.545	0.572
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1413	1732.6	19.49	19.70	1.050	0.03	0.551	0.578
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	1413	1732.6	19.49	19.70	1.050	0.03	0.023	0.024
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	1413	1732.6	19.49	19.70	1.050	-0.11	0.074	0.078
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1413	1732.6	19.49	19.70	1.050	-0.01	0.834	0.875
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1312	1712.4	19.32	19.70	1.091	0.05	0.786	0.858
21	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1513	1752.6	19.40	19.70	1.072	0	0.836	0.896
	WCDMA V	RMC 12.2Kbps	Front	10mm	4233	846.6	24.07	24.70	1.156	-0.01	0.262	0.303
	WCDMA V	RMC 12.2Kbps	Back	10mm	4233	846.6	24.07	24.70	1.156	0.01	0.272	0.314
22	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4233	846.6	24.07	24.70	1.156	-0.06	0.321	0.371
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	4233	846.6	24.07	24.70	1.156	-0.03	0.198	0.229
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	4233	846.6	24.07	24.70	1.156	0.03	0.170	0.197

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	99	Front	10mm	20850	2510	22.14	22.50	1.086	-0.02	0.276	0.300
	LTE Band 7	20M	QPSK	50	50	Front	10mm	20850	2510	22.23	22.50	1.064	0.01	0.274	0.292
	LTE Band 7	20M	QPSK	1	99	Back	10mm	20850	2510	22.14	22.50	1.086	0.01	0.317	0.344
	LTE Band 7	20M	QPSK	50	50	Back	10mm	20850	2510	22.23	22.50	1.064	-0.06	0.316	0.336
	LTE Band 7	20M	QPSK	1	99	Left Side	10mm	20850	2510	22.14	22.50	1.086	0.03	0.103	0.112
	LTE Band 7	20M	QPSK	50	50	Left Side	10mm	20850	2510	22.23	22.50	1.064	-0.03	0.101	0.107
	LTE Band 7	20M	QPSK	1	99	Right Side	10mm	20850	2510	22.14	22.50	1.086	-0.01	0.169	0.184
	LTE Band 7	20M	QPSK	50	50	Right Side	10mm	20850	2510	22.23	22.50	1.064	0	0.170	0.181
23	LTE Band 7	20M	QPSK	1	99	Bottom Side	10mm	20850	2510	22.14	22.50	1.086	0.01	0.519	0.564
	LTE Band 7	20M	QPSK	50	50	Bottom Side	10mm	20850	2510	22.23	22.50	1.064	0	0.518	0.551



FCC SAR TEST REPORT

Report No. : FA8O2421-03

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Front	10mm	23095	707.5	23.62	25.00	1.374	-0.02	0.234	0.322
	LTE Band 12	10M	QPSK	25	12	Front	10mm	23095	707.5	22.80	24.00	1.318	0	0.206	0.272
	LTE Band 12	10M	QPSK	1	0	Back	10mm	23095	707.5	23.62	25.00	1.374	0.02	0.264	0.363
	LTE Band 12	10M	QPSK	25	12	Back	10mm	23095	707.5	22.80	24.00	1.318	0	0.232	0.306
24	LTE Band 12	10M	QPSK	1	0	Left Side	10mm	23095	707.5	23.62	25.00	1.374	-0.08	0.272	0.374
	LTE Band 12	10M	QPSK	25	12	Left Side	10mm	23095	707.5	22.80	24.00	1.318	-0.02	0.235	0.310
	LTE Band 12	10M	QPSK	1	0	Right Side	10mm	23095	707.5	23.62	25.00	1.374	-0.07	0.193	0.265
	LTE Band 12	10M	QPSK	25	12	Right Side	10mm	23095	707.5	22.80	24.00	1.318	-0.01	0.170	0.224
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	23095	707.5	23.62	25.00	1.374	0.18	0.078	0.107
	LTE Band 12	10M	QPSK	25	12	Bottom Side	10mm	23095	707.5	22.80	24.00	1.318	0.13	0.067	0.088
	LTE Band 13	10M	QPSK	1	0	Front	10mm	23230	782	23.60	25.00	1.380	0.03	0.198	0.273
	LTE Band 13	10M	QPSK	25	12	Front	10mm	23230	782	22.74	24.00	1.337	0.06	0.164	0.219
	LTE Band 13	10M	QPSK	1	0	Back	10mm	23230	782	23.60	25.00	1.380	0	0.236	0.326
	LTE Band 13	10M	QPSK	25	12	Back	10mm	23230	782	22.74	24.00	1.337	0.07	0.195	0.261
25	LTE Band 13	10M	QPSK	1	0	Left Side	10mm	23230	782	23.60	25.00	1.380	-0.03	0.260	0.359
	LTE Band 13	10M	QPSK	25	12	Left Side	10mm	23230	782	22.74	24.00	1.337	-0.08	0.218	0.291
	LTE Band 13	10M	QPSK	1	0	Right Side	10mm	23230	782	23.60	25.00	1.380	-0.11	0.113	0.156
	LTE Band 13	10M	QPSK	25	12	Right Side	10mm	23230	782	22.74	24.00	1.337	-0.06	0.098	0.131
	LTE Band 13	10M	QPSK	1	0	Bottom Side	10mm	23230	782	23.60	25.00	1.380	0.04	0.066	0.091
	LTE Band 13	10M	QPSK	25	12	Bottom Side	10mm	23230	782	22.74	24.00	1.337	-0.08	0.055	0.074
	LTE Band 25	20M	QPSK	1	99	Front	10mm	26590	1905	19.09	19.50	1.099	0.09	0.274	0.301
	LTE Band 25	20M	QPSK	50	24	Front	10mm	26590	1905	19.18	19.50	1.076	0.08	0.295	0.318
	LTE Band 25	20M	QPSK	1	99	Back	10mm	26590	1905	19.09	19.50	1.099	-0.1	0.213	0.234
	LTE Band 25	20M	QPSK	50	24	Back	10mm	26590	1905	19.18	19.50	1.076	-0.14	0.232	0.250
	LTE Band 25	20M	QPSK	1	99	Left Side	10mm	26590	1905	19.09	19.50	1.099	-0.17	0.031	0.034
	LTE Band 25	20M	QPSK	50	24	Left Side	10mm	26590	1905	19.18	19.50	1.076	-0.08	0.032	0.034
	LTE Band 25	20M	QPSK	1	99	Right Side	10mm	26590	1905	19.09	19.50	1.099	-0.09	0.023	0.025
	LTE Band 25	20M	QPSK	50	24	Right Side	10mm	26590	1905	19.18	19.50	1.076	-0.11	0.024	0.026
	LTE Band 25	20M	QPSK	1	99	Bottom Side	10mm	26590	1905	19.09	19.50	1.099	-0.14	0.567	0.623
26	LTE Band 25	20M	QPSK	50	24	Bottom Side	10mm	26590	1905	19.18	19.50	1.076	-0.12	0.604	0.650
	LTE Band 26	15M	QPSK	1	74	Front	10mm	26865	831.5	23.65	25.00	1.365	0.02	0.192	0.262
	LTE Band 26	15M	QPSK	36	20	Front	10mm	26865	831.5	22.73	24.00	1.340	-0.02	0.171	0.229
	LTE Band 26	15M	QPSK	1	74	Back	10mm	26865	831.5	23.65	25.00	1.365	0.01	0.215	0.293
	LTE Band 26	15M	QPSK	36	20	Back	10mm	26865	831.5	22.73	24.00	1.340	-0.09	0.193	0.259
27	LTE Band 26	15M	QPSK	1	74	Left Side	10mm	26865	831.5	23.65	25.00	1.365	-0.02	0.275	0.375
	LTE Band 26	15M	QPSK	36	20	Left Side	10mm	26865	831.5	22.73	24.00	1.340	-0.08	0.244	0.327
	LTE Band 26	15M	QPSK	1	74	Right Side	10mm	26865	831.5	23.65	25.00	1.365	0.03	0.162	0.221
	LTE Band 26	15M	QPSK	36	20	Right Side	10mm	26865	831.5	22.73	24.00	1.340	-0.01	0.133	0.178
	LTE Band 26	15M	QPSK	1	74	Bottom Side	10mm	26865	831.5	23.65	25.00	1.365	0.12	0.119	0.162
	LTE Band 26	15M	QPSK	36	20	Bottom Side	10mm	26865	831.5	22.73	24.00	1.340	0.07	0.102	0.137
	LTE Band 66	20M	QPSK	1	0	Front	10mm	132322	1745	19.50	20.00	1.122	-0.01	0.413	0.463
	LTE Band 66	20M	QPSK	50	0	Front	10mm	132322	1745	19.62	20.00	1.091	-0.01	0.416	0.454
	LTE Band 66	20M	QPSK	1	0	Back	10mm	132322	1745	19.50	20.00	1.122	0.07	0.408	0.458
	LTE Band 66	20M	QPSK	50	0	Back	10mm	132322	1745	19.62	20.00	1.091	0.07	0.415	0.453
	LTE Band 66	20M	QPSK	1	0	Left Side	10mm	132322	1745	19.50	20.00	1.122	0.07	0.018	0.020
	LTE Band 66	20M	QPSK	50	0	Left Side	10mm	132322	1745	19.62	20.00	1.091	-0.12	0.020	0.022
	LTE Band 66	20M	QPSK	1	0	Right Side	10mm	132322	1745	19.50	20.00	1.122	-0.08	0.060	0.067
	LTE Band 66	20M	QPSK	50	0	Right Side	10mm	132322	1745	19.62	20.00	1.091	-0.14	0.060	0.065
	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	132322	1745	19.50	20.00	1.122	-0.11	0.686	0.770
28	LTE Band 66	20M	QPSK	50	0	Bottom Side	10mm	132322	1745	19.62	20.00	1.091	-0.12	0.717	0.783

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	10mm	41055	2636.5	22.14	22.50	1.086	62.9	1.006	0.07	0.145	0.158
	LTE Band 41	20M	QPSK	50	0	Front	10mm	41055	2636.5	22.24	22.50	1.062	62.9	1.006	0	0.149	0.159
	LTE Band 41	20M	QPSK	1	0	Back	10mm	41055	2636.5	22.14	22.50	1.086	62.9	1.006	-0.04	0.177	0.193
	LTE Band 41	20M	QPSK	50	0	Back	10mm	41055	2636.5	22.24	22.50	1.062	62.9	1.006	-0.07	0.183	0.195
	LTE Band 41	20M	QPSK	1	0	Left Side	10mm	41055	2636.5	22.14	22.50	1.086	62.9	1.006	0.03	0.034	0.037
	LTE Band 41	20M	QPSK	50	0	Left Side	10mm	41055	2636.5	22.24	22.50	1.062	62.9	1.006	0.15	0.036	0.038
	LTE Band 41	20M	QPSK	1	0	Right Side	10mm	41055	2636.5	22.14	22.50	1.086	62.9	1.006	0.01	0.056	0.061
	LTE Band 41	20M	QPSK	50	0	Right Side	10mm	41055	2636.5	22.24	22.50	1.062	62.9	1.006	0.11	0.056	0.060
	LTE Band 41	20M	QPSK	1	0	Bottom Side	10mm	41055	2636.5	22.14	22.50	1.086	62.9	1.006	0.06	0.305	0.333
29	LTE Band 41	20M	QPSK	50	0	Bottom Side	10mm	41055	2636.5	22.24	22.50	1.062	62.9	1.006	-0.01	0.317	0.339

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 0	6	2437	14.10	14.50	1.096	100	1.000	-0.08	0.054	0.059
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 0	6	2437	14.10	14.50	1.096	100	1.000	0.03	0.097	0.106
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Chain 0	6	2437	14.10	14.50	1.096	100	1.000	-0.1	0.105	0.115
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Chain 0	6	2437	14.10	14.50	1.096	100	1.000	-0.09	0.002	0.003
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 1	6	2437	13.70	14.00	1.072	100	1.000	0.08	0.005	0.006
30	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 1	6	2437	13.70	14.00	1.072	100	1.000	-0.1	0.192	0.206
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Chain 1	6	2437	13.70	14.00	1.072	100	1.000	-0.09	0.041	0.044

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	39	2441	11.05	12.78	1.489	76.6	1.087	-0.02	0.018	0.029
31	Bluetooth	1Mbps	Back	10mm	39	2441	11.05	12.78	1.489	76.6	1.087	0.07	0.032	0.052
	Bluetooth	1Mbps	Left Side	10mm	39	2441	11.05	12.78	1.489	76.6	1.087	-0.09	0.030	0.049
	Bluetooth	1Mbps	Top Side	10mm	39	2441	11.05	12.78	1.489	76.6	1.087	0.01	0.001	0.001

13.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
32	GSM850	GPRS (4 Tx slots)	Front	15mm	128	824.2	26.26	27.20	1.242	-0.01	0.173	0.215
	GSM850	GPRS (4 Tx slots)	Back	15mm	128	824.2	26.26	27.20	1.242	0.16	0.171	0.212
	GSM1900	GPRS (4 Tx slots)	Front	15mm	661	1880	22.58	23.20	1.153	0.17	0.170	0.196
33	GSM1900	GPRS (4 Tx slots)	Back	15mm	661	1880	22.58	23.20	1.153	-0.1	0.171	0.197

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
34	WCDMA II	RMC 12.2Kbps	Front	15mm	9400	1880	18.97	19.20	1.054	-0.03	0.206	0.217
	WCDMA II	RMC 12.2Kbps	Back	15mm	9400	1880	18.97	19.20	1.054	0.07	0.179	0.189
	WCDMA IV	RMC 12.2Kbps	Front	15mm	1413	1732.6	19.49	19.70	1.050	0.02	0.280	0.294
35	WCDMA IV	RMC 12.2Kbps	Back	15mm	1413	1732.6	19.49	19.70	1.050	0.07	0.300	0.315
36	WCDMA V	RMC 12.2Kbps	Front	15mm	4233	846.6	24.07	24.70	1.156	-0.01	0.250	0.289
	WCDMA V	RMC 12.2Kbps	Back	15mm	4233	846.6	24.07	24.70	1.156	0.05	0.244	0.282

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	99	Front	15mm	20850	2510	22.14	22.50	1.086	0.04	0.157	0.171
	LTE Band 7	20M	QPSK	50	50	Front	15mm	20850	2510	22.23	22.50	1.064	-0.05	0.158	0.168
37	LTE Band 7	20M	QPSK	1	99	Back	15mm	20850	2510	22.14	22.50	1.086	0.03	0.178	0.193
	LTE Band 7	20M	QPSK	50	50	Back	15mm	20850	2510	22.23	22.50	1.064	-0.01	0.177	0.188
	LTE Band 12	10M	QPSK	1	0	Front	15mm	23095	707.5	23.62	25.00	1.374	-0.04	0.225	0.309
	LTE Band 12	10M	QPSK	25	12	Front	15mm	23095	707.5	22.80	24.00	1.318	0	0.200	0.264
38	LTE Band 12	10M	QPSK	1	0	Back	15mm	23095	707.5	23.62	25.00	1.374	0.06	0.241	0.331
	LTE Band 12	10M	QPSK	25	12	Back	15mm	23095	707.5	22.80	24.00	1.318	-0.01	0.213	0.281
	LTE Band 13	10M	QPSK	1	0	Front	15mm	23230	782	23.60	25.00	1.380	-0.01	0.187	0.258
	LTE Band 13	10M	QPSK	25	12	Front	15mm	23230	782	22.74	24.00	1.337	0	0.155	0.207
39	LTE Band 13	10M	QPSK	1	0	Back	15mm	23230	782	23.60	25.00	1.380	-0.01	0.203	0.280
	LTE Band 13	10M	QPSK	25	12	Back	15mm	23230	782	22.74	24.00	1.337	0.02	0.170	0.227
	LTE Band 25	20M	QPSK	1	0	Front	15mm	26340	1880	22.47	23.00	1.130	0.04	0.245	0.277
	LTE Band 25	20M	QPSK	50	24	Front	15mm	26340	1880	22.58	23.00	1.102	0	0.227	0.250
40	LTE Band 25	20M	QPSK	1	0	Back	15mm	26340	1880	22.47	23.00	1.130	-0.09	0.335	0.378
	LTE Band 25	20M	QPSK	50	24	Back	15mm	26340	1880	22.58	23.00	1.102	-0.08	0.311	0.343
	LTE Band 26	15M	QPSK	1	74	Front	15mm	26865	831.5	23.65	25.00	1.365	0.04	0.180	0.246
	LTE Band 26	15M	QPSK	36	20	Front	15mm	26865	831.5	22.73	24.00	1.340	-0.03	0.162	0.217
41	LTE Band 26	15M	QPSK	1	74	Back	15mm	26865	831.5	23.65	25.00	1.365	0.06	0.187	0.255
	LTE Band 26	15M	QPSK	36	20	Back	15mm	26865	831.5	22.73	24.00	1.340	-0.03	0.168	0.225
	LTE Band 66	20M	QPSK	1	0	Front	15mm	132572	1770	22.50	23.00	1.122	0.07	0.454	0.509
	LTE Band 66	20M	QPSK	50	0	Front	15mm	132072	1720	22.73	23.00	1.064	0.03	0.473	0.503
	LTE Band 66	20M	QPSK	1	0	Back	15mm	132572	1770	22.50	23.00	1.122	0.06	0.462	0.518
42	LTE Band 66	20M	QPSK	50	0	Back	15mm	132072	1720	22.73	23.00	1.064	0.06	0.522	0.555

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	15mm	41055	2636.5	22.14	22.50	1.086	62.9	1.006	-0.05	0.093	0.102
	LTE Band 41	20M	QPSK	50	0	Front	15mm	41055	2636.5	22.24	22.50	1.062	62.9	1.006	0.06	0.096	0.103
	LTE Band 41	20M	QPSK	1	0	Back	15mm	41055	2636.5	22.14	22.50	1.086	62.9	1.006	-0.04	0.103	0.113
43	LTE Band 41	20M	QPSK	50	0	Back	15mm	41055	2636.5	22.24	22.50	1.062	62.9	1.006	0.07	0.107	0.114

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Chain 0	6	2437	14.10	14.50	1.096	100	1.000	0.01	0.030	0.033
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Chain 0	6	2437	14.10	14.50	1.096	100	1.000	0.04	0.047	0.052
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Chain 1	6	2437	13.70	14.00	1.072	100	1.000	-0.04	0.003	0.004
44	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Chain 1	6	2437	13.70	14.00	1.072	100	1.000	-0.09	0.072	0.077
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 0	58	5290	13.60	14.00	1.096	95.76	1.044	-0.08	0.012	0.014
45	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 0	58	5290	13.60	14.00	1.096	95.76	1.044	0.05	0.028	0.032
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 1	58	5290	11.40	12.00	1.148	96.6	1.035	-0.07	0.006	0.007
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 1	58	5290	11.40	12.00	1.148	96.6	1.035	0.03	0.018	0.021
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 0	122	5610	13.70	14.00	1.072	95.76	1.044	-0.09	0.009	0.010
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 0	122	5610	13.70	14.00	1.072	95.76	1.044	0	0.024	0.027
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 1	122	5610	11.70	12.00	1.072	96.6	1.035	0.08	0.001	0.001
46	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 1	122	5610	11.70	12.00	1.072	96.6	1.035	0.01	0.076	0.084
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 0	155	5775	13.30	14.00	1.175	95.76	1.044	0	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 0	155	5775	13.30	14.00	1.175	95.76	1.044	0	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 1	155	5775	11.40	12.00	1.148	96.6	1.035	0	0.001	0.001
47	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 1	155	5775	11.40	12.00	1.148	96.6	1.035	-0.15	0.044	0.052

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	15mm	39	2441	11.05	12.78	1.489	76.6	1.087	0.04	0.008	0.014
48	Bluetooth	1Mbps	Back	15mm	39	2441	11.05	12.78	1.489	76.6	1.087	0.04	0.013	0.021

13.4 Product Specific SAR

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 25	20M	QPSK	1	99	Bottom Side	0mm	26590	1905	22.44	23.00	1.138	-0.1	1.730	1.968
	LTE Band 25	20M	QPSK	1	0	Bottom Side	0mm	26340	1880	22.47	23.00	1.130	-0.1	1.950	2.203
49	LTE Band 25	20M	QPSK	1	0	Bottom Side	0mm	26140	1860	22.36	23.00	1.159	-0.09	2.030	2.352
	LTE Band 66	20M	QPSK	1	0	Front	0mm	132322	1745	22.39	23.00	1.151	-0.15	2.590	2.981
50	LTE Band 66	20M	QPSK	1	49	Front	0mm	132072	1720	22.50	23.00	1.122	-0.02	2.690	3.018
	LTE Band 66	20M	QPSK	1	0	Front	0mm	132572	1770	22.50	23.00	1.122	-0.02	2.670	2.996
	LTE Band 66	20M	QPSK	1	0	Back	0mm	132322	1745	22.39	23.00	1.151	-0.19	1.950	2.244
	LTE Band 66	20M	QPSK	1	49	Back	0mm	132072	1720	22.50	23.00	1.122	0.01	2.080	2.334
	LTE Band 66	20M	QPSK	1	0	Back	0mm	132572	1770	22.50	23.00	1.122	0.03	2.000	2.244
	LTE Band 66	20M	QPSK	1	0	Bottom Side	0mm	132322	1745	22.39	23.00	1.151	-0.04	2.570	2.958
	LTE Band 66	20M	QPSK	1	49	Bottom Side	0mm	132072	1720	22.50	23.00	1.122	0.12	2.380	2.670
	LTE Band 66	20M	QPSK	1	0	Bottom Side	0mm	132572	1770	22.50	23.00	1.122	0	2.340	2.626

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 0	58	5290	13.60	14.00	1.096	95.76	1.044	0.01	0.189	0.216
51	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 0	58	5290	13.60	14.00	1.096	95.76	1.044	-0.03	0.602	0.689
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 0	58	5290	13.60	14.00	1.096	95.76	1.044	-0.06	0.246	0.282
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 0	58	5290	13.60	14.00	1.096	95.76	1.044	-0.01	0.003	0.004
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 1	58	5290	11.40	12.00	1.148	96.6	1.035	0.01	0.051	0.061
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 1	58	5290	11.40	12.00	1.148	96.6	1.035	0	0.204	0.242
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 1	58	5290	11.40	12.00	1.148	96.6	1.035	-0.03	0.008	0.009
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 1	58	5290	11.40	12.00	1.148	96.6	1.035	-0.15	0.023	0.027
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 0	122	5610	13.70	14.00	1.072	95.76	1.044	0	0.135	0.151
52	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 0	122	5610	13.70	14.00	1.072	95.76	1.044	-0.06	0.475	0.531
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 0	122	5610	13.70	14.00	1.072	95.76	1.044	0.11	0.215	0.241
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 0	122	5610	13.70	14.00	1.072	95.76	1.044	0.03	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 1	122	5610	11.70	12.00	1.072	96.6	1.035	-0.01	0.039	0.043
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 1	122	5610	11.70	12.00	1.072	96.6	1.035	-0.06	0.388	0.430
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 1	122	5610	11.70	12.00	1.072	96.6	1.035	-0.01	0.029	0.032
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 1	122	5610	11.70	12.00	1.072	96.6	1.035	-0.17	0.057	0.063
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 0	155	5775	13.30	14.00	1.175	95.76	1.044	0	0.053	0.065
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 0	155	5775	13.30	14.00	1.175	95.76	1.044	-0.16	0.177	0.217
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 0	155	5775	13.30	14.00	1.175	95.76	1.044	-0.12	0.072	0.088
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 0	155	5775	13.30	14.00	1.175	95.76	1.044	0	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 1	155	5775	11.40	12.00	1.148	96.6	1.035	0	0.021	0.025
53	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 1	155	5775	11.40	12.00	1.148	96.6	1.035	-0.14	0.227	0.270
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 1	155	5775	11.40	12.00	1.148	96.6	1.035	-0.16	0.014	0.017
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 1	155	5775	11.40	12.00	1.148	96.6	1.035	-0.18	0.029	0.034

13.5 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9262	1852.4	18.78	19.20	1.102	0	0.859	-	0.946
2nd	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9262	1852.4	18.78	19.20	1.102	0.03	0.821	1.05	0.904
1st	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1513	1752.6	19.40	19.70	1.072	0	0.836	-	0.896
2nd	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1513	1752.6	19.40	19.70	1.072	0.01	0.835	1.00	0.895

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	LTE Band 25	20M	QPSK	1	0	Bottom Side	0mm	26140	1860	22.36	23.00	1.159	-0.09	2.030	-	2.352
2nd	LTE Band 25	20M	QPSK	1	0	Bottom Side	0mm	26140	1860	22.36	23.00	1.159	-0.09	1.990	1.02	2.306
1st	LTE Band 66	20M	QPSK	1	49	Front	0mm	132072	1720	22.50	23.00	1.122	-0.02	2.690	-	3.018
2nd	LTE Band 66	20M	QPSK	1	49	Front	0mm	132072	1720	22.50	23.00	1.122	0.02	2.680	1.00	3.007

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

14. Simultaneous Transmission Analysis

Case	Cellular	WLAN Chain0 / BT	WLAN Chain1
1	GSM/GPRS/EDGE	BT/BLE	(None)
2	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 2.4G
3	GSM/GPRS/EDGE	WLAN 5G	WLAN 5G
4	UMTS/HSPA	BT/BLE	(None)
5	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G
6	UMTS/HSPA	WLAN 5G	WLAN 5G
7	LTE	BT/BLE	(None)
8	LTE	WLAN 2.4G	WLAN 2.4G
9	LTE	WLAN 5G	WLAN 5G
10	(None)	BT/BLE WLAN 5G	WLAN 5G
11	GSM/GPRS/EDGE	BT/BLE WLAN 5G	WLAN 5G
12	UMTS/HSPA	BT/BLE WLAN 5G	WLAN 5G
13	LTE	BT/BLE WLAN 5G	WLAN 5G
14	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 5G
15	UMTS/HSPA	WLAN 2.4G	WLAN 5G
16	LTE	WLAN 2.4G	WLAN 5G

General Note:

1. This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications.
2. 2.4GHz WLAN and Bluetooth share the same chain0, and cannot transmit simultaneously.
3. All licensed modes share the same antenna part and cannot transmit simultaneously
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

14.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3	1+4+5+6	1+2+5	1+6	1+4+5	4+5+6
		WWAN	2.4GHz WLAN Chain 0	2.4GHz WLAN Chain 1	5GHz WLAN Chain 0	5GHz WLAN Chain 1	Bluetooth	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
GSM	GSM850	Right Cheek	0.170	0.387	0.011	0.291	0.193	0.204	0.568	0.858	0.750	0.374	0.688
		Right Tilted	0.096	0.077	0.008	0.042	0.170	0.026	0.181	0.334	0.343	0.122	0.238
		Left Cheek	0.205	0.125	0.009	0.097	0.112	0.050	0.339	0.464	0.442	0.255	0.414
		Left Tilted	0.108	0.025	0.007	0.034	0.109	0.008	0.140	0.259	0.242	0.116	0.151
	GSM1900	Right Cheek	0.021	0.387	0.011	0.291	0.193	0.204	0.419	0.709	0.601	0.225	0.688
		Right Tilted	0.009	0.077	0.008	0.042	0.170	0.026	0.094	0.247	0.256	0.035	0.238
		Left Cheek	0.018	0.125	0.009	0.097	0.112	0.050	0.152	0.277	0.255	0.068	0.259
		Left Tilted	0.010	0.025	0.007	0.034	0.109	0.008	0.042	0.161	0.144	0.018	0.153
WCDMA	WCDMA II	Right Cheek	0.024	0.387	0.011	0.291	0.193	0.204	0.422	0.712	0.604	0.228	0.688
		Right Tilted	0.016	0.077	0.008	0.042	0.170	0.026	0.101	0.254	0.263	0.042	0.238
		Left Cheek	0.030	0.125	0.009	0.097	0.112	0.050	0.164	0.289	0.267	0.080	0.259
		Left Tilted	0.014	0.025	0.007	0.034	0.109	0.008	0.046	0.165	0.148	0.022	0.157
	WCDMA IV	Right Cheek	0.213	0.387	0.011	0.291	0.193	0.204	0.611	0.901	0.793	0.417	0.688
		Right Tilted	0.089	0.077	0.008	0.042	0.170	0.026	0.174	0.327	0.336	0.115	0.238
		Left Cheek	0.099	0.125	0.009	0.097	0.112	0.050	0.233	0.358	0.336	0.149	0.259
		Left Tilted	0.051	0.025	0.007	0.034	0.109	0.008	0.083	0.202	0.185	0.059	0.151
	WCDMA V	Right Cheek	0.260	0.387	0.011	0.291	0.193	0.204	0.658	0.948	0.840	0.464	0.688
		Right Tilted	0.133	0.077	0.008	0.042	0.170	0.026	0.218	0.371	0.380	0.159	0.238
		Left Cheek	0.309	0.125	0.009	0.097	0.112	0.050	0.443	0.568	0.546	0.359	0.259
		Left Tilted	0.148	0.025	0.007	0.034	0.109	0.008	0.180	0.299	0.282	0.156	0.151
LTE	LTE Band 7	Right Cheek	0.042	0.387	0.011	0.291	0.193	0.204	0.440	0.730	0.622	0.246	0.688
		Right Tilted	0.024	0.077	0.008	0.042	0.170	0.026	0.109	0.262	0.271	0.050	0.238
		Left Cheek	0.046	0.125	0.009	0.097	0.112	0.050	0.180	0.305	0.283	0.096	0.259
		Left Tilted	0.035	0.025	0.007	0.034	0.109	0.008	0.067	0.186	0.169	0.043	0.151
	LTE Band 12	Right Cheek	0.249	0.387	0.011	0.291	0.193	0.204	0.647	0.937	0.829	0.453	0.688
		Right Tilted	0.103	0.077	0.008	0.042	0.170	0.026	0.188	0.341	0.350	0.129	0.238
		Left Cheek	0.271	0.125	0.009	0.097	0.112	0.050	0.405	0.530	0.508	0.321	0.259
		Left Tilted	0.107	0.025	0.007	0.034	0.109	0.008	0.139	0.258	0.241	0.115	0.151
	LTE Band 13	Right Cheek	0.178	0.387	0.011	0.291	0.193	0.204	0.576	0.866	0.758	0.382	0.688
		Right Tilted	0.084	0.077	0.008	0.042	0.170	0.026	0.169	0.322	0.331	0.110	0.238
		Left Cheek	0.216	0.125	0.009	0.097	0.112	0.050	0.350	0.475	0.453	0.266	0.259
		Left Tilted	0.101	0.025	0.007	0.034	0.109	0.008	0.133	0.252	0.235	0.109	0.151
	LTE Band 25	Right Cheek	0.093	0.387	0.011	0.291	0.193	0.204	0.491	0.781	0.673	0.297	0.688
		Right Tilted	0.055	0.077	0.008	0.042	0.170	0.026	0.140	0.293	0.302	0.081	0.238
		Left Cheek	0.094	0.125	0.009	0.097	0.112	0.050	0.228	0.353	0.331	0.144	0.259
		Left Tilted	0.044	0.025	0.007	0.034	0.109	0.008	0.076	0.195	0.178	0.052	0.151
	LTE Band 26	Right Cheek	0.231	0.387	0.011	0.291	0.193	0.204	0.629	0.919	0.811	0.435	0.688
		Right Tilted	0.135	0.077	0.008	0.042	0.170	0.026	0.220	0.373	0.382	0.161	0.238
		Left Cheek	0.301	0.125	0.009	0.097	0.112	0.050	0.435	0.560	0.538	0.351	0.259
		Left Tilted	0.142	0.025	0.007	0.034	0.109	0.008	0.174	0.293	0.276	0.150	0.151
	LTE Band 41	Right Cheek	0.026	0.387	0.011	0.291	0.193	0.204	0.424	0.714	0.606	0.230	0.688
		Right Tilted	0.006	0.077	0.008	0.042	0.170	0.026	0.091	0.244	0.253	0.032	0.238
		Left Cheek	0.051	0.125	0.009	0.097	0.112	0.050	0.185	0.310	0.288	0.101	0.259
		Left Tilted	0.016	0.025	0.007	0.034	0.109	0.008	0.048	0.167	0.150	0.024	0.151
	LTE Band 66	Right Cheek	0.159	0.387	0.011	0.291	0.193	0.204	0.557	0.847	0.739	0.363	0.688
		Right Tilted	0.058	0.077	0.008	0.042	0.170	0.026	0.143	0.296	0.305	0.084	0.238
		Left Cheek	0.086	0.125	0.009	0.097	0.112	0.050	0.220	0.345	0.323	0.136	0.259
		Left Tilted	0.058	0.025	0.007	0.034	0.109	0.008	0.090	0.209	0.192	0.066	0.151

14.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	6	1+2+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Chain 0 1g SAR (W/kg)	2.4GHz WLAN Chain 1 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
GSM	GSM850	Front	0.214	0.059	0.006	0.029	0.279	0.243
		Back	0.220	0.106	0.206	0.052	0.532	0.272
		Left side	0.281	0.115	0.044	0.049	0.440	0.330
		Right side	0.147				0.147	0.147
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.135				0.135	0.135
	GSM1900	Front	0.487	0.059	0.006	0.029	0.552	0.516
		Back	0.464	0.106	0.206	0.052	0.776	0.516
		Left side	0.032	0.115	0.044	0.049	0.191	0.081
		Right side	0.029				0.029	0.029
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.754				0.754	0.754
WCDMA	WCDMA II	Front	0.409	0.059	0.006	0.029	0.474	0.438
		Back	0.372	0.106	0.206	0.052	0.684	0.424
		Left side	0.051	0.115	0.044	0.049	0.210	0.100
		Right side	0.033				0.033	0.033
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.946				0.946	0.946
	WCDMA IV	Front	0.572	0.059	0.006	0.029	0.637	0.601
		Back	0.578	0.106	0.206	0.052	0.890	0.630
		Left side	0.024	0.115	0.044	0.049	0.183	0.073
		Right side	0.078				0.078	0.078
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.896				0.896	0.896
	WCDMA V	Front	0.303	0.059	0.006	0.029	0.368	0.332
		Back	0.314	0.106	0.206	0.052	0.626	0.366
		Left side	0.371	0.115	0.044	0.049	0.530	0.420
		Right side	0.229				0.229	0.229
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.197				0.197	0.197

WWAN Band		Exposure Position	1	2	3	6	1+2+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Chain 0 1g SAR (W/kg)	2.4GHz WLAN Chain 1 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
LTE	LTE Band 7	Front	0.300	0.059	0.006	0.029	0.365	0.329
		Back	0.344	0.106	0.206	0.052	0.656	0.396
		Left side	0.112	0.115	0.044	0.049	0.271	0.161
		Right side	0.184				0.184	0.184
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.564				0.564	0.564
	LTE Band 12	Front	0.322	0.059	0.006	0.029	0.387	0.351
		Back	0.363	0.106	0.206	0.052	0.675	0.415
		Left side	0.374	0.115	0.044	0.049	0.533	0.423
		Right side	0.265				0.265	0.265
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.107				0.107	0.107
	LTE Band 13	Front	0.273	0.059	0.006	0.029	0.338	0.302
		Back	0.326	0.106	0.206	0.052	0.638	0.378
		Left side	0.359	0.115	0.044	0.049	0.518	0.408
		Right side	0.156				0.156	0.156
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.091				0.091	0.091
	LTE Band 25	Front	0.318	0.059	0.006	0.029	0.383	0.347
		Back	0.250	0.106	0.206	0.052	0.562	0.302
		Left side	0.034	0.115	0.044	0.049	0.193	0.083
		Right side	0.026				0.026	0.026
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.650				0.650	0.650
	LTE Band 26	Front	0.262	0.059	0.006	0.029	0.327	0.291
		Back	0.293	0.106	0.206	0.052	0.605	0.345
		Left side	0.375	0.115	0.044	0.049	0.534	0.424
		Right side	0.221				0.221	0.221
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.162				0.162	0.162
	LTE Band 41	Front	0.159	0.059	0.006	0.029	0.224	0.188
		Back	0.195	0.106	0.206	0.052	0.507	0.247
		Left side	0.038	0.115	0.044	0.049	0.197	0.087
		Right side	0.061				0.061	0.061
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.339				0.339	0.339
	LTE Band 66	Front	0.463	0.059	0.006	0.029	0.528	0.492
		Back	0.458	0.106	0.206	0.052	0.770	0.510
		Left side	0.022	0.115	0.044	0.049	0.181	0.071
		Right side	0.067				0.067	0.067
		Top side		0.003		0.001	0.003	0.001
		Bottom side	0.783				0.783	0.783

14.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3	1+4+5+6	1+2+5	1+6	1+4+5	4+5+6
			WWAN	2.4GHz WLAN Chain 0	2.4GHz WLAN Chain 1	5GHz WLAN Chain 0	5GHz WLAN Chain 1	Bluetooth	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM	GSM850	Front	0.215	0.033	0.004	0.014	0.007	0.014	0.252	0.250	0.255	0.229	0.236	0.035
		Back	0.212	0.052	0.077	0.032	0.084	0.021	0.341	0.349	0.348	0.233	0.328	0.137
	GSM1900	Front	0.196	0.033	0.004	0.014	0.007	0.014	0.233	0.231	0.236	0.210	0.217	0.035
		Back	0.197	0.052	0.077	0.032	0.084	0.021	0.326	0.334	0.333	0.218	0.313	0.137
WCDMA	WCDMA II	Front	0.217	0.033	0.004	0.014	0.007	0.014	0.254	0.252	0.257	0.231	0.238	0.035
		Back	0.189	0.052	0.077	0.032	0.084	0.021	0.318	0.326	0.325	0.210	0.305	0.137
	WCDMA IV	Front	0.294	0.033	0.004	0.014	0.007	0.014	0.331	0.329	0.334	0.308	0.315	0.035
		Back	0.315	0.052	0.077	0.032	0.084	0.021	0.444	0.452	0.451	0.336	0.431	0.137
	WCDMA V	Front	0.289	0.033	0.004	0.014	0.007	0.014	0.326	0.324	0.329	0.303	0.310	0.035
		Back	0.282	0.052	0.077	0.032	0.084	0.021	0.411	0.419	0.418	0.303	0.398	0.137
LTE	LTE Band 7	Front	0.171	0.033	0.004	0.014	0.007	0.014	0.208	0.206	0.211	0.185	0.192	0.035
		Back	0.193	0.052	0.077	0.032	0.084	0.021	0.322	0.330	0.329	0.214	0.309	0.137
	LTE Band 12	Front	0.309	0.033	0.004	0.014	0.007	0.014	0.346	0.344	0.349	0.323	0.330	0.035
		Back	0.331	0.052	0.077	0.032	0.084	0.021	0.460	0.468	0.467	0.352	0.447	0.137
	LTE Band 13	Front	0.258	0.033	0.004	0.014	0.007	0.014	0.295	0.293	0.298	0.272	0.279	0.035
		Back	0.280	0.052	0.077	0.032	0.084	0.021	0.409	0.417	0.416	0.301	0.396	0.137
	LTE Band 25	Front	0.277	0.033	0.004	0.014	0.007	0.014	0.314	0.312	0.317	0.291	0.298	0.035
		Back	0.378	0.052	0.077	0.032	0.084	0.021	0.507	0.515	0.514	0.399	0.494	0.137
	LTE Band 26	Front	0.246	0.033	0.004	0.014	0.007	0.014	0.283	0.281	0.286	0.260	0.267	0.035
		Back	0.255	0.052	0.077	0.032	0.084	0.021	0.384	0.392	0.391	0.276	0.371	0.137
	LTE Band 41	Front	0.103	0.033	0.004	0.014	0.007	0.014	0.140	0.138	0.143	0.117	0.124	0.035
		Back	0.114	0.052	0.077	0.032	0.084	0.021	0.243	0.251	0.250	0.135	0.230	0.137
	LTE Band 66	Front	0.509	0.033	0.004	0.014	0.007	0.014	0.546	0.544	0.549	0.523	0.530	0.035
		Back	0.555	0.052	0.077	0.032	0.084	0.021	0.684	0.692	0.691	0.576	0.671	0.137

14.4 Product Specific Exposure Conditions

WWAN Band		Exposure Position	1	4	5	1+4+5 Summed 10g SAR (W/kg)
			WWAN	5GHz WLAN Chain 0	5GHz WLAN Chain 1	
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	
LTE	LTE Band 25	Front		0.216	0.061	0.277
		Back		0.689	0.430	1.119
		Left side		0.282	0.032	0.314
		Right side				
		Top side		0.004	0.063	0.067
		Bottom side	2.352			2.352
	LTE Band 66	Front	3.018	0.216	0.061	3.295
		Back	2.334	0.689	0.430	3.453
		Left side		0.282	0.032	0.314
		Right side				
		Top side		0.004	0.063	0.067
		Bottom side	2.958			2.958

Remark:

1. According to KDB 648474 D04v01r03, for WWAN / 2.4GHz WLAN / Bluetooth SAR was excluded, due to Hotspot SAR was < 1.2W/kg.
2. According to KDB 941225 D06 v02r01, for 5GHz WLAN SAR was excluded for that position, due to transmitting antenna located larger 25mm from that surface or edge

15. Supplemental tuner tests results

General Note:

1. This device implements antenna tuning techniques in the LTE 2, 4, 5, 13, 25, 26, 66. SAR test proposal was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing and this design will provide the highest power at different user scenarios and would not influence to the antenna characteristics other than impedance matching.
2. The following test procedure was followed to demonstrate that the SAR results in this report represent the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR will be measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements will be evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values.
3. To evaluate all of the tuner states, the 96 tuner states are divided evenly among band, mode and exposure combinations so that at least one single point SAR measurement is measured in each configuration. Single point time-sweep measurements will be performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state will be established remotely so that the device is not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe will remain stationary at the same position throughout the entire series of single point measurements for each combination.
4. The device supports LTE B5/B26, B2/B25 and B4/B66. Since the supported frequency span for LTE B5/B2/B4 falls completely within the supported frequency span for LTE B26/B25/B66, and both bands have the same target power and both LTE bands share the same transmission path, therefore standalone SAR was only assessed for LTE B26/B25/B66. The single point SAR time-sweep measurements were treated independently for each supported ACL frequency band. For the LTE B5/B2/B4 single point SAR measurement selected the highest measured SAR configuration and exposure condition of LTE B26/B25/B66. And the number of required single point measurements at least 24 applies to the band.
5. The tuner state was established remotely through Wi-Fi so that the device is not moved for the entire series of single point SAR for the tuner states in each combination (band, mode, exposure conditions).

15.1 Supplemental Head SAR results

Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									Auto-Tune	0	4	8	12	16	20	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	84	88	92			
LTE B13	QPSK	782	23230	1	0	Left Cheek	0mm	0.164	0.174	0.161	0.049	0.128	0.117	0.118	0.173	0.024	0.088	0.172	0.014	0.089	0.167	0.024	0.084	0.172	0.123	0.083	0.171	0.022	0.082	0.166	0.12	0.089	0.17			
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									Auto-Tune	1	5	9	13	17	21	25	29	33	37	41	45	49	53	57	61	65	69	73	77	81	85	89	93			
LTE B25	QPSK	1880	26340	1	0	Left Cheek	0mm	0.087	0.099	0.024	0.048	0.067	0.04	0.068	0.088	0.053	0.068	0.076	0.061	0.075	0.083	0.043	0.063	0.075	0.053	0.075	0.087	0.074	0.076	0.075	0.077	0.077	0.075			
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									Auto-Tune	2	6	10	14	18	22	26	30	34	38	42	46	50	54	58	62	66	70	74	78	82	86	90	94			
LTE B26	QPSK	831.5	26865	1	0	Left Cheek	0mm	0.235	0.25	0.025	0.079	0.207	0.038	0.135	0.217	0.065	0.169	0.239	0.067	0.185	0.178	0.058	0.153	0.239	0.06	0.174	0.191	0.07	0.185	0.221	0.074	0.203	0.136			
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									Auto-Tune	3	7	11	15	19	23	27	31	35	39	43	47	51	55	59	63	67	71	75	79	83	87	91	95			
LTE B66	QPSK	1770	132572	1	0	Right Cheek	0mm	0.143	0.154	0.091	0.117	0.135	0.113	0.136	0.143	0.139	0.133	0.127	0.136	0.123	0.114	0.126	0.132	0.131	0.13	0.129	0.124	0.153	0.129	0.115	0.141	0.109	0.095			

**15.2 Supplemental Body SAR results**

Mode	Service/ Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																								
									Auto-Tune	0	4	8	12	16	20	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	84	88	92
LTE B13	QPSK	782	23230	1	0	Left Side	10mm	0.26	0.292	0.273	0.086	0.222	0.261	0.249	0.289	0.044	0.149	0.284	0.027	0.157	0.291	0.043	0.144	0.289	0.277	0.251	0.287	0.039	0.14	0.277	0.023	0.154	0.285
Mode	Service/ Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																								
									Auto-Tune	1	5	9	13	17	21	25	29	33	37	41	45	49	53	57	61	65	69	73	77	81	85	89	93
LTE B25	QPSK	1905	26590	50	24	Bottom Side	10mm	0.604	0.755	0.191	0.383	0.536	0.303	0.526	0.676	0.388	0.527	0.601	0.445	0.587	0.661	0.323	0.493	0.595	0.384	0.573	0.679	0.517	0.583	0.597	0.55	0.602	0.614
Mode	Service/ Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																								
									Auto-Tune	2	6	10	14	18	22	26	30	34	38	42	46	50	54	58	62	66	70	74	78	82	86	90	94
LTE B26	QPSK	831.5	26865	1	74	Left Side	10mm	0.275	0.3	0.028	0.086	0.26	0.048	0.184	0.254	0.061	0.17	0.299	0.072	0.236	0.242	0.055	0.154	0.296	0.066	0.225	0.248	0.147	0.118	0.101	0.148	0.114	0.099
Mode	Service/ Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																								
									Auto-Tune	3	7	11	15	19	23	27	31	35	39	43	47	51	55	59	63	67	71	75	79	83	87	91	95
LTE B66	QPSK	1745	132322	50	0	Bottom Side	10mm	0.717	0.878	0.468	0.689	0.831	0.636	0.834	0.877	0.695	0.816	0.833	0.755	0.818	0.796	0.636	0.797	0.841	0.717	0.83	0.831	0.785	0.824	0.794	0.804	0.763	0.71

Test Engineer : Neil Hsiang Randy Lin Andy Jiang Willy Yu Ted Hsieh Jay Jian Thomas Wang White
Huang Wilson Lin and Carter Chuang

16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 941225 D07 v01r02, "SAR EVALUATION PROCEDURES FOR UMPC MINI-TABLET DEVICES", Oct. 2015
- [13] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [14] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.