

Appendix B

Detailed Test Results

1. GSM
GSM850 for Head, Body
GSM1900 for Head, Body
2. WCDMA
WCDMA Band IV for Head, Body
WCDMA Band V for Head, Body
3. LTE
LTE Band 4 for Head, Body
LTE Band 12 for Head, Body
LTE Band 41 for Head, Body
4. WIFI & BT
WIFI 2.4G for Head, Body
WIFI 5G for Head, Body
BT for Head, Body

Test Laboratory: SGS-SAR Lab

PM-1352-BV GSM 850 GPRS 4TS 190CH Right cheek

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.594$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.8, 8.8, 8.8); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.223 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.803 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.210 W/kg

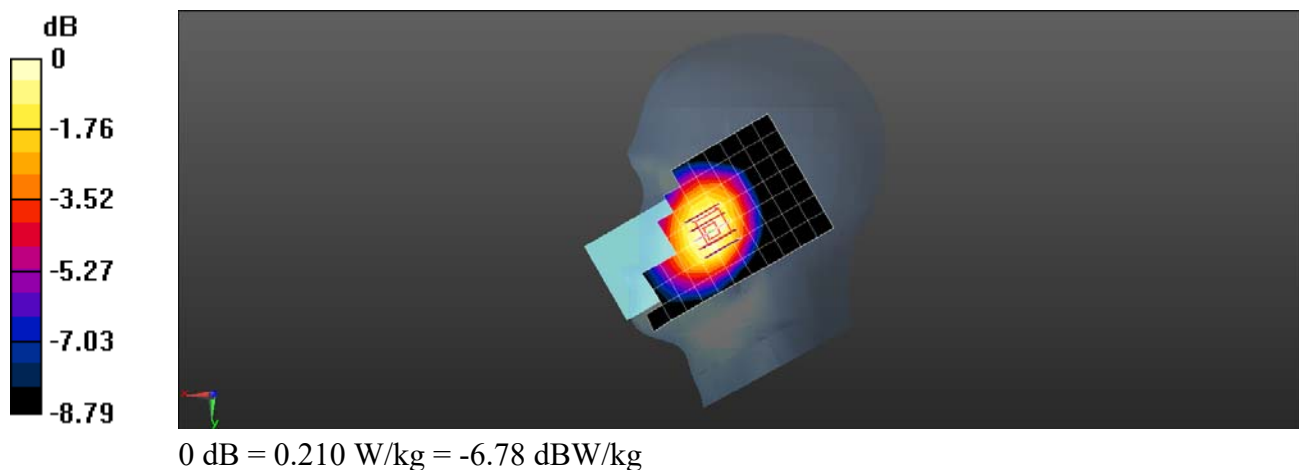

Test Laboratory: SGS-SAR Lab

PM-1352-BV GSM 850 GPRS 4TS 190CH Back side 15mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.594$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.8, 8.8, 8.8); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.242 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.74 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.249 W/kg

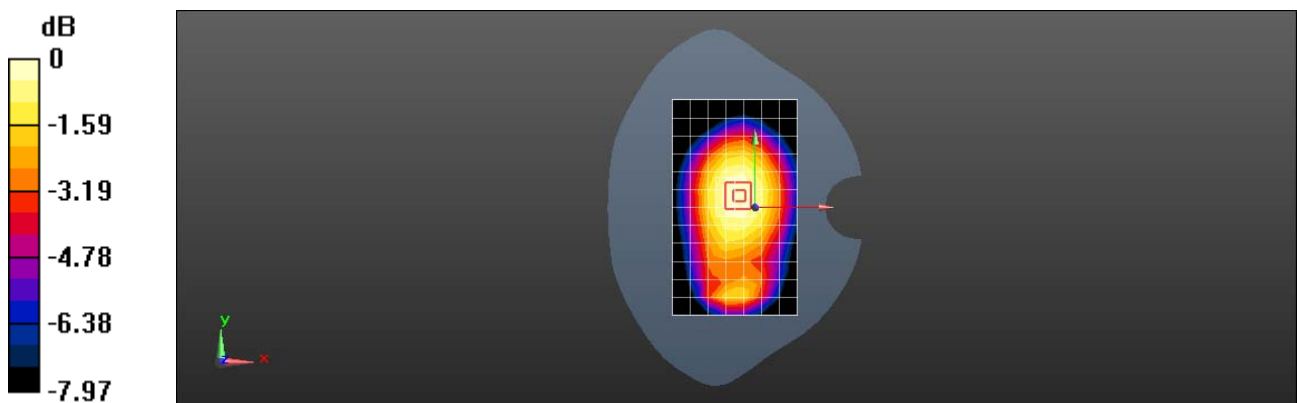

0 dB = 0.249 W/kg = -6.04 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV GSM 850 GPRS 4TS 190CH Back side 10mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.594$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.8, 8.8, 8.8); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.502 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.96 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.779 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.548 W/kg

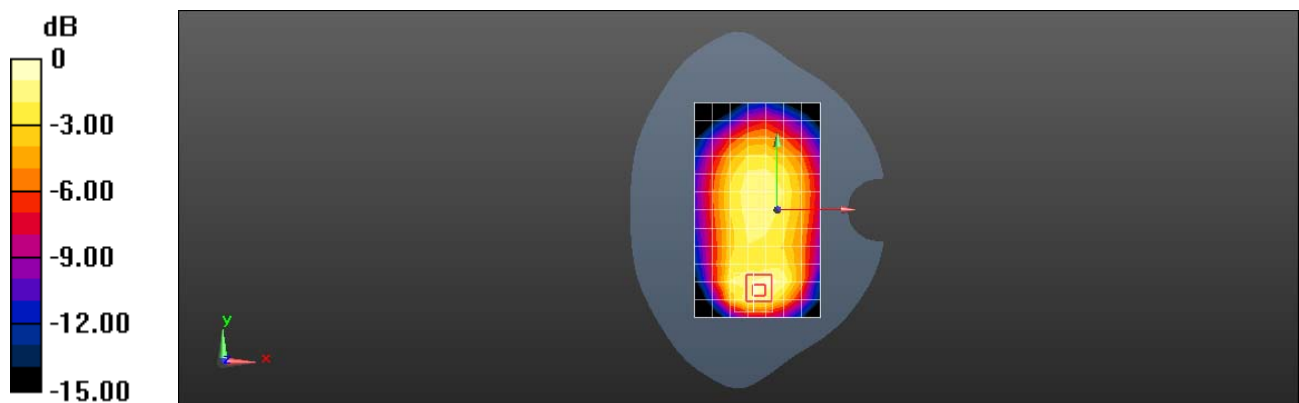

Test Laboratory: SGS-SAR Lab

PM-1352-BV GSM 1900 GPRS 4TS 661CH Left cheek

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.278$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.0558 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.273 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0543 W/kg

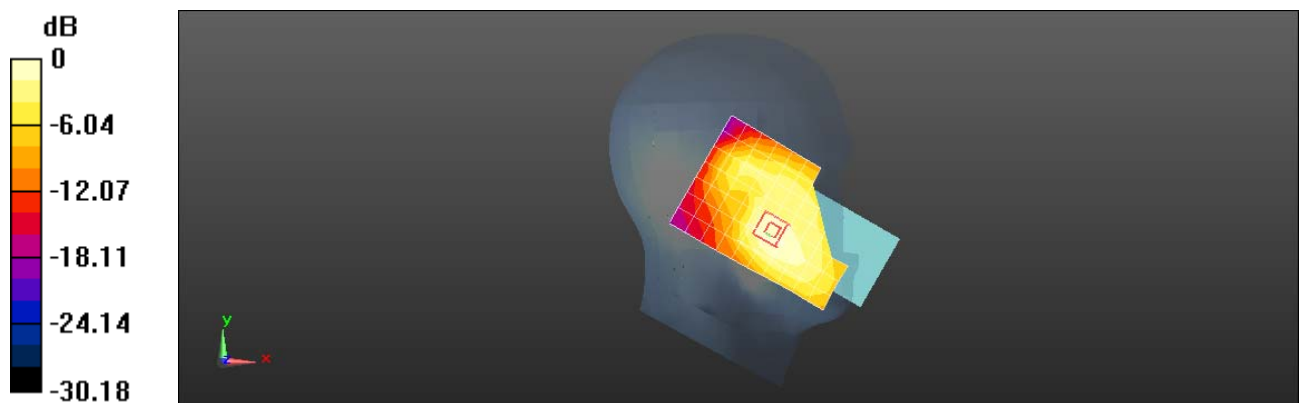

0 dB = 0.0543 W/kg = -12.65 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV GSM 1900 GPRS 4TS 661CH Back side 15mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.278$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0907 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.756 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.0855 W/kg

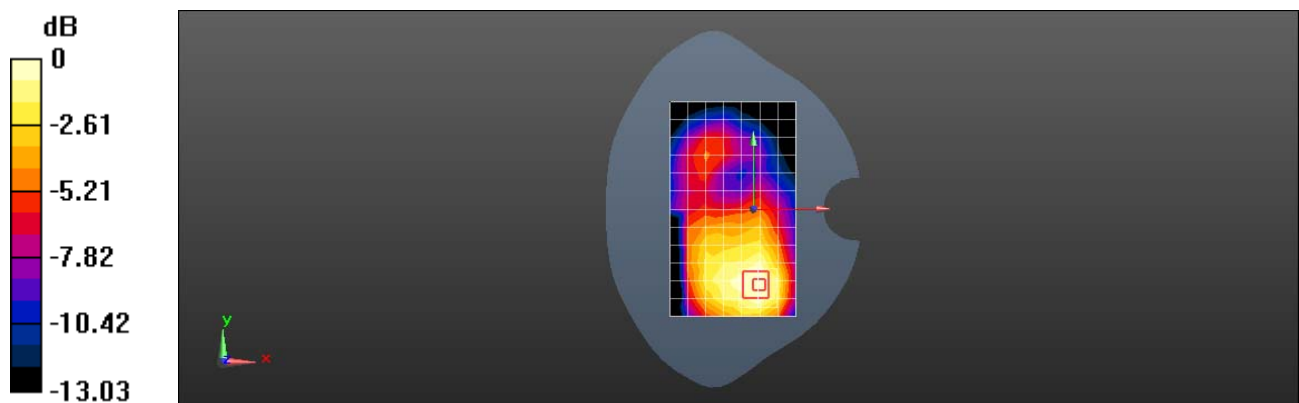

0 dB = 0.0855 W/kg = -10.68 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV GSM 1900 GPRS 4TS 661CH Back side 10mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.278$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.241 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.519 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.246 W/kg

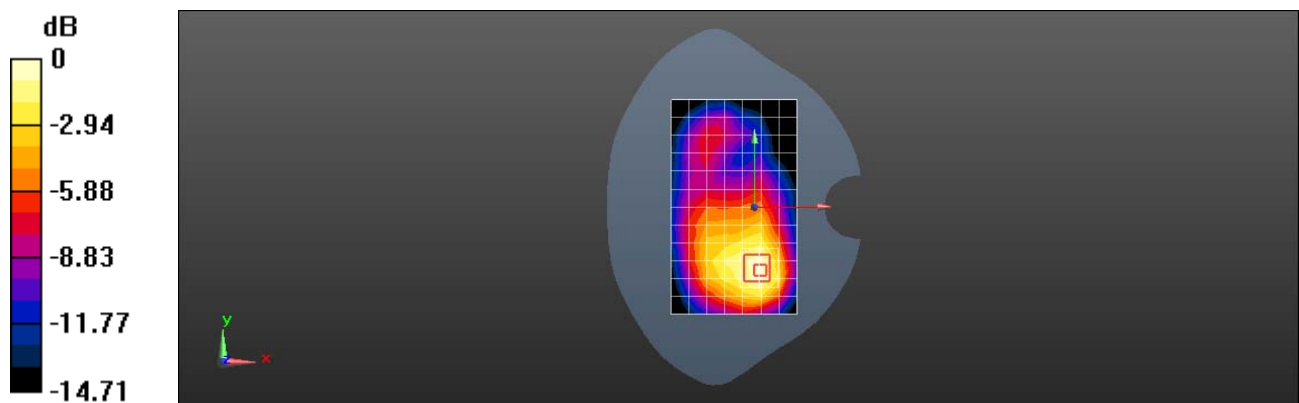

0 dB = 0.246 W/kg = -6.09 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WCDMA Band IV 1412CH Right cheek

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 40.686$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.68, 7.68, 7.68); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.123 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.945 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.132 W/kg

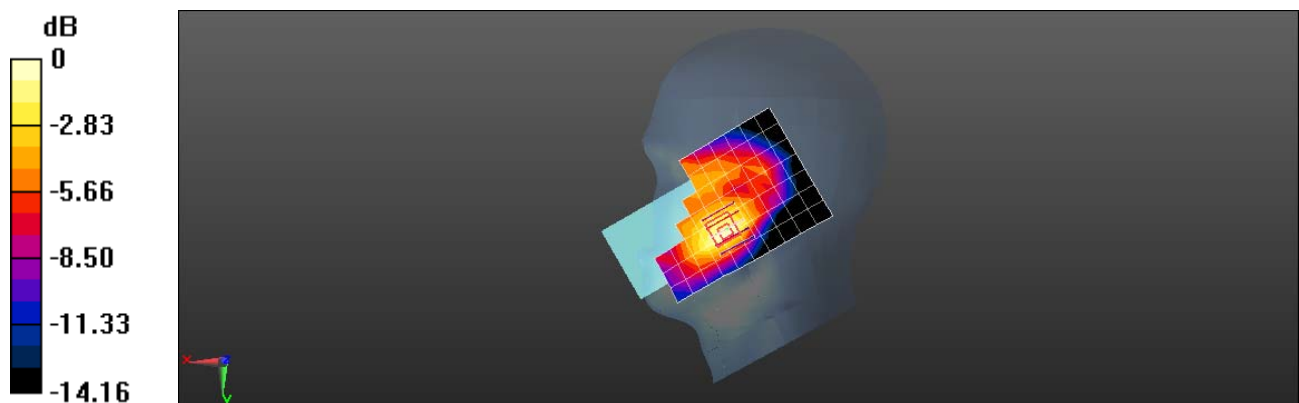

0 dB = 0.132 W/kg = -8.79 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WCDMA Band IV 1412CH Back side 15mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 40.686$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.68, 7.68, 7.68); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.201 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.730 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

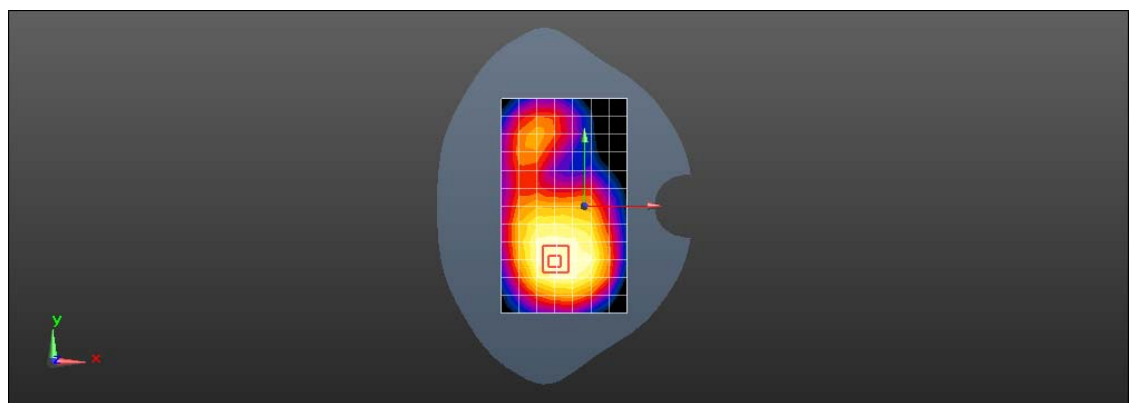

0 dB = 0.192 W/kg = -7.17 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WCDMA Band IV 1412CH Back side 10mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 40.686$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.68, 7.68, 7.68); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.358 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.543 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.366 W/kg

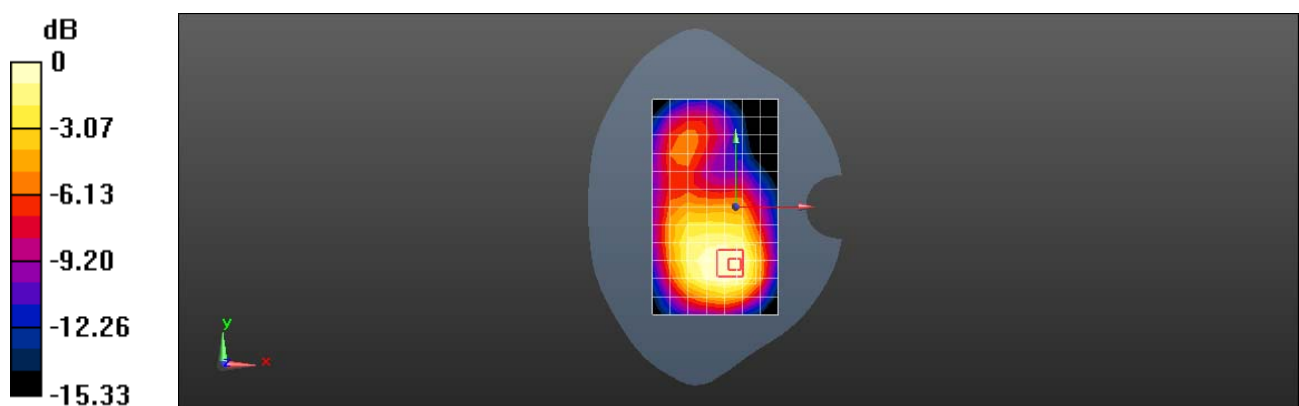

0 dB = 0.366 W/kg = -4.37 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WCDMA Band V 4182CH Right cheek

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 42.598$;

$\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.8, 8.8, 8.8); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.317 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.299 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.331 W/kg

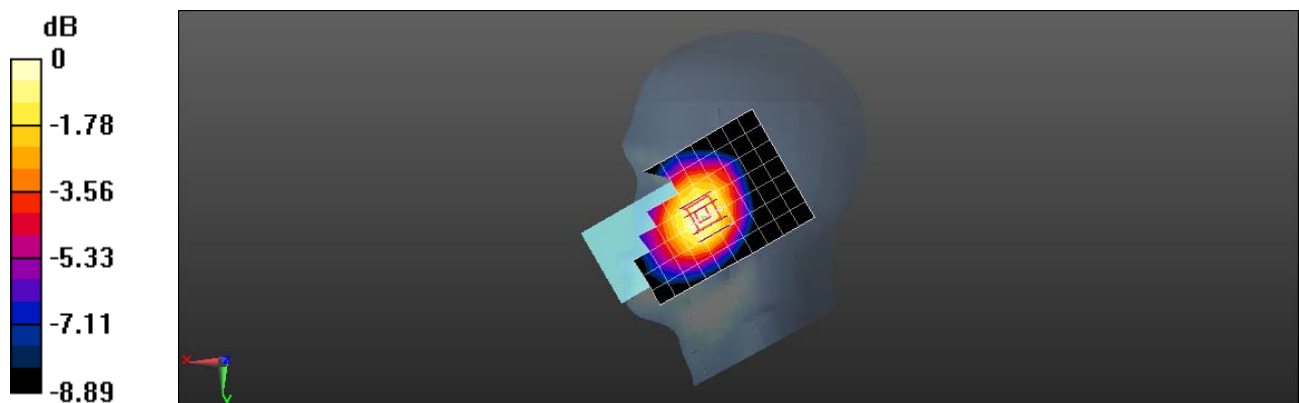

0 dB = 0.331 W/kg = -4.80 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WCDMA Band V 4182CH Back side 15mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 42.598$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.8, 8.8, 8.8); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.370 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.48 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.432 W/kg

SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.381 W/kg

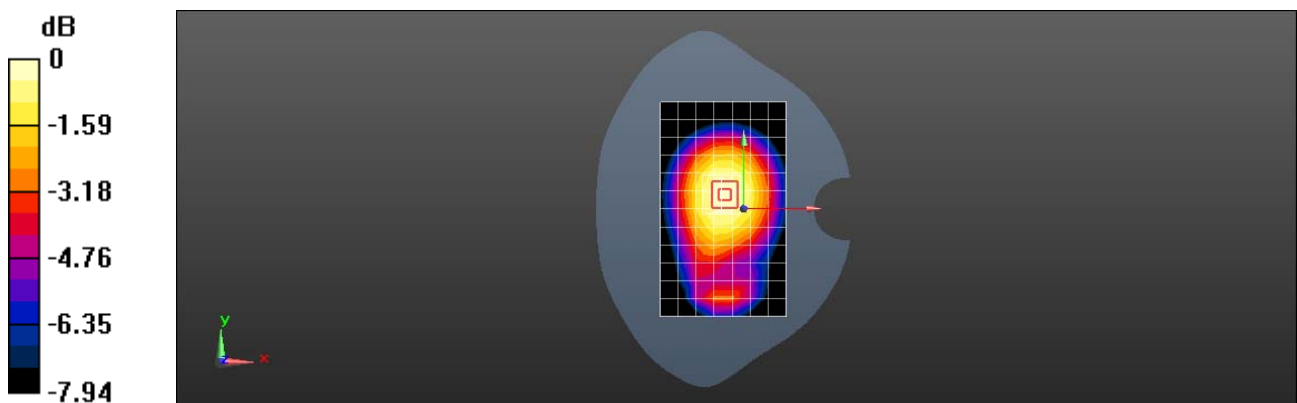

Test Laboratory: SGS-SAR Lab

PM-1352-BV WCDMA Band V 4182CH Back side 10mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 42.598$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.8, 8.8, 8.8); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.416 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.51 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.606 W/kg

SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.432 W/kg

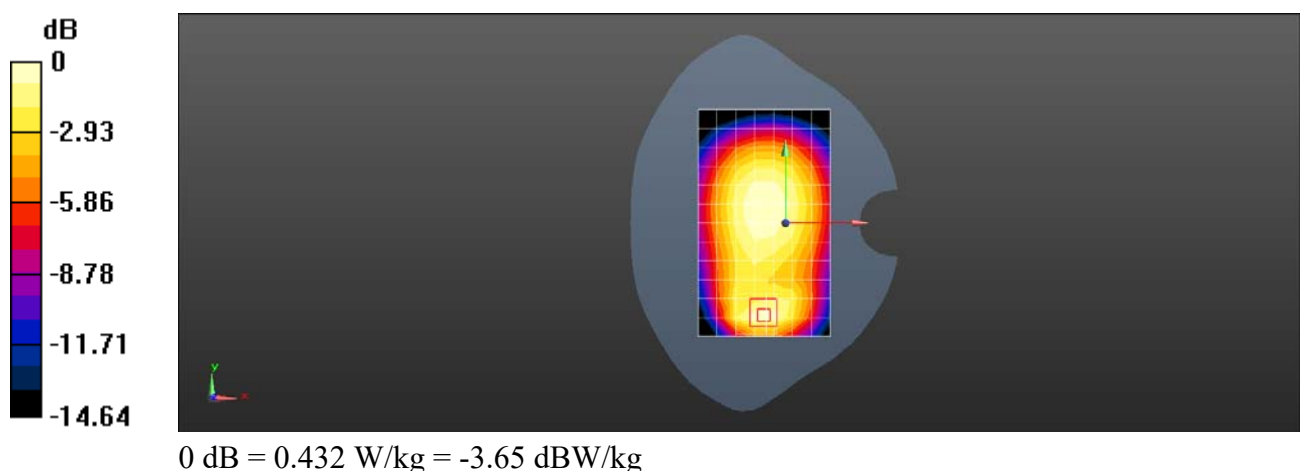

Test Laboratory: SGS-SAR Lab

PM-1352-BV LTE Band 4 20M QPSK 1RB0 20175CH Left cheek

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 40.686$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.68, 7.68, 7.68); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0849 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.705 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.0847 W/kg

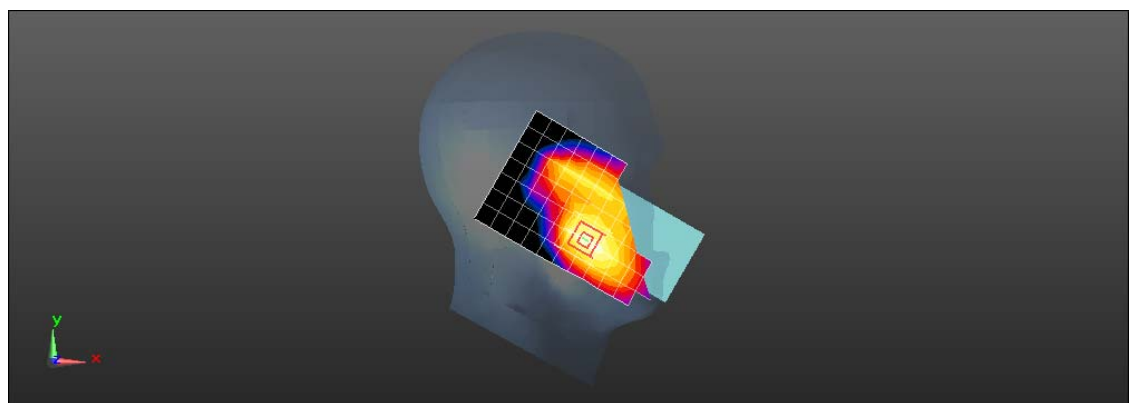

0 dB = 0.0847 W/kg = -10.72 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV LTE Band 4 20M QPSK 1RB0 20175CH Back side 15mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 40.686$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.68, 7.68, 7.68); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.115 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.955 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

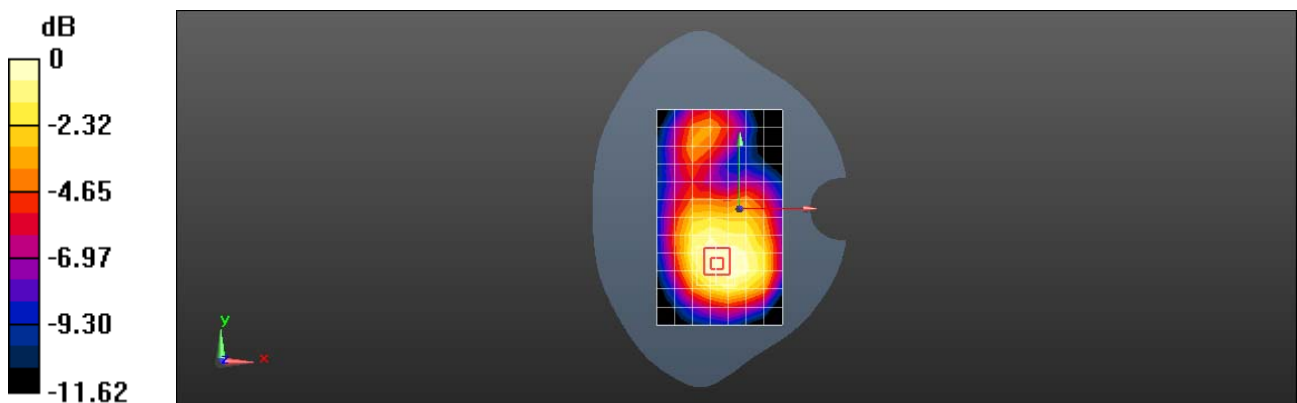

0 dB = 0.120 W/kg = -9.21 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV LTE Band 4 20M QPSK 1RB0 20175CH Back side 10mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 40.686$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.68, 7.68, 7.68); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.230 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.543 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

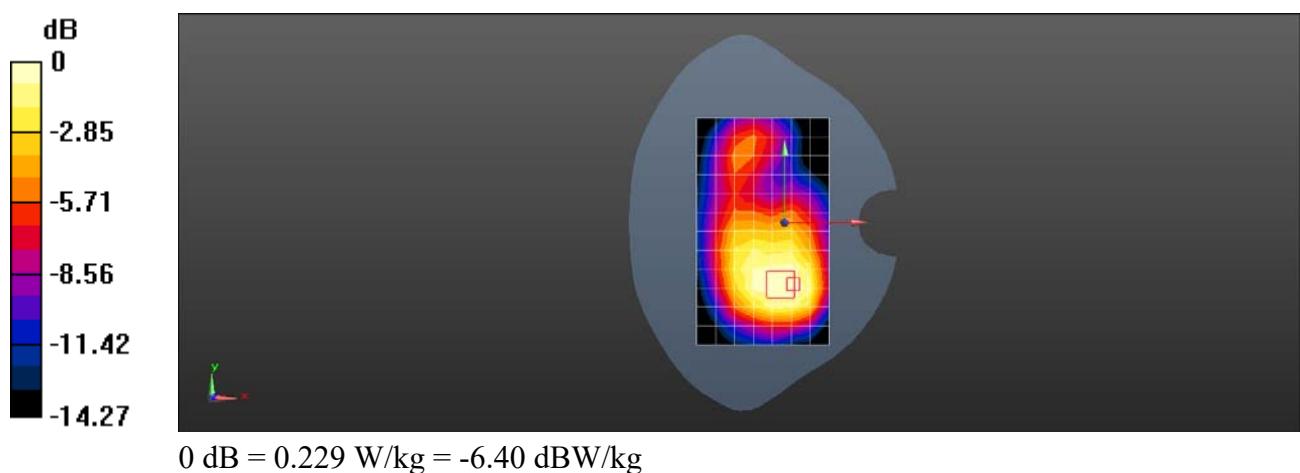

Test Laboratory: SGS-SAR Lab

PM-1352-BV LTE Band 12 10M QPSK 1RB49 23095CH Right cheek

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.852$ S/m; $\epsilon_r = 43.367$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.15, 9.15, 9.15); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.170 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.394 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

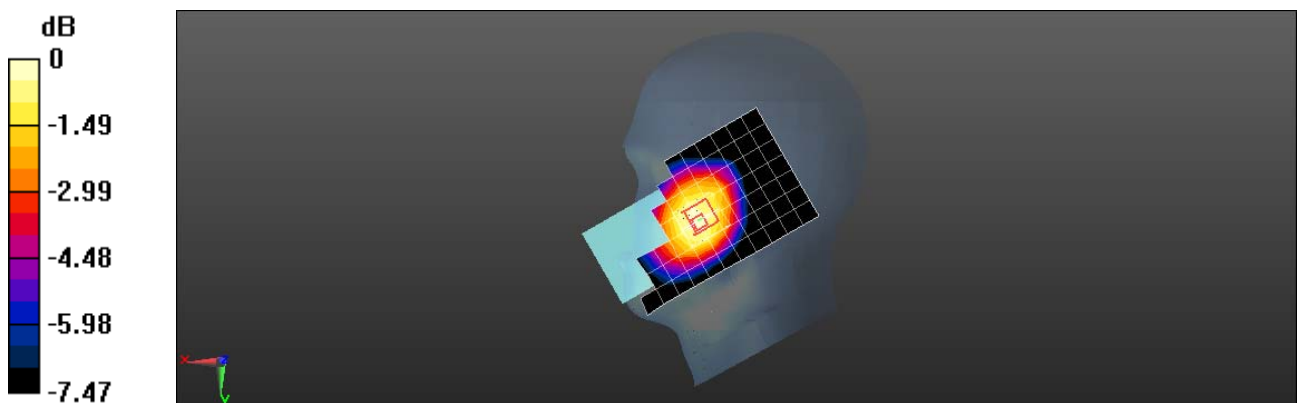

0 dB = 0.171 W/kg = -7.67 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV LTE Band 12 10M QPSK 1RB49 23095CH Back side 15mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.852$ S/m; $\epsilon_r = 43.367$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.15, 9.15, 9.15); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.327 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.21 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

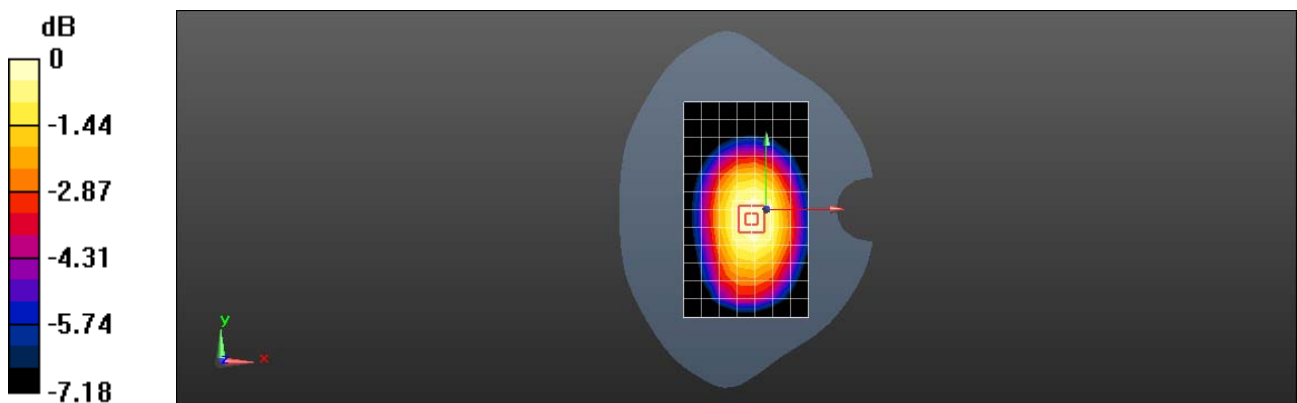

0 dB = 0.332 W/kg = -4.79 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV LTE Band 12 10M QPSK 1RB49 23095CH Back side 10mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.852$ S/m; $\epsilon_r = 43.367$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.15, 9.15, 9.15); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.372 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.56 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.273 W/kg

Maximum value of SAR (measured) = 0.380 W/kg

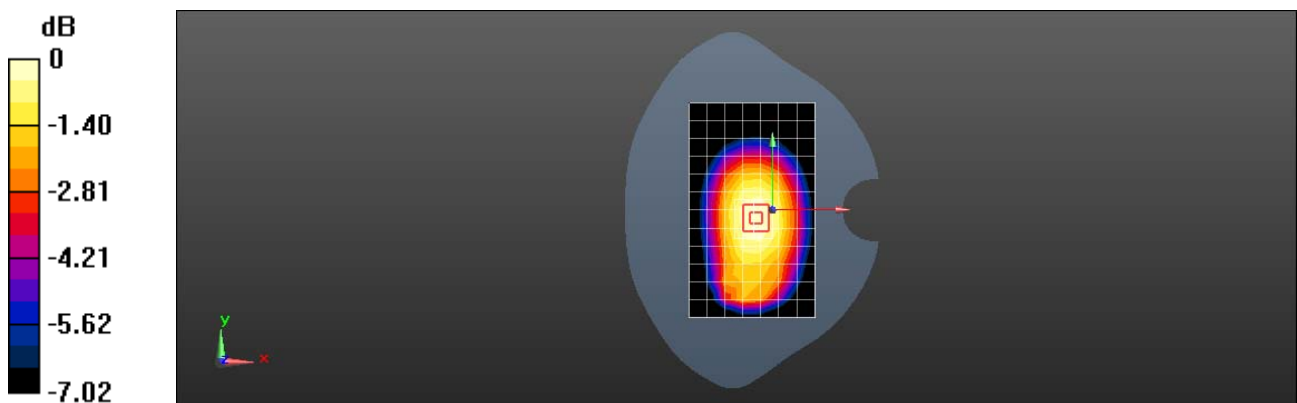

0 dB = 0.380 W/kg = -4.20 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV LTE Band 41 20M QPSK 1RB99 40620CH Left cheek

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.57906

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 37.485$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.79, 6.79, 6.79); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.0947 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.5190 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0963 W/kg

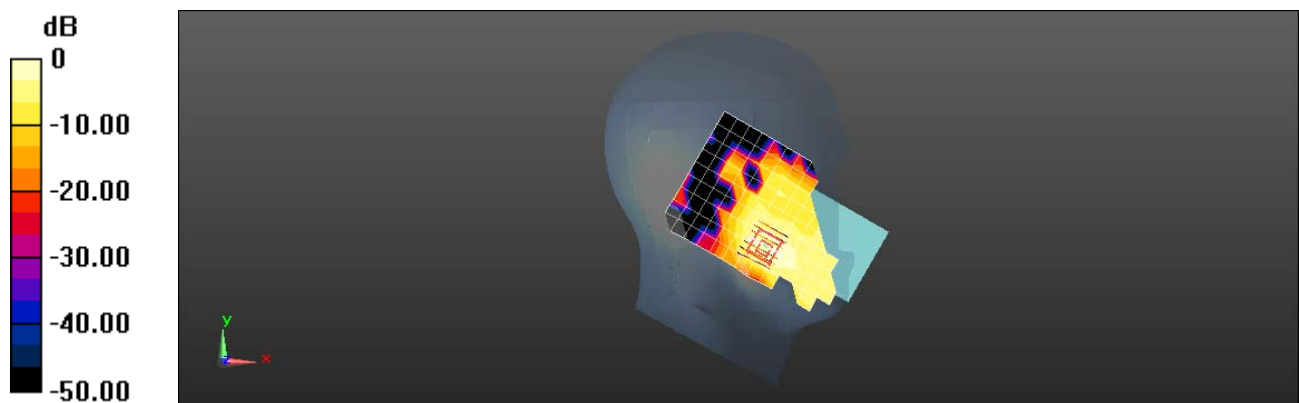

0 dB = 0.0963 W/kg = -10.16 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV LTE Band 41 20M QPSK 1RB99 40620CH Back side 15mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.57906

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 37.485$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.79, 6.79, 6.79); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.452 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.839 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.627 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.468 W/kg

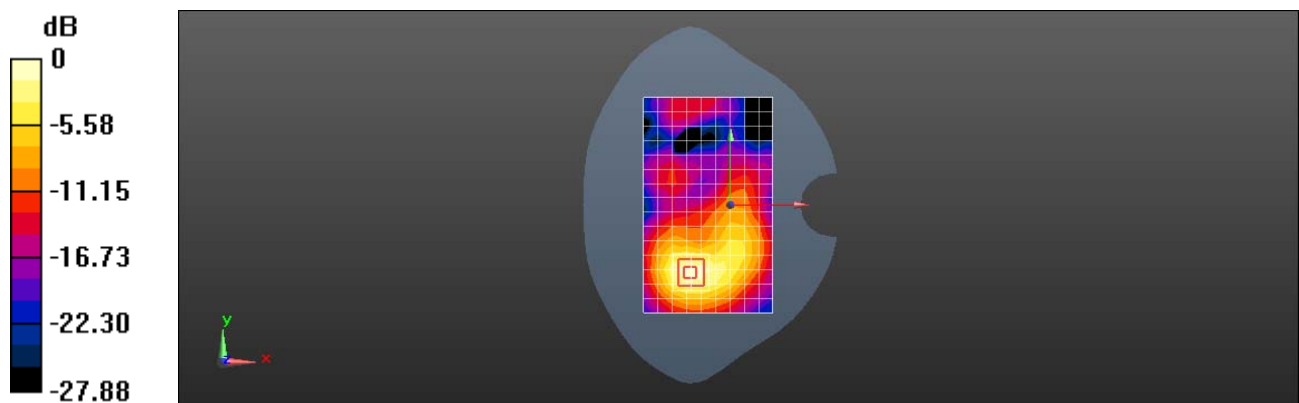

0 dB = 0.468 W/kg = -3.30 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV LTE Band 41 20M QPSK 1RB99 40620CH Back side 10mm

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.57906

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 37.485$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.79, 6.79, 6.79); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.985 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.625 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

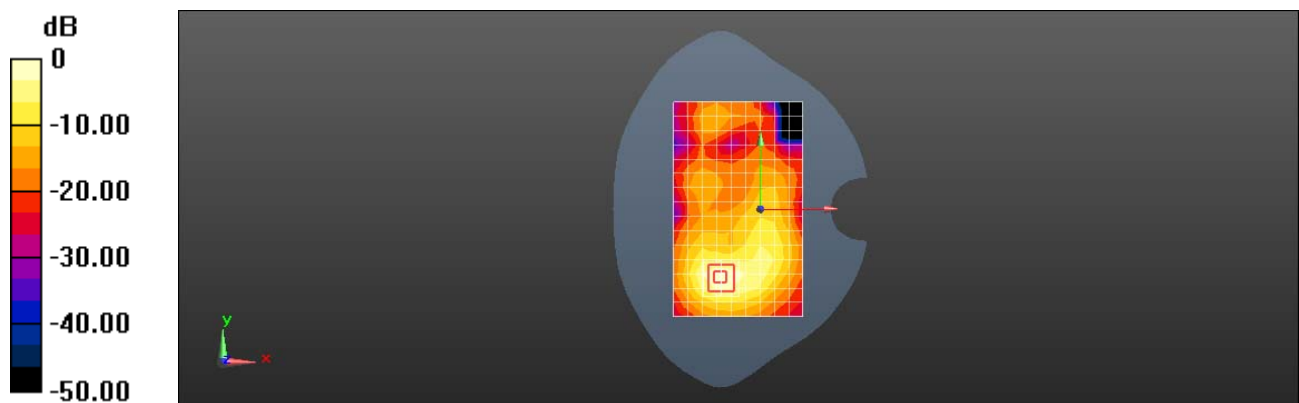

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 2.4G 802.11b 11CH Right cheek chain 0

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.806$ S/m; $\epsilon_r = 40.636$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.628 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.31 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 0.696 W/kg

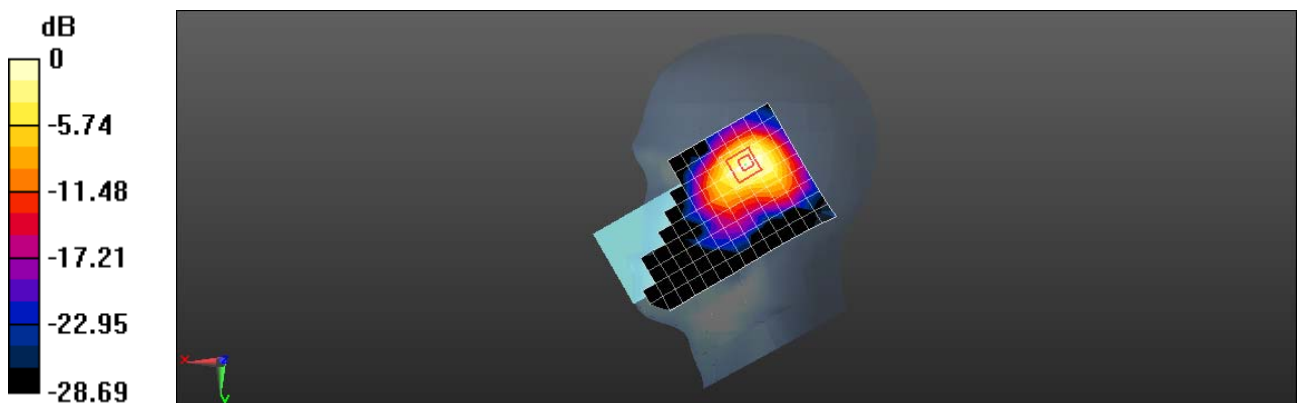

0 dB = 0.696 W/kg = -1.57 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 2.4G 802.11b 11CH Back side 15mm chain 0

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.806$ S/m; $\epsilon_r = 40.636$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.108 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.163 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

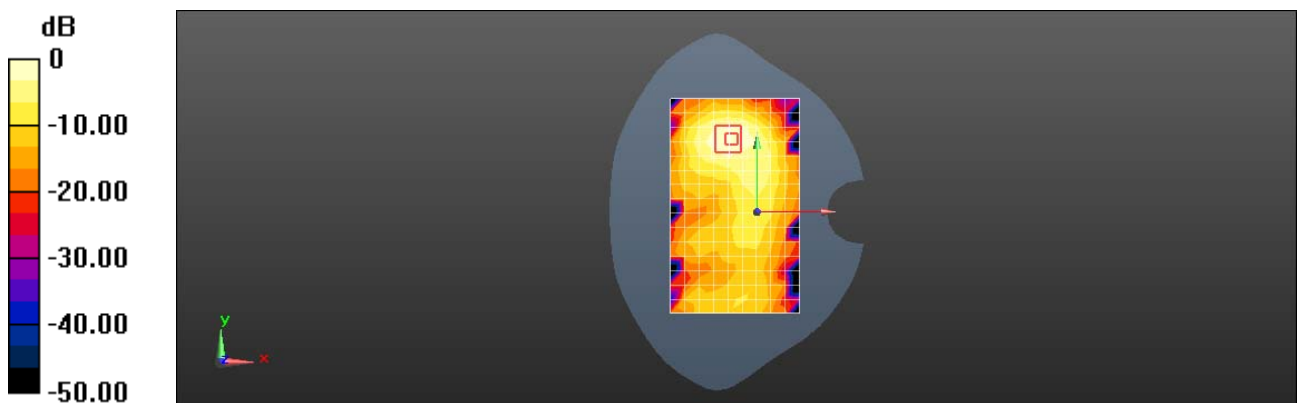

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 2.4G 802.11b 11CH Back side 10mm chain 0

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.806$ S/m; $\epsilon_r = 40.636$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.217 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.054 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.248 W/kg

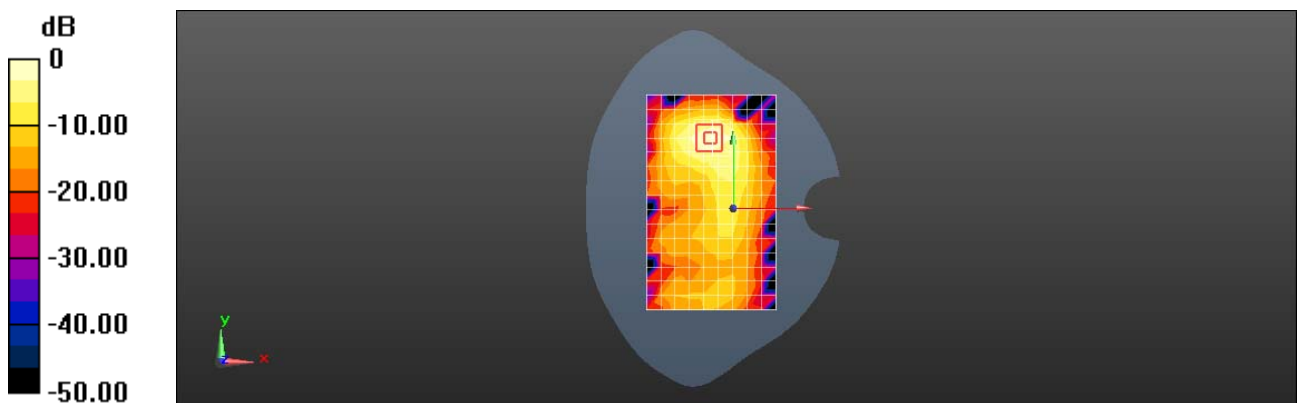

0 dB = 0.248 W/kg = -6.06 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 2.4G 802.11b 1CH Left cheek chain 1

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.004

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.773$ S/m; $\epsilon_r = 40.706$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0636 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0665 W/kg

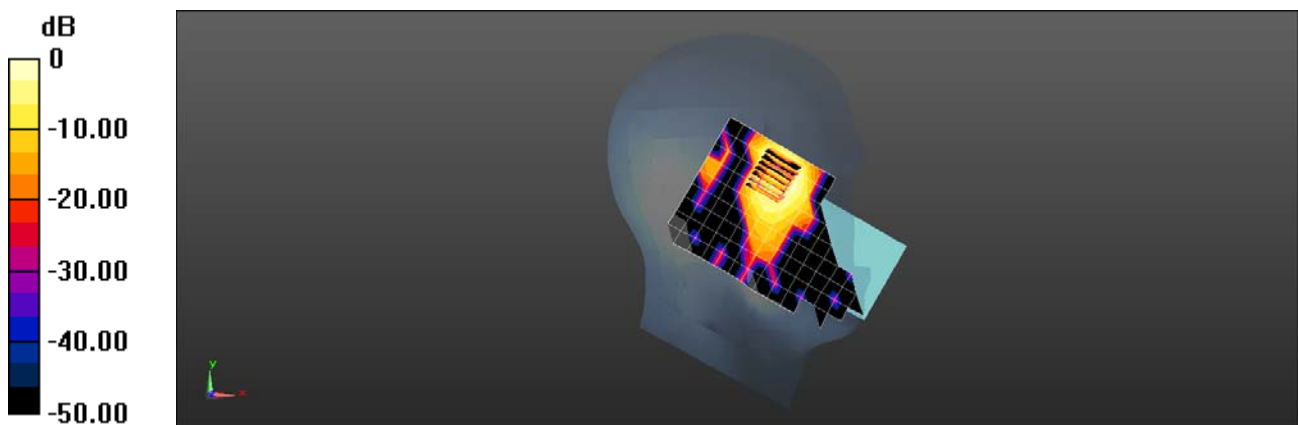

0 dB = 0.0665 W/kg = -11.77 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 2.4G 802.11b 1CH Back side 15mm chain 1

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2412$ MHz; $\sigma = 1.744$ S/m; $\epsilon_r = 40.812$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0328 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.109 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.0079 W/kg

Maximum value of SAR (measured) = 0.0365 W/kg

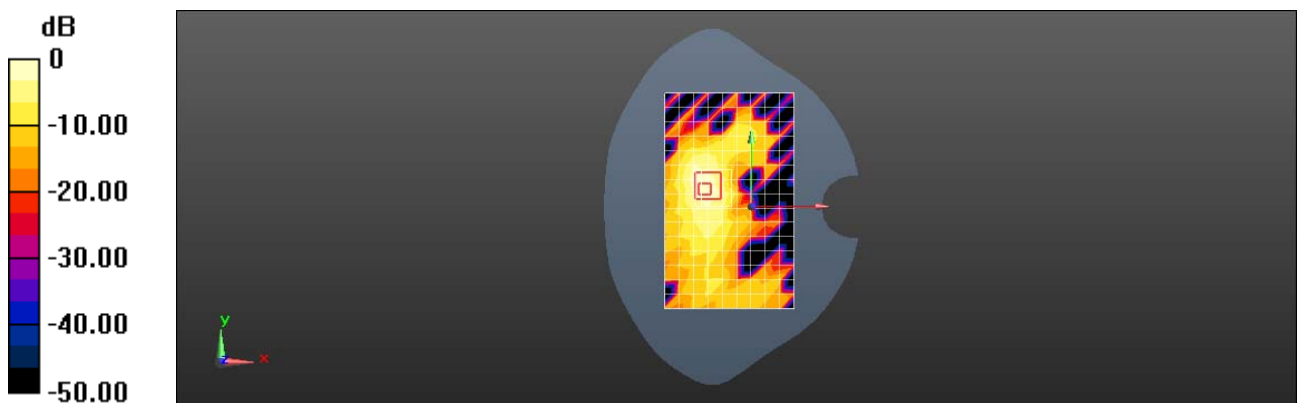

0 dB = 0.0365 W/kg = -14.38 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 2.4G 802.11b 1CH Back side 10mm chain 1

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2412$ MHz; $\sigma = 1.744$ S/m; $\epsilon_r = 40.812$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.104 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.984 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.113 W/kg

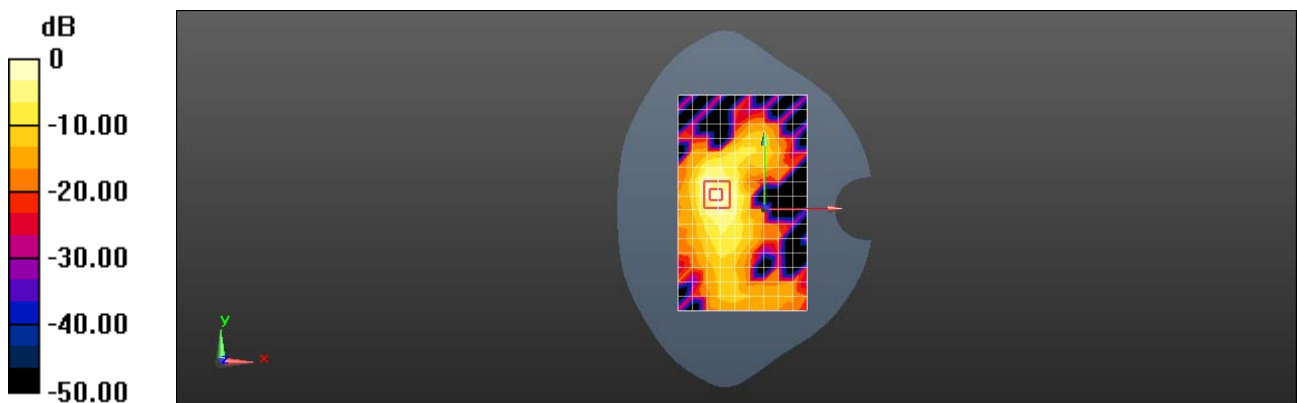

0 dB = 0.113 W/kg = -9.47 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 2.4G 802.11b 6CH Right cheek MIMO

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.773$ S/m; $\epsilon_r = 40.706$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.588 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.19 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.902 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.221 W/kg

Maximum value of SAR (measured) = 0.684 W/kg

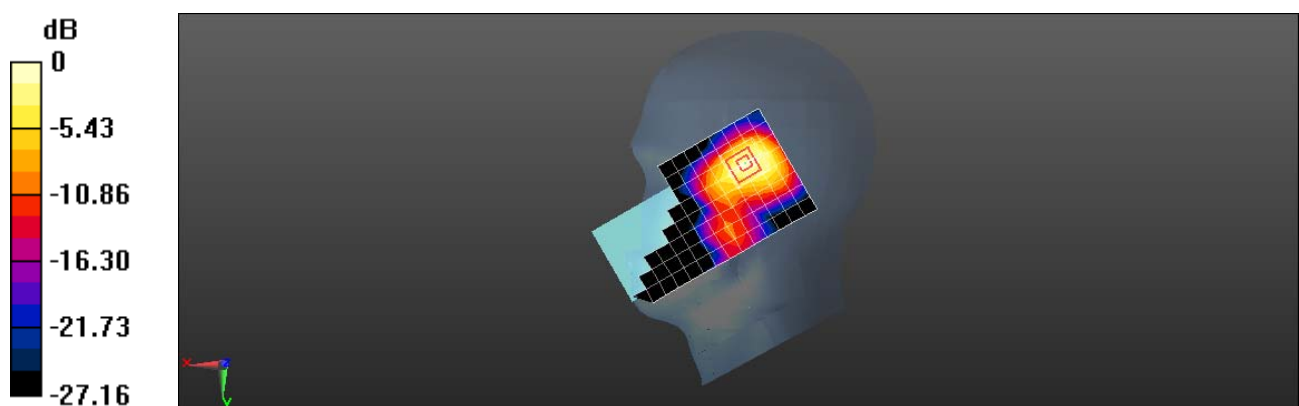

0 dB = 0.684 W/kg = -1.65 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 2.4G 802.11b 6CH Back side 15mm MIMO

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.773$ S/m; $\epsilon_r = 40.706$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.100 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.462 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0956 W/kg

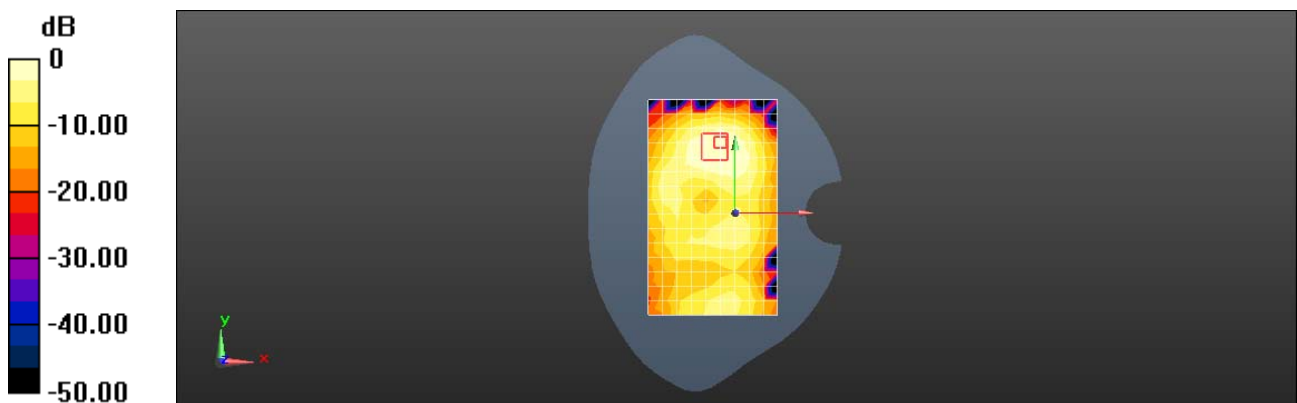

0 dB = 0.0956 W/kg = -10.20 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 2.4G 802.11b 6CH Back side 10mm MIMO

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.773$ S/m; $\epsilon_r = 40.706$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.189 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.948 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.201 W/kg

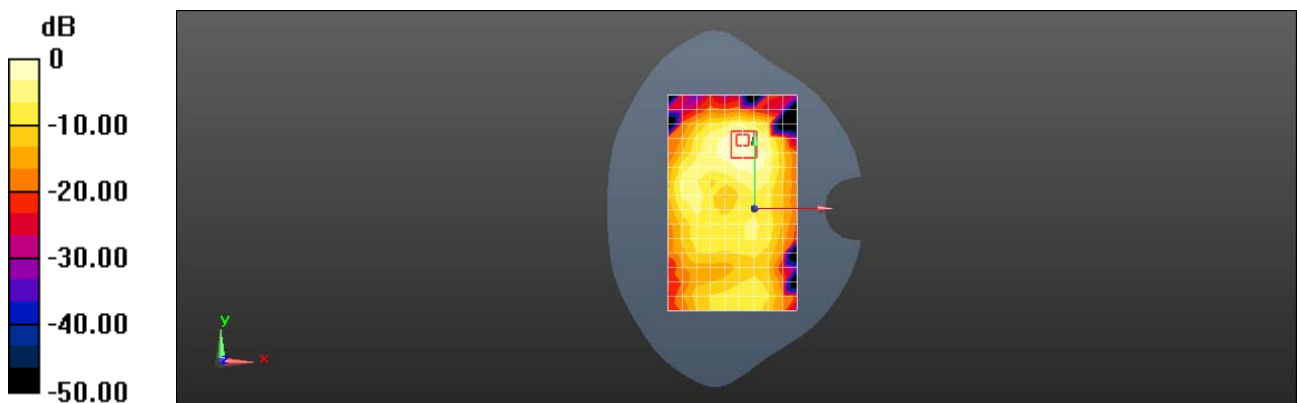

0 dB = 0.201 W/kg = -6.97 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 58CH Right tilted chain 0

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5290 MHz; Duty Cycle: 1:1.132

Medium: HSL5GHz; Medium parameters used: $f = 5290$ MHz; $\sigma = 4.694$ S/m; $\epsilon_r = 35.489$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5.05, 5.05, 5.05); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.837 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.450 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.852 W/kg

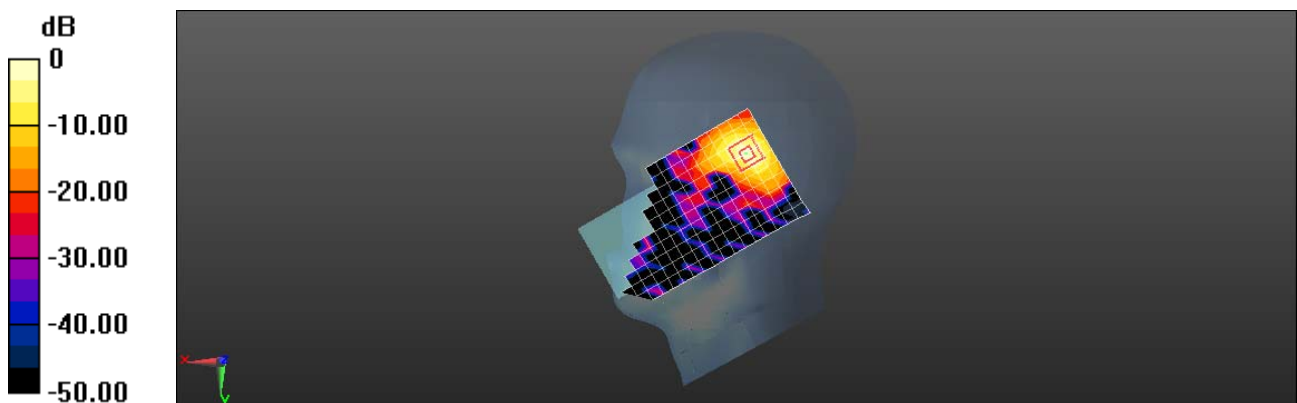

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 155CH Back side 15mm chain 0

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz; Duty Cycle: 1:1.132

Medium: HSL5GHz; Medium parameters used: $f = 5775$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 34.552$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.7, 4.7, 4.7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.369 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.398 W/kg

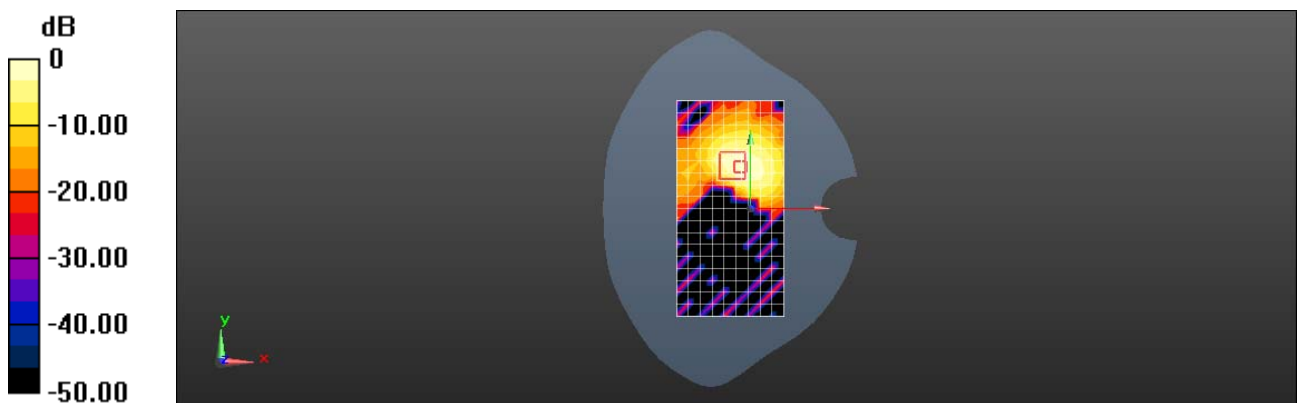

0 dB = 0.398 W/kg = -4.00 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 42CH Back side 10mm chain 0

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5210 MHz;Duty Cycle: 1:1.132

Medium: HSL5GHz;Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.616 \text{ S/m}$; $\epsilon_r = 35.534$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5.05, 5.05, 5.05); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.596 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.303 W/kg ; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.712 W/kg

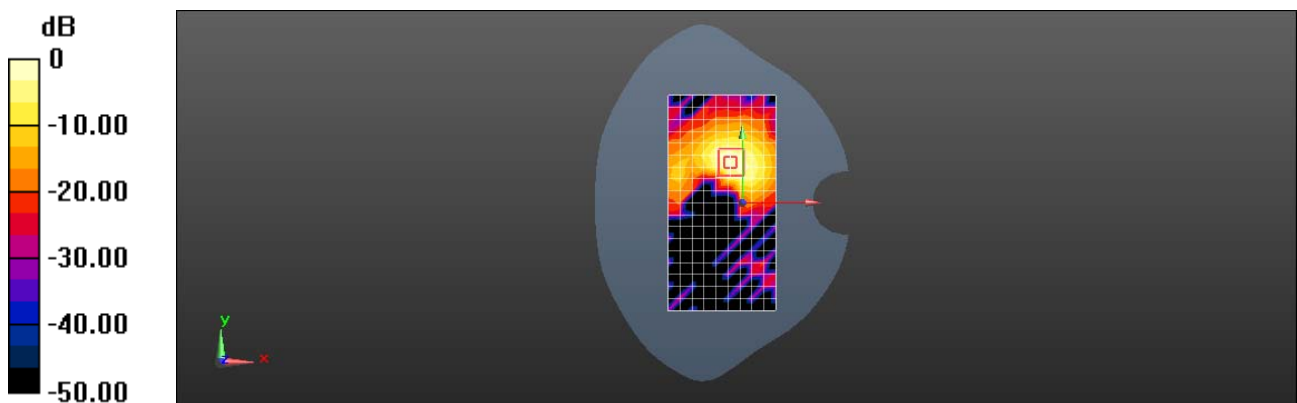

0 dB = 0.712 W/kg = -1.48 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 138CH Back side 0mm chain 0

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5690 MHz;Duty Cycle: 1:1.132

Medium: HSL5GHz;Medium parameters used: $f = 5690$ MHz; $\sigma = 5.122$ S/m; $\epsilon_r = 34.54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.64, 4.64, 4.64); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.64 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 0.511 W/kg

Maximum value of SAR (measured) = 6.90 W/kg

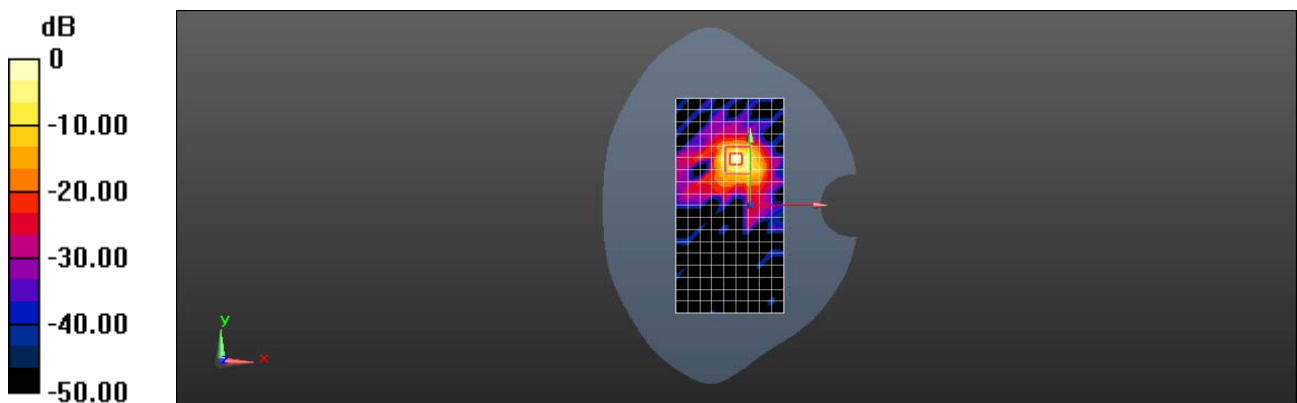

0 dB = 6.90 W/kg = 8.39 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 155CH Left cheek chain1

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz;Duty Cycle: 1:1.132

Medium: HSL5GHz;Medium parameters used: $f = 5775$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 34.552$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.7, 4.7, 4.7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.129 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.997 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.0112 W/kg

Maximum value of SAR (measured) = 0.185 W/kg

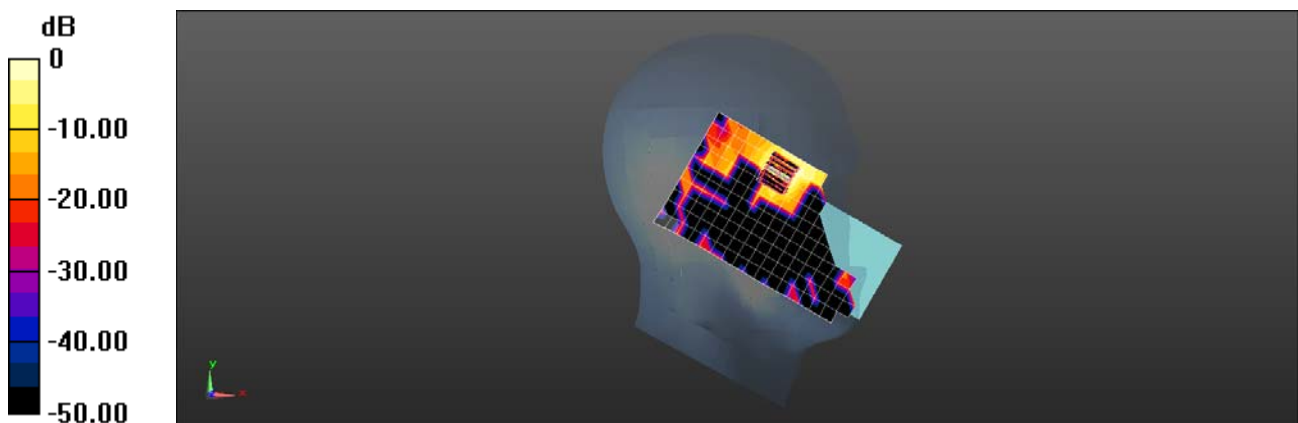

0 dB = 0.185 W/kg = -7.33 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 58CH Back side 15mm chain 1

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5290 MHz; Duty Cycle: 1:1.132

Medium: HSL5GHz; Medium parameters used: $f = 5290 \text{ MHz}$; $\sigma = 4.694 \text{ S/m}$; $\epsilon_r = 35.489$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5.05, 5.05, 5.05); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.362 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.314 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.155 W/kg ; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.357 W/kg

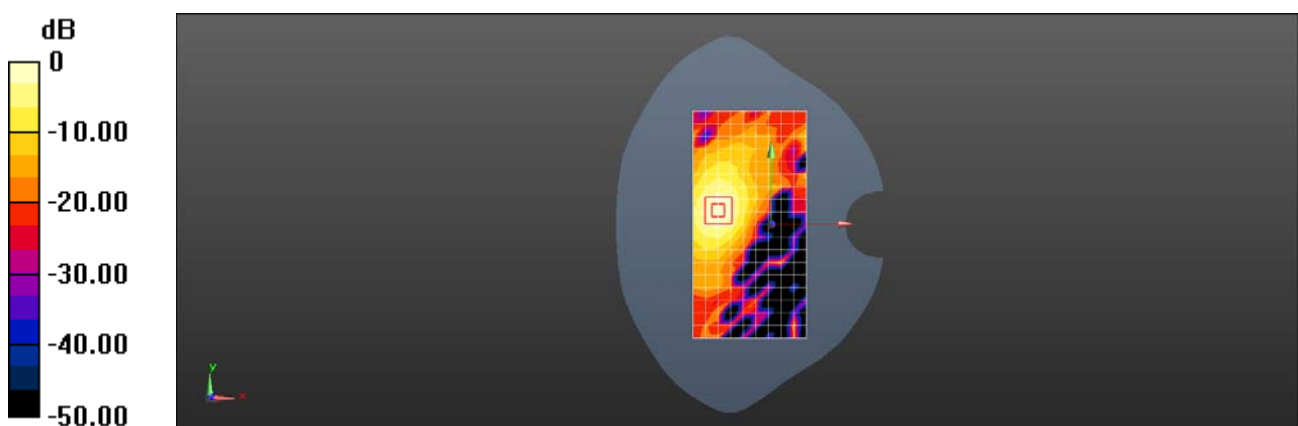

0 dB = 0.357 W/kg = -4.47 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 42CH Back side 10mm chain 1

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5210 MHz; Duty Cycle: 1:1.132

Medium: HSL5GHz; Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.616 \text{ S/m}$; $\epsilon_r = 35.534$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5.05, 5.05, 5.05); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.421 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.563 V/m ; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.721 W/kg

SAR(1 g) = 0.186 W/kg ; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.447 W/kg

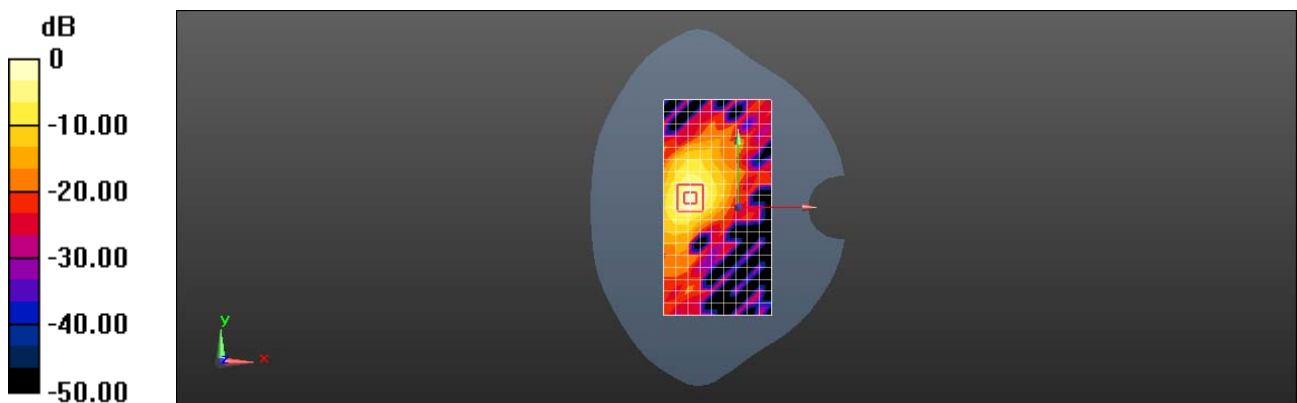

0 dB = 0.447 W/kg = -3.50 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 138CH Back side 0mm chain 1

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5690 MHz; Duty Cycle: 1:1.132

Medium: HSL5GHz; Medium parameters used: $f = 5690$ MHz; $\sigma = 5.122$ S/m; $\epsilon_r = 34.54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.64, 4.64, 4.64); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 5.81 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.557 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 24.3 W/kg

SAR(1 g) = 2.73 W/kg; SAR(10 g) = 0.538 W/kg

Maximum value of SAR (measured) = 9.55 W/kg

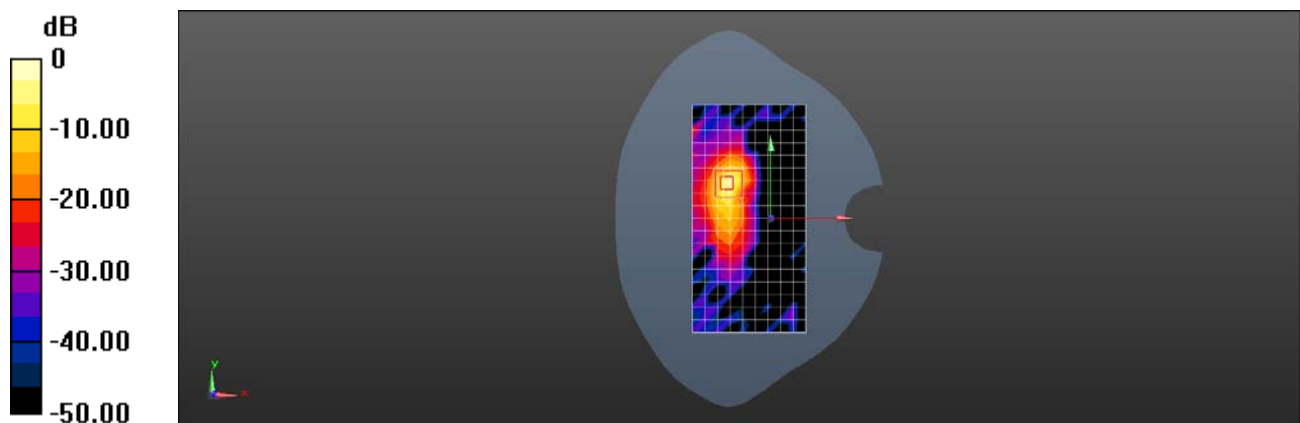

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 58CH Right tilted MIMO

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5290 MHz; Duty Cycle: 1:1.132

Medium: HSL5GHz; Medium parameters used: $f = 5290$ MHz; $\sigma = 4.694$ S/m; $\epsilon_r = 35.489$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5.05, 5.05, 5.05); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.717 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.771 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.740 W/kg

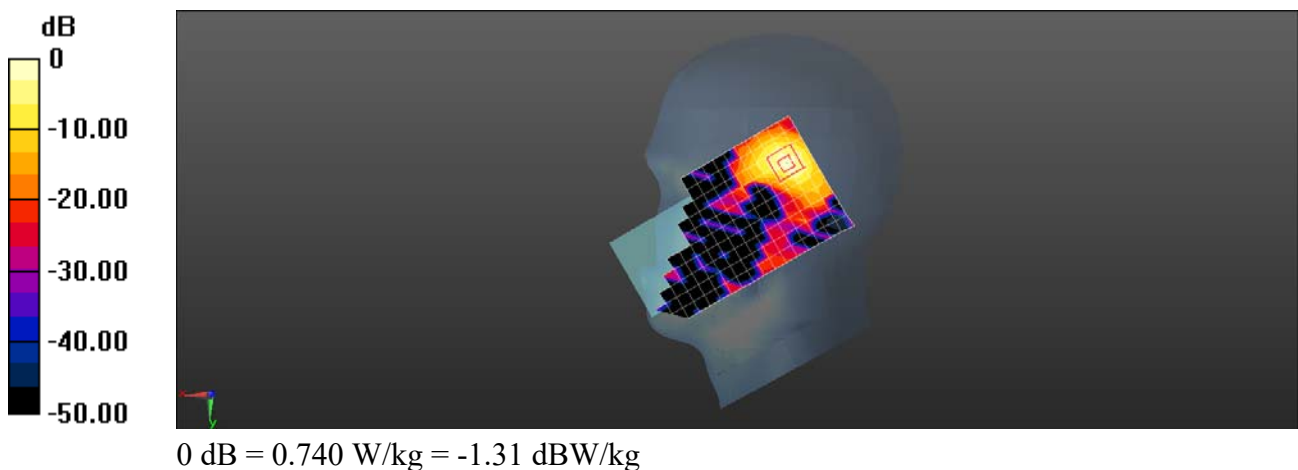

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 58CH Back side 15mm MIMO

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5290 MHz; Duty Cycle: 1:1.132

Medium: HSL5GHz; Medium parameters used: $f = 5290 \text{ MHz}$; $\sigma = 4.694 \text{ S/m}$; $\epsilon_r = 35.489$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5.05, 5.05, 5.05); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.256 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.122 W/kg ; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.287 W/kg

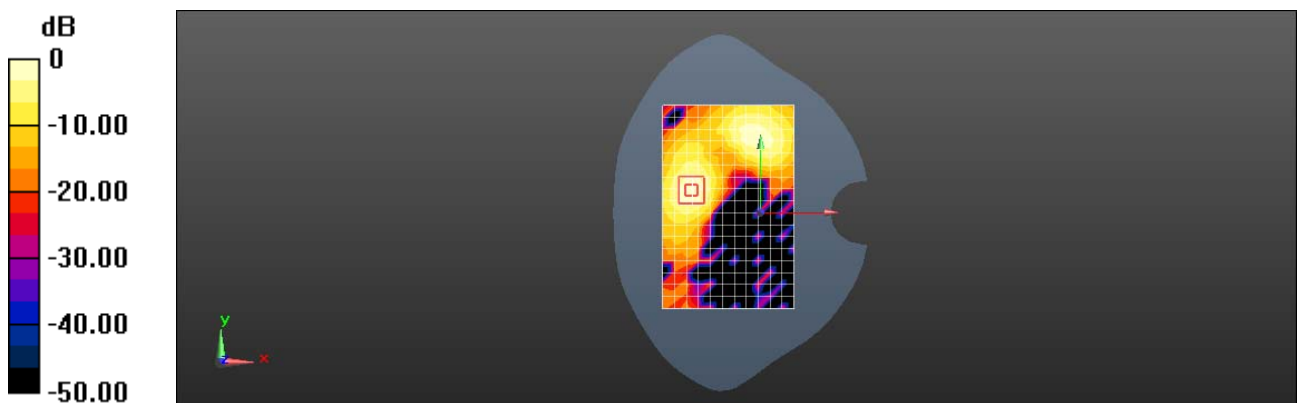

0 dB = 0.287 W/kg = -5.42 dBW/kg

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 42CH Back side 10mm MIMO

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5210 MHz; Duty Cycle: 1:1.132

Medium: HSL5GHz; Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.616 \text{ S/m}$; $\epsilon_r = 35.534$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5.05, 5.05, 5.05); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.508 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.240 W/kg ; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.545 W/kg

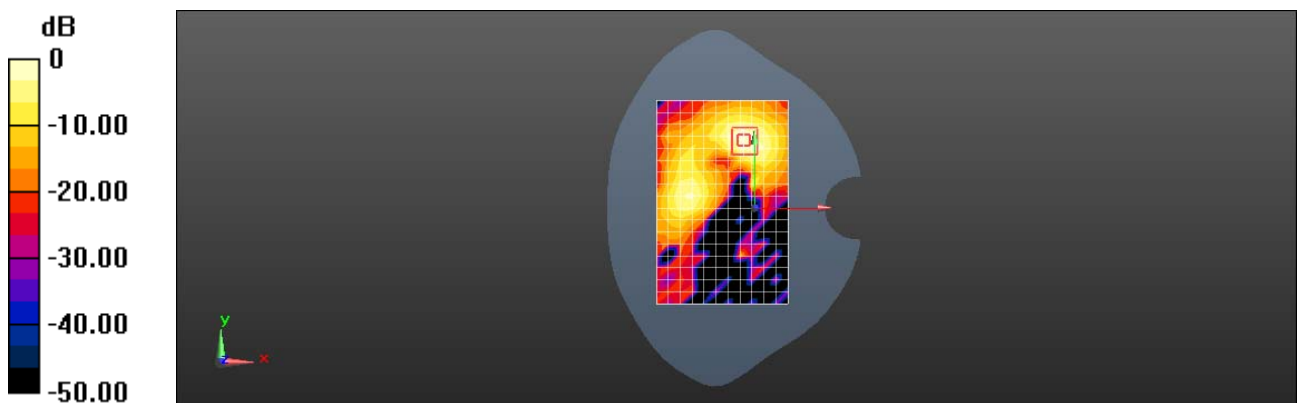

Test Laboratory: SGS-SAR Lab

PM-1352-BV WIFI 5G 802.11ac 80M 138CH Back side 0mm MIMO

DUT: PM-1352-BV; Type: Mobile Phone; Serial: 004402542590918

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5690 MHz; Duty Cycle: 1:1.132

Medium: HSL5GHz; Medium parameters used: $f = 5690$ MHz; $\sigma = 5.122$ S/m; $\epsilon_r = 34.54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.64, 4.64, 4.64); Calibrated: 2020-07-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: SAM 1; Type: SAM; Serial: 1640
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.23 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 21.2 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 0.470 W/kg

Maximum value of SAR (measured) = 9.74 W/kg

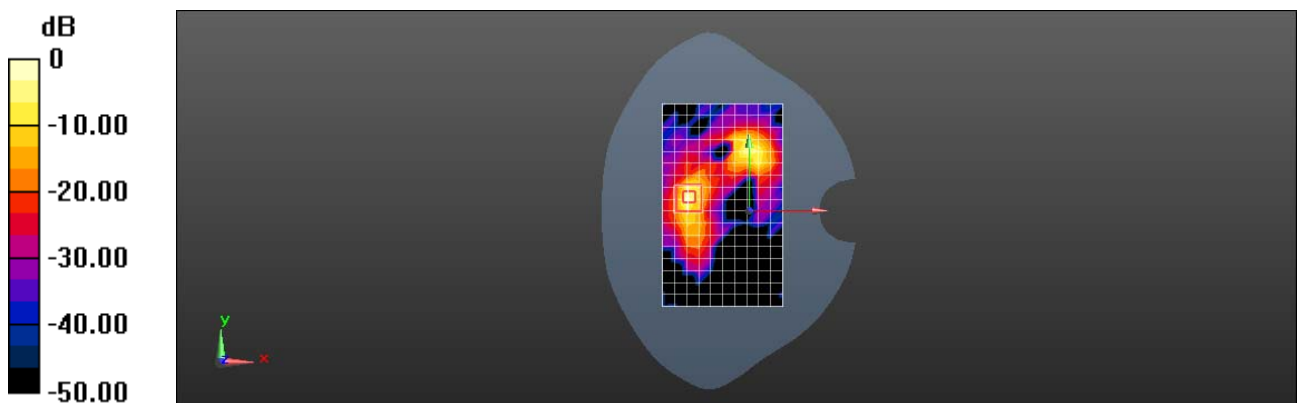

Test Laboratory: SGS-SAR Lab

PDX-213-K1 Bluetooth DH5 78CH Right cheek

DUT: PDX-213-K1; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.825$ S/m; $\epsilon_r = 40.587$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.188 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.477 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.199 W/kg

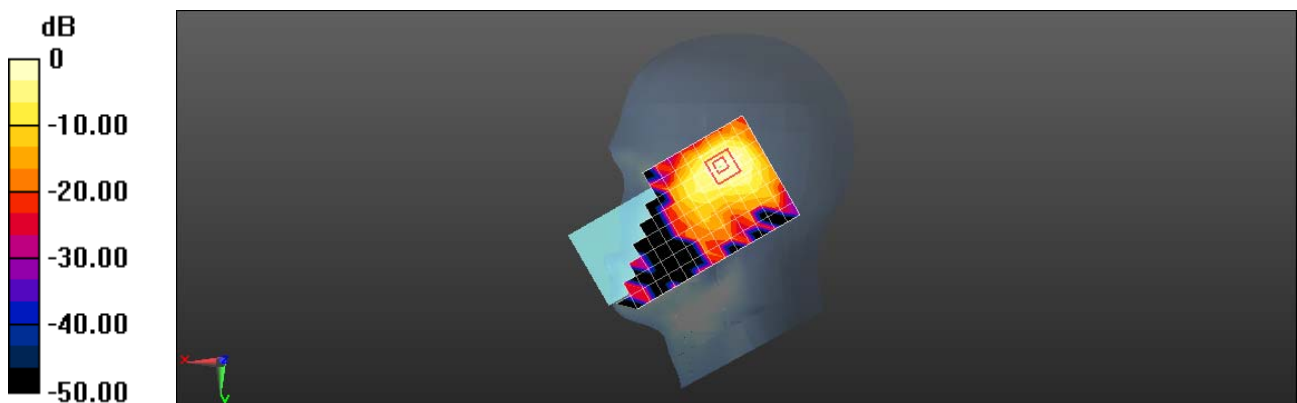

0 dB = 0.199 W/kg = -7.01 dBW/kg

Test Laboratory: SGS-SAR Lab

PDX-213-K1 Bluetooth DH5 78CH Back side 15mm

DUT: PDX-213-K1; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.825$ S/m; $\epsilon_r = 40.587$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0275 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8410 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.00962 W/kg

Maximum value of SAR (measured) = 0.0276 W/kg

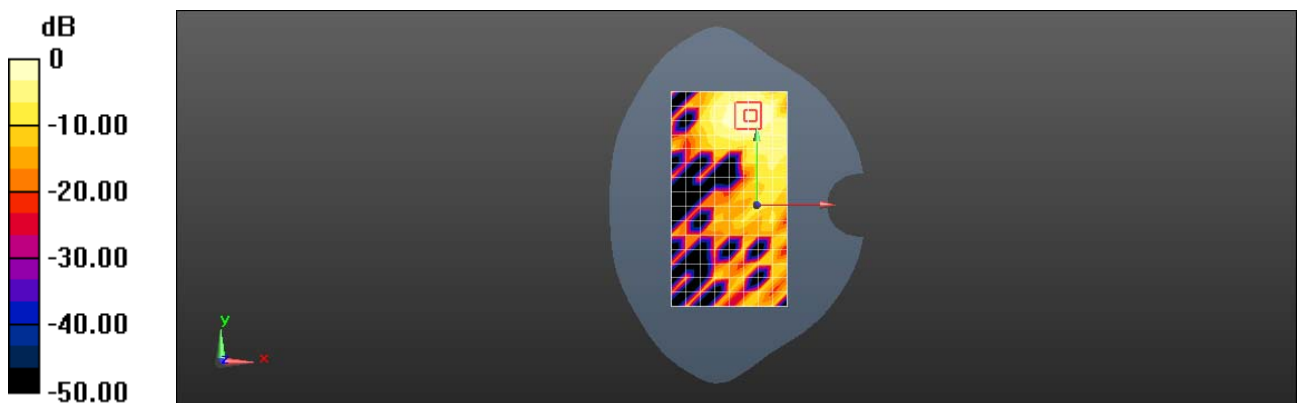

0 dB = 0.0276 W/kg = -15.59 dBW/kg

Test Laboratory: SGS-SAR Lab

PDX-213-K1 Bluetooth DH5 78CH Back side 10mm

DUT: PDX-213-K1; Type: Mobile Phone; Serial: 005129ADNVM2

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.825$ S/m; $\epsilon_r = 40.587$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/07/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2020/03/03
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0688 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9090 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0705 W/kg

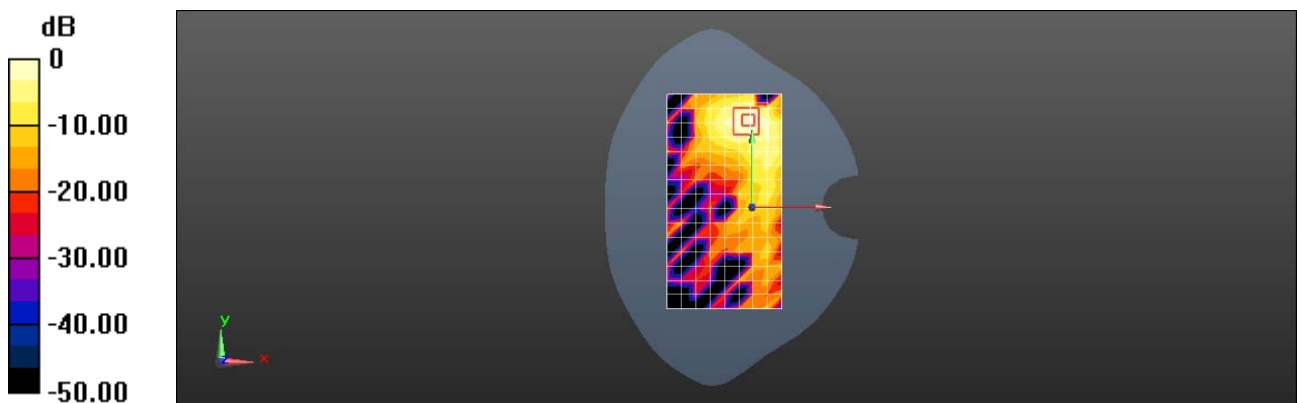

0 dB = 0.0705 W/kg = -11.52 dBW/kg