



FCC RF Test Report

APPLICANT : Sony Mobile Communications Inc.
EQUIPMENT : Smart phone
BRAND NAME : Sony
FCC ID : PY7-PM0952
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Feb. 04, 2016 and testing was completed on Mar. 04, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7-PM0952

Page Number : 1 of 38

Report Issued Date : May 26, 2016

Report Version : Rev. 03

Report Template No.: BU5-FR15CBT4.0 Version 1.2



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Modification of EUT	7
1.5 Testing Location	7
1.6 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Descriptions of Test Mode	8
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Peak Output Power Measurement	15
3.3 Power Spectral Density Measurement	16
3.4 Conducted Band Edges and Spurious Emission Measurement	21
3.5 Radiated Band Edges and Spurious Emission Measurement	26
3.6 AC Conducted Emission Measurement.....	31
3.7 Antenna Requirements.....	35
4 LIST OF MEASURING EQUIPMENT.....	36
5 UNCERTAINTY OF EVALUATION.....	38
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR620405B	Rev. 01	Initial issue of report	Apr. 28, 2016
FR620405B	Rev. 02	Detail changes list as below : 1. Updating EUT information in section 1.3 2. Revising Bluetooth version from 4.0 to 4.1	May 10, 2016
FR620405B	Rev. 03	Adjust band edge and fundamental plot position in appendix C.	May 26, 2016



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(1)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.31 dB at 2493.040 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.90 dB at 0.478 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

1.2 Manufacturer

Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII, a/b/g/n, GPS and NFC

Product Specification subjective to this standard				
Antenna Type		Bluetooth LE : PIFA Antenna type with gain -2.30 dBi		
EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
004402455816987	A	36.0.A.1.28	WUJ01M8LEX	RF conducted measurement
004402455814016			WUJ01M8BA5	Radiated Spurious Emission
004402455814008			WUJ01M8BA4	Conducted Emission



Accessory List	
AC Adapter	Model No. : UCH20
	Type No. : AC-0060-US
	S/N :
	1315W52500072 (for radiated spurious emission) 1315W52500025 (for conducted emission)
Earphone	Model No. : MH410c
	Type No. : AG-1110
	S/N :
	1435204403A9122 (for radiated spurious emission) 14321E5F00817B2 (for conducted emission)
USB Cable	Model No. : UCB16
	Type No. : AI-0142
	S/N :
	1602A901000542E (for radiated spurious emission) 1602A90A000378C (for conducted emission)

Note:

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH05-HY	CO05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.1 – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	0.17 dBm
Ch19	2440MHz	1.10 dBm
Ch39	2480MHz	0.40 dBm

- The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.1 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + Camera + Earphone + USB Cable (Charging from Adapter)

2.3 Connection Diagram of Test System

<Bluetooth 4.1 – LE Tx Mode>

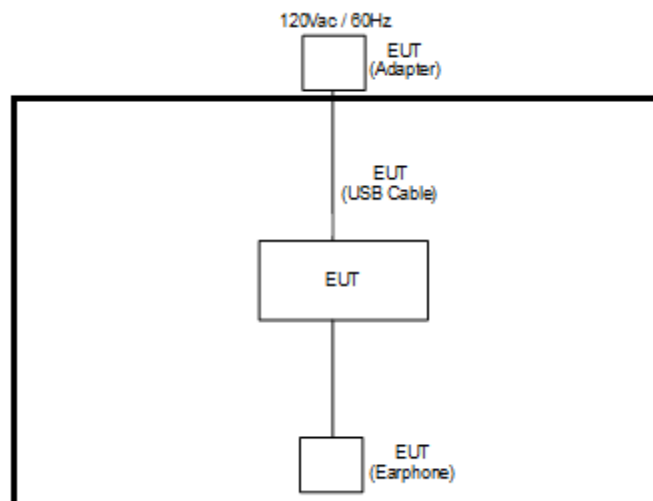

<AC Conducted Emission Mode>

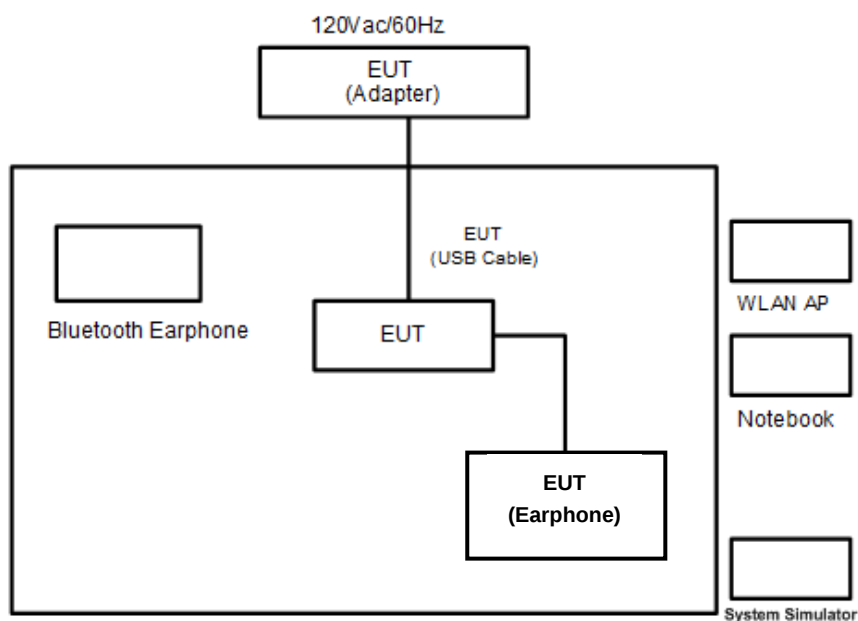

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-865L	KA2IR865LA1	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Samsung	SBH20	PY7-RD0010	Unshielded, 0.75 m	N/A
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth LE RF test items, an engineering test program was provided and enabled to make EUT transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

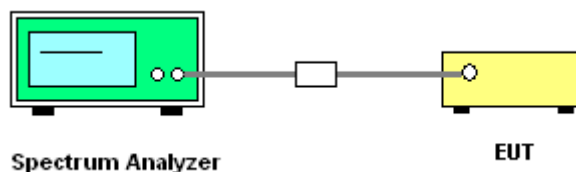


3.1.5 Test Result of 6dB Bandwidth

Test data refer to Appendix A.




6 dB Bandwidth Plot on Channel 00

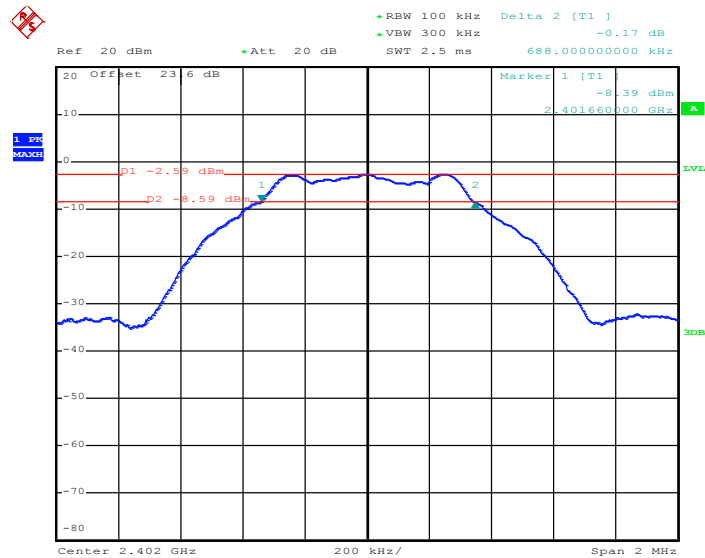

Date: 9.FEB.2016 09:20:16


6 dB Bandwidth Plot on Channel 19

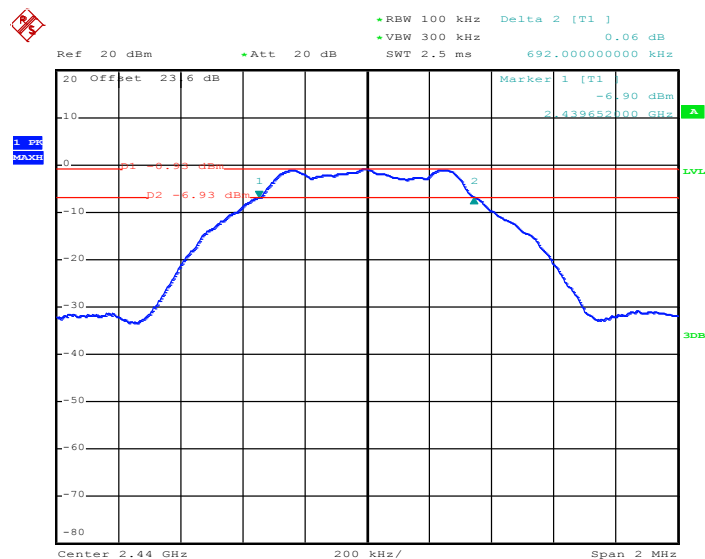

Date: 9.FEB.2016 09:37:44



6 dB Bandwidth Plot on Channel 39

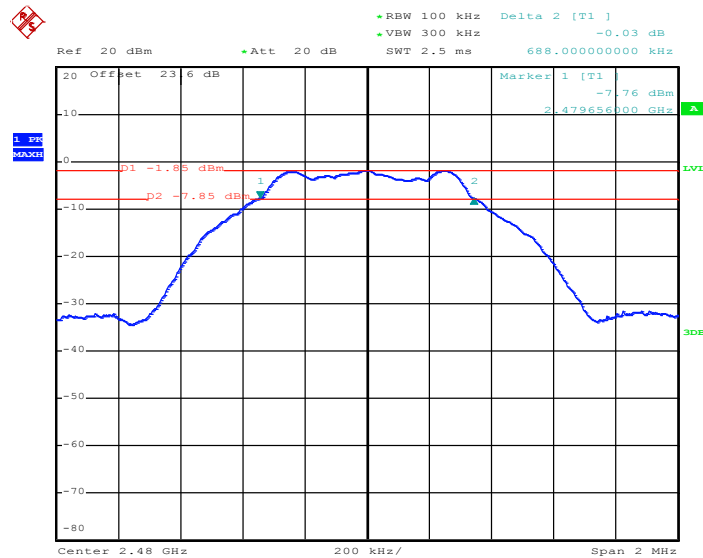


Date: 9.FEB.2016 09:41:33

3.1.6 Test Result of 99% Occupied Bandwidth

Test data refer to Appendix A.


99% Bandwidth Plot on Channel 00

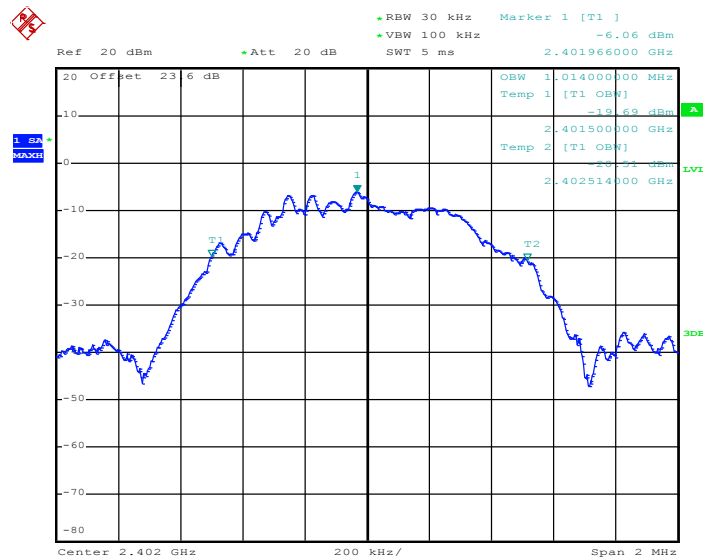

Date: 9.FEB.2016 09:22:14




99% Occupied Bandwidth Plot on Channel 19

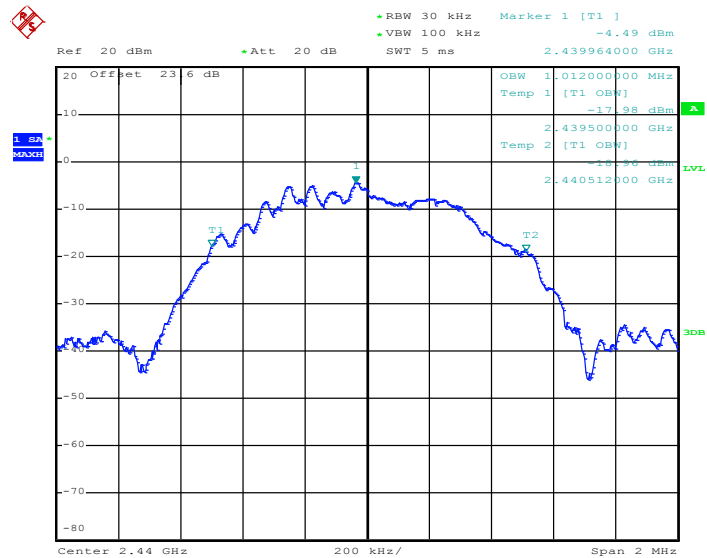

Date: 9.FEB.2016 09:39:25

99% Occupied Bandwidth Plot on Channel 39

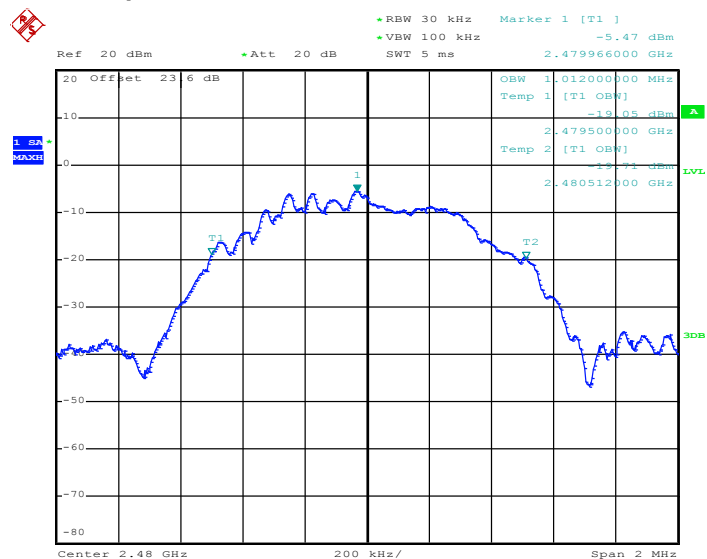

Date: 9.FEB.2016 09:43:15

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

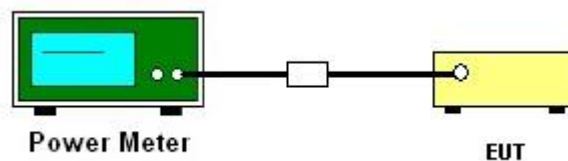

3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

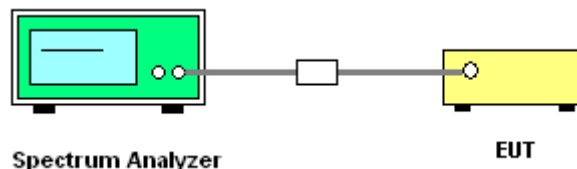


3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 00

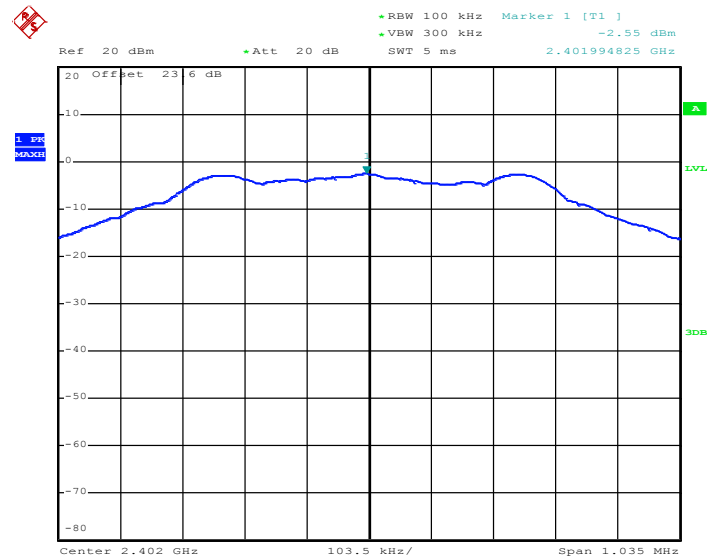

Date: 9.FEB.2016 09:20:49


PSD 100kHz Plot on Channel 19

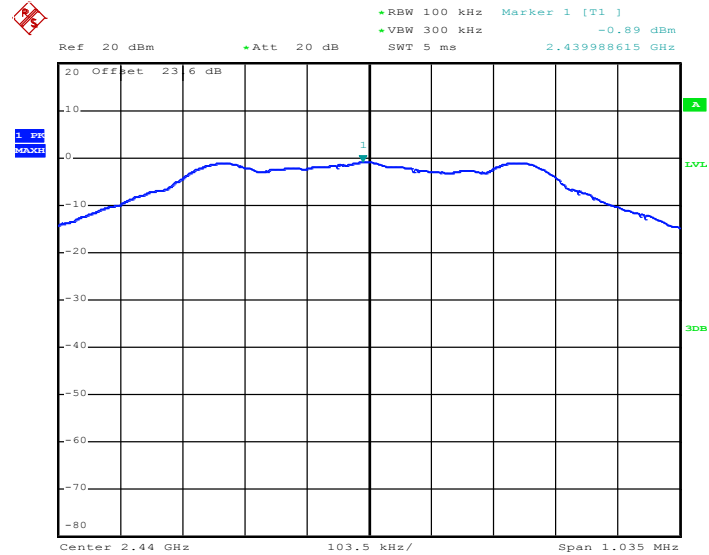

Date: 9.FEB.2016 09:38:11



PSD 100kHz Plot on Channel 39

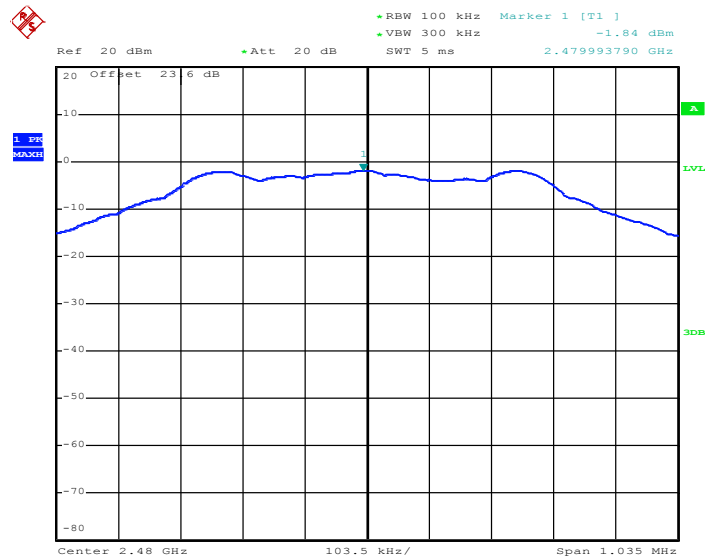


Date: 9.FEB.2016 09:42:04




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 00

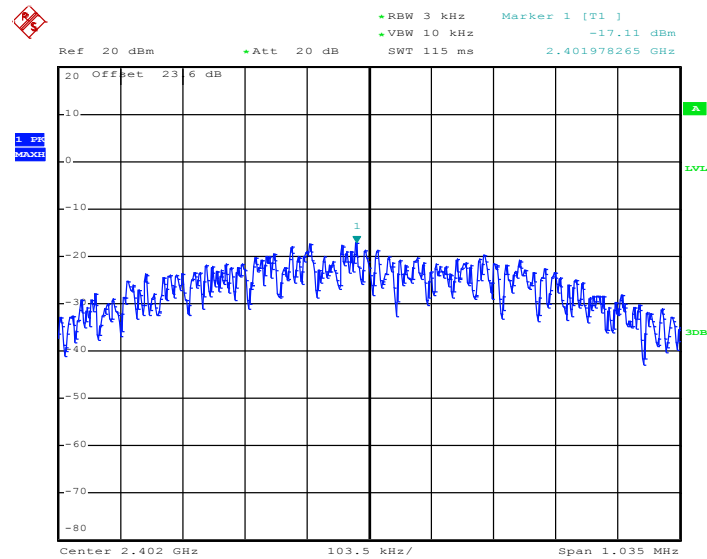

Date: 9.FEB.2016 09:20:29


PSD 3kHz Plot on Channel 19

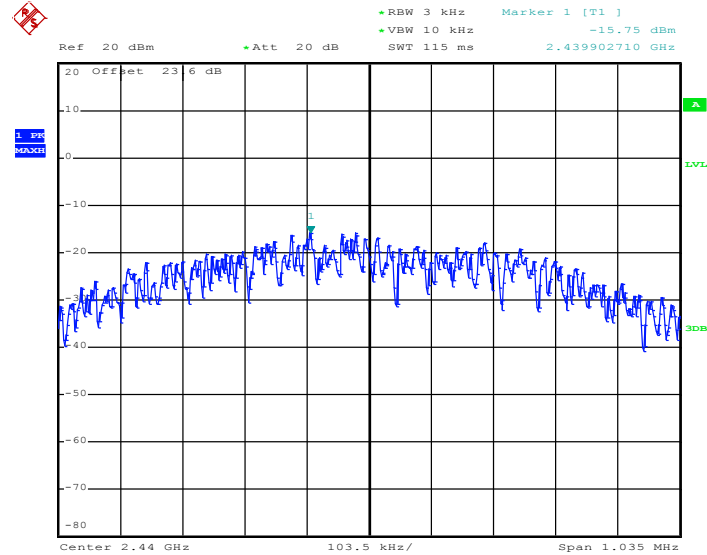

Date: 9.FEB.2016 09:37:57



PSD 3kHz Plot on Channel 39

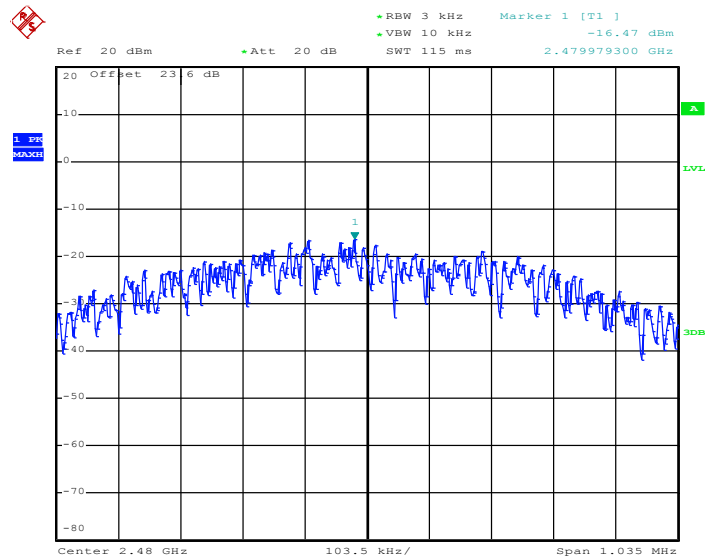

Date: 9.FEB.2016 09:41:43

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

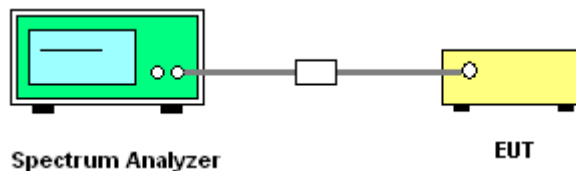


3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 00

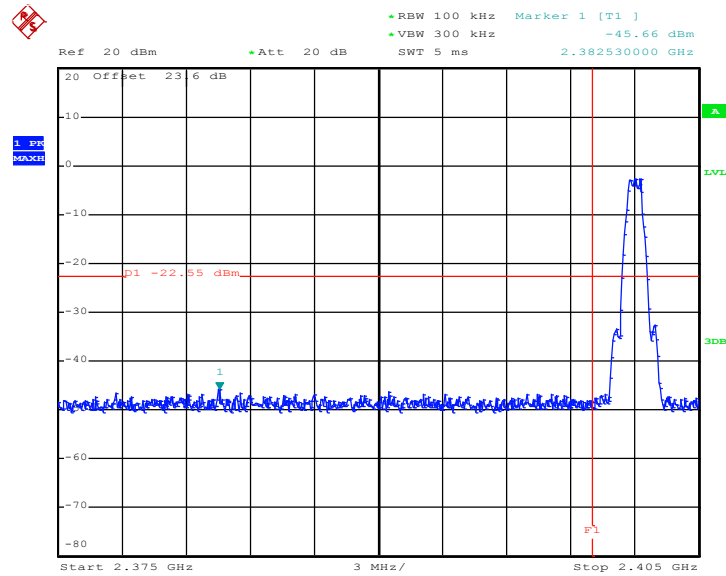

Date: 9.FEB.2016 09:21:04

High Band Edge Plot on Channel 39

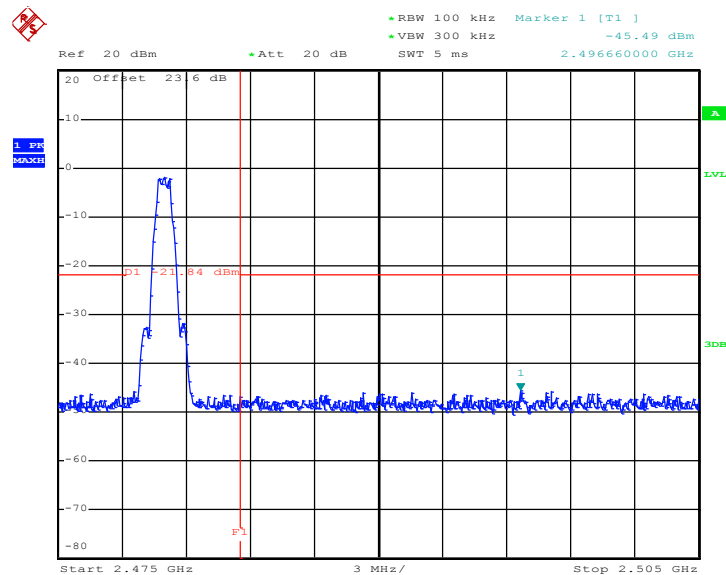


Date: 9.FEB.2016 09:42:25




3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

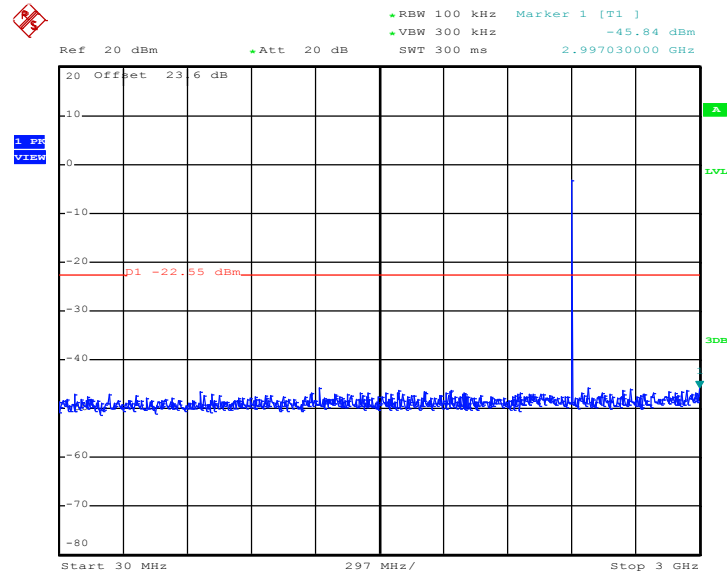

Date: 9.FEB.2016 09:21:18


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

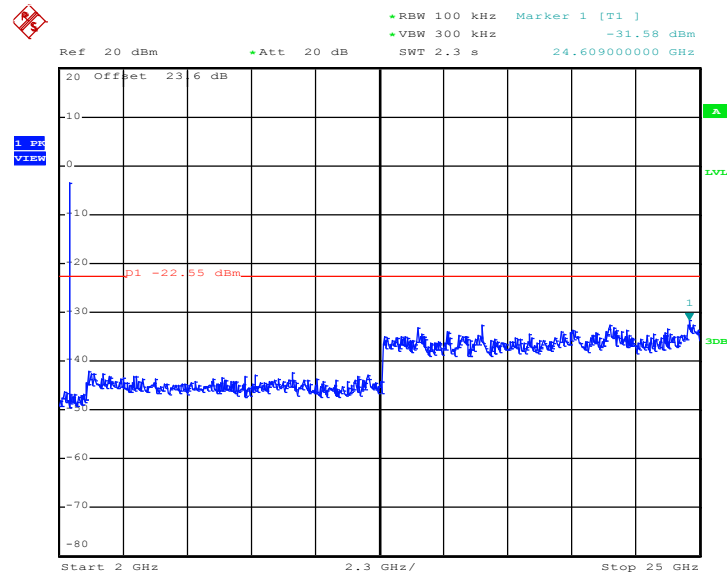

Date: 9.FEB.2016 09:21:26




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

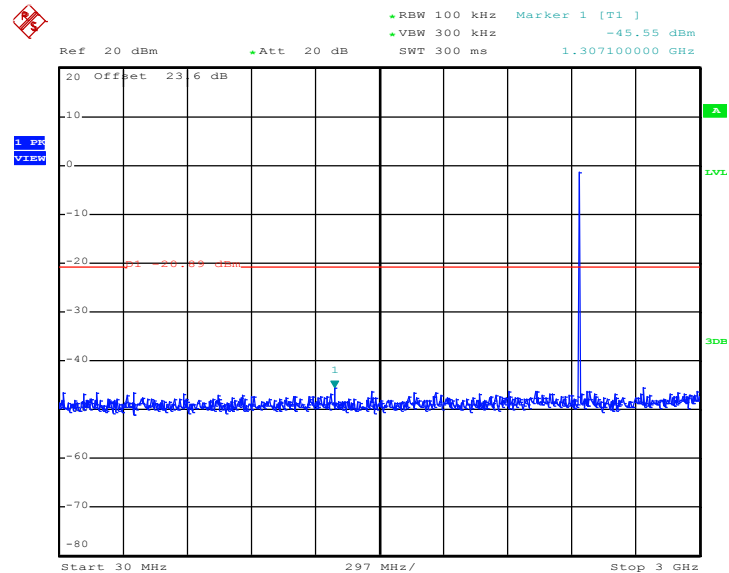

Date: 9.FEB.2016 09:38:45


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

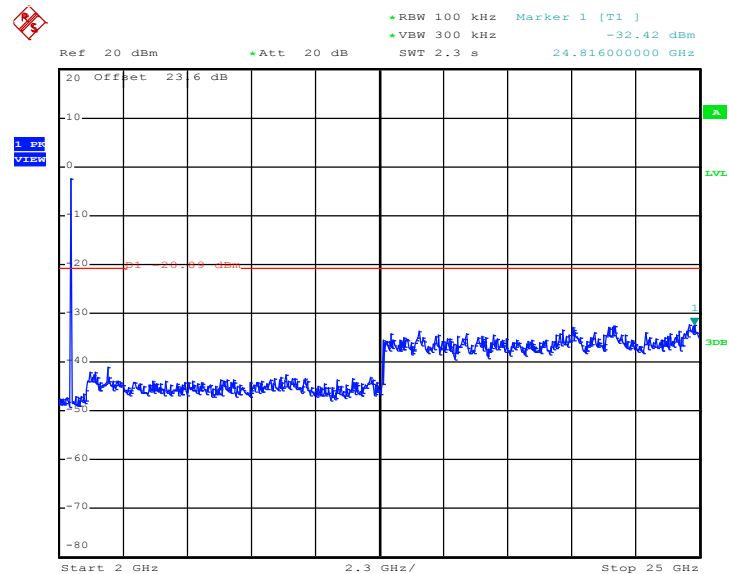

Date: 9.FEB.2016 09:38:53




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

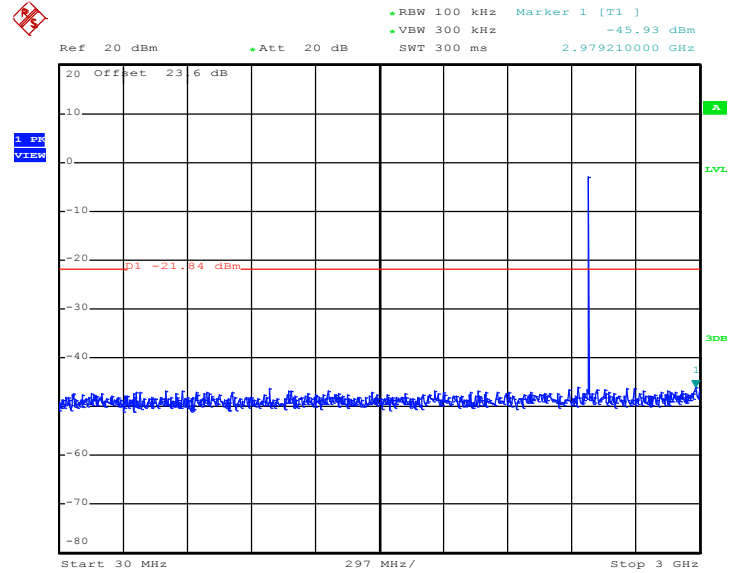

Date: 9.FEB.2016 09:42:40

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

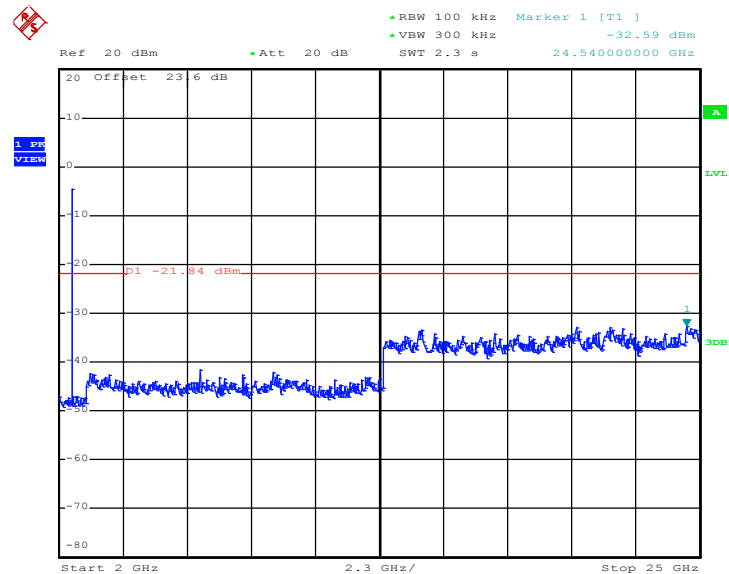

Date: 9.FEB.2016 09:42:48



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μ s)	1/T(kHz)	VBW Setting
Bluetooth 4.1 - LE	59.62	372.00	2.69	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

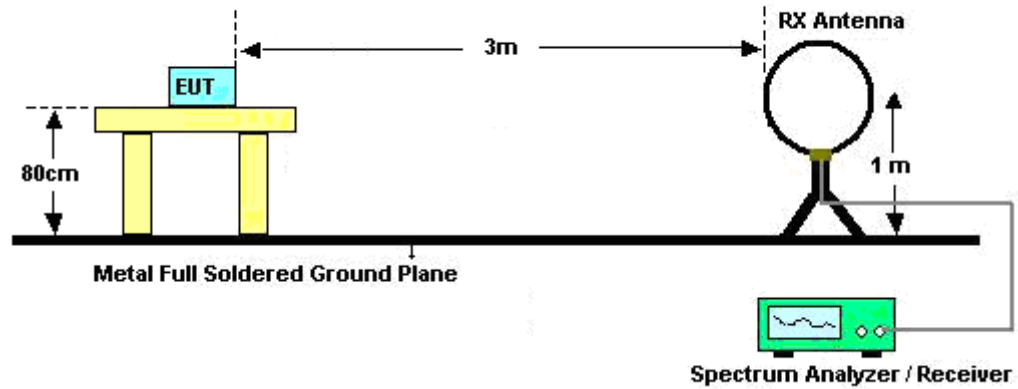

For radiated emissions from 30MHz to 1GHz

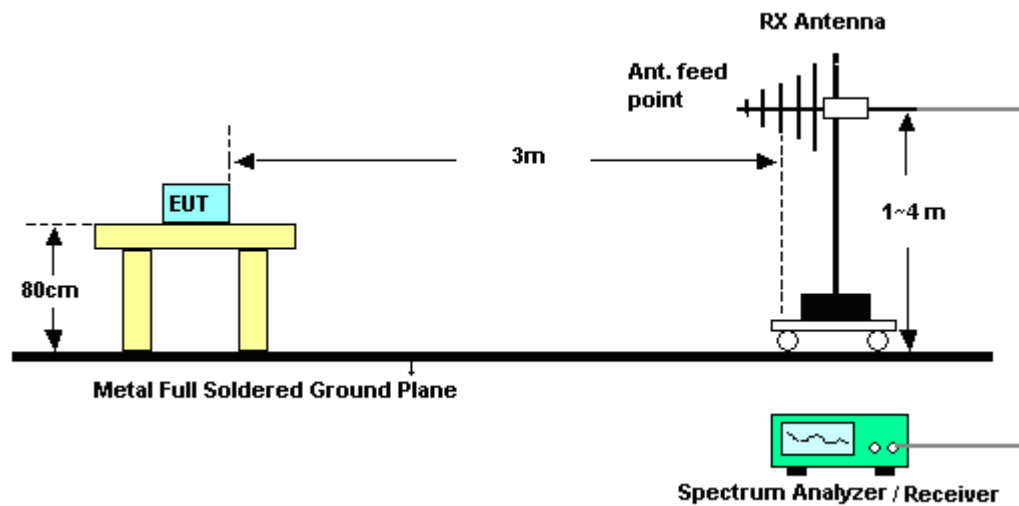

For radiated emissions above 1GHz

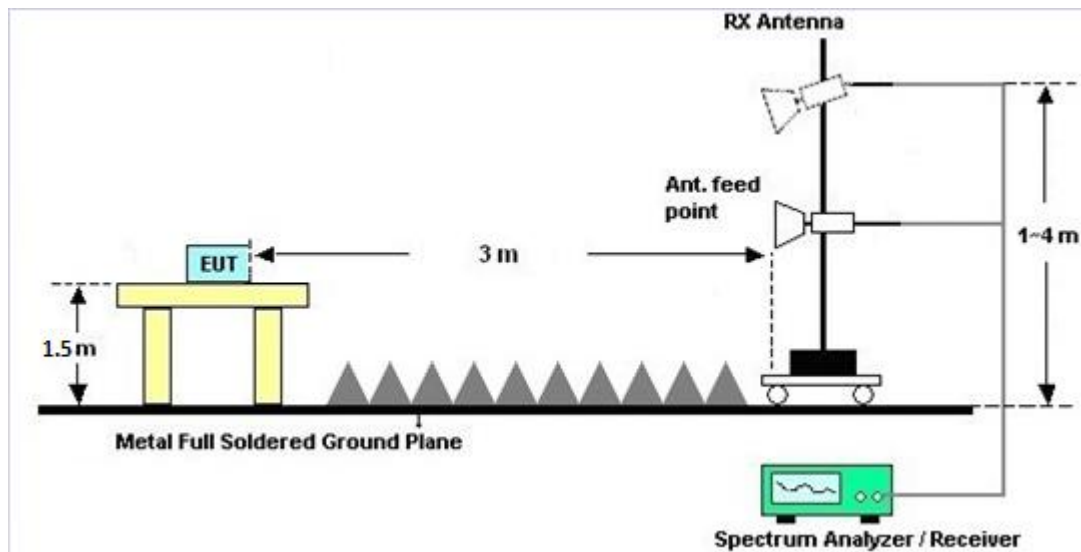

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges


Please refer to Appendix B and C.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.5.8 Duty Cycle

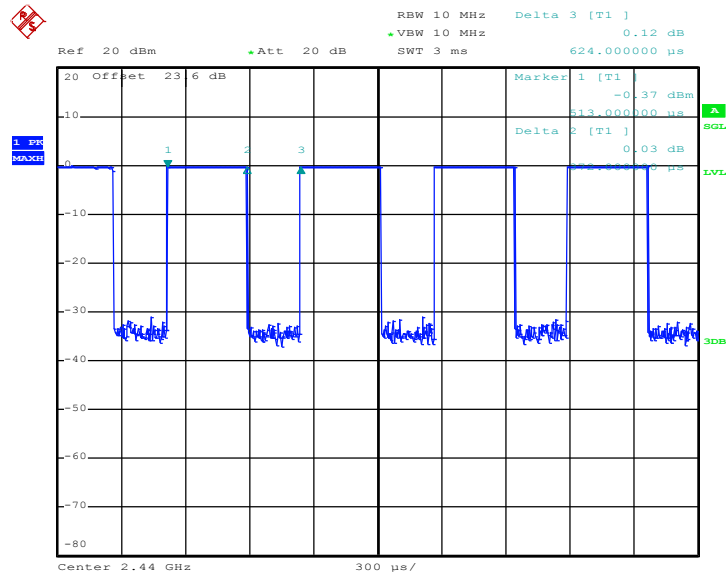

Date: 8.FEB.2016 10:38:37

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

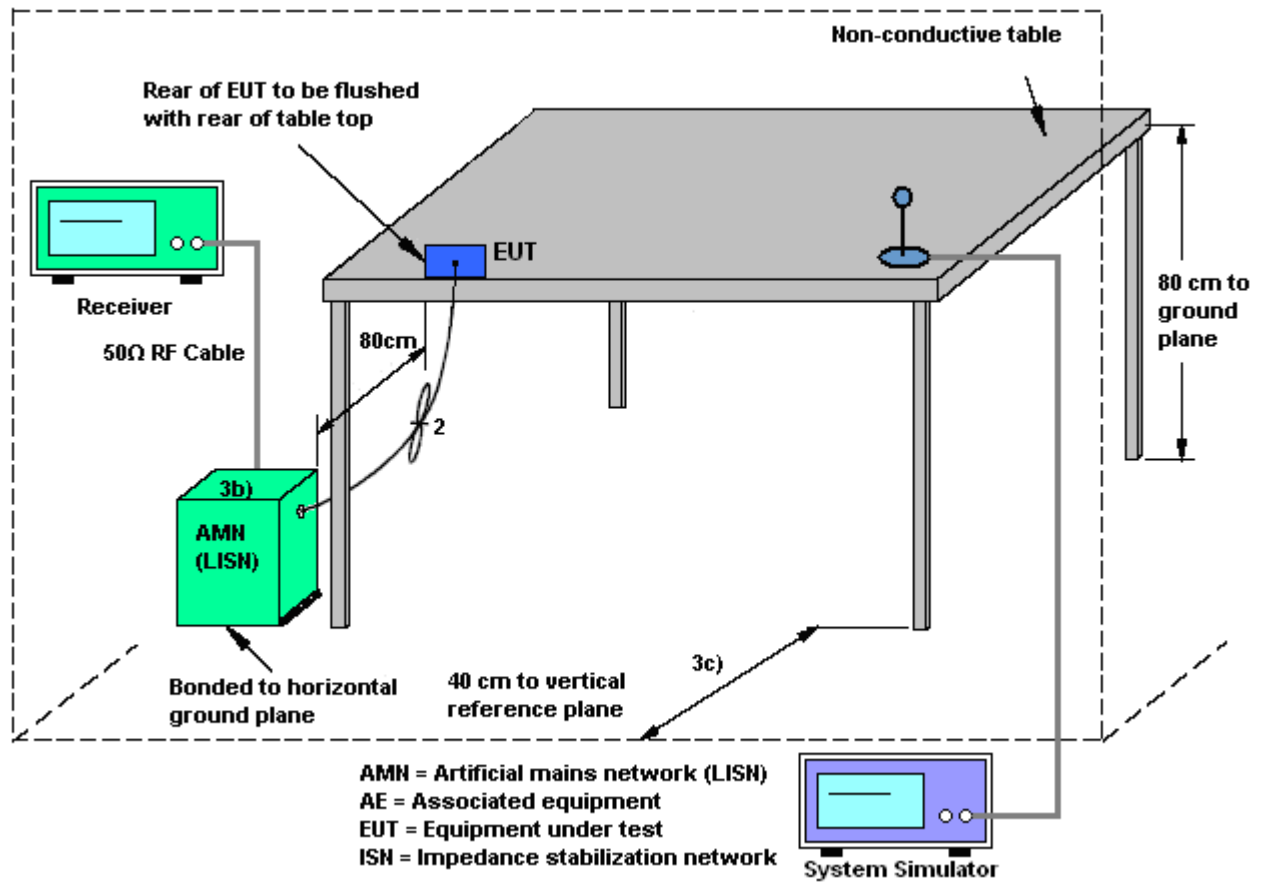

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	23~24℃
Test Engineer :	Kai-Chun Chu	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + Camera + Earphone + USB Cable (Charging from Adapter)		

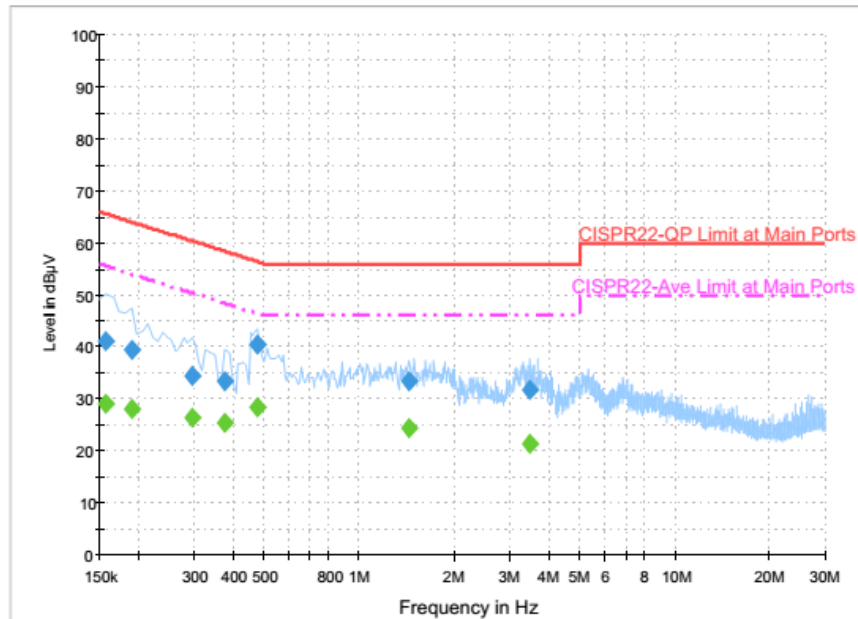


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	41.3	Off	L1	19.6	24.3	65.6
0.190000	39.5	Off	L1	19.6	24.5	64.0
0.294000	34.5	Off	L1	19.6	25.9	60.4
0.374000	33.4	Off	L1	19.6	25.0	58.4
0.478000	40.5	Off	L1	19.6	15.9	56.4
1.446000	33.3	Off	L1	19.6	22.7	56.0
3.494000	31.7	Off	L1	19.6	24.3	56.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	29.0	Off	L1	19.6	26.6	55.6
0.190000	28.0	Off	L1	19.6	26.0	54.0
0.294000	26.4	Off	L1	19.6	24.0	50.4
0.374000	25.5	Off	L1	19.6	22.9	48.4
0.478000	28.5	Off	L1	19.6	17.9	46.4
1.446000	24.5	Off	L1	19.6	21.5	46.0
3.494000	21.4	Off	L1	19.6	24.6	46.0

Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + Camera + Earphone + USB Cable (Charging from Adapter)		

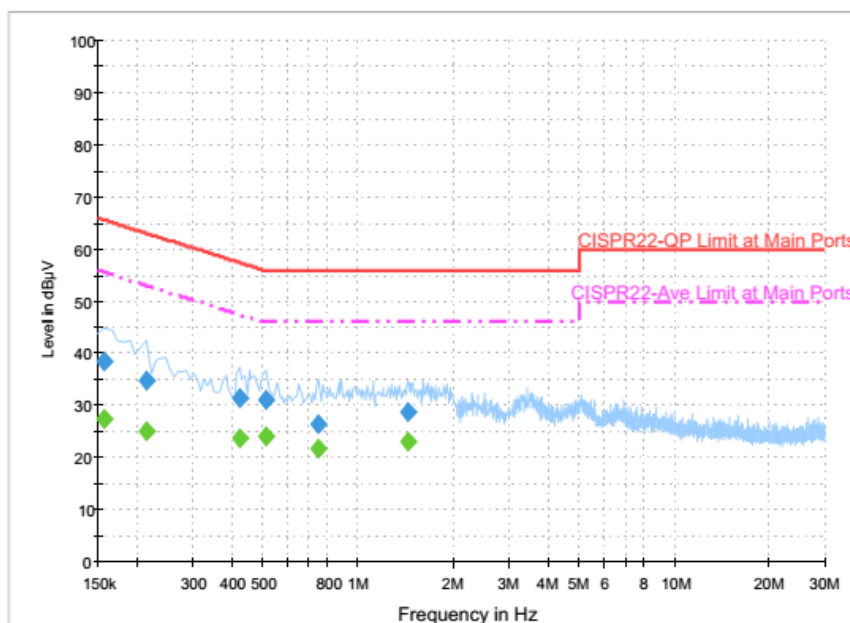
Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	38.5	Off	N	19.6	27.1	65.6
0.214000	34.7	Off	N	19.6	28.3	63.0
0.422000	31.4	Off	N	19.6	26.0	57.4
0.510000	31.1	Off	N	19.6	24.9	56.0
0.750000	26.4	Off	N	19.6	29.6	56.0
1.438000	28.7	Off	N	19.6	27.3	56.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	27.4	Off	N	19.6	28.2	55.6
0.214000	25.2	Off	N	19.6	27.8	53.0
0.422000	23.7	Off	N	19.6	23.7	47.4
0.510000	24.1	Off	N	19.6	21.9	46.0
0.750000	21.8	Off	N	19.6	24.2	46.0
1.438000	23.1	Off	N	19.6	22.9	46.0



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Jan. 08, 2016	Feb. 08, 2016 ~ Mar. 04, 2016	Jan. 07, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Jan. 07, 2016	Feb. 08, 2016 ~ Mar. 04, 2016	Jan. 06, 2017	Conducted (TH05-HY)
Hygrometer	Testo	608-H2	41410069	N/A	Aug. 27, 2015	Feb. 08, 2016 ~ Mar. 04, 2016	Aug. 26, 2016	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 23, 2015	Feb. 08, 2016 ~ Mar. 04, 2016	Nov. 22, 2016	Conducted (TH05-HY)
RF Cable	JYEBAO	K30K30-500 3-1.5M40	N/A	0.1MHz~40GHz	Mar. 18, 2015	Feb. 08, 2016 ~ Mar. 04, 2016	Mar. 17, 2016	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Feb. 22, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 26, 2015	Feb. 22, 2016	Aug. 25, 2016	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Apr. 20, 2015	Feb. 22, 2016	Apr. 19, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Feb. 22, 2016	Dec. 01, 2016	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 06, 2016	Feb. 22, 2016	Jan. 05, 2017	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	Feb. 22, 2016	N/A	Conduction (CO05-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D	35419	30MHz to 1GHz	Jan. 13, 2016	Feb. 23, 2016 ~ Feb. 26, 2016	Jan. 12, 2017	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 21, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	Aug. 20, 2016	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz- 40GHz	Oct. 12, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	Oct. 11, 2016	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	Sep. 01, 2016	Radiation (03CH07-HY)
Hygrometer	Testo	608-H1	34897197	N/A	May 04, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	May 03, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00 101800-30-1 0P	1590075	1GHz ~ 18GHz	Apr. 20, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	Apr. 19, 2016	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1000MHz	Mar. 12, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	Mar. 11, 2016	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 19, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	Oct. 18, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-18004 000-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	Jun. 01, 2016	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Mar. 03, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	Mar. 02, 2016	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Feb. 23, 2016 ~ Feb. 26, 2016	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF780208368	Control Ant Mast	N/A	Feb. 23, 2016 ~ Feb. 26, 2016	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Feb. 23, 2016 ~ Feb. 26, 2016	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 degree	N/A	Feb. 23, 2016 ~ Feb. 26, 2016	N/A	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	9KHz~40GHz	Dec. 03, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	Dec. 02, 2016	Radiation (03CH07-HY)
EMI Test Receiver	Agilent Technologies	N9038A(MXE)	MY53290045	20MHz~8.4GHz	Feb. 01, 2016	Feb. 23, 2016 ~ Feb. 26, 2016	Jan. 31, 2017	Radiation (03CH07-HY)
Test Software	N/A	E3	6.2009-8-24 (sporton)	N/A	N/A	Feb. 23, 2016 ~ Feb. 26, 2016	N/A	Radiation (03CH07-HY)
Filter	Wainwright	WLKS1200-8SS	SN3	1.2G Low Pass	Oct. 01, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	Sep. 30, 2016	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Oct. 01, 2015	Feb. 23, 2016 ~ Feb. 26, 2016	Sep. 30, 2016	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
--	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.60
--	------



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Luffy Lin	Temperature:	21~25	°C
Test Date:	2016/02/08 ~ 2016/03/04	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.01	0.69	0.50	Pass
BLE	1Mbps	1	19	2440	1.01	0.69	0.50	Pass
BLE	1Mbps	1	39	2480	1.01	0.69	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.17	30.00	-2.30	-2.13	36.00	Pass
BLE	1Mbps	1	19	2440	1.10	30.00	-2.30	-1.20	36.00	Pass
BLE	1Mbps	1	39	2480	0.40	30.00	-2.30	-1.90	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.25	-0.57
BLE	1Mbps	1	19	2440	2.25	0.57
BLE	1Mbps	1	39	2480	2.25	-0.31

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-2.55	-17.11	-2.30	8.00	Pass
BLE	1Mbps	1	19	2440	-0.89	-15.75	-2.30	8.00	Pass
BLE	1Mbps	1	39	2480	-1.84	-16.47	-2.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

Test Engineer :	Ken Wu, James Chiu, and Jesse Wang	Temperature :	21~24°C
		Relative Humidity :	50~54%

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2373	55.58	-18.42	74	50.54	32.16	7.24	34.36	100	284	P	H
		2388.21	46.3	-7.7	54	41.17	32.18	7.31	34.36	100	284	A	H
	*	2402	91.27	-	-	86.1	32.18	7.31	34.32	100	284	P	H
	*	2402	90.68	-	-	85.51	32.18	7.31	34.32	100	284	A	H
													H
													H
		2321.7	55.63	-18.37	74	50.8	32.09	7.18	34.44	306	173	P	V
		2381.73	46.41	-7.59	54	41.3	32.16	7.31	34.36	306	173	A	V
	*	2402	87.37	-	-	82.2	32.18	7.31	34.32	306	173	P	V
	*	2402	86.69	-	-	81.52	32.18	7.31	34.32	306	173	A	V
													V
													V
		2378.76	55.61	-18.39	74	50.57	32.16	7.24	34.36	102	354	P	H
		2372.1	46.23	-7.77	54	41.19	32.16	7.24	34.36	102	354	A	H
BLE CH 19 2440MHz	*	2440	94.1	-	-	88.77	32.24	7.36	34.27	102	354	P	H
	*	2440	93.55	-	-	88.22	32.24	7.36	34.27	102	354	A	H
		2497.4	56.99	-17.01	74	51.44	32.3	7.4	34.15	102	354	P	H
		2489.68	46.67	-7.33	54	41.16	32.3	7.4	34.19	102	354	A	H
		2320.71	55.75	-18.25	74	50.92	32.09	7.18	34.44	300	0	P	V
		2373.63	46.37	-7.63	54	41.33	32.16	7.24	34.36	300	0	A	V
	*	2440	88.88	-	-	83.55	32.24	7.36	34.27	300	0	P	V
	*	2440	88.27	-	-	82.94	32.24	7.36	34.27	300	0	A	V
		2495.04	55.99	-18.01	74	50.44	32.3	7.4	34.15	300	0	P	V
		2493.04	46.69	-7.31	54	41.14	32.3	7.4	34.15	300	0	A	V



BLE CH 39 2480MHz	*	2479.83	92.2	-	-	86.71	32.28	7.4	34.19	100	292	P	H
	*	2479.99	91.87	-	-	86.38	32.28	7.4	34.19	100	292	A	H
		2493.96	55.65	-18.35	74	50.1	32.3	7.4	34.15	100	292	P	H
		2490.68	46.34	-7.66	54	40.83	32.3	7.4	34.19	100	292	A	H
													H
													H
	*	2479.91	88.05	-	-	82.56	32.28	7.4	34.19	380	156	P	V
	*	2479.99	87.77	-	-	82.28	32.28	7.4	34.19	380	156	A	V
		2497.04	55.26	-18.74	74	49.71	32.3	7.4	34.15	380	156	P	V
		2492.88	46.33	-7.67	54	40.78	32.3	7.4	34.15	380	156	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	41.89	-32.11	74	55.48	34.25	11.83	59.67	100	0	P	H
													H
													H
													H
		4804	42.21	-31.79	74	55.8	34.25	11.83	59.67	100	0	P	V
													V
													V
													V
BLE CH 19 2440MHz		4880	39.99	-34.01	74	53.73	34.3	11.53	59.57	100	0	P	H
		7320	41.35	-32.65	74	50.43	35.6	13.81	58.49	100	0	P	H
													H
													H
		4880	40.56	-33.44	74	54.3	34.3	11.53	59.57	100	0	P	V
		7320	40.72	-33.28	74	49.8	35.6	13.81	58.49	100	0	P	V
													V
													V
BLE CH 39 2480MHz		4960	42.14	-31.86	74	56	34.37	11.22	59.45	100	0	P	H
		7440	41.8	-32.2	74	50.79	35.6	14.05	58.64	100	0	P	H
													H
													H
		4960	40.4	-33.6	74	54.26	34.37	11.22	59.45	100	0	P	V
		7440	41.68	-32.32	74	50.67	35.6	14.05	58.64	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz BLE LF		30	28.4	-11.6	40	32.83	26	1.07	31.5	100	0	P	H
		159.33	26.01	-17.49	43.5	38.36	17.07	1.78	31.2	-	-	P	H
		237.63	22.61	-23.39	46	33.7	17.84	2.07	31	-	-	P	H
		479.2	25.88	-20.12	46	29.91	23.73	3.04	30.8	-	-	P	H
		706.7	29.77	-16.23	46	29.92	26.51	3.74	30.4	-	-	P	H
		973.4	33.42	-20.58	54	29.41	30.25	4.07	30.31	-	-	P	H
													H
													H
													H
													H
													H
													H
		31.08	30.53	-9.47	40	35.46	25.46	1.07	31.46	100	0	P	V
		63.48	24.87	-15.13	40	42.55	12.28	1.28	31.24	-	-	P	V
		170.4	23.43	-20.07	43.5	36.8	15.95	1.78	31.1	-	-	P	V
		470.1	25.97	-20.03	46	30.19	23.54	3.04	30.8	-	-	P	V
		774.6	31.13	-14.87	46	30.21	27.45	3.82	30.35	-	-	P	V
		989.5	35.16	-18.84	54	31.14	30.28	3.98	30.24	-	-	P	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plot

Test Engineer :	Ken Wu, James Chiu, and Jesse Wang	Temperature :	21~24°C
		Relative Humidity :	50~54%

Note symbol

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz
BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The measured signal (blue line) is below this limit, with a peak at approximately 2375 MHz reaching about 58.5 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 620405 Mode : 11	Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The measured signal (blue line) is below this limit, with a peak at approximately 2375 MHz reaching about 58.5 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 620405 Mode : 11
Avg.	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B (AVG) limit at 73.1 dBuV/m. The measured signal (blue line) is below this limit, with a peak at approximately 2375 MHz reaching about 58.5 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 620405 Mode : 11	Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B (AVG) limit at 73.1 dBuV/m. The measured signal (blue line) is below this limit, with a peak at approximately 2375 MHz reaching about 58.5 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 620405 Mode : 11



BLE	2.4GHz 2400~2483.5MHz Fundamental @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak	Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a sharp peak at 2402 MHz, reaching approximately 87.8 dBuV/m, which is above the FCC CLASS-B limit of 73.1 dBuV/m. The background noise floor is around 58.5 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 11	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a sharp peak at 2402 MHz, reaching approximately 87.8 dBuV/m, which is above the FCC CLASS-B limit of 73.1 dBuV/m. The background noise floor is around 58.5 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 11
Avg	Horizontal Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a sharp peak at 2402 MHz, reaching approximately 87.8 dBuV/m, which is above the FCC CLASS-B (AVG) limit of 58.5 dBuV/m. The background noise floor is around 43.8 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 11	Vertical Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a sharp peak at 2402 MHz, reaching approximately 87.8 dBuV/m, which is above the FCC CLASS-B (AVG) limit of 58.5 dBuV/m. The background noise floor is around 43.8 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 11



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Horizontal	Vertical
Peak	Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a peak at 2440 MHz. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 620405 Mode : 12	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a peak at 2440 MHz. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 620405 Mode : 12
Avg.	Horizontal Avg Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows the average level across the frequency band. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B (AVG) limit at approximately 58.5 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 620405 Mode : 12	Vertical Avg Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows the average level across the frequency band. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B (AVG) limit at approximately 58.5 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 620405 Mode : 12



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Vertical
Peak	Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue signal trace with a peak at 2440 MHz. A red horizontal line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 0 to 117 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 620405 Mode : 12	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue signal trace with a peak at 2440 MHz. A red horizontal line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 0 to 117 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 620405 Mode : 12
Avg.	Horizontal Avg Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue signal trace with a peak at 2440 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at approximately 73.1 dBuV/m. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 0 to 117 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 620405 Mode : 12	Vertical Avg Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue signal trace with a peak at 2440 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at approximately 73.1 dBuV/m. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 0 to 117 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 620405 Mode : 12



BLE	2.4GHz 2400~2483.5MHz Fundamental @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak	Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a sharp peak at 2440 MHz, exceeding the FCC CLASS-B limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2400 to 2483.5 MHz. A red line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 12	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a sharp peak at 2440 MHz, exceeding the FCC CLASS-B limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2400 to 2483.5 MHz. A red line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 12
Avg.	Horizontal Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a sharp peak at 2440 MHz, exceeding the FCC CLASS-B (AVG) limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2400 to 2483.5 MHz. A red line indicates the FCC CLASS-B (AVG) limit at approximately 58.5 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 12	Vertical Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a sharp peak at 2440 MHz, exceeding the FCC CLASS-B (AVG) limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2400 to 2483.5 MHz. A red line indicates the FCC CLASS-B (AVG) limit at approximately 58.5 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 12



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a peak at 2480 MHz, exceeding the FCC CLASS-B limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 620405 Mode : 13	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a peak at 2480 MHz, exceeding the FCC CLASS-B limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 620405 Mode : 13
Avg.	Horizontal Avg. Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a peak at 2480 MHz, exceeding the FCC CLASS-B (AVG) limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red line indicates the FCC CLASS-B (AVG) limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 620405 Mode : 13	Vertical Avg. Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a peak at 2480 MHz, exceeding the FCC CLASS-B (AVG) limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red line indicates the FCC CLASS-B (AVG) limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 620405 Mode : 13



BLE	2.4GHz 2400~2483.5MHz Fundamental @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a sharp peak at 2480 MHz, exceeding the FCC CLASS-B limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2400 to 2483.5 MHz. A red line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 13	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a sharp peak at 2480 MHz, exceeding the FCC CLASS-B limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2400 to 2483.5 MHz. A red line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 13
Avg.	Horizontal Avg Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a sharp peak at 2480 MHz, exceeding the FCC CLASS-B limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2400 to 2483.5 MHz. A red line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 13	Vertical Avg Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a sharp peak at 2480 MHz, exceeding the FCC CLASS-B limit. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2400 to 2483.5 MHz. A red line indicates the FCC CLASS-B limit at approximately 73.1 dBuV/m. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 620405 Mode : 13



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH07-4Y Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 620405 Mode : 11	Site : 03CH07-4Y Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 620405 Mode : 11





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak Avg.	117 102.4 87.8 73.9 58.5 43.9 29.3 14.6 0 Level (dBuV/m) Date: 2016-02-24 Frequency (MHz) Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 620405 Mode : 12	117 102.4 87.8 73.1 58.5 43.9 29.3 14.6 0 Level (dBuV/m) Date: 2016-02-24 Frequency (MHz) Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 620405 Mode : 12



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	Level (dBuV/m) Date: 2016-02-24 Frequency (MHz) Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 620405 Mode : 13	Level (dBuV/m) Date: 2016-02-24 Frequency (MHz) Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 620405 Mode : 13



Emission below 1GHz
2.4GHz BLE (LF)

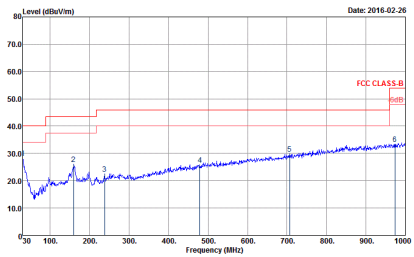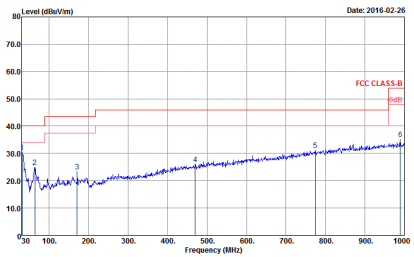BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH07-4HY Condition : FCC CLASS-B 3m LF-ANT:35419(6) HORIZONTAL Detector : Peak Project : 620405 Mode : 14	 Site : 03CH07-4HY Condition : FCC CLASS-B 3m LF-ANT:35419(6) VERTICAL Detector : Peak Project : 620405 Mode : 14