

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: IC 3463A-1
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
DAT-P-176/94-D1



Independent ETSI
compliance test house



Accredited Bluetooth® Test Facility (BQTF)

Test report no.	:	2-4530-03-03/06
Applicant	:	SonyEricsson Mobile Communications AB
Type	:	AAD-3022061-BV
Test Standard	:	FCC Part 15.247 RSS-210 Issue 6
FCC ID	:	PY7A3022061
Certification No. IC	:	4170B-A3022061

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license

Table of contents

1. ADMINISTRATIVE DATA	3
1.1. ADMINISTRATIVE DATA OF THE TEST FACILITY	3
1.1.1 Identification of the testing laboratory	3
1.1.2 Organizational items.....	3
1.1.3 Applicant's details	4
1.2 ADMINISTRATIVE DATA OF MANUFACTURER / MEMBER	4
1.3 DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
1.3.1 EUT: Type, S/N etc.	5
1.3.2 If RF component testing only, description of additional used HW/SW.....	5
1.3.3 Additional EUT information For IC Canada (appendix 2).....	6
1.3.4 EUT operating modes	7
1.3.5 Extreme conditions testing values.....	7
2. TESTSTANDARD & SUMMARY LIST OF ALL PERFORMED TEST CASES	8
3. RF MEASUREMENT TESTING	9
3.1 DESCRIPTION OF TEST SET-UP	9
3.1.1 Radiated measurements	9
3.1.2 Conducted measurements	9
3.2 REFERENCED DOCUMENTS.....	10
3.3 ADDITIONAL COMMENTS	10
3.4 ANTENNA GAIN	10
3.5 CARRIER FREQUENCY SEPARATION §15.247(A)(1)	11
3.6 NUMBER OF HOPPING CHANNELS §15.247(A)(1).....	12
3.7 TIME OF OCCUPANCY (DWELL TIME) §15.247(A)(1)(III).....	14
3.8 POWER SPECTRAL DENSITY (HYBRID SYSTEM IN INQUIRY MODE/PAGE SCAN) §15.247(E)	15
3.9 SPECTRUM BANDWIDTH OF A FHSS SYSTEM / 20dB BANDWITH §15.247(A)(1).....	16
3.10 MAXIMUM OUTPUT POWER (CONDUCTED) § 15.247 (B)(1)	25
3.11 MAX. PEAK OUTPUT POWER (RADIATED) § 15.247 (B)(1)	34
3.12 BAND-EDGE COMPLIANCE OF CONDUCTED EMISSIONS §15.247 (D)	35
3.13 BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS §15.205	39
3.14 SPURIOUS EMISSIONS - CONDUCTED (TRANSMITTER) § 15.247 (C)(1)	43
3.15 SPURIOUS EMISSIONS > 30 MHz- RADIATED (TRANSMITTER) § 15.247 (C)(1)	46
3.16 SPURIOUS EMISSIONS - RADIATED (RECEIVER) § 15.109	50
3.17 SPURIOUS EMISSIONS < 30 MHz - TRANSMITTER RADIATED § 15.209	52
3.17 SPURIOUS EMISSIONS < 30 MHz - TRANSMITTER RADIATED § 15.209	52
3.18 CONDUCTED EMISSIONS <30 MHz § 15.107/207	53
4 PHOTOGRAPHS OF TEST SET-UP	56
5 PHOTOGRAPHS OF EUT	59


ANNEX 1: TECHNICAL PRODUCT DESCRIPTION

1. Administrative data

1.1. Administrative data of the test facility

1.1.1 Identification of the testing laboratory


Company name:	Cetecom ICT Services GmbH
Address:	Untertürkheimerstr. 6-10 D-66117 Saarbruecken Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-176/94-D1 Bluetooth Qualification Test Facility (BQTF)
Responsible for testing laboratory:	Michael Berg Phone: +49 681 598 0 Fax: +49 681 598 9075 email: info@ict.cetecom.de

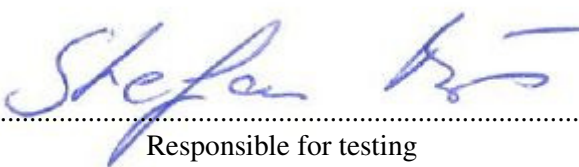
.....
Responsible for testing
(Stefan Bös)

1.1.2 Organizational items

Reference No.:	2-4530-03-03/06
Receipt of EUT:	2007-02-07
Date(s) of test:	2007-02-07 to 2007-02-14
Date of report:	2007-02-14
Number of report pages:	66

Version of template:	1.8


.....
Responsible for laboratory
(Michael Berg)

CETECOM ICT Services GmbH

Untertürkheimer Str. 6-10, 66117 Saarbruecken
RSC-Laboratory

Phone: +49 (0) 681 598-0
Phone: +49 (0) 681 598-0

Fax: -9075
Fax: -9075

Test report no.: 2-4530-03-03/06

Date: 2007-02-14

Page 4 of 66

Note:

The test results of this test report relate exclusively to the item tested as specified in this report. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

During the test no hardware and software changes are allowed to be performed at the EUT.

1.1.3 Applicant's details

Applicant's name:	SonyEricsson Mobile Communications AB
Address:	Nya Vattentorget S-22188 Lund Sweden
Contact person:	Mr. Peter Lindeborg Tel. +46-46-212-6180 Fax. +46-46-19-3295 e-mail. peter.lindeborg@sonyericsson.com

1.2 Administrative data of manufacturer / member

Manufacturer's name:	SonyEricsson Mobile Communications AB
Address:	Nya Vattentorget S-22188 Lund Sweden

1.3 Description of the Equipment under test (EUT)

1.3.1 EUT: Type, S/N etc.

Product name : AAD-3022061-BV
Description : GSM Mobile Phone 900/1800/1900/UMTS/BT
S/N serial number : Rad. CB5A08JNDH, CB5A08JN8K
Cond. CB5A08JND4, CB5A08JN87
HW hardware status : A
SW software status : -.-
Frequency Band [MHz] : ISM 2.400 - 2.483,5
Type of Modulation : FHSS + EDR (8PSK)
Number of channels : 79
Antenna : Integrated antenna
Power Supply : 4.0 V DC by Li-Polymer battery
Temperature Range : -20°C - +55°C

Max. power radiated: -1.7 dBm EIRP
Max. power conducted: +0.3 dBm

FCC ID: PY7A3022061
IC: 4170B-A3022061

1.3.2 If RF component testing only, description of additional used HW/SW

	Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
1						
2						
3						
4						

1.3.3 Additional EUT information For IC Canada (appendix 2)

Company Number:	4170B
Model Name:	AAD-3022061-BV
Manufacturer (complete Address):	SonyEricsson Mobile Communication
Tested to Radio Standards Specification (RSS) No.:	RSS-210 Issue 6
Open Area Test Site Industry Canada Number:	IC 3463A-1
Frequency Range (or fixed frequency) [MHz]:	2402 – 2480 MHz
RF: Power [W] (max):	Rad. EIRP: 0.68 mW Conducted : 1.07 mW
Antenna Type:	Integrated antenna
Occupied Bandwidth (99% BW) [kHz]:	Max. 1225 kHz
Type of Modulation:	8PSK / FSK
Emission Designator (TRC-43):	922KGXD / 1M23FXD
Transmitter Spurious (worst case) [μ V/m in 3m]:	No peaks found above noise floor
Receiver Spurious (worst case) [μ V/m in 3m]:	No peaks found above noise floor

ATTESTATION: I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all the applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Date: 2007-02-14

Testengineer: Stefan Bös

1.3.4 EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 2		low temperature, high power source conditions
Op. 3		high temperature, low power source conditions
Op. 4		high temperature, high power source conditions

*) EUT operating mode no. is used to simplify the testplan

1.3.5 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature / humidity	T _{nom}	°C / %	+21 / 52
Low Temperature	T _{low}	°C	-20
High Temperature	T _{high}	°C	+55
Nominal Power Source	V _{nom}	V	4.0
Low Power Source	V _{low}	V	3.4
High Power Source	V _{high}	V	4.4

Type of powersource: V DC

Deviations from this values are reported in chapter 2

2. Teststandard & summary list of all performed test cases

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210 Issue 6	PASS	2007-02-14	PASS

Test Specification Clause	Test Case	Modulation	Pass	Fail	N/A	Not performed
None	Antenna Gain	GFSK	Yes			
§15.247(a1)	Carrier frequency separation	GFSK	Yes			
§15.247(a1)	Number of hopping channels	GFSK	Yes			
§15.247(a)(1)(iii)	Time of occupancy (dwell time)	--	Yes			
§15.247(e)	Power Spectral density (Hybrid system in Inquiry mode/Page scan)	--			Yes	
§15.247(a)(1)	Spectrum Bandwidth of a FHSS System / 20dB Bandwith	GFSK Pi/4 DQPSK 8 DPSK	Yes Yes Yes			
§ 15.247 (b)(1)	Maximum output power (conducted)	GFSK Pi/4 DQPSK 8 DPSK	Yes Yes Yes			
§ 15.247 (b)(1)	Max. peak output power (radiated)	GFSK	Yes			
§ 15.247 (d)	Band-edge compliance of conducted emissions	Widest modulation	Yes			
§ 15.205	Band-edge compliance of radiated emissions	Widest modulation	Yes			
§ 15.247 (d)	Spurious Emission - conducted (Transmitter)	GFSK	Yes			
§ 15.247 (d)	Spurious Emission - radiated (Transmitter) >30 MHz	GFSK	Yes			
§ 15.109	Spurious Emissions - radiated (Receiver)	GFSK	Yes			
§ 15.209	Spurious Emissions - radiated (Transmitter) <30 MHz	GFSK	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	GFSK	Yes			

3. RF measurement testing

3.1 Description of test set-up

3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

9 kHz - 150 kHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna


>1GHz: Average, RBW 1MHz, VBW 10 Hz, waveguide horn

All measurements are done in accordance with the Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA 00-705 and Appendix A "BLUETOOTH APPROVALS"

The EUT is powered by an external power supply with nominal voltage. The signaling is performed from outside the chamber with a signaling unit (CMU200 or other) by airlink using signaling antenna.

3.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal path is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signaling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

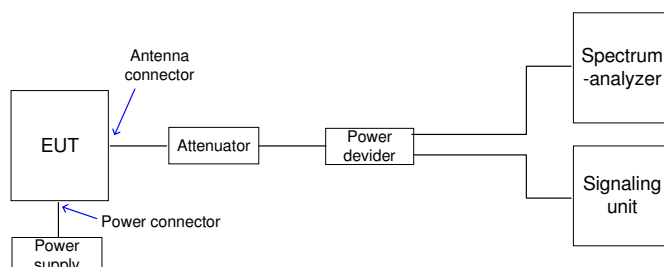

3.2 Referenced documents

none

3.3 Additional comments

--

3.4 Antenna gain


The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

	low channel	mid channel	high channel
Conducted power [dBm] <i>GFSK</i>	-0.9	0.3	0.0
Radiated power [dBm] <i>GFSK</i>	-2.9	-1.7	-2.0
Gain [dB]	-2.0	-2.0	-2.0

3.5 Carrier frequency separation §15.247(a)(1)

Modulation: GFSK

Plot 1 of 1:

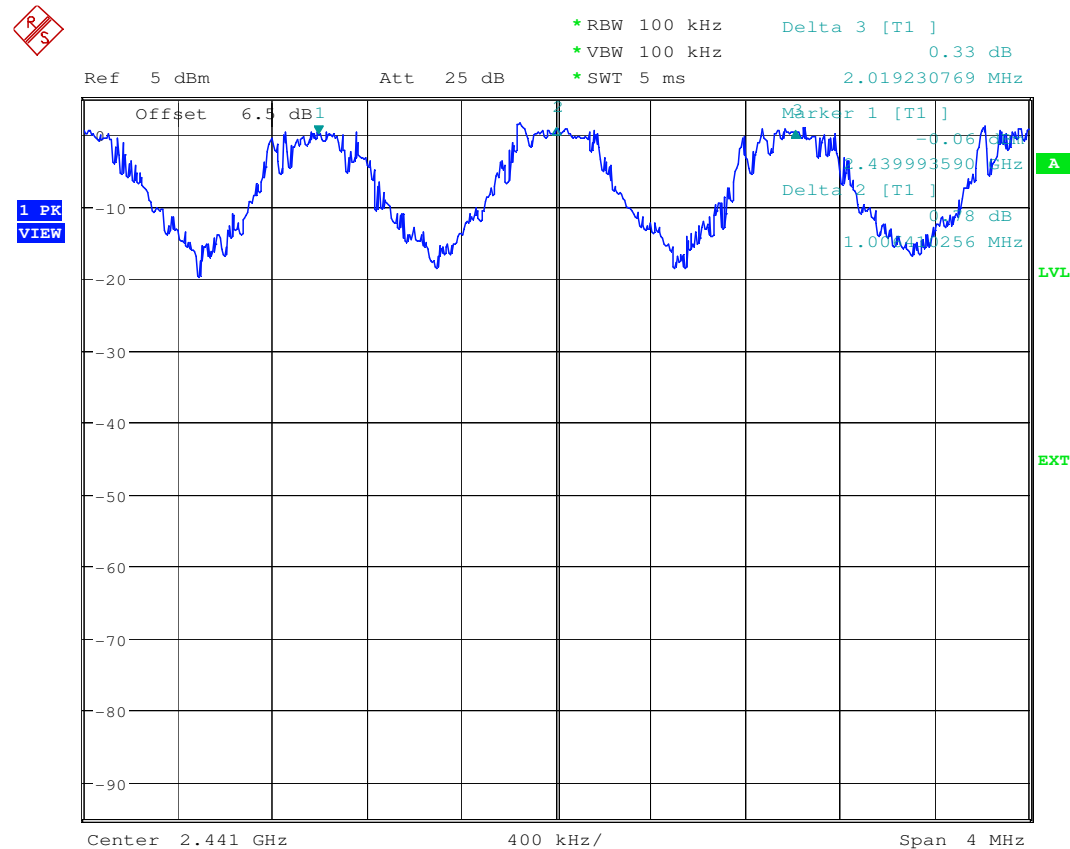

Date: 14.FEB.2007 07:06:39

Result : Channel separation is: ~ 1 MHz


Limits :

Under normal test conditions only	Minimum 25 kHz or 20 dB Bandwidth of the hopping system
-----------------------------------	---

3.6 Number of hopping channels §15.247(a)(1)


Modulation: GFSK

Plot 1 of 2:

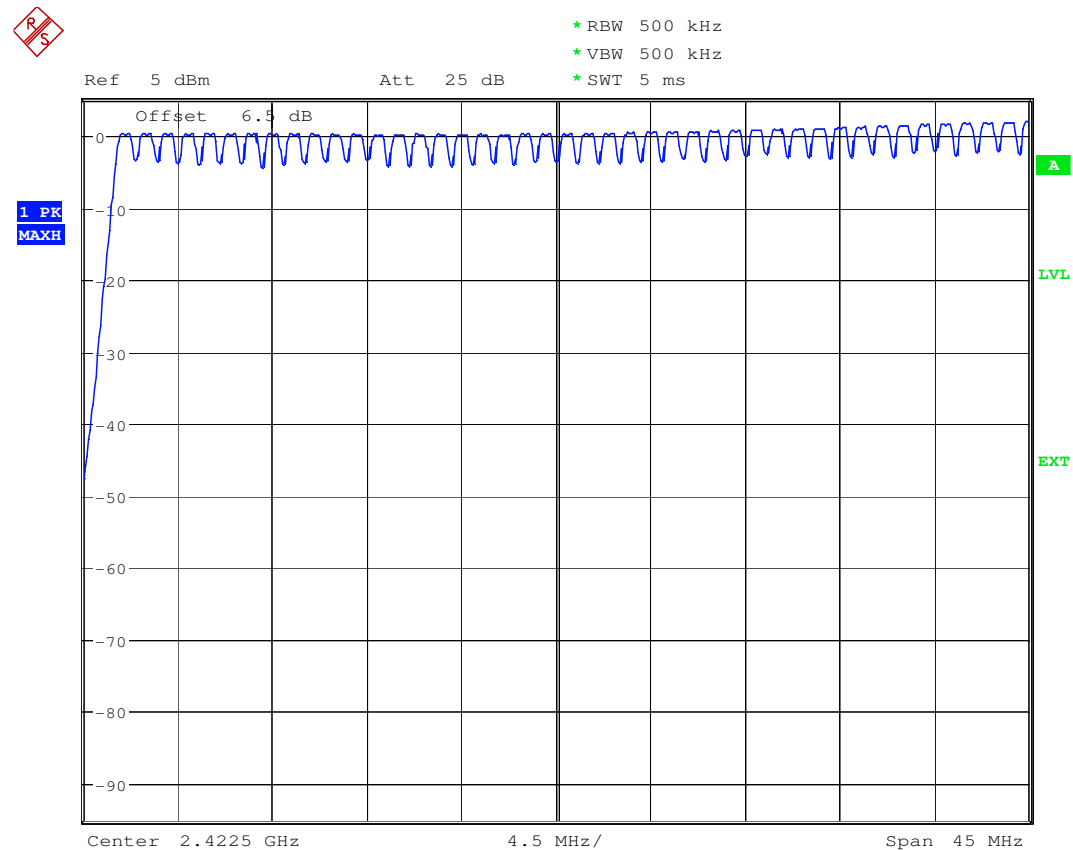

Date: 14.FEB.2007 07:07:38

Plot 2 of 2:

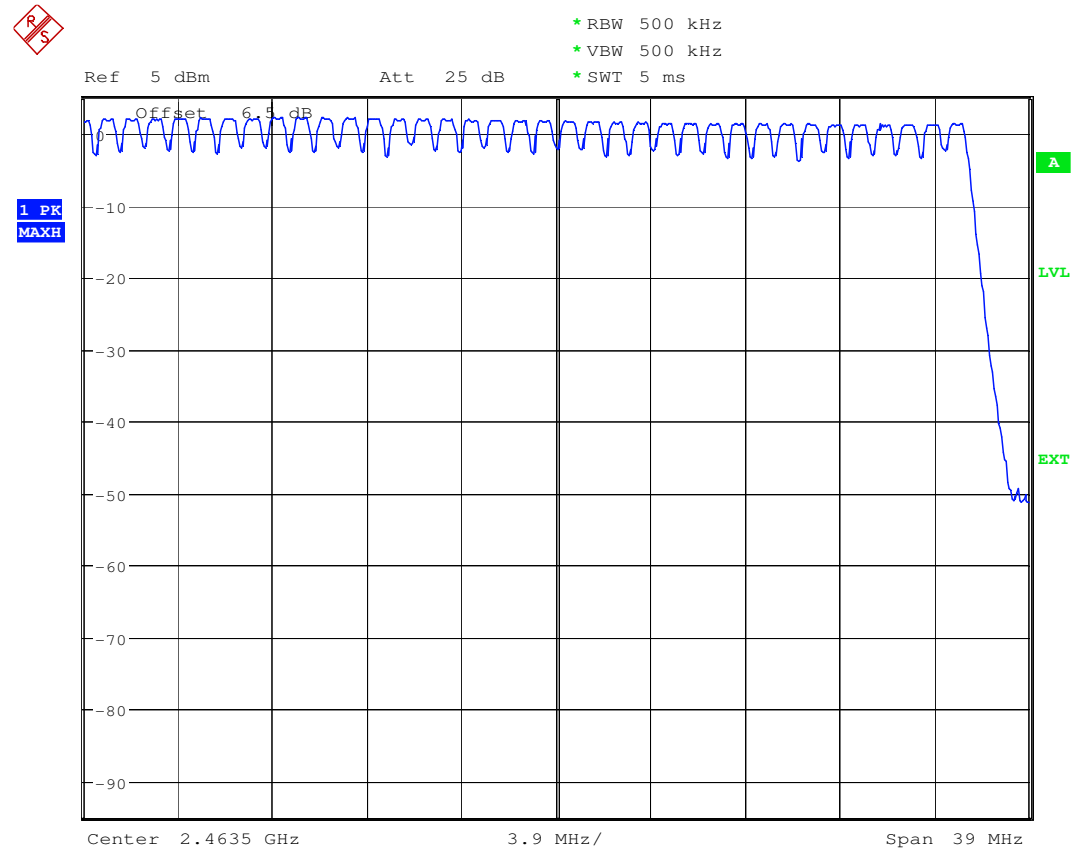

Date: 14.FEB.2007 07:08:12

Result : The number of hopping channels is: 79

Limits :

Under normal test conditions only	at least 15 non-overlapping channels
-----------------------------------	--------------------------------------

3.7 Time of occupancy (dwell time) §15.247(a)(1)(iii)

For Bluetooth devives:

The dwell time of 0.4 s within a 31.6 second period in data mode is independent from the packet type (packet length).
The calculation for a 31.6 second period is a follows:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time = $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/s / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

This is according the Bluetooth Core Specification V 1.1 & V 1.2 & V2.0 (+ critical errata) for all Bluetooth devices.

Therefore, all Bluetooth devices comply with the FCC dwell timerequirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 mS (in a 12.8s period)

3.8 Power Spectral density (Hybrid system in Inquiry mode/Page scan) §15.247(e)

Plot 1 of 1:

Not applicable


Result: Power density : - dBm/Hz = - dBm / 3 KHz
Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB

Limits :

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission
-----------------------------------	---


3.9 Spectrum Bandwidth of a FHSS System / 20dB Bandwith §15.247(a)(1)

Plot 1 GFSK

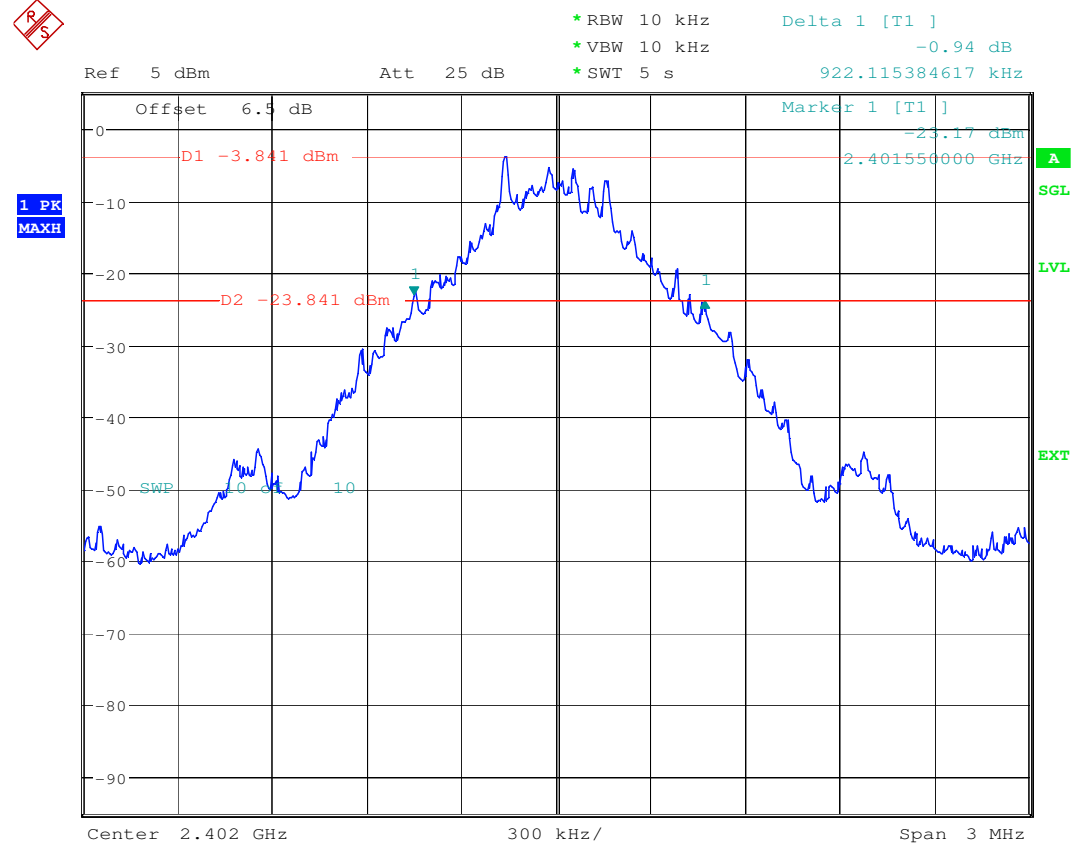

Date: 14.FEB.2007 07:30:40

Plot 2 GFSK

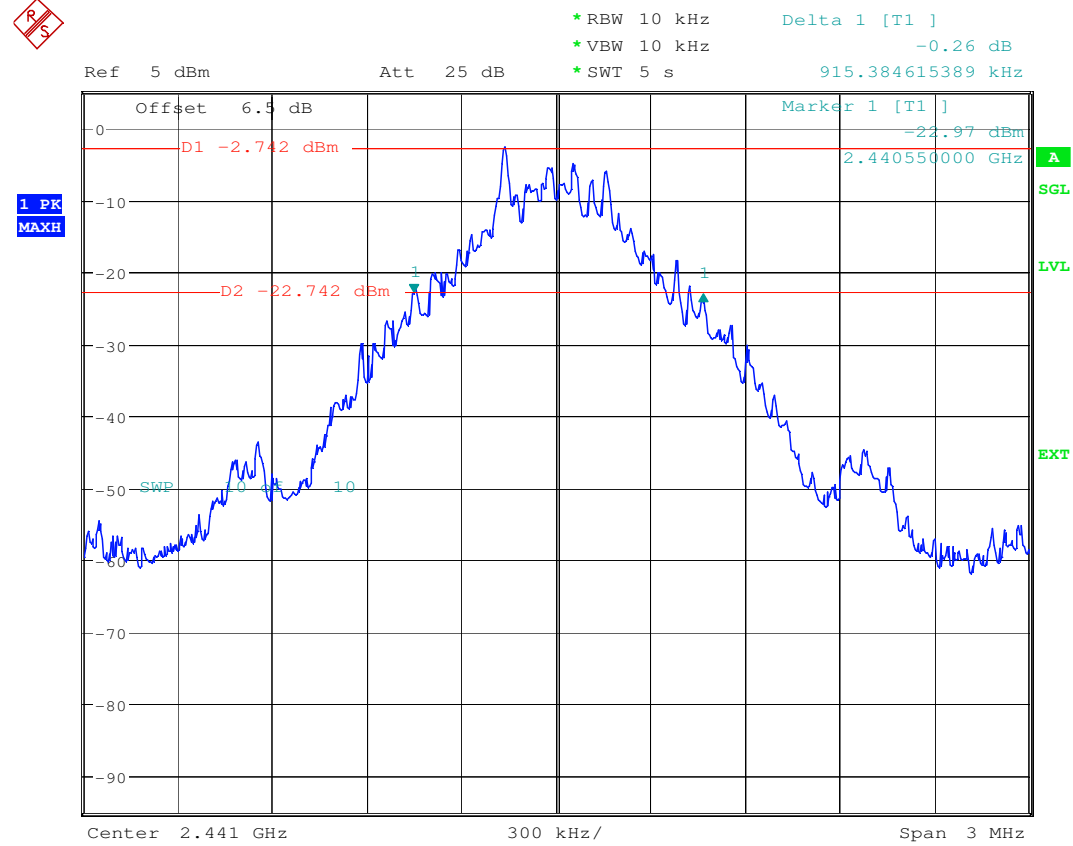


Date: 14.FEB.2007 08:43:39

Fax: -9075
Fax: -9075

Page 18 of 66


Date: 14.FEB.2007 08:48:30

Plot 4 Pi/4 DQPSK

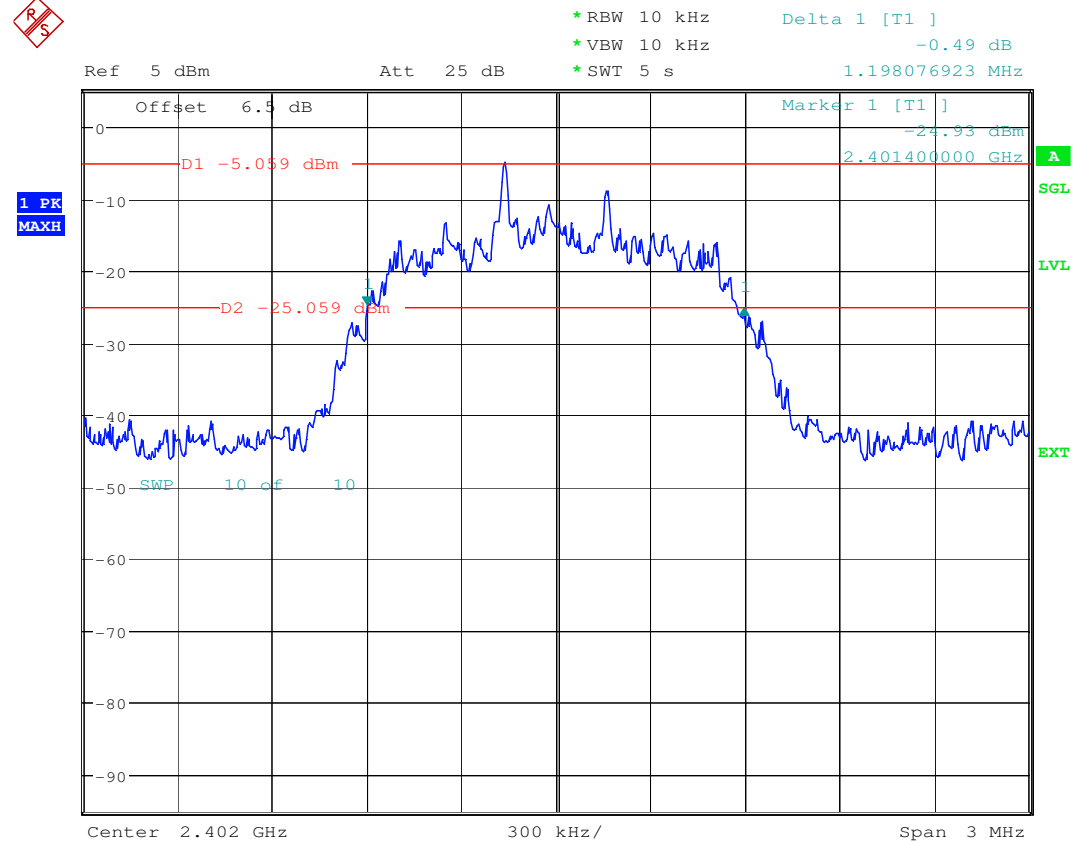


Date: 14.FEB.2007 12:17:33

Plot 5 Pi/4 DQPSK

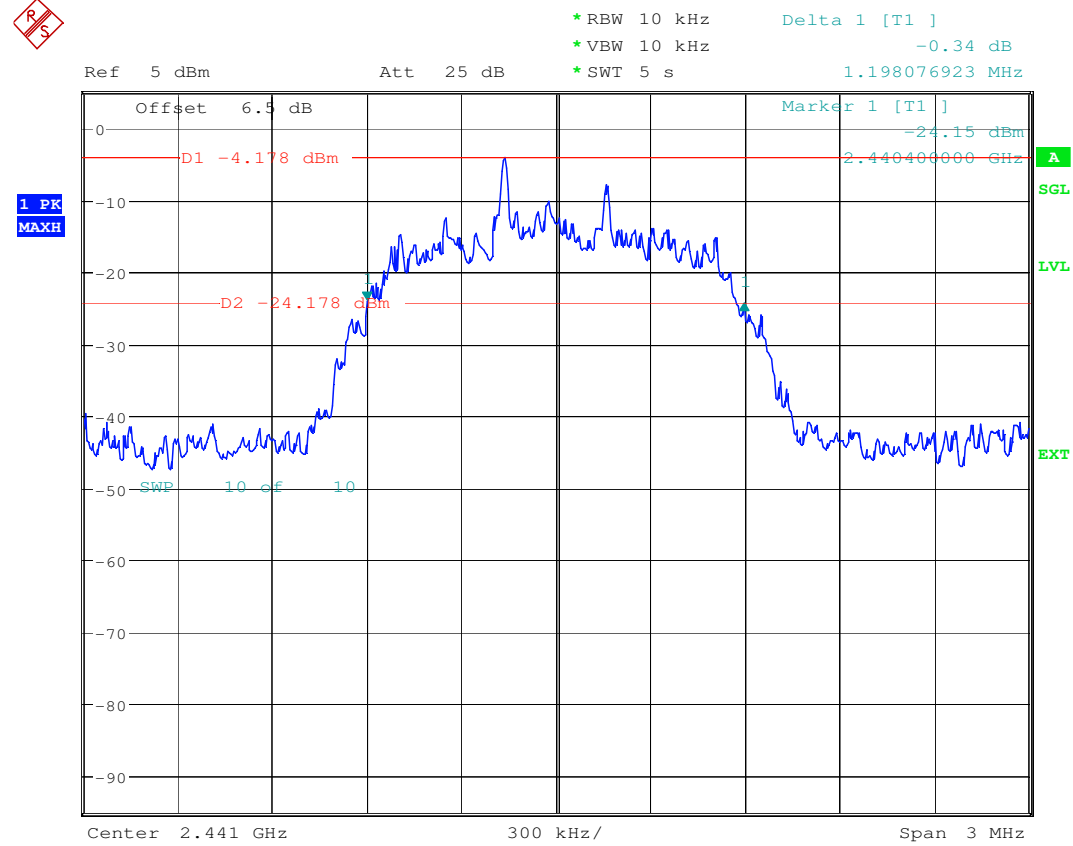


Date: 14.FEB.2007 12:14:38

Plot 6 Pi/4 DQPSK

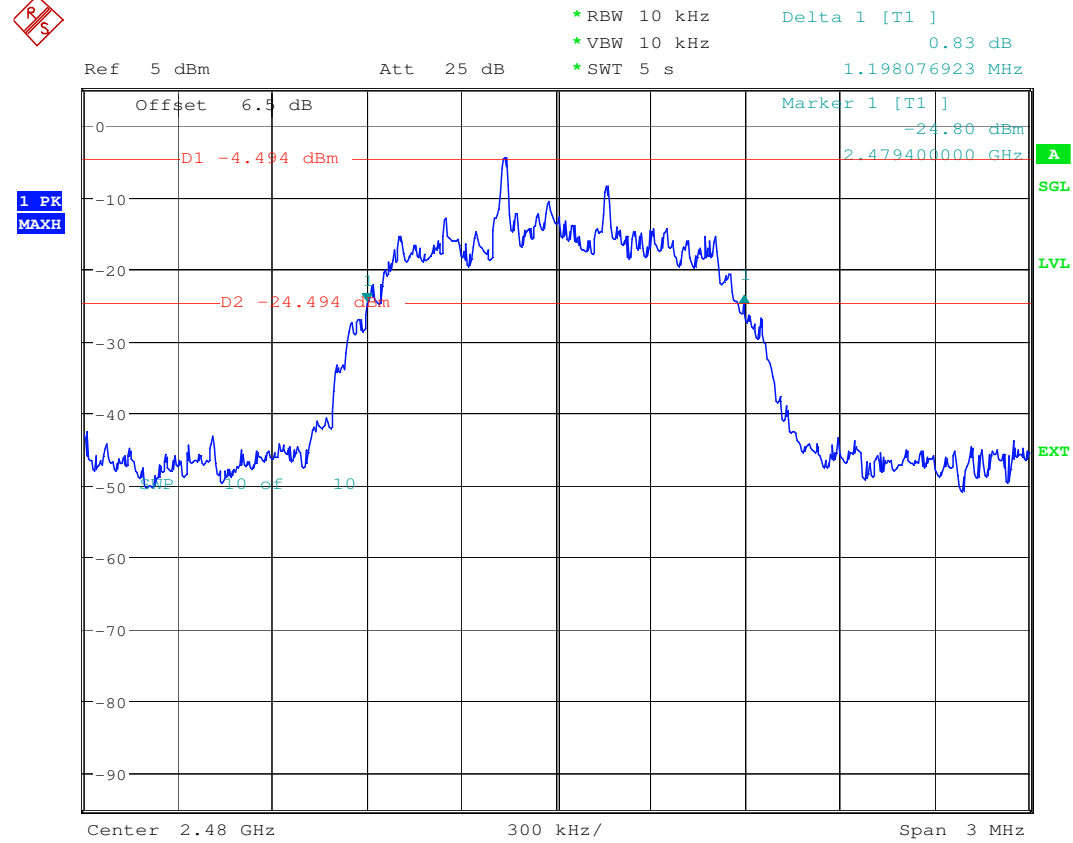


Date: 14.FEB.2007 11:52:00

Plot 7 8DPSK

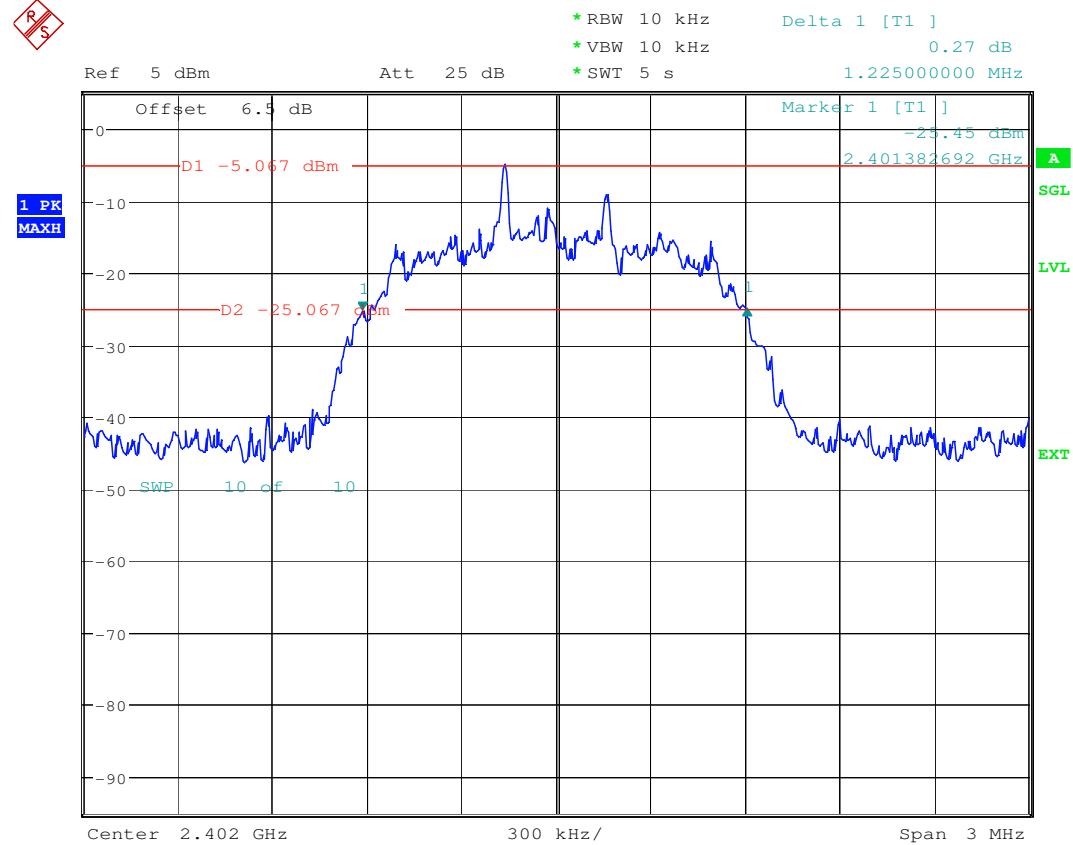


Date: 14.FEB.2007 12:21:03

Plot 8 8DPSK

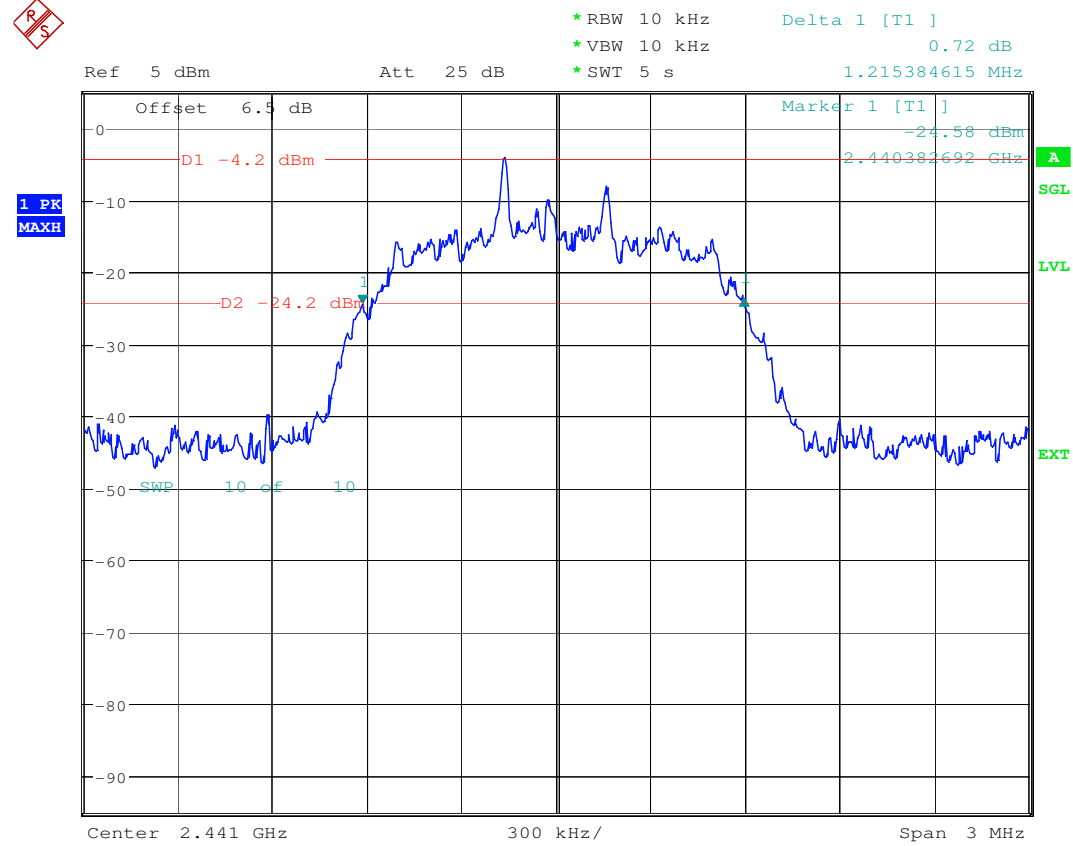

Date: 14.FEB.2007 12:23:53

Plot 9 8DPSK

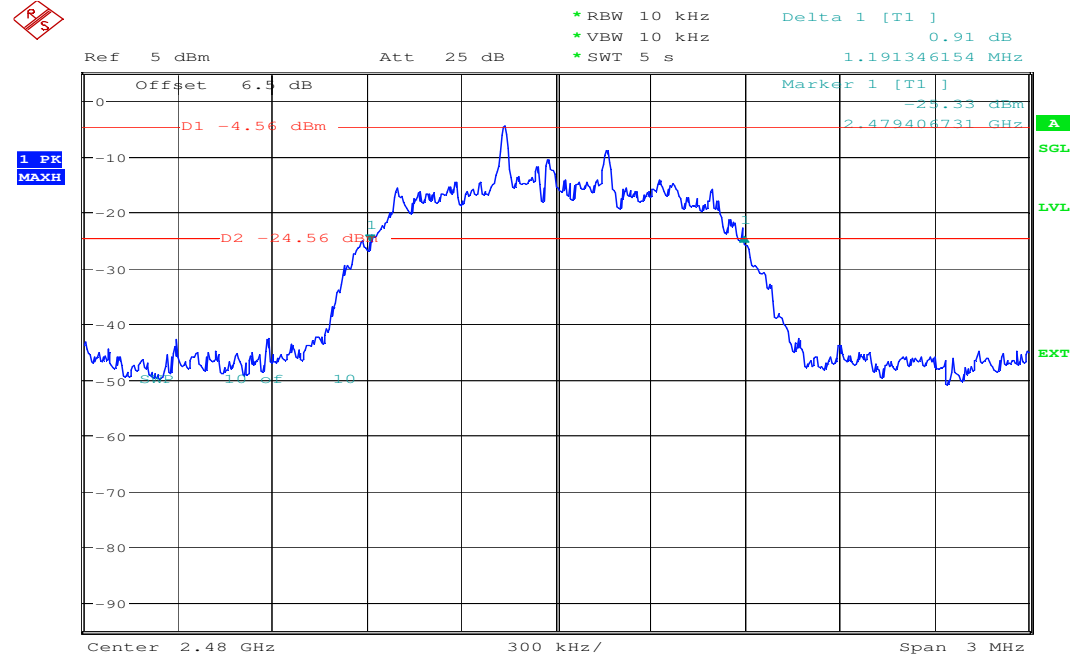

Date: 14.FEB.2007 12:47:44

Results:

Modulation	20 dB BANDWIDTH [KHz]		
Frequency [MHz]	2402	2441	2480
GFSK	922.115	915.385	915.385
Pi/4 DQPSK	1198.077	1198.077	1198.077
8DPSK	1225.000	1215.385	1191.346
Measurement uncertainty	±1kHz		


RBW: 10 kHz / VBW 10 kHz

Limits :

Under normal test conditions only	< 1000 kHz for GFSK modulation < 1500 kHz for Pi/4/DQPSK or DPSK
-----------------------------------	---

3.10 Maximum output power (conducted) § 15.247 (b)(1)

Plot 1 GFSK

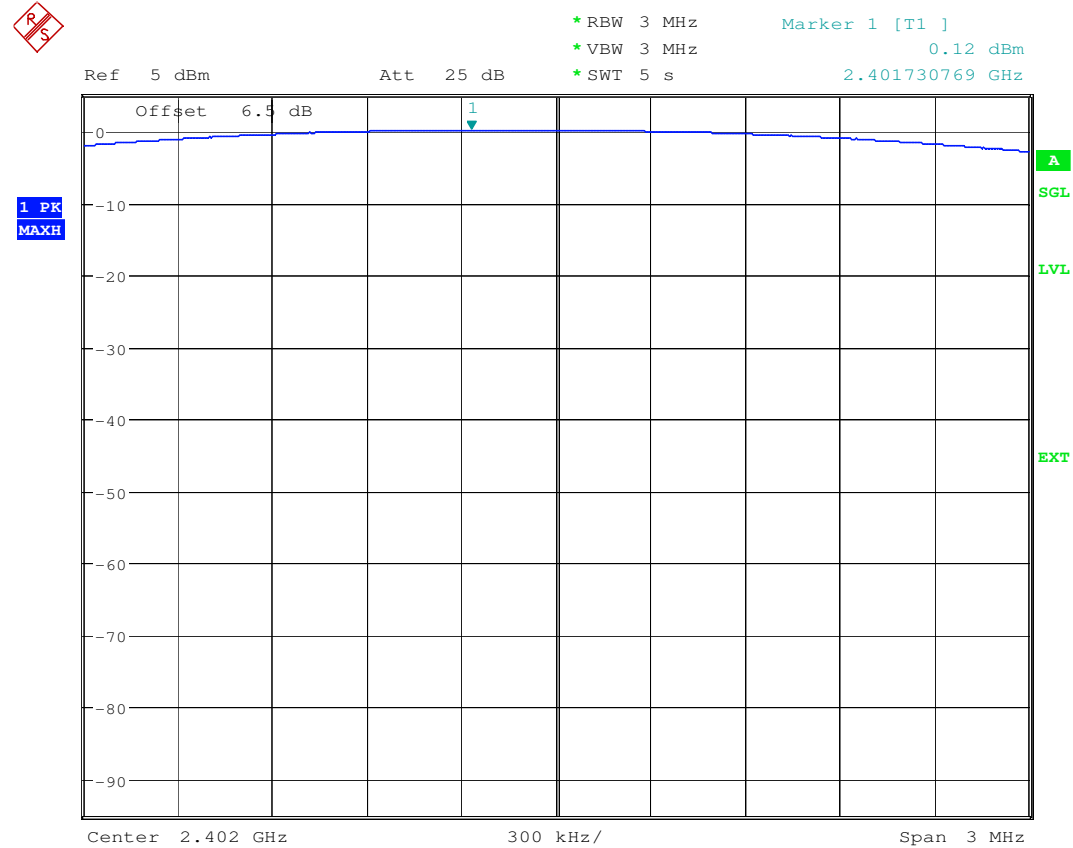

Date: 14.FEB.2007 12:49:24

CETECOM ICT Services GmbH

Untertürkheimer Str. 6-10, 66117 Saarbruecken
RSC-Laboratory

Phone: +49 (0) 681 598-0
Phone: +49 (0) 681 598-0


Fax: -9075
Fax: -9075

Test report no.: 2-4530-03-03/06

Date: 2007-02-14

Page 26 of 66

Plot 2 GFSK

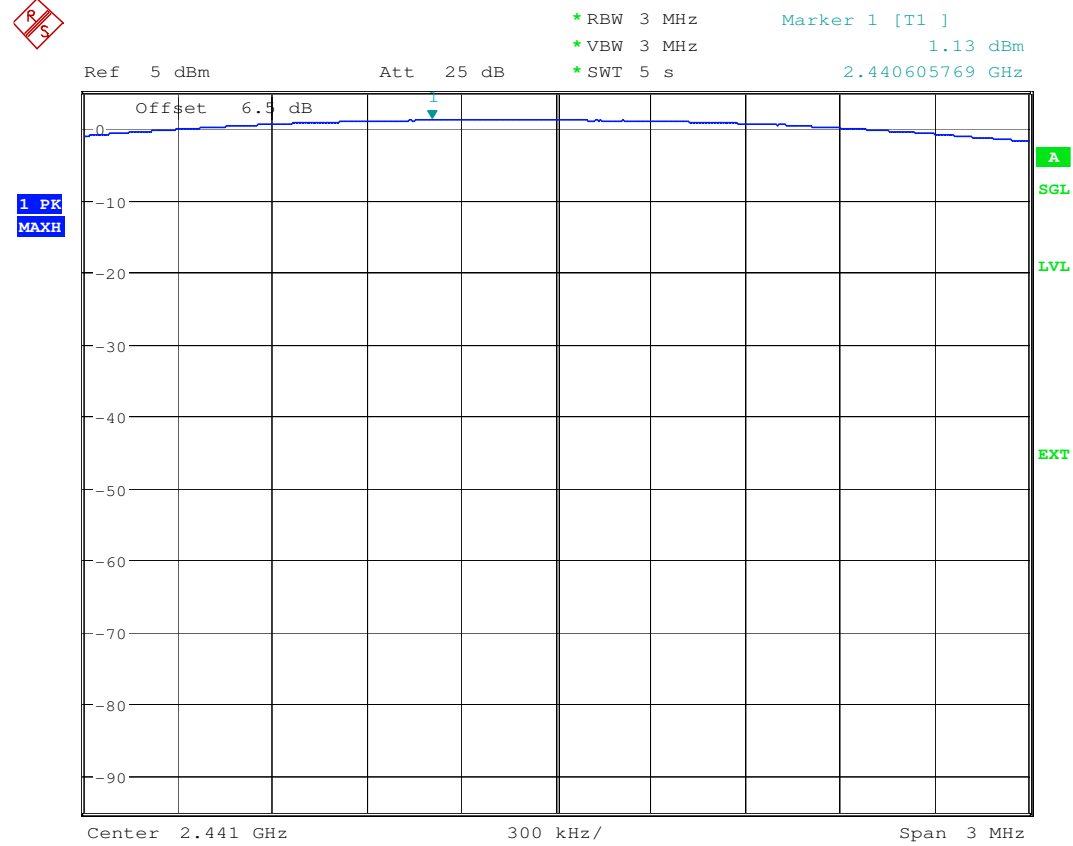

Date: 14.FEB.2007 12:50:17

CETECOM ICT Services GmbH

Untertürkheimer Str. 6-10, 66117 Saarbruecken
RSC-Laboratory

Phone: +49 (0) 681 598-0
Phone: +49 (0) 681 598-0


Fax: -9075
Fax: -9075

Test report no.: 2-4530-03-03/06

Date: 2007-02-14

Page 27 of 66

Plot 3 GFSK

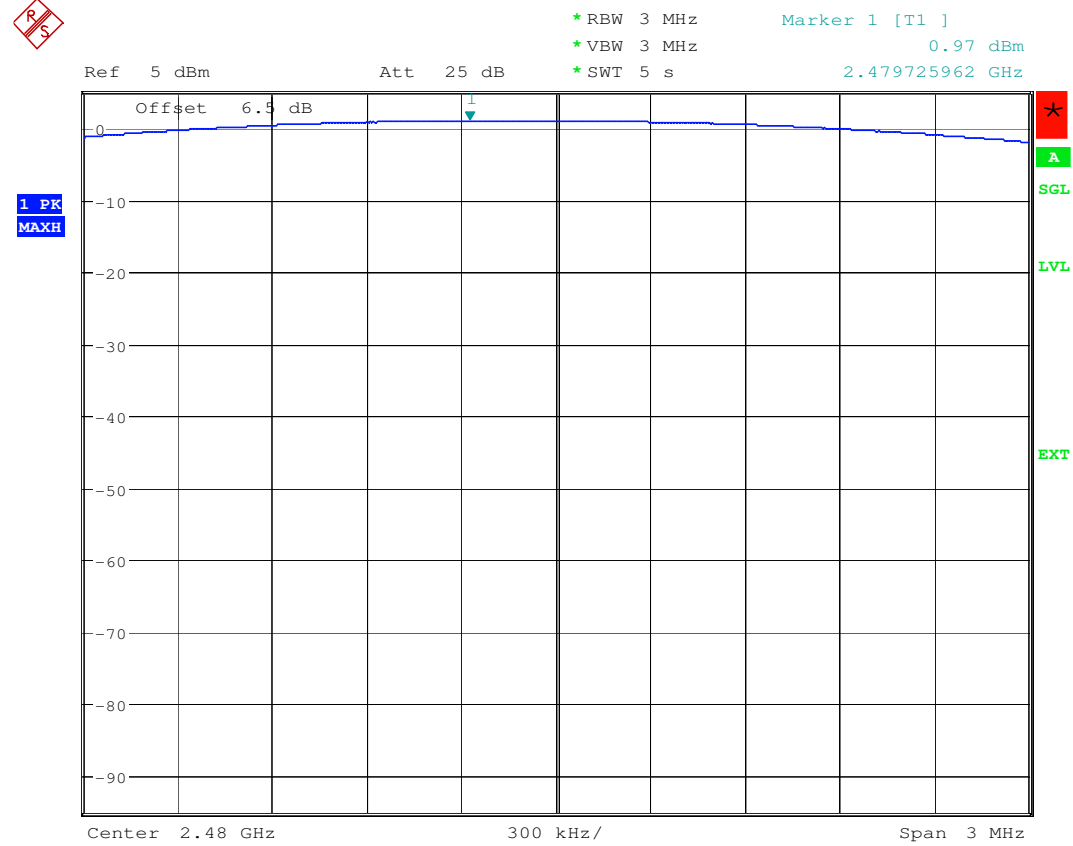

Date: 14.FEB.2007 12:50:58

CETECOM ICT Services GmbH

Untertürkheimer Str. 6-10, 66117 Saarbruecken
RSC-Laboratory

Phone: +49 (0) 681 598-0
Phone: +49 (0) 681 598-0


Fax: -9075
Fax: -9075

Test report no.: 2-4530-03-03/06

Date: 2007-02-14

Page 28 of 66

Plot 4 Pi/4 DQPSK

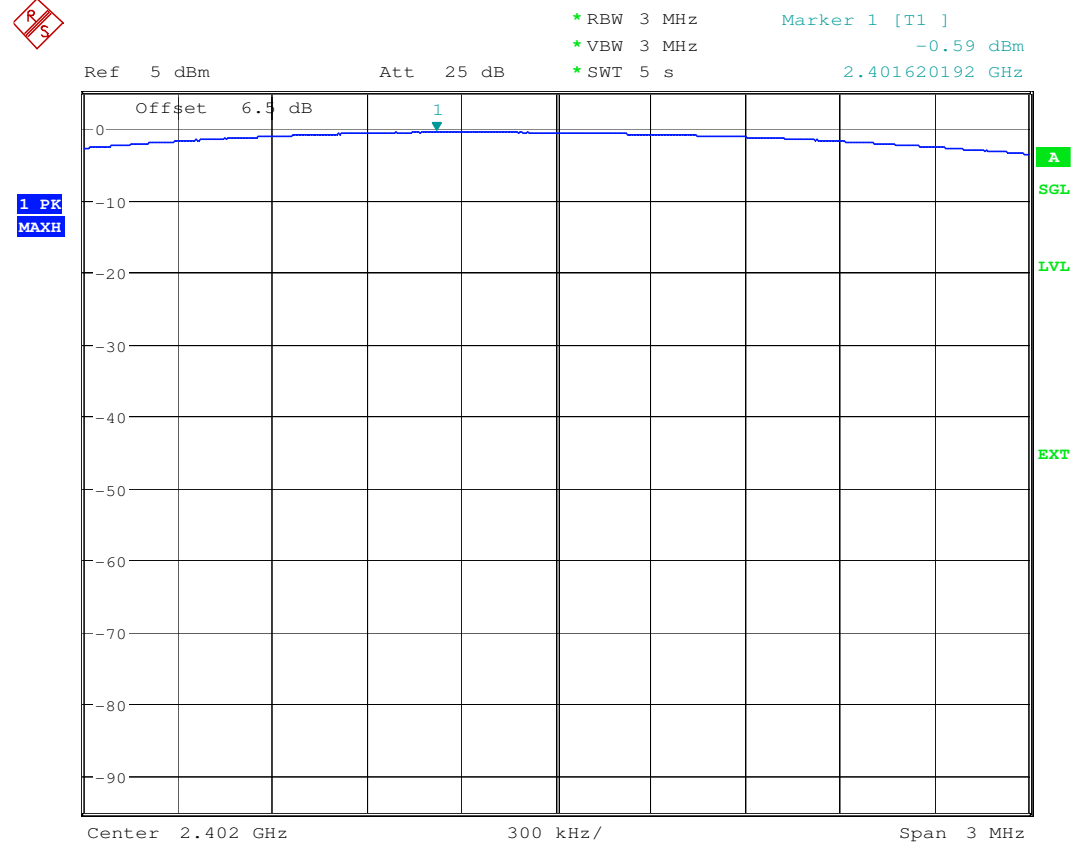

Date: 14.FEB.2007 12:53:32

CETECOM ICT Services GmbH

Untertürkheimer Str. 6-10, 66117 Saarbruecken
RSC-Laboratory

Phone: +49 (0) 681 598-0
Phone: +49 (0) 681 598-0


Fax: -9075
Fax: -9075

Test report no.: 2-4530-03-03/06

Date: 2007-02-14


Page 29 of 66

Plot 5 Pi/4 DQPSK

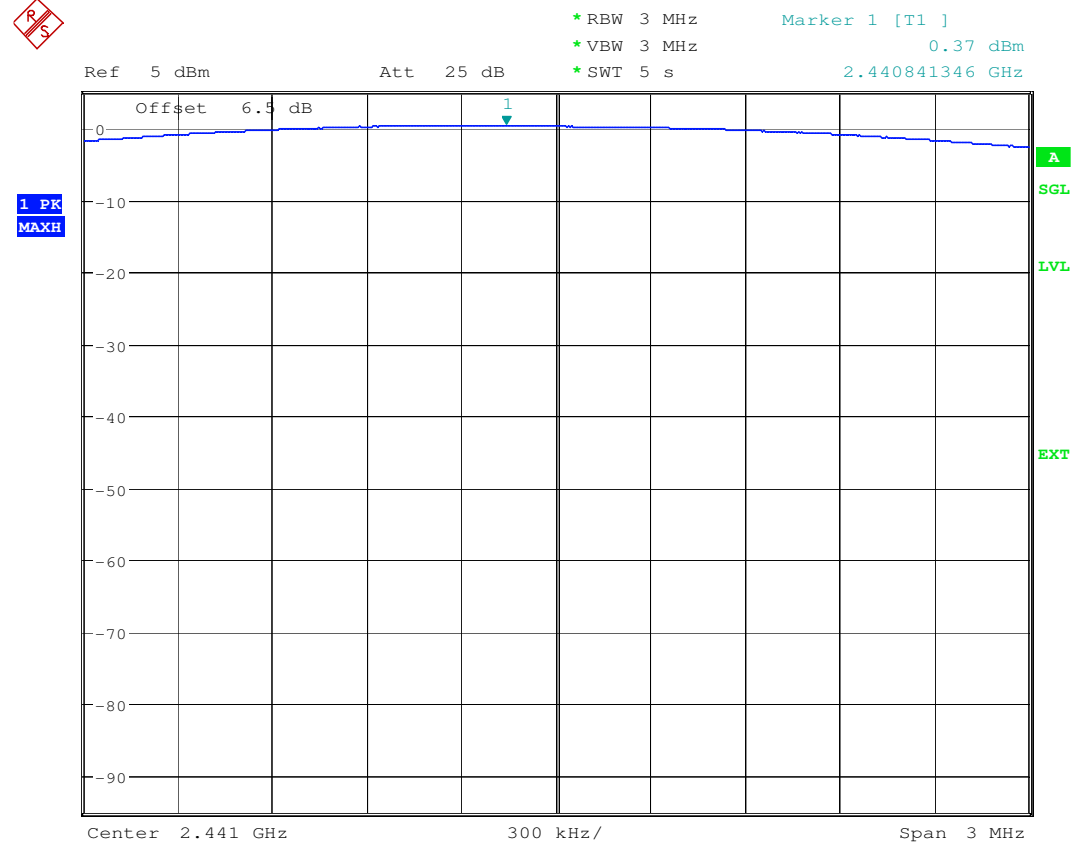


Date: 14.FEB.2007 12:52:46

Plot 6 Pi/4 DQPSK

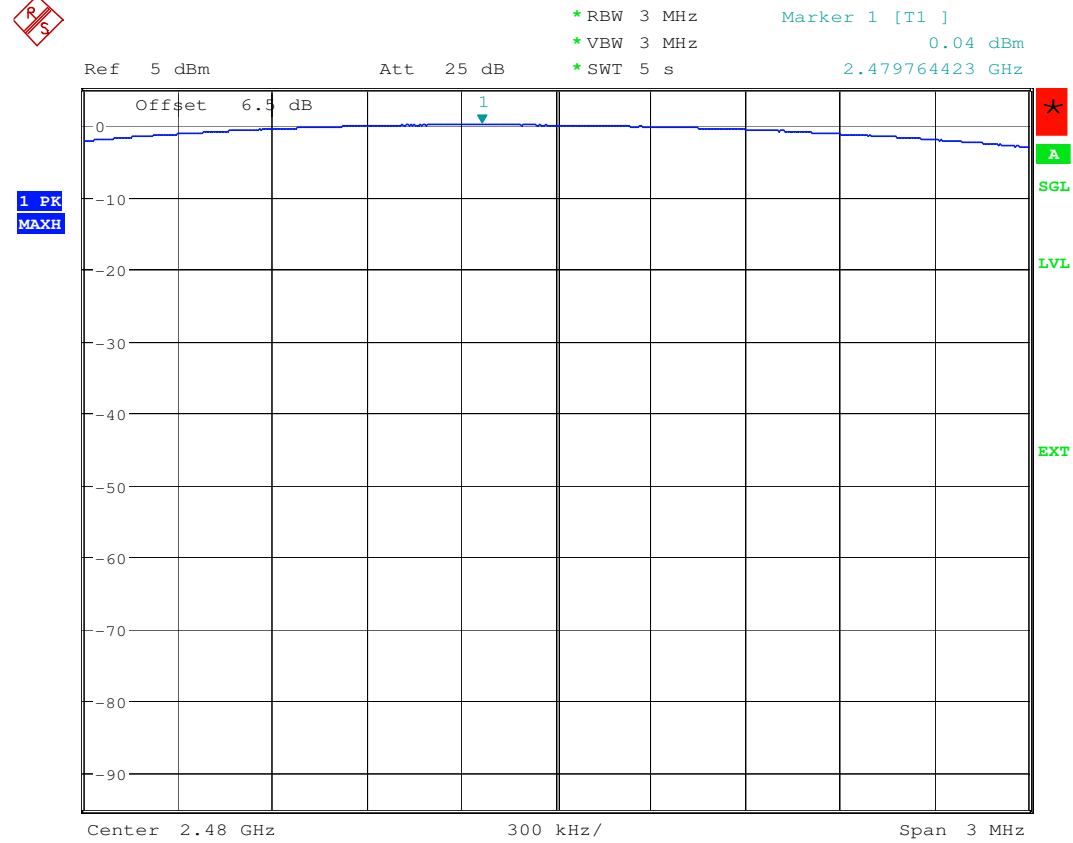

Date: 14.FEB.2007 12:52:01

Plot 7 8DPSK

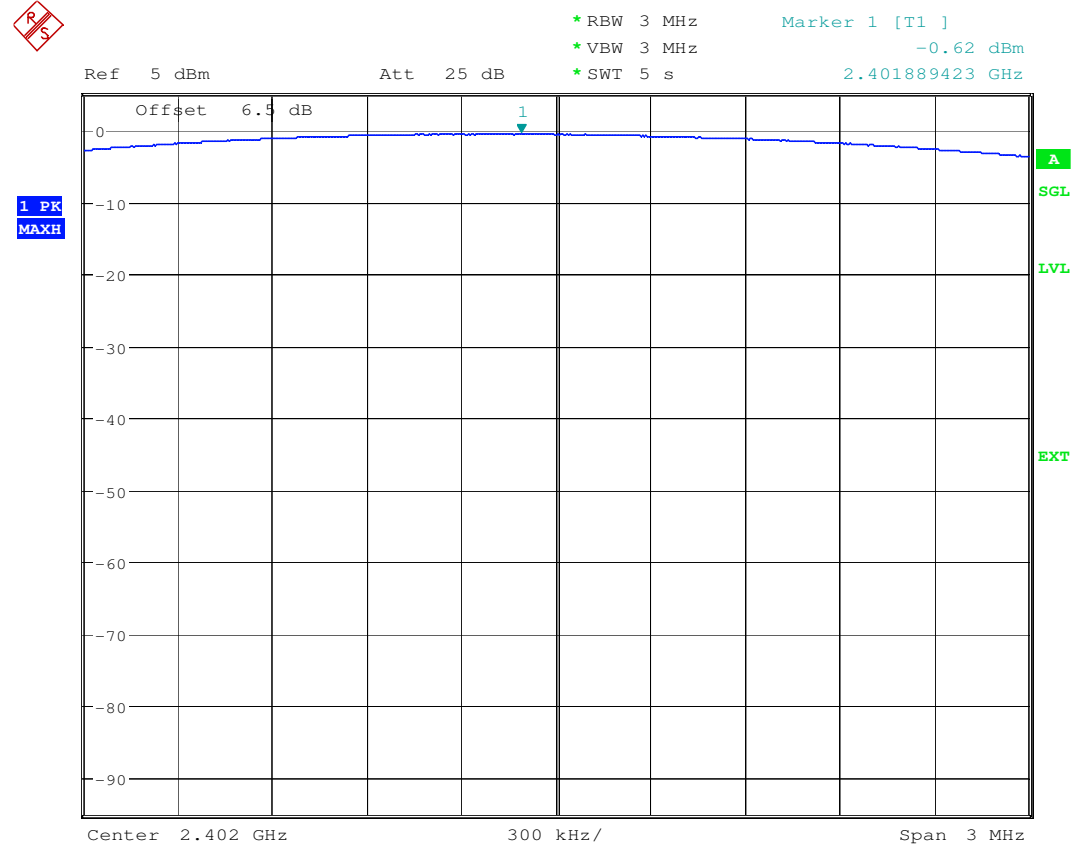

Date: 14.FEB.2007 12:54:33

CETECOM ICT Services GmbH

Untertürkheimer Str. 6-10, 66117 Saarbruecken
RSC-Laboratory

Phone: +49 (0) 681 598-0
Phone: +49 (0) 681 598-0


Fax: -9075
Fax: -9075

Test report no.: 2-4530-03-03/06

Date: 2007-02-14


Page 32 of 66

Plot 8 8DPSK

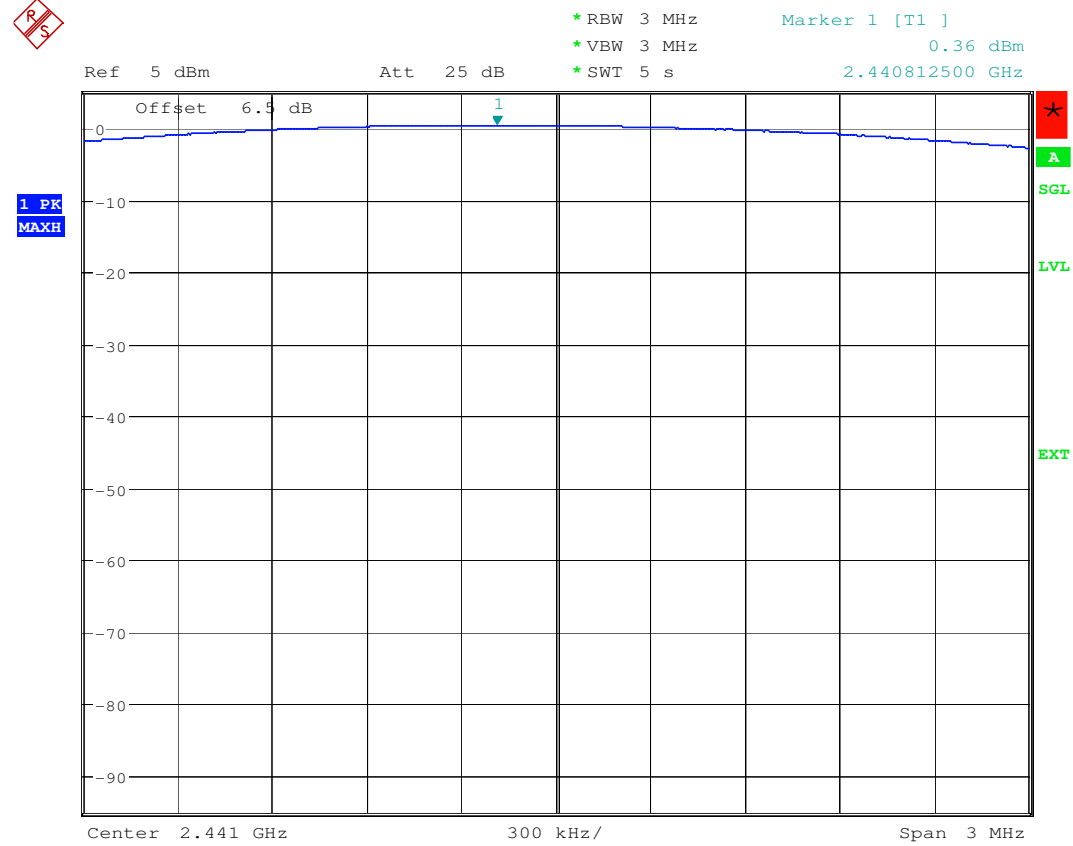

Date: 14.FEB.2007 12:55:09

Plot 9 8DPSK

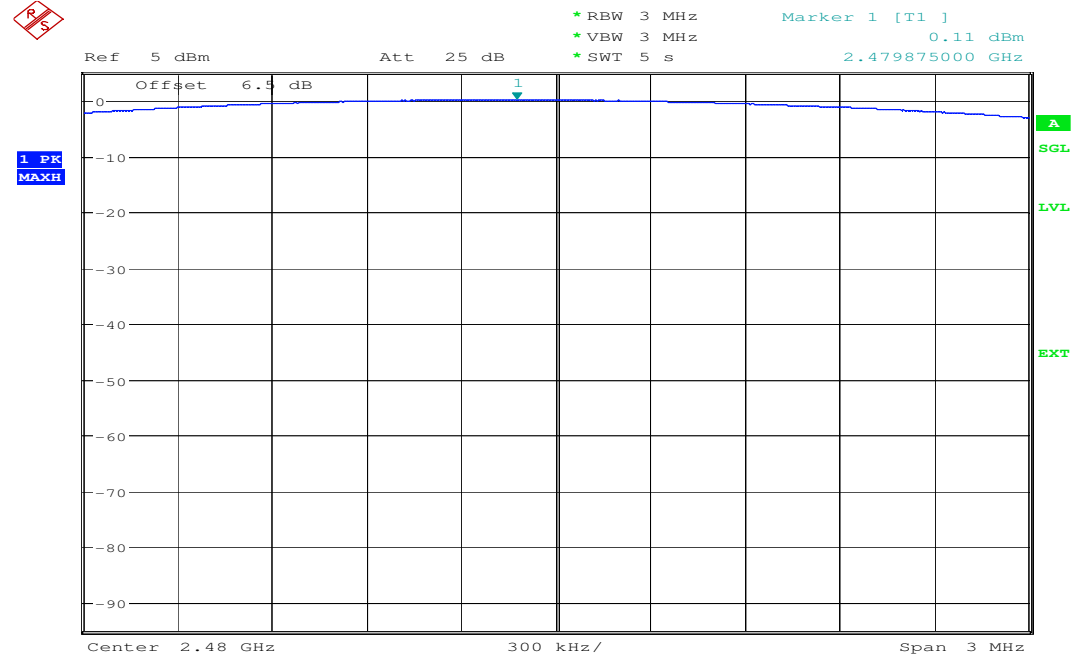

Date: 14.FEB.2007 12:56:06

Results:

There is an additional offset (-1 dB) to calculate the real value

Modulation	Max. peak output power [dBm]		
Frequency [MHz]	2402	2441	2480
GFSK	-0.9	0.2	0.0
Pi/4 DQPSK	-1.6	-0.4	-1.0
8DPSK	-1.6	-0.4	-1.1
Measurement uncertainty	±2dB		

RBW / VBW : 3 MHz

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------

3.11 Max. peak output power (radiated) § 15.247 (b)(1)

Modulation: GFSK

Test conditions		Max. peak output power EIRP [dBm]		
Frequency [MHz]		2402	2442	2480
T _{nom}	V _{nom}	-2.9	-1.7	-2.0
Measurement uncertainty		±3dB		

RBW / VBW : 3 MHz

Measured at a distance of 3m


Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------

3.12 Band-edge compliance of conducted emissions §15.247 (d)


Modulation: widest

Plot 1 of 4 (hopping off, lowest frequency):

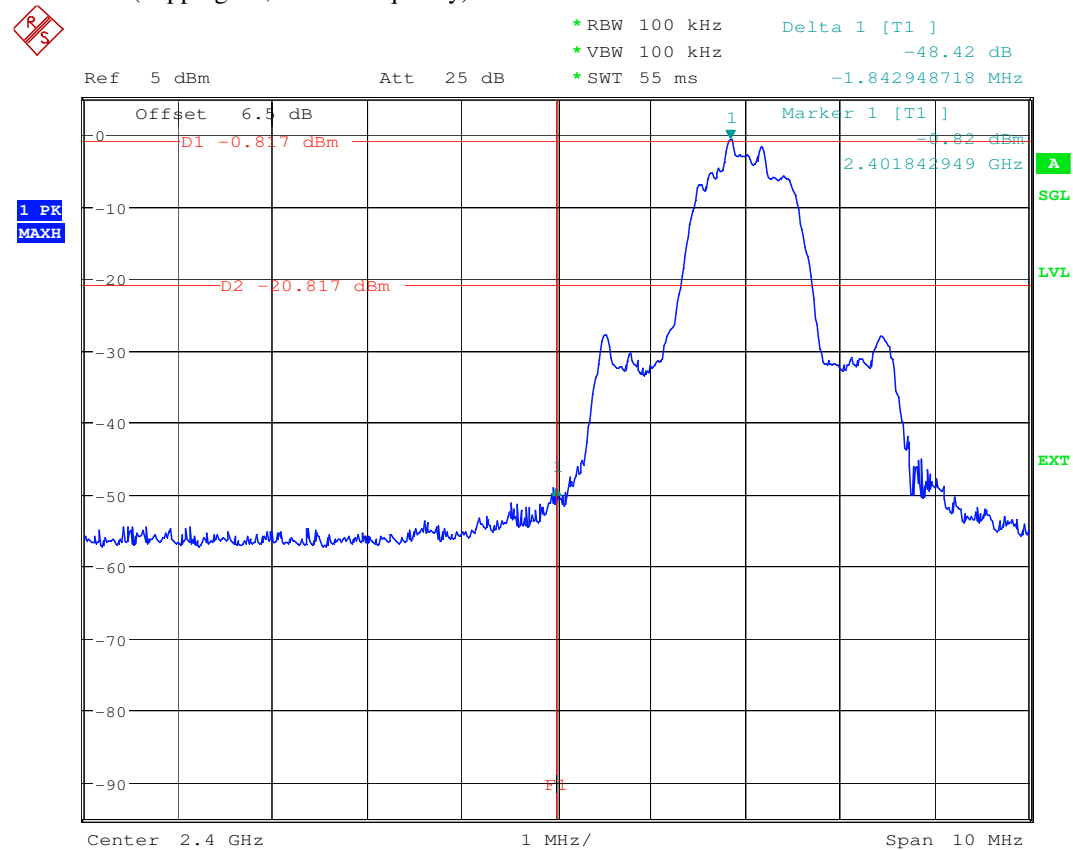


Date: 14.FEB.2007 13:07:04

Plot 2 of 4 (hopping on, lowest frequency):

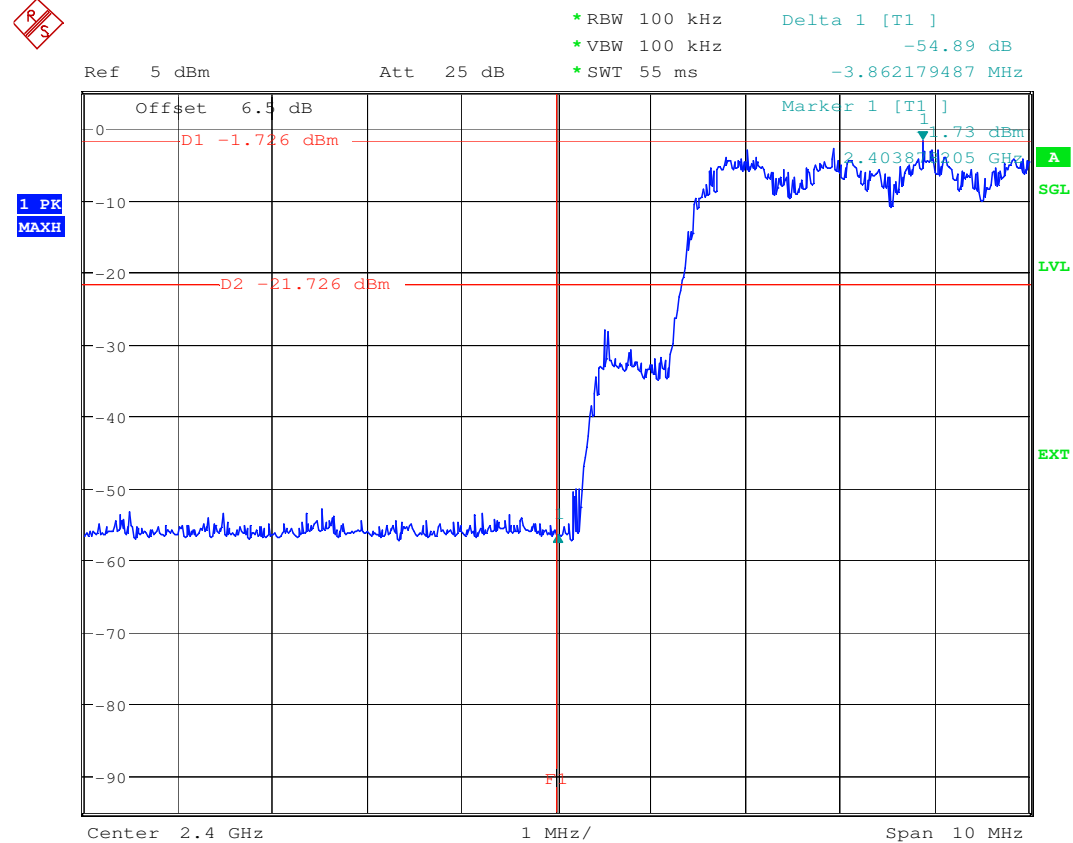


Date: 14.FEB.2007 13:08:28

Plot 3 of 4 (hopping off, highest frequency):

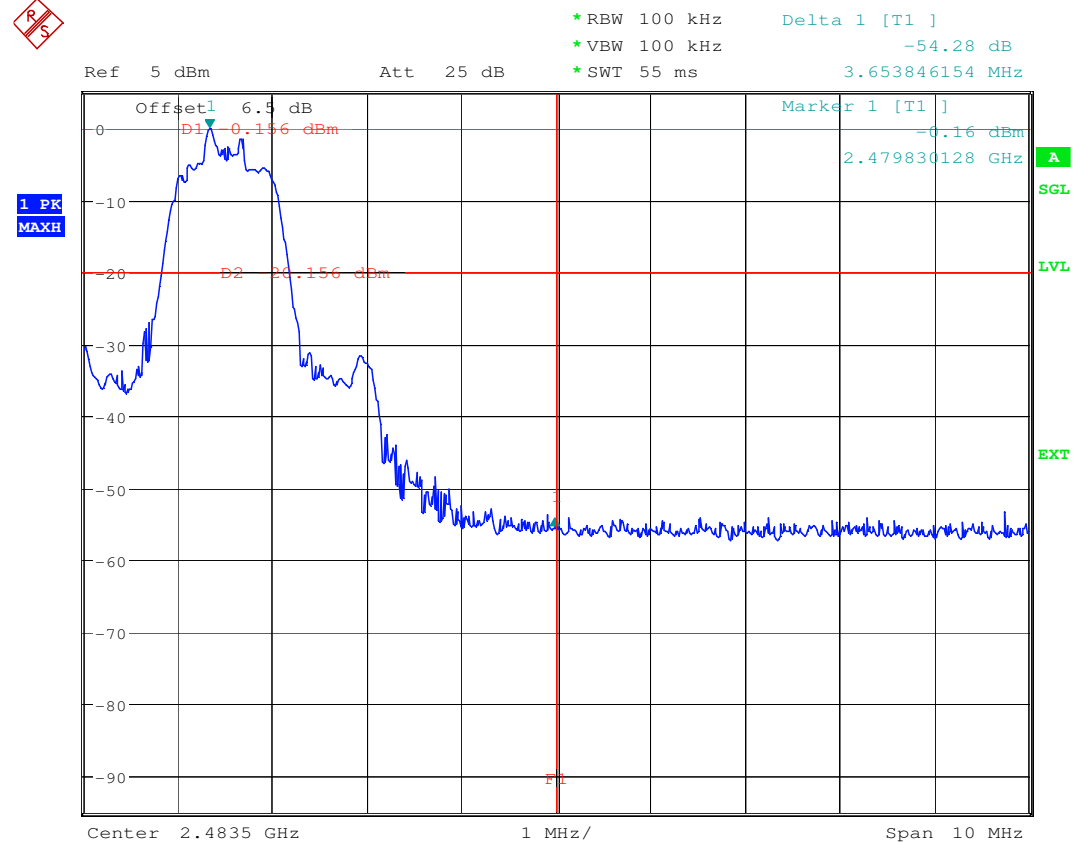

Date: 14.FEB.2007 13:10:54

Plot 4 of 4 (hopping on, highest frequency):

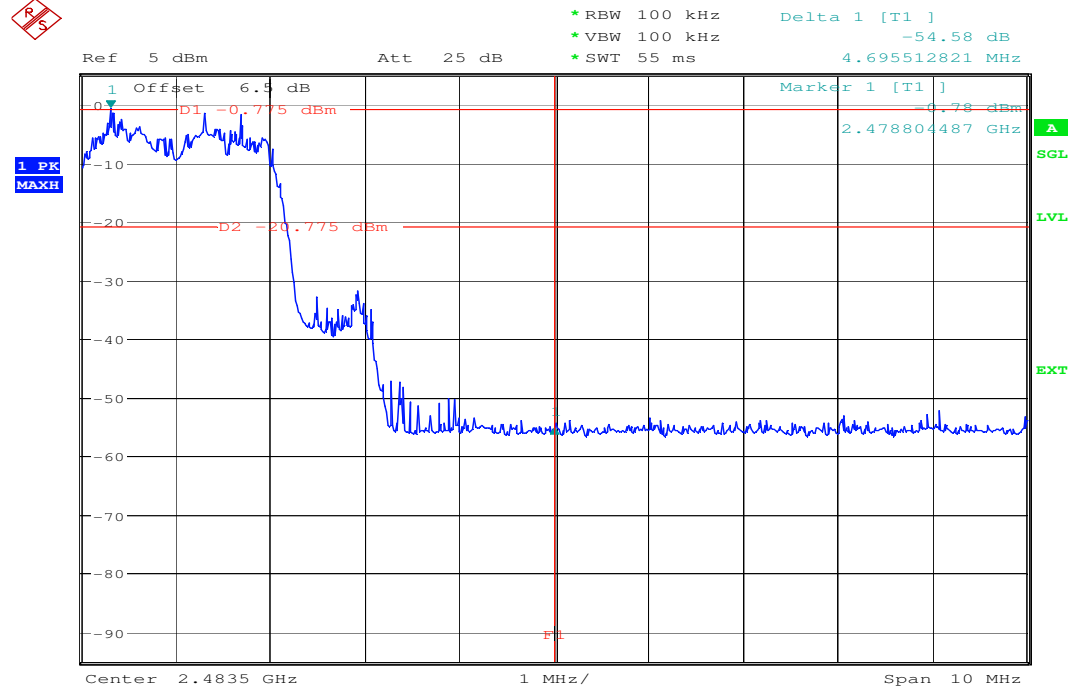

Date: 14.FEB.2007 13:10:06

Results:

SCENARIO	DELTA VALUE [DB]
hopping off, lowest frequency	> 20 dB
hopping on, lowest frequency	> 20 dB
hopping off, highest frequency	> 20 dB
hopping on, highest frequency	> 20 dB
Measurement uncertainty	±1,5dB


Limits:

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--

3.13 Band-edge compliance of radiated emissions §15.205


Modulation: widest

Plot 1 : Max field strength in 3m distance (single frequency)

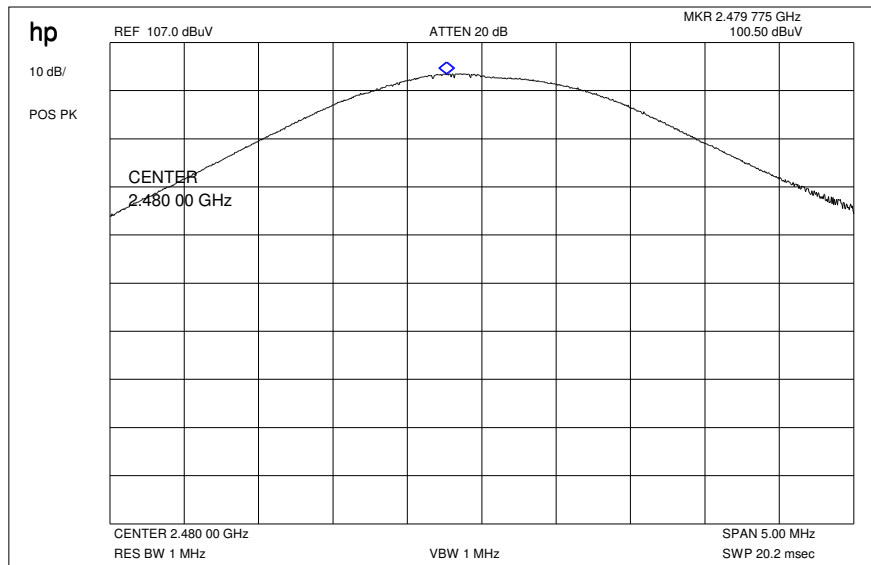

Result: 100.50 dB μ V/m

Plot 2: Marker-Delta Method (single carrier)

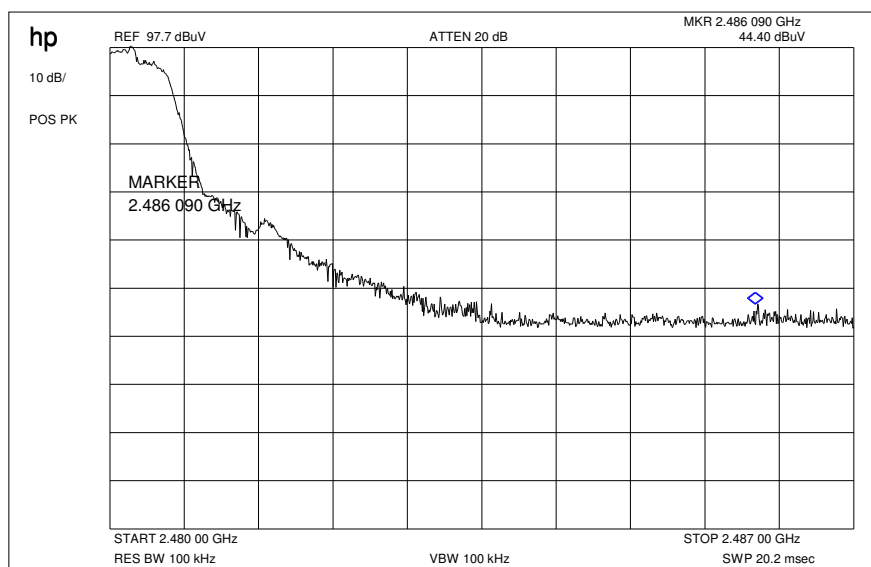


Result:

Marker-Delta-Value : 53.30 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

Plot 3: Marker-Delta Method (hopping)

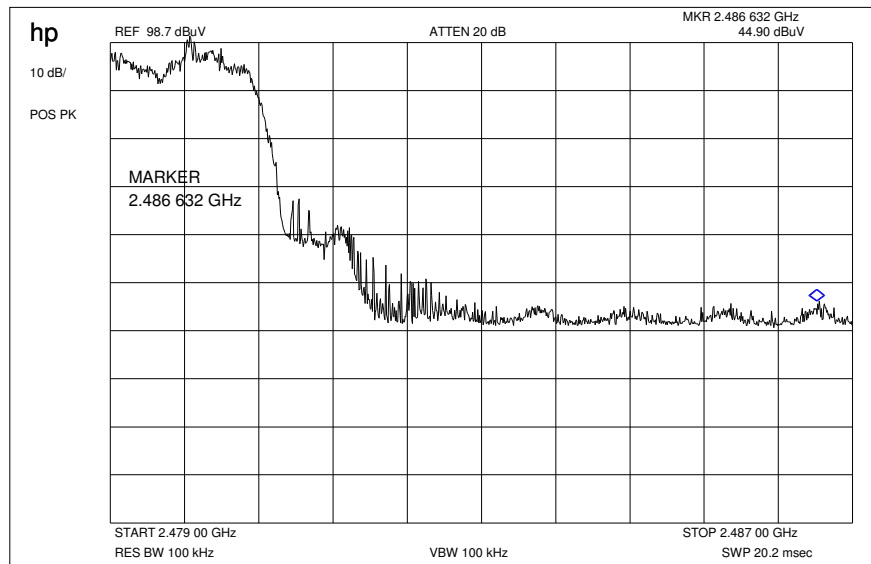


Result:


Marker-Delta-Value : 53.80 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

Plot 4: Restricted Bands low

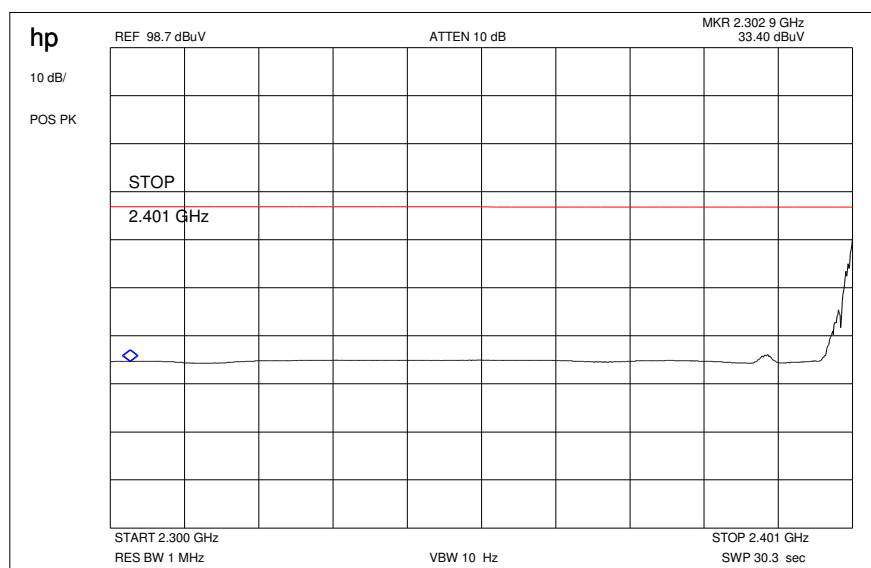

Plot 5: Restricted Bands high

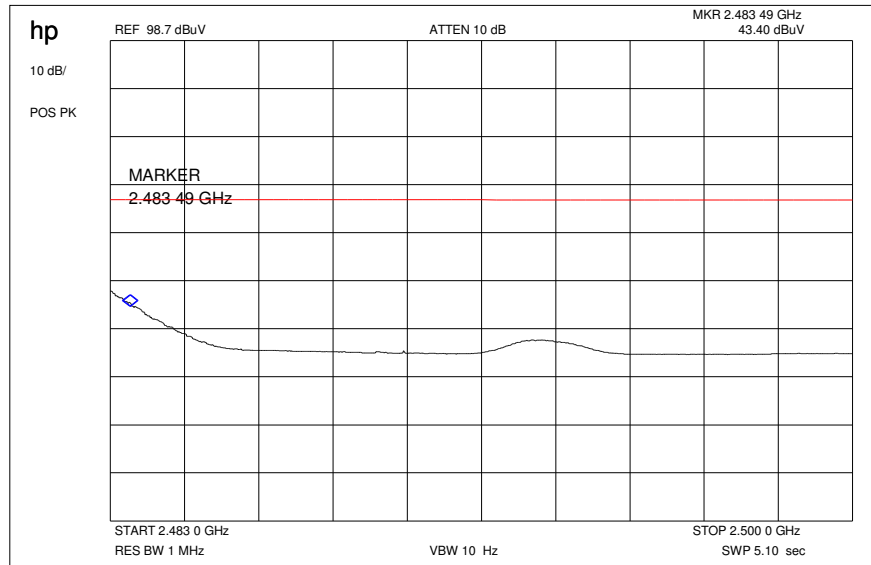

CETECOM ICT Services GmbH

Untertürkheimer Str. 6-10, 66117 Saarbruecken
RSC-Laboratory

Phone: +49 (0) 681 598-0
Phone: +49 (0) 681 598-0

Fax: -9075
Fax: -9075

Test report no.: 2-4530-03-03/06

Date: 2007-02-14

Page 42 of 66

Results & Limits:

Radiated field strength


The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	100.50 dB μ V/m	-3.2	97.30 dB μ V/m
Max. average value	Calculated with duty cycle correction factor	97.30 dB μ V/m peak	-1,07dB duty cycle correction factor (worst case DH5)	96.23 dB μ V/m
Delta value	Peak 100 kHz RBW/VBW	53.30 dB (single carrier) 53.80 dB (hopping mode)	-	-
Value at band edge	limit 54 dB μ V/m			42.93 dB μ V/m (single carrier) 42.43 dB μ V/m (hopping mode)
Statement:				Complies

3.14 Spurious Emissions - conducted (Transmitter) § 15.247 (c)(1)


Modulation: GFSK

Plot 1 of 3: lowest channel

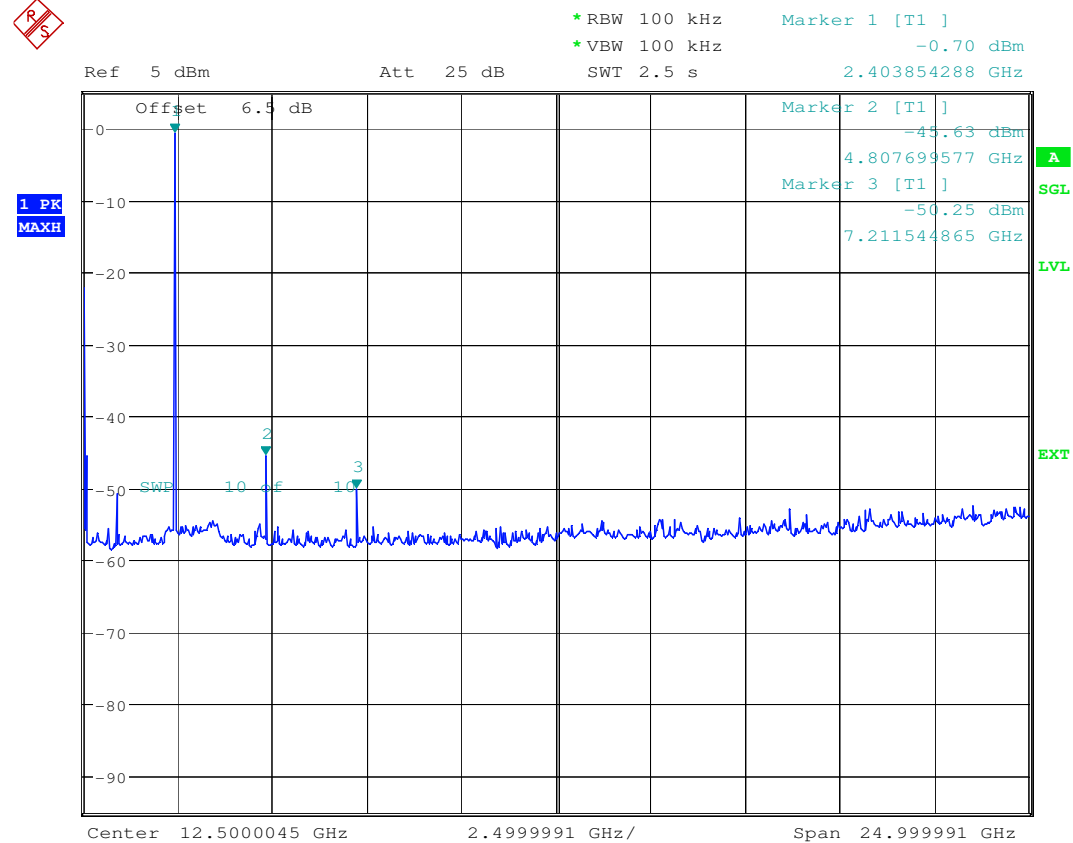


Date: 14.FEB.2007 13:13:34

Plot 2 of 3: middle channel

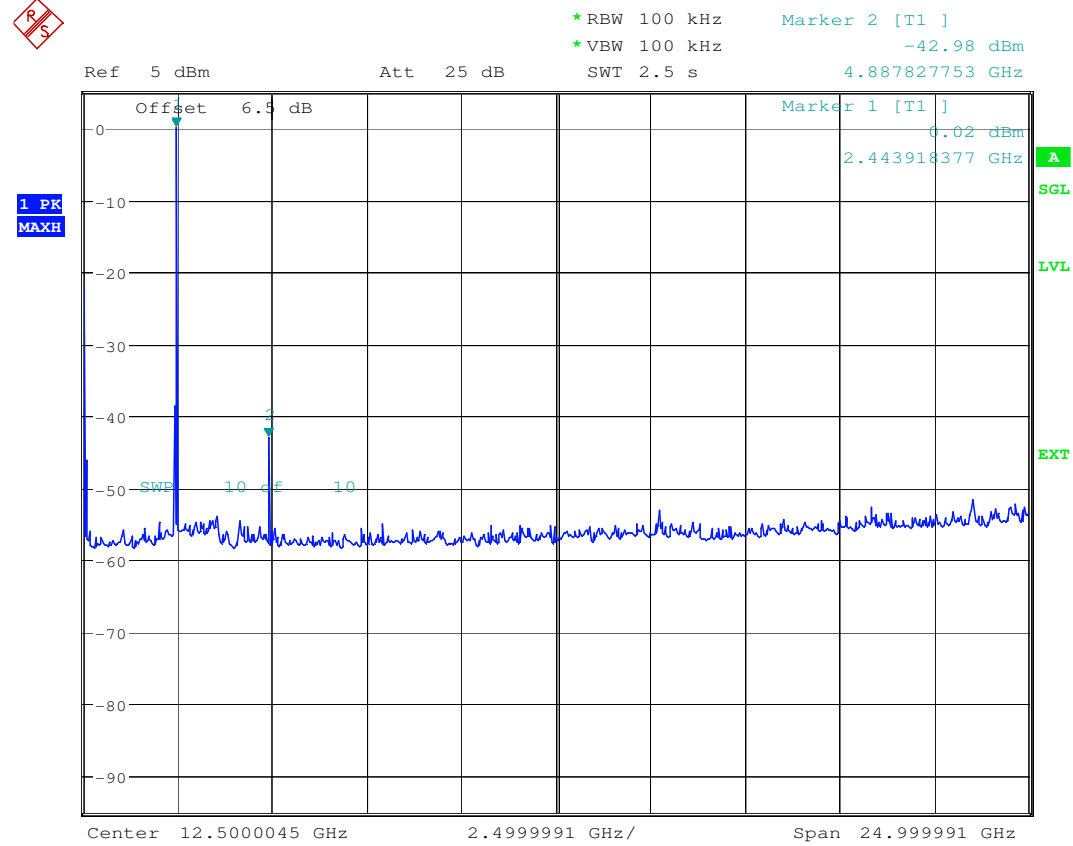

Date: 14.FEB.2007 13:15:28

Plot 3 of 3: highest channel

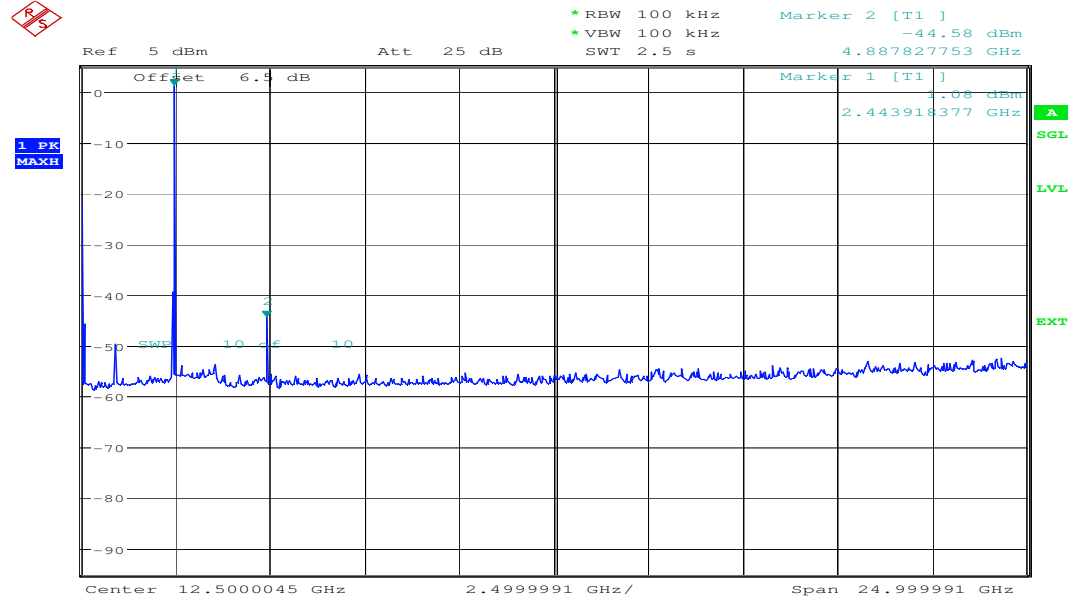

Date: 14.FEB.2007 13:16:56

Result & Limits:

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402			30 dBm		Operating frequency
			-20 dBc		
2441			30 dBm		Operating frequency
4882		-43.0	-20 dBc		complies
2480			30 dBm		Operating frequency
4960		-44.6	-20 dBc		complies
Measurement uncertainty		± 3dB			

RBW : 100 kHz VBW: 100 MHz


Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.


3.15 Spurious Emissions > 30 MHz- radiated (Transmitter) § 15.247 (c)(1)

Modulation: GFSK


Plot : 0.03 - 4 GHz vertical/horizontal (lowest channel)

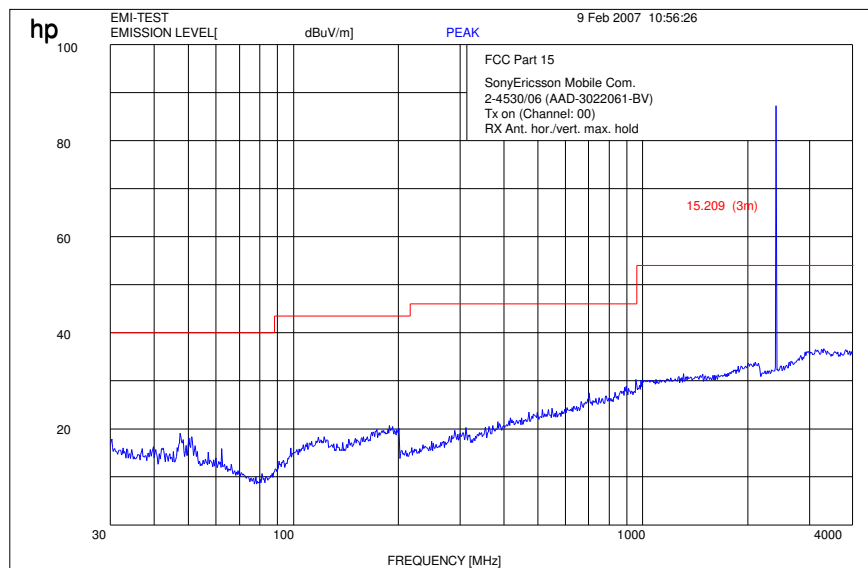


Plot : 4- 12 GHz vertical/horizontal (lowest channel)

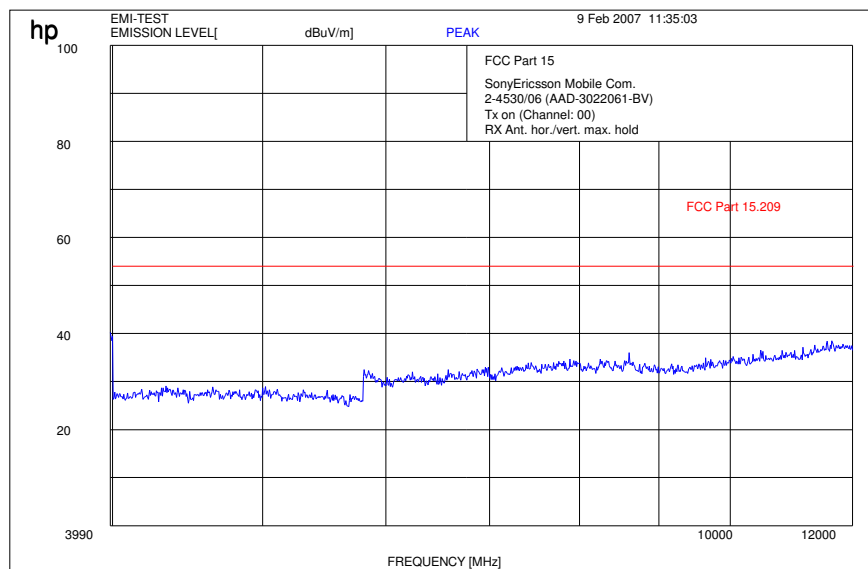


Plot : 12- 25 GHz vertical/horizontal (valid for all channels)

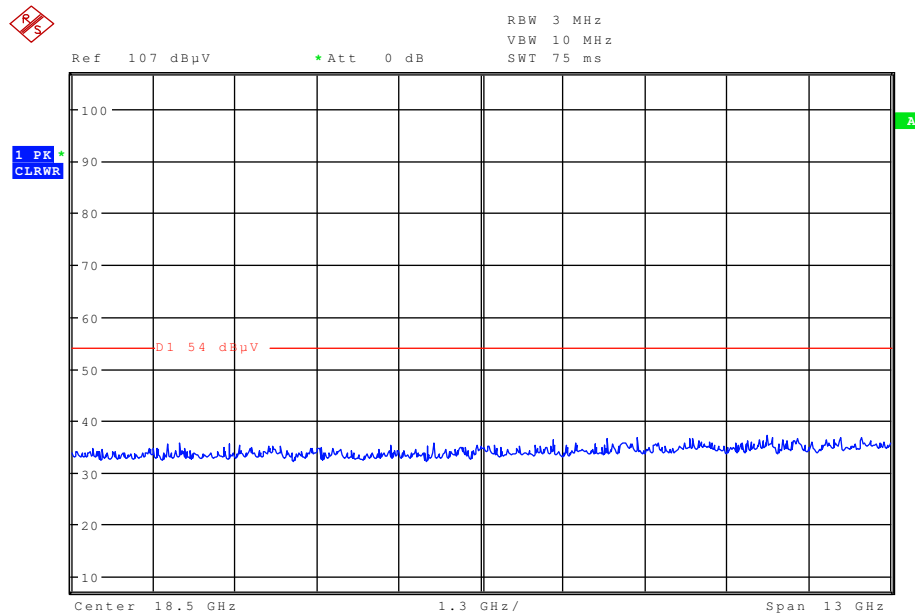


Plot : 0.03 - 4 GHz vertical/horizontal (middle channel)

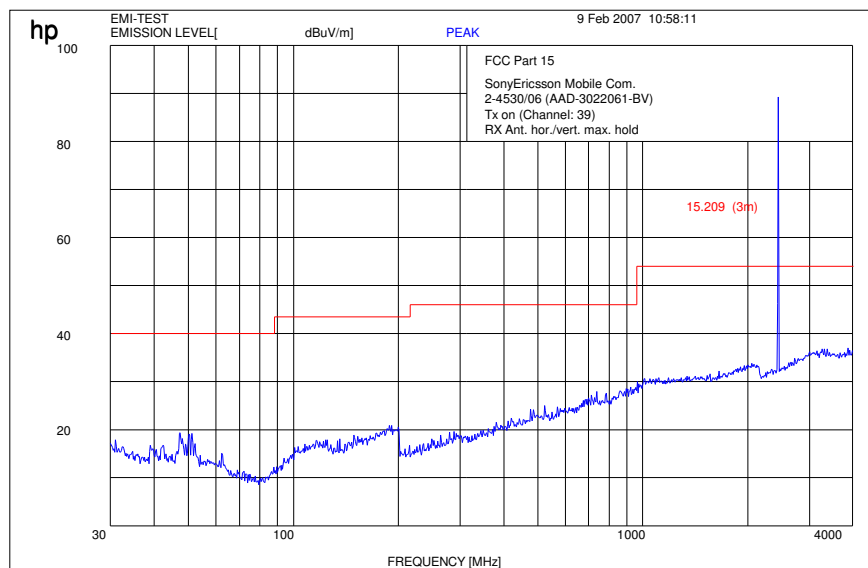


Plot : 4- 12 GHz vertical/horizontal (middle channel)

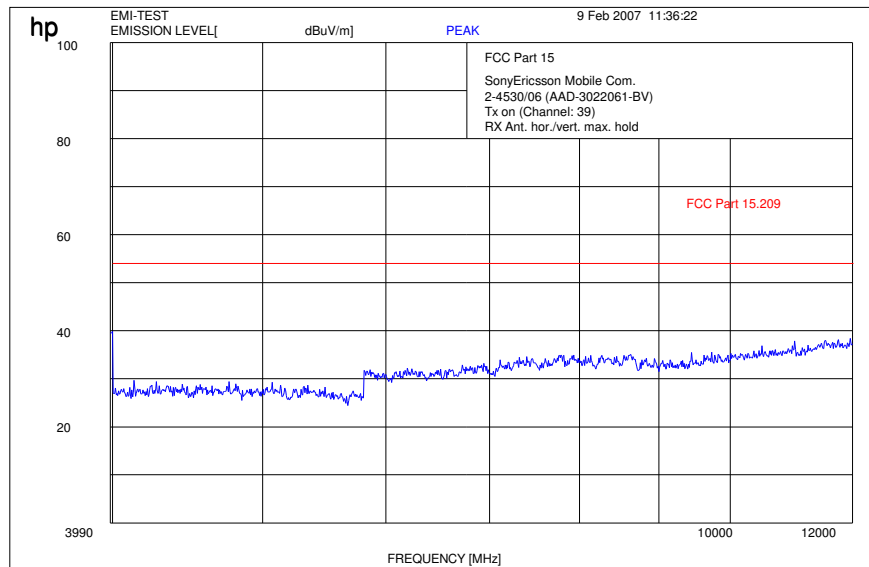

Plot : 0.03 - 4 GHz vertical/horizontal (highest channel)

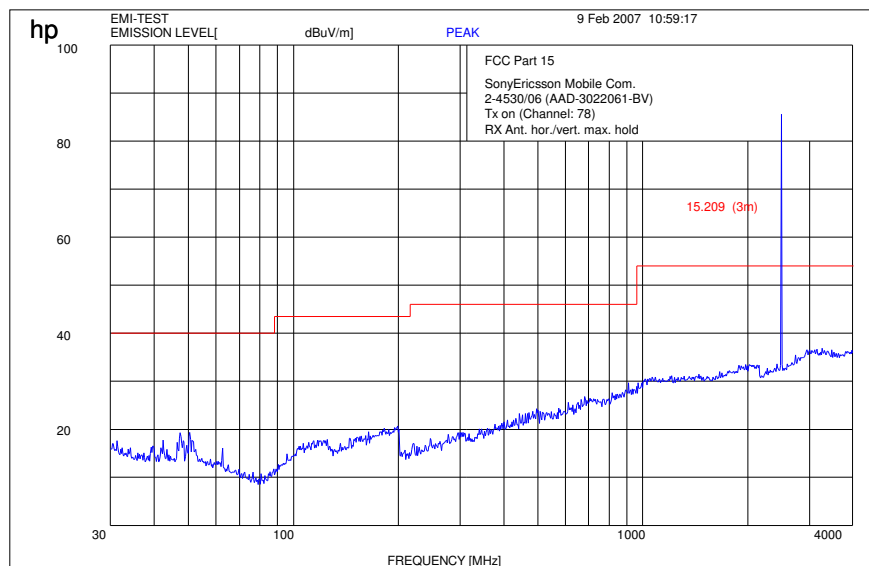

Plot : 4- 12 GHz vertical/horizontal (highest channel)

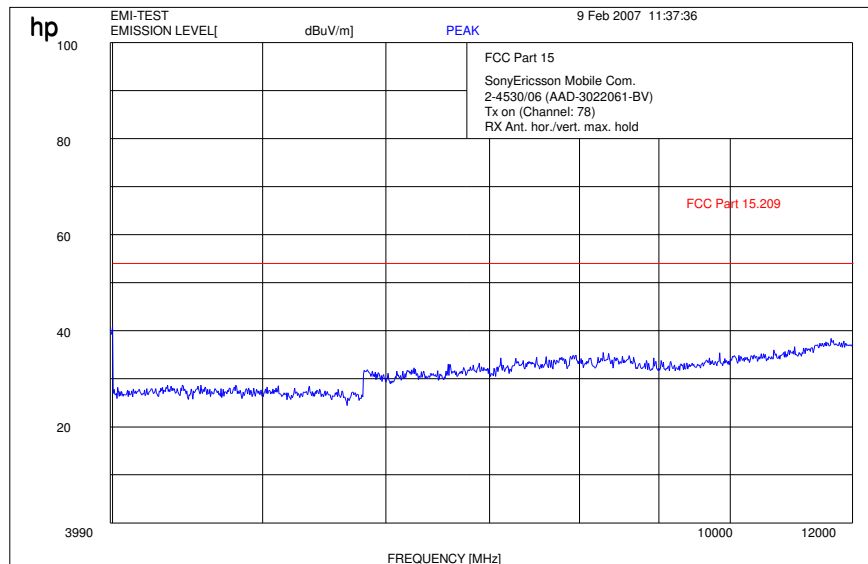

Results:

SPURIOUS EMISSIONS LEVEL (dB μ V/m)								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Level [dB μ V/m]	Level [μ V/m]
No peaks found			No peaks found			No peaks found		
Measurement uncertainty			± 3 dB					

$f < 1$ GHz : RBW/VBW: 100 kHz

$f \geq 1$ GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


Limits: § 15.209

Frequency [MHz]	Field strength [μ V/m]	Measurement distance (m)
30 - 88	100 (40 dB μ V/m)	3
88 - 216	150 (43.5 dB μ V/m)	3
216 - 960	200 (46 dB μ V/m)	3
above 960	500 (54 dB μ V/m)	3


3.16 Spurious Emissions - radiated (Receiver) § 15.109

Modulation: GFSK


Plot : 0.03 - 4 GHz vertical/horizontal (receiver)

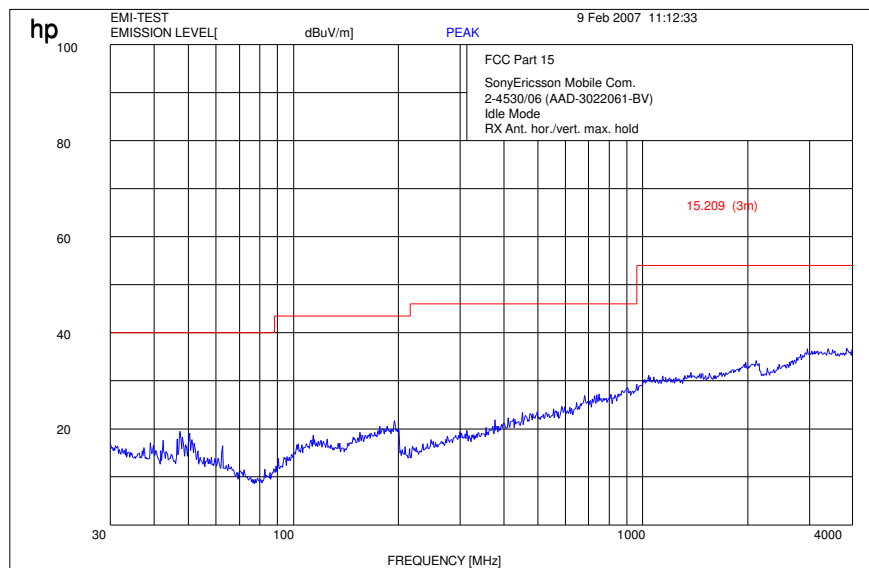

Plot : 4- 12 GHz vertical/horizontal (receiver)

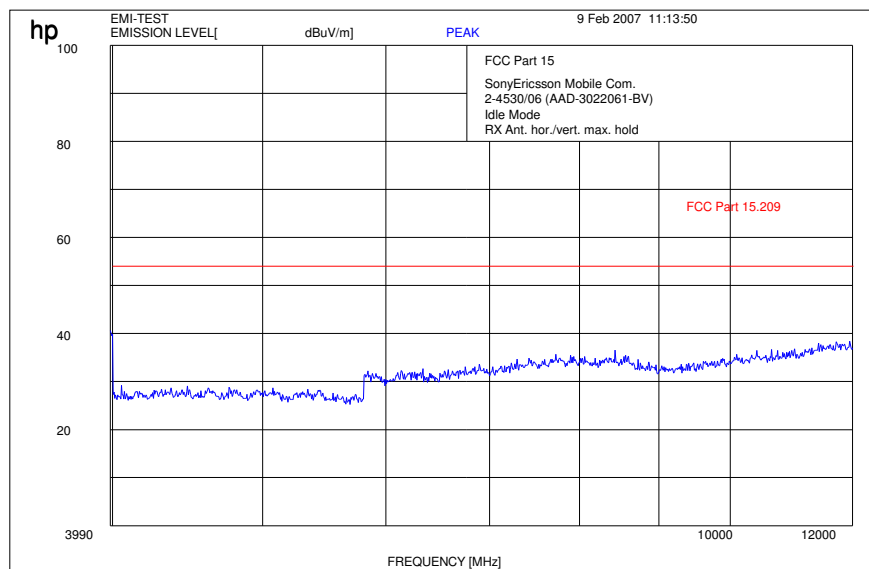

Plot : 12- 25 GHz vertical/horizontal (receiver)

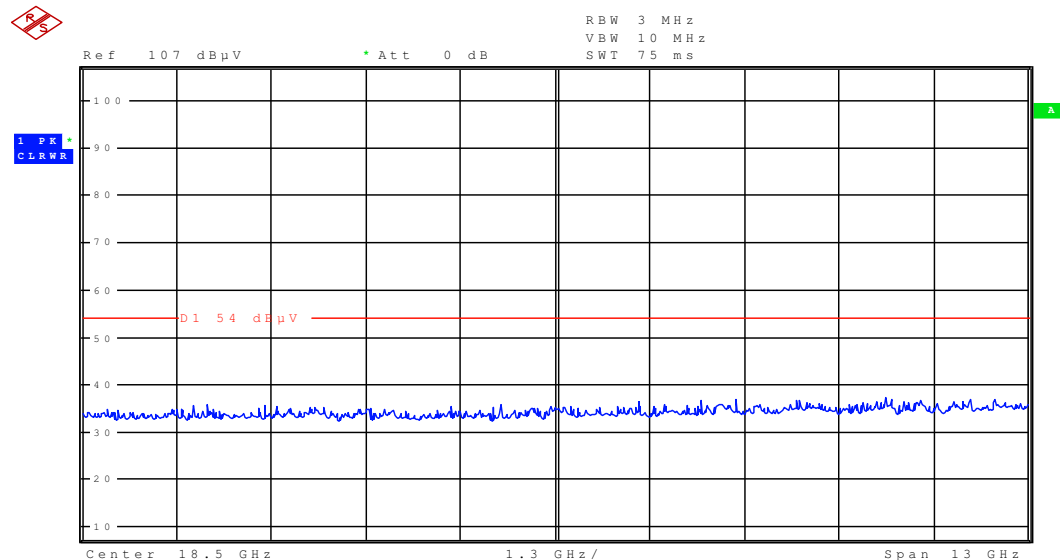

Spurious Emissions level [dBμV/m]								
Receiving Mode								
f[MHz]	Detector	Level [dBμV/m]	f[MHz]	Detector	Level [dBμV/m]	f[MHz]	Detector	Level [dBμV/m]
No peaks found								
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz
see above plots

f ≥ 1GHz : RBW/VBW: 1 MHz

Measurement distance see table

Limits : § 15.109

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
30 - 88	100 (40 dBμV/m)	3
88 - 216	150 (43.5 dBμV/m)	3
216 - 960	200 (46 dBμV/m)	3
above 960	500 (54 dBμV/m)	3


3.17 Spurious Emissions < 30 MHz - Transmitter radiated § 15.209

Modulation: GFSK

Measured at 10 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

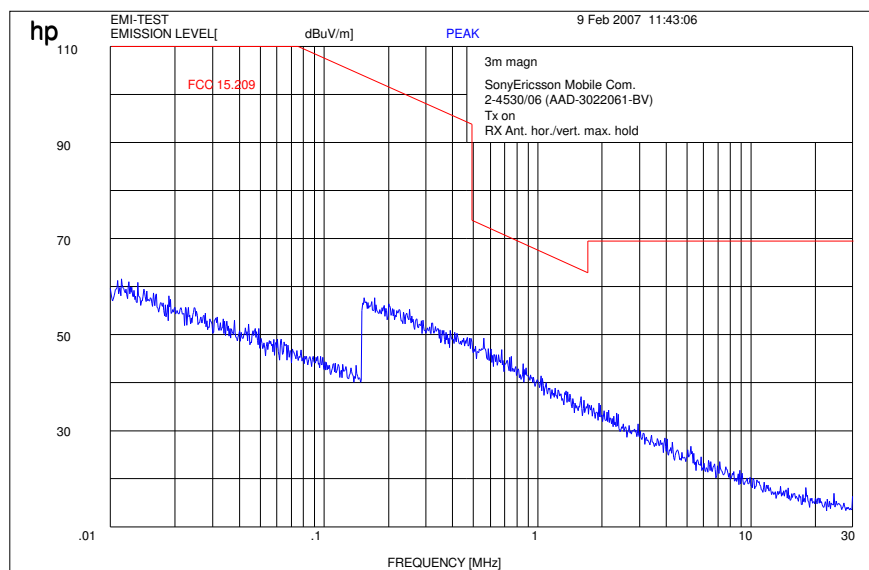


Limits:

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB $\mu\text{V/m}$	30

3.18 Conducted Emissions <30 MHz § 15.107/207

Modulation: GFSK

Plot 1:

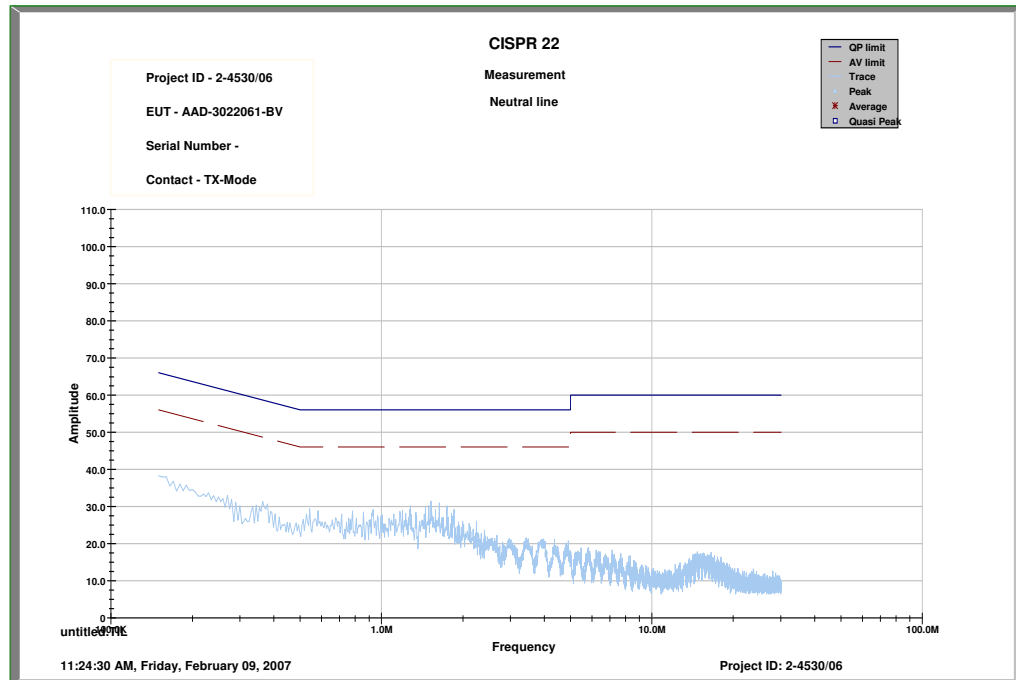

Limits :

Under normal test conditions only	See plots
-----------------------------------	-----------

3.19 Used Testequipment

Anechoic chamber C:

Device	Manufacturer	Type	S/N Number	Inv. No. Cetecom
Spektrum Analyser	HP	8566B	2747A05306	300001000
Spektrum Analyser Display	HP	85662A	2816A16541	300002297
Quasi-Peak-Adapter	HP	85650A	2811A01131	300000999
Power Supply	HP	6032A	2818A03450	300001040
Power Attenuator	Byrd	8325	1530	300001595
Bikonical Antenna	EMCO	3104	3758	300001602
Log. Period. Antenna	EMCO	3146	2130	300001603
Double Ridged Antenna	EMCO	HP 3115P	3088	300001032
Active Loop Antenna	EMCO	6502	2210	300001015
Antenna VDE/FCC		HP11965B		300002298
SRM-Drive	HP	9144A	2823e46556	300001044
Software	HP	EMI		300000983
Busisolator	Kontron			300001056
Absorberhalle	MWB		87400/02	300000996
Salzsäule	Kontron			300001055
Antenna	R&S	HMO20	832211/003	300002243
Indukt. Tast Antenna	R&S	HFH 2 Z4	881468/026	300001464
System-Rack	HP I.V.	85900	*	300000222
Spectrum Analyzer	HP	8566B	2747A05275	300000219
Quasi-Peak-Adapter	HP	85650A	2811A01135	300000216
RF-Preselector	HP	85685A	2837A00779	300000218
Rahmen Antenne	R&S	HFH2-Z2	891847-35	300001169
Leitungsteiler	HP	11850C		300000997
Breitband-Hornantenne EMI	HP	35155P		300002300
PC	HP	Vectra VL		300001688
VHF Meßantenne	Schwarzbeck	VHA 9103		300001778
Spectrum Analyzer Display	HP	85662A	2816A16497	300001690
VHF Meßantenna	Schwarzbeck	VHA 9103		300001780
Biconical Antenna	EMCO	3104 C	9909-4868	300002590

SRD Laboratory: (Bluetooth System)

No	Equipment/Type	Manufact.	Serial Nr.	Inv. No. Cetecom
1	System Controller PSM 12	R&S	835259/007	3000002681
2	Memory Extension PSM-K10	R&S	To 1	3000002681
3	Operating Software PSM-B2	R&S	To 1	3000002681
4	19'' Monitor		22759020-ED	3000002681
5	Mouse		LZE 0095/6639	3000002681
6	Keyboard		G00013834L461	3000002681
7	Spectrum Analyser FSIQ 26	R&S	835540/018	3000002681
8	Tracking Generator FSIQ-B10	R&S	835107/015	3000002681
10	RF-Generator SMIQ03 (B1 Signal)	R&S	835541/056	3000002681
11	Modulation Coder SMIQ-B20	R&S	To 10	3000002681
12	Data Generator SMIQ-B11	R&S	To 10	3000002681
13	RF Rear Connection SMIQ-B19	R&S	To 10	3000002681
14	Fast CPU SM-B50	R&S	To 10	3000002681
15	FM Modulator SM-B5	R&S	835676/033	3000002681
16	RF-Generator SMIQ03 (B2 Signal)	R&S	835541/055	3000002681

CETECOM ICT Services GmbH

Untertürkheimer Str. 6-10, 66117 Saarbruecken
RSC-Laboratory

Phone: +49 (0) 681 598-0
Phone: +49 (0) 681 598-0

Fax: -9075
Fax: -9075

Test report no.: 2-4530-03-03/06

Date: 2007-02-14

Page 55 of 66

17	Modulation Coder SMIQ-B20	R&S	To 16	3000002681
18	Data Generator SMIQ-B11	R&S	To 16	3000002681
19	RF Rear Connection SMIQ-B19	R&S	To 16	3000002681
20	Fast CPU SM-B50	R&S	To 16	3000002681
21	FM Modulator SM-B5	R&S	836061/022	3000002681
22	RF-Generator SMP03 (B3 Signal)	R&S	835133/011	3000002681
23	Attenuator SMP-B15	R&S	835136/014	3000002681
24	RF Rear Connection SMP-B19	R&S	834745/007	3000002681
25	Power Meter NRVD	R&S	835430/044	3000002681
26	Power Sensor NRVD-Z1	R&S	833894/012	3000002681
27	Power Sensor NRVD-Z1	R&S	833894/011	3000002681
28	Rubidium Standard RUB	R&S	6197	3000002681
29	Switching and Signal Conditioning Unit SSCU	R&S	338864/003	3000002681
30	Laser Printer HP Deskjet 2100	HP	N/A	3000002681
31	19'' Rack	R&S	11138363000004	3000002681
32	RF-cable set	R&S	N/A	3000002681
33	IEEE-cables	R&S	N/A	3000002681
34	Sampling System FSIQ-B70	R&S	835355/009	3000002681
35	RSP programmable attenuator	R&S	834500/010	3000002681
36	Signalling Unit	R&S	838312/011	3000002681
37	NGPE programmable Power Supply for EUT	R&S	192.033.41	3000002681

SRD Laboratory (Bluetooth Testsystem Extended)

No	Equipment/Type	Manufact.	Serial Nr.	Inv. No. Cetecom
1	Climatic box	Voetsch	58566046820010	300003019
2	CBT32 with EDR Signaling Unit	R&S		
3	Coupling unit	Narda	N/A	--
4	2xSwitch Matrix PSU	R&S	872584/021	--
5	RF-cable set	R&S	N/A	different
6	IEEE-cables	R&S	N/A	--
7	System Controller with NI IEEE card	other	N/A	--
8	CMU 200	R&S	832221/0055	300002862

4 Photographs of Test Set-up

Photo 1: Radiated Emissions

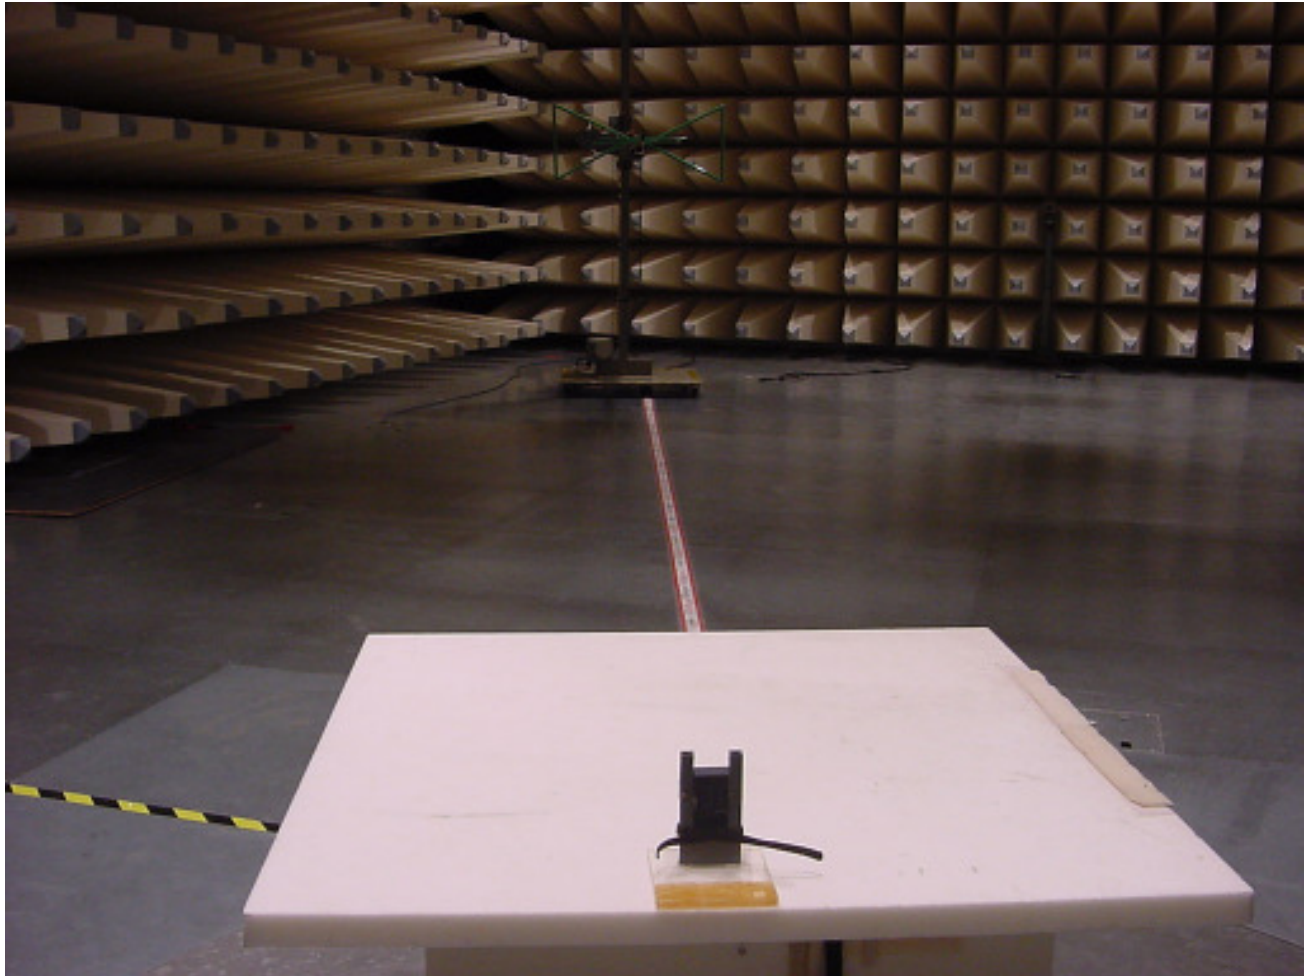


Photo 2: Radiated Emissions

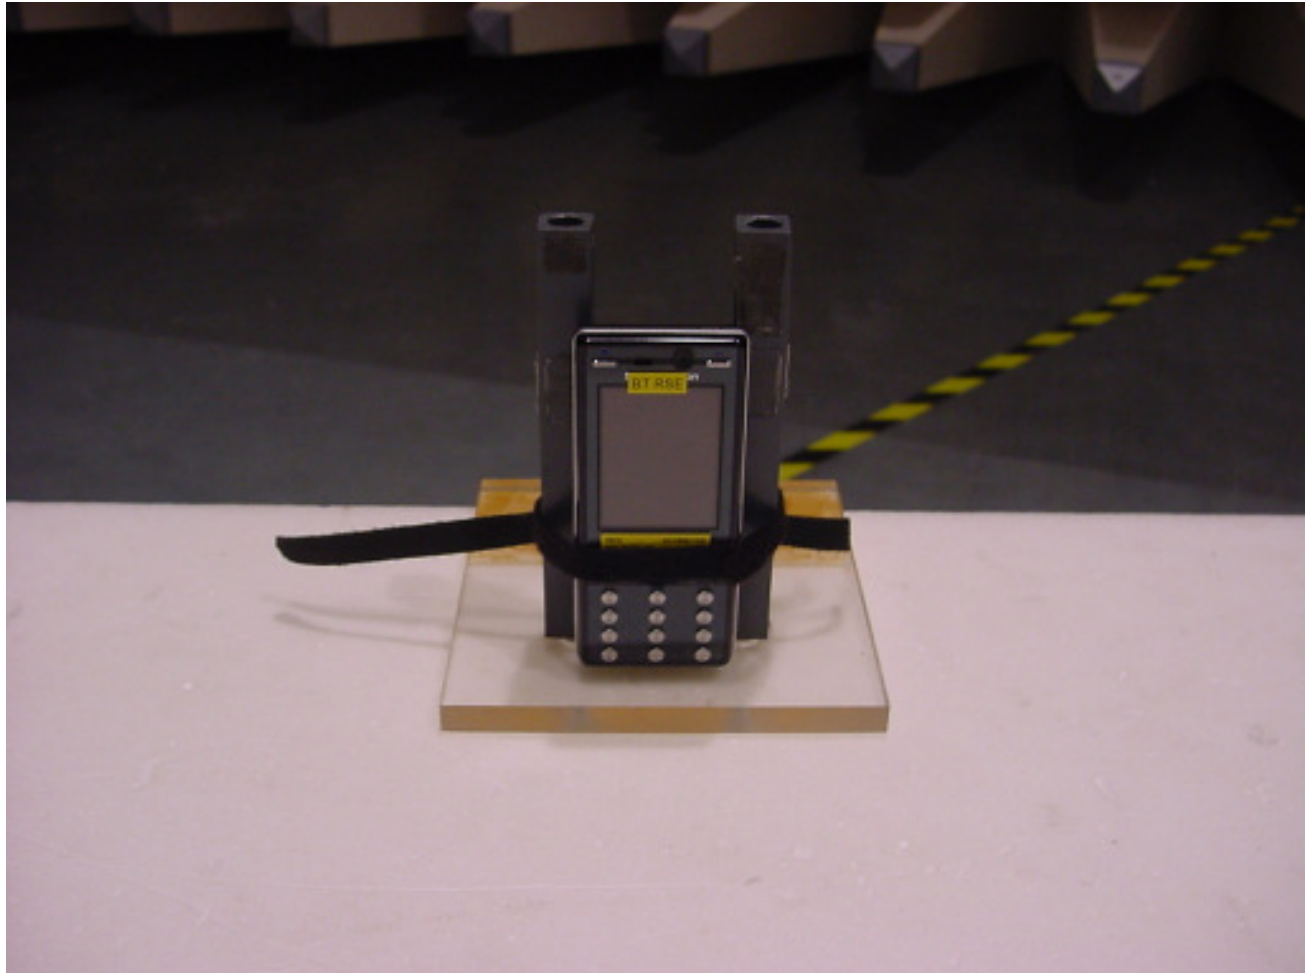


Photo 3: Conducted Emissions



5 Photographs of EUT

Photo 1:



Photo 2:



Photo 3:



Photo 4:



Photo 5:

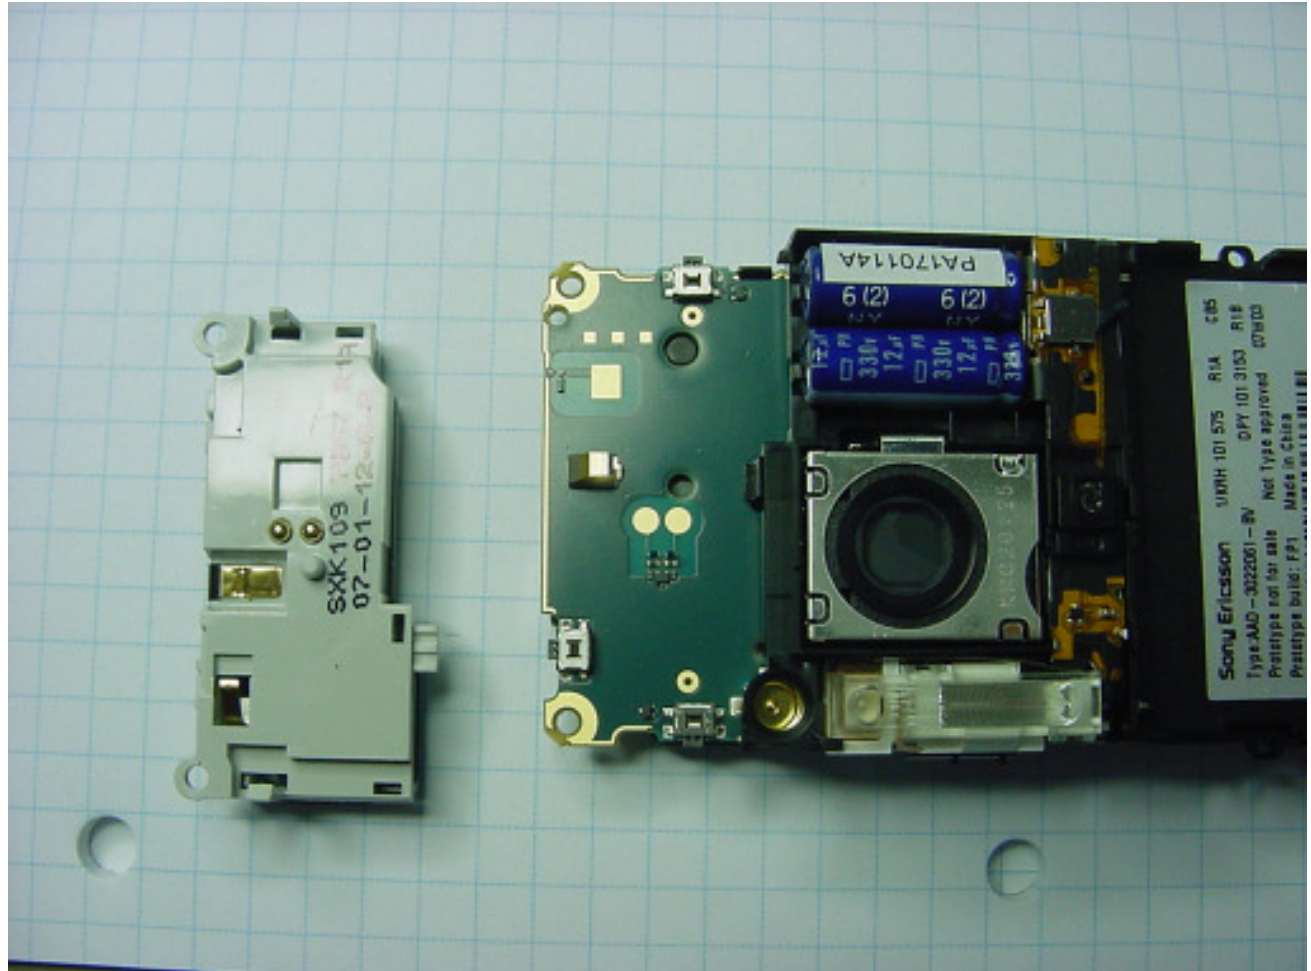


Photo 6:

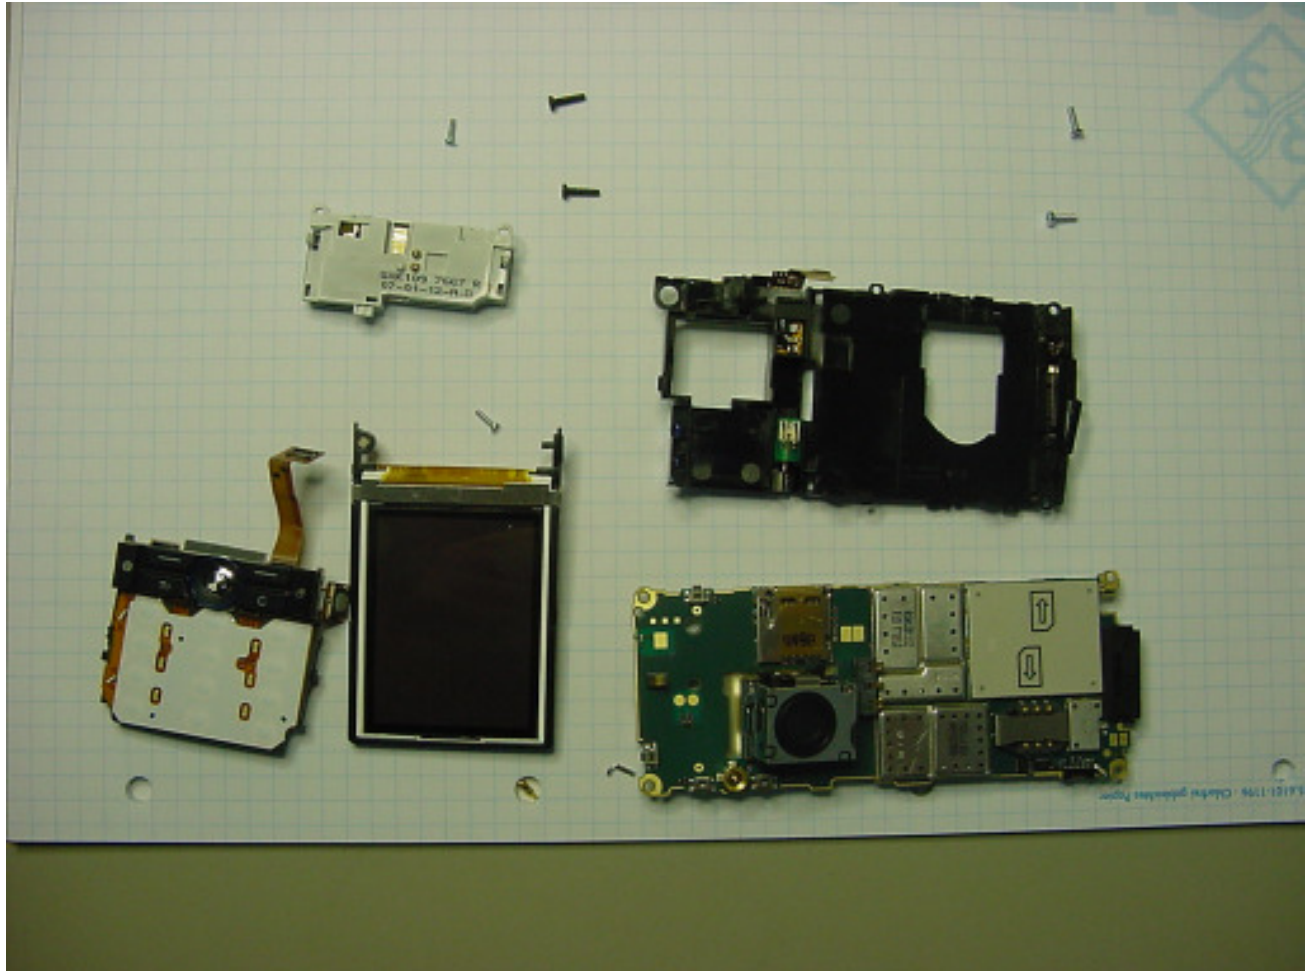


Photo 7:

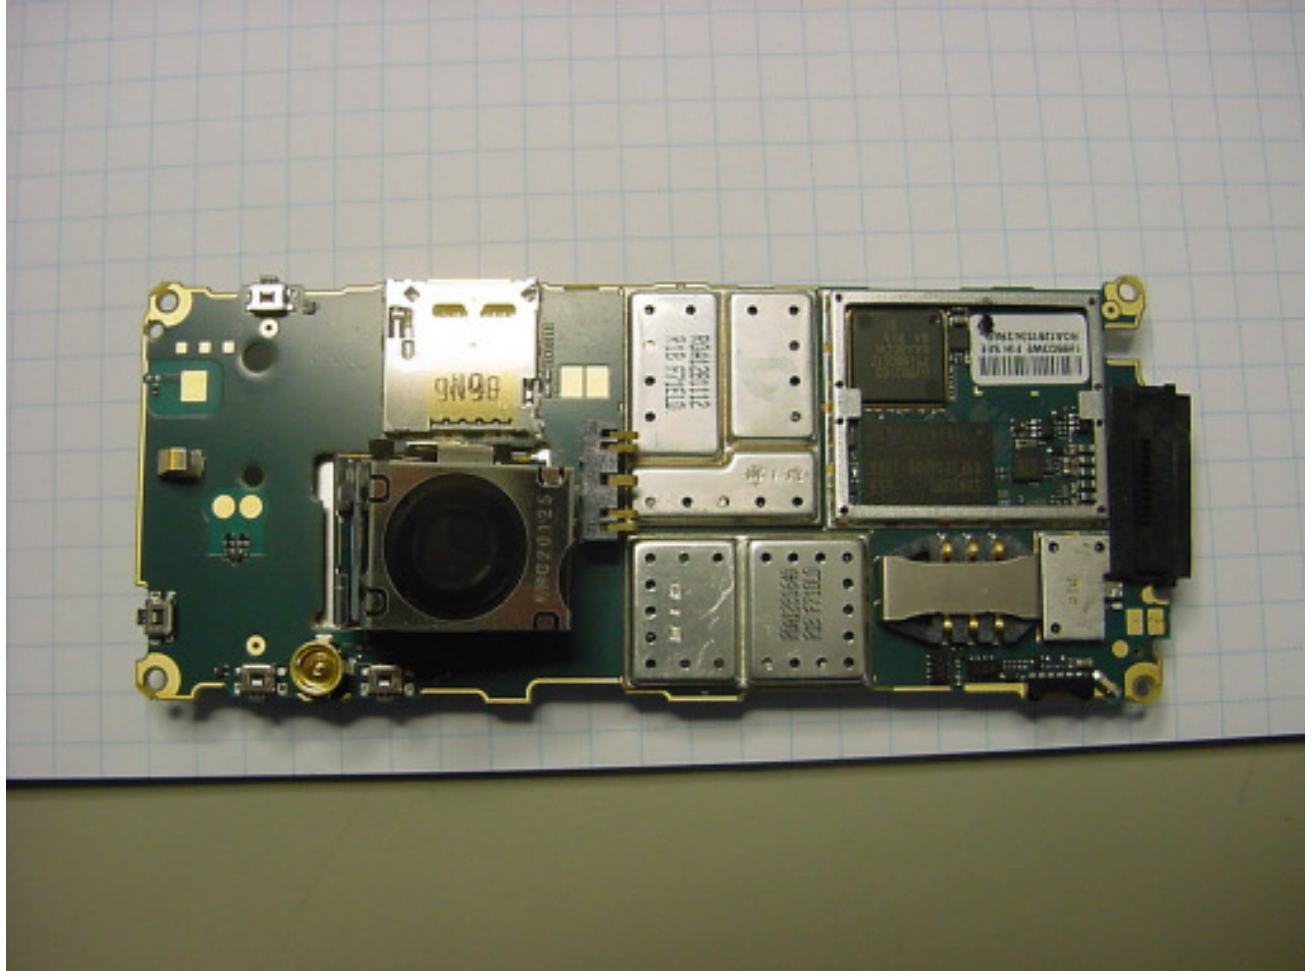


Photo 8:

