Untertürkheimer Straße 6-10. **RSC-Laboratory**

D-66117 Saarbrücken

Phone: +49 (0) 681-598-0 Fax:-9075





Accredited testing-laboratory

DAR registration number: DAT-P-176/94-D1

Federal Motor Transport Authority (KBA) DAR registration number: KBA-P 00070-97

Recognized by the Federal Communications Commission Anechoic chamber registration no.: 90462 (FCC) Anechoic chamber registration no.: 3463A-1 (IC) **Certification ID: DE 0001 Accreditation ID: DE 0002**

Accredited Bluetooth® Test Facility (BQTF)
The Bluetooth word mark and logos are owned by the Bluetooth SIG,

Inc. and any use of such marks by Cetecom ICT is under license

2-4576-07-02/07 Annex to Test

report no. :

Type identification: AAD-3022091-BV

Applicant : Sony Ericsson Mobile Communications AB

: PY7A3022091 FCC ID : 4170B-A3022091 IC Reg. No. Test standards : 47 CFR Part 15

RSS - 210 Issue 6

2007-05-22 Page 1 of 25



Annex to Test report no.: 2-4576-07-02/07

Table of contents

1	Ge	eneral information	3
	1.1	Notes	3
	1.2	Testing laboratory	
	1.3	Details of applicant	4
	1.4	Application details	4
2	Te	est standard/s:	5
3	Te	echnical tests	6
	3.1	Details of manufacturer	6
	3.2	Test item(s) and test configuration	
4	Su	mmary of Measurement Results and list of all performed test cases	7
5	Mo	easurements and results	8
6	An	nnex A: FCC Part 15 Subpart B	9
	6.1	Conducted Limits	9
	6.2	Receiver spurious emission radiated (Idle mode)	12
7	Ph	notographs of the Test Set-up	15
8	Ph	otographs of the EUT	18

Annex to Test report no.: 2-4576-07-02/07



1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

2007-05-21	Detlev Gillmann	
Date	Name	Signature

Technical responsibility for area of testing:

2007-05-21	Harro Ames	W. chus	
Date	Name	Signature	

11 /

2007-05-22 Page 3 of 25

Annex to Test report no.: 2-4576-07-02/07



1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10 66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to

DIN EN ISO/IEC 17025

DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)

DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name : Street : Town : Country : Phone : Fax :

1.3 Details of applicant

Name: Sony Ericsson Mobile Communications AB

Street: Nya Vattentornet
Town: 22188 Lund
Country: Sweden

Telephone: +46-46-19-3000 Fax: +46-46-19-3295 Contact: Peter Lindeborg

E-mail: peter.lindeborg@sonyericsson.com

Telephone: +46-46-212-6180

1.4 Application details

Date of receipt of order: 2007-03-14

Date of receipt of test item: 2007-05-16

Date of start test: 2007-05-16

Date of end test 2007-05-22

Persons(s) who have been present during the test:

2007-05-22 Page 4 of 25

Annex to Test report no.: 2-4576-07-02/07



2 Test standard/s:

47 CFR Part 15 2006-08 Title 47 of the Code of Federal Regulations; Chapter I-

Federal Communications Commission

subchapter A - general, Part 15-Radio frequency devices

RSS - 210 Issue 6 2005-09 Spectrum Management and Telecommunications - Radio

Standards Specification

Low-power Licence-exempt Radiocommunication Devices (All

Frequency Bands): Category I Equipment

2007-05-22 Page 5 of 25



Annex to Test report no.: 2-4576-07-02/07



3 **Technical tests**

3.1 Details of manufacturer

Name:	Sony Ericsson Mobile Communications AB		
Street:	Nya Vattentornet		
Town:	22188 Lund		
Country:	Sweden		

Test item(s) and test configuration 3.2

Standard Charger CST - 75 No.: 1 with AAD-3022091-BV



2007-05-22 Page 6 of 25



Annex to Test report no.: 2-4576-07-02/07

4	Summary of Measurement Results and list of all performed
	test cases

\boxtimes	No deviations from the technical specifications were ascertained
	There were deviations from the technical specifications ascertained

Section in	Test Name	Verdict
this Report		
6.1	Conducted limits CFR Part 15.207, 15.107 RSS 210, Issue 6, Section 6.6, 7.4	Pass
6.2	Receiver spurious emission radiated (Idle mode) CFR Part SUBCLAUSE § 15.109 RSS 210, Issue 6, Section 7.3 Receiver Spurious Emissions (Radiated)	Pass

2007-05-22 Page 7 of 25

Annex to Test report no.: 2-4576-07-02/07



5 Measurements and results

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are conforming to specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2. Antennas are conforming to ANSI C63.2-1996 item 15.

9 kHz – 150 kHz ,Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna. 150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, passive loop antenna. 30 MHz - 200 MHz: Quasi Peak measurement, 120 KHz Bandwidth, biconical antenna 200MHz - 1GHz: Quasi Peak measurement, 120 KHz Bandwidth, log periodic antenna >1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.109 and 15.107

2007-05-22 Page 8 of 25

Annex to Test report no.: 2-4576-07-02/07



6 Annex A: FCC Part 15 Subpart B

6.1 Conducted Limits

Reference

FCC:	CFR Part 15.207, 15.107
IC:	RSS 210, Issue 6, Section 6.6, 7.4

Limits: § 15.107 / 15.207

Frequency of Emission (MHz)	Conducted Limit (dBµV)		
	Quasi-peak	Average	
0.15 - 0.5	66 to 56 *	56 to 46 *	
0.5 - 5	56	46	
5 - 30	60	50	

^{*} Decreases with the logarithm of the frequency

2007-05-22 Page 9 of 25

Annex to Test report no.: 2-4576-07-02/07




EUT: : AC/DC Standard Charger CST - 75

(with mobile AAD3022091-BV)

Power AC (measured) : 115 V / 60 Hz Manufacturer: : Sony Ericsson Operating Condition : Traffic mode

Test Site: : Room 006 (Shielded chamber)

Operator: : Gillmann

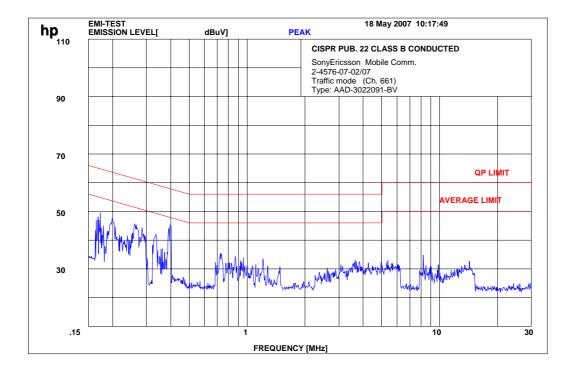


Upper Limit LINE CISPPR 22 QP Lower Limit LINE CISPPR 22 AV

Setting: 150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth,

L1 and $N-system \ (max. Hold)$

2007-05-22 Page 10 of 25






EUT: : AC/DC Standard Charger CST - 75

(with mobile AAD3022091-BV)

Power AC (measured) : 115 V / 60 Hz Manufacturer: : SonyEricsson Operating Condition : Idle mode

Test Site: : Room 006 (Shielded chamber)

Operator: : Gillmann

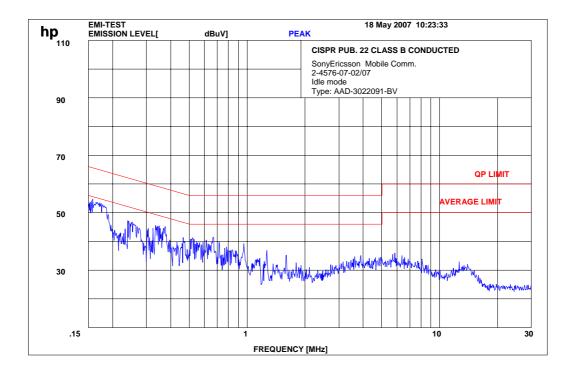


Upper Limit LINE CISPPR 22 QP Lower Limit LINE CISPPR 22 AV

Setting: 150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth,

L1 and N-system (max. Hold)

2007-05-22 Page 11 of 25





6.2 Receiver spurious emission radiated (Idle mode)

Reference

FCC: CFR Part SUBCLAUSE § 15.109

IC: RSS 210, Issue 6, Section 7.3 Receiver Spurious Emissions (Radiated)

	SPURIOUS EMISSIONS LEVEL (μV/m)							
	Idle Mode							
	1900 MHz		MHz		MHz			
F [MHz]	Detector	Level [μV/m]	F [MHz]	Detector	Level [µV/m]	F [MHz]	Detector	Level [μV/m]
N	No peaks foun	ıd						
Measuremen	Measurement uncertainty						•	

f < 1 GHz: RBW/VBW: 100 kHz $f \ge 1 GHz: RBW/VBW: 1 \text{ MHz}$

Limits

SUBCLAUSE § 15.109


Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)	
30 - 88	100	3	
88 - 216	150	3	
216 - 960	200	3	
above 960	500	3	

2007-05-22 Page 12 of 25


Annex to Test report no.: 2-4576-07-02/07



Idle Mode (30 MHz – 4.0 GHz)

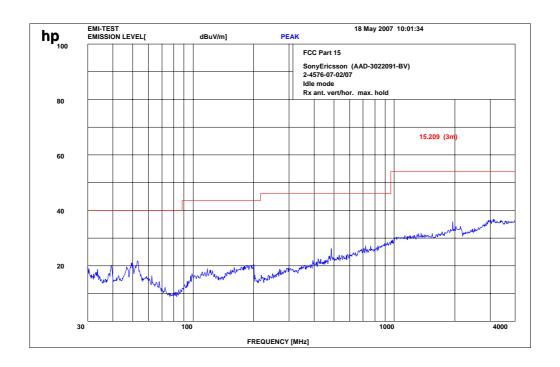

Idle Mode (4 GHz – 12.0 GHz)

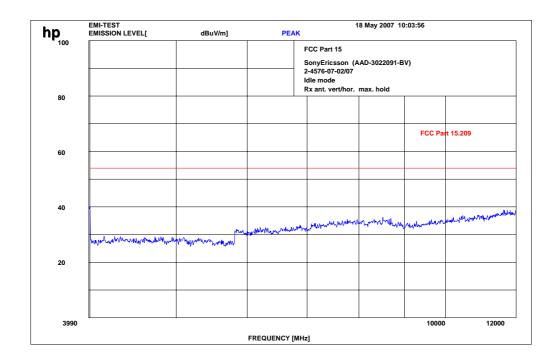


f < 1 GHz : RBW/VBW: 100 kHz $f \ge 1 GHz : RBW / VBW 1 MHz$

2007-05-22 Page 13 of 25



Annex to Test report no.: 2-4576-07-02/07

Idle Mode (12 GHz - 25 GHz)

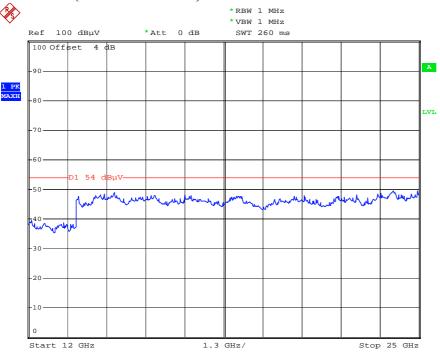

Date: 21.MAY.2007 10:53:17

2007-05-22 Page 14 of 25

Annex to Test report no.: 2-4576-07-02/07



7 Photographs of the Test Set-up





2007-05-22 Page 15 of 25

Annex to Test report no.: 2-4576-07-02/07



Photo 2:


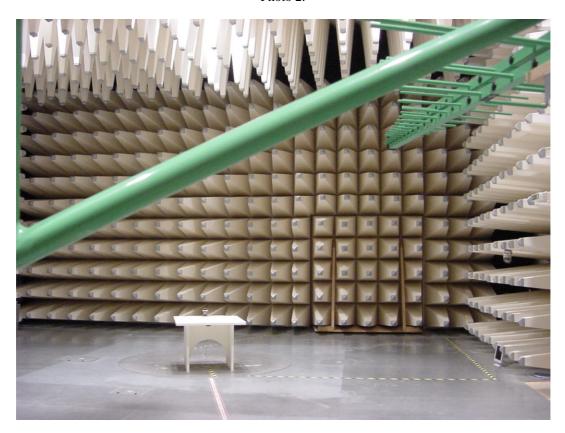


Photo 3:

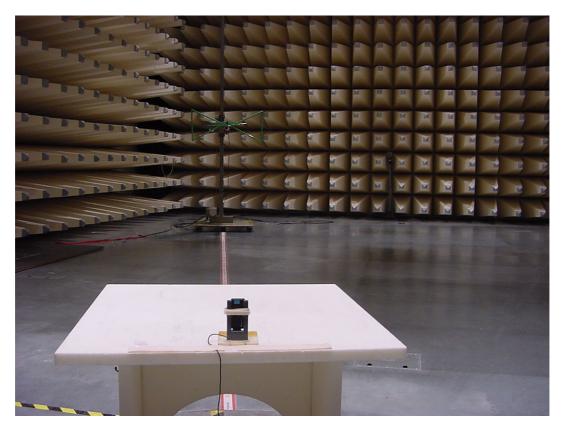

2007-05-22 Page 16 of 25

Annex to Test report no.: 2-4576-07-02/07



Photo 4:



2007-05-22 Page 17 of 25

Annex to Test report no.: 2-4576-07-02/07



8 Photographs of the EUT

Photo 5:



2007-05-22 Page 18 of 25



Photo 6:



Photo 7:



2007-05-22 Page 19 of 25

Annex to Test report no.: 2-4576-07-02/07



Photo 8:



Photo 9:



2007-05-22 Page 20 of 25

Annex to Test report no.: 2-4576-07-02/07



Photo 10:



Photo 11:



2007-05-22 Page 21 of 25

Annex to Test report no.: 2-4576-07-02/07



Photo 12:



Photo 13:



2007-05-22 Page 22 of 25


Annex to Test report no.: 2-4576-07-02/07



Photo 14:



Photo 15:

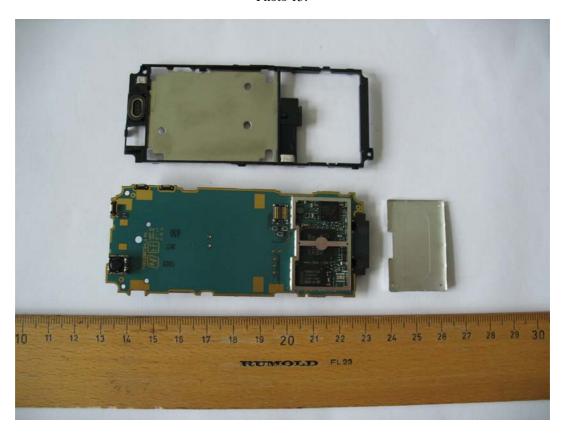

2007-05-22 Page 23 of 25

Annex to Test report no.: 2-4576-07-02/07



Photo 16:


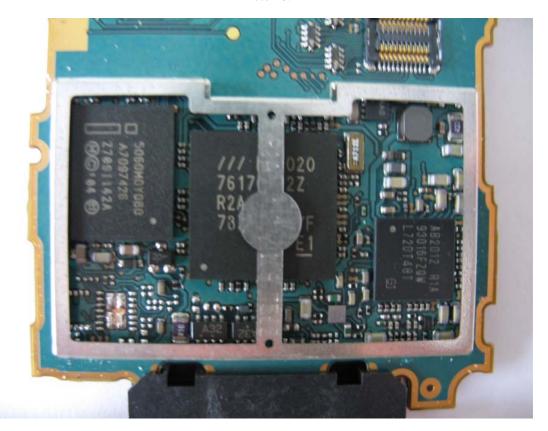


Photo 17:

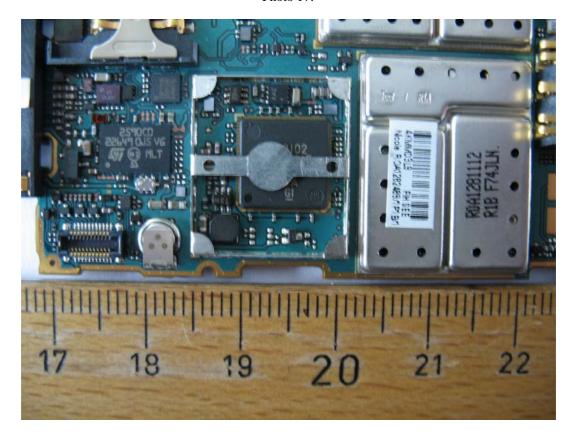

2007-05-22 Page 24 of 25

Annex to Test report no.: 2-4576-07-02/07



Photo 18:

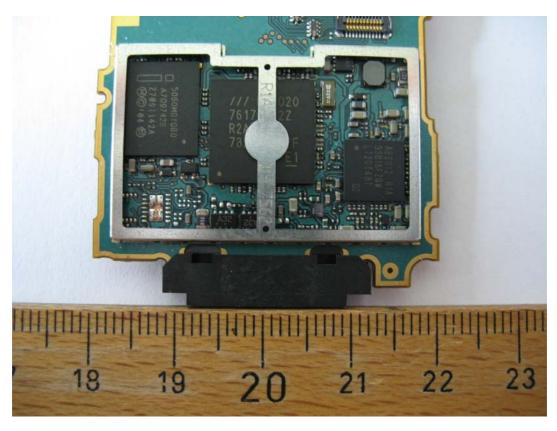


Photo 19:



2007-05-22 Page 25 of 25