

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: 3463 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 081/94-DO



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test report no.: 2-3730-01-04_04
FCC Part 15.247 / CANADA RSS-210
FCC ID: PY7AD021011 / IC: 4170B-AD021011

AAD-3021011-BV

CETECOM – ICT Services GmbH
Untertürkheimerstr. 6-10
D-66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0
Fax: + 49 (0) 681 / 9075

BLUETOOTH is a trademark owned by Bluetooth SIG, Inc. and licensed to Cetecom

Table of contents

1. ADMINISTRATIVE DATA	3
1.1. ADMINISTRATIVE DATA OF THE TEST FACILITY	3
1.1.1 Identification of the testing laboratory	3
1.1.2 Organizational items.....	3
1.1.3 Applicant's details	4
1.2 ADMINISTRATIVE DATA OF MANUFACTURER / MEMBER	4
1.3 DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
1.3.1 EUT: Type, S/N etc.	5
1.3.2 If RF component testing only, description of additional used HW/SW	5
1.3.3 Additional EUT information For IC Canada (appendix 2).....	6
1.3.4 EUT operating modes	7
1.3.5 Extreme conditions testing values.....	7
2. TESTSTANDARD & SUMMARY LIST OF ALL PERFORMED TEST CASES	8
3. RF MEASUREMENT TESTING	9
3.1 DESCRIPTION OF TEST SET-UP	9
3.1.1 Radiated measurements	9
3.1.2 Conducted measurements	9
3.2 REFERENCED DOCUMENTS.....	10
3.3 ADDITIONAL COMMENTS.....	10
3.4 ANTENNA GAIN	10
3.5 CARRIER FREQUENCY SEPARATION §15.247(A1).....	11
3.6 NUMBER OF HOPPING CHANNELS §15.247(A1)	12
3.7 TIME OF OCCUPANCY (DWELL TIME) §15.247(A1 III)	13
3.8 POWER SPECTRAL DENSITY (HYBRID SYSTEM IN INQUIRY MODE/PAGE SCAN) §15.247(D)	14
3.9 SPECTRUM BANDWIDTH OF A FHSS SYSTEM / 20dB BANDWITH §15.247(A1)	15
3.10 MAXIMUM OUTPUT POWER (CONDUCTED) § 15.247 (B) (1)	17
3.11 MAX. PEAK OUTPUT POWER (RADIATED) § 15.247 (B) (1).....	19
3.12 BAND-EDGE COMPLIANCE OF CONDUCTED EMISSIONS §15.247 (C)	20
3.13 BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS §15.205	23
3.14 SPURIOUS EMISSIONS - CONDUCTED (TRANSMITTER) § 15.247 (C) (1)	26
3.15 SPURIOUS EMISSIONS - RADIATED (TRANSMITTER) § 15.247 (C) (1).....	28
3.16 SPURIOUS EMISSIONS - RADIATED (RECEIVER) § 15.109	35
3.17 SPURIOUS EMISSIONS - RADIATED <30 MHz § 15.109	37
3.18 CONDUCTED EMISSIONS <30 MHz § 15.107/207	38
4 PHOTOGRAPHS	43

ANNEX 1: TECHNICAL PRODUCT DESCRIPTION

1. Administrative data

1.1. Administrative data of the test facility

1.1.1 Identification of the testing laboratory

Company name:	Cetecom ICT Services GmbH
Address:	Untertürkheimerstr. 6-10 D-66117 Saarbruecken Germany
Laboratory accreditation:	DAR-Registration No. TTI-P-G 081/94-DO Bluetooth Qualification Test Facility (BQTF)
Responsible for testing laboratory:	Warken Jörg, Berg Michael Phone: +49 681 598 0 Fax: +49 681 598 9075 email: info@ict.cetecom.de

..... /

Responsible for testing laboratory
(Warken Jörg, Berg Michael)

1.1.2 Organizational items

Reference No.:	2-3730-01-04_04
Order No.:	--
Responsible for test report and project leader:	Warken Jörg, Berg Michael
Receipt of EUT:	2004-09-11
Date(s) of test:	2004-09-13 to 2004-09-15
Date of report:	2004-09-15
Number of report pages:	58
Number of diagram pages (annex):	--

Version of template:	1.8

..... /

Responsible for test report
(Warken Jörg, Berg Michael)

Note:

The test results of this test report relate exclusively to the item tested as specified in this report. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

During the test no hardware and software changes are allowed to be performed at the EUT.

1.1.3 Applicant's details

Applicant's name:	Sony Ericsson Mobile Communications AB
Address:	Nya Vattentornet 221 88 Lund Sweden
Contact person:	Bo Johansson Phone: +46 46 193242 Fax: +46 46 193295 email: bo.g.johansson@sonyericsson.com

1.2 Administrative data of manufacturer / member

Manufacturer's name:	see 1.1.3
Address:	

1.3 Description of the Equipment under test (EUT)

1.3.1 EUT: Type, S/N etc.

Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
AAD-3021011-BV	V800	GSM900/1800/1900 and WCDMA mobile with <i>Bluetooth</i> support	CB50ZZ7G8E / 00460101-504575-1 (BT-Rad.) CB50ZZ7G8E / 00460101-504656-9 (BT-Cond.)	FB1	R1A031
Frequency Band [MHz]	Type of Modulation	Number of channels	Antenna	Power Supply	Temperature Range
ISM 2.400 - 2.485,5	FHSS	79	integral	DC	-20 to +55 °C

Max. power radiated: 1,61 dBm

Max. power conducted: 2,10 dBm EIRP

FCC ID: PY7AD021011

IC: 4170B-AD021011

1.3.2 If RF component testing only, description of additional used HW/SW


	Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
1						
2						
3						
4						

1.3.3 Additional EUT information For IC Canada (appendix 2)

Company Number:	4170B
Model Number:	V800
Product Name:	AAD-3021011-BV
Manufacturer:	Sony Ericsson Mobile Communications AB
Tested to Radio Standards Specification (RSS) No.:	RSS-210
Open Area Test Site Industry Canada Number:	3463
Frequency Range (or fixed frequency) [MHz]:	2400 – 2483.5 MHz
RF: Power [W] (max):	Rad. EIRP: 1,45 m Conducted : 1,62 m
Field Strength [dB μ V/m in 3m]:	96,8
Occupied Bandwidth (99% BW) [kHz]:	774
Type of Modulation:	FSK
Emission Designator (TRC-43):	IM00FXD / 79M0FXD (FHSS)
Transmitter Spurious (worst case) [μ V/m in 3m]:	No peaks found
Receiver Spurious (worst case) [μ V/m in 3m]:	No peaks found

ATTESTATION: I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all the applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Date:

2004-09-15

Warken Jörg

Testengineer

1.3.4 EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 2		low temperature, high power source conditions
Op. 3		high temperature, low power source conditions
Op. 4		high temperature, high power source conditions

*) EUT operating mode no. is used to simplify the testplan

1.3.5 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature / humidity	T _{nom}	°C / %	20 / 39
Low Temperature	T _{low}	°C	-20
High Temperature	T _{high}	°C	55
Nominal Power Source	V _{nom}	V	3,6
Low Power Source	V _{low}	V	3,3
High Power Source	V _{high}	V	4,4

Type of powersource: V DC

Deviations from this values are reported in chapter 2

2. Teststandard & summary list of all performed test cases

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210	PASS	2004-09-15	

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
§15.247(a1)	Carrier frequency separation	Yes			
§15.247(a1)	Number of hopping channels	Yes			
§15.247(a1 iii)	Time of occupancy (dwell time)	Yes			
§15.247(d)	Power Spectral density (Hybrid system in Inquiry mode/Page scan)	Yes			
§15.247(a1)	Spectrum Bandwidth of a FHSS System / 20dB Bandwith	Yes			
§ 15.247 (b) (1)	Maximum output power (conducted)	Yes			
§ 15.247 (b) (1)	Max. peak output power (radiated)	Yes			
§15.247 (c)	Band-edge compliance of conducted emissions	Yes			
§15.205	Band-edge compliance of radiated emissions	Yes			
§ 15.247 (c) (1)	Spurious Emission - conducted (Transmitter)	Yes			
§ 15.247 (c) (1)	Spurious Emission - radiated (Transmitter)	Yes			
§ 15.109	Spurious Emissions - radiated (Receiver)	Yes			
§ 15.109	Spurious Emissions - radiated <30 MHz	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	Yes			

3. RF measurement testing

3.1 Description of test set-up

3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-1992 clause 4.2.

Antennas conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna


1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn

All measurements are done in accordance with the Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA 00-705 and Appendix A "BLUETOOTH APPROVALS"

The EUT is powered by an external power supply with nominal voltage. The signaling is performed from outside the chamber with a signaling unit (CMU200 or other) by airlink using signaling antenna.

3.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signaling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

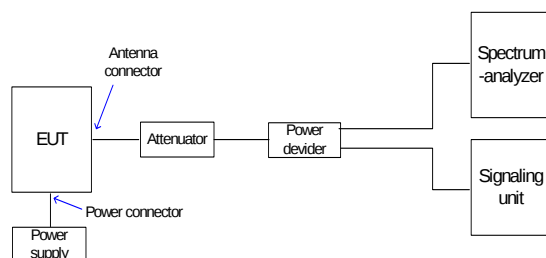

3.2 Referenced documents

none

3.3 Additional comments

Hardware / software changes during testing (only for pretesting)

Setup revision	Description of change	Change referenced to setup revision	Already perf. testcases influenced yes (reaped) / no
1.0	Start setup	-	-


3.4 Antenna gain

The antenna gain of the complete system is calculated by the difference of conducted power of the module and the radiated power in EIRP.

	low channel	mid channel	high channel
Conducted power [dBm]	2,10	1,32	0,25
Radiated power [dBm]	1,61	1,30	0,25
Gain [dB]	-0,49	-0,02	0

3.5 Carrier frequency separation §15.247(a1)

Plot 1 of 1:

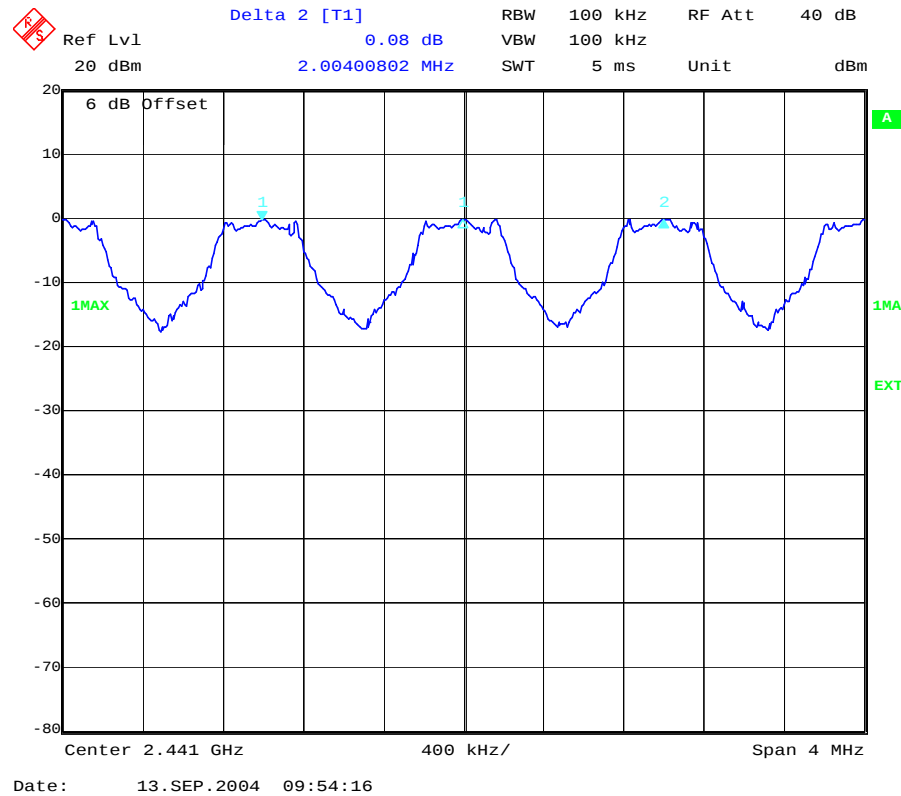


Result : Channel separation is: ~ 1 MHz

Limits :

Under normal test conditions only	Minimum 25 kHz or 20 dB Bandwidth of the hopping system
-----------------------------------	---


3.6 Number of hopping channels §15.247(a1)

Plot 1 of 2:

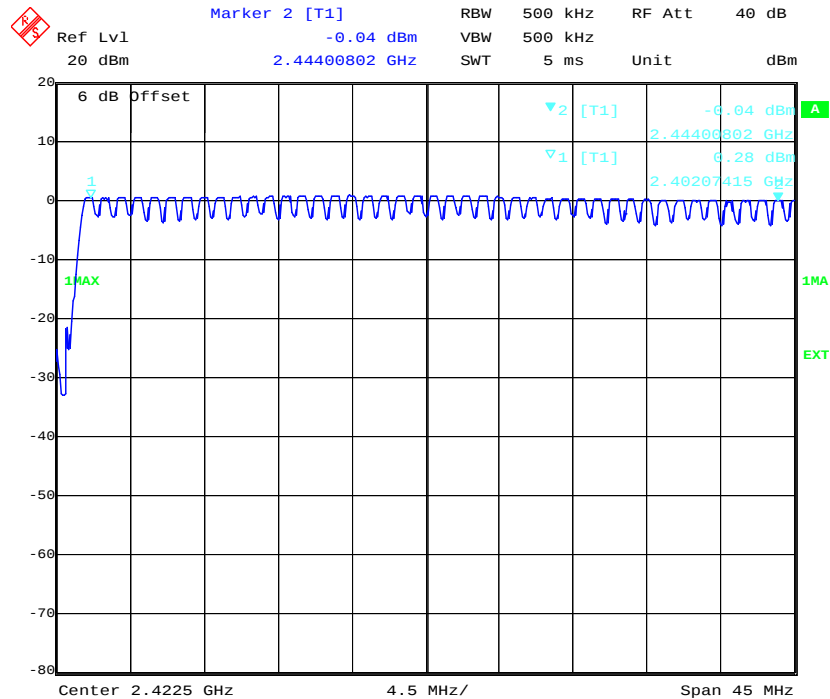

Date: 13.SEP.2004 09:59:43

Plot 2 of 2:

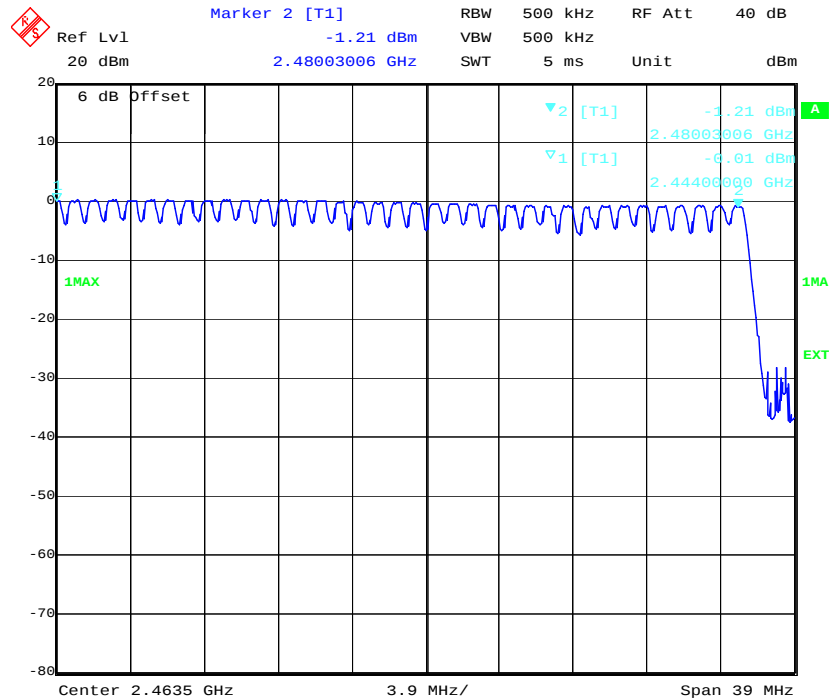

Date: 13.SEP.2004 10:01:09

Result : The number of hopping channels is: 79

Limits :

Under normal test conditions only	at least 15 non-overlapping channels
-----------------------------------	--------------------------------------

3.7 Time of occupancy (dwell time) §15.247(a1 iii)

For Bluetooth devives:

The dwell time of 0.4 s within a 31.6 second period in data mode is independent from the packet type (packet length).
The calculation for a 31.6 second period is a follows:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time = $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/s / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

This is according the Bluetooth Core Specification V 1.1 & V 1.2 (+ critical errata) for all Bluetooth devices.


Therefore, all Bluetooth devices comply with the FCC dwell timerequirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 mS (in a 12.8s period)

3.8 Power Spectral density (Hybrid system in Inquiry mode/Page scan) §15.247(d)

Plot 1 of 1:

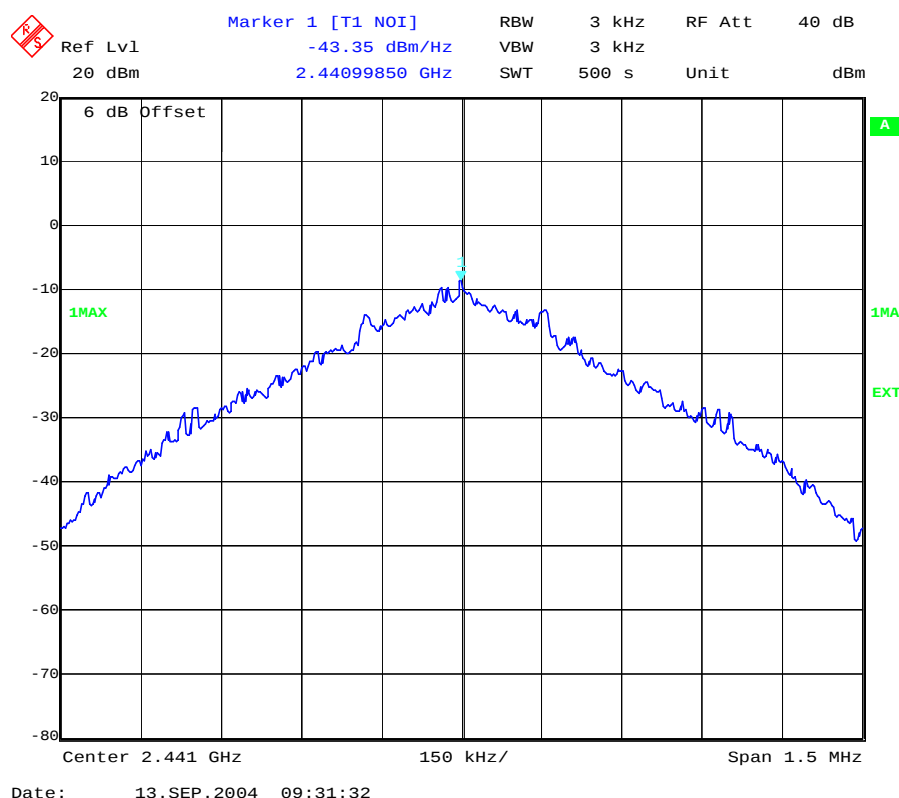


Result: Power density : - 43,35 dBm/Hz = - 8,55 dBm / 3 KHz
 Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB

Limits :

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission
-----------------------------------	---


3.9 Spectrum Bandwidth of a FHSS System / 20dB Bandwidth §15.247(a1)

Plot 1 of 3

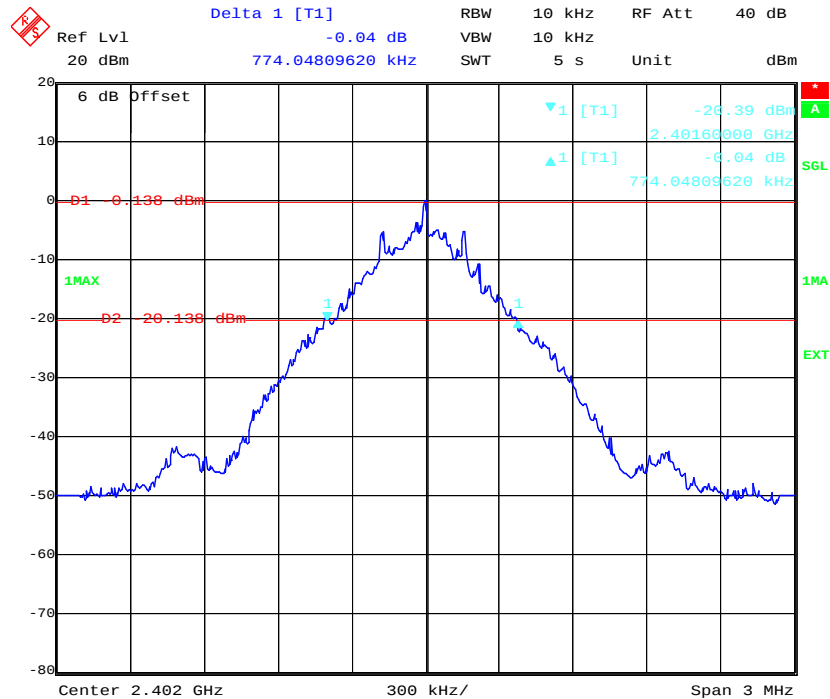


Date: 13.SEP.2004 10:16:10

Plot 2 of 3

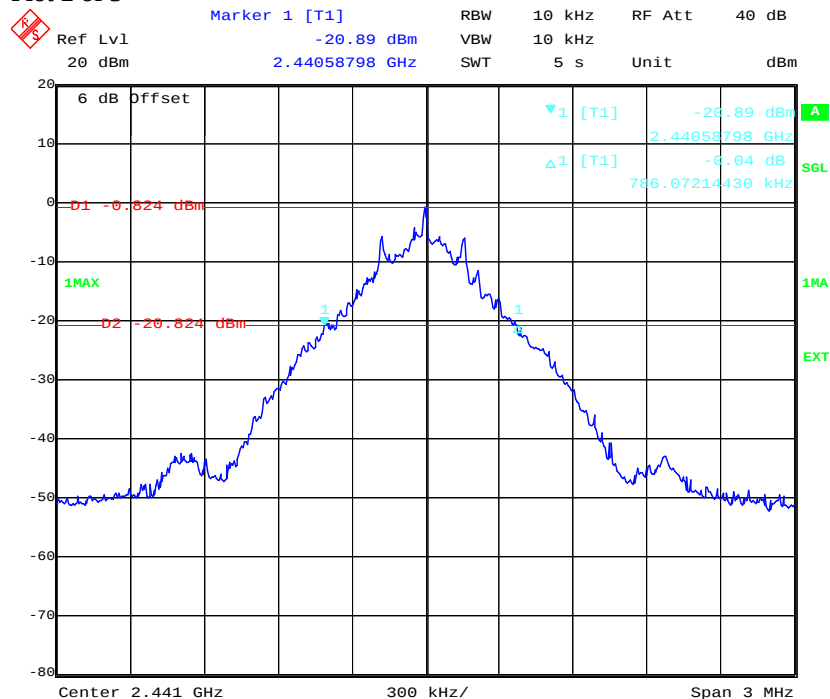

Date: 13.SEP.2004 09:36:20

Plot 3 of 3

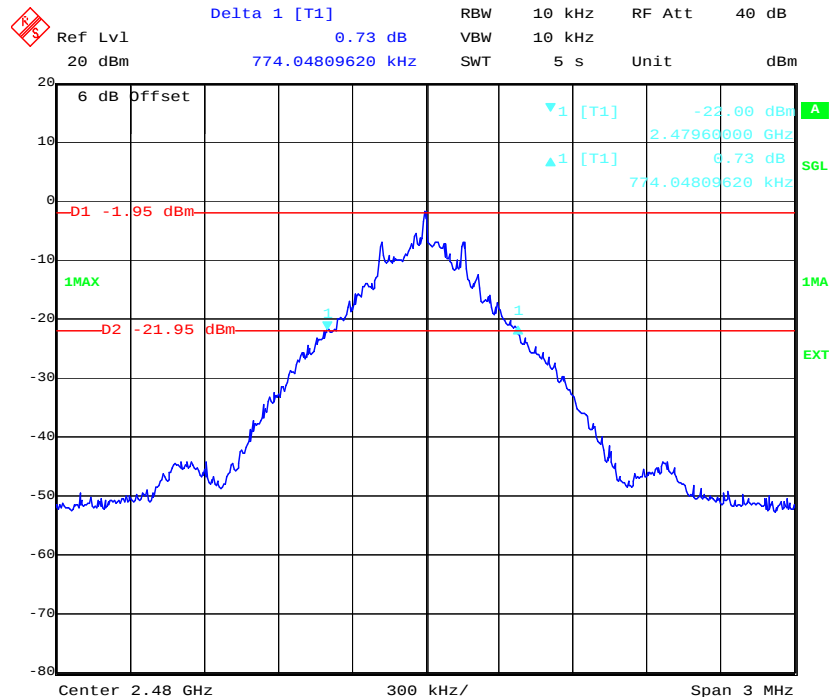

Date: 13.SEP.2004 10:10:45

Results:

Test conditions		20 dB BANDWIDTH [KHz]		
		2402	2441	2480
Frequency [MHz]				
T _{nom}	V _{nom}	774	766	774
Measurement uncertainty		±1kHz		

RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)


RBW: 10 kHz / VBW 100 kHz

Limits :

Under normal test conditions only	< 1000 KHz
-----------------------------------	------------


3.10 Maximum output power (conducted) § 15.247 (b) (1)

Plot 1 of 3

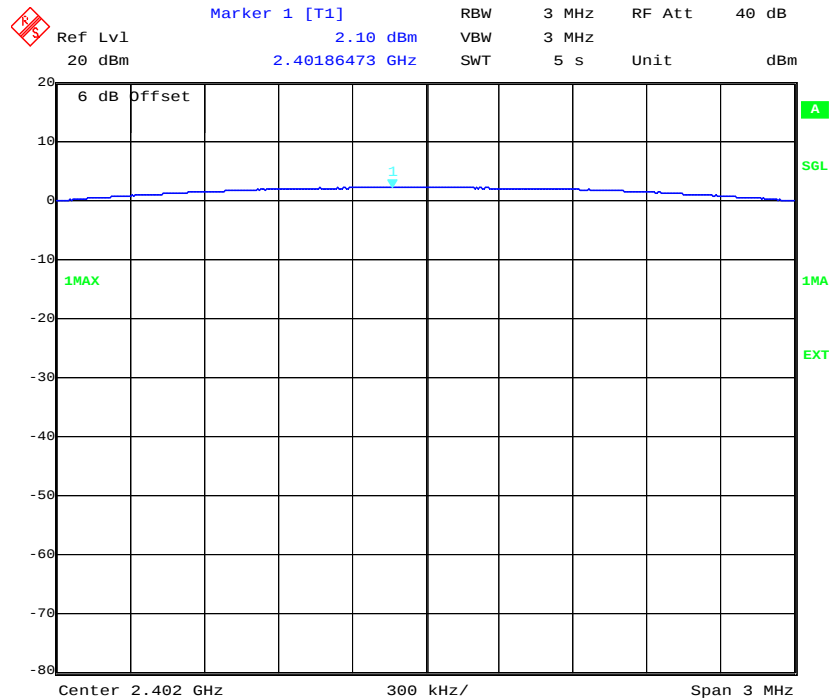


Date: 13.SEP.2004 09:07:55

Plot 2 of 3

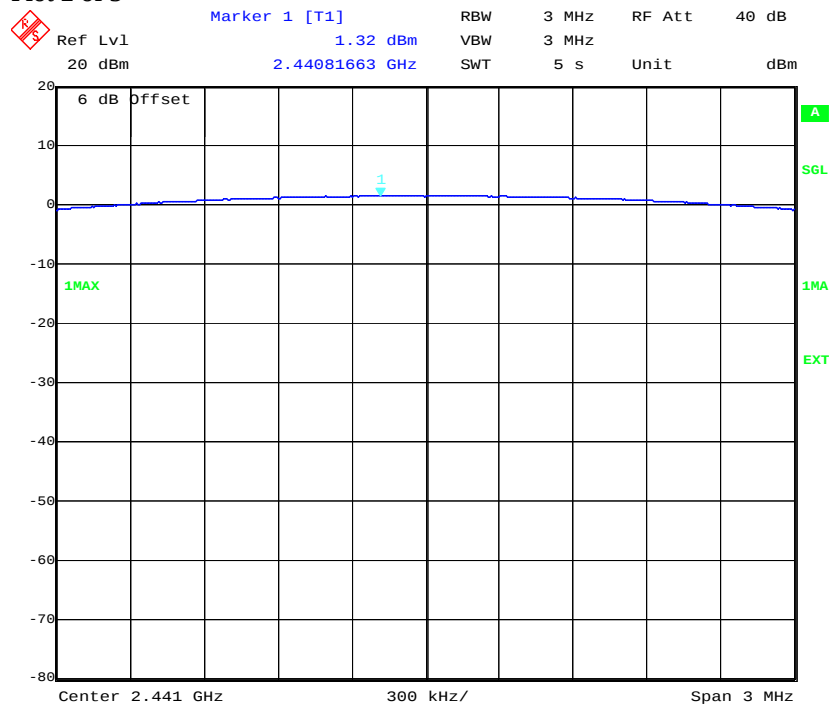

Date: 13.SEP.2004 09:20:08

Plot 3 of 3

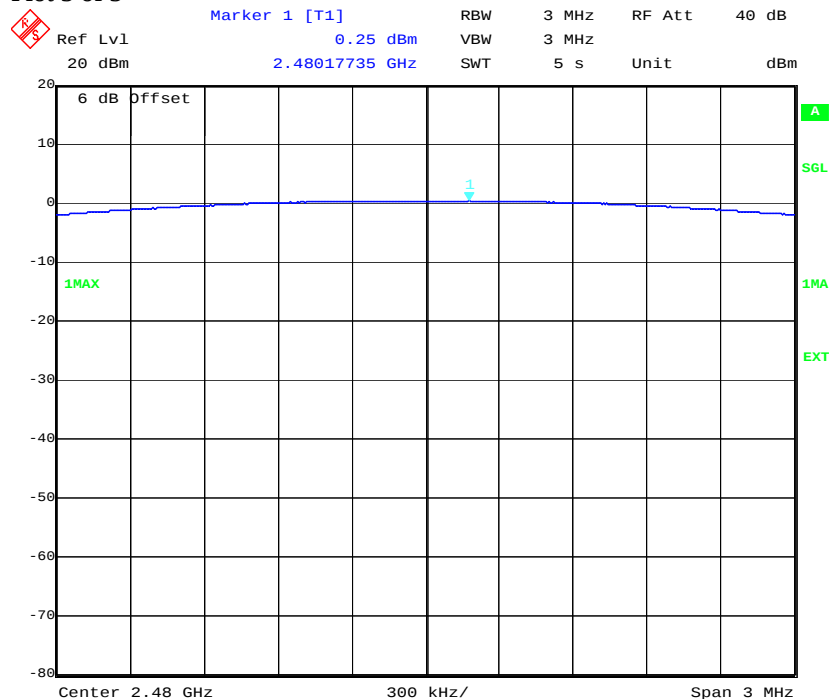

Date: 13.SEP.2004 10:06:34

Results:

Test conditions		Max. peak output power [dBm]			
Frequency [MHz]		2402		2442	2480
T _{nom}	V _{nom}	PK	2,10	1,32	0,25
Measurement uncertainty		±3dB			

RBW / VBW : 3 MHz

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------

3.11 Max. peak output power (radiated) § 15.247 (b) (1)

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Frequency [MHz]		2402	2442	2480
T _{nom}	V _{nom}	1,61	1,30	0,25
Measurement uncertainty		±3dB		

RBW / VBW : 3 MHz


Measured at a distance of 3m

Limits:


Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------

3.12 Band-edge compliance of conducted emissions §15.247 (c)


Plot 1 of 4 (hopping off, lowest frequency):

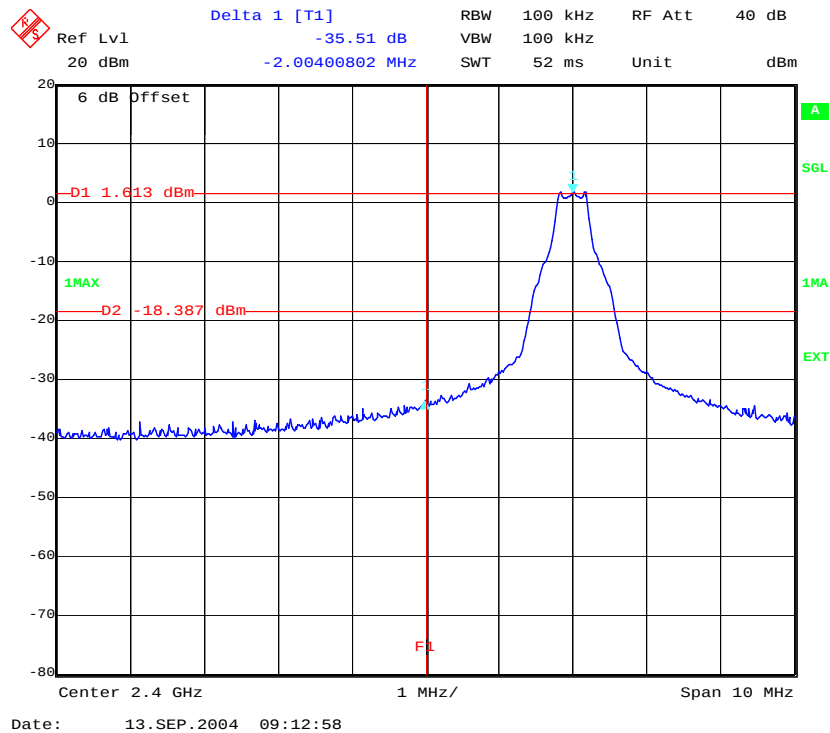

Plot 2 of 4 (hopping on, lowest frequency):

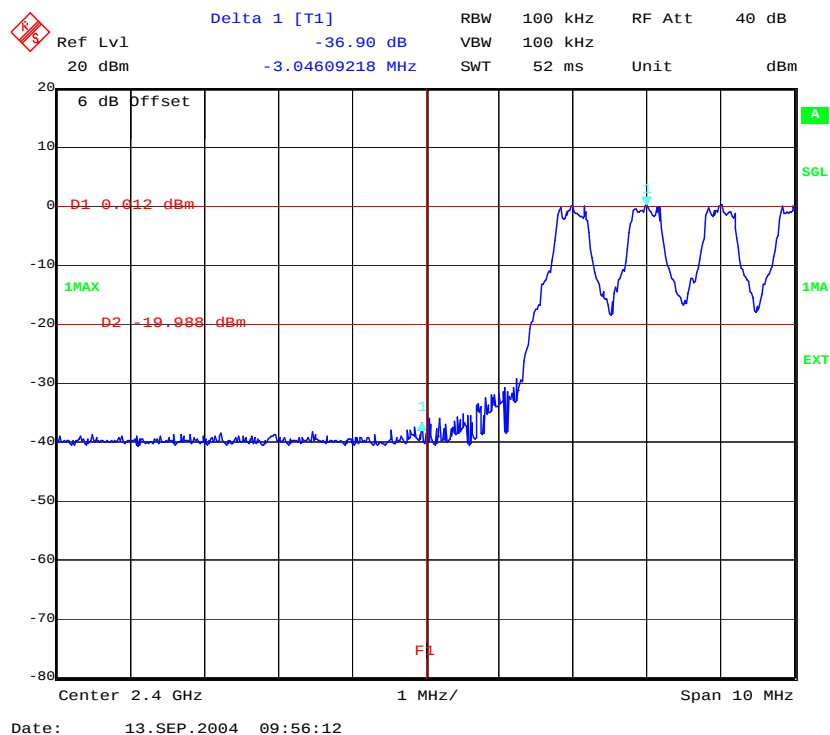


Plot 3 of 4 (hopping off, highest frequency):

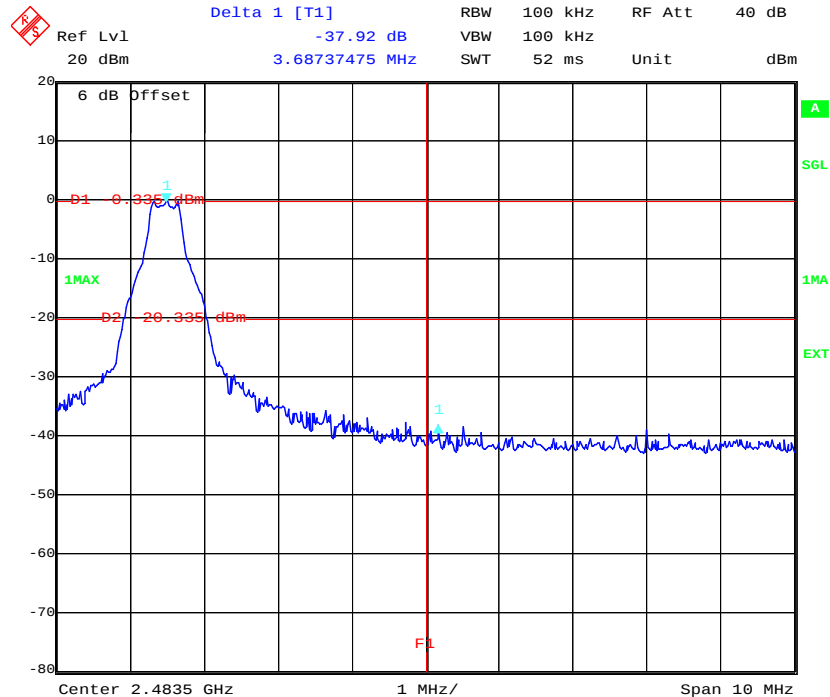

Date: 13.SEP.2004 10:05:55

Plot 4 of 4 (hopping on, highest frequency):

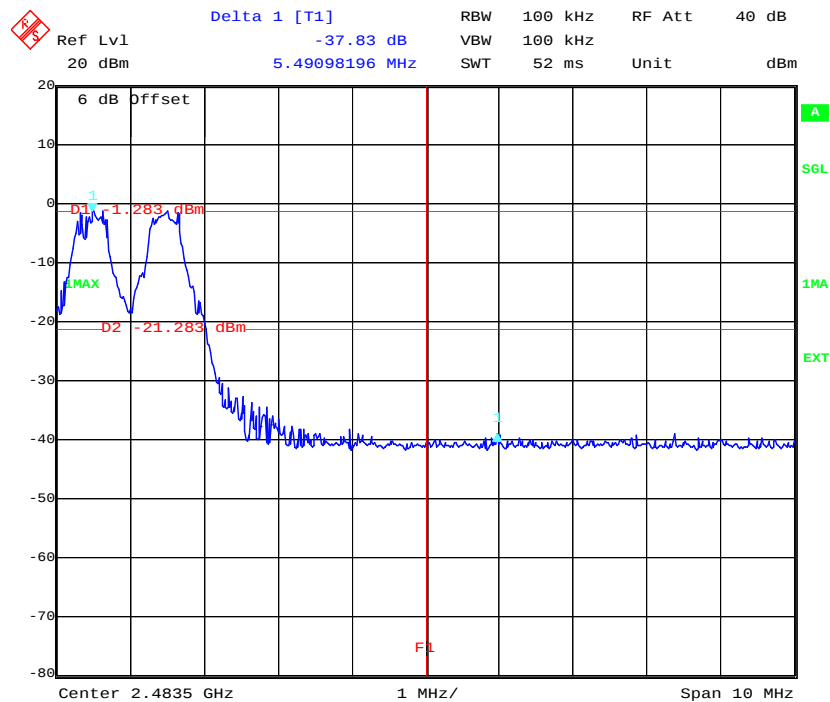

Date: 13.SEP.2004 09:57:56

Results:


Szenario	Delta Value [dB]
hopping off, lowest frequency	35,51
hopping on, lowest frequency	36,90
hopping off, highest frequency	37,92
hopping on, highest frequency	37,83
Measurement uncertainty	$\pm 1,5\text{dB}$

Limits:

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--


3.13 Band-edge compliance of radiated emissions §15.205

Plot 1 : Max field strength in 3m distance (single frequency)

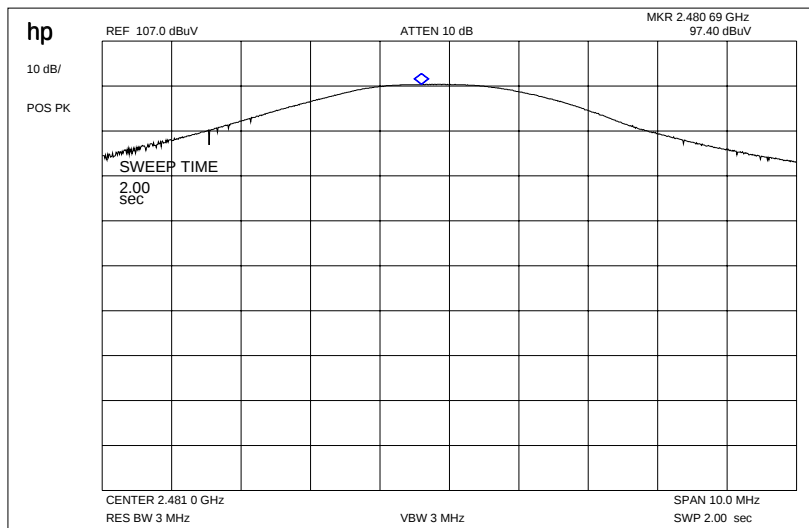

Result: 97,40 dB μ V/m

Plot 2: Marker-Delta Method (single carrier)

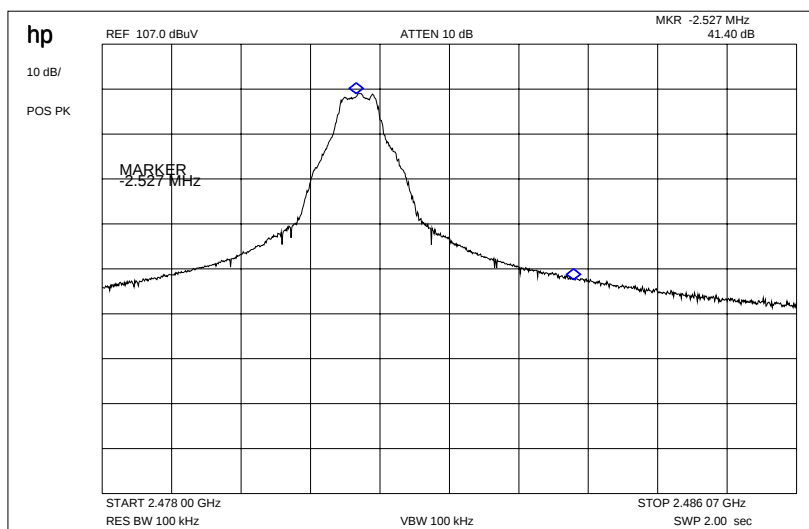


Result:

Marker-Delta-Value : 41,40 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

Plot 3: Marker-Delta Method (hopping)

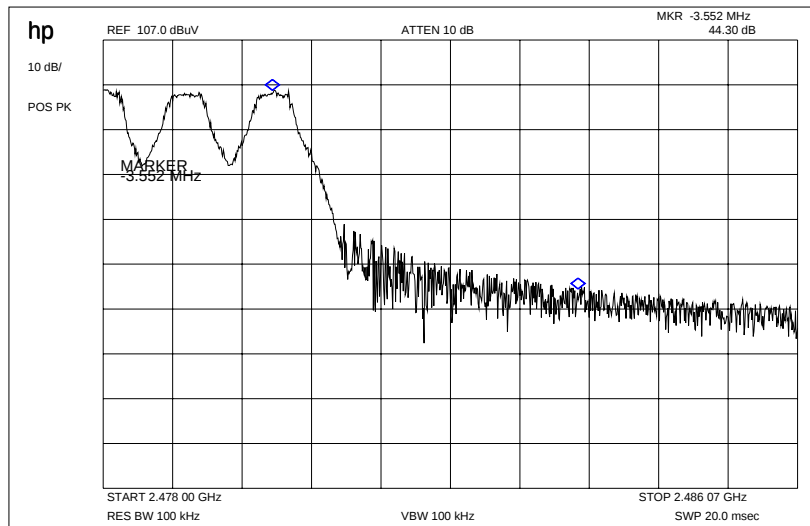


Result:


Marker-Delta-Value : 44,30 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

Plot 4: Restricted Bands low

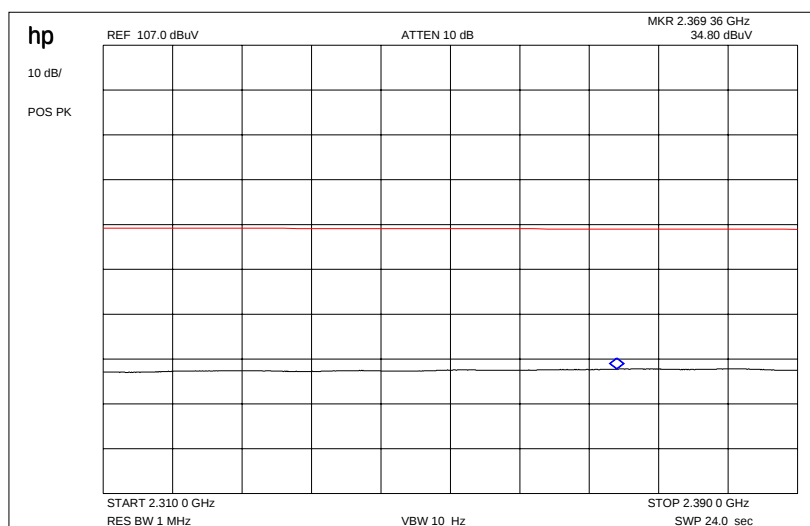

Plot 5: Restricted Bands high

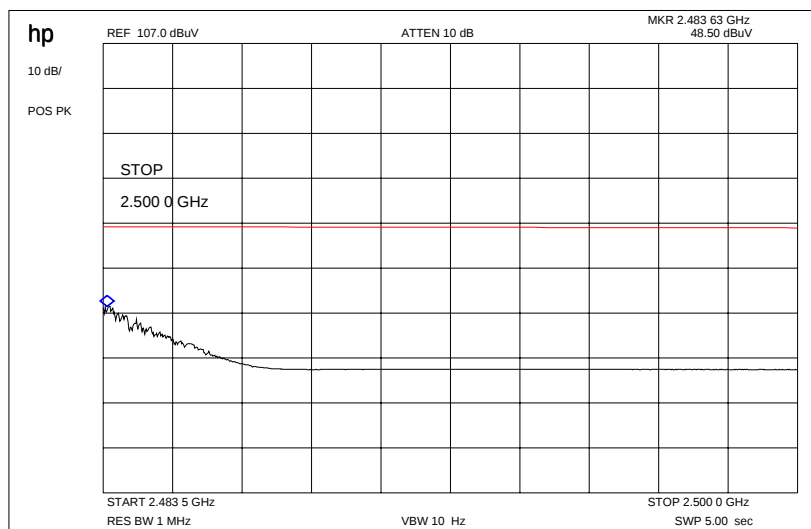

Results & Limits:


Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	97,40 dB μ V/m	-4,45	92,95 dB μ V/m
Max. average value	Calculated with duty cycle correction factor	92,95 dB μ V/m peak	-1,07dB duty cycle correction factor (worst case DH5)	91,88 dB μ V/m
Delta value	Peak 30 kHz RBW/VBW	41,40dB (single carrier) 43,80 dB (hopping mode)	-	-
Value at band edge	limit 54 dB μ V/m			50,48 dB μ V/m (single carrier) 48,08 dB μ V/m (hopping mode)
Statement:				Complies


3.14 Spurious Emissions - conducted (Transmitter) § 15.247 (c) (1)

Plot 1 of 3: lowest channel

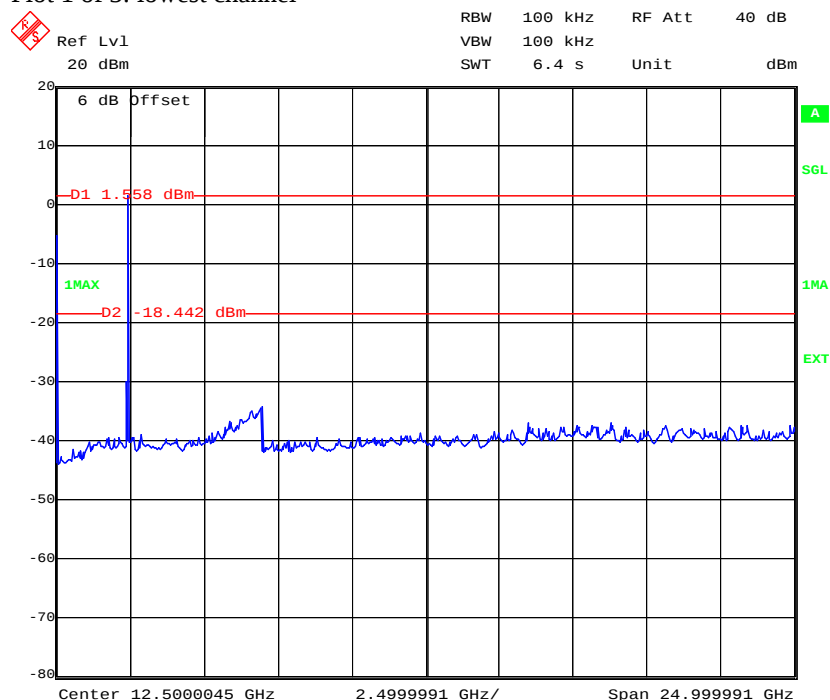


Date: 13.SEP.2004 09:10:19

Plot 2 of 3: middle channel

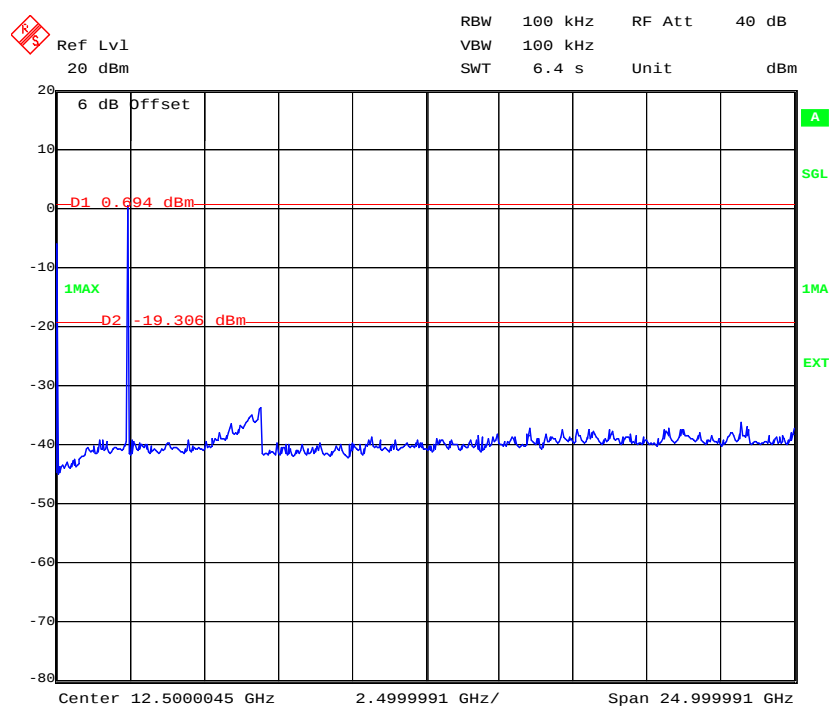

Date: 13.SEP.2004 09:33:52

Plot 3 of 3: highest channel

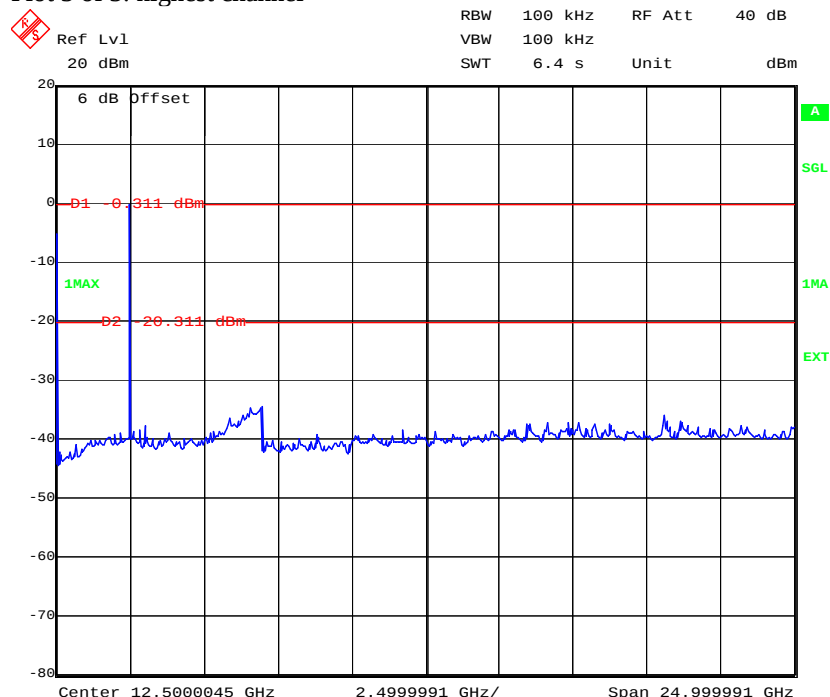

Date: 13.SEP.2004 10:08:39

Result & Limits:

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emmission power	actual attenuation below frequency of operation [dB]	results
2402		1,558	30 dBm	-	Operating frequency
			-20 dBc	No peaks	complies
				No peaks	complies
2441		0,694	30 dBm	-	Operating frequency
			-20 dBc	No peaks	complies
				No peaks	complies
2480		-0,011	30 dBm	-	Operating frequency
			-20 dBc	No peaks	complies
				No peaks	complies
Measurement uncertainty		± 3dB			


RBW : 100 kHz VBW: 100 MHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--


Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

3.15 Spurious Emissions - radiated (Transmitter) § 15.247 (c) (1)

Plot : 0.03 - 4 GHz vertical/horizontal (lowest channel)

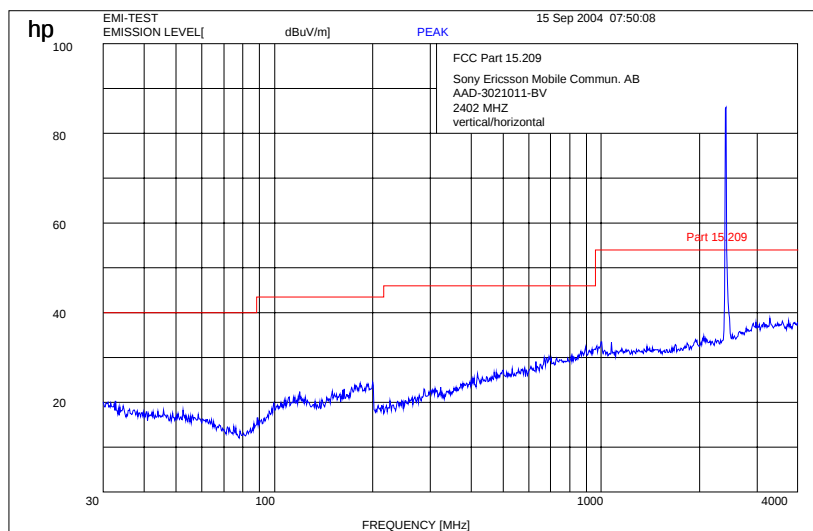

Plot : 4- 12 GHz vertical/horizontal (lowest channel)

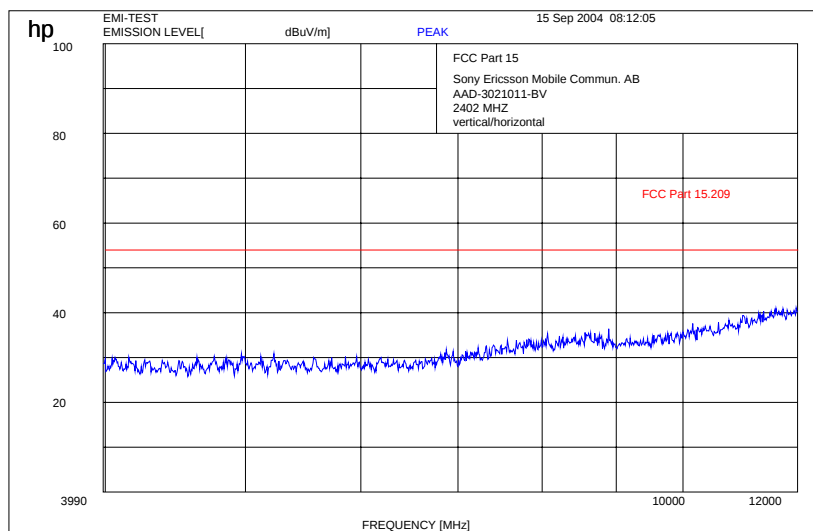

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3730-01-04_04

Date: 2004-09-15

Page 29 of 58

Plot : 12- 25 GHz vertical/horizontal (lowest channel)

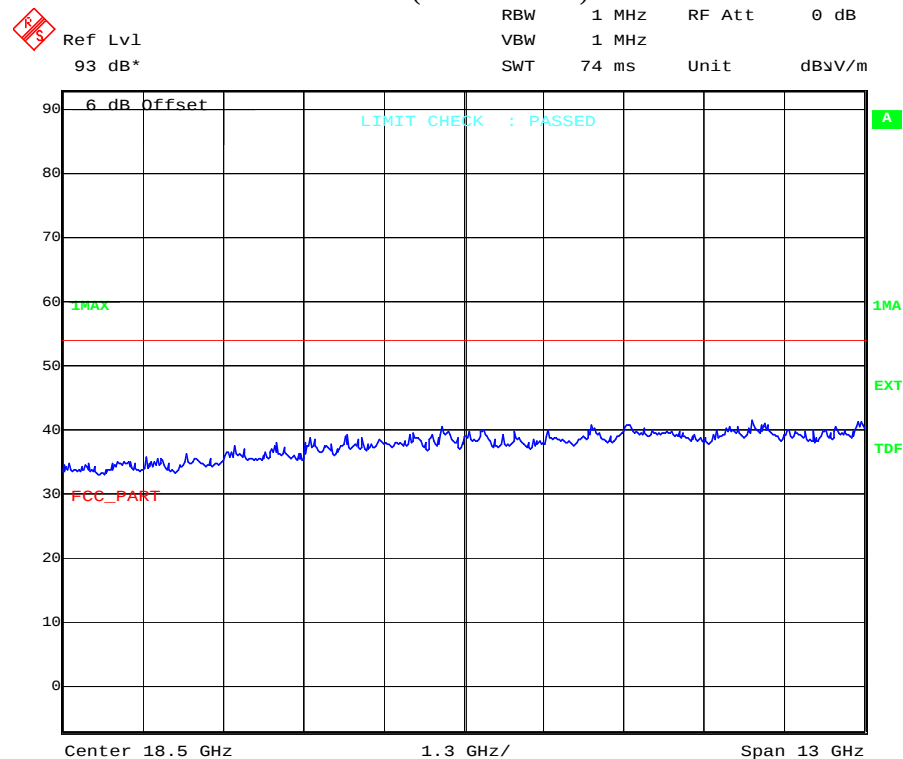

Date: 13.SEP.2004 09:14:29

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3730-01-04_04


Date: 2004-09-15

Page 30 of 58

Plot : 0.03 - 4 GHz vertical/horizontal (middle channel)

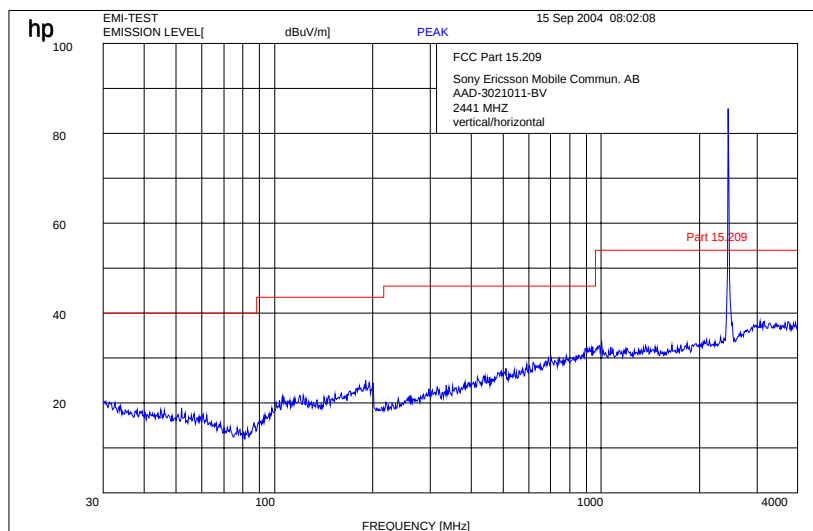

Plot : 4- 12 GHz vertical/horizontal (middle channel)

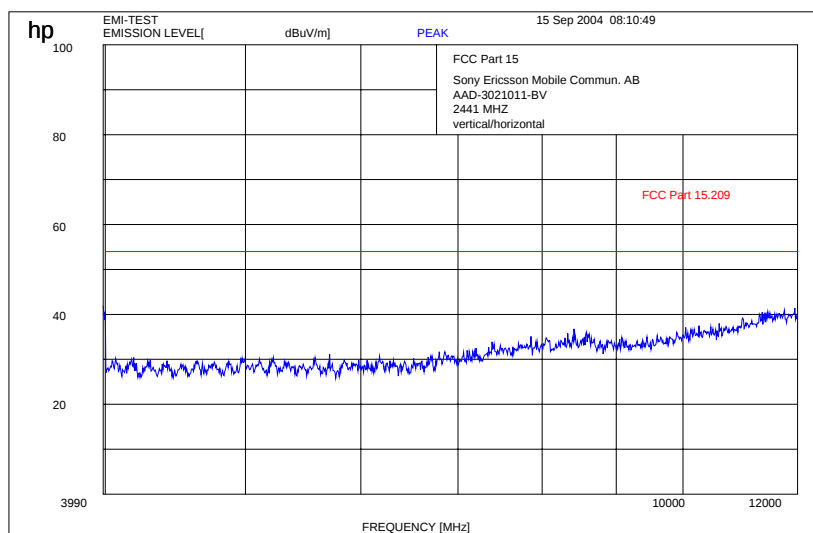

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3730-01-04_04

Date: 2004-09-15

Page 31 of 58

Plot : 12- 25 GHz vertical/horizontal (middle channel)

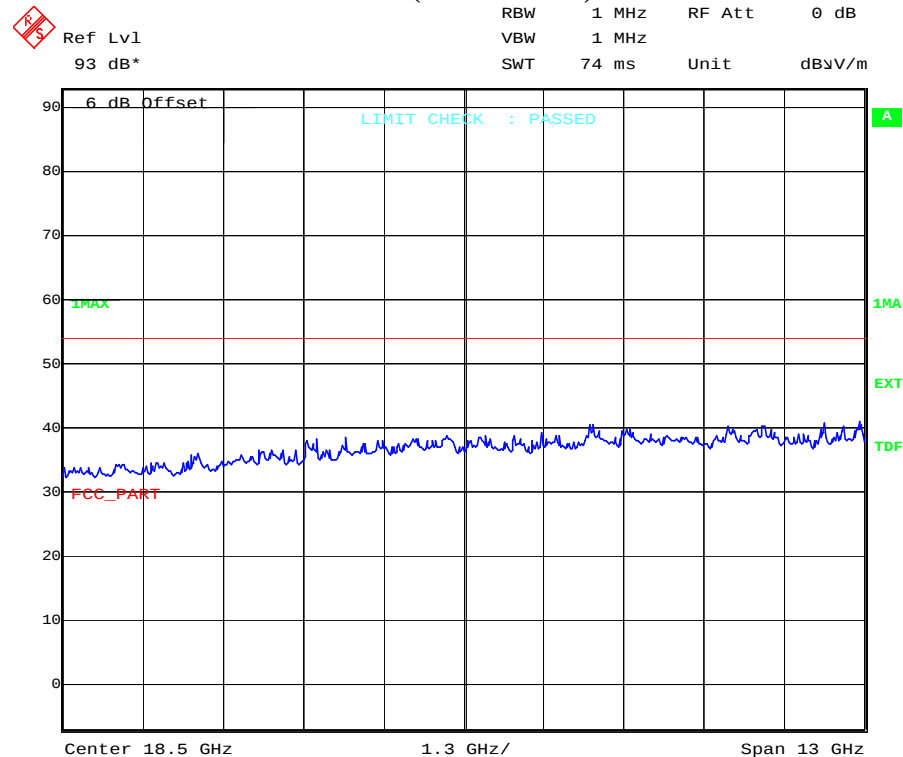

Date: 13.SEP.2004 09:18:58

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3730-01-04_04


Date: 2004-09-15

Page 32 of 58

Plot : 0.03 - 4 GHz vertical/horizontal (highest channel)

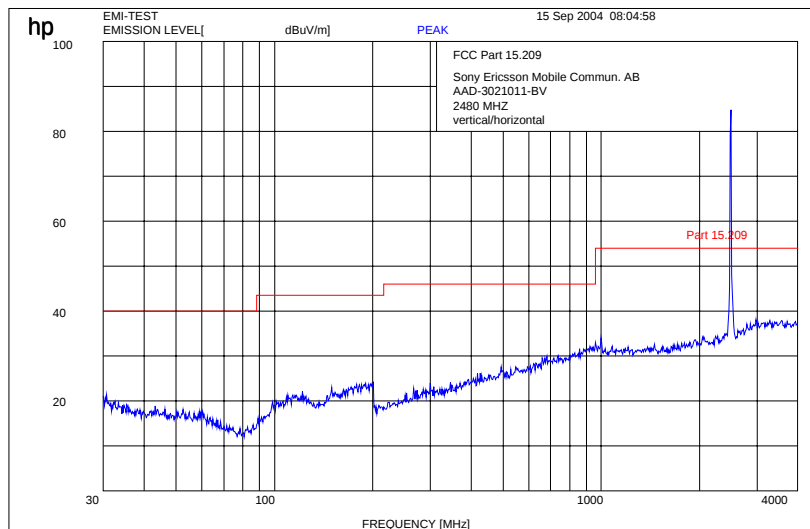

Plot : 4- 12 GHz vertical/horizontal (highest channel)

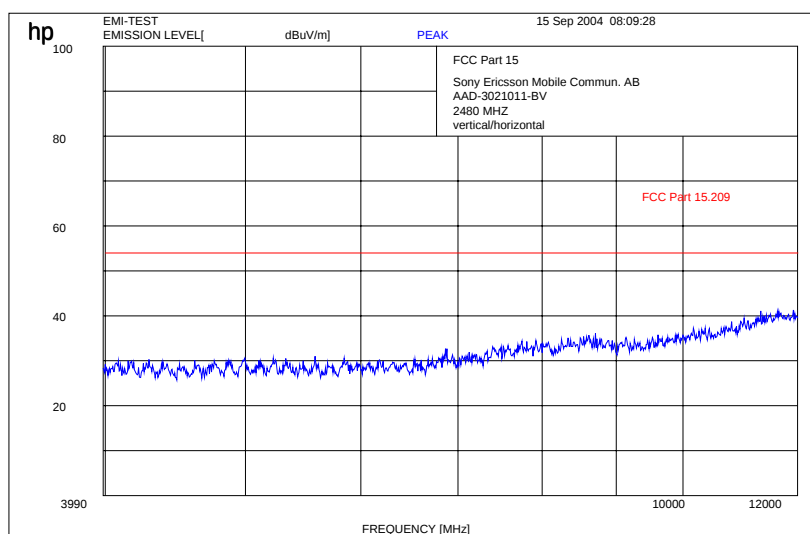

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3730-01-04_04

Date: 2004-09-15

Page 33 of 58

Plot : 12- 25 GHz vertical/horizontal (highest channel)

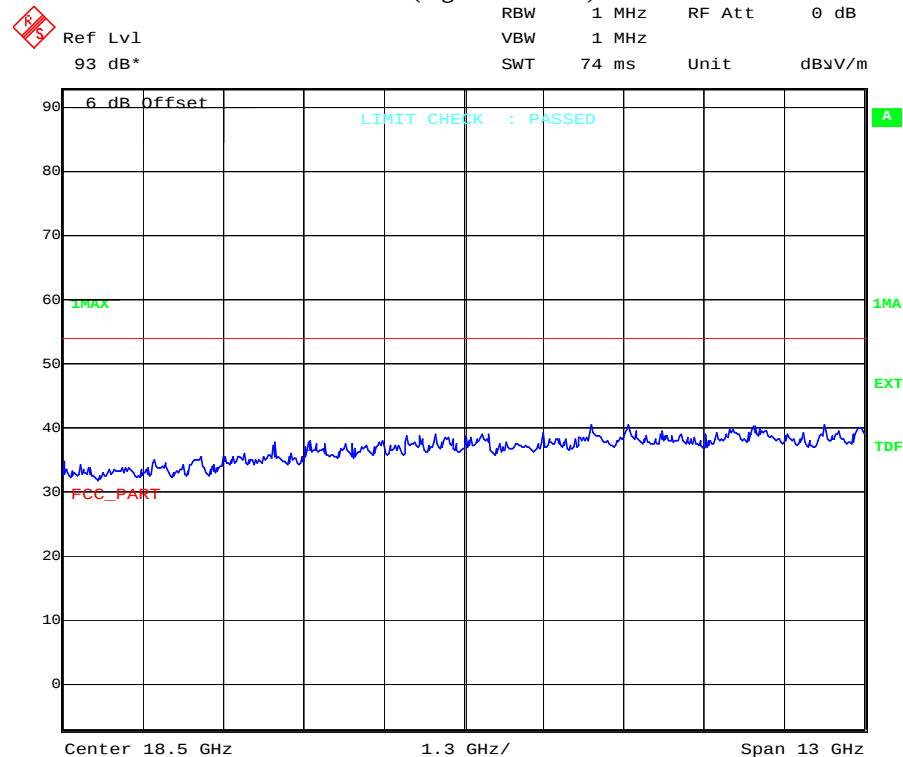

Date: 13.SEP.2004 09:19:25

Results:

SPURIOUS EMISSIONS LEVEL ($\mu\text{V/m}$)								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [$\mu\text{V/m}$]	F [MHz]	Detector	Level [$\mu\text{V/m}$]	F [MHz]	Detector	Level [$\mu\text{V/m}$]
No peaks found			No peaks found			No peaks found		
Measurement uncertainty			$\pm 3 \text{ dB}$					

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Limits: § 15.247 (c)


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.209


Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3

3.16 Spurious Emissions - radiated (Receiver) § 15.109


Plot : 0.03 - 4 GHz vertical/horizontal (receiver)

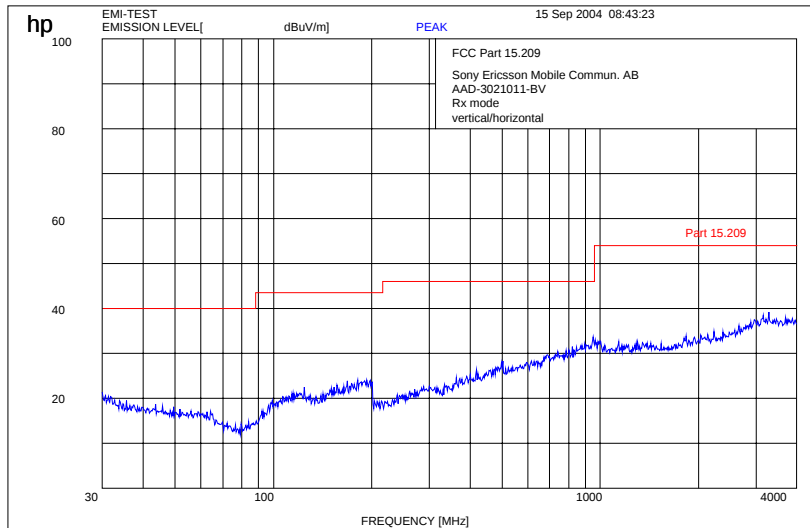

Plot : 4- 12 GHz vertical/horizontal (receiver)

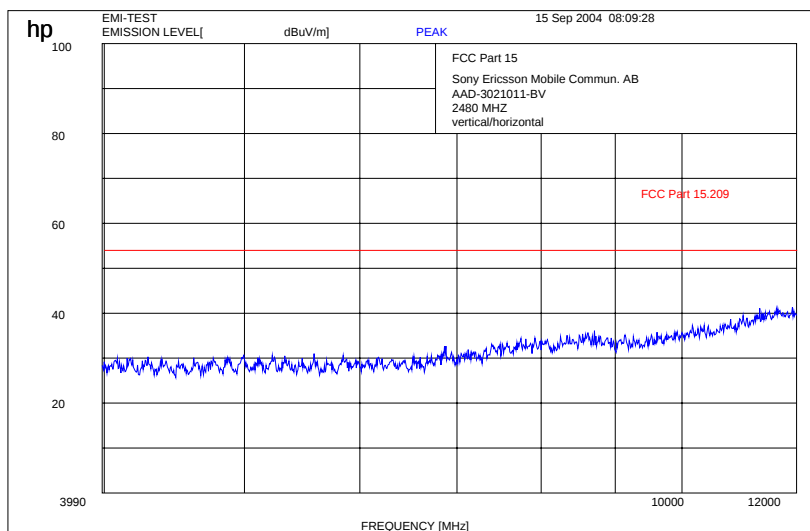

Plot : 12- 25 GHz vertical/horizontal (receiver)

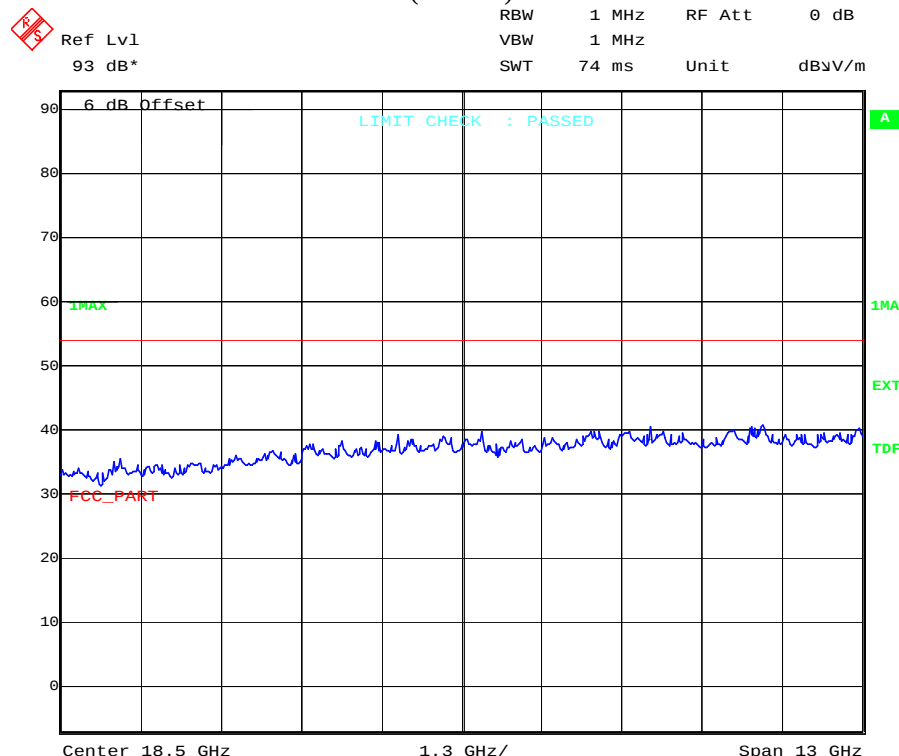

Date: 13.SEP.2004 09:15:03

Spurious Emissions level [μ V/m]								
CH 1 / 2 / 3								
f[MHz]	Detector	Level [μ V/m]	f[MHz]	Detector	Level [μ V/m]	f[MHz]	Detector	Level [μ V/m]
No peaks found			No peaks found			No peaks found		
Measurement uncertainty			± 3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f $\geq$ 1GHz : RBW/VBW: 1 MHz

see above plots

Measurement distance see table

Limits : § 15.109


Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
30 - 88	100 (40 dB μ V/m)	3
88 - 216	150 (43.5 dB μ V/m)	3
216 - 960	200 (46 dB μ V/m)	3
above 960	500 (54 dB μ V/m)	3

3.17 Spurious Emissions - radiated <30 MHz § 15.109

Measured at 10 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot :
 EUT: AAD-3021011-BV
 Manufacturer: Sony Ericsson
 Operating Condition: Idle mode
 Test Site: Cetecom, Room 6
 Operator: Berg M.
 Test Specification: 15.109
 Comment: 115 V/ 60Hz
 Start of Test: 14.09.04 / 12:03:18

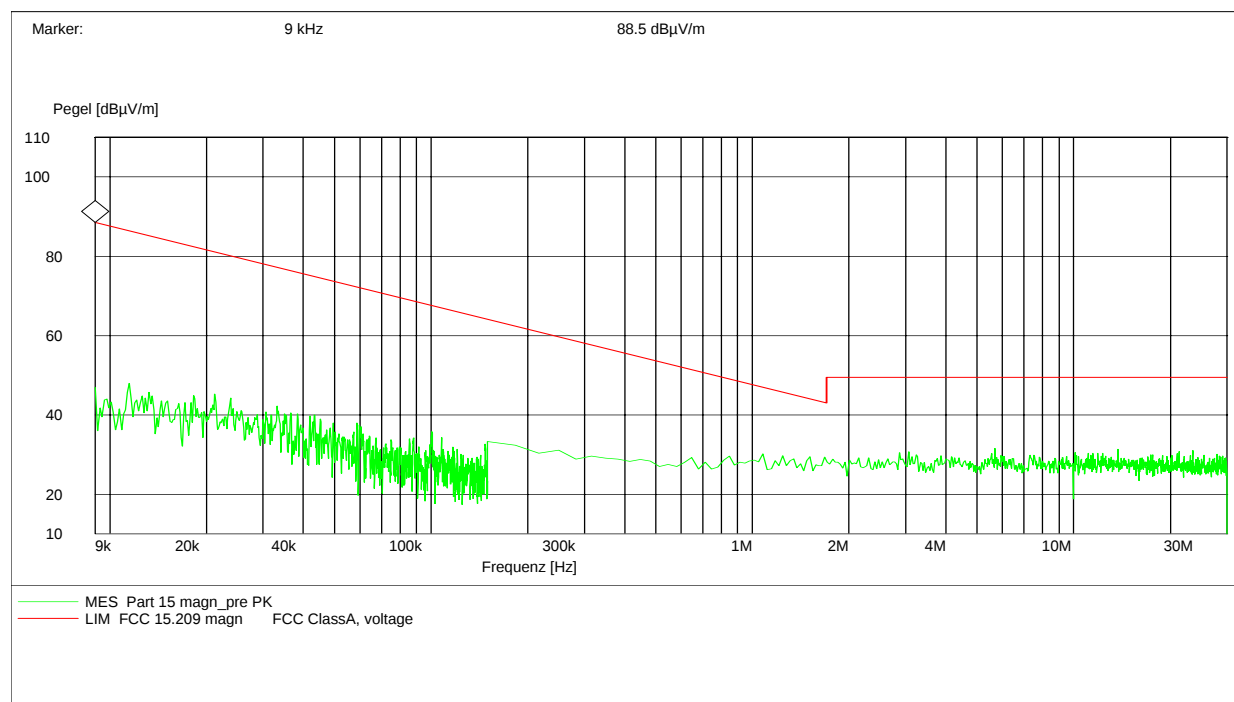


Limits:

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBμV/m	30
30 - 88	100 / 40 dBμV/m	3
88 - 216	150 / 43.5 dBμV/m	3
216 - 960	200 / 46 dBμV/m	3
above 960	500 / 54 dBμV/m	3

3.18 Conducted Emissions <30 MHz § 15.107/207

Plot :
 EUT: AAD-3021011
 Manufacturer: Sony Ericsson Mobile Communications AB
 Operating Condition: Idle mode
 Test Site: CETECOM ICT Services Room 006
 Operator: Berg M.
 Test Specification: EN 55022 / CISPR 22
 Comment: 115V / 60 Hz
 Start of Test: 14.09.04 / 13:14:32

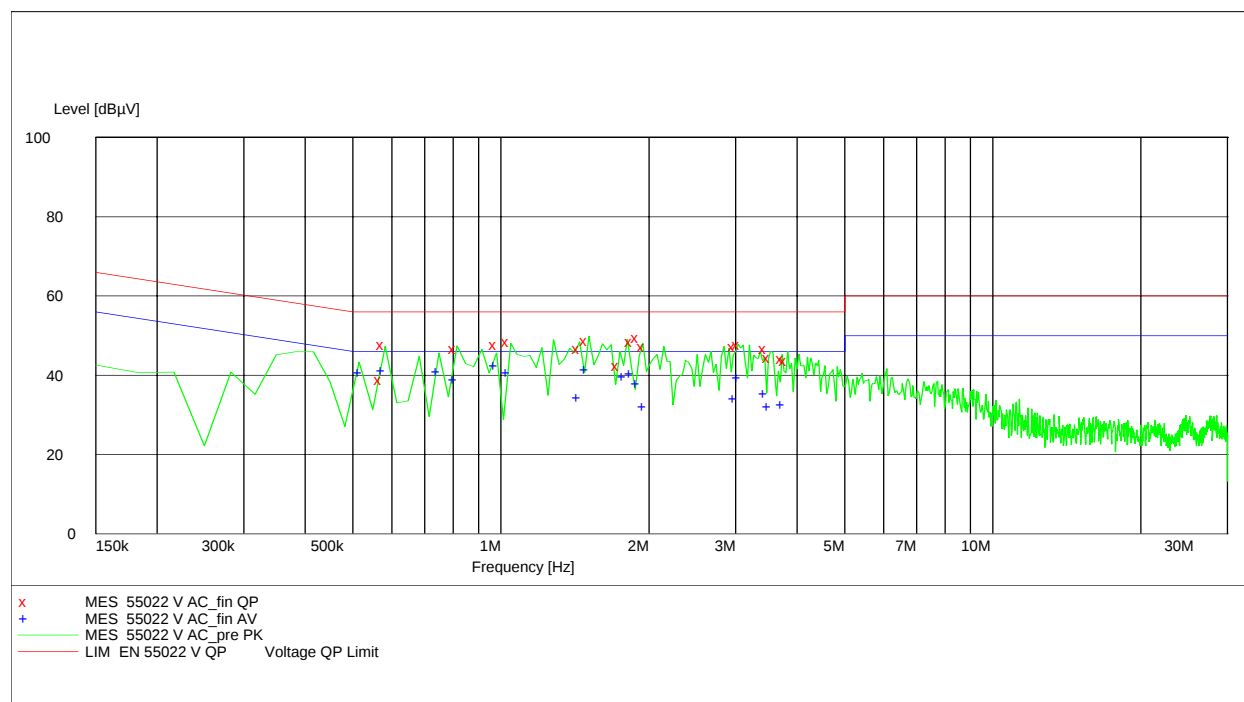

MEASUREMENT RESULT: "55022 V AC_fin QP"

14.09.04 13:21

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.577500	38.80	10.5	56	17.2	N	FLO
0.585000	47.70	10.5	56	8.3	N	FLO
0.817500	46.60	10.5	56	9.4	L1	GND
0.990000	47.70	10.6	56	8.3	N	FLO
1.050000	48.40	10.5	56	7.6	N	FLO
1.462500	46.60	10.4	56	9.4	N	GND
1.515000	48.60	10.4	56	7.4	N	GND
1.755000	42.50	10.5	56	13.5	N	GND
1.867500	48.40	10.5	56	7.6	N	GND
1.927500	49.50	10.5	56	6.5	N	FLO
1.980000	47.10	10.5	56	8.9	N	FLO
3.030000	47.10	10.6	56	8.9	N	FLO
3.090000	47.70	10.6	56	8.3	N	FLO


3.502500 46.80 10.5 56 9.2 N FLO

MEASUREMENT RESULT: "55022 V AC_fin AV"

14.09.04 13:21

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.525000	40.60	10.6	46	5.4	N	FLO
0.585000	41.10	10.5	46	4.9	N	FLO
0.757500	40.90	10.6	46	5.1	N	GND
0.817500	38.90	10.5	46	7.1	L1	GND
0.990000	42.30	10.6	46	3.7	N	FLO
1.050000	40.70	10.5	46	5.3	N	FLO
1.462500	34.30	10.4	46	11.7	N	GND
1.515000	41.50	10.4	46	4.5	N	GND
1.807500	39.70	10.5	46	6.3	N	GND
1.867500	40.40	10.5	46	5.6	N	GND
1.927500	37.80	10.5	46	8.2	N	FLO
1.987500	32.00	10.5	46	14.0	N	FLO
3.037500	34.10	10.6	46	11.9	N	FLO
3.090000	39.40	10.6	46	6.6	N	FLO

EUT: AAD-3021011-BV
 Manufacturer: Sony Ericsson Mobile Communications AB
 Operating Condition: Traffic mode
 Test Site: CETECOM ICT Services Room 006
 Operator: Berg M.
 Test Specification: EN 55022 / CISPR 22
 Comment: 115V / 60 Hz
 Start of Test: 14.09.04 / 13:25:25

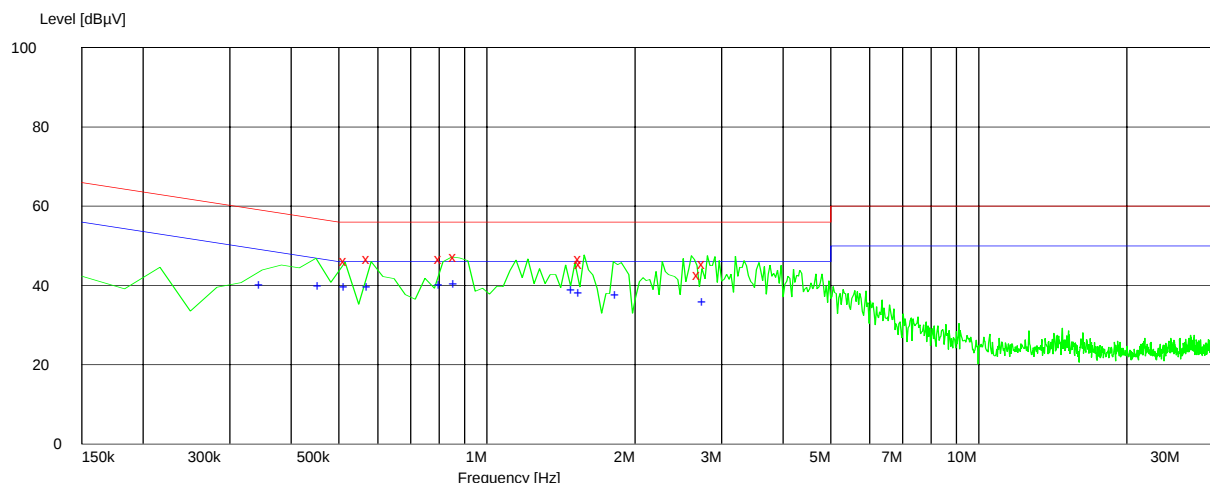

x MES 55022 V AC_fin QP
 + MES 55022 V AC_fin AV
 — MES 55022 V AC_pre PK
 — LIM EN 55022 V QP Voltage QP Limit

MEASUREMENT RESULT: "55022 V AC_fin QP"

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3730-01-04_04

Date: 2004-09-15

Page 40 of 58

14.09.04 13:30

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.525000	46.30	10.6	56	9.7	N	FLO
0.585000	46.80	10.5	56	9.2	N	FLO
0.817500	46.80	10.5	56	9.2	N	GND
0.877500	47.30	10.4	56	8.7	N	GND
1.575000	46.80	10.4	56	9.2	N	GND
1.582500	45.40	10.4	56	10.6	N	GND
2.745000	42.70	10.5	56	13.3	N	GND
2.805000	45.60	10.5	56	10.4	N	GND

MEASUREMENT RESULT: "55022 V AC_fin AV"

14.09.04 13:30

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.352500	40.20	10.7	49	8.7	N	FLO
0.465000	39.90	10.6	47	6.7	L1	GND
0.525000	39.70	10.6	46	6.3	N	FLO
0.585000	39.80	10.5	46	6.2	N	FLO
0.817500	40.20	10.5	46	5.8	N	GND
0.877500	40.30	10.4	46	5.7	N	GND
1.522500	38.90	10.4	46	7.1	N	GND
1.575000	38.20	10.4	46	7.8	N	GND
1.867500	37.70	10.5	46	8.3	N	FLO
2.805000	35.80	10.5	46	10.2	N	GND

Limits :

Under normal test conditions only	See plots
-----------------------------------	-----------

3.19 Used Testequipment

Anaechoic chamber C:

Device	Manufacturer	Type	S/N Number	Inv. No. Cetecom
Spektrum Analyser	HP	8566B	2747A05306	300001000
Spektrum Analyser Display	HP	85662A	2816A16541	300002297
Quasi-Peak-Adapter	HP	85650A	2811A01131	300000999
Power Supply	HP	6032A	2818A03450	300001040
Power Attenuator	Byrd	8325	1530	300001595
Biconical Antenna	EMCO	3104	3758	300001602
Log. Period. Antenna	EMCO	3146	2130	300001603
Double Ridged Antenna	EMCO	HP 3115P	3088	300001032
Active Loop Antenna	EMCO	6502	2210	300001015
Antenna VDE/FCC		HP11965B		300002298
SRM-Drive	HP	9144A	2823e46556	300001044
Software	HP	EMI		300000983
Busisolator	Kontron			300001056
Absorberhalle	MWB		87400/02	300000996
Salzsäule	Kontron			300001055
Antenna	R&S	HMO20	832211/003	300002243
Indukt. Tast Antenna	R&S	HFH 2 Z4	881468/026	300001464
System-Rack	HP I.V.	85900	*	300000222
Spectrum Analyzer	HP	8566B	2747A05275	300000219
Quasi-Peak-Adapter	HP	85650A	2811A01135	300000216
RF-Preselector	HP	85685A	2837A00779	300000218
Rahmen Antenne	R&S	HFH2-Z2	891847-35	300001169
Leitungsteiler	HP	11850C		300000997
Breitband-Hornantenne EMI	HP	35155P		300002300
PC	HP	Vectra VL		300001688
VHF Meßantenne	Schwarzbeck	VHA 9103		300001778
Spectrum Analyzer Display	HP	85662A	2816A16497	300001690
VHF Meßantenna	Schwarzbeck	VHA 9103		300001780
Biconical Antenna	EMCO	3104 C	9909-4868	300002590

SRD Laboratory: (Bluetooth System)

No	Equipment/Type	Manufact.	Serial Nr.	Inv. No. Cetecom
1	System Controller PSM 12	R&S	835259/007	3000002681
2	Memory Extension PSM-K10	R&S	To 1	3000002681
3	Operating Software PSM-B2	R&S	To 1	3000002681
4	19'' Monitor		22759020-ED	3000002681
5	Mouse		LZE 0095/6639	3000002681
6	Keyboard		G00013834L461	3000002681
7	Spectrum Analyser FSIQ 26	R&S	835540/018	3000002681
8	Tracking Generator FSIQ-B10	R&S	835107/015	3000002681
10	RF-Generator SMIQ03 (B1 Signal)	R&S	835541/056	3000002681
11	Modulation Coder SMIQ-B20	R&S	To 10	3000002681
12	Data Generator SMIQ-B11	R&S	To 10	3000002681
13	RF Rear Connection SMIQ-B19	R&S	To 10	3000002681
14	Fast CPU SM-B50	R&S	To 10	3000002681

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3730-01-04_04

Date: 2004-09-15

Page 42 of 58

15	FM Modulator SM-B5	R&S	835676/033	3000002681
16	RF-Generator SMIQ03 (B2 Signal)	R&S	835541/055	3000002681
17	Modulation Coder SMIQ-B20	R&S	To 16	3000002681
18	Data Generator SMIQ-B11	R&S	To 16	3000002681
19	RF Rear Connection SMIQ-B19	R&S	To 16	3000002681
20	Fast CPU SM-B50	R&S	To 16	3000002681
21	FM Modulator SM-B5	R&S	836061/022	3000002681
22	RF-Generator SMP03 (B3 Signal)	R&S	835133/011	3000002681
23	Attenuator SMP-B15	R&S	835136/014	3000002681
24	RF Rear Connection SMP-B19	R&S	834745/007	3000002681
25	Power Meter NRVD	R&S	835430/044	3000002681
26	Power Sensor NRVD-Z1	R&S	833894/012	3000002681
27	Power Sensor NRVD-Z1	R&S	833894/011	3000002681
28	Rubidium Standard RUB	R&S	6197	3000002681
29	Switching and Signal Conditioning Unit SSCU	R&S	338864/003	3000002681
30	Laser Printer HP Deskjet 2100	HP	N/A	3000002681
31	19'' Rack	R&S	11138363000004	3000002681
32	RF-cable set	R&S	N/A	3000002681
33	IEEE-cables	R&S	N/A	3000002681
34	Sampling System FSIQ-B70	R&S	835355/009	3000002681
35	RSP programmable attenuator	R&S	834500/010	3000002681
36	Signalling Unit	R&S	838312/011	3000002681
37	NGPE programmable Power Supply for EUT	R&S	192.033.41	3000002681

SRD Laboratory:

Device	Manufacturer	Type	S/N Number	Inv. No. Cetecom
Climatic box	Heraeus Vötsch	VT 4002	--	300003019
Signaling Unit	R&S	CMU200	832221/0055	300002862
Power Splitter	Inmet Corp.	6005-3	none	300002841
SMA Cables	Insulated Wire	SPS-1151-985-SPS	different	different

4 Photographs



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3730-01-04_04

Date: 2004-09-15

Page 44 of 58



Test site



Test site



Test setup



Photographs of the equipment



Photographs of the equipment

Power supply



Photographs of the equipment



Photographs of the equipment



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3730-01-04_04


Date: 2004-09-15

Page 52 of 58


Photographs of the equipment

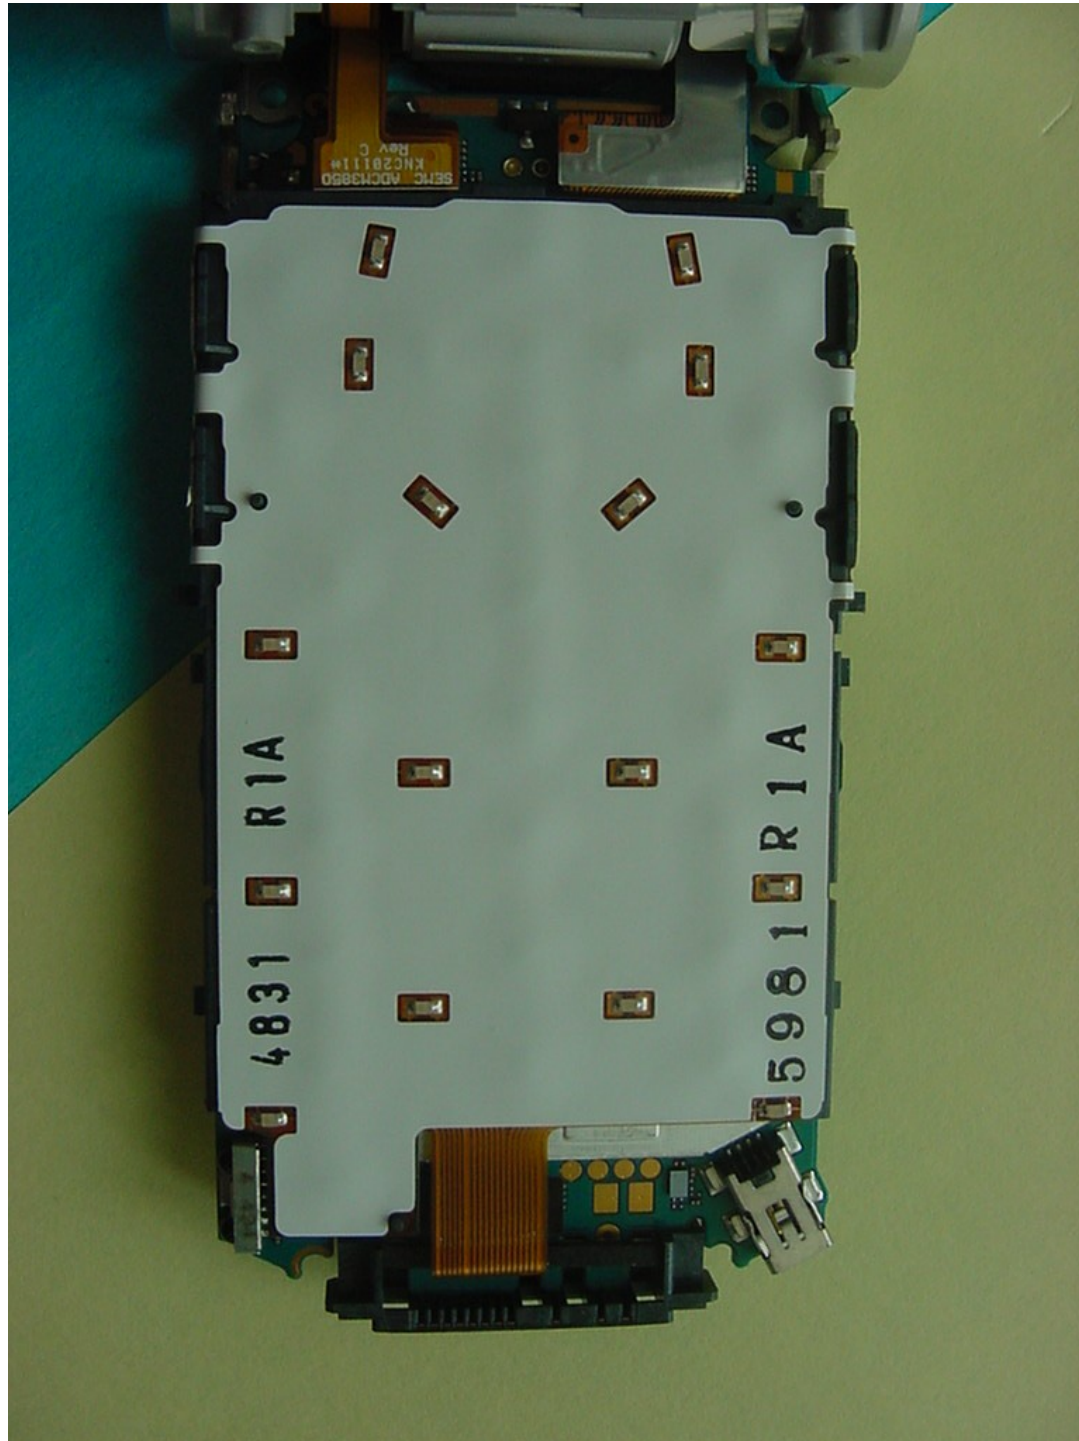

Photographs of the equipment

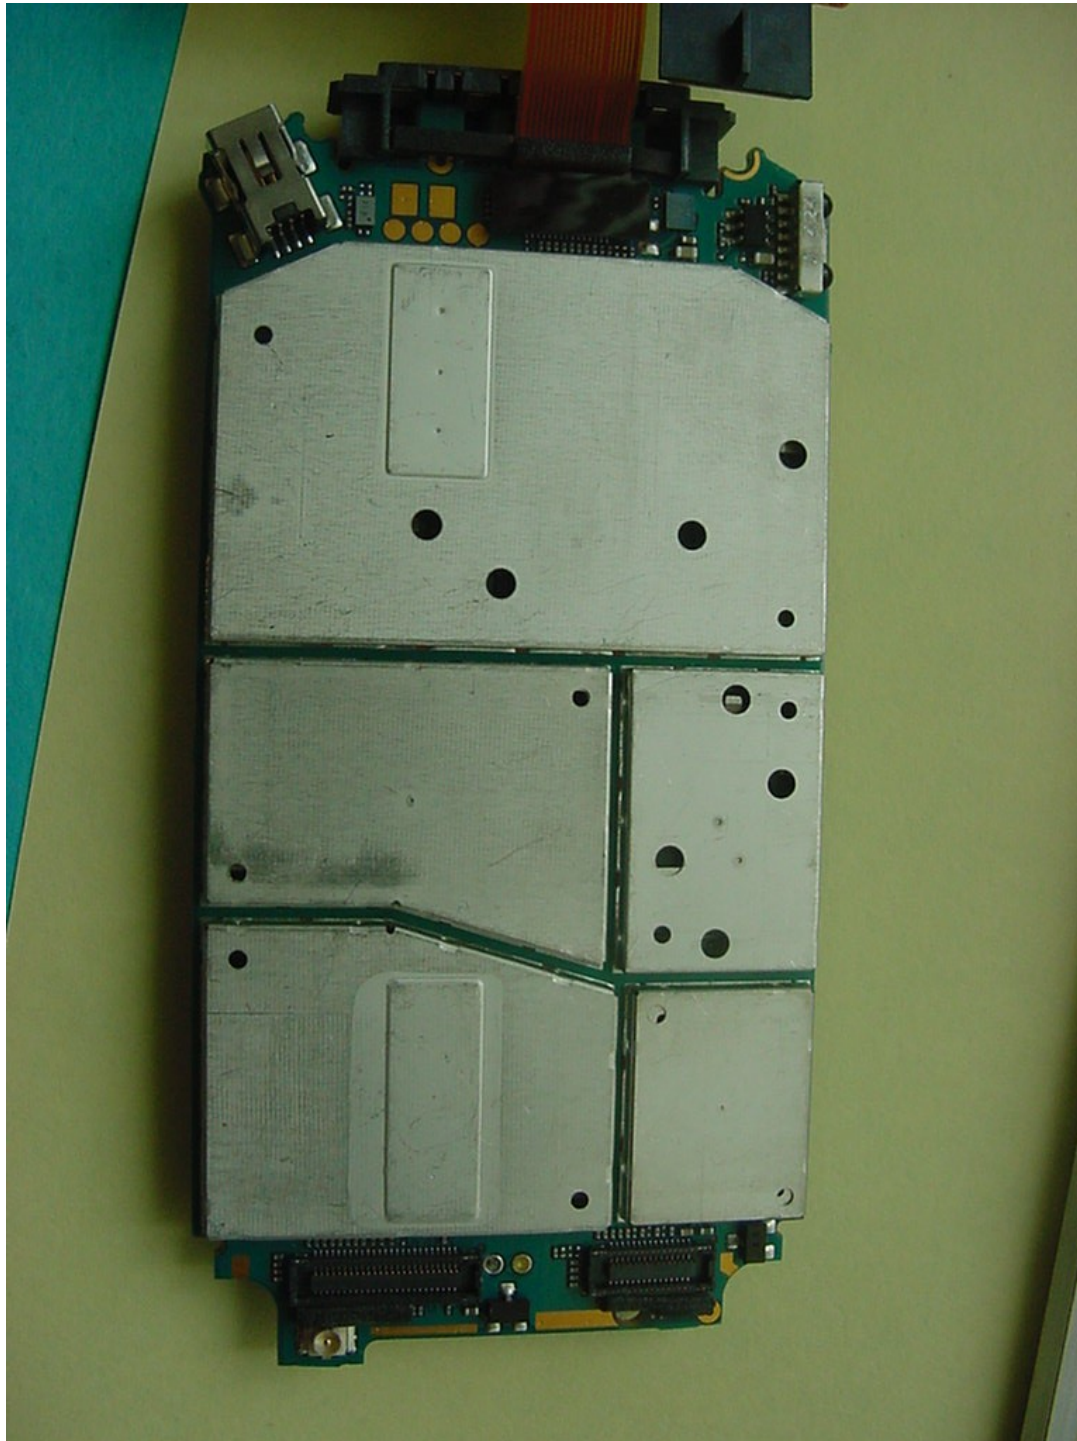

Photographs of the equipment

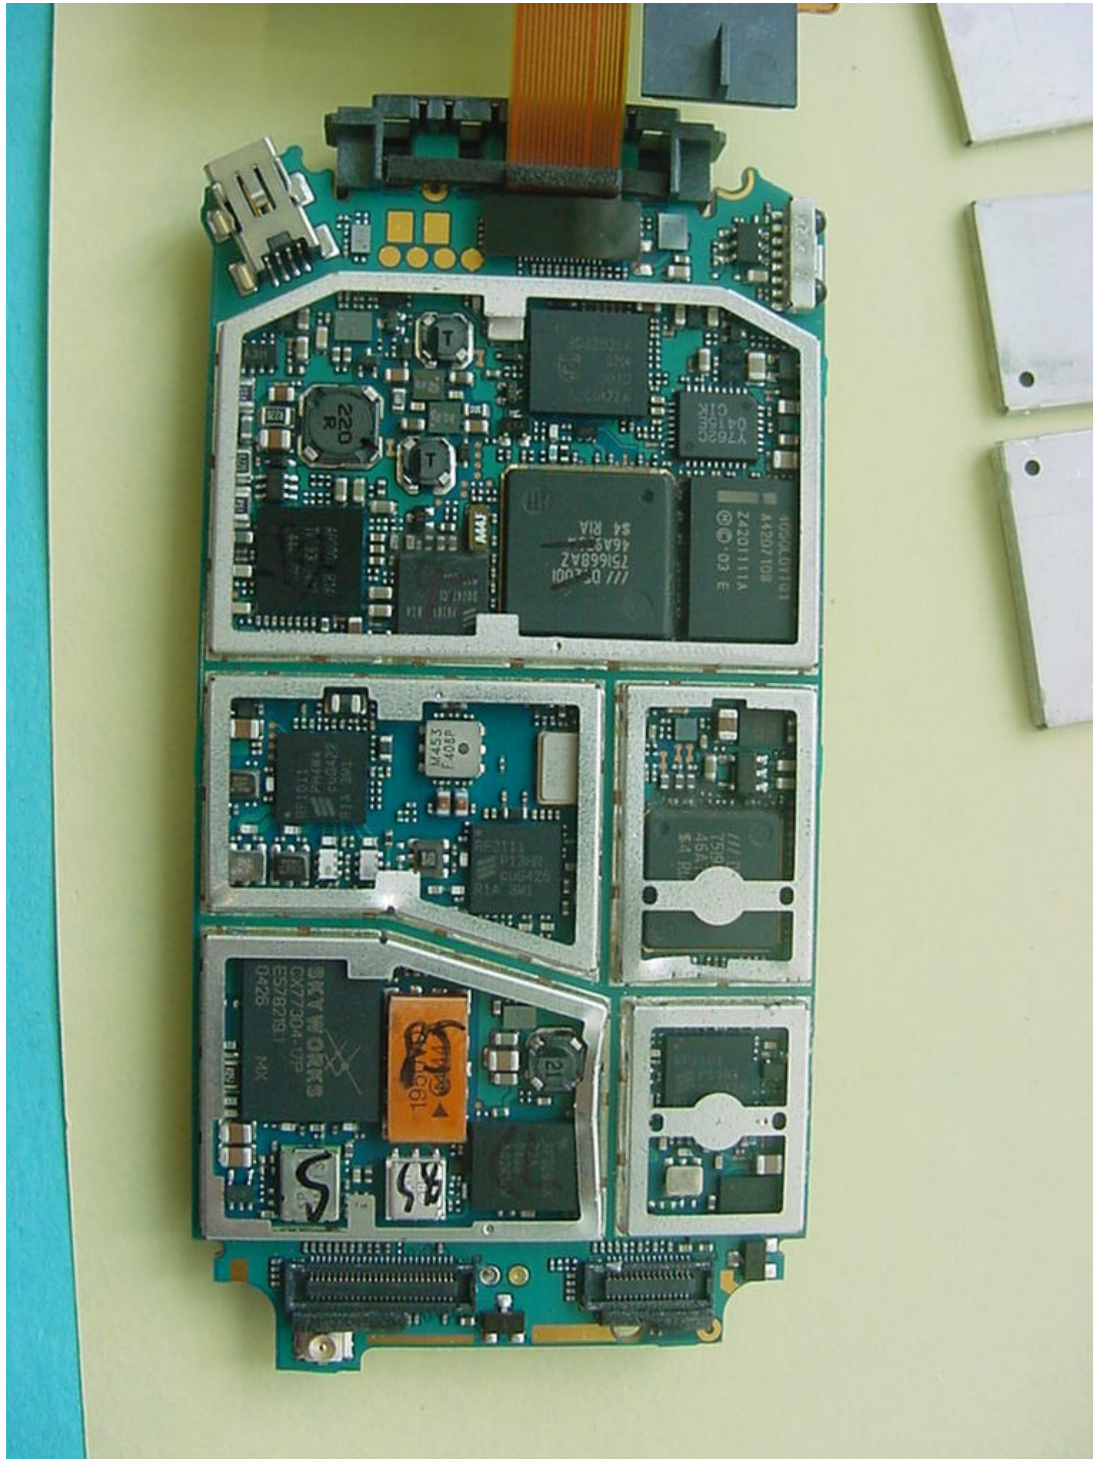


Photographs of the equipment



Photographs of the equipment



Photographs of the equipment

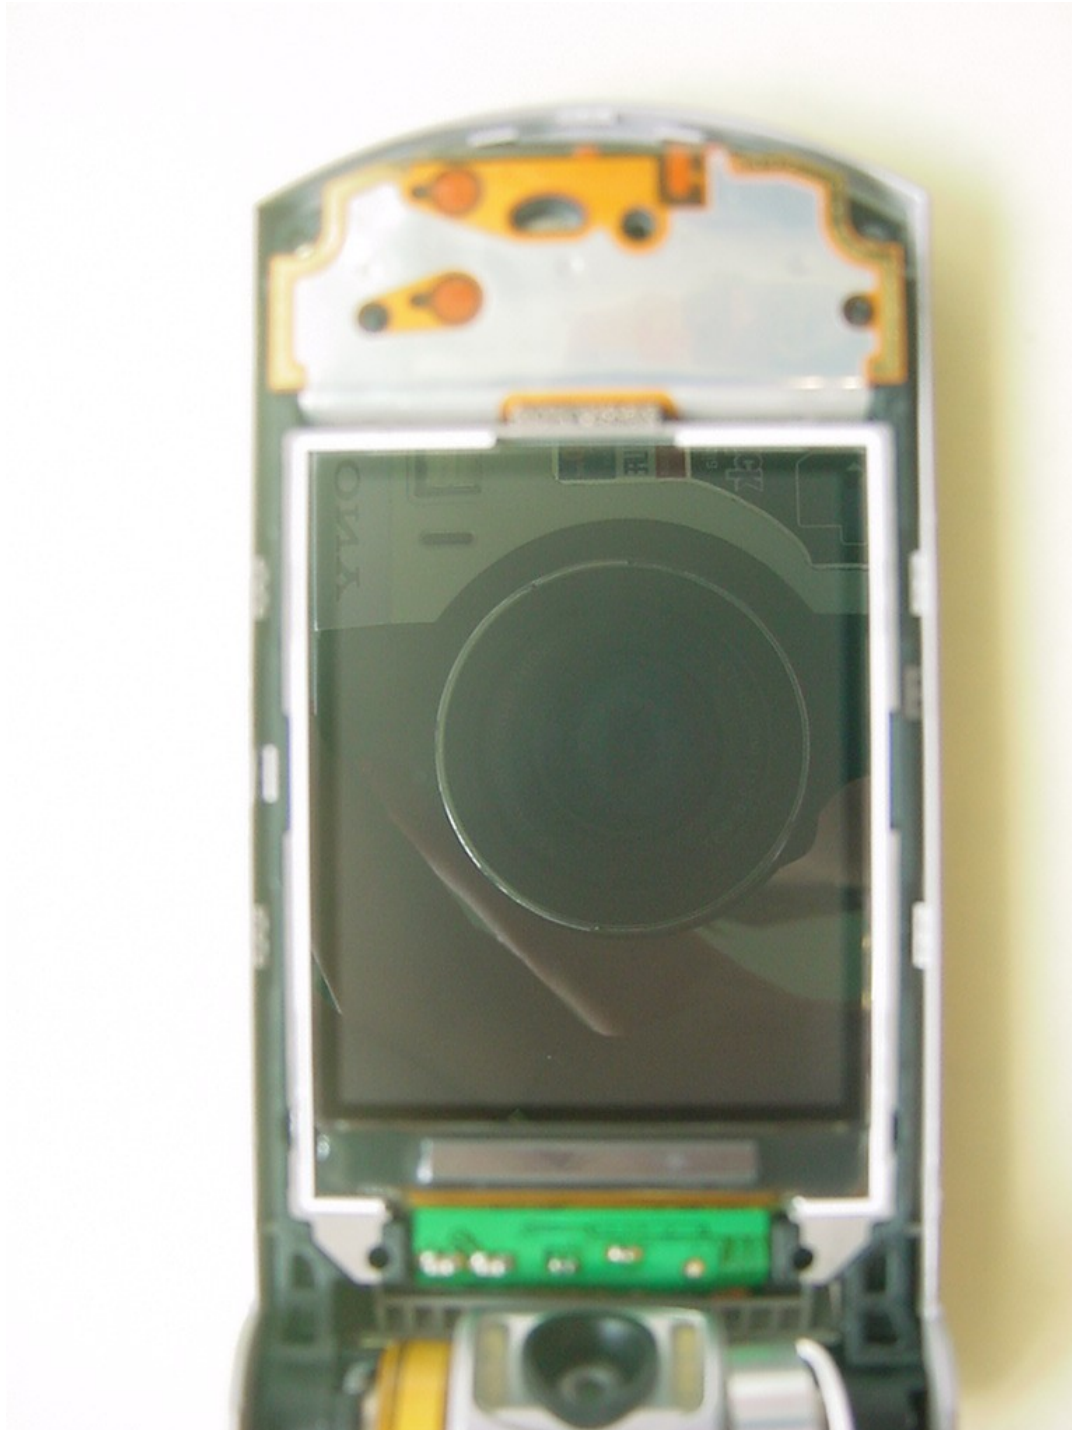

Photographs of the equipment

