



Sony Ericsson

1 (3)

Prepared (also subject responsible if other)

SEM/BGRRP MICHAEL FRINK

Approved

SEM/BGRRP (MICHAEL FRINK)

Checked

Limited Internal
MARKING DRAWING

No.

1/151 86 – DPY 101 2890

Date

25 Aug 05

Rev

B

Reference

Approved according to: 000 21 – LXE 107 42/1

Type AAF-1061011-BV.

Label


The label used for marking is defined in the Manufacturing Specification on the SVF 930 361/1.

Placing

The label shall be placed on the back of the telephone as shown across.

Print layout

Sony Ericsson trademark	Model Number
DPY number, r-state/variant	
Type number G H Y1 field	
Country approval mark 1	Country approval mark 2
IMEI-numbers as barcode	
IMEI-numbers as characters	
Serial number as barcode	
Serial number as characters	
Marking of Origin	
Production Week Repair Code CE Marking	

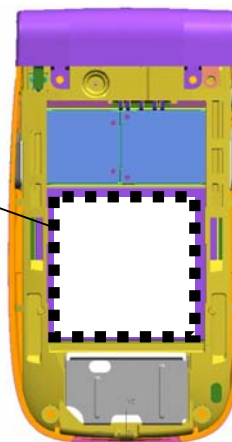

Definitions:

Sony Ericsson trademark	Sony Ericsson trademark shall be according to the corporate standard 190 89-EN/LZT 108 5347.
Model number	The model number is Z502a and shall be printed "Model : Z502a"
DPY product number & r-state/variant	The product number of the DPY including the R-state of the file, eg. DPY 2890/XX RXX
Type number	Print : "Type number: AAF-1061011-BV"
G – Field	R-State identification of the CXC-module according to the Marking Data 1/151 86 for the KRH
H-field	R-state identification of the KRH according to the Marking data 1/151 86 for the KRH.
Y ¹ -field	R-state identification of the ROA according to the Marking data 1/151 86 for the KRH.
Country approval mark 1	Consist of text: FCC:PY7AF061011 <i>Within a frame with height > 1,5 mm.</i>
Country approval mark 2	Consist of text: IC:4170B-AF061011



Sony Ericsson

2 (3)

Prepared (also subject responsible if other)

SEM/BGRRP MICHAEL FRINK

Approved

SEM/BGRRP (MICHAEL FRINK)

Checked

Limited Internal
MARKING DRAWING

No.

1/151 86 – DPY 101 2890

Date

25 Aug 05

Rev

B

Reference

IMEI number as bar code	See below for definition of IMEI-number. The bar code shall only contain the digits of the IMEI number
IMEI number as characters	Actual electronic serial number (IMEI) of the phone (KRH), "00000000-000000-0" In the format TAC-SNR-CD. TAC and SNR derived from the 1/151 86-document in the 1095- for the KRH. CD = check digit according to the Luhn formula (ISO/IEC 7812), GSM 02.16..
Serial number as bar code	According to Ericsson corporate standard 102 01 – 109.
Serial number as characters	According to Ericsson group standard 0012-101. Ericsson group factory number system according the Ericsson corporate standard 1120-101
Production week (Prod wk)	The production week shall be given as yyWww (yy = year, ww = week) according to the ISO 8601 standard.
Repair code	Six character code to identify repair data; four characters for date code followed by a two character repair code. "Manufacturing" will <u>NOT</u> be using this space; populated <u>ONLY</u> after completion of repairs and " <u>RELABELING</u> ", when required.
Marking of origin	"Made in" statement should reflect the country of origin of the DPY (i.e. Made in Malaysia).
Approval Marks (CE Marking)	1. According to 1424 - SVF 930 52 2. The notified body number from the type approval certificate, 0682. The print size (height) for the notified body number (e.g. 0682) and the corresponding approval marks shall be minimum 5 mm. This is a regulatory requirement.



Sony Ericsson

3 (3)

Prepared (also subject responsible if other)

SEM/BGRRP MICHAEL FRINK

Approved

SEM/BGRRP (MICHAEL FRINK)

Checked

Limited Internal
MARKING DRAWING

No.

1/151 86 – DPY 101 2890

Date

25 Aug 05

Rev

B

Reference

Print regulations

The printing shall be well readable and permanent.

Typeface	OCR-B
Type size	min 1.1 mm
Line spacing	min 1.5 mm
Trademark	min 1.5 mm

Document History

Rev.	Date Created (not released date)	Detailed Changes (BOLD)
A	26 April 2005	1. Initial Release
B	25 August 2005	2. Correct FCC ID and change CAN to IC.