


Hearing Aid Compatibility (HAC) T-Coil Test Report

APPLICANT : Sony Mobile Communications AB
EQUIPMENT : Smart phone
BRAND NAME : Sony
MODEL NAME : PM-0261-BV
MARKETING NAME : C1604
FCC ID : PY7PM-0261
STANDARD : FCC 47 CFR §20.19
ANSI C63.19-2007
T CATEGORY : T3

The product sample completely tested on Oct. 04, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7PM-0261

Page Number : 1 of 32

Report Issued Date : Nov. 30, 2012

Report Version : Rev. 03



Table of Contents

Revision History.....	3
1. Statement of Compliance	4
2. Administration Data.....	5
2.1 Testing Laboratory	5
2.2 Applicant.....	5
2.3 Manufacturer	5
2.4 Application Details	5
3. General Information	6
3.1 Description of Equipment Under Test (EUT).....	6
3.2 Product Photos	7
3.3 Applied Standards	8
3.4 Test Conditions	9
3.4.1 Ambient Condition	9
3.4.2 Test Configuration.....	9
4. Hearing Aid Compliance (HAC).....	10
4.1 Introduction.....	10
5. HAC T-Coil Measurement Setup	11
5.1 System Configuration	11
5.2 AM1D Probe	12
5.2.1 Probe Calibration in AMCC	13
5.3 AMCC	14
5.4 AMMI	14
5.5 DATA Acquisition Electronics (DAE)	15
5.6 Robot.....	15
5.7 Measurement Server	16
5.8 Phone Positioner	16
5.9 Test Arch Phantom	17
5.10 Cabling of System	17
5.11 HAC Extension Software	18
5.12 Test Equipment List	18
5.13 Reference Input of Audio Signal Spectrum	19
5.14 Signal Verification	20
6. Description for EUT Testing Position	21
7. T-Coil Test Procedure	22
8. T-Coil Signal Quality Categories	24
9. HAC T-Coil Test Results	25
9.1 Conducted Power (Unit: dBm).....	25
9.2 Magnitude Result.....	25
9.3 Frequency Response Plots	27
9.4 T-Coil Coupling Field Intensity.....	29
9.4.1 Axial Field Intensity.....	29
9.4.2 Radial Field Intensity	29
9.4.3 Frequency Response at Axial Measurement Point	29
9.4.4 Signal Quality	29
10. Uncertainty Assessment	30
11. References.....	32
 Appendix A. Plots of T-Coil Measurement	
Appendix B. DASY Calibration Certificate	
Appendix C. Product Photos	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
HA290405B	Rev. 01	Initial issue of report	Nov. 09, 2012
HA290405B	Rev. 02	Remove Battery picture	Nov. 26, 2012
HA290405B	Rev. 03	Add WLAN and BT functionality and Revise rule of KDB 285076	Nov. 30, 2012

1. Statement of Compliance

The Hearing Aid Compliance (HAC) maximum results found during testing for the **Sony Mobile Communications AB Smart phone Sony PM-0261-BV C1604** are as follows (with expanded uncertainty $\pm 8.1\%$ for AMB1 and $\pm 12.3\%$ for AMB2):

Reference (63.19)	Description	Verdict	Section
7.3.1.1	Axial Field Intensity	Pass	9.2.1
7.3.1.2	Radial Field Intensity	Pass	9.2.2
7.3.2	Frequency Response	Pass	9.2.3
7.3.3	Signal Quality	T3	9.2.4

Band	(S+N)/N in dB	T Rating
GSM850	24.89	T3
GSM1900	21.32	T3
WCDMA V	28.7	T3
WCDMA II	28.33	T3

They are in compliance with HAC limits (HAC Rated category T3) specified in guidelines FCC 47CFR §20.19 and ANSI Standard ANSI C63.19.

Results Summary : T Category = T3 (ANSI C63.19-2007)

2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. : SAR01-HY

2.2 Applicant

Company Name	Sony Mobile Communications AB
Address	Nya Vattentornet, 22188 Lund, Sweden

2.3 Manufacturer

Company Name	Arima Communications Corp.
Address	6F., No. 866, Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan

2.4 Application Details

Date of Start during the Test	Oct. 04, 2012
Date of End during the Test	Oct. 04, 2012

3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT Type	Smart phone
Brand Name	Sony
Model Name / Marketing Name	PM-0261-BV
FCC ID	PY7PM-0261
EUT Serial No	WUJ012D9FC
IMEI Code	004402146213651
Tx Frequency	GSM850 : 824.2 MHz ~ 848.8 MHz GSM1900 : 1850.2 MHz ~ 1909.8 MHz WCDMA Band V : 826.4 MHz ~ 846.6 MHz WCDMA Band II : 1852.4 MHz ~ 1907.6 MHz WLAN2.4G: 2412 MHz ~ 2462 MHz Bluetooth : 2402 MHz ~ 2480 MHz
Rx Frequency	GSM850 : 869.2 MHz ~ 893.8 MHz GSM1900 : 1930.2 MHz ~ 1989.8 MHz WCDMA Band V : 869.2 MHz ~ 893.8 MHz WCDMA Band II : 1932.4 MHz ~ 1987.6 MHz WLAN2.4G: 2412 MHz ~ 2462 MHz Bluetooth : 2402 MHz ~ 2480 MHz
Measure Maximum Average Output Power to Antenna	GSM850 : 33.82 dBm GSM1900 : 30.90 dBm WCDMA Band V : 24.85 dBm WCDMA Band II : 23.38 dBm 802.11b : 15.59 dBm 802.11g : 15.10 dBm 802.11n-HT20 (2.4GHz) : 12.71 dBm Bluetooth: 5.65 dBm
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna
HW Version	SP
SW Version	11.1.A.0.21
Type of Modulation	GSM : GMSK WCDMA : QPSK (Uplink) 802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth : GFSK Bluetooth EDR : $\pi/4$ -DQPSK, 8-DPSK
EUT Stage	Production Unit

**List of air interfaces / frequency bands**

Air Interface	Band (MHz)	Voice/Data	C 63.19-2007 Tested	Concurrent connections	Reduced Power 20.19 (c)(1)
GSM	850,1900	Voice	Yes	WLAN, BT	No
WCDMA	850, 1900	Voice	Yes	WLAN, BT	No
WLAN	2450	Data (*)	No	GSM, WCDMA	No
BT	2450	Data (*)	No	GSM, WCDMA,	No

Note:

1. (*): The voice function maybe be activated via 3rd party software application.
2. Per KDB 285076 D01 v03)10)a), during T-Coil test, concurrent transmission is disabled.

3.2 Product Photos

Refer to Appendix C.



3.3 Applied Standards

The Standard ANSI C63.19:2007 represents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.

3.4 Test Conditions

3.4.1 Ambient Condition

Ambient Temperature	20-24°C
Humidity	<60%
Acoustic Ambient Noise	>10dB below the measurement level

3.4.2 Test Configuration

The device was controlled by using a base station emulator R&S CMU200. Communication between the device and the emulator was established by coaxial connection. The EUT was set from the emulator to radiate maximum output power during all testing.



4. Hearing Aid Compliance (HAC)

4.1 Introduction

In September 2006, the T-Coil requirements of ANSI C63.19 Standard went into effect. The federal communication commission (FCC) adopted ANSI C63.19 as HAC test standard.

5. HAC T-Coil Measurement Setup

5.1 System Configuration



Fig. 5.1 T-Coil setup with HAC Test Arch and AMCC

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

5.2 AM1D Probe

The AM1D probe is an active probe with a single sensor. It is fully RF-shielded and has a rounded tip 6mm in diameter incorporating a pickup coil with its center offset 3mm from the tip and the sides. The symmetric signal preamplifier in the probe is fed via the shielded symmetric output cable from the AMMI with a 48V "phantom" voltage supply. The 7-pin connector on the back in the axis of the probe does not carry any signals. It is mounted to the DAE for the correct orientation of the sensor. If the probe axis is tilted 54.7 degree from the vertical, the sensor is approximately vertical when the signal connector is at the underside of the probe (cable hanging downwards).

Specification:

Frequency Range	0.1 ~ 20 kHz (RF sensitivity <-100dB, fully RF shielded)
Sensitivity	<-50dB A/m @ 1 kHz
Pre-amplifier	40 dB, symmetric
Dimensions	Tip diameter/ length: 6/ 290 mm, sensor according to ANSI-PC63.19

5.2.1 Probe Calibration in AMCC

The probe sensitivity at 1 kHz is 0.06556 V/(A/m) (-23.66 dBV/(A/m)) was calibrated by AMCC coil for verification of setup performance. The evaluated probe sensitivity was able to be compared to the calibration of the AM1D probe. The frequency response and sensitivity was shown in Fig. 5.2. The probe signal is represented after application of an ideal integrator. The green curve represents the current though the AMCC, the blue curve the integrated probe signal. The DIFFERENCE between the two curves is equivalent to the frequency response of the probe system and shows the characteristics. The probe/system complies with the frequency response and linearity requirements in C63.19 according to the Speag's calibrated report as shown in Annex B (AM1D probe: SPAM100AF)

(1)The frequency response has been tested within +/- 0.5 dB of ideal differentiator from 100 Hz to 10 kHz. (2)The linearity has also been tested within 0.1dB from 5 dB below limitation to 16 dB above noise level. The AMCC coil is qualified according to certificate report, SDHACPO02A as shown in Annex B.

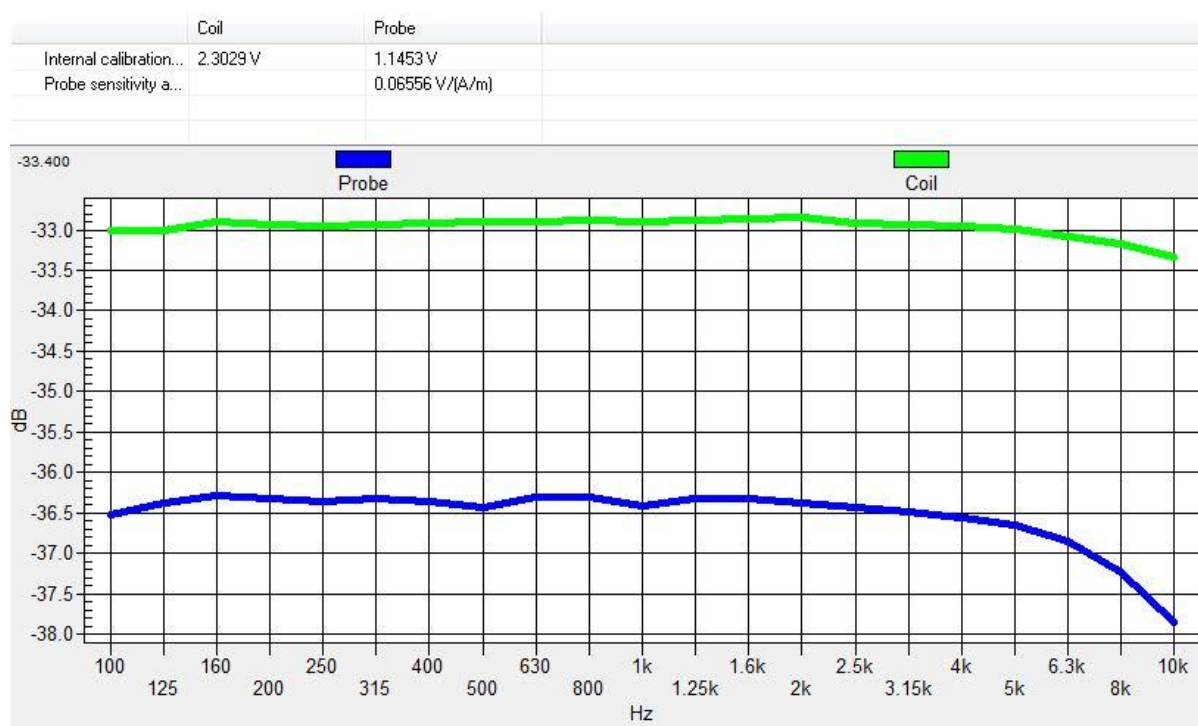


Fig. 5.2 The frequency response and sensitivity of AM1D probe

5.3 AMCC

The Audio Magnetic Calibration coil is a Helmholtz Coil designed for calibration of the AM1D probe. The two horizontal coils generate a homogeneous magnetic field in the z direction. The DC input resistance is adjusted by a series resistor to approximately 50 Ohm, and a shunt resistor of 10 Ohm permits monitoring the current with a scale of 1:10.

Port description:

Signal	Connector	Resistance
Coil In	BNC	typically 50 Ohm
Coil Monitor	BNO	100 Ohm $\pm 1\%$ (100mV corresponding to 1 A/m)

Specification:

Dimensions	370 x 370 x 196 mm, according to ANSI C63.19
-------------------	--

5.4 AMMI



Fig. 5.3 AMMI front panel

The Audio Magnetic Measuring Instrument (AMMI) is a desktop 19-inch unit containing a sampling unit, a waveform generator for test and calibration signals, and a USB interface.

Specification:

Sampling rate	48 kHz/24 bit
Dynamic range	85 dB
Test signal generation	User selectable and predefined (vis PC)
Calibration	Auto-calibration/full system calibration using AMCC with monitor output
Dimensions	482 x 65 x 270 mm

5.5 DATA Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig. 5.4 Photo of DAE

5.6 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

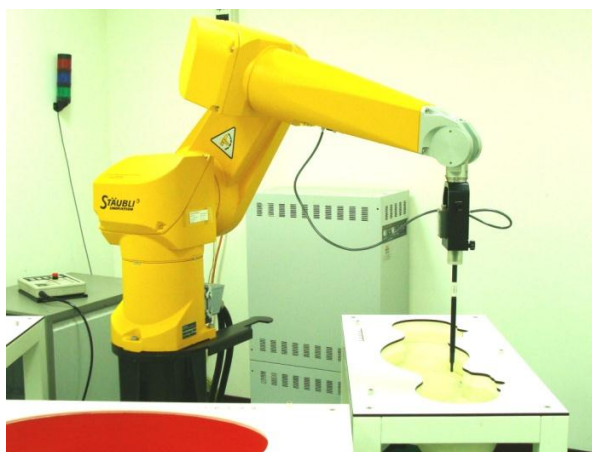


Fig. 5.5 Photo of DASY4



Fig. 5.6 Photo of DASY5

5.7 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig. 5.7 Photo of Server for DASY4



Fig. 5.8 Photo of Server for DASY5

5.8 Phone Positioner

The phone positioner shown in Fig. 5.9 is used to adjust EUT to the suitable position.



Fig. 5.9 Phone Positioner

5.9 Test Arch Phantom

Construction :	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	
Dimensions :	370 x 370 x 370 mm	

Fig. 5.10 Photo of Arch Phantom

5.10 Cabling of System

The principal cabling of the T-Coil setup is shown in Fig. 5.11. All cables provided with the basic setup have a length of approximately 5 m.

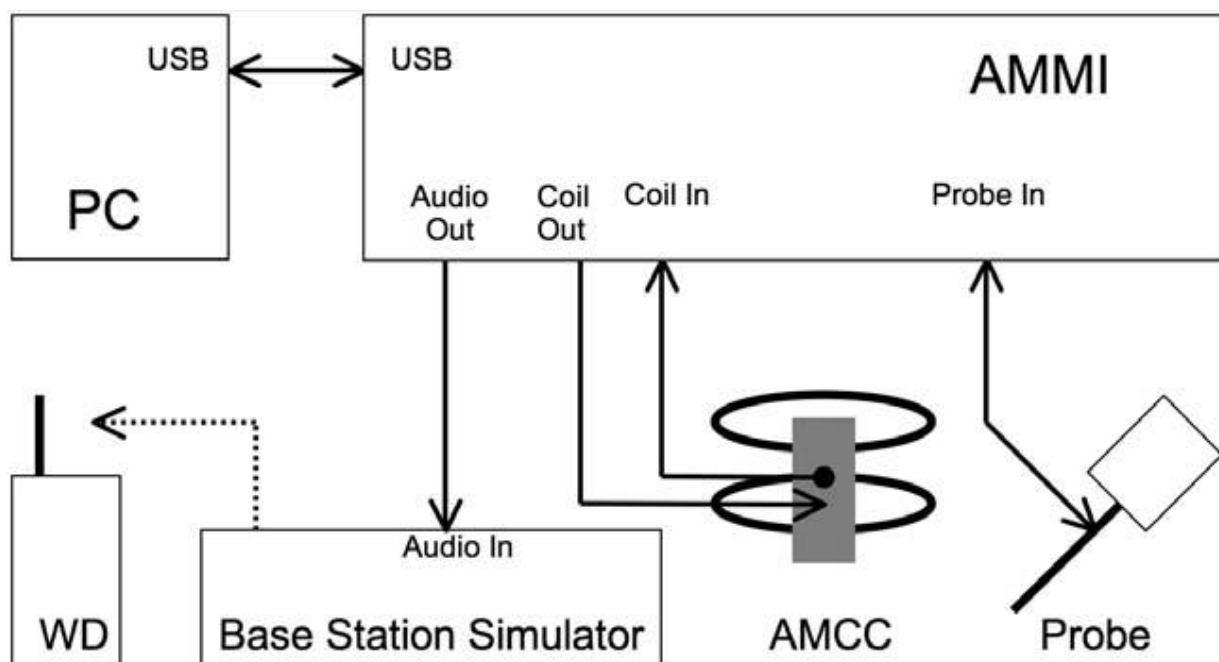


Fig. 5.11 T-Coil setup cabling

5.11 HAC Extension Software

Specification:

Precise teaching	Easy teaching with adaptive distance verification
Measurement area	Flexible selection of measurement area, predefined according to ANSI C63.19
Evaluation	ABM: spectral processing, filtering, weighting and evaluation according to ANSI C63.19
Report	Documentation ready for compliance report

5.12 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Audio Magnetic 1D Field Probe	AM1DV2	1038	Jan. 23, 2012	Jan. 22, 2013
SPEAG	Audio Magnetic Calibration Coil	AMCC	1049	NCR	NCR
SPEAG	Audio Measuring Instrument	AMMI	1041	NCR	NCR
SPEAG	Data Acquisition Electronics	DAE4	1279	May 03, 2012	May 02, 2013
Wisewind	Thermometer	ETP-101	N/A	Nov. 16, 2011	Nov. 15, 2012
SPEAG	Test Arch Phantom	N/A	N/A	NCR	NCR
SPEAG	Phone Positoiner	N/A	N/A	NCR	NCR
Agilent	Network Analyzer	E5071C	MY46101588	May 11, 2012	May 10, 2013
Agilent	ESG Vector Series Signal Generator	E4438C	MY49070755	Oct. 02, 2012	Oct. 01, 2013
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Dec. 21, 2011	Dec. 20, 2012
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 05, 2012	Jan. 04, 2014
R&S	Universal Digital Radio communication Tester	CMU200	106656	Jun. 28, 2012	Jun. 27, 2013

Table 5.1 Test Equipment List

5.13 Reference Input of Audio Signal Spectrum

With the reference job "use as reference" in the beginning of a procedure, measure the spectrum of the current when applied to the AMCC, i.e. the input magnetic field spectrum, as shown below Fig. 5.12 and Fig. 5.13. For this, the delay of the window shall be set to a multiple of the signal period and at least 2s. From the measurement on the device, using the same signal, the postprocessor deducts the input spectrum, so the result represents the net EUT response.

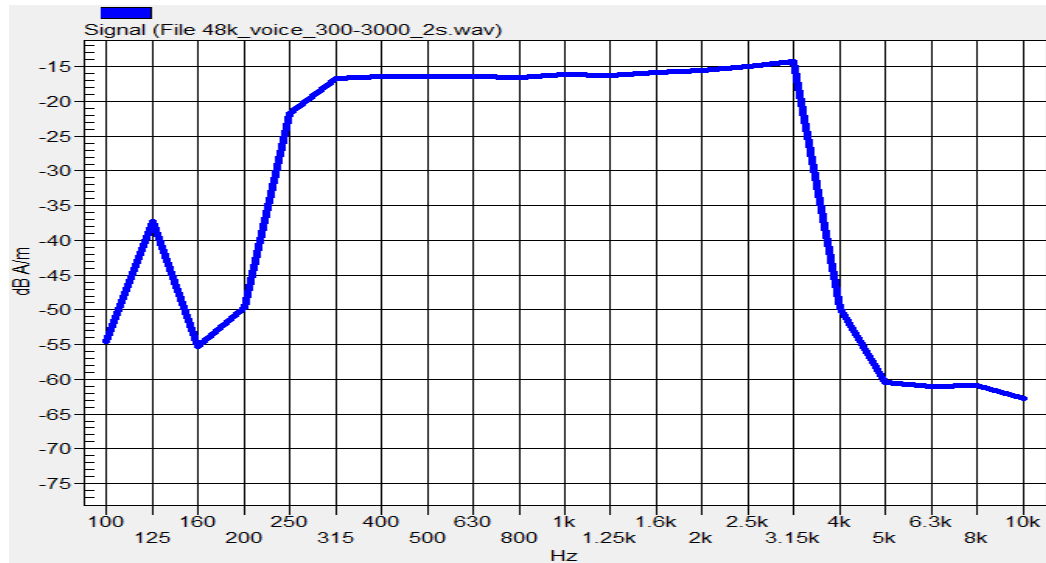


Fig. 5.12 Audio signal spectrum of the broadband signal (48kHz_voice_300Hz~3 kHz)

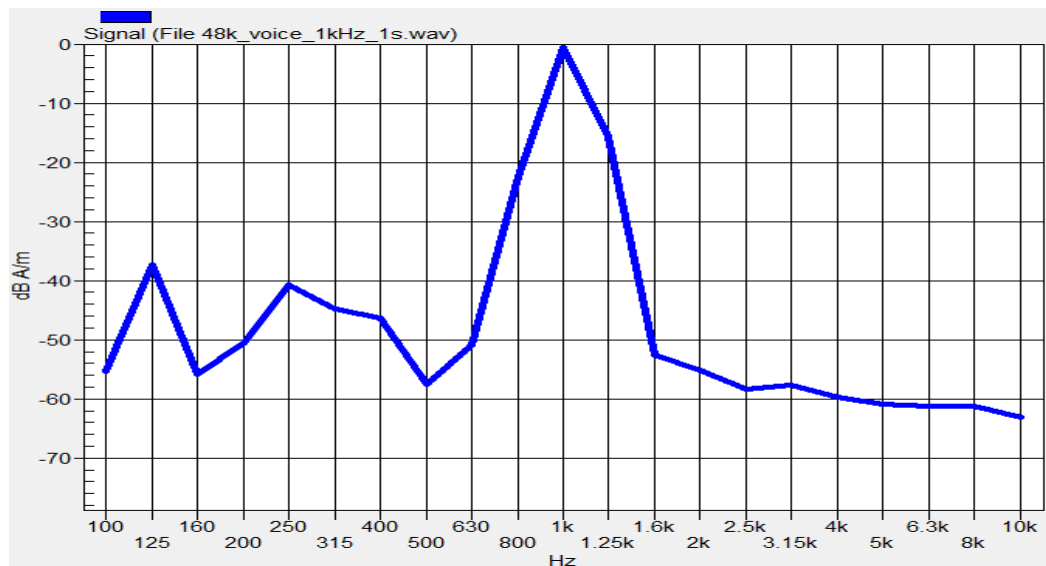


Fig. 5.13 Audio signal spectrum of the narrowband signal (48kHz_voice_1kHz)

5.14 Signal Verification

According to ANSI C63.19:2007 section 6.3.2.1, the normal speech input level for HAC T-coil tests shall be set to -16 dBm0 for GSM and UMTS (WCDMA), and to -18 dBm0 for CDMA. This technical note shows a possibility to evaluate and set the correct level with the HAC T-Coil setup with a Rohde&Schwarz communication tester CMU200 with audio option B52 and B85.

Establish a call from the CMU200 to a wireless device. Select CMU200 Network Bitstream "Decoder Cal" to have a 1 kHz signal with a level of 3.14 dBm0 at the speech output. Run the measurement job and read the voltage level at the multi-meter display "Coil signal". Read the RMS voltage corresponding to 3.14 dBm0 and note it. Calculate the desired signal levels of -16 dBm0:

3.14 dBm0 = -2.78 dBV
-16 dBm0 = -21.92 dBV

Determine the 1 kHz input level to generate the desired signal level of -16 dBm0. Select CMU200 Network Bitstream "Codec Cal" to loop the input via the codec to the output. Run the measurement job (AMMI 1 kHz signal with gain 10 inserted) and read the voltage level at the multimeter display "Coil signal". Calculate the required gain setting for the above levels:

Gain 10 = -20.18 dBV
Difference for -16 dBm0 = -21.92 - (-20.18) = -1.74 dB
Gain factor = $10^{((-1.74) / 20)} = 0.818$
Resulting Gain = $10 \times 0.818 = 8.18$

The predefined signal types have the following differences / factors compared to the 1 kHz sine signal:

Signal Type	Duration (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting
1kHz	1	16.2	-12.7	4.33	35.44
300Hz ~ 3kHz	2	21.6	-18.6	8.48	69.41

6. Description for EUT Testing Position

Fig.6.1 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix D for the setup photographs.

- The area is 5 cm by 5 cm.
- The area is centered on the audio frequency output transducer of the EUT.
- The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- The measurement plane is parallel to, and 10 mm in front of, the reference plane.

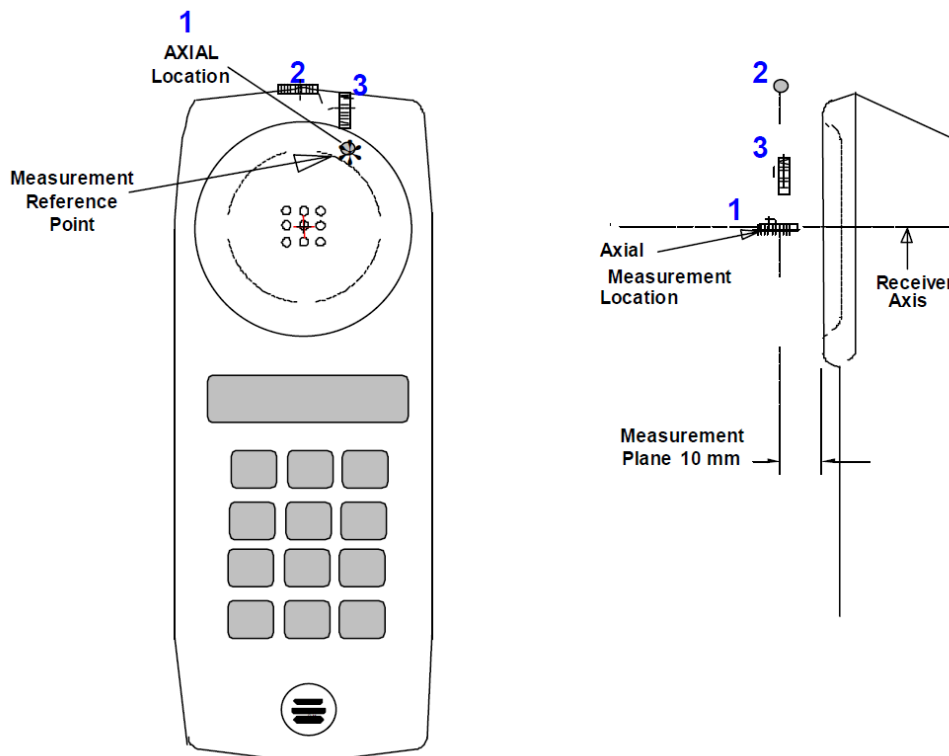


Fig 6.1 A typical EUT reference and plane for T-Coil measurements

7. T-Coil Test Procedure

The following illustrate a typical test scan over a wireless communications device:

1. Geometry and signal check: system probe alignment, proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the test Arch.
2. Set the reference drive level of signal voice defined in C63.19 per 6.3.2.1, as shown in this report of section 5.12.
3. The ambient and test system background noise (dB A/m) was measured as well as ABM2 over the full measurement. The maximum noise level must be at least 10dB below the limit of C63.19 per 7.3.2.
4. The EUT was positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
5. The EUT operation for maximum rated RF output power was configured and connected by using of coaxial cable connection to the base station simulator at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The EUT audio output was positioned tangent (as physically possible) to the measurement plane.
6. The EUT's RF emission field was eliminated from T-coil results by using a well RF-shielding of the probe, AM1D, and by using of coaxial cable connection to a Base Station Simulator. One test channel was pre-measurement to avoid this possibility.
7. Determined the optimal measurement locations for the EUT by following the three steps, coarse resolution scan, fine resolution scans, and point measurement, as described in C63.19 per 6.3.4.4. At each measurement locations, samples in the measurement window duration were evaluated to get ABM1 and the signal spectrum. The noise measurement was performed after the scan with the signal, the same happened, just with the voice signal switched off. The ABM2 was calculated from this second scan.
 - (1) Coarse resolution scans (1 kHz signal at 50 x 50 mm grid area with 10 mm spacing). Only ABM1 was measured in order to find the location of T-Coil source.
 - (2) Fine resolution scans (1 kHz signal at 10 x 10 mm grid area with 2 mm spacing). The positioned appropriately based on optimal AMB1 of coarse resolution scan. Both ABM1 and ABM2 were measured in order to find the location of the SNR point.
 - (3) Point measurement (1 kHz signal) for ABM1 and ABM2 in axial, radial transverse and radial longitudinal. The positioned appropriately based on optimal SNR of fine resolution scan. The SNR was calculated for axial, radial transverse and radial longitudinal orientation.
 - (4) Point measurement (300Hz to 3 kHz signal) for frequency response in axial. The positioned appropriately based on optimal SNR of fine resolution axial scan.



8. All results resulting from a measurement point in a T-Coil job were calculated from the signal samples during this window interval. ABM values were averaged over the sequence of these samples.
9. At an optimal point measurement, the SNR (ABM1/ABM2) was calculated for axial, radial transverse and radial longitudinal orientation, and the frequency response was measured in axial axis.
10. Corrected for the frequency response after the EUT measurement since the DASY system had known the spectrum of the input signal by using a reference job, as shown in this report of section 5.12.
11. In SEMCAD post-processing, the spectral points are in addition scaled with the high-pass (half-band) and the A-weighting, bandwidth compensated factor (BWC) and those results are final as shown in this report.
12. Classified the signal quality based on the table 8.1: T-Coil Signal Quality Categories.

8. T-Coil Signal Quality Categories

This section provides the signal quality requirement for the intended T-Coil signal from a WD. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. A device is assessed beginning by determining the category of the RF environment in the area of the T-Coil source.

The RF measurements made for the T-Coil evaluation are used to assign the category T1 through T4. The limitation is given in Table 8.1. This establishes the RF environment presented by the WD to a hearing aid.

Category	Telephone parameters WD signal quality ((signal + noise) to noise ratio in dB)
Category T1	0 to 10 dB
Category T2	10 to 20 dB
Category T3	20 to 30 dB
Category T4	> 30 dB

Table 8.1 T-Coil Signal Quality Categories

9. HAC T-Coil Test Results

9.1 Conducted Power (Unit: dBm)

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	33.82	33.75	33.60	30.90	30.75	30.63

Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency (MHz)	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	24.85	24.60	24.72	23.35	23.38	23.20

9.2 Magnitude Result

The Table 9.1 shows testing result in position coordinates which are defined as deviation from earpiece center in millimeters. Axial measurement location was defined by the manufacture of the device. Signal strength measurement scans are presented in appendix A.

Plot No.	Plot No.	Band	Channel	Probe Position	Ambient Noise (dB A/m)	Signal ABM1 (dB A/m)	Signal to Noise			
							ABM1 (dB A/m)	ABM2 (dB A/m)	SNR (dB)	T Rating
1	GSM850	Voice	128	Axial (Z)	-56.78	7.69	4.64	27.74	32.38	T4
				Radial 1 (X)	-51.02	5.80	-9.81	35.53	25.72	T3
				Radial 2 (Y)	-41.16	-0.37	-4.57	33.56	28.99	T3
2	GSM850	Voice	189	Axial (Z)	-52.82	7.85	5.00	27.48	32.48	T4
				Radial 1 (X)	-51.02	5.89	-10.83	36.65	25.82	T3
				Radial 2 (Y)	-41.18	5.86	1.67	27.58	29.25	T3
3	GSM850	Voice	251	Axial (Z)	-56	7.58	4.51	27.68	32.19	T4
				Radial 1 (X)	-51.25	5.73	-12.88	37.77	24.89	T3
				Radial 2 (Y)	-41.04	-0.67	-5.16	34.05	28.89	T3
4	GSM1900	Voice	512	Axial (Z)	-51.46	7.28	7.28	23.54	30.82	T4
				Radial 1 (X)	-50.78	-0.56	-15.92	37.24	21.32	T3
				Radial 2 (Y)	-38.3	-6.86	-9.05	34.42	25.37	T3
5	GSM1900	Voice	661	Axial (Z)	-58.73	5.64	2.54	28.64	31.18	T4
				Radial 1 (X)	-50.85	3.60	-11.86	37.23	25.37	T3
				Radial 2 (Y)	-47.66	-2.59	-6.45	35.69	29.24	T3
6	GSM1900	Voice	810	Axial (Z)	-57.77	7.19	4.34	28.97	33.31	T4
				Radial 1 (X)	-51.53	5.46	-9.25	37.55	28.30	T3
				Radial 2 (Y)	-48.17	5.29	2.80	28.46	31.26	T4

Plot No.	Plot No.	Band	Channel	Probe Position	Ambient Noise (dB A/m)	Signal ABM1 (dB A/m)	Signal to Noise			
							ABM1 (dB A/m)	ABM2 (dB A/m)	SNR (dB)	T Rating
7	WCDMA V	Voice	4132	Axial (Z)	-63.01	2.19	-9.17	39.19	30.02	T4
				Radial 1 (X)	-56.11	-1.53	-3.33	32.03	28.70	T3
				Radial 2 (Y)	-46.78	-0.97	-0.97	30.36	29.39	T3
8	WCDMA V	Voice	4182	Axial (Z)	-61.01	1.78	-10.38	40.21	29.83	T3
				Radial 1 (X)	-56.98	-7.82	-9.85	38.68	28.83	T3
				Radial 2 (Y)	-46.55	-7.30	-7.30	36.57	29.27	T3
9	WCDMA V	Voice	4233	Axial (Z)	-60.98	1.96	-8.12	38.04	29.92	T3
				Radial 1 (X)	-55.19	-7.81	-7.82	36.65	28.83	T3
				Radial 2 (Y)	-45.37	-7.29	-9.31	38.52	29.21	T3
10	WCDMA II	Voice	9262	Axial (Z)	-63.05	1.89	-0.90	30.63	29.73	T3
				Radial 1 (X)	-55.24	-1.69	-3.57	31.90	28.33	T3
				Radial 2 (Y)	-46.01	-1.21	-1.21	30.36	29.15	T3
11	WCDMA II	Voice	9400	Axial (Z)	-63.05	1.74	-0.89	30.48	29.59	T3
				Radial 1 (X)	-56.01	-1.71	-4.35	32.76	28.41	T3
				Radial 2 (Y)	-46.11	-1.40	-3.18	31.91	28.73	T3
12	WCDMA II	Voice	9538	Axial (Z)	-62.01	8.12	-4.45	34.08	29.63	T3
				Radial 1 (X)	-55.98	-1.59	-3.87	32.43	28.56	T3
				Radial 2 (Y)	-45.87	-1.22	-1.22	30.21	28.99	T3

Table 9.1 Test Result for Various Positions
Remark:

1. There is no special HAC mode software on this EUT.
2. The volume was adjusted to maximum level and the backlight turned off during T-Coil testing.
3. Test Engineer : Aaron Chen

9.3 Frequency Response Plots

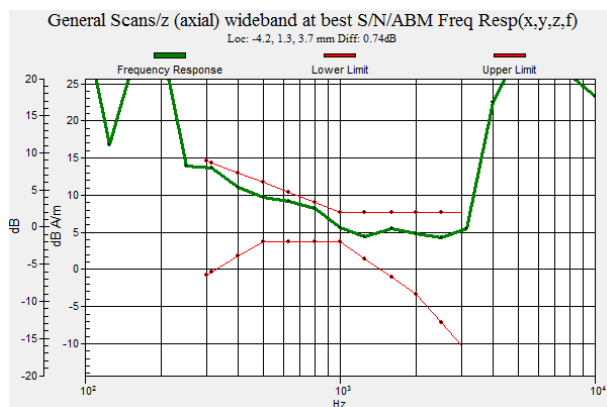


Fig 9.1 GSM850 Ch128

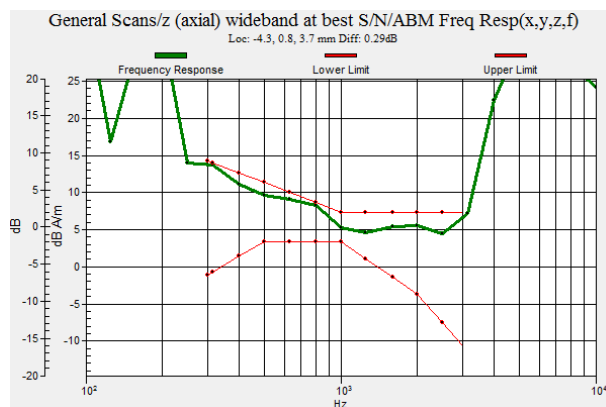


Fig 9.2 GSM850 Ch189

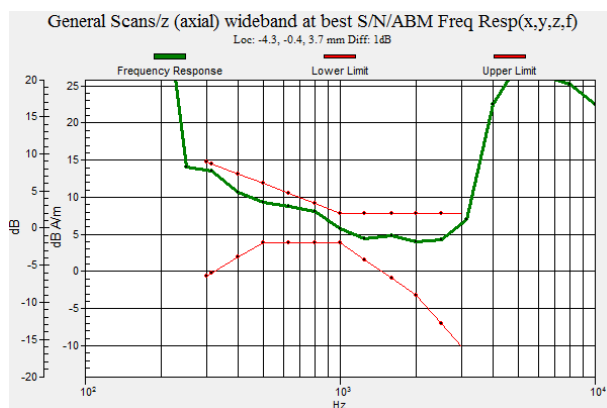


Fig 9.3 GSM850 Ch251

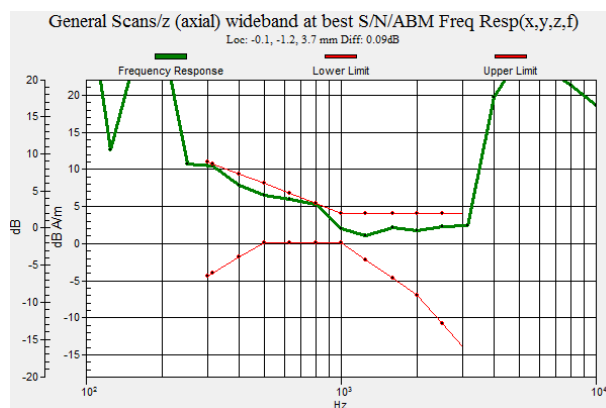


Fig 9.4 GSM1900 Ch512

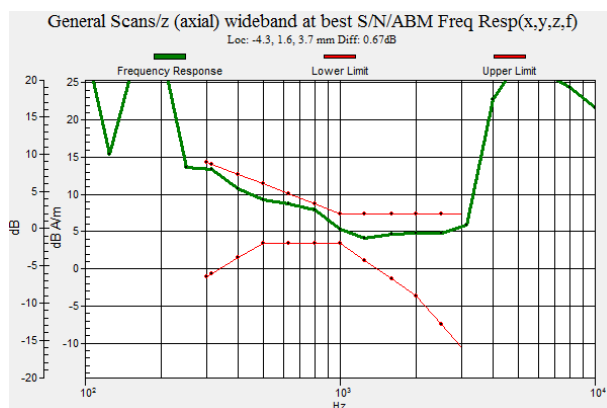


Fig 9.5 GSM1900 Ch661

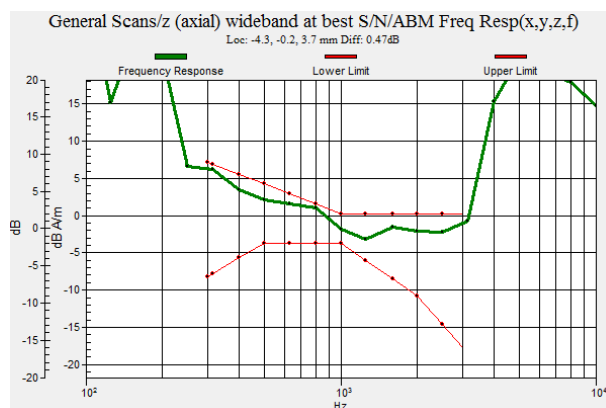


Fig 9.6 GSM1900 Ch810

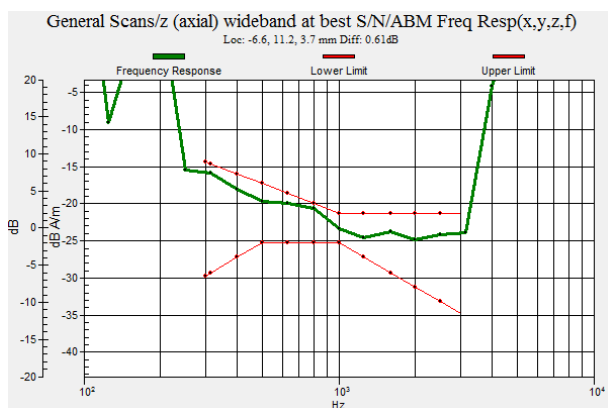


Fig 9.7 WCDMA Band V Ch4132

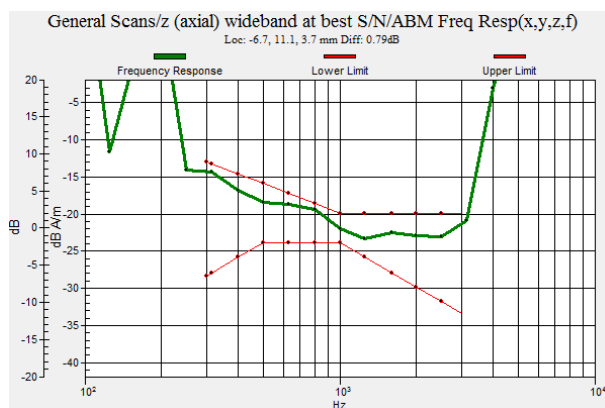


Fig 9.8 WCDMA Band V Ch4182

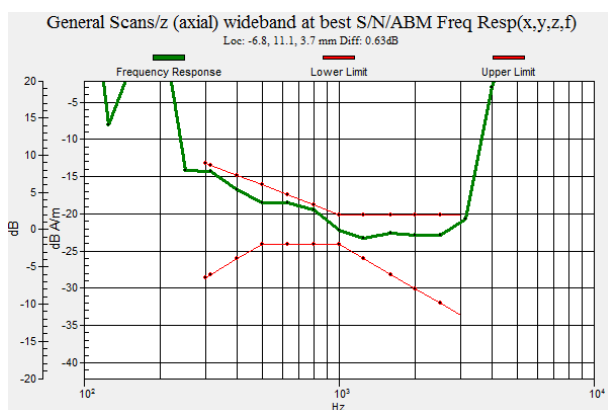


Fig 9.9 WCDMA Band V Ch4233

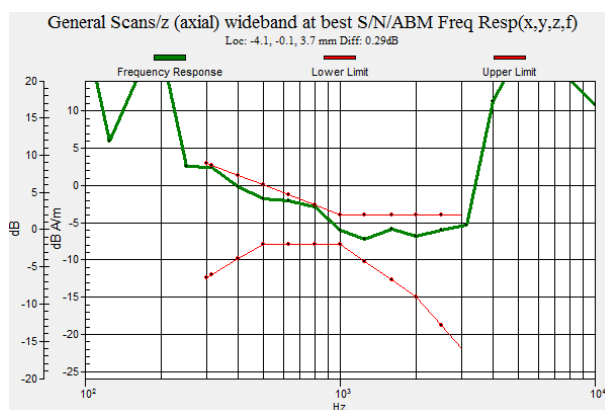


Fig 9.10 WCDMA Band II Ch9262

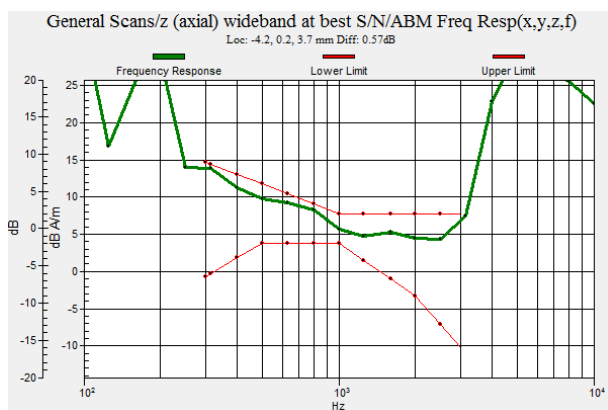


Fig 9.11 WCDMA Band II Ch9400

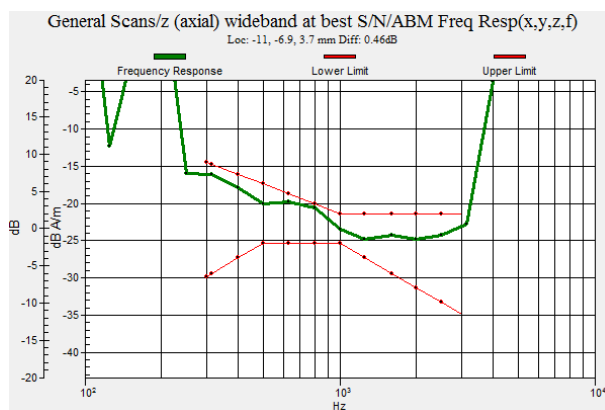


Fig 9.12 WCDMA Band II Ch9538

9.4 T-Coil Coupling Field Intensity

9.4.1 Axial Field Intensity

Cell Phone Mode	Minimum limit (dB A/m)	Result (dB A/m)	Verdict
GSM850	-18	4.51	Pass
GSM1900	-18	2.54	Pass
WCDMA V	-18	-10.38	Pass
WCDMA II	-18	-4.45	Pass

9.4.2 Radial Field Intensity

Cell Phone Mode	Minimum limit (dB A/m)	Result (dB A/m)	Verdict
GSM850	-18	-12.88	Pass
GSM1900	-18	-15.92	Pass
WCDMA V	-18	-9.85	Pass
WCDMA II	-18	-4.35	Pass

9.4.3 Frequency Response at Axial Measurement Point

Cell Phone Mode	Verdict
GSM850	Pass
GSM1900	Pass
WCDMA V	Pass
WCDMA II	Pass

9.4.4 Signal Quality

Cell Phone Mode	Minimum limit (dB)				Minimum Result (dB)	Verdict
	T1	T2	T3	T4		
GSM850	0	10	20	>30	24.89	T3
GSM1900	0	10	20	>30	21.32	T3
WCDMA V	0	10	20	>30	28.7	T3
WCDMA II	0	10	20	>30	28.33	T3

10. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 10.1.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-shape
Multiplying factor^(a)	$1/k$ ^(b)	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 10.1 Multiplying Factors for Various Distributions

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 10.2.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (ABM1)	Ci (ABM2)	Standard Uncertainty (ABM1)	Standard Uncertainty (ABM2)
Probe Sensitivity							
Reference Level	3.0	Normal	1	1	1	± 3.0 %	± 3.0 %
AMCC Geometry	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
AMCC Current	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Probe Positioning During Calibrate	0.1	Rectangular	√3	1	1	± 0.1 %	± 0.1 %
Noise Contribution	0.7	Rectangular	√3	0.0143	1	± 0.0 %	± 0.4 %
Frequency Slope	5.9	Rectangular	√3	0.1	1	± 0.3 %	± 3.5 %
Probe System							
Repeatability / Drift	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity / Dynamic Range	0.6	Rectangular	√3	1	1	± 0.4 %	± 0.4 %
Acoustic Noise	1.0	Rectangular	√3	0.1	1	± 0.1 %	± 0.6 %
Probe Angle	2.3	Rectangular	√3	1	1	± 1.4 %	± 1.4 %
Spectral Processing	0.9	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	0.6	Normal	1	1	5	± 0.6 %	± 3.0 %
Field Disturbation	0.2	Rectangular	√3	1	1	± 0.1 %	± 0.1 %
Test Signal							
Reference Signal Spectral Response	0.6	Rectangular	√3	0	1	± 0.0 %	± 0.4 %
Positioning							
Probe Positioning	1.9	Rectangular	√3	1	1	± 1.1 %	± 1.1 %
Phantom Thickness	0.9	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
EUT Positioning	1.9	Rectangular	√3	1	1	± 1.1 %	± 1.1 %
External Contributions							
RF Interference	0.0	Rectangular	√3	1	0.3	± 0.0 %	± 0.0 %
Test Signal Variation	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Combined Standard Uncertainty						± 4.1 %	± 6.1 %
Coverage Factor for 95 %						K = 2	
Expanded Uncertainty						± 8.1 %	± 12.3 %

Table 10.2 Uncertainty Budget of DASY



11. References

- [1] ANSI C63.19 2007, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", 8 June 2007
- [2] SPEAG DASY System Handbook



Appendix A. Plots of T-Coil Measurement

The plots are shown as follows.

#01 T-Coil_GSM850_Voice_Ch128_Axial (Z)**DUT: 290405**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 7.69 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 32.38 dB

ABM1 comp = 4.64 dB A/m


Location: -4.2, 0, 3.7 mm

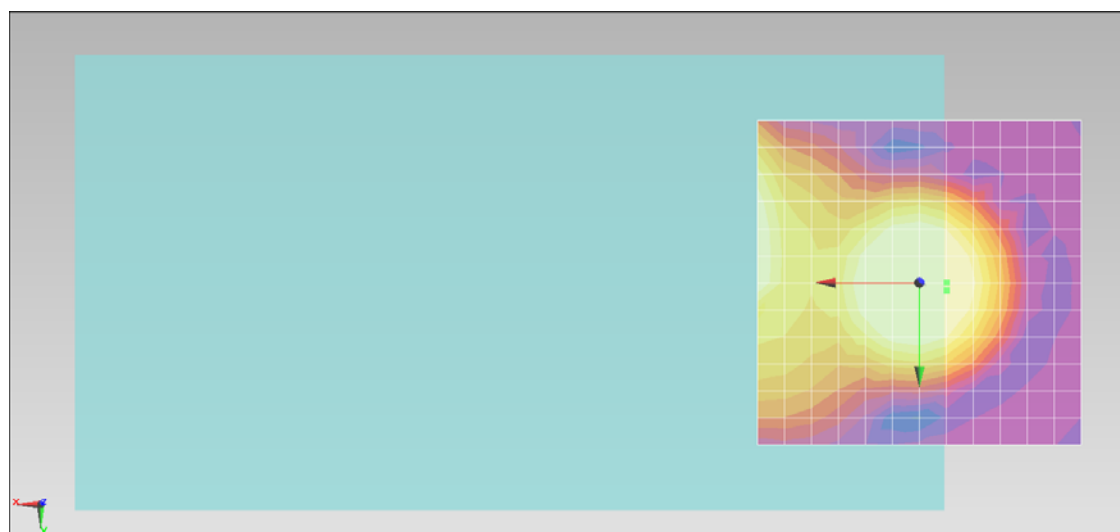

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.2, 1.3, 3.7 mm Diff: 0.74dB

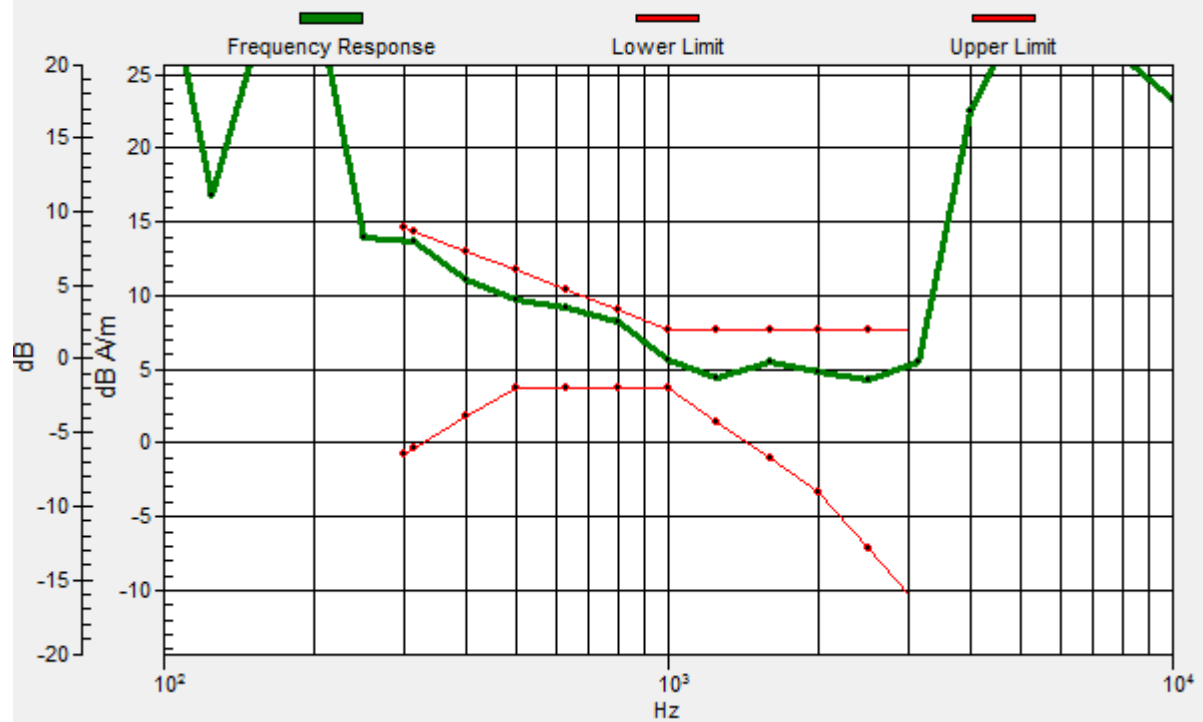

#01 T-Coil_GSM850_Voice_Ch128_Radial 1 (X)**DUT: 290405**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 5.80 dB A/m


Location: 8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 25.72 dB

ABM1 comp = -9.81 dB A/m

Location: -25, 4.2, 3.7 mm

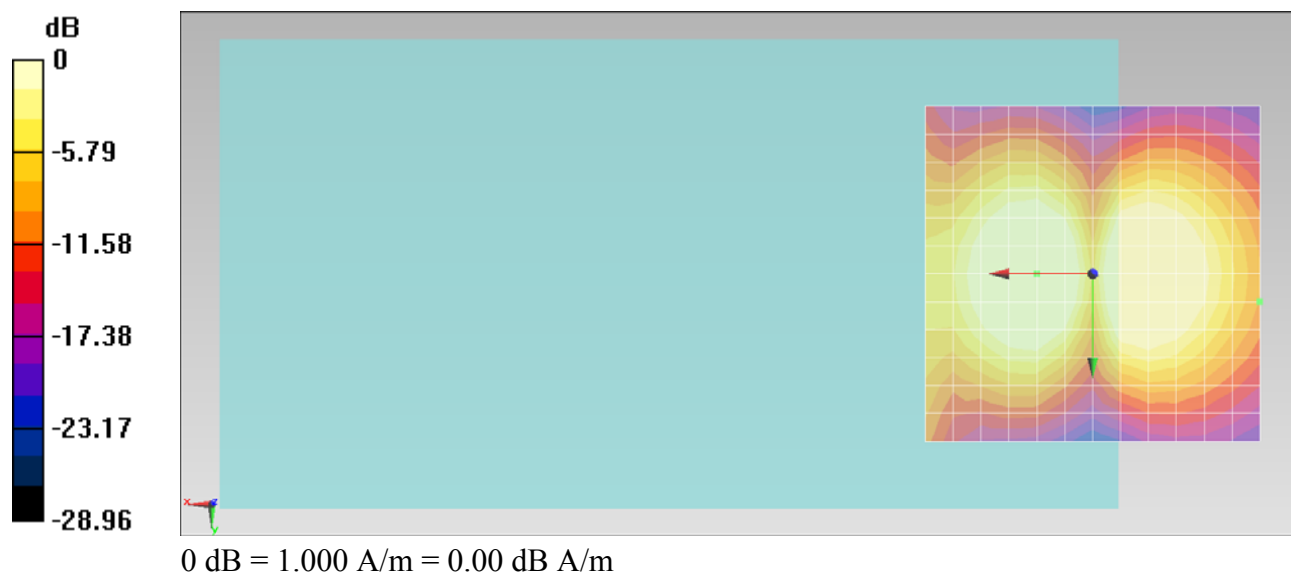

#01 T-Coil_GSM850_Voice_Ch128_Radial 2 (Y)**DUT: 290405**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -0.37 dB A/m

Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 28.99 dB

ABM1 comp = -4.57 dB A/m

Location: -4.2, -4.2, 3.7 mm



#02 T-Coil_GSM850_Voice_Ch189_Axial (Z)**DUT: 290405**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 7.85 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 32.48 dB

ABM1 comp = 5.00 dB A/m


Location: -4.2, 0, 3.7 mm

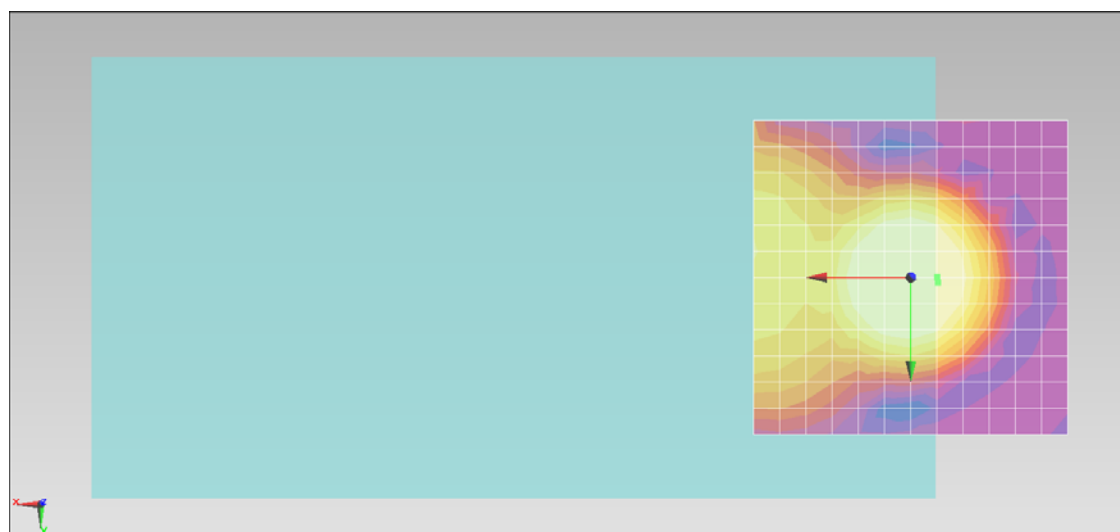

0 dB = 1.000 A/m = 0.00 dB A/m


General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.3, 0.8, 3.7 mm Diff: 0.29dB

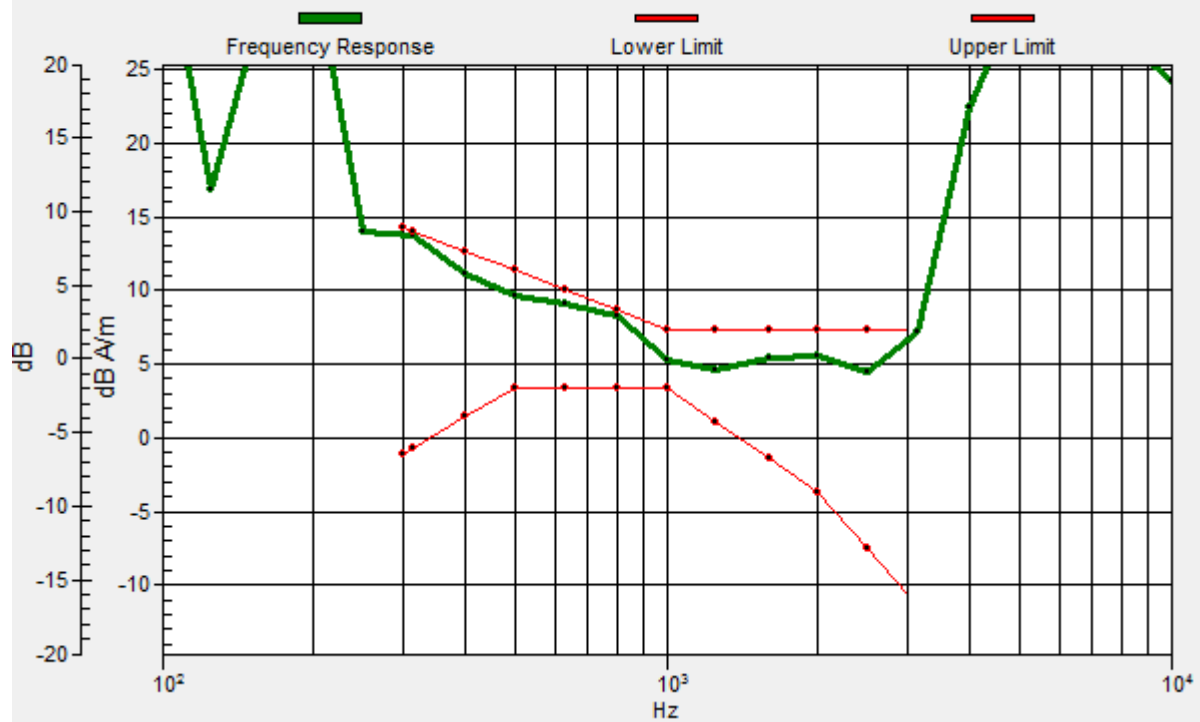

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.3, 0.8, 3.7 mm Diff: 0.29dB

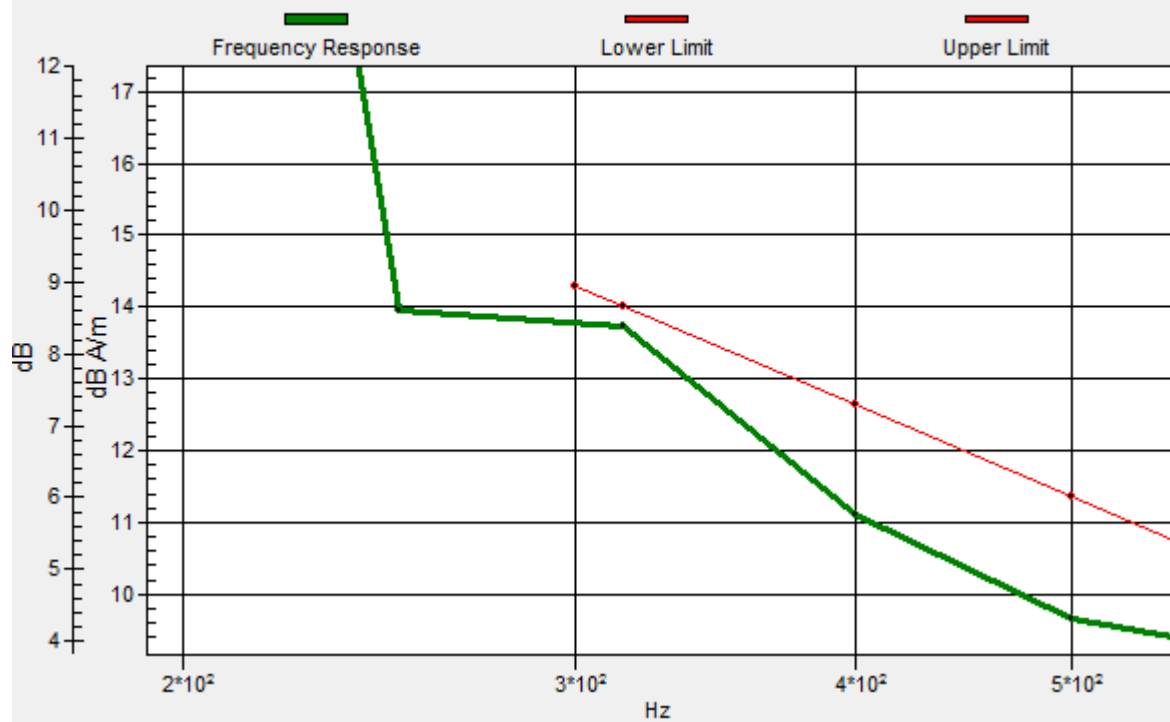

#02 T-Coil_GSM850_Voice_Ch189_Radial 1 (X)**DUT: 290405**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 5.89 dB A/m


Location: 8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 25.82 dB

ABM1 comp = -10.83 dB A/m

Location: -25, 8.3, 3.7 mm

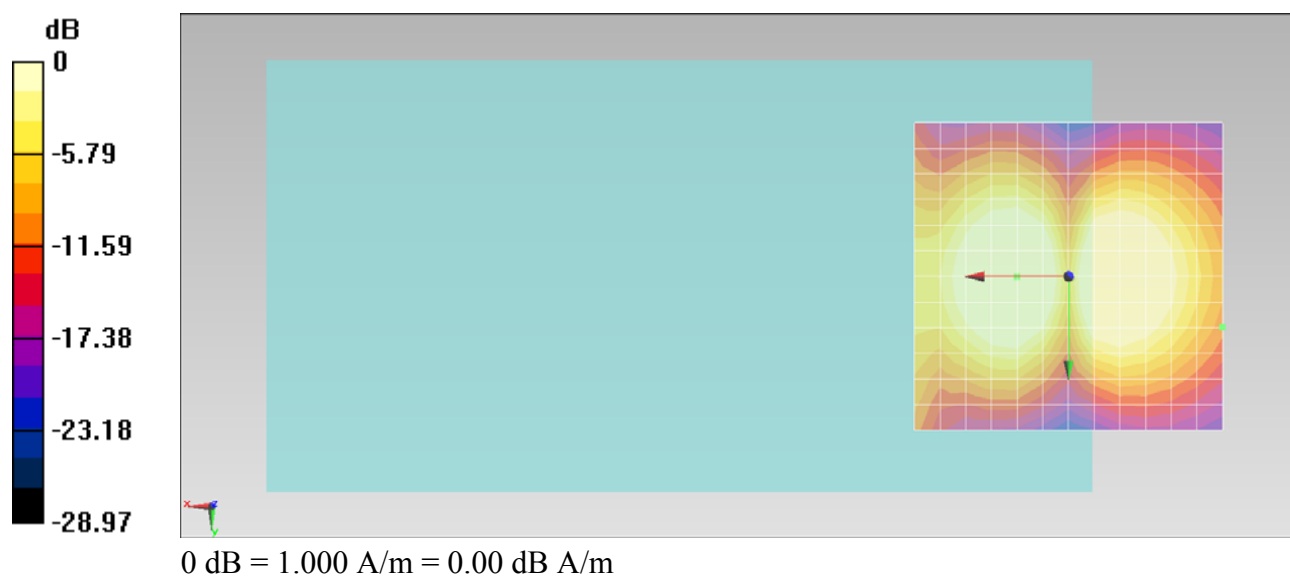

#02 T-Coil_GSM850_Voice_Ch189_Radial 2 (Y)**DUT: 290405**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 5.86 dB A/m


Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 29.25 dB

ABM1 comp = 1.67 dB A/m

Location: -4.2, -4.2, 3.7 mm

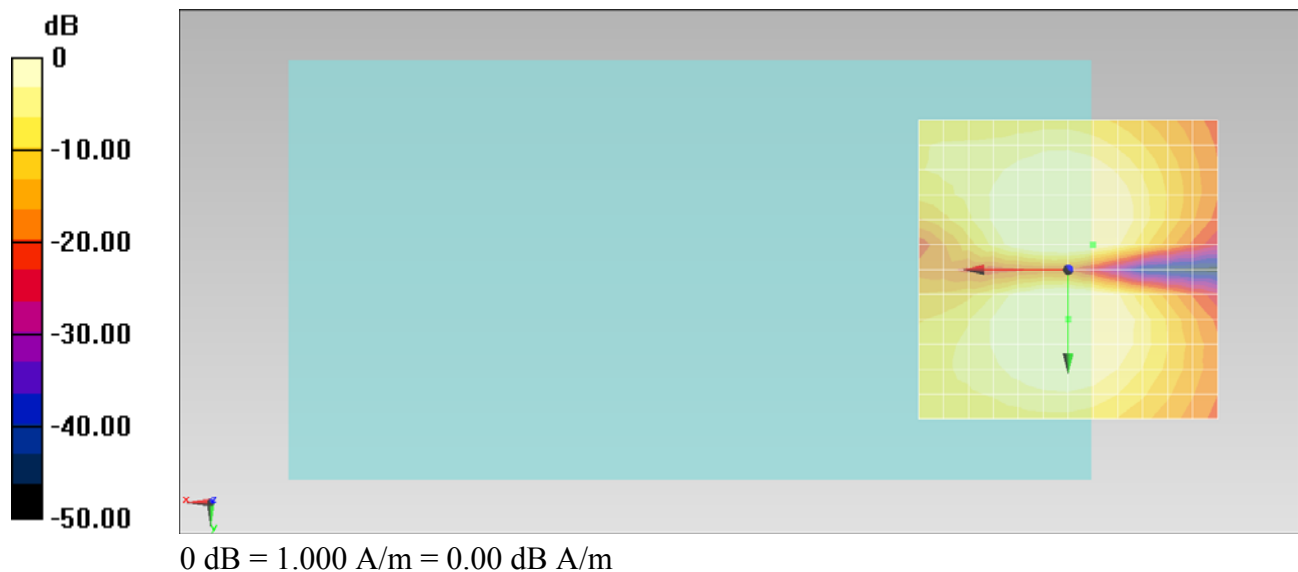

#03 T-Coil_GSM850_Voice_Ch251_Axial (Z)**DUT: 290405**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 7.58 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 32.19 dB

ABM1 comp = 4.51 dB A/m


Location: -4.2, 0, 3.7 mm

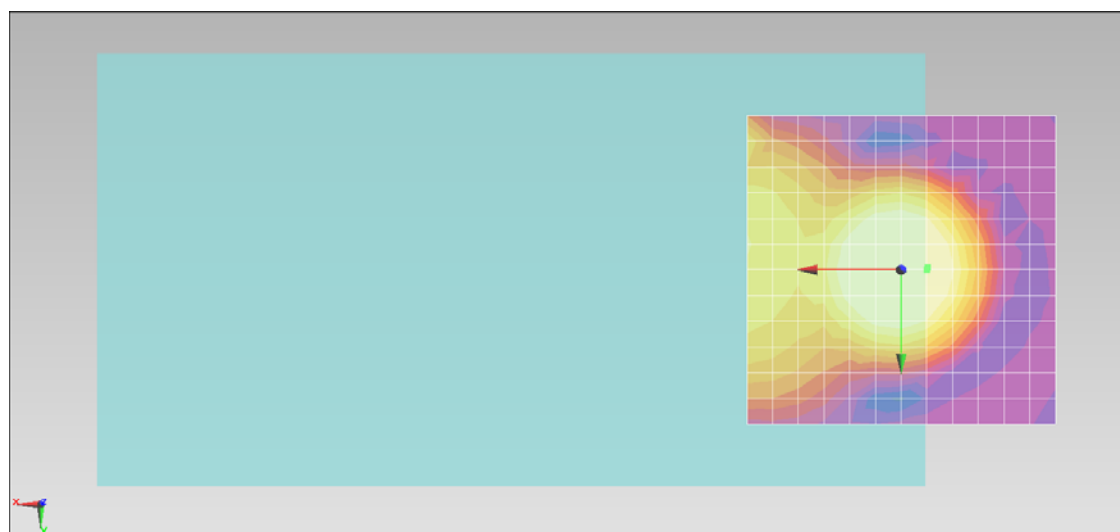

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.3, -0.4, 3.7 mm Diff: 1dB

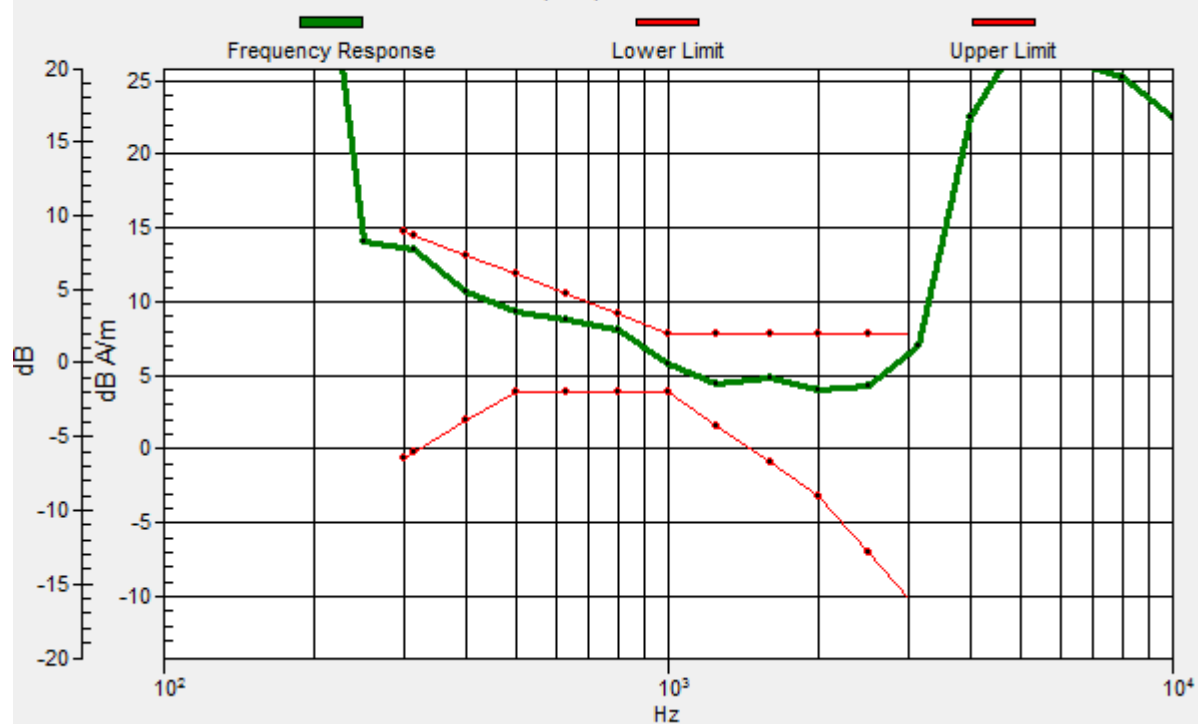

#03 T-Coil_GSM850_Voice_Ch251_Radial 1 (X)**DUT: 290405**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 5.73 dB A/m


Location: 8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 24.89 dB

ABM1 comp = -12.88 dB A/m

Location: -25, 12.5, 3.7 mm

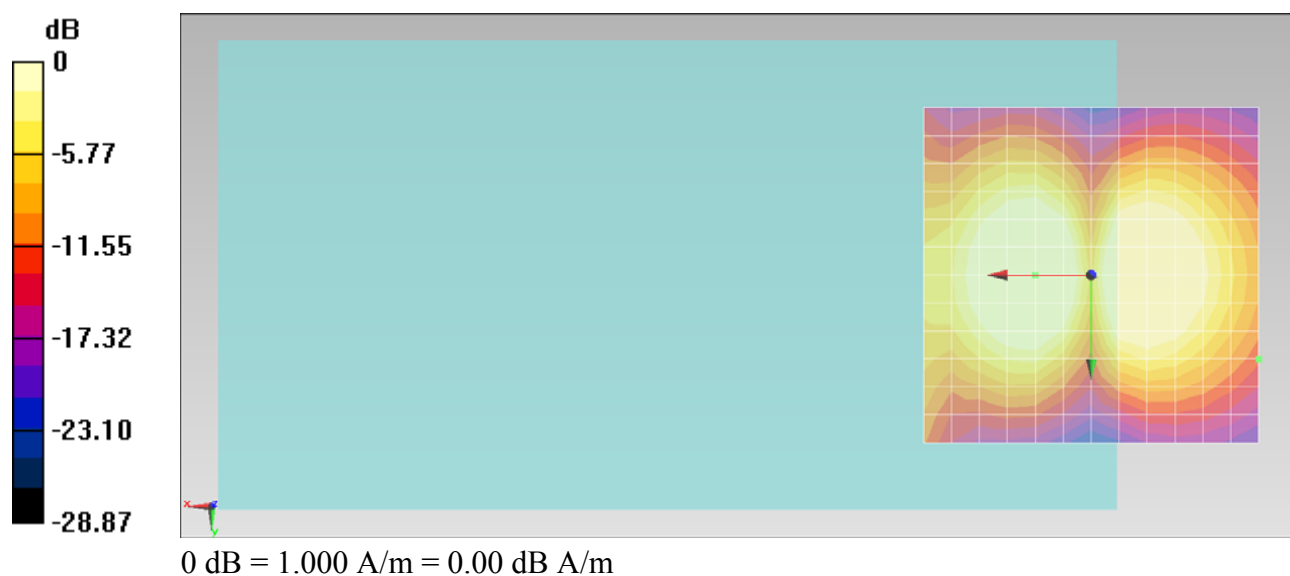

#03 T-Coil_GSM850_Voice_Ch251_Radial 2 (Y)**DUT: 290405**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -0.67 dB A/m

Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 28.89 dB

ABM1 comp = -5.16 dB A/m

Location: -4.2, -4.2, 3.7 mm



#04 T-Coil_GSM1900_Voice_Ch512_Axial (Z)**DUT: 290405**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 7.28 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 30.82 dB

ABM1 comp = 7.28 dB A/m


Location: 0, 0, 3.7 mm

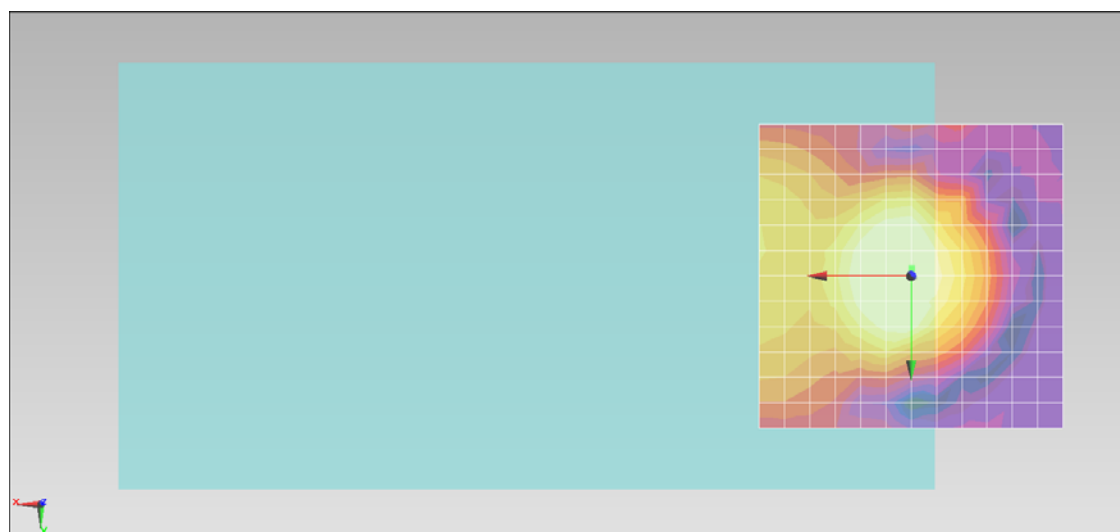

0 dB = 1.000 A/m = 0.00 dB A/m


General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -0.1, -1.2, 3.7 mm Diff: 0.09dB

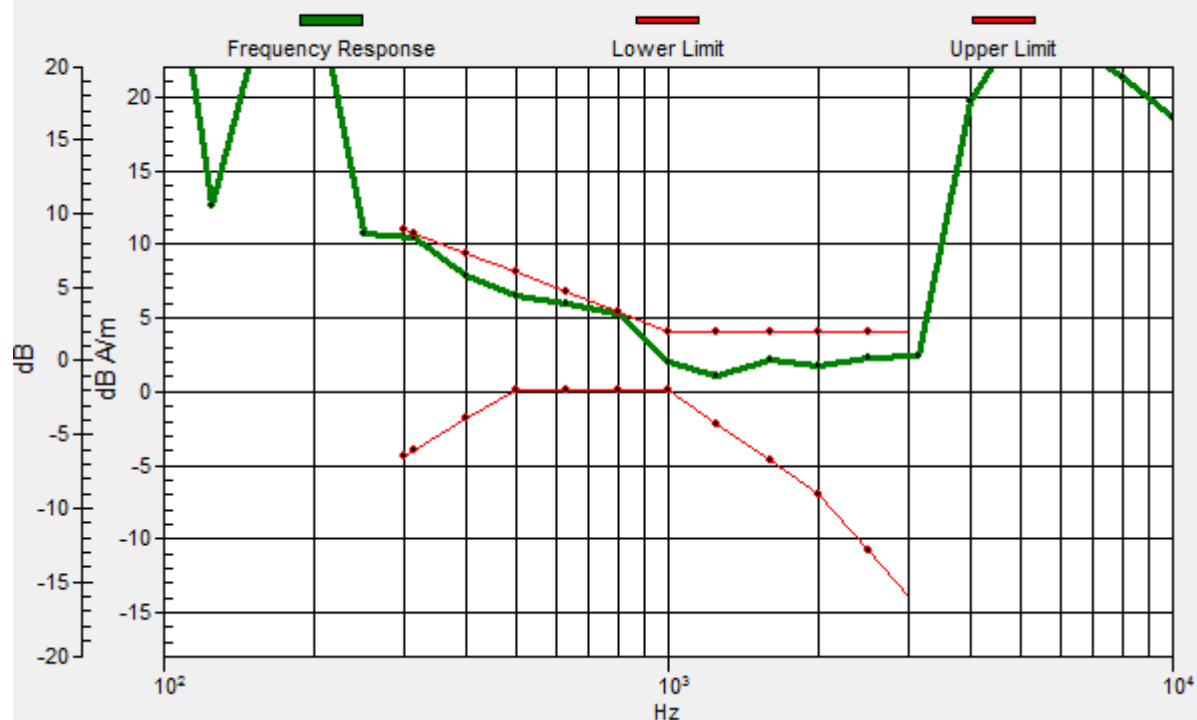

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -0.1, -1.2, 3.7 mm Diff: 0.09dB

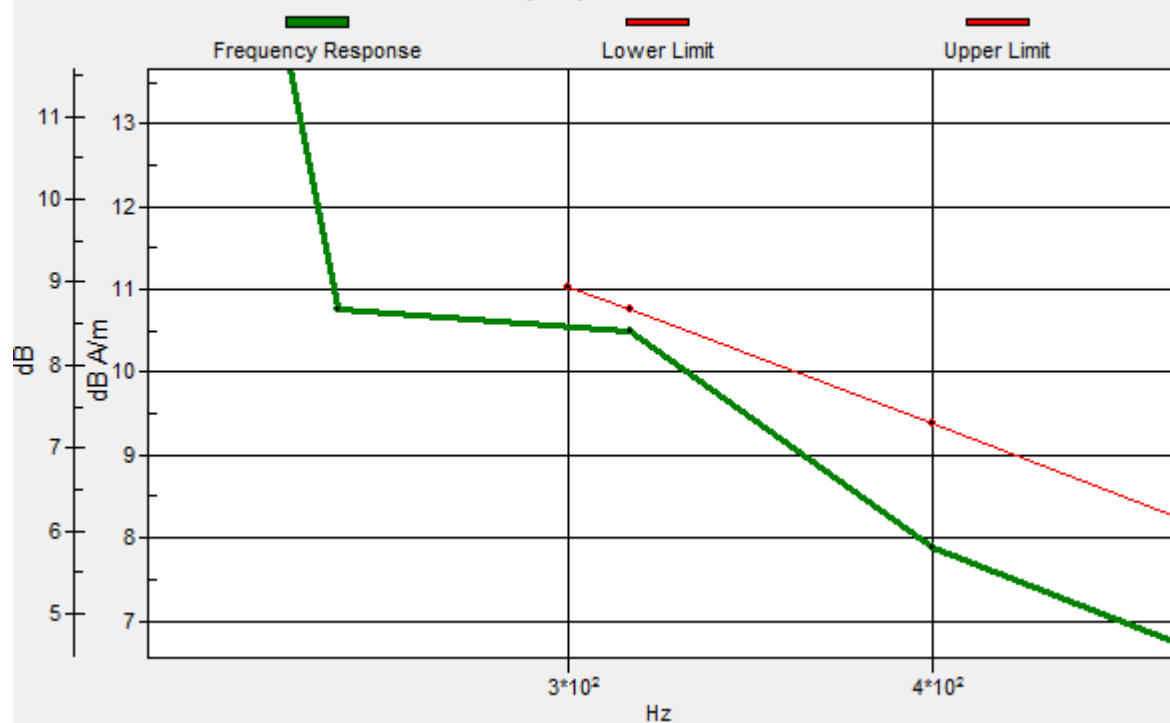

#04 T-Coil_GSM1900_Voice_Ch512_Radial 1 (X)**DUT: 290405**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -0.56 dB A/m


Location: 8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 21.32 dB

ABM1 comp = -15.92 dB A/m

Location: -25, 4.2, 3.7 mm

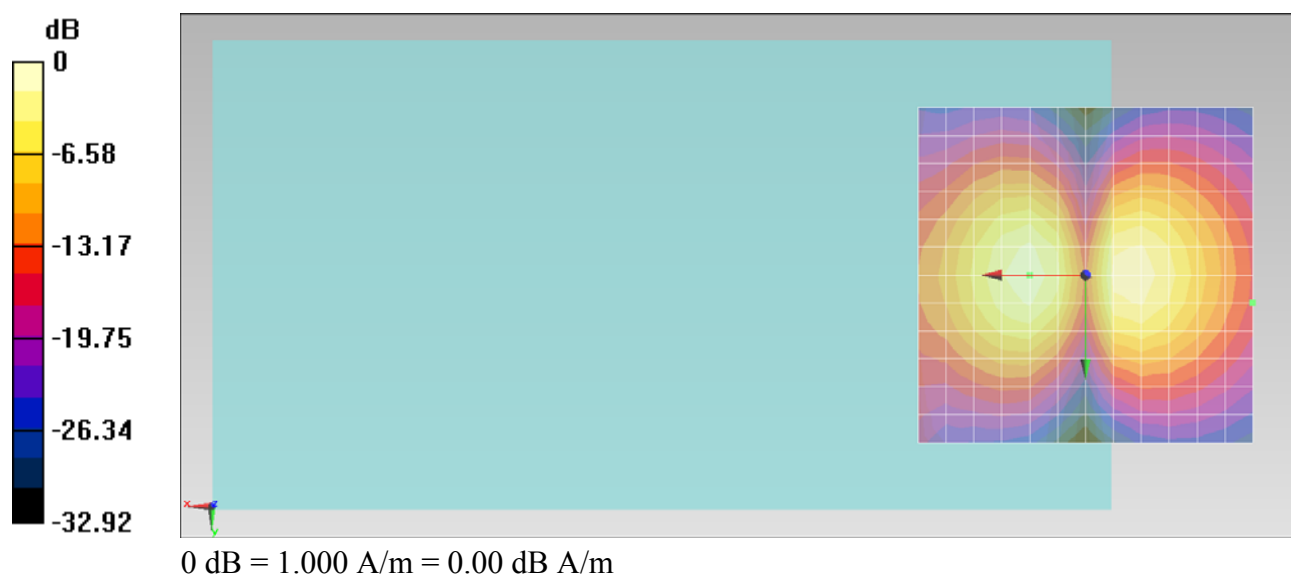

#04 T-Coil_GSM1900_Voice_Ch512_Radial 2 (Y)**DUT: 290405**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -6.86 dB A/m


Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 25.37 dB

ABM1 comp = -9.05 dB A/m

Location: 0, -4.2, 3.7 mm

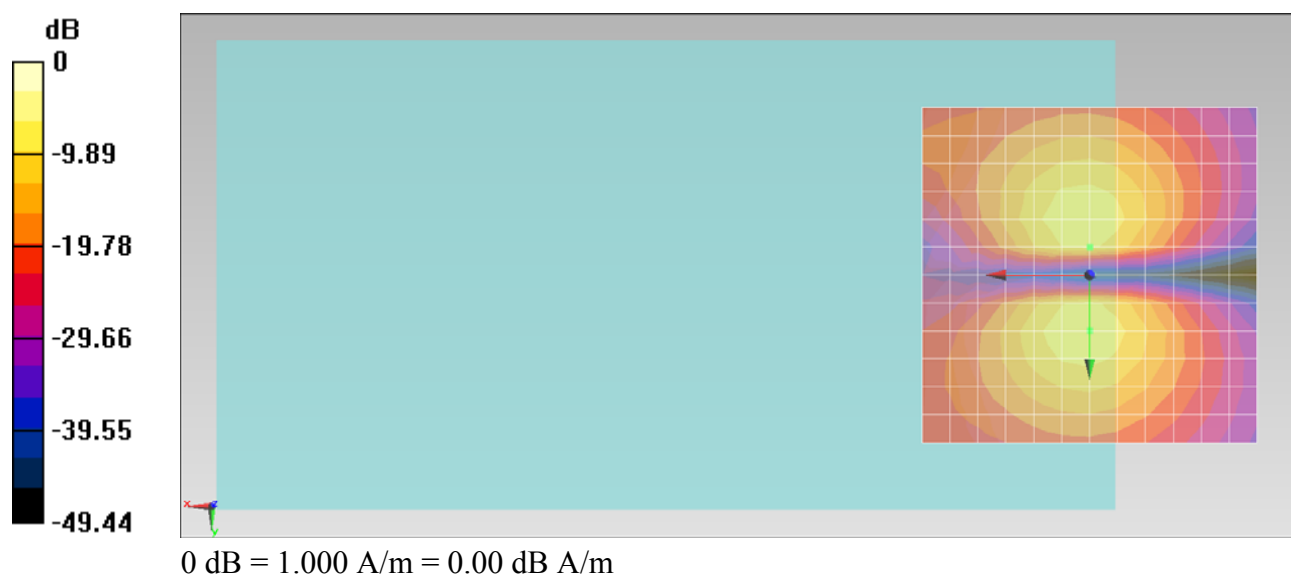

#05 T-Coil_GSM1900_Voice_Ch661_Axial (Z)**DUT: 290405**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 5.64 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 31.18 dB

ABM1 comp = 2.54 dB A/m


Location: -4.2, 0, 3.7 mm

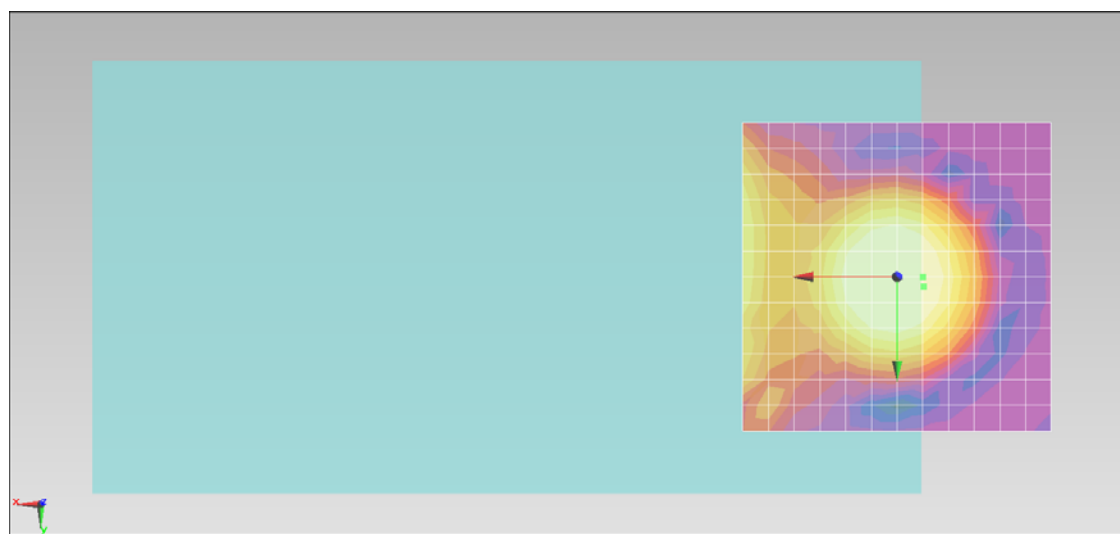

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.3, 1.6, 3.7 mm Diff: 0.67dB

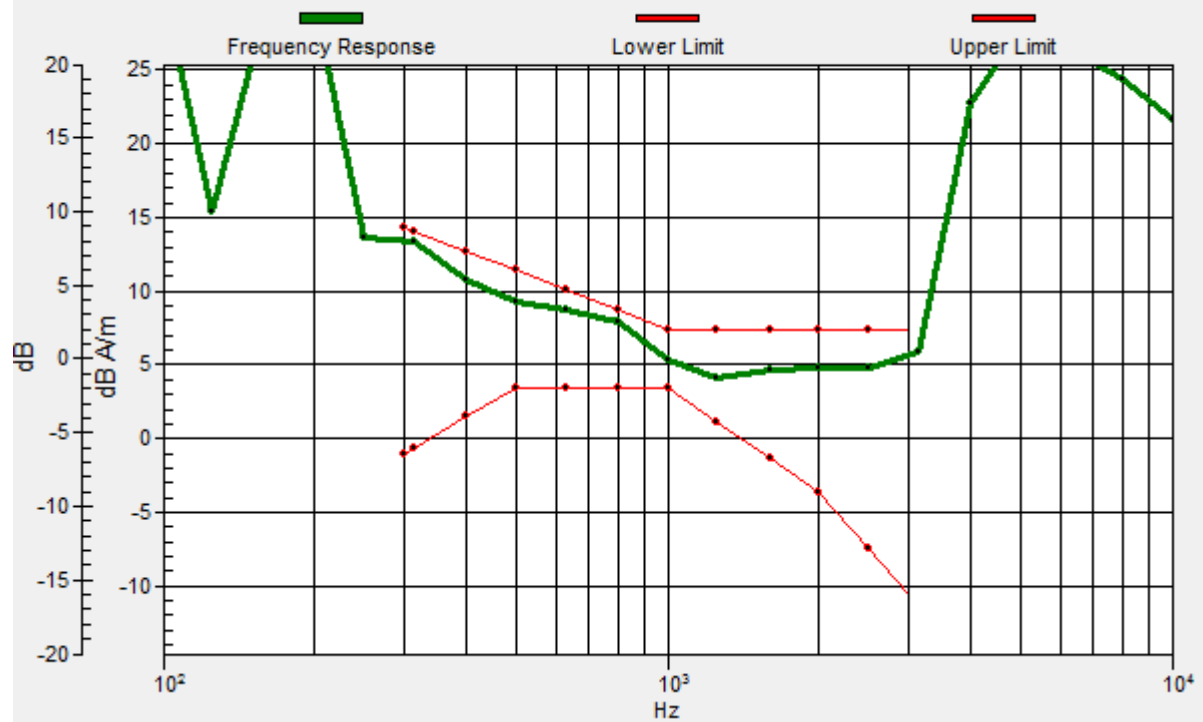

#05 T-Coil_GSM1900_Voice_Ch661_Radial 1 (X)**DUT: 290405**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 3.60 dB A/m


Location: 8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 25.37 dB

ABM1 comp = -11.86 dB A/m

Location: -25, 4.2, 3.7 mm

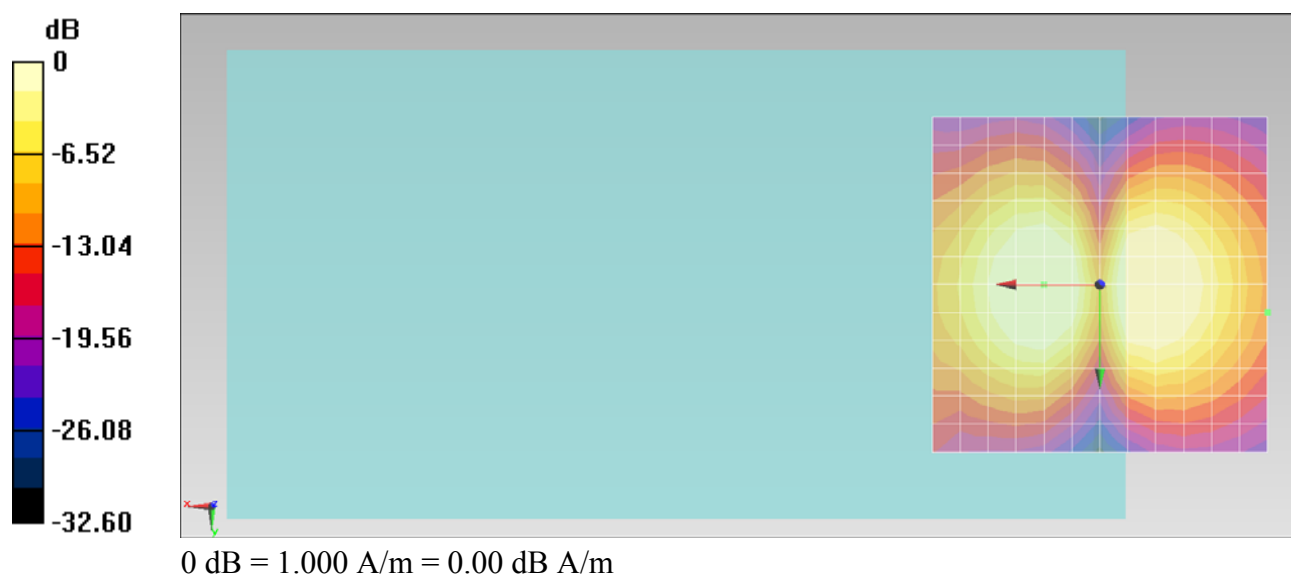

#05 T-Coil_GSM1900_Voice_Ch661_Radial 2 (Y)**DUT: 290405**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -2.59 dB A/m


Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 29.24 dB

ABM1 comp = -6.45 dB A/m

Location: -4.2, -4.2, 3.7 mm

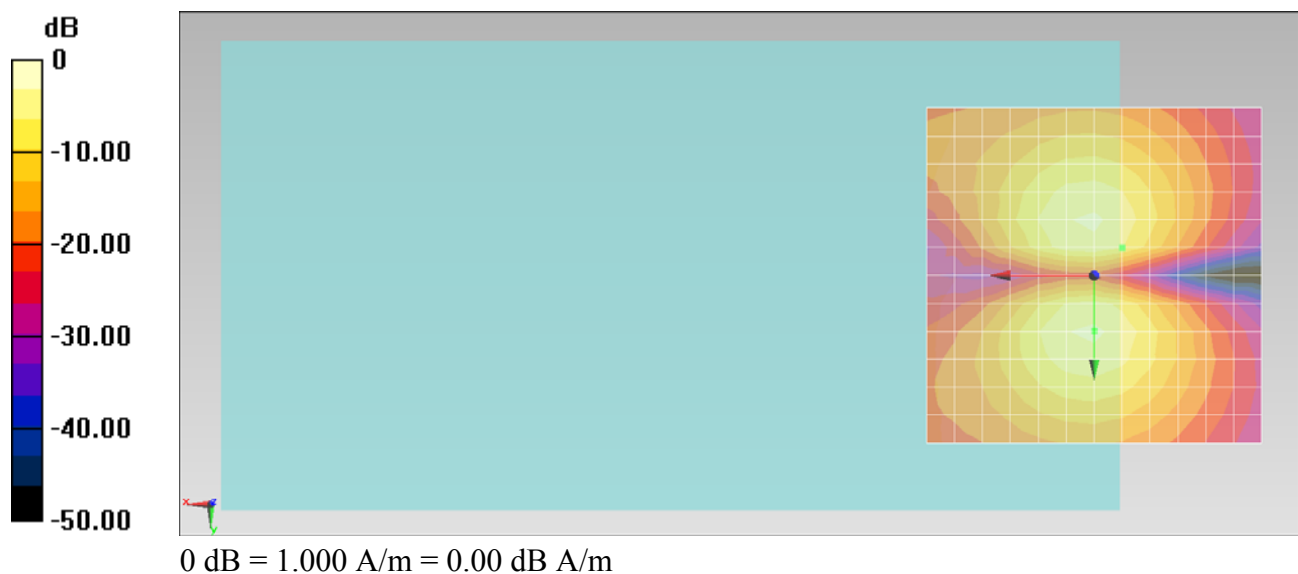

#06 T-Coil_GSM1900_Voice_Ch810_Axial (Z)**DUT: 290405**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 7.19 dB A/m


Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 33.31 dB


ABM1 comp = 4.34 dB A/m

Location: -4.2, 0, 3.7 mm

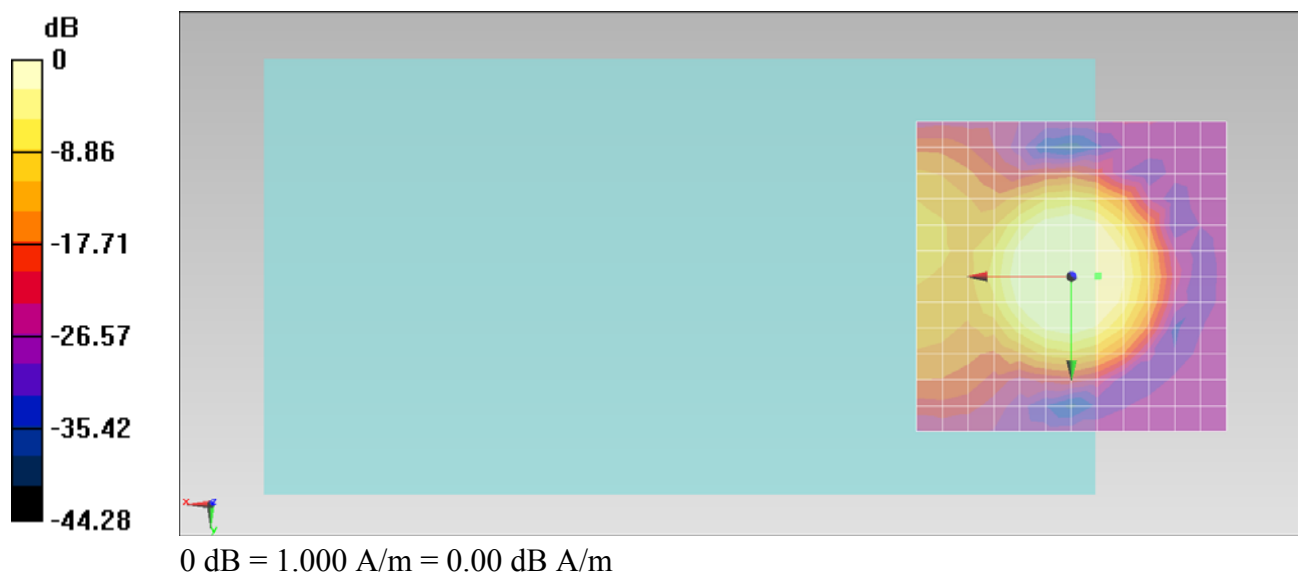

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.3, -0.2, 3.7 mm Diff: 0.47dB

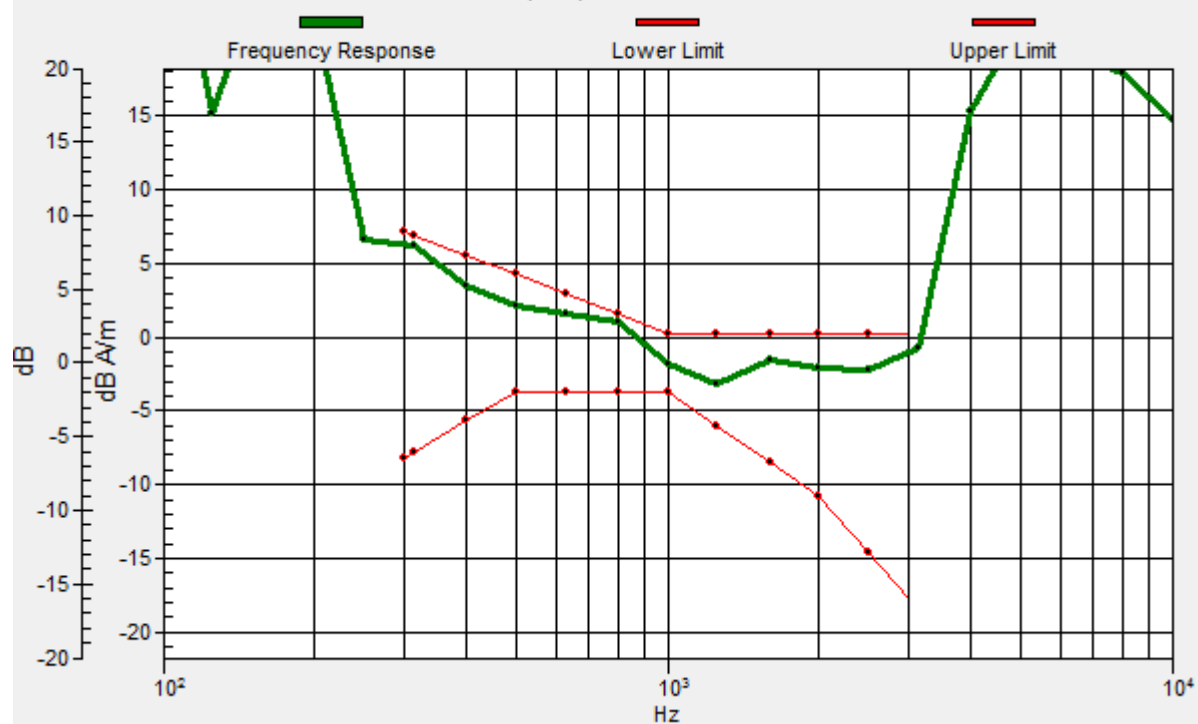

#06 T-Coil_GSM1900_Voice_Ch810_Radial 1 (X)**DUT: 290405**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 5.46 dB A/m



Location: 8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 28.30 dB

ABM1 comp = -9.25 dB A/m

Location: -25, 0, 3.7 mm

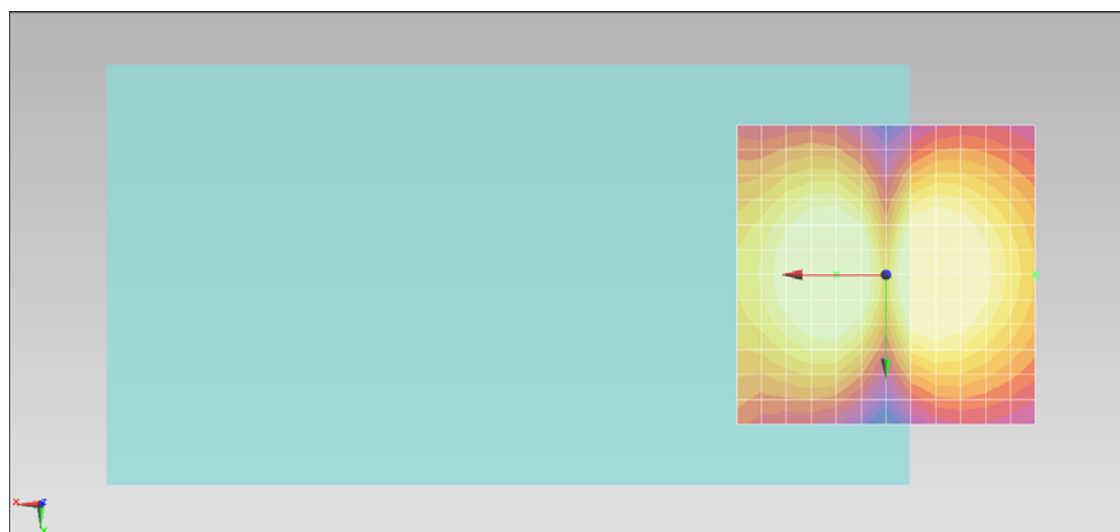

0 dB = 1.000 A/m = 0.00 dB A/m

#06 T-Coil_GSM1900_Voice_Ch810_Radial 2 (Y)**DUT: 290405**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 5.29 dB A/m

Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 31.26 dB

ABM1 comp = 2.80 dB A/m

Location: 0, -4.2, 3.7 mm



#07 T-Coil_WCDMA V_Voice_Ch4132_Axial (Z)**DUT: 290405**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 2.19 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 30.02 dB

ABM1 comp = -9.17 dB A/m


Location: -8.3, 4.2, 3.7 mm

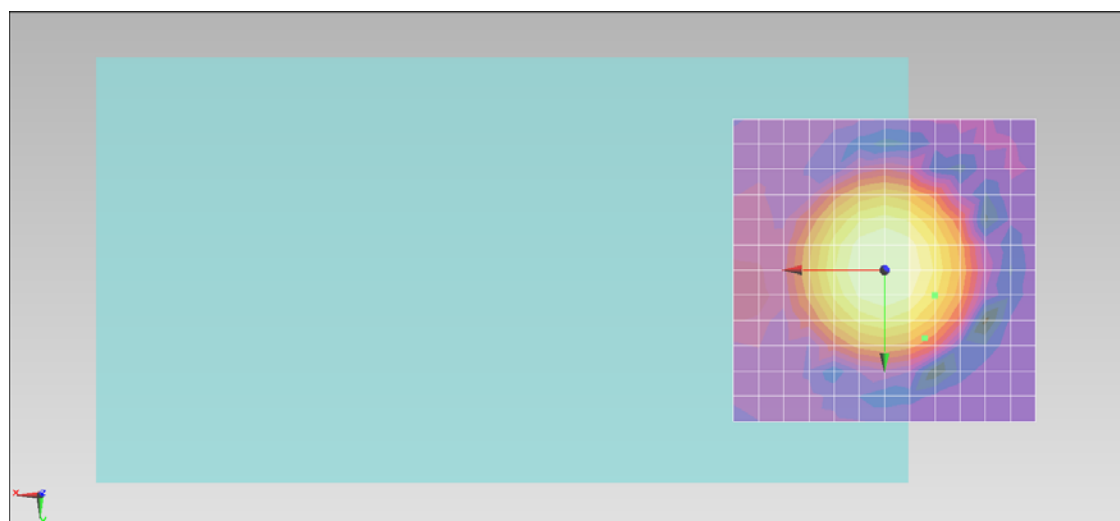

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -6.6, 11.2, 3.7 mm Diff: 0.61dB

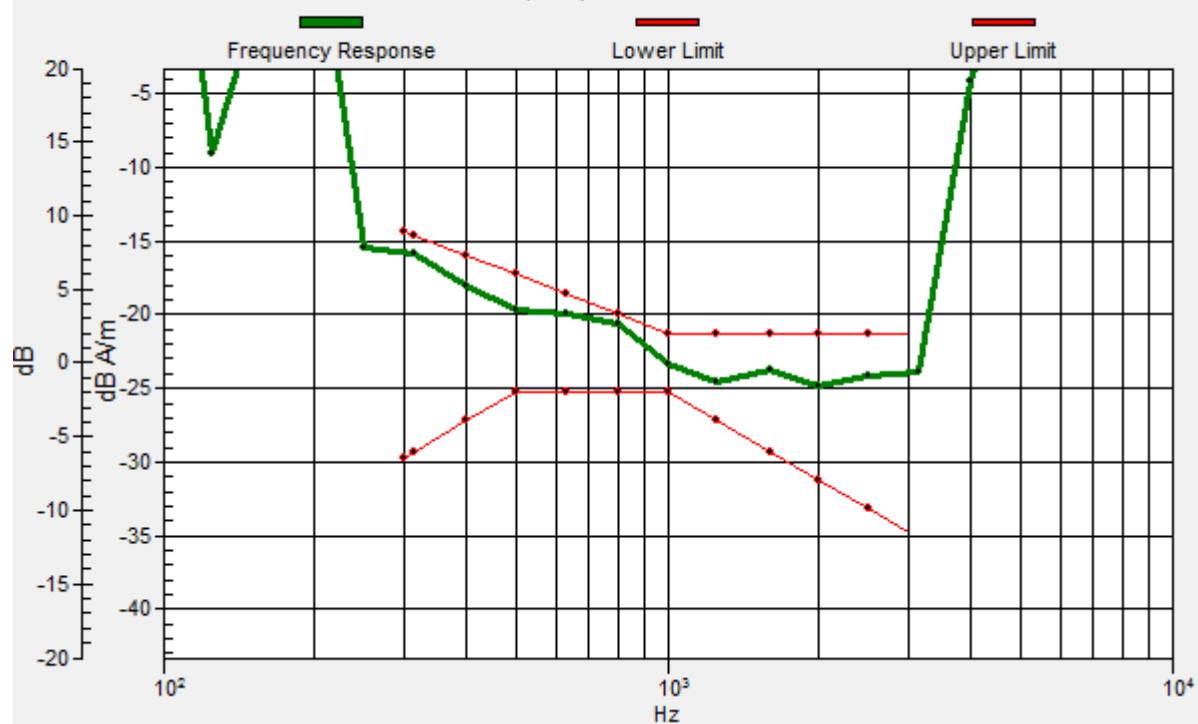

#07 T-Coil_WCDMA V_Voice_Ch4132_Radial 1 (X)**DUT: 290405**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -1.53 dB A/m


Location: -8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 28.70 dB

ABM1 comp = -3.33 dB A/m

Location: -12.5, 0, 3.7 mm

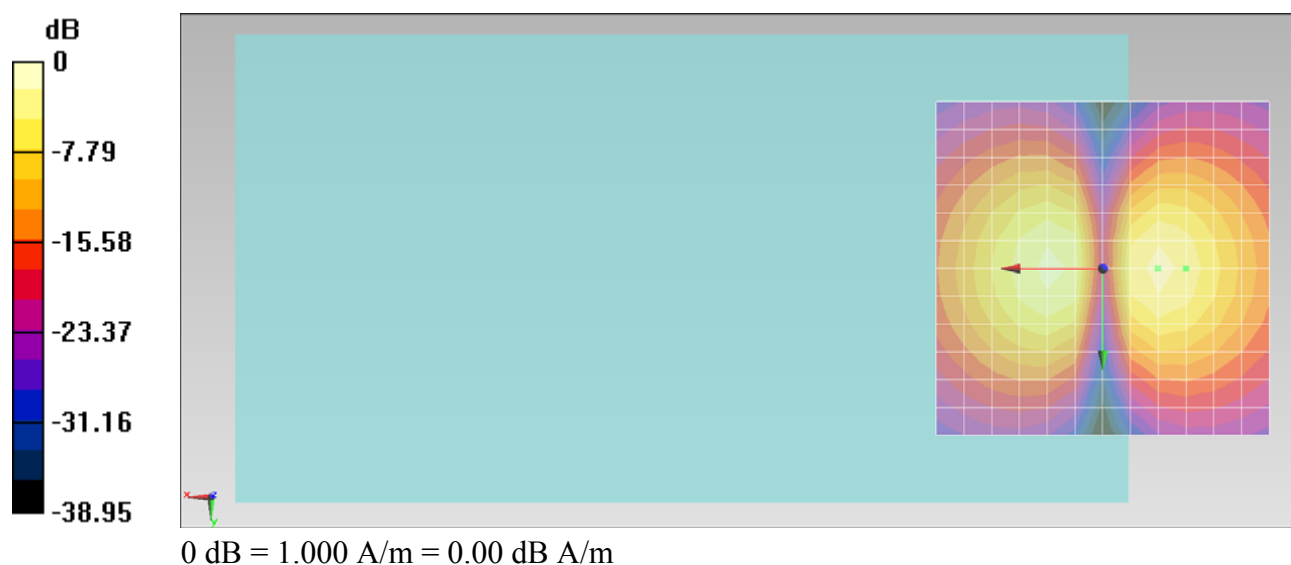

#07 T-Coil_WCDMA V_Voice_Ch4132_Radial 2 (Y)**DUT: 290405**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -0.97 dB A/m

Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 29.39 dB

ABM1 comp = -0.97 dB A/m

Location: 0, 8.3, 3.7 mm



#08 T-Coil_WCDMA V_Voice_Ch4182_Axial (Z)**DUT: 290405**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.78 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 29.83 dB

ABM1 comp = -10.38 dB A/m


Location: -8.3, 4.2, 3.7 mm

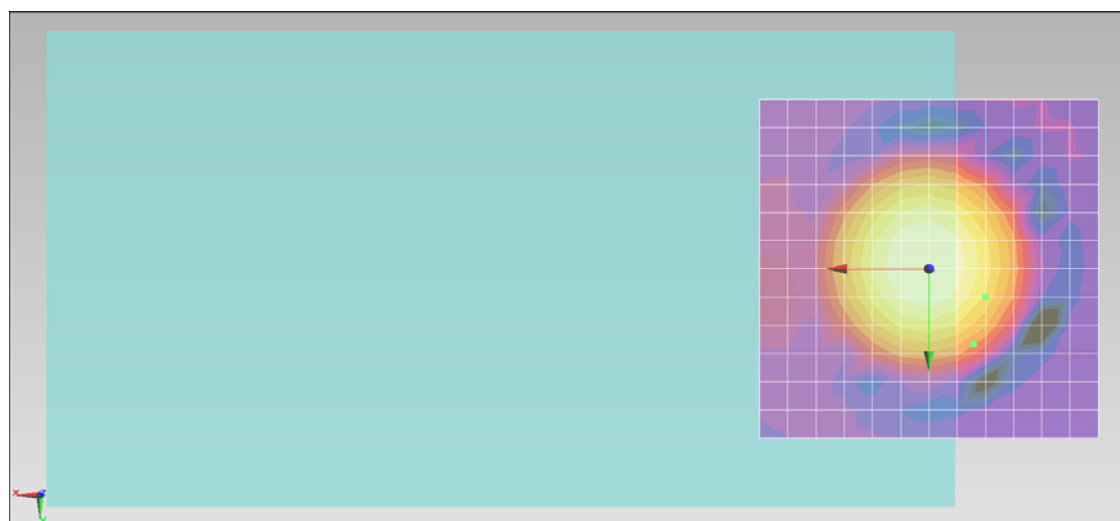

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -6.7, 11.1, 3.7 mm Diff: 0.79dB

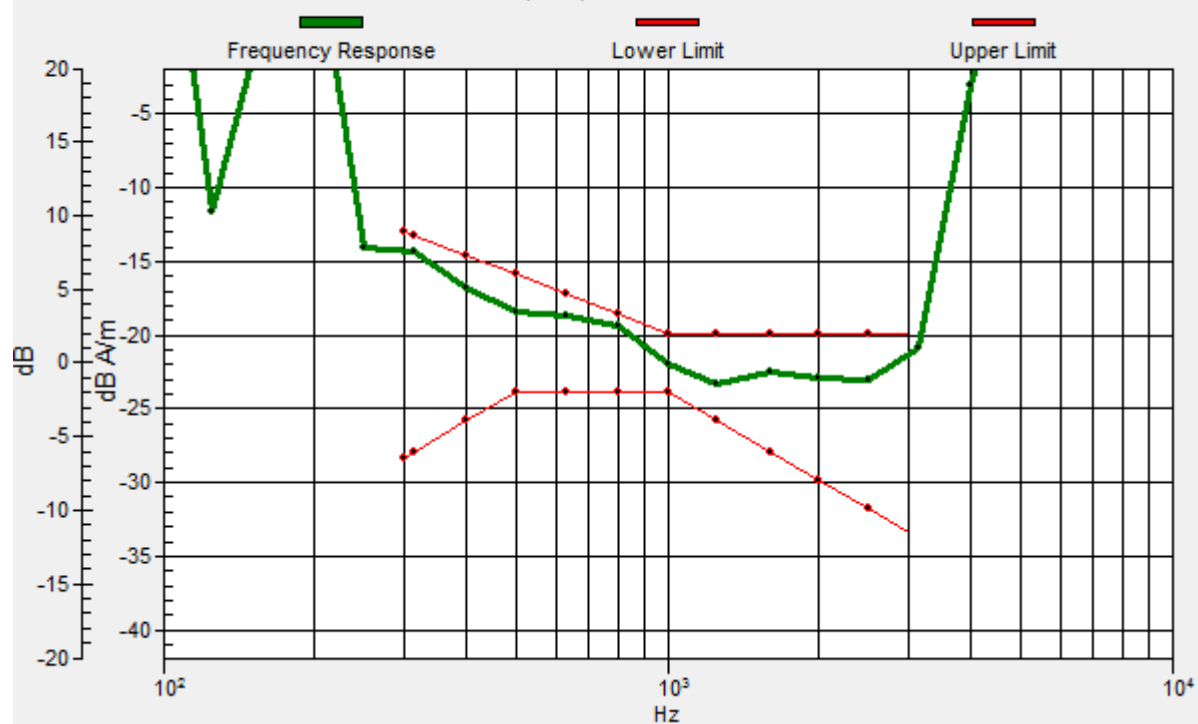

#08 T-Coil_WCDMA V_Voice_Ch4182_Radial 1 (X)**DUT: 290405**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -7.82 dB A/m



Location: -8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 28.83 dB

ABM1 comp = -9.85 dB A/m

Location: -12.5, 0, 3.7 mm

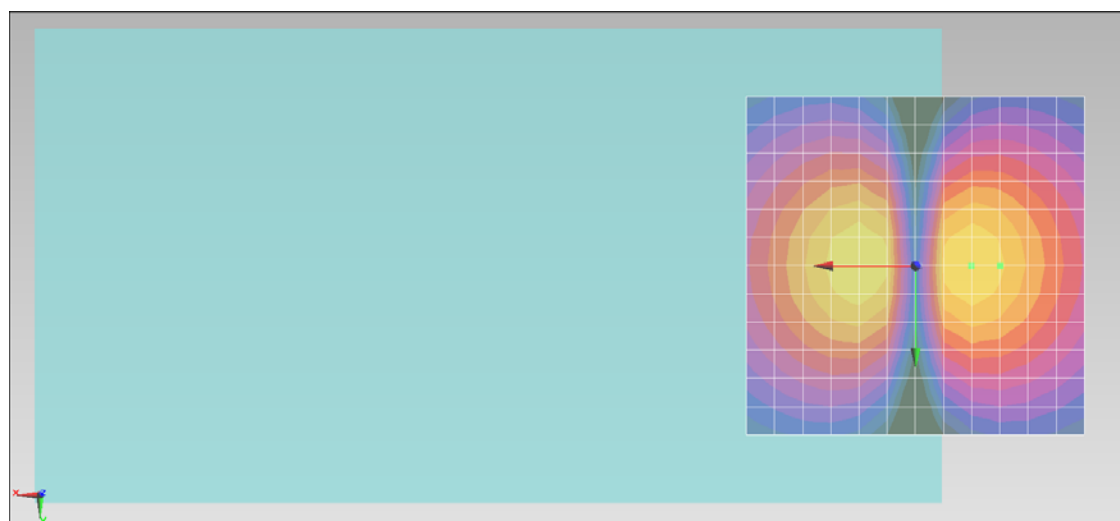

0 dB = 1.000 A/m = 0.00 dB A/m

#08 T-Coil_WCDMA V_Voice_Ch4182_Radial 2 (Y)**DUT: 290405**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -7.30 dB A/m



Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 29.27 dB

ABM1 comp = -7.30 dB A/m

Location: 0, 8.3, 3.7 mm

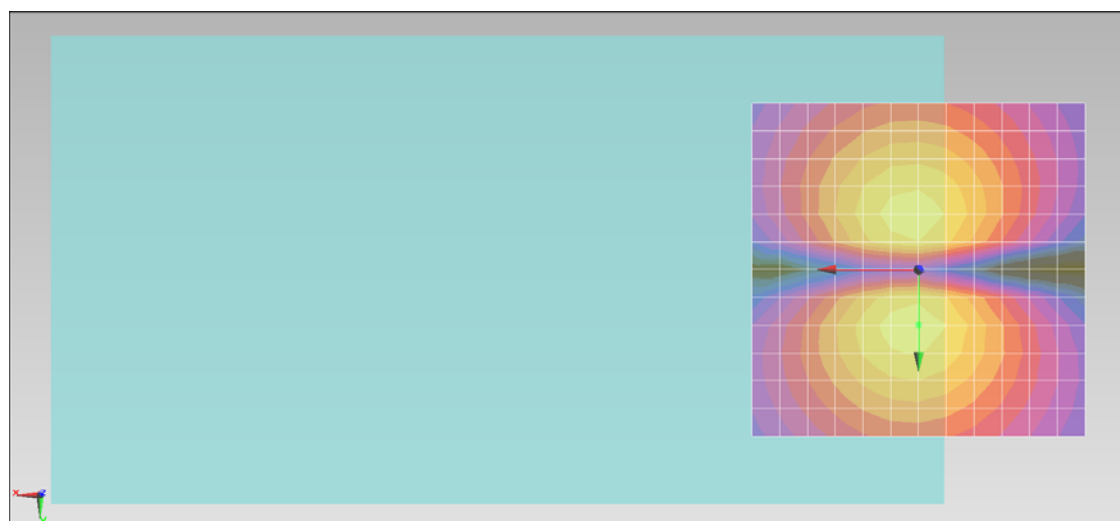

0 dB = 1.000 A/m = 0.00 dB A/m

#09 T-Coil_WCDMA V_Voice_Ch4233_Axial (Z)**DUT: 290405**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.96 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 29.92 dB

ABM1 comp = -8.12 dB A/m


Location: -8.3, 0, 3.7 mm

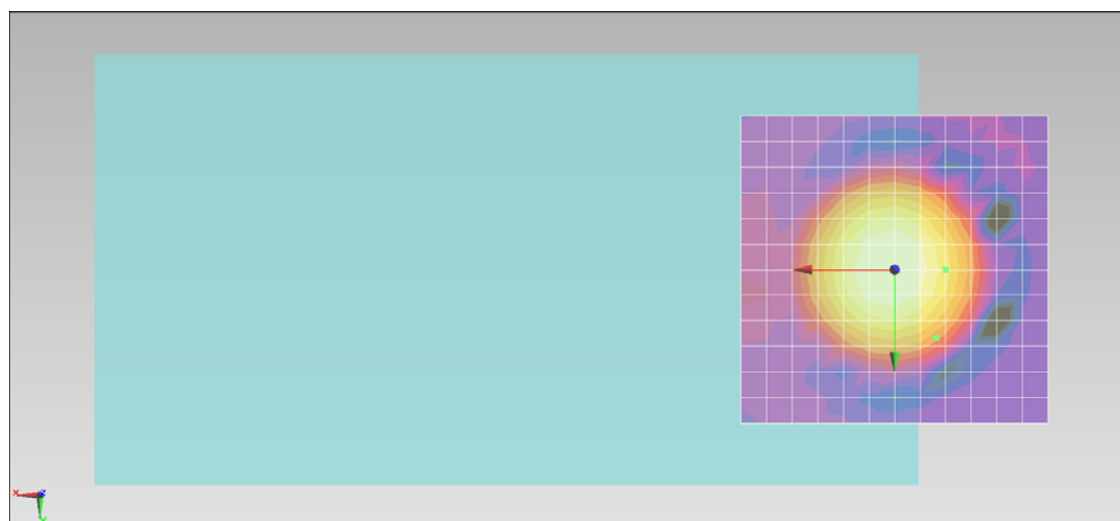

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -6.8, 11.1, 3.7 mm Diff: 0.63dB

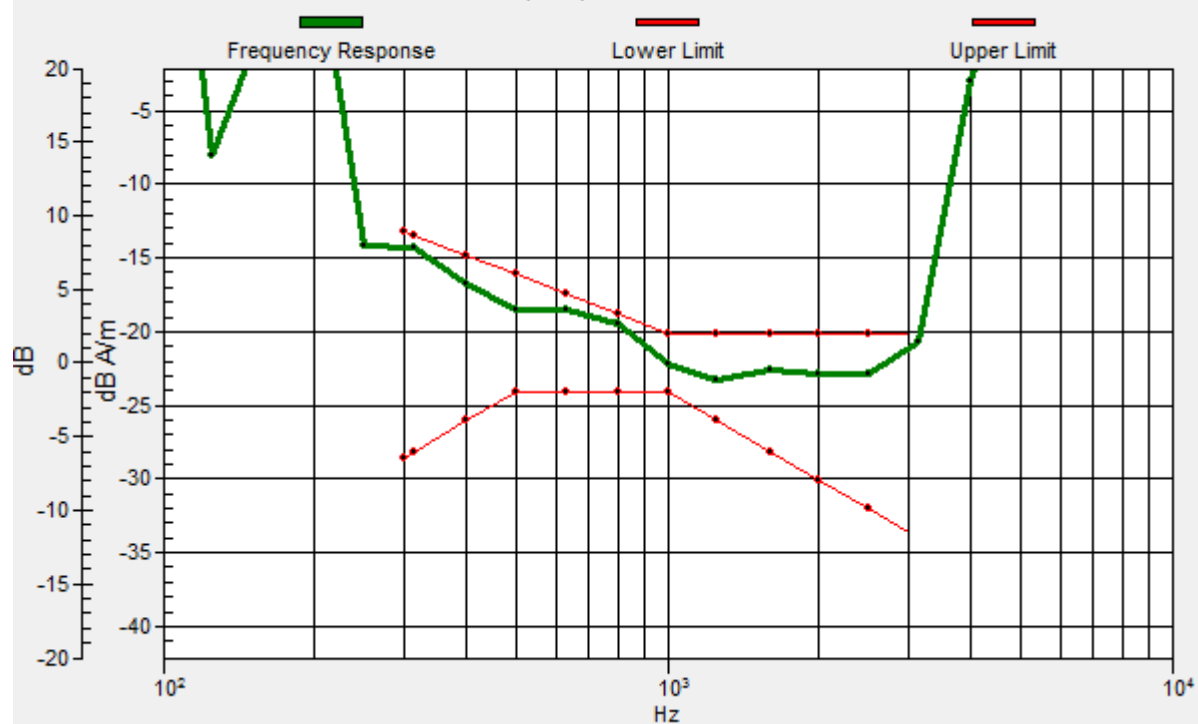

#09 T-Coil_WCDMA V_Voice_Ch4233_Radial 1 (X)**DUT: 290405**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -7.81 dB A/m


Location: 8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 28.83 dB

ABM1 comp = -7.82 dB A/m

Location: -8.3, 0, 3.7 mm

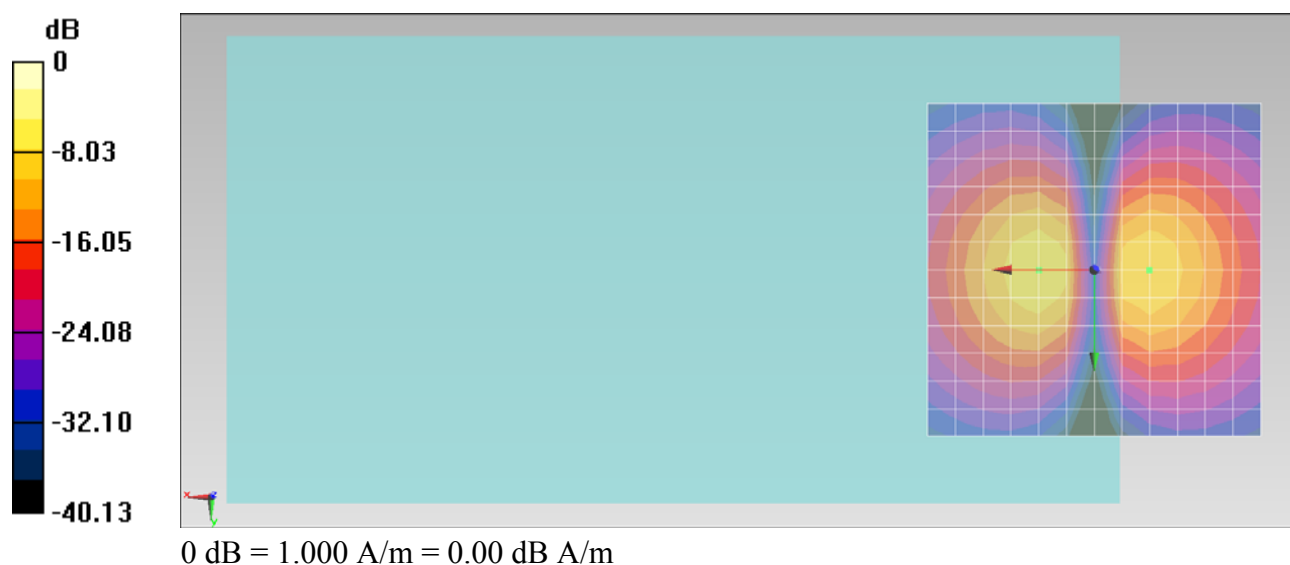

#09 T-Coil_WCDMA V_Voice_Ch4233_Radial 2 (Y)**DUT: 290405**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -7.29 dB A/m



Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 29.21 dB

ABM1 comp = -9.31 dB A/m

Location: -4.2, 8.3, 3.7 mm

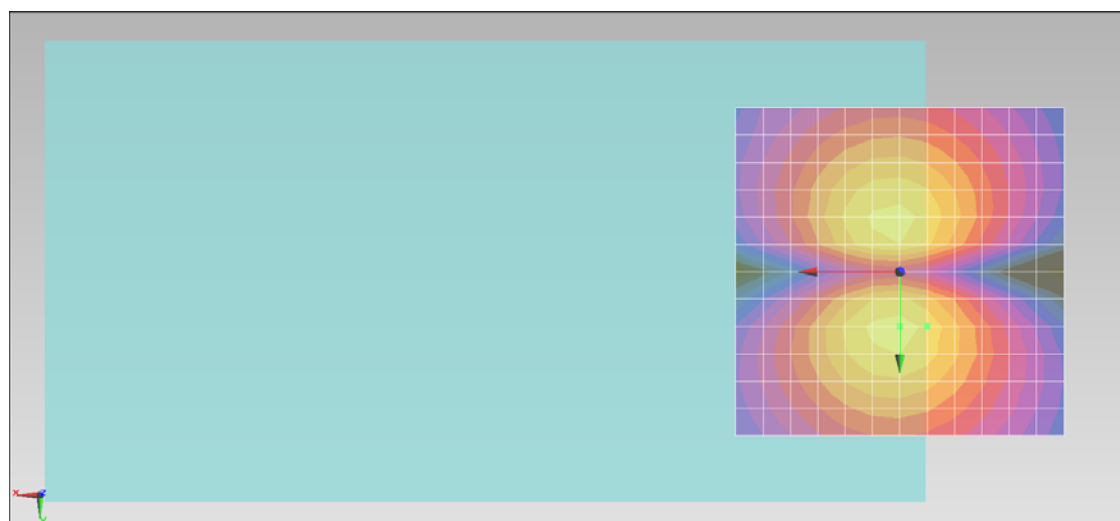

0 dB = 1.000 A/m = 0.00 dB A/m

#10 T-Coil_WCDMA II_Voice_Ch9262_Axial (Z)**DUT: 290405**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.89 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 29.73 dB

ABM1 comp = -0.90 dB A/m


Location: -4.2, 0, 3.7 mm

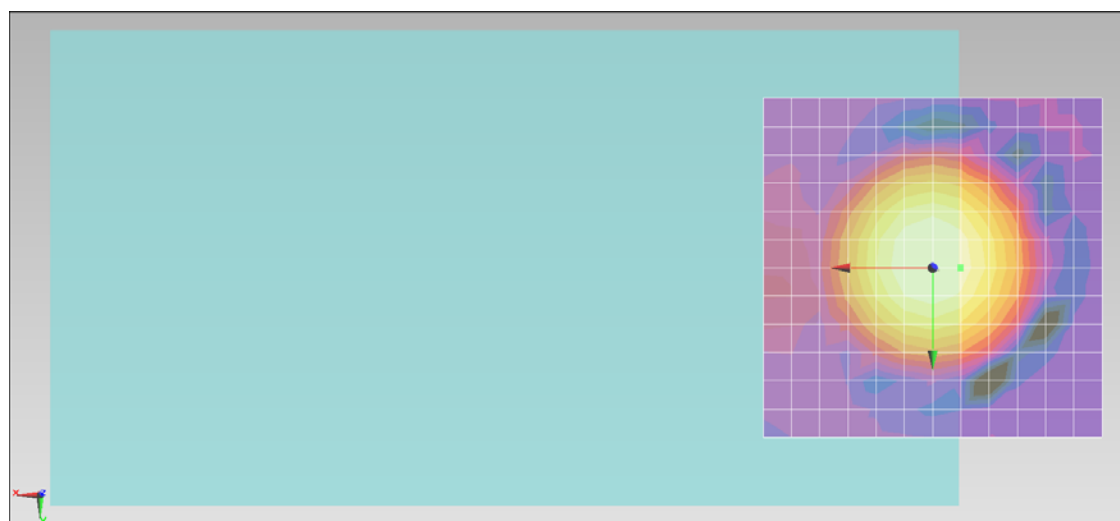

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.1, -0.1, 3.7 mm Diff: 0.29dB

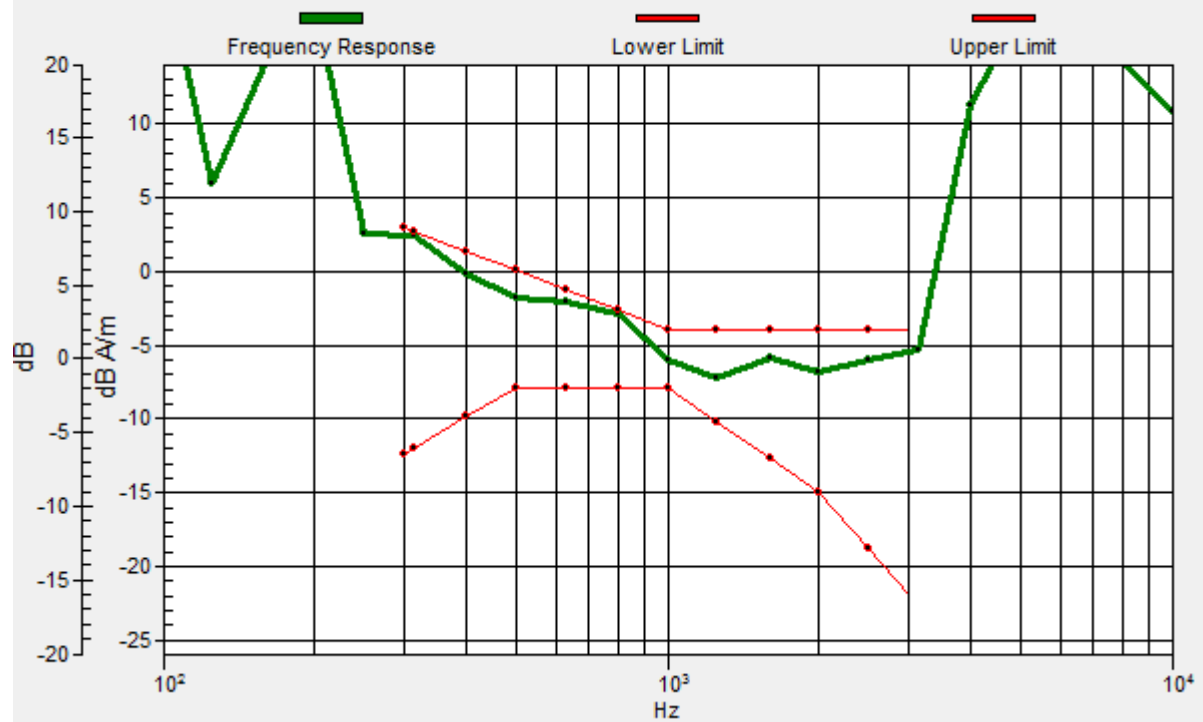

#10 T-Coil_WCDMA II_Voice_Ch9262_Radial 1 (X)**DUT: 290405**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -1.69 dB A/m



Location: -8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 28.33 dB

ABM1 comp = -3.57 dB A/m

Location: -12.5, 0, 3.7 mm

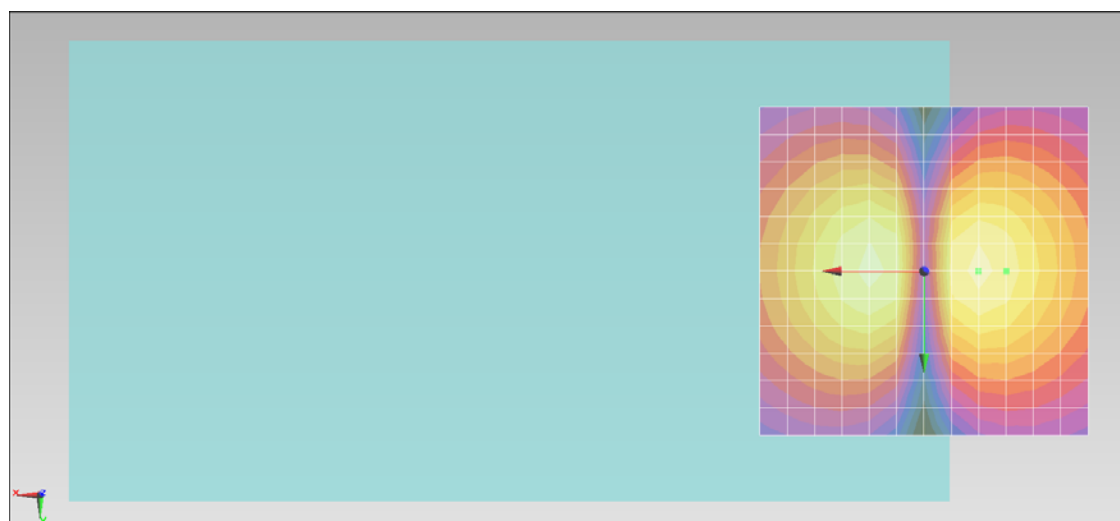

0 dB = 1.000 A/m = 0.00 dB A/m

#10 T-Coil_WCDMA II_Voice_Ch9262_Radial 2 (Y)**DUT: 290405**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -1.21 dB A/m



Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 29.15 dB

ABM1 comp = -1.21 dB A/m

Location: 0, 8.3, 3.7 mm

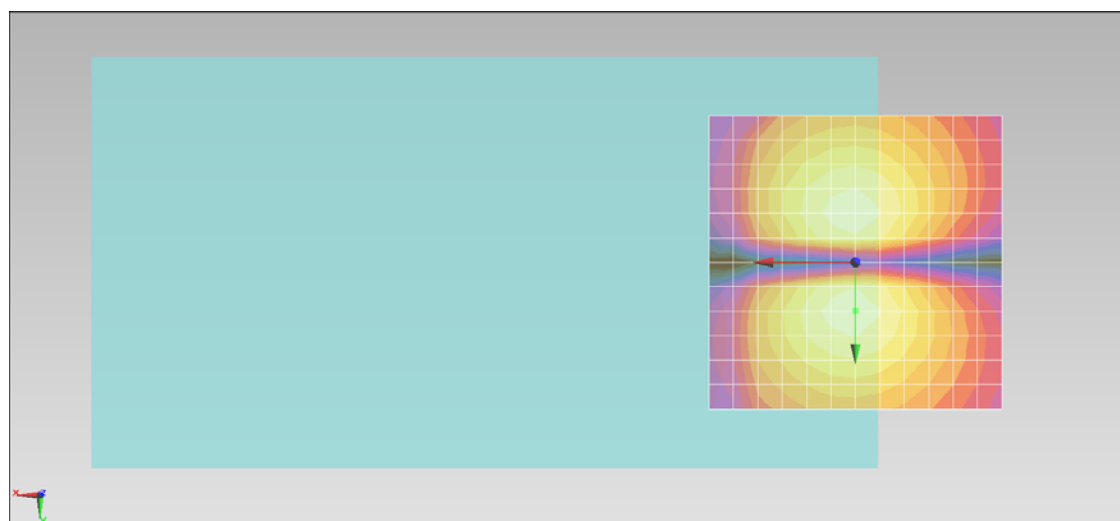

0 dB = 1.000 A/m = 0.00 dB A/m

#11 T-Coil_WCDMA II_Voice_Ch9400_Axial (Z)**DUT: 290405**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.74 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 29.59 dB

ABM1 comp = -0.89 dB A/m


Location: -4.2, 0, 3.7 mm

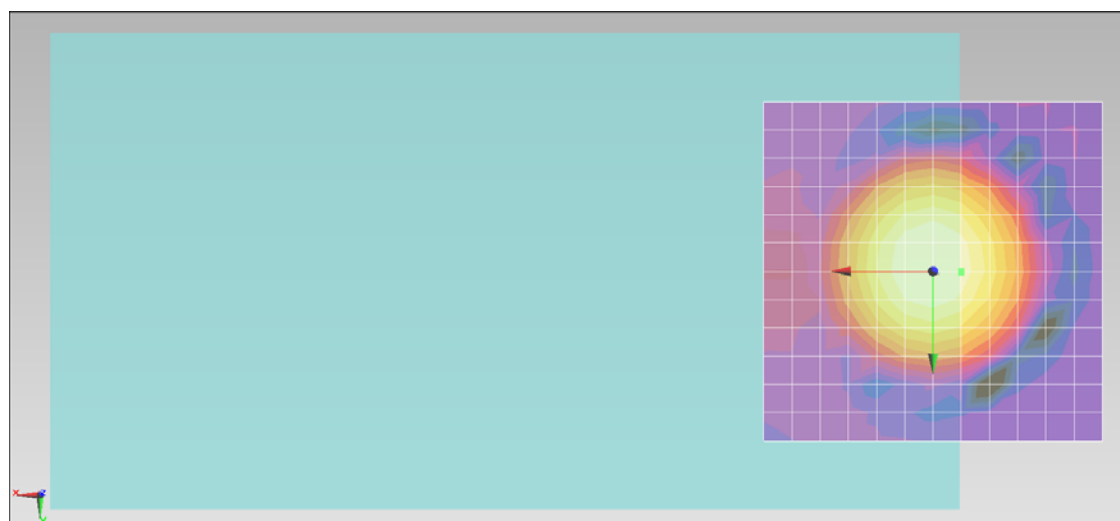

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.2, 0.2, 3.7 mm Diff: 0.57dB

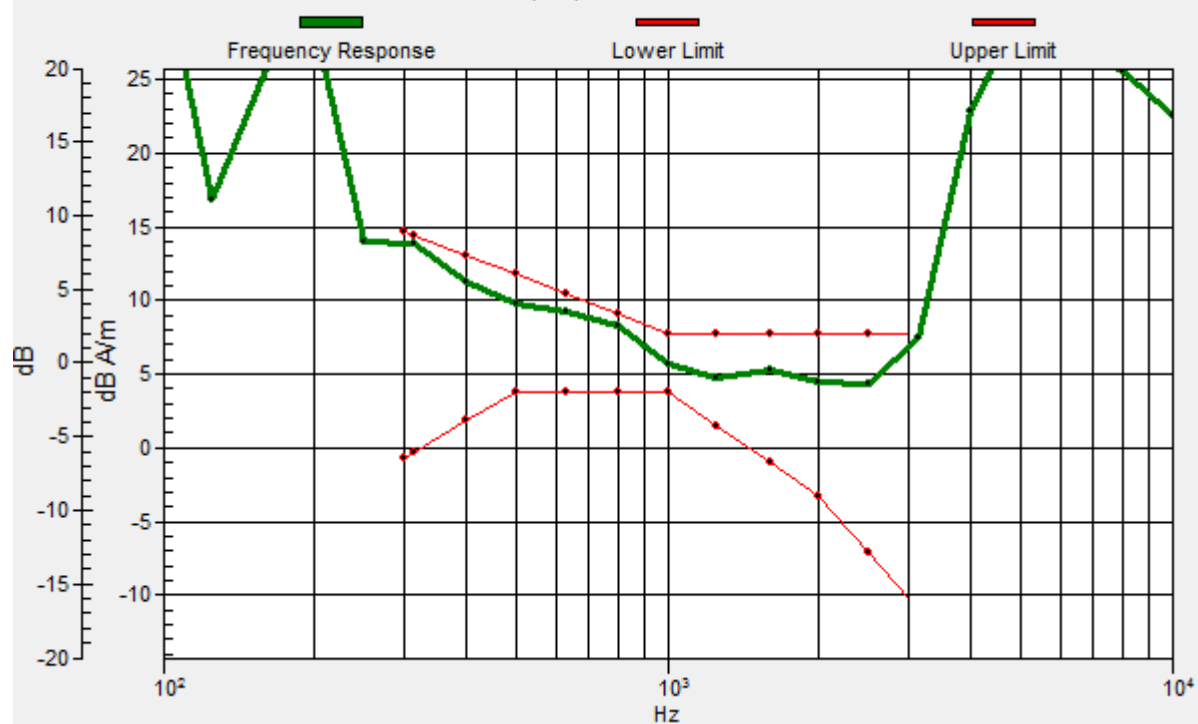

#11 T-Coil_WCDMA II_Voice_Ch9400_Radial 1 (X)**DUT: 290405**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -1.71 dB A/m



Location: -8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 28.41 dB

ABM1 comp = -4.35 dB A/m

Location: -12.5, -4.2, 3.7 mm

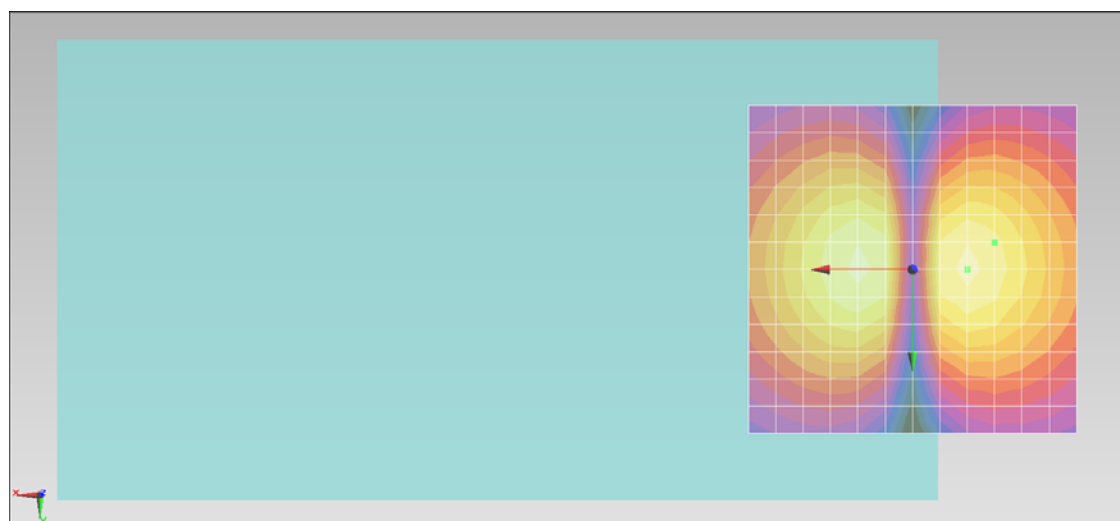

0 dB = 1.000 A/m = 0.00 dB A/m

#11 T-Coil_WCDMA II_Voice_Ch9400_Radial 2 (Y)**DUT: 290405**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -1.40 dB A/m



Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 28.73 dB

ABM1 comp = -3.18 dB A/m

Location: -4.2, 8.3, 3.7 mm

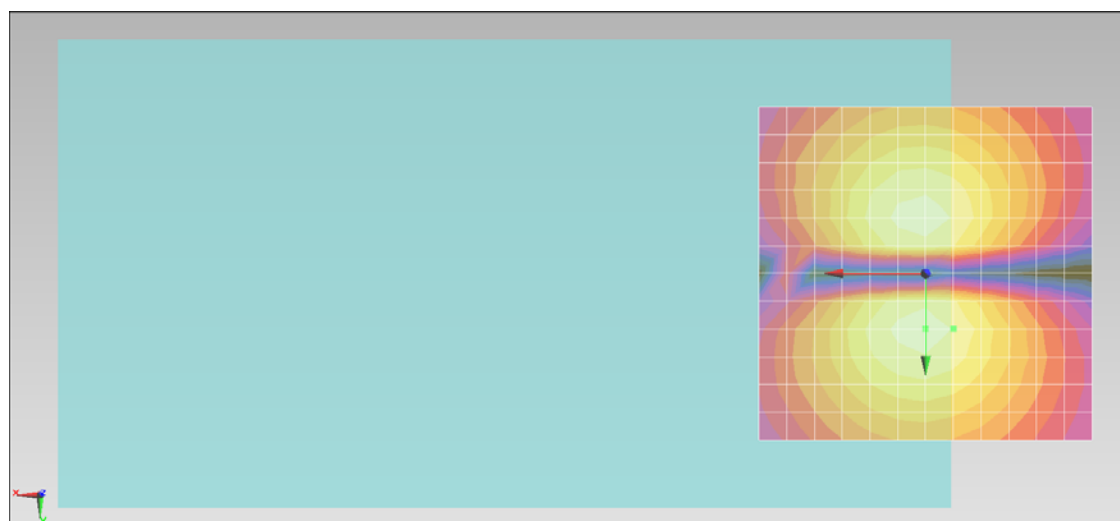

0 dB = 1.000 A/m = 0.00 dB A/m

#12 T-Coil_WCDMA II_Voice_Ch9538_Axial (Z)**DUT: 290405**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 8.12 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 29.63 dB

ABM1 comp = -4.45 dB A/m


Location: -8.3, 4.2, 3.7 mm

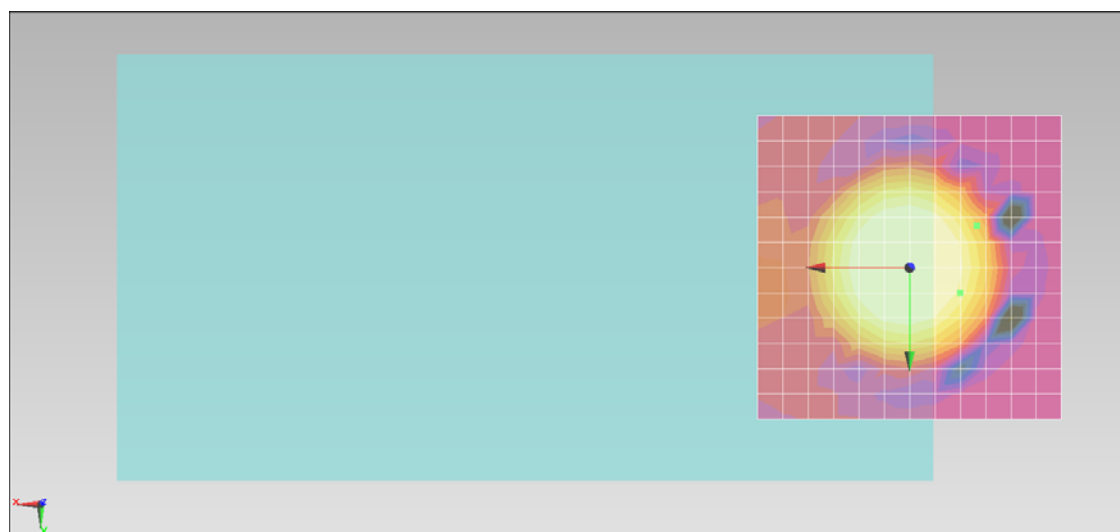

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -11, -6.9, 3.7 mm Diff: 0.46dB

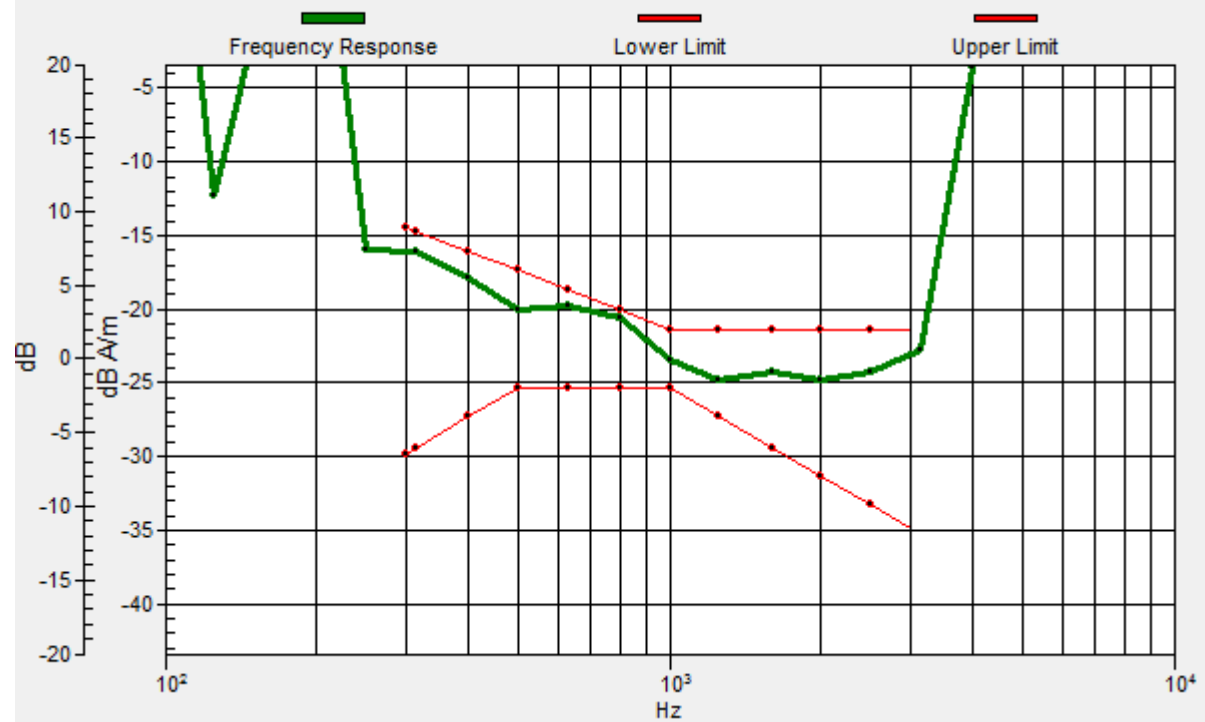

#12 T-Coil_WCDMA II_Voice_Ch9538_Radial 1 (X)**DUT: 290405**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -1.59 dB A/m



Location: 8.3, 0, 3.7 mm

General Scans/x (longitudinal) (2007) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 28.56 dB

ABM1 comp = -3.87 dB A/m

Location: -12.5, 0, 3.7 mm

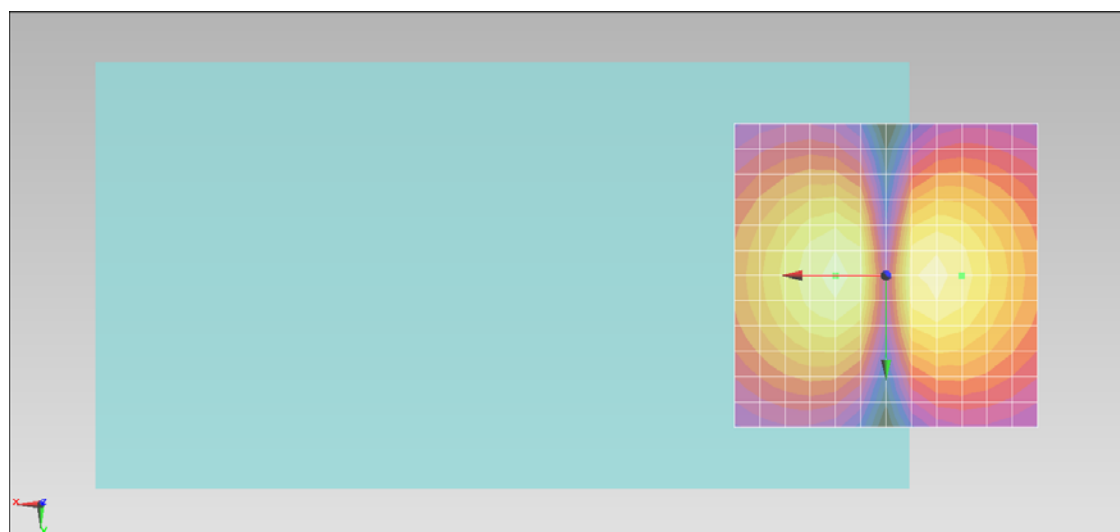

0 dB = 1.000 A/m = 0.00 dB A/m

#12 T-Coil_WCDMA II_Voice_Ch9538_Radial 2 (Y)**DUT: 290405**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = -1.22 dB A/m



Location: 0, 8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 28.99 dB

ABM1 comp = -1.22 dB A/m

Location: 0, 8.3, 3.7 mm

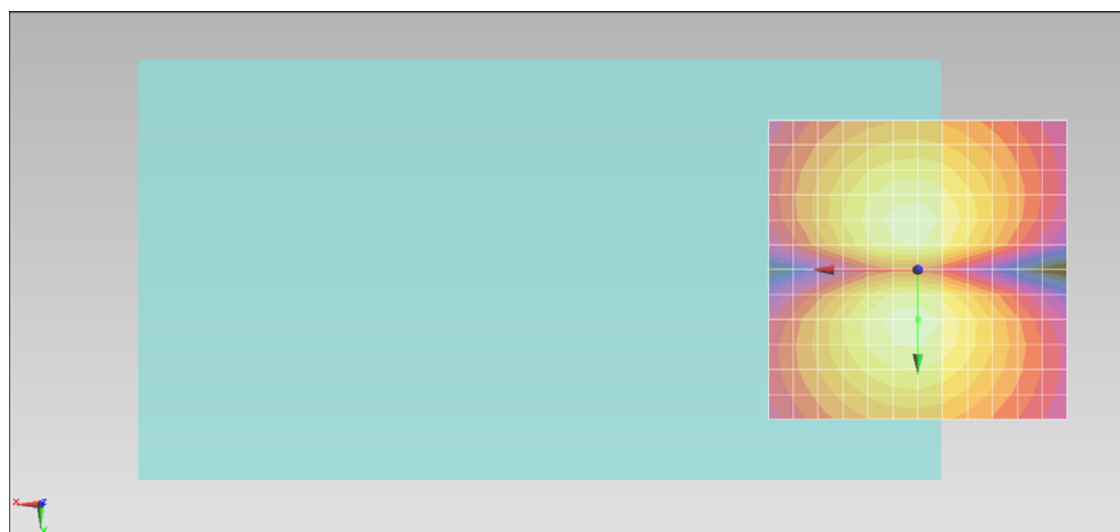

0 dB = 1.000 A/m = 0.00 dB A/m



Appendix B. Calibration Data

The DASy calibration certificates are shown as follows.



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sporton (Auden)**

Certificate No: **AM1DV2-1038_Jan12**

CALIBRATION CERTIFICATE

Object **AM1DV2 - SN: 1038**

Calibration procedure(s) **QA CAL-24.v3**
Calibration procedure for AM1D magnetic field probes and TMFS in the audio range

Calibration date: **January 23, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-11 (No:11450)	Sep-12
Reference Probe AM1DV2	SN: 1008	12-Jan-12 (No. AM1D-1008_Jan12)	Jan-13
DAE4	SN: 781	20-Apr-11 (No. DAE4-781_Apr11)	Apr-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
AMCC	1050	12-Oct-11 (in house check Oct-11)	Oct-13

Calibrated by: **Dimce Iliev** Name **Laboratory Technician** Function **D. Iliev** Signature

Approved by: **Fin Bornholt** Name **R&D Director** Function **F. Bornholt** Signature

Issued: January 24, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

References

- [1] ANSI C63.19-2007
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1] without additional shielding.

Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [2], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of Noise level
RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected. Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.
- *Sensitivity:* With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

AM1D probe identification and configuration data

Item	AM1DV2 Audio Magnetic 1D Field Probe
Type No	SP AM1 001 AF
Serial No	1038

Overall length	296 mm
Tip diameter	6.0 mm (at the tip)
Sensor offset	3.0 mm (centre of sensor from tip)
Internal Amplifier	40 dB

Manufacturer / Origin	Schmid & Partner Engineering AG, Zurich, Switzerland
Manufacturing date	Sep-2006
Last calibration date	January 18, 2011

Calibration data

Connector rotation angle	(in DASY system)	42.1 °	+/- 3.6 ° (k=2)
Sensor angle	(in DASY system)	2.59 °	+/- 0.5 ° (k=2)
Sensitivity at 1 kHz	(in DASY system)	0.0664 V / (A/m)	+/- 2.2 % (k=2)



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sporton (Auden)**

Certificate No: **DAE4-1279_May12**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BJ - SN: 1279**

Calibration procedure(s) **QA CAL-06.v24**
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **May 03, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-11 (No:11450)	Sep-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V2.1	SE UWS 053 AA 1001	05-Jan-12 (in house check)	In house check: Jan-13

	Name	Function	Signature
Calibrated by:	Dominique Steffen	Technician	

Approved by:	Fin Bornholt	R&D Director	
--------------	--------------	--------------	--

Issued: May 3, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption:* Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1µV , full range = -100...+300 mV
Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	405.179 ± 0.1% (k=2)	404.974 ± 0.1% (k=2)	404.316 ± 0.1% (k=2)
Low Range	3.98658 ± 0.7% (k=2)	3.98731 ± 0.7% (k=2)	3.99734 ± 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	117.0 ° ± 1 °
---	---------------

Appendix

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	199991.33	-3.98	-0.00
Channel X + Input	20000.42	1.05	0.01
Channel X - Input	-20000.99	0.62	-0.00
Channel Y + Input	199992.57	-2.48	-0.00
Channel Y + Input	20000.37	1.13	0.01
Channel Y - Input	-20001.77	-0.06	0.00
Channel Z + Input	199995.61	0.39	0.00
Channel Z + Input	19999.27	0.00	0.00
Channel Z - Input	-20002.85	-1.22	0.01

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	1999.48	-0.32	-0.02
Channel X + Input	200.41	0.23	0.11
Channel X - Input	-199.28	0.50	-0.25
Channel Y + Input	2000.24	0.55	0.03
Channel Y + Input	200.58	0.44	0.22
Channel Y - Input	-199.75	-0.01	0.00
Channel Z + Input	1998.83	-0.82	-0.04
Channel Z + Input	198.55	-1.51	-0.75
Channel Z - Input	-201.15	-1.30	0.65

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	17.08	15.93
	- 200	-15.69	-16.88
Channel Y	200	8.48	8.38
	- 200	-9.22	-9.58
Channel Z	200	-0.67	-0.84
	- 200	-0.62	-0.65

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	3.17	-3.15
Channel Y	200	7.76	-	3.57
Channel Z	200	8.98	6.44	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15658	14778
Channel Y	16426	15731
Channel Z	15918	15544

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	0.78	-0.61	2.27	0.58
Channel Y	0.16	-1.45	2.45	0.76
Channel Z	-0.63	-2.21	0.54	0.54

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9