


090: Front of EUT Facing Phantom LTE Band 2 20MHz BW 1RB Middle CH18900

Date 03/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

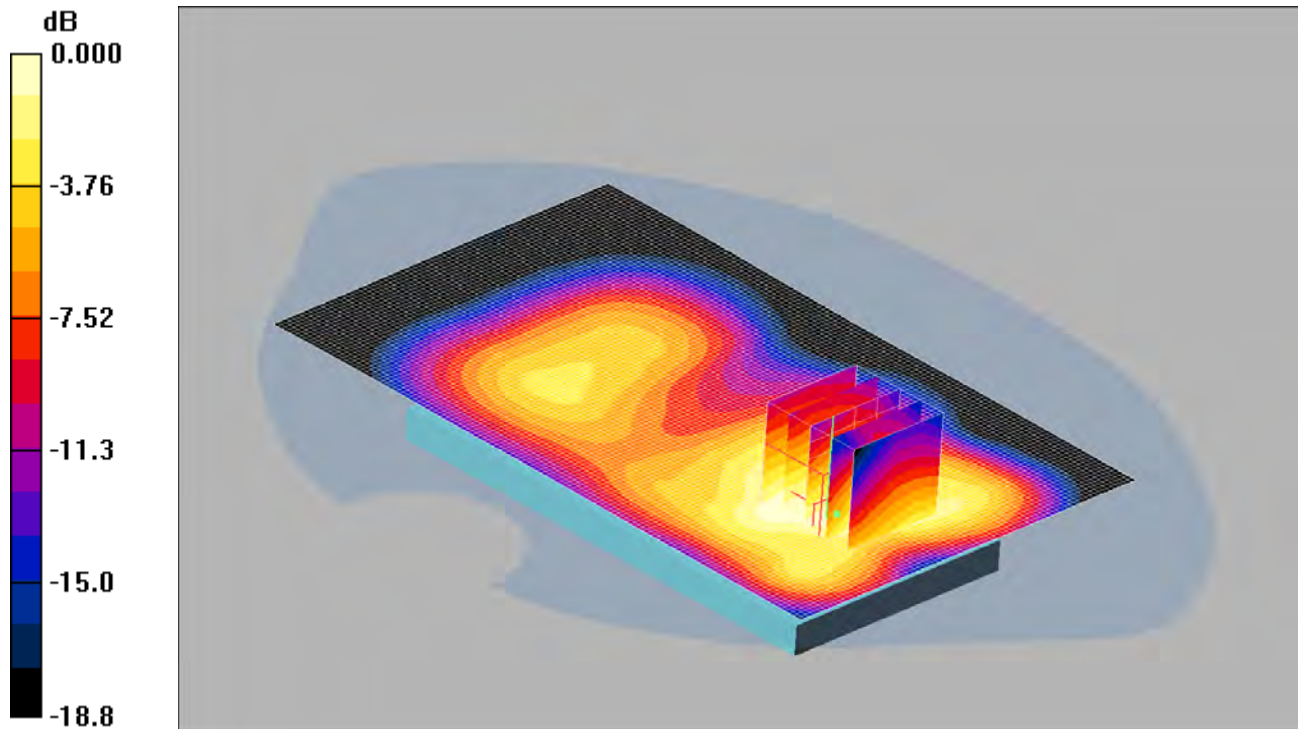

0 dB = 0.712mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.705 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.99 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 0.987 W/kg


SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.443 mW/g

Maximum value of SAR (measured) = 0.712 mW/g

091: Front of EUT Facing Phantom LTE Band 2 20MHz BW 1RB Middle CH18700

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

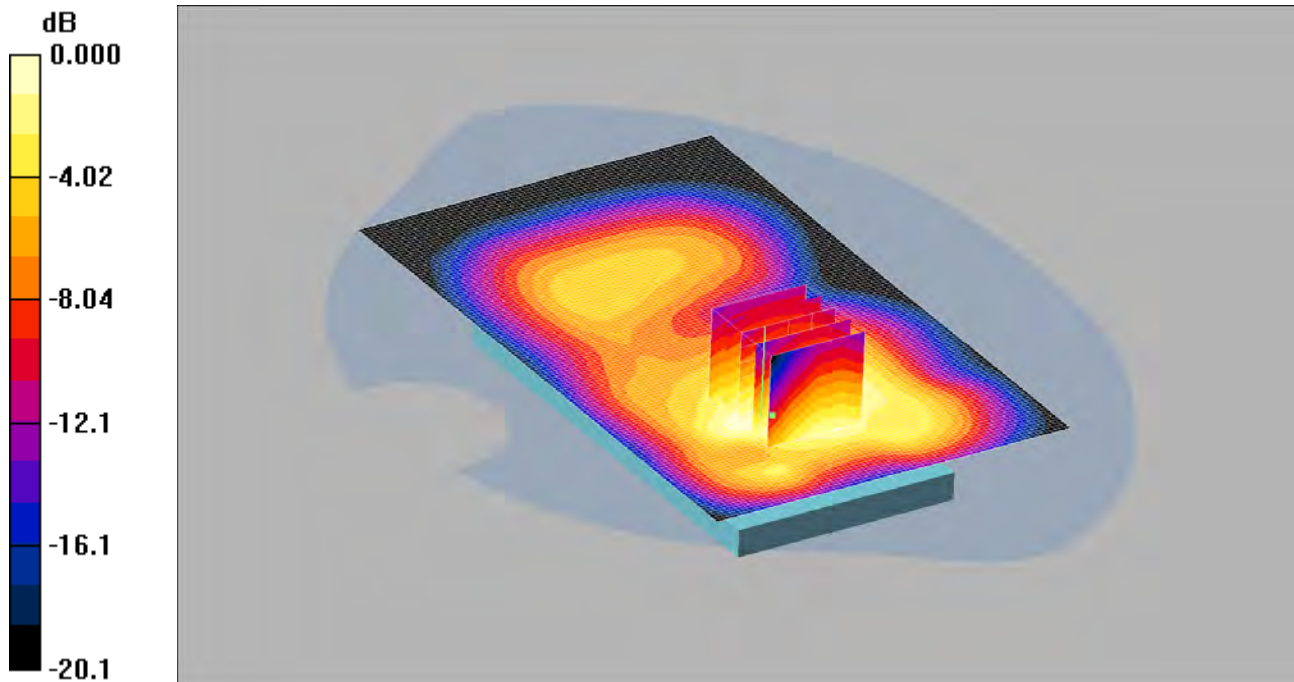

0 dB = 0.793mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.862 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.50 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 1.07 W/kg


SAR(1 g) = 0.764 mW/g; SAR(10 g) = 0.492 mW/g

Maximum value of SAR (measured) = 0.793 mW/g

092: Front of EUT Facing Phantom LTE Band 2 20MHz BW 1RB Middle CH19100

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

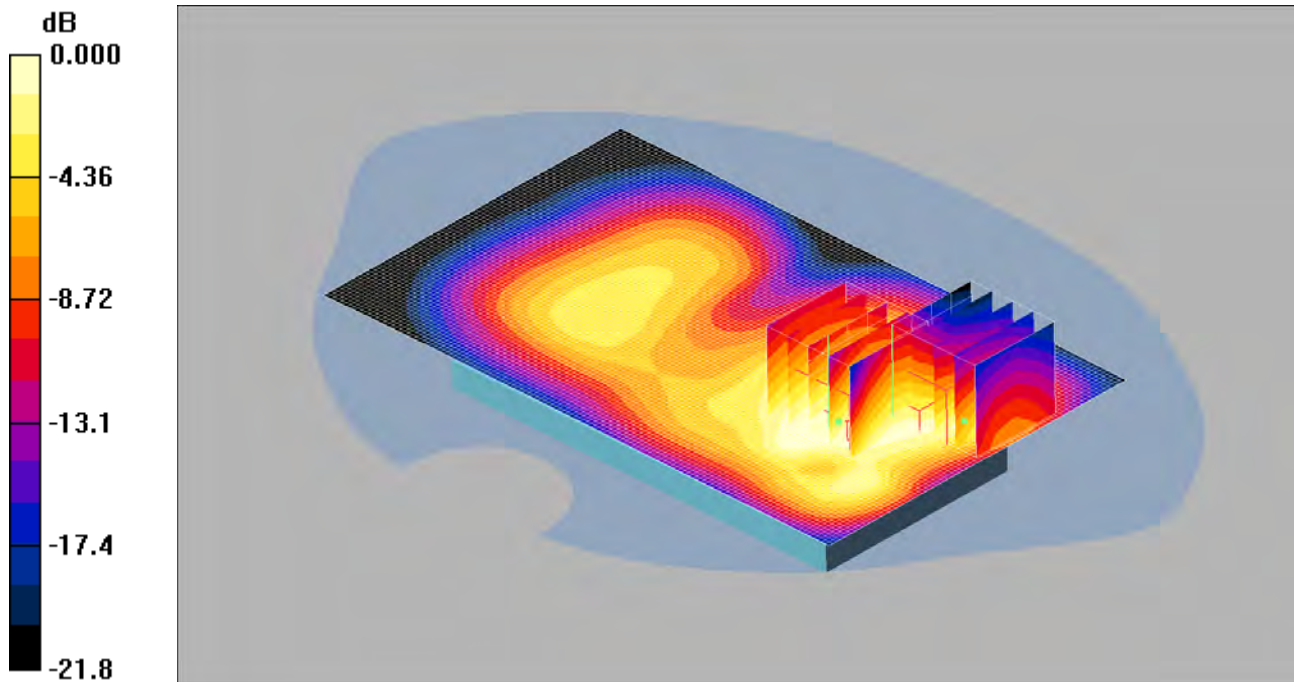

0 dB = 0.612mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom -High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.742 mW/g

Front of EUT Facing Phantom -High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.37 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.994 W/kg

SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.443 mW/g

Maximum value of SAR (measured) = 0.727 mW/g

Front of EUT Facing Phantom -High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.37 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.245 mW/g


Maximum value of SAR (measured) = 0.612 mW/g

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

093: Front of EUT Facing Phantom LTE Band 2 20MHz BW 50%RB Middle CH18900

Date 03/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

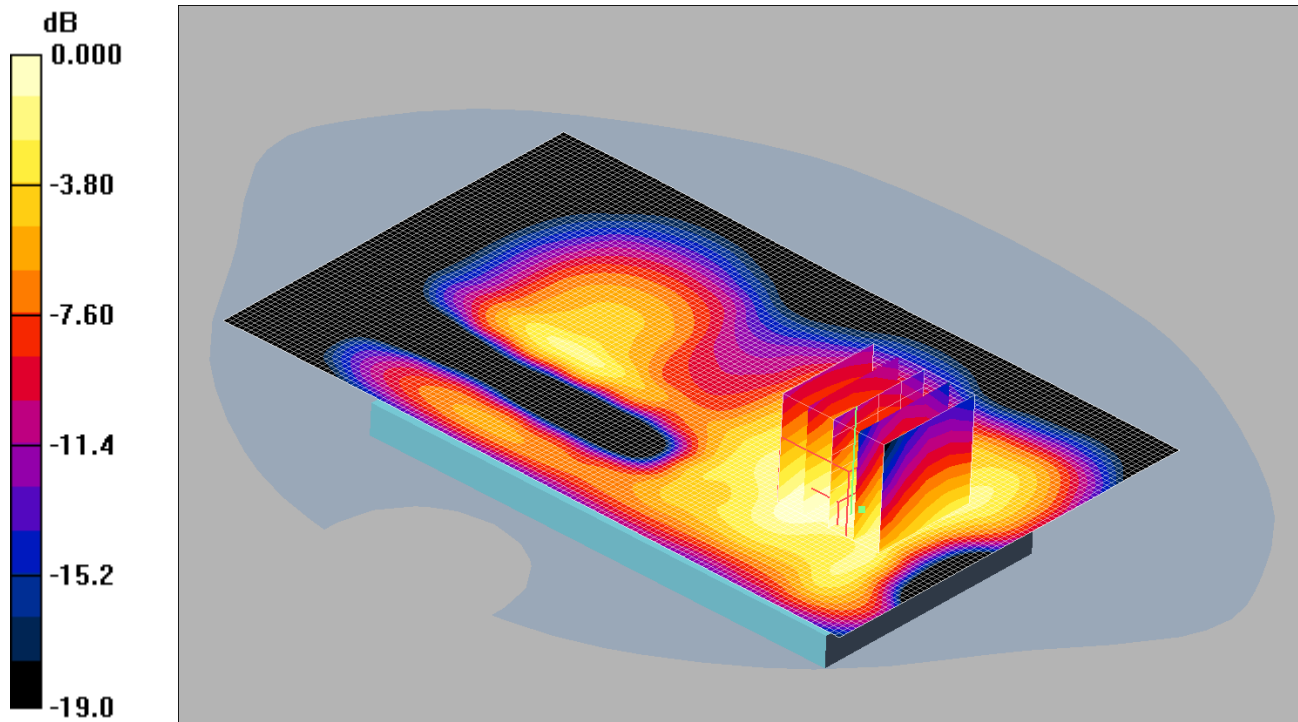

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.559 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.02 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.756 W/kg


SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.351 mW/g

Maximum value of SAR (measured) = 0.563 mW/g

094: 1 Front of EUT Facing Phantom LTE Band 2 20MHz BW 100%RB Middle CH18900

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

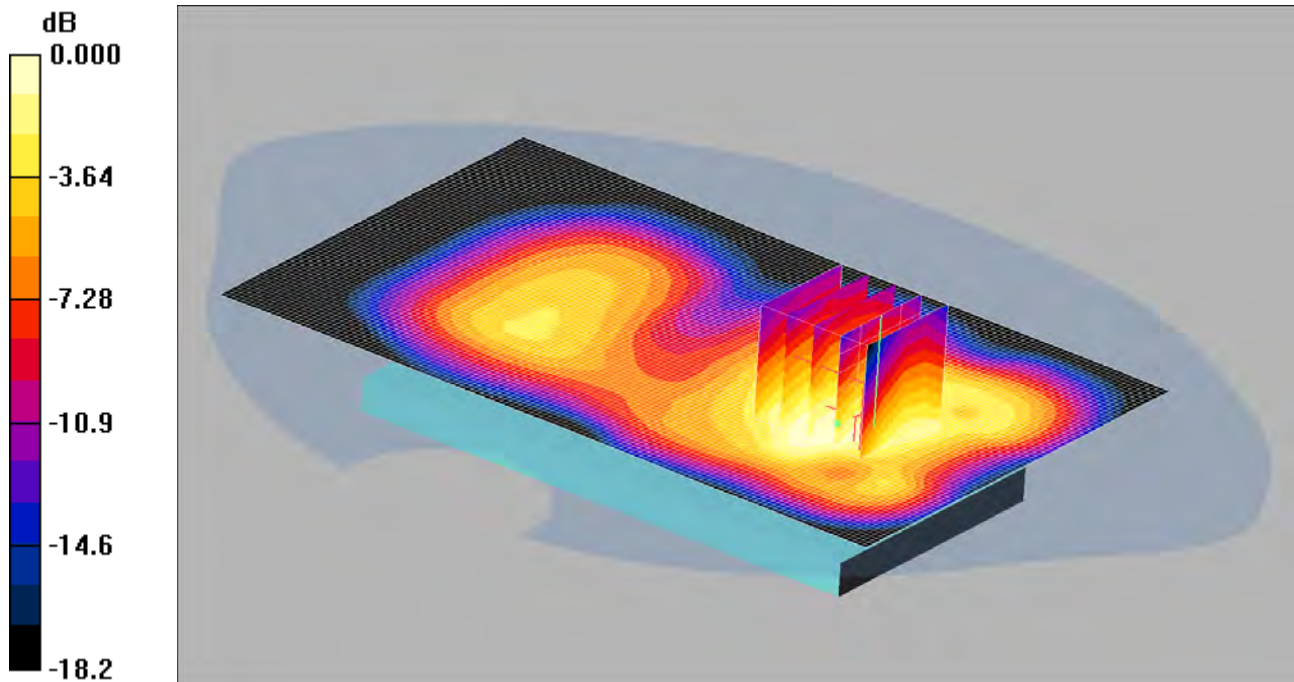

0 dB = 0.604mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.642 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.66 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.822 W/kg


SAR(1 g) = 0.579 mW/g; SAR(10 g) = 0.377 mW/g

Maximum value of SAR (measured) = 0.604 mW/g

095: Back of EUT Facing Phantom LTE Band 2 20MHz BW 1RB Middle CH18900

Date 03/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

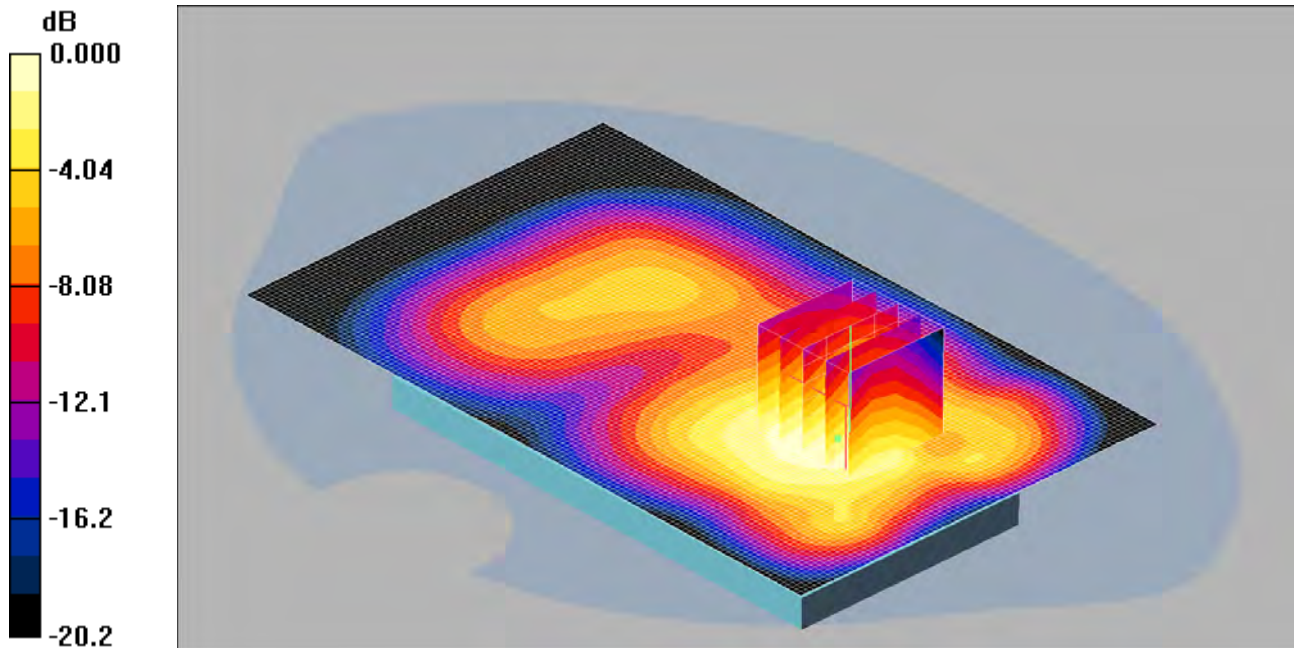

0 dB = 0.879mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.894 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 1.16 W/kg


SAR(1 g) = 0.829 mW/g; SAR(10 g) = 0.540 mW/g

Maximum value of SAR (measured) = 0.879 mW/g

096: Back of EUT Facing Phantom LTE Band 2 20MHz BW 1RB Middle CH18700

Date 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

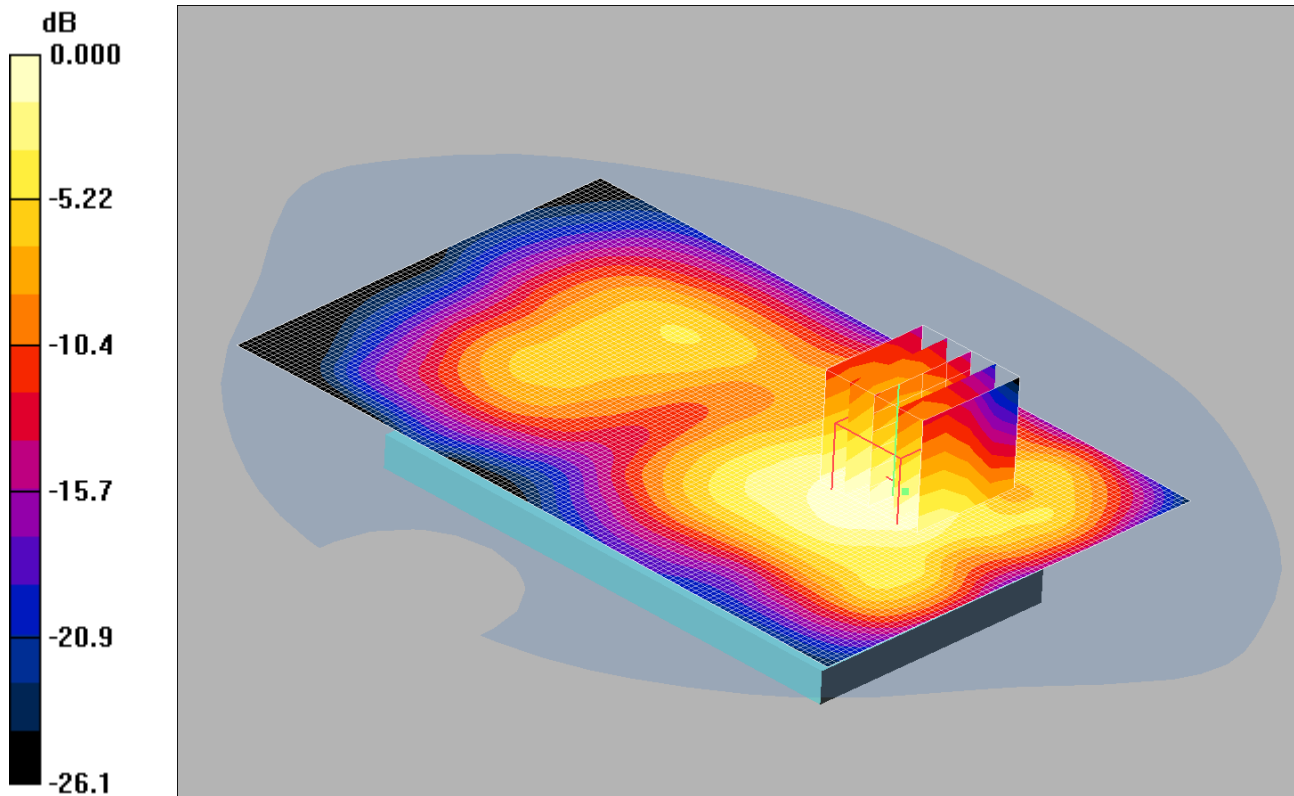

0 dB = 0.900mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.954 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.98 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 1.20 W/kg


SAR(1 g) = 0.850 mW/g; SAR(10 g) = 0.544 mW/g

Maximum value of SAR (measured) = 0.900 mW/g

097: Back of EUT Facing Phantom LTE Band 2 20MHz BW 1RB Middle CH19100

Date 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

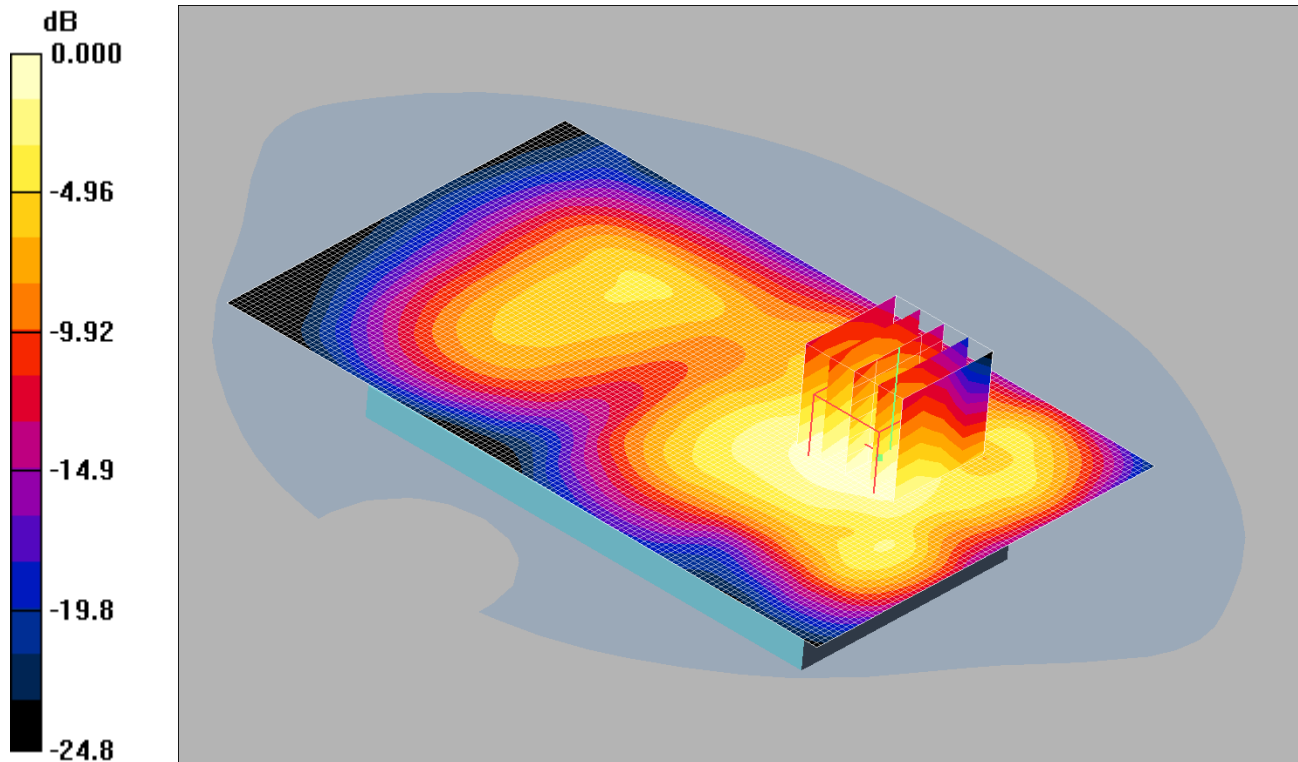

0 dB = 0.797mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.857 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.76 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 1.08 W/kg


SAR(1 g) = 0.752 mW/g; SAR(10 g) = 0.477 mW/g

Maximum value of SAR (measured) = 0.797 mW/g

098: Back of EUT Facing Phantom LTE Band 2 20MHz BW 50%RB Middle CH18900

Date 03/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

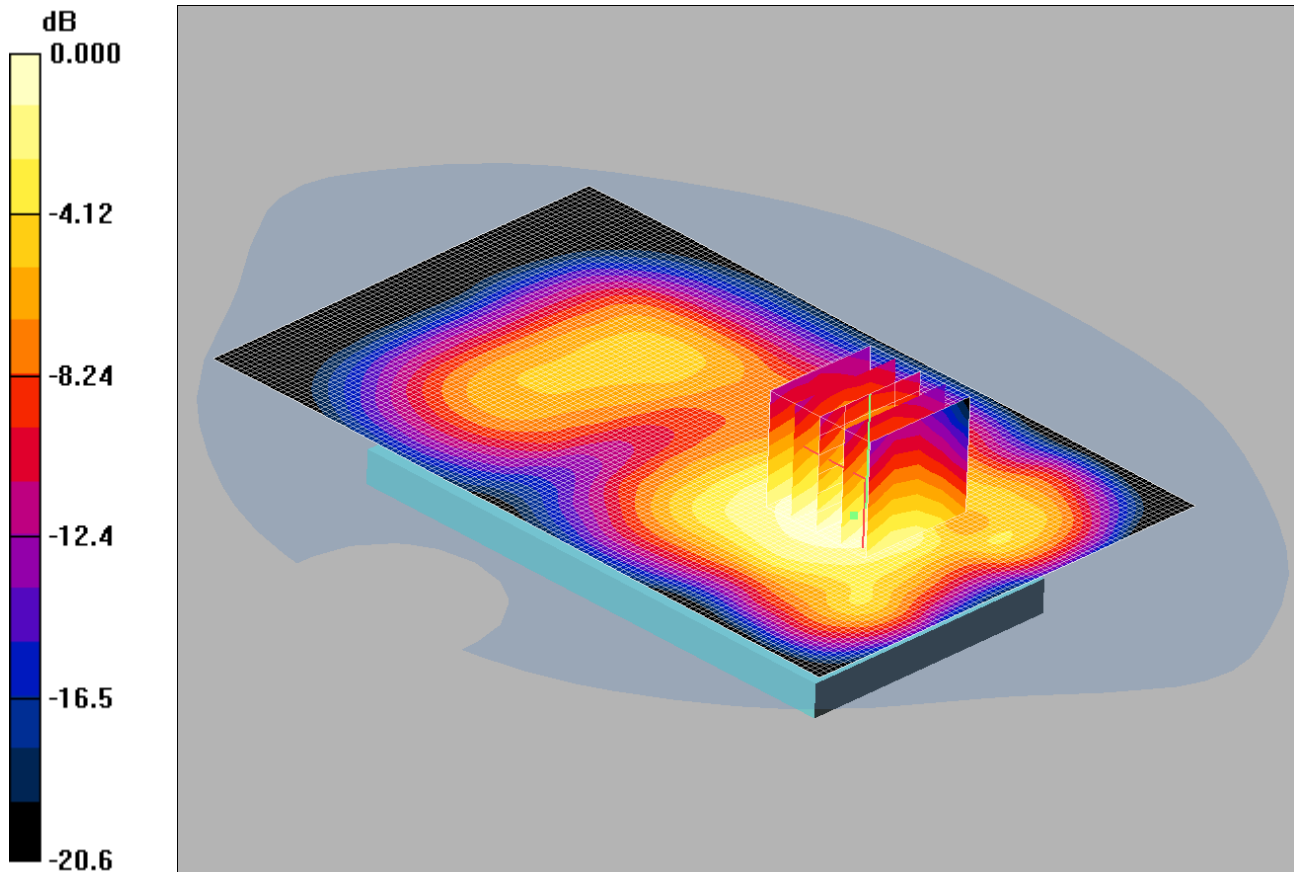

0 dB = 0.705mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.722 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.17 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.934 W/kg


SAR(1 g) = 0.667 mW/g; SAR(10 g) = 0.434 mW/g

Maximum value of SAR (measured) = 0.705 mW/g

099: Back of EUT Facing Phantom LTE Band 2 20MHz BW 50%RB Middle CH18700

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

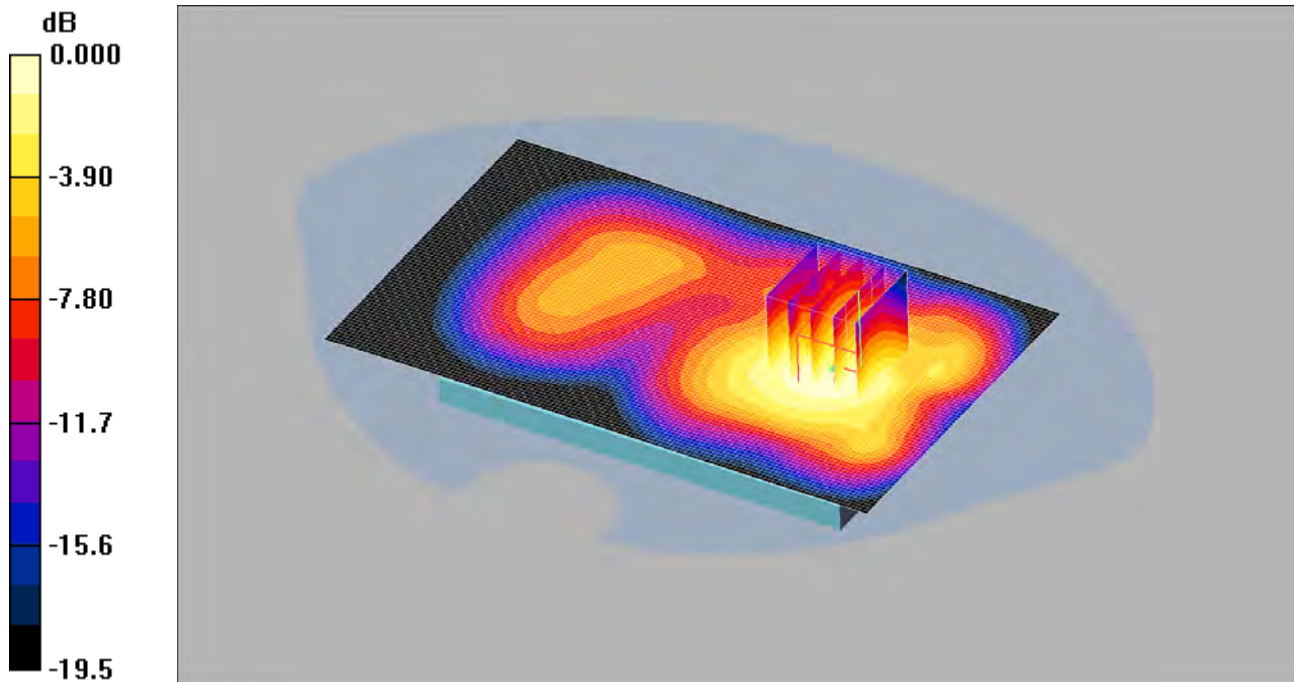

0 dB = 0.721mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.721 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.40 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.841 W/kg


SAR(1 g) = 0.608 mW/g; SAR(10 g) = 0.398 mW/g

Maximum value of SAR (measured) = 0.721 mW/g

100: Back of EUT Facing Phantom LTE Band 2 20MHz BW 50%RB Middle CH19100

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

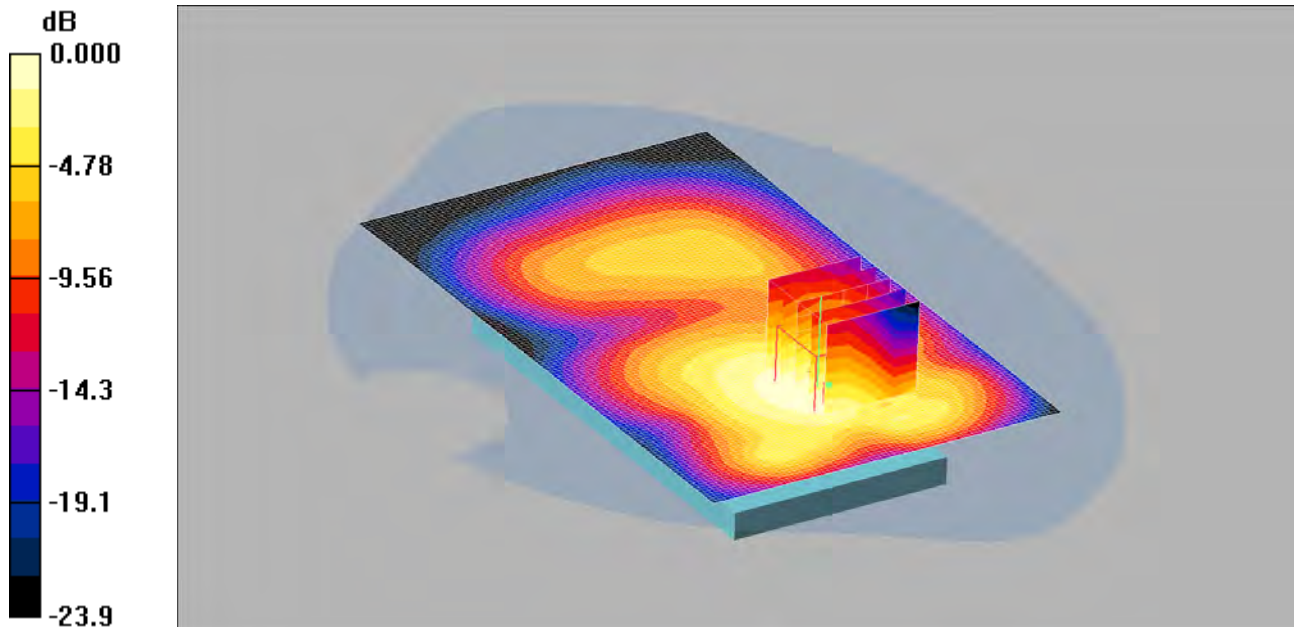

0 dB = 0.642mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.642 mW/g

Back of EUT Facing Phantom -High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.16 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.895 W/kg


SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.383 mW/g

Maximum value of SAR (measured) = 0.642 mW/g

101: Back of EUT Facing Phantom LTE Band 2 20MHz BW 100%RB Middle CH18900

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

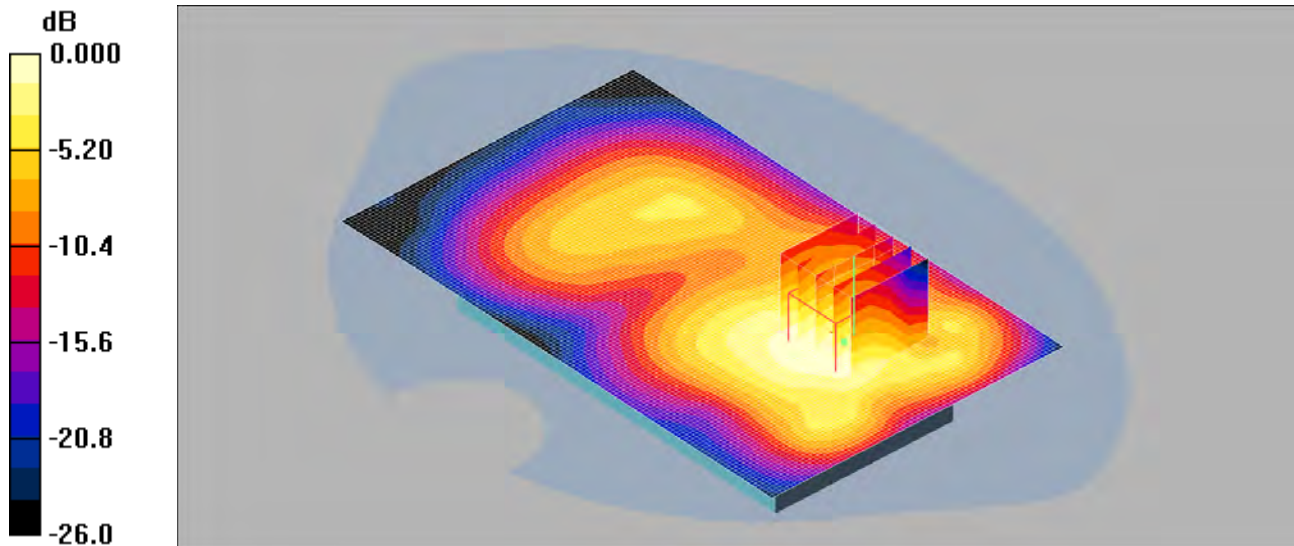

0 dB = 0.655mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.701 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.56 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.879 W/kg


SAR(1 g) = 0.616 mW/g; SAR(10 g) = 0.391 mW/g

Maximum value of SAR (measured) = 0.655 mW/g

102: Left Hand Side of EUT Facing Phantom LTE Band 2 20MHz BW 1RB Middle CH18900

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

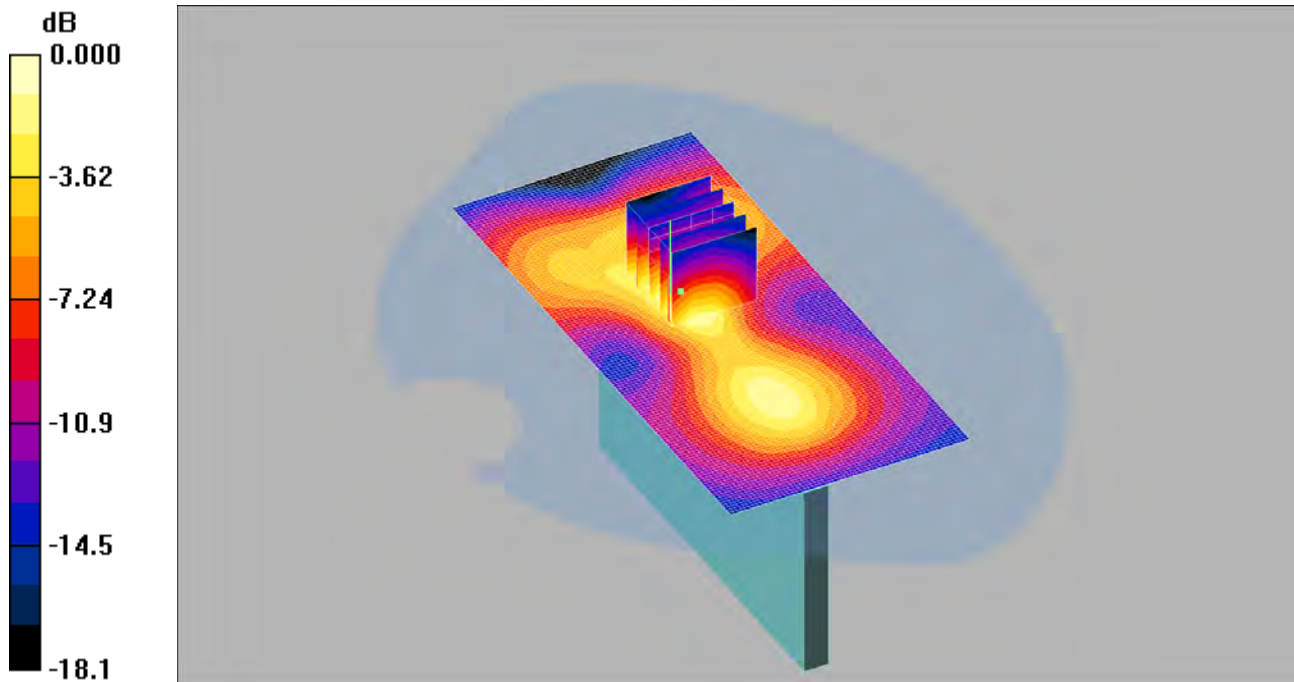

0 dB = 0.222mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

left Hand Side of EUT Facing Phantom - Middle/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.225 mW/g

left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.70 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 0.352 W/kg


SAR(1 g) = 0.204 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.222 mW/g

103: Left Hand Side of EUT Facing Phantom LTE Band 2 20MHz BW 50%RB Middle CH18900

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

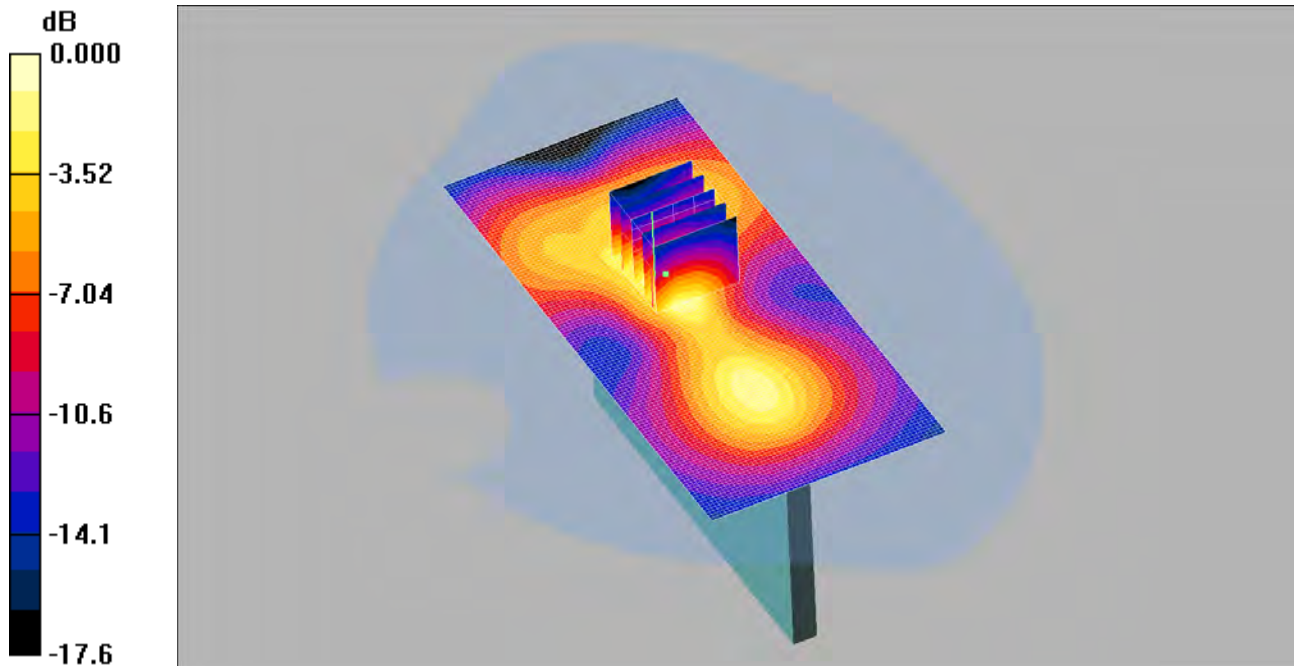

0 dB = 0.180mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

left Hand Side of EUT Facing Phantom - Middle/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.185 mW/g

left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.66 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.288 W/kg


SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.087 mW/g

Maximum value of SAR (measured) = 0.180 mW/g

104: Right Hand Side of EUT Facing Phantom LTE Band 2 20MHz BW 1RB Middle CH18900

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

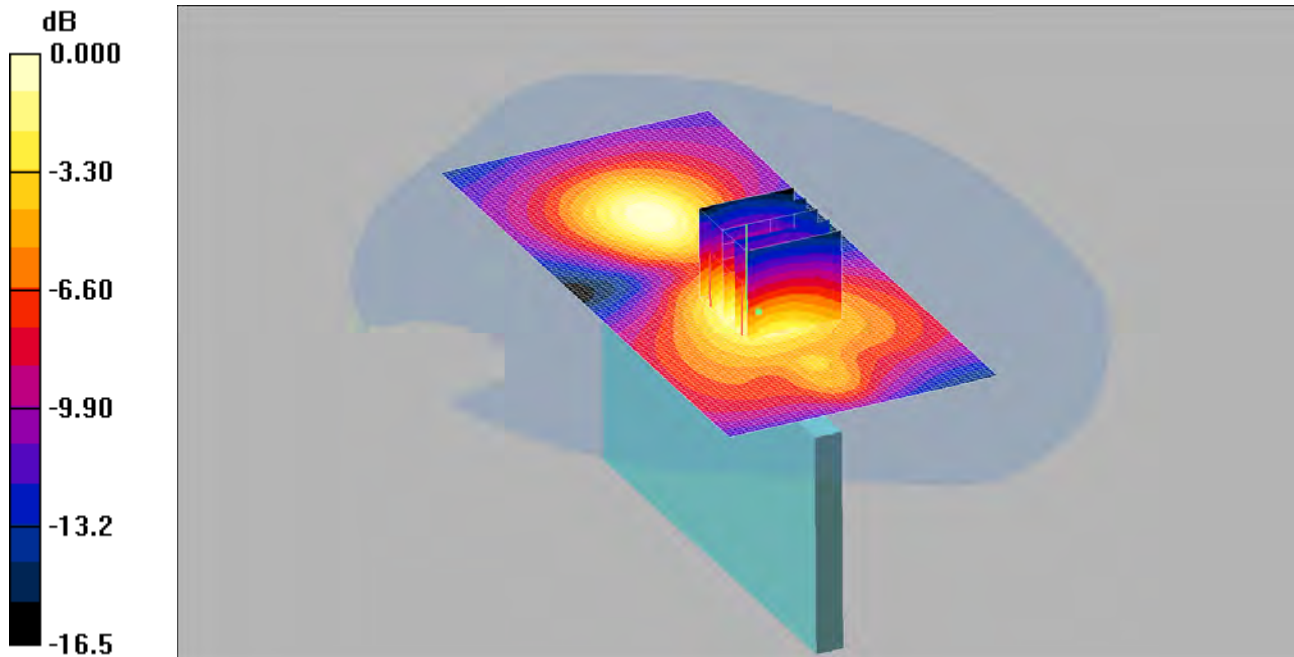

0 dB = 0.124mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom - Middle/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.129 mW/g

Right Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.94 V/m; Power Drift = 0.049 dB

Peak SAR (extrapolated) = 0.183 W/kg


SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.124 mW/g

105: Right Hand Side of EUT Facing Phantom LTE Band 2 20MHz BW 50%RB Middle CH18900

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

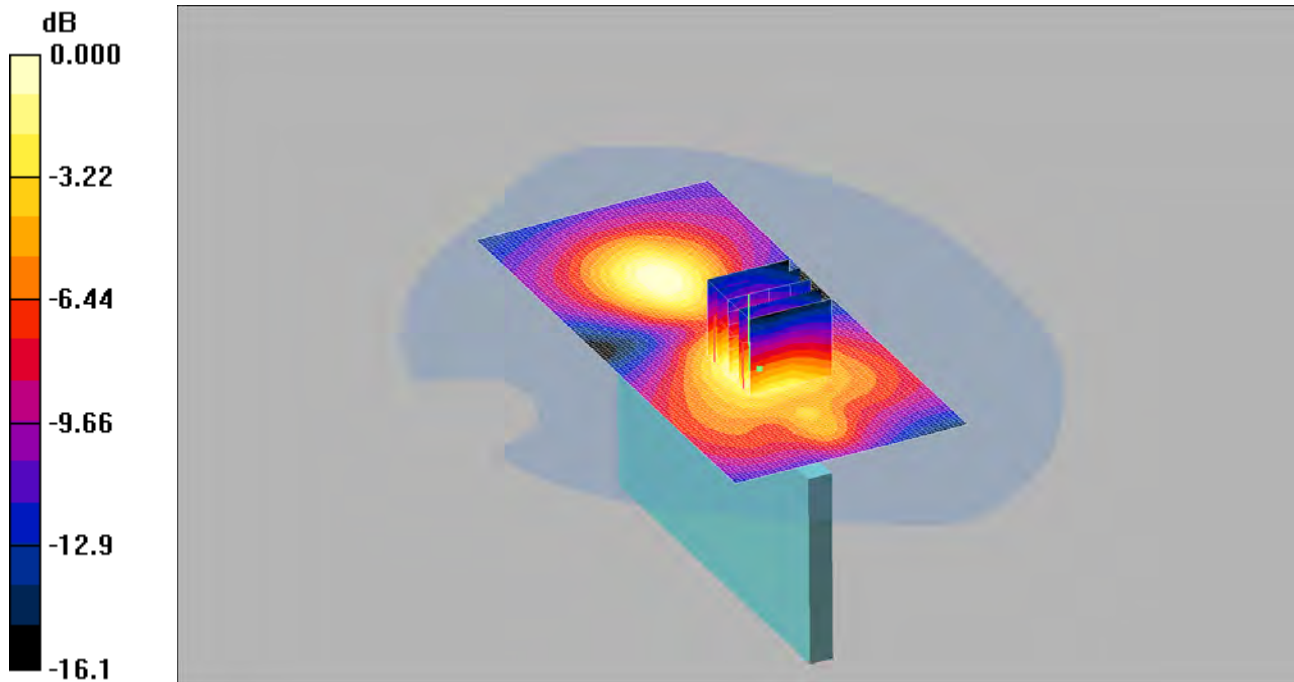

0 dB = 0.092mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom - Middle/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.099 mW/g

Right Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.26 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.136 W/kg


SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.092 mW/g

106: Bottom of EUT Facing Phantom LTE Band 2 20MHz BW 1RB Middle CH18900

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

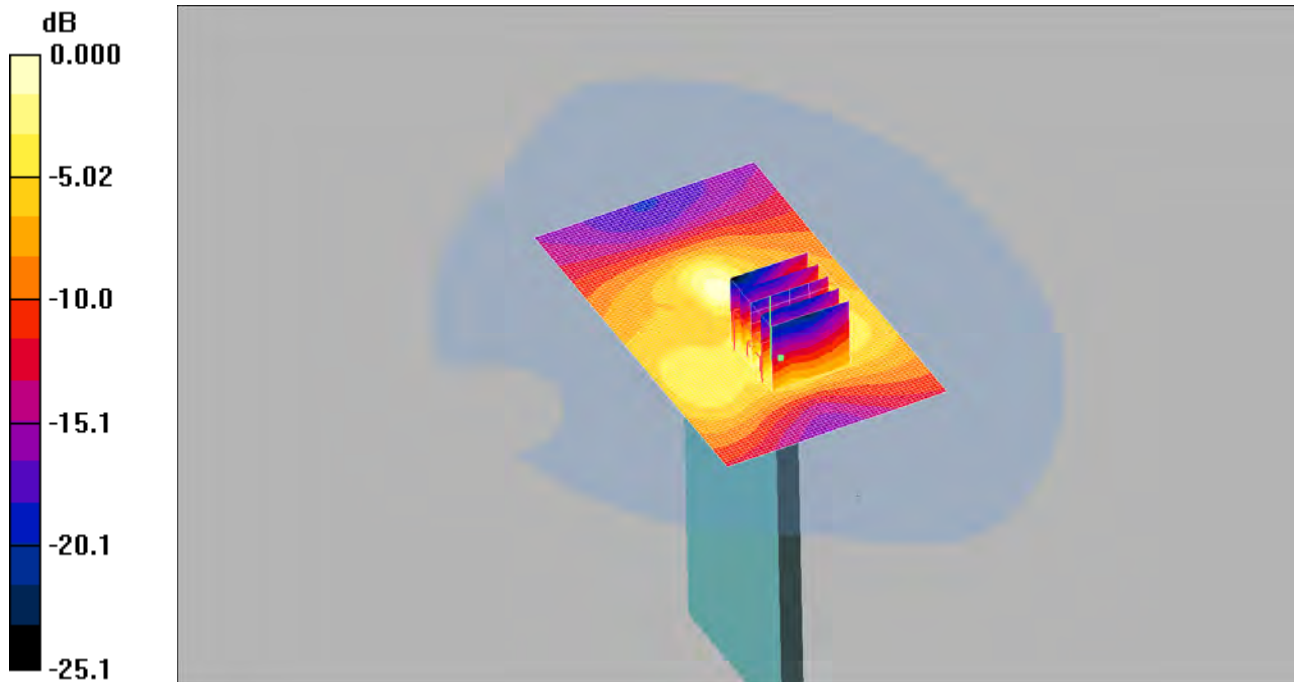

0 dB = 0.209mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.185 mW/g

Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.84 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.374 W/kg


SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.209 mW/g

107: Bottom of EUT Facing Phantom LTE Band 2 20MHz BW 50%RB Middle CH18900

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

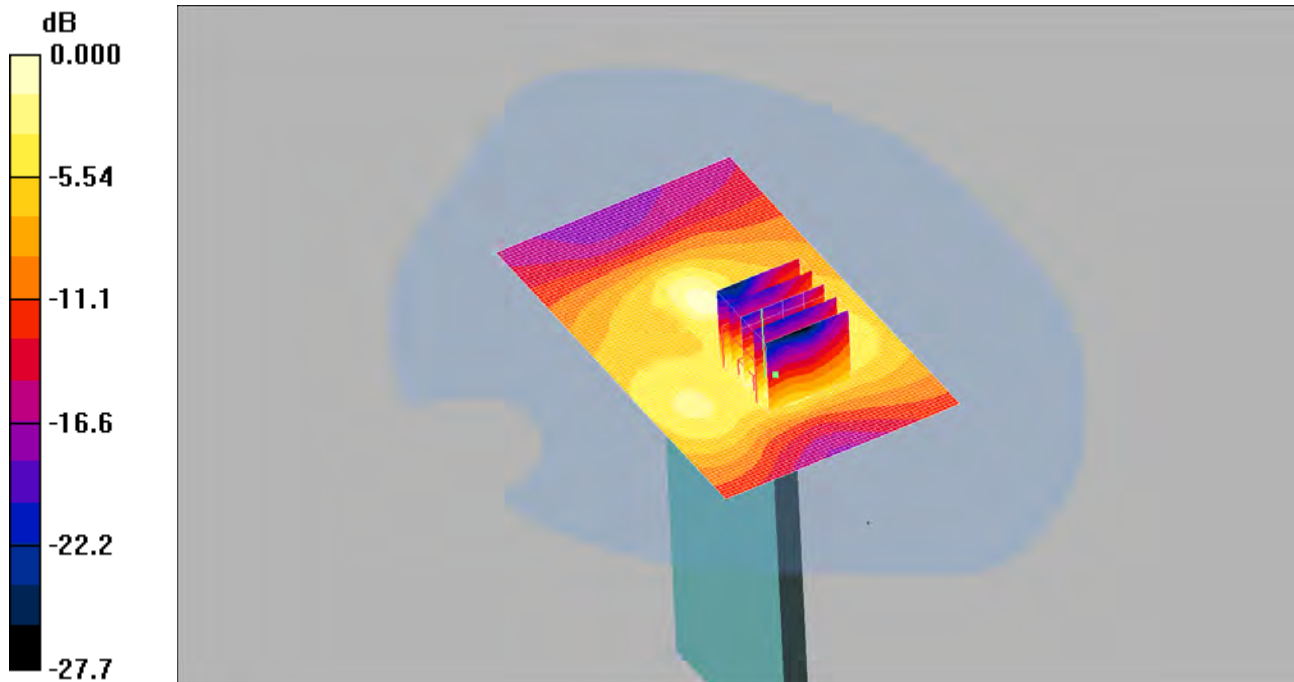

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.140 mW/g

Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.26 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.289 W/kg


SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.164 mW/g

108: Front of EUT Facing Phantom at 15mm LTE Band 2 20MHz BW 1RB Middle CH18700

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

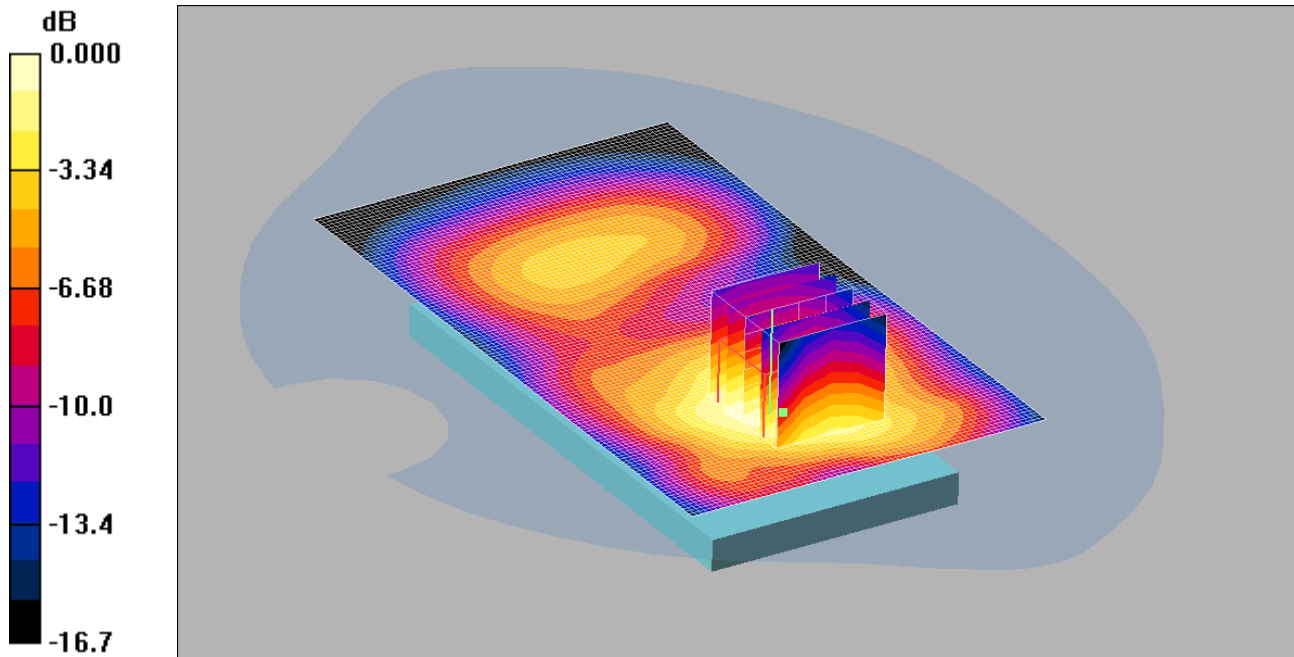

0 dB = 0.431mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom at 15mm -Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.434 mW/g

Front of EUT Facing Phantom at 15mm -Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.46 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.582 W/kg


SAR(1 g) = 0.402 mW/g; SAR(10 g) = 0.261 mW/g

Maximum value of SAR (measured) = 0.431 mW/g

109: Back of EUT Facing Phantom at 15mm LTE Band 2 20MHz BW 1RB Middle CH18700

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

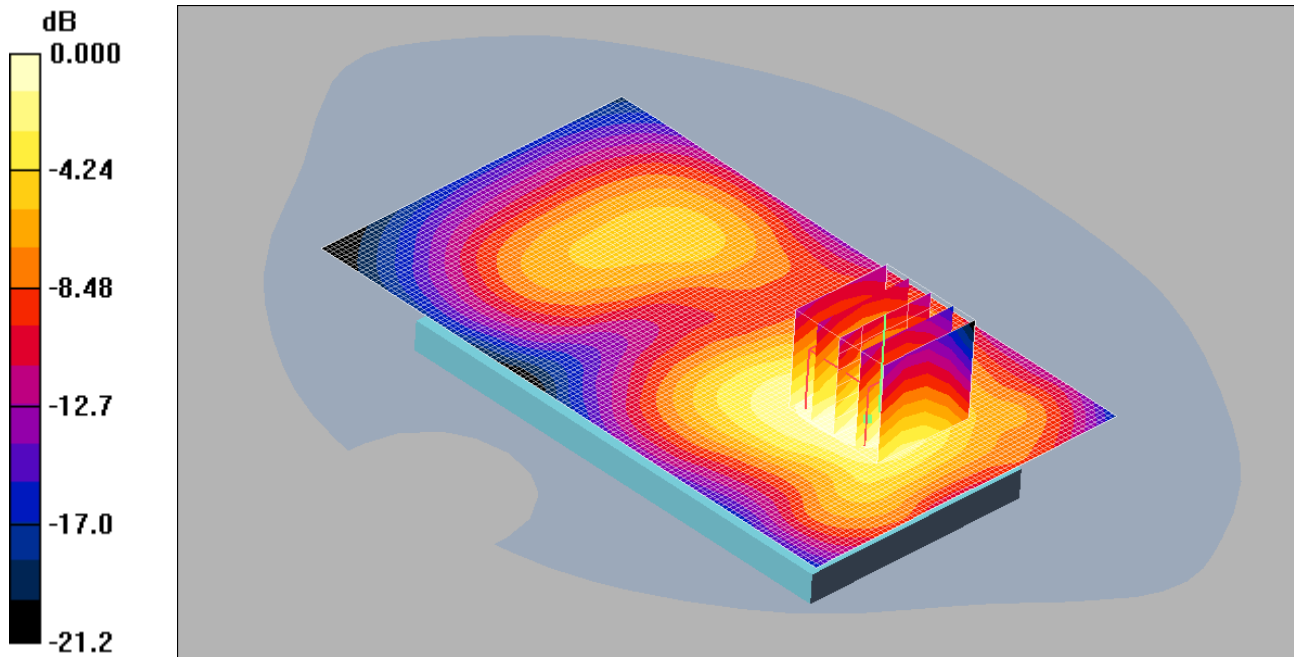

0 dB = 0.471mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom at 15mm - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.470 mW/g

Back of EUT Facing Phantom at 15mm - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.83 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.648 W/kg


SAR(1 g) = 0.439 mW/g; SAR(10 g) = 0.282 mW/g

Maximum value of SAR (measured) = 0.471 mW/g

110: Touch Left LTE Band 4 20MHz BW 1RB Middle CH20175

Date 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

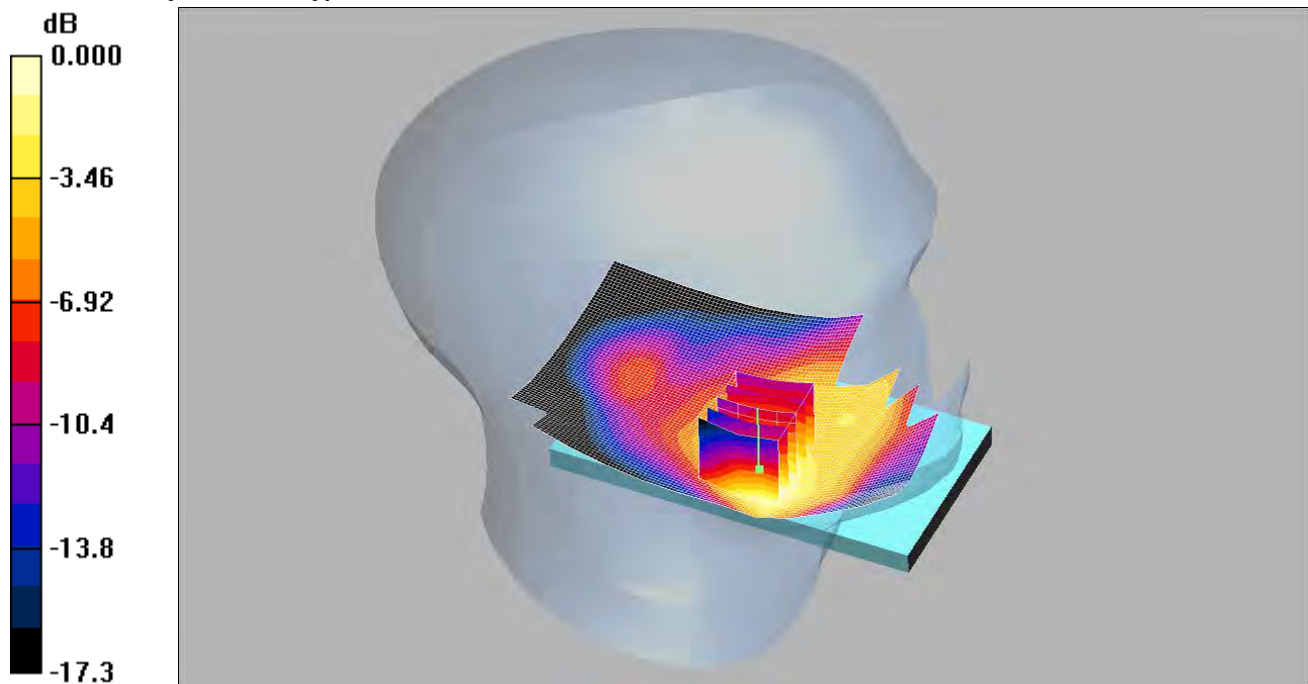

0 dB = 0.382mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.13, 5.13, 5.13); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.376 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.97 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.486 W/kg


SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 0.382 mW/g

111: Touch Left LTE Band 4 20MHz BW 50%RB Middle CH20050

Date 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

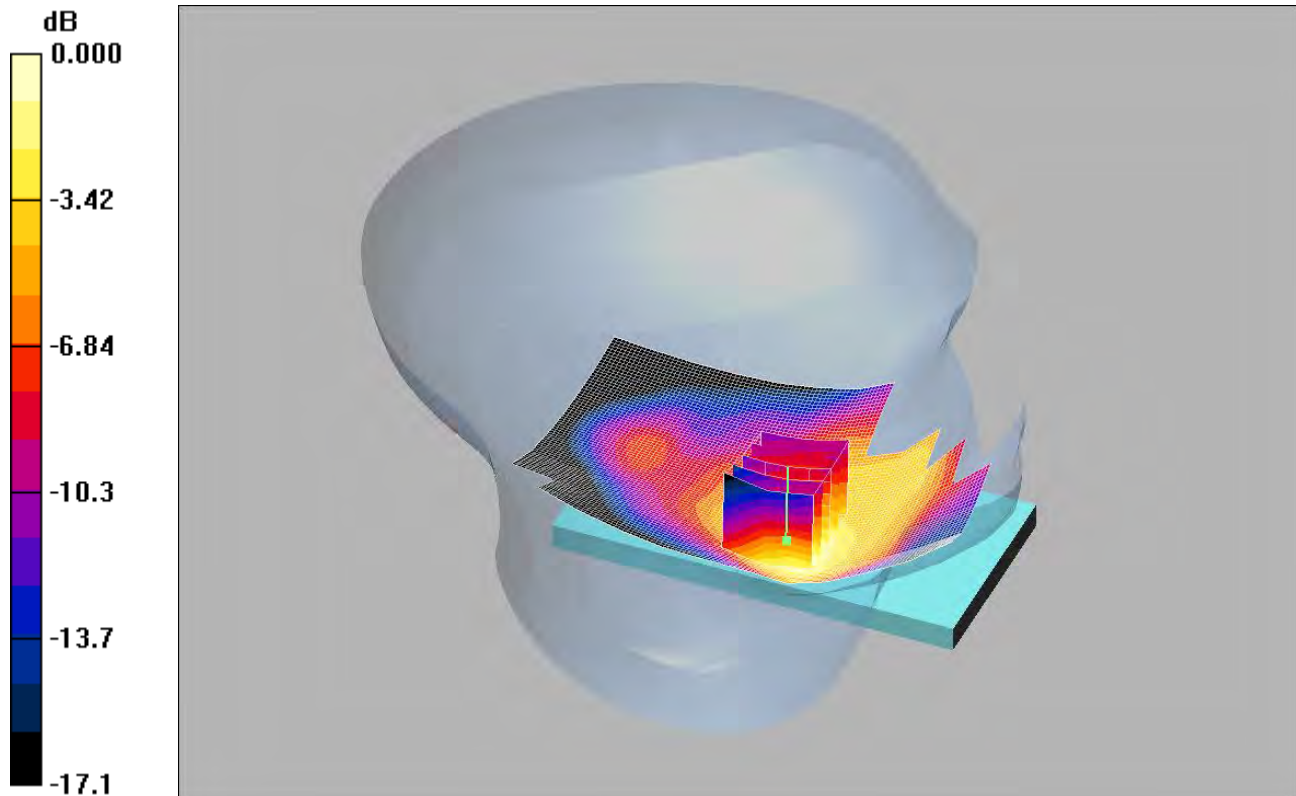

0 dB = 0.295mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800MHz HSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.3$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.13, 5.13, 5.13); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.293 mW/g

Touch Left - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.11 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.372 W/kg


SAR(1 g) = 0.264 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.295 mW/g

112: Tilt Left LTE Band 4 20MHz BW 1RB Middle CH20175

Date 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

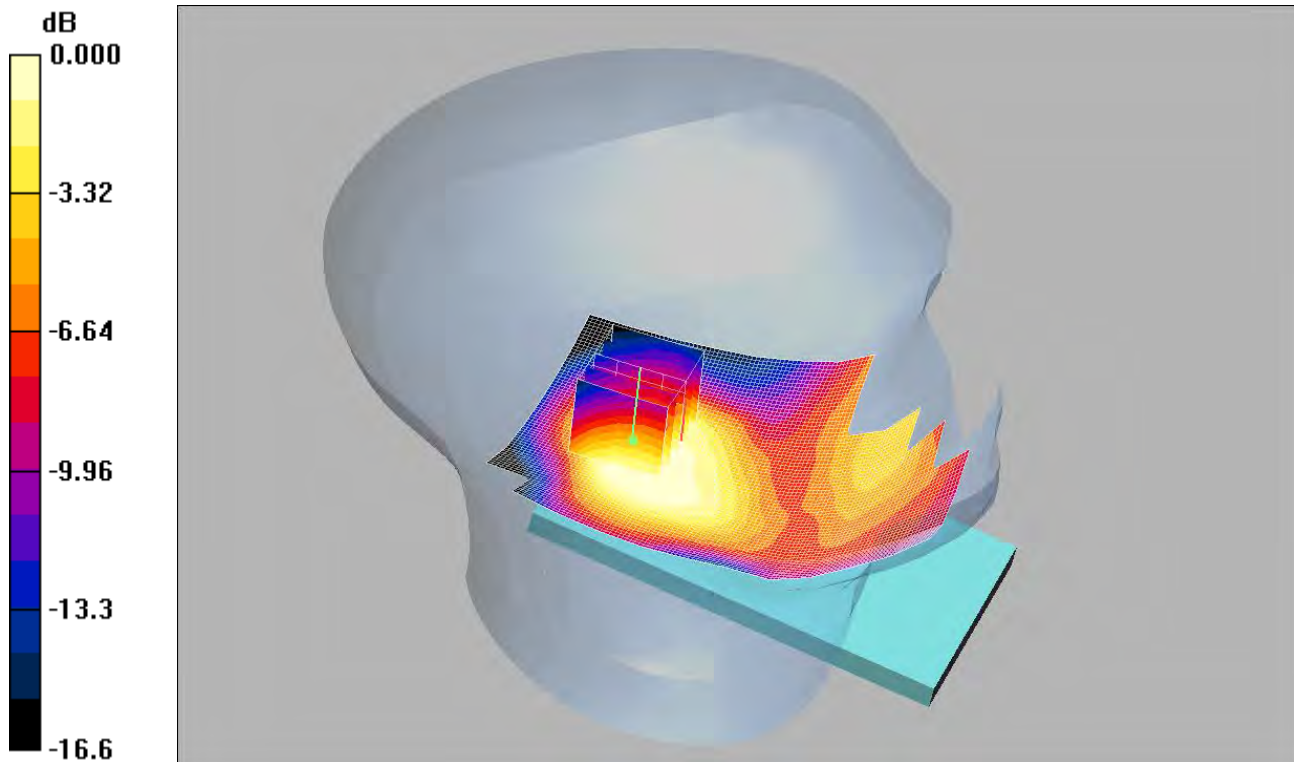

0 dB = 0.152mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1800MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.13, 5.13, 5.13); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.168 mW/g

Tilt Left - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 0.206 W/kg


SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.152 mW/g

113: Tilt Left LTE Band 4 20MHz BW 50%RB Middle CH20050

Date 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

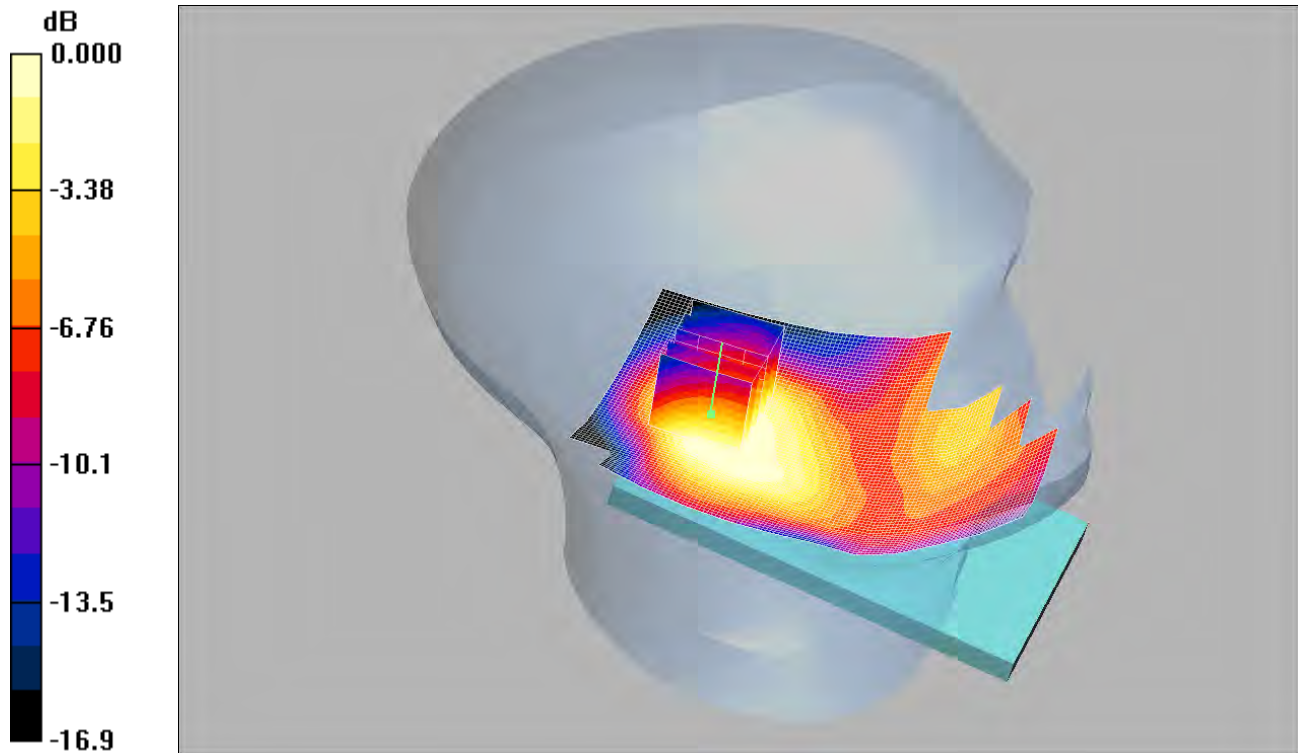

0 dB = 0.114mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800MHz HSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.3$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.13, 5.13, 5.13); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.137 mW/g

Tilt Left - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.163 W/kg


SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.114 mW/g

114: Touch Right LTE Band 4 20MHz BW 1RB Middle CH20175

Date 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

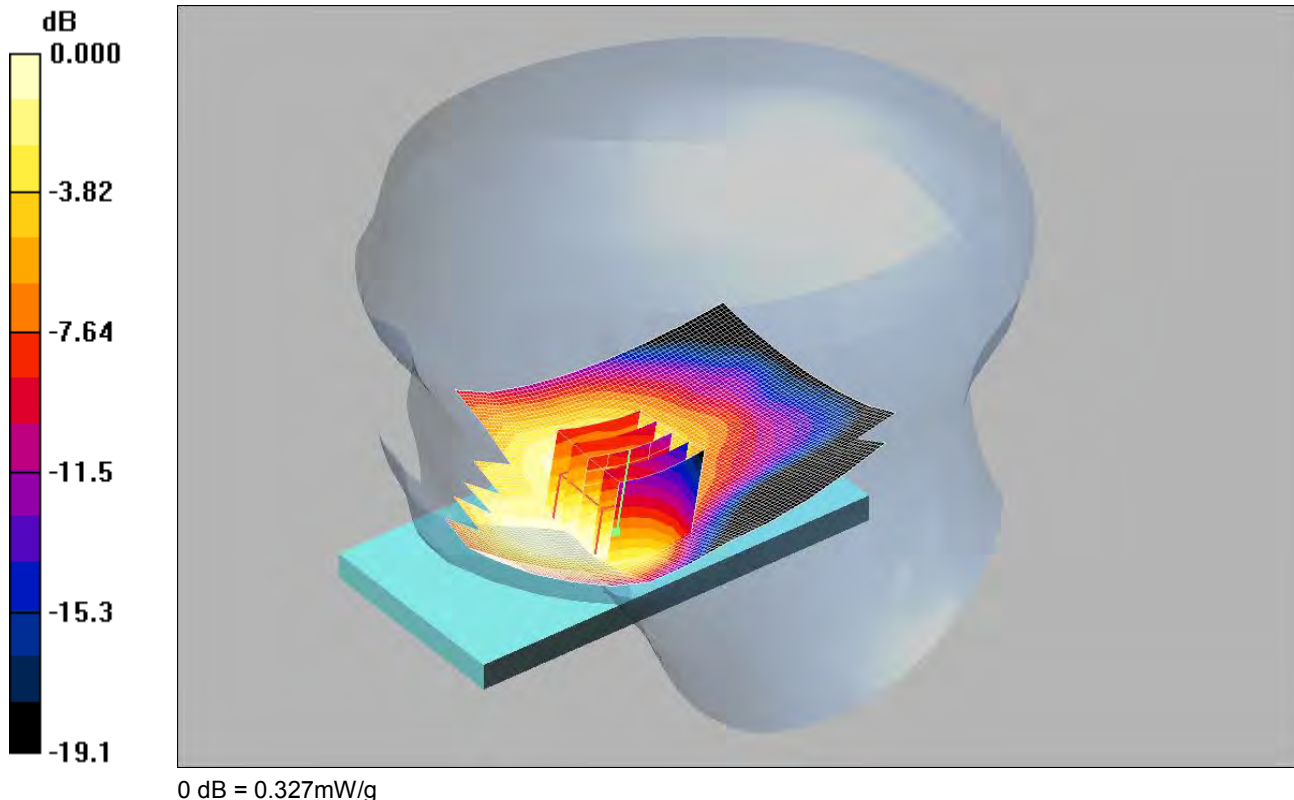

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.13, 5.13, 5.13); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.382 mW/g

Touch Right - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.55 V/m; Power Drift = 0.071 dB

Peak SAR (extrapolated) = 0.423 W/kg


SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.214 mW/g

Maximum value of SAR (measured) = 0.327 mW/g

115: Touch Right LTE Band 4 20MHz BW 50%RB Middle CH20050

Date 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

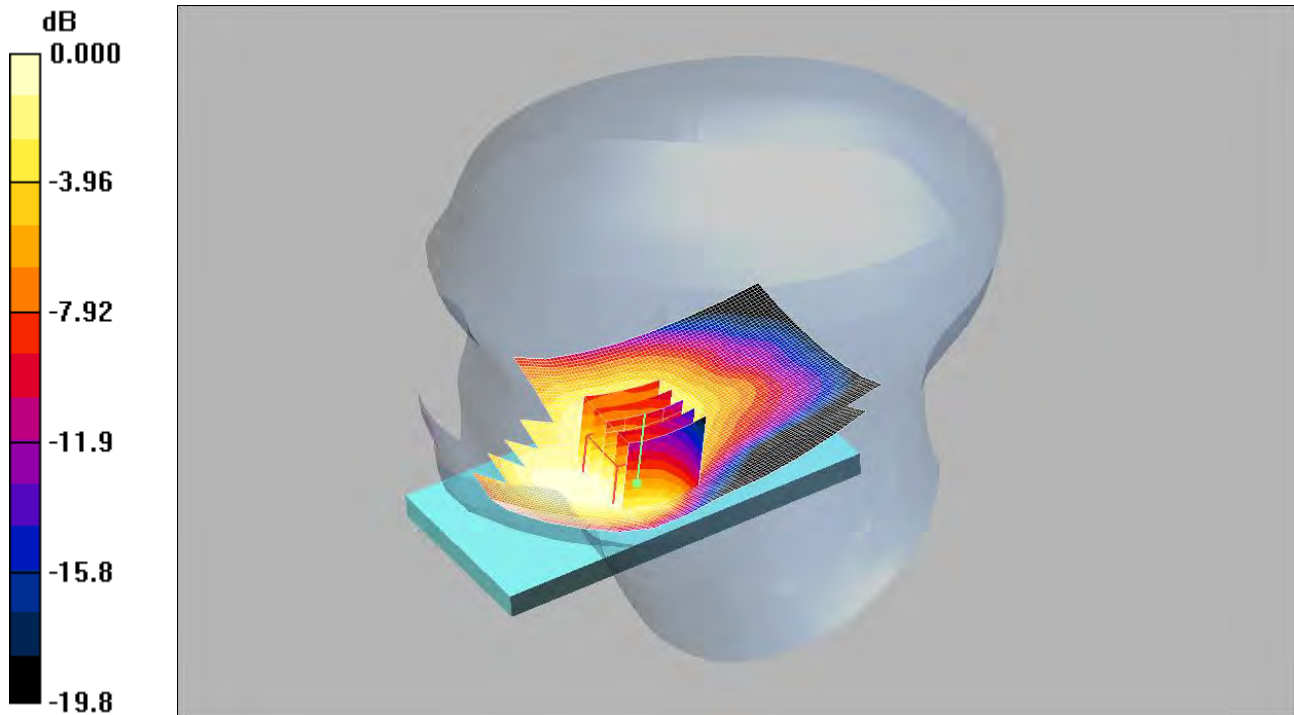

0 dB = 0.237mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800MHz HSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.3$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.13, 5.13, 5.13); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.273 mW/g

Touch Right - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.19 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.310 W/kg


SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.237 mW/g

116: Tilt Right LTE Band 4 20MHz BW 1RB Middle CH20175

Date 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

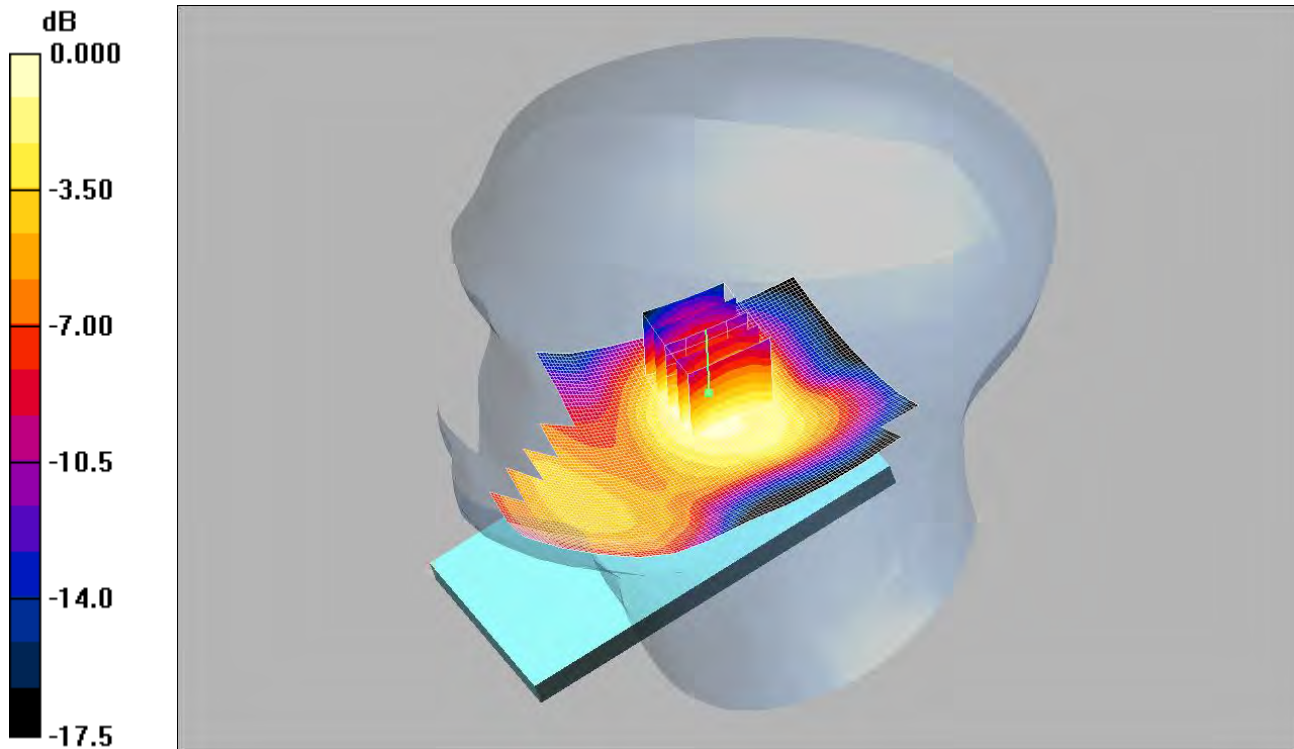

0 dB = 0.187mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.13, 5.13, 5.13); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.206 mW/g

Touch Right - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.05 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.256 W/kg


SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.187 mW/g

117: Tilt Right LTE Band 4 20MHz BW 50%RB Middle CH20050

Date 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

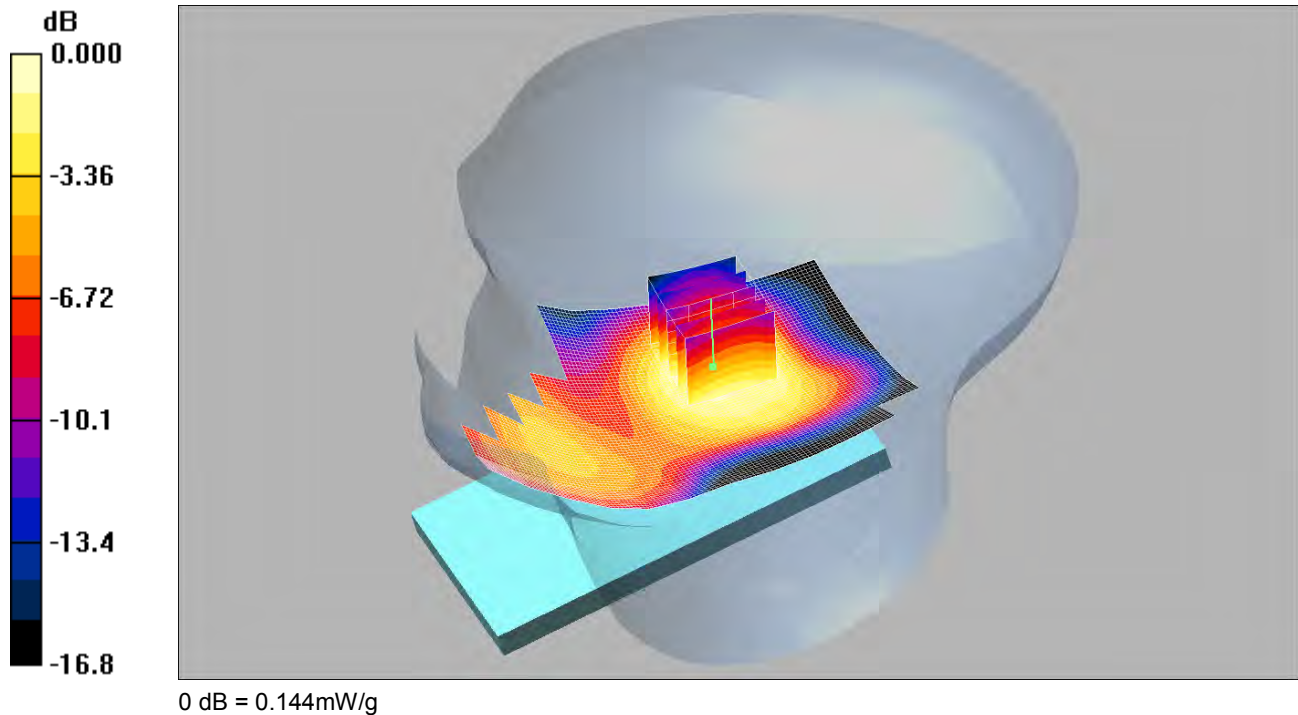

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800MHz HSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.3$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.13, 5.13, 5.13); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.151 mW/g

Touch Right - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.13 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.181 W/kg


SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.144 mW/g

118: Touch Left LTE Band 4 20MHz BW 1RB Middle CH20050

Date: 12/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

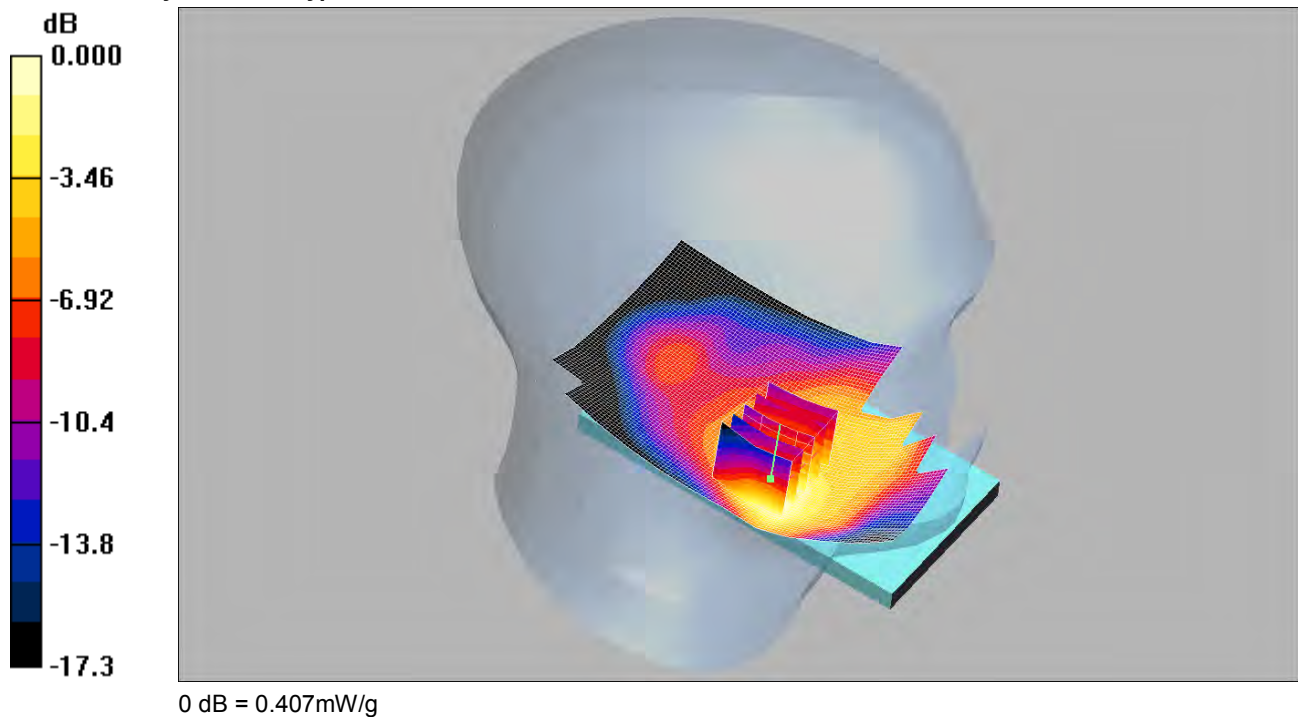

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800MHz HSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.3$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.13, 5.13, 5.13); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.394 mW/g

Touch Left - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.61 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.517 W/kg


SAR(1 g) = 0.367 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.407 mW/g

119: Touch Left LTE Band 4 20MHz BW 1RB Middle CH20300

Date: 12/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

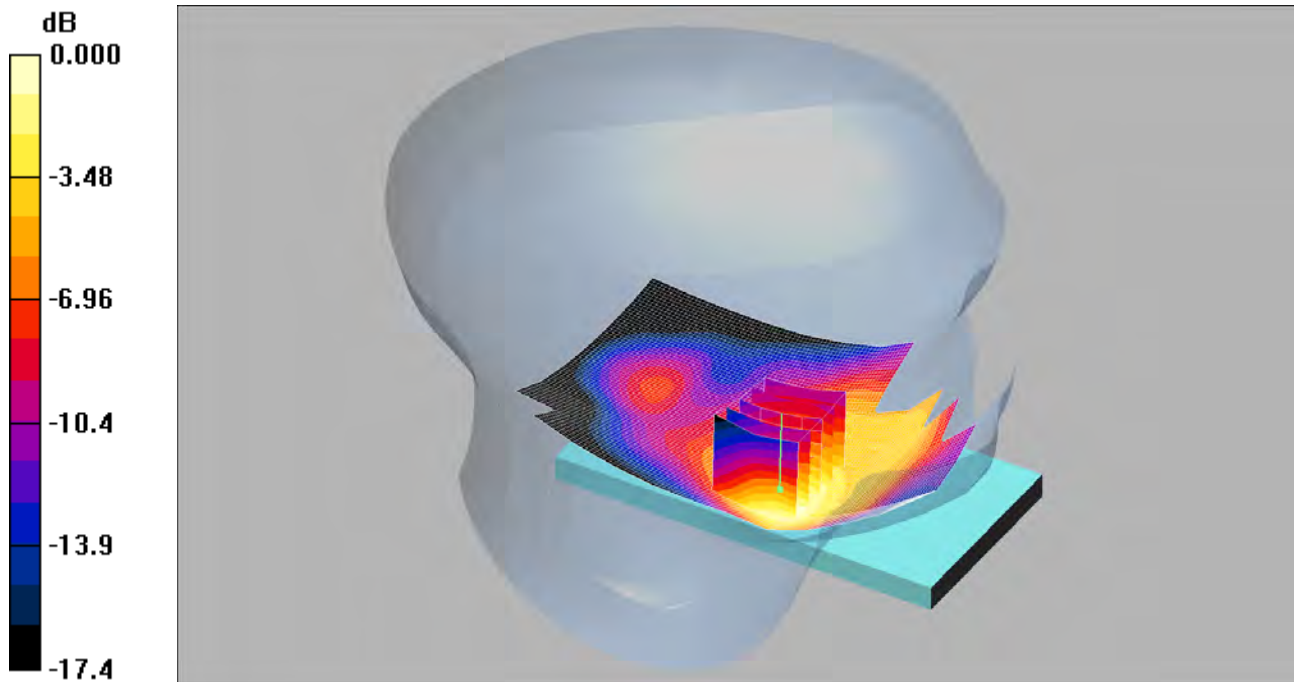

0 dB = 0.437mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800MHz HSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.13, 5.13, 5.13); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.440 mW/g

Touch Left - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.04 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.575 W/kg


SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 0.437 mW/g

120: Front of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Middle CH20175

Date: 09/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

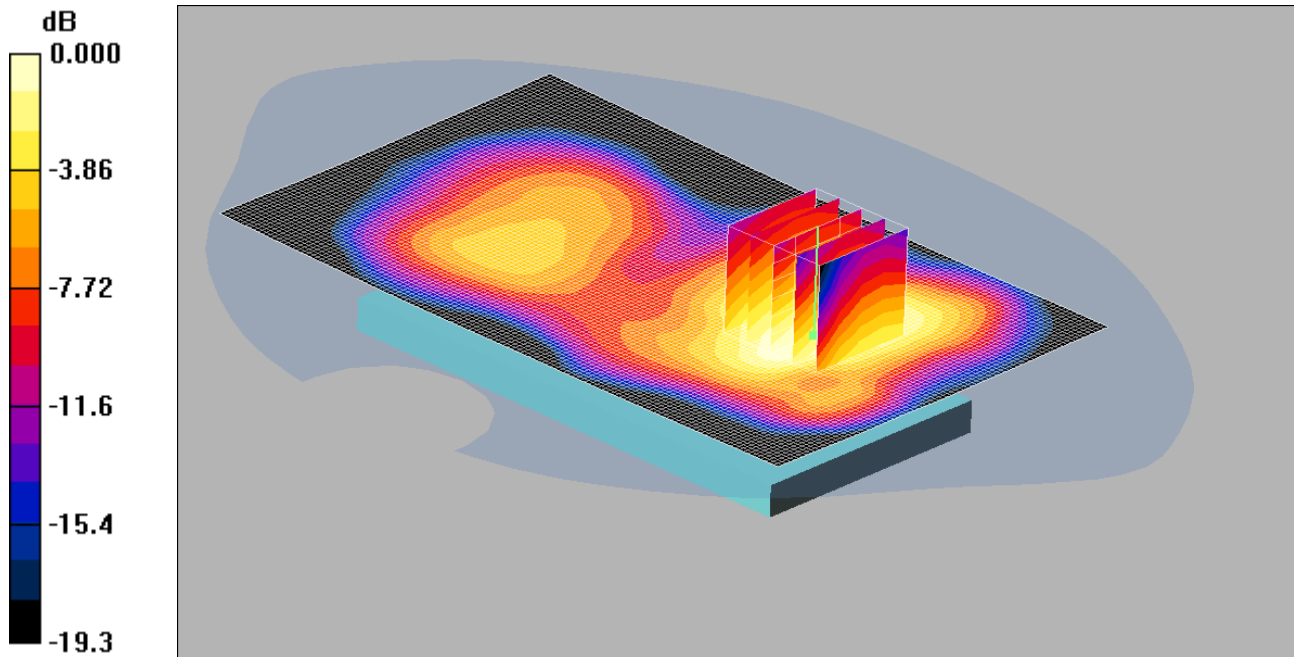

0 dB = 0.929mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 20/09/2012
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.00 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.65 V/m; Power Drift = 0.149 dB

Peak SAR (extrapolated) = 1.13 W/kg


SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.592 mW/g

Maximum value of SAR (measured) = 0.929 mW/g

121: Front of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Middle CH20050

Date: 09/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

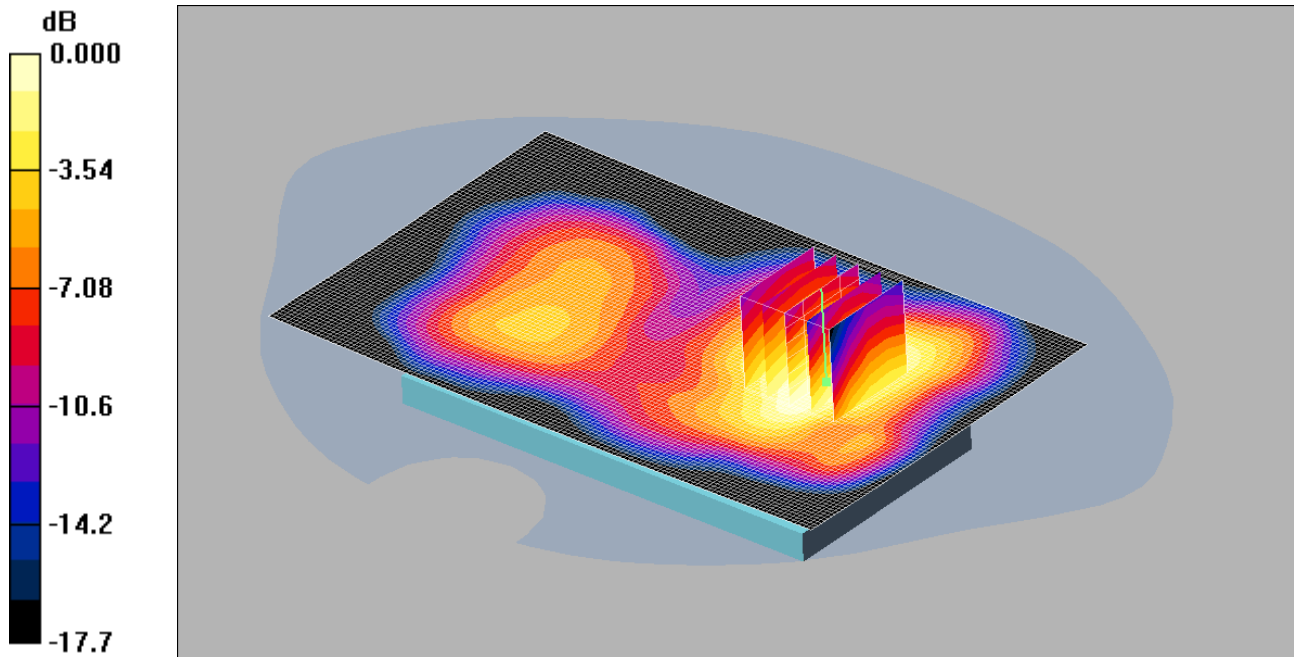

0 dB = 0.891mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low 2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.963 mW/g

Front of EUT Facing Phantom - Low 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.37 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 1.07 W/kg


SAR(1 g) = 0.829 mW/g; SAR(10 g) = 0.572 mW/g

Maximum value of SAR (measured) = 0.891 mW/g

122: Front of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Middle CH20300

Date: 09/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

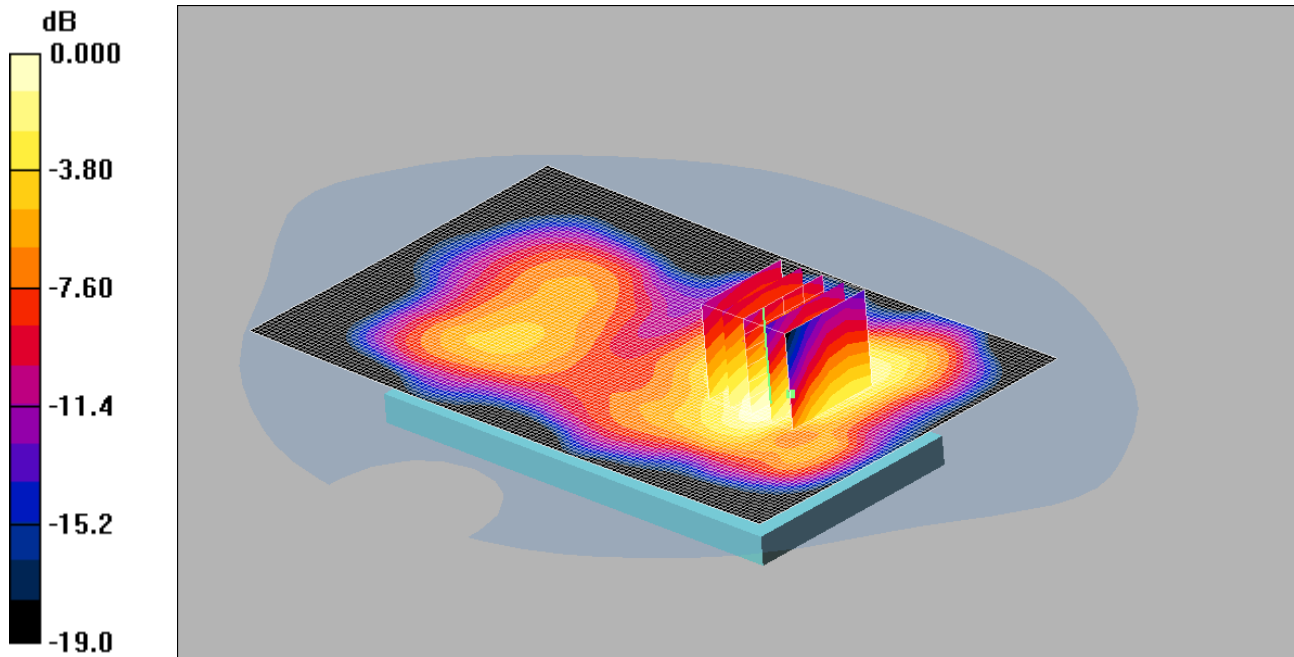

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.00 mW/g

Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.124 dB

Peak SAR (extrapolated) = 1.15 W/kg


SAR(1 g) = 0.871 mW/g; SAR(10 g) = 0.588 mW/g

Maximum value of SAR (measured) = 0.929 mW/g

123: Front of EUT Facing Phantom LTE Band 4 20MHz BW 50% RB Middle CH20050

Date: 09/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

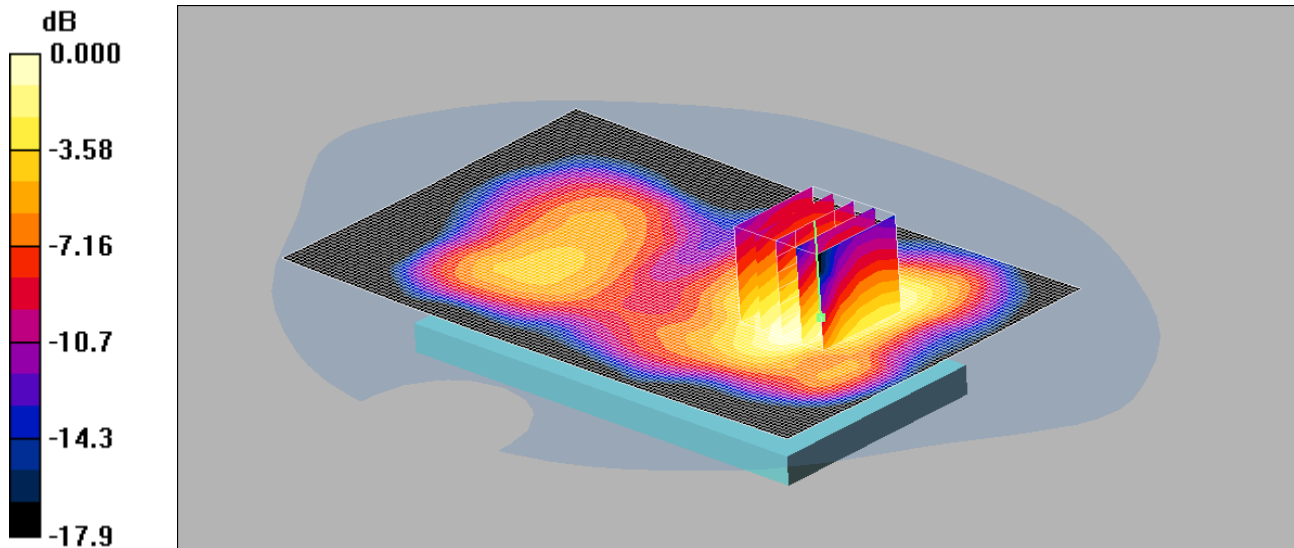

0 dB = 0.669mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low 2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.738 mW/g

Front of EUT Facing Phantom - Low 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.06 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 0.818 W/kg


SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.433 mW/g

Maximum value of SAR (measured) = 0.669 mW/g

124: Front of EUT Facing Phantom LTE Band 4 20MHz BW 50% RB Middle CH20175

Date: 09/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

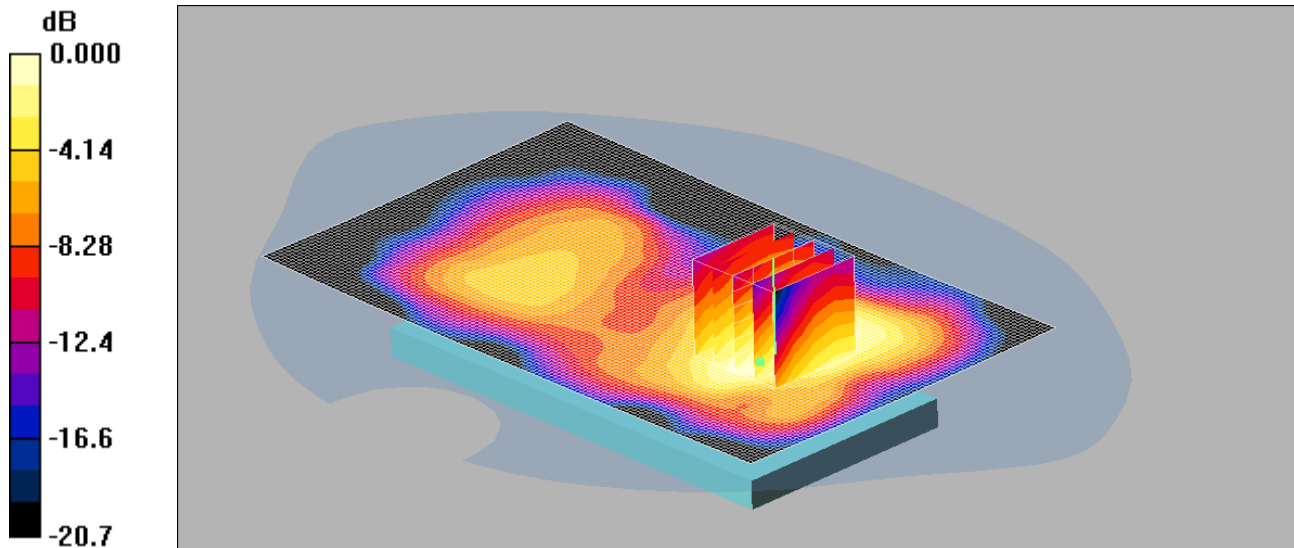

0 dB = 0.707mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.724 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 3 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.32 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.869 W/kg


SAR(1 g) = 0.658 mW/g; SAR(10 g) = 0.444 mW/g

Maximum value of SAR (measured) = 0.707 mW/g

125: Front of EUT Facing Phantom LTE Band 4 20MHz BW 50% RB Middle CH20300

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

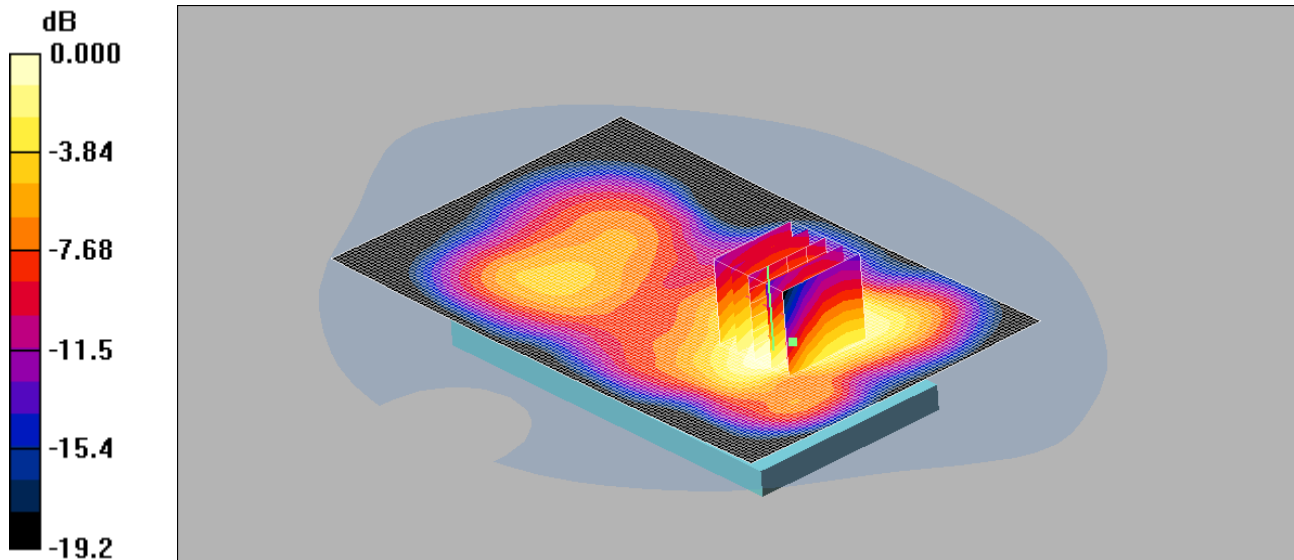

0 dB = 0.726mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.771 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 3 2 (5x5x7)/Cube 0: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.99 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 0.907 W/kg


SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.451 mW/g

Maximum value of SAR (measured) = 0.726 mW/g

126: Front of EUT Facing Phantom LTE Band 4 20MHz BW 100%RB Middle CH20300

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

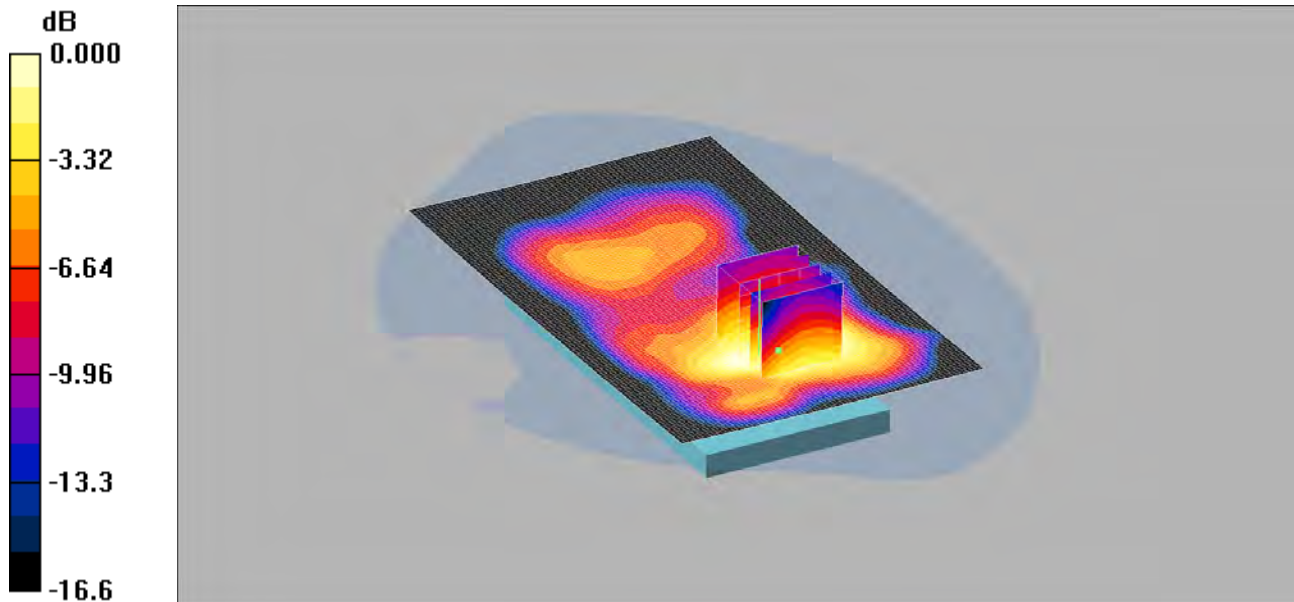

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.770 mW/g

Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.41 V/m; Power Drift = 0.125 dB

Peak SAR (extrapolated) = 0.923 W/kg


SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.467 mW/g

Maximum value of SAR (measured) = 0.738 mW/g

127: Back of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Middle CH20175

Date: 09/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

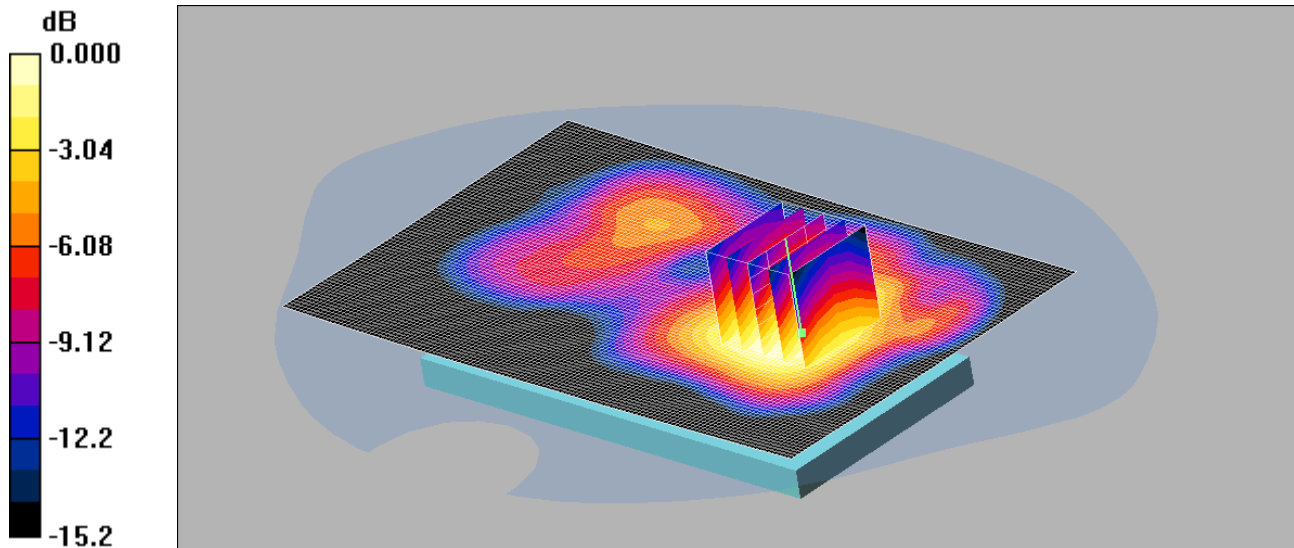

0 dB = 1.07mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.14 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 1.28 W/kg


SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.686 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

128: Back of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Middle CH20050

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

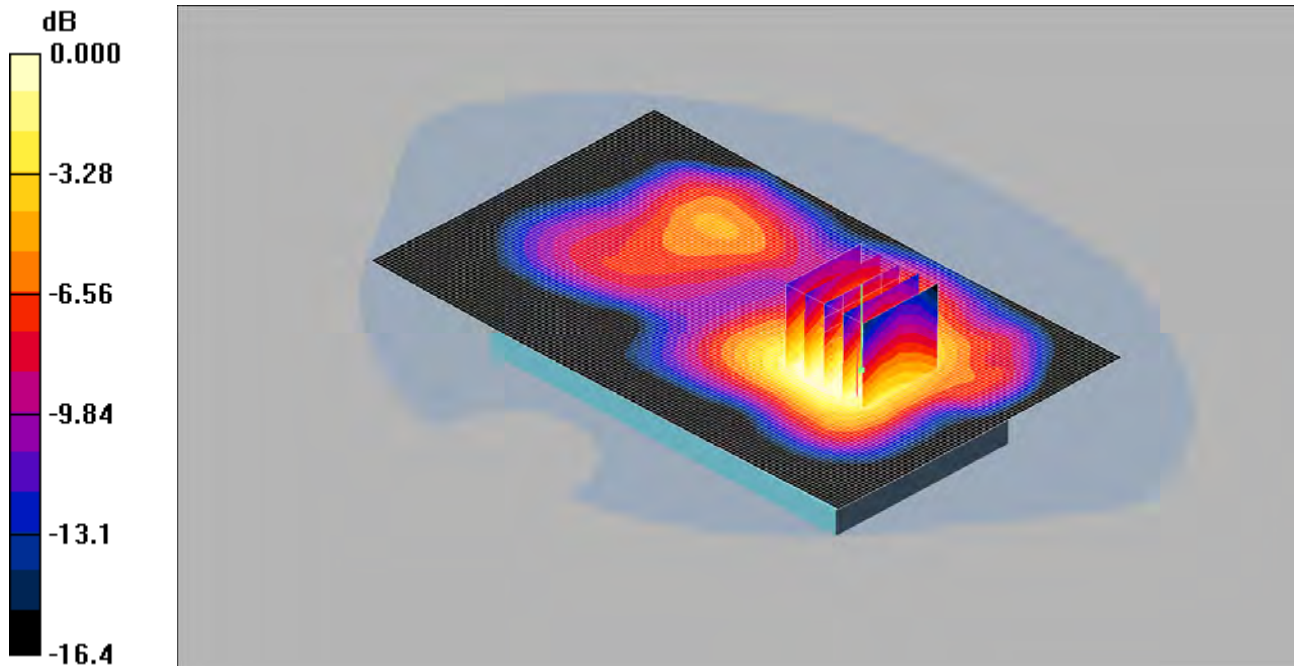

0 dB = 1.07mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 mW/g

Back of EUT Facing Phantom -Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = 0.088 dB

Peak SAR (extrapolated) = 1.26 W/kg


SAR(1 g) = 1 mW/g; SAR(10 g) = 0.684 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

129: Back of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Middle CH20300

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

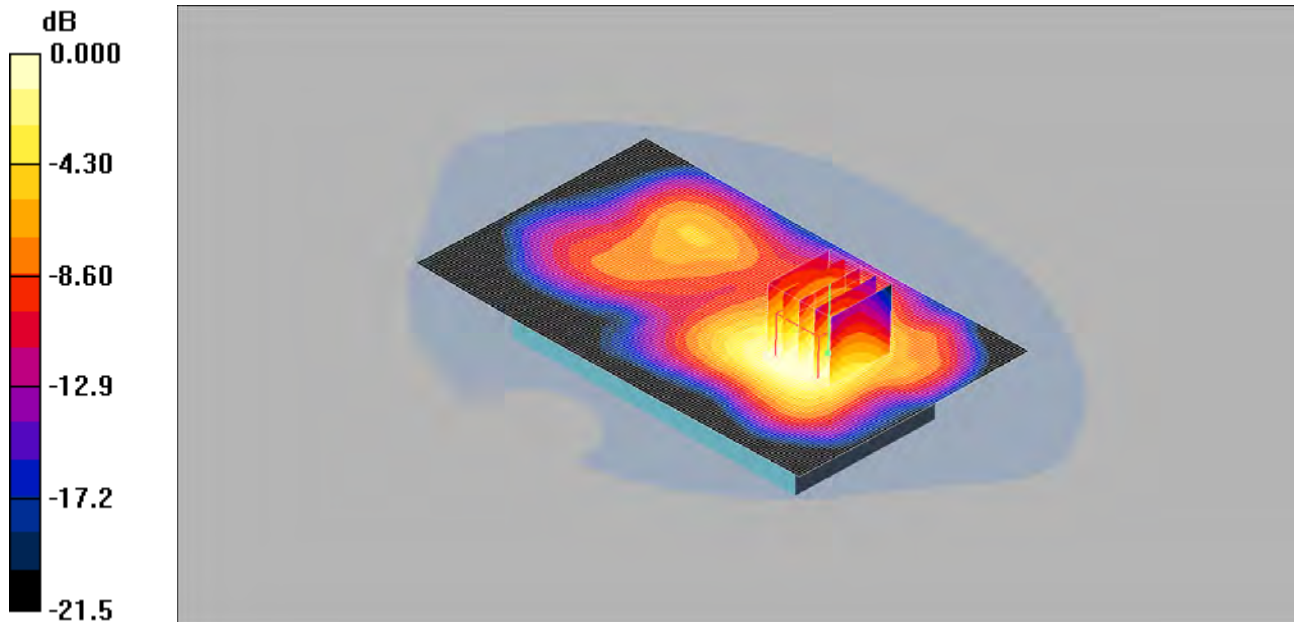

0 dB = 1.15mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.16 mW/g

Back of EUT Facing Phantom -High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 1.35 W/kg


SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.710 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

130: Back of EUT Facing Phantom LTE Band 4 20MHz BW 50%RB Middle CH20050

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

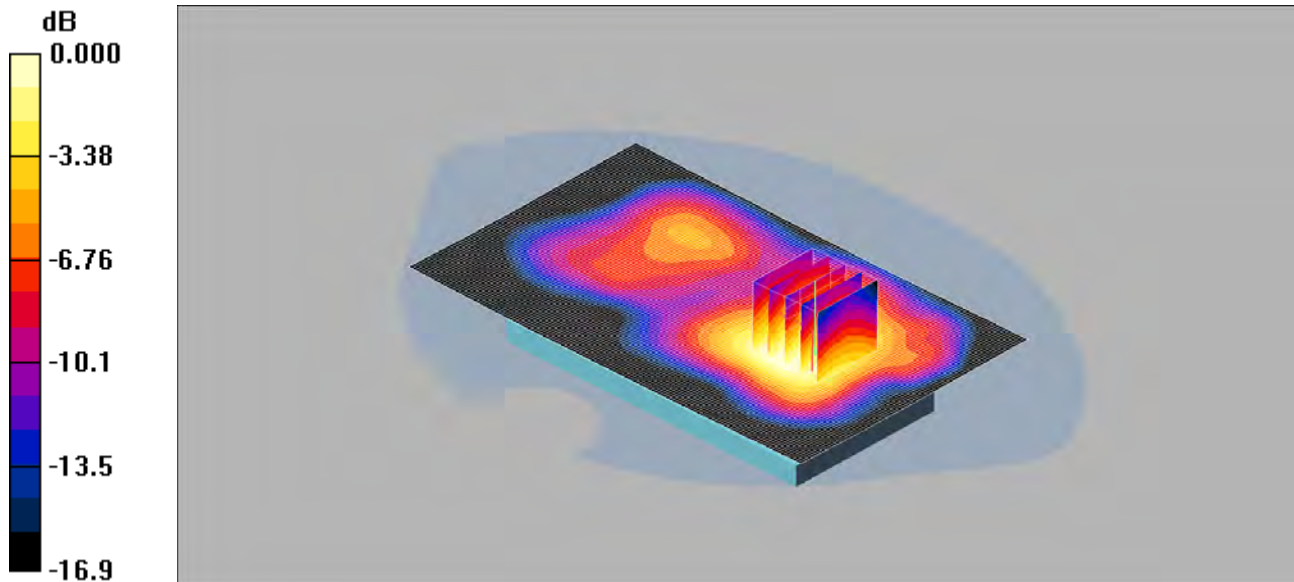

0 dB = 0.809mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz;Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.846 mW/g

Back of EUT Facing Phantom -Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.966 W/kg


SAR(1 g) = 0.753 mW/g; SAR(10 g) = 0.512 mW/g

Maximum value of SAR (measured) = 0.809 mW/g

131: Back of EUT Facing Phantom LTE Band 4 20MHz BW 50%RB Middle CH20175

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

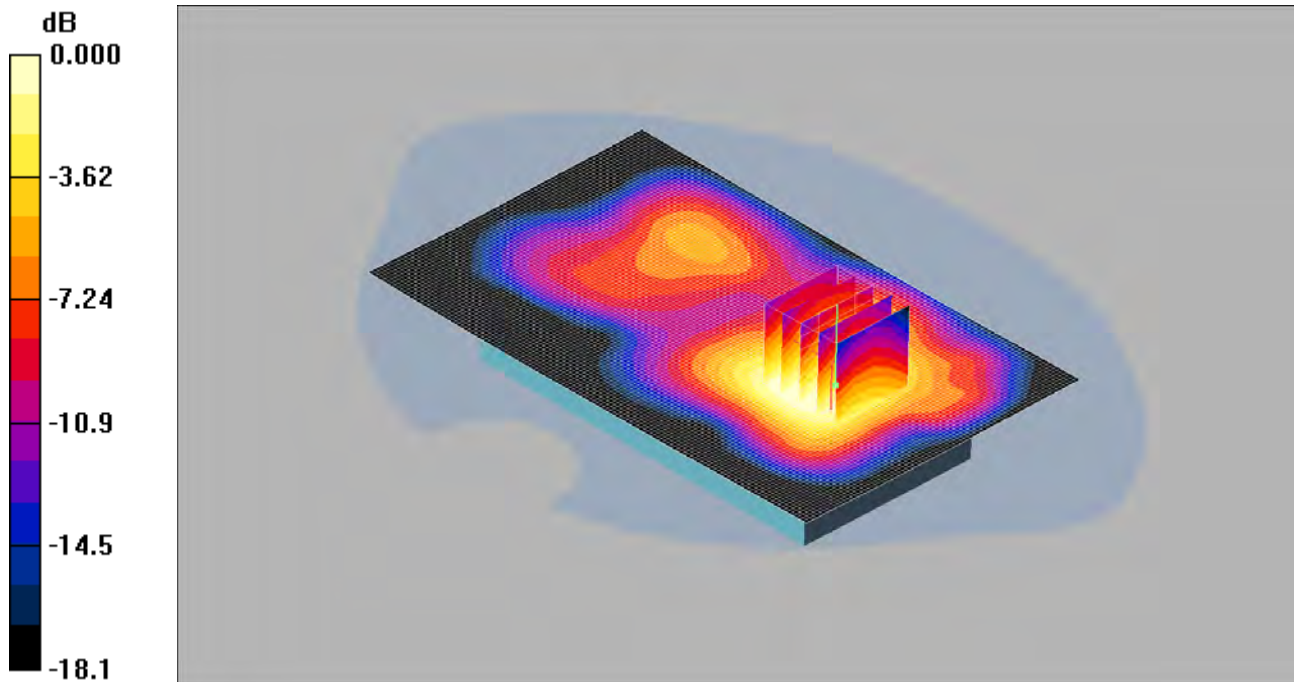

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.845 mW/g

Back of EUT Facing Phantom -Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.991 W/kg


SAR(1 g) = 0.768 mW/g; SAR(10 g) = 0.518 mW/g

Maximum value of SAR (measured) = 0.826 mW/g

132: Back of EUT Facing Phantom LTE Band 4 20MHz BW 50%RB Middle CH20300

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

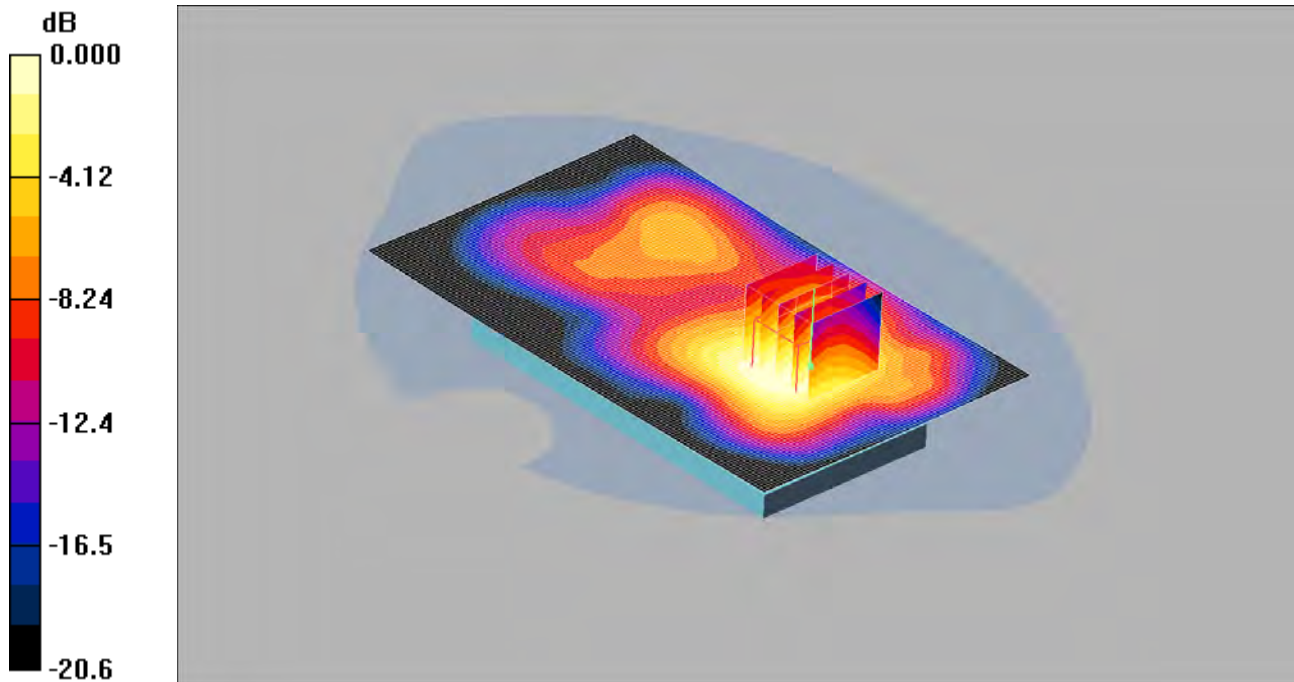

0 dB = 0.833mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.861 mW/g

Back of EUT Facing Phantom -High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.988 W/kg


SAR(1 g) = 0.771 mW/g; SAR(10 g) = 0.521 mW/g

Maximum value of SAR (measured) = 0.833 mW/g

133: Back of EUT Facing Phantom LTE Band 4 20MHz BW 100%RB Middle CH20300

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

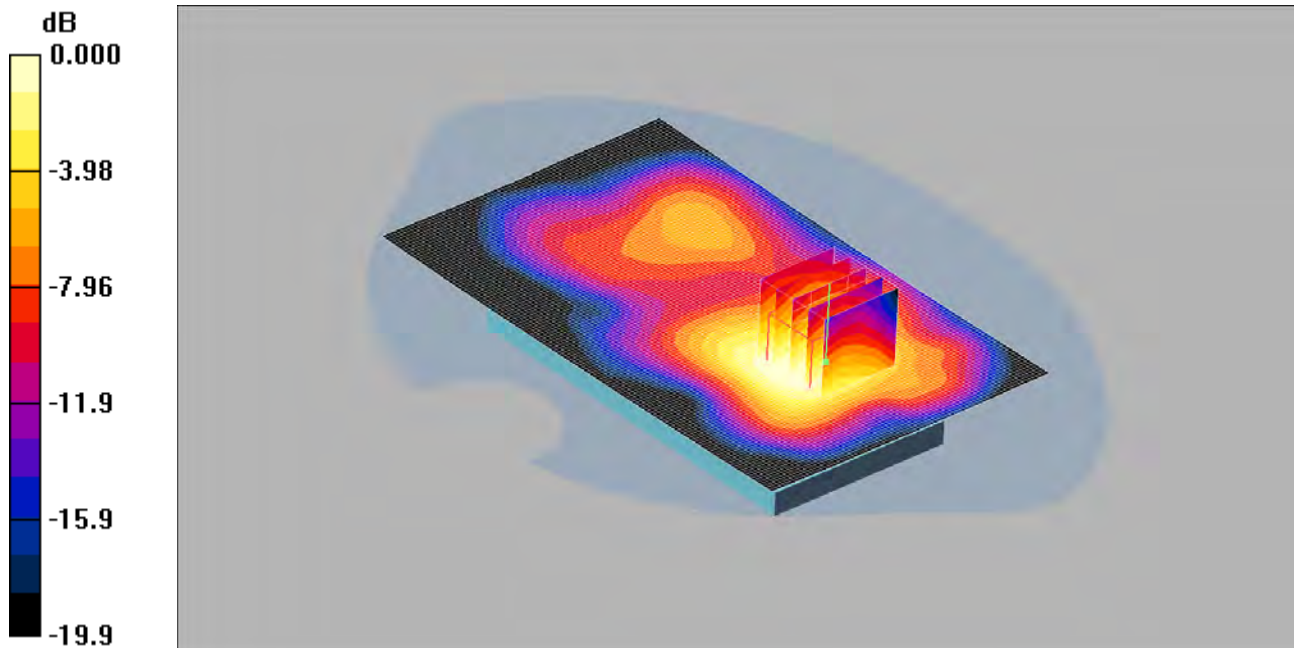

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.879 mW/g

Back of EUT Facing Phantom -High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 1.02 W/kg


SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.533 mW/g

Maximum value of SAR (measured) = 0.851 mW/g

134: Left Hand side of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Middle CH20175

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

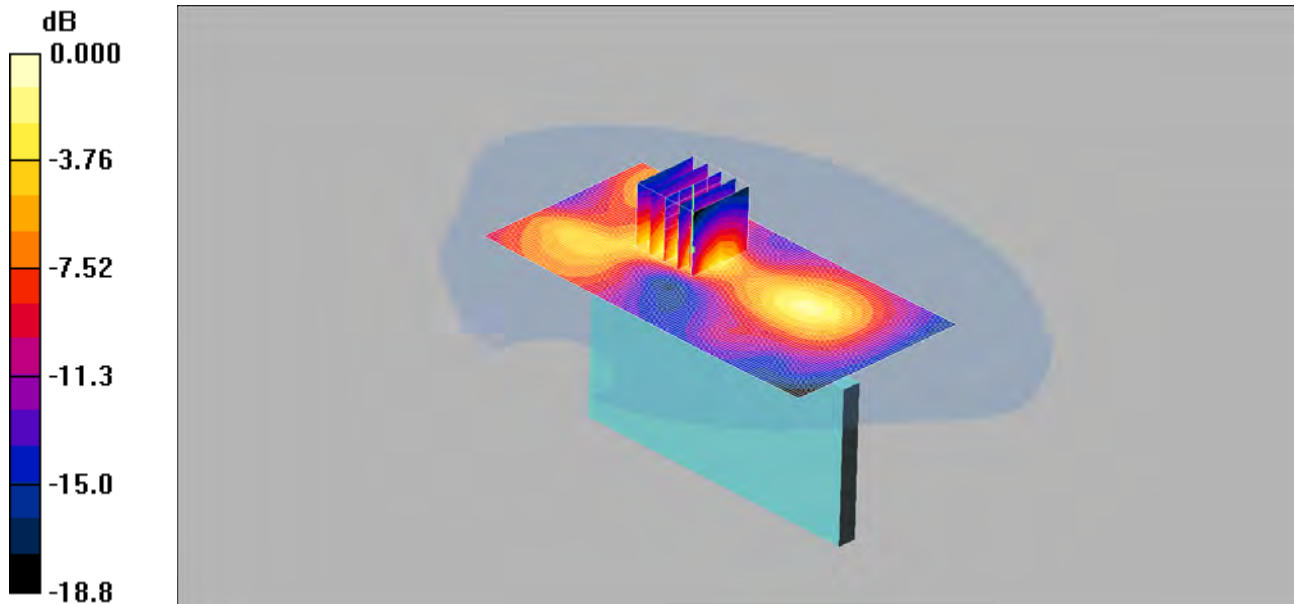

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom - Middle/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.186 mW/g

Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.71 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.291 W/kg


SAR(1 g) = 0.170 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.198 mW/g

135: Left Hand side of EUT Facing Phantom LTE Band 4 20MHz BW 50%RB Middle CH20050

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

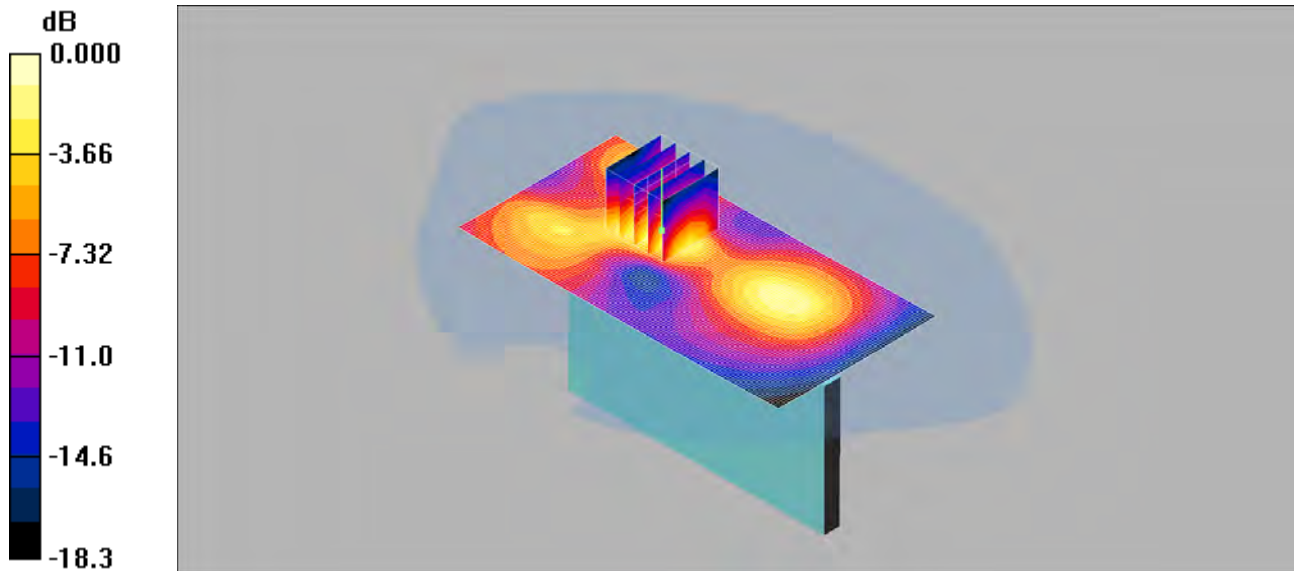

0 dB = 0.145mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom - Low/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.137 mW/g

Left Hand Side of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.70 V/m; Power Drift = 0.087 dB

Peak SAR (extrapolated) = 0.217 W/kg


SAR(1 g) = 0.128 mW/g; SAR(10 g) = 0.065 mW/g

Maximum value of SAR (measured) = 0.145 mW/g

136: Right Hand side of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Middle CH20175

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

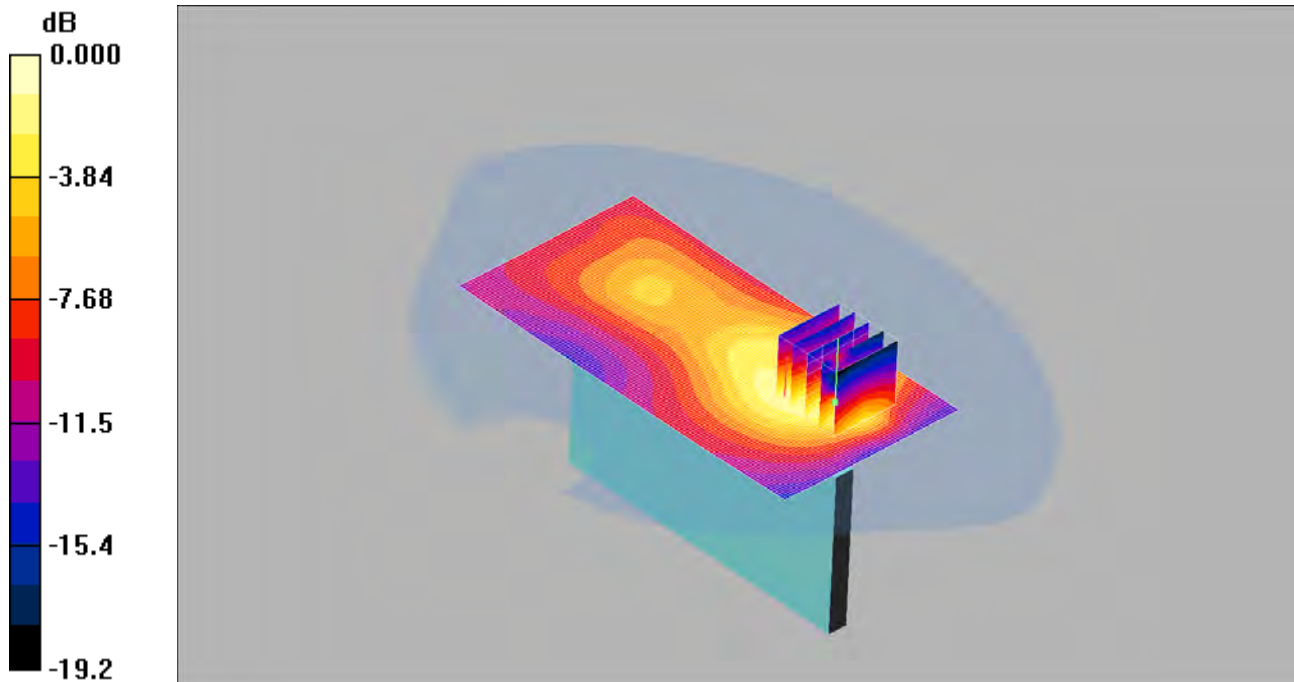

0 dB = 0.150mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom - Middle/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.142 mW/g

Right Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.46 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.212 W/kg


SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.150 mW/g

137: Right Hand side of EUT Facing Phantom LTE Band 4 20MHz BW 50%RB Middle CH20050

Date: 10/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

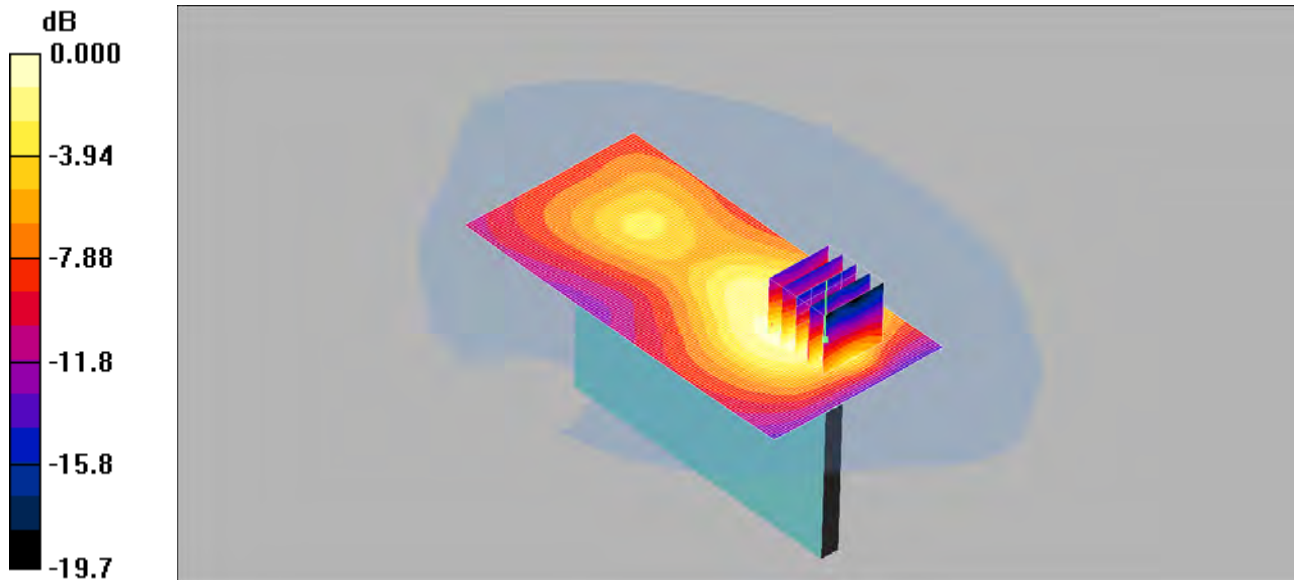

0 dB = 0.097mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom - Low/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.101 mW/g

Right Hand Side of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.84 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.153 W/kg


SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.097 mW/g

138: Bottom of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Middle CH20175

Date: 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

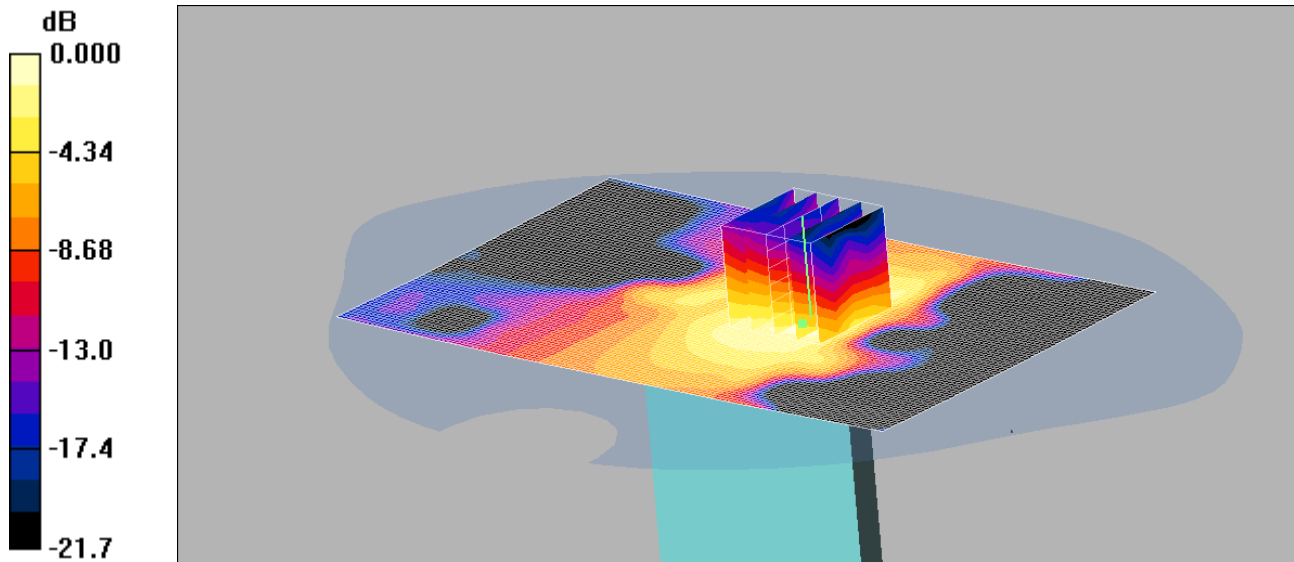

0 dB = 0.204mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.176 mW/g

Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.99 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.338 W/kg


SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.204 mW/g

139: Bottom of EUT Facing Phantom LTE Band 4 20MHz BW 50RB Middle CH20050

Date: 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

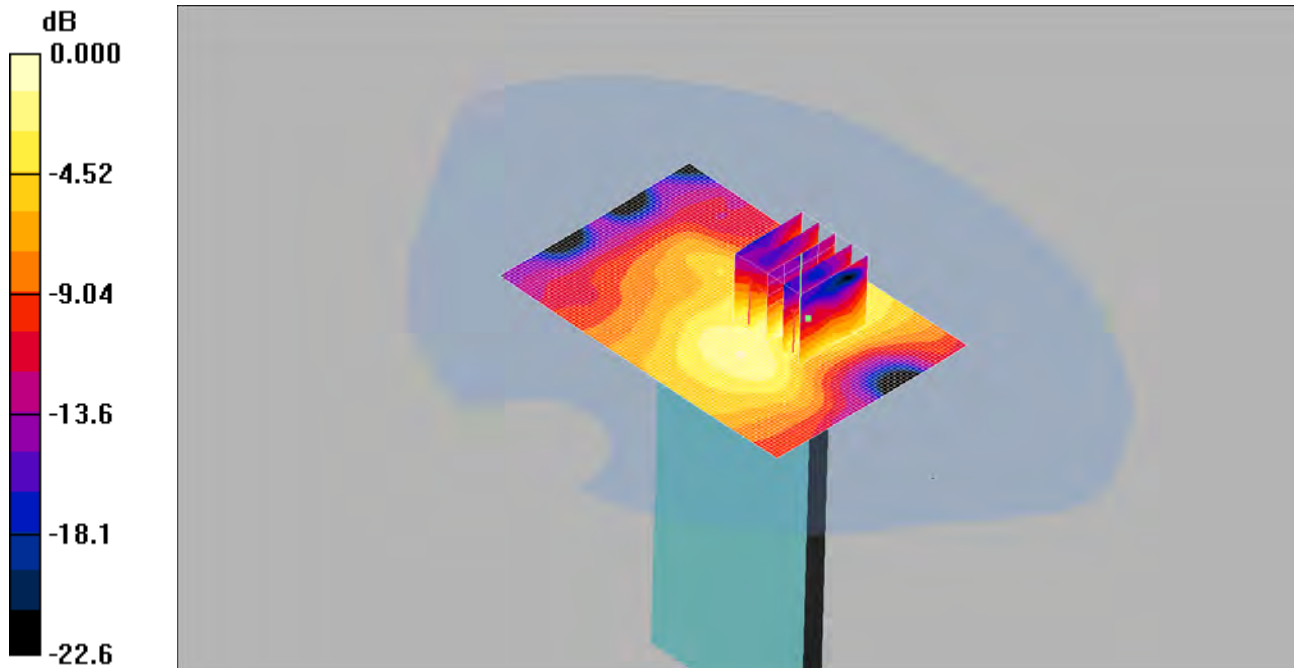

0 dB = 0.121mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.101 mW/g

Bottom of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.43 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.211 W/kg


SAR(1 g) = 0.105 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.121 mW/g

140: Front of EUT Facing Phantom at 15mm LTE Band 4 20MHz BW 1RB Middle CH20300

Date: 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

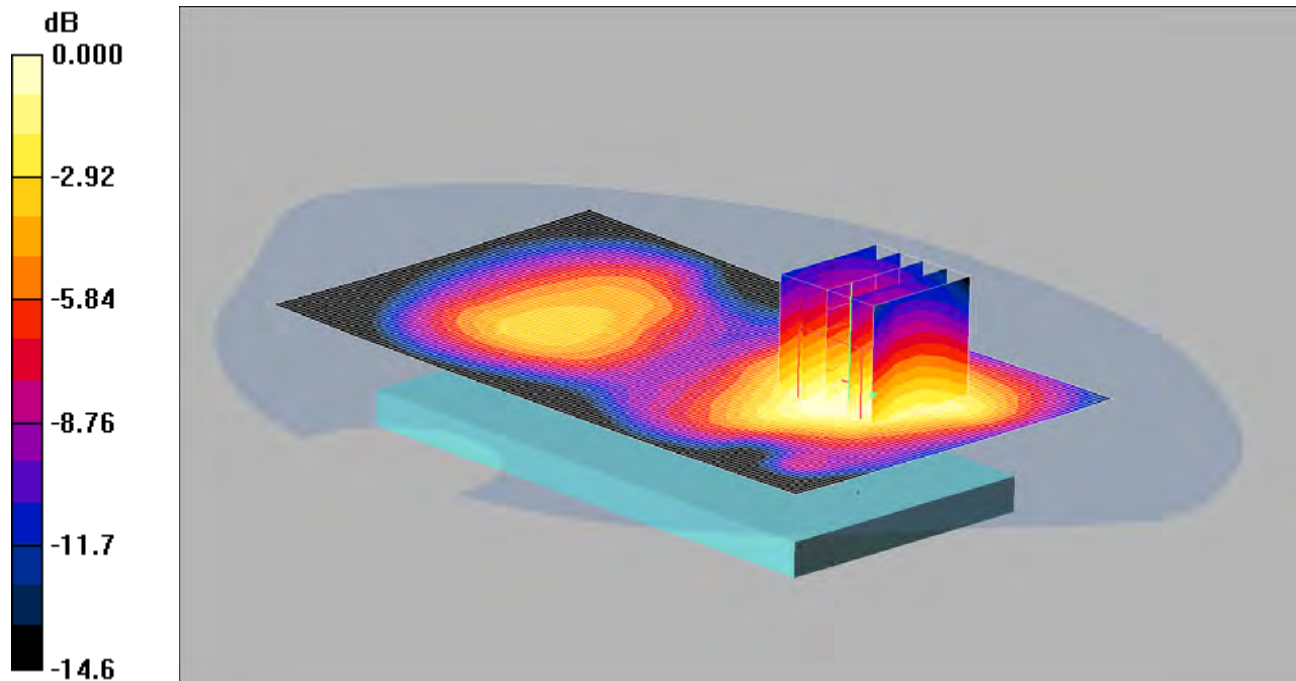

0 dB = 0.610mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom -High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.613 mW/g

Front of EUT Facing Phantom -High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.53 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.753 W/kg


SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.390 mW/g

Maximum value of SAR (measured) = 0.610 mW/g

141: Back of EUT Facing Phantom at15mm LTE Band 4 20MHz BW 1RB Middle CH20300

Date: 11/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

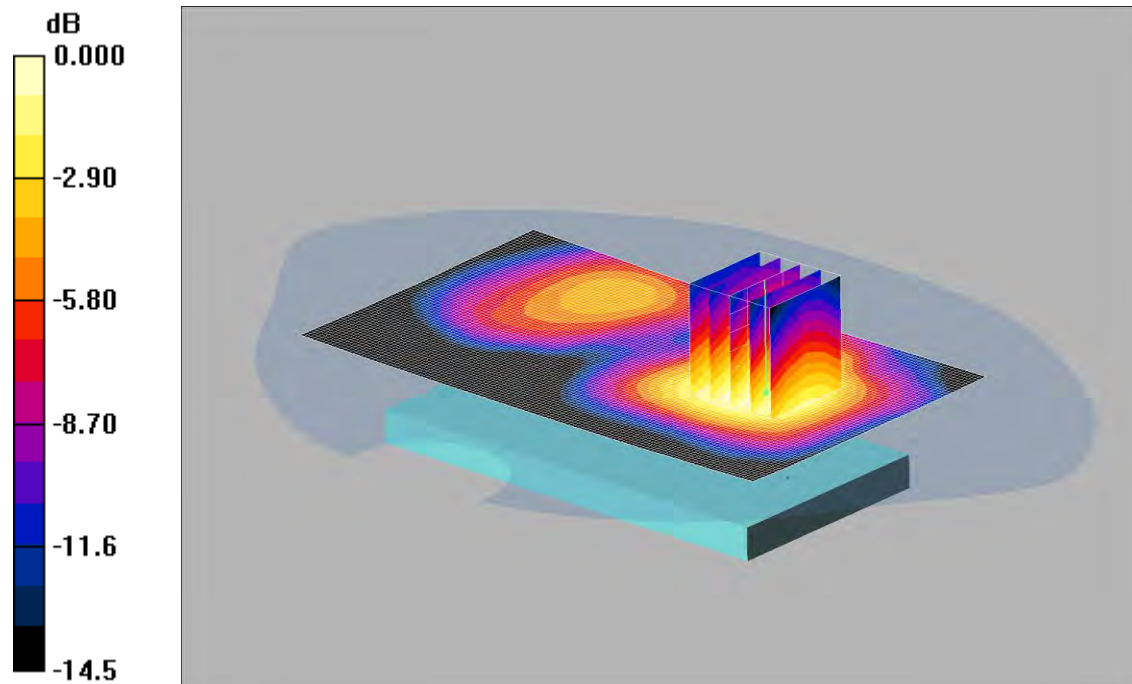

0 dB = 0.647mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 20/09/2012
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.666 mW/g

Back of EUT Facing Phantom -High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.94 V/m; Power Drift = 0.171 dB

Peak SAR (extrapolated) = 0.802 W/kg


SAR(1 g) = 0.610 mW/g; SAR(10 g) = 0.407 mW/g

Maximum value of SAR (measured) = 0.647 mW/g

142: Touch Left LTE Band 5 10MHz BW 1RB Middle CH20525

Date: 01/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

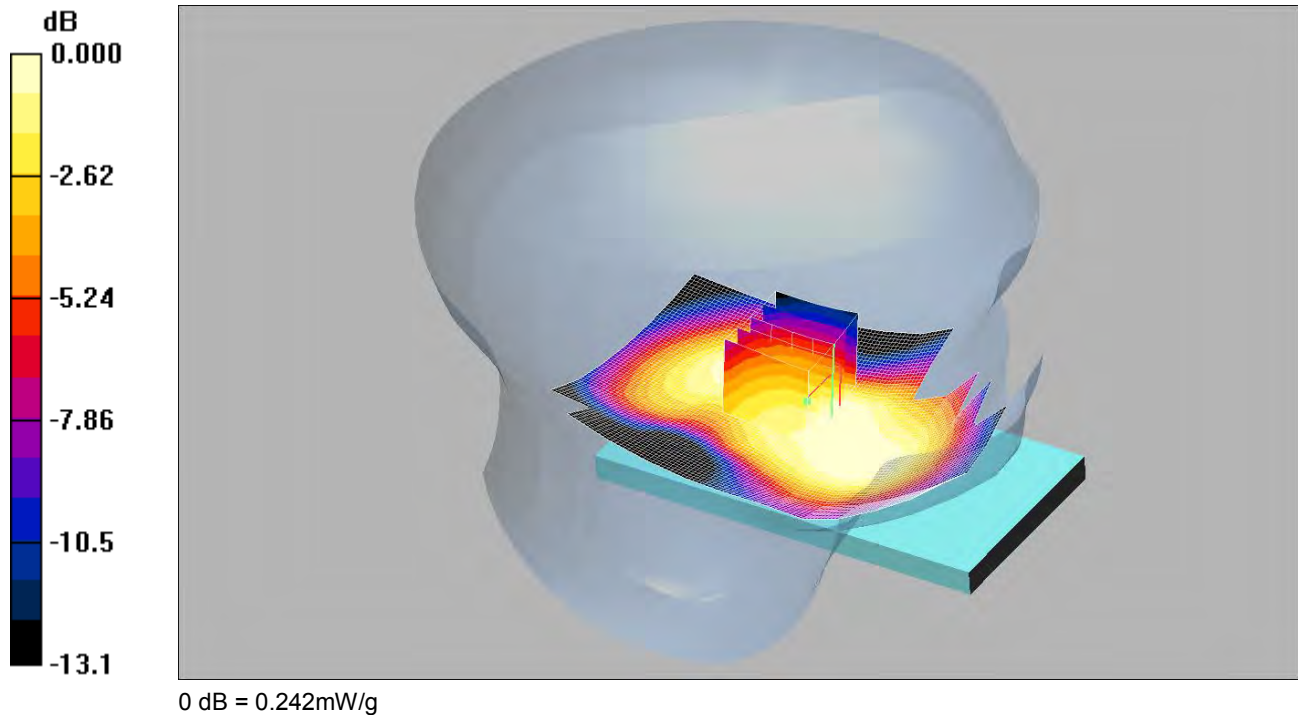

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.24, 6.24, 6.24); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.256 mW/g

Touch Left - Middle 2 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.317 W/kg


SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.242 mW/g

143: Touch Left LTE Band 5 10MHz BW 50%RB Middle CH20525

Date: 01/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

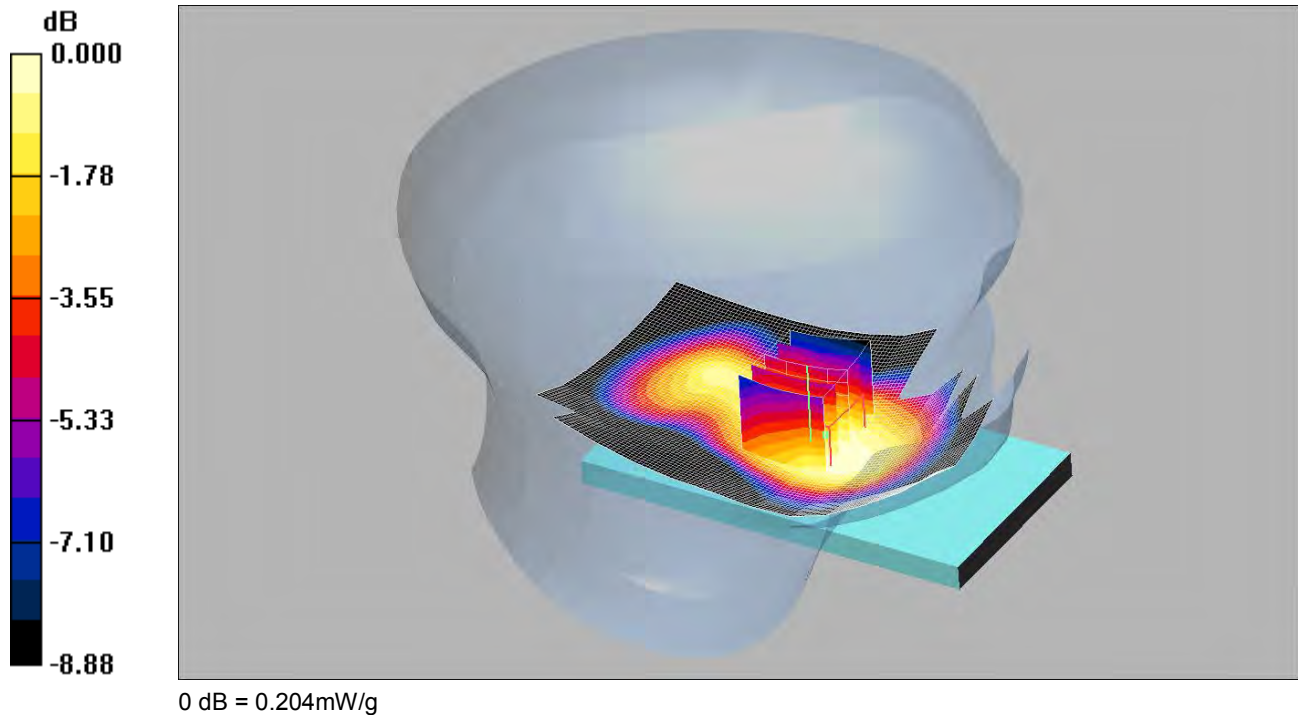

0 dB = 0.204mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.24, 6.24, 6.24); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.195 mW/g

Touch Left - Middle 2 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 0.225 W/kg


SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.154 mW/g

Maximum value of SAR (measured) = 0.204 mW/g

144: Tilt Left LTE Band 5 10MHz BW 1RB Middle CH20525

Date: 01/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

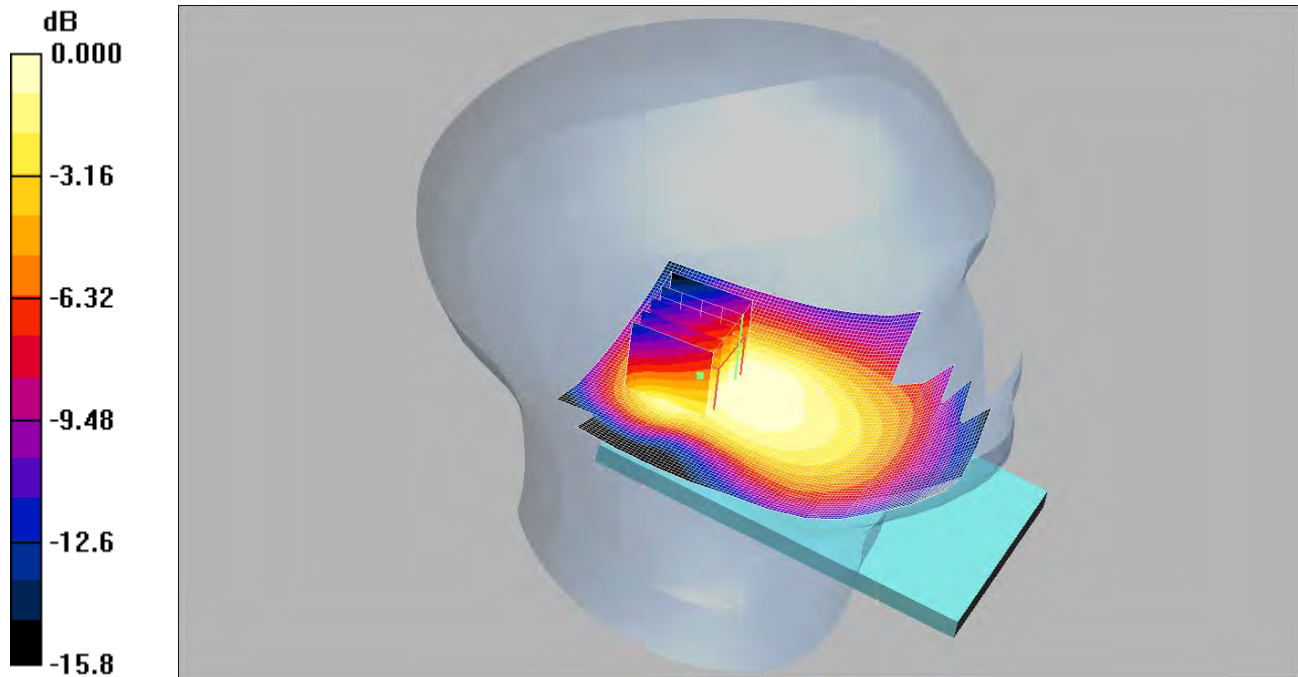

0 dB = 0.199mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.24, 6.24, 6.24); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.210 mW/g

Tilt Left - Middle 2 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.0 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.286 W/kg


SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.199 mW/g

145: Tilt Left LTE Band 5 10MHz BW 50%RB Middle CH20525

Date: 01/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

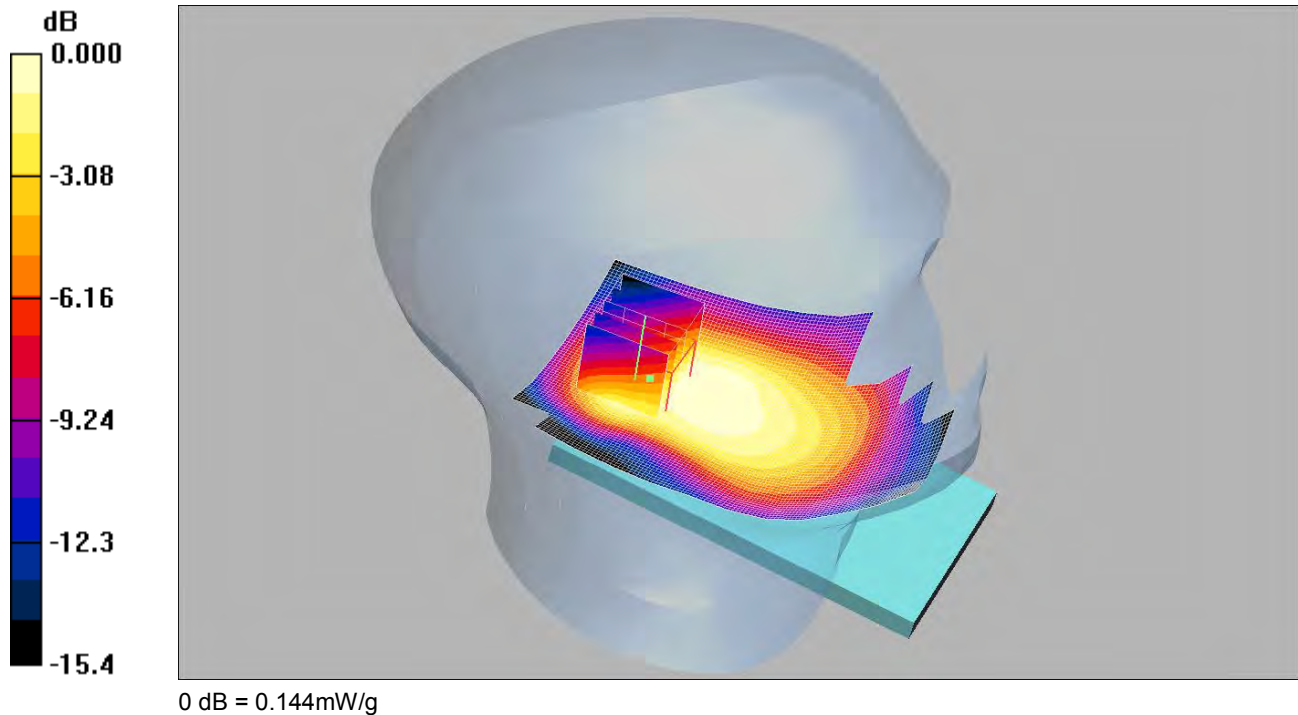

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.24, 6.24, 6.24); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.159 mW/g

Tilt Left - Middle 2 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.219 W/kg


SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.144 mW/g

146: Touch Right LTE Band 5 10MHz BW 1RB Middle CH20525

Date: 01/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

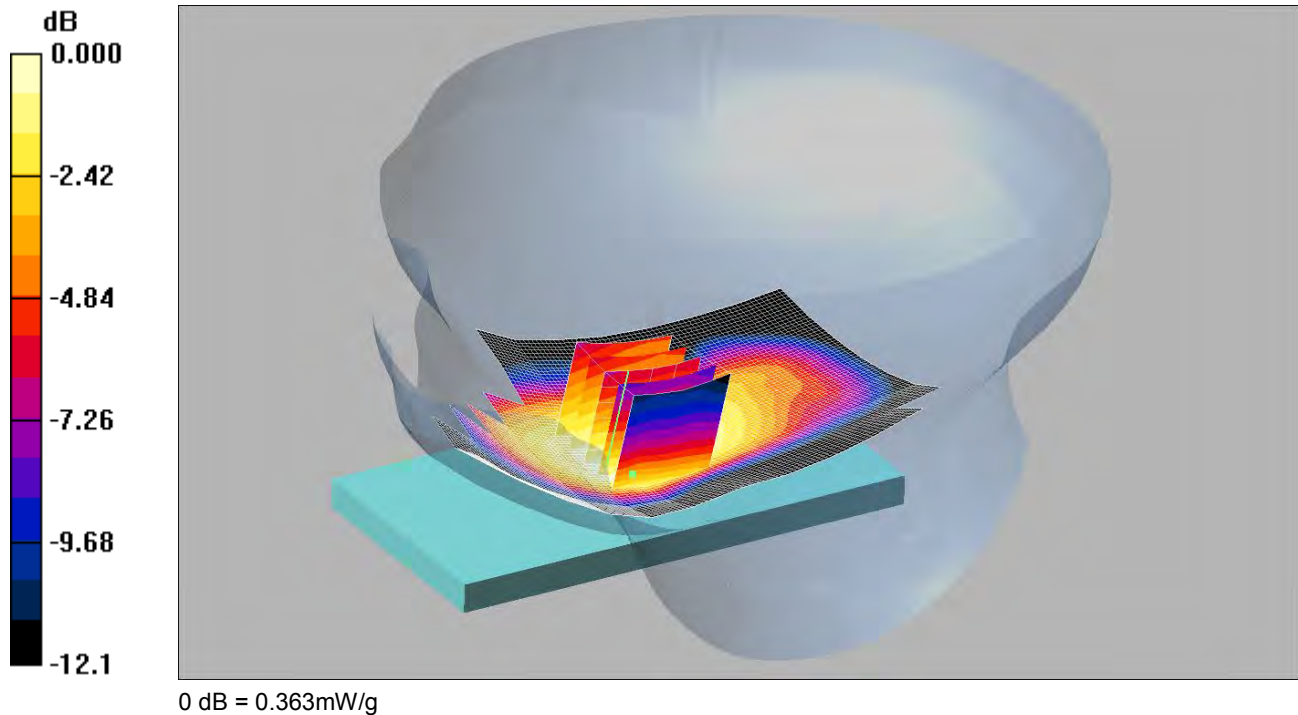

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.24, 6.24, 6.24); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.406 mW/g

Touch Right- Middle 2 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.483 W/kg


SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.270 mW/g

Maximum value of SAR (measured) = 0.363 mW/g

147: Touch Right LTE Band 5 10MHz BW 50%RB Middle CH20525

Date: 01/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

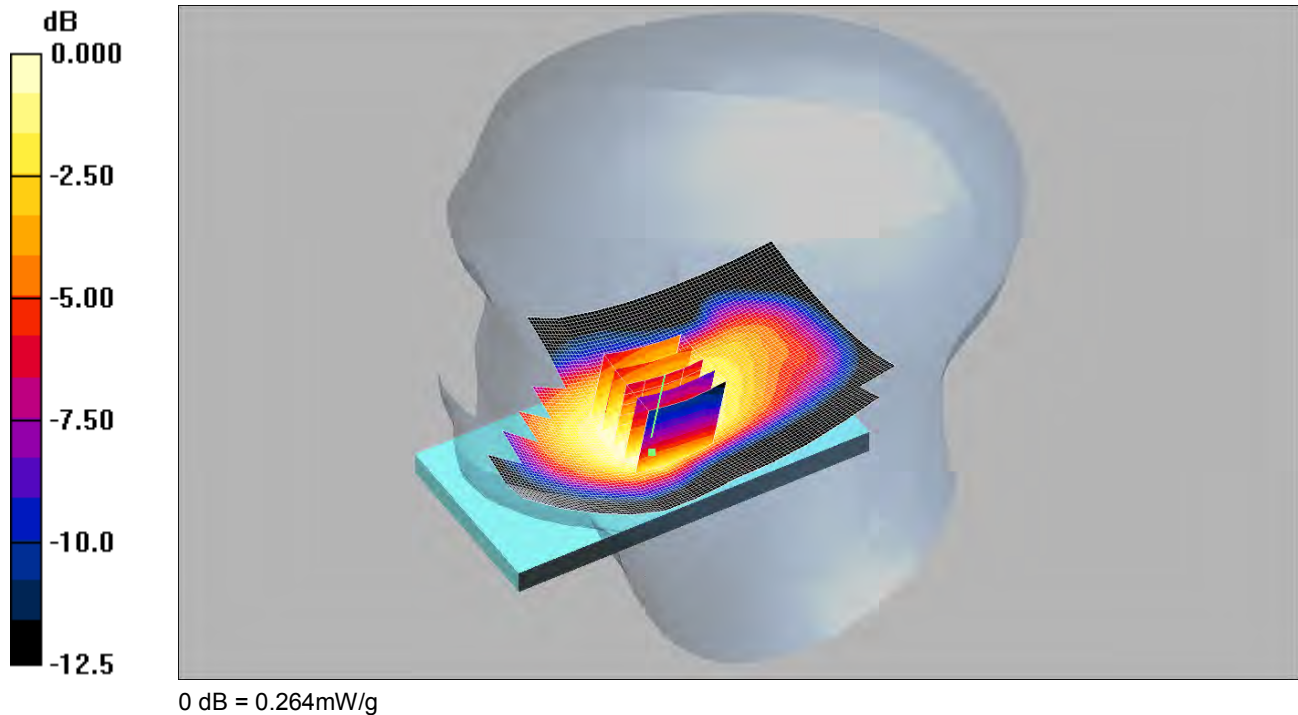

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.24, 6.24, 6.24); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.302 mW/g

Touch Right- Middle 2 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.347 W/kg


SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.264 mW/g

148: Tilt Right LTE Band 5 10MHz BW 1RB Middle CH20525

Date: 01/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

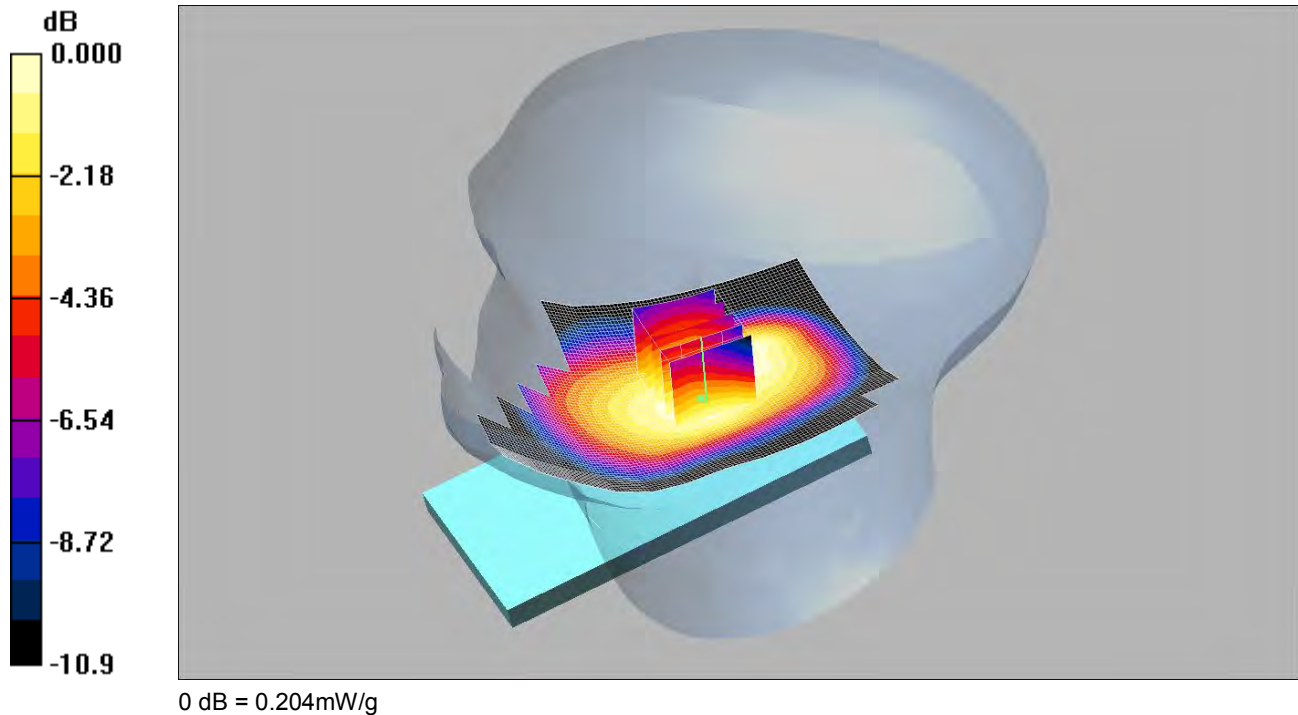

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.24, 6.24, 6.24); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Right- Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.207 mW/g

Tilt Right- Middle 2 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = 0.087 dB

Peak SAR (extrapolated) = 0.226 W/kg


SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.204 mW/g

149: Tilt Right LTE Band 5 10MHz BW 50%RB Middle CH20525

Date: 01/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

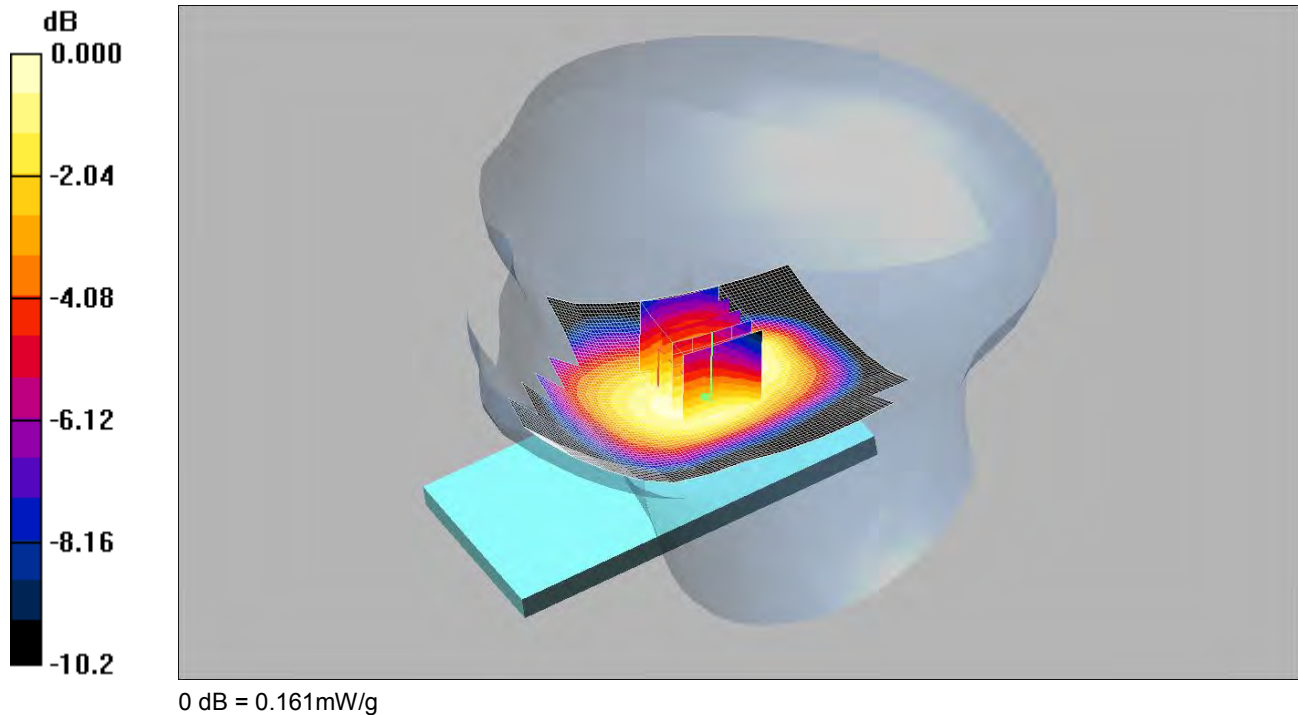

0 dB = 0.161mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.24, 6.24, 6.24); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Right- Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.166 mW/g

Tilt Right- Middle 2 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.179 W/kg


SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.161 mW/g

150: Tilt Right LTE Band 5 10MHz BW 1RB Middle CH20450

Date: 01/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

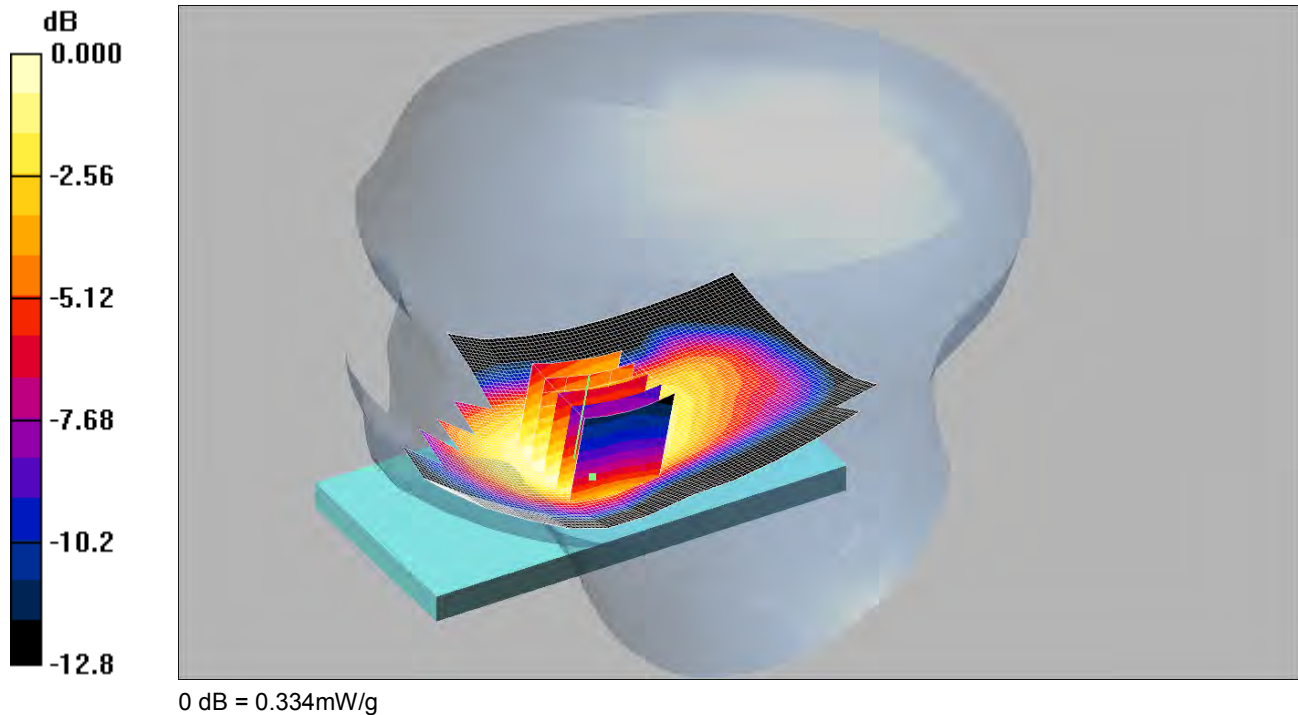

Communication System: LTE Band 5 / 10MHz; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.24, 6.24, 6.24); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.371 mW/g

Touch Right- Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.430 W/kg


SAR(1 g) = 0.318 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 0.334 mW/g

151: Tilt Right LTE Band 5 10MHz BW 1RB Middle CH20600

Date: 01/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

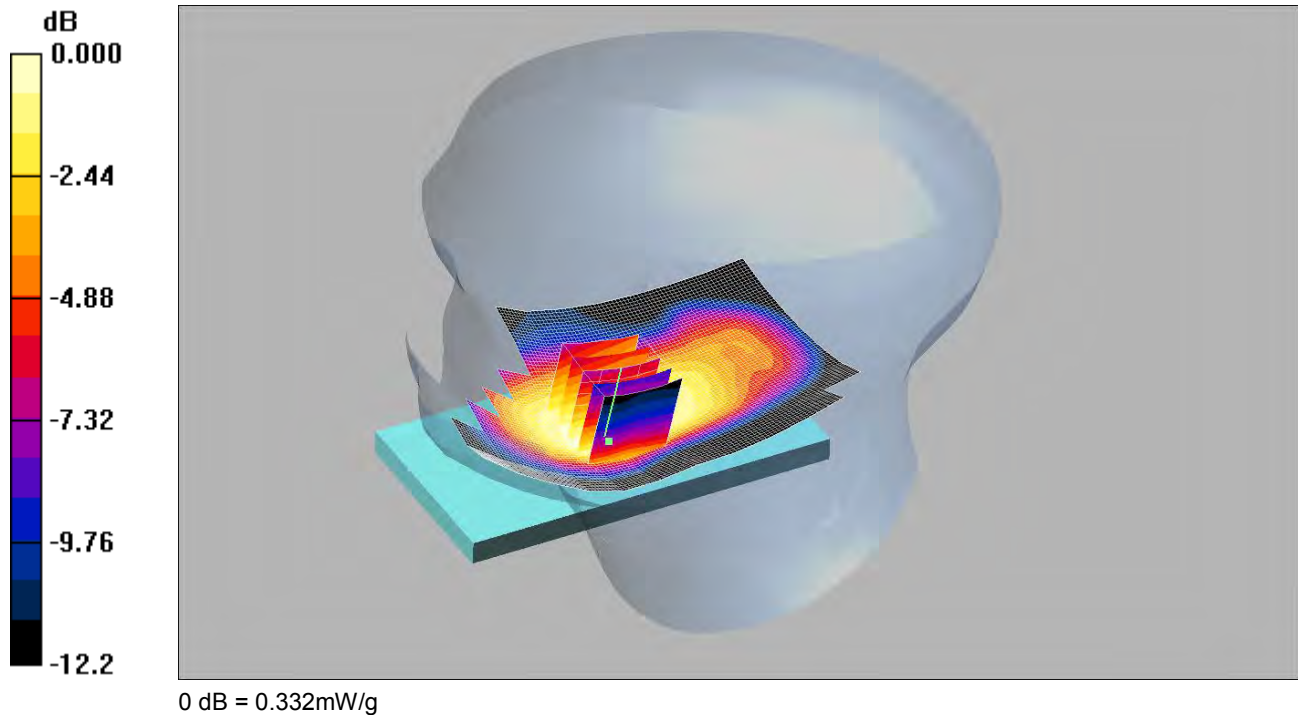

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.922$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.24, 6.24, 6.24); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.390 mW/g

Touch Right- High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 0.450 W/kg


SAR(1 g) = 0.320 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.332 mW/g

152: Front of EUT Facing Phantom LTE Band 5 10MHz BW 1RB Middle CH20525

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

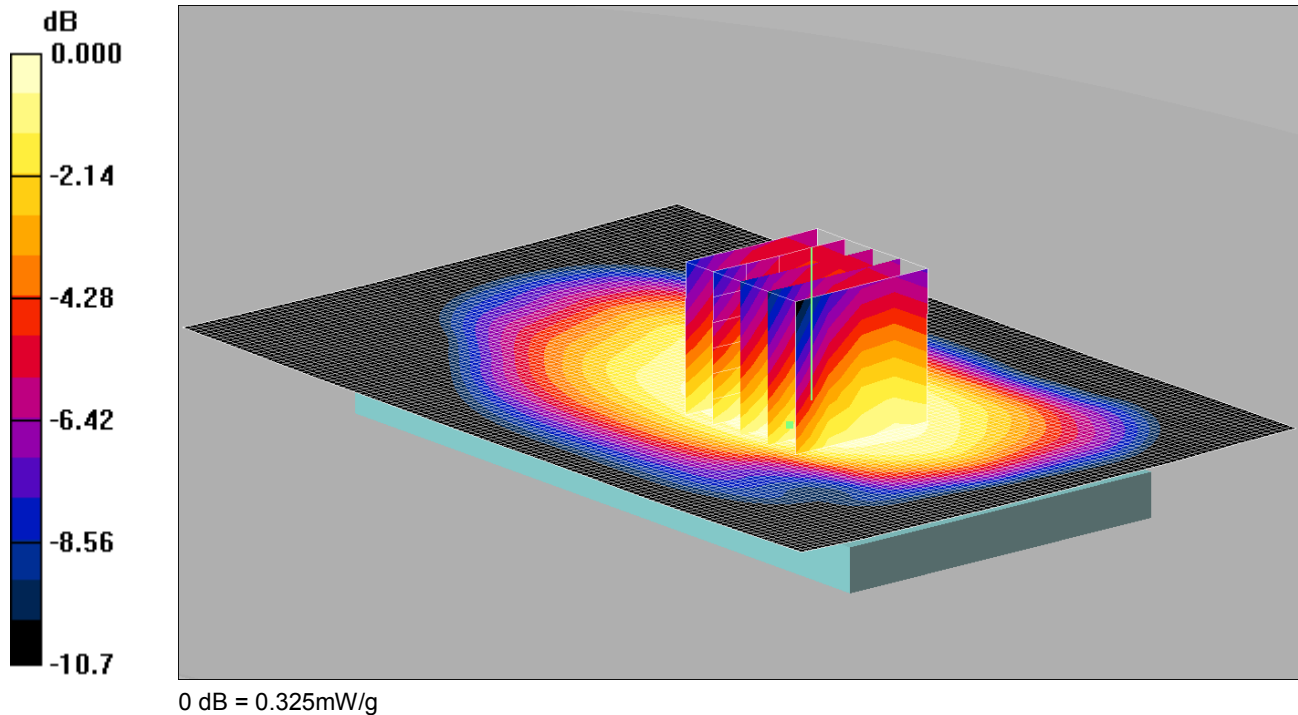

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle 2/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.344 mW/g

Front of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.368 W/kg


SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

153: Front of EUT Facing Phantom LTE Band 5 10MHz BW 50%RB Middle CH20525

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

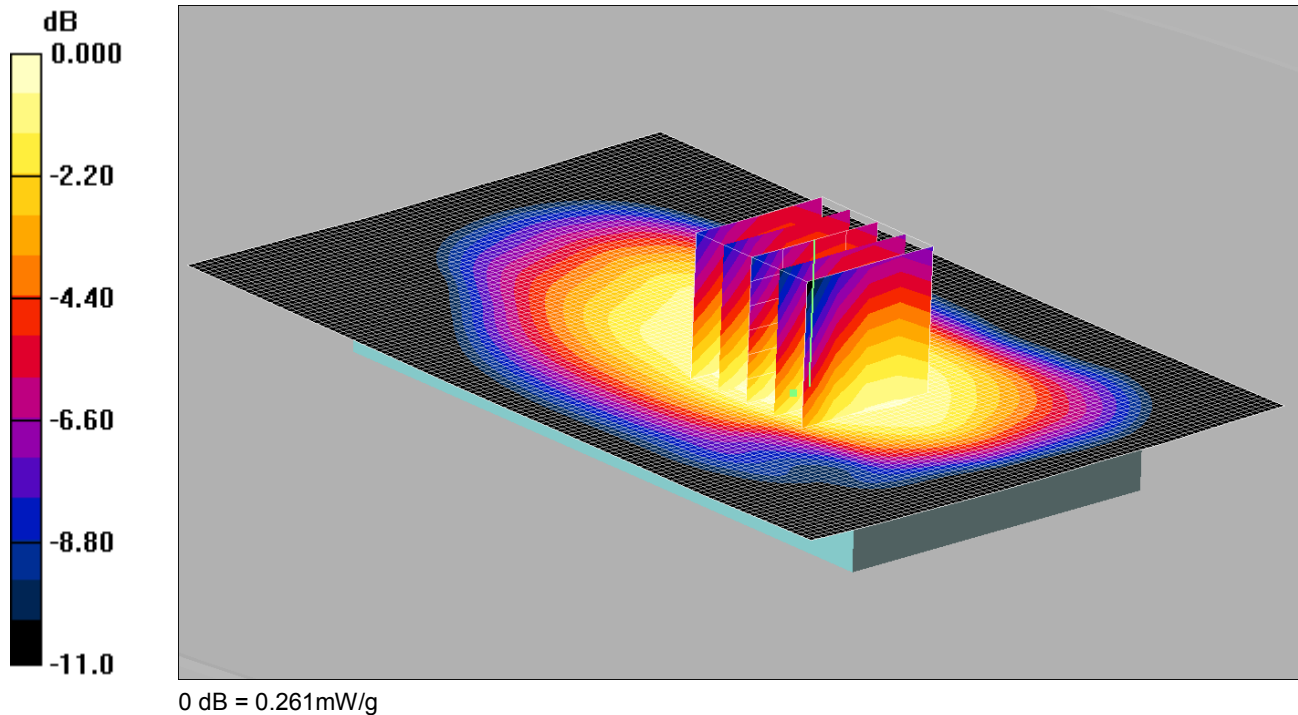

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle 2/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.264 mW/g

Front of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.297 W/kg


SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 0.261 mW/g

154: Back of EUT Facing Phantom LTE Band 5 10MHz BW 1RB Middle CH20525

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

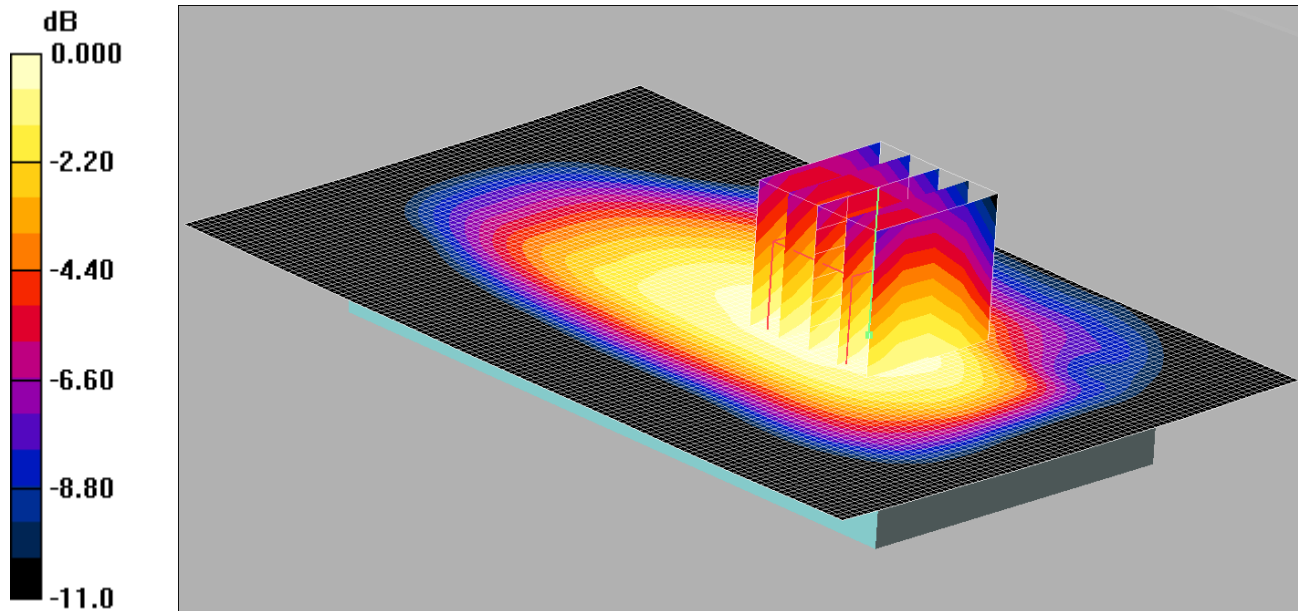

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle 2/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.369 mW/g

Back of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.399 W/kg


SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.263 mW/g

Maximum value of SAR (measured) = 0.354 mW/g

155: Back of EUT Facing Phantom LTE Band 5 10MHz BW 50%RB Middle CH20525

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

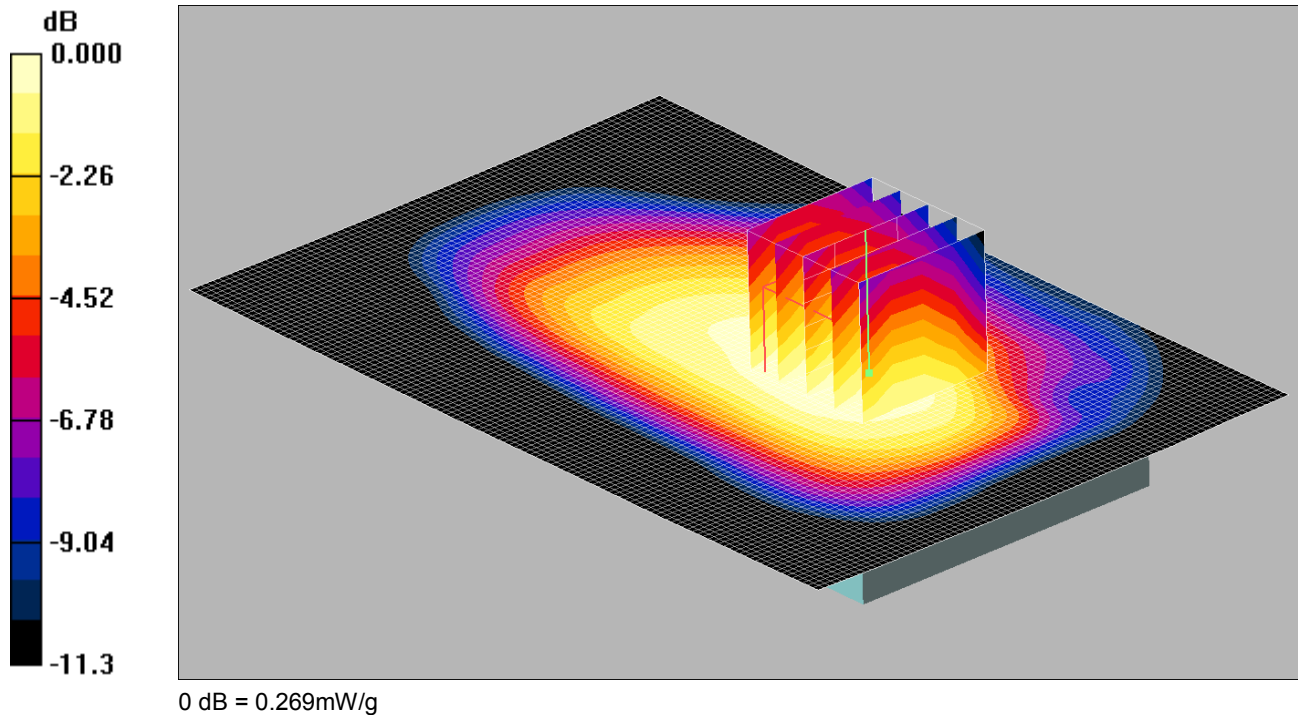

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle 2/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.279 mW/g

Back of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.1 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.310 W/kg


SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.203 mW/g

Maximum value of SAR (measured) = 0.269 mW/g

156: Left Hand Side of EUT Facing Phantom LTE Band 5 10MHz BW 1RB Middle CH20525

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

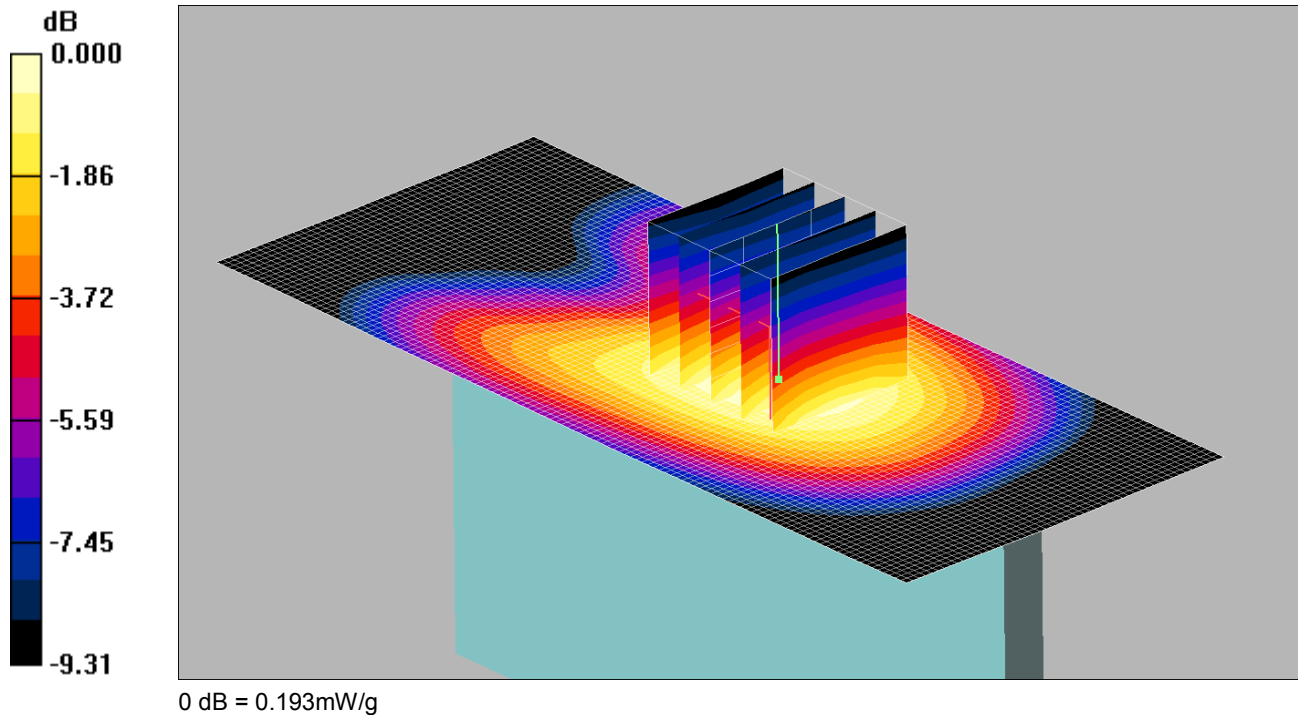

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom - Middle 2/Area Scan (51x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.198 mW/g

Left Hand Side of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.255 W/kg


SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.193 mW/g

157: Left Hand Side of EUT Facing Phantom LTE Band 5 10MHz BW 50%RB Middle CH20525

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

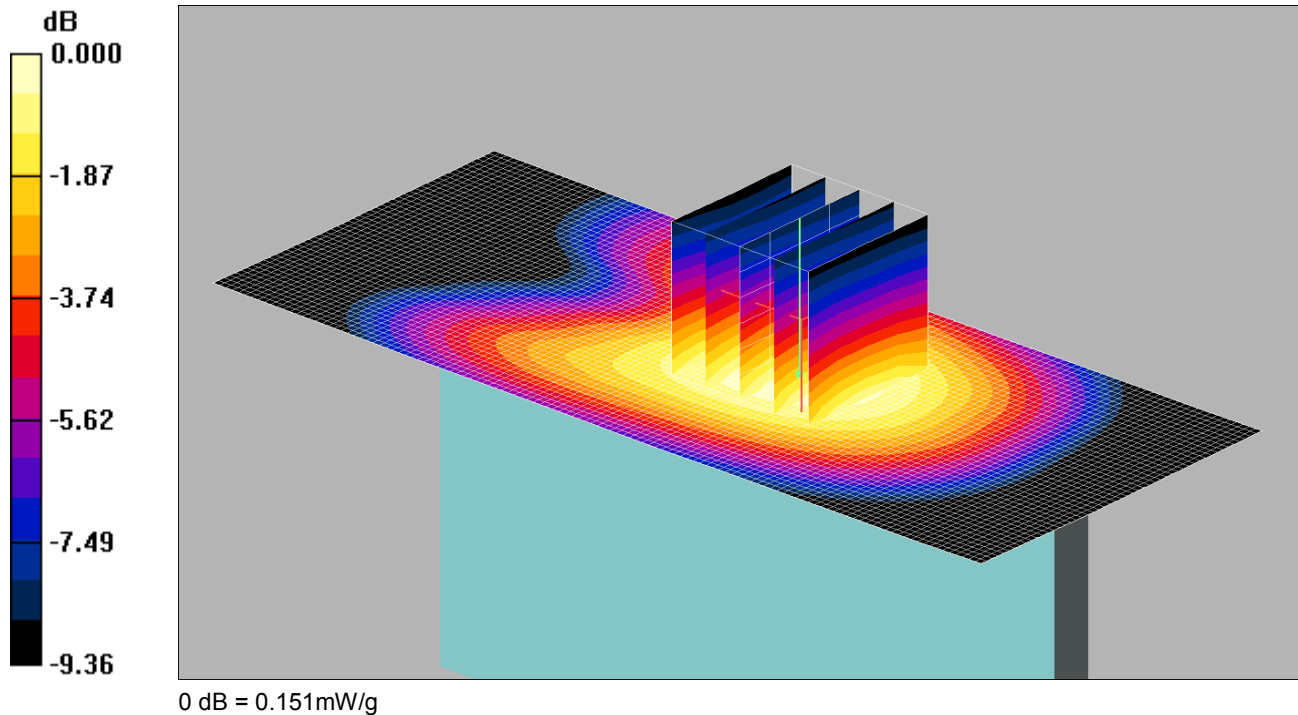

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom - Middle 2/Area Scan (51x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.152 mW/g

Left Hand Side of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.199 W/kg


SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.151 mW/g

158: Right Hand Side of EUT Facing Phantom LTE Band 5 10MHz BW 1RB Middle CH20525

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

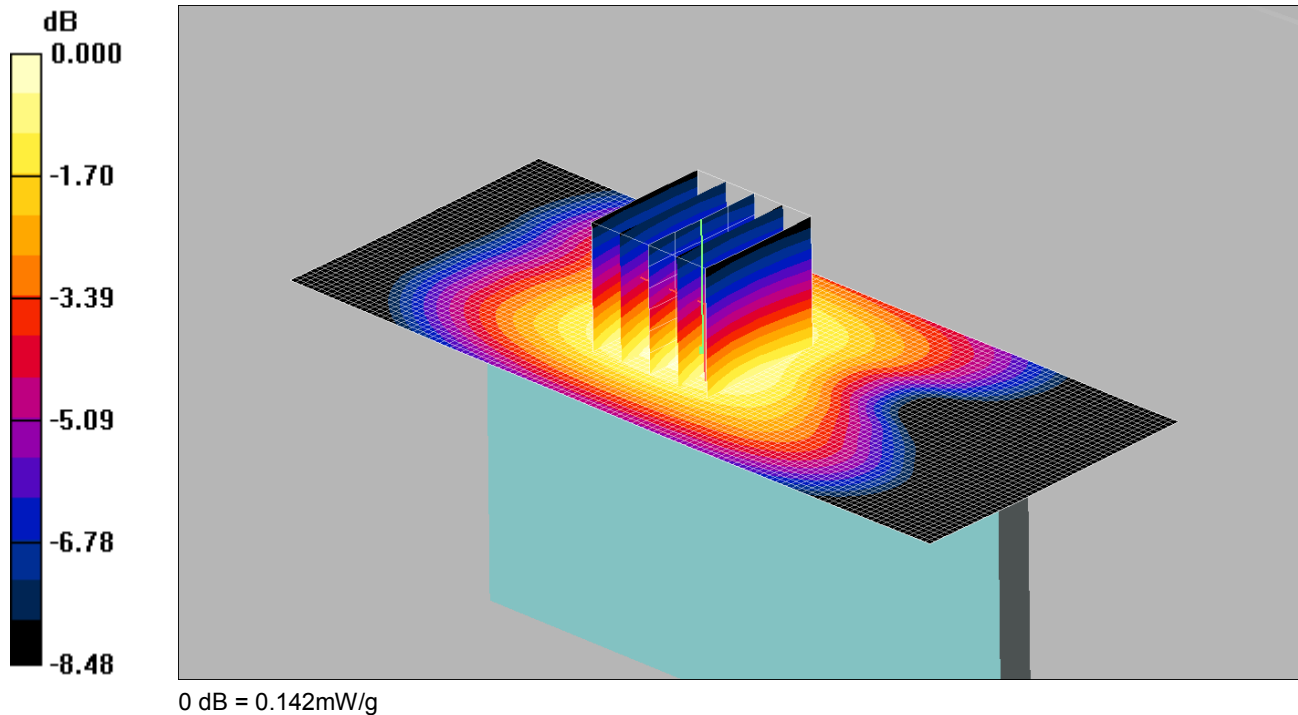

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom - Middle 2/Area Scan (51x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.142 mW/g

Right Hand Side of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.176 W/kg


SAR(1 g) = 0.134 mW/g; SAR(10 g) = 0.097 mW/g

Maximum value of SAR (measured) = 0.142 mW/g

159: Right Hand Side of EUT Facing Phantom LTE Band 5 10MHz BW 50%RB Middle CH20525

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

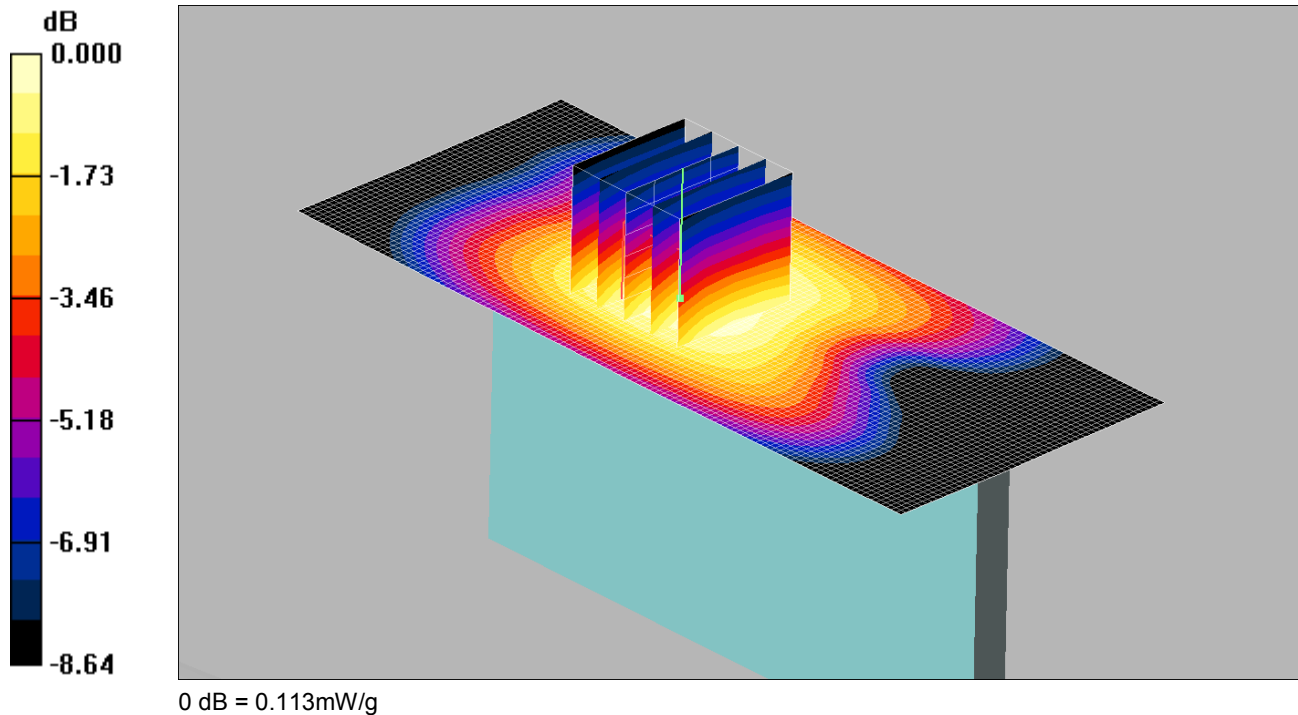

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom - Middle 2/Area Scan (51x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.115 mW/g

Right Hand Side of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.140 W/kg


SAR(1 g) = 0.107 mW/g; SAR(10 g) = 0.078 mW/g

Maximum value of SAR (measured) = 0.113 mW/g

160: Bottom of EUT Facing Phantom LTE Band 5 10MHz BW 1RB Middle CH20525

Date: 09/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

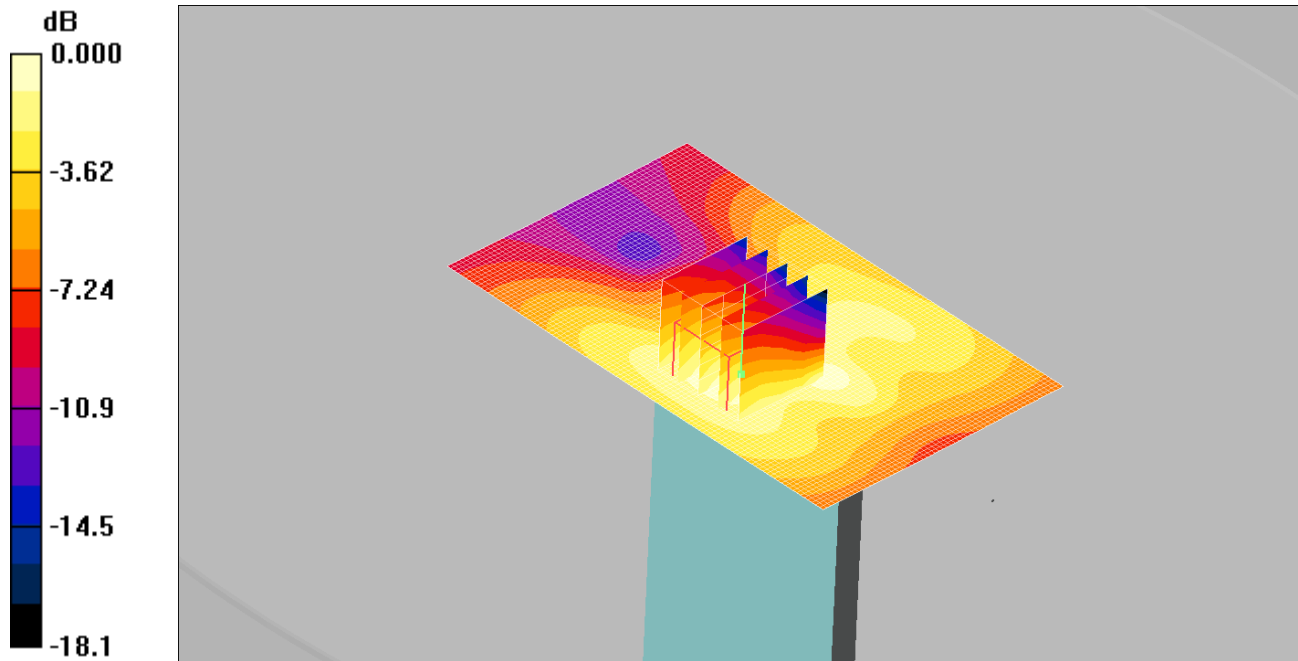

0 dB = 0.017mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - Middle 2 2 2/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.016 mW/g

Bottom of EUT Facing Phantom - Middle 2 2 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.92 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.032 W/kg


SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.017 mW/g

161: Bottom of EUT Facing Phantom LTE Band 5 10MHz BW 50%RB Middle CH20525

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

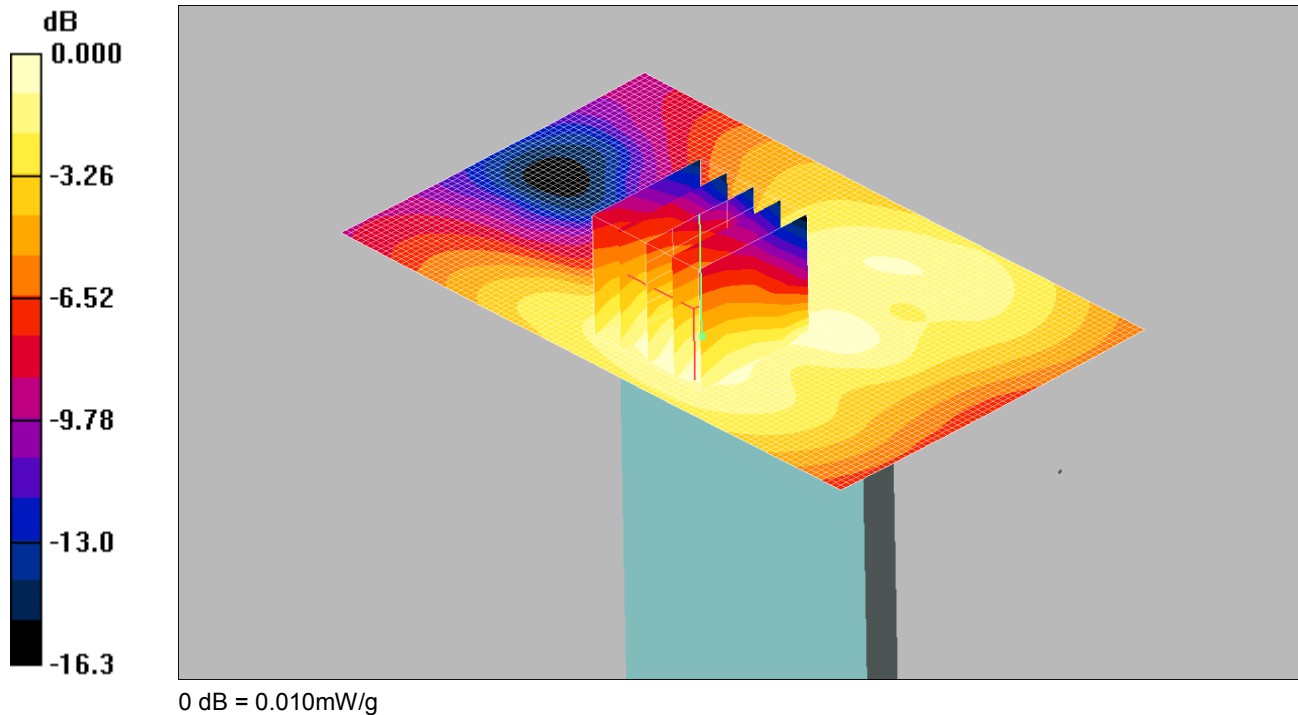

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - Middle 2/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.011 mW/g

Bottom of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.48 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.018 W/kg

SAR(1 g) = 0.00988 mW/g; SAR(10 g) = 0.00676 mW/g


Maximum value of SAR (measured) = 0.010 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

162: Back of EUT Facing Phantom LTE Band 5 10MHz BW 1RB Middle CH20450

Date: 09/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

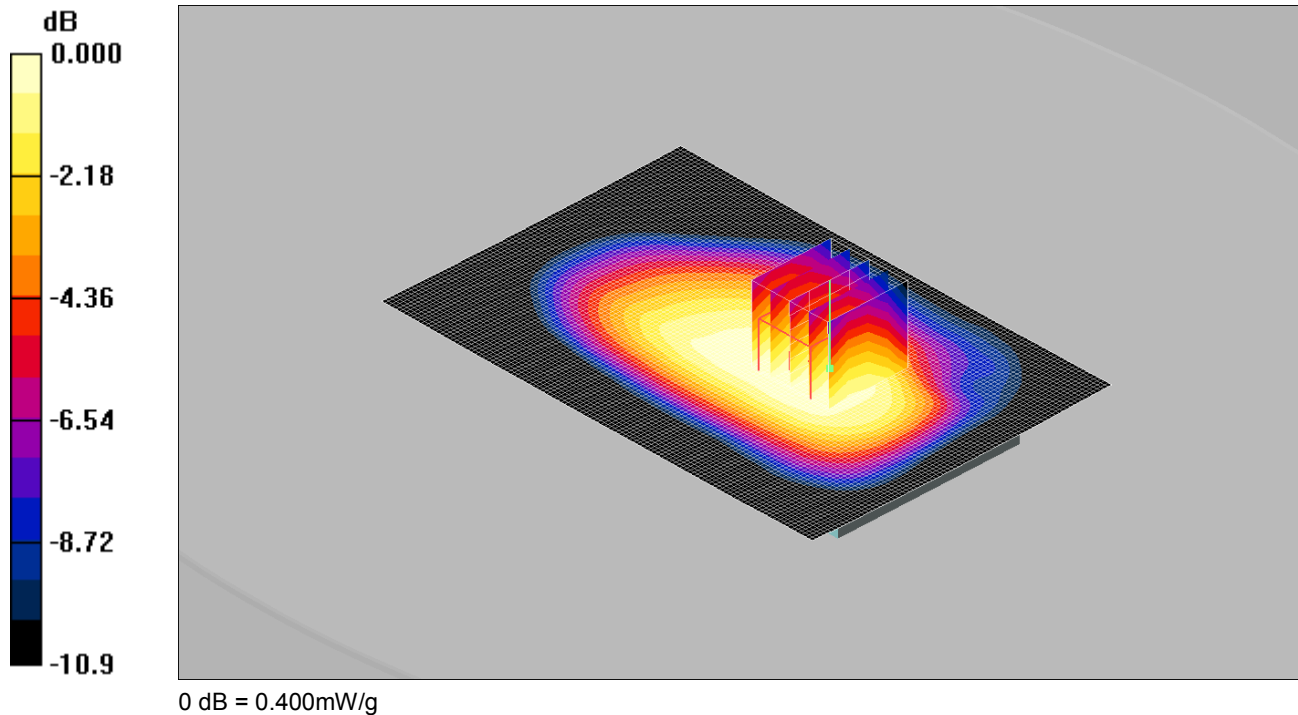

Communication System: LTE Band 5 / 10MHz; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -Low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.410 mW/g

Back of EUT Facing Phantom -Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.1 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.452 W/kg


SAR(1 g) = 0.386 mW/g; SAR(10 g) = 0.303 mW/g

Maximum value of SAR (measured) = 0.400 mW/g

163: Back of EUT Facing Phantom LTE Band 5 10MHz BW 1RB Middle CH20600

Date: 09/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

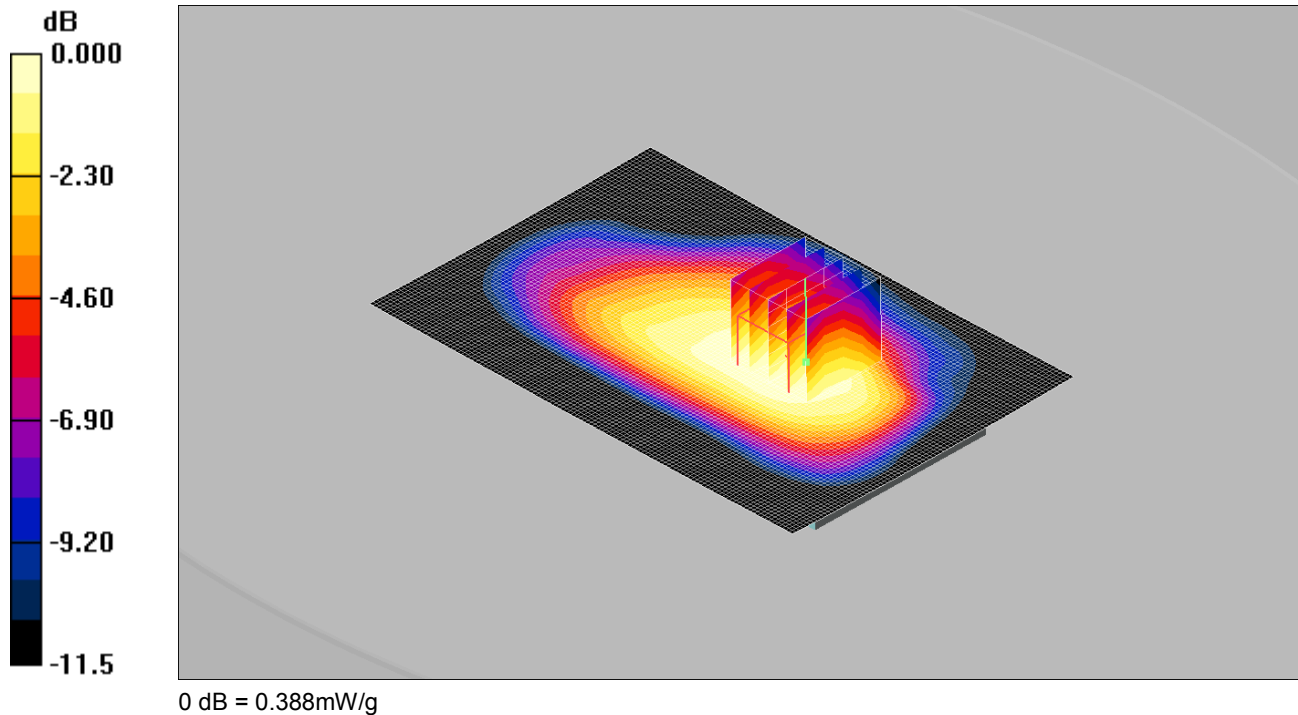

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -High/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.410 mW/g

Back of EUT Facing Phantom -High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.436 W/kg


SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.289 mW/g

Maximum value of SAR (measured) = 0.388 mW/g

164: Front of EUT Facing Phantom at 15mm LTE Band 5 10MHz BW 1RB Middle CH20450

Date: 09/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

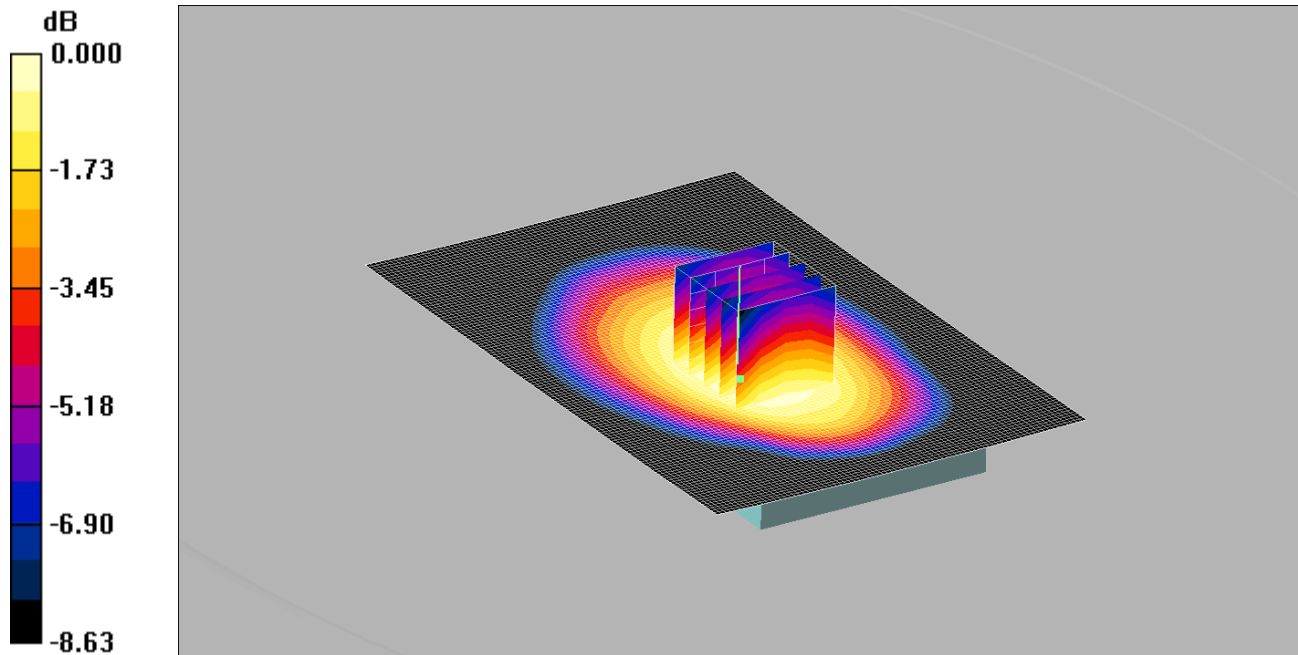

0 dB = 0.341mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom at 15mm -Low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.344 mW/g

Front of EUT Facing Phantom at 15mm -Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.6 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.391 W/kg


SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.256 mW/g

Maximum value of SAR (measured) = 0.341 mW/g

165: Back of EUT Facing Phantom at 15mm LTE Band 5 10MHz BW 1RB Middle CH20450

Date: 09/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

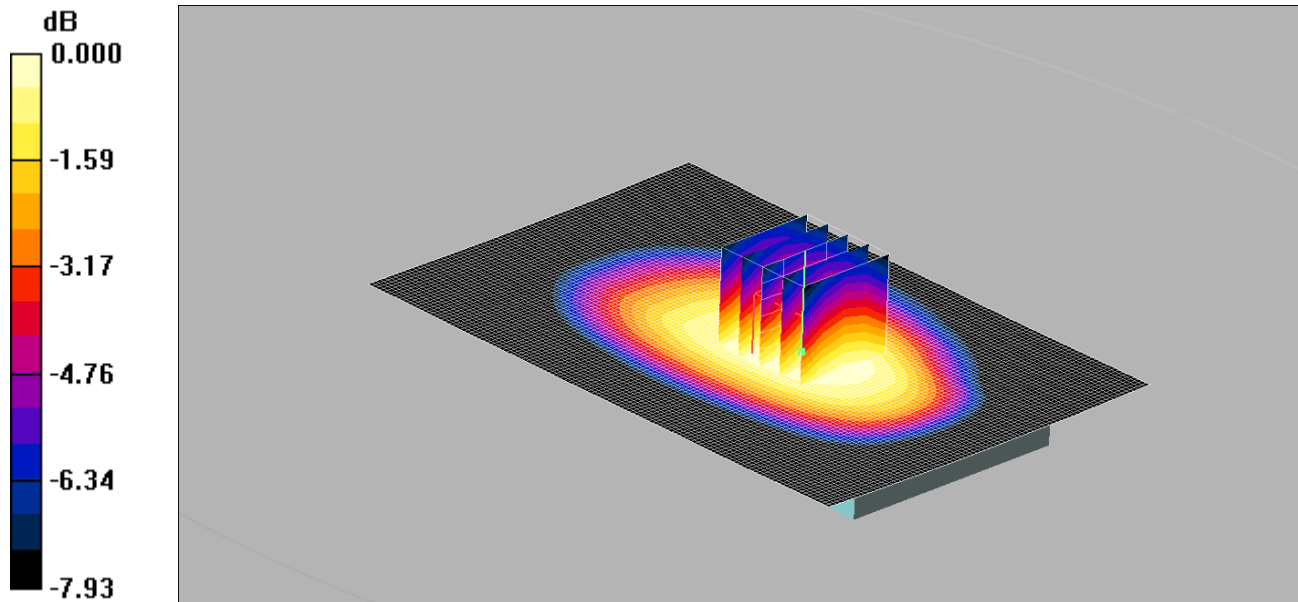

0 dB = 0.342mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 829 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom at 15mm -Low/Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.340 mW/g

Back of EUT Facing Phantom at 15mm -Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.1 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.386 W/kg


SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.254 mW/g

Maximum value of SAR (measured) = 0.342 mW/g

166: Touch Left LTE Band 7 20MHz BW 1RB Middle CH21100

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

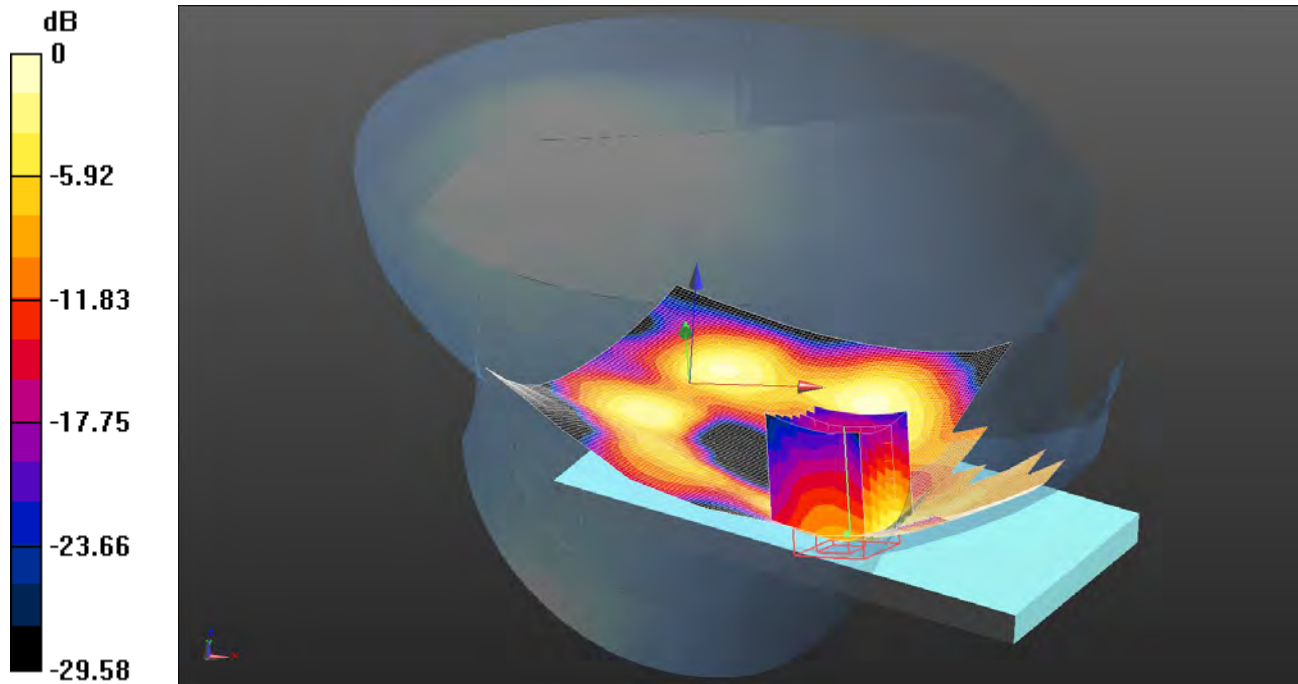

0 dB = 0.327 W/kg = -4.85 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2600 MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 38.327$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.4, 4.4, 4.4); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left - Middle 2/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.366 W/kg

Configuration/Touch Left - Middle 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.930 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.639 W/kg


SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.327 W/kg

167: Touch Left LTE Band 7 20MHz BW 50% RB Middle CH21100

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

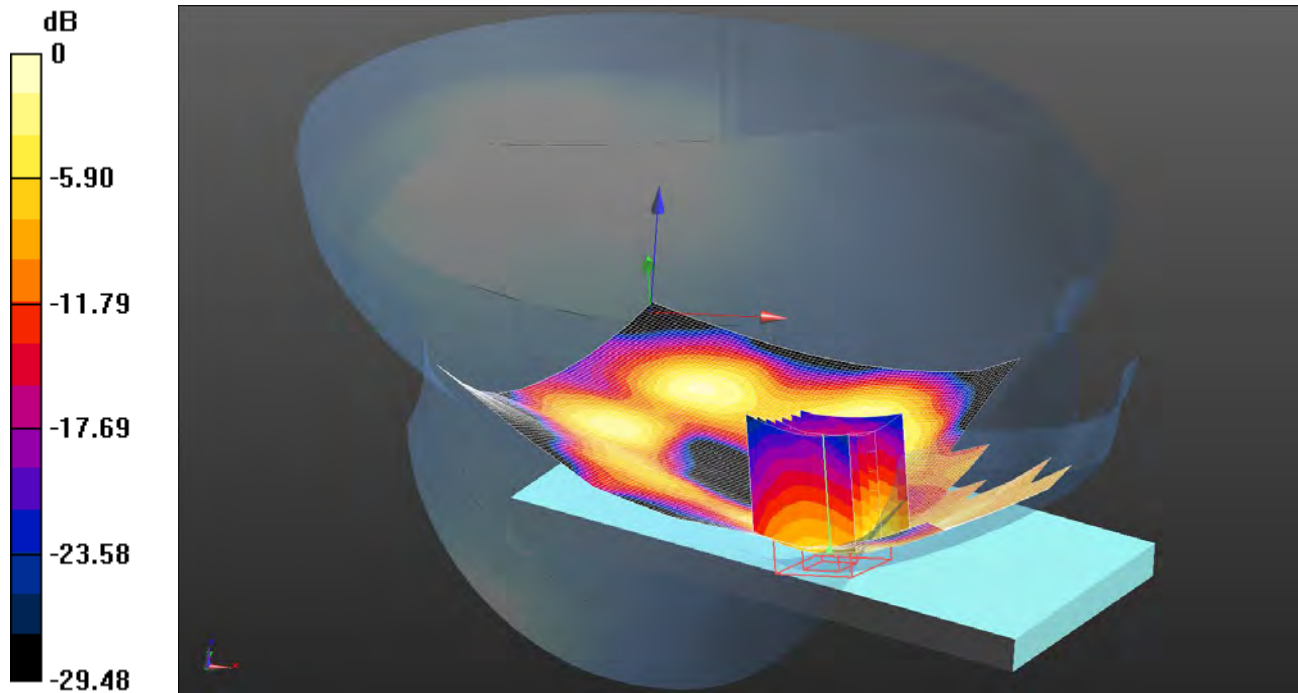

0 dB = 0.255 W/kg = -5.93 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2600 MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 38.327$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.4, 4.4, 4.4); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left - Middle 2/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.282 W/kg

Configuration/Touch Left - Middle 2/Zoom Scan (7x7x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.817 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.486 W/kg


SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.255 W/kg

168: Tilt Left LTE Band 7 20MHz BW 1RB Middle CH21100

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

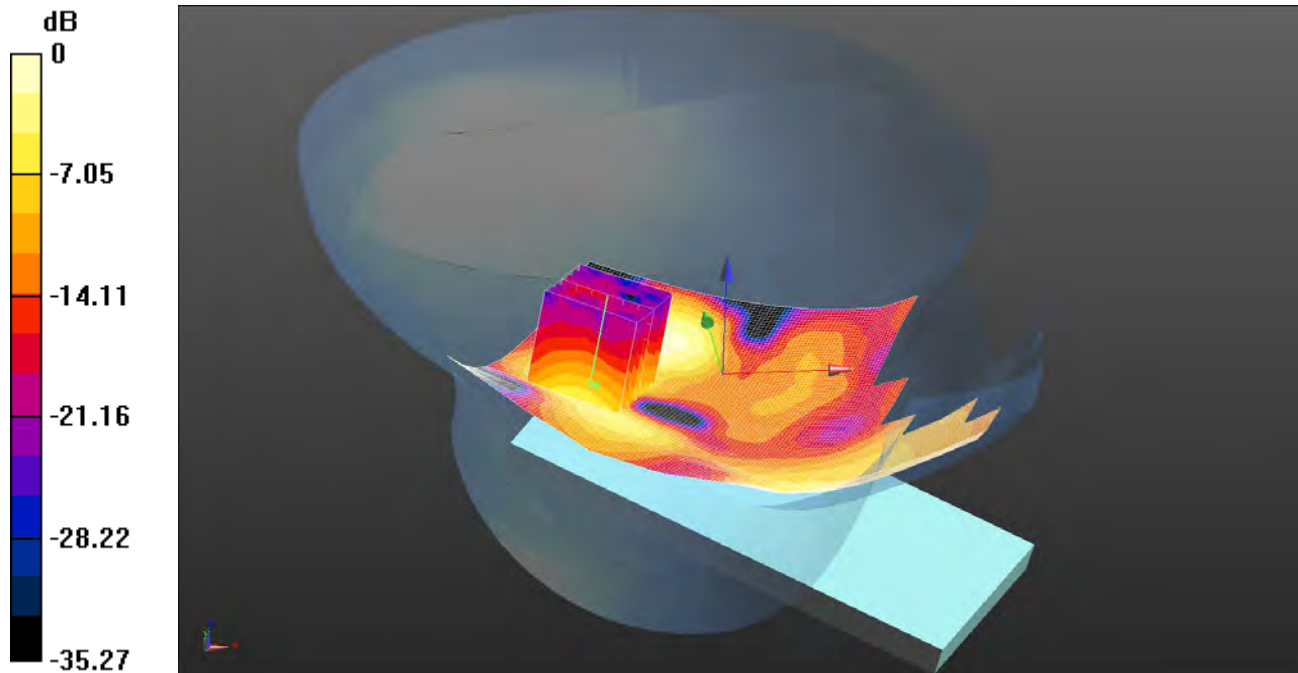

0 dB = 0.212 W/kg = -6.74 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2600 MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 38.327$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.4, 4.4, 4.4); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Left - Middle 2/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.234 W/kg

Configuration/Tilt Left - Middle 2/Zoom Scan (7x7x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.501 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.427 W/kg


SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.212 W/kg

169: Tilt Left LTE Band 7 20MHz BW 50% RB Middle CH21100

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

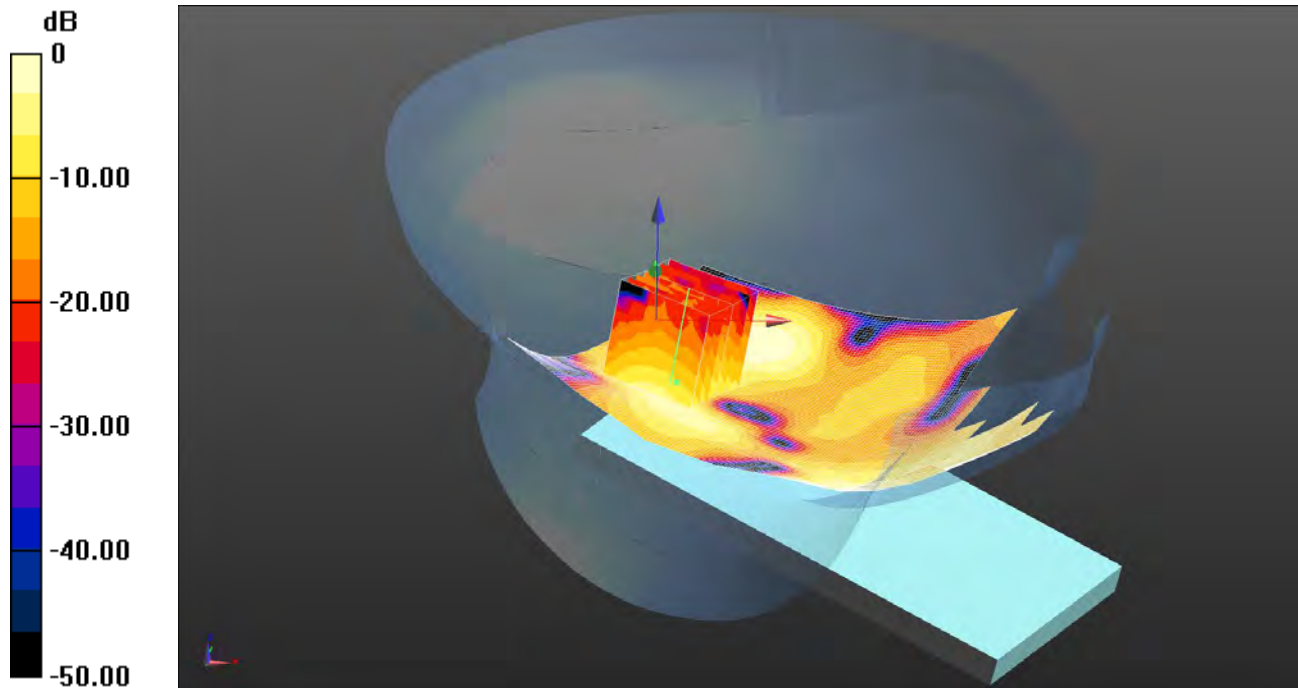

0 dB = 0.157 W/kg = -8.04 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2600 MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 38.327$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.4, 4.4, 4.4); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Left - Middle 2/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.182 W/kg

Configuration/Tilt Left - Middle 2/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.404 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.318 W/kg


SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

170: Touch Right LTE Band 7 20MHz BW 1RB Middle CH21100

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

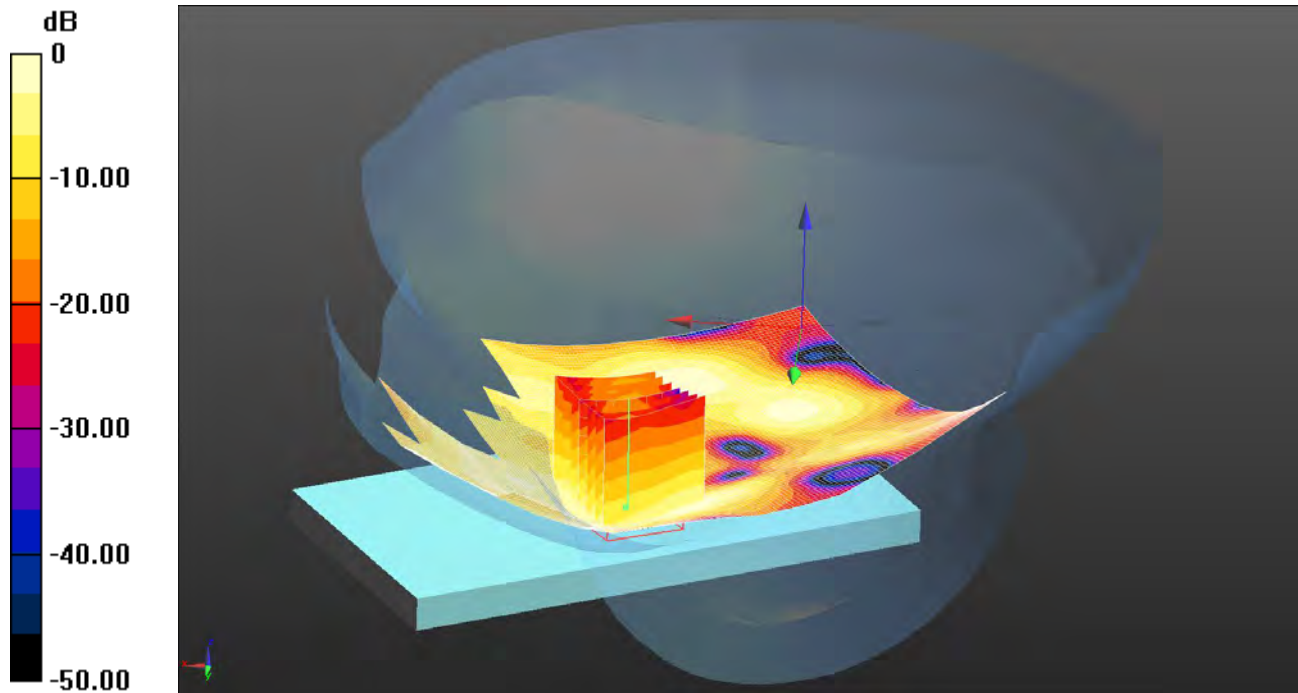

0 dB = 0.362 W/kg = -4.41 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2600 MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 38.327$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.4, 4.4, 4.4); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right - Middle 2/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.378 W/kg

Configuration/Touch Right - Middle 2/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.847 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.689 W/kg


SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

171: Touch Right LTE Band 7 20MHz BW 50% RB Middle CH21100

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

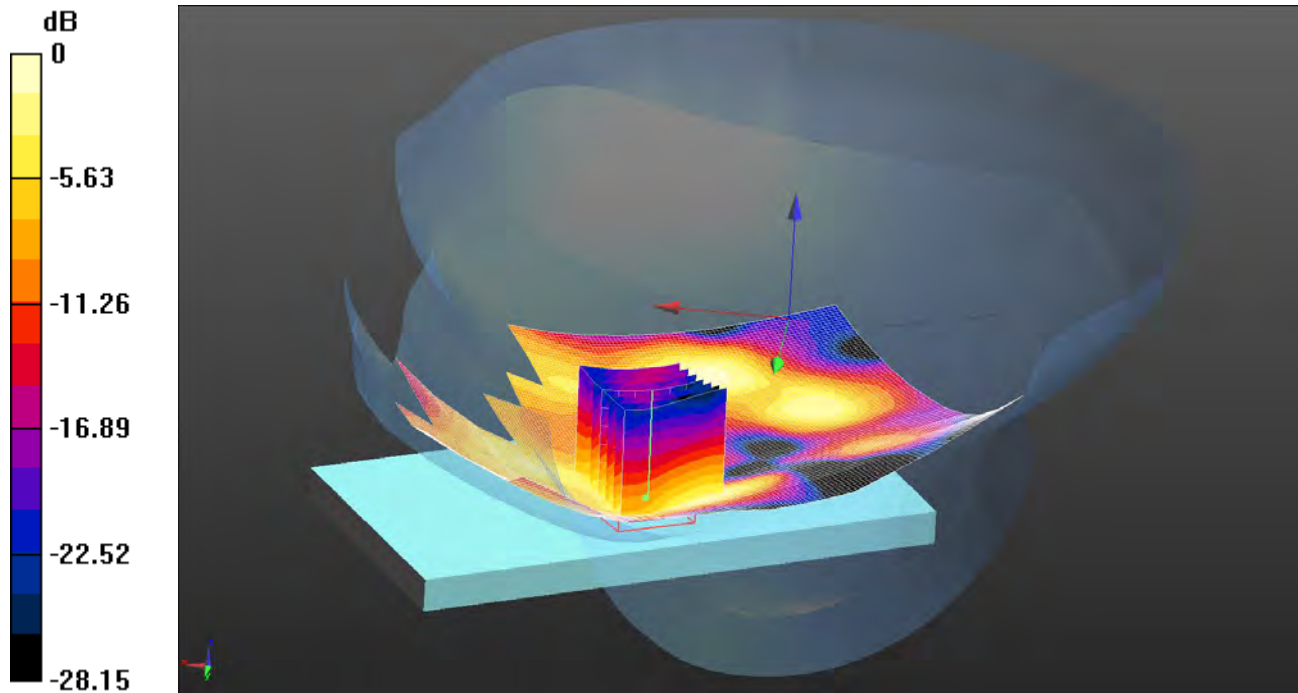

0 dB = 0.273 W/kg = -5.64 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2600 MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 38.327$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.4, 4.4, 4.4); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right - Middle 2/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.275 W/kg

Configuration/Touch Right - Middle 2/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.680 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.518 W/kg


SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

172: Tilt Right LTE Band 7 20MHz BW 1RB Middle CH21100

Date: 08/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

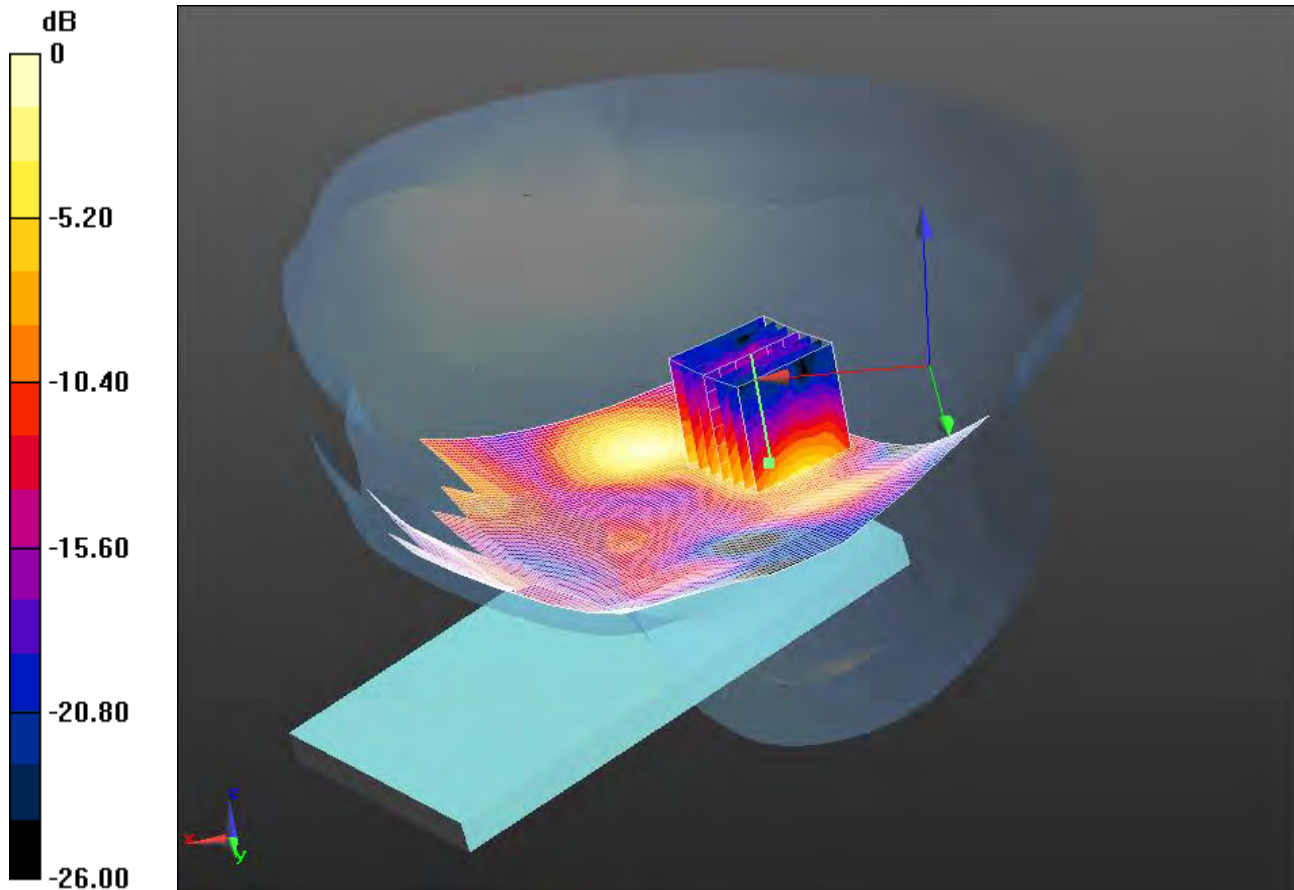

0 dB = 0.224 W/kg = -6.50 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium: 2600 MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 38.125$; $\rho = 1000$ kg/m³

Phantom section: Right Section DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.4, 4.4, 4.4); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Right - Middle 2 2 2/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.244 W/kg

Configuration/Tilt Right - Middle 2 2 2/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.993 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.462 W/kg


SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

173: Tilt Right LTE Band 7 20MHz BW 50% RB Middle CH21100

Date: 08/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

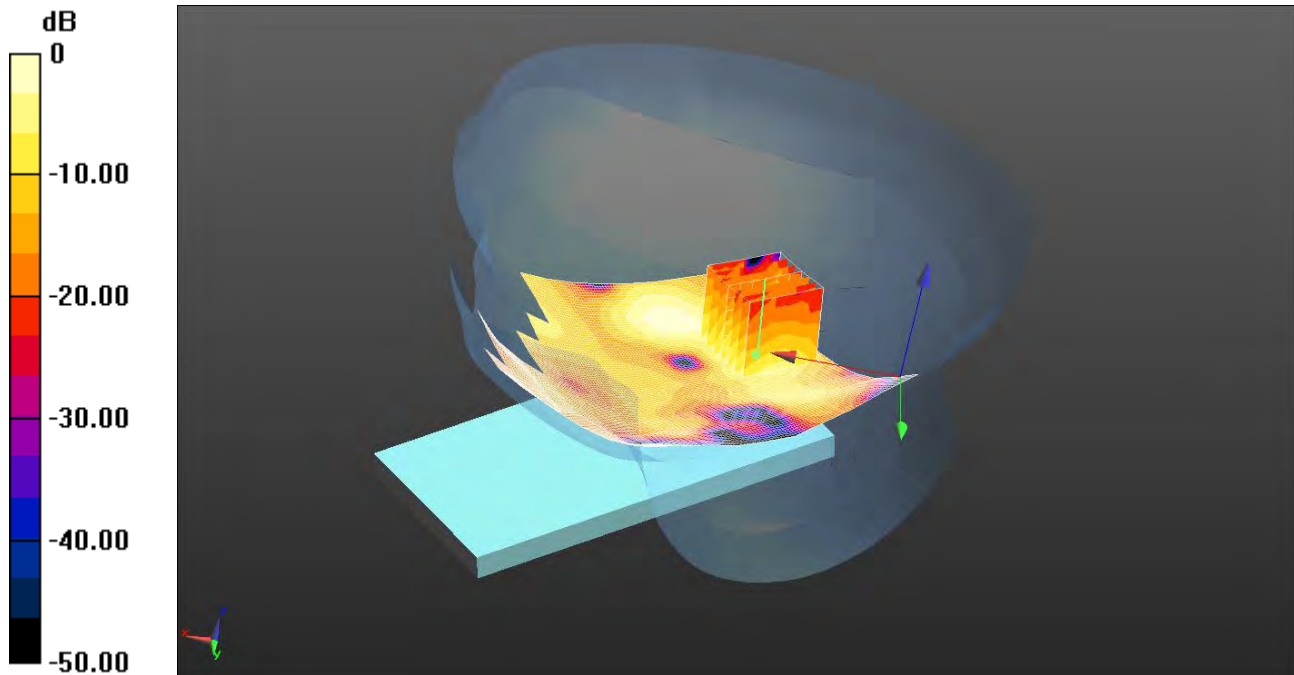

0 dB = 0.170 W/kg = -7.70 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2600 MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 38.125$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.4, 4.4, 4.4); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Right - Middle 2 2 /Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.186 W/kg

Configuration/Tilt Right - Middle 2 2 /Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.349 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.349 W/kg


SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

174: Touch Right LTE Band 7 20MHz BW 1RB Middle CH20850

Date: 08/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

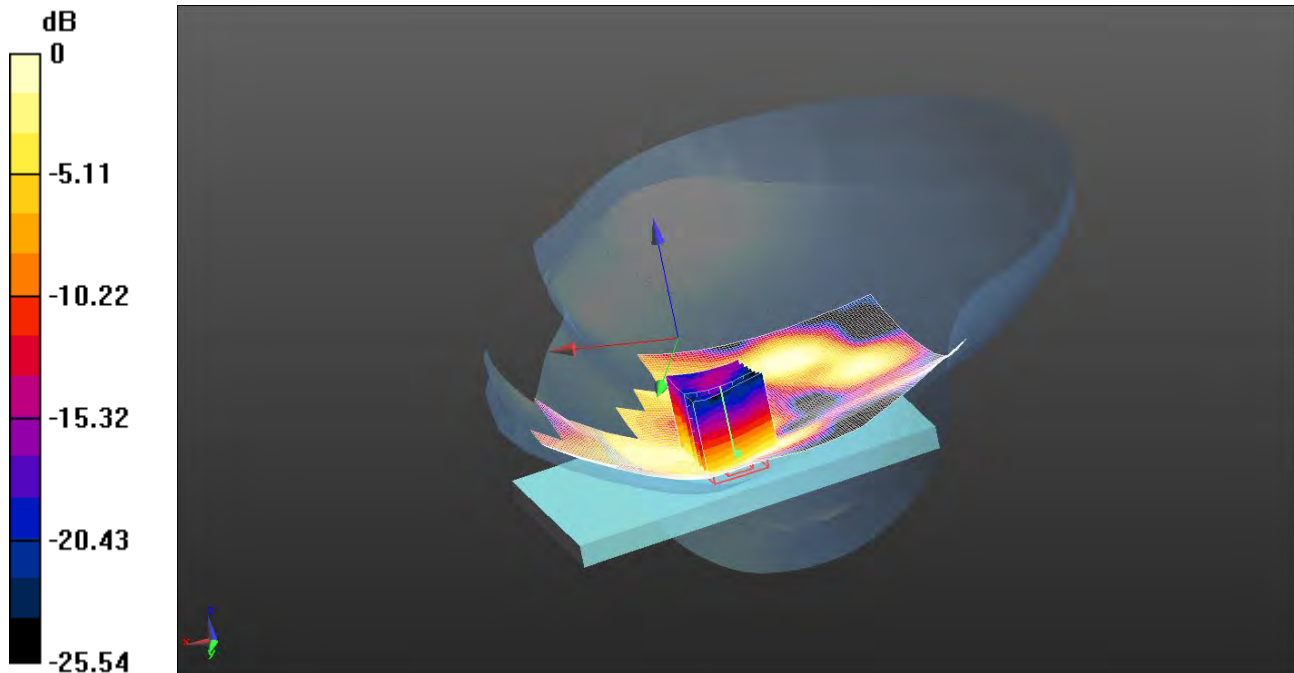

0 dB = 0.271 W/kg = -5.67 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: 2600 MHz HSL Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 1.908$ S/m; $\epsilon_r = 38.408$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.4, 4.4, 4.4); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right - Low/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.268 W/kg

Configuration/Touch Right - Low/Zoom Scan (7x7x7) 2 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.437 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.520 W/kg


SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.271 W/kg

175: Touch Right LTE Band 7 20MHz BW 1RB Middle CH21350

Date:08/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

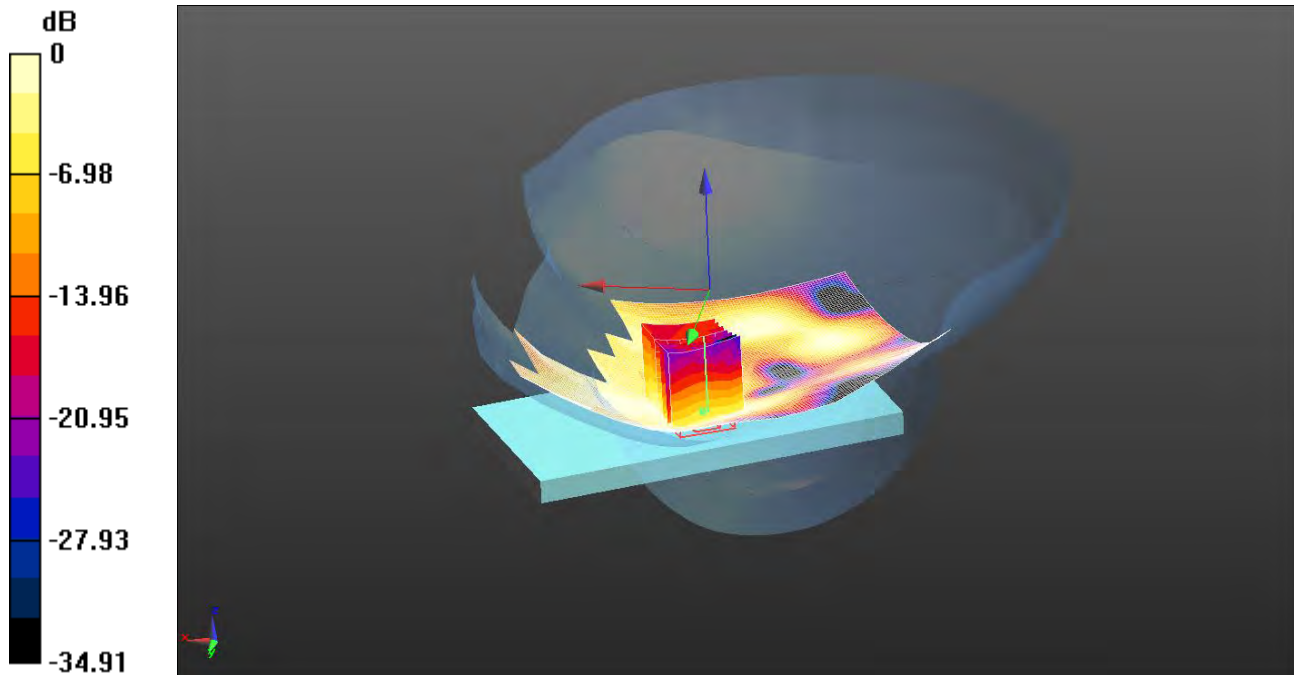

0 dB = 0.261 W/kg = -5.83 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: 2600 MHz HSL Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 38.241$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.4, 4.4, 4.4); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right - High/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.290 W/kg

Configuration/Touch Right - High/Zoom Scan (7x7x7) 2 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.750 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.499 W/kg


SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

176: Front of EUT Facing Phantom LTE Band 7 20MHz BW 1RB Middle CH21100

Date: 03/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

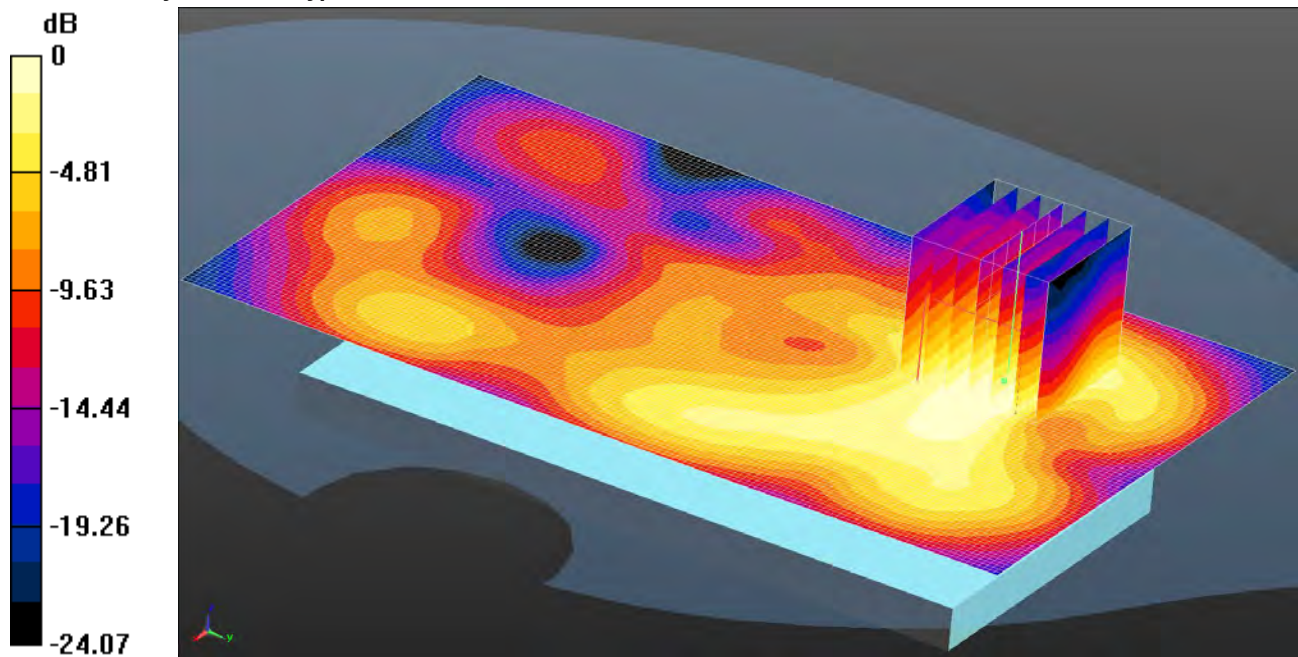

0 dB = 0.492 W/kg = -3.08 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.124$ S/m; $\epsilon_r = 51.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom- Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.516 W/kg

Configuration/Front of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.468 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.800 W/kg


SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 0.492 W/kg

177: Front of EUT Facing Phantom LTE Band 7 20MHz BW 50% RB Middle CH21100

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

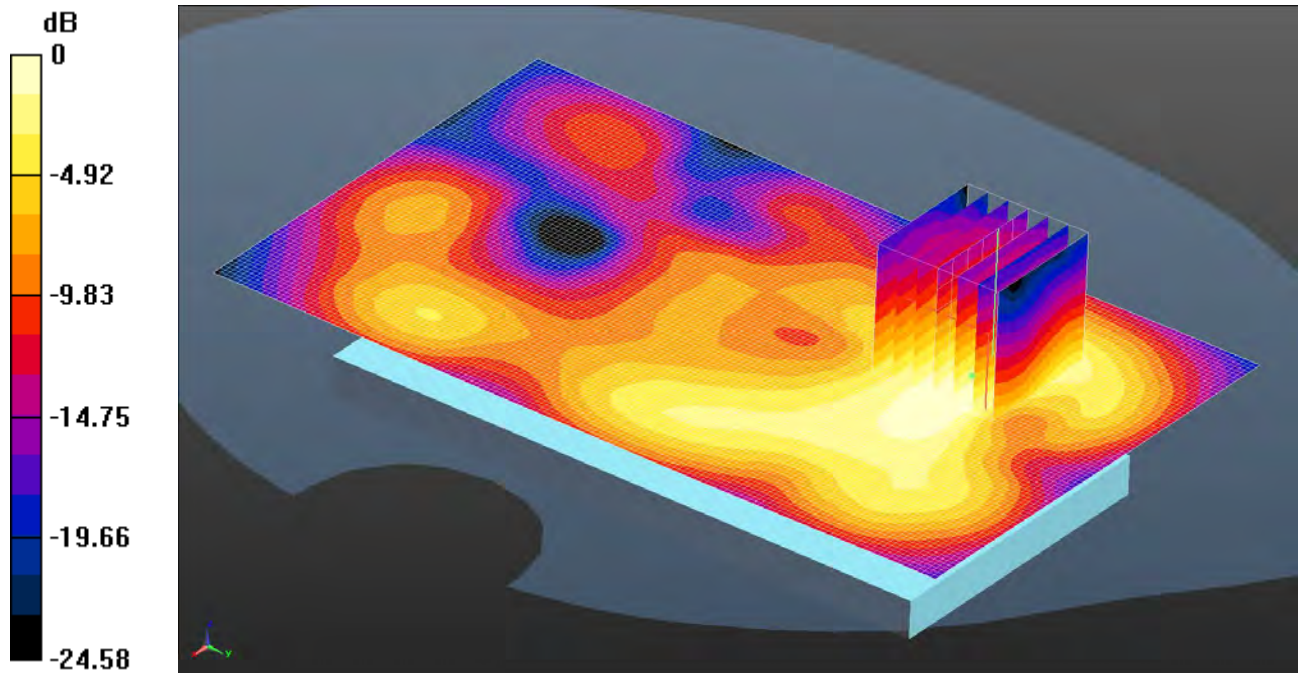

0 dB = 0.375 W/kg = -4.26 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.124$ S/m; $\epsilon_r = 51.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom- Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.387 W/kg

Configuration/Front of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.101 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.628 W/kg


SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.375 W/kg

178: Back of EUT Facing Phantom LTE Band 7 20MHz BW 1RB Middle CH21100

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

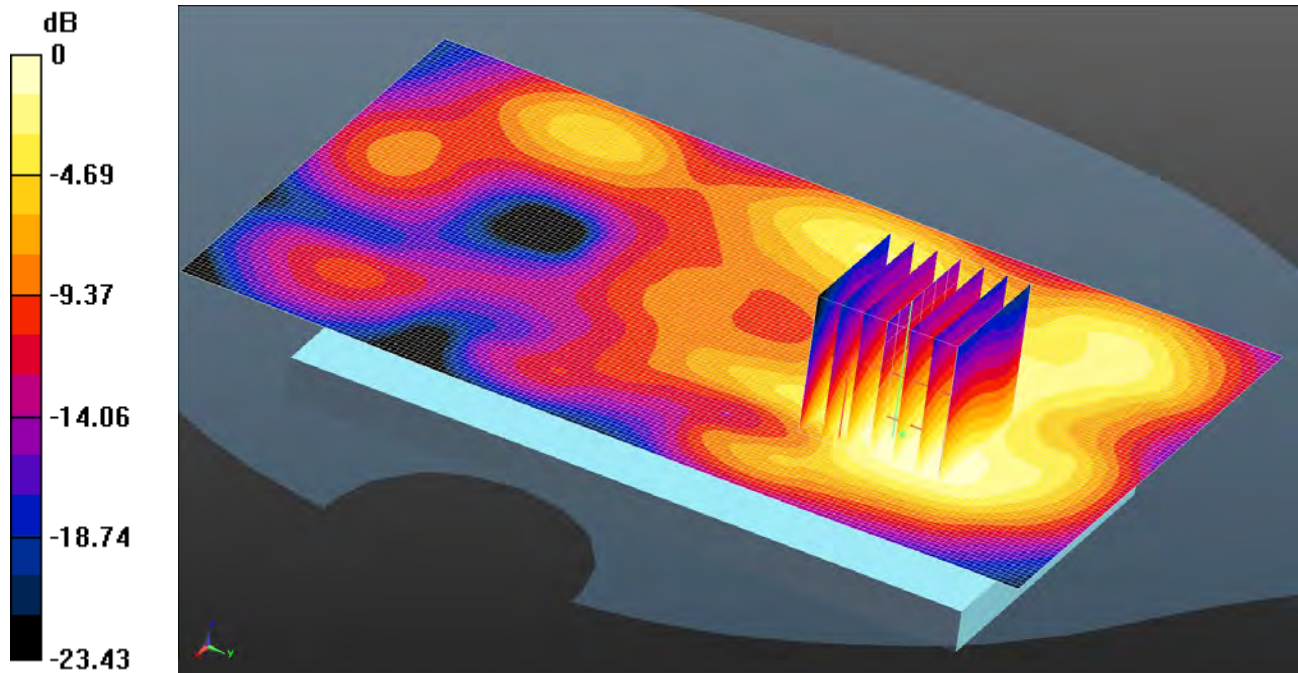

0 dB = 0.443 W/kg = -3.54 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.124$ S/m; $\epsilon_r = 51.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom- Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.453 W/kg

Configuration/Back of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.672 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.744 W/kg


SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

179: Back of EUT Facing Phantom LTE Band 7 20MHz BW 50% RB Middle CH21100

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

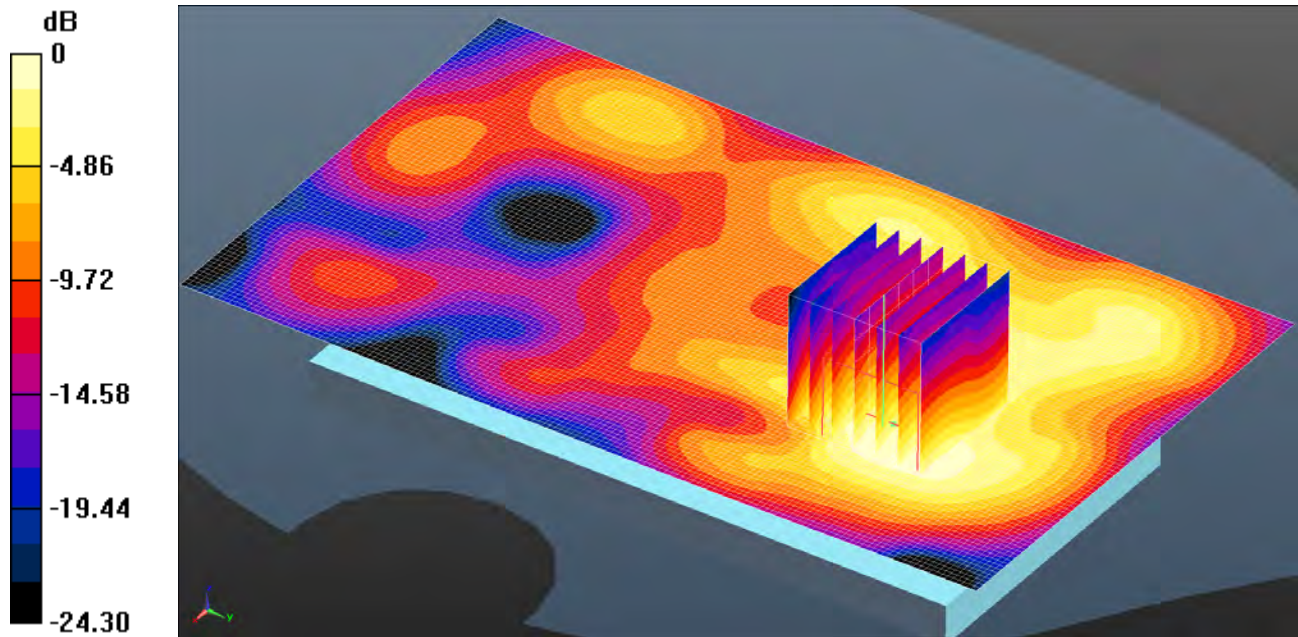

0 dB = 0.336 W/kg = -4.74 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.124$ S/m; $\epsilon_r = 51.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom- Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.336 W/kg

Configuration/Back of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.239 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.561 W/kg


SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.336 W/kg

180: Left Hand Side of EUT Facing Phantom LTE Band 7 20MHz BW 1RB Middle CH21100

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

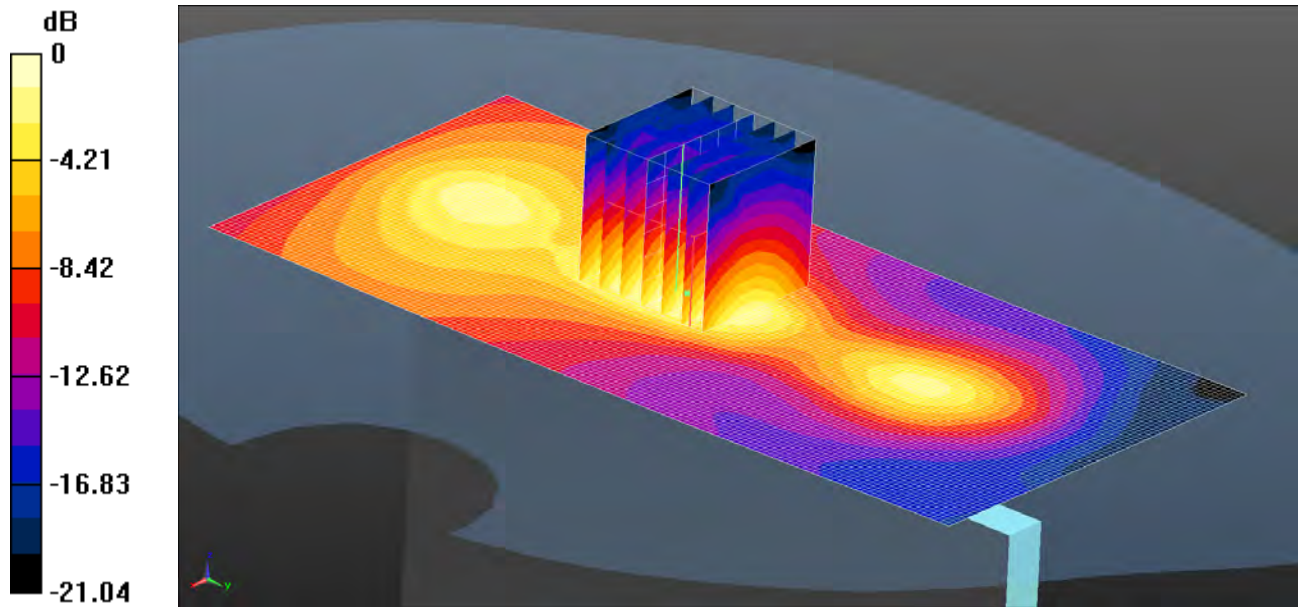

0 dB = 0.186 W/kg = -7.30 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.124$ S/m; $\epsilon_r = 51.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Left Hand Side of EUT Facing Phantom- Middle/Area Scan (71x151x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.196 W/kg

Configuration/Left Hand Side of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.067 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.364 W/kg


SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

181: Left Hand Side of EUT Facing Phantom LTE Band 7 20MHz BW 50% RB Middle CH21100

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

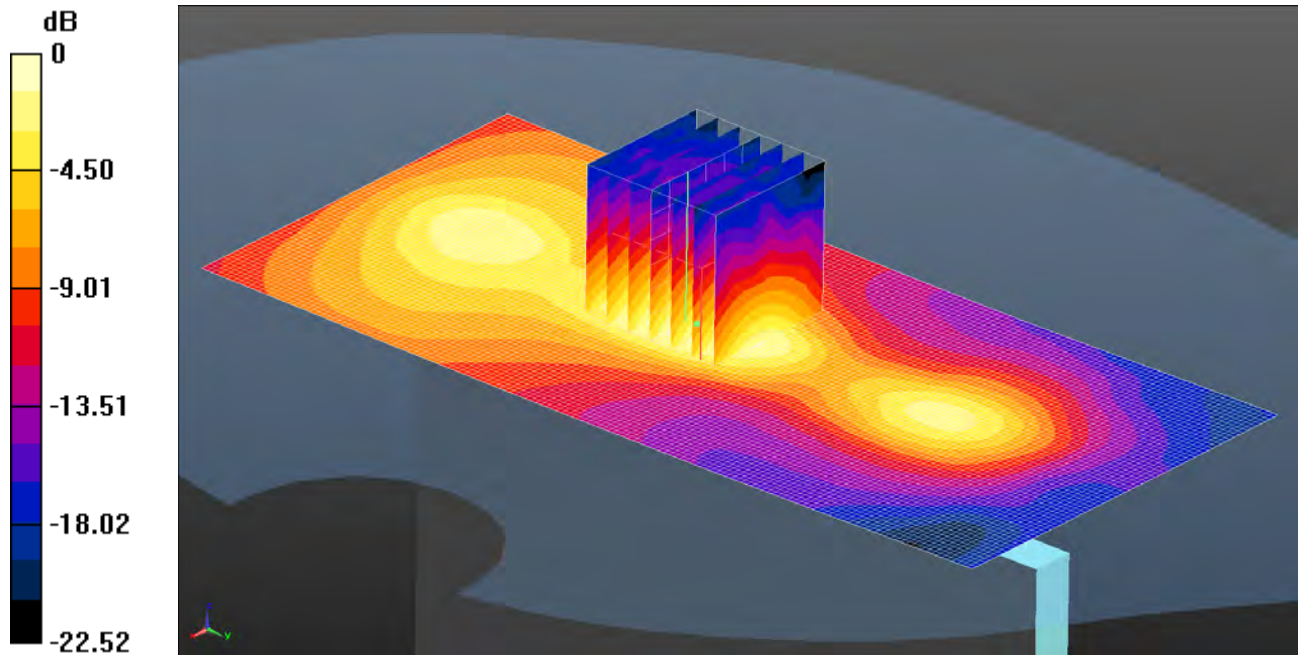

0 dB = 0.140 W/kg = -8.54 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.124$ S/m; $\epsilon_r = 51.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Left Hand Side of EUT Facing Phantom- Middle/Area Scan (71x151x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.153 W/kg

Configuration/Left Hand Side of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.843 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.278 W/kg


SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.140 W/kg

182: Right Hand Side of EUT Facing Phantom LTE Band 7 20MHz BW 1RB Middle CH21100

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

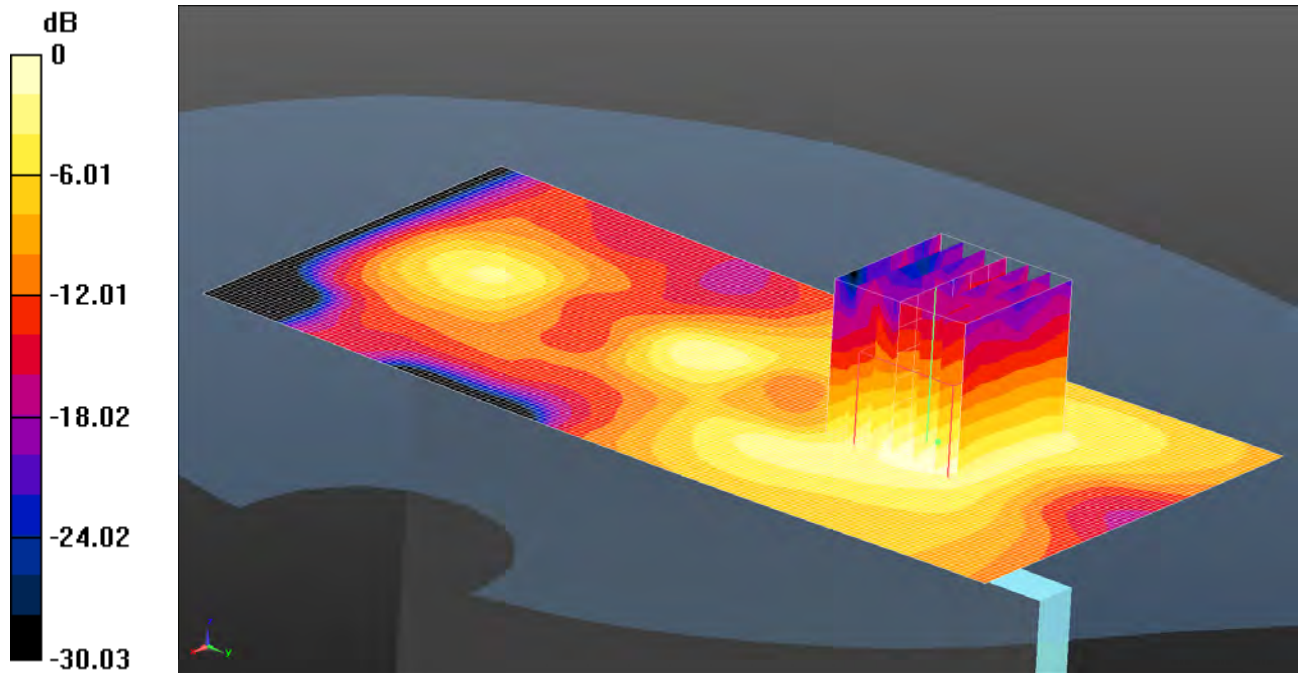

0 dB = 0.114 W/kg = -9.43 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.124$ S/m; $\epsilon_r = 51.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Right Hand Side of EUT Facing Phantom- Middle/Area Scan (71x151x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.114 W/kg

Configuration/Right Hand Side of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.802 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.271 W/kg


SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

183: Right Hand Side of EUT Facing Phantom LTE Band 7 20MHz BW 50% RB Middle CH21100

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

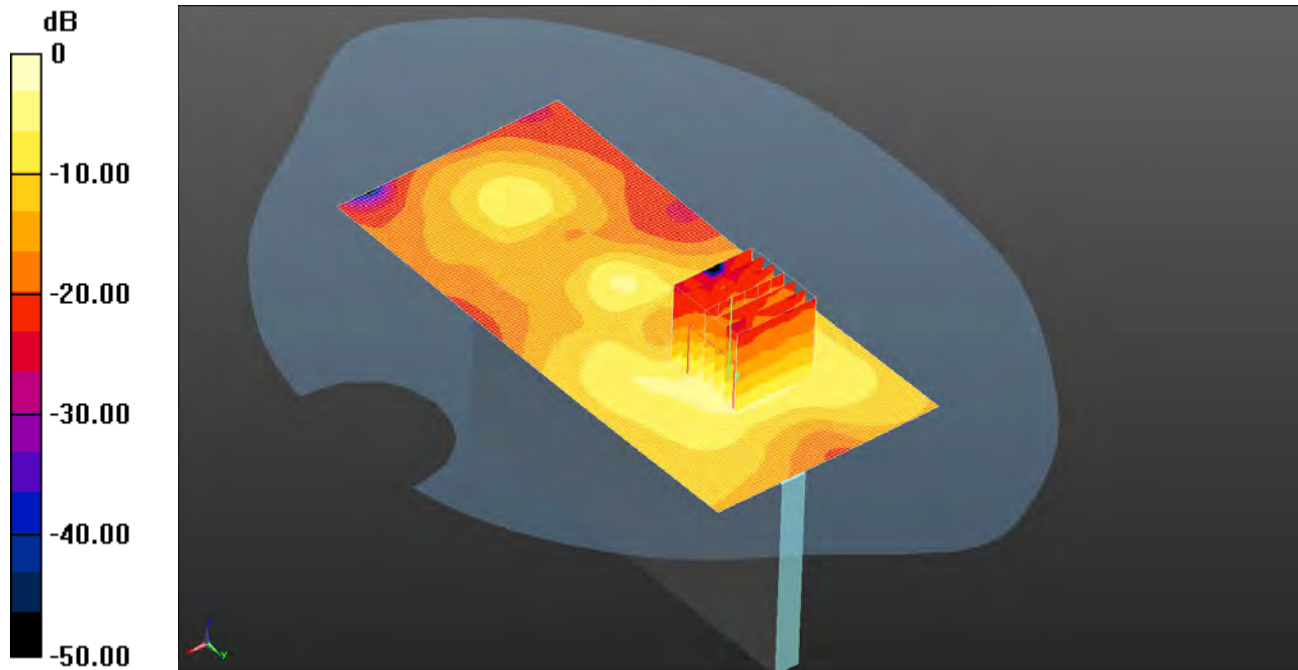

0 dB = 0.200 W/kg = -6.99 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.124$ S/m; $\epsilon_r = 51.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Right Hand Side of EUT Facing Phantom- Middle/Area Scan (71x151x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0876 W/kg

Configuration/Right Hand Side of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 2 (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.186 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.038 W/kg


Maximum value of SAR (measured) = 0.0881 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

184: Bottom of EUT Facing Phantom LTE Band 7 20MHz BW 1RB Middle CH21100

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

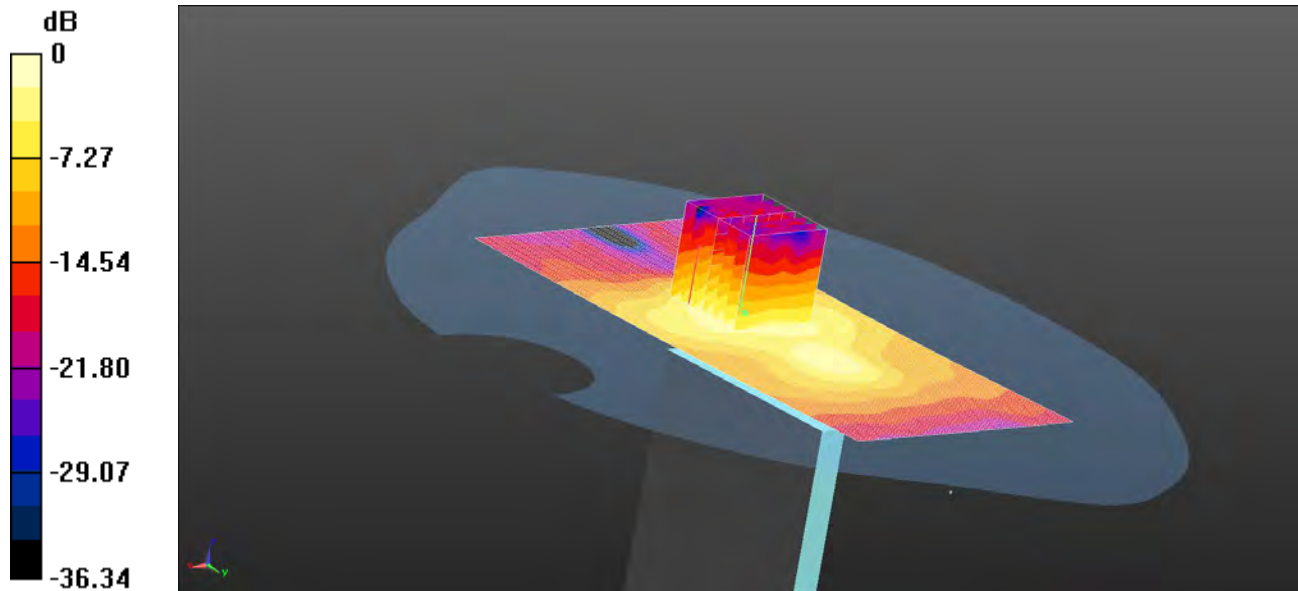

0 dB = 0.204 W/kg = -6.90 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.124$ S/m; $\epsilon_r = 51.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Bottom of EUT Facing Phantom- Middle/Area Scan (71x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.181 W/kg

Configuration/Bottom of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 2 (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.295 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.438 W/kg


SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.204 W/kg

185: Bottom of EUT Facing Phantom LTE Band 7 20MHz BW 50% RB Middle CH21100

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

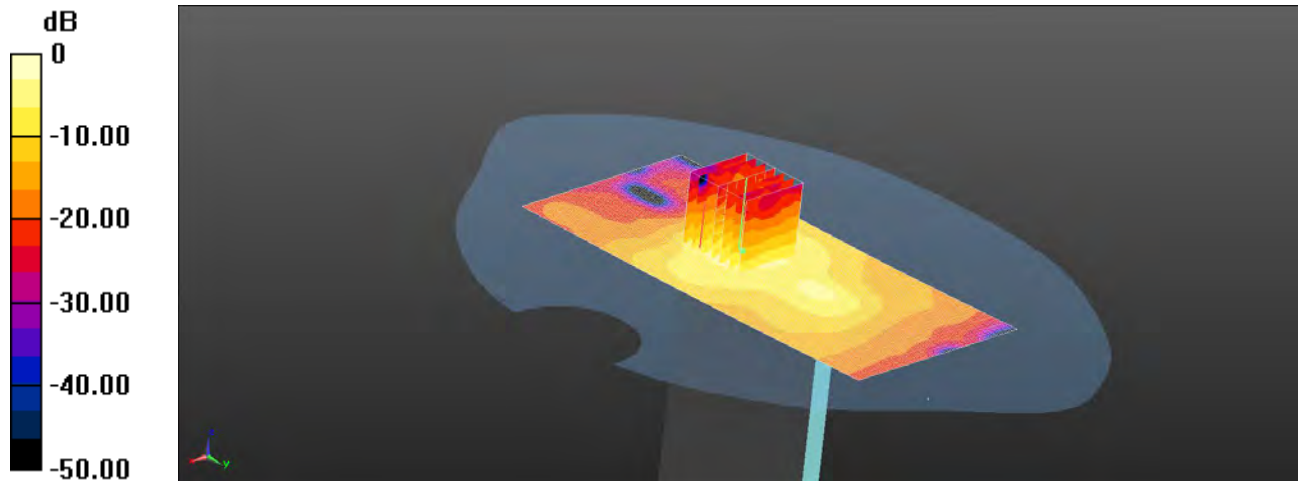

0 dB = 0.300 W/kg = -5.23 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.124$ S/m; $\epsilon_r = 51.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Bottom of EUT Facing Phantom- Middle/Area Scan (71x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.136 W/kg

Configuration/Bottom of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 2 (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.379 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.342 W/kg


SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

186: Front of EUT Facing Phantom LTE Band 7 20MHz BW 1RB Middle CH20850

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

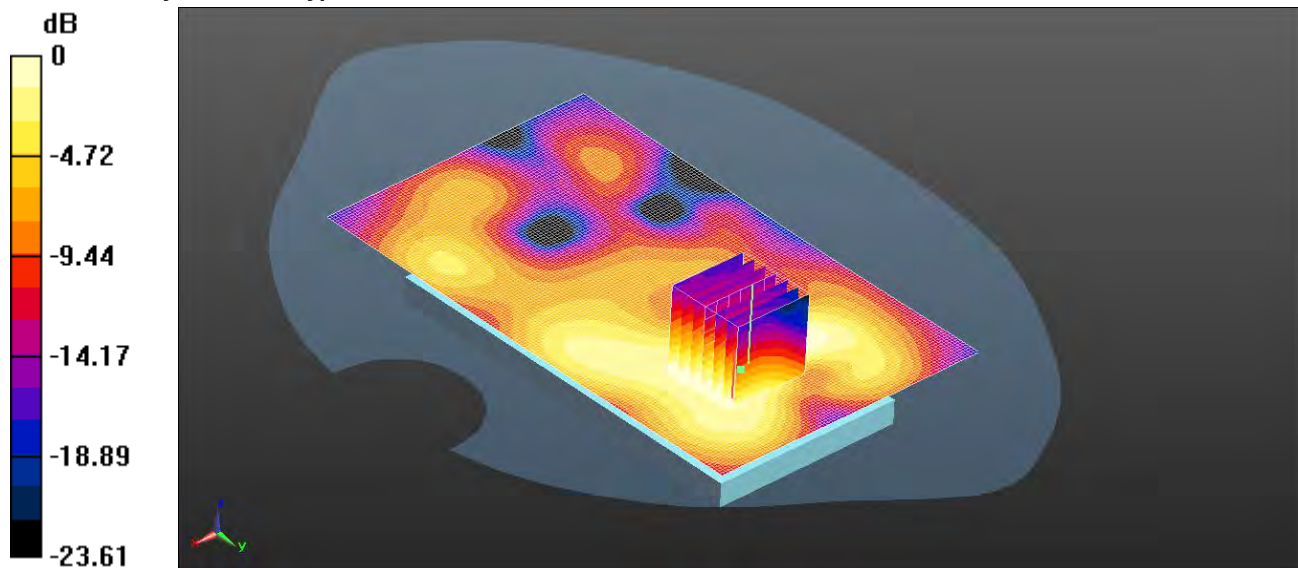

0 dB = 0.223 W/kg = -6.52 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 2.095$ S/m; $\epsilon_r = 51.902$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom- Low/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.235 W/kg

Configuration/Front of EUT Facing Phantom- Low/Zoom Scan (7x7x7) 2 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.694 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.382 W/kg


SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.223 W/kg

187: Front of EUT Facing Phantom LTE Band 7 20MHz BW 1RB Middle CH21350

Date: 04/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

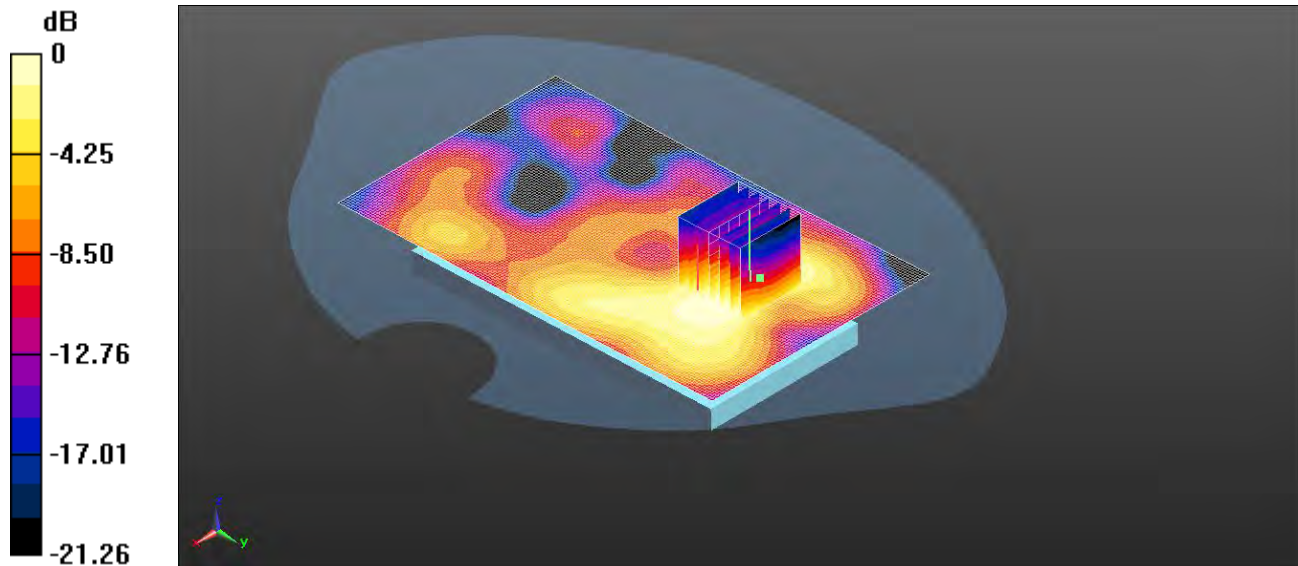

0 dB = 0.253 W/kg = -5.97 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 2.155$ S/m; $\epsilon_r = 51.774$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom- High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.265 W/kg

Configuration/Front of EUT Facing Phantom- High/Zoom Scan (7x7x7) 2 2 2 2 (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.484 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.450 W/kg


SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

188: Front of EUT Facing Phantom at 15mm LTE Band 7 20MHz BW 1RB Middle CH21100

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

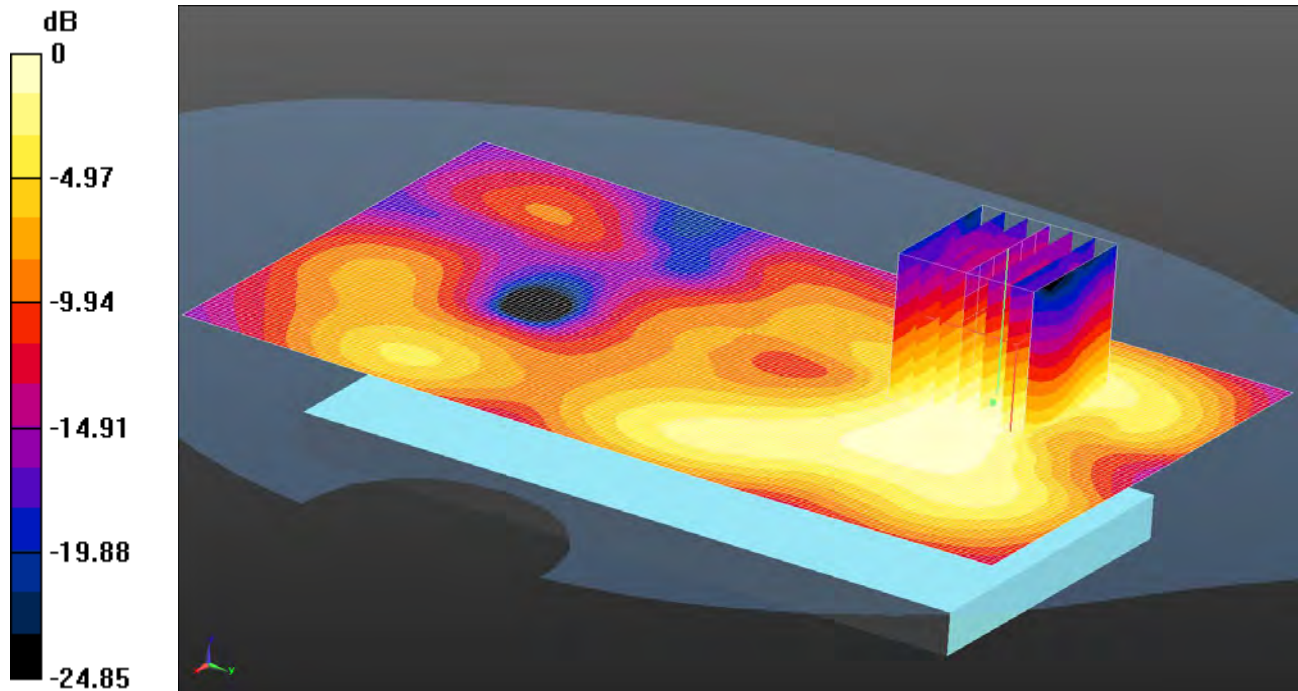

0 dB = 0.231 W/kg = -6.36 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.109$ S/m; $\epsilon_r = 51.133$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom- Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.234 W/kg

Configuration/Front of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.179 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.388 W/kg


SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

189: Back of EUT Facing Phantom at 15mm LTE Band 7 20MHz BW 1RB Middle CH21100

Date: 05/07/2013

DUT: Sony Honami ; Type: Honami Rex; Serial: PM-0460-BV

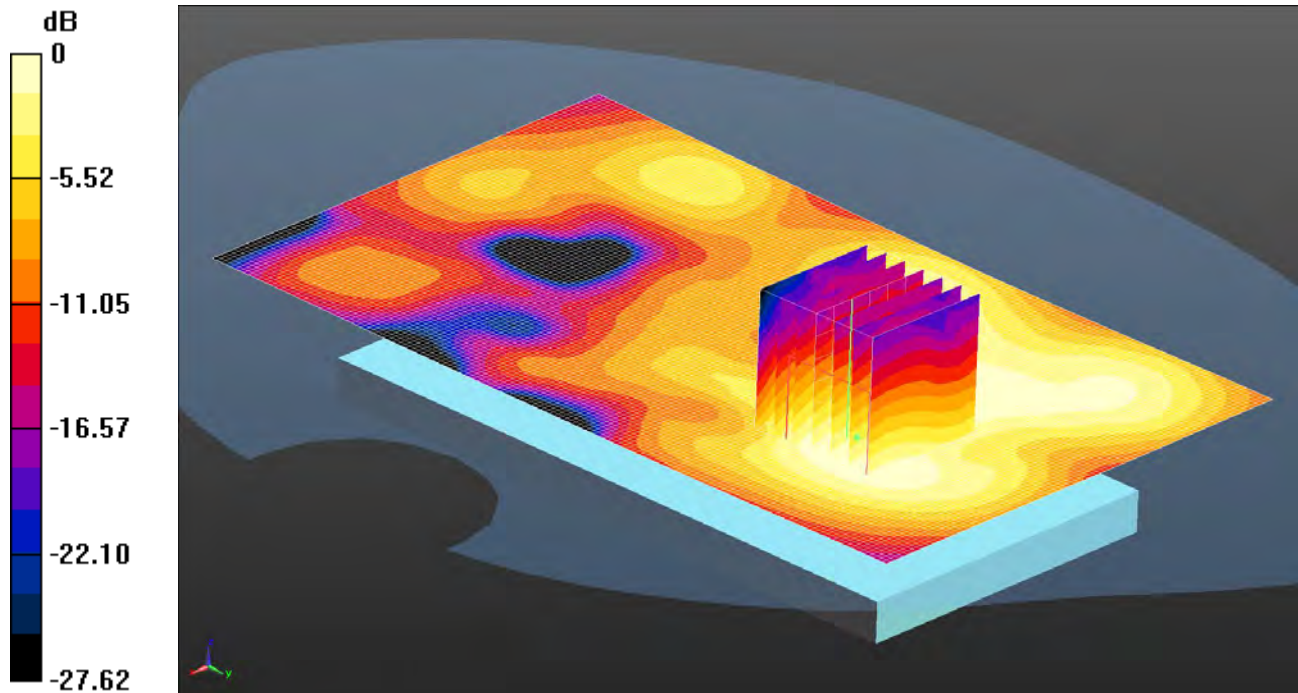

0 dB = 0.190 W/kg = -7.21 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.109$ S/m; $\epsilon_r = 51.133$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.16, 4.16, 4.16); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom- Middle/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.191 W/kg

Configuration/Back of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.718 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.190 W/kg