


FCC SAR Test Report

APPLICANT : Sony Mobile Communications AB
EQUIPMENT : Smart phone
BRAND NAME : SONY
TYPE NAME : PM-0771-BV
FCC ID : PY7PM-0771
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Standard	5
4. Equipment Under Test (EUT)	6
4.1 General Information	6
4.2 Device Serial Number	7
4.3 Maximum Tune-up Limit	7
4.4 General LTE SAR Test and Reporting Considerations	11
5. RF Exposure Limits.....	13
5.1 Uncontrolled Environment.....	13
5.2 Controlled Environment.....	13
6. Specific Absorption Rate (SAR).....	14
6.1 Introduction	14
6.2 SAR Definition.....	14
7. System Description and Setup	15
8. Measurement Procedures	16
8.1 Spatial Peak SAR Evaluation.....	16
8.2 Power Reference Measurement.....	17
8.3 Area Scan	17
8.4 Zoom Scan.....	18
8.5 Volume Scan Procedures.....	18
8.6 Power Drift Monitoring.....	18
9. Test Equipment List.....	19
10. System Verification	20
10.1 Tissue Verification	20
10.2 System Performance Check Results.....	22
11. RF Exposure Positions	23
11.1 Ear and handset reference point	23
11.2 Definition of the cheek position.....	24
11.3 Definition of the tilt position.....	25
11.4 Body Worn Accessory	26
11.5 Wireless Router.....	26
12. Conducted RF Output Power (Unit: dBm).....	27
13. Bluetooth Exclusions Applied	49
14. Antenna Location	50
15. SAR Test Results	51
15.1 Head SAR	52
15.2 Hotspot SAR	55
15.3 Body Worn Accessory SAR	58
15.4 Repeated SAR Measurement	60
16. Simultaneous Transmission Analysis	61
16.1 Head Exposure Conditions	62
16.2 Hotspot Exposure Conditions.....	68
16.3 Body-Worn Accessory Exposure Conditions	70
16.4 SPLSR Evaluation and Analysis.....	72
17. Uncertainty Assessment	75
18. References.....	78
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA440284	Rev. 01	Initial issue of report	Jun. 06, 2014
FA440284	Rev. 02	Correct LTE B7 maximum output power on page4.	Jun. 20, 2014



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Sony Mobile Communications AB, Smart phone, PM-0771-BV**, are as follows.

Equipment Class	Frequency Band	Highest 1g SAR Summary						
		Head (Separation 0mm)		Body-worn (Separation 15mm)		Wireless Router (Separation 10mm)		Simultaneous Transmission
		Maximum Power (dBm)	1g SAR (W/kg)	Maximum Power (dBm)	1g SAR (W/kg)	Maximum Power (dBm)	1g SAR (W/kg)	1g SAR (W/kg)
PCE	GSM850	33.50	0.63	33.50	0.80	27.50	0.79	1.54
	GSM1900	25.90	0.55	25.90	0.47	27.50	0.46	
	WCDMA Band V	24.00	0.58	24.00	0.70	24.00	0.75	
	WCDMA Band IV	24.00	0.52	24.00	0.62	20.00	0.52	
	WCDMA Band II	24.00	0.65	24.00	0.64	19.00	0.44	
	LTE Band 17	24.00	0.26	24.00	0.29	24.00	0.44	
	LTE Band 4	24.00	0.49	24.00	0.66	21.00	0.62	
	LTE Band 2	24.00	0.54	24.00	0.50	19.00	0.33	
	LTE Band 7	24.00	0.67	24.00	0.87	20.00	0.68	
DTS	WLAN 2.4GHz Band	17.00	1.19	17.00	0.09	17.00	0.17	1.54
	WLAN 5.8GHz Band	14.00	0.23	14.00	0.14	14.00	0.23	
NII	WLAN 5.2GHz Band	14.00	0.30	14.00	0.08			1.00
	WLAN 5.3GHz Band	14.00	0.24	14.00	0.06			
	WLAN 5.5GHz Band	14.00	0.21	14.00	0.13			
Date of Testing:		04/17/2014 ~ 04/30/2014						

Frequency Band		Highest 10g SAR Summary						
		Head (Separation 0mm)		Body-worn (Separation 15mm)		Wireless Router (Separation 10mm)		Simultaneous Transmission
		Maximum Power (dBm)	10g SAR (W/kg)	Maximum Power (dBm)	10g SAR (W/kg)	Maximum Power (dBm)	10g SAR (W/kg)	10g SAR (W/kg)
GSM	GSM850	33.50	0.49	33.50	0.63	27.50	0.62	0.78
	GSM1900	25.90	0.33	25.90	0.27	27.50	0.25	
UMTS	Band V	24.00	0.44	24.00	0.55	24.00	0.59	
	Band IV	24.00	0.34	24.00	0.40	20.00	0.29	
	Band II	24.00	0.41	24.00	0.37	19.00	0.23	
LTE	Band 17	24.00	0.21	24.00	0.22	24.00	0.33	
	Band 4	24.00	0.32	24.00	0.43	21.00	0.36	
	Band 2	24.00	0.34	24.00	0.32	19.00	0.20	
	Band 7	24.00	0.35	24.00	0.48	20.00	0.37	
WLAN	2.4GHz Band	17.00	0.55	17.00	0.06	17.00	0.09	0.78
	5.8GHz Band	14.00	0.09	14.00	0.07	14.00	0.10	
	5.2GHz Band	14.00	0.11	14.00	0.05			0.68
	5.3GHz Band	14.00	0.10	14.00	0.04			
	5.5GHz Band	14.00	0.08	14.00	0.08			
Date of Testing:		04/17/2014 ~ 04/30/2014						

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Sony Mobile Communications AB
Address	Nya Vattentornet, 22188 Lund, Sweden

Manufacturer	
Company Name	Compal Communications, INC.
Address	No. 385, Yangguang Street, Neihsu, Taipei 11491, Taiwan

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- FCC KDB 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D06 Hotspot Mode SAR v01r01

4. Equipment Under Test (EUT)

4.1 General Information

The equipment under test is a smart phone supporting, GSM850/900/1800/1900, UMTS I / II / IV / V, LTE Band 17 / 04 / 02 / 07, WLAN 2.4GHz 802.11b/g/n, Bluetooth, FM Receiver and GPS features, and below is details of information. For FCC, only wireless modes in US frequency bands are tested.

Product Feature & Specification	
Equipment Name	Smart phone
Brand Name	SONY
Type Name	PM-0771-BV
FCC ID	PY7PM-0771
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	• GSM/GPRS/EGPRS • AMR/RMC 12.2Kbps • HSDPA • HSUPA • DC-HSDPA • LTE: QPSK, 16QAM • 802.11a/b/g/n HT20/HT40 • Bluetooth v3.0+EDR · Bluetooth v4.0-LE • NFC:ASK • ANT+
HW Version	A
SW Version	18.3.C.0.8
GSM / (E)GPRS Dual Transfer mode	Class A – EUT can support Packet Switched and Circuit Switched Network simultaneously.
EUT Stage	Production Unit
Remark: 1. 802.11n-HT40 is not supported in 2.4GHz and 5GHz WLNA operated in 5600 MHz ~ 5650 MHz is notched. 2. This device supports VoIP in EGPRS, WCDMA, LTE (e.g. 3rd part VoIP) and supports EGPRS mode up to multi-slot class33 and supports DTM up to multi-slot class11. 3. This device 2.4GHz WLAN supports Hotspot operation, and 2.4GHz / 5.8GHz WLAN supports WiFi Direct (Group Client / Group Owner), and 5.2GHz / 5.3GHz / 5.5GHz supports WiFi Direct (Group Client only). 4. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, UMTS B2 / B4, and LTE B2 / B4 / B7.	



4.2 Device Serial Number

Sample	Serial Number	IMEI Code
GSM / UTMS SAR measurements	ZH8002JUUR0	004402452475241
LTE SAR measurements	ZH8002J8VQ	004402452477767
WLAN SAR measurements	ZH8002J9Q1	004402453857546
GSM / UTMS SAR measurements	ZH8002JUUR0	004402452475241
LTE SAR measurements	ZH8002J8VQ	004402452477767
BT/WLAN Conducted measurements	ZH8002JUPJ	004402452474269

Note: Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

4.3 Maximum Tune-up Limit

Mode		Burst Average Power (dBm)		
		GSM 850	GSM 1900	
		Full Power Mode	Full Power Mode	Reduced Power Mode
GSM (GMSK, 1 Tx slot)		33.50	30.50	27.50
GPRS (GMSK, 1 Tx slot)		33.50	30.50	27.50
GPRS (GMSK, 2 Tx slots)		30.50	27.50	24.50
GPRS (GMSK, 3 Tx slots)		28.50	25.50	22.50
GPRS (GMSK, 4 Tx slots)		27.50	24.50	21.50
EDGE (8PSK, 1 Tx slot)		27.50	26.50	22.00
EDGE (8PSK, 2 Tx slots)		27.30	26.30	21.80
EDGE (8PSK, 3 Tx slots)		27.10	26.10	21.60
EDGE (8PSK, 4 Tx slots)		26.90	25.90	21.40
DTM 5	GSM (GMSK, 1 Tx slot)	30.50	27.50	24.50
	GPRS (GMSK, 1 Tx slot)	30.50	27.50	24.50
DTM 9	GSM (GMSK, 1 Tx slot)	30.50	27.50	24.50
	GPRS (GMSK, 1 Tx slot)	30.50	27.50	24.50
DTM11	GSM (GMSK, 1 Tx slot)	28.50	25.50	22.50
	GPRS (GMSK, 2 Tx slots)	28.50	25.50	22.50
DTM 5	GSM (GMSK, 1 Tx slot)	30.50	27.50	24.50
	EDGE (8PSK, 1 Tx slot)	27.30	26.30	21.80
DTM 9	GSM (GMSK, 1 Tx slot)	30.50	27.50	24.50
	EDGE (8PSK, 1 Tx slot)	27.30	26.30	21.80
DTM 11	GSM (GMSK, 1 Tx slot)	28.50	25.50	22.50
	EDGE (8PSK, 2 Tx slots)	27.10	26.10	21.60

Mode	Average Power (dBm)				
	Band-II		Band-IV		Band-V
	Full Power Mode	Reduced Power Mode	Full Power Mode	Reduced Power Mode	Full Power Mode
AMR 12.2Kbps	24.00	19.00	24.00	20.00	24.00
RMC 12.2Kbps	24.00	19.00	24.00	20.00	24.00
HSDPA Subtest-1	24.00	19.00	24.00	20.00	24.00
DC-HSDPA Subtest-1	24.00	19.00	24.00	20.00	24.00
HSUPA Subtest-5	24.00	19.00	24.00	20.00	24.00

LTE Band 17				
average power(dBm)				
Modulation	BW (MHz)	RB size	Full Power mode (MPR)	Full power mode
QPSK	10	≤ 12	0	24.00
QPSK	10	> 12	1	23.00
16QAM	10	≤ 12	1	23.00
16QAM	10	> 12	2	22.00
QPSK	5	≤ 8	0	24.00
QPSK	5	> 8	1	23.00
16QAM	5	≤ 8	1	23.00
16QAM	5	> 8	2	22.00

LTE Band 4						
average power(dBm)						
Modulation	BW (MHz)	RB size	Full Power mode (MPR)	Full power mode	Reduced Power mode (MPR)	Reduced Power mode
QPSK	20	≤ 18	0	24.00	0	21.00
QPSK	20	> 18	1	23.00	0	21.00
16QAM	20	≤ 18	1	23.00	0	21.00
16QAM	20	> 18	2	22.00	0	21.00
QPSK	15	≤ 16	0	24.00	0	21.00
QPSK	15	> 16	1	23.00	0	21.00
16QAM	15	≤ 16	1	23.00	0	21.00
16QAM	15	> 16	2	22.00	0	21.00
QPSK	10	≤ 12	0	24.00	0	21.00
QPSK	10	> 12	1	23.00	0	21.00
16QAM	10	≤ 12	1	23.00	0	21.00
16QAM	10	> 12	2	22.00	0	21.00
QPSK	5	≤ 8	0	24.00	0	21.00
QPSK	5	> 8	1	23.00	0	21.00
16QAM	5	≤ 8	1	23.00	0	21.00
16QAM	5	> 8	2	22.00	0	21.00
QPSK	3	≤ 4	0	24.00	0	21.00
QPSK	3	> 4	1	23.00	0	21.00
16QAM	3	≤ 4	1	23.00	0	21.00
16QAM	3	> 4	2	22.00	0	21.00
QPSK	1.4	≤ 5	0	24.00	0	21.00
QPSK	1.4	> 5	1	23.00	0	21.00
16QAM	1.4	≤ 5	1	23.00	0	21.00
16QAM	1.4	> 5	2	22.00	0	21.00

LTE Band 7						
average power(dBm)						
Modulation	BW (MHz)	RB size	Full Power mode (MPR)	Full power mode	Reduced Power mode (MPR)	Reduced Power mode
QPSK	20	≤ 18	0	24.00	0	20.00
QPSK	20	> 18	1	23.00	0	20.00
16QAM	20	≤ 18	1	23.00	0	20.00
16QAM	20	> 18	2	22.00	0	20.00
QPSK	15	≤ 16	0	24.00	0	20.00
QPSK	15	> 16	1	23.00	0	20.00
16QAM	15	≤ 16	1	23.00	0	20.00
16QAM	15	> 16	2	22.00	0	20.00
QPSK	10	≤ 12	0	24.00	0	20.00
QPSK	10	> 12	1	23.00	0	20.00
16QAM	10	≤ 12	1	23.00	0	20.00
16QAM	10	> 12	2	22.00	0	20.00
QPSK	5	≤ 8	0	24.00	0	20.00
QPSK	5	> 8	1	23.00	0	20.00
16QAM	5	≤ 8	1	23.00	0	20.00
16QAM	5	> 8	2	22.00	0	20.00

LTE Band 2						
average power(dBm)						
Modulation	BW (MHz)	RB size	Full Power mode (MPR)	Full power mode	Reduced Power mode (MPR)	Reduced Power mode
QPSK	20	≤ 18	0	24.00	0	19.00
QPSK	20	> 18	1	23.00	0	19.00
16QAM	20	≤ 18	1	23.00	0	19.00
16QAM	20	> 18	2	22.00	0	19.00
QPSK	15	≤ 16	0	24.00	0	19.00
QPSK	15	> 16	1	23.00	0	19.00
16QAM	15	≤ 16	1	23.00	0	19.00
16QAM	15	> 16	2	22.00	0	19.00
QPSK	10	≤ 12	0	24.00	0	19.00
QPSK	10	> 12	1	23.00	0	19.00
16QAM	10	≤ 12	1	23.00	0	19.00
16QAM	10	> 12	2	22.00	0	19.00
QPSK	5	≤ 8	0	24.00	0	19.00
QPSK	5	> 8	1	23.00	0	19.00
16QAM	5	≤ 8	1	23.00	0	19.00
16QAM	5	> 8	2	22.00	0	19.00
QPSK	3	≤ 4	0	24.00	0	19.00
QPSK	3	> 4	1	23.00	0	19.00
16QAM	3	≤ 4	1	23.00	0	19.00
16QAM	3	> 4	2	22.00	0	19.00
QPSK	1.4	≤ 5	0	24.00	0	19.00
QPSK	1.4	> 5	1	23.00	0	19.00
16QAM	1.4	≤ 5	1	23.00	0	19.00
16QAM	1.4	> 5	2	22.00	0	19.00

Mode		Average Power (dBm)	
2.4GHz WLAN	802.11b	17.0	
	802.11g	15.0	
	802.11n-HT20	14.0	
5GHz WLAN	802.11a	14.0	
	802.11n-HT20	14.0	
	802.11n-HT40	CH 62	13.0
		CH102	10.0
		Other channel	14.0
Bluetooth v3.0+EDR		9.5	
Bluetooth v4.0+LE		2.75	

4.4 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r03													
FCC ID	PY7PM-0771												
Equipment Name	Smart phone												
Operating Frequency Range of each LTE transmission band	LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 04: 1710.7 MHz ~ 1754.3 MHz LTE Band 02: 1850.7 MHz ~ 1909.3 MHz LTE Band 07: 2502.5 MHz ~ 2567.5 MHz												
Channel Bandwidth	LTE Band 17: 5MHz, 10MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz												
uplink modulations used	QPSK, and 16QAM												
LTE Voice / Data requirements	Data only												
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3												
	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)					
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz						
		QPSK	> 5	> 4	> 8	> 12	> 16		> 18	≤ 1			
		16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16		≤ 18	≤ 1			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2						
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)												
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.												
Power reduction applied to satisfy SAR compliance	Yes, When operating in hotspot mode that LTE B2 / B4 / B7 power reduction applied to satisfy SAR compliance.												
Transmission (H, M, L) channel numbers and frequencies in each LTE band													
LTE Band 17													
	Bandwidth 5 MHz						Bandwidth 10 MHz						
	Channel #		Freq.(MHz)				Channel #		Freq. (MHz)				
L	23755		706.5				23780		709				
M	23790		710				23790		710				
H	23825		713.5				23800		711				
LTE Band 4													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720	
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745	
LTE Band 2													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860	
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900	
LTE Band 7													
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz
	Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)		Ch. #
L	20775		2502.5		20800		2505		20825		2507.5		20850
M	21100		2535		21100		2535		21100		2535		21100
H	21425		2567.5		21400		2565		21375		2562.5		21350

Target Power reduction applied for each wireless mode

Exposure Position / wireless mode		Hotspot ⁽¹⁾
GSM1900 (GMSK 1 Tx slot) - CS1		3.0 dB
GSM1900 GPRS (GMSK 1 Tx slot) - CS1		3.0 dB
GSM1900 GPRS (GMSK 2 Tx slots) - CS1		3.0 dB
GSM1900 GPRS (GMSK 3 Tx slots) - CS1		3.0 dB
GSM1900 GPRS (GMSK 4 Tx slots) - CS1		3.0 dB
GSM1900 EDGE (8PSK 1 Tx slot) - MCS5		4.5 dB
GSM1900 EDGE (8PSK 2 Tx slots) - MCS5		4.5 dB
GSM1900 EDGE (8PSK 3 Tx slots) - MCS5		4.5 dB
GSM1900 EDGE (8PSK 4 Tx slots) - MCS5		4.5 dB
DTM 5	GSM (GMSK, 1 Tx slot)	3.0 dB
	GPRS (GMSK, 1 Tx slot)	3.0 dB
DTM 9	GSM (GMSK, 1 Tx slot)	3.0 dB
	GPRS (GMSK, 1 Tx slot)	3.0 dB
DTM11	GSM (GMSK, 1 Tx slot)	3.0 dB
	GPRS (GMSK, 2 Tx slots)	3.0 dB
DTM 5	GSM (GMSK, 1 Tx slot)	3.0 dB
	EDGE (8PSK, 1 Tx slot)	4.5 dB
DTM 9	GSM (GMSK, 1 Tx slot)	3.0 dB
	EDGE (8PSK, 1 Tx slot)	4.5 dB
DTM 11	GSM (GMSK, 1 Tx slot)	3.0 dB
	EDGE (8PSK, 2 Tx slots)	4.5 dB
UMTS band II		5.0 dB
UMTS band IV		4.0 dB
LTE band 2		5.0 dB
LTE band 4		3.0 dB
LTE band 7		4.0 dB

Remark:

- (1): Reduced maximum limit applied by activation of Hotspot operation
- When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, UMTS Band B2 / B4, and LTE Band B2 / B4 / B7.
- Power reduction is not applicable for GSM850, UMTS Band 5, LTE Band17, WLAN and Bluetooth.

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

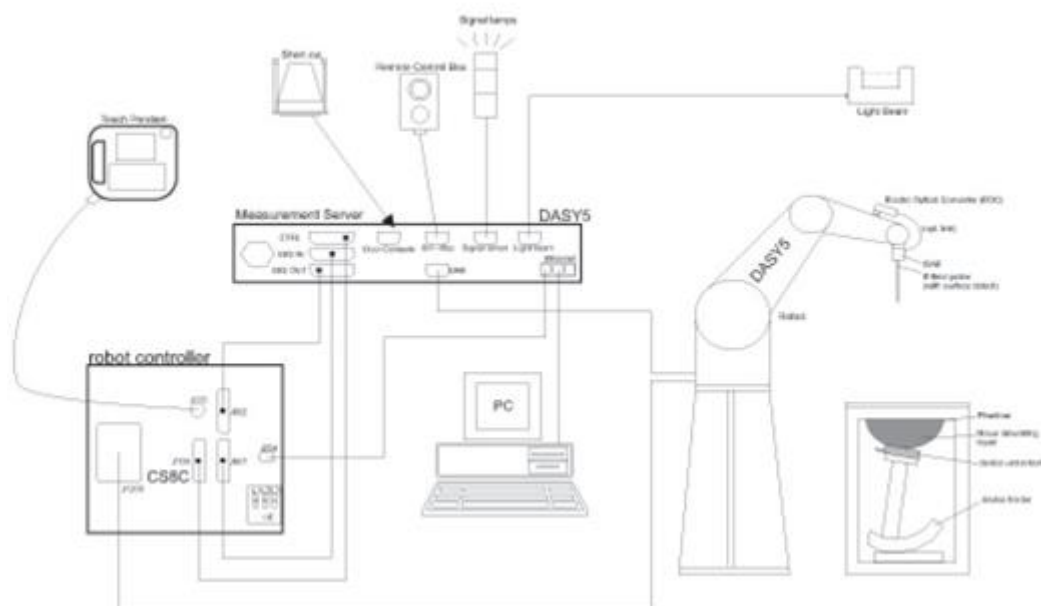

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Nov. 11, 2013	Nov. 10, 2014
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 24, 2014	Mar. 23, 2015
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 27, 2013	Nov. 26, 2014
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 21, 2014	Mar. 20, 2015
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 13, 2013	Nov. 12, 2014
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Nov. 13, 2013	Nov. 12, 2014
SPEAG	5GHz System Validation Kit	D5GHzV2	1128	Jul. 24, 2013	Jul. 23, 2014
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 21, 2013	Aug. 20, 2014
SPEAG	Data Acquisition Electronics	DAE4	1279	Jan. 30, 2014	Jan. 29, 2015
SPEAG	Data Acquisition Electronics	DAE3	495	May. 08, 2013	May. 07, 2014
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 07, 2013	Nov. 06, 2014
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 24, 2013	Sep. 23, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 04, 2013	Nov. 03, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	Jun. 12, 2013	Jun. 11, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 12, 2013	Nov. 11, 2014
Wisewind	Thermometer	ETP-101	TM685	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM281	Oct. 22, 2013	Oct. 21, 2014
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 22, 2013	Oct. 21, 2014
WonDer	Thermometer	WD-5015	TM225	Dec. 02, 2013	Dec. 01, 2014
Anritsu	Radio Communication Analyzer	MT8820C	6201341950	Dec. 25, 2013	Dec. 24, 2014
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 10, 2014	Jan. 09, 2016
R&S	Radio communication Tester	CMW500	113998	Oct. 04, 2013	Oct. 03, 2014
SPEAG	Device Holder	N/A	N/A	NCR	NCR
Agilent	Signal Generator	E4438C	MY49070755	Oct. 08, 2013	Oct. 07, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 23, 2013	Jul. 22, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2014	Feb. 06, 2015
Anritsu	Power Meter	ML2495A	1349001	Dec. 04, 2013	Dec. 03, 2014
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2013	Dec. 02, 2014
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 09, 2013	Jul. 08, 2014
Agilent	Dual Directional Coupler	778D	50422	Note 2	
Woken	Attenuator	WK0602-XX	N/A	Note 2	
PE	Attenuator	PE7005-10	N/A	Note 2	
PE	Attenuator	PE7005- 3	N/A	Note 2	
AR	Power Amplifier	5S1G4M2	0328767	Note 2	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 2	
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note 2	

General Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler were measured by the network analyzer. The reading of the power meter was compensated by the path loss between the signal generator and the power meter, and offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.2	0.885	40.799	0.89	41.90	-0.56	-2.63	±5	2014/4/24
750	Body	22.3	0.970	54.642	0.96	55.50	1.04	-1.55	±5	2014/4/21
835	Head	22.2	0.895	42.983	0.90	41.50	-0.56	3.57	±5	2014/4/24
835	Head	22.4	0.905	40.297	0.90	41.50	0.56	-2.90	±5	2014/4/25
835	Body	22.3	0.976	52.883	0.97	55.20	0.62	-4.20	±5	2014/4/21
1750	Head	22.6	1.395	38.571	1.40	40.00	-0.36	-3.57	±5	2014/4/23
1750	Body	22.5	1.526	52.021	1.52	53.30	0.39	-2.40	±5	2014/4/19
1750	Body	22.4	1.525	51.728	1.52	53.30	0.33	-2.95	±5	2014/4/22
1900	Head	22.5	1.412	38.320	1.40	40.00	0.86	-4.20	±5	2014/4/23
1900	Head	22.5	1.412	38.320	1.40	40.00	0.86	-4.20	±5	2014/4/23
1900	Head	22.5	1.448	39.456	1.40	40.00	3.43	-1.36	±5	2014/4/30
1900	Body	22.3	1.530	52.859	1.52	53.30	0.66	-0.83	±5	2014/4/22
1900	Body	22.3	1.530	52.859	1.52	53.30	0.66	-0.83	±5	2014/4/22
1900	Body	22.4	1.548	51.871	1.52	53.30	1.84	-2.68	±5	2014/4/30
2450	Head	22.6	1.851	39.252	1.80	39.20	2.83	0.13	±5	2014/4/17
2450	Body	22.4	1.929	52.480	1.95	52.70	-1.08	-0.42	±5	2014/4/19
2600	Head	22.6	1.974	38.204	1.96	39.00	0.71	-2.04	±5	2014/4/24
2600	Body	22.6	2.209	51.123	2.16	52.50	2.27	-2.62	±5	2014/4/20
5200	Head	22.5	4.786	35.420	4.66	36.00	2.70	-1.61	±5	2014/4/21
5200	Body	22.3	5.114	47.437	5.30	49.00	-3.51	-3.19	±5	2014/4/19
5300	Head	22.5	4.889	35.285	4.76	35.87	2.71	-1.63	±5	2014/4/21
5300	Body	22.3	5.244	47.199	5.42	48.88	-3.25	-3.44	±5	2014/4/19
5300	Body	22.4	5.405	47.298	5.42	48.88	-0.28	-3.24	±5	2014/4/20
5600	Head	22.5	5.192	34.709	5.06	35.53	2.61	-2.31	±5	2014/4/21
5600	Body	22.4	5.800	46.785	5.77	48.47	0.52	-3.48	±5	2014/4/20
5800	Head	22.5	5.393	34.362	5.27	35.30	2.33	-2.66	±5	2014/4/22
5800	Body	22.3	5.939	46.527	6.00	48.20	-1.02	-3.47	±5	2014/4/21

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2014/4/24	750	Head	250	D750V3-1099	3925	495	1.95	8.42	7.80	-7.36
2014/4/21	750	Body	250	D750V3-1099	3955	1399	2.16	8.56	8.64	0.93
2014/4/24	835	Head	250	D835V2-499	3925	495	2.38	9.13	9.52	4.27
2014/4/25	835	Head	250	D835V2-499	3955	1399	2.28	9.13	9.12	-0.11
2014/4/21	835	Body	250	D835V2-499	3955	1399	2.37	9.46	9.48	0.21
2014/4/23	1750	Head	250	D1750V2-1068	3925	495	9.61	37.30	38.44	3.06
2014/4/19	1750	Body	250	D1750V2-1068	3955	1399	9.39	37.50	37.56	0.16
2014/4/22	1750	Body	250	D1750V2-1068	3955	1399	8.93	37.50	35.72	-4.75
2014/4/23	1900	Head	250	D1900V2-5d041	3955	1399	10.40	41.00	41.60	1.46
2014/4/23	1900	Head	250	D1900V2-5d041	3925	495	10.10	41.00	40.40	-1.46
2014/4/30	1900	Head	250	D1900V2-5d041	3954	1279	9.52	41.00	38.08	-7.12
2014/4/22	1900	Body	250	D1900V2-5d041	3955	1399	9.87	41.00	39.48	-3.71
2014/4/22	1900	Body	250	D1900V2-5d041	3270	778	9.86	41.00	39.44	-3.80
2014/4/30	1900	Body	250	D1900V2-5d041	3954	1279	10.70	41.00	42.80	4.39
2014/4/17	2450	Head	250	D2450V2-924	3925	495	14.00	52.40	56.00	6.87
2014/4/19	2450	Body	250	D2450V2-924	3954	1279	12.90	50.20	51.60	2.79
2014/4/24	2600	Head	250	D2600V2-1070	3955	1399	13.20	56.60	52.80	-6.71
2014/4/20	2600	Body	250	D2600V2-1070	3955	1399	13.30	55.70	53.20	-4.49
2014/4/21	5200	Head	100	D5GHzV2-1128	3954	1279	8.18	78.20	81.80	4.60
2014/4/19	5200	Body	100	D5GHzV2-1128	3954	1279	7.61	73.40	76.10	3.68
2014/4/21	5300	Head	100	D5GHzV2-1128	3954	1279	8.36	80.60	83.60	3.72
2014/4/19	5300	Body	100	D5GHzV2-1128	3954	1279	7.64	74.30	76.40	2.83
2014/4/20	5300	Body	100	D5GHzV2-1128	3954	1279	7.35	74.30	73.50	-1.08
2014/4/21	5600	Head	100	D5GHzV2-1128	3954	1279	7.60	80.50	76.00	-5.59
2014/4/20	5600	Body	100	D5GHzV2-1128	3954	1279	7.32	77.80	73.20	-5.91
2014/4/22	5800	Head	100	D5GHzV2-1128	3954	1279	7.98	77.20	79.80	3.37
2014/4/21	5800	Body	100	D5GHzV2-1128	3954	1279	7.59	72.20	75.90	5.12

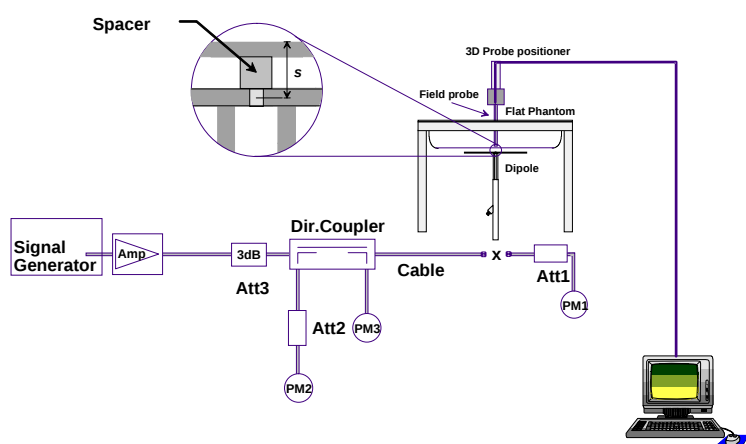


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2. The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

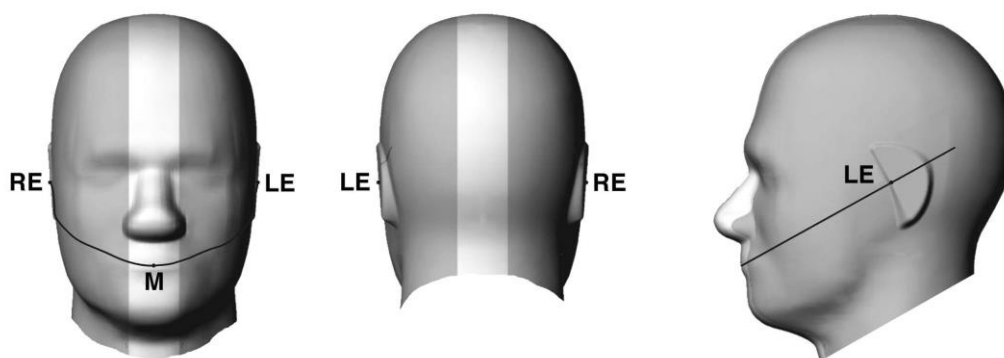


Fig 9.1.1 Front, back, and side views of SAM twin phantom

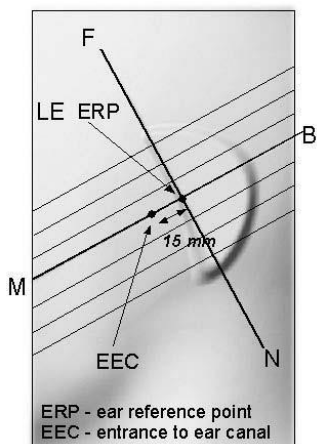


Fig 9.1.2 Close-up side view of phantom showing the ear region.

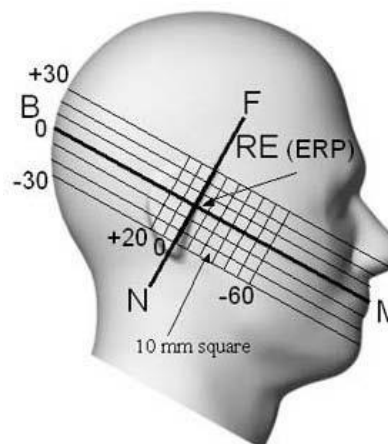


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

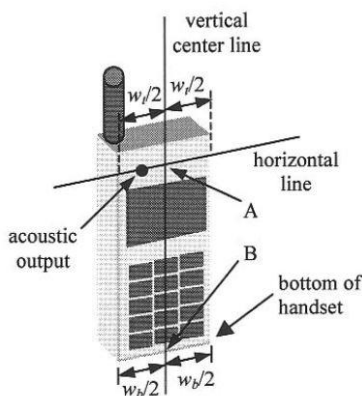


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

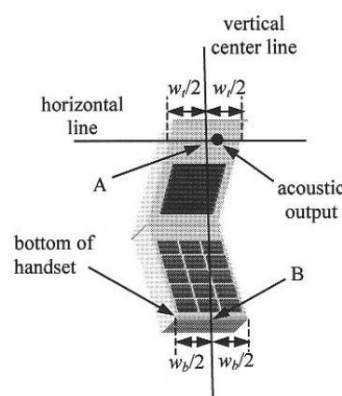


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

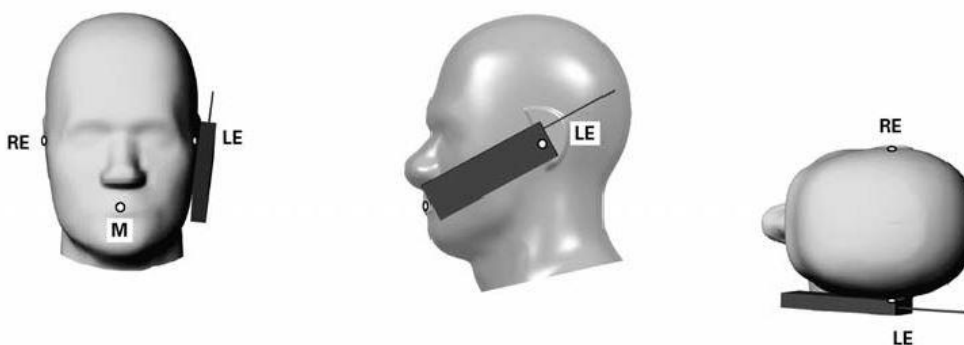


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15° .
3. Rotate the handset around the horizontal line by 15° .
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

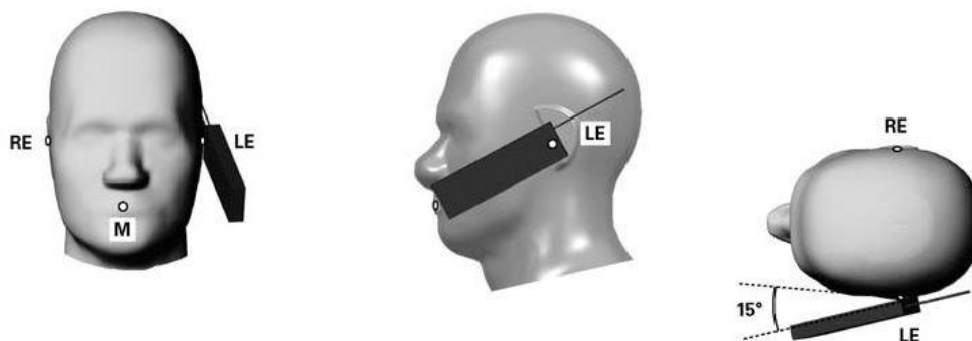


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB 648474 D04v01r02, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v05r02 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

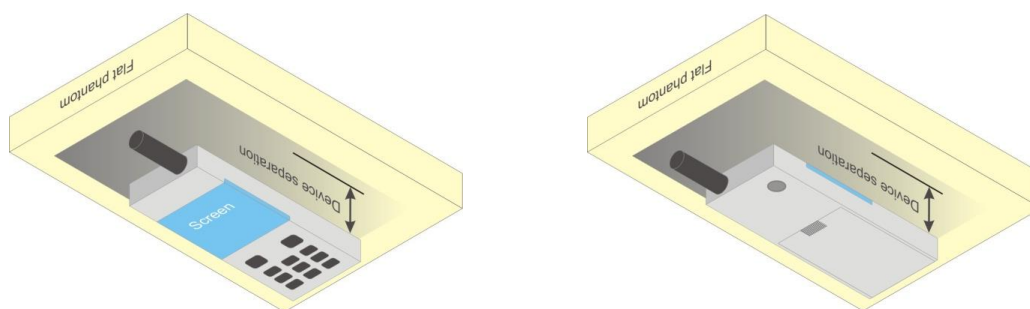


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC HDB Publication 941225 D06v01r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

- For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
- Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table above, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 \cdot \log [\sum (\text{power of each slot, in mW}) / 8]$$

- Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- For Head and body-worn SAR testing, the EUT was set in GSM Voice for GSM850 and DTM Multi-slot class 11 for GSM1900 due to its highest frame-average power and considering the possibility of e.g. 3rd part VoIP operation was additional EGPRS SAR testing performed on voice mode worse case.
- For hotspot mode SAR testing, GPRS / EDGE should be evaluated, therefore the EUT was set in GPRS 4 Tx slots for GSM850 band due to its highest frame-average power.
- Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 1 Tx slot due to its highest frame-average power.

Full Power mode

Band GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM (GMSK, 1 Tx slot)		33.43	33.44	33.49	33.50	24.43	24.44	24.49	24.50
GPRS (GMSK, 1 Tx slot)		33.38	33.41	33.44	33.50	24.38	24.41	24.44	24.50
GPRS (GMSK, 2 Tx slots)		30.20	30.35	30.40	30.50	24.20	24.35	24.40	24.50
GPRS (GMSK, 3 Tx slots)		28.21	28.36	28.45	28.50	23.95	24.10	24.19	24.24
GPRS (GMSK, 4 Tx slots)		27.37	27.41	27.44	27.50	24.37	24.41	24.44	24.50
EDGE (8PSK, 1 Tx slot)		26.67	26.78	26.79	27.50	17.67	17.78	17.79	18.50
EDGE (8PSK, 2 Tx slots)		25.88	26.07	26.14	27.30	19.88	20.07	20.14	21.30
EDGE (8PSK, 3 Tx slots)		25.75	25.87	25.89	27.10	21.49	21.61	21.63	22.84
EDGE (8PSK, 4 Tx slots)		25.60	25.70	25.73	26.90	22.60	22.70	22.73	23.90
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.30	30.45	30.49	30.50	24.24	24.39	24.46	24.48
	GPRS (GMSK, 1 Tx slot)	30.23	30.37	30.48	30.50				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.07	30.29	30.38	30.50	24.02	24.23	24.32	24.48
	GPRS (GMSK, 1 Tx slot)	30.01	30.22	30.31	30.50				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	28.21	28.46	28.49	28.50	23.92	24.21	24.22	24.24
	GPRS (GMSK, 2 Tx slots)	28.16	28.47	28.48	28.50				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.08	30.28	30.37	30.50	22.48	22.67	22.73	23.17
	EDGE (8PSK, 1 Tx slot)	26.00	26.17	26.13	27.30				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.01	30.16	30.29	30.50	22.42	22.59	22.66	23.17
	EDGE (8PSK, 1 Tx slot)	25.97	26.17	26.11	27.30				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	28.17	28.45	28.44	28.50	22.53	22.75	22.72	23.36
	EDGE (8PSK, 2 Tx slots)	25.89	26.06	26.02	27.10				

<Hotspot inactive - full power mode>

Band GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)		30.46	30.19	29.81	30.50	21.46	21.19	20.81	21.50
GPRS (GMSK, 1 Tx slot)		30.49	30.20	29.83	30.50	21.49	21.20	20.83	21.50
GPRS (GMSK, 2 Tx slots)		27.47	27.18	26.82	27.50	21.47	21.18	20.82	21.50
GPRS (GMSK, 3 Tx slots)		25.46	25.17	25.05	25.50	21.20	20.91	20.79	21.24
GPRS (GMSK, 4 Tx slots)		24.48	24.26	24.11	24.50	21.48	21.26	21.11	21.50
EDGE (8PSK, 1 Tx slot)		25.96	25.45	25.08	26.50	16.96	16.45	16.08	17.50
EDGE (8PSK, 2 Tx slots)		25.75	25.29	24.97	26.30	19.75	19.29	18.97	20.30
EDGE (8PSK, 3 Tx slots)		25.40	24.90	24.54	26.10	21.14	20.64	20.28	21.84
EDGE (8PSK, 4 Tx slots)		25.27	24.77	24.45	25.90	22.27	21.77	21.45	22.90
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.41	26.95	26.56	27.50	21.43	20.98	20.58	21.48
	GPRS (GMSK, 1 Tx slot)	27.49	27.05	26.65	27.50				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.37	26.83	26.45	27.50	21.39	20.85	20.47	21.48
	GPRS (GMSK, 1 Tx slot)	27.45	26.91	26.54	27.50				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	25.39	24.85	24.63	25.50	21.17	20.69	20.44	21.24
	GPRS (GMSK, 2 Tx slots)	25.45	25.00	24.74	25.50				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.36	26.82	26.45	27.50	20.72	20.19	19.83	20.92
	EDGE (8PSK, 1 Tx slot)	26.01	25.50	25.16	26.30				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.39	26.85	26.49	27.50	20.67	20.14	19.79	20.92
	EDGE (8PSK, 1 Tx slot)	25.86	25.34	25.00	26.30				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	25.37	25.07	24.73	25.50	21.24	20.66	20.38	21.65
	EDGE (8PSK, 2 Tx slots)	25.57	24.84	24.59	26.10				

<Hotspot active - reduced power mode>

Band GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)		27.03	26.52	26.17	27.50	18.03	17.52	17.17	18.50
GPRS (GMSK, 1 Tx slot)		27.00	26.48	26.12	27.50	18.00	17.48	17.12	18.50
GPRS (GMSK, 2 Tx slots)		23.61	23.11	22.86	24.50	17.61	17.11	16.86	18.50
GPRS (GMSK, 3 Tx slots)		21.55	21.09	20.89	22.50	17.29	16.83	16.63	18.24
GPRS (GMSK, 4 Tx slots)		20.74	20.30	20.10	21.50	17.74	17.30	17.10	18.50
EDGE (8PSK, 1 Tx slot)		21.62	21.11	21.04	22.00	12.62	12.11	12.04	13.00
EDGE (8PSK, 2 Tx slots)		21.59	21.05	20.88	21.80	15.59	15.05	14.88	15.80
EDGE (8PSK, 3 Tx slots)		21.22	20.65	20.46	21.60	16.96	16.39	16.20	17.34
EDGE (8PSK, 4 Tx slots)		21.02	20.53	20.39	21.40	18.02	17.53	17.39	18.40
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	23.66	23.14	22.83	24.50	17.62	17.10	16.79	18.48
	GPRS (GMSK, 1 Tx slot)	23.62	23.10	22.79	24.50				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	23.64	23.11	22.87	24.50	17.60	17.07	16.83	18.48
	GPRS (GMSK, 1 Tx slot)	23.60	23.07	22.83	24.50				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	21.58	21.12	20.92	22.50	17.30	16.85	16.65	18.24
	GPRS (GMSK, 2 Tx slots)	21.55	21.10	20.90	22.50				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	23.74	23.19	22.91	24.50	16.76	16.21	15.97	17.34
	EDGE (8PSK, 1 Tx slot)	21.56	21.01	20.82	21.80				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	23.67	23.15	22.88	24.50	16.67	16.15	15.92	17.34
	EDGE (8PSK, 1 Tx slot)	21.43	20.91	20.73	21.80				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	21.61	21.17	21.00	22.50	17.04	16.53	16.35	17.66
	EDGE (8PSK, 2 Tx slots)	21.13	20.59	20.40	21.60				

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

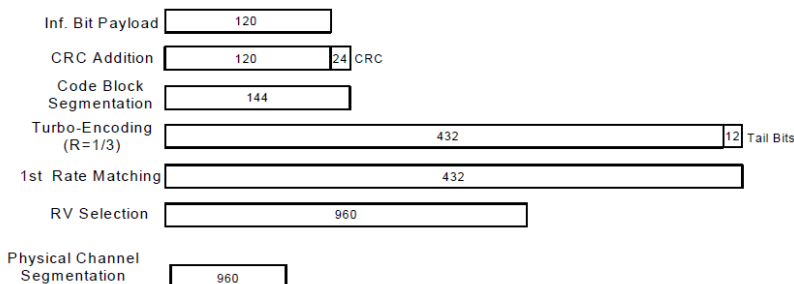
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:

1. SAR testing in AMR configuration is not required when the maximum average output of each RF channel for AMR 12.2Kbps is less than 0.25dB higher than that measured in RMC 12.2Kbps
2. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/kg}$, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.

<Hotspot inactive - full power mode>

Band			WCDMA V			WCDMA II			WCDMA IV		
TX Channel			4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
MPR(dB)	3GPP Rel 99	AMR 12.2Kbps	23.96	23.72	23.84	23.33	23.95	23.39	23.05	23.08	23.74
	3GPP Rel 99	RMC 12.2Kbps	23.99	23.72	23.85	23.34	23.96	23.41	23.06	23.10	23.77
0	3GPP Rel 6	HSDPA Subtest-1	23.23	23.01	23.09	22.08	23.01	22.43	22.03	22.09	22.80
0	3GPP Rel 6	HSDPA Subtest-2	23.19	22.98	23.06	22.06	22.98	22.39	22.01	22.05	22.78
0.5	3GPP Rel 6	HSDPA Subtest-3	22.90	22.64	22.68	21.54	22.53	22.16	21.79	21.83	22.43
0.5	3GPP Rel 6	HSDPA Subtest-4	22.84	22.59	22.61	21.52	22.51	22.13	21.74	21.76	22.40
0	3GPP Rel 8	DC-HSDPA Subtest-1	23.22	23.00	23.07	22.00	23.00	22.42	22.02	22.08	22.79
0	3GPP Rel 8	DC-HSDPA Subtest-2	23.16	22.96	23.04	22.05	22.98	22.37	22.00	22.03	22.74
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	22.88	22.61	22.66	21.52	22.51	22.14	21.77	21.82	22.41
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	22.84	22.58	22.57	21.51	22.50	22.12	21.71	21.74	22.34
0	3GPP Rel 6	HSUPA Subtest-1	22.99	22.38	22.39	22.13	22.85	22.21	22.28	22.30	22.57
2	3GPP Rel 6	HSUPA Subtest-2	22.51	21.89	21.90	21.25	21.65	21.24	21.04	21.06	21.32
1	3GPP Rel 6	HSUPA Subtest-3	22.12	21.52	21.57	21.13	21.69	21.28	21.35	21.40	21.56
2	3GPP Rel 6	HSUPA Subtest-4	22.80	22.23	22.25	21.50	22.03	21.85	21.43	21.48	21.63
0	3GPP Rel 6	HSUPA Subtest-5	23.25	22.98	23.09	22.34	23.19	22.74	22.02	22.02	22.87

<Hotspot active - reduced power mode>

Band			WCDMA II			WCDMA IV		
TX Channel			9262	9400	9538	1312	1413	1513
Frequency (MHz)			1852.4	1880	1907.6	1712.4	1732.6	1752.6
MPR(dB)	3GPP Rel 99	RMC 12.2Kbps	18.44	18.95	18.38	19.85	19.95	19.94
	3GPP Rel 99	RMC 12.2Kbps	18.50	18.96	18.41	19.87	19.98	19.99
0	3GPP Rel 6	HSDPA Subtest-1	17.51	17.96	17.44	18.81	19.05	19.06
0	3GPP Rel 6	HSDPA Subtest-2	17.49	17.94	17.40	18.78	19.04	19.02
0.5	3GPP Rel 6	HSDPA Subtest-3	17.04	17.47	17.01	18.47	18.60	18.64
0.5	3GPP Rel 6	HSDPA Subtest-4	17.03	17.46	17.00	18.41	18.59	18.62
0	3GPP Rel 8	DC-HSDPA Subtest-1	17.48	17.94	17.38	18.78	19.01	19.05
0	3GPP Rel 8	DC-HSDPA Subtest-2	17.45	17.90	17.36	18.72	19.00	19.03
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	17.02	17.45	16.99	18.45	18.57	18.62
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	17.00	17.40	16.97	18.40	18.54	18.60
0	3GPP Rel 6	HSUPA Subtest-1	17.33	17.36	16.98	18.29	18.75	18.95
2	3GPP Rel 6	HSUPA Subtest-2	16.78	16.82	16.51	17.35	17.56	17.65
1	3GPP Rel 6	HSUPA Subtest-3	16.47	16.50	16.20	17.62	17.99	18.15
2	3GPP Rel 6	HSUPA Subtest-4	17.11	17.15	16.83	17.42	17.60	17.52
0	3GPP Rel 6	HSUPA Subtest-5	17.51	17.94	17.43	18.78	18.99	18.99

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

<LTE Band 17 Full Power Mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.82	23.78	23.75	24	0
10	QPSK	1	24	23.72	23.75	23.87		
10	QPSK	1	49	23.97	23.93	23.95		
10	QPSK	25	0	22.78	22.76	22.74	23	0-1
10	QPSK	25	12	22.79	22.77	22.80		
10	QPSK	25	24	22.83	22.90	22.93		
10	QPSK	50	0	22.80	22.83	22.79		
10	16QAM	1	0	22.78	22.71	22.72	23	0-1
10	16QAM	1	24	22.72	22.68	22.79		
10	16QAM	1	49	22.93	22.89	22.88		
10	16QAM	25	0	21.81	21.80	21.78	22	0-2
10	16QAM	25	12	21.83	21.87	21.79		
10	16QAM	25	24	21.80	21.95	21.89		
10	16QAM	50	0	21.86	21.85	21.79		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.81	23.72	23.79	24	0
5	QPSK	1	12	23.76	23.73	23.85		
5	QPSK	1	24	23.79	23.93	23.90		
5	QPSK	12	0	22.81	22.75	22.88	23	0-1
5	QPSK	12	6	22.83	22.76	22.87		
5	QPSK	12	11	22.76	22.74	22.89		
5	QPSK	25	0	22.83	22.77	22.87		
5	16QAM	1	0	22.79	22.70	22.75	23	0-1
5	16QAM	1	12	22.66	22.73	22.77		
5	16QAM	1	24	22.73	22.79	22.88		
5	16QAM	12	0	21.89	21.77	21.88	22	0-2
5	16QAM	12	6	21.83	21.77	21.93		
5	16QAM	12	11	21.83	21.79	21.93		
5	16QAM	25	0	21.84	21.76	21.93		



<LTE Band 4 Hotspot inactive - full power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20050	20175	20300	24	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.93	23.97	23.89		
20	QPSK	1	49	23.92	23.77	23.88	23	1
20	QPSK	1	99	23.74	23.41	23.63		
20	QPSK	50	0	22.93	22.93	22.98		
20	QPSK	50	24	22.84	22.96	22.92	23	1
20	QPSK	50	49	22.73	22.89	22.86		
20	QPSK	100	0	22.69	22.96	22.94		
20	16QAM	1	0	22.97	22.98	22.83	23	1
20	16QAM	1	49	22.95	22.87	22.82		
20	16QAM	1	99	22.93	22.73	22.54		
20	16QAM	50	0	21.88	21.96	21.57	22	2
20	16QAM	50	24	21.83	21.99	21.97		
20	16QAM	50	49	21.82	21.99	21.93		
20	16QAM	100	0	21.76	21.99	21.82	24	0
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.92	23.92	23.83	24	0
15	QPSK	1	37	23.91	23.51	23.72		
15	QPSK	1	74	23.90	23.49	23.70		
15	QPSK	36	0	22.90	22.98	22.96	23	1
15	QPSK	36	18	22.83	22.94	22.91		
15	QPSK	36	37	22.81	22.80	22.84		
15	QPSK	75	0	22.76	23.00	22.89	23	1
15	16QAM	1	0	22.59	22.88	22.87		
15	16QAM	1	37	22.56	22.53	22.77		
15	16QAM	1	74	22.50	22.33	22.71	22	2
15	16QAM	36	0	21.89	21.71	21.58		
15	16QAM	36	18	21.87	21.72	21.95		
15	16QAM	36	37	21.81	21.66	21.90	24	0
15	16QAM	75	0	21.75	21.99	21.87		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.85	23.83	23.95	24	0
10	QPSK	1	24	23.82	23.51	23.94		
10	QPSK	1	49	23.80	23.43	23.90		
10	QPSK	25	0	22.90	22.90	22.96	23	1
10	QPSK	25	12	22.85	22.87	22.90		
10	QPSK	25	24	22.81	22.75	22.95		
10	QPSK	50	0	22.79	22.82	22.96	23	1
10	16QAM	1	0	22.83	22.66	22.86		
10	16QAM	1	24	22.80	22.37	22.85		
10	16QAM	1	49	22.73	22.33	22.81	22	2
10	16QAM	25	0	21.96	21.84	21.99		
10	16QAM	25	12	21.90	21.68	21.73		
10	16QAM	25	24	21.88	21.44	21.65	22	2
10	16QAM	50	0	21.80	21.65	21.41		



Channel				19975	20175	20375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.69	23.45	23.94	24	0
5	QPSK	1	12	23.62	23.41	23.90		
5	QPSK	1	24	23.55	23.31	23.78		
5	QPSK	12	0	22.97	22.65	22.86	23	1
5	QPSK	12	6	22.95	22.63	22.86		
5	QPSK	12	11	22.90	22.59	22.88		
5	QPSK	25	0	22.87	22.50	22.89		
5	16QAM	1	0	22.98	22.78	22.96	23	1
5	16QAM	1	12	22.93	22.70	22.93		
5	16QAM	1	24	22.88	22.67	22.87		
5	16QAM	12	0	21.89	21.88	21.89	22	2
5	16QAM	12	6	21.82	21.85	21.90		
5	16QAM	12	11	21.80	21.82	21.90		
5	16QAM	25	0	21.75	21.80	21.87		
Channel				19965	20175	20385	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.68	23.45	23.90	24	0
3	QPSK	1	7	23.53	23.43	23.89		
3	QPSK	1	14	23.50	23.39	23.80		
3	QPSK	8	0	22.98	22.95	22.97	23	1
3	QPSK	8	4	22.94	22.95	22.99		
3	QPSK	8	7	22.92	22.91	22.96		
3	QPSK	15	0	22.90	22.93	22.97		
3	16QAM	1	0	22.86	22.45	22.86	23	1
3	16QAM	1	7	22.82	22.41	22.80		
3	16QAM	1	14	22.76	22.31	22.74		
3	16QAM	8	0	21.82	21.85	21.86	22	2
3	16QAM	8	4	21.95	21.82	21.84		
3	16QAM	8	7	21.97	21.80	21.84		
3	16QAM	15	0	21.85	21.76	21.83		
Channel				19957	20175	20393	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.42	23.43	23.86	24	0
1.4	QPSK	1	2	23.40	23.42	23.85		
1.4	QPSK	1	5	23.38	23.32	23.80		
1.4	QPSK	3	0	23.29	23.36	23.77		
1.4	QPSK	3	1	23.24	23.38	23.73		
1.4	QPSK	3	2	23.26	23.37	23.70		
1.4	QPSK	6	0	22.96	22.94	22.90	23	1
1.4	16QAM	1	0	22.36	22.42	22.82	23	1
1.4	16QAM	1	2	22.34	22.40	22.80		
1.4	16QAM	1	5	22.30	22.30	22.77		
1.4	16QAM	3	0	22.17	22.19	22.65		
1.4	16QAM	3	1	22.14	22.22	22.63		
1.4	16QAM	3	2	22.10	22.20	22.59		
1.4	16QAM	6	0	21.89	21.62	21.89	22	2



<LTE Band 4 Hotspot active - reduced power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	20.98	20.95	20.86		
20	QPSK	1	49	20.93	20.92	20.79	21	0
20	QPSK	1	99	20.90	20.90	20.73		
20	QPSK	50	0	20.87	20.83	20.78		
20	QPSK	50	24	20.81	20.80	20.75	21	1
20	QPSK	50	49	20.85	20.77	20.72		
20	QPSK	100	0	20.84	20.83	20.70		
20	16QAM	1	0	20.91	20.91	20.86	21	1
20	16QAM	1	49	20.86	20.79	20.60		
20	16QAM	1	99	20.80	20.77	20.60		
20	16QAM	50	0	20.79	20.72	20.84	21	2
20	16QAM	50	24	20.82	20.85	20.68		
20	16QAM	50	49	20.85	20.87	20.66		
20	16QAM	100	0	20.87	20.81	20.75		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.92	20.95	20.91		
15	QPSK	1	37	20.80	20.89	20.83	21	0
15	QPSK	1	74	20.77	20.84	20.81		
15	QPSK	36	0	20.81	20.84	20.83		
15	QPSK	36	18	20.80	20.82	20.74	21	1
15	QPSK	36	37	20.75	20.79	20.75		
15	QPSK	75	0	20.83	20.73	20.79		
15	16QAM	1	0	20.85	20.91	20.86	21	1
15	16QAM	1	37	20.74	20.82	20.71		
15	16QAM	1	74	20.76	20.78	20.67		
15	16QAM	36	0	20.83	20.82	20.83	21	2
15	16QAM	36	18	20.83	20.84	20.72		
15	16QAM	36	37	20.79	20.81	20.73		
15	16QAM	75	0	20.83	20.80	20.82		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.96	20.92	20.87		
10	QPSK	1	24	20.84	20.86	20.84	21	0
10	QPSK	1	49	20.81	20.77	20.75		
10	QPSK	25	0	20.81	20.80	20.86		
10	QPSK	25	12	20.81	20.79	20.75	21	1
10	QPSK	25	24	20.79	20.75	20.72		
10	QPSK	50	0	20.90	20.70	20.82		
10	16QAM	1	0	20.90	20.90	20.80	21	1
10	16QAM	1	24	20.77	20.85	20.65		
10	16QAM	1	49	20.74	20.87	20.60		
10	16QAM	25	0	20.89	20.83	20.77	21	2
10	16QAM	25	12	20.86	20.82	20.68		
10	16QAM	25	24	20.84	20.79	20.70		
10	16QAM	50	0	20.82	20.72	20.71		



Channel				19975	20175	20375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.96	20.90	20.85	21	0
5	QPSK	1	12	20.83	20.83	20.78		
5	QPSK	1	24	20.83	20.87	20.74		
5	QPSK	12	0	20.85	20.85	20.79	21	1
5	QPSK	12	6	20.85	20.87	20.79		
5	QPSK	12	11	20.81	20.89	20.78		
5	QPSK	25	0	20.86	20.87	20.74		
5	16QAM	1	0	20.89	20.83	20.79	21	1
5	16QAM	1	12	20.77	20.76	20.65		
5	16QAM	1	24	20.81	20.79	20.58		
5	16QAM	12	0	20.88	20.73	20.71	21	2
5	16QAM	12	6	20.79	20.80	20.73		
5	16QAM	12	11	20.77	20.78	20.72		
5	16QAM	25	0	20.72	20.81	20.72		
Channel				19965	20175	20385	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.92	20.93	20.87	21	0
3	QPSK	1	7	20.80	20.87	20.76		
3	QPSK	1	14	20.85	20.90	20.78		
3	QPSK	8	0	20.88	20.87	20.80	21	1
3	QPSK	8	4	20.86	20.85	20.76		
3	QPSK	8	7	20.82	20.81	20.84		
3	QPSK	15	0	20.80	20.83	20.83		
3	16QAM	1	0	20.84	20.90	20.80	21	1
3	16QAM	1	7	20.74	20.74	20.61		
3	16QAM	1	14	20.75	20.70	20.67		
3	16QAM	8	0	20.70	20.82	20.76	21	2
3	16QAM	8	4	20.66	20.84	20.72		
3	16QAM	8	7	20.63	20.87	20.78		
3	16QAM	15	0	20.59	20.83	20.72		
Channel				19957	20175	20393	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	20.91	20.97	20.89	21	0
1.4	QPSK	1	2	20.88	20.93	20.82		
1.4	QPSK	1	5	20.90	20.90	20.86		
1.4	QPSK	3	0	20.88	20.88	20.87		
1.4	QPSK	3	1	20.90	20.85	20.82		
1.4	QPSK	3	2	20.88	20.83	20.83		
1.4	QPSK	6	0	20.88	20.80	20.80	21	1
1.4	16QAM	1	0	20.86	20.83	20.83	21	1
1.4	16QAM	1	2	20.83	20.81	20.76		
1.4	16QAM	1	5	20.83	20.80	20.79		
1.4	16QAM	3	0	20.85	20.70	20.81		
1.4	16QAM	3	1	20.82	20.69	20.77		
1.4	16QAM	3	2	20.83	20.71	20.76		
1.4	16QAM	6	0	20.82	20.71	20.76	21	2



<LTE Band 2 Hotspot inactive - full power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.76	23.88	23.72		
20	QPSK	1	49	23.62	23.71	23.67	24	0
20	QPSK	1	99	23.40	23.64	23.65		
20	QPSK	50	0	22.69	22.70	22.63		
20	QPSK	50	24	22.74	22.68	22.59	23	1
20	QPSK	50	49	22.68	22.63	22.57		
20	QPSK	100	0	22.63	22.52	22.55		
20	16QAM	1	0	22.69	22.54	22.61	23	1
20	16QAM	1	49	22.54	22.47	22.78		
20	16QAM	1	99	22.41	22.48	22.75		
20	16QAM	50	0	21.72	21.57	21.74	22	2
20	16QAM	50	24	21.59	21.55	21.83		
20	16QAM	50	49	21.67	21.59	21.78		
20	16QAM	100	0	21.65	21.50	21.80		
Channel				18675	18900	19125	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.72	23.44	23.67		
15	QPSK	1	37	23.71	23.47	23.82	24	0
15	QPSK	1	74	23.59	23.50	23.75		
15	QPSK	36	0	22.71	22.51	22.79		
15	QPSK	36	18	22.68	22.53	22.78	23	1
15	QPSK	36	37	22.59	22.59	22.80		
15	QPSK	75	0	22.71	22.52	22.81		
15	16QAM	1	0	22.68	22.45	22.71	23	1
15	16QAM	1	37	22.64	22.46	22.76		
15	16QAM	1	74	22.51	22.47	22.71		
15	16QAM	36	0	21.72	21.50	21.84	22	2
15	16QAM	36	18	21.66	21.53	21.84		
15	16QAM	36	37	21.52	21.55	21.76		
15	16QAM	75	0	21.75	21.54	21.83		
Channel				18650	18900	19150	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.67	23.51	23.84		
10	QPSK	1	24	23.67	23.46	23.74	24	0
10	QPSK	1	49	23.52	23.50	23.81		
10	QPSK	25	0	22.68	22.52	22.84		
10	QPSK	25	12	22.68	22.54	22.84	23	1
10	QPSK	25	24	22.68	22.60	22.88		
10	QPSK	50	0	22.67	22.52	22.84		
10	16QAM	1	0	22.62	22.55	22.81	23	1
10	16QAM	1	24	22.61	22.44	22.77		
10	16QAM	1	49	22.51	22.47	22.74		
10	16QAM	25	0	21.73	21.56	21.85	22	2
10	16QAM	25	12	21.76	21.56	21.88		
10	16QAM	25	24	21.69	21.62	21.98		
10	16QAM	50	0	21.69	21.54	21.81		



FCC SAR Test Report

Report No. : FA440284

Channel				18625	18900	19175	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.68	23.49	23.74	24	0
5	QPSK	1	12	23.65	23.48	23.76		
5	QPSK	1	24	23.66	23.47	23.74		
5	QPSK	12	0	22.69	22.55	22.87	23	1
5	QPSK	12	6	22.65	22.52	22.85		
5	QPSK	12	11	22.68	22.53	22.85		
5	QPSK	25	0	22.70	22.56	22.82		
5	16QAM	1	0	22.63	22.47	22.72	23	1
5	16QAM	1	12	22.57	22.46	22.81		
5	16QAM	1	24	22.56	22.52	22.69		
5	16QAM	12	0	21.67	21.55	21.92	22	2
5	16QAM	12	6	21.68	21.54	21.90		
5	16QAM	12	11	21.70	21.56	21.86		
5	16QAM	25	0	21.68	21.58	21.93		
Channel				18615	18900	19185	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.66	23.46	23.85	24	0
3	QPSK	1	7	23.69	23.40	23.77		
3	QPSK	1	14	23.61	23.51	23.82		
3	QPSK	8	0	22.70	22.57	22.83	23	1
3	QPSK	8	4	22.65	22.54	22.82		
3	QPSK	8	7	22.65	22.52	22.84		
3	QPSK	15	0	22.71	22.53	22.89		
3	16QAM	1	0	22.65	22.46	22.83	23	1
3	16QAM	1	7	22.64	22.46	22.77		
3	16QAM	1	14	22.62	22.47	22.73		
3	16QAM	8	0	21.69	21.51	21.90	22	2
3	16QAM	8	4	21.72	21.55	21.88		
3	16QAM	8	7	21.74	21.58	21.85		
3	16QAM	15	0	21.65	21.46	21.86		
Channel				18607	18900	19193	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.73	23.44	23.78	24	0
1.4	QPSK	1	2	23.65	23.47	23.74		
1.4	QPSK	1	5	23.70	23.49	23.79		
1.4	QPSK	3	0	23.76	23.48	23.84		
1.4	QPSK	3	1	23.73	23.45	23.75		
1.4	QPSK	3	2	23.75	23.44	23.73		
1.4	QPSK	6	0	22.70	22.56	22.89	23	1
1.4	16QAM	1	0	22.61	22.44	22.77	23	1
1.4	16QAM	1	2	22.62	22.45	22.77		
1.4	16QAM	1	5	22.62	22.47	22.77		
1.4	16QAM	3	0	22.61	22.47	22.78		
1.4	16QAM	3	1	22.61	22.48	22.79		
1.4	16QAM	3	2	22.62	22.48	22.77		
1.4	16QAM	6	0	21.56	21.46	21.78	22	2

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456 / FAX : 886-3-328-4978

FCC ID : PY7PM-0771

Page 40 of 78

Issued Date : Jun. 20, 2014

Form version. : 140422



<LTE Band 2 Hotspot active - reduced power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.94	18.91	18.84		
20	QPSK	1	49	18.91	18.87	18.83	19	0
20	QPSK	1	99	18.82	18.80	18.75		
20	QPSK	50	0	18.92	18.84	18.79		
20	QPSK	50	24	18.82	18.80	18.76	19	1
20	QPSK	50	49	18.80	18.79	18.78		
20	QPSK	100	0	18.83	18.80	18.76		
20	16QAM	1	0	18.92	18.77	18.88	19	1
20	16QAM	1	49	18.60	18.74	18.81		
20	16QAM	1	99	18.47	18.66	18.76		
20	16QAM	50	0	18.88	18.60	18.84	19	2
20	16QAM	50	24	18.74	18.61	18.83		
20	16QAM	50	49	18.69	18.60	18.84		
20	16QAM	100	0	18.70	18.60	18.76		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.91	18.87	18.79		
15	QPSK	1	37	18.85	18.84	18.75	19	0
15	QPSK	1	74	18.83	18.78	18.74		
15	QPSK	36	0	18.81	18.77	18.66		
15	QPSK	36	18	18.77	18.79	18.66	19	1
15	QPSK	36	37	18.75	18.78	18.78		
15	QPSK	75	0	18.70	18.86	18.75		
15	16QAM	1	0	18.88	18.80	18.75	19	1
15	16QAM	1	37	18.82	18.74	18.67		
15	16QAM	1	74	18.80	18.68	18.69		
15	16QAM	36	0	18.87	18.75	18.71	19	2
15	16QAM	36	18	18.83	18.79	18.63		
15	16QAM	36	37	18.80	18.78	18.74		
15	16QAM	75	0	18.70	18.77	18.72		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.93	18.83	18.79		
10	QPSK	1	24	18.92	18.80	18.66	19	0
10	QPSK	1	49	18.91	18.72	18.71		
10	QPSK	25	0	18.89	18.77	18.60		
10	QPSK	25	12	18.88	18.81	18.71	19	1
10	QPSK	25	24	18.83	18.78	18.75		
10	QPSK	50	0	18.81	18.72	18.71		
10	16QAM	1	0	18.89	18.79	18.76	19	1
10	16QAM	1	24	18.81	18.73	18.61		
10	16QAM	1	49	18.78	18.63	18.66		
10	16QAM	25	0	18.69	18.71	18.67	19	2
10	16QAM	25	12	18.67	18.62	18.64		
10	16QAM	25	24	18.65	18.66	18.61		
10	16QAM	50	0	18.60	18.64	18.67		



Channel				18625	18900	19175	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.89	18.89	18.80	19	0
5	QPSK	1	12	18.88	18.73	18.69		
5	QPSK	1	24	18.82	18.69	18.74		
5	QPSK	12	0	18.80	18.78	18.76	19	1
5	QPSK	12	6	18.78	18.83	18.79		
5	QPSK	12	11	18.68	18.85	18.72		
5	QPSK	25	0	18.66	18.86	18.73		
5	16QAM	1	0	18.79	18.83	18.73	19	1
5	16QAM	1	12	18.77	18.74	18.70		
5	16QAM	1	24	18.71	18.75	18.69		
5	16QAM	12	0	18.74	18.76	18.63	19	2
5	16QAM	12	6	18.67	18.70	18.55		
5	16QAM	12	11	18.61	18.76	18.65		
5	16QAM	25	0	18.64	18.67	18.71		
Channel				18615	18900	19185	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.86	18.91	18.86	19	0
3	QPSK	1	7	18.83	18.89	18.73		
3	QPSK	1	14	18.80	18.85	18.77		
3	QPSK	8	0	18.81	18.90	18.73	19	1
3	QPSK	8	4	18.79	18.88	18.73		
3	QPSK	8	7	18.76	18.83	18.78		
3	QPSK	15	0	18.75	18.90	18.79		
3	16QAM	1	0	18.82	18.90	18.82	19	1
3	16QAM	1	7	18.74	18.76	18.66		
3	16QAM	1	14	18.76	18.67	18.67		
3	16QAM	8	0	18.80	18.83	18.80	19	2
3	16QAM	8	4	18.74	18.87	18.79		
3	16QAM	8	7	18.72	18.80	18.80		
3	16QAM	15	0	18.69	18.82	18.79		
Channel				18607	18900	19193	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.89	18.92	18.82	19	0
1.4	QPSK	1	2	18.84	18.86	18.75		
1.4	QPSK	1	5	18.87	18.91	18.79		
1.4	QPSK	3	0	18.85	18.86	18.81		
1.4	QPSK	3	1	18.88	18.85	18.79		
1.4	QPSK	3	2	18.87	18.85	18.77		
1.4	QPSK	6	0	18.86	18.88	18.78	19	1
1.4	16QAM	1	0	18.83	18.80	18.73	19	1
1.4	16QAM	1	2	18.82	18.78	18.69		
1.4	16QAM	1	5	18.81	18.77	18.69		
1.4	16QAM	3	0	18.82	18.73	18.71		
1.4	16QAM	3	1	18.78	18.77	18.69		
1.4	16QAM	3	2	18.76	18.75	18.69		
1.4	16QAM	6	0	18.77	18.76	18.68	19	2



<LTE Band 7 Hotspot inactive - full power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.50	23.61	23.42		
20	QPSK	1	49	23.75	23.59	23.45	24	0
20	QPSK	1	99	23.88	23.63	23.48		
20	QPSK	50	0	21.31	21.50	21.12		
20	QPSK	50	24	21.52	21.52	21.14	23	1
20	QPSK	50	49	21.59	21.57	21.17		
20	QPSK	100	0	21.45	21.43	21.07		
20	16QAM	1	0	22.45	22.67	22.45	23	1
20	16QAM	1	49	22.65	22.64	22.43		
20	16QAM	1	99	22.75	22.44	22.42		
20	16QAM	50	0	20.41	20.33	20.32	22	2
20	16QAM	50	24	20.30	20.34	20.33		
20	16QAM	50	49	20.38	20.24	20.38		
20	16QAM	100	0	20.34	20.30	20.40		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.60	23.82	23.47		
15	QPSK	1	37	23.81	23.80	23.49	24	0
15	QPSK	1	74	23.85	23.79	23.55		
15	QPSK	36	0	21.18	21.03	21.14		
15	QPSK	36	18	21.14	21.00	21.12	23	1
15	QPSK	36	37	21.22	21.01	21.08		
15	QPSK	75	0	21.17	21.09	21.03		
15	16QAM	1	0	22.58	22.87	22.38	23	1
15	16QAM	1	37	22.76	22.86	22.39		
15	16QAM	1	74	22.98	22.81	22.61		
15	16QAM	36	0	20.43	20.50	20.33	22	2
15	16QAM	36	18	20.45	20.58	20.32		
15	16QAM	36	37	20.61	20.56	20.26		
15	16QAM	75	0	20.42	20.52	20.24		
Channel				20800	21100	21400		
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.64	23.79	23.53		
10	QPSK	1	24	23.71	23.72	23.40	24	0
10	QPSK	1	49	23.75	23.74	23.49		
10	QPSK	25	0	21.14	21.23	21.10		
10	QPSK	25	12	21.18	21.28	21.07	23	1
10	QPSK	25	24	21.15	21.33	21.12		
10	QPSK	50	0	21.15	21.23	21.03		
10	16QAM	1	0	22.61	22.82	22.33	23	1
10	16QAM	1	24	22.66	22.79	22.41		
10	16QAM	1	49	22.85	22.94	22.45		
10	16QAM	25	0	20.73	20.80	20.46	22	2
10	16QAM	25	12	20.73	20.82	20.47		
10	16QAM	25	24	20.75	20.76	20.42		
10	16QAM	50	0	20.73	20.80	20.40		



Channel				20775	21100	21425	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.55	23.85	23.46	24	0
5	QPSK	1	12	23.60	23.82	23.49		
5	QPSK	1	24	23.67	23.85	23.52		
5	QPSK	12	0	21.07	21.28	21.17	23	1
5	QPSK	12	6	21.17	21.23	21.14		
5	QPSK	12	11	21.19	21.29	21.08		
5	QPSK	25	0	21.17	21.25	21.04		
5	16QAM	1	0	22.54	22.68	22.29	23	1
5	16QAM	1	12	22.59	22.65	22.31		
5	16QAM	1	24	22.63	22.61	22.48		
5	16QAM	12	0	20.66	20.83	20.55	22	2
5	16QAM	12	6	20.80	20.82	20.54		
5	16QAM	12	11	20.75	20.85	20.41		
5	16QAM	25	0	20.76	20.84	20.41		



<LTE Band 7 Hotspot active - reduced power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	19.96	19.95	19.83		
20	QPSK	1	49	19.94	19.93	19.72	20	0
20	QPSK	1	99	19.93	19.90	19.64		
20	QPSK	50	0	19.87	19.84	19.55		
20	QPSK	50	24	19.85	19.82	19.52	20	1
20	QPSK	50	49	19.80	19.83	19.51		
20	QPSK	100	0	19.79	19.76	19.44		
20	16QAM	1	0	19.90	19.92	19.69	20	1
20	16QAM	1	49	19.88	19.83	19.66		
20	16QAM	1	99	19.85	19.53	19.62		
20	16QAM	50	0	19.76	19.52	19.59	20	2
20	16QAM	50	24	19.75	19.89	19.57		
20	16QAM	50	49	19.73	19.87	19.50		
20	16QAM	100	0	19.64	19.79	19.54		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	19.94	19.92	19.63		
15	QPSK	1	37	19.92	19.88	19.54	20	0
15	QPSK	1	74	19.87	19.81	19.52		
15	QPSK	36	0	19.68	19.87	19.41		
15	QPSK	36	18	19.61	19.83	19.38	20	1
15	QPSK	36	37	19.64	19.86	19.42		
15	QPSK	75	0	19.59	19.85	19.50		
15	16QAM	1	0	19.91	19.90	19.60	20	1
15	16QAM	1	37	19.88	19.81	19.59		
15	16QAM	1	74	19.85	19.58	19.48		
15	16QAM	36	0	19.80	19.87	19.44	20	2
15	16QAM	36	18	19.78	19.83	19.46		
15	16QAM	36	37	19.76	19.80	19.45		
15	16QAM	75	0	19.75	19.75	19.31		
Channel				20800	21100	21400		
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	19.93	19.93	19.69		
10	QPSK	1	24	19.92	19.89	19.64	20	0
10	QPSK	1	49	19.89	19.85	19.51		
10	QPSK	25	0	19.85	19.83	19.67		
10	QPSK	25	12	19.84	19.81	19.61	20	1
10	QPSK	25	24	19.77	19.80	19.51		
10	QPSK	50	0	19.73	19.71	19.44		
10	16QAM	1	0	19.95	19.90	19.58	20	1
10	16QAM	1	24	19.85	19.79	19.51		
10	16QAM	1	49	19.87	19.75	19.49		
10	16QAM	25	0	19.86	19.77	19.48	20	2
10	16QAM	25	12	19.83	19.75	19.45		
10	16QAM	25	24	19.80	19.69	19.41		
10	16QAM	50	0	19.76	19.64	19.36		



Channel				20775	21100	21425	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	19.91	19.93	19.69	20	0
5	QPSK	1	12	19.87	19.85	19.52		
5	QPSK	1	24	19.86	19.91	19.47		
5	QPSK	12	0	19.79	19.86	19.53	20	1
5	QPSK	12	6	19.76	19.86	19.51		
5	QPSK	12	11	19.75	19.86	19.42		
5	QPSK	25	0	19.69	19.87	19.52		
5	16QAM	1	0	19.89	19.87	19.62	20	1
5	16QAM	1	12	19.79	19.77	19.52		
5	16QAM	1	24	19.76	19.76	19.50		
5	16QAM	12	0	19.74	19.82	19.42	20	2
5	16QAM	12	6	19.73	19.81	19.47		
5	16QAM	12	11	19.71	19.86	19.46		
5	16QAM	25	0	19.69	19.84	19.44		

<WLAN Conducted Power>
General Note:

1. For IEEE802.11b/g SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were selected for SAR evaluation. 802.11g were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11b mode.
2. For IEEE802.11n, SAR testing can be conducted on channel with the highest output power when taking into consideration tune-up tolerance for same test configuration that was identified during SAR evaluations for IEEE802.11a/b/g (as applicable) provided bandwidth and test position are the same.
3. For IEEE802.11n with multiple channel BW configurations, highest channel BW configuration with highest output power limit shall be tested.
4. Testing of lower BW configurations is not required when the maximum average output of the default test channels in each lower BW configuration is less than 1/4dB higher than the default test channel in the highest BW configuration.

<2.4GHz WLAN>

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	16.71	16.94	16.91	16.96
CH 6	2437	16.98			
CH 11	2462	16.84			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	14.61	14.90	14.92	14.84	14.92	14.88	14.86	14.90
CH 6	2437	14.93							
CH 11	2462	14.79							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	13.64	13.94	13.93	13.92	13.88	13.93	13.91	13.93
CH 6	2437	13.95							
CH 11	2462	13.77							



<5GHz WLAN>

WLAN 5GHz 802.11a Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	13.72	13.61	13.53	13.71	13.67	13.71	13.70	13.66
CH 40	5200	13.70							
CH 44	5220	13.66							
CH 48	5240	13.57							
CH 52	5260	13.63	13.96	13.95	13.94	13.96	13.95	13.96	13.96
CH 56	5280	13.72							
CH 60	5300	13.90							
CH 64	5320	13.97							
CH 100	5500	13.95	13.70	13.52	13.56	13.33	13.53	13.86	13.80
CH 104	5520	13.50							
CH 108	5540	13.52							
CH 112	5560	13.51							
CH 116	5580	13.67							
CH 132	5660	13.62							
CH 136	5680	13.75							
CH 140	5700	13.83							
CH 149	5745	13.98	13.96	13.97	13.96	13.94	13.95	13.92	13.96
CH 153	5765	13.90							
CH 157	5785	13.81							
CH 161	5805	13.75							
CH 165	5825	13.90							

WLAN 5GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 36	5180	13.69	13.65	13.68	13.66	13.68	13.66	13.68	13.65
CH 40	5200	13.61							
CH 44	5220	13.62							
CH 48	5240	13.57							
CH 52	5260	13.59	13.94	13.89	13.94	13.89	13.90	13.92	13.91
CH 56	5280	13.58							
CH 60	5300	13.85							
CH 64	5320	13.95							
CH 100	5500	14.00	13.99	13.98	13.98	13.99	13.98	13.98	13.95
CH 104	5520	13.90							
CH 108	5540	13.92							
CH 112	5560	13.91							
CH 116	5580	13.72							
CH 132	5660	13.84							
CH 136	5680	13.78							
CH 140	5700	13.88							
CH 149	5745	13.99	13.97	13.98	13.96	13.98	13.96	13.98	13.91
CH 153	5765	13.93							
CH 157	5785	13.88							
CH 161	5805	13.91							
CH 165	5825	13.95							

WLAN 5GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 38	5190	13.83	13.77	13.81	13.82	13.80	13.79	13.77	13.74
CH 46	5230	13.75							
CH 54	5270	13.89	13.87	13.84	13.80	13.83	13.82	13.75	13.79
CH 62	5310	12.62							
CH 102	5510	8.70	13.59	13.63	13.63	13.62	13.56	13.57	13.59
CH 110	5550	13.64							
CH 134	5670	13.52							
CH 151	5755	13.82	13.80	13.76	13.77	13.80	13.79	13.77	13.78
CH 159	5795	13.57							

13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth v3.0+EDR	Bluetooth v4.0+LE
2.4GHz Bluetooth	9.50	2.75

Note:

- Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison


Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
9.50	5	2.48	2.83

Note:

Per KDB 447498 D01v05r02, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 2.83 which is ≤ 3, SAR testing is not required.

14. Antenna Location

<Mobile Phone>

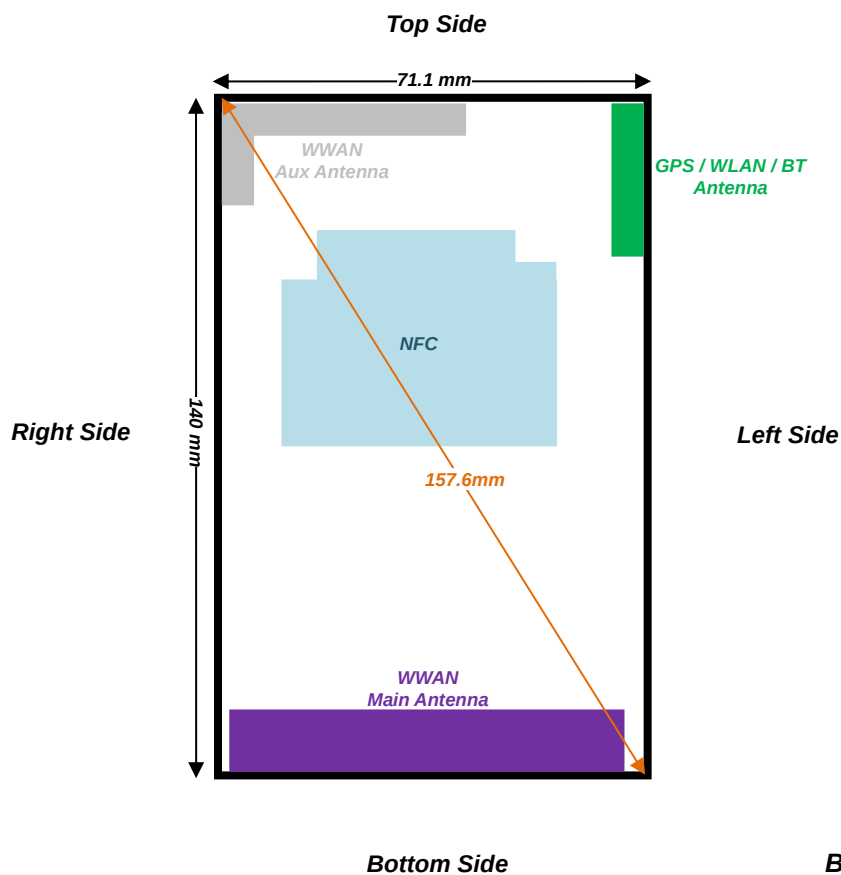

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	120.5mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	104.9mm	58.9mm	≤ 25mm
Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

Note:

Per KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN / WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Considering the possibility of e.g. 3rd part VoIP operation, LTE SAR for the head exposure positions and body-worn positions are performed and was additional EGPRS SAR testing performed on voice mode worse case.
4. For GSM1900 DTM of head exposure positions and body worn exposure positions, the tune-up scaling factor was used source-based time-average power and tune-up limit calculation.
5. Per KDB 941225 D02v02r03, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2 W/kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded..
6. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
7. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
8. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
9. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is > not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
10. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is > not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
11. Per KDB 648474 D04v01r02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is < 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
12. This device 2.4GHz WLAN supports Hotspot operation, and 2.4GHz / 5.8GHz WLAN supports WiFi Direct (Group Client / Group Owner), and 5.2GHz / 5.3GHz / 5.5GHz supports WiFi Direct (Group Client only).
13. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, UMTS B2 / B4, and LTE B2 / B4 / B7.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Modulation	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GMSK	GSM Voice	Right Cheek	251	848.8	33.49	33.50	1.002	0.14	0.575	0.576	0.450	0.451
	GSM850	GMSK	GSM Voice	Right Tilted	251	848.8	33.49	33.50	1.002	0	0.334	0.335	0.262	0.263
01	GSM850	GMSK	GSM Voice	Left Cheek	251	848.8	33.49	33.50	1.002	-0.01	0.624	0.625	0.486	0.487
	GSM850	GMSK	GSM Voice	Left Cheek	128	824.2	33.43	33.50	1.016	0.03	0.412	0.419	0.315	0.320
	GSM850	GMSK	GSM Voice	Left Cheek	189	836.4	33.44	33.50	1.014	-0.04	0.561	0.569	0.438	0.444
	GSM850	GMSK	GPRS (4 Tx slots)	Left Cheek	251	848.8	27.44	27.50	1.014	-0.01	0.597	0.605	0.468	0.475
	GSM850	GMSK	GSM Voice	Left Tilted	251	848.8	33.49	33.50	1.002	0.02	0.395	0.396	0.309	0.310
	GSM1900	GSM Voice with 8PSK 2Tx	DTM Multi-slot class 11	Right Cheek	512	1850.2	21.24	21.65	1.098	0.01	0.197	0.216	0.134	0.147
	GSM1900	GSM Voice with 8PSK 2Tx	DTM Multi-slot class 11	Right Tilted	512	1850.2	21.24	21.65	1.098	0.13	0.124	0.136	0.081	0.089
	GSM1900	GSM Voice with 8PSK 2Tx	DTM Multi-slot class 11	Left Cheek	512	1850.2	21.24	21.65	1.098	-0.03	0.370	0.406	0.233	0.256
	GSM1900	8PSK	EDGE (4 Tx slots)	Left Cheek	512	1850.2	25.27	25.90	1.156	-0.05	0.440	0.509	0.280	0.324
02	GSM1900	8PSK	EDGE (4 Tx slots)	Left Cheek	661	1880	24.77	25.90	1.297	-0.16	0.422	0.547	0.256	0.332
	GSM1900	8PSK	EDGE (4 Tx slots)	Left Cheek	810	1909.8	24.45	25.90	1.396	0.02	0.365	0.510	0.226	0.316
	GSM1900	GSM Voice with 8PSK 2Tx	DTM Multi-slot class 11	Left Tilted	512	1850.2	21.24	21.65	1.098	-0.18	0.178	0.195	0.114	0.125

<WCDMA SAR>

Plot No.	Band	Modulation	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA V	QPSK	RMC 12.2Kbps	Right Cheek	4132	826.4	23.99	24.00	1.002	0.04	0.512	0.513	0.390	0.391
	WCDMA V	QPSK	RMC 12.2Kbps	Right Cheek	4182	836.4	23.72	24.00	1.067	-0.01	0.523	0.558	0.400	0.427
03	WCDMA V	QPSK	RMC 12.2Kbps	Right Cheek	4233	846.6	23.85	24.00	1.035	-0.05	0.555	0.575	0.424	0.439
	WCDMA V	QPSK	RMC 12.2Kbps	Right Tilted	4132	826.4	23.99	24.00	1.002	0.04	0.272	0.273	0.210	0.210
	WCDMA V	QPSK	RMC 12.2Kbps	Left Cheek	4132	826.4	23.99	24.00	1.002	0.03	0.481	0.482	0.356	0.357
	WCDMA V	QPSK	RMC 12.2Kbps	Left Tilted	4132	826.4	23.99	24.00	1.002	-0.01	0.318	0.319	0.245	0.246
04	WCDMA IV	QPSK	RMC 12.2Kbps	Right Cheek	1513	1752.6	23.77	24.00	1.054	0.05	0.494	0.521	0.320	0.337
	WCDMA IV	QPSK	RMC 12.2Kbps	Right Cheek	1312	1712.4	23.06	24.00	1.242	0.04	0.400	0.497	0.258	0.320
	WCDMA IV	QPSK	RMC 12.2Kbps	Right Cheek	1413	1732.6	23.10	24.00	1.230	-0.06	0.354	0.436	0.228	0.281
	WCDMA IV	QPSK	RMC 12.2Kbps	Right Tilted	1513	1752.6	23.77	24.00	1.054	-0.07	0.209	0.220	0.139	0.147
	WCDMA IV	QPSK	RMC 12.2Kbps	Left Cheek	1513	1752.6	23.77	24.00	1.054	0.02	0.427	0.450	0.278	0.293
	WCDMA IV	QPSK	RMC 12.2Kbps	Left Tilted	1513	1752.6	23.77	24.00	1.054	-0.01	0.293	0.309	0.188	0.198
	WCDMA II	QPSK	RMC 12.2Kbps	Right Cheek	9400	1880	23.96	24.00	1.009	0.09	0.333	0.336	0.230	0.232
	WCDMA II	QPSK	RMC 12.2Kbps	Right Tilted	9400	1880	23.96	24.00	1.009	0.06	0.198	0.200	0.133	0.134
	WCDMA II	QPSK	RMC 12.2Kbps	Left Cheek	9400	1880	23.96	24.00	1.009	0.02	0.591	0.596	0.378	0.381
	WCDMA II	QPSK	RMC 12.2Kbps	Left Cheek	9262	1852.4	23.34	24.00	1.164	0.03	0.470	0.547	0.304	0.354
05	WCDMA II	QPSK	RMC 12.2Kbps	Left Cheek	9538	1907.6	23.41	24.00	1.146	0.06	0.566	0.648	0.357	0.409
	WCDMA II	QPSK	RMC 12.2Kbps	Left Tilted	9400	1880	23.96	24.00	1.009	0	0.265	0.267	0.173	0.175



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
06	LTE Band 17	10M	QPSK	1	49	Right Cheek	23780	709	23.97	24.00	1.007	-0.02	0.251	0.253	0.196	0.197
	LTE Band 17	10M	QPSK	1	49	Right Cheek	23790	710	23.93	24.00	1.016	-0.03	0.251	0.255	0.198	0.201
	LTE Band 17	10M	QPSK	1	49	Right Cheek	23800	711	23.95	24.00	1.012	-0.01	0.259	0.262	0.204	0.206
	LTE Band 17	10M	QPSK	25	24	Right Cheek	23800	711	22.93	23.00	1.016	0.05	0.157	0.160	0.124	0.126
	LTE Band 17	10M	QPSK	1	49	Right Tilted	23780	709	23.97	24.00	1.007	0.02	0.086	0.087	0.069	0.069
	LTE Band 17	10M	QPSK	25	24	Right Tilted	23800	711	22.93	23.00	1.016	-0.06	0.069	0.070	0.055	0.056
	LTE Band 17	10M	QPSK	1	49	Left Cheek	23780	709	23.97	24.00	1.007	0.03	0.178	0.179	0.139	0.140
	LTE Band 17	10M	QPSK	25	24	Left Cheek	23800	711	22.93	23.00	1.016	0	0.147	0.149	0.115	0.117
	LTE Band 17	10M	QPSK	1	49	Left Tilted	23780	709	23.97	24.00	1.007	-0.05	0.065	0.065	0.052	0.052
	LTE Band 17	10M	QPSK	25	24	Left Tilted	23800	711	22.93	23.00	1.016	-0.01	0.052	0.053	0.041	0.042
07	LTE Band 4	20M	QPSK	1	0	Right Cheek	20175	1732.5	23.97	24.00	1.007	-0.02	0.487	0.490	0.317	0.319
	LTE Band 4	20M	QPSK	1	0	Right Cheek	20050	1720	23.93	24.00	1.016	0.03	0.407	0.414	0.266	0.270
	LTE Band 4	20M	QPSK	1	0	Right Cheek	20300	1745	23.89	24.00	1.026	0.04	0.319	0.327	0.207	0.212
	LTE Band 4	20M	QPSK	50	0	Right Cheek	20300	1745	22.98	23.00	1.005	-0.17	0.414	0.416	0.270	0.271
	LTE Band 4	20M	QPSK	1	0	Right Tilted	20175	1732.5	23.97	24.00	1.007	0.01	0.142	0.143	0.089	0.090
	LTE Band 4	20M	QPSK	50	0	Right Tilted	20300	1745	22.98	23.00	1.005	-0.02	0.126	0.127	0.080	0.080
	LTE Band 4	20M	QPSK	1	0	Left Cheek	20175	1732.5	23.97	24.00	1.007	0.03	0.335	0.337	0.230	0.232
	LTE Band 4	20M	QPSK	50	0	Left Cheek	20300	1745	22.98	23.00	1.005	0.05	0.255	0.256	0.167	0.168
	LTE Band 4	20M	QPSK	1	0	Left Tilted	20175	1732.5	23.97	24.00	1.007	0.1	0.178	0.179	0.111	0.112
	LTE Band 4	20M	QPSK	50	0	Left Tilted	20300	1745	22.98	23.00	1.005	0.06	0.166	0.167	0.105	0.105
08	LTE Band 2	20M	QPSK	1	0	Right Cheek	18900	1880	23.88	24.00	1.028	0.05	0.335	0.344	0.221	0.227
	LTE Band 2	20M	QPSK	50	24	Right Cheek	18700	1860	22.74	23.00	1.062	0.04	0.302	0.321	0.199	0.211
	LTE Band 2	20M	QPSK	1	0	Right Tilted	18900	1880	23.88	24.00	1.028	-0.07	0.206	0.212	0.137	0.141
	LTE Band 2	20M	QPSK	50	24	Right Tilted	18700	1860	22.74	23.00	1.062	-0.01	0.173	0.184	0.116	0.123
	LTE Band 2	20M	QPSK	1	0	Left Cheek	18900	1880	23.88	24.00	1.028	-0.01	0.471	0.484	0.301	0.309
	LTE Band 2	20M	QPSK	1	0	Left Cheek	18700	1860	23.76	24.00	1.057	0.05	0.458	0.484	0.296	0.313
	LTE Band 2	20M	QPSK	1	0	Left Cheek	19100	1900	23.72	24.00	1.067	0.07	0.505	0.539	0.318	0.339
	LTE Band 2	20M	QPSK	50	24	Left Cheek	18700	1860	22.74	23.00	1.062	-0.02	0.420	0.446	0.263	0.279
	LTE Band 2	20M	QPSK	1	0	Left Tilted	18900	1880	23.88	24.00	1.028	0.07	0.279	0.287	0.183	0.188
	LTE Band 2	20M	QPSK	50	24	Left Tilted	18700	1860	22.74	23.00	1.062	-0.04	0.213	0.226	0.141	0.150
09	LTE Band 7	20M	QPSK	1	99	Right Cheek	20850	2510	23.88	24.00	1.028	0.05	0.462	0.475	0.249	0.256
	LTE Band 7	20M	QPSK	50	49	Right Cheek	20850	2510	21.59	23.00	1.384	0	0.242	0.335	0.129	0.178
	LTE Band 7	20M	QPSK	1	99	Right Tilted	20850	2510	23.88	24.00	1.028	-0.04	0.244	0.251	0.127	0.131
	LTE Band 7	20M	QPSK	50	49	Right Tilted	20850	2510	21.59	23.00	1.384	0.01	0.125	0.173	0.064	0.089
	LTE Band 7	20M	QPSK	1	99	Left Cheek	20850	2510	23.88	24.00	1.028	0.01	0.650	0.668	0.343	0.353
	LTE Band 7	20M	QPSK	1	99	Left Cheek	21100	2535	23.63	24.00	1.089	0.05	0.545	0.593	0.287	0.313
	LTE Band 7	20M	QPSK	1	99	Left Cheek	21350	2560	23.48	24.00	1.127	-0.06	0.415	0.468	0.223	0.251
	LTE Band 7	20M	QPSK	50	49	Left Cheek	20850	2510	21.59	23.00	1.384	0.01	0.374	0.517	0.196	0.271
	LTE Band 7	20M	QPSK	1	99	Left Tilted	20850	2510	23.88	24.00	1.028	0.02	0.307	0.316	0.157	0.161
	LTE Band 7	20M	QPSK	50	49	Left Tilted	20850	2510	21.59	23.00	1.384	0.06	0.160	0.221	0.081	0.112



<WLAN SAR>

Plot No.	Band	Modulation	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Right Cheek	6	2437	16.98	17.00	1.004	-0.13	1.040	1.044	0.483	0.485
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Right Cheek	1	2412	16.71	17.00	1.068	-0.14	0.930	0.993	0.432	0.461
10	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Right Cheek	11	2462	16.84	17.00	1.037	-0.08	1.150	1.192	0.533	0.552
	WLAN2.4GHz	DBPSK	802.11n-HT20 MCS0	Right Cheek	6	2437	13.95	14.00	1.012	-0.06	0.400	0.405	0.183	0.185
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Right Tilted	6	2437	16.98	17.00	1.004	-0.04	0.707	0.710	0.327	0.328
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Left Cheek	6	2437	16.98	17.00	1.004	0.01	0.519	0.521	0.278	0.279
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Left Tilted	6	2437	16.98	17.00	1.004	0	0.549	0.551	0.280	0.281
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	149	5745	13.98	14.00	1.005	0.05	0.209	0.210	0.084	0.084
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	157	5785	13.81	14.00	1.045	0.02	0.182	0.190	0.074	0.077
11	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	165	5825	13.90	14.00	1.023	0.03	0.229	0.234	0.087	0.089
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Right Cheek	151	5755	13.82	14.00	1.043	0.14	0.123	0.128	0.051	0.053
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Tilted	149	5745	13.98	14.00	1.005	0.08	0.193	0.194	0.074	0.074
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Cheek	149	5745	13.98	14.00	1.005	-0.02	0.120	0.121	0.051	0.051
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Tilted	149	5745	13.98	14.00	1.005	-0.15	0.123	0.124	0.054	0.054

Plot No.	Band	Modulation	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
12	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	36	5180	13.72	14.00	1.066	-0.06	0.277	0.295	0.106	0.113
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	44	5220	13.66	14.00	1.081	-0.1	0.253	0.273	0.103	0.111
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Right Cheek	38	5190	13.83	14.00	1.041	-0.04	0.245	0.255	0.104	0.108
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Tilted	36	5180	13.72	14.00	1.066	-0.11	0.172	0.183	0.065	0.069
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Cheek	36	5180	13.72	14.00	1.066	-0.06	0.101	0.108	0.044	0.047
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Tilted	36	5180	13.72	14.00	1.066	-0.09	0.078	0.083	0.033	0.035
13	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	64	5320	13.97	14.00	1.007	-0.16	0.242	0.244	0.095	0.096
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	56	5280	13.72	14.00	1.067	-0.02	0.214	0.228	0.088	0.094
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Right Cheek	54	5270	13.89	14.00	1.026	-0.18	0.187	0.192	0.080	0.082
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Tilted	64	5320	13.97	14.00	1.007	-0.18	0.159	0.160	0.063	0.063
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Cheek	64	5320	13.97	14.00	1.007	0.16	0.077	0.078	0.036	0.036
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Tilted	64	5320	13.97	14.00	1.007	0.18	0.070	0.070	0.035	0.035
14	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	100	5500	13.95	14.00	1.011	0.14	0.211	0.213	0.074	0.075
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	116	5580	13.67	14.00	1.078	0.1	0.187	0.202	0.069	0.074
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	140	5700	13.83	14.00	1.039	0.06	0.170	0.177	0.069	0.072
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Right Cheek	110	5550	13.64	14.00	1.087	0.03	0.163	0.177	0.060	0.065
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Tilted	100	5500	13.95	14.00	1.011	0.1	0.187	0.189	0.066	0.067
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Cheek	100	5500	13.95	14.00	1.011	-0.1	0.125	0.126	0.051	0.052
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Tilted	100	5500	13.95	14.00	1.011	-0.13	0.127	0.128	0.053	0.054

15.2 Hotspot SAR

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	120.5mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	104.9mm	58.9mm	≤ 25mm
Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

Note:

Per KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

<GSM SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Power Reduction	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
15	GSM850	GMSK	GPRS (4 Tx slots)	Front	1cm	251	848.8	OFF	27.44	27.50	1.014	0	0.781	0.792	0.613	0.622
	GSM850	GMSK	GPRS (4 Tx slots)	Front	1cm	128	824.2	OFF	27.37	27.50	1.030	0.02	0.635	0.654	0.502	0.517
	GSM850	GMSK	GPRS (4 Tx slots)	Front	1cm	189	836.4	OFF	27.41	27.50	1.021	0.03	0.700	0.715	0.553	0.565
	GSM850	GMSK	GPRS (4 Tx slots)	Back	1cm	251	848.8	OFF	27.44	27.50	1.014	-0.02	0.777	0.788	0.612	0.621
	GSM850	GMSK	GPRS (4 Tx slots)	Left Side	1cm	251	848.8	OFF	27.44	27.50	1.014	0.01	0.630	0.639	0.444	0.450
	GSM850	GMSK	GPRS (4 Tx slots)	Right Side	1cm	251	848.8	OFF	27.44	27.50	1.014	0.08	0.586	0.594	0.408	0.414
	GSM850	GMSK	GPRS (4 Tx slots)	Bottom Side	1cm	251	848.8	OFF	27.44	27.50	1.014	-0.02	0.282	0.286	0.157	0.159
	GSM1900	GMSK	GPRS (1 Tx slot)	Front	1cm	512	1850.2	ON	27.00	27.50	1.122	-0.04	0.230	0.258	0.128	0.144
	GSM1900	GMSK	GPRS (1 Tx slot)	Back	1cm	512	1850.2	ON	27.00	27.50	1.122	0.01	0.310	0.348	0.179	0.201
	GSM1900	GMSK	GPRS (1 Tx slot)	Left Side	1cm	512	1850.2	ON	27.00	27.50	1.122	0.04	0.096	0.108	0.059	0.066
	GSM1900	GMSK	GPRS (1 Tx slot)	Right Side	1cm	512	1850.2	ON	27.00	27.50	1.122	-0.02	0.040	0.045	0.024	0.027
	GSM1900	GMSK	GPRS (1 Tx slot)	Bottom Side	1cm	512	1850.2	ON	27.00	27.50	1.122	0.03	0.317	0.356	0.175	0.196
	GSM1900	GMSK	GPRS (1 Tx slot)	Bottom Side	1cm	661	1880	ON	26.48	27.50	1.265	-0.03	0.340	0.430	0.185	0.234
16	GSM1900	GMSK	GPRS (1 Tx slot)	Bottom Side	1cm	810	1909.8	ON	26.12	27.50	1.374	-0.01	0.334	0.459	0.179	0.246



<WCDMA SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Power Reduction	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA V	QPSK	RMC 12.2Kbps	Front	1cm	4132	826.4	OFF	23.99	24.00	1.002	-0.02	0.726	0.728	0.574	0.575
	WCDMA V	QPSK	RMC 12.2Kbps	Back	1cm	4132	826.4	OFF	23.99	24.00	1.002	0	0.735	0.737	0.579	0.580
17	WCDMA V	QPSK	RMC 12.2Kbps	Back	1cm	4182	836.4	OFF	23.72	24.00	1.067	-0.06	0.700	0.747	0.552	0.589
	WCDMA V	QPSK	RMC 12.2Kbps	Back	1cm	4233	846.6	OFF	23.85	24.00	1.035	0	0.715	0.740	0.563	0.583
	WCDMA V	QPSK	RMC 12.2Kbps	Left Side	1cm	4132	826.4	OFF	23.99	24.00	1.002	-0.13	0.513	0.514	0.364	0.365
	WCDMA V	QPSK	RMC 12.2Kbps	Right Side	1cm	4132	826.4	OFF	23.99	24.00	1.002	0.01	0.503	0.504	0.359	0.360
	WCDMA V	QPSK	RMC 12.2Kbps	Bottom Side	1cm	4132	826.4	OFF	23.99	24.00	1.002	0.05	0.188	0.188	0.105	0.105
	WCDMA IV	QPSK	RMC 12.2Kbps	Front	1cm	1513	1752.6	ON	19.99	20.00	1.002	-0.09	0.389	0.390	0.230	0.231
	WCDMA IV	QPSK	RMC 12.2Kbps	Back	1cm	1513	1752.6	ON	19.99	20.00	1.002	-0.06	0.465	0.466	0.287	0.288
	WCDMA IV	QPSK	RMC 12.2Kbps	Left Side	1cm	1513	1752.6	ON	19.99	20.00	1.002	-0.01	0.124	0.124	0.076	0.076
	WCDMA IV	QPSK	RMC 12.2Kbps	Right Side	1cm	1513	1752.6	ON	19.99	20.00	1.002	0.11	0.076	0.076	0.047	0.047
18	WCDMA IV	QPSK	RMC 12.2Kbps	Bottom Side	1cm	1513	1752.6	ON	19.99	20.00	1.002	-0.05	0.518	0.519	0.293	0.294
	WCDMA IV	QPSK	RMC 12.2Kbps	Bottom Side	1cm	1312	1712.4	ON	19.87	20.00	1.030	0.03	0.360	0.371	0.206	0.212
	WCDMA IV	QPSK	RMC 12.2Kbps	Bottom Side	1cm	1413	1732.6	ON	19.98	20.00	1.005	-0.09	0.438	0.440	0.249	0.250
	WCDMA II	QPSK	RMC 12.2Kbps	Front	1cm	9400	1880	ON	18.96	19.00	1.009	0	0.247	0.249	0.132	0.133
	WCDMA II	QPSK	RMC 12.2Kbps	Back	1cm	9400	1880	ON	18.96	19.00	1.009	-0.01	0.330	0.333	0.183	0.185
	WCDMA II	QPSK	RMC 12.2Kbps	Left Side	1cm	9400	1880	ON	18.96	19.00	1.009	0.01	0.113	0.114	0.069	0.070
	WCDMA II	QPSK	RMC 12.2Kbps	Right Side	1cm	9400	1880	ON	18.96	19.00	1.009	0.17	0.040	0.040	0.024	0.024
	WCDMA II	QPSK	RMC 12.2Kbps	Bottom Side	1cm	9400	1880	ON	18.96	19.00	1.009	-0.05	0.368	0.371	0.200	0.202
	WCDMA II	QPSK	RMC 12.2Kbps	Bottom Side	1cm	9262	1852.4	ON	18.50	19.00	1.122	-0.07	0.311	0.349	0.172	0.193
19	WCDMA II	QPSK	RMC 12.2Kbps	Bottom Side	1cm	9538	1907.6	ON	18.41	19.00	1.146	0.08	0.381	0.436	0.204	0.234

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Power Reduction	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 17	10M	QPSK	1	49	Front	1cm	23780	709	OFF	23.97	24.00	1.007	0.01	0.372	0.375	0.279	0.281
	LTE Band 17	10M	QPSK	25	24	Front	1cm	23800	711	OFF	22.93	23.00	1.016	-0.01	0.291	0.296	0.219	0.223
	LTE Band 17	10M	QPSK	1	49	Back	1cm	23780	709	OFF	23.97	24.00	1.007	-0.02	0.389	0.392	0.292	0.294
	LTE Band 17	10M	QPSK	1	49	Back	1cm	23790	710	OFF	23.93	24.00	1.016	0	0.421	0.428	0.316	0.321
20	LTE Band 17	10M	QPSK	1	49	Back	1cm	23800	711	OFF	23.95	24.00	1.012	0.03	0.431	0.436	0.323	0.327
	LTE Band 17	10M	QPSK	25	24	Back	1cm	23800	711	OFF	22.93	23.00	1.016	0.04	0.306	0.311	0.229	0.233
	LTE Band 17	10M	QPSK	1	49	Left Side	1cm	23780	709	OFF	23.97	24.00	1.007	-0.04	0.143	0.144	0.104	0.105
	LTE Band 17	10M	QPSK	25	24	Left Side	1cm	23800	711	OFF	22.93	23.00	1.016	-0.02	0.110	0.112	0.080	0.081
	LTE Band 17	10M	QPSK	1	49	Right Side	1cm	23780	709	OFF	23.97	24.00	1.007	0.02	0.147	0.148	0.107	0.108
	LTE Band 17	10M	QPSK	25	24	Right Side	1cm	23800	711	OFF	22.93	23.00	1.016	0.01	0.115	0.117	0.084	0.085
	LTE Band 17	10M	QPSK	1	49	Bottom Side	1cm	23780	709	OFF	23.97	24.00	1.007	-0.01	0.092	0.093	0.056	0.056
	LTE Band 17	10M	QPSK	25	24	Bottom Side	1cm	23800	711	OFF	22.93	23.00	1.016	-0.06	0.072	0.073	0.044	0.045
	LTE Band 4	20M	QPSK	1	0	Front	1cm	20050	1720	ON	20.98	21.00	1.005	0.03	0.462	0.464	0.276	0.277
	LTE Band 4	20M	QPSK	50	0	Front	1cm	20050	1720	ON	20.87	21.00	1.030	0.01	0.470	0.484	0.281	0.290
	LTE Band 4	20M	QPSK	1	0	Back	1cm	20050	1720	ON	20.98	21.00	1.005	0.02	0.450	0.452	0.283	0.284
	LTE Band 4	20M	QPSK	50	0	Back	1cm	20050	1720	ON	20.87	21.00	1.030	0.04	0.466	0.480	0.292	0.301
	LTE Band 4	20M	QPSK	1	0	Left Side	1cm	20050	1720	ON	20.98	21.00	1.005	0.05	0.098	0.098	0.060	0.060
	LTE Band 4	20M	QPSK	50	0	Left Side	1cm	20050	1720	ON	20.87	21.00	1.030	-0.01	0.109	0.112	0.066	0.068
	LTE Band 4	20M	QPSK	1	0	Right Side	1cm	20050	1720	ON	20.98	21.00	1.005	0.04	0.077	0.077	0.049	0.049
	LTE Band 4	20M	QPSK	50	0	Right Side	1cm	20050	1720	ON	20.87	21.00	1.030	0.03	0.081	0.083	0.051	0.053
	LTE Band 4	20M	QPSK	1	0	Bottom Side	1cm	20050	1720	ON	20.98	21.00	1.005	-0.01	0.595	0.598	0.322	0.323
21	LTE Band 4	20M	QPSK	50	0	Bottom Side	1cm	20050	1720	ON	20.87	21.00	1.030	-0.05	0.603	0.621	0.346	0.357
	LTE Band 4	20M	QPSK	50	0	Bottom Side	1cm	20175	1732.5	ON	20.83	21.00	1.040	0.01	0.549	0.571	0.313	0.325
	LTE Band 4	20M	QPSK	50	0	Bottom Side	1cm	20300	1745	ON	20.78	21.00	1.052	-0.01	0.587	0.618	0.335	0.352



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Power Reduction	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	1cm	18700	1860	ON	18.94	19.00	1.014	0.08	0.232	0.235	0.142	0.144
	LTE Band 2	20M	QPSK	50	0	Front	1cm	18700	1860	ON	18.92	19.00	1.019	0.01	0.226	0.230	0.137	0.140
22	LTE Band 2	20M	QPSK	1	0	Back	1cm	18700	1860	ON	18.94	19.00	1.014	0.06	0.327	0.332	0.197	0.200
	LTE Band 2	20M	QPSK	1	0	Back	1cm	18900	1880	ON	18.91	19.00	1.021	-0.04	0.253	0.258	0.155	0.158
	LTE Band 2	20M	QPSK	1	0	Back	1cm	19100	1900	ON	18.84	19.00	1.038	-0.04	0.253	0.262	0.152	0.158
	LTE Band 2	20M	QPSK	50	0	Back	1cm	18700	1860	ON	18.92	19.00	1.019	0.09	0.300	0.306	0.184	0.187
	LTE Band 2	20M	QPSK	1	0	Left Side	1cm	18700	1860	ON	18.94	19.00	1.014	0.08	0.113	0.115	0.072	0.073
	LTE Band 2	20M	QPSK	50	0	Left Side	1cm	18700	1860	ON	18.92	19.00	1.019	0.06	0.112	0.114	0.071	0.072
	LTE Band 2	20M	QPSK	1	0	Right Side	1cm	18700	1860	ON	18.94	19.00	1.014	0.08	0.055	0.056	0.036	0.037
	LTE Band 2	20M	QPSK	50	0	Right Side	1cm	18700	1860	ON	18.92	19.00	1.019	0.05	0.052	0.053	0.034	0.035
	LTE Band 2	20M	QPSK	1	0	Bottom Side	1cm	18700	1860	ON	18.94	19.00	1.014	0.14	0.315	0.319	0.179	0.181
	LTE Band 2	20M	QPSK	50	0	Bottom Side	1cm	18700	1860	ON	18.92	19.00	1.019	0.1	0.313	0.319	0.178	0.181
	LTE Band 7	20M	QPSK	1	0	Front	1cm	20850	2510	ON	19.96	20.00	1.009	-0.04	0.390	0.394	0.208	0.210
	LTE Band 7	20M	QPSK	50	0	Front	1cm	20850	2510	ON	19.87	20.00	1.030	-0.01	0.399	0.411	0.214	0.221
	LTE Band 7	20M	QPSK	1	0	Back	1cm	20850	2510	ON	19.96	20.00	1.009	-0.04	0.649	0.655	0.351	0.354
23	LTE Band 7	20M	QPSK	50	0	Back	1cm	20850	2510	ON	19.87	20.00	1.030	-0.02	0.663	0.683	0.355	0.366
	LTE Band 7	20M	QPSK	50	0	Back	1cm	21100	2535	ON	19.84	20.00	1.038	-0.04	0.637	0.661	0.341	0.354
	LTE Band 7	20M	QPSK	50	0	Back	1cm	21350	2560	ON	19.55	20.00	1.109	0.03	0.512	0.568	0.273	0.303
	LTE Band 7	20M	QPSK	1	0	Left Side	1cm	20850	2510	ON	19.96	20.00	1.009	0.1	0.360	0.363	0.204	0.206
	LTE Band 7	20M	QPSK	50	0	Left Side	1cm	20850	2510	ON	19.87	20.00	1.030	-0.06	0.197	0.203	0.110	0.113
	LTE Band 7	20M	QPSK	1	0	Right Side	1cm	20850	2510	ON	19.96	20.00	1.009	-0.06	0.277	0.280	0.160	0.161
	LTE Band 7	20M	QPSK	50	0	Right Side	1cm	20850	2510	ON	19.87	20.00	1.030	-0.02	0.145	0.149	0.083	0.086
	LTE Band 7	20M	QPSK	1	0	Bottom Side	1cm	20850	2510	ON	19.96	20.00	1.009	-0.02	0.494	0.499	0.226	0.228
	LTE Band 7	20M	QPSK	50	0	Bottom Side	1cm	20850	2510	ON	19.87	20.00	1.030	0.02	0.481	0.496	0.230	0.237

<WLAN SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Front	1cm	6	2437	16.98	17.00	1.004	0.07	0.154	0.155	0.089	0.089
24	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1cm	6	2437	16.98	17.00	1.004	-0.07	0.169	0.170	0.091	0.091
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1cm	1	2412	16.71	17.00	1.068	0.02	0.146	0.156	0.081	0.087
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1cm	11	2462	16.84	17.00	1.037	0.06	0.163	0.169	0.087	0.090
	WLAN2.4GHz	DBPSK	802.11n-HT20 MCS0	Back	1cm	6	2437	13.95	14.00	1.012	0.05	0.085	0.086	0.046	0.047
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Left Side	1cm	6	2437	16.98	17.00	1.004	0.17	0.106	0.106	0.056	0.056
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Top Side	1cm	6	2437	16.98	17.00	1.004	0.14	0.143	0.144	0.079	0.079
	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1cm	149	5745	13.98	14.00	1.005	-0.06	0.055	0.055	0.040	0.040
25	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1cm	149	5745	13.98	14.00	1.005	-0.11	0.232	0.233	0.098	0.098
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1cm	157	5785	13.98	14.00	1.005	-0.09	0.253	0.254	0.104	0.104
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1cm	165	5825	13.98	14.00	1.005	0.06	0.277	0.278	0.112	0.113
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Back	1cm	151	5755	13.82	14.00	1.043	-0.04	0.212	0.221	0.079	0.082
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Side	1cm	149	5745	13.98	14.00	1.005	0.16	0.202	0.203	0.097	0.097
	WLAN5GHz	OFDM	802.11a 6Mbps	Top Side	1cm	149	5745	13.98	14.00	1.005	-0.16	0.080	0.080	0.051	0.051

**15.3 Body Worn Accessory SAR****<GSM SAR>**

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
26	GSM850	GMSK	GSM Voice	Front	1.5cm	251	848.8	33.49	33.50	1.002	-0.04	0.801	0.803	0.625	0.626
	GSM850	GMSK	GSM Voice	Front	1.5cm	128	824.2	33.43	33.50	1.016	0.01	0.714	0.726	0.561	0.570
	GSM850	GMSK	GSM Voice	Front	1.5cm	189	836.4	33.44	33.50	1.014	0.02	0.763	0.774	0.596	0.604
	GSM850	GMSK	GPRS (4 Tx slots)	Front	1.5cm	251	848.8	27.44	27.5	1.014	-0.03	0.740	0.750	0.584	0.592
	GSM850	GMSK	GSM Voice	Back	1.5cm	251	836.4	33.49	33.50	1.002	0.02	0.763	0.765	0.596	0.597
	GSM1900	GSM Voice with 8PSK 2Tx	DTM Multi-slot class 11	Front	1.5cm	512	1850.2	21.24	21.65	1.098	-0.04	0.228	0.250	0.138	0.151
	GSM1900	GSM Voice with 8PSK 2Tx	DTM Multi-slot class 11	Back	1.5cm	512	1850.2	21.24	21.65	1.098	-0.04	0.285	0.313	0.176	0.193
	GSM1900	8PSK	EDGE (4 Tx slots)	Back	1.5cm	512	1850.2	25.27	25.90	1.156	-0.04	0.355	0.410	0.219	0.253
	GSM1900	8PSK	EDGE (4 Tx slots)	Back	1.5cm	661	1880	24.77	25.90	1.297	-0.05	0.354	0.459	0.208	0.270
27	GSM1900	8PSK	EDGE (4 Tx slots)	Back	1.5cm	810	1909.8	24.45	25.90	1.396	0.04	0.334	0.466	0.194	0.271

<WCDMA SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA V	QPSK	RMC 12.2Kbps	Front	1.5cm	4132	826.4	23.99	24.00	1.002	-0.03	0.629	0.630	0.492	0.493
	WCDMA V	QPSK	RMC 12.2Kbps	Back	1.5cm	4132	826.4	23.99	24.00	1.002	0.02	0.669	0.671	0.522	0.523
28	WCDMA V	QPSK	RMC 12.2Kbps	Back	1.5cm	4182	836.4	23.72	24.00	1.067	0.05	0.659	0.703	0.514	0.548
	WCDMA V	QPSK	RMC 12.2Kbps	Back	1.5cm	4233	846.6	23.85	24.00	1.035	0	0.679	0.703	0.528	0.547
	WCDMA IV	QPSK	RMC 12.2Kbps	Front	1.5cm	1513	1752.6	23.77	24.00	1.054	-0.05	0.574	0.605	0.360	0.380
29	WCDMA IV	QPSK	RMC 12.2Kbps	Back	1.5cm	1513	1752.6	23.77	24.00	1.054	0.07	0.591	0.623	0.380	0.401
	WCDMA IV	QPSK	RMC 12.2Kbps	Back	1.5cm	1312	1712.4	23.06	24.00	1.242	-0.01	0.472	0.586	0.305	0.379
	WCDMA IV	QPSK	RMC 12.2Kbps	Back	1.5cm	1413	1732.6	23.10	24.00	1.230	0.19	0.492	0.605	0.314	0.386
	WCDMA II	QPSK	RMC 12.2Kbps	Front	1.5cm	9400	1880	23.96	24.00	1.009	-0.01	0.367	0.370	0.216	0.218
	WCDMA II	QPSK	RMC 12.2Kbps	Back	1.5cm	9400	1880	23.96	24.00	1.009	0.03	0.570	0.575	0.335	0.338
	WCDMA II	QPSK	RMC 12.2Kbps	Back	1.5cm	9262	1852.4	23.34	24.00	1.164	0.06	0.448	0.522	0.272	0.317
30	WCDMA II	QPSK	RMC 12.2Kbps	Back	1.5cm	9538	1907.6	23.41	24.00	1.146	0.04	0.560	0.641	0.323	0.370

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 17	10M	QPSK	1	49	Front	1.5cm	23780	709	23.97	24.00	1.007	-0.02	0.232	0.234	0.174	0.175
	LTE Band 17	10M	QPSK	25	24	Front	1.5cm	23800	711	22.93	23.00	1.016	-0.01	0.177	0.180	0.134	0.136
	LTE Band 17	10M	QPSK	1	49	Back	1.5cm	23780	709	23.97	24.00	1.007	-0.01	0.276	0.278	0.208	0.209
	LTE Band 17	10M	QPSK	1	49	Back	1.5cm	23790	710	23.93	24.00	1.016	-0.04	0.268	0.272	0.206	0.209
31	LTE Band 17	10M	QPSK	1	49	Back	1.5cm	23800	711	23.95	24.00	1.012	0.03	0.282	0.285	0.217	0.220
	LTE Band 17	10M	QPSK	25	24	Back	1.5cm	23800	711	22.93	23.00	1.016	-0.06	0.205	0.208	0.153	0.155
	LTE Band 4	20M	QPSK	1	0	Front	1.5cm	20175	1732.5	23.97	24.00	1.007	0.01	0.630	0.634	0.398	0.401
	LTE Band 4	20M	QPSK	50	0	Front	1.5cm	20300	1745	22.98	23.00	1.005	-0.01	0.532	0.534	0.335	0.337
32	LTE Band 4	20M	QPSK	1	0	Back	1.5cm	20175	1732.5	23.97	24.00	1.007	0	0.655	0.660	0.428	0.431
	LTE Band 4	20M	QPSK	1	0	Back	1.5cm	20050	1720	23.93	24.00	1.016	-0.11	0.533	0.542	0.347	0.353
	LTE Band 4	20M	QPSK	1	0	Back	1.5cm	20300	1745	23.89	24.00	1.026	-0.02	0.411	0.422	0.267	0.274
	LTE Band 4	20M	QPSK	50	0	Back	1.5cm	20300	1745	22.98	23.00	1.005	-0.07	0.574	0.577	0.375	0.377
	LTE Band 2	20M	QPSK	1	0	Front	1.5cm	18900	1880	23.88	24.00	1.028	-0.04	0.308	0.317	0.204	0.210
	LTE Band 2	20M	QPSK	50	24	Front	1.5cm	18700	1860	22.74	23.00	1.062	-0.05	0.277	0.294	0.184	0.195
	LTE Band 2	20M	QPSK	1	0	Back	1.5cm	18900	1880	23.88	24.00	1.028	-0.04	0.420	0.432	0.270	0.278
33	LTE Band 2	20M	QPSK	1	0	Back	1.5cm	18700	1860	23.76	24.00	1.057	-0.03	0.469	0.496	0.305	0.322
	LTE Band 2	20M	QPSK	1	0	Back	1.5cm	19100	1900	23.72	24.00	1.067	-0.06	0.416	0.444	0.258	0.275
	LTE Band 2	20M	QPSK	50	24	Back	1.5cm	18700	1860	22.74	23.00	1.062	-0.06	0.354	0.376	0.230	0.244



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	99	Front	1.5cm	20850	2510	23.88	24.00	1.028	-0.05	0.565	0.581	0.313	0.322
	LTE Band 7	20M	QPSK	50	49	Front	1.5cm	20850	2510	21.59	23.00	1.384	-0.05	0.294	0.407	0.163	0.226
34	LTE Band 7	20M	QPSK	1	99	Back	1.5cm	20850	2510	23.88	24.00	1.028	0.04	0.846	0.870	0.470	0.483
	LTE Band 7	20M	QPSK	1	99	Back	1.5cm	21100	2535	23.63	24.00	1.089	-0.02	0.749	0.816	0.415	0.452
	LTE Band 7	20M	QPSK	1	99	Back	1.5cm	21350	2560	23.48	24.00	1.127	0	0.668	0.753	0.366	0.413
	LTE Band 7	20M	QPSK	50	49	Back	1.5cm	20850	2510	21.59	23.00	1.384	0.1	0.482	0.667	0.268	0.371
	LTE Band 7	20M	QPSK	100	0	Back	1.5cm	20850	2510	21.45	23.00	1.429	0.06	0.499	0.713	0.276	0.394

<WLAN SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Front	1.5cm	6	2437	16.98	17.00	1.004	0.04	0.091	0.091	0.055	0.055
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1.5cm	6	2437	16.98	17.00	1.004	-0.17	0.094	0.094	0.056	0.056
35	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1.5cm	1	2412	16.71	17.00	1.068	-0.07	0.088	0.094	0.055	0.059
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1.5cm	11	2462	16.84	17.00	1.037	-0.16	0.083	0.086	0.049	0.051
	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1.5cm	149	5745	13.98	14.00	1.005	-0.06	0.044	0.044	0.035	0.035
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	149	5745	13.98	14.00	1.005	0	0.164	0.165	0.083	0.083
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	157	5785	13.81	14.00	1.045	0.04	0.177	0.185	0.088	0.092
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	165	5825	13.90	14.00	1.023	0.03	0.204	0.209	0.098	0.100
36	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Back	1.5cm	151	5755	13.82	14.00	1.043	-0.04	0.133	0.139	0.065	0.068

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1.5cm	36	5180	13.72	14.00	1.066	-0.04	0.047	0.050	0.034	0.036
37	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	36	5180	13.72	14.00	1.066	0.09	0.070	0.075	0.044	0.047
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	44	5220	13.66	14.00	1.081	-0.03	0.067	0.072	0.041	0.044
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Back	1.5cm	38	5190	13.83	14.00	1.041	0.11	0.055	0.057	0.039	0.041
	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1.5cm	64	5320	13.97	14.00	1.007	0.19	0.047	0.047	0.037	0.037
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	64	5320	13.97	14.00	1.007	-0.16	0.062	0.062	0.042	0.042
38	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	56	5280	13.72	14.00	1.067	-0.19	0.058	0.062	0.040	0.043
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Back	1.5cm	54	5270	13.89	14.00	1.026	-0.07	0.058	0.060	0.042	0.043
	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1.5cm	100	5500	13.95	14.00	1.011	-0.04	0.059	0.060	0.039	0.039
39	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	100	5500	13.95	14.00	1.011	-0.05	0.130	0.131	0.078	0.079
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	116	5580	13.67	14.00	1.078	0.01	0.121	0.130	0.067	0.072
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	140	5700	13.83	14.00	1.039	-0.08	0.122	0.127	0.061	0.063
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Back	1.5cm	110	5550	13.64	14.00	1.087	-0.11	0.090	0.098	0.052	0.057



15.4 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz		DBPSK			802.11b 1Mbps	Right Cheek		11	2462	16.84	17.00	1.037	-0.08	1.150	-	1.192
2nd	WLAN2.4GHz		DBPSK			802.11b 1Mbps	Right Cheek		11	2462	16.84	17.00	1.037	-0.16	1.120	1.03	1.161
1st	GSM850		GMSK			GSM Voice	Front	1.5cm	251	848.8	33.49	33.50	1.002	-0.04	0.801	-	0.803
2nd	GSM850		GMSK			GSM Voice	Front	1.5cm	251	848.8	33.49	33.50	1.002	-0.01	0.768	1.04	0.770
1st	LTE Band 7	20M	QPSK	1	99		Back	1.5cm	20850	2510	23.88	24.00	1.028	0.04	0.846	-	0.870
2nd	LTE Band 7	20M	QPSK	1	99		Back	1.5cm	20850	2510	23.88	24.00	1.028	-0.03	0.816	1.04	0.839

General Note:

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes		
2.	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
3.	GSM(Voice) + Bluetooth(data)	Yes	Yes		
4.	WCDMA((Voice) + Bluetooth(data)	Yes	Yes		
5.	GSM(Voice) + WLAN5GHz(data)	Yes	Yes		
6.	WCDMA((Voice) + WLAN5GHz(data)	Yes	Yes		
7.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
8.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
9.	LTE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
10.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
11.	WCDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
12.	LTE(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
13.	GPRS/EDGE(data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct
14.	WCDMA(data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct
15.	LTE(data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct

General Note:

- This device supported VoIP in EGPRS, WCDMA, LTE (e.g. 3rd party VoIP).
- This device 2.4GHz WLAN supports Hotspot operation, and 2.4GHz / 5.8GHz WLAN supports WiFi Direct (Group Client / Group Owner), and 5.2GHz / 5.3GHz / 5.5GHz supports WiFi Direct (Group Client only).
- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- The worst case 2.4GHz / 5GHz WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with each WLAN mode.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6\text{W/kg}$.
 - $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - For scalar SAR summation $> 1.6\text{W/kg}$, SAR peak location information and SPLSR analysis is required, and the SPLSR calculated results please refer to section 16.4.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is $< 5 \text{ mm}$, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.

Bluetooth Max Power	Exposure Position	Head	Hotspot	Body-worn
	Test separation	0 mm	10 mm	15 mm
9.5 dBm	Estimated 1g SAR (W/kg)	0.378 W/kg	0.189 W/kg	0.126 W/kg
	Estimated 10g SAR (W/kg)	0.151 W/kg	0.076 W/kg	0.050 W/kg

16.1 Head Exposure Conditions

WWAN Band		Exposure Position	WWAN 1g SAR (W/kg)	2.4GHz / 5.8GHz WLAN		Summed 1g SAR (W/kg)	SPLSR	Case No
				Band	1g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.576	2.4GHz WLAN	1.192	1.77	0.03	Case 1
		Right Tilted	0.335	2.4GHz WLAN	0.710	1.05		
		Left Cheek	0.625	2.4GHz WLAN	0.521	1.15		
		Left Tilted	0.396	2.4GHz WLAN	0.551	0.95		
	GSM1900	Right Cheek	0.216	2.4GHz WLAN	1.192	1.41		
		Right Tilted	0.136	2.4GHz WLAN	0.710	0.85		
		Left Cheek	0.547	2.4GHz WLAN	0.521	1.07		
		Left Tilted	0.195	2.4GHz WLAN	0.551	0.75		
WCMDA	Band V	Right Cheek	0.575	2.4GHz WLAN	1.192	1.77	0.04	Case 2
		Right Tilted	0.273	2.4GHz WLAN	0.710	0.98		
		Left Cheek	0.482	2.4GHz WLAN	0.521	1.00		
		Left Tilted	0.319	2.4GHz WLAN	0.551	0.87		
	Band IV	Right Cheek	0.521	2.4GHz WLAN	1.192	1.71	0.03	Case 3
		Right Tilted	0.220	2.4GHz WLAN	0.710	0.93		
		Left Cheek	0.450	2.4GHz WLAN	0.521	0.97		
		Left Tilted	0.309	2.4GHz WLAN	0.551	0.86		
	Band II	Right Cheek	0.336	2.4GHz WLAN	1.192	1.53		
		Right Tilted	0.200	2.4GHz WLAN	0.710	0.91		
		Left Cheek	0.648	2.4GHz WLAN	0.521	1.17		
		Left Tilted	0.267	2.4GHz WLAN	0.551	0.82		
LTE	Band 17	Right Cheek	0.262	2.4GHz WLAN	1.192	1.45		
		Right Tilted	0.087	2.4GHz WLAN	0.710	0.80		
		Left Cheek	0.179	2.4GHz WLAN	0.521	0.70		
		Left Tilted	0.065	2.4GHz WLAN	0.551	0.62		
	Band 4	Right Cheek	0.490	2.4GHz WLAN	1.192	1.68	0.03	Case 4
		Right Tilted	0.143	2.4GHz WLAN	0.710	0.85		
		Left Cheek	0.337	2.4GHz WLAN	0.521	0.86		
		Left Tilted	0.179	2.4GHz WLAN	0.551	0.73		
	Band 2	Right Cheek	0.344	2.4GHz WLAN	1.192	1.54		
		Right Tilted	0.212	2.4GHz WLAN	0.710	0.92		
		Left Cheek	0.539	2.4GHz WLAN	0.521	1.06		
		Left Tilted	0.287	2.4GHz WLAN	0.551	0.84		
	Band 7	Right Cheek	0.475	2.4GHz WLAN	1.192	1.67	0.03	Case 5
		Right Tilted	0.251	2.4GHz WLAN	0.710	0.96		
		Left Cheek	0.668	2.4GHz WLAN	0.521	1.19		
		Left Tilted	0.316	2.4GHz WLAN	0.551	0.87		



WWAN Band		Exposure Position	WWAN	5.2GHz / 5.3GHz / 5.5GHz WLAN		Summed 1g SAR (W/kg)	SPLSR	Case No
			1g SAR (W/kg)	Band	1g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.576	5.2GHz WALN	0.295	0.87		
		Right Tilted	0.335	5.5GHz WLAN	0.189	0.52		
		Left Cheek	0.625	5.5GHz WLAN	0.126	0.75		
		Left Tilted	0.396	5.5GHz WLAN	0.128	0.52		
	GSM1900	Right Cheek	0.216	5.2GHz WALN	0.295	0.51		
		Right Tilted	0.136	5.5GHz WLAN	0.189	0.33		
		Left Cheek	0.547	5.5GHz WLAN	0.126	0.67		
		Left Tilted	0.195	5.5GHz WLAN	0.128	0.32		
WCMDA	Band V	Right Cheek	0.575	5.2GHz WALN	0.295	0.87		
		Right Tilted	0.273	5.5GHz WLAN	0.189	0.46		
		Left Cheek	0.482	5.5GHz WLAN	0.126	0.61		
		Left Tilted	0.319	5.5GHz WLAN	0.128	0.45		
	Band IV	Right Cheek	0.521	5.2GHz WALN	0.295	0.82		
		Right Tilted	0.220	5.5GHz WLAN	0.189	0.41		
		Left Cheek	0.450	5.5GHz WLAN	0.126	0.58		
		Left Tilted	0.309	5.5GHz WLAN	0.128	0.44		
	Band II	Right Cheek	0.336	5.2GHz WALN	0.295	0.63		
		Right Tilted	0.200	5.5GHz WLAN	0.189	0.39		
		Left Cheek	0.648	5.5GHz WLAN	0.126	0.77		
		Left Tilted	0.267	5.5GHz WLAN	0.128	0.40		
LTE	Band 17	Right Cheek	0.262	5.2GHz WALN	0.295	0.56		
		Right Tilted	0.087	5.5GHz WLAN	0.189	0.28		
		Left Cheek	0.179	5.5GHz WLAN	0.126	0.31		
		Left Tilted	0.065	5.5GHz WLAN	0.128	0.19		
	Band 4	Right Cheek	0.490	5.2GHz WALN	0.295	0.79		
		Right Tilted	0.143	5.5GHz WLAN	0.189	0.33		
		Left Cheek	0.337	5.5GHz WLAN	0.126	0.46		
		Left Tilted	0.179	5.5GHz WLAN	0.128	0.31		
	Band 2	Right Cheek	0.344	5.2GHz WALN	0.295	0.64		
		Right Tilted	0.212	5.5GHz WLAN	0.189	0.40		
		Left Cheek	0.539	5.5GHz WLAN	0.126	0.67		
		Left Tilted	0.287	5.5GHz WLAN	0.128	0.42		
	Band 7	Right Cheek	0.475	5.2GHz WALN	0.295	0.77		
		Right Tilted	0.251	5.5GHz WLAN	0.189	0.44		
		Left Cheek	0.668	5.5GHz WLAN	0.126	0.79		
		Left Tilted	0.316	5.5GHz WLAN	0.128	0.44		



WWAN Band		Exposure Position	WWAN 1g SAR (W/kg)	2.4GHz Bluetooth Estimated 1g SAR (W/kg)	Summed 1g SAR (W/kg)	SPLSR	Case No
GSM	GSM850	Right Cheek	0.576	0.378	0.95		
		Right Tilted	0.335	0.378	0.71		
		Left Cheek	0.625	0.378	1.00		
		Left Tilted	0.396	0.378	0.77		
	GSM1900	Right Cheek	0.216	0.378	0.59		
		Right Tilted	0.136	0.378	0.51		
		Left Cheek	0.547	0.378	0.93		
		Left Tilted	0.195	0.378	0.57		
WCMDA	Band V	Right Cheek	0.575	0.378	0.95		
		Right Tilted	0.273	0.378	0.65		
		Left Cheek	0.482	0.378	0.86		
		Left Tilted	0.319	0.378	0.70		
	Band IV	Right Cheek	0.521	0.378	0.90		
		Right Tilted	0.220	0.378	0.60		
		Left Cheek	0.450	0.378	0.83		
		Left Tilted	0.309	0.378	0.69		
	Band II	Right Cheek	0.336	0.378	0.71		
		Right Tilted	0.200	0.378	0.58		
		Left Cheek	0.648	0.378	1.03		
		Left Tilted	0.267	0.378	0.65		
LTE	Band 17	Right Cheek	0.262	0.378	0.64		
		Right Tilted	0.087	0.378	0.47		
		Left Cheek	0.179	0.378	0.56		
		Left Tilted	0.065	0.378	0.44		
	Band 4	Right Cheek	0.490	0.378	0.87		
		Right Tilted	0.143	0.378	0.52		
		Left Cheek	0.337	0.378	0.72		
		Left Tilted	0.179	0.378	0.56		
	Band 2	Right Cheek	0.344	0.378	0.72		
		Right Tilted	0.212	0.378	0.59		
		Left Cheek	0.539	0.378	0.92		
		Left Tilted	0.287	0.378	0.67		
	Band 7	Right Cheek	0.475	0.378	0.85		
		Right Tilted	0.251	0.378	0.63		
		Left Cheek	0.668	0.378	1.05		
		Left Tilted	0.316	0.378	0.69		



WWAN Band		Exposure Position	WWAN	2.4GHz / 5.8GHz WLAN		Summed 10g SAR (W/kg)	SPLSR	Case No
			10g SAR (W/kg)	Band	10g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.451	2.4GHz WLAN	0.552	1.00		
		Right Tilted	0.263	2.4GHz WLAN	0.328	0.59		
		Left Cheek	0.487	2.4GHz WLAN	0.279	0.77		
		Left Tilted	0.310	2.4GHz WLAN	0.281	0.59		
	GSM1900	Right Cheek	0.147	2.4GHz WLAN	0.552	0.70		
		Right Tilted	0.089	2.4GHz WLAN	0.328	0.42		
		Left Cheek	0.332	2.4GHz WLAN	0.279	0.61		
		Left Tilted	0.125	2.4GHz WLAN	0.281	0.41		
WCMDA	Band V	Right Cheek	0.439	2.4GHz WLAN	0.552	0.99		
		Right Tilted	0.210	2.4GHz WLAN	0.328	0.54		
		Left Cheek	0.357	2.4GHz WLAN	0.279	0.64		
		Left Tilted	0.246	2.4GHz WLAN	0.281	0.53		
	Band IV	Right Cheek	0.337	2.4GHz WLAN	0.552	0.89		
		Right Tilted	0.147	2.4GHz WLAN	0.328	0.48		
		Left Cheek	0.293	2.4GHz WLAN	0.279	0.57		
		Left Tilted	0.198	2.4GHz WLAN	0.281	0.48		
	Band II	Right Cheek	0.232	2.4GHz WLAN	0.552	0.78		
		Right Tilted	0.134	2.4GHz WLAN	0.328	0.46		
		Left Cheek	0.409	2.4GHz WLAN	0.279	0.69		
		Left Tilted	0.175	2.4GHz WLAN	0.281	0.46		
LTE	Band 17	Right Cheek	0.206	2.4GHz WLAN	0.552	0.76		
		Right Tilted	0.069	2.4GHz WLAN	0.328	0.40		
		Left Cheek	0.140	2.4GHz WLAN	0.279	0.42		
		Left Tilted	0.052	2.4GHz WLAN	0.281	0.33		
	Band 4	Right Cheek	0.319	2.4GHz WLAN	0.552	0.87		
		Right Tilted	0.090	2.4GHz WLAN	0.328	0.42		
		Left Cheek	0.232	2.4GHz WLAN	0.279	0.51		
		Left Tilted	0.112	2.4GHz WLAN	0.281	0.39		
	Band 2	Right Cheek	0.227	2.4GHz WLAN	0.552	0.78		
		Right Tilted	0.141	2.4GHz WLAN	0.328	0.47		
		Left Cheek	0.339	2.4GHz WLAN	0.279	0.62		
		Left Tilted	0.188	2.4GHz WLAN	0.281	0.47		
	Band 7	Right Cheek	0.256	2.4GHz WLAN	0.552	0.81		
		Right Tilted	0.131	2.4GHz WLAN	0.328	0.46		
		Left Cheek	0.353	2.4GHz WLAN	0.279	0.63		
		Left Tilted	0.161	2.4GHz WLAN	0.281	0.44		



WWAN Band		Exposure Position	WWAN	5.2GHz / 5.3GHz / 5.5GHz WLAN		Summed 10g SAR (W/kg)	SPLSR	Case No
			10g SAR (W/kg)	Band	10g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.451	5.2GHz WALN	0.113	0.56		
		Right Tilted	0.263	5.5GHz WLAN	0.067	0.33		
		Left Cheek	0.487	5.5GHz WLAN	0.052	0.54		
		Left Tilted	0.310	5.5GHz WLAN	0.054	0.36		
	GSM1900	Right Cheek	0.147	5.2GHz WALN	0.113	0.26		
		Right Tilted	0.089	5.5GHz WLAN	0.067	0.16		
		Left Cheek	0.332	5.5GHz WLAN	0.052	0.38		
		Left Tilted	0.125	5.5GHz WLAN	0.054	0.18		
WCMDA	Band V	Right Cheek	0.439	5.2GHz WALN	0.113	0.55		
		Right Tilted	0.210	5.5GHz WLAN	0.067	0.28		
		Left Cheek	0.357	5.5GHz WLAN	0.052	0.41		
		Left Tilted	0.246	5.5GHz WLAN	0.054	0.30		
	Band IV	Right Cheek	0.337	5.2GHz WALN	0.113	0.45		
		Right Tilted	0.147	5.5GHz WLAN	0.067	0.21		
		Left Cheek	0.293	5.5GHz WLAN	0.052	0.35		
		Left Tilted	0.198	5.5GHz WLAN	0.054	0.25		
	Band II	Right Cheek	0.232	5.2GHz WALN	0.113	0.35		
		Right Tilted	0.134	5.5GHz WLAN	0.067	0.20		
		Left Cheek	0.409	5.5GHz WLAN	0.052	0.46		
		Left Tilted	0.175	5.5GHz WLAN	0.054	0.23		
LTE	Band 17	Right Cheek	0.206	5.2GHz WALN	0.113	0.32		
		Right Tilted	0.069	5.5GHz WLAN	0.067	0.14		
		Left Cheek	0.140	5.5GHz WLAN	0.052	0.19		
		Left Tilted	0.052	5.5GHz WLAN	0.054	0.11		
	Band 4	Right Cheek	0.319	5.2GHz WALN	0.113	0.43		
		Right Tilted	0.090	5.5GHz WLAN	0.067	0.16		
		Left Cheek	0.232	5.5GHz WLAN	0.052	0.28		
		Left Tilted	0.112	5.5GHz WLAN	0.054	0.17		
	Band 2	Right Cheek	0.227	5.2GHz WALN	0.113	0.34		
		Right Tilted	0.141	5.5GHz WLAN	0.067	0.21		
		Left Cheek	0.339	5.5GHz WLAN	0.052	0.39		
		Left Tilted	0.188	5.5GHz WLAN	0.054	0.24		
	Band 7	Right Cheek	0.256	5.2GHz WALN	0.113	0.37		
		Right Tilted	0.131	5.5GHz WLAN	0.067	0.20		
		Left Cheek	0.353	5.5GHz WLAN	0.052	0.41		
		Left Tilted	0.161	5.5GHz WLAN	0.054	0.22		



WWAN Band		Exposure Position	WWAN 10g SAR (W/kg)	2.4GHz Bluetooth Estimated 10g SAR (W/kg)	Summed 10g SAR (W/kg)	SPLSR	Case No
GSM	GSM850	Right Cheek	0.451	0.151	0.60		
		Right Tilted	0.263	0.151	0.41		
		Left Cheek	0.487	0.151	0.64		
		Left Tilted	0.310	0.151	0.46		
	GSM1900	Right Cheek	0.147	0.151	0.30		
		Right Tilted	0.089	0.151	0.24		
		Left Cheek	0.332	0.151	0.48		
		Left Tilted	0.125	0.151	0.28		
WCMDA	Band V	Right Cheek	0.439	0.151	0.59		
		Right Tilted	0.210	0.151	0.36		
		Left Cheek	0.357	0.151	0.51		
		Left Tilted	0.246	0.151	0.40		
	Band IV	Right Cheek	0.337	0.151	0.49		
		Right Tilted	0.147	0.151	0.30		
		Left Cheek	0.293	0.151	0.44		
		Left Tilted	0.198	0.151	0.35		
	Band II	Right Cheek	0.232	0.151	0.38		
		Right Tilted	0.134	0.151	0.29		
		Left Cheek	0.409	0.151	0.56		
		Left Tilted	0.175	0.151	0.33		
LTE	Band 17	Right Cheek	0.206	0.151	0.36		
		Right Tilted	0.069	0.151	0.22		
		Left Cheek	0.140	0.151	0.29		
		Left Tilted	0.052	0.151	0.20		
	Band 4	Right Cheek	0.319	0.151	0.47		
		Right Tilted	0.090	0.151	0.24		
		Left Cheek	0.232	0.151	0.38		
		Left Tilted	0.112	0.151	0.26		
	Band 2	Right Cheek	0.227	0.151	0.38		
		Right Tilted	0.141	0.151	0.29		
		Left Cheek	0.339	0.151	0.49		
		Left Tilted	0.188	0.151	0.34		
	Band 7	Right Cheek	0.256	0.151	0.41		
		Right Tilted	0.131	0.151	0.28		
		Left Cheek	0.353	0.151	0.50		
		Left Tilted	0.161	0.151	0.31		



16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2		3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz / 5.8GHz WLAN		2.4GHz Bluetooth				
			1g SAR (W/kg)	Band	1g SAR (W/kg)	Estimated 1g SAR (W/kg)				
GSM	GSM850	Front	0.792	2.4GHz WLAN	0.155	0.189	0.95	0.98		
		Back	0.788	5.8GHz WLAN	0.233	0.189	1.02	0.98		
		Left side	0.639	5.8GHz WLAN	0.203	0.189	0.84	0.83		
		Right side	0.594				0.59	0.59		
		Top side		2.4GHz WLAN	0.144	0.189	0.14	0.19		
		Bottom side	0.286				0.29	0.29		
	GSM1900	Front	0.258	2.4GHz WLAN	0.155	0.189	0.41	0.45		
		Back	0.348	5.8GHz WLAN	0.233	0.189	0.58	0.54		
		Left side	0.108	5.8GHz WLAN	0.203	0.189	0.31	0.30		
		Right side	0.045				0.05	0.05		
		Top side		2.4GHz WLAN	0.144	0.189	0.14	0.19		
		Bottom side	0.459				0.46	0.46		
WCDMA	Band V	Front	0.728	2.4GHz WLAN	0.155	0.189	0.88	0.92		
		Back	0.747	5.8GHz WLAN	0.233	0.189	0.98	0.94		
		Left side	0.514	5.8GHz WLAN	0.203	0.189	0.72	0.70		
		Right side	0.504				0.50	0.50		
		Top side		2.4GHz WLAN	0.144	0.189	0.14	0.19		
		Bottom side	0.188				0.19	0.19		
	Band IV	Front	0.390	2.4GHz WLAN	0.155	0.189	0.55	0.58		
		Back	0.466	5.8GHz WLAN	0.233	0.189	0.70	0.66		
		Left side	0.124	5.8GHz WLAN	0.203	0.189	0.33	0.31		
		Right side	0.076				0.08	0.08		
		Top side		2.4GHz WLAN	0.144	0.189	0.14	0.19		
		Bottom side	0.519				0.52	0.52		
	Band II	Front	0.249	2.4GHz WLAN	0.155	0.189	0.40	0.44		
		Back	0.333	5.8GHz WLAN	0.233	0.189	0.57	0.52		
		Left side	0.114	5.8GHz WLAN	0.203	0.189	0.32	0.30		
		Right side	0.040				0.04	0.04		
		Top side		2.4GHz WLAN	0.144	0.189	0.14	0.19		
		Bottom side	0.436				0.44	0.44		
LTE	Band 17	Front	0.375	2.4GHz WLAN	0.155	0.189	0.53	0.56		
		Back	0.436	5.8GHz WLAN	0.233	0.189	0.67	0.63		
		Left side	0.144	5.8GHz WLAN	0.203	0.189	0.35	0.33		
		Right side	0.148				0.15	0.15		
		Top side		2.4GHz WLAN	0.144	0.189	0.14	0.19		
		Bottom side	0.093				0.09	0.09		
	Band 4	Front	0.484	2.4GHz WLAN	0.155	0.189	0.64	0.67		
		Back	0.480	5.8GHz WLAN	0.233	0.189	0.71	0.67		
		Left side	0.112	5.8GHz WLAN	0.203	0.189	0.32	0.30		
		Right side	0.083				0.08	0.08		
		Top side		2.4GHz WLAN	0.144	0.189	0.14	0.19		
		Bottom side	0.621				0.62	0.62		
	Band 2	Front	0.235	2.4GHz WLAN	0.155	0.189	0.39	0.42		
		Back	0.332	5.8GHz WLAN	0.233	0.189	0.57	0.52		
		Left side	0.115	5.8GHz WLAN	0.203	0.189	0.32	0.30		
		Right side	0.056				0.06	0.06		
		Top side		2.4GHz WLAN	0.144	0.189	0.14	0.19		
		Bottom side	0.319				0.32	0.32		
	Band 7	Front	0.411	2.4GHz WLAN	0.155	0.189	0.57	0.60		
		Back	0.683	5.8GHz WLAN	0.233	0.189	0.92	0.87		
		Left side	0.363	5.8GHz WLAN	0.203	0.189	0.57	0.55		
		Right side	0.280				0.28	0.28		
		Top side		2.4GHz WLAN	0.144	0.189	0.14	0.19		
		Bottom side	0.499				0.50	0.50		



WWAN Band		Exposure Position	1	2		3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz / 5.8GHz WLAN		2.4GHz Bluetooth				
			10g SAR (W/kg)	Band	10g SAR (W/kg)	Estimated 10g SAR (W/kg)				
GSM	GSM850	Front	0.622	2.4GHz WLAN	0.089	0.076	0.71	0.70		
		Back	0.621	5.8GHz WLAN	0.098	0.076	0.72	0.70		
		Left side	0.450	5.8GHz WLAN	0.097	0.076	0.55	0.53		
		Right side	0.414				0.41	0.41		
		Top side		2.4GHz WLAN	0.079	0.076	0.08	0.08		
		Bottom side	0.159				0.16	0.16		
	GSM1900	Front	0.144	2.4GHz WLAN	0.089	0.076	0.23	0.22		
		Back	0.201	5.8GHz WLAN	0.098	0.076	0.30	0.28		
		Left side	0.066	5.8GHz WLAN	0.097	0.076	0.16	0.14		
		Right side	0.027				0.03	0.03		
		Top side		2.4GHz WLAN	0.079	0.076	0.08	0.08		
		Bottom side	0.246				0.25	0.25		
WCDMA	Band V	Front	0.575	2.4GHz WLAN	0.089	0.076	0.66	0.65		
		Back	0.589	5.8GHz WLAN	0.098	0.076	0.69	0.67		
		Left side	0.365	5.8GHz WLAN	0.097	0.076	0.46	0.44		
		Right side	0.360				0.36	0.36		
		Top side		2.4GHz WLAN	0.079	0.076	0.08	0.08		
		Bottom side	0.105				0.11	0.11		
	Band IV	Front	0.231	2.4GHz WLAN	0.089	0.076	0.32	0.31		
		Back	0.288	5.8GHz WLAN	0.098	0.076	0.39	0.36		
		Left side	0.076	5.8GHz WLAN	0.097	0.076	0.17	0.15		
		Right side	0.047				0.05	0.05		
		Top side		2.4GHz WLAN	0.079	0.076	0.08	0.08		
		Bottom side	0.294				0.29	0.29		
	Band II	Front	0.133	2.4GHz WLAN	0.089	0.076	0.22	0.21		
		Back	0.185	5.8GHz WLAN	0.098	0.076	0.28	0.26		
		Left side	0.070	5.8GHz WLAN	0.097	0.076	0.17	0.15		
		Right side	0.024				0.02	0.02		
		Top side		2.4GHz WLAN	0.079	0.076	0.08	0.08		
		Bottom side	0.234				0.23	0.23		
LTE	Band 17	Front	0.281	2.4GHz WLAN	0.089	0.076	0.37	0.36		
		Back	0.327	5.8GHz WLAN	0.098	0.076	0.43	0.40		
		Left side	0.105	5.8GHz WLAN	0.097	0.076	0.20	0.18		
		Right side	0.108				0.11	0.11		
		Top side		2.4GHz WLAN	0.079	0.076	0.08	0.08		
		Bottom side	0.056				0.06	0.06		
	Band 4	Front	0.290	2.4GHz WLAN	0.089	0.076	0.38	0.37		
		Back	0.301	5.8GHz WLAN	0.098	0.076	0.40	0.38		
		Left side	0.068	5.8GHz WLAN	0.097	0.076	0.17	0.14		
		Right side	0.053				0.05	0.05		
		Top side		2.4GHz WLAN	0.079	0.076	0.08	0.08		
		Bottom side	0.357				0.36	0.36		
	Band 2	Front	0.144	2.4GHz WLAN	0.089	0.076	0.23	0.22		
		Back	0.200	5.8GHz WLAN	0.098	0.076	0.30	0.28		
		Left side	0.073	5.8GHz WLAN	0.097	0.076	0.17	0.15		
		Right side	0.037				0.04	0.04		
		Top side		2.4GHz WLAN	0.079	0.076	0.08	0.08		
		Bottom side	0.181				0.18	0.18		
	Band 7	Front	0.221	2.4GHz WLAN	0.089	0.076	0.31	0.30		
		Back	0.366	5.8GHz WLAN	0.098	0.076	0.46	0.44		
		Left side	0.206	5.8GHz WLAN	0.097	0.076	0.30	0.28		
		Right side	0.161				0.16	0.16		
		Top side		2.4GHz WLAN	0.079	0.076	0.08	0.08		
		Bottom side	0.228				0.23	0.23		



16.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2		3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz / 5.8GHz WLAN		2.4GHz Bluetooth				
			1g SAR (W/kg)	Band	1g SAR (W/kg)	Estimated 1g SAR (W/kg)				
GSM	GSM850	Front	0.803	2.4GHz WLAN	0.091	0.126	0.89	0.93		
		Back	0.765	5.8GHz WLAN	0.139	0.126	0.90	0.89		
	GSM1900	Front	0.250	2.4GHz WLAN	0.091	0.126	0.34	0.38		
		Back	0.466	5.8GHz WLAN	0.139	0.126	0.61	0.59		
WCMDA	Band V	Front	0.630	2.4GHz WLAN	0.091	0.126	0.72	0.76		
		Back	0.703	5.8GHz WLAN	0.139	0.126	0.84	0.83		
	Band IV	Front	0.605	2.4GHz WLAN	0.091	0.126	0.70	0.73		
		Back	0.623	5.8GHz WLAN	0.139	0.126	0.76	0.75		
	Band II	Front	0.370	2.4GHz WLAN	0.091	0.126	0.46	0.50		
		Back	0.641	5.8GHz WLAN	0.139	0.126	0.78	0.77		
LTE	Band 17	Front	0.234	2.4GHz WLAN	0.091	0.126	0.33	0.36		
		Back	0.285	5.8GHz WLAN	0.139	0.126	0.42	0.41		
	Band 4	Front	0.634	2.4GHz WLAN	0.091	0.126	0.73	0.76		
		Back	0.660	5.8GHz WLAN	0.139	0.126	0.80	0.79		
	Band 2	Front	0.317	2.4GHz WLAN	0.091	0.126	0.41	0.44		
		Back	0.496	5.8GHz WLAN	0.139	0.126	0.64	0.62		
	Band 7	Front	0.581	2.4GHz WLAN	0.091	0.126	0.67	0.71		
		Back	0.870	5.8GHz WLAN	0.139	0.126	1.01	1.00		

WWAN Band		Exposure Position	1	2		1+2 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5.2GHz / 5.3GHz / 5.5GHz WLAN				
			1g SAR (W/kg)	Band	1g SAR (W/kg)			
GSM	GSM850	Front	0.803	5.5GHz WLAN	0.060	0.86		
		Back	0.765	5.5GHz WLAN	0.131	0.90		
	GSM1900	Front	0.250	5.5GHz WLAN	0.060	0.31		
		Back	0.466	5.5GHz WLAN	0.131	0.60		
WCMDA	Band V	Front	0.630	5.5GHz WLAN	0.060	0.69		
		Back	0.703	5.5GHz WLAN	0.131	0.83		
	Band IV	Front	0.605	5.5GHz WLAN	0.060	0.67		
		Back	0.623	5.5GHz WLAN	0.131	0.75		
	Band II	Front	0.370	5.5GHz WLAN	0.060	0.43		
		Back	0.641	5.5GHz WLAN	0.131	0.77		
LTE	Band 17	Front	0.234	5.5GHz WLAN	0.060	0.29		
		Back	0.285	5.5GHz WLAN	0.131	0.42		
	Band 4	Front	0.634	5.5GHz WLAN	0.060	0.69		
		Back	0.660	5.5GHz WLAN	0.131	0.79		
	Band 2	Front	0.317	5.5GHz WLAN	0.060	0.38		
		Back	0.496	5.5GHz WLAN	0.131	0.63		
	Band 7	Front	0.581	5.5GHz WLAN	0.060	0.64		
		Back	0.870	5.5GHz WLAN	0.131	1.00		




WWAN Band		Exposure Position	1	2		3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz / 5.8GHz WLAN		2.4GHz Bluetooth				
			10g SAR (W/kg)	Band	10g SAR (W/kg)	Estimated 10g SAR (W/kg)				
GSM	GSM850	Front	0.626	2.4GHz WLAN	0.055	0.050	0.68	0.68		
		Back	0.597	5.8GHz WLAN	0.068	0.050	0.67	0.65		
	GSM1900	Front	0.151	2.4GHz WLAN	0.055	0.050	0.21	0.20		
		Back	0.271	5.8GHz WLAN	0.068	0.050	0.34	0.32		
WCMDA	Band V	Front	0.493	2.4GHz WLAN	0.055	0.050	0.55	0.54		
		Back	0.548	5.8GHz WLAN	0.068	0.050	0.62	0.60		
	Band IV	Front	0.380	2.4GHz WLAN	0.055	0.050	0.44	0.43		
		Back	0.401	5.8GHz WLAN	0.068	0.050	0.47	0.45		
	Band II	Front	0.218	2.4GHz WLAN	0.055	0.050	0.27	0.27		
		Back	0.370	5.8GHz WLAN	0.068	0.050	0.44	0.42		
LTE	Band 17	Front	0.175	2.4GHz WLAN	0.055	0.050	0.23	0.23		
		Back	0.220	5.8GHz WLAN	0.068	0.050	0.29	0.27		
	Band 4	Front	0.401	2.4GHz WLAN	0.055	0.050	0.46	0.45		
		Back	0.431	5.8GHz WLAN	0.068	0.050	0.50	0.48		
	Band 2	Front	0.210	2.4GHz WLAN	0.055	0.050	0.27	0.26		
		Back	0.322	5.8GHz WLAN	0.068	0.050	0.39	0.37		
	Band 7	Front	0.322	2.4GHz WLAN	0.055	0.050	0.38	0.37		
		Back	0.483	5.8GHz WLAN	0.068	0.050	0.55	0.53		


WWAN Band		Exposure Position	1	2		1+2 Summed 10g SAR (W/kg)	SPLSR	Case No
			WWAN	5.2GHz / 5.3GHz / 5.5GHz WLAN				
			10g SAR (W/kg)	Band	10g SAR (W/kg)			
GSM	GSM850	Front	0.626	5.5GHz WLAN	0.039	0.67		
		Back	0.597	5.5GHz WLAN	0.079	0.68		
	GSM1900	Front	0.151	5.5GHz WLAN	0.039	0.19		
		Back	0.271	5.5GHz WLAN	0.079	0.35		
WCMDA	Band V	Front	0.493	5.5GHz WLAN	0.039	0.53		
		Back	0.548	5.5GHz WLAN	0.079	0.63		
	Band IV	Front	0.380	5.5GHz WLAN	0.039	0.42		
		Back	0.401	5.5GHz WLAN	0.079	0.48		
	Band II	Front	0.218	5.5GHz WLAN	0.039	0.26		
		Back	0.370	5.5GHz WLAN	0.079	0.45		
LTE	Band 17	Front	0.175	5.5GHz WLAN	0.039	0.21		
		Back	0.220	5.5GHz WLAN	0.079	0.30		
	Band 4	Front	0.401	5.5GHz WLAN	0.039	0.44		
		Back	0.431	5.5GHz WLAN	0.079	0.51		
	Band 2	Front	0.210	5.5GHz WLAN	0.039	0.25		
		Back	0.322	5.5GHz WLAN	0.079	0.40		
	Band 7	Front	0.322	5.5GHz WLAN	0.039	0.36		
		Back	0.483	5.5GHz WLAN	0.079	0.56		

16.4 SPLSR Evaluation and Analysis

Case 1	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850			(cm)	X	Y	Z				
	2.4GHz WLAN		0.576	-	0.0664	-0.269	-0.174				
			1.192	-	0.0338	-0.328	-0.173	67.4	1.77	0.03	Not required

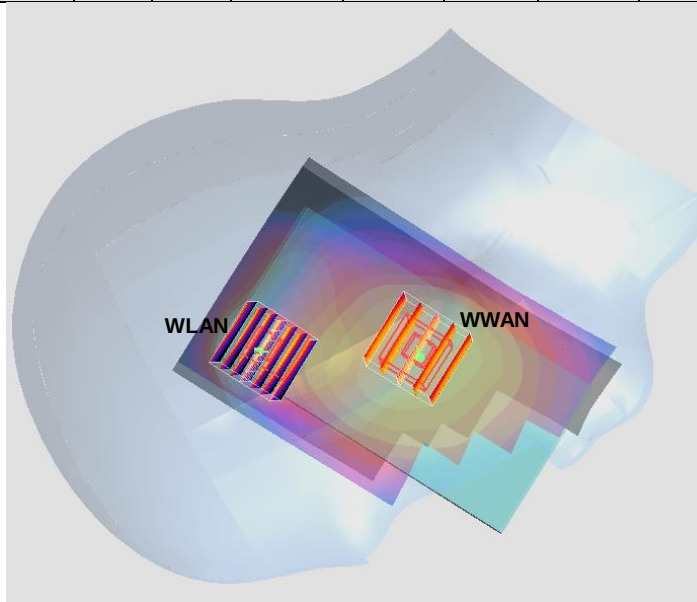


Case 2	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V			(cm)	X	Y	Z				
	2.4GHz WLAN		0.575	-	0.0659	-0.271	-0.174				
			1.192	-	0.0338	-0.328	-0.173	65.4	1.77	0.04	Not required

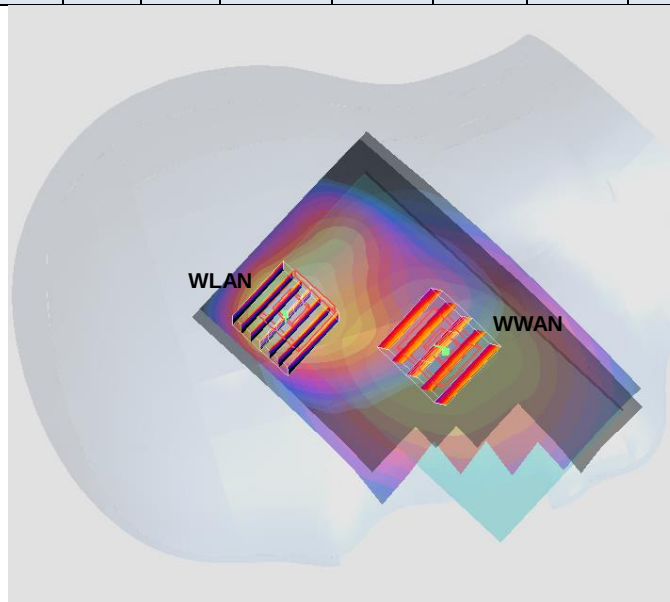


Case 3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV	Right Cheek	0.521	-	X	Y	Z	80.7	1.71	0.03	Not required
	2.4GHz WLAN		1.192	-	0.0338	-0.328	-0.173				



Case 4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 4	Right Cheek	0.490	-	X	Y	Z	82.8	1.68	0.03	Not required
	2.4GHz WLAN		1.192	-	0.0338	-0.328	-0.173				

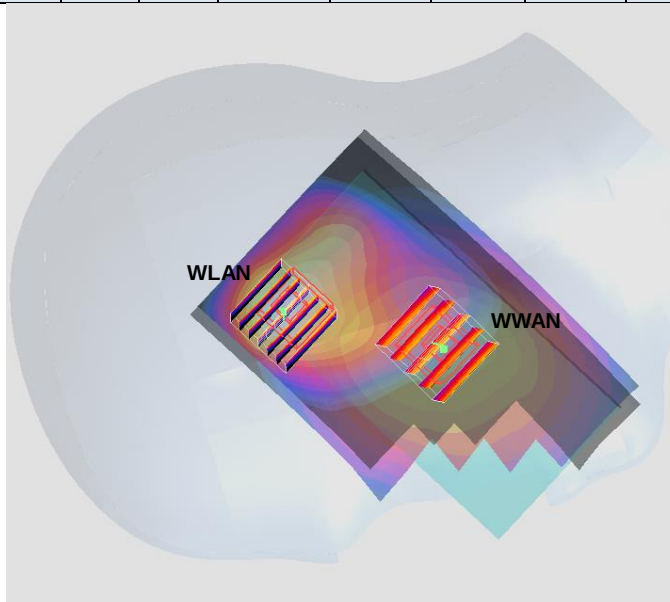

Case 5	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 7	Right Cheek	0.475	-	0.0639	-0.25	-0.172	83.6	1.67	0.03	Not required
	2.4GHz WLAN		1.192	-	0.0338	-0.328	-0.173				

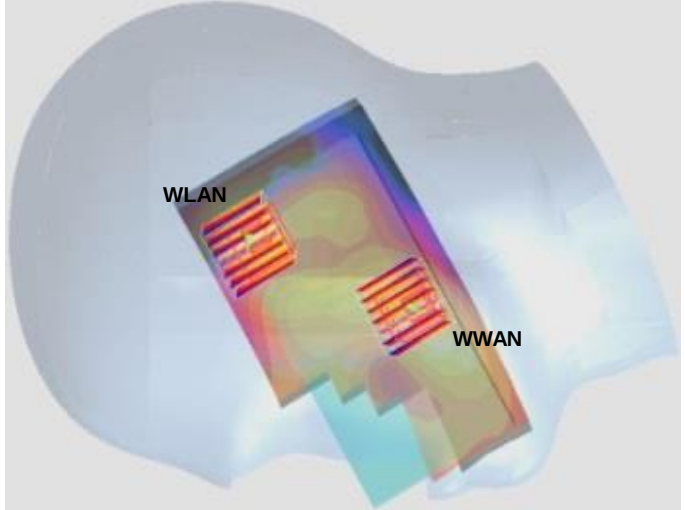

Test Engineer : Galen Zhang, Ken Lee, Mood Huang, Jerry Hu, and Lawrence Chen

17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 17.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	$\sqrt{3}$	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	± 0.5 %	± 0.5 %
Probe Positioning	9.9	Rectangular	$\sqrt{3}$	1	1	± 5.7 %	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	± 2.3 %	± 2.3 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	$\sqrt{3}$	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 12.8 %	± 12.6 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 25.6 %	± 25.2 %

Table 17.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013.
- [8] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [9] FCC KDB 941225 D02 v02r02, "SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced", May 2013.
- [10] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [11] FCC KDB 941225 D04 v01, "Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode", January 2010
- [12] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013
- [13] FCC KDB 941225 D06 v01r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", May 2013.
- [14] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [15] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.