



TEST REPORT

Test Report No. : UL-RPT-RP10295140JD02B V2.0

Manufacturer : Sony Mobile Communications Inc.

FCC ID : PY7PM-0804

Technology : UMTS850 Band V

Test Standard(s) : FCC Part 22.917

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 2.0 supersedes all previous versions.

Date of Issue: 04 August 2014


Checked by:

Sarah Williams
Engineer, Radio Laboratory

Issued by :

pp

John Newell
Group Quality Manager
Basingstoke,
UL VS LTD

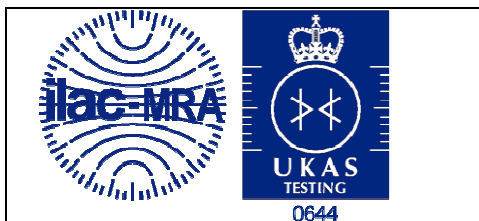

This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its' terms
of accreditation.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
3. Equipment Under Test (EUT)	6
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	7
3.5. Support Equipment	7
4. Operation and Monitoring of the EUT during Testing	8
4.1. Operating Modes	8
4.2. Configuration and Peripherals	8
5. Measurements, Examinations and Derived Results.....	9
5.1. General Comments	9
5.2. Test Results	10
5.2.1. Transmitter Out of Band Radiated Emissions	10
5.2.2. Transmitter Band Edge Radiated Emissions	13
6. Measurement Uncertainty	23
7. Report Revision History	24

1. Customer Information

Company Name:	Sony Mobile Communications Inc.
Address:	Nya Vattentornet Mobilvägen 10 Lund 22188 Sweden

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR22
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 22 Subpart H (Public Mobile Services)
Site Registration:	209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Date:	09 July 2014

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 2.1053/22.917	Transmitter Out of Band Radiated Emissions	
Part 2.1053/22.917	Transmitter Band Edge Radiated Emissions	
Key to Results  = Complied  = Did not comply		

2.3. Methods and Procedures

Reference:	ANSI/TIA-603-C-2004
Title:	Land Mobile Communications Equipment, Measurements and performance Standards
Reference:	FCC KDB 971168 D01 v02r01, 7 June 2013
Title:	Measurement Guidance for Certification of Licensed Digital Transmitters

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Sony
IMEI:	004402452980612 (<i>Radiated sample #1</i>)
Test Sample Serial Number:	CB5A1ZQX7W
Hardware Version Number:	A
Software Version Number:	23.0.A.0.283
FCC ID:	PY7PM-0804

Brand Name:	Sony
IMEI:	004402452980620 (<i>Radiated sample #2</i>)
Test Sample Serial Number:	CB5A1ZQX5W
Hardware Version Number:	A
Software Version Number:	23.0.A.0.283
FCC ID:	PY7PM-0804

Brand Name:	Sony
Description:	AC Charger
Model Name or Number:	EP880

Brand Name:	Generic
Description:	MHL Cable
Model Name or Number:	Not marked

Brand Name:	Sony
Description:	MHL Adaptor
Model Name or Number:	IM750

Brand Name:	Sony
Description:	USB Cable
Model Name or Number:	EC803

Brand Name:	Sony
Description:	Deskstand
Model Name or Number:	DK43

Identification of Equipment Under Test (EUT) (continued)

Brand Name:	Sony
Description:	PHF
Model Name or Number:	MH410c

3.2. Description of EUT

The equipment under test (EUT) was a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac + NFC & ANT+.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	UMTS850		
Type of Radio Device:	Transceiver		
Mode:	UMTS FDD V		
Modulation Type:	QPSK / 8PSK		
Channel Spacing:	5 MHz		
Power Supply Requirement(s):	Nominal	3.8 V	
Transmit Frequency Range:	824 to 849 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	4132	826.4
	Top	4233	846.6

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	2 GB Micro SD Card
Brand Name:	Generic
Model Name or Number:	Not marked

Description:	22" High Definition Television
Brand Name:	Logik
Model Name or Number:	L22FE12A
Serial Number:	1309020661

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Constantly transmitting at full power on bottom and top channels as required.
- Band edge tests were performed with the EUT in Voice (12.2 kbps), HSDPA (Sub-tests 1 to 4) or HSUPA (Sub-tests 1 to 5) modes.
- Transmitter radiated spurious emissions were checked in all modes during pre-scans. Voice / 12.2 kbps was found to be the worst case and all final measurements were performed with the EUT in this mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- Connected to a Rohde & Schwarz CMW 500 Universal Radio Communications Tester, operating in UMTS Band V mode.
- Transmitter radiated spurious emission tests were performed with the following configurations, employing all available accessories:
 - o Configuration 1 – Handset with the AC charger, USB Cable, MHL cable (terminated in to a television), MHL adaptor and PHF.
 - o Configuration 2 – Handset with the AC charger, USB Cable, Deskstand and PHF.

Pre-scans below 1 GHz were performed in both configurations 1 and 2, with final measurements limited to the configuration which provided worst case results. Pre-scans above 1 GHz were performed in the configuration that employed the most accessories (Configuration 1), with any final measurements being performed in both configurations.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter Out of Band Radiated Emissions

Test Summary:

Test Engineers:	David Doyle & Georgios Vrezas	Test Date:	09 July 2014
Test Sample IMEIs:	004402452980612 & 004402452980620		

FCC Reference:	Parts 2.1053 & 22.917
Test Method Used:	As detailed in KDB 971168 Section 6.1 referencing FCC Part 2.1053
Frequency Range:	30 MHz to 9 GHz
Configuration:	Voice / 12.2 kbps

Environmental Conditions:

Temperature (°C):	22 to 24
Relative Humidity (%):	32 to 51





Note(s):


1. The uplink traffic channel is shown on the 30 MHz to 1 GHz plot.
2. No spurious emissions were detected above the noise floor of the measuring receiver; the highest peak noise floor reading of the measuring receiver was recorded.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
4. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Results: Voice / 12.2 kbps – Top Channel

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
3793.269	-36.6	-13.0	23.6	Complied

Transmitter Out of Band Radiated Emissions (continued)

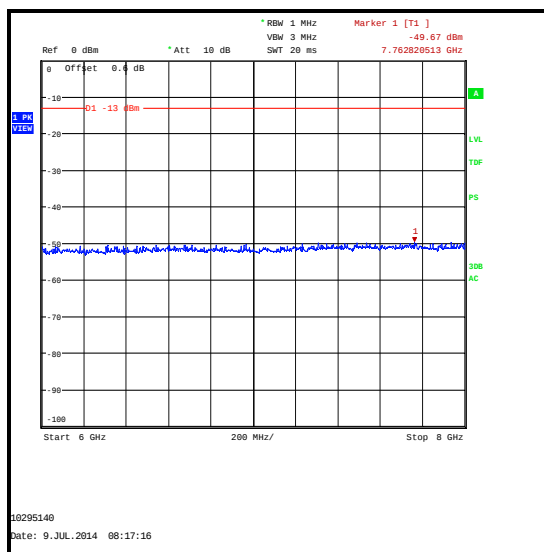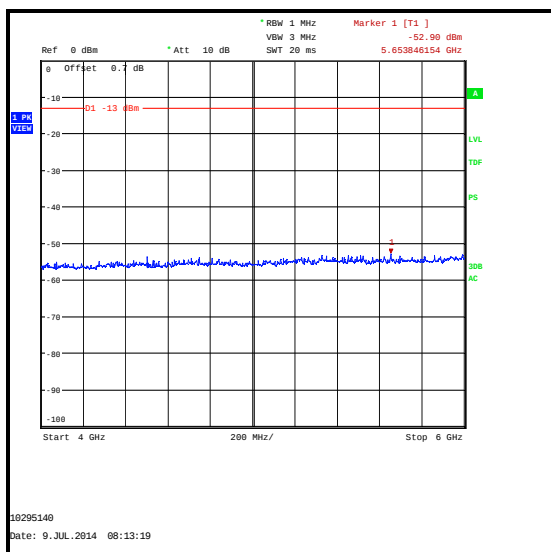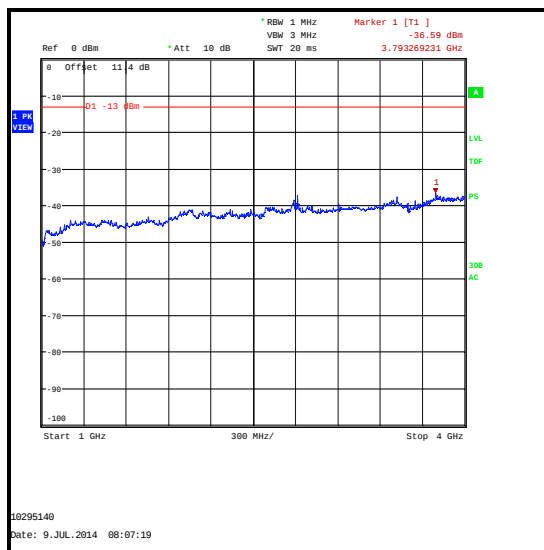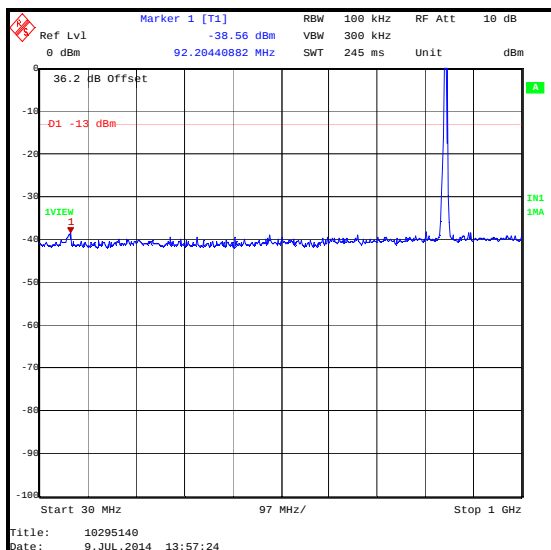

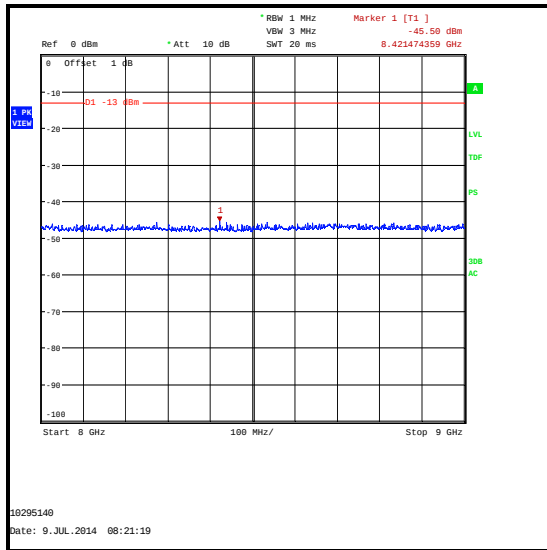Transmitter Out of Band Radiated Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1622	Thermohygrometer	JM Handelspunkt	30.5015.06	None stated	31 Dec 2014	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	26 Nov 2014	12
M1273	Test Receiver	Rohde & Schwarz	ESIB26	100275	15 Feb 2015	12
G0543	Pre-Amplifier	Sonoma	310N	230801	19 Aug 2014	3
A490	Antenna	Chase	CBL6111A	1590	29 Apr 2015	12
A1834	Attenuator	Hewlett Packard	8491B	10444	15 Nov 2014	12
A2142	Attenuator	AtlanTechRF	AN18-20	081120-23	25 Apr 2015	12
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	14 Nov 2014	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	13 May 2015	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	18 May 2015	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	02 May 2015	12
A148	High Pass Filter	AtlanTechRF	5H036	32218	17 May 2015	12
A1818	Antenna	EMCO	3115	00075692	14 Nov 2014	12
A253	Antenna	Flann Microwave	12240-20	128	14 Nov 2014	12
A254	Antenna	Flann Microwave	14240-20	139	14 Nov 2014	12
A255	Antenna	Flann Microwave	16240-20	519	14 Nov 2014	12

5.2.2. Transmitter Band Edge Radiated Emissions**Test Summary:**

Test Engineer:	David Doyle	Test Date:	09 July 2014
Test Sample IMEI:	004402452980612		



FCC Reference:	Parts 2.1053 & 22.917
Test Method Used:	As detailed in KDB 971168 Section 6.1 referencing FCC Part 22.917

Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	51



Results: Voice / 12.2 kbps

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
823.968	-30.3	-13.0	17.3	Complied
824	-30.6	-13.0	17.6	Complied
849	-28.0	-13.0	15.0	Complied
849.019	-27.8	-13.0	14.8	Complied

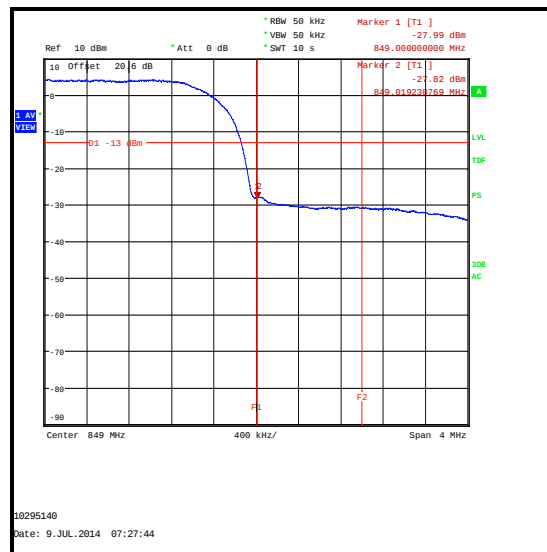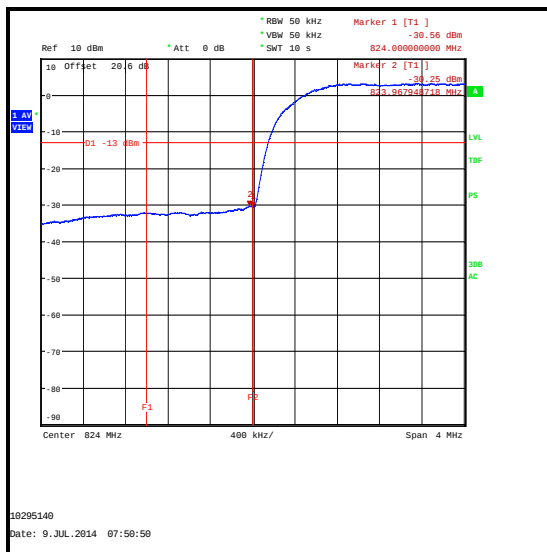



Transmitter Band Edge Radiated Emissions (continued)**Results: HSDPA Sub-Test 1**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
823.981	-30.8	-13.0	17.8	Complied
824	-31.1	-13.0	18.1	Complied
849	-28.0	-13.0	15.0	Complied
849.038	-27.6	-13.0	14.6	Complied

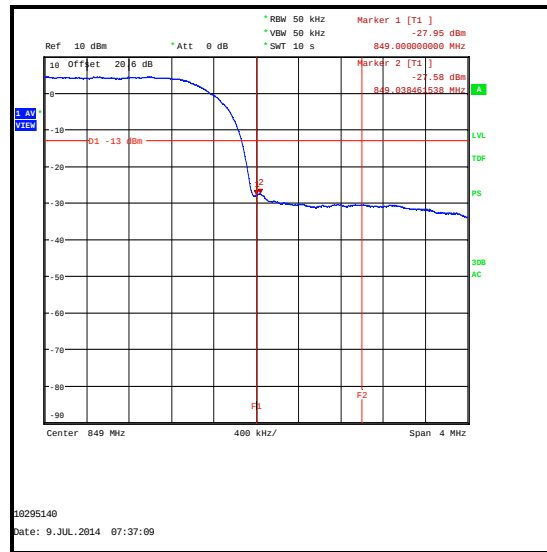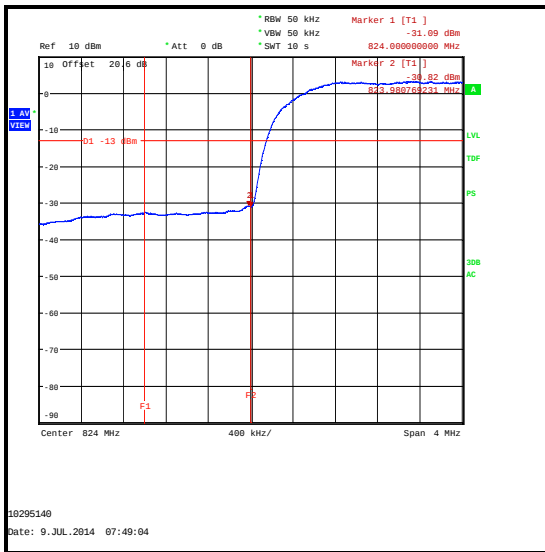



Transmitter Band Edge Radiated Emissions (continued)**Results: HSDPA Sub-Test 2**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
823.974	-30.7	-13.0	17.7	Complied
824	-30.8	-13.0	17.8	Complied
849	-28.4	-13.0	15.4	Complied
849.179	-28.1	-13.0	15.1	Complied

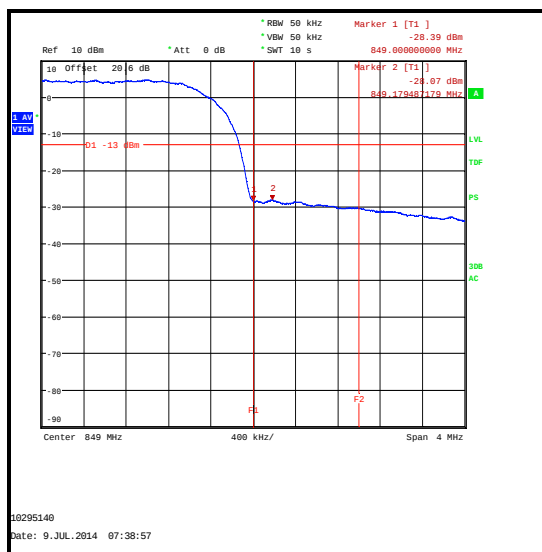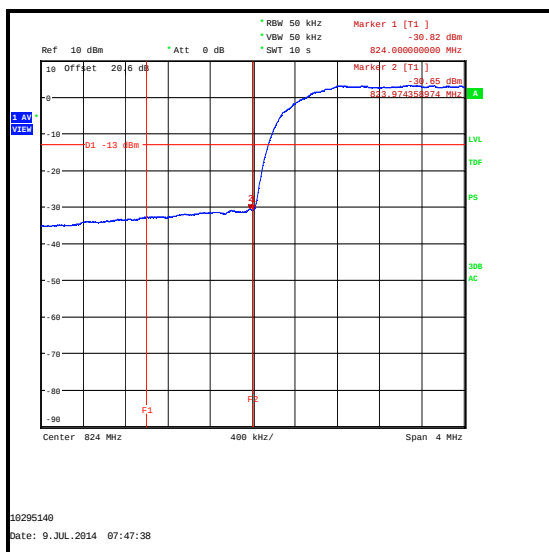



Transmitter Band Edge Radiated Emissions (continued)**Results: HSDPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
823.795	-31.2	-13.0	18.2	Complied
824	-31.5	-13.0	18.5	Complied
849	-29.5	-13.0	16.5	Complied
849.179	-28.3	-13.0	15.3	Complied

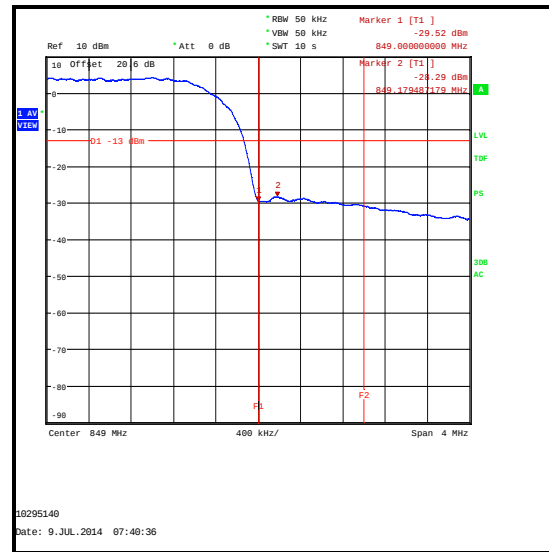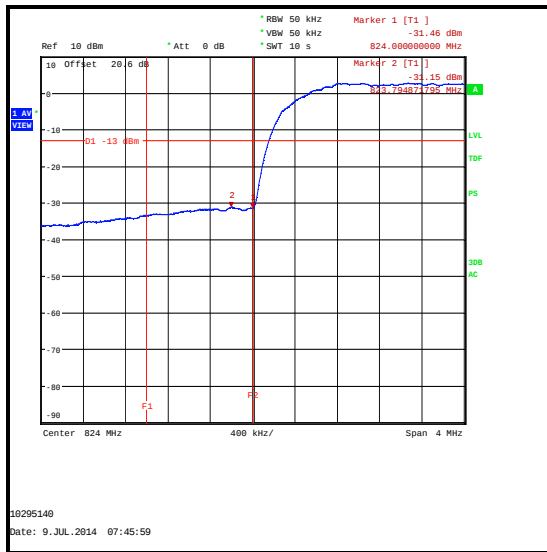



Transmitter Band Edge Radiated Emissions (continued)**Results: HSDPA Sub-Test 4**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
823.795	-31.0	-13.0	18.0	Complied
824	-31.4	-13.0	18.4	Complied
849	-29.7	-13.0	16.7	Complied
849.173	-28.3	-13.0	15.3	Complied

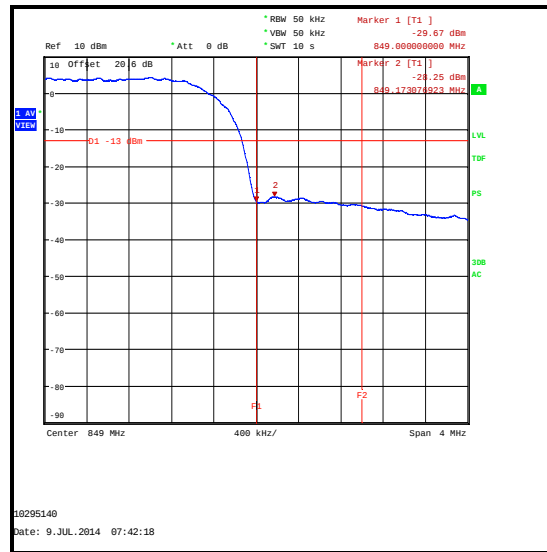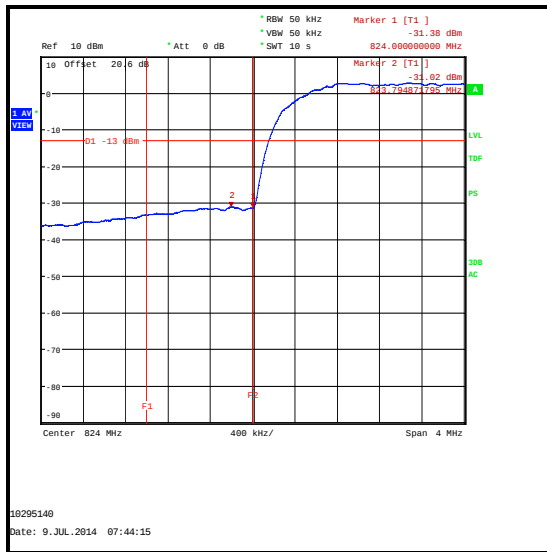



Transmitter Band Edge Radiated Emissions (continued)**Results: HSUPA Sub-Test 1**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-30.9	-13.0	17.9	Complied
849	-28.7	-13.0	15.7	Complied
849.173	-28.5	-13.0	15.5	Complied

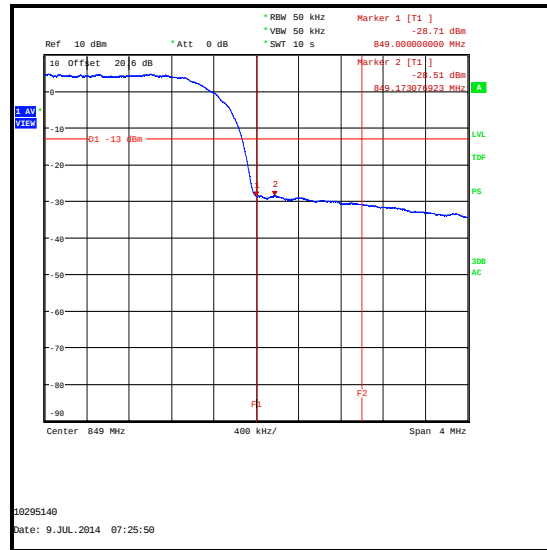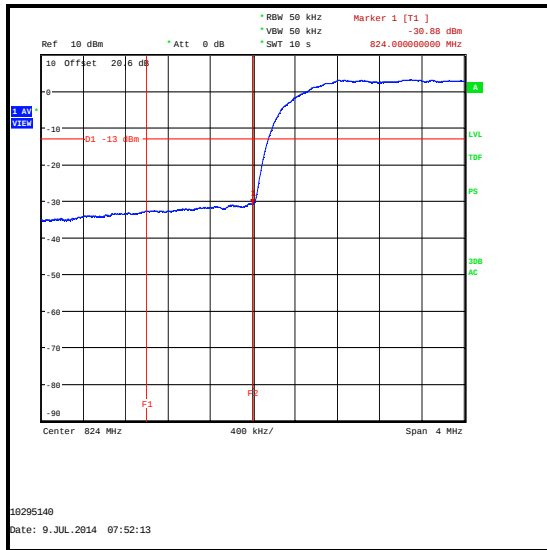



Transmitter Band Edge Radiated Emissions (continued)**Results: HSUPA Sub-Test 2**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-31.5	-13.0	18.5	Complied
849	-28.6	-13.0	15.6	Complied
849.026	-28.2	-13.0	15.2	Complied

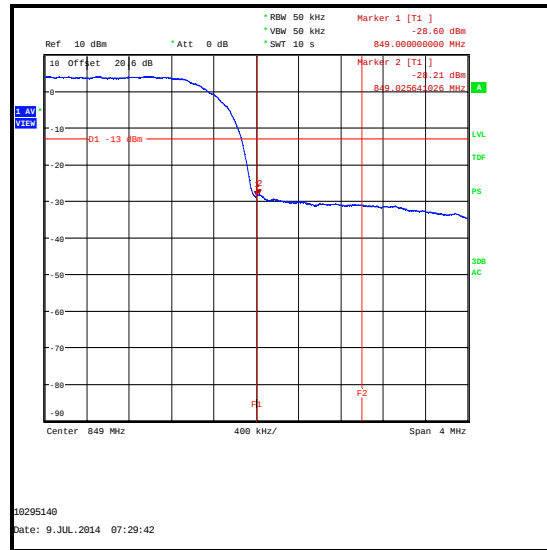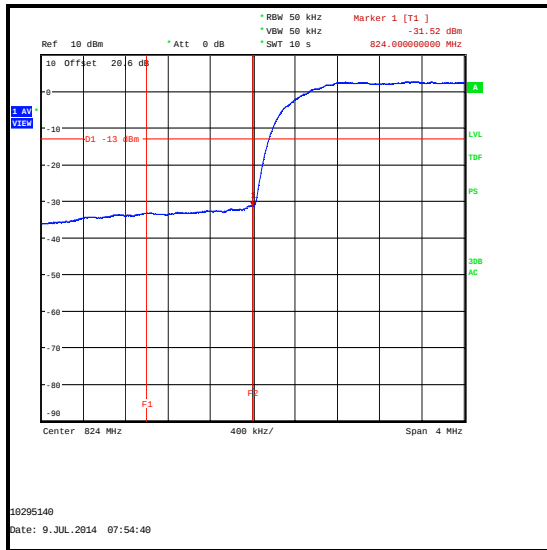



Transmitter Band Edge Radiated Emissions (continued)**Results: HSUPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-30.8	-13.0	17.8	Complied
849	-28.6	-13.0	15.6	Complied
849.167	-27.5	-13.0	14.5	Complied

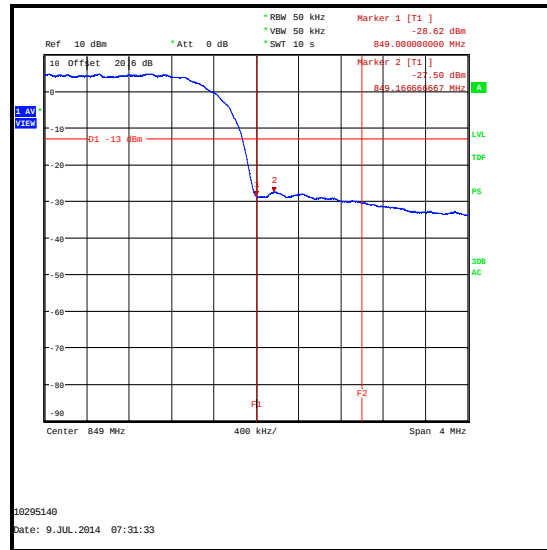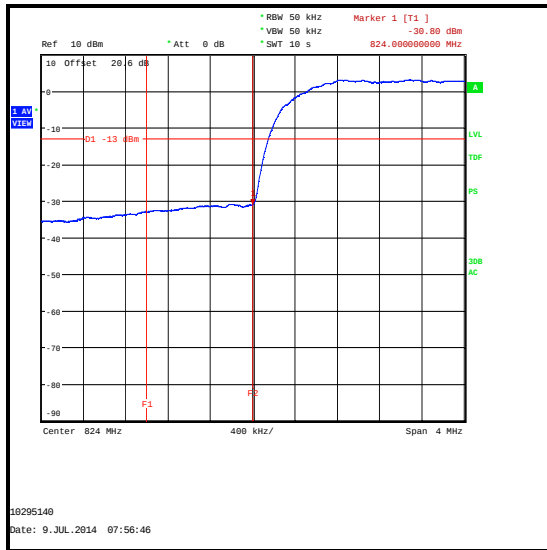



Transmitter Band Edge Radiated Emissions (continued)**Results: HSUPA Sub-Test 4**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-30.8	-13.0	17.8	Complied
849	-27.8	-13.0	14.8	Complied
849.038	-27.5	-13.0	14.5	Complied

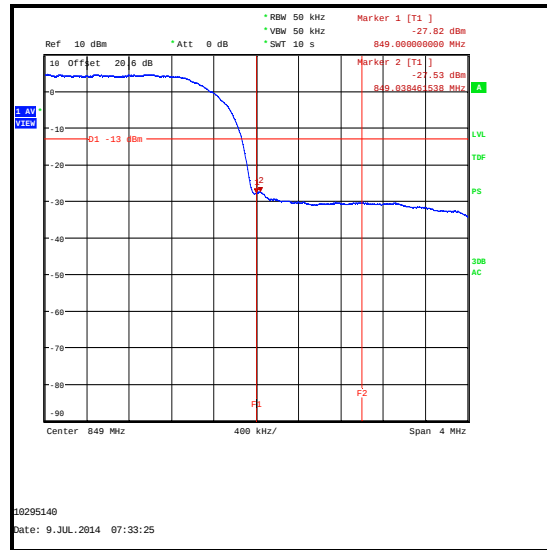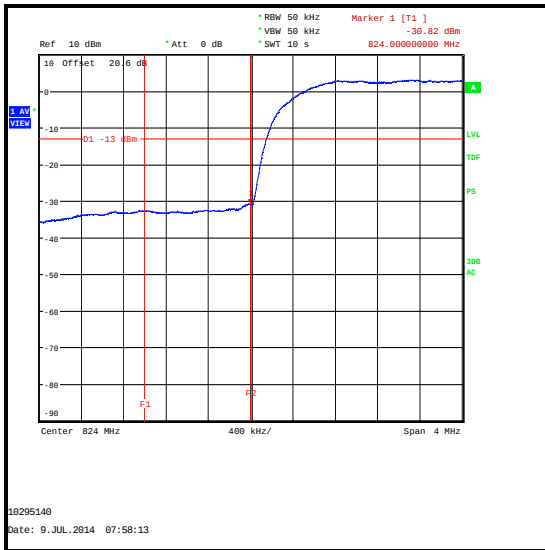

Transmitter Band Edge Radiated Emissions (continued)**Results: HSUPA Sub-Test 5**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
823.962	-30.8	-13.0	17.8	Complied
824	-31.0	-13.0	18.0	Complied
849	-28.3	-13.0	15.3	Complied
849.019	-28.0	-13.0	15.0	Complied

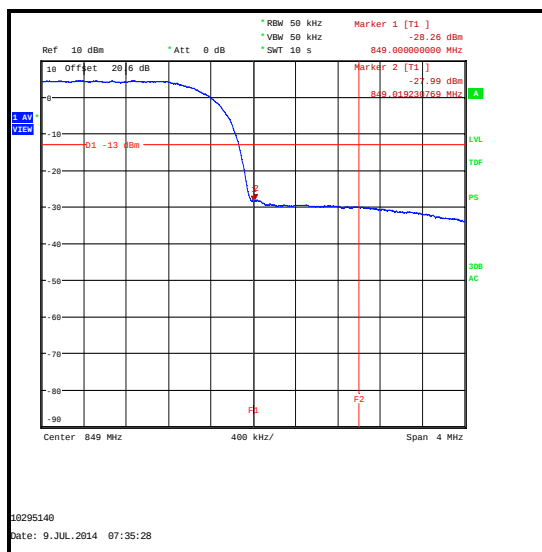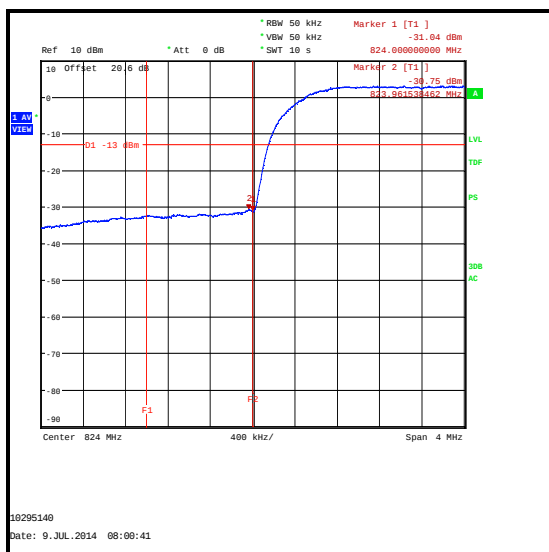**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelpunkt	30.5015.13	None stated	14 Mar 2015	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	14 Nov 2014	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	13 May 2015	12
A1393	Attenuator	Huber & Suhner	6820.17.B	757456	02 May 2015	12
A288	Antenna	Chase	CBL6111A	1589	20 Aug 2014	12

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±5.65 dB
Radiated Spurious Emissions	1 GHz to 9 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version
2.0	-	-	EUT Description update

--- END OF REPORT ---