



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2003 & 2013**

For
GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC

FCC ID: PY7PM-0810

**Report Number: 14U17929-S1
Issue Date: 7/10/2014**

Prepared for
**SONY MOBILE COMMUNICATIONS INC.
NYA VATTENTORNET MOBILVAGEN 10
LUND 22188
SWEDEN**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
--	7/10/2014	Initial Issue	--

Table of Contents

1.	Attestation of Test Results	6
2.	Test Specification, Methods and Procedures.....	7
3.	Facilities and Accreditation	7
4.	SAR Measurement System & Test Equipment	8
4.1.	SAR Measurement System.....	8
4.2.	Test Equipment.....	9
5.	Measurement Uncertainty.....	11
6.	Device Under Test (DUT) Information	12
6.1.	DUT Description	12
6.2.	Wireless Technologies.....	12
6.3.	Nominal and Maximum Output Power.....	13
6.4.	Simultaneous Transmission Condition	16
6.5.	General LTE SAR Test and Reporting Considerations.....	17
6.6.	Antenna Dimensions and Separation Distances	18
7.	RF Exposure Conditions (Test Configurations)	19
7.1.	Head.....	19
7.2.	Body-worn Accessory.....	19
7.3.	Wireless Router (Hotspot) and Wi-Fi Direct	19
8.	Conducted Output Power Measurements.....	20
8.1.	GSM850/1900.....	20
8.2.	W-CDMA Band V/IV/II.....	23
8.3.	LTE Band 2/4/5/7/13/17	29
8.4.	Wi-Fi (2.4 GHz Band).....	40
8.5.	Wi-Fi (5 GHz Bands).....	41
8.6.	Bluetooth	44
9.	Dielectric Property Measurements.....	45
9.1.	Tissue Dielectric Parameters	45
9.2.	Dielectric Property Measurements Results	46
	System Check	50
9.3.	Reference Target SAR Values.....	50
9.4.	System Check Results.....	51
10.	Measured and Reported (Scaled) SAR Results.....	53
10.1.	GSM850.....	54

10.2.	GSM1900	54
10.3.	W-CDMA Band V	55
10.4.	W-CDMA Band IV	55
10.5.	W-CDMA Band II.....	55
10.6.	LTE Band 2 (20MHz Bandwidth)	56
10.7.	LTE Band 4 (20MHz Bandwidth)	56
10.8.	LTE Band 5 (10MHz Bandwidth)	57
10.9.	LTE Band 7 (20MHz Bandwidth)	57
10.10.	LTE Band 13 (10MHz Bandwidth)	58
10.11.	LTE Band 17 (10MHz Bandwidth)	58
10.12.	Wi-Fi (DTS Band).....	59
10.13.	Wi-Fi (U-NII Bands).....	59
10.14.	Bluetooth.....	60
11.	SAR Measurement Variability.....	61
11.1.	The Highest Measured SAR Configuration in Each Frequency Band	61
11.2.	Repeated Measurement Results	61
12.	Simultaneous Transmission SAR Analysis.....	62
12.1.	Sum of the SAR for GSM850 & Wi-Fi & BT	63
12.2.	Sum of the SAR for GSM1900 & Wi-Fi & BT	64
12.3.	Sum of the SAR for WCDMA Band V & Wi-Fi & BT.....	65
12.4.	Sum of the SAR for WCDMA Band IV & Wi-Fi & BT	66
12.5.	Sum of the SAR for WCDMA Band II & Wi-Fi & BT	67
12.6.	Sum of the SAR for LTE Band 2 & Wi-Fi & BT	68
12.7.	Sum of the SAR for LTE Band 4 & Wi-Fi & BT	69
12.8.	Sum of the SAR for LTE Band 5 & Wi-Fi & BT	70
12.9.	Sum of the SAR for LTE Band 7 & Wi-Fi & BT	71
12.10.	Sum of the SAR for LTE Band 13 & Wi-Fi & BT	72
12.11.	Sum of the SAR for LTE Band 17 & Wi-Fi & BT	73
13.	Appendixes.....	74
13.1.	Photos and Antenna Locations.....	74
13.2.	System Performance Check Plots.....	74
13.3.	Highest SAR Test Plots.....	74
13.4.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3902	74
13.5.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3531	74
13.6.	Calibration Certificate for E-Field Probe EX3DV3 - SN 3773	74
13.7.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3929	74

13.8.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3991	74
13.9.	Calibration Certificate for D750V3 - SN 1071	74
13.10.	Calibration Certificate for D835V2 - SN 4d002	74
13.11.	Calibration Certificate for D1750V2 - SN 1077	74
13.12.	Calibration Certificate for D1750V2 - SN 1050	74
13.13.	Calibration Certificate for D1900V2- SN 5d043	74
13.14.	Calibration Certificate for D2450V2 - SN 899	74
13.15.	Calibration Certificate for D2600V2 - SN 1006	74
13.16.	Calibration Certificate for D5GHzV2 - SN 1003	74
13.17.	Calibration Certificate for D5GHzV2 - SN 1138	74

1. Attestation of Test Results

Applicant Name	SONY MOBILE COMMUNICATIONS, INC.			
Application Purpose	☒ Original Grant ☐ Class II Permissive Change			
FCC ID	PY7PM-0810			
DUT Description	GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC			
Exposure Category	General Population/Uncontrolled Exposure (1g SAR limit: 1.6 W/kg)			
The highest reported SAR	RF Exposure Conditions	Equipment Class		
		Licensed	DTS	UNII
	Head	0.947 W/kg	0.539 W/kg	0.578 W/kg
	Body-worn Accessory	0.998 W/kg	0.131 W/kg	0.293 W/kg
	Wireless Router (Hotspot)	1.098 W/kg	0.350 W/kg	N/A
	Simultaneous Transmission	Head: 1.407 W/kg Body: 1.326 W/kg Hotspot: 1.448 W/kg	Head: 1.368 W/kg Body: 1.129 W/kg Hotspot: 1.448 W/kg	Head: 1.407 W/kg Body: 1.326 W/kg Hotspot: N/A
Highest SAR across exposure conditions	1.098 W/kg			
Applicable Standards	FCC 47 CFR § 2.1093 KDB publication IEEE Std 1528-2003 & 2013			
Test Results	Pass			
Date tested	6/23/2014 – 7/10/2014			
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.				
Approved & Released By:  Devin Chang Senior Engineer UL Verification Services Inc.		Prepared By:  Yu Chen Laboratory Technician UL Verification Services Inc.		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2003 & 2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 941225 D01 SAR test for 3G devices v02
- 941225 D02 HSPA and 1x Advanced v02r02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- 941225 D05 SAR for LTE Devices v02r03
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01
- 941225 D06 Hotspot Mode SAR v01r01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- 865664 D02 SAR Reporting v01r01
- 690783 D01 SAR Listings on Grants v01r03

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

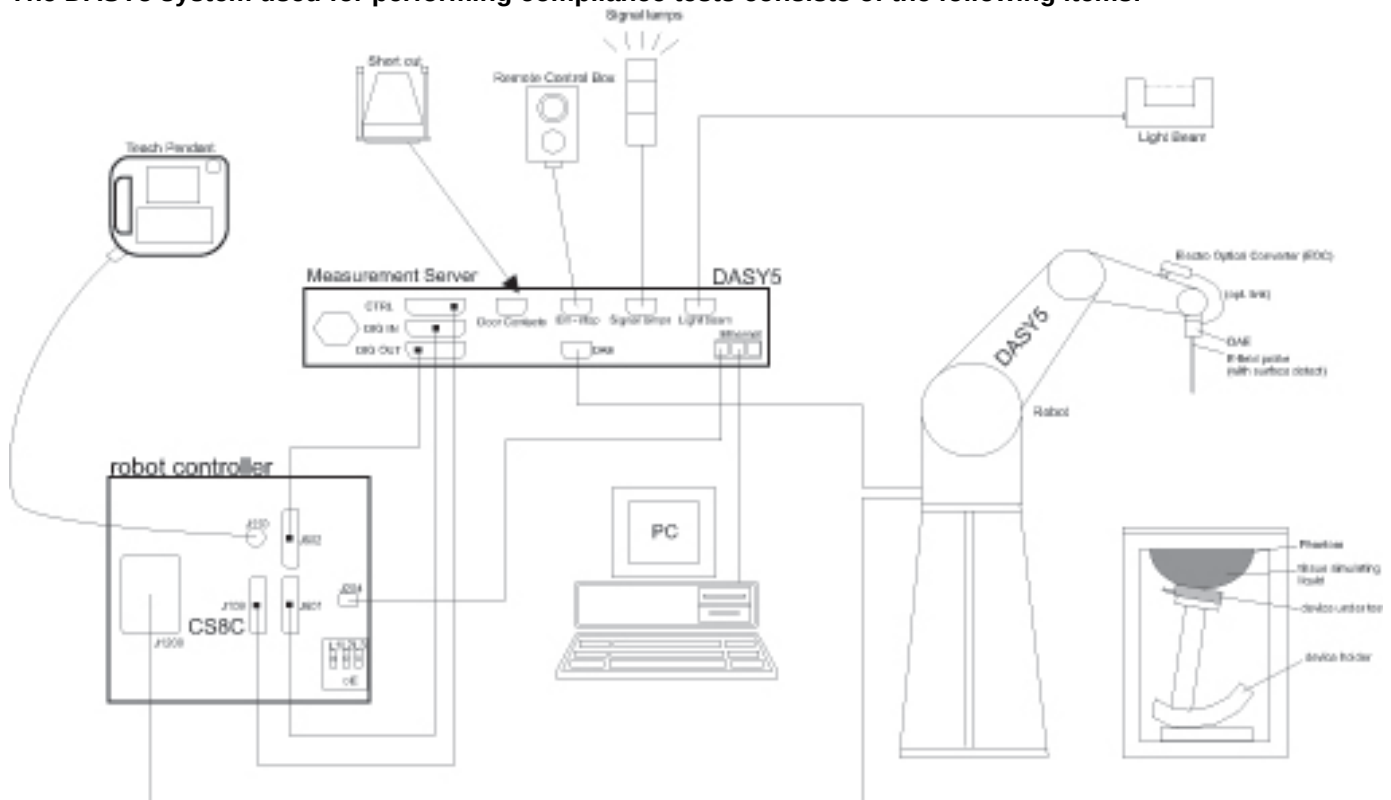

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	ENA Series/E5071B	MY42100131	2/24/2015
Dielectronic Probe kit	SPEAG	DAK-3.5	1087	11/13/2014
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	4242	122529163	9/19/2014
Thermometer	EXTECH	445703	CCS-200	3/24/2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
ESG Vecto Signal Generator	Agilent	E4438C	MY47271507	6/17/2015
Power Meter	HP	438A	2822A05684	10/10/2014
Power Sensor	Agilent	8481A	2237A31744	10/2/2014
Power Sensor	Agilent	8481A	2349A36506	9/30/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808939	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	Sorensen Ametek	XT15-4	1319A02778	N/A
ESG Vecto Signal Generator	Agilent	E4438C	MY47271045	6/18/2015
Power Meter	HP	438A	3513U04320	10/2/2014
Power Sensor	Agilent	8481A	2702A66876	9/30/2014
Power Sensor	Agilent	8481A	3318A95392	9/30/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
E-Field Probe (SAR 1)	SPEAG	EX3DV4	3902	5/19/2015
E-Field Probe (SAR 2)	SPEAG	EX3DV3	3531	11/21/2014
E-Field Probe (SAR 3)	SPEAG	EX3DV4	3773	4/22/2015
E-Field Probe (SAR 4)	SPEAG	EX3DV4	3929	5/9/2015
E-Field Probe (SAR 5)	SPEAG	EX3DV4	3991	5/6/2015
Data Acquisition Electronics (SAR 1)	SPEAG	DAE3	427	1/14/2015
Data Acquisition Electronics (SAR 2)	SPEAG	DAE4	1359	2/17/2015
Data Acquisition Electronics (SAR 3)	SPEAG	DAE4	1343	7/24/2014
Data Acquisition Electronics (SAR 4)	SPEAG	DAE4	1352	9/11/2014
Data Acquisition Electronics (SAR 5)	SPEAG	DAE4	1439	5/14/2015
System Validation Dipole	SPEAG	D750V3	1071	11/15/2014
System Validation Dipole	SPEAG	D835V2	4d002	11/15/2015
System Validation Dipole	SPEAG	D1750V2	1077	9/12/2014
System Validation Dipole	SPEAG	D1750V2	1050	4/22/2015
System Validation Dipole	SPEAG	D1900V2	5d043	11/12/2015
System Validation Dipole	SPEAG	D2450V2	899	9/10/2014
System Validation Dipole	SPEAG	D2600V2	1006	9/11/2014
System Validation Dipole	SPEAG	D5GHzV2	1003	2/26/2015
System Validation Dipole	SPEAG	D5GHzV2	1138	11/19/2014
Thermometer (SAR Lab 1)	EXTECH	445703	CCS-205	3/24/2015
Thermometer (SAR Lab 2)	EXTECH	445703	CCS-203	3/28/2015
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-237	6/3/2015
Thermometer (SAR Lab 4)	EXTECH	445703	CCS-238	6/3/2015
Thermometer (SAR Lab 5)	EXTECH	445703	CCS-239	6/3/2015

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1911A	MY53060016	8/3/2014
Power Sensor	Agilent	N1921A	MY52020011	5/6/2015
Base Station Simulator	R&S	CMW 500	132909-bd	6/6/2015
Base Station Simulator	R&S	CMW 500	135393-VQ	7/3/2015
Base Station Simulator	R&S	CMW 500	125236-eS	5/29/2015
Base Station Simulator	R&S	CMU 200	106291	10/18/2014
Base Station Simulator	Agilent	8960 Series 10	GB46160222	11/21/2014
Base Station Simulator	Agilent	8960 Series 10	MY53211024	9/11/2014
Bluetooth Tester	R & S	CBT	100900-ac	7/12/2014

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 & 2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

This device has two power setting. When hotspot mode is activated, an automatic RF power reduction is activated and reduces the output RF power level. When hotspot mode is deactivated, the RF output power levels return to their maximum RF power level.	
Device Dimension	Overall (Length x Width): 127 mm x 64.9 mm Overall Diagonal: 138.91 mm Display Diagonal: 116 mm
Battery Back Cover	The rechargeable battery is not user accessible.
Battery Options	The rechargeable battery is not user accessible.
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☐ Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☒ Wi-Fi Direct (Wi-Fi 5 GHz) (Group Client only)

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
GSM	850 / 1900	Voice (GMSK), GPRS (GMSK) EGPRS (8PSK)	GSM Voice: 12.5%; GPRS/EGPRS: 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%,
	GPRS Multi-Slot Class: ☐ Class 8 - One Up ☐ Class 10 - Two Up ☒ Class 12 - Four Up ☐ Class 33 - Four Up DTM (Dual Transfer Mode): Supported		
W-CDMA (UMTS)	Band V / IV / II	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) DC-HSDPA (Rel. 8) HSPA+ (Rel. 7)	100%
LTE (FDD)	Band 2 / 4 / 5 / 7 / 13 / 17	QPSK, 16QAM (Rel. 10) Do not support Carrier Aggregation (CA).	100%
	Does this device SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No		
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)	100%
Bluetooth	2.4 GHz	Version 4.0 LE	32.25% (DH1), 66.68% (DH3), 77.52% (DH5)

6.3. Nominal and Maximum Output Power

RF Air interface	Mode		Full Power			Reduce Power		
			Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)	Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)
GSM850	GSM	Voice	33.0	-1.4 ~ 0.6	33.6	33.0	-1.4 ~ 0.6	33.6
	GPRS GMSK	Tx Slot 1	33.0	-1.4 ~ 0.6	33.6	33.0	-1.4 ~ 0.6	33.6
		Tx Slot 2	29.5	-1.5 ~ 0.6	30.1	29.1	-1.5 ~ 0.6	29.7
		Tx Slot 3	27.5	-1.5 ~ 0.6	28.1	27.0	-1.5 ~ 0.6	27.6
		Tx Slot 4	26.5	-1.5 ~ 0.6	27.1	25.6	-1.5 ~ 0.6	26.2
	EGPRS 8PSK	Tx Slot 1	27.0	-1.5 ~ 1.0	28.0	27.0	-1.5 ~ 1.0	28.0
		Tx Slot 2	25.0	-1.5 ~ 1.0	26.0	25.0	-1.5 ~ 1.0	26.0
		Tx Slot 3	24.0	-1.5 ~ 1.0	25.0	24.0	-1.5 ~ 1.0	25.0
		Tx Slot 4	22.0	-1.5 ~ 1.0	23.0	22.0	-1.5 ~ 1.0	23.0
GSM1900	GSM	Voice	30.0	-0.7 ~ 0.6	30.6	30.0	-0.7 ~ 0.6	30.6
	GPRS GMSK	Tx Slot 1	30.0	-0.7 ~ 0.6	30.6	30.0	-0.7 ~ 0.6	30.6
		Tx Slot 2	28.0	-1.5 ~ 0.6	28.6	26.4	-1.5 ~ 0.6	27.0
		Tx Slot 3	27.0	-1.5 ~ 0.6	27.6	24.6	-1.5 ~ 0.6	25.2
		Tx Slot 4	26.0	-1.5 ~ 0.6	26.6	23.4	-1.5 ~ 0.6	24.0
	EGPRS 8PSK	Tx Slot 1	26.0	-1.5 ~ 1.0	27.0	26.0	-1.5 ~ 1.0	27.0
		Tx Slot 2	24.0	-1.5 ~ 1.0	25.0	24.0	-1.5 ~ 1.0	25.0
		Tx Slot 3	23.0	-1.5 ~ 1.0	24.0	23.0	-1.5 ~ 1.0	24.0
		Tx Slot 4	22.0	-1.5 ~ 1.0	23.0	22.0	-1.5 ~ 1.0	23.0

Dual Transfer Mode

RF Air interface	Mode			Full Power			Reduce Power		
				Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)	Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)
GSM850	GSM(Voice) + GPRS(Data)	Tx Slot 1	CS	33.0	-1.4 ~ 0.6	33.6	33.0	-1.4 ~ 0.6	33.6
		Tx Slot 2	CS	29.5	-1.5 ~ 0.6	30.1	29.1	-1.5 ~ 0.6	29.7
			PS	29.5	-1.5 ~ 0.6	30.1	29.1	-1.5 ~ 0.6	29.7
		Tx Slot 3	CS	27.5	-1.3 ~ 0.6	28.1	27.0	-1.5 ~ 0.6	27.6
			PS	27.5	-1.3 ~ 0.6	28.1	27.0	-1.5 ~ 0.6	27.6
	GSM(Voice) + EGPRS(Data)	Tx Slot 1	CS	33.0	-1.4 ~ 0.6	33.6	33.0	-1.4 ~ 0.6	33.6
		Tx Slot 2	CS	29.5	-1.5 ~ 0.6	30.1	29.1	-1.5 ~ 0.6	29.7
			PS	25.0	-1.5 ~ 1.0	26.0	25.0	-1.5 ~ 1.0	26.0
		Tx Slot 3	CS	27.5	-1.3 ~ 0.6	28.1	27.0	-1.5 ~ 0.6	27.6
			PS	24.0	-1.5 ~ 1.0	25.0	24.0	-1.5 ~ 1.0	25.0
GSM1900	GSM(Voice) + GPRS(Data)	Tx Slot 1	CS	30.0	-0.7 ~ 0.6	30.6	30.0	-0.7 ~ 0.6	30.6
		Tx Slot 2	CS	28.0	-1.5 ~ 0.6	28.6	26.4	-1.5 ~ 1.5	27.9
			PS	28.0	-1.5 ~ 0.6	28.6	26.4	-1.5 ~ 1.5	27.9
		Tx Slot 3	CS	27.0	-1.5 ~ 0.6	27.6	24.6	-1.5 ~ 1.5	26.1
			PS	27.0	-1.5 ~ 0.6	27.6	24.6	-1.5 ~ 1.5	26.1
	GSM(Voice) + EGPRS(Data)	Tx Slot 1	CS	30.0	-0.7 ~ 0.6	30.6	30.0	-0.7 ~ 0.6	30.6
		Tx Slot 2	CS	28.0	-1.5 ~ 0.6	28.6	26.4	-1.5 ~ 1.5	27.9
			PS	24.0	-1.5 ~ 1.0	25.0	24.0	-1.5 ~ 1.5	25.5
		Tx Slot 3	CS	27.0	-1.5 ~ 0.6	27.6	24.6	-1.5 ~ 1.5	26.1
			PS	23.0	-1.5 ~ 1.0	24.0	23.0	-1.5 ~ 1.5	24.5

Note: CS : circuit switched PS : packet switched

RF Air interface	Mode		Full Power			Reduce Power		
			Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)	Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)
WCDMA Band II	R99		23.5	-0.7 ~ 0.3	23.8	19.5	-0.7 ~ 0.5	20.0
	HSDPA	Subtest 1	23.0	-1.5 ~ 0.8	23.8	19.5	-0.7 ~ 0.5	20.0
		Subtest 2	23.0	-1.5 ~ 0.8	23.8	19.5	-0.7 ~ 0.5	20.0
		Subtest 3	23.0	-1.5 ~ 0.8	23.8	19.5	-0.7 ~ 0.5	20.0
		Subtest 4	23.0	-1.5 ~ 0.8	23.8	19.5	-0.7 ~ 0.5	20.0
	HSUPA	Subtest 1	23.0	-1.5 ~ 0.8	23.8	19.5	-0.7 ~ 0.5	20.0
		Subtest 2	21.5	-1.5 ~ 2.0	23.5	19.5	-0.7 ~ 0.5	20.0
		Subtest 3	22.5	-1.5 ~ 1.3	23.8	19.5	-0.7 ~ 0.5	20.0
		Subtest 4	21.5	-1.5 ~ 2.0	23.5	19.5	-0.7 ~ 0.5	20.0
		Subtest 5	23.0	-1.5 ~ 0.8	23.8	19.5	-0.7 ~ 0.5	20.0
	DC-HSDPA	Subtest 1	23.0	-1.5 ~ 0.8	23.8	19.5	-0.7 ~ 0.5	20.0
		Subtest 2	23.0	-1.5 ~ 0.8	23.8	19.5	-0.7 ~ 0.5	20.0
		Subtest 3	23.0	-1.5 ~ 0.8	23.8	19.5	-0.7 ~ 0.5	20.0
		Subtest 4	23.0	-1.5 ~ 0.8	23.8	19.5	-0.7 ~ 0.5	20.0
WCDMA Band IV	R99		24.0	-0.7 ~ 0.5	24.5	21.3	-0.7 ~ 0.5	21.8
	HSDPA	Subtest 1	23.5	-1.5 ~ 1.0	24.5	21.3	-0.7 ~ 0.5	21.8
		Subtest 2	23.5	-1.5 ~ 1.0	24.5	21.3	-0.7 ~ 0.5	21.8
		Subtest 3	23.5	-1.5 ~ 1.0	24.5	21.3	-0.7 ~ 0.5	21.8
		Subtest 4	23.5	-1.5 ~ 1.0	24.5	21.3	-0.7 ~ 0.5	21.8
	HSUPA	Subtest 1	23.5	-1.5 ~ 1.0	24.5	21.3	-0.7 ~ 0.5	21.8
		Subtest 2	22.0	-1.5 ~ 2.0	24.0	21.3	-0.7 ~ 0.5	21.8
		Subtest 3	23.0	-1.5 ~ 1.5	24.5	21.3	-0.7 ~ 0.5	21.8
		Subtest 4	22.0	-1.5 ~ 2.0	24.0	21.3	-0.7 ~ 0.5	21.8
		Subtest 5	23.5	-1.5 ~ 1.0	24.5	21.3	-0.7 ~ 0.5	21.8
	DC-HSDPA	Subtest 1	23.5	-1.5 ~ 1.0	24.5	21.3	-0.7 ~ 0.5	21.8
		Subtest 2	23.5	-1.5 ~ 1.0	24.5	21.3	-0.7 ~ 0.5	21.8
		Subtest 3	23.5	-1.5 ~ 1.0	24.5	21.3	-0.7 ~ 0.5	21.8
		Subtest 4	23.5	-1.5 ~ 1.0	24.5	21.3	-0.7 ~ 0.5	21.8
WCDMA Band V	R99		24.0	-0.7 ~ 0.5	24.5	Not Supported		
	HSDPA	Subtest 1	24.0	-1.5 ~ 0.5	24.5			
		Subtest 2	24.0	-1.5 ~ 0.5	24.5			
		Subtest 3	23.5	-1.5 ~ 1.0	24.5			
		Subtest 4	23.5	-1.5 ~ 1.0	24.5			
	HSUPA	Subtest 1	24.0	-1.5 ~ 0.5	24.5			
		Subtest 2	22.0	-1.5 ~ 2.0	24.0			
		Subtest 3	23.0	-1.5 ~ 1.5	24.5			
		Subtest 4	22.0	-1.5 ~ 2.0	24.0			
		Subtest 5	24.0	-1.5 ~ 0.5	24.5			
	DC-HSDPA	Subtest 1	24.0	-1.5 ~ 0.5	24.5			
		Subtest 2	24.0	-1.5 ~ 0.5	24.5			
		Subtest 3	23.5	-1.5 ~ 1.0	24.5			
		Subtest 4	23.5	-1.5 ~ 1.0	24.5			

RF Air interface	Mode	Full Power			Reduce Power		
		Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)	Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)
LTE B2	QPSK	22.5	-1.0 ~ 0.7	23.2	18.5	-1.5 ~ 1.5	20.0
	16QAM	21.5	-1.0 ~ 0.7	22.2	18.5	-1.5 ~ 1.5	20.0
LTE B4	QPSK	23.0	-1.0 ~ 0.7	23.7	20.8	-1.5 ~ 1.5	22.3
	16QAM	22.0	-1.0 ~ 0.7	22.7	20.8	-1.5 ~ 1.5	22.3
LTE B5	QPSK	23.0	-1.0 ~ 0.7	23.7	Not Supported		
	16QAM	22.0	-1.0 ~ 0.7	22.7			
LTE B7	QPSK	23.0	-1.5 ~ 0.5	23.5	18.0	-1.5 ~ 1.5	19.5
	16QAM	22.0	-1.5 ~ 0.5	22.5	18.0	-1.5 ~ 1.5	19.5
LTE B13	QPSK	23.0	-1.0 ~ 0.7	23.7	Not Supported		
	16QAM	22.0	-1.0 ~ 0.7	22.7			
LTE B17	QPSK	23.0	-1.0 ~ 0.7	23.7	Not Supported		
	16QAM	22.0	-1.0 ~ 0.7	22.7			
RF Air interface	Mode	Full Power		Not Supported			
		Max. Tune-up Limit (dBm)					
Wi-Fi 2.4 GHz	802.11b	16.0					
	802.11g	15.5					
	802.11n HT20	15.0					
Wi-Fi 5 GHz	802.11a	16.0					
	802.11n HT20	16.0					
	802.11n HT40	14.0					
	802.11ac VHT20	16.0					
	802.11ac VHT40	14.0					
	802.11ac VHT80	13.0					
Bluetooth	BR	10.5					
	EDR	7.9					
	BLE	2.4					

6.4. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	1. GSM 850/1900 Voice + Wi-Fi 2.4/5GHz 2. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4/5GHz 3. WCDMA Band 2/4/5 + Wi-Fi 2.4/5GHz 4. LTE B2/4/5/7/13/17 + Wi-Fi 2.4/5GHz
Body-worn Accessory	5. GSM 850/1900 Voice + Wi-Fi 2.4/5GHz 6. GSM 850/1900 Voice + BT 7. GSM 850/1900 Voice + BT + Wi-Fi 5GHz 8. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4/5GHz (VoIP) 9. GSM 850/1900 (GPRS/EDGE) + BT (VoIP) 10. GSM 850/1900 (GPRS/EDGE) + BT + Wi-Fi 5GHz (VoIP) 11. WCDMA Band 2/4/5 + Wi-Fi 2.4/5GHz 12. WCDMA Band 2/4/5 + BT 13. WCDMA Band 2/4/5 + Wi-Fi 5GHz + BT 14. LTE B2/4/5/7/13/17 + Wi-Fi 2.4/5GHz 15. LTE B2/4/5/7/13/17 + BT 16. LTE B2/4/5/7/13/17 + Wi-Fi 5GHz + BT
Wireless Router (Hotspot)/ Wi-Fi Direct	17. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4GHz 18. WCDMA Band 2/4/5 + Wi-Fi 2.4GHz 19. LTE B2/4/5/7/13/17 + Wi-Fi 2.4GHz
Notes: 1. Wi-Fi 2.4GHz supports Hotspot and Wi-Fi Direct. 2. Wi-Fi 5GHz does not support Hotspot but supports Wi-Fi Direct (Group Client only). 3. GPRS/EDGE, WCDMA and LTE support Hotspot. 4. VoIP is supported in LTE, WCDMA and GPRS/EDGE. 5. Wi-Fi 2.4 GHz Radio cannot transmit simultaneously with Bluetooth Radio. 6. Wi-Fi 5 GHz Radio can transmit simultaneously with Bluetooth Radio.	

6.5. General LTE SAR Test and Reporting Considerations

Item	Description					
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5
	Band 4	Frequency range: 1710 - 1755 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5
	Band 5	Frequency range: 824 - 849 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5
	Band 7	Frequency range: 2500 - 2570 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	20850 2510	20825 2507.5	20800 2505	20775 2502.5	
	Mid	21100 2535	21100 2535	21100 2535	21100 2535	
	High	21350 2560	21375 2562.5	21400 2565	21425 2567.5	
	Band 13	Frequency range: 777 - 787 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low				23205/ 779.5	
	Mid			23230/ 782	23230/ 782	
	High				23255/ 784.5	
	Band 17	Frequency range: 704 - 716 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low				23755/ 706.5	
	Mid			23790/ 710	23790/ 710	
	High				23825/ 713.5	

General LTE SAR Test and Reporting Considerations (Continued)

LTE transmitter and antenna implementation	LTE has one (1) TX/RX antennas and one (1) RX antennas Refer to section 13.1. Photos and Antenna Locations																																						
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table> MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
Power reduction	Yes Refer to section 6.3. Nominal and Maximum Output Power																																						
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						

6.6. Antenna Dimensions and Separation Distances

Refer to section 13.1. Photos and Antenna Locations

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix “Antenna Locations and Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

7.1. Head

For WWAN, LTE and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

7.2. Body-worn Accessory

For WWAN and LTE

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

7.3. Wireless Router (Hotspot) and Wi-Fi Direct

For WWAN and LTE

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	76.55 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 2 (Right)	0 mm	Yes	
Edge 3 (Bottom)	0 mm	Yes	
Edge 4 (Left)	0 mm	Yes	

For Wi-Fi (2.4 GHz only)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	22.3 mm	Yes	
Edge 2 (Right)	0 mm	Yes	
Edge 3 (Bottom)	81.45 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 4 (Left)	51 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR

8. Conducted Output Power Measurements

8.1. GSM850/1900

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Full Pwr		Reduce Pwr	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
850	GSM (Voice)	CS1	1	128	824.2	33.1	24.1	33.1	24.1
				190	836.6	33.0	24.0	33.2	24.2
				251	848.8	33.0	24.0	33.1	24.1
	GPRS (GMSK)	CS1	1	128	824.2	33.1	24.1	33.1	24.1
				190	836.6	33.0	24.0	33.2	24.2
				251	848.8	33.0	24.0	33.1	24.1
			2	128	824.2	29.6	23.6	28.3	22.3
				190	836.6	29.6	23.6	28.3	22.3
				251	848.8	29.6	23.6	28.4	22.4
			3	128	824.2	27.6	23.3	26.0	21.7
				190	836.6	27.6	23.3	26.1	21.8
				251	848.8	27.6	23.3	26.2	21.9
			4	128	824.2	26.5	23.5	25.0	22.0
				190	836.6	26.6	23.6	25.0	22.0
				251	848.8	26.7	23.7	25.2	22.2
	EGPRS (8PSK)	MCS5	1	128	824.2	26.7	17.7	26.8	17.8
				190	836.6	26.8	17.8	26.8	17.8
				251	848.8	26.8	17.8	26.9	17.9
			2	128	824.2	24.8	18.8	24.9	18.9
				190	836.6	24.9	18.9	24.9	18.9
				251	848.8	24.9	18.9	25.0	19.0
			3	128	824.2	24.0	19.7	24.0	19.7
				190	836.6	24.1	19.8	24.2	19.9
				251	848.8	24.1	19.8	24.2	19.9
			4	128	824.2	21.9	18.9	22.0	19.0
				190	836.6	21.9	18.9	22.0	19.0
				251	848.8	22.0	19.0	22.1	19.1

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

RF Exposure Conditions	Mode	Pwr Back-off	Tx Slot
Head	GSM (Voice)	OFF	1
Head	GPRS (GMSK)	OFF	1
Body-worn	GSM (Voice)	OFF	1
Body-worn	GPRS (GMSK)	OFF	1
Hotspot	GPRS (GMSK)	ON	1

- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode.

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Full Pwr		Reduce Pwr	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
1900	GSM (Voice)	CS1	1	512	1850.2	30.3	21.3	30.3	21.3
				661	1880.0	30.3	21.3	30.3	21.3
				810	1909.8	30.3	21.3	30.3	21.3
	GPRS (GMSK)	CS1	1	512	1850.2	30.3	21.3	30.3	21.3
				661	1880.0	30.3	21.3	30.3	21.3
				810	1909.8	30.3	21.3	30.3	21.3
			2	512	1850.2	28.3	22.3	25.7	19.7
				661	1880.0	28.2	22.2	25.7	19.7
				810	1909.8	28.3	22.3	25.7	19.7
			3	512	1850.2	27.2	22.9	23.9	19.6
				661	1880.0	27.2	22.9	23.9	19.6
				810	1909.8	27.3	23.0	23.9	19.6
			4	512	1850.2	26.4	23.4	22.7	19.7
				661	1880.0	26.3	23.3	22.7	19.7
				810	1909.8	26.4	23.4	22.7	19.7
	EGPRS (8PSK)	MCS5	1	512	1850.2	25.7	16.7	25.7	16.7
				661	1880.0	25.7	16.7	25.8	16.8
				810	1909.8	25.7	16.7	25.7	16.7
			2	512	1850.2	24.1	18.1	24.1	18.1
				661	1880.0	24.1	18.1	24.0	18.0
				810	1909.8	24.1	18.1	24.1	18.1
			3	512	1850.2	23.0	18.7	22.3	18.0
				661	1880.0	23.0	18.7	22.3	18.0
				810	1909.8	23.0	18.7	22.3	18.0
			4	512	1850.2	21.9	18.9	21.3	18.3
				661	1880.0	21.9	18.9	21.3	18.3
				810	1909.8	22.0	19.0	21.3	18.3

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

RF Exposure Conditions	Mode	Pwr Back-off	Tx Slot
Head	GSM (Voice)	OFF	1
Head	GPRS (GMSK)	OFF	4
Body-worn	GSM (Voice)	OFF	1
Body-worn	GPRS (GMSK)	OFF	4
Hotspot	GPRS (GMSK)	ON	1

- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM850 DTM Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Full Pwr				Reduce Pwr			
						CS		PS		CS		PS	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
850	GSM(Voice) + GPRS(GMSK)	CS1	1	128	824.2	33.1	24.1			33.1	24.1		
				190	836.6	33.0	24.0			33.1	24.1		
				251	848.8	33.0	24.0			33.1	24.1		
			2	128	824.2	29.4	23.4	29.5	23.5	28.3	22.3	28.3	22.3
				190	836.6	29.4	23.4	29.5	23.5	28.3	22.3	28.4	22.4
				251	848.8	29.5	23.5	29.6	23.6	28.3	22.3	28.4	22.4
			3	128	824.2	27.4	23.1	27.4	23.1	26.0	21.7	26.0	21.7
				190	836.6	27.5	23.2	27.6	23.3	26.1	21.8	26.1	21.8
				251	848.8	27.5	23.2	27.6	23.3	26.1	21.8	26.1	21.8
	GSM(Voice) + EGPRS(8PSK)	MCS5	1	128	824.2	33.1	24.1			33.1	24.1		
				190	836.6	33.0	24.0			33.1	24.1		
				251	848.8	33.0	24.0			33.1	24.1		
			2	128	824.2	29.4	23.4	24.8	18.8	28.3	22.3	24.8	18.8
				190	836.6	29.4	23.4	24.9	18.9	28.3	22.3	24.9	18.9
				251	848.8	29.6	23.6	24.9	18.9	28.4	22.4	24.9	18.9
			3	128	824.2	27.5	23.2	23.9	19.6	26.0	21.7	23.9	19.6
				190	836.6	27.5	23.2	24.1	19.8	26.1	21.8	24.0	19.7
				251	848.8	27.6	23.3	24.0	19.8	26.2	21.9	24.2	19.9

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

RF Exposure Conditions	Mode	Pwr Back-off	Tx Slot
Body-worn	GSM(Voice) + GPRS(GMSK)	OFF	2
Hotspot	GSM(Voice) + GPRS(GMSK)	ON	2

- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM1900 DTM Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Full Pwr				Reduce Pwr			
						CS		PS		CS		PS	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
1900	GSM(Voice) + GPRS(GMSK)	CS1	1	512	1850.2	30.3	21.3			30.3	21.3		
				661	1880.0	30.3	21.3			30.3	21.3		
				810	1909.8	30.3	21.3			30.3	21.3		
			2	512	1850.2	28.1	22.1	28.2	22.2	25.6	19.6	25.7	19.7
				661	1880.0	28.1	22.1	28.2	22.2	25.6	19.6	25.7	19.7
				810	1909.8	28.2	22.2	28.3	22.3	25.6	19.6	25.7	19.7
			3	512	1850.2	27.2	22.9	27.3	23.0	23.7	19.4	23.7	19.4
				661	1880.0	27.2	22.9	27.2	22.9	23.7	19.4	23.7	19.4
				810	1909.8	27.2	22.9	27.2	22.9	23.7	19.4	23.7	19.4
	GSM(Voice) + EGPRS(8PSK)	MCS5	1	512	1850.2	30.3	21.3			30.3	21.3		
				661	1880.0	30.3	21.3			30.3	21.3		
				810	1909.8	30.3	21.3			30.3	21.3		
			2	512	1850.2	28.2	22.2	24.0	18.0	25.7	19.7	24.0	18.0
				661	1880.0	28.1	22.1	24.0	18.0	25.7	19.7	24.0	18.0
				810	1909.8	28.2	22.2	24.1	18.1	25.7	19.7	24.1	18.1
			3	512	1850.2	27.2	22.9	22.9	18.6	23.8	19.5	22.0	17.7
				661	1880.0	27.2	22.9	22.9	18.6	23.7	19.4	21.9	17.6
				810	1909.8	27.2	22.9	22.9	18.6	23.7	19.4	22.0	17.7

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

RF Exposure Conditions	Mode	Pwr Back-off	Tx Slot
Body-worn	GSM(Voice) + GPRS(GMSK)	OFF	3
Hotspot	GSM(Voice) + GPRS(GMSK)	ON	2

- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

8.2. W-CDMA Band V/IV/II

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Full Avg Pwr (dBm)	Reduce Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	23.9	Not Supported
		4183	836.6	23.7	
		4233	846.6	23.9	
W-CDMA Band IV	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	24.1	21.5
		1413	1732.6	24.1	21.6
		1513	1752.6	24.2	21.6
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	23.8	19.6
		9400	1880.0	23.8	19.5
		9538	1907.6	23.8	19.5

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	1	1.5	1.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Full Avg Pwr (dBm)	Reduce Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	24.0	Not Supported
		4183	836.6	23.8	
		4233	846.6	23.9	
	Subtest 2	4132	826.4	24.0	
		4183	836.6	23.8	
		4233	846.6	23.9	
	Subtest 3	4132	826.4	23.5	
		4183	836.6	23.3	
		4233	846.6	23.5	
	Subtest 4	4132	826.4	23.5	
		4183	836.6	23.3	
		4233	846.6	23.5	
W-CDMA Band IV	Subtest 1	1312	1712.4	23.6	21.1
		1413	1732.6	23.5	21.0
		1513	1752.6	23.5	21.1
	Subtest 2	1312	1712.4	23.5	21.3
		1413	1732.6	23.6	21.1
		1513	1752.6	23.8	21.3
	Subtest 3	1312	1712.4	23.5	21.0
		1413	1732.6	23.6	21.2
		1513	1752.6	23.5	21.1
	Subtest 4	1312	1712.4	23.8	21.3
		1413	1732.6	23.7	21.1
		1513	1752.6	23.8	21.3
W-CDMA Band II	Subtest 1	9262	1852.4	23.3	19.1
		9400	1880.0	23.3	19.1
		9538	1907.6	23.2	19.0
	Subtest 2	9262	1852.4	23.4	19.2
		9400	1880.0	23.3	19.2
		9538	1907.6	23.2	19.1
	Subtest 3	9262	1852.4	23.3	19.2
		9400	1880.0	23.3	19.1
		9538	1907.6	22.7	19.1
	Subtest 4	9262	1852.4	23.3	19.2
		9400	1880.0	23.3	19.1
		9538	1907.6	22.7	19.1

Maximum output power levels that are possible for all subtests reported.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	15/15
	β_{ec}	209/225	12/15	30/15	2/15	24/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	β_{hs}	22/15	12/15	30/15	4/15	30/15
	β_{ed}	1309/225	94/75	47/15 47/15	56/75	134/15
	CM (dB)	1.0	3.0	2.0	3.0	1.0
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11		E-TFCI 11	E-TFCI 11	
		E-TFCI PO 4			E-TFCI PO 4	
		E-TFCI 67			E-TFCI 67	
		E-TFCI PO 18			E-TFCI PO 18	
E-TFCI 71		E-TFCI 71				
E-TFCI PO 23	E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18	E-TFCI PO 23				
E-TFCI 75		E-TFCI 75				
E-TFCI PO 26		E-TFCI PO 26				
E-TFCI 81		E-TFCI 81				
E-TFCI PO 27		E-TFCI PO 27				

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Full Avg Pwr (dBm)	Reduce Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	23.3	Not Supported
		4183	836.6	23.6	
		4233	846.6	23.3	
	Subtest 2	4132	826.4	22.1	
		4183	836.6	22.3	
		4233	846.6	22.0	
	Subtest 3	4132	826.4	22.4	
		4183	836.6	22.5	
		4233	846.6	22.9	
	Subtest 4	4132	826.4	22.3	
		4183	836.6	22.4	
		4233	846.6	22.2	
	Subtest 5	4132	826.4	24.0	
		4183	836.6	23.8	
		4233	846.6	24.0	
W-CDMA Band IV	Subtest 1	1312	1712.4	23.4	21.0
		1413	1732.6	23.3	20.6
		1513	1752.6	23.4	20.9
	Subtest 2	1312	1712.4	22.2	19.5
		1413	1732.6	22.0	19.4
		1513	1752.6	22.0	19.5
	Subtest 3	1312	1712.4	23.0	20.4
		1413	1732.6	22.7	20.2
		1513	1752.6	22.8	20.2
	Subtest 4	1312	1712.4	22.5	19.8
		1413	1732.6	22.5	19.8
		1513	1752.6	22.5	19.8
	Subtest 5	1312	1712.4	23.6	21.1
		1413	1732.6	23.6	21.1
		1513	1752.6	23.8	21.1
W-CDMA Band II	Subtest 1	9262	1852.4	22.9	18.8
		9400	1880.0	23.1	19.1
		9538	1907.6	22.8	18.8
	Subtest 2	9262	1852.4	21.7	17.5
		9400	1880.0	21.7	17.7
		9538	1907.6	21.8	17.5
	Subtest 3	9262	1852.4	22.8	18.5
		9400	1880.0	22.4	18.4
		9538	1907.6	22.3	18.1
	Subtest 4	9262	1852.4	21.4	18.0
		9400	1880.0	21.8	18.0
		9538	1907.6	21.8	17.9
	Subtest 5	9262	1852.4	23.4	19.2
		9400	1880.0	23.4	19.2
		9538	1907.6	23.2	19.1

DC-HSDPA

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

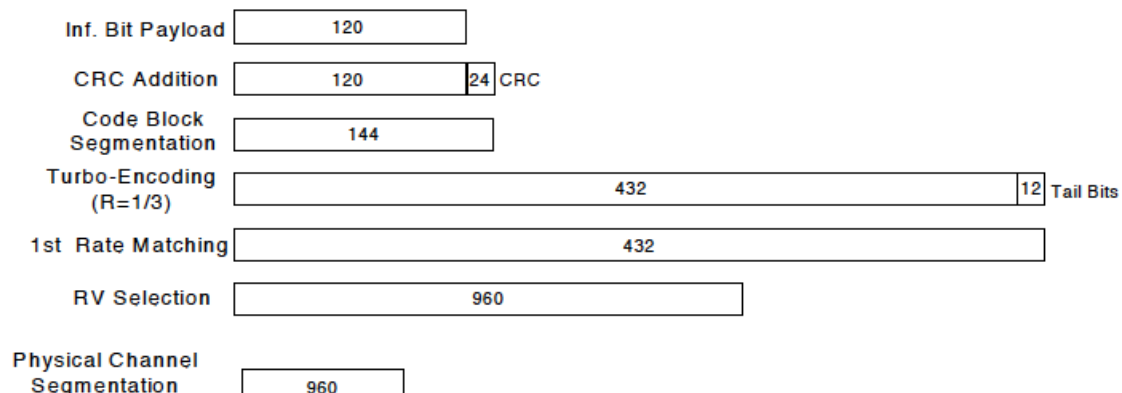


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

Up commands are set continuously to set the UE to Max power.

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Full Avg Pwr (dBm)	Reduce Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	24.0	Not Supported
		4183	836.6	23.7	
		4233	846.6	23.9	
	Subtest 2	4132	826.4	24.0	
		4183	836.6	23.7	
		4233	846.6	24.0	
	Subtest 3	4132	826.4	23.5	
		4183	836.6	23.2	
		4233	846.6	23.5	
	Subtest 4	4132	826.4	23.5	
		4183	836.6	23.3	
		4233	846.6	23.5	
W-CDMA Band IV	Subtest 1	1312	1712.4	23.5	21.0
		1413	1732.6	23.5	21.0
		1513	1752.6	23.5	21.2
	Subtest 2	1312	1712.4	23.8	21.1
		1413	1732.6	23.6	21.0
		1513	1752.6	23.8	21.0
	Subtest 3	1312	1712.4	23.8	21.0
		1413	1732.6	23.7	21.0
		1513	1752.6	23.8	21.3
	Subtest 4	1312	1712.4	23.7	21.2
		1413	1732.6	23.7	21.1
		1513	1752.6	23.8	21.3
W-CDMA Band II	Subtest 1	9262	1852.4	23.3	19.1
		9400	1880.0	23.4	19.2
		9538	1907.6	23.2	19.0
	Subtest 2	9262	1852.4	23.4	19.4
		9400	1880.0	23.4	19.2
		9538	1907.6	23.2	19.1
	Subtest 3	9262	1852.4	23.2	19.1
		9400	1880.0	23.3	19.1
		9538	1907.6	22.9	19.1
	Subtest 4	9262	1852.4	23.3	19.2
		9400	1880.0	23.3	19.1
		9538	1907.6	22.9	19.1

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., CAT 6 Rel 6. Therefore, the RF conducted power is not measured.

8.3. LTE Band 2/4/5/7/13/17

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 2 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1860 MHz	1880 MHz	1900 MHz		1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	23.0	23.0	23.1	0	18.5	18.4	18.6
			1	50	0	23.0	23.0	23.1	0	18.6	18.4	18.5
			1	99	0	23.0	23.1	23.1	0	18.5	18.5	18.6
			50	0	1	22.1	22.1	22.1	0	18.6	18.5	18.6
			50	25	1	22.1	22.1	22.1	0	18.6	18.4	18.5
			50	50	1	22.1	22.1	22.1	0	18.5	18.5	18.5
			100	0	1	22.1	22.0	22.2	0	18.5	18.4	18.6
		16QAM	1	0	1	22.1	22.0	22.2	0	18.5	18.4	18.6
			1	50	1	22.1	22.0	22.2	0	18.6	18.4	18.6
			1	99	1	22.1	22.1	22.2	0	18.6	18.5	18.6
			50	0	2	21.1	21.1	21.1	0	18.6	18.6	18.6
			50	25	2	21.1	21.0	21.0	0	18.5	18.5	18.5
			50	50	2	21.1	21.0	21.0	0	18.6	18.5	18.5
			100	0	2	21.1	21.0	21.1	0	18.5	18.5	18.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1857.5 MHz	1880 MHz	1902.5 MHz		1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	22.9	23.1	23.1	0	18.3	18.5	18.5
			1	36	0	22.9	23.0	23.0	0	18.4	18.3	18.4
			1	74	0	22.9	23.0	23.0	0	18.4	18.3	18.5
			36	0	1	22.1	22.1	22.2	0	18.5	18.5	18.6
			36	18	1	22.1	22.0	22.0	0	18.5	18.4	18.4
			36	37	1	22.1	22.1	22.0	0	18.5	18.4	18.4
			75	0	1	22.1	22.1	22.1	0	18.6	18.4	18.5
		16QAM	1	0	1	21.8	21.9	21.9	0	18.2	18.7	18.9
			1	36	1	21.8	22.2	21.8	0	18.2	18.6	18.8
			1	74	1	21.9	22.2	21.9	0	18.2	18.5	18.8
			36	0	2	21.0	21.1	21.2	0	18.5	18.6	18.6
			36	18	2	21.0	21.1	21.0	0	18.4	18.5	18.4
			36	37	2	21.0	21.0	21.0	0	18.5	18.5	18.4
			75	0	2	21.1	21.0	21.1	0	18.5	18.5	18.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1855 MHz	1880 MHz	1905 MHz		1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	22.9	23.1	23.0	0	18.3	18.5	18.4
			1	25	0	22.9	22.9	23.0	0	18.3	18.4	18.4
			1	49	0	22.9	23.0	23.0	0	18.4	18.4	18.4
			25	0	1	22.0	22.1	22.1	0	18.5	18.6	18.4
			25	12	1	22.1	22.0	22.0	0	18.5	18.4	18.3
			25	25	1	22.1	22.1	22.1	0	18.6	18.4	18.4
			50	0	1	22.1	22.0	22.1	0	18.5	18.5	18.5
		16QAM	1	0	1	21.8	22.2	21.9	0	18.3	18.6	18.3
			1	25	1	21.8	22.1	21.8	0	18.2	18.5	18.2
			1	49	1	21.8	22.2	21.9	0	18.3	18.6	18.3
			25	0	2	21.0	21.1	21.1	0	18.5	18.6	18.5
			25	12	2	20.9	21.0	21.1	0	18.4	18.5	18.4
			25	25	2	21.0	21.0	21.1	0	18.5	18.5	18.5
			50	0	2	21.0	21.0	21.1	0	18.5	18.5	18.5

LTE Band 2 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1852.5 MHz	1880 MHz	1907.5 MHz		1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	22.9	23.2	23.1	0	18.4	18.6	18.6
			1	12	0	22.9	23.0	23.0	0	18.4	18.5	18.5
			1	24	0	22.9	23.1	23.1	0	18.4	18.5	18.6
			12	0	1	22.0	22.1	22.0	1	18.5	18.4	18.4
			12	6	1	22.0	22.0	22.0	1	18.5	18.4	18.4
			12	11	1	22.0	22.0	22.0	1	18.5	18.4	18.5
			25	0	1	22.0	22.0	22.0	1	18.6	18.4	18.5
		16QAM	1	0	1	21.8	22.1	22.1	1	18.2	18.5	18.8
			1	12	1	21.8	22.0	22.0	1	18.3	18.4	18.8
			1	24	1	21.9	22.0	22.0	1	18.3	18.4	18.8
			12	0	2	21.0	21.0	21.0	2	18.5	18.4	18.4
			12	6	2	21.0	21.0	21.0	2	18.5	18.5	18.5
			12	11	2	21.0	21.0	21.1	2	18.5	18.5	18.4
			25	0	2	21.1	20.9	21.0	2	18.6	18.5	18.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1851.5 MHz	1880 MHz	1908.5 MHz		1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	22.9	23.0	23.0	0	18.5	18.4	18.4
			1	7	0	22.8	23.0	23.0	0	18.4	18.4	18.4
			1	14	0	22.9	23.0	23.0	0	18.4	18.4	18.5
			8	0	1	22.0	22.0	22.1	1	18.6	18.4	18.4
			8	4	1	22.0	22.0	22.1	1	18.5	18.4	18.5
			8	7	1	22.0	22.0	22.1	1	18.5	18.4	18.5
			15	0	1	22.0	22.0	22.1	1	18.6	18.4	18.5
		16QAM	1	0	1	21.8	22.2	21.9	1	18.3	18.6	18.3
			1	7	1	21.8	22.1	21.8	1	18.3	18.5	18.3
			1	14	1	21.9	22.2	21.9	1	18.3	18.6	18.3
			8	0	2	21.0	20.8	21.1	2	18.5	18.2	18.5
			8	4	2	21.0	20.8	21.1	2	18.5	18.2	18.5
			8	7	2	21.0	20.8	21.1	2	18.5	18.2	18.5
			15	0	2	21.0	21.0	21.0	2	18.5	18.5	18.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1850.7 MHz	1880 MHz	1909.3 MHz		1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	23.0	22.9	23.0	0	18.5	18.4	18.5
			1	2	0	22.9	22.9	23.0	0	18.4	18.3	18.4
			1	5	0	22.9	23.0	23.0	0	18.5	18.4	18.5
			3	0	0	23.0	23.0	23.0	0	18.6	18.4	18.5
			3	1	0	23.0	22.9	23.0	0	18.5	18.4	18.5
			3	2	0	23.0	23.0	23.0	0	18.5	18.4	18.5
			6	0	1	22.1	22.1	22.1	1	18.6	18.4	18.6
		16QAM	1	0	1	22.1	21.8	22.1	1	18.5	18.2	18.5
			1	2	1	22.0	21.8	22.1	1	18.5	18.2	18.5
			1	5	1	22.1	21.9	22.1	1	18.6	18.3	18.5
			3	0	1	22.0	22.2	22.0	1	18.5	18.6	18.4
			3	1	1	22.0	22.2	22.0	1	18.5	18.6	18.4
			3	2	1	22.0	22.2	22.0	1	18.5	18.5	18.4
			6	0	2	21.1	21.1	21.1	2	18.5	18.5	18.5

LTE Band 4 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1720 MHz	1732.5 MHz	1745 MHz		1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	23.0	23.1	23.1	0	20.7	20.7	20.8
			1	50	0	23.1	23.0	23.1	0	20.8	20.7	20.8
			1	99	0	23.1	23.0	23.1	0	20.8	20.7	20.8
			50	0	1	22.2	22.2	22.1	0	20.9	20.8	20.8
			50	25	1	22.2	22.1	22.1	0	20.8	20.7	20.8
			50	50	1	22.1	22.1	22.1	0	20.8	20.7	20.8
			100	0	1	22.2	22.1	22.0	0	20.8	20.7	20.7
		16QAM	1	0	1	22.2	22.2	22.2	0	20.8	20.8	20.9
			1	50	1	22.2	22.0	22.2	0	20.9	20.7	20.9
			1	99	1	22.2	22.1	22.2	0	20.9	20.8	20.9
			50	0	2	21.2	21.1	21.0	0	20.9	20.9	20.8
			50	25	2	21.1	21.1	21.1	0	20.9	20.8	20.8
			50	50	2	21.1	21.1	21.0	0	20.8	20.8	20.8
			100	0	2	21.1	21.0	21.0	0	20.8	20.8	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1717.5 MHz	1732.5 MHz	1747.5 MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	22.9	23.1	23.0	0	20.6	20.7	20.8
			1	36	0	23.0	22.9	23.1	0	20.6	20.6	20.8
			1	74	0	23.0	23.0	23.0	0	20.7	20.6	20.8
			36	0	1	22.1	22.2	22.2	0	20.8	20.8	20.8
			36	18	1	22.1	22.1	22.1	0	20.8	20.7	20.8
			36	37	1	22.2	22.0	22.1	0	20.8	20.7	20.8
			75	0	1	22.2	22.2	22.1	0	20.9	20.8	20.8
		16QAM	1	0	1	21.9	22.3	22.4	0	20.5	21.0	21.1
			1	36	1	21.9	22.2	22.5	0	20.6	20.8	21.2
			1	74	1	21.9	22.2	22.5	0	20.6	20.8	21.1
			36	0	2	21.0	21.2	21.1	0	20.8	20.9	20.7
			36	18	2	21.0	21.1	21.0	0	20.8	20.8	20.7
			36	37	2	21.1	21.1	21.0	0	20.8	20.8	20.7
			75	0	2	21.1	21.1	21.1	0	20.9	20.8	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1715 MHz	1732.5 MHz	1750 MHz		1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	22.9	23.1	23.0	0	20.6	20.7	20.7
			1	25	0	23.0	23.0	22.9	0	20.7	20.6	20.6
			1	49	0	23.0	23.0	23.0	0	20.7	20.7	20.7
			25	0	1	22.2	22.1	22.0	0	20.8	20.7	20.7
			25	12	1	22.1	22.1	22.1	0	20.8	20.7	20.7
			25	25	1	22.1	22.0	22.1	0	20.8	20.7	20.8
			50	0	1	22.2	22.0	22.1	0	20.8	20.7	20.8
		16QAM	1	0	1	21.9	22.3	21.9	0	20.5	20.6	20.6
			1	25	1	21.9	22.2	21.8	0	20.6	20.5	20.5
			1	49	1	21.9	22.2	21.9	0	20.5	20.5	20.6
			25	0	2	21.0	21.0	21.1	0	20.8	20.8	20.7
			25	12	2	21.0	21.0	21.1	0	20.8	20.8	20.7
			25	25	2	21.1	21.0	21.1	0	20.8	20.8	20.7
			50	0	2	21.1	21.0	21.1	0	20.8	20.8	20.8

LTE Band 4 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1712.5 MHz	1732.5 MHz	1752.5 MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	22.9	23.1	23.1	0	20.6	20.8	20.8
			1	12	0	23.0	23.0	23.1	0	20.7	20.8	20.8
			1	24	0	23.0	23.1	23.1	0	20.7	20.8	20.8
			12	0	1	22.0	22.0	22.1	0	20.7	20.7	20.8
			12	6	1	22.1	22.1	22.1	0	20.8	20.7	20.8
			12	11	1	22.1	22.0	22.1	0	20.8	20.7	20.8
			25	0	1	22.1	22.0	22.1	0	20.8	20.7	20.8
		16QAM	1	0	1	21.8	22.0	22.4	0	20.5	20.7	21.1
			1	12	1	21.9	22.0	22.4	0	20.6	20.6	21.1
			1	24	1	21.9	22.0	22.5	0	20.6	20.7	21.1
			12	0	2	21.0	21.0	21.1	0	20.7	20.7	20.8
			12	6	2	21.1	21.0	21.1	0	20.8	20.7	20.8
			12	11	2	21.1	21.0	21.1	0	20.8	20.7	20.8
			25	0	2	21.2	21.0	21.1	0	20.9	20.7	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	23.0	23.0	23.0	0	20.6	20.8	20.7
			1	7	0	23.0	23.0	23.0	0	20.7	20.7	20.7
			1	14	0	23.1	23.0	23.0	0	20.7	20.7	20.7
			8	0	1	22.1	22.1	22.1	0	20.8	20.7	20.8
			8	4	1	22.0	22.0	22.1	0	20.7	20.7	20.8
			8	7	1	22.1	22.0	22.1	0	20.8	20.7	20.8
			15	0	1	22.1	22.1	22.1	0	20.8	20.7	20.8
		16QAM	1	0	1	21.9	22.2	21.9	0	20.5	20.9	20.6
			1	7	1	21.9	22.2	21.9	0	20.6	20.8	20.5
			1	14	1	21.9	22.2	21.9	0	20.6	20.9	20.6
			8	0	2	21.0	20.8	21.1	0	20.8	20.6	20.9
			8	4	2	21.0	20.8	21.1	0	20.7	20.5	20.9
			8	7	2	21.1	20.8	21.1	0	20.8	20.5	20.9
			15	0	2	21.1	21.0	21.1	0	20.8	20.8	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						1710.7 MHz	1732.5 MHz	1754.3 MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	23.0	22.9	23.1	0	20.7	20.7	20.8
			1	2	0	22.9	22.9	23.0	0	20.6	20.6	20.7
			1	5	0	23.0	23.0	23.1	0	20.7	20.7	20.8
			3	0	0	23.0	23.0	23.1	0	20.8	20.7	20.9
			3	1	0	23.0	23.0	23.0	0	20.7	20.7	20.8
			3	2	0	22.9	23.0	23.0	0	20.7	20.7	20.8
			6	0	1	22.1	22.0	22.2	0	20.8	20.8	20.9
		16QAM	1	0	1	22.1	21.9	22.2	0	20.8	20.5	20.9
			1	2	1	22.0	21.8	22.1	0	20.7	20.5	20.9
			1	5	1	22.1	21.9	22.2	0	20.8	20.6	20.9
			3	0	1	22.0	22.2	22.1	0	20.7	20.8	20.8
			3	1	1	22.0	22.2	22.1	0	20.6	20.8	20.7
			3	2	1	21.9	22.2	22.1	0	20.7	20.8	20.7
			6	0	2	21.1	21.1	21.2	0	20.8	20.8	20.9

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						829 MHz	836.5 MHz	844 MHz		829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	22.9	23.1	23.0	Not Supported			
			1	25	0	22.9	23.1	23.0				
			1	49	0	23.0	23.1	23.0				
			25	0	1	22.0	22.2	22.1				
			25	12	1	22.1	22.1	22.1				
			25	25	1	22.1	22.1	22.1				
		16QAM	50	0	1	22.2	22.2	22.2				
			1	0	1	21.9	22.3	21.9				
			1	25	1	21.8	22.3	21.9				
			1	49	1	21.9	22.3	21.9				
			25	0	2	21.0	21.2	21.2				
			25	12	2	21.1	21.2	21.2				
			25	25	2	21.1	21.2	21.2				
			50	0	2	21.1	21.1	21.1				
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	23.0	23.2	23.2	Not Supported			
			1	12	0	22.9	23.2	23.2				
			1	24	0	23.0	23.2	23.2				
			12	0	1	22.0	22.2	22.2				
			12	6	1	22.1	22.1	22.1				
			12	11	1	22.1	22.1	22.1				
		16QAM	25	0	1	22.1	22.1	22.1				
			1	0	1	21.8	22.1	22.5				
			1	12	1	21.8	22.1	22.4				
			1	24	1	21.9	22.1	22.4				
			12	0	2	21.1	21.2	21.1				
			12	6	2	21.0	21.1	21.1				
			12	11	2	21.1	21.1	21.1				
			25	0	2	21.1	21.2	21.1				
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	23.0	23.1	23.1	Not Supported			
			1	7	0	22.9	23.0	23.0				
			1	14	0	23.0	23.1	23.0				
			8	0	1	22.1	22.2	22.2				
			8	4	1	22.0	22.1	22.1				
			8	7	1	22.0	22.1	22.1				
			15	0	1	22.1	22.1	22.1				
		16QAM	1	0	1	21.9	22.0	21.9				
			1	7	1	21.8	21.9	21.9				
			1	14	1	21.9	21.9	21.9				
			8	0	2	21.0	21.2	21.2				
			8	4	2	21.0	21.2	21.1				
			8	7	2	21.0	21.2	21.1				
			15	0	2	21.1	21.1	21.1				

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	23.0	23.2	23.1	Not Supported			
			1	2	0	23.0	23.1	23.0				
			1	5	0	23.0	23.1	23.1				
			3	0	0	23.1	23.2	23.1				
			3	1	0	23.0	23.2	23.1				
			3	2	0	23.0	23.2	23.1				
			6	0	1	22.1	22.2	22.1				
		16QAM	1	0	1	22.2	22.0	22.2				
			1	2	1	22.1	22.0	22.1				
			1	5	1	22.2	22.1	22.2				
			3	0	1	22.0	22.3	22.1				
			3	1	1	22.0	22.3	22.0				
			3	2	1	22.0	22.3	22.0				
			6	0	2	21.1	21.2	21.2				

LTE Band 7 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						2510 MHz	2535 MHz	2560 MHz		2510 MHz	2535 MHz	2560 MHz
LTE Band 7	20	QPSK	1	0	0	23.0	23.1	23.1	0	17.9	17.9	18.1
			1	49	0	22.9	23.2	23.1	0	17.8	18.0	18.1
			1	99	0	23.0	23.1	22.6	0	17.9	17.8	18.0
			50	0	1	21.9	22.1	22.2	0	17.8	18.0	18.1
			50	24	1	22.0	22.0	22.1	0	17.8	17.9	17.9
			50	50	1	22.0	22.1	22.1	0	17.8	18.0	17.9
			100	0	1	21.9	22.1	22.2	0	17.8	18.0	17.9
		16QAM	1	0	1	22.2	22.1	22.3	0	18.0	18.0	18.2
			1	49	1	22.1	22.1	22.2	0	17.9	18.0	18.1
			1	99	1	22.2	22.0	22.1	0	18.1	17.9	18.1
			50	0	2	21.0	21.1	21.1	0	17.8	18.1	18.1
			50	24	2	21.0	21.1	21.0	0	17.9	18.0	17.9
			50	50	2	21.0	21.1	21.1	0	17.8	18.0	17.9
			100	0	2	21.0	21.1	21.1	0	17.8	18.0	17.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						2507.5 MHz	2535 MHz	2562.5 MHz		2507.5 MHz	2535 MHz	2562.5 MHz
LTE Band 7	15	QPSK	1	0	0	23.0	23.0	23.3	0	17.9	17.9	18.1
			1	37	0	22.8	23.1	23.0	0	17.7	18.0	18.0
			1	74	0	22.8	23.1	22.9	0	17.7	17.9	17.9
			36	0	1	21.9	22.2	22.2	0	17.7	18.0	18.0
			36	20	1	21.9	22.2	22.1	0	17.8	18.1	17.9
			36	39	1	22.0	22.1	22.2	0	17.9	17.9	17.9
			75	0	1	21.9	22.2	22.2	0	17.8	17.9	18.0
		16QAM	1	0	1	21.9	22.2	22.5	0	17.7	18.1	18.5
			1	37	1	21.7	22.3	22.4	0	17.5	18.2	18.3
			1	74	1	21.7	22.2	22.3	0	17.6	18.1	18.3
			36	0	2	20.8	21.2	21.0	0	17.7	18.1	17.8
			36	20	2	20.9	21.2	21.0	0	17.8	18.1	17.8
			36	39	2	20.9	21.1	21.1	0	17.8	18.0	17.9
			75	0	2	20.9	21.1	21.1	0	17.7	18.0	18.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						2505 MHz	2535 MHz	2565 MHz		2505 MHz	2535 MHz	2565 MHz
LTE Band 7	10	QPSK	1	0	0	23.1	23.1	23.1	0	17.9	17.9	17.9
			1	25	0	22.7	23.1	23.1	0	17.7	17.9	17.9
			1	49	0	22.8	23.0	23.0	0	17.8	17.8	17.9
			25	0	1	22.1	22.1	22.2	0	17.8	18.0	17.9
			25	12	1	21.9	22.2	22.2	0	17.7	18.1	17.9
			25	25	1	22.0	22.2	22.2	0	17.8	18.0	17.9
			50	0	1	22.0	22.1	22.2	0	17.8	18.0	17.9
		16QAM	1	0	1	22.1	21.9	22.1	0	17.8	17.8	17.8
			1	25	1	21.6	21.9	22.0	0	17.5	17.8	17.7
			1	49	1	21.8	21.9	22.0	0	17.6	17.6	17.7
			25	0	2	21.0	21.2	21.1	0	17.8	18.1	17.9
			25	12	2	20.8	21.3	21.1	0	17.7	18.2	17.9
			25	25	2	20.9	21.3	21.2	0	17.8	18.1	17.9
			50	0	2	21.0	21.1	21.1	0	17.8	18.0	17.9

LTE Band 7 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)			Target MPR	Reduce Avg Pwr (dBm)		
						2502.5 MHz	2535 MHz	2567.5 MHz		2502.5 MHz	2535 MHz	2567.5 MHz
LTE Band 7	5	QPSK	1	0	0	23.1	23.2	23.2	0	18.0	18.1	18.0
			1	12	0	22.9	23.3	23.2	0	17.8	18.1	18.1
			1	24	0	22.8	23.3	23.1	0	17.7	18.1	18.0
			12	0	1	22.2	22.2	22.3	0	17.9	18.1	18.0
			12	7	1	22.0	22.2	22.3	0	17.8	18.1	17.9
			12	13	1	22.0	22.2	22.2	0	17.8	18.0	17.9
			25	0	1	22.0	22.2	22.3	0	17.8	18.1	18.0
		16QAM	1	0	1	22.0	22.1	22.5	0	17.7	18.0	18.3
			1	12	1	21.8	22.2	22.5	0	17.5	18.0	18.4
			1	24	1	21.7	22.2	22.5	0	17.5	18.0	18.4
			12	0	2	21.1	21.3	21.2	0	17.9	18.1	18.0
			12	7	2	21.0	21.3	21.2	0	17.8	18.1	17.9
			12	13	2	21.0	21.3	21.2	0	17.8	18.1	18.0
			25	0	2	21.1	21.2	21.2	0	17.9	18.1	17.9

LTE Band 13 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)	Target MPR	Reduce Avg Pwr (dBm)
						782 MHz		782 MHz
LTE Band 13	10	QPSK	1	0	0	22.9	Not Supported	
			1	25	0	22.9		
			1	49	0	23.0		
			25	0	1	22.1		
			25	12	1	22.1		
			25	25	1	22.1		
			50	0	1	22.1		
		16QAM	1	0	1	21.8		
			1	25	1	21.8		
			1	49	1	21.9		
			25	0	2	21.1		
			25	12	2	21.1		
			25	25	2	21.0		
			50	0	2	21.1		
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)	Target MPR	Reduce Avg Pwr (dBm)
						782 MHz		782 MHz
LTE Band 13	5	QPSK	1	0	0	23.0	Not Supported	
			1	12	0	23.0		
			1	24	0	23.0		
			12	0	1	22.1		
			12	6	1	22.1		
			12	11	1	22.1		
			25	0	1	22.1		
		16QAM	1	0	1	21.9		
			1	12	1	21.9		
			1	24	1	21.9		
			12	0	2	21.1		
			12	6	2	21.1		
			12	11	2	21.1		
			25	0	2	21.2		

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 17 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)	Target MPR	Reduce Avg Pwr (dBm)
						710 MHz		710 MHz
LTE Band 17	10	QPSK	1	0	0	22.8	Not Supported	
			1	25	0	22.8		
			1	49	0	22.9		
			25	0	1	21.9		
			25	12	1	21.9		
			25	25	1	22.0		
			50	0	1	22.0		
		16QAM	1	0	1	21.8		
			1	25	1	21.7		
			1	49	1	21.8		
			25	0	2	20.9		
			25	12	2	20.9		
			25	25	2	21.0		
			50	0	2	21.0		
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Full Avg Pwr (dBm)	Target MPR	Reduce Avg Pwr (dBm)
						710 MHz		710 MHz
LTE Band 17	5	QPSK	1	0	0	23.0	Not Supported	
			1	12	0	23.0		
			1	24	0	23.0		
			12	0	1	22.0		
			12	6	1	22.0		
			12	11	1	22.0		
			25	0	1	22.0		
		16QAM	1	0	1	22.3		
			1	12	1	22.3		
			1	24	1	22.3		
			12	0	2	21.0		
			12	6	2	21.0		
			12	11	2	21.0		
			25	0	2	20.9		

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

8.4. Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	▽
		2.437	6	√	▽
		2.462	11 [#]	√	▽

Notes:

√ = "default test channels"

▽ = possible 802.11g channels with maximum average output $\frac{1}{4}$ dB $\geq$ the "default test channels"

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4 (DTS)	802.11b	1 Mbps	1	2412	15.2	Yes
			6	2437	15.2	
			11	2462	14.8	
	802.11g	6 Mbps	1	2412	14.7	No
			6	2437	14.7	
			11	2462	14.3	
	802.11n (HT20)	6.5 Mbps	1	2412	14.0	No
			6	2437	13.9	
			11	2462	13.9	

Note(s):

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	6	2437	1 Mbps	15.2	Yes
			2 Mbps	15.1	No
			5.5 Mbps	15.2	No
			11 Mbps	15.2	No

8.5. Wi-Fi (5 GHz Bands)

Required Test Channels per KDB 248227 D01

Mode		Band	GHz	Channel	"Default Test Channels"	
					802.11a	
802.11a	UNII (15.407)	5.2 GHz	5.180	36	√	
			5.200	40		*
			2.220	44		*
			5.240	48	√	
		5.3 GHz	5.260	52	√	
			5.280	56		*
			5.300	60		*
			5.320	64	√	
		5.5 GHz	5.500	100		
			5.520	104	√	
			5.540	108		*
			5.560	112		*
			5.580	116	√	
			5.600	120		*
			5.620	124	√	
			5.640	128		*
			5.660	132		*
			5.680	136	√	
			5.700	140		*
	DTS (15.247)	5.8 GHz	5.745	149	√	
			5.765	153		*
			5.785	157	√	
			5.805	161		*
			5.825	165	√	

√ = "default test channels"

* = possible 802.11a channels with maximum average output > the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
5.2 (U-NII-1)	802.11a	6 Mbps	36	5180	14.9	Yes
			40	5200	14.7	
			44	5220	14.6	
			48	5240	14.6	
	802.11n (HT20)	6.5 Mbps	36	5180	14.7	No
			40	5200	14.7	
			48	5240	14.7	
	802.11n (HT40)	13.5 Mbps	38	5190	12.6	No
			46	5230	12.6	
	802.11ac (VHT20)	6.5 Mbps	36	5180	14.7	Yes
			40	5200	14.6	
			48	5240	14.7	
	802.11ac (VHT40)	13.5 Mbps	38	5190	12.7	No
			46	5230	12.6	
	802.11ac (VHT80)	29.3 Mbps	42	5210	11.4	No
5.3 (U-NII-2A)	802.11a	6 Mbps	52	5260	14.8	Yes
			56	5280	14.7	
			60	5300	14.7	
			64	5320	14.6	
	802.11n (HT20)	6.5 Mbps	52	5260	15.0	No
			60	5300	14.9	
			64	5320	14.4	
	802.11n (HT40)	13.5 Mbps	54	5270	12.8	No
			62	5310	12.8	
	802.11ac (VHT20)	6.5 Mbps	52	5260	15.0	Yes
			60	5300	14.9	
			64	5320	14.5	
	802.11ac (VHT40)	13.5 Mbps	54	5270	12.8	No
			62	5310	12.7	
	802.11ac (VHT80)	29.3 Mbps	58	5290	11.6	No

Wi-Fi (5 GHz Bands) Measured Results (continued)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
5.5 (U-NII-2C)	802.11a	6 Mbps	100	5500	15.2	Yes
			104	5520	15.0	
			108	5540	14.9	
			112	5560	14.9	
			116	5580	15.0	
			120	5600	Not supported	
			124	5620	Not supported	
			128	5640	Not supported	
			132	5660	15.0	
			136	5680	15.0	
			140	5700	14.9	
	802.11n (HT20)	6.5 Mbps	100	5500	15.0	No
			116	5580	15.1	
			140	5700	15.1	
	802.11n (HT40)	13.5 Mbps	102	5510	12.9	No
			110	5550	12.9	
			134	5670	12.8	
	802.11ac (VHT20)	6.5 Mbps	100	5500	15.0	Yes
			116	5580	15.0	
			140	5700	14.7	
	802.11ac (VHT40)	13.5 Mbps	102	5510	12.9	No
			110	5550	12.9	
			134	5670	12.9	
	802.11ac (VHT80)	29.3 Mbps	106	5530	11.8	No
			122	5610	Not supported	
5.8 (U-NII-3)	802.11a	6 Mbps	149	5745	14.9	Yes
			153	5765	14.7	
			157	5785	14.4	
			161	5805	14.4	
			165	5825	14.4	
	802.11n (HT20)	6.5 Mbps	149	5745	14.9	No
			157	5785	14.6	
			161	5805	14.5	
	802.11n (HT40)	13.5 Mbps	151	5755	12.5	No
			159	5795	12.5	
	802.11ac (VHT20)	6.5 Mbps	149	5745	14.8	Yes
			157	5785	14.5	
			165	5825	14.6	
	802.11ac (VHT40)	13.5 Mbps	151	5755	12.5	No
			159	5795	12.5	
	802.11ac (VHT80)	29.3 Mbps	155	5775	11.3	No

Note(s):

Per KDB 248227, SAR is not required for 802.11n HT20/HT40 and 802.11ac VHT40/VHT80 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a and 802.11ac VHT20 channels.

Power measurements to determine worst-case data rates

Band	Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
5.2 GHz (U-NII-1)	802.11a	36	5180	6 Mbps	14.9	Yes
				9 Mbps	14.7	No
				12 Mbps	14.8	No
				18 Mbps	14.8	No
				24 Mbps	14.9	No
				36 Mbps	14.9	No
				48 Mbps	15.0	No
5.3 GHz (U-NII-2A)	802.11a	52	5260	54 Mbps	14.0	No
				6 Mbps	14.9	Yes
				9 Mbps	14.8	No
				12 Mbps	14.7	No
				18 Mbps	14.7	No
				24 Mbps	15.0	No
				36 Mbps	15.0	No
5.5 GHz (U-NII-2C)	802.11a	100	5500	48 Mbps	15.0	No
				54 Mbps	14.2	No
				6 Mbps	15.2	Yes
				9 Mbps	15.2	No
				12 Mbps	15.2	No
				18 Mbps	15.2	No
				24 Mbps	15.3	No
5.8 GHz (U-NII-3)	802.11a	149	5745	36 Mbps	15.3	No
				48 Mbps	15.3	No
				54 Mbps	14.2	No
				6 Mbps	14.9	Yes
				9 Mbps	14.9	No
				12 Mbps	14.9	No
				18 Mbps	14.9	No

8.6. Bluetooth

Band (MHz)	Mode	Ch #	Freq. (MHz)	Freq. (MHz)	Conducted Avg Power	
					(dBm)	(mW)
2.4	V3.0 + EDR, GFSK	0	2402	2412	7.3	5.37
		39	2441	2437	9.7	9.33
		78	2480	2462	7.5	5.62
	V3.0 + EDR, $\pi/4$ DQPSK	0	2402	2412	4.3	2.69
		39	2441	2437	6.1	4.07
		78	2480	2462	3.7	2.34
	V3.0 + EDR, 8-DPSK	0	2402	2412	4.5	2.82
		39	2441	2437	6.2	4.17
		78	2480	2462	3.9	2.45
	V4.0 LE, GFSK	0	2402	2422	-1.6	0.69
		19	2440	2437	-1.5	0.71
		39	2480	2452	-1.4	0.72

9. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

9.1. Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3

9.2. Dielectric Property Measurements Results

SAR Lab 1

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
6/28/2014	Head 1900	e'	38.0700	Relative Permittivity (ϵ_r):	38.07	40.00	-4.83	5
		e"	13.3300	Conductivity (σ):	1.41	1.40	0.59	5
	Head 1850	e'	38.2400	Relative Permittivity (ϵ_r):	38.24	40.00	-4.40	5
		e"	13.2200	Conductivity (σ):	1.36	1.40	-2.87	5
	Head 1910	e'	38.0200	Relative Permittivity (ϵ_r):	38.02	40.00	-4.95	5
		e"	13.3400	Conductivity (σ):	1.42	1.40	1.20	5
6/28/2014	Body 1900	e'	51.0300	Relative Permittivity (ϵ_r):	51.03	53.30	-4.26	5
		e"	14.5300	Conductivity (σ):	1.54	1.52	0.99	5
	Body 1850	e'	51.2400	Relative Permittivity (ϵ_r):	51.24	53.30	-3.86	5
		e"	14.4100	Conductivity (σ):	1.48	1.52	-2.48	5
	Body 1910	e'	50.9900	Relative Permittivity (ϵ_r):	50.99	53.30	-4.33	5
		e"	14.5500	Conductivity (σ):	1.55	1.52	1.66	5
7/1/2014	Head 5180	e'	36.1900	Relative Permittivity (ϵ_r):	36.19	36.01	0.49	5
		e"	15.5100	Conductivity (σ):	4.47	4.63	-3.53	5
	Head 5200	e'	36.1600	Relative Permittivity (ϵ_r):	36.16	35.99	0.47	5
		e"	15.5400	Conductivity (σ):	4.49	4.65	-3.39	5
	Head 5600	e'	35.6700	Relative Permittivity (ϵ_r):	35.67	35.53	0.38	5
		e"	15.7400	Conductivity (σ):	4.90	5.06	-3.15	5
	Head 5800	e'	35.3900	Relative Permittivity (ϵ_r):	35.39	35.30	0.25	5
		e"	15.8600	Conductivity (σ):	5.11	5.27	-2.94	5
	Head 5825	e'	35.5400	Relative Permittivity (ϵ_r):	35.54	35.30	0.68	5
		e"	15.8700	Conductivity (σ):	5.14	5.27	-2.46	5
7/1/2014	Body 5180	e'	47.7900	Relative Permittivity (ϵ_r):	47.79	49.05	-2.56	5
		e"	18.4500	Conductivity (σ):	5.31	5.27	0.81	5
	Body 5200	e'	47.7200	Relative Permittivity (ϵ_r):	47.72	49.02	-2.65	5
		e"	18.4500	Conductivity (σ):	5.33	5.29	0.75	5
	Body 5600	e'	47.0200	Relative Permittivity (ϵ_r):	47.02	48.48	-3.01	5
		e"	18.8300	Conductivity (σ):	5.86	5.76	1.77	5
	Body 5800	e'	46.7200	Relative Permittivity (ϵ_r):	46.72	48.20	-3.07	5
		e"	19.0200	Conductivity (σ):	6.13	6.00	2.23	5
	Body 5825	e'	46.6600	Relative Permittivity (ϵ_r):	46.66	48.20	-3.20	5
		e"	19.0500	Conductivity (σ):	6.17	6.00	2.83	5
7/6/2014	Head 5180	e'	37.2500	Relative Permittivity (ϵ_r):	37.25	36.01	3.43	5
		e"	16.4100	Conductivity (σ):	4.73	4.63	2.07	5
	Head 5200	e'	37.2300	Relative Permittivity (ϵ_r):	37.23	35.99	3.44	5
		e"	16.4100	Conductivity (σ):	4.74	4.65	2.02	5
	Head 5600	e'	36.6500	Relative Permittivity (ϵ_r):	36.65	35.53	3.14	5
		e"	16.5800	Conductivity (σ):	5.16	5.06	2.02	5
	Head 5800	e'	36.3500	Relative Permittivity (ϵ_r):	36.35	35.30	2.97	5
		e"	16.6900	Conductivity (σ):	5.38	5.27	2.13	5
	Head 5825	e'	36.3100	Relative Permittivity (ϵ_r):	36.31	35.30	2.86	5
		e"	16.7100	Conductivity (σ):	5.41	5.27	2.70	5

SAR Lab 2

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
7/1/2014	Head 1750	e'	38.6200	Relative Permittivity (ϵ_r):	38.62	40.08	-3.65	5
		e"	13.9300	Conductivity (σ):	1.36	1.37	-0.99	5
	Head 1710	e'	38.8000	Relative Permittivity (ϵ_r):	38.80	40.15	-3.35	5
		e"	13.8300	Conductivity (σ):	1.31	1.35	-2.33	5
	Head 1755	e'	38.6000	Relative Permittivity (ϵ_r):	38.60	40.08	-3.69	5
		e"	13.9400	Conductivity (σ):	1.36	1.37	-0.84	5
7/1/2014	Body 1750	e'	51.5300	Relative Permittivity (ϵ_r):	51.53	53.44	-3.58	5
		e"	15.0200	Conductivity (σ):	1.46	1.49	-1.66	5
	Body 1710	e'	51.6400	Relative Permittivity (ϵ_r):	51.64	53.54	-3.56	5
		e"	14.9100	Conductivity (σ):	1.42	1.46	-3.00	5
	Body 1755	e'	51.5100	Relative Permittivity (ϵ_r):	51.51	53.43	-3.59	5
		e"	15.0300	Conductivity (σ):	1.47	1.49	-1.51	5
7/8/2014	Head 2450	e'	38.6000	Relative Permittivity (ϵ_r):	38.60	39.20	-1.53	5
		e"	13.4200	Conductivity (σ):	1.83	1.80	1.57	5
	Head 2410	e'	38.7600	Relative Permittivity (ϵ_r):	38.76	39.28	-1.32	5
		e"	13.3400	Conductivity (σ):	1.79	1.76	1.54	5
	Head 2475	e'	38.5100	Relative Permittivity (ϵ_r):	38.51	39.17	-1.68	5
		e"	13.4800	Conductivity (σ):	1.86	1.83	1.54	5
7/8/2014	Body 2450	e'	50.7300	Relative Permittivity (ϵ_r):	50.73	52.70	-3.74	5
		e"	14.3300	Conductivity (σ):	1.95	1.95	0.11	5
	Body 2410	e'	50.8300	Relative Permittivity (ϵ_r):	50.83	52.76	-3.66	5
		e"	14.2800	Conductivity (σ):	1.91	1.91	0.32	5
	Body 2475	e'	50.6700	Relative Permittivity (ϵ_r):	50.67	52.67	-3.79	5
		e"	14.3600	Conductivity (σ):	1.98	1.99	-0.45	5
7/9/2014	Body 1750	e'	51.7400	Relative Permittivity (ϵ_r):	51.74	53.44	-3.18	5
		e"	15.4700	Conductivity (σ):	1.51	1.49	1.29	5
	Body 1710	e'	51.8800	Relative Permittivity (ϵ_r):	51.88	53.54	-3.11	5
		e"	15.3900	Conductivity (σ):	1.46	1.46	0.12	5
	Body 1755	e'	51.7200	Relative Permittivity (ϵ_r):	51.72	53.43	-3.20	5
		e"	15.4900	Conductivity (σ):	1.51	1.49	1.50	5

SAR Lab 3

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
6/28/2014	Head 2600	e'	37.2900	Relative Permittivity (ϵ_r):	37.29	39.01	-4.41	5
		e''	14.0000	Conductivity (σ):	2.02	1.96	3.15	5
	Head 2500	e'	37.6600	Relative Permittivity (ϵ_r):	37.66	39.14	-3.77	5
		e''	13.7800	Conductivity (σ):	1.92	1.85	3.32	5
	Head 2570	e'	37.7000	Relative Permittivity (ϵ_r):	37.70	39.05	-3.45	5
		e''	13.9500	Conductivity (σ):	1.99	1.93	3.30	5
6/28/2014	Body 2600	e'	50.3700	Relative Permittivity (ϵ_r):	50.37	52.51	-4.08	5
		e''	15.0000	Conductivity (σ):	2.17	2.16	0.36	5
	Body 2500	e'	50.7600	Relative Permittivity (ϵ_r):	50.76	52.64	-3.57	5
		e''	14.6000	Conductivity (σ):	2.03	2.02	0.46	5
	Body 2570	e'	50.4900	Relative Permittivity (ϵ_r):	50.49	52.55	-3.92	5
		e''	14.8900	Conductivity (σ):	2.13	2.12	0.43	5
6/30/2014	Head 750	e'	40.2700	Relative Permittivity (ϵ_r):	40.27	41.96	-4.03	5
		e''	21.5200	Conductivity (σ):	0.90	0.89	0.49	5
	Head 700	e'	41.0100	Relative Permittivity (ϵ_r):	41.01	42.22	-2.86	5
		e''	21.7600	Conductivity (σ):	0.85	0.89	-4.76	5
	Head 790	e'	39.7700	Relative Permittivity (ϵ_r):	39.77	41.76	-4.76	5
		e''	21.2200	Conductivity (σ):	0.93	0.90	4.01	5
7/1/2014	Body 790	e'	53.6700	Relative Permittivity (ϵ_r):	53.67	55.39	-3.11	5
		e''	23.0800	Conductivity (σ):	1.01	0.97	4.93	5
	Body 750	e'	54.1500	Relative Permittivity (ϵ_r):	54.15	55.55	-2.51	5
		e''	23.3900	Conductivity (σ):	0.98	0.96	1.28	5
	Body 770	e'	53.8900	Relative Permittivity (ϵ_r):	53.89	55.47	-2.85	5
		e''	23.2500	Conductivity (σ):	1.00	0.96	3.20	5
7/1/2014	Body 750	e'	54.7600	Relative Permittivity (ϵ_r):	54.76	55.55	-1.42	5
		e''	23.8900	Conductivity (σ):	1.00	0.96	3.45	5
	Body 700	e'	55.3600	Relative Permittivity (ϵ_r):	55.36	55.74	-0.68	5
		e''	24.3500	Conductivity (σ):	0.95	0.96	-1.20	5
	Body 725	e'	55.0600	Relative Permittivity (ϵ_r):	55.06	55.64	-1.05	5
		e''	24.1200	Conductivity (σ):	0.97	0.96	1.16	5
7/1/2014	Head 835	e'	40.2600	Relative Permittivity (ϵ_r):	40.26	41.50	-2.99	5
		e''	19.0000	Conductivity (σ):	0.88	0.90	-1.98	5
	Head 820	e'	40.4400	Relative Permittivity (ϵ_r):	40.44	41.60	-2.79	5
		e''	19.0200	Conductivity (σ):	0.87	0.90	-3.48	5
	Head 850	e'	40.0700	Relative Permittivity (ϵ_r):	40.07	41.50	-3.45	5
		e''	18.9700	Conductivity (σ):	0.90	0.92	-2.01	5
7/1/2014	Body 835	e'	53.0900	Relative Permittivity (ϵ_r):	53.09	55.20	-3.82	5
		e''	21.3300	Conductivity (σ):	0.99	0.97	2.10	5
	Body 820	e'	53.2200	Relative Permittivity (ϵ_r):	53.22	55.28	-3.72	5
		e''	21.3700	Conductivity (σ):	0.97	0.97	0.61	5
	Body 850	e'	52.9300	Relative Permittivity (ϵ_r):	52.93	55.16	-4.04	5
		e''	21.2700	Conductivity (σ):	1.01	0.99	1.84	5

SAR Lab 4

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
6/27/2014	Head 835	e'	39.9400	Relative Permittivity (ϵ_r):	39.94	41.50	-3.76	5
		e''	18.9100	Conductivity (σ):	0.88	0.90	-2.45	5
	Head 820	e'	40.1500	Relative Permittivity (ϵ_r):	40.15	41.60	-3.49	5
		e''	18.9500	Conductivity (σ):	0.86	0.90	-3.83	5
	Head 850	e'	39.7400	Relative Permittivity (ϵ_r):	39.74	41.50	-4.24	5
		e''	18.8500	Conductivity (σ):	0.89	0.92	-2.63	5
6/27/2014	Body 835	e'	53.7600	Relative Permittivity (ϵ_r):	53.76	55.20	-2.61	5
		e''	21.7100	Conductivity (σ):	1.01	0.97	3.91	5
	Body 820	e'	53.9200	Relative Permittivity (ϵ_r):	53.92	55.28	-2.45	5
		e''	21.7700	Conductivity (σ):	0.99	0.97	2.49	5
	Body 850	e'	53.6100	Relative Permittivity (ϵ_r):	53.61	55.16	-2.80	5
		e''	21.6300	Conductivity (σ):	1.02	0.99	3.56	5

SAR Lab 5

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
6/28/2014	Head 2450	e'	38.6800	Relative Permittivity (ϵ_r):	38.68	39.20	-1.33	5
		e''	13.7500	Conductivity (σ):	1.87	1.80	4.06	5
	Head 2410	e'	38.8400	Relative Permittivity (ϵ_r):	38.84	39.28	-1.12	5
		e''	13.6400	Conductivity (σ):	1.83	1.76	3.83	5
	Head 2475	e'	38.5800	Relative Permittivity (ϵ_r):	38.58	39.17	-1.50	5
		e''	13.8200	Conductivity (σ):	1.90	1.83	4.10	5
6/28/2014	Body 2450	e'	51.8700	Relative Permittivity (ϵ_r):	51.87	52.70	-1.57	5
		e''	14.3600	Conductivity (σ):	1.96	1.95	0.32	5
	Body 2410	e'	52.0200	Relative Permittivity (ϵ_r):	52.02	52.76	-1.40	5
		e''	14.2100	Conductivity (σ):	1.90	1.91	-0.17	5
	Body 2475	e'	51.7900	Relative Permittivity (ϵ_r):	51.79	52.67	-1.67	5
		e''	14.4500	Conductivity (σ):	1.99	1.99	0.17	5
6/30/2014	Head 2600	e'	37.5600	Relative Permittivity (ϵ_r):	37.56	39.01	-3.72	5
		e''	14.2200	Conductivity (σ):	2.06	1.96	4.77	5
	Head 2500	e'	38.0000	Relative Permittivity (ϵ_r):	38.00	39.14	-2.91	5
		e''	13.9300	Conductivity (σ):	1.94	1.85	4.44	5
	Head 2700	e'	37.1300	Relative Permittivity (ϵ_r):	37.13	38.88	-4.51	5
		e''	14.4700	Conductivity (σ):	2.17	2.07	4.93	5

System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

9.3. Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1071	11/15/2013	750	1g	8.46	8.64
				10g	5.51	5.72
D835V2	4d002	11/15/2013	835	1g	9.49	9.43
				10g	6.18	6.21
D1750V2	1077	9/12/2013	1750	1g	37.6	37.7
				10g	20.0	20.3
D1750V2	1050	4/22/2014	1750	1g	36.6	37.2
				10g	19.4	20
D1900V2	5d043	11/12/2013	1900	1g	40.1	39.0
				10g	21.1	20.8
D2450V2	899	9/10/2013	2450	1g	51.3	49.7
				10g	23.9	23.3
D2600V2	1006	9/11/2013	2600	1g	56.5	55.70
				10g	25.2	24.8
D5GHzV2	1003	2/26/2014	5200	1g	77.7	73.5
				10g	22.2	20.5
			5600	1g	81.8	79.6
				10g	23.2	22.1
			5800	1g	78.3	73.8
				10g	22.1	20.4
D5GHzV2	1138	11/19/2013	5200	1g	78.5	72.9
				10g	22.5	20.4
			5600	1g	82.7	78.3
				10g	23.5	21.7
			5800	1g	78.3	72.8
				10g	22.4	20.1

9.4. System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab 1

Date Tested	System Dipole		T.S. Liquid		Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.
	Type	Serial #			Area Scan	Zoom Scan	Normalize to 1 W				
6/28/2014	D1900V2	5d043	Head	1g	4.30	4.19	41.9	40.1	4.49	2.56	1,2
				10g	2.200	2.170	21.7	21.1	2.84		
6/28/2014	D1900V2	5d043	Body	1g	4.03	4.02	40.2	39.0	3.08	0.25	
				10g	2.040	2.120	21.2	20.8	1.92		
7/1/2014	D5GHzV2 (5.2 GHz)	1003	Head	1g	6.78	7.22	72.2	77.70	-7.08	-6.49	3,4
				10g	1.880	2.08	20.8	22.20	-6.31		
7/1/2014	D5GHzV2 (5.6 GHz)	1003	Head	1g	7.79	8.33	83.3	81.80	1.83	-6.93	
				10g	2.130	2.380	23.8	23.20	2.59		
7/1/2014	D5GHzV2 (5.8 GHz)	1003	Head	1g	6.89	7.48	74.8	78.30	-4.47	-8.56	
				10g	1.900	2.130	21.3	22.10	-3.62		
7/1/2014	D5GHzV2 (5.2 GHz)	1003	Body	1g	6.79	7.08	70.8	73.50	-3.67	-4.27	
				10g	1.870	2.010	20.1	20.50	-1.95		
7/1/2014	D5GHzV2 (5.6 GHz)	1003	Body	1g	7.96	8.48	84.8	79.60	6.53	-6.53	
				10g	2.150	2.380	23.8	22.10	7.69		
7/1/2014	D5GHzV2 (5.8 GHz)	1003	Body	1g	6.79	7.23	72.3	73.80	-2.03	-6.48	
				10g	1.830	2.020	20.2	20.40	-0.98		
7/6/2014	D5GHzV2 (5.2 GHz)	1138	Head	1g	7.36	7.82	78.2	78.50	-0.38	-6.25	
				10g	2.090	2.260	22.6	22.50	0.44		
7/6/2014	D5GHzV2 (5.6 GHz)	1138	Head	1g	7.68	8.43	84.3	82.70	1.93	-9.77	
				10g	2.120	2.390	23.9	23.50	1.70		
7/6/2014	D5GHzV2 (5.8 GHz)	1138	Head	1g	7.49	8.26	82.6	78.30	5.49	-10.28	5,6
				10g	2.070	2.35	23.5	22.40	4.91		

SAR Lab 2

Date Tested	System Dipole		T.S. Liquid		Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.
	Type	Serial #			Area Scan	Zoom Scan	Normalize to 1 W				
7/1/2014	D1750V2	1077	Head	1g	3.77	3.66	36.6	37.6	-2.66	2.92	
				10g	2.06	1.95	19.5	20.0	-2.50		
7/1/2014	D1750V2	1077	Body	1g	3.72	3.56	35.6	37.7	-5.57	4.30	7,8
				10g	1.96	1.93	19.3	20.3	-4.93		
7/8/2014	D2450V2	899	Head	1g	5.42	5.35	53.5	51.3	4.29	1.29	
				10g	2.360	2.47	24.7	23.9	3.35		
7/8/2014	D2450V2	899	Body	1g	5.21	5.31	53.1	49.7	6.84	-1.92	9,10
				10g	2.280	2.500	25.0	23.3	7.30		
7/9/2014	D1750V2	1050	Body	1g	3.65	3.48	34.8	37.2	-6.45	4.66	11,12
				10g	1.92	1.89	18.9	20.0	-5.50		

SAR Lab 3

OK! Pass

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
6/28/2014	D2600V2	1006	Head	1g	6.07	5.77	57.7	56.5	2.12	4.94	
				10g	2.700	2.560	25.6	25.2	1.59		
6/28/2014	D2600V2	1006	Body	1g	5.34	5.18	51.8	55.7	-7.00	3.00	13,14
				10g	2.310	2.290	22.9	24.8	-7.66		
6/30/2014	D750V3	1071	Head	1g	0.862	0.851	8.5	8.46	0.59	1.28	
				10g	0.587	0.558	5.6	5.51	1.27		
7/1/2014	D750V3	1071	Body	1g	0.875	0.863	8.6	8.64	-0.12	1.37	
				10g	0.596	0.574	5.7	5.72	0.35		
7/1/2014	D750V3	1071	Body	1g	0.894	0.881	8.8	8.64	1.97	1.45	15,16
				10g	0.609	0.586	5.9	5.72	2.45		
7/1/2014	D835V2	4d002	Head	1g	0.981	0.961	9.6	9.49	1.26	2.04	
				10g	0.660	0.630	6.3	6.18	1.94		
7/1/2014	D835V2	4d002	Body	1g	1.010	1.000	10.0	9.43	6.04	0.99	17,18
				10g	0.683	0.659	6.6	6.21	6.12		

SAR Lab 4

Date Tested	System Dipole		T.S. Liquid		Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.
	Type	Serial #			Area Scan	Zoom Scan	Normalize to 1 W				
6/27/2014	D835V2	4d002	Head	1g	0.96	0.94	9.4	9.50	-1.58	2.81	
				10g	0.674	0.62	6.2	6.20	-0.81		
6/27/2014	D835V2	4d002	Body	1g	1.03	1.02	10.2	9.43	8.17	0.97	19,20
				10g	0.690	0.670	6.7	6.21	7.89		

SAR Lab 5

OKR 2023

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
6/28/2014	D2450V2	899	Head	1g	5.10	5.05	50.5	51.30	-1.56	0.98	
				10g	2.230	2.300	23.0	23.90	-3.77		
6/28/2014	D2450V2	899	Body	1g	4.960	5.07	50.7	49.70	2.01	-2.22	21,22
				10g	2.180	2.390	23.9	23.30	2.58		
6/30/2014	D2600V2	1006	Head	1g	6.26	6.02	60.2	56.5	6.55	3.83	23,24
				10g	2.790	2.620	26.2	25.2	3.97		

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least $\frac{1}{4}$ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR Measurements Procedures for 802.11 a/b/g Transmitters v01r02 (pg.6):

Each channel should be tested at the lowest data rate in each a-b/g mode or 4.9 GHz channel BW configuration.

When the extrapolated maximum peak SAR for the maximum output channel is ≤ 1.6 W/kg and the 1-g averaged SAR is ≤ 0.8 W/kg, testing of other channels in the “default test channels” or “required test channels” configuration is optional.

April 2013 TCB Workshop Updates:

Apply usual 802.11 test exclusion considerations, but include 802.11ac SAR for highest 802.11a configuration in each frequency band and each exposure condition.

10.1. GSM850

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	OFF	0	Left Touch	190	836.6	33.6	33.0	0.394	0.452	
				Left Tilt	190	836.6	33.6	33.0	0.260	0.299	
				Right Touch	190	836.6	33.6	33.0	0.395	0.454	
				Right Tilt	190	836.6	33.6	33.0	0.276	0.317	
Head (VoIP)	GPRS 1 Slots	OFF	0	Left Touch	190	836.6	33.6	33.0	0.407	0.467	1
				Left Tilt	190	836.6	33.6	33.0	0.276	0.317	
				Right Touch	190	836.6	33.6	33.0	0.371	0.426	
				Right Tilt	190	836.6	33.6	33.0	0.240	0.276	
Body-worn	Voice	OFF	15	Rear	190	836.6	33.6	33.0	0.480	0.551	2
				Front	190	836.6	33.6	33.0	0.457	0.525	
Body-worn (VoIP)	GPRS 1 Slots	OFF	15	Rear	190	836.6	33.6	33.0	0.459	0.527	
				Front	190	836.6	33.6	33.0	0.440	0.505	
Hotspot	GPRS 1 Slots	ON	10	Rear	190	836.6	33.6	33.2	0.532	0.583	3
				Front	190	836.6	33.6	33.2	0.485	0.532	
				Edge 2	190	836.6	33.6	33.2	0.383	0.420	
				Edge 3	190	836.6	33.6	33.2	0.038	0.041	
				Edge 4	190	836.6	33.6	33.2	0.221	0.242	

Additional test in DTM (Dual Transfer Mode)

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Body-worn	CS + GPRS 2 Slots	OFF	15	Rear	190	836.6	30.1	29.5	0.393	0.451	
Hotspot	CS + GPRS 2 Slots	ON	10	Rear	190	836.6	29.7	28.4	0.423	0.571	

10.2. GSM1900

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	OFF	0	Left Touch	661	1880.0	30.6	30.3	0.397	0.425	
				Left Tilt	661	1880.0	30.6	30.3	0.086	0.092	
				Right Touch	661	1880.0	30.6	30.3	0.388	0.416	
				Right Tilt	661	1880.0	30.6	30.3	0.094	0.101	
Head (VoIP)	GPRS 4 Slots	OFF	0	Left Touch	661	1880.0	26.6	26.3	0.570	0.611	4
				Left Tilt	661	1880.0	26.6	26.3	0.135	0.145	
				Right Touch	661	1880.0	26.6	26.3	0.558	0.598	
				Right Tilt	661	1880.0	26.6	26.3	0.115	0.123	
Body-worn	Voice	OFF	15	Rear	661	1880.0	30.6	30.3	0.379	0.406	
				Front	661	1880.0	30.6	30.3	0.371	0.398	
Body-worn (VoIP)	GPRS 4 Slots	OFF	15	Rear	512	1850.2	26.6	26.4	0.726	0.760	
					661	1880.0	26.6	26.3	0.775	0.830	
					810	1909.8	26.6	26.4	0.814	0.852	5
				Front	661	1880.0	26.6	26.3	0.690	0.739	
Hotspot	GPRS 1 Slots	ON	10	Rear	661	1880.0	30.6	30.3	0.737	0.790	6
				Front	661	1880.0	30.6	30.3	0.616	0.660	
				Edge 2	661	1880.0	30.6	30.3	0.078	0.084	
				Edge 3	661	1880.0	30.6	30.3	0.170	0.182	
				Edge 4	661	1880.0	30.6	30.3	0.064	0.068	

Additional test in DTM (Dual Transfer Mode)

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Body-worn	CS + GPRS 3 Slots	OFF	15	Rear	661	1880.0	27.6	27.2	0.512	0.561	
Hotspot	CS + GPRS 2 Slots	ON	10	Rear	661	1880.0	27.9	25.7	0.441	0.732	

10.3. W-CDMA Band V

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	OFF	0	Left Touch	4183	836.6	24.5	23.7	0.419	0.504	7
				Left Tilt	4183	836.6	24.5	23.7	0.310	0.373	
				Right Touch	4183	836.6	24.5	23.7	0.395	0.475	
				Right Tilt	4183	836.6	24.5	23.7	0.325	0.391	
Body-Worn & Hotspot	Rel 99 RMC	OFF	10	Rear	4132	826.4	24.5	23.9	0.676	0.776	8
					4183	836.6	24.5	23.7	0.701	0.843	
					4233	846.6	24.5	23.9	0.684	0.785	
				Front	4183	836.6	24.5	23.7	0.603	0.725	
				Edge 2	4183	836.6	24.5	23.7	0.288	0.346	
				Edge 3	4183	836.6	24.5	23.7	0.031	0.038	
				Edge 4	4183	836.6	24.5	23.7	0.282	0.339	

10.4. W-CDMA Band IV

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	OFF	0	Left Touch	1312	1712.4	24.5	24.1	0.740	0.811	9
					1413	1732.6	24.5	24.1	0.756	0.829	
					1513	1752.6	24.5	24.2	0.762	0.816	
				Left Tilt	1413	1732.6	24.5	24.1	0.185	0.203	
				Right Touch	1312	1712.4	24.5	24.1	0.756	0.829	
					1413	1732.6	24.5	24.1	0.773	0.848	
					1513	1752.6	24.5	24.2	0.884	0.947	
				Right Tilt	1413	1732.6	24.5	24.1	0.168	0.184	
Body-worn	Rel 99 RMC	OFF	15	Rear	1312	1712.4	24.5	24.1	0.700	0.768	10
					1413	1732.6	24.5	24.1	0.849	0.931	
					1513	1752.6	24.5	24.2	0.931	0.998	
				Front	1413	1732.6	24.5	24.1	0.624	0.684	
Hotspot	Rel 99 RMC	ON	10	Rear	1413	1732.6	21.8	21.6	0.699	0.739	11
				Front	1413	1732.6	21.8	21.6	0.489	0.517	
				Edge 2	1413	1732.6	21.8	21.6	0.126	0.133	
				Edge 3	1413	1732.6	21.8	21.6	0.305	0.322	
				Edge 4	1413	1732.6	21.8	21.6	0.136	0.144	

10.5. W-CDMA Band II

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	OFF	0	Left Touch	9400	1880.0	23.8	23.8	0.630	0.630	12
				Left Tilt	9400	1880.0	23.8	23.8	0.172	0.172	
				Right Touch	9400	1880.0	23.8	23.8	0.622	0.622	
				Right Tilt	9400	1880.0	23.8	23.8	0.158	0.158	
Body-worn	Rel 99 RMC	OFF	15	Rear	9400	1880.0	23.8	23.8	0.732	0.732	13
				Front	9400	1880.0	23.8	23.8	0.674	0.674	
Hotspot	Rel 99 RMC	ON	10	Rear	9400	1880.0	20.0	19.5	0.660	0.734	14
				Front	9400	1880.0	20.0	19.5	0.524	0.583	
				Edge 2	9400	1880.0	20.0	19.5	0.054	0.060	
				Edge 3	9400	1880.0	20.0	19.5	0.157	0.175	
				Edge 4	9400	1880.0	20.0	19.5	0.056	0.062	

10.6. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	18900	1880.0	1	49	23.2	23.0	0.657	0.690	15
							50	0	22.2	22.1	0.512	0.519	
				Left Tilt	18900	1880.0	1	49	23.2	23.0	0.111	0.116	
							50	0	22.2	22.1	0.081	0.082	
				Right Touch	18900	1880.0	1	49	23.2	23.0	0.569	0.597	
							50	0	22.2	22.1	0.450	0.456	
				Right Tilt	18900	1880.0	1	49	23.2	23.0	0.109	0.114	
							50	0	22.2	22.1	0.084	0.085	
Body-worn	QPSK	OFF	15	Rear	18900	1880.0	1	49	23.2	23.0	0.567	0.595	16
							50	0	22.2	22.1	0.435	0.441	
				Front	18900	1880.0	1	49	23.2	23.0	0.425	0.446	
							50	0	22.2	22.1	0.332	0.337	
Hotspot	QPSK	ON	10	Rear	18900	1880.0	1	49	20.0	18.5	0.366	0.517	
							50	0	20.0	18.5	0.367	0.518	
				Front	18900	1880.0	1	49	20.0	18.5	0.259	0.366	
							50	0	20.0	18.5	0.261	0.369	
				Edge 2	18900	1880.0	1	49	20.0	18.5	0.036	0.051	
							50	0	20.0	18.5	0.036	0.051	
				Edge 3	18900	1880.0	1	49	20.0	18.5	0.082	0.116	
							50	0	20.0	18.5	0.085	0.120	
				Edge 4	18900	1880.0	1	49	20.0	18.5	0.040	0.057	
							50	0	20.0	18.5	0.041	0.058	

10.7. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	20050	1732.5	1	0	23.7	23.1	0.639	0.740	18
							50	0	22.7	22.2	0.499	0.562	
				Left Tilt	20050	1732.5	1	0	23.7	23.1	0.149	0.173	
							50	0	22.7	22.2	0.116	0.131	
				Right Touch	20050	1732.5	1	0	23.7	23.1	0.414	0.480	
							50	0	22.7	22.2	0.325	0.366	
				Right Tilt	20050	1732.5	1	0	23.7	23.1	0.133	0.154	
							50	0	22.7	22.2	0.110	0.124	
Body-worn	QPSK	OFF	15	Rear	20050	1732.5	1	0	23.7	23.1	0.643	0.745	19
							50	0	22.7	22.2	0.532	0.599	
				Front	20050	1732.5	1	0	23.7	23.1	0.456	0.528	
							50	0	22.7	22.2	0.388	0.437	
Hotspot	QPSK	ON	10	Rear	20050	1720.0	1	49	22.3	20.8	0.729	1.034	20
							50	0	22.3	20.9	0.786	1.098	
							100	0	22.3	20.8	0.755	1.069	
					20175	1732.5	1	0	22.3	20.7	0.652	0.934	
							50	0	22.3	20.8	0.655	0.922	
							1	0	22.3	20.8	0.738	1.050	
				20300	1745.0		50	0	22.3	20.8	0.736	1.043	
				Front	20050	1732.5	1	0	22.3	20.7	0.453	0.649	
							50	0	22.3	20.8	0.462	0.650	
				Edge 2	20050	1732.5	1	0	22.3	20.7	0.052	0.075	
							50	0	22.3	20.8	0.053	0.075	
				Edge 3	20050	1732.5	1	0	22.3	20.7	0.261	0.374	
							50	0	22.3	20.8	0.253	0.356	
				Edge 4	20050	1732.5	1	0	22.3	20.7	0.063	0.090	
							50	0	22.3	20.8	0.061	0.086	

10.8. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	20525	836.5	1	0	23.7	23.1	0.322	0.368	21
							25	0	22.7	22.2	0.248	0.279	
				Left Tilt	20525	836.5	1	0	23.7	23.1	0.217	0.248	
							25	0	22.7	22.2	0.168	0.189	
				Right Touch	20525	836.5	1	0	23.7	23.1	0.317	0.362	
							25	0	22.7	22.2	0.262	0.295	
Body-worn & Hotspot	QPSK	OFF	10	Rear	20525	836.5	1	0	23.7	23.1	0.455	0.520	22
							25	0	22.7	22.2	0.356	0.400	
				Front	20525	836.5	1	0	23.7	23.1	0.414	0.473	
							25	0	22.7	22.2	0.327	0.368	
				Edge 2	20525	836.5	1	0	23.7	23.1	0.301	0.344	
							25	0	22.7	22.2	0.228	0.256	
				Edge 3	20525	836.5	1	0	23.7	23.1	0.023	0.026	
							25	0	22.7	22.2	0.020	0.022	
				Edge 4	20525	836.5	1	0	23.7	23.1	0.270	0.309	
							25	0	22.7	22.2	0.197	0.222	

10.9. LTE Band 7 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	21100	2535.0	1	49	23.5	23.2	0.443	0.475	23
							50	0	22.5	22.1	0.365	0.400	
				Left Tilt	21100	2535.0	1	49	23.5	23.2	0.105	0.113	
							50	0	22.5	22.1	0.090	0.099	
				Right Touch	21100	2535.0	1	49	23.5	23.2	0.301	0.323	
							50	0	22.5	22.1	0.248	0.272	
Body-worn	QPSK	OFF	15	Right Tilt	21100	2535.0	1	49	23.5	23.2	0.128	0.137	
							50	0	22.5	22.1	0.105	0.115	
				Rear	21100	2535.0	1	49	23.5	23.2	0.400	0.429	24
							50	0	22.5	22.1	0.332	0.364	
				Front	21100	2535.0	1	49	23.5	23.2	0.247	0.265	
							50	0	22.5	22.1	0.202	0.221	
Hotspot	QPSK	ON	10	Rear	21100	2535.0	1	49	19.5	18.0	0.324	0.456	25
							50	0	19.5	18.0	0.340	0.477	
				Front	21100	2535.0	1	49	19.5	18.0	0.168	0.236	
							50	0	19.5	18.0	0.172	0.241	
				Edge 2	21100	2535.0	1	49	19.5	18.0	0.085	0.120	
							50	0	19.5	18.0	0.092	0.129	
				Edge 3	21100	2535.0	1	49	19.5	18.0	0.269	0.378	
							50	0	19.5	18.0	0.282	0.396	
				Edge 4	21100	2535.0	1	49	19.5	18.0	0.029	0.040	
							50	0	19.5	18.0	0.031	0.044	

10.10. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	23230	782.0	1	49	23.7	23.0	0.214	0.251	26
							25	0	22.7	22.1	0.150	0.172	
				Left Tilt	23230	782.0	1	49	23.7	23.0	0.155	0.182	
							25	0	22.7	22.1	0.108	0.124	
				Right Touch	23230	782.0	1	49	23.7	23.0	0.253	0.297	
							25	0	22.7	22.1	0.183	0.210	
Body-worn & Hotspot	QPSK	OFF	10	Rear	23230	782.0	1	49	23.7	23.0	0.430	0.505	27
							25	0	22.7	22.1	0.315	0.362	
				Front	23230	782.0	1	49	23.7	23.0	0.335	0.394	
							25	0	22.7	22.1	0.246	0.282	
				Edge 2	23230	782.0	1	49	23.7	23.0	0.258	0.303	
							25	0	22.7	22.1	0.171	0.196	
				Edge 3	23230	782.0	1	49	23.7	23.0	0.015	0.018	
							25	0	22.7	22.1	0.011	0.013	
				Edge 4	23230	782.0	1	49	23.7	23.0	0.243	0.286	
							25	0	22.7	22.1	0.156	0.179	

10.11. LTE Band 17 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	23790	710.0	1	49	23.7	22.9	0.114	0.137	28
							25	25	22.7	22.0	0.083	0.098	
				Left Tilt	23790	710.0	1	49	23.7	22.9	0.075	0.090	
							25	25	22.7	22.0	0.051	0.060	
				Right Touch	23790	710.0	1	49	23.7	22.9	0.109	0.131	
							25	25	22.7	22.0	0.083	0.098	
Body-worn & Hotspot	QPSK	OFF	10	Right Tilt	23790	710.0	1	49	23.7	22.9	0.066	0.079	
							25	25	22.7	22.0	0.048	0.056	
				Rear	23790	710.0	1	49	23.7	22.9	0.143	0.172	29
							25	25	22.7	22.0	0.105	0.123	
				Front	23790	710.0	1	49	23.7	22.9	0.108	0.130	
							25	25	22.7	22.0	0.082	0.097	
				Edge 2	23790	710.0	1	49	23.7	22.9	0.090	0.108	
							25	25	22.7	22.0	0.069	0.081	
				Edge 3	23790	710.0	1	49	23.7	22.9	0.008	0.010	
							25	25	22.7	22.0	0.006	0.007	
				Edge 4	23790	710.0	1	49	23.7	22.9	0.108	0.130	
							25	25	22.7	22.0	0.085	0.100	

10.12. Wi-Fi (DTS Band)

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Head	802.11b 1 Mbps	0	Left Touch	6	2437.0	16.0	15.2	0.448	0.539	30
				Left Tilt	6	2437.0	16.0	15.2	0.141	0.170	
				Right Touch	6	2437.0	16.0	15.2	0.152	0.183	
				Right Tilt	6	2437.0	16.0	15.2	0.069	0.083	
	Body-worn	802.11b 1 Mbps	15	Rear	6	2437.0	16.0	15.2	0.109	0.131	31
				Front	6	2437.0	16.0	15.2	0.049	0.059	
	Hotspot	802.11b 1 Mbps	10	Rear	6	2437.0	16.0	15.2	0.291	0.350	32
				Front	6	2437.0	16.0	15.2	0.094	0.113	
				Edge 1	6	2437.0	16.0	15.2	0.020	0.024	
				Edge 2	6	2437.0	16.0	15.2	0.278	0.334	

Additional test in 802.11n mode

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Head	802.11b 1 Mbps	0	Left Touch	6	2437.0	16.0	15.2	0.360	0.433	

10.13. Wi-Fi (U-NII Bands)

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
5.2 GHz (U-NII-1)	Head	802.11a 6 Mbps	0	Left Touch	36	5180.0	16.0	14.9	0.231	0.298	33
				Left Tilt	36	5180.0	16.0	14.9	0.143	0.184	
				Right Touch	36	5180.0	16.0	14.9	0.083	0.107	
				Right Tilt	36	5180.0	16.0	14.9	0.055	0.071	
	Body-worn	802.11a 6 Mbps	15	Rear	36	5180.0	16.0	14.9	0.091	0.117	34
				Front	36	5180.0	16.0	14.9	0.022	0.028	
Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz (U-NII-2A)	Head	802.11a 6 Mbps	0	Left Touch	52	5260.0	16.0	14.8	0.318	0.419	35
				Left Tilt	52	5260.0	16.0	14.8	0.155	0.204	
				Right Touch	52	5260.0	16.0	14.8	0.114	0.150	
				Right Tilt	52	5260.0	16.0	14.8	0.085	0.112	
	Body-worn	802.11a 6 Mbps	15	Rear	52	5260.0	16.0	14.8	0.107	0.141	36
				Front	52	5260.0	16.0	14.8	0.022	0.029	
Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
5.5 GHz (U-NII-2C)	Head	802.11a 6 Mbps	0	Left Touch	104	5520.0	16.0	15.0	0.459	0.578	37
				Left Tilt	104	5520.0	16.0	15.0	0.278	0.350	
				Right Touch	104	5520.0	16.0	15.0	0.241	0.303	
				Right Tilt	104	5520.0	16.0	15.0	0.213	0.268	
	Body-worn	802.11a 6 Mbps	15	Rear	104	5520.0	16.0	15.0	0.233	0.293	38
				Front	104	5520.0	16.0	15.0	0.023	0.029	
Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
5.8 GHz (U-NII-3)	Head	802.11a 6 Mbps	0	Left Touch	149	5745.0	16.0	14.9	0.275	0.354	39
				Left Tilt	149	5745.0	16.0	14.9	0.190	0.245	
				Right Touch	149	5745.0	16.0	14.9	0.188	0.242	
				Right Tilt	149	5745.0	16.0	14.9	0.110	0.142	
	Body-worn	802.11a 6 Mbps	15	Rear	149	5745.0	16.0	14.9	0.222	0.286	40
				Front	149	5745.0	16.0	14.9	0.031	0.039	

Additional test in 802.11ac mode

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
5.2 GHz (U-NII-1)	Head	802.11ac VHT20	0	Left Touch	36	5180.0	16.0	14.7	0.194	0.262	
	Body-worn	802.11ac VHT20	15	Rear	36	5180.0	16.0	14.7	0.047	0.063	
Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz (U-NII-2A)	Head	802.11ac VHT20	0	Left Touch	52	5260.0	16.0	15.0	0.225	0.283	
	Body-worn	802.11ac VHT20	15	Rear	52	5260.0	16.0	15.0	0.105	0.132	
Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
5.5 GHz (U-NII-2C)	Head	802.11ac VHT20	0	Left Touch	104	5520.0	16.0	15.0	0.420	0.529	
	Body-worn	802.11ac VHT20	15	Rear	104	5520.0	16.0	15.0	0.225	0.283	
Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
5.8 GHz (U-NII-3)	Head	802.11ac VHT20	0	Left Touch	149	5745.0	16.0	14.8	0.256	0.337	
	Body-worn	802.11ac VHT20	15	Rear	149	5745.0	16.0	14.8	0.152	0.200	

10.14. Bluetooth

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
BT	Body-worn	GFSK	15	Rear	39	2441.0	10.5	9.7	0.029	0.035	41
				Front	39	2441.0	10.5	9.7	0.008	0.009	

11. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

11.1. The Highest Measured SAR Configuration in Each Frequency Band

Frequency Band (MHz)	Air Interface	Head (W/kg)	Body-worn Accessory (W/kg)	Wireless Router (Hotspot) (W/kg)	Repeated SAR (Yes/No)
750	LTE Band 13		0.430		No
	LTE Band 17		0.143		No
850	GSM 850			0.532	No
	WCDMA Band V		0.701		No
	LTE Band 5		0.455		No
1900	GSM 1900			0.737	No
	WCDMA Band II		0.732		No
	LTE Band 2	0.657			No
1750	LTE Band 4			0.786	No
	WCDMA Band IV		0.931		Yes
2400	Wi-Fi 802.11b/g/n	0.448			No
2600	LTE Band 7	0.443			No
5200	Wi-Fi 802.11a/n/ac	0.231			No
5300	Wi-Fi 802.11a/n/ac	0.273			No
5500	Wi-Fi 802.11a/n/ac	0.459			No
5800	Wi-Fi 802.11a/n/ac	0.284			No

11.2. Repeated Measurement Results

Frequency band	Test Position	Pwr Banck-off	Mode	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
						Original	Repeated		
W-CDMA Band IV	Rear	OFF	Rel 99 RMC	1513	1752.6	0.931	0.889	1.05	1

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

A new threshold of 0.04 is also introduced in the draft KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

12.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM850	② Wi-Fi(DTS)	③ Wi-Fi(UNII)	④ Bluetooth		
Head	Left Touch	① + ②	0.467	0.539			1.006	No
		① + ③	0.467		0.578		1.045	No
	Left Tilt	① + ②	0.317	0.170			0.487	No
		① + ③	0.317		0.350		0.667	No
	Right Touch	① + ②	0.454	0.183			0.637	No
		① + ③	0.454		0.303		0.757	No
	Right Tilt	① + ②	0.317	0.083			0.400	No
		① + ③	0.317		0.268		0.585	No
Body-worn	Rear	① + ②	0.551	0.131			0.682	No
		① + ③	0.551		0.293		0.844	No
		① + ④	0.551			0.035	0.586	No
		① + ③ + ④	0.551		0.293	0.035	0.879	No
	Front	① + ②	0.525	0.059			0.584	No
		① + ③	0.525		0.039		0.564	No
		① + ④	0.525			0.009	0.534	No
		① + ③ + ④	0.525		0.039	0.009	0.573	No
Hotspot	Rear	① + ②	0.583	0.350			0.933	No
	Front	① + ②	0.532	0.113			0.645	No
	Edge 1	① + ②		0.024			0.024	No
	Edge 2	① + ②	0.420	0.334			0.754	No
	Edge 3	① + ②	0.041				0.041	No
	Edge 4	① + ②	0.242				0.242	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

12.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM1900	② Wi-Fi(DTS)	③ Wi-Fi(UNII)	④ Bluetooth		
Head	Left Touch	① + ②	0.611	0.539			1.150	No
		① + ③	0.611		0.578		1.189	No
	Left Tilt	① + ②	0.145	0.170			0.315	No
		① + ③	0.145		0.350		0.495	No
	Right Touch	① + ②	0.598	0.183			0.781	No
		① + ③	0.598		0.303		0.901	No
	Right Tilt	① + ②	0.123	0.083			0.206	No
		① + ③	0.123		0.268		0.391	No
Body-worn	Rear	① + ②	0.852	0.131			0.983	No
		① + ③	0.852		0.293		1.145	No
		① + ④	0.852			0.035	0.887	No
		① + ③ + ④	0.852		0.293	0.035	1.180	No
	Front	① + ②	0.739	0.059			0.798	No
		① + ③	0.739		0.039		0.778	No
		① + ④	0.739			0.009	0.748	No
		① + ③ + ④	0.739		0.039	0.009	0.787	No
Hotspot	Rear	① + ②	0.790	0.350			1.140	No
	Front	① + ②	0.660	0.113			0.773	No
	Edge 1	① + ②		0.024			0.024	No
	Edge 2	① + ②	0.084	0.334			0.418	No
	Edge 3	① + ②	0.182				0.182	No
	Edge 4	① + ②	0.068				0.068	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

12.3. Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① W-CDMA Band V	② Wi-Fi(DTS)	③ Wi-Fi(UNII)	④ Bluetooth		
Head	Left Touch	① + ②	0.504	0.539			1.043	No
		① + ③	0.504		0.578		1.082	No
	Left Tilt	① + ②	0.373	0.170			0.543	No
		① + ③	0.373		0.350		0.723	No
	Right Touch	① + ②	0.475	0.183			0.658	No
		① + ③	0.475		0.303		0.778	No
	Right Tilt	① + ②	0.391	0.083			0.474	No
		① + ③	0.391		0.268		0.659	No
Body-worn	Rear	① + ②	0.843	0.131			0.974	No
		① + ③	0.843		0.293		1.136	No
		① + ④	0.843			0.035	0.878	No
		① + ③ + ④	0.843		0.293	0.035	1.171	No
	Front	① + ②	0.725	0.059			0.784	No
		① + ③	0.725		0.039		0.764	No
		① + ④	0.725			0.009	0.734	No
		① + ③ + ④	0.725		0.039	0.009	0.773	No
Hotspot	Rear	① + ②	0.843	0.350			1.193	No
	Front	① + ②	0.725	0.113			0.838	No
	Edge 1	① + ②		0.024			0.024	No
	Edge 2	① + ②	0.346	0.334			0.680	No
	Edge 3	① + ②	0.038				0.038	No
	Edge 4	① + ②	0.339				0.339	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

12.4. Sum of the SAR for WCDMA Band IV & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① W-CDMA Band IV	② Wi-Fi(DTS)	③ Wi-Fi(UNII)	④ Bluetooth		
Head	Left Touch	① + ②	0.829	0.539			1.368	No
		① + ③	0.829		0.578		1.407	No
	Left Tilt	① + ②	0.203	0.170			0.373	No
		① + ③	0.203		0.350		0.553	No
	Right Touch	① + ②	0.947	0.183			1.130	No
		① + ③	0.947		0.303		1.250	No
	Right Tilt	① + ②	0.184	0.083			0.267	No
		① + ③	0.184		0.268		0.452	No
Body-worn	Rear	① + ②	0.998	0.131			1.129	No
		① + ③	0.998		0.293		1.291	No
		① + ④	0.998			0.035	1.033	No
		① + ③ + ④	0.998		0.293	0.035	1.326	No
	Front	① + ②	0.684	0.059			0.743	No
		① + ③	0.684		0.039		0.723	No
		① + ④	0.684			0.009	0.693	No
		① + ③ + ④	0.684		0.039	0.009	0.732	No
Hotspot	Rear	① + ②	0.739	0.350			1.089	No
	Front	① + ②	0.517	0.113			0.630	No
	Edge 1	① + ②		0.024			0.024	No
	Edge 2	① + ②	0.133	0.334			0.467	No
	Edge 3	① + ②	0.322				0.322	No
	Edge 4	① + ②	0.144				0.144	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

12.5. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① W-CDMA Band II	② Wi-Fi(DTS)	③ Wi-Fi(UNII)	④ Bluetooth		
Head	Left Touch	① + ②	0.630	0.539			1.169	No
		① + ③	0.630		0.578		1.208	No
	Left Tilt	① + ②	0.172	0.170			0.342	No
		① + ③	0.172		0.350		0.522	No
	Right Touch	① + ②	0.622	0.183			0.805	No
		① + ③	0.622		0.303		0.925	No
	Right Tilt	① + ②	0.158	0.083			0.241	No
		① + ③	0.158		0.268		0.426	No
Body-worn	Rear	① + ②	0.732	0.131			0.863	No
		① + ③	0.732		0.293		1.025	No
		① + ④	0.732			0.035	0.767	No
		① + ③ + ④	0.732		0.293	0.035	1.060	No
	Front	① + ②	0.674	0.059			0.733	No
		① + ③	0.674		0.039		0.713	No
		① + ④	0.674			0.009	0.683	No
		① + ③ + ④	0.674		0.039	0.009	0.722	No
Hotspot	Rear	① + ②	0.734	0.350			1.084	No
	Front	① + ②	0.583	0.113			0.696	No
	Edge 1	① + ②		0.024			0.024	No
	Edge 2	① + ②	0.060	0.334			0.394	No
	Edge 3	① + ②	0.175				0.175	No
	Edge 4	① + ②	0.062				0.062	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

12.6. Sum of the SAR for LTE Band 2 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE B2	② Wi-Fi(DTS)	③ Wi-Fi(UNII)	④ Bluetooth		
Head	Left Touch	① + ②	0.690	0.539			1.229	No
		① + ③	0.690		0.578		1.268	No
	Left Tilt	① + ②	0.116	0.170			0.286	No
		① + ③	0.116		0.350		0.466	No
	Right Touch	① + ②	0.597	0.183			0.780	No
		① + ③	0.597		0.303		0.900	No
	Right Tilt	① + ②	0.114	0.083			0.197	No
		① + ③	0.114		0.268		0.382	No
Body-worn	Rear	① + ②	0.595	0.131			0.726	No
		① + ③	0.595		0.293		0.888	No
		① + ④	0.595			0.035	0.630	No
		① + ③ + ④	0.595		0.293	0.035	0.923	No
	Front	① + ②	0.446	0.059			0.505	No
		① + ③	0.446		0.039		0.485	No
		① + ④	0.446			0.009	0.455	No
		① + ③ + ④	0.446		0.039	0.009	0.494	No
Hotspot	Rear	① + ②	0.518	0.350			0.868	No
	Front	① + ②	0.369	0.113			0.482	No
	Edge 1	① + ②		0.024			0.024	No
	Edge 2	① + ②	0.051	0.334			0.385	No
	Edge 3	① + ②	0.120				0.120	No
	Edge 4	① + ②	0.058				0.058	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

12.7. Sum of the SAR for LTE Band 4 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE B4	② Wi-Fi(DTS)	③ Wi-Fi(UNII)	④ Bluetooth		
Head	Left Touch	① + ②	0.740	0.539			1.279	No
		① + ③	0.740		0.578		1.318	No
	Left Tilt	① + ②	0.173	0.170			0.343	No
		① + ③	0.173		0.350		0.523	No
	Right Touch	① + ②	0.480	0.183			0.663	No
		① + ③	0.480		0.303		0.783	No
	Right Tilt	① + ②	0.154	0.083			0.237	No
		① + ③	0.154		0.268		0.422	No
Body-worn	Rear	① + ②	0.745	0.131			0.876	No
		① + ③	0.745		0.293		1.038	No
		① + ④	0.745			0.035	0.780	No
		① + ③ + ④	0.745		0.293	0.035	1.073	No
	Front	① + ②	0.528	0.059			0.587	No
		① + ③	0.528		0.039		0.567	No
		① + ④	0.528			0.009	0.537	No
		① + ③ + ④	0.528		0.039	0.009	0.576	No
Hotspot	Rear	① + ②	1.098	0.350			1.448	No
	Front	① + ②	0.650	0.113			0.763	No
	Edge 1	① + ②		0.024			0.024	No
	Edge 2	① + ②	0.075	0.334			0.409	No
	Edge 3	① + ②	0.374				0.374	No
	Edge 4	① + ②	0.090				0.090	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

12.8. Sum of the SAR for LTE Band 5 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE B5	② Wi-Fi(DTS)	③ Wi-Fi(UNII)	④ Bluetooth		
Head	Left Touch	① + ②	0.368	0.539			0.907	No
		① + ③	0.368		0.578		0.946	No
	Left Tilt	① + ②	0.248	0.170			0.418	No
		① + ③	0.248		0.350		0.598	No
	Right Touch	① + ②	0.362	0.183			0.545	No
		① + ③	0.362		0.303		0.665	No
	Right Tilt	① + ②	0.269	0.083			0.352	No
		① + ③	0.269		0.268		0.537	No
Body-worn	Rear	① + ②	0.520	0.131			0.651	No
		① + ③	0.520		0.293		0.813	No
		① + ④	0.520			0.035	0.555	No
		① + ③ + ④	0.520		0.293	0.035	0.848	No
	Front	① + ②	0.473	0.059			0.532	No
		① + ③	0.473		0.039		0.512	No
		① + ④	0.473			0.009	0.482	No
		① + ③ + ④	0.473		0.039	0.009	0.521	No
Hotspot	Rear	① + ②	0.520	0.350			0.870	No
	Front	① + ②	0.473	0.113			0.586	No
	Edge 1	① + ②		0.024			0.024	No
	Edge 2	① + ②	0.344	0.334			0.678	No
	Edge 3	① + ②	0.026				0.026	No
	Edge 4	① + ②	0.309				0.309	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

12.9. Sum of the SAR for LTE Band 7 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE B7	② Wi-Fi(DTS)	③ Wi-Fi(UNII)	④ Bluetooth		
Head	Left Touch	① + ②	0.475	0.539			1.014	No
		① + ③	0.475		0.578		1.053	No
	Left Tilt	① + ②	0.113	0.170			0.283	No
		① + ③	0.113		0.350		0.463	No
	Right Touch	① + ②	0.323	0.183			0.506	No
		① + ③	0.323		0.303		0.626	No
	Right Tilt	① + ②	0.137	0.083			0.220	No
		① + ③	0.137		0.268		0.405	No
Body-worn	Rear	① + ②	0.429	0.131			0.560	No
		① + ③	0.429		0.293		0.722	No
		① + ④	0.429			0.035	0.464	No
		① + ③ + ④	0.429		0.293	0.035	0.757	No
	Front	① + ②	0.265	0.059			0.324	No
		① + ③	0.265		0.039		0.304	No
		① + ④	0.265			0.009	0.274	No
		① + ③ + ④	0.265		0.039	0.009	0.313	No
Hotspot	Rear	① + ②	0.477	0.350			0.827	No
	Front	① + ②	0.241	0.113			0.354	No
	Edge 1	① + ②		0.024			0.024	No
	Edge 2	① + ②	0.129	0.334			0.463	No
	Edge 3	① + ②	0.396				0.396	No
	Edge 4	① + ②	0.044				0.044	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

12.10. Sum of the SAR for LTE Band 13 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE B13	② Wi-Fi(DTS)	③ Wi-Fi(UNII)	④ Bluetooth		
Head	Left Touch	① + ②	0.251	0.539			0.790	No
		① + ③	0.251		0.578		0.829	No
	Left Tilt	① + ②	0.182	0.170			0.352	No
		① + ③	0.182		0.350		0.532	No
	Right Touch	① + ②	0.297	0.183			0.480	No
		① + ③	0.297		0.303		0.600	No
	Right Tilt	① + ②	0.200	0.083			0.283	No
		① + ③	0.200		0.268		0.468	No
Body-worn	Rear	① + ②	0.505	0.131			0.636	No
		① + ③	0.505		0.293		0.798	No
		① + ④	0.505			0.035	0.540	No
		① + ③ + ④	0.505		0.293	0.035	0.833	No
	Front	① + ②	0.394	0.059			0.453	No
		① + ③	0.394		0.039		0.433	No
		① + ④	0.394			0.009	0.403	No
		① + ③ + ④	0.394		0.039	0.009	0.442	No
Hotspot	Rear	① + ②	0.505	0.350			0.855	No
	Front	① + ②	0.394	0.113			0.507	No
	Edge 1	① + ②		0.024			0.024	No
	Edge 2	① + ②	0.303	0.334			0.637	No
	Edge 3	① + ②	0.018				0.018	No
	Edge 4	① + ②	0.286				0.286	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

12.11. Sum of the SAR for LTE Band 17 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE B17	② Wi-Fi(DTS)	③ Wi-Fi(UNII)	④ Bluetooth		
Head	Left Touch	① + ②	0.137	0.539			0.676	No
		① + ③	0.137		0.578		0.715	No
	Left Tilt	① + ②	0.090	0.170			0.260	No
		① + ③	0.090		0.350		0.440	No
	Right Touch	① + ②	0.131	0.183			0.314	No
		① + ③	0.131		0.303		0.434	No
	Right Tilt	① + ②	0.079	0.083			0.162	No
		① + ③	0.079		0.268		0.347	No
Body-worn	Rear	① + ②	0.172	0.131			0.303	No
		① + ③	0.172		0.293		0.465	No
		① + ④	0.172			0.035	0.207	No
		① + ③ + ④	0.172		0.293	0.035	0.500	No
	Front	① + ②	0.130	0.059			0.189	No
		① + ③	0.130		0.039		0.169	No
		① + ④	0.130			0.009	0.139	No
		① + ③ + ④	0.130		0.039	0.009	0.178	No
Hotspot	Rear	① + ②	0.172	0.350			0.522	No
	Front	① + ②	0.130	0.113			0.243	No
	Edge 1	① + ②		0.024			0.024	No
	Edge 2	① + ②	0.108	0.334			0.442	No
	Edge 3	① + ②	0.010				0.010	No
	Edge 4	① + ②	0.130				0.130	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

13. Appendixes

Refer to separated files for the following appendixes.

- 13.1. Photos and Antenna Locations
- 13.2. System Performance Check Plots
- 13.3. Highest SAR Test Plots
- 13.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3902
- 13.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3531
- 13.6. Calibration Certificate for E-Field Probe EX3DV3 - SN 3773
- 13.7. Calibration Certificate for E-Field Probe EX3DV4 - SN 3929
- 13.8. Calibration Certificate for E-Field Probe EX3DV4 - SN 3991
- 13.9. Calibration Certificate for D750V3 - SN 1071
- 13.10. Calibration Certificate for D835V2 - SN 4d002
- 13.11. Calibration Certificate for D1750V2 - SN 1077
- 13.12. Calibration Certificate for D1750V2 - SN 1050
- 13.13. Calibration Certificate for D1900V2- SN 5d043
- 13.14. Calibration Certificate for D2450V2 - SN 899
- 13.15. Calibration Certificate for D2600V2 - SN 1006
- 13.16. Calibration Certificate for D5GHzV2 - SN 1003
- 13.17. Calibration Certificate for D5GHzV2 - SN 1138

END OF REPORT