

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-940_08.docx	Date of Report:	13-Sep-2013
Number of pages:	43	Customer's Contact person:	Lasse Vaattovaara
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation P.O.Box(86) Joensuunkatu 7H FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-940 / AC-Charger AC-60E / Headset WH-208		
FCC ID:	PYAB	IC:	661V-B
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			
	Sami Lehtonen, Specialist, EMC		

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	16-Jul-2013
Testing completed	02-Aug-2013
The customer's contact person	Lasse Vaattovaara
Test Plan referred to	T:\Projects\RM-940\TestPlan\RS_Testplan_RM-940.xlsm
Notes	-
Document name	T:\Projects\RM-940\EMC\FCC15CBT_RM-940_08.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/WCDMA/WLAN/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-940	004402473425571	2100	-	1028.0301.1326.10115	17579
AC-Charger	AC-60E	409049315461030267600675677	-	-	-	17580
Headset	WH-208	2131731	-	-	-	17581
USB-Cable	CA-190CD	07304563083v2f	-	-	-	17608
Phone	RM-940	004402473425498	2102	-	1028.0301.1326.10115	17563
AC-Charger	AC-60E	409049315461030285300675677	CE	-	-	17584
Data Cable	CA-190CD	-	CE	-	-	17585
Headset	WH-208	2131731	CE	-	-	17586
Phone	RM-940	004402473425951	2100	-	1028.0301.1326.10115	17583

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(2))	Conducted peak output power	PASSED
15.247(d), 15.205(b)	A8(0.5)	Band edge compliance of RF emissions	PASSED
15.247(d)	A8(0.5)	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8(0.1(1))	20dB(bandwidth)	PASSED
15.247(a)(1)	A8(0.1(2))	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Time of occupancy	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.

CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5).....	5
2.2. Test method and limit.....	5
2.3. Bluetooth test results.....	6
3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	14
3.2. Test method and limit.....	14
3.3. Bluetooth test results.....	16
4. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2))	18
4.1. Test Setup.....	18
4.2. Test method and limit.....	18
4.3. Bluetooth Test results	19
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5).....	22
5.1. Test Setup.....	22
5.2. Test method and limit.....	22
5.3. Bluetooth Test results	23
6. AC powerline conducted emissions FCC §15.207, RSS-GEN 7.2.2	26
6.1. Test Setup.....	26
6.2. Test method and limit.....	26
6.3. Bluetooth Test results	27
7. 20 dB bandwidth 15.247(a)(1), A8.1 (a).....	28
7.1. Test Setup.....	28
7.2. Test method and limit.....	28
7.3. Bluetooth Test results	29
8. Carrier frequency separation 15.247(a)(1), A8.1 (b)	33
8.1. Test Setup.....	33
8.2. Test method and limit.....	33
8.3. Bluetooth Test results	34

9. Number of hopping frequencies

15.247(a)(1)(iii), A8.1 (d) 36

9.1. Test Setup..... 36

9.2. Test method and limit..... 36

9.3. Bluetooth Test results 37

10. Time of occupancy

15.247(a)(1)(iii), A8.1 (d) 39

10.1. Test Setup..... 39

10.2. Test method and limit..... 39

10.3. Bluetooth Test results 40

11. Test Equipment 42


11.1. Conducted measurements 42

11.2. Radiated measurements 42

2. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5)

EUT with DUT number	RM-940, DUT 17579
Accessories with DUT numbers	AC-60E, DUT 17580 ; WH-208, DUT 17581
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 68 / 101.8
Date of measurements	01-Aug-2013
Measured by	Jari Keto

2.1.1 Test setup

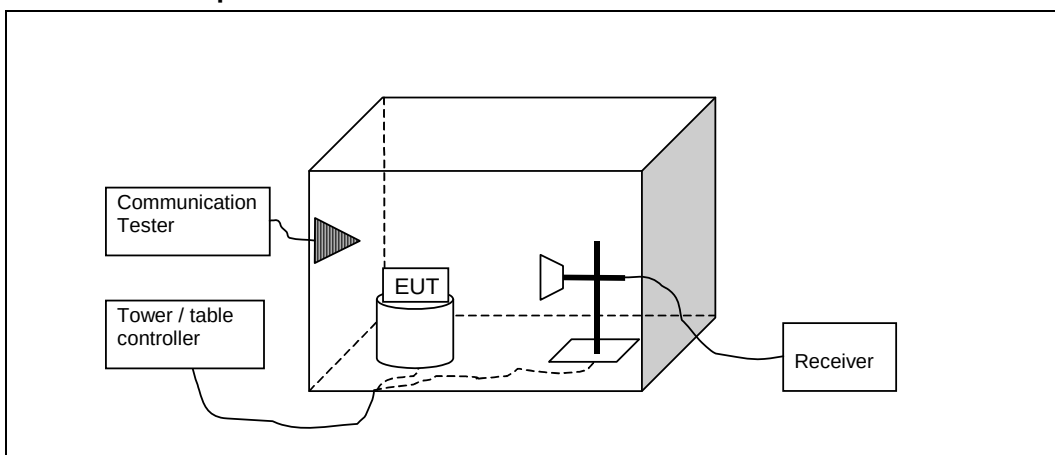

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit
Below 2390 and above 2483.5	54 dBuV/m (avg) and 74 dBuV/m (pk)

2.3. Bluetooth test results

2.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

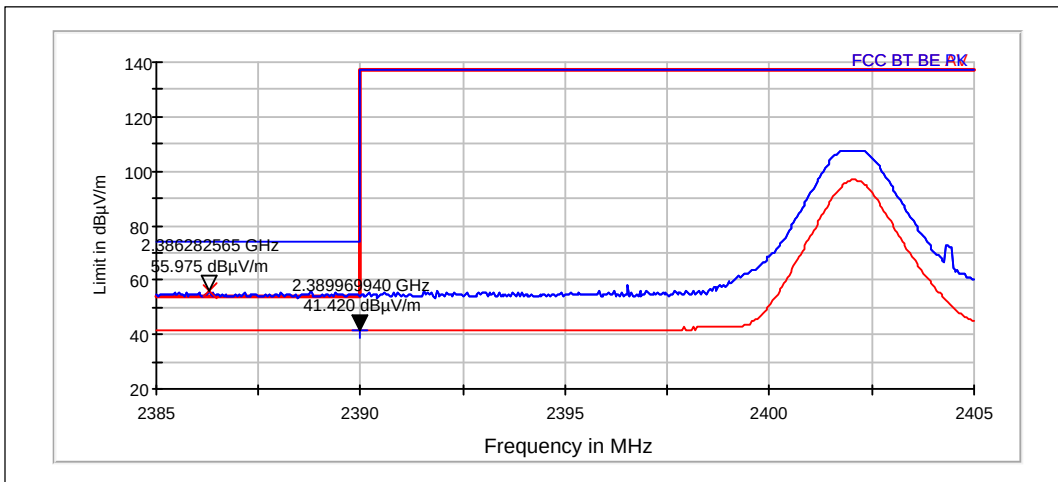


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2386	55.98	629.144	55.64	0.34	0.341	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	41.42	117.761	41.08	0.34	0.341	PASSED

Hopping on. Low end.

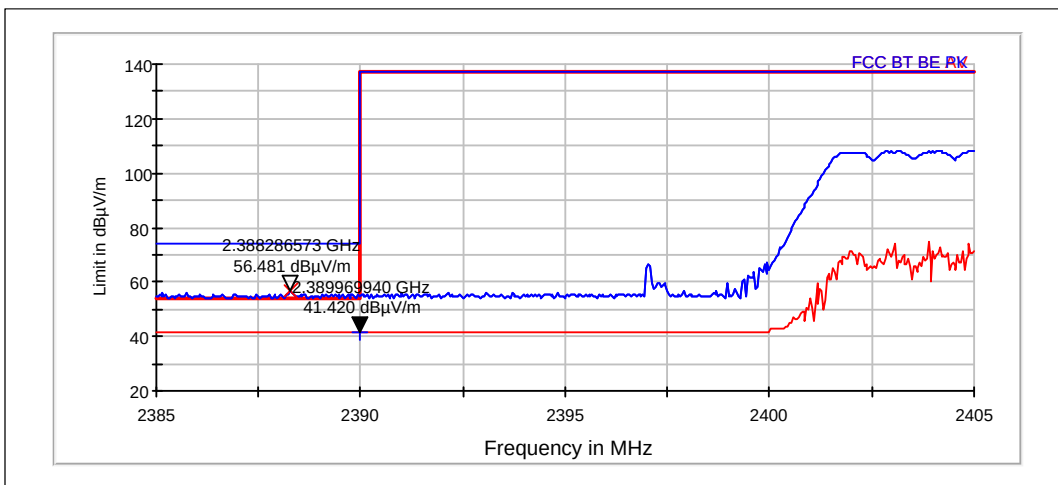


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2388	56.48	666.884	56.14	0.34	0.341	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	41.42	117.761	41.08	0.34	0.341	PASSED

Hopping on. High end.

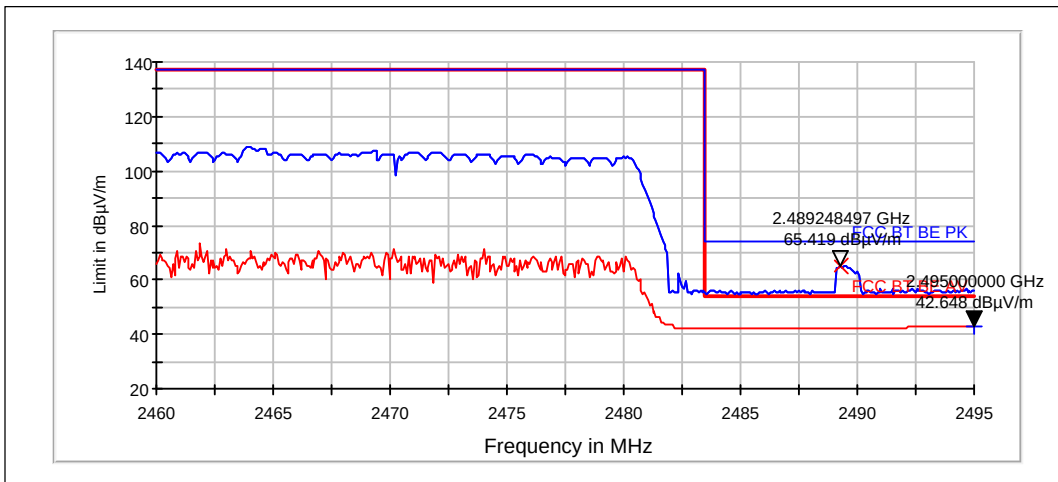


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2489	65.42	1866.165	64.39	1.03	1.032	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2495	42.65	135.644	41.62	1.03	1.032	PASSED

Channel 78 / 2480 MHz

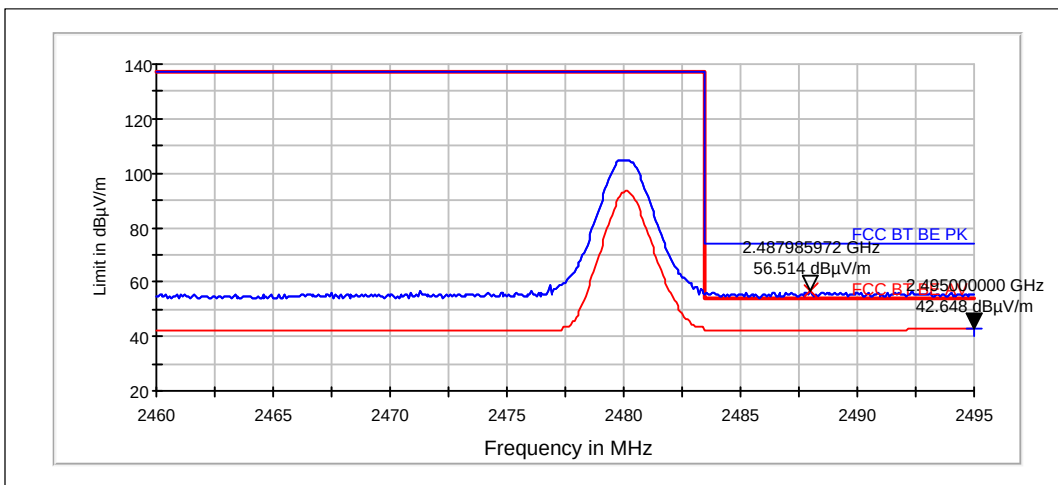

Peak (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2488	56.51	669.422	55.48	1.03	1.032	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2495	42.65	135.644	41.62	1.03	1.032	PASSED

2.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

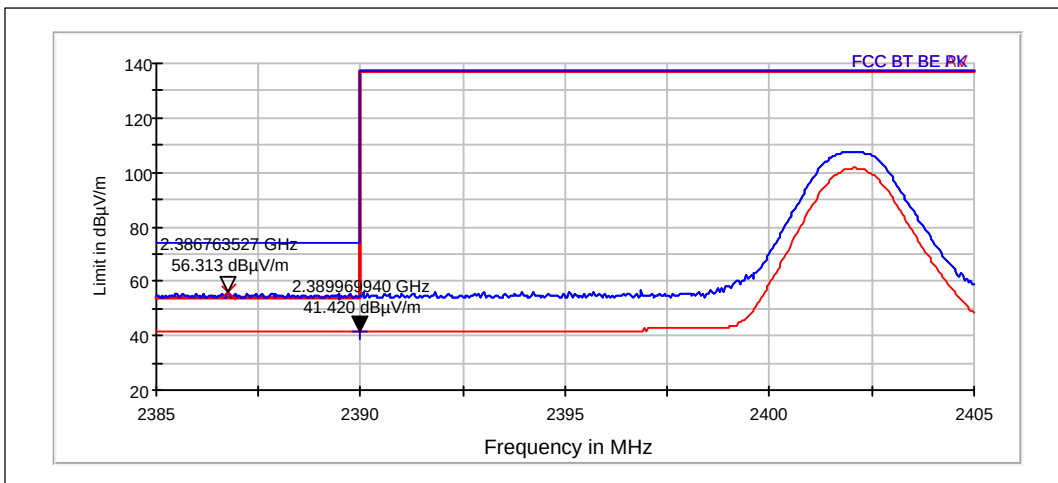


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2387	56.31	654.109	55.97	0.34	0.341	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	41.42	117.761	41.08	0.34	0.341	PASSED

Hopping on. Low end.

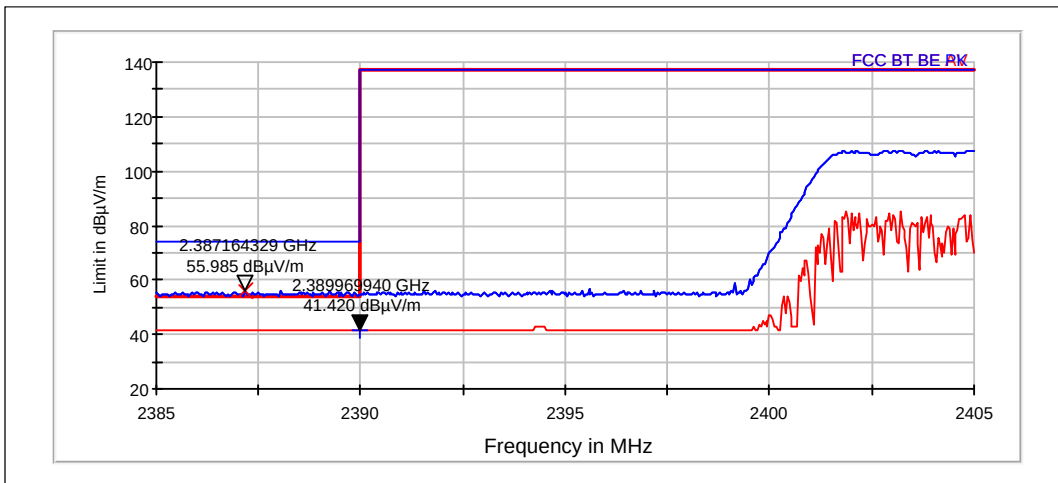


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2387	55.99	629.869	55.65	0.34	0.341	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	41.42	117.761	41.08	0.34	0.341	PASSED

Hopping on. High end.

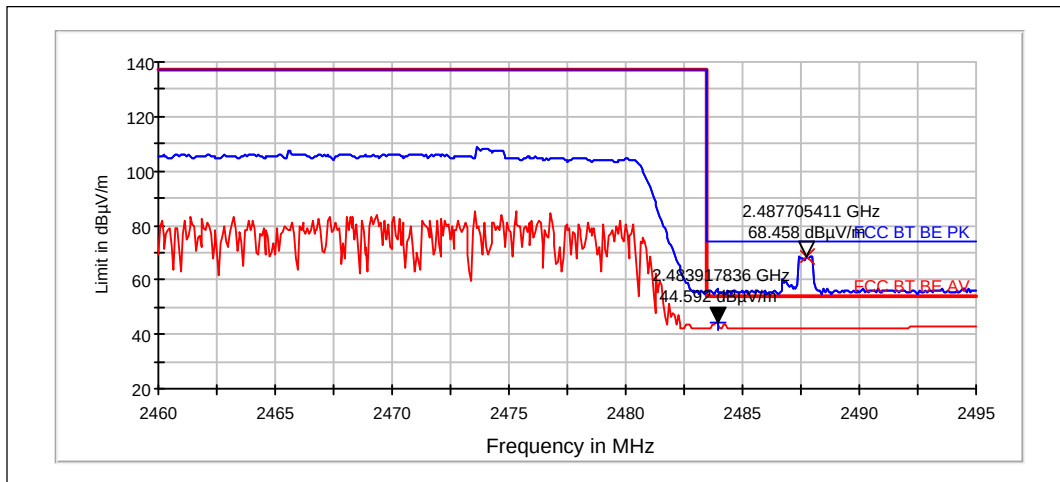


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2488	68.46	2647.89	67.43	1.03	1.032	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2484	44.59	169.668	43.56	1.03	1.032	PASSED

Channel 78 / 2480 MHz

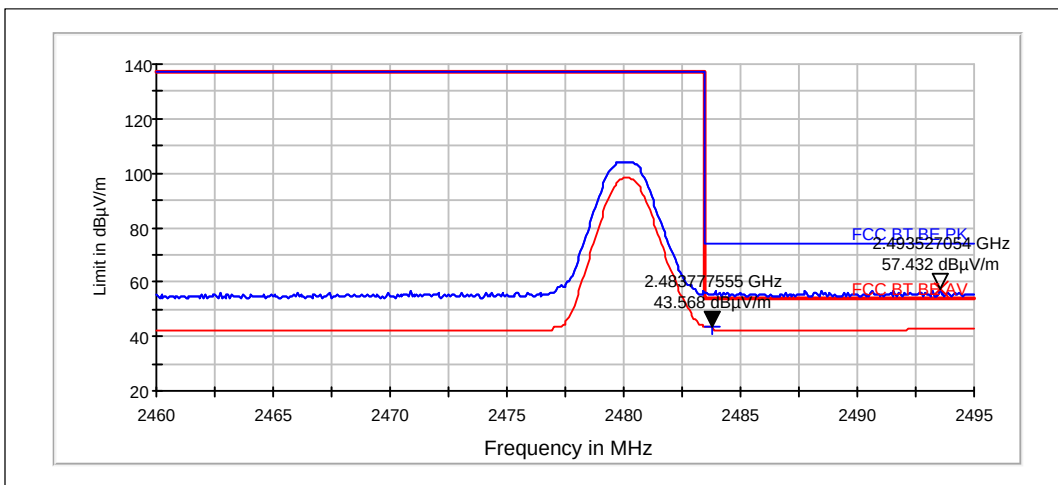

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2494	57.43	744.046	56.4	1.03	1.032	PASSED


Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2484	43.57	150.8	42.54	1.03	1.032	PASSED

3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-940, DUT 17579
Accessories with DUT numbers	AC-60E, DUT 17580 ; WH-208, DUT 17581
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 68 / 101.8
Date of measurements	01-Aug-2013
Measured by	Jari Keto

3.1.1 Test setup

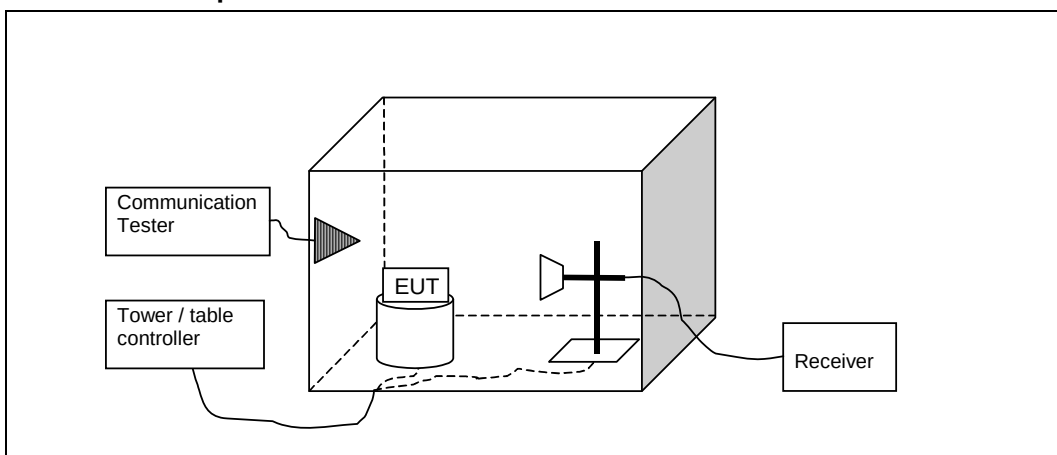

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:
The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [$dB\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. Bluetooth test results

3.3.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
33.568	22.81	13.815	28.94	-6.13	17.2	40	PASSED
33.84	22.48	13.297	28.79	-6.31	17.5	40	PASSED
34.792	23.04	14.194	29.96	-6.92	17	40	PASSED
38.296	24.23	16.282	33.41	-9.18	15.8	40	PASSED
40.539	27.4	23.431	38.03	-10.63	12.6	40	PASSED
40.803	26.08	20.13	36.88	-10.8	13.9	40	PASSED
41.817	25.34	18.501	36.81	-11.47	14.7	40	PASSED
45.471	23.56	15.068	37.48	-13.92	16.4	40	PASSED
368.006	35.07	56.689	46.98	-11.91	11	46	PASSED
374.408	35.6	60.277	47.29	-11.69	10.4	46	PASSED

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4803.9	46.67	215.452	47.86	-1.19	27.3	74	PASSED
7205.8	47.43	235.288	43.23	4.2	77.8	125	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4803.9	32.56	42.462	33.75	-1.19	21.4	54	PASSED
7205.8	33.81	49.057	29.61	4.2	---	---	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4960.3	46.65	214.981	47.61	-0.96	27.3	74	PASSED
7438.6	46.87	220.419	41.38	5.49	27.1	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4960.3	29.77	30.793	30.73	-0.96	24.2	54	PASSED
7438.6	34.14	50.904	28.65	5.49	19.8	54	PASSED

3.3.2 8DPSK modulation, PRBS packet type

Channel 40 / 2442 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
10940.385	53.98	499.919	40.64	13.35	20	74	PASSED
11436.477	53.39	467.358	40.63	12.76	20.6	74	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
34.978	21.74	12.221	28.78	-7.04	18.3	40	PASSED
35.602	23.35	14.711	30.79	-7.44	16.6	40	PASSED
39.676	25.25	18.31	35.31	-10.06	14.7	40	PASSED
40.713	25.8	19.494	36.54	-10.74	14.2	40	PASSED
40.809	25.97	19.879	36.78	-10.81	14	40	PASSED
45.471	24.74	17.248	38.66	-13.92	15.3	40	PASSED
45.597	24.56	16.902	38.57	-14.01	15.4	40	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
10940.385	40.86	110.344	27.52	13.35	13.1	54	PASSED
11436.477	40.73	108.73	27.97	12.76	13.3	54	PASSED

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4804	46.42	209.387	47.61	-1.19	27.6	74	PASSED
7206.1	46.32	206.895	42.12	4.2	78.9	125	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4804	32.62	42.761	33.81	-1.19	21.4	54	PASSED
7206.1	33.59	47.791	29.39	4.2	---	---	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4960.2	46.65	214.981	47.61	-0.96	27.3	74	PASSED
7439.7	46.5	211.276	41.01	5.49	27.5	74	PASSED


Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4960.2	32.59	42.604	33.55	-0.96	21.4	54	PASSED
7439.7	34.09	50.629	28.6	5.49	19.9	54	PASSED

4. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-940, DUT 17563
Accessories with DUT numbers	AC-60E, DUT 17584 ; CA-190CD, DUT 17585 ; WH-208, DUT 17586
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 57 /102
Date of measurements	02-Aug-2013
Measured by	Tomi Lipponen

4.1. Test Setup

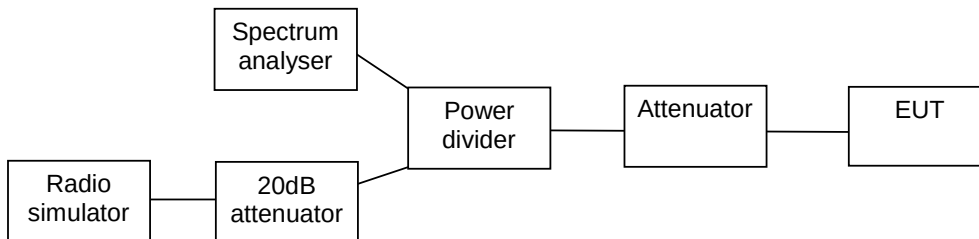

4.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5 5725 - 5850	<= 1	<= 30

4.3. Bluetooth Test results


4.3.1 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	9.75	9.441	PASSED
40 / 2442	9.29	8.492	PASSED
78 / 2480	7.4	5.495	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

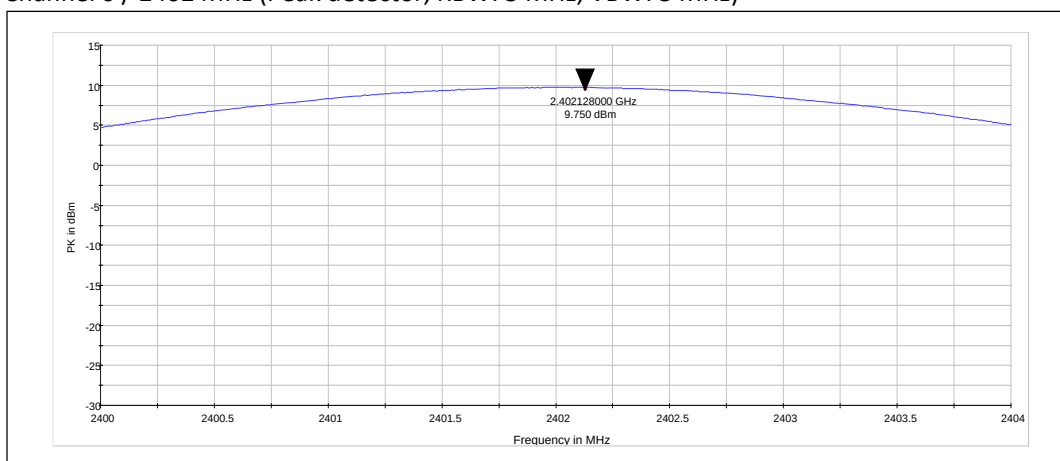

Channel 40 / 2442 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

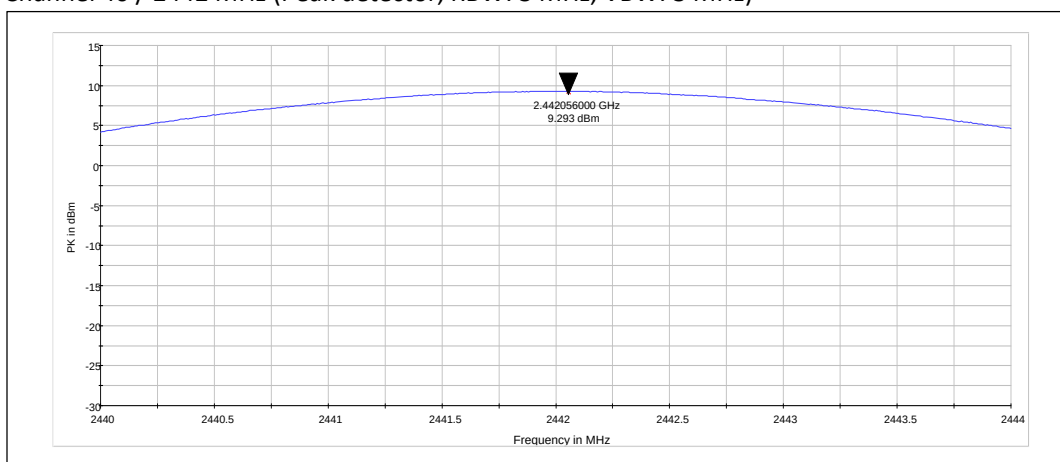


Channel 78 / 2480 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

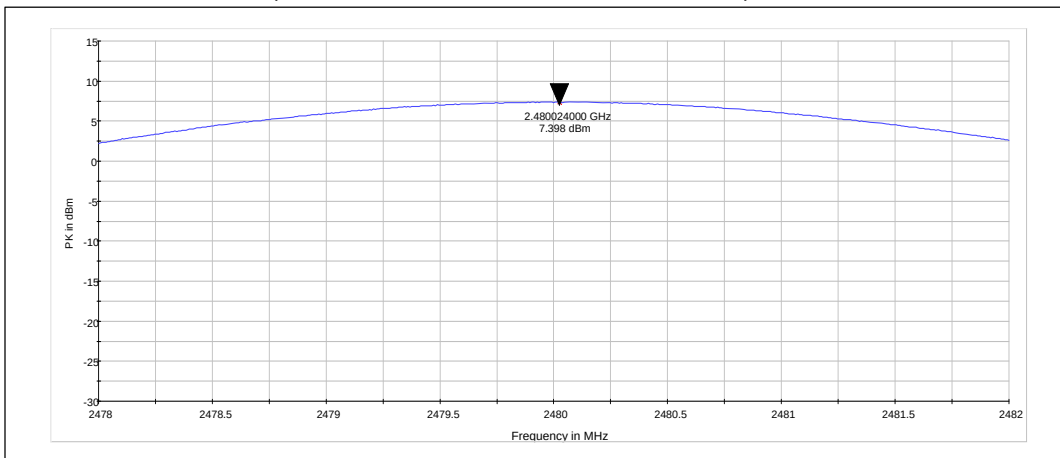

4.3.2 GFSK modulation, PRBS packet type


Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	8.25	6.683	PASSED
40 / 2442	8.11	6.471	PASSED
78 / 2480	6.09	4.064	PASSED

Channel 0 / 2402 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

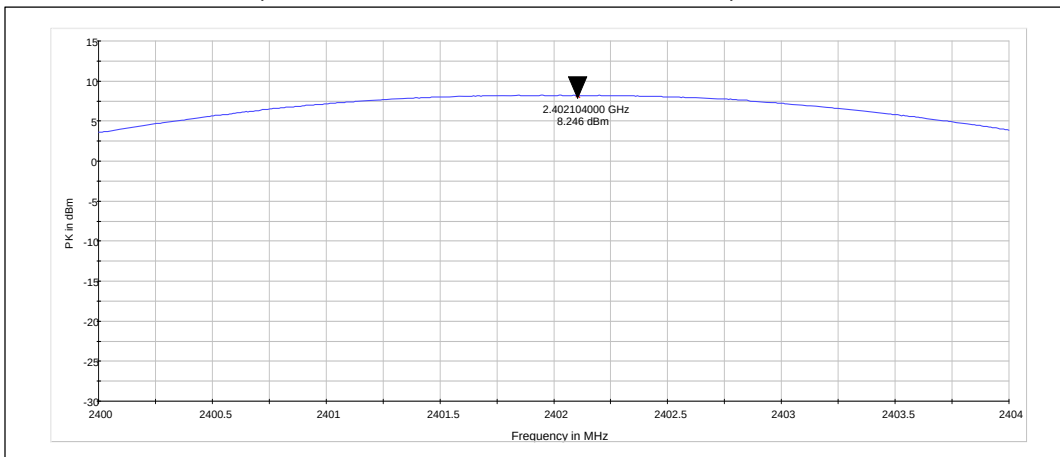


Channel

40 / 2442 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

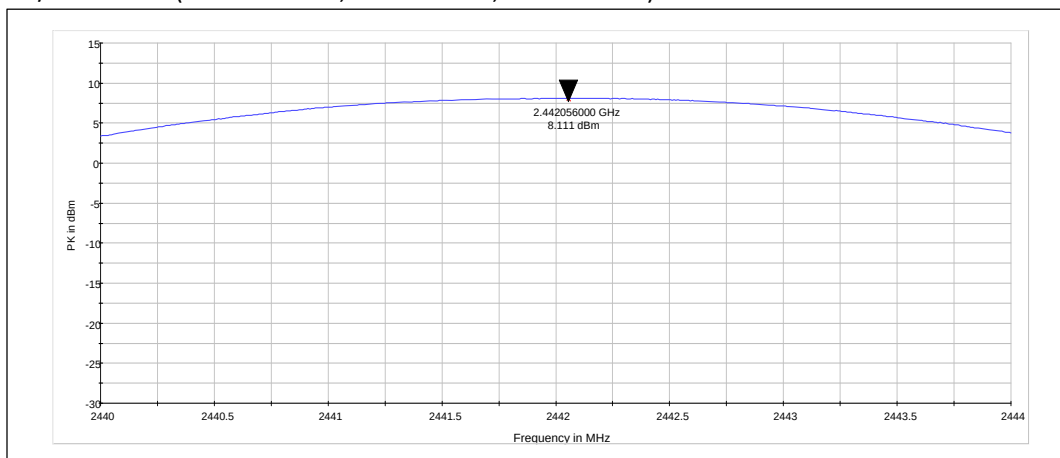


Channel 78 / 2480 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

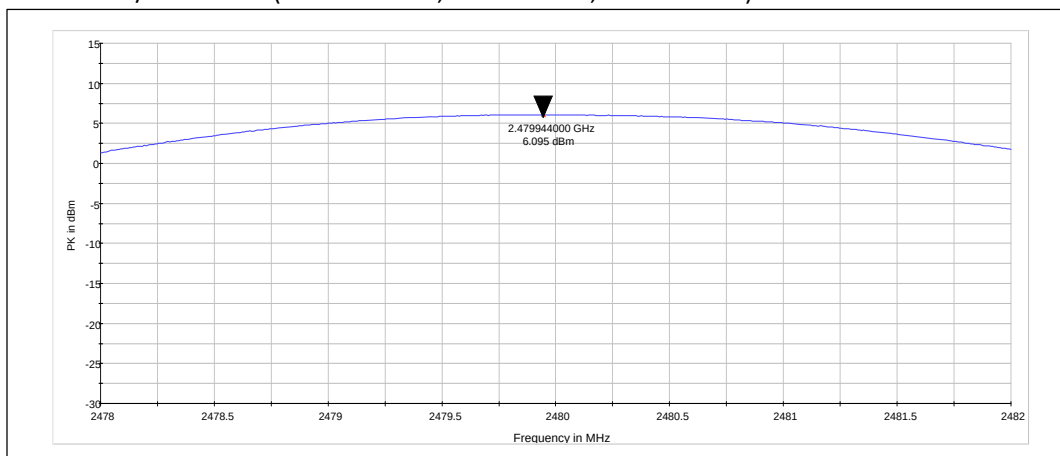

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-940, DUT 17563
Accessories with DUT numbers	AC-60E, DUT 17584 ; CA-190CD, DUT 17585 ; WH-208, DUT 17586
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 57 /102
Date of measurements	02-Aug-2013
Measured by	Tomi Lipponen

5.1. Test Setup

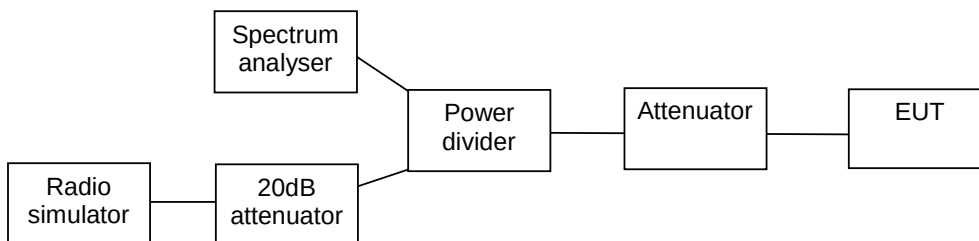

5.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

5.3. Bluetooth Test results

5.3.1 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

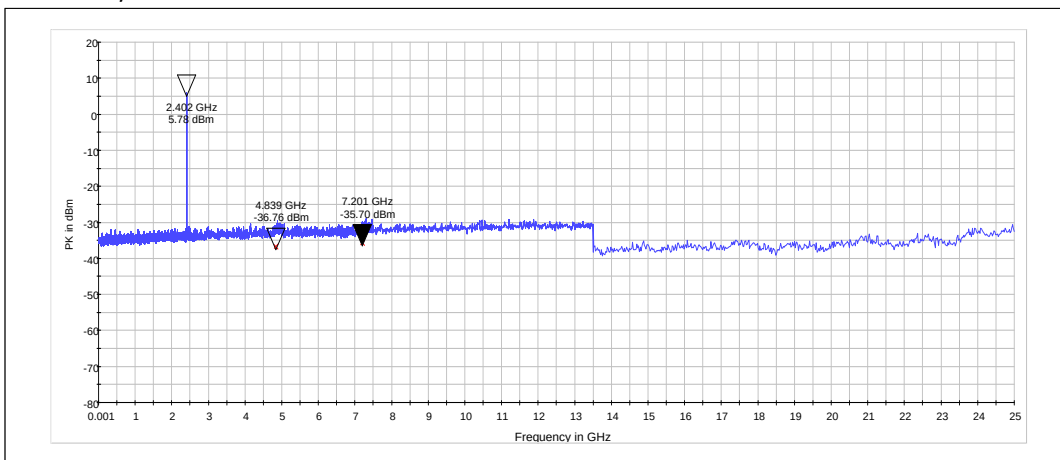

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4839.200	-36.76	PASSED
7201.200	-35.70	PASSED


Channel 40 / 2442 MHz

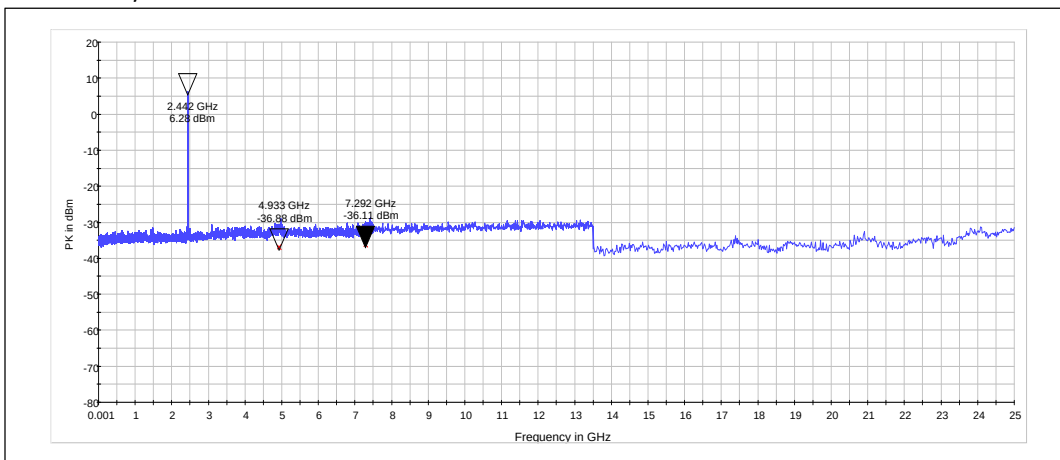

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4932.800	-36.88	PASSED
7291.800	-36.11	PASSED

Channel 78 / 2480 MHz

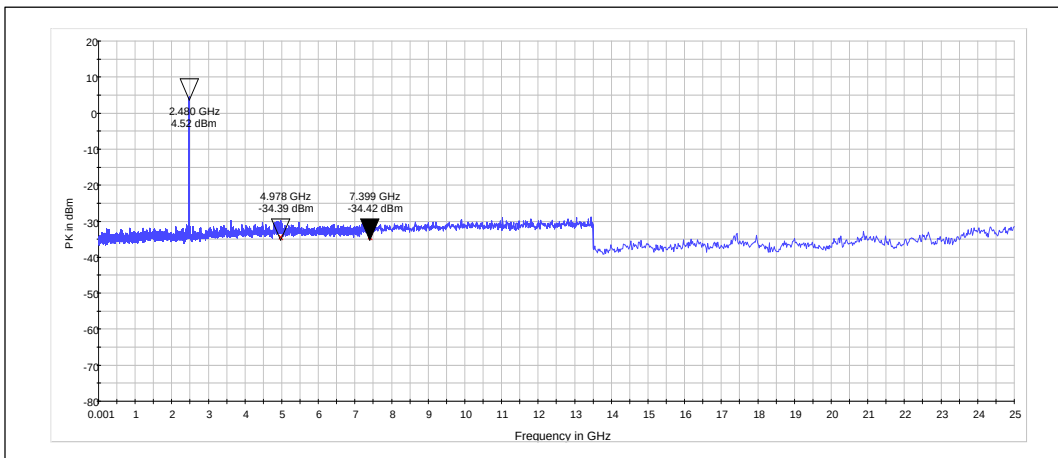


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4977.600	-34.39	PASSED
7398.600	-34.42	PASSED

5.3.2 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

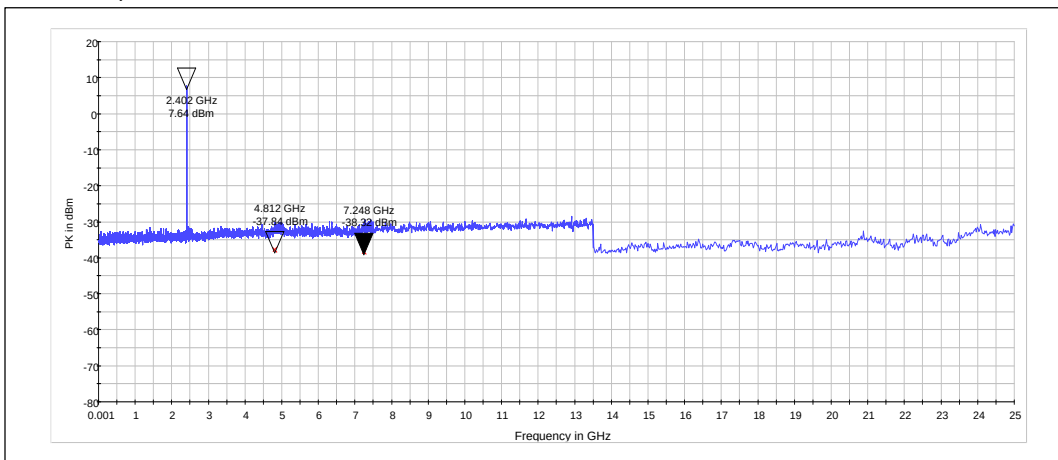

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4811.600	-37.84	PASSED
7248.000	-38.32	PASSED


Channel 40 / 2442 MHz

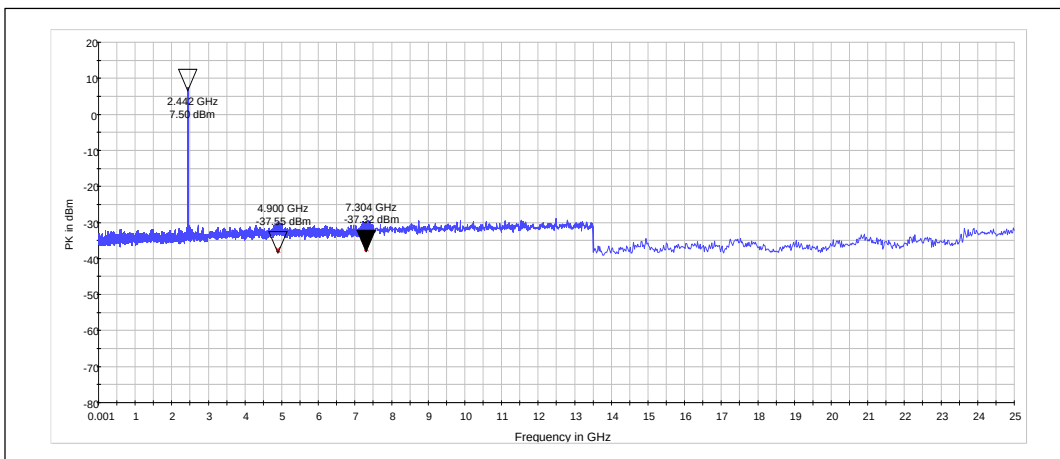

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4899.600	-37.55	PASSED
7303.800	-37.32	PASSED

Channel 78 / 2480 MHz

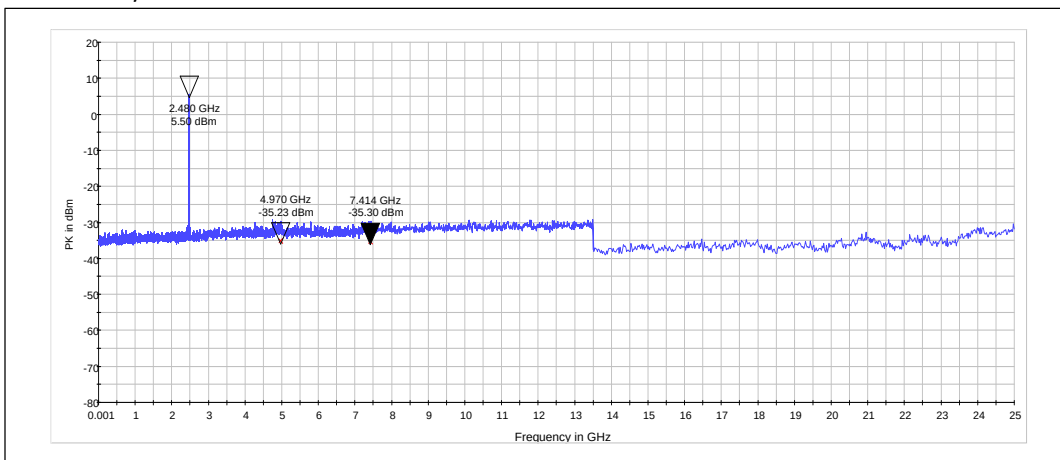

Peak (RBW: 100 kHz, VBW: 100 kHz)


Frequency [MHz]	P [dBc]	Result
4970.400	-35.23	PASSED
7414.200	-35.30	PASSED

6. AC powerline conducted emissions

FCC §15.207, RSS-GEN 7.2.2

EUT with DUT number	RM-940, DUT 17583
Accessories with DUT numbers	CA-190CD, DUT 17585 ; AC-60E, DUT 17584 ; WH-208, DUT 17586
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 65 / 101
Date of measurements	05-Aug-2013
Measured by	Tomi Lipponen

6.1. Test Setup



6.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

6.3. Bluetooth Test results

6.3.1 GSKF modulation, PRBS packet type

Channel 40 / 2442 MHz

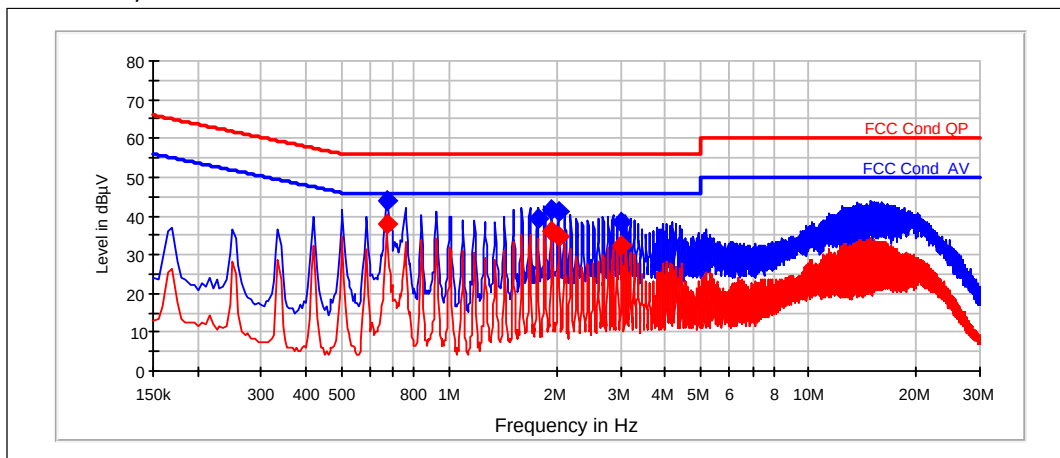

QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.67	43.82	N	PASSED
1.76	39.27	N	PASSED
1.93	41.56	N	PASSED
2.015	40.98	N	PASSED
3.02	38.56	N	PASSED


Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.67	37.7	N	PASSED
1.93	35.84	N	PASSED
2.015	34.56	N	PASSED
3.02	32.27	N	PASSED

7. 20 dB bandwidth 15.247(a)(1), A8.1 (a)

EUT with DUT number	RM-940, DUT 17563
Accessories with DUT numbers	AC-60E, DUT 17584 ; CA-190CD, DUT 17585 ; WH-208, DUT 17586
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 57 /102
Date of measurements	02-Aug-2013
Measured by	Tomi Lipponen

7.1. Test Setup

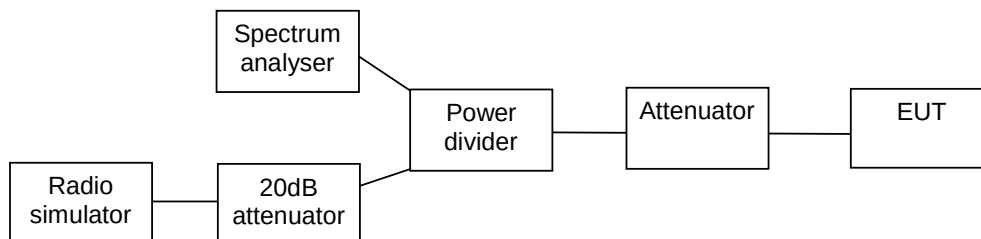

7.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

7.3. Bluetooth Test results


7.3.1 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]
0 / 2402	1300
40 / 2442	1304
78 / 2480	1300


0 / 2402

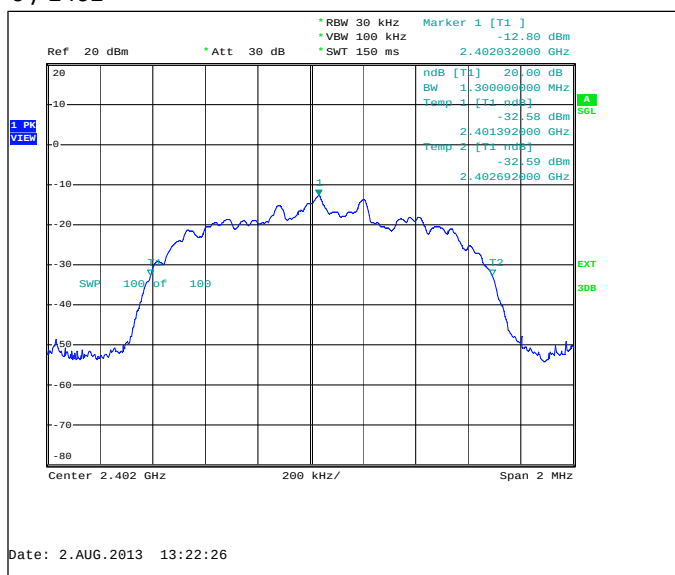

40 / 2442

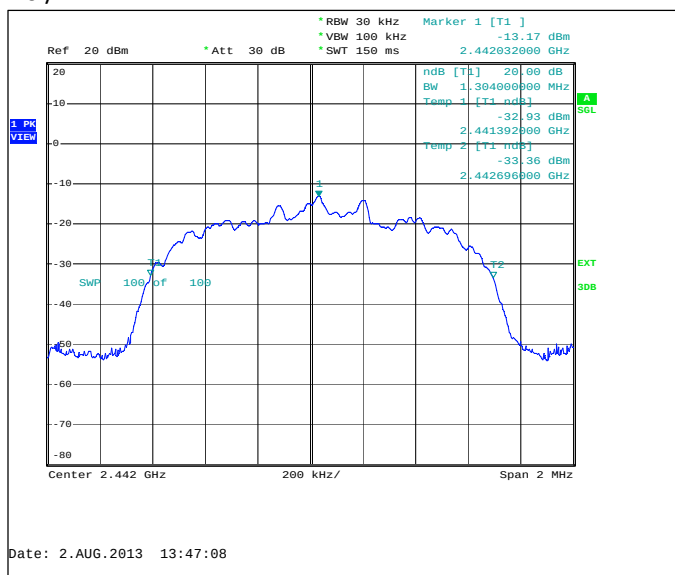


78 / 2480

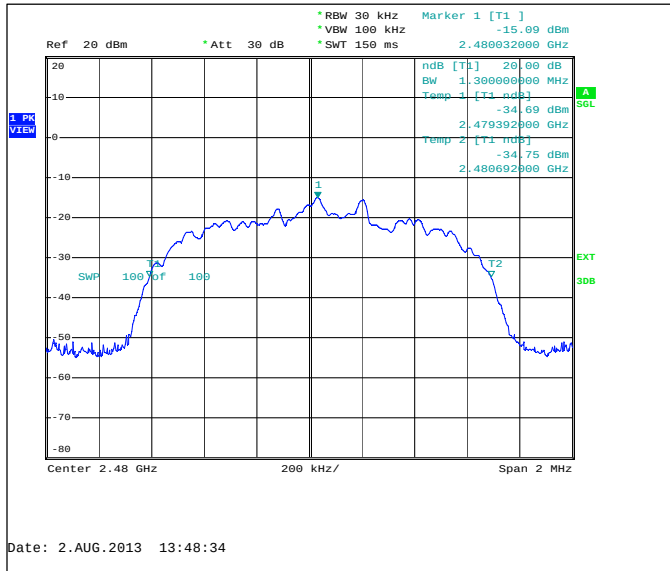


7.3.2 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]
0 / 2402	848
40 / 2442	848
78 / 2480	848


0 / 2402

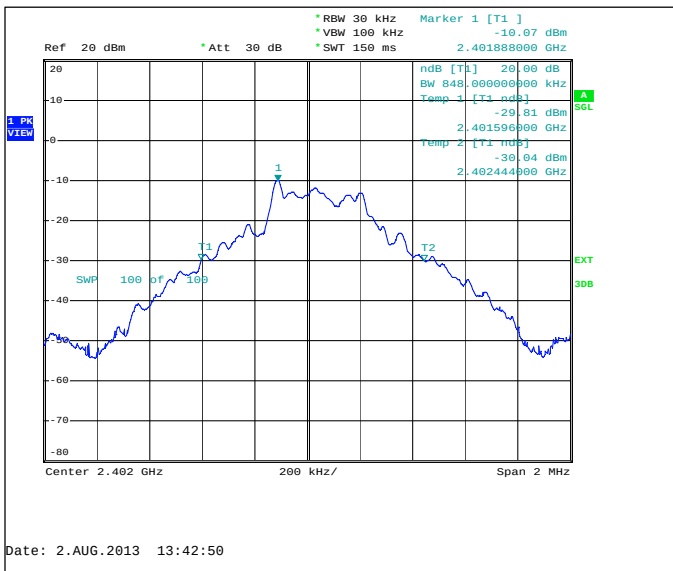

40 / 2442

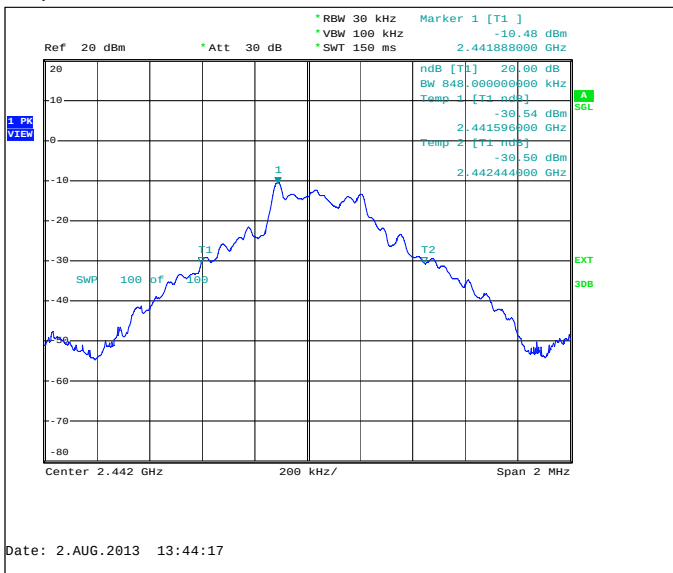

78 / 2480

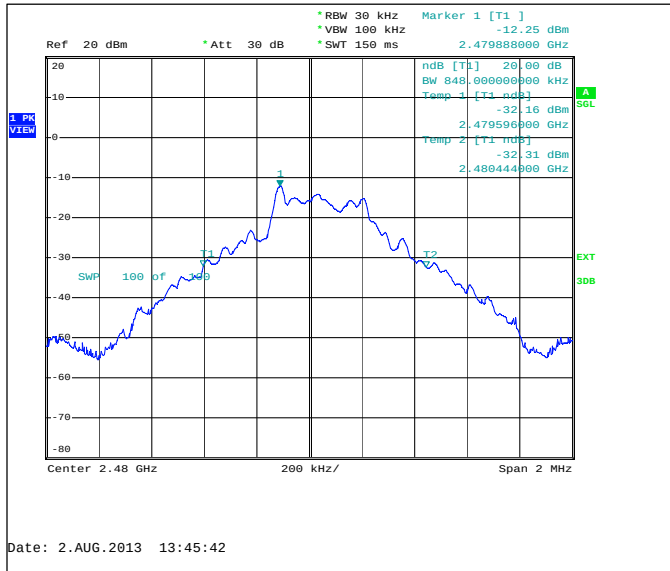


8. Carrier frequency separation

15.247(a)(1), A8.1 (b)

EUT with DUT number	RM-940, DUT 17563
Accessories with DUT numbers	AC-60E, DUT 17584 ; CA-190CD, DUT 17585 ; WH-208, DUT 17586
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 57 /102
Date of measurements	02-Aug-2013
Measured by	Tomi Lipponen

8.1. Test Setup

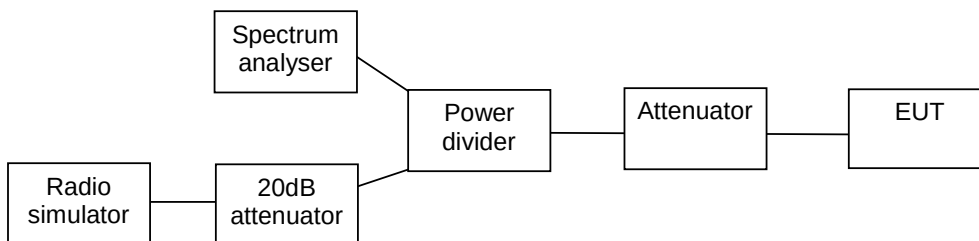

8.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

8.3. Bluetooth Test results

8.3.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
860	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

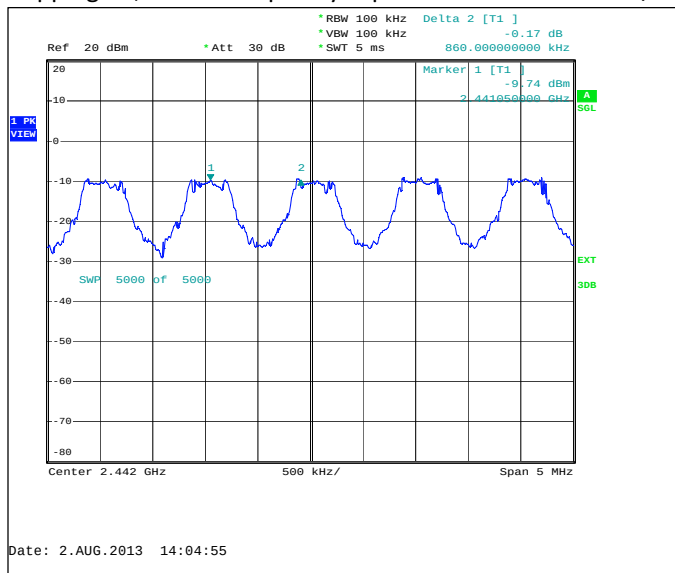

8.3.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1070	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

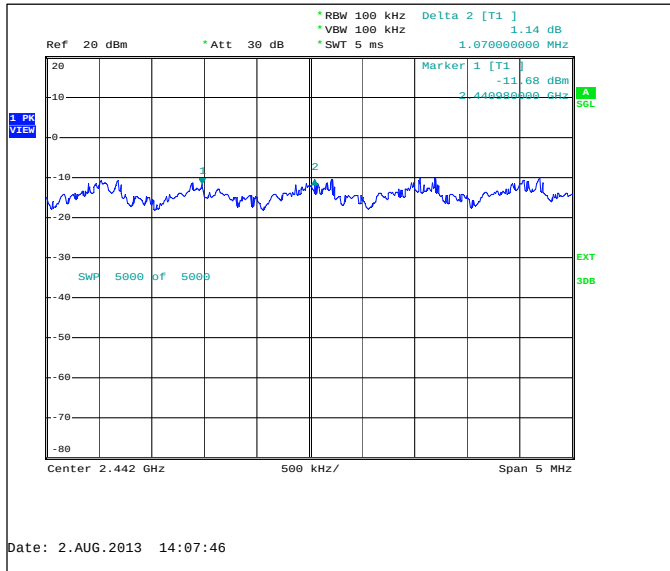


9. Number of hopping frequencies

15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-940, DUT 17563
Accessories with DUT numbers	AC-60E, DUT 17584 ; CA-190CD, DUT 17585 ; WH-208, DUT 17586
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 57 /102
Date of measurements	02-Aug-2013
Measured by	Tomi Lipponen

9.1. Test Setup

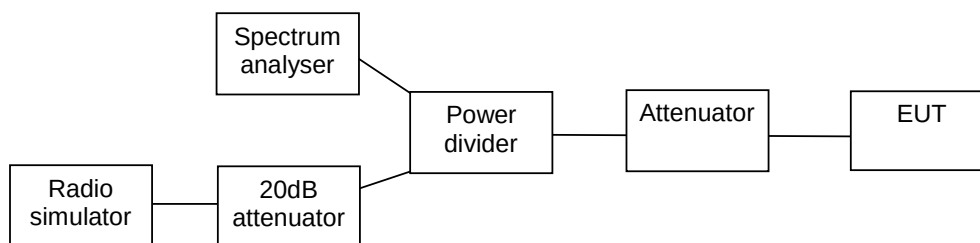

9.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
>= 15

9.3. Bluetooth Test results

9.3.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

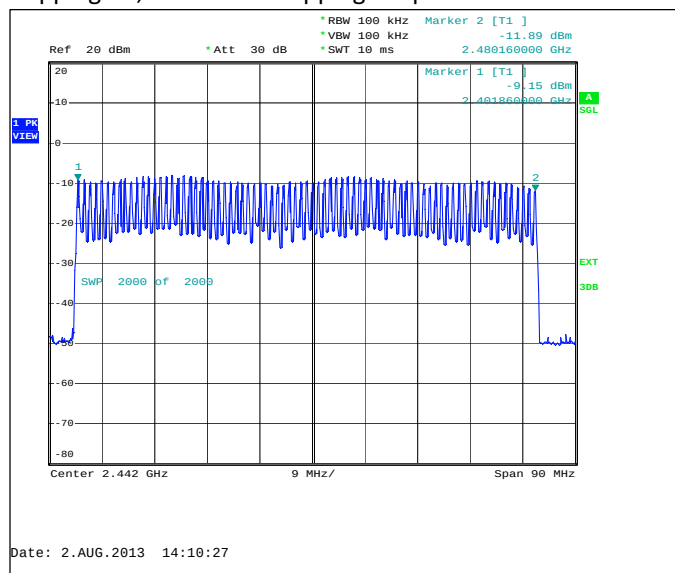

9.3.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
64	PASSED

Hopping on, number of hopping frequencies

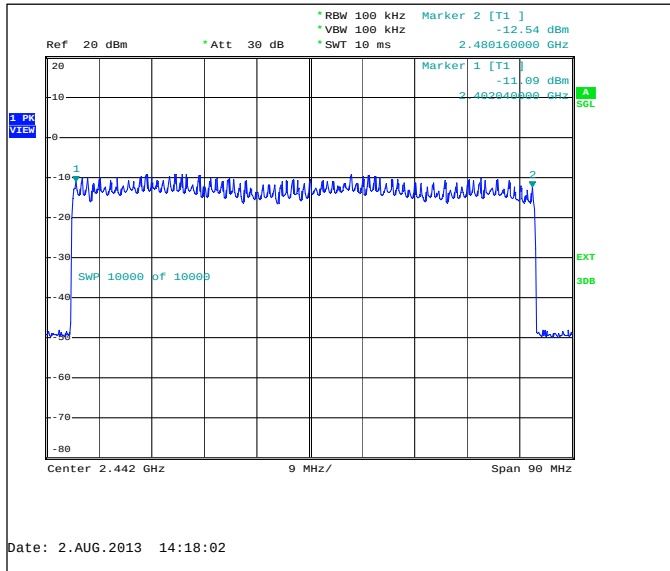


10. Time of occupancy

15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-940, DUT 17563
Accessories with DUT numbers	AC-60E, DUT 17584 ; CA-190CD, DUT 17585 ; WH-208, DUT 17586
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 57 /102
Date of measurements	02-Aug-2013
Measured by	Tomi Lipponen

10.1. Test Setup

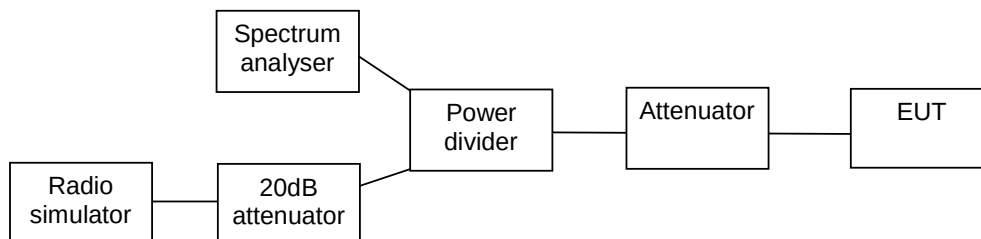

10.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
<= 0.4

10.3. Bluetooth Test results


10.3.1 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
96	3.16	0.303	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

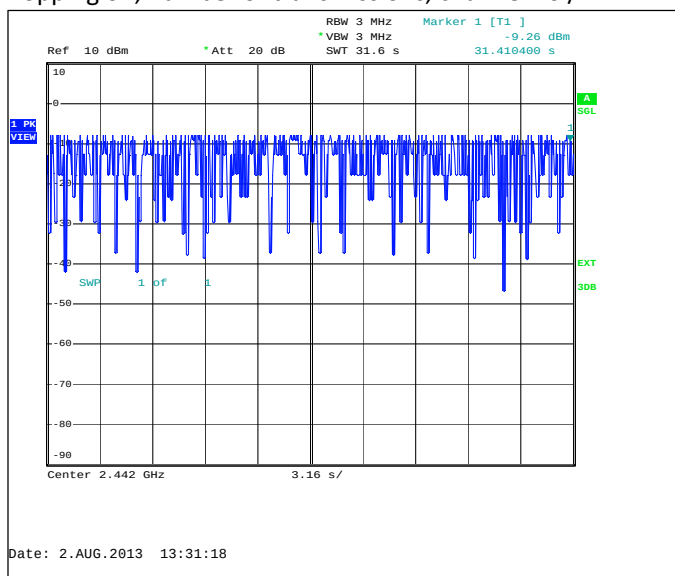


Hopping on, duration of one transmission, channel 40 / 2442 MHz

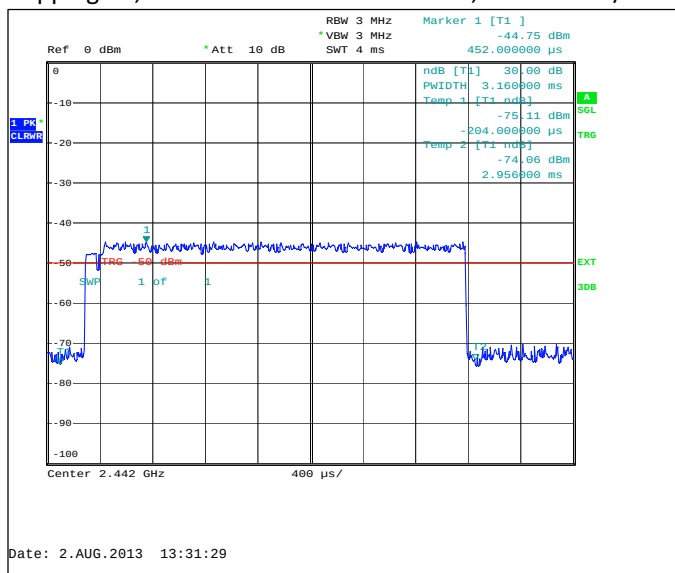


10.3.2 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
100	2.912	0.291	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

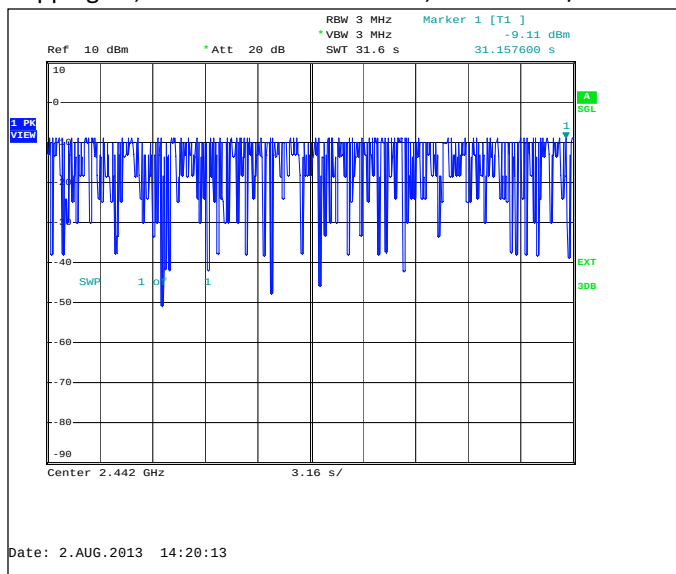

Hopping on, duration of one transmission, channel 40 / 2442 MHz

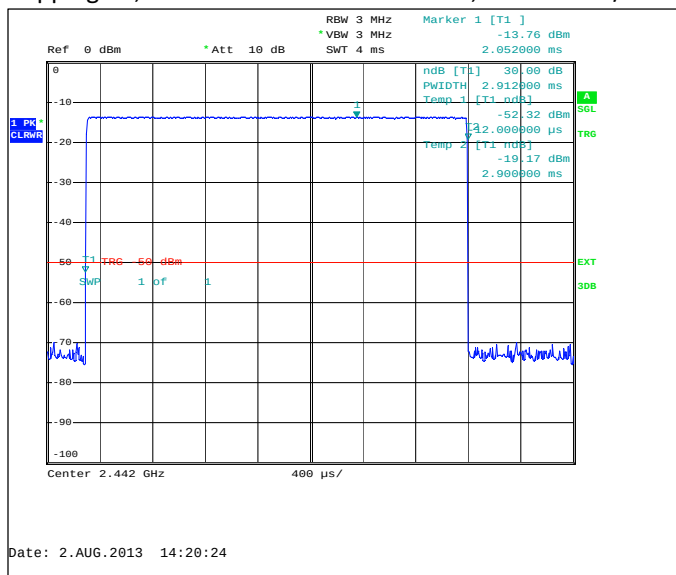

11. Test Equipment

11.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1916	Communication Tester	CMTA84	R&S	15B
1992	Signal Generator	83630B	Agilent	15C, 15B
1999	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
2039	Power Supply	PL330QMD	Thurlby	15C, 15B
2059	V-network	ESH3-Z6	R&S	-
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2206	Signal Generator	SMX	R&S	15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP-30	R&S	22/24/27, 15C
2359	Temperature Test Chamber	VT4002	Vötsch	22/24/27
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2390	Directional Coupler	DC2600	AR	-
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6012	CDN	CDN USB/c	Teseq	-
6015	Receiver	ESI	R&S	22/24, 15C, 15B
6036	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B
6044	V-network	ESH3-Z6	R&S	-
6045	Power splitter	11667B	Agilent	22/24/27, 15C
6046	Attenuator 10dB	8493C	Agilent	22/24/27, 15C
6047	Attenuator 20dB	8493C	Agilent	22/24/27, 15C
6094	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
6096	EMC Analyzer	E7405A	HP	-
6098	Signal Generator	8648C	Agilent	-
6103	Bluetooth tester	CBT	R&S	15B
6113	Signal Generator	SMF100A	R&S	22/24/27, 15C 15B
6120	Thermal Chamber	WT 20/40	Weiss	22/24/27, 15C 15B
6121	Power Splitter	HP11667B	Agilent	22/24/27, 15C 15B
6122	Power Splitter	HP11667B	Agilent	22/24/27, 15C 15B
6134	Attenuator 10dB	BW-S10-2W263+	Mini-Circuits	22/24/27, 15C
6136	Attenuator 20dB	BW-S20-2W263+	Mini-Circuits	22/24/27, 15C
10479	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B

11.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1917	Communication Tester	CMTA84	R&S	15B
1984	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B
2009	Signal Generator	SMP 22	R&S	22/24/27, 15C, 15B
2027	CDN	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	CDN	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	Thurlby	22/24/27, 15C
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22
2135	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2140	Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Antenna	3146	EMCO	22/24/27, 15C
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2176	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2353	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	15C
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	22/24/27, 15C, 15B
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
6017	Antenna	SBA 9113	Schwarzbeck	22 / 24 / 27
6037	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B
6087	Antenna	BBHA 9120D	Scharzbeck	22/24/27, 15C
6088	Antenna	VUBA 9117	Scharzbeck	22/24/27, 15C
6089	Antenna	HFH2-Z2	R&S	15C, 15B
6094	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
6103	Bluetooth tester	CBT	R&S	15B
6113	Signal Generator	SMF100A	R&S	22/24/27, 15C 15B
6115	Open switch and control unit	OSP 130	R&S	22/24/27, 15C 15B
6116	Open switch and control unit	OSP 150	R&S	22/24/27, 15C 15B
6130	Notch Filter	WRCD1880-1.1.25/50-10SS	Wainwright	22/24/27
6131	Notch Filter	WRCT902.4-0.4/40-8SS	Wainwright	-
6135	Notch Filter	WRCJV2531/2539-2523/2547-60/12SS	Wainwright	22/24/27
10479	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF immunity / Emission Software	EMC32	R&S	22/24/27, 15C, 15B