

SAR Compliance Test Report

Test report no.:	FCC_SAR_RM-1152_02	Date of report:	2015-11-13
Template version:	20.0	Number of pages:	67
Testing laboratory:	TCC Microsoft Salo Laboratory P.O.Box 303 Joensuunkatu 7E FIN-24101 SALO, FINLAND Tel. +358 71 800 8000 Fax. +358 71 80 44122	Client:	Microsoft P.O. Box 68 Sinitaival 5 FIN-33721 TAMPERE, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 46880
Responsible test engineer:	Janne Hirsimäki	Product contact person:	Juha Paukku
Measurements made by:	Janne Hirsimäki, Juha Korkeakoski, Nina Koskinen		
Tested device:	RM-1152, HW: 1540		
FCC ID:	PYARM-1152	IC:	N/A
Supplement reports:	SAR_Photo_RM-1152_03		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC published RF exposure KDB procedures RSS-102, Issue 5 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:	For the contents:		

CONTENTS

1. SUMMARY OF SAR TEST REPORT	4
1.1 TEST DETAILS	4
1.2 MAXIMUM RESULTS	4
1.2.1 Head Configuration	4
1.2.2 Body-worn 15 mm Configuration	4
1.2.3 Wireless Router 10 mm Configuration	5
1.2.4 Summary SAR data	5
1.2.5 Maximum Drift	5
1.2.6 Measurement Uncertainty	6
2. DESCRIPTION OF THE DEVICE UNDER TEST	6
2.1 BANDS AND MODES OF THE DUT	6
2.2 DUT FEATURES AND TEST REQUIREMENTS	7
3. CONDUCTED POWERS	10
3.1 GSM/GPRS/EGPRS	10
3.1.1 GSM850 Head, Body-worn 15 mm and Wireless Router 10 mm	10
3.1.2 GSM1900 Head, Body-worn 15 mm and Wireless Router 10 mm	11
3.2 WCDMA	11
3.2.1 WCDMA850 (Band 5) Head, Body-worn 15 mm and Wireless Router 10 mm	11
3.2.2 LTE2500 (Band 7) Head, Body-worn 15 mm and Wireless Router 10 mm	12
3.3 BT	15
3.4 WLAN2450	16
3.4.1 WLAN2450 Head	16
3.4.2 WLAN2450 Body-worn 15 mm and Wireless Router 10 mm	19
4. DESCRIPTION OF THE TEST EQUIPMENT	22
4.1 MEASUREMENT SYSTEM AND COMPONENTS	22
4.1.1 Isotropic E-field Probe Type ES3DV3	24
4.1.2 Isotropic E-field Probe Type EX3DV4	24
4.2 PHANTOMS	25
4.3 TISSUE SIMULANTS	25
4.3.1 Tissue Simulant Recipes	25
4.4 SYSTEM VALIDATION AND SYSTEM CHECKING	26
4.4.1 System validation status	26
4.4.2 System checking	26
4.5 TISSUE SIMULANTS USED IN THE MEASUREMENTS	29
5. DESCRIPTION OF THE TEST PROCEDURE	30
5.1 DEVICE HOLDER	30
5.2 TEST POSITIONS	31
5.2.1 Against Phantom Head	31
5.2.2 Body-worn 15 mm Configuration	31
5.2.3 Wireless Router 10 mm Configuration	31

5.3	SCAN PROCEDURES	31
5.4	SAR AVERAGING METHODS	31
6.	MEASUREMENT UNCERTAINTY	33
7.	RESULTS.....	35
7.1	THE MEASURED HEAD SAR VALUES FOR THE TEST DEVICE	35
7.1.1	GSM/GPRS/EGPRS 850 Head SAR results	35
7.1.2	WCDMA850 (Band 5) Head SAR results	37
7.1.3	GSM/GPRS/EGPRS 1900 Head SAR results	38
7.1.4	LTE2500 (Band 7) Head SAR results	40
7.1.5	WLAN2450 Head SAR results	43
7.1.6	Simultaneous Transmission SAR Test Exclusion Considerations for Head Measurements.....	45
7.1.7	Combined 1g Head SAR data	45
7.2	THE MEASURED BODY-WORN 15 MM SAR VALUES FOR THE TEST DEVICE	47
7.2.1	GSM/GPRS/EGPRS 850 Body-worn 15 mm SAR results	47
7.2.2	WCDMA850 (Band 5) Body-worn 15 mm SAR results	48
7.2.3	GSM/GPRS/EGPRS 1900 Body-worn 15 mm SAR results	49
7.2.4	LTE2500 (Band 7) Body-worn 15 mm SAR results	50
7.2.5	WLAN2450 Body-worn 15mm SAR results	52
7.2.6	Combined 1g Body-worn 15 mm SAR data	54
7.3	THE MEASURED WIRELESS ROUTER 10 MM SAR VALUES FOR THE TEST DEVICE	56
7.3.1	GSM/GPRS/EGPRS 850 Wireless Router 10 mm SAR results	56
7.3.2	WCDMA850 (Band 5) Wireless Router 10 mm SAR results	57
7.3.3	GSM/GPRS/EGPRS 1900 Wireless Router 10 mm SAR results	58
7.3.4	LTE2500 (Band 7) Wireless Router 10 mm SAR results	59
7.3.5	WLAN2450 Wireless Router 10 mm SAR results	63
1.1.1	Combined 1g Wireless Router 10 mm SAR data	65

APPENDIX A: SYSTEM CHECK SCANS

APPENDIX B: MEASUREMENT SCANS

APPENDIX C: DIELECTRIC PARAMETERS OF THE TISSUE SIMULANTS

APPENDIX D: RELEVANT PAGES FROM PROBE CALIBRATION REPORTS

APPENDIX E: RELEVANT PAGES FROM DIPOLE VALIDATION REPORTS

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2015-10-22 to 2015-11-10
HW and SW numbers of tested device	RM-1152, HW: 1540, SW: 01078.10006.15421.42000
Batteries used in testing	BV-T3G
Headsets used in testing	WH-108
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

1.2 Maximum Results

The maximum reported SAR values for Head, Body-worn 15 mm, Wireless Router 10 mm configurations are given in section 1.2.1, 1.2.2 and 1.2.3 respectively. The device conforms to the requirements of the standards when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Reported* SAR value (1g avg)	SAR limit (1g avg)	Result	Plot #
2-slot GPRS850	0.53 W/kg	1.6 W/kg	PASSED	H1
WCDMA850 (Band 5)	0.50 W/kg	1.6 W/kg	PASSED	H2
4-slot GPRS1900	0.32 W/kg	1.6 W/kg	PASSED	H3
LTE2500 (Band 7)	0.98 W/kg	1.6 W/kg	PASSED	H4
WLAN2450	0.94 W/kg	1.6 W/kg	PASSED	H5
Maximum of SPEAG combined multiband algorithm results				
LTE2500 (Band 7) + WLAN2450	1.01 W/kg	1.6 W/kg	PASSED	H6

1.2.2 Body-worn 15 mm Configuration

Mode	Reported* SAR value (1g avg)	SAR limit (1g avg)	Result	Plot #
2-slot GPRS850	0.65 W/kg	1.6 W/kg	PASSED	B1
WCDMA850 (Band 5)	0.59 W/kg	1.6 W/kg	PASSED	B2
4-slot GPRS1900	0.24 W/kg	1.6 W/kg	PASSED	B3
LTE2500 (Band 7)	0.60 W/kg	1.6 W/kg	PASSED	B4
WLAN2450	0.19 W/kg	1.6 W/kg	PASSED	B5
Maximum of SPEAG combined multiband algorithm results				
2-slot GPRS850 + WLAN2450	0.65 W/kg	1.6 W/kg	PASSED	B1

1.2.3 Wireless Router 10 mm Configuration

Mode	Reported* SAR value (1g avg)	SAR limit (1g avg)	Result	Plot #
2-slot GPRS850	0.95 W/kg	1.6 W/kg	PASSED	W1
WCDMA850 (Band 5)	0.90 W/kg	1.6 W/kg	PASSED	W2
4-slot GPRS1900	0.54 W/kg	1.6 W/kg	PASSED	W3
LTE2500 (Band 7)	1.09 W/kg	1.6 W/kg	PASSED	W4
WLAN2450	0.67 W/kg	1.6 W/kg	PASSED	W5
Maximum of SPEAG combined multiband algorithm results				
LTE2500 (Band 7) + WLAN2450	1.09 W/kg	1.6 W/kg	PASSED	W4

* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance.

1.2.4 Summary SAR data

Description	FCC-defined SAR values for the Grants of Equipment Authorization		
	PCE	DTS	NII
Maximum Head SAR values	0.98	0.94	-
{Max + Max} Simultaneous Head SAR value	1.27		
Maximum Body-worn 15 mm SAR values	0.65	0.19	-
{Max + Max} Simultaneous Body-worn 15 mm SAR value	0.84		
Maximum Product Specific (Wireless Router 10 mm) SAR values	1.09	0.67	-
{Max + Max} Simultaneous Product Specific (Wireless Router 10 mm) SAR value	1.41		
Maximum Simultaneous SAR value	1.41		
WR SAR: LTE2500 (Band 7) + WLAN2450			

Note:

PCE contains the highest results between all cellular modes (cellular, AWS and PCS bands)

DTS contains the highest results between all WLAN 2.4 GHz modes

NII contains the highest results between WLAN 5150-5250, 5250-5350, 5470-5725 and 5725-5850 MHz

1.2.5 Maximum Drift

Maximum drift during measurements	≤ 0.2 dB
-----------------------------------	----------

1.2.6 Measurement Uncertainty

Expanded Uncertainty (k=2) 95 %	± 29.8 %
---------------------------------	----------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

2.1 Bands and Modes of the DUT

Bands	Modes of Operation	Modulation Mode	Duty Cycle	Channel Bandwidth (MHz)	Transmitter Frequency Range (MHz)	Power Reduction in Wireless Router (Hotspot) Mode (dB)			
						1-slot	2-slot	3-slot	4-slot
850	GSM/GPRS	GMSK	1/8 to 4/8		824 – 849	-	-	-	-
850	EGPRS	GMSK / 8PSK	1/8 to 4/8		824 – 849	-	-	-	-
850 (Band 5)	WCDMA	QPSK	1		826 – 847	-			
850 (Band 5)	HSUPA	QPSK	1		826 – 847	-			
850 (Band 5)	DC-HSDPA	QPSK	1		826 – 847	-			
1900	GSM/GPRS	GMSK	1/8 to 4/8		1850 – 1910	-	-	-	-
1900	EGPRS	GMSK / 8PSK	1/8 to 4/8		1850 – 1910	-	-	-	-
2500 (Band 7)	LTE	QPSK / 16QAM	1	5, 10, 15, 20	2500 - 2570	-			
2450	BT	GFSK	1		2402 – 2480	-			
2450	WLAN b-mode	DSSS	1	20	2412 – 2462	-			
2450	WLAN g-mode	OFDM	1	20	2412 – 2462	-			
2450	WLAN n-mode	OFDM	1	20	2412 – 2462	-			
2450	WLAN n-mode	OFDM	1	40	2412 – 2462	-			

2.2 DUT Features and Test Requirements

Common features	Testing / Specification / KDB																	
Bands operating outside USA	These bands are not part of this filing: GSM/GPRS/EGPRS900 GSM/GPRS/EGPRS1800 WCDMA/HSUPA/DC-HSDPA2100 (Band 1) WCDMA/HSUPA/DC-HSDPA900 (Band 8) LTE2100 (Band 1) LTE1800 (Band 3) LTE900 (Band 8) LTE850 (Band 20)																	
Number of SIM cards:	1																	
Ambient temperature:	20.5 – 22.5 °C / Controlled																	
Ambient humidity (RH %):	35 – 55 % RH / Controlled																	
Output power and batteries	The device output power was set to maximum power level for all tests. A fully charged battery was used for every test sequence.																	
Test channels	In all operating bands the measurements were performed on lowest, middle and highest channels, and/or on all required test channels as defined in Published FCC KDB Procedures.																	
VOIP	This device has Voice-over-IP capability for use at the ear. Therefore SAR for data modes was evaluated against the head profile of the phantom for all communication systems.																	
Antennas	See the antenna drawing in the report SAR_Photo_RM-1152_03, Section 3. Two antennas are used for transmission of the cellular bands in diversity-Tx mode. In this mode the antennas cannot transmit at the same time. See table below for applicable antennas in each transmission band and mode. A separate single antenna is used for WLAN. All antennas are fully and separately SAR tested for individual transmission. Simultaneous transmissions with WLAN2450 are assessed separately for both cellular antennas. Same RF PA circuitry is used for both antennas and therefore same output power targets and conducted power results apply to both antennas. Control software was used to route the TX power to the chosen antenna during the SAR test sequence. <table><tr><th rowspan="2">Band</th><th colspan="2">Tx Antennas</th></tr><tr><th>Antenna 1</th><th>Antenna 2</th></tr><tr><td>GSM/GPRS/EGPRS850</td><td>✓</td><td>✓</td></tr><tr><td>WCDMA850 (Band 5)</td><td>✓</td><td>✓</td></tr><tr><td>GSM/GPRS/EGPRS1900</td><td>✓</td><td>✓</td></tr><tr><td>LTE2500 (Band 7)</td><td>✓</td><td>✓</td></tr></table>	Band	Tx Antennas		Antenna 1	Antenna 2	GSM/GPRS/EGPRS850	✓	✓	WCDMA850 (Band 5)	✓	✓	GSM/GPRS/EGPRS1900	✓	✓	LTE2500 (Band 7)	✓	✓
Band	Tx Antennas																	
	Antenna 1	Antenna 2																
GSM/GPRS/EGPRS850	✓	✓																
WCDMA850 (Band 5)	✓	✓																
GSM/GPRS/EGPRS1900	✓	✓																
LTE2500 (Band 7)	✓	✓																

(Table continues)

(Table continues)

GSM/GPRS/EGPRS	KDB 941225 D03 SAR Test Reduction Procedures for GSM/GPRS/EDGE																																						
Device Class	A																																						
GSM multi slot class	33																																						
DTM class	DTM class 11. Dual Transfer Mode was not specifically tested as the average power in multi-slot GMSK GPRS mode is always greater than, or equal to, the average power in Dual Transfer Mode in Microsoft devices.																																						
EGPRS	8PSK EGPRS mode was not measured, because maximum averaged output power is lower in 8PSK EGPRS mode than in GPRS mode.																																						
Call tester settings	CMU200 / Anritsu: MS signal was always set to maximum power: Pmax 5 for GSM850 and 0 for GSM1900.																																						
Number of slots used in testing	The number of Tx slots in all GSM/GPRS mode tests was based on tuning target/conducted power data, see Section 3. The number of slots with highest or equal highest time-average power was tested.																																						
WCDMA	KDB 941225 D01 SAR Measurement Procedures for 3G Devices																																						
WCDMA	Rel 9 Conducted power measurements for WCDMA modes have been carried out in accordance with 3GPP TS34.1083 and GPP TS 34.121-1. See conducted power results in section 3																																						
Call test settings for WCDMA	CMU200 / Anritsu: UE uplink signal was configured to 12.2kbps RMC with all TPC bit set to 1.																																						
HSUPA	SAR tests for HSUPA mode have not been performed as no HSUPA Sub-test mode has an average power > 0.25 dB above the basic WCDMA 12.2 kbps RMC mode.																																						
DC-HSDPA	SAR tests for DC-HSDPA mode have not been performed as no DC-HSDPA Sub-test mode has an average power > 0.25 dB above the basic WCDMA 12.2 kbps RMC mode.																																						
LTE	KDB 941225 D05 SAR for LTE Devices v02r02 DR07-41372																																						
LTE Category	4																																						
Call tester settings	CMW500: Uplink Power Control was set to 'Max Power'. Additional Spectrum Emission was set to 'NS_01' to disable A-MPR.																																						
LTE MPR	MPR values as stipulated in Table 6.2.3_1 of 3GPP TS 36.101 (presented below) have been incorporated into the device; these MPR values are dependent on the modulation, Channel Bandwidth and Resource Block allocations as shown: <table><caption>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</caption><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table> No additional MPR settings have been incorporated into the design of the device and therefore no A-MPR settings have been active during its testing. Conducted Power Tables in Section 3: "Nominal" column lists measured powers with MPR active. The "A-MPR active" column lists measured powers with MPR and A-MPR active (as defined by 3GPP TS 36.101).	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																

(Table continues)

(Table continues)

WLAN	KDB 248227 SAR Measurement Procedures for 802.11 a/b/g Transmitters
WLAN modes tested	The transmission modes of the device used in WLAN b-mode tests were BPSK 1 Mbps and QPSK 11 Mbps. No OFDM modes needed to be tested.
WLAN power reduction 'held to ear'	This device applies 'held to ear' power reduction for SAR compliance for WLAN2450 modes. It always applies power reduction in voice or VOIP 'held to ear' scenarios on the WLAN transmitter, and does not impact any other transmitter in the device. Head SAR is evaluated at reduced power according to the head SAR test positions. Power reduction is -4 dB in all held-to-ear scenarios and WLAN modes. All other positions are evaluated at full power.
WLAN test settings	The device was put into operation by using control software.
BT	KDB 447498 D01 General RF Exposure Guidance v05
BT Class	II
BT testing	BT power tuning target upper limit is 3.0 dBm. WLAN2450 power tuning target upper limit is 18.5 dBm. Since WLAN2450 and BT use same frequency and antenna, WLAN2450 power is 15.5 dB higher, and they cannot transmit simultaneously, the WLAN2450 standalone SAR is conservative estimation of BT SAR. As WLAN2450 SAR result is below limit, also BT SAR can be deemed to comply without further analysis or standalone measurements. Also WLAN2450+cellular bands combined SAR results can be regarded as conservative estimation of BT+cellular combined SARs. As WLAN2450+cellular combined SAR result are below limit, also BT+cellular combined SAR can be deemed to comply without further analysis.
Simultaneous transmission	KDB 447498 D01 General RF Exposure Guidance v05
In Head and Body-worn use	Simultaneous transmission of any singular cellular, PCS or AWS with WLAN2450 is possible.
Wireless Router "Hotspot" mode	Yes
In Wireless Router use	Simultaneous transmission of any singular cellular, AWS or PCS band with WLAN2450 is possible. The hotspot mode (Wireless Router mode) may operate concurrently in DTM mode with voice calls. The reported SAR test results are conservative regarding that use case, since output power in hotspot mode is equal to or lower than in normal voice and data modes. See Section 2.1 for hotspot mode power reductions. Also simultaneous transmissions with WLANs are already conservatively assessed for head and body-worn exposure conditions due to VoIP capability.
Power reduction for Wireless Router mode	There is no power reduction for Wireless Router mode.
KDBs used in testing	KDB 248227 SAR Measurement Procedures for 802.11 a/b/g Transmitters KDB 447498 D01 General RF Exposure Guidance v05 KDB 648474 D04 Handset SAR v01r01 KDB 690783 D01 SAR Listings on Grants KDB 865664 D01 SAR Measurements 100 MHz to 6 GHz v01 KDB 865664 D02 SAR Reporting v01 KDB 941225 D01 SAR Measurement Procedures for 3G Devices KDB 941225 D03 SAR Test Reduction Procedures for GSM/GPRS/EDGE KDB 941225 D05 SAR for LTE Devices v02r02 DR07-41372

3. CONDUCTED POWERS

The conducted output power of the device was measured by a separate test laboratory on the same units as used for SAR testing.

Shaded lines in the GSM tables below show which mode/configuration is used in testing.

3.1 GSM/GPRS/EGPRS

3.1.1 GSM850 Head, Body-worn 15 mm and Wireless Router 10 mm

Antenna 1 / HW: 1540

GSM 850								
SN: 004402742963105			Conducted power (dBm)			Time-averaged power (dBm)		
Slot configuration	Tuning target (dBm)	Upper limit (dBm)	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz
GSM 1-slot	32.5	32.9	32.8	32.5	32.7	23.8	23.5	23.7
GPRS 2-slot	31.0	31.4	31.3	31.0	31.1	25.3	25.0	25.1
GPRS 3-slot	29.2	29.6	29.1	29.1	29.2	24.8	24.8	24.9
GPRS 4-slot	28.0	28.4	28.1	28.1	28.2	25.1	25.1	25.2
EGPRS 1-slot	27.0	27.4	26.8	26.8	26.9	17.8	17.8	17.9
EGPRS 2-slot	26.0	26.4	26.3	26.3	26.4	20.3	20.3	20.4
EGPRS 3-slot	24.2	24.6	24.4	24.4	24.4	20.1	20.1	20.1
EGPRS 4-slot	23.0	23.4	23.2	23.3	23.3	20.2	20.3	20.3

Antenna 2 / HW: 1540

GSM 850								
SN: 004402742963105			Conducted power (dBm)			Time-averaged power (dBm)		
Slot configuration	Tuning target (dBm)	Upper limit (dBm)	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz
GSM 1-slot	32.5	32.9	32.7	32.4	32.6	23.7	23.4	23.6
GPRS 2-slot	31.0	31.4	31.2	30.9	31.0	25.2	24.9	25.0
GPRS 3-slot	29.2	29.6	29.0	29.0	29.1	24.7	24.7	24.8
GPRS 4-slot	28.0	28.4	28.0	28.0	28.1	25.0	25.0	25.1
EGPRS 1-slot	27.0	27.4	26.7	26.7	26.8	17.7	17.7	17.8
EGPRS 2-slot	26.0	26.4	26.2	26.2	26.3	20.2	20.2	20.3
EGPRS 3-slot	24.2	24.6	24.1	24.3	24.3	19.8	20.0	20.0
EGPRS 4-slot	23.0	23.4	23.1	23.2	23.2	20.1	20.2	20.2

3.1.2 GSM1900 Head, Body-worn 15 mm and Wireless Router 10 mm

Antenna 1 / HW: 1540

GSM 1900								
SN: 004402742962867			Conducted power (dBm)			Time-averaged power (dBm)		
Slot configuration	Tuning target (dBm)	Upper limit (dBm)	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz
GSM 1-slot	29.5	29.9	29.3	29.7	29.8	20.3	20.7	20.8
GPRS 2-slot	28.0	28.4	27.7	28.0	28.1	21.7	22.0	22.1
GPRS 3-slot	26.2	26.6	26.1	26.3	26.4	21.8	22.0	22.1
GPRS 4-slot	25.0	25.4	24.9	25.1	25.2	21.9	22.1	22.2
EGRPS 1-slot	25.5	25.9	25.4	25.6	25.9	16.4	16.6	16.9
EGPRS 2-slot	25.5	25.9	25.3	25.5	25.8	19.3	19.5	19.8
EGPRS 3-slot	24.2	24.6	23.9	24.2	24.4	19.6	19.9	20.1
EGPRS 4-slot	23.0	23.4	22.8	23.1	23.4	19.8	20.1	20.4

Antenna 2 / HW: 1540

GSM 1900								
SN: 004402742962867			Conducted power (dBm)			Time-averaged power (dBm)		
Slot configuration	Tuning target (dBm)	Upper limit (dBm)	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz
GSM 1-slot	29.5	29.9	29.0	29.4	29.5	20.0	20.4	20.5
GPRS 2-slot	28.0	28.4	27.4	27.7	27.8	21.4	21.7	21.8
GPRS 3-slot	26.2	26.6	25.8	26.0	26.1	21.5	21.7	21.8
GPRS 4-slot	25.0	25.4	24.6	24.8	24.9	21.6	21.8	21.9
EGRPS 1-slot	25.5	25.9	25.1	25.3	25.6	16.1	16.3	16.6
EGPRS 2-slot	25.5	25.9	25.0	25.2	25.5	19.0	19.2	19.5
EGPRS 3-slot	24.2	24.6	23.6	23.9	24.1	19.3	19.6	19.8
EGPRS 4-slot	23.0	23.4	22.5	22.8	23.1	19.5	19.8	20.1

3.2 WCDMA

3.2.1 WCDMA850 (Band 5) Head, Body-worn 15 mm and Wireless Router 10 mm

Antenna 1 / HW: 1540

SN: 004402742963105		WCDMA 5			
Mode	Tuning target (dBm)	Upper limit (dBm)	CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz
WCDMA	23.5	23.9	23.8	23.8	23.5
HSUPA Sub-mode 1	22.5	22.9	22.4	22.7	22.5
HSUPA Sub-mode 2	20.5	20.9	21.8	21.2	21.2
HSUPA Sub-mode 3	21.5	21.9	21.0	20.9	21.4
HSUPA Sub-mode 4	20.5	20.9	22.3	22.3	22.1
HSUPA Sub-mode 5	22.5	22.9	22.8	22.8	22.6
DC-HSDPA Sub-mode 1	22.5	22.9	22.8	22.7	22.6
DC-HSDPA Sub-mode 2	22.5	22.9	22.8	22.7	22.6
DC-HSDPA Sub-mode 3	22	22.4	22.2	22.2	22.1
DC-HSDPA Sub-mode 4	22	22.4	22.2	22.2	22.1

Antenna 2 / HW: 1540

SN: 004402742963105					
WCDMA 5					
Mode	Tuning target (dBm)	Upper limit (dBm)	CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz
WCDMA	23.5	23.9	23.6	23.6	23.3
HSUPA Sub-mode 1	22.5	22.9	22.2	22.5	22.3
HSUPA Sub-mode 2	20.5	20.9	21.6	21.0	21.0
HSUPA Sub-mode 3	21.5	21.9	20.9	20.7	21.2
HSUPA Sub-mode 4	20.5	20.9	22.2	22.1	21.9
HSUPA Sub-mode 5	22.5	22.9	22.6	22.6	22.4
DC-HSDPA Sub-mode 1	22.5	22.9	22.6	22.5	22.4
DC-HSDPA Sub-mode 2	22.5	22.9	22.6	22.5	22.4
DC-HSDPA Sub-mode 3	22	22.4	22.0	22.0	21.9
DC-HSDPA Sub-mode 4	22	22.4	22.0	22.0	21.9

3.2.2 LTE2500 (Band 7) Head, Body-worn 15 mm and Wireless Router 10 mm

Antenna 1 / HW: 1540

SN: 004402742962883						Nominal			A-MPR active		
Band / BW	Modulation	RB Allocation	RB Offset	Tuning target (dBm)	Upper limit (dBm)	Ch20775 / 2502.5 MHz	Ch21100 / 2535 MHz	Ch21425 / 2567.5 MHz	Ch20775 / 2502.5 MHz	Ch21100 / 2535 MHz	Ch21425 / 2567.5 MHz
LTE7 5 MHz	QPSK	1	0	23.0	23.4	23.2	23.2	22.9			
		1	12	23.0	23.4	23.2	23.1	22.8			
		1	24	23.0	23.4	23.1	23.0	22.8			
		12	0	22.0	22.4	22.2	22.2	21.9			
		12	6	22.0	22.4	22.2	22.1	22.0			
		12	13	22.0	22.4	22.2	22.0	22.0			
		25	0	22.0	22.4	22.2	22.2	21.9			
	16QAM	1	0	22.0	22.4	22.6	22.4	22.2			
		1	12	22.0	22.4	22.5	22.3	22.2			
		1	24	22.0	22.4	22.6	22.4	22.2			
		12	0	21.0	21.4	21.2	21.1	20.8			
		12	6	21.0	21.4	21.2	21.1	20.9			
		12	13	21.0	21.4	21.2	21.0	20.8			
		25	0	21.0	21.4	21.2	21.2	21.0			
		25	0	21.0	21.4	21.2	21.2	21.0			

SN: 004402742962883						Nominal			A-MPR active		
Band / BW	Modulation	RB Allocation	RB Offset	Tuning target (dBm)	Upper limit (dBm)	Ch20800 / 2505 MHz	Ch21100 / 2535 MHz	Ch21400 / 2565 MHz	Ch20800 / 2505 MHz	Ch21100 / 2535 MHz	Ch21400 / 2565 MHz
LTE7 10 MHz	QPSK	1	0	23.0	23.4	23.0	23.3	22.9			
		1	24	23.0	23.4	23.2	23.0	23.1			
		1	49	23.0	23.4	23.1	23.2	23.0			
		25	0	22.0	22.4	22.1	22.3	22.0			
		25	12	22.0	22.4	22.0	22.2	22.1			
		25	25	22.0	22.4	22.1	22.2	22.2			
		50	0	22.0	22.4	22.0	22.2	22.1			
	16QAM	1	0	22.0	22.4	22.5	22.6	22.4			
		1	24	22.0	22.4	22.6	22.6	22.6			
		1	49	22.0	22.4	22.3	22.3	22.6			
		25	0	21.0	21.4	21.2	21.4	21.1			
		25	12	21.0	21.4	21.1	21.2	21.0			
		25	25	21.0	21.4	21.2	21.2	21.1			
		50	0	21.0	21.4	21.2	21.3	21.1			
		50	0	21.0	21.4	21.2	21.3	21.1			

(LTE7/Antenna 1 table continues)

(LTE7/Antenna 1 table continues)

SN: 004402742962883						Nominal			A-MPR active		
Band / BW	Modulation	RB Allocation	RB Offset	Tuning target (dBm)	Upper limit (dBm)	Ch20825 / 2507.5 MHz	Ch21100 / 2535 MHz	Ch21375 / 2562.5 MHz	Ch20825 / 2507.5 MHz	Ch21100 / 2535 MHz	Ch21375 / 2562.5 MHz
LTE7 15 MHz	QPSK	1	0	23.0	23.4	23.2	23.4	22.9			
		1	36	23.0	23.4	23.0	23.0	22.8			
		1	74	23.0	23.4	23.3	23.0	23.0			
		36	0	22.0	22.4	22.4	22.3	22.0			
		36	18	22.0	22.4	22.3	22.1	22.1			
		36	38	22.0	22.4	22.4	22.1	22.1			
		75	0	22.0	22.4	22.2	22.2	22.1			
	16QAM	1	0	22.0	22.4	22.8	22.4	22.7			
		1	36	22.0	22.4	22.8	22.2	22.3			
		1	74	22.0	22.4	22.8	22.3	22.6			
		36	0	21.0	21.4	21.4	21.3	21.1			
		36	18	21.0	21.4	21.4	21.2	21.1			
		36	38	21.0	21.4	21.4	21.2	21.2			
		75	0	21.0	21.4	21.3	21.2	21.1			
SN: 004402742962883						Nominal			A-MPR active		
Band / BW	Modulation	RB Allocation	RB Offset	Tuning target (dBm)	Upper limit (dBm)	Ch20850 / 2510 MHz	Ch21100 / 2535 MHz	Ch21350 / 2560 MHz	Ch20850 / 2510 MHz	Ch21100 / 2535 MHz	Ch21350 / 2560 MHz
LTE7 20 MHz	QPSK	1	0	23.0	23.4	23.3	23.4	23.0			
		1	49	23.0	23.4	23.3	23.2	23.0			
		1	99	23.0	23.4	23.2	23.0	23.2			
		50	0	22.0	22.4	22.2	22.3	22.1			
		50	24	22.0	22.4	22.3	22.2	22.2			
		50	50	22.0	22.4	22.3	22.1	22.3			
		100	0	22.0	22.4	22.4	22.3	22.2			
	16QAM	1	0	22.0	22.4	23.0	23.0	22.1			
		1	49	22.0	22.4	22.9	22.8	22.8			
		1	99	22.0	22.4	22.7	22.2	22.6			
		50	0	21.0	21.4	21.4	21.3	21.1			
		50	24	21.0	21.4	21.4	21.2	21.2			
		50	50	21.0	21.4	21.4	21.2	21.2			
		100	0	21.0	21.4	21.5	21.3	21.2			

Antenna 2 / HW: 1540

SN: 004402742962883						Nominal			A-MPR active		
Band / BW	Modulation	RB Allocation	RB Offset	Tuning target (dBm)	Upper limit (dBm)	Ch20775 / 2502.5 MHz	Ch21100 / 2535 MHz	Ch21425 / 2567.5 MHz	Ch20775 / 2502.5 MHz	Ch21100 / 2535 MHz	Ch21425 / 2567.5 MHz
LTE7 5 MHz	QPSK	1	0	23.0	23.4	22.8	22.8	22.5			
		1	12	23.0	23.4	22.8	22.7	22.4			
		1	24	23.0	23.4	22.7	22.6	22.4			
		12	0	22.0	22.4	21.8	21.8	21.5			
		12	6	22.0	22.4	21.8	21.7	21.6			
		12	13	22.0	22.4	21.8	21.6	21.6			
		25	0	22.0	22.4	21.8	21.8	21.5			
	16QAM	1	0	22.0	22.4	22.2	22.0	21.8			
		1	12	22.0	22.4	22.1	21.9	21.8			
		1	24	22.0	22.4	22.2	22.0	21.8			
		12	0	21.0	21.4	20.8	20.7	20.4			
		12	6	21.0	21.4	20.8	20.7	20.5			
		12	13	21.0	21.4	20.8	20.6	20.4			
		25	0	21.0	21.4	20.8	20.8	20.6			
SN: 004402742962883						Nominal			A-MPR active		
Band / BW	Modulation	RB Allocation	RB Offset	Tuning target (dBm)	Upper limit (dBm)	Ch20800 / 2505 MHz	Ch21100 / 2535 MHz	Ch21400 / 2565 MHz	Ch20800 / 2505 MHz	Ch21100 / 2535 MHz	Ch21400 / 2565 MHz
LTE7 10 MHz	QPSK	1	0	23.0	23.4	22.6	22.9	22.5			
		1	24	23.0	23.4	22.8	22.8	22.7			
		1	49	23.0	23.4	22.7	22.6	22.6			
		25	0	22.0	22.4	21.7	21.9	21.6			
		25	12	22.0	22.4	21.6	21.8	21.7			
		25	25	22.0	22.4	21.7	21.8	21.8			
		50	0	22.0	22.4	21.6	21.8	21.7			
	16QAM	1	0	22.0	22.4	22.1	22.2	22.0			
		1	24	22.0	22.4	22.2	22.2	22.2			
		1	49	22.0	22.4	21.9	21.9	22.2			
		25	0	21.0	21.4	20.8	21.0	20.7			
		25	12	21.0	21.4	20.7	20.8	20.6			
		25	25	21.0	21.4	20.8	20.8	20.7			
		50	0	21.0	21.4	20.8	20.9	20.7			
SN: 004402742962883						Nominal			A-MPR active		
Band / BW	Modulation	RB Allocation	RB Offset	Tuning target (dBm)	Upper limit (dBm)	Ch20825 / 2507.5 MHz	Ch21100 / 2535 MHz	Ch21375 / 2562.5 MHz	Ch20825 / 2507.5 MHz	Ch21100 / 2535 MHz	Ch21375 / 2562.5 MHz
LTE7 15 MHz	QPSK	1	0	23.0	23.4	22.8	23.0	22.5			
		1	36	23.0	23.4	22.6	22.6	22.4			
		1	74	23.0	23.4	22.9	22.6	22.6			
		36	0	22.0	22.4	22.0	21.9	21.6			
		36	18	22.0	22.4	21.9	21.7	21.7			
		36	38	22.0	22.4	22.0	21.7	21.7			
		75	0	22.0	22.4	21.8	21.8	21.7			
	16QAM	1	0	22.0	22.4	22.4	22.0	22.3			
		1	36	22.0	22.4	22.4	21.8	21.9			
		1	74	22.0	22.4	22.4	21.9	22.2			
		36	0	21.0	21.4	21.0	20.9	20.7			
		36	18	21.0	21.4	21.0	20.8	20.7			
		36	38	21.0	21.4	21.0	20.8	20.8			
		75	0	21.0	21.4	20.9	20.8	20.7			

(LTE7/Antenna 2 table continues)

(LTE7/Antenna 2 table continues)

SN: 004402742962883						Nominal			A-MPR active		
Band / BW	Modulation	RB Allocation	RB Offset	Tuning target (dBm)	Upper limit (dBm)	Ch20850 / 2510 MHz	Ch21100 / 2535 MHz	Ch21350 / 2560 MHz	Ch20850 / 2510 MHz	Ch21100 / 2535 MHz	Ch21350 / 2560 MHz
LTE7 20 MHz	QPSK	1	0	23.0	23.4	22.9	23.0	22.6			
		1	49	23.0	23.4	22.9	22.8	22.6			
		1	99	23.0	23.4	22.8	22.6	22.8			
		50	0	22.0	22.4	21.8	21.9	21.7			
		50	24	22.0	22.4	21.9	21.8	21.8			
		50	50	22.0	22.4	21.9	21.7	21.9			
		100	0	22.0	22.4	22.0	21.9	21.8			
	16QAM	1	0	22.0	22.4	22.6	22.6	21.7			
		1	49	22.0	22.4	22.5	22.4	22.4			
		1	99	22.0	22.4	22.3	21.8	22.2			
		50	0	21.0	21.4	21.0	20.9	20.7			
		50	24	21.0	21.4	21.0	20.8	20.8			
		50	50	21.0	21.4	21.0	20.8	20.8			
		100	0	21.0	21.4	21.1	20.9	20.8			

3.3 BT

BT	Tuning target (dBm)	Upper limit (dBm)
	1.5	3.0

3.4 WLAN2450

Note: Channels 12 and 13 are not operational in US, those results should be omitted for this filing.

3.4.1 WLAN2450 Head

Tuning targets for Head / Antenna 1 / HW: 1540

WLAN 2.4 GHz: 20 MHz channel bandwidth													
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	Tuning target (dBm)							
						CH 1	CH 2	CH 6	CH 7	CH 10	CH 11	CH 12	CH 13
802.11b			DSSS	BPSK	1	13.0	13.0	13.0	13.0	13.0	13.0	0.0	0.0
802.11b			DSSS	QPSK	2	13.0	13.0	13.0	13.0	13.0	13.0	0.0	0.0
802.11b			DSSS	QPSK	5.5	13.0	13.0	13.0	13.0	13.0	13.0	0.0	0.0
802.11b			DSSS	QPSK	11	13.0	13.0	13.0	13.0	13.0	13.0	0.0	0.0
802.11g			OFDM	BPSK	6	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11g			OFDM	BPSK	9	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11g			OFDM	QPSK	12	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11g			OFDM	QPSK	18	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11g			OFDM	16QAM	24	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11g			OFDM	16QAM	36	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11g			OFDM	64QAM	48	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11g			OFDM	64QAM	54	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	0	1	OFDM	BPSK	6.5 / 7.2	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	1	1	OFDM	QPSK	13.0 / 14.4	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	2	1	OFDM	QPSK	19.5 / 21.7	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	3	1	OFDM	16QAM	26.0 / 28.9	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	4	1	OFDM	16QAM	39.0 / 43.3	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	5	1	OFDM	64QAM	52.0 / 57.8	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	6	1	OFDM	64QAM	58.5 / 65.0	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	7	1	OFDM	64QAM	65.0 / 72.2	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
WLAN 2.4 GHz: 40 MHz channel bandwidth													
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	Tuning target (dBm)							
						CH 3 (1...5)	CH 4 (2...6)	CH 5 (3...7)	CH 6 (4...8)	CH 7 (5...9)	CH 8 (6...10)	CH 9 (7...11)	CH 11 (9...13)
802.11n	0	1	OFDM	BPSK	13.5 / 15.0	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	1	1	OFDM	QPSK	27.0 / 30.0	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	2	1	OFDM	QPSK	40.5 / 45.0	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	3	1	OFDM	16QAM	54.0 / 60.0	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	4	1	OFDM	16QAM	81.0 / 90.0	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	5	1	OFDM	64QAM	108.0 / 120.0	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	6	1	OFDM	64QAM	121.5 / 135.0	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0
802.11n	7	1	OFDM	64QAM	135.0 / 150.0	11.0	11.0	11.0	11.0	11.0	11.0	0.0	0.0

Measured conducted output powers for Head / Antenna 1 / HW: 1540

WLAN 2.4 GHz: 20 MHz channel bandwidth													
SN: 004402742967882						Measured value (dBm)							
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	CH 1	CH 2	CH 6	CH 7	CH 10	CH 11	CH 12	CH 13
802.11b			DSSS	BPSK	1	13.5	13.4	13.0	13.5	13.5	13.3		
802.11b			DSSS	QPSK	2	13.5	13.4	13.0	13.4	13.5	13.3		
802.11b			DSSS	QPSK	5.5	13.5	13.4	13.0	13.4	13.5	13.3		
802.11b			DSSS	QPSK	11	13.5	13.4	13.0	13.4	13.5	13.3		
802.11g			OFDM	BPSK	6	11.4	11.3	11.0	11.4	11.5	11.2		
802.11g			OFDM	BPSK	9	11.5	11.3	11.0	11.4	11.5	11.3		
802.11g			OFDM	QPSK	12	11.5	11.4	11.0	11.4	11.6	11.3		
802.11g			OFDM	QPSK	18	11.6	11.4	11.1	11.5	11.6	11.3		
802.11g			OFDM	16QAM	24	11.6	11.4	11.0	11.6	11.6	11.4		
802.11g			OFDM	16QAM	36	11.7	11.7	11.2	11.6	11.7	11.4		
802.11g			OFDM	64QAM	48	11.8	11.6	11.2	11.7	11.8	11.5		
802.11g			OFDM	64QAM	54	11.6	11.7	11.2	11.6	11.7	11.4		
802.11n	0	1	OFDM	BPSK	6.5 / 7.2	11.6	11.5	11.0	11.5	11.6	11.4		
802.11n	1	1	OFDM	QPSK	13.0 / 14.4	11.6	11.5	11.0	11.5	11.6	11.3		
802.11n	2	1	OFDM	QPSK	19.5 / 21.7	11.6	11.5	11.1	11.6	11.7	11.5		
802.11n	3	1	OFDM	16QAM	26.0 / 28.9	11.8	11.6	11.2	11.5	11.7	11.5		
802.11n	4	1	OFDM	16QAM	39.0 / 43.3	11.6	11.6	11.1	11.5	11.8	11.5		
802.11n	5	1	OFDM	64QAM	52.0 / 57.8	11.7	11.6	11.0	11.6	11.8	11.6		
802.11n	6	1	OFDM	64QAM	58.5 / 65.0	11.8	11.5	11.2	11.7	11.8	11.6		
802.11n	7	1	OFDM	64QAM	65.0 / 72.2	11.9	11.6	11.2	11.7	11.9	11.6		

WLAN 2.4 GHz: 40 MHz channel bandwidth														
SN: 004402742967882						Measured value (dBm)								
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	CH 3 (1...5)	CH 4 (2...6)	CH 5 (3...7)	CH 6 (4...8)	CH 7 (5...9)	CH 8 (6...10)	CH 9 (7...11)	CH 10 (8...12)	CH 11 (9...13)
802.11n	0	1	OFDM	BPSK	13.5 / 15.0	11.1	11.0	11.0	11.0	11.2	11.1	11.5		
802.11n	1	1	OFDM	QPSK	27.0 / 30.0	11.2	11.1	11.0	11.0	11.3	11.2	11.6		
802.11n	2	1	OFDM	QPSK	40.5 / 45.0	11.3	11.2	11.1	11.0	11.4	11.3	11.7		
802.11n	3	1	OFDM	16QAM	54.0 / 60.0	11.3	11.2	11.0	11.0	11.4	11.3	11.6		
802.11n	4	1	OFDM	16QAM	81.0 / 90.0	11.4	11.2	11.2	11.1	11.5	11.4	11.7		
802.11n	5	1	OFDM	64QAM	108.0 / 120.0	11.3	11.3	11.2	11.1	11.5	11.4	11.8		
802.11n	6	1	OFDM	64QAM	121.5 / 135.0	11.5	11.3	11.2	11.1	11.5	11.3	11.8		
802.11n	7	1	OFDM	64QAM	135.0 / 150.0	11.4	11.3	11.3	11.0	11.6	11.5	11.9		

Upper limits for Head / Antenna 1 / HW: 1540

WLAN 2.4 GHz: 20 MHz channel bandwidth													
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	Upper limit of tuning target (dBm)							
						CH 1	CH 2	CH 6	CH 7	CH 10	CH 11	CH 12	CH 13
802.11b			DSSS	BPSK	1	14.5	14.5	14.5	14.5	14.5	14.5	1.5	1.5
802.11b			DSSS	QPSK	2	14.5	14.5	14.5	14.5	14.5	14.5	1.5	1.5
802.11b			DSSS	QPSK	5.5	14.5	14.5	14.5	14.5	14.5	14.5	1.5	1.5
802.11b			DSSS	QPSK	11	14.5	14.5	14.5	14.5	14.5	14.5	1.5	1.5
802.11g			OFDM	BPSK	6	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11g			OFDM	BPSK	9	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11g			OFDM	QPSK	12	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11g			OFDM	QPSK	18	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11g			OFDM	16QAM	24	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11g			OFDM	16QAM	36	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11g			OFDM	64QAM	48	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11g			OFDM	64QAM	54	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11n	0	1	OFDM	BPSK	6.5 / 7.2	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11n	1	1	OFDM	QPSK	13.0 / 14.4	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11n	2	1	OFDM	QPSK	19.5 / 21.7	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11n	3	1	OFDM	16QAM	26.0 / 28.9	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11n	4	1	OFDM	16QAM	39.0 / 43.3	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11n	5	1	OFDM	64QAM	52.0 / 57.8	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11n	6	1	OFDM	64QAM	58.5 / 65.0	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
802.11n	7	1	OFDM	64QAM	65.0 / 72.2	12.5	12.5	12.5	12.5	12.5	12.5	1.5	1.5
WLAN 2.4 GHz: 40 MHz channel bandwidth													
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	Upper limit of tuning target (dBm)							
						CH 3 (1...5)	CH 4 (2...6)	CH 5 (3...7)	CH 6 (4...8)	CH 7 (5...9)	CH 8 (6...10)	CH 9 (7...11)	CH 10 (8...12)
802.11n	0	1	OFDM	BPSK	13.5 / 15.0	12.5	12.5	12.5	12.5	12.5	12.5	12.5	1.5
802.11n	1	1	OFDM	QPSK	27.0 / 30.0	12.5	12.5	12.5	12.5	12.5	12.5	12.5	1.5
802.11n	2	1	OFDM	QPSK	40.5 / 45.0	12.5	12.5	12.5	12.5	12.5	12.5	12.5	1.5
802.11n	3	1	OFDM	16QAM	54.0 / 60.0	12.5	12.5	12.5	12.5	12.5	12.5	12.5	1.5
802.11n	4	1	OFDM	16QAM	81.0 / 90.0	12.5	12.5	12.5	12.5	12.5	12.5	12.5	1.5
802.11n	5	1	OFDM	64QAM	108.0 / 120.0	12.5	12.5	12.5	12.5	12.5	12.5	12.5	1.5
802.11n	6	1	OFDM	64QAM	121.5 / 135.0	12.5	12.5	12.5	12.5	12.5	12.5	12.5	1.5
802.11n	7	1	OFDM	64QAM	135.0 / 150.0	12.5	12.5	12.5	12.5	12.5	12.5	12.5	1.5

3.4.2 WLAN2450 Body-worn 15 mm and Wireless Router 10 mm

Tuning targets for Body-worn 15 mm and Wireless Router 10 mm / Antenna 1 / HW: 1540

WLAN 2.4 GHz: 20 MHz channel bandwidth													
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	Tuning target (dBm)							
						CH 1	CH 2	CH 6	CH 7	CH 10	CH 11	CH 12	CH 13
802.11b			DSSS	BPSK	1	17.0	17.0	17.0	17.0	17.0	17.0	0.0	0.0
802.11b			DSSS	QPSK	2	17.0	17.0	17.0	17.0	17.0	17.0	0.0	0.0
802.11b			DSSS	QPSK	5.5	17.0	17.0	17.0	17.0	17.0	17.0	0.0	0.0
802.11b			DSSS	QPSK	11	17.0	17.0	17.0	17.0	17.0	17.0	0.0	0.0
802.11g			OFDM	BPSK	6	12.0	17.0	17.0	17.0	17.0	12.0	0.0	0.0
802.11g			OFDM	BPSK	9	12.0	17.0	17.0	17.0	17.0	12.0	0.0	0.0
802.11g			OFDM	QPSK	12	12.0	17.0	17.0	17.0	17.0	12.0	0.0	0.0
802.11g			OFDM	QPSK	18	12.0	17.0	17.0	17.0	17.0	12.0	0.0	0.0
802.11g			OFDM	16QAM	24	12.0	17.0	17.0	17.0	17.0	12.0	0.0	0.0
802.11g			OFDM	16QAM	36	12.0	16.5	16.5	16.5	16.5	12.0	0.0	0.0
802.11g			OFDM	64QAM	48	12.0	15.5	15.5	15.5	15.5	12.0	0.0	0.0
802.11g			OFDM	64QAM	54	12.0	15.0	15.0	15.0	15.0	12.0	0.0	0.0
802.11n	0	1	OFDM	BPSK	6.5 / 7.2	12.0	16.0	16.0	16.0	16.0	12.0	0.0	0.0
802.11n	1	1	OFDM	QPSK	13.0 / 14.4	12.0	16.0	16.0	16.0	16.0	12.0	0.0	0.0
802.11n	2	1	OFDM	QPSK	19.5 / 21.7	12.0	16.0	16.0	16.0	16.0	12.0	0.0	0.0
802.11n	3	1	OFDM	16QAM	26.0 / 28.9	12.0	16.0	16.0	16.0	16.0	12.0	0.0	0.0
802.11n	4	1	OFDM	16QAM	39.0 / 43.3	12.0	15.0	15.0	15.0	15.0	12.0	0.0	0.0
802.11n	5	1	OFDM	64QAM	52.0 / 57.8	12.0	14.5	14.5	14.5	14.5	12.0	0.0	0.0
802.11n	6	1	OFDM	64QAM	58.5 / 65.0	12.0	14.0	14.0	14.0	14.0	12.0	0.0	0.0
802.11n	7	1	OFDM	64QAM	65.0 / 72.2	12.0	13.0	13.0	13.0	13.0	12.0	0.0	0.0

WLAN 2.4 GHz: 40 MHz channel bandwidth													
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	Tuning target (dBm)							
						CH 3 (1...5)	CH 4 (2...6)	CH 5 (3...7)	CH 6 (4...8)	CH 7 (5...9)	CH 8 (6...10)	CH 9 (7...11)	CH 10 (8...12)
802.11n	0	1	OFDM	BPSK	13.5 / 15.0	11.0	12.5	15.0	15.0	15.0	13.5	11.0	0.0
802.11n	1	1	OFDM	QPSK	27.0 / 30.0	11.0	12.5	15.0	15.0	15.0	13.5	11.0	0.0
802.11n	2	1	OFDM	QPSK	40.5 / 45.0	11.0	12.5	15.0	15.0	15.0	13.5	11.0	0.0
802.11n	3	1	OFDM	16QAM	54.0 / 60.0	11.0	12.5	15.0	15.0	15.0	13.5	11.0	0.0
802.11n	4	1	OFDM	16QAM	81.0 / 90.0	11.0	12.5	14.0	14.0	14.0	13.5	11.0	0.0
802.11n	5	1	OFDM	64QAM	108.0 / 120.0	11.0	12.5	13.5	13.5	13.5	13.5	11.0	0.0
802.11n	6	1	OFDM	64QAM	121.5 / 135.0	11.0	12.5	13.0	13.0	13.0	13.0	11.0	0.0
802.11n	7	1	OFDM	64QAM	135.0 / 150.0	11.0	12.0	12.0	12.0	12.0	12.0	11.0	0.0

**Measured conducted output powers for Body-worn 15 mm and Wireless Router 10 mm
/ Antenna 1 / HW: 1540**

WLAN 2.4 GHz: 20 MHz channel bandwidth													
SN: 004402742967882						Measured value (dBm)							
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	CH 1	CH 2	CH 6	CH 7	CH 10	CH 11	CH 12	CH 13
802.11b			DSSS	BPSK	1	17.9	17.7	17.4	17.6	17.6	17.5		
802.11b			DSSS	QPSK	2	17.7	17.7	17.5	17.6	17.6	17.5		
802.11b			DSSS	QPSK	5.5	17.7	17.7	17.5	17.7	17.7	17.5		
802.11b			DSSS	QPSK	11	17.8	17.9	17.5	17.8	17.8	17.6		
802.11g			OFDM	BPSK	6	12.4	17.4	17.1	17.5	17.3	12.1		
802.11g			OFDM	BPSK	9	12.2	17.5	17.2	17.5	17.4	12.1		
802.11g			OFDM	QPSK	12	12.3	17.5	17.2	17.6	17.4	12.1		
802.11g			OFDM	QPSK	18	12.2	17.6	17.3	17.6	17.5	12.1		
802.11g			OFDM	16QAM	24	12.2	17.7	17.3	17.6	17.5	12.1		
802.11g			OFDM	16QAM	36	12.2	17.3	17.2	17.3	17.2	12.0		
802.11g			OFDM	64QAM	48	12.1	16.1	16.0	16.5	16.4	12.0		
802.11g			OFDM	64QAM	54	12.1	15.8	15.6	15.9	15.8	12.0		
802.11n	0	1	OFDM	BPSK	6.5 / 7.2	12.3	16.7	16.4	16.7	16.6	12.2		
802.11n	1	1	OFDM	QPSK	13.0 / 14.4	12.3	16.5	16.3	16.7	16.6	12.2		
802.11n	2	1	OFDM	QPSK	19.5 / 21.7	12.3	16.5	16.4	16.9	16.6	12.2		
802.11n	3	1	OFDM	16QAM	26.0 / 28.9	12.3	16.6	16.5	16.7	16.7	12.1		
802.11n	4	1	OFDM	16QAM	39.0 / 43.3	12.2	15.6	15.4	15.8	15.9	12.1		
802.11n	5	1	OFDM	64QAM	52.0 / 57.8	12.2	15.1	15.2	15.5	15.4	12.0		
802.11n	6	1	OFDM	64QAM	58.5 / 65.0	12.2	14.6	14.5	14.9	14.9	12.0		
802.11n	7	1	OFDM	64QAM	65.0 / 72.2	12.2	13.6	13.5	14.1	14.1	12.0		

WLAN 2.4 GHz: 40 MHz channel bandwidth													
SN: 004402742967882						Measured value (dBm)							
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	CH 3 (1...5)	CH 4 (2...6)	CH 5 (3...7)	CH 6 (4...8)	CH 7 (5...9)	CH 8 (6...10)	CH 9 (7...11)	CH 10 (8...12)
802.11n	0	1	OFDM	BPSK	13.5 / 15.0	11.1	12.5	15.4	15.3	15.6	13.8	11.5	
802.11n	1	1	OFDM	QPSK	27.0 / 30.0	11.2	12.3	15.6	15.5	15.7	13.7	11.6	
802.11n	2	1	OFDM	QPSK	40.5 / 45.0	11.3	12.3	15.6	15.5	15.8	13.9	11.7	
802.11n	3	1	OFDM	16QAM	54.0 / 60.0	11.3	12.4	15.6	15.5	15.9	13.7	11.6	
802.11n	4	1	OFDM	16QAM	81.0 / 90.0	11.4	12.3	14.7	14.5	14.9	13.6	11.7	
802.11n	5	1	OFDM	64QAM	108.0 / 120.0	11.3	12.3	14.2	14.1	14.5	13.9	11.8	
802.11n	6	1	OFDM	64QAM	121.5 / 135.0	11.5	12.3	13.8	13.6	13.9	13.4	11.8	
802.11n	7	1	OFDM	64QAM	135.0 / 150.0	11.4	12.0	12.6	12.5	12.6	12.5	11.9	

Upper limits for Body-worn 15 mm and Wireless Router 10 mm / Antenna 1 / HW: 1540

WLAN 2.4 GHz: 20 MHz channel bandwidth													
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	Upper limit of tuning target (dBm)							
						CH 1	CH 2	CH 6	CH 7	CH 10	CH 11	CH 12	CH 13
802.11b			DSSS	BPSK	1	18.5	18.5	18.5	18.5	18.5	18.5	1.5	1.5
802.11b			DSSS	QPSK	2	18.5	18.5	18.5	18.5	18.5	18.5	1.5	1.5
802.11b			DSSS	QPSK	5.5	18.5	18.5	18.5	18.5	18.5	18.5	1.5	1.5
802.11b			DSSS	QPSK	11	18.5	18.5	18.5	18.5	18.5	18.5	1.5	1.5
802.11g			OFDM	BPSK	6	13.5	18.5	18.5	18.5	18.5	13.5	1.5	1.5
802.11g			OFDM	BPSK	9	13.5	18.5	18.5	18.5	18.5	13.5	1.5	1.5
802.11g			OFDM	QPSK	12	13.5	18.5	18.5	18.5	18.5	13.5	1.5	1.5
802.11g			OFDM	QPSK	18	13.5	18.5	18.5	18.5	18.5	13.5	1.5	1.5
802.11g			OFDM	16QAM	24	13.5	18.5	18.5	18.5	18.5	13.5	1.5	1.5
802.11g			OFDM	16QAM	36	13.5	18.0	18.0	18.0	18.0	13.5	1.5	1.5
802.11g			OFDM	64QAM	48	13.5	17.0	17.0	17.0	17.0	13.5	1.5	1.5
802.11g			OFDM	64QAM	54	13.5	16.5	16.5	16.5	16.5	13.5	1.5	1.5
802.11n	0	1	OFDM	BPSK	6.5 / 7.2	13.5	17.5	17.5	17.5	17.5	13.5	1.5	1.5
802.11n	1	1	OFDM	QPSK	13.0 / 14.4	13.5	17.5	17.5	17.5	17.5	13.5	1.5	1.5
802.11n	2	1	OFDM	QPSK	19.5 / 21.7	13.5	17.5	17.5	17.5	17.5	13.5	1.5	1.5
802.11n	3	1	OFDM	16QAM	26.0 / 28.9	13.5	17.5	17.5	17.5	17.5	13.5	1.5	1.5
802.11n	4	1	OFDM	16QAM	39.0 / 43.3	13.5	16.5	16.5	16.5	16.5	13.5	1.5	1.5
802.11n	5	1	OFDM	64QAM	52.0 / 57.8	13.5	16.0	16.0	16.0	16.0	13.5	1.5	1.5
802.11n	6	1	OFDM	64QAM	58.5 / 65.0	13.5	15.5	15.5	15.5	15.5	13.5	1.5	1.5
802.11n	7	1	OFDM	64QAM	65.0 / 72.2	13.5	14.5	14.5	14.5	14.5	13.5	1.5	1.5
WLAN 2.4 GHz: 40 MHz channel bandwidth													
Standard	MCS index	Spatial streams	Transmission mode	Modulation	Data rate [Mbps]	Upper limit of tuning target (dBm)							
						CH 3 (1...5)	CH 4 (2...6)	CH 5 (3...7)	CH 6 (4...8)	CH 7 (5...9)	CH 8 (6...10)	CH 9 (7...11)	CH 10 (8...12)
802.11n	0	1	OFDM	BPSK	13.5 / 15.0	12.5	14.0	16.5	16.5	16.5	15.0	12.5	1.5
802.11n	1	1	OFDM	QPSK	27.0 / 30.0	12.5	14.0	16.5	16.5	16.5	15.0	12.5	1.5
802.11n	2	1	OFDM	QPSK	40.5 / 45.0	12.5	14.0	16.5	16.5	16.5	15.0	12.5	1.5
802.11n	3	1	OFDM	16QAM	54.0 / 60.0	12.5	14.0	16.5	16.5	16.5	15.0	12.5	1.5
802.11n	4	1	OFDM	16QAM	81.0 / 90.0	12.5	14.0	15.5	15.5	15.5	15.0	12.5	1.5
802.11n	5	1	OFDM	64QAM	108.0 / 120.0	12.5	14.0	15.0	15.0	15.0	15.0	12.5	1.5
802.11n	6	1	OFDM	64QAM	121.5 / 135.0	12.5	14.0	14.5	14.5	14.5	14.5	12.5	1.5
802.11n	7	1	OFDM	64QAM	135.0 / 150.0	12.5	13.5	13.5	13.5	13.5	13.5	12.5	1.5

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated DASY near-field scanning system manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration date	Calibration expiry
DAE4	728	2015-01	2016-01
DAE4	1302	2015-04	2016-04
DAE4	538	2015-04	2016-04
E-field Probe ES3DV3	3276	2015-04	2016-04
E-field Probe ES3DV3	3275	2015-04	2016-04
E-field Probe EX3DV4	3892	2015-04	2016-04
Dipole Validation Kit, D835V2	480	2015-01	2017-01
Dipole Validation Kit, D1750V2	1082	2015-01	2017-01
Dipole Validation Kit, D1900V2	5d013	2015-01	2017-01
Dipole Validation Kit, D2450V2	749	2015-01	2017-01
Dipole Validation Kit, D2600V2	1056	2015-01	2017-01
DASY5 software	Version 52.8	-	-

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration expiry
Signal Generator	E4438C	MY42080610	2015-04	2016-04
Signal Generator	SML03	101264	2015-04	2016-04
Signal Generator	SMB100A	105735	2015-04	2016-04
Amplifier	5S1G4	25583	-	-
Amplifier	ZHL-42-SMA	NO72095-5	-	-
Amplifier	5S4G11	312661	-	-
Amplifier	ZVE-3W-83+	373701337 / 1005	-	-
Power Meter	NRVS	838623/006	2015-07	2016-06
Power Meter	NRVD	840023/028	2015-04	2016-04
Power Meter	NRP	101465	2015-04	2016-04
Power Sensor	NRV-Z32	100067	2015-04	2016-04
Power Sensor	NRV-Z32	849745/018	2015-04	2016-04
Power Sensor	NRP-Z92	100088	2015-04	2016-04
Call Tester	CMU 200	103293	-	-
Call Tester	CMU 200	104983	-	-
Call Tester	CMW 500	108406	-	-
Call Tester	CMW 500	136294	-	-
Call Tester	MT8820C	6200883095	-	-
Network Analyzer	ENA E5071C	MY46213166	2015-04	2016-04
Dielectric Probe Kit	DAK-3.5	1042	-	-

4.1.1 Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix D
Frequency	10 MHz to 4 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.1.2 Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix D
Frequency	10 MHz to >6 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 10 mm Body diameter: 12 mm Tip diameter: 2.5 mm Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 6 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all Head SAR tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG; the SAM phantom conforms to the requirements of IEEE 1528.

The phantom used for all Body SAR tests i.e. for both system checks and device testing, was a flat phantom also manufactured by SPEAG this phantom conform to the requirements of FCC published RF Exposure KDB Procedures.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 and FCC published RF Exposure KDB Procedures. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was at least 15.0 cm for all system check and device tests, measured from the ear reference point in the case of the SAM phantom and from the inner surface of the flat phantom.

4.3.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue simulant(s):

800 MHz band		
Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	51.50	69.25
Tween 20	47.35	30.00
Salt	1.15	0.75

1900 MHz band		
Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.50	70.25
Tween 20	45.23	29.41
Salt	0.27	0.34

2450-2600 MHz band		
Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	56.0	70.20
Tween 20	44.0	29.62
Salt	-	0.18

4.4 System validation and System checking

4.4.1 System validation status

Probe Calibration Point f / MHz	Test System	DASY SW	Dipole Type / SN	Probe Type / SN	Calibrated signal type(s)	DAE unit Type / SN	Validation done		
							Validated signal Type(s)	Head tissue simulant	Body tissue simulant
835	TCC Salo SAR-2	52.8.8 (1222)	D835V2 480	ES3DV3 3275	CW	DAE4 1302	CW OFDM GMSK	2015-09	2015-09
1900	TCC Salo SAR-1	52.8.8 (1222)	D1900V2 5d013	ES3DV3 3276	CW	DAE4 728	CW OFDM GMSK	2015-05	2015-05
2450	TCC Salo SAR-3	52.8.8 (1222)	D2450V2 749	EX3DV4 3892	CW	DAE4 538	CW CCK	2015-05	2015-05
2600	TCC Salo SAR-3	52.8.8 (1222)	D2600V2 1056	EX3DV4 3892	CW	DAE4 538	CW SC-FDMA	2015-05	2015-05

4.4.2 System checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna. The dipole was placed under the flat section of the twin SAM phantom for head system checking, and under the flat phantom for body system checking. The system checking results (dielectric parameters and SAR values) are given in the table below.

System checking, head tissue simulant

Dipole freq. [MHz]	Description	SAR 1g [W/kg]	Estimated SAR 1g [W/kg]	Estimated SAR 1g Dev. dSAR [%]	Scaled 1W SAR 1g [W/kg]	Dielectric Parameters		SAR 1g Deviation from target	Dielectric Parameters Deviation from target		Temp [°C]	Plot #
						ϵ_r	s [S/m]		dSAR [%]	ϵ_r [%]	s [%]	
835	Tolerances			±3%				±10 %	±5 %	±5 %		
	Target result SN:480	-	-	-	9.13	41.5	0.90	TCC Salo / SAR-2 ES3DV3 - SN:3275 Head 835 MHz				
	2015-10-22	2.30	2.35	2.17	9.20	40.8	0.89	0.77	-1.69	-1.11	22.7	
	2015-10-23	2.26	2.30	1.77	9.04	40.5	0.89	-0.99	-2.41	-1.11	22.5	1
	2015-10-24	2.30	2.31	0.43	9.20	40.3	0.88	0.77	-2.89	-2.22	22.5	
1900	Tolerances			±3%				±10 %	±5 %	±5 %		
	Target result SN:5d013	-	-	-	40.70	40.0	1.40	TCC Salo / SAR-1 ES3DV3 - SN:3276 Head 1900 MHz				
	2015-10-27	10.10	10.30	1.98	40.40	39.1	1.41	-0.74	-2.25	0.71	21.2	
	2015-10-28	9.99	10.20	2.10	39.96	38.4	1.41	-1.82	-4.00	0.71	20.6	2
	Tolerances			±3%				±10 %	±5 %	±5 %		
2450	Target result SN:749	-	-	-	52.10	39.2	1.80	TCC Salo / SAR-3 EX3DV4 - SN:3892 Head 2450 MHz				
	2015-11-10	13.10	12.90	-1.53	52.40	38.6	1.78	0.58	-1.53	-1.11	22.2	3
	Tolerances			±3%				±10 %	±5 %	±5 %		
2600	Target result SN:1056	-	-	-	56.80	39.0	1.96	TCC Salo / SAR-3 EX3DV4 - SN:3892 Head 2600 MHz				
	2015-10-29	14.90	14.70	-1.34	59.60	37.7	1.97	4.93	-3.33	0.51	22.2	4
	2015-10-30	14.70	14.70	0.00	58.80	37.1	1.93	3.52	-4.87	-1.53	22.1	
	2015-10-31	14.30	14.30	0.00	57.20	37.9	1.94	0.70	-2.82	-1.02	22.1	
	2015-11-02	14.50	14.50	0.00	58.00	37.7	1.95	2.11	-3.33	-0.51	22.0	
	Tolerances			±3%				±10 %	±5 %	±5 %		

* Dielectric parameter reference data taken from IEEE1528/IEC62209

System checking, body tissue simulant

Dipole freq. [MHz]	Description	SAR 1g [W/kg]	Estimated SAR 1g [W/kg]	Estimated SAR 1g Dev. dSAR [%]	Scaled 1W SAR 1g [W/kg]	Dielectric Parameters		SAR 1g Deviation from target	Dielectric Parameters Deviation from target		Temp [°C]	Plot #
						ϵ_r	s [S/m]		dSAR [%]	ϵ_r [%]	s [%]	
835	Tolerances			±3%				±10 %	±5 %	±5 %		
	Target result SN:480	-	-	-	9.02	55.2	0.97	TCC Salo / SAR-2 ES3DV3 - SN:3275 Body 835 MHz				
	2015-10-25	2.36	2.37	0.42	9.44	54.1	0.96	4.66	-1.99	-1.03	21.8	
	2015-10-26	2.38	2.40	0.84	9.52	54.1	0.96	5.54	-1.99	-1.03	21.8	5
1900	Tolerances			±3%				±10 %	±5 %	±5 %		
	Target result SN:5d013	-	-	-	40.50	53.3	1.52	TCC Salo / SAR-1 ES3DV3 - SN:3276 Body 1900 MHz				
	2015-10-29	10.10	10.20	0.99	40.40	51.6	1.55	-0.25	-3.19	1.97	20.8	6
	Tolerances			±3%				±10 %	±5 %	±5 %		
2450	Target result SN:749	-	-	-	50.80	52.7	1.95	TCC Salo / SAR-3 EX3DV4 - SN:3892 Body 2450 MHz				
	2015-10-27	11.70	11.80	0.85	46.80	51.1	1.90	-7.87	-3.04	-2.56	22.7	7
	Tolerances			±3%				±10 %	±5 %	±5 %		
2600	Target result SN:1056	-	-	-	55.90	52.5	2.16	TCC Salo / SAR-3 EX3DV4 - SN:3892 Body 2600 MHz				
	2015-11-02	13.80	13.90	0.72	55.20	50.0	2.12	-1.25	-4.76	-1.85	22.0	
	2015-11-04	13.60	13.70	0.74	54.40	50.2	2.12	-2.68	-4.38	-1.85	21.9	8
	2015-11-05	13.70	13.90	1.46	54.80	50.6	2.11	-1.97	-3.62	-2.31	21.6	

* Dielectric parameter reference data taken from FCC Published RF Exposure KDB Procedures

Plots of the system checking scans are given in Appendix A.

4.5 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Dielectric Parameters Deviation from recommended value		Temp [°C]
		ϵ_r	s [S/m]	$d\epsilon_r$ [%]	ds [%]	
835	Tolerances			± 5 %	± 5 %	
	Recommended value	41.5	0.90			
	2015-10-22	40.8	0.89	-1.69	-1.11	22.7
	2015-10-23	40.5	0.89	-2.41	-1.11	22.5
	2015-10-24	40.3	0.88	-2.89	-2.22	22.5
836	Tolerances			± 5 %	± 5 %	
	Recommended value	41.5	0.90			
	2015-10-22	40.8	0.89	-1.69	-1.11	22.7
	2015-10-23	40.5	0.89	-2.41	-1.11	22.5
	2015-10-24	40.3	0.88	-2.89	-2.22	22.5
1880	Tolerances			± 5 %	± 5 %	
	Recommended value	40.0	1.40			
	2015-10-27	39.2	1.39	-2.00	-0.71	21.2
	2015-10-28	38.5	1.39	-3.75	-0.71	20.6
2437	Tolerances			± 5 %	± 5 %	
	Recommended value	39.2	1.79			
	2015-11-10	38.6	1.76	-1.53	-1.68	22.2
2535	Tolerances			± 5 %	± 5 %	
	Recommended value	39.1	1.89			
	2015-10-29	37.9	1.90	-3.07	0.53	22.2
	2015-10-30	37.3	1.86	-4.60	-1.59	22.1
	2015-10-31	38.1	1.87	-2.56	-1.06	22.1
	2015-11-02	37.9	1.87	-3.07	-1.06	0.0

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Dielectric Parameters Deviation from recommended value		Temp [°C]
		ϵ_r	s [S/m]	$d\epsilon_r$ [%]	ds [%]	
835	Tolerances			± 5 %	± 5 %	
	Recommended value	55.2	0.97			
	2015-10-25	54.1	0.96	-1.99	-1.03	21.8
	2015-10-26	54.1	0.96	-1.99	-1.03	21.8
	2015-10-27	53.9	0.96	-2.36	-1.03	21.9
836	Tolerances			± 5 %	± 5 %	
	Recommended value	55.2	0.97			
	2015-10-25	54.1	0.96	-1.99	-1.03	21.8
	2015-10-26	54.1	0.97	-1.99	0.00	21.8
	2015-10-27	53.9	0.96	-2.36	-1.03	21.9
1880	Tolerances			± 5 %	± 5 %	
	Recommended value	53.3	1.52			
	2015-10-29	51.7	1.53	-3.00	0.66	20.8
2437	Tolerances			± 5 %	± 5 %	
	Recommended value	52.7	1.94			
	2015-10-27	51.2	1.88	-2.85	-3.09	22.7
2535	Tolerances			± 5 %	± 5 %	
	Recommended value	52.6	2.07			
	2015-11-02	50.2	2.04	-4.56	-1.45	22.0
	2015-11-04	50.4	2.05	-4.18	-0.97	21.9
	2015-11-05	50.8	2.03	-3.42	-1.93	21.6

Dielectric parameter data for the band edges is given in Appendix C.

5. DESCRIPTION OF THE TEST PROCEDURE


5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in "cheek" and "tilt" positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

5.2.2 Body-worn 15 mm Configuration

The device was placed in the SPEAG holder using the spacer and placed below the flat phantom. The distance between the device and the phantom was kept at the separation distance indicated in Section 1.2 using a separate flat spacer that was removed before the start of the measurements. The device was oriented with both sides facing the phantom to find the highest results.

Microsoft Body-worn accessories are commonly available for the separation distance used in this testing.

5.2.3 Wireless Router 10 mm Configuration

The device was placed in the SPEAG holder and, in sequence, the back, display and each of the 4 edges was positioned 10 mm away from the flat phantom. The spacer was removed before the start of the measurements.

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan. Fast SAR is measured according to the KDB 447498 D01 General RF Exposure Guidance v05r01.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy52 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to

neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation for 1g Full SAR in 0.3-6G Hz range

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	c_i	$c_i \cdot u_i$ (%)	v_i
Measurement System							
Probe Calibration	E2.1	±6.6	N	1	1	±6.6	∞
Axial Isotropy	E2.2	±4.7	R	√3	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	√3	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±2.0	R	√3	1	±1.2	∞
Linearity	E2.4	±4.7	R	√3	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6	∞
Modulation response	E2.5	±2.4	R	√3	1	±1.4	
Readout Electronics	E2.6	±0.3	N	1	1	±0.3	∞
Response Time	E2.7	±0.8	R	√3	1	±0.5	∞
Integration Time	E2.8	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	√3	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.8	R	√3	1	±0.5	∞
Probe Positioning with respect to Phantom Shell	E6.3	±6.7	R	√3	1	±3.9	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5	±4.0	R	√3	1	±2.3	∞
Test sample Related							
Test Sample Positioning	E4.2	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1	±3.6	N	1	1	±3.6	5
Output Power Variation - SAR drift measurement	E2.9	±5.0	R	√3	1	±2.9	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±6.6	R	√3	1	±3.8	∞
SAR correction	E3.2	±1.9	R	√3	1	±1.1	∞
Conductivity Target - tolerance	E3.4	±5.0	R	√3	0.6	±1.8	∞
Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.6	±3.5	5
Permittivity Target - tolerance	E3.4	±5.0	R	√3	0.6	±1.7	∞
Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
Combined Standard Uncertainty			RSS			±14.0	198
Coverage Factor for 95%			k=2				
Expanded Uncertainty						±28.2	

Table 6.2 – Measurement uncertainty evaluation for 1g Fast SAR in 0.3-6G Hz range

Relative DASYS Uncertainty Budget for Fast SAR Tests According to IEEE 1528/2011 and IEC 62209-1/2011 (0.3-6 GHz range)						
Uncertainty Component	Tol. (%)	Prob Dist.	Div.	c_i	$c_i \cdot u_i$ (%)	v_i
Measurement System						
Probe Calibration	±6.6	N	1	0		
Axial Isotropy	±4.7	R	√3	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	±9.6	R	√3	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	±2.0	R	√3	1	±1.2	∞
Linearity	±4.7	R	√3	1	±2.7	∞
System Detection Limits	±1.0	R	√3	1	±0.6	∞
Modulation Response	±2.4	R	√3	1	±1.4	∞
Readout Electronics	±0.3	N	1	0		
Response Time	±0.8	R	√3	0		
Integration Time	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	±3.0	R	√3	0		
Probe Positioner Mechanical Tolerance	±0.8	R	√3	1	±0.5	∞
Probe Positioning with respect to Phantom Shell	±6.7	R	√3	1	±3.9	∞
Spatial x-y Resolution	±10.0	R	√3	1	±5.8	∞
Fast SAR z Approximation	±14.0	R	√3	1	±8.1	∞
Test sample Related						
Test Sample Positioning	±6.0	N	1	1	±6.0	12
Device Holder Uncertainty	±3.6	N	1	1	±3.6	5
Output Power Variation - SAR drift measurement	±5.0	R	√3	1	±2.9	∞
Power Scaling	±0	R	√3	0		
Phantom and Setup						
Phantom Uncertainty (shape and thickness tolerances)	±6.6	R	√3	1	±3.8	∞
SAR correction	±1.9	R	√3	0		
Conductivity Target - tolerance	±1.9	R	√3	0		
Conductivity - measurement uncertainty	±5.0	R	√3	0		
Permittivity Target - tolerance	±5.5	N	1	0		
Permittivity - measurement uncertainty	±5.0	R	√3	0		
Combined Standard Uncertainty						
		RSS			±14.9	748
Coverage Factor for 95%						
		k=2				
Expanded Uncertainty						
					±29.8	

7. RESULTS

7.1 The measured Head SAR values for the test device

7.1.1 GSM/GPRS/EGPRS 850 Head SAR results

Antenna 1 / HW: 1540

2-slot GPRS850									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 128	CH 190	CH 251	CH 128	CH 190	CH 251		
		824.2 MHz	836.6 MHz	848.8 MHz	824.2 MHz	836.6 MHz	848.8 MHz		
Upper limit		31.4			Scaling factor*				
Conducted Power		31.3	31.0	31.1	0.1	0.4	0.3	dB	
Time-averaged Power		25.3	25.0	25.1	1.02	1.10	1.07	Lin	
Left Cheek	Estimated SAR	-	0.237	-	-	0.260	-	-	-
	Full SAR	-	-	-	-	-	-		
Left Tilt	Estimated SAR	-	0.150	-	-	0.164	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Cheek	Estimated SAR	0.340	0.315	0.278	0.348	0.345	0.298	0.02	-
	Full SAR	0.360	-	-	0.368	-	-		
Right Tilt	Estimated SAR	-	0.112	-	-	0.123	-	-	-
	Full SAR	-	-	-	-	-	-		

2-slot 8PSK EGPRS850									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 128	CH 190	CH 251	CH 128	CH 190	CH 251		
		824.2 MHz	836.6 MHz	848.8 MHz	824.2 MHz	836.6 MHz	848.8 MHz		
Upper limit		26.4			Scaling factor*				
Conducted Power		26.3	26.3	26.4	0.1	0.1	-	dB	
Time-averaged Power		20.3	20.3	20.4	1.02	1.02	1.00	Lin	
Right Cheek	Estimated SAR	0.116	-	-	0.119	-	-	0.00	-
	Full SAR	0.112	-	-	0.115	-	-		

Antenna 2 / HW: 1540

2-slot GPRS850									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 128	CH 190	CH 251	CH 128	CH 190	CH 251		
		824.2 MHz	836.6 MHz	848.8 MHz	824.2 MHz	836.6 MHz	848.8 MHz		
Upper limit		31.4			Scaling factor*				
Conducted Power		31.2	30.9	31.0	0.2	0.5	0.4	dB	
Time-averaged Power		25.2	24.9	25.0	1.05	1.12	1.10	Lin	
Left Cheek	Estimated SAR	0.513	0.456	0.358	0.537	0.512	0.393	0.00	H1
	Full SAR	0.510	-	-	0.534	-	-		
Left Tilt	Estimated SAR	-	0.143	-	-	0.160	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Cheek	Estimated SAR	-	0.290	-	-	0.325	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Tilt	Estimated SAR	-	0.122	-	-	0.137	-	-	-
	Full SAR	-	-	-	-	-	-		

2-slot 8PSK EGPRS850									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 128	CH 190	CH 251	CH 128	CH 190	CH 251		
		824.2 MHz	836.6 MHz	848.8 MHz	824.2 MHz	836.6 MHz	848.8 MHz		
Upper limit		26.4			Scaling factor*				
Conducted Power		26.2	26.2	26.3	0.2	0.2	0.1	dB	
Time-averaged Power		20.2	20.2	20.3	1.05	1.05	1.02	Lin	
Left Cheek	Estimated SAR	0.219	-	-	0.229	-	-	0.00	-
	Full SAR	0.215	-	-	0.225	-	-		

7.1.2 WCDMA850 (Band 5) Head SAR results

Antenna 1 / HW: 1540

WCDMA850 (Band 5)									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 4132	CH 4175	CH 4233	CH 4132	CH 4175	CH 4233		
		826.4 MHz	835.0 MHz	846.6 MHz	826.4 MHz	835.0 MHz	846.6 MHz		
Upper limit		23.9			Scaling factor*				
Conducted Power		23.8	23.8	23.5	0.1	0.1	0.4	dB	
Time-averaged Power		23.8	23.8	23.5	1.02	1.02	1.10	Lin	
Left Cheek	Estimated SAR	-	0.245	-	-	0.251	-	-	-
	Full SAR	-	-	-	-	-	-		
Left Tilt	Estimated SAR	-	0.100	-	-	0.102	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Cheek	Estimated SAR	0.405	0.391	0.441	0.414	0.400	0.484	0.02	H2
	Full SAR	-	-	0.456	-	-	0.500		
Right Tilt	Estimated SAR	-	0.112	-	-	0.115	-	-	-
	Full SAR	-	-	-	-	-	-		

Antenna 2 / HW: 1540

WCDMA850 (Band 5)									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz	CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz		
Upper limit		23.9			Scaling factor*				
Conducted Power		23.6	23.6	23.3	0.3	0.3	0.6	dB	
Time-averaged Power		23.6	23.6	23.3	1.07	1.07	1.15	Lin	
Left Cheek	Estimated SAR	0.323	0.338	0.293	0.346	0.362	0.336	0.03	-
	Full SAR	-	0.304	-	-	0.326	-		
Left Tilt	Estimated SAR	-	0.110	-	-	0.118	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Cheek	Estimated SAR	-	0.255	-	-	0.273	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Tilt	Estimated SAR	-	0.097	-	-	0.104	-	-	-
	Full SAR	-	-	-	-	-	-		

7.1.3 GSM/GPRS/EGPRS 1900 Head SAR results

Antenna 1 / HW: 1540

4-slot GPRS1900									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 512	CH 661	CH 810	CH 512	CH 661	CH 810		
		1850.2 MHz	1880.0 MHz	1909.8 MHz	1850.2 MHz	1880.0 MHz	1909.8 MHz		
Upper limit		25.4			Scaling factor*				
Conducted Power		24.9	25.1	25.2	0.5	0.3	0.2	dB	
Time-averaged Power		21.9	22.1	22.2	1.12	1.07	1.05	Lin	
Left Cheek	Estimated SAR	-	0.107	-	-	0.115	-	-	-
	Full SAR	-	-	-	-	-	-		
Left Tilt	Estimated SAR	-	0.085	-	-	0.091	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Cheek	Estimated SAR	0.210	0.201	0.273	0.236	0.215	0.286	0.01	
	Full SAR	-	-	0.278	-	-	0.291		
Right Tilt	Estimated SAR	-	0.078	-	-	0.083	-	-	-
	Full SAR	-	-	-	-	-	-		

4-slot 8PSK EGPRS1900									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 512	CH 661	CH 810	CH 512	CH 661	CH 810		
		1850.2 MHz	1880.0 MHz	1909.8 MHz	1850.2 MHz	1880.0 MHz	1909.8 MHz		
Upper limit		23.4			Scaling factor*				
Conducted Power		22.8	23.1	23.4	0.6	0.3	-	dB	
Time-averaged Power		19.8	20.1	20.4	1.15	1.07	1.00	Lin	
Right Cheek	Estimated SAR	-	-	0.152	-	-	0.152	0.00	-
	Full SAR	-	-	0.156	-	-	0.156		

Antenna 2 / HW: 1540

4-slot GPRS1900									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz		
Upper limit		25.4			Scaling factor*				
Conducted Power		24.6	24.8	24.9	0.8	0.6	0.5	dB	
Time-averaged Power		21.6	21.8	21.9	1.20	1.15	1.12	Lin	
Left Cheek	Estimated SAR	0.230	0.228	0.223	0.277	0.262	0.250	0.04	H3
	Full SAR	0.265	-	-	0.319	-	-		
Left Tilt	Estimated SAR	-	0.056	-	-	0.064	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Cheek	Estimated SAR	-	0.097	-	-	0.111	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Tilt	Estimated SAR	-	0.062	-	-	0.071	-	-	-
	Full SAR	-	-	-	-	-	-		
4-slot 8PSK EGPRS1900									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz		
Upper limit		23.4			Scaling factor*				
Conducted Power		22.5	22.8	23.1	0.9	0.6	0.3	dB	
Time-averaged Power		19.5	19.8	20.1	1.23	1.15	1.07	Lin	
Left Cheek	Estimated SAR	0.155	-	-	0.191	-	-	0.01	-
	Full SAR	0.160	-	-	0.197	-	-		

7.1.4 LTE2500 (Band 7) Head SAR results

Antenna 1 / HW: 1540

LTE2500 (Band 7) - 20MHz - QPSK - 1 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		23.4			Scaling factor*				
Conducted Power		23.3	23.4	23.0	0.1	-	0.4	dB	
Time-averaged Power		23.3	23.4	23.0	1.02	1.00	1.10	Lin	
Left Cheek	Estimated SAR	-	0.276	-	-	0.276	-	-	-
	Full SAR	-	-	-	-	-	-		
Left Tilt	Estimated SAR	-	0.157	-	-	0.157	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Cheek	Estimated SAR	-	0.462	-	-	0.462	-	0.02	-
	Full SAR	-	0.477	-	-	0.477	-		
Right Tilt	Estimated SAR	-	0.160	-	-	0.160	-	-	-
	Full SAR	-	-	-	-	-	-		
LTE2500 (Band 7) - 20MHz - QPSK - 50 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		22.2	22.3	22.1	0.2	0.1	0.3	dB	
Time-averaged Power		22.2	22.3	22.1	1.05	1.02	1.07	Lin	
Left Cheek	Estimated SAR	-	0.199	-	-	0.204	-	-	-
	Full SAR	-	-	-	-	-	-		
Left Tilt	Estimated SAR	-	0.116	-	-	0.119	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Cheek	Estimated SAR	-	0.358	-	-	0.366	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Tilt	Estimated SAR	-	0.124	-	-	0.127	-	-	-
	Full SAR	-	-	-	-	-	-		

(LTE7 Head/Ant 1 table continues)

(LTE7 Head/Ant 1 table continues)

LTE2500 (Band 7) - 20MHz - QPSK - 100 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850	CH 21100	CH 21350	CH 20850	CH 21100	CH 21350		
		2510.0 MHz	2535.0 MHz	2560.0 MHz	2510.0 MHz	2535.0 MHz	2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		22.4	22.3	22.2	-	0.1	0.2	dB	
Time-averaged Power		22.4	22.3	22.2	1.00	1.02	1.05	Lin	
Right Cheek	Estimated SAR	0.322	-	-	0.322	-	-	-	-
	Full SAR	-	-	-	-	-	-		

Antenna 2 / HW: 1540

LTE2500 (Band 7) - 20MHz - QPSK - 1 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850	CH 21100	CH 21350	CH 20850	CH 21100	CH 21350		
		2510.0 MHz	2535.0 MHz	2560.0 MHz	2510.0 MHz	2535.0 MHz	2560.0 MHz		
Upper limit		23.4			Scaling factor*				
Conducted Power		22.9	23.0	22.6	0.5	0.4	0.8	dB	
Time-averaged Power		22.9	23.0	22.6	1.12	1.10	1.20	Lin	
Left Cheek	Estimated SAR	0.754	0.785	-	0.846	0.861	-	-	-
	Full SAR	-	-	-	-	-	-		
Left Tilt	Estimated SAR	-	0.185	-	-	0.203	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Cheek	Estimated SAR	-	0.360	-	-	0.395	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Tilt	Estimated SAR	-	0.221	-	-	0.242	-	-	-
	Full SAR	-	-	-	-	-	-		

LTE2500 (Band 7) - 20MHz - QPSK - 1 RB - Offset 99									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850	CH 21100	CH 21350	CH 20850	CH 21100	CH 21350		
		2510.0 MHz	2535.0 MHz	2560.0 MHz	2510.0 MHz	2535.0 MHz	2560.0 MHz		
Upper limit		23.4			Scaling factor*				
Conducted Power		22.8	22.6	22.8	0.6	0.8	0.6	dB	
Time-averaged Power		22.8	22.6	22.8	1.15	1.20	1.15	Lin	
Left Cheek	Estimated SAR	-	-	0.764	-	-	0.877	0.04	-
	Full SAR	-	-	0.805	-	-	0.924		
Repeated Left Cheek	Estimated SAR	-	-	0.877	-	-	1.007	0.03	H4
	Full SAR	-	-	0.851	-	-	0.977		

(LTE7 Head/Ant 2 table continues)

(LTE7 Head/Ant 2 table continues)

LTE2500 (Band 7) - 20MHz - QPSK - 50 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850	CH 21100	CH 21350	CH 20850	CH 21100	CH 21350		
		2510.0 MHz	2535.0 MHz	2560.0 MHz	2510.0 MHz	2535.0 MHz	2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		21.8	21.9	21.7	0.6	0.5	0.7	dB	
Time-averaged Power		21.8	21.9	21.7	1.15	1.12	1.17	Lin	
Left Cheek	Estimated SAR	-	0.585	-	-	0.656	-	-	-
	Full SAR	-	-	-	-	-	-		
Left Tilt	Estimated SAR	-	0.136	-	-	0.153	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Cheek	Estimated SAR	-	0.273	-	-	0.306	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Tilt	Estimated SAR	-	0.160	-	-	0.180	-	-	-
	Full SAR	-	-	-	-	-	-		

LTE2500 (Band 7) - 20MHz - QPSK - 100 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850	CH 21100	CH 21350	CH 20850	CH 21100	CH 21350		
		2510.0 MHz	2535.0 MHz	2560.0 MHz	2510.0 MHz	2535.0 MHz	2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		22.0	21.9	21.8	0.4	0.5	0.6	dB	
Time-averaged Power		22.0	21.9	21.8	1.10	1.12	1.15	Lin	
Left Cheek	Estimated SAR	0.627	-	-	0.687	-	-	0.00	-
	Full SAR	0.626	-	-	0.686	-	-		

7.1.5 WLAN2450 Head SAR results

HW: 1540

WLAN2450 b-mode DSSS 20 MHz									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 1 2412.0 MHz	CH 6 2437.0 MHz	CH 11 2462.0 MHz	CH 1 2412.0 MHz	CH 6 2437.0 MHz	CH 11 2462.0 MHz		
Data rate		1	1	1	Scaling factor*			Mbps	
Upper limit		14.5	14.5	14.5					
Conducted Power		13.5	13.0	13.3	1.0	1.5	1.2	dB	
Time-averaged Power		13.5	13.0	13.3	1.26	1.41	1.32	Lin	
Left Cheek	Estimated SAR	-	0.521	-	-	0.736	-	-	-
	Full SAR	-	-	-	-	-	-		
Left Tilt	Estimated SAR	0.550	0.579	0.702	0.692	0.818	0.925	0.01	H5
	Full SAR	-	-	0.714	-	-	0.941		
Right Cheek	Estimated SAR	-	0.481	-	-	0.679	-	-	-
	Full SAR	-	-	-	-	-	-		
Right Tilt	Estimated SAR	-	0.507	-	-	0.716	-	-	-
	Full SAR	-	-	-	-	-	-		

Adjusted SAR							
Test configuration used	Next test configuration	Device Orientation	Reported 1g SAR for test cfg used [W/kg]	Tuning target for test cfg used [dBm]*	Tuning target for next test cfg [dBm]*	Adjusted 1g SAR [W/kg]	Adjusted SAR > 1.20 [YES/NO]
b-mode DSSS 20MHz	g-mode OFDM 20 MHz	Left Tilt	0.941	13.0	11.0	0.594	NO

Individual Head SAR plots are given in Appendix B.

**Simultaneous transmissions: Combined Head 1g SAR results –
WLAN and Individual band Max results - Antenna 1**

Test configuration	WLAN 2450	2-slot GPRS850	WCDMA 850 (Band 5)	4-slot GPRS1900	LTE 2500 (Band 7)
Left Cheek	0.736	0.260	0.251	0.115	0.276
Left Tilt	0.941	0.164	0.102	0.091	0.157
Right Cheek	0.679	0.368	0.500	0.291	0.477
Right Tilt	0.716	0.123	0.115	0.083	0.160

**Simultaneous transmissions: Combined Head 1g SAR results –
WLAN and Individual band Max results - Antenna 2**

Test configuration	WLAN 2450	2-slot GPRS850	WCDMA 850 (Band 5)	4-slot GPRS1900	LTE 2500 (Band 7)
Left Cheek	0.736	0.534	0.326	0.319	0.977
Left Tilt	0.941	0.160	0.118	0.064	0.203
Right Cheek	0.679	0.325	0.273	0.111	0.395
Right Tilt	0.716	0.137	0.104	0.071	0.242

**Simultaneous transmissions: Combined Head 1g SAR results –
WLAN Max + Max combined results - Antenna 1**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Left Cheek	0.996	0.987	0.851	1.012
Left Tilt	1.105	1.043	1.032	1.098
Right Cheek	1.047	1.179	0.970	1.156
Right Tilt	0.839	0.831	0.799	0.876

**Simultaneous transmissions: Combined Head 1g SAR results –
WLAN Max + Max combined results - Antenna 2**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Left Cheek	1.270	1.062	1.055	1.713
Left Tilt	1.101	1.059	1.005	1.144
Right Cheek	1.004	0.952	0.790	1.074
Right Tilt	0.853	0.820	0.787	0.958

7.1.6 Simultaneous Transmission SAR Test Exclusion Considerations for Head Measurements

Simultaneous transmission SAR tests exclusion procedures as described in KDB 447498 D01 v05 is needed for some Head measurements. Following table gives antenna pair SAR to peak location separation ratios for the transmitter combinations for which the sum of simultaneously transmitting 1g SAR was above limit (See "Max+Max Combined results" table in previous section).

Antenna Pair SAR to Peak Location Separation Ratio - Antenna 2

Ant 2	LTE 2500 (Band 7)	WLAN 2450
	Left Cheek	
X [mm]	62.71	14.9
Y [mm]	247.9	312.6
Z [mm]	-172.8	-171.6
DISTANCE [mm]	80.46	
MAX + MAX (Reported SAR)	1.71	
SAR to peak location separation ratio	0.03	

All simultaneous transmitter configurations where the Antenna Pair SPLSR ≤ 0.04 , are excluded from expanded zoom scan testing. For this product no expanded zoom scan testing is required for Head configurations.

7.1.7 Combined 1g Head SAR data

The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values.

The combinations are done for the maximum Head configuration of the each band or band group. Maximum configurations are given in the Max+Max tables in the Section 7.1 of the report. The same scaling factors are used in plotting as for the individual reported SAR value calculations.

**Simultaneous transmissions: Reported* Combined 1g SAR Head results –
SPEAG Combined Multiband algorithm results – Antenna 1**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Left Cheek	-	-	-	-
Left Tilt	-	-	-	-
Right Cheek	-	-	-	-
Right Tilt	-	-	-	-
Plot no	-	-	-	-

**Simultaneous transmissions: Reported* Combined 1g SAR Head results –
SPEAG Combined Multiband algorithm results – Antenna 2**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Left Cheek	0.760	-	0.744	1.010
Left Tilt	-	-	-	-
Right Cheek	-	-	-	-
Right Tilt	-	-	-	-
Plot no	-	-	-	H6

2-slot GPRS850 Antenna 2 + WLAN2450 has the highest Max+Max result of the 850MHz Antenna 1 and Antenna 2 grouped bands: 2-slot GPRS850 and WCDMA850 (Band 5).

Note:

* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance.

The highest result within individual zoom scan or individual expanded zoom scan results is given in Section 1.2 for each transmitter. The highest result within contributing individual zoom scan, individual expanded zoom scan, Speag combined algorithm or combined expanded zoom scan results is given in the Section for the simultaneous transmitter combination giving the highest combined value.

Speag Combined Multiband Head SAR plots are given in Appendix B.

7.2 The measured Body-worn 15 mm SAR values for the test device

7.2.1 GSM/GPRS/EGPRS 850 Body-worn 15 mm SAR results

Antenna 1 / HW: 1540

2-slot GPRS850									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz		
		Upper limit			Scaling factor*				
Conducted Power		31.3	31.0	31.1	0.1	0.4	0.3	dB	
Time-averaged Power		25.3	25.0	25.1	1.02	1.10	1.07	Lin	
Back	Estimated SAR	-	0.460	-	-	0.504	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	0.440	0.512	0.585	0.450	0.561	0.627	0.02	B1
	Full SAR	-	-	0.607	-	-	0.650		

Antenna 2 / HW: 1540

2-slot GPRS850									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz		
Upper limit		31.4			Scaling factor*				
Conducted Power		31.2	30.9	31.0	0.2	0.5	0.4	dB	
Time-averaged Power		25.2	24.9	25.0	1.05	1.12	1.10	Lin	
Back	Estimated SAR	0.556	0.501	0.467	0.582	0.562	0.512	0.02	-
	Full SAR	0.576	-	-	0.603	-	-		
Display	Estimated SAR	-	0.496	-	-	0.557	-	-	-
	Full SAR	-	-	-	-	-	-		

7.2.2 WCDMA850 (Band 5) Body-worn 15 mm SAR results

Antenna 1 / HW: 1540

WCDMA850 (Band 5)									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz	CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz		
		23.9			Scaling factor*				
Upper limit		23.9			Scaling factor*				
Conducted Power		23.8	23.8	23.5	0.1	0.1	0.4	dB	
Time-averaged Power		23.8	23.8	23.5	1.02	1.02	1.10	Lin	
Back	Estimated SAR	-	0.498	-	-	0.510	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	0.485	0.503	0.514	0.496	0.515	0.564	0.03	B2
	Full SAR	-	-	0.541	-	-	0.593		

Antenna 2 / HW: 1540

WCDMA850 (Band 5)									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 4132	CH 4175	CH 4233	CH 4132	CH 4175	CH 4233		
		826.4 MHz	835.0 MHz	846.6 MHz	826.4 MHz	835.0 MHz	846.6 MHz		
Upper limit		23.9			Scaling factor*				
Conducted Power		23.6	23.6	23.3	0.3	0.3	0.6	dB	
Time-averaged Power		23.6	23.6	23.3	1.07	1.07	1.15	Lin	
Back	Estimated SAR	0.428	0.418	0.412	0.459	0.448	0.473	0.01	-
	Full SAR	-	-	0.424	-	-	0.487		
Display	Estimated SAR	-	0.402	-	-	0.431	-	-	-
	Full SAR	-	-	-	-	-	-		

7.2.3 GSM/GPRS/EGPRS 1900 Body-worn 15 mm SAR results

Antenna 1 / HW: 1540

4-slot GPRS1900									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz		
Upper limit		25.4			Scaling factor*				
Conducted Power		24.9	25.1	25.2	0.5	0.3	0.2	dB	
Time-averaged Power		21.9	22.1	22.2	1.12	1.07	1.05	Lin	
Back	Estimated SAR	-	0.150	-	-	0.161	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	0.143	0.164	0.181	0.160	0.176	0.190	0.00	-
	Full SAR	-	-	0.185	-	-	0.194		

Antenna 2 / HW: 1540

4-slot GPRS1900									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 512	CH 661	CH 810	CH 512	CH 661	CH 810		
		1850.2	1880.0	1909.8	1850.2	1880.0	1909.8		
		MHz	MHz	MHz	MHz	MHz	MHz		
Upper limit		25.4			Scaling factor*				
Conducted Power		24.6	24.8	24.9	0.8	0.6	0.5	dB	
Time-averaged Power		21.6	21.8	21.9	1.20	1.15	1.12	Lin	
Back	Estimated SAR	-	0.151	-	-	0.173	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	0.185	0.169	0.156	0.222	0.194	0.175	0.01	B3
	Full SAR	0.198	-	-	0.238	-	-		

7.2.4 LTE2500 (Band 7) Body-worn 15 mm SAR results

Antenna 1 / HW: 1540

LTE2500 (Band 7) - 20MHz - QPSK - 1 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		23.4			Scaling factor*				
Conducted Power		23.3	23.4	23.0	0.1	-	0.4	dB	
Time-averaged Power		23.3	23.4	23.0	1.02	1.00	1.10	Lin	
Back	Estimated SAR	-	0.400	-	-	0.400	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	-	0.401	-	-	0.401	-	0.01	-
	Full SAR	-	0.411	-	-	0.411	-		
LTE2500 (Band 7) - 20MHz - QPSK - 50 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		22.2	22.3	22.1	0.2	0.1	0.3	dB	
Time-averaged Power		22.2	22.3	22.1	1.05	1.02	1.07	Lin	
Back	Estimated SAR	-	0.298	-	-	0.305	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	-	0.302	-	-	0.309	-	-	-
	Full SAR	-	-	-	-	-	-		
LTE2500 (Band 7) - 20MHz - QPSK - 100 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		22.4	22.3	22.2	-	0.1	0.2	dB	
Time-averaged Power		22.4	22.3	22.2	1.00	1.02	1.05	Lin	
Display	Estimated SAR	0.291	-	-	0.291	-	-	-	-
	Full SAR	-	-	-	-	-	-		

Antenna 2 / HW: 1540

LTE2500 (Band 7) - 20MHz - QPSK - 1 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		23.4			Scaling factor*				
Conducted Power		22.9	23.0	22.6	0.5	0.4	0.8	dB	
Time-averaged Power		22.9	23.0	22.6	1.12	1.10	1.20	Lin	
Back	Estimated SAR	-	0.555	-	-	0.609	-	0.01	B4
	Full SAR	-	0.544	-	-	0.596	-		
Display	Estimated SAR	-	0.486	-	-	0.533	-	-	-
	Full SAR	-	-	-	-	-	-		
LTE2500 (Band 7) - 20MHz - QPSK - 50 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		21.8	21.9	21.7	0.6	0.5	0.7	dB	
Time-averaged Power		21.8	21.9	21.7	1.15	1.12	1.17	Lin	
Back	Estimated SAR	-	0.395	-	-	0.443	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	-	0.363	-	-	0.407	-	-	-
	Full SAR	-	-	-	-	-	-		
LTE2500 (Band 7) - 20MHz - QPSK - 100 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		22.0	21.9	21.8	0.4	0.5	0.6	dB	
Time-averaged Power		22.0	21.9	21.8	1.10	1.12	1.15	Lin	
Back	Estimated SAR	0.372	-	-	0.408	-	-	-	-
	Full SAR	-	-	-	-	-	-		

7.2.5 WLAN2450 Body-worn 15mm SAR results

HW: 1540

WLAN2450 b-mode DSSS 20 MHz									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 1 2412.0 MHz	CH 6 2437.0 MHz	CH 11 2462.0 MHz	CH 1 2412.0 MHz	CH 6 2437.0 MHz	CH 11 2462.0 MHz		
Data rate		1	11	11	Scaling factor*			Mbps	
Upper limit		18.5	18.5	18.5					
Conducted Power		17.9	17.5	17.6	0.6	1.0	0.9	dB	
Time-averaged Power		17.9	17.5	17.6	1.15	1.26	1.23	Lin	
Back	Estimated SAR	-	0.096	-	-	0.121	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	0.103	0.115	0.148	0.118	0.145	0.182	0.01	B5
	Full SAR	-	-	0.154	-	-	0.189		

Adjusted SAR							
Test configuration used	Next test configuration	Device Orientation	Reported 1g SAR for test cfg used [W/kg]	Tuning target for test cfg used [dBm]*	Tuning target for next test cfg [dBm]*	Adjusted 1g SAR [W/kg]	Adjusted SAR > 1.20 [YES/NO]
b-mode DSSS 20 MHz	g-mode OFDM 20 MHz	Display	0.189	17.0	17.0	0.189	NO

Individual Body-worn 15 mm SAR plots are given Appendix B.

**Simultaneous transmissions: Combined Body-worn 15 mm 1g SAR results –
WLAN and Individual band Max results - Antenna 1**

Test configuration	WLAN 2450	2-slot GPRS850	WCDMA 850 (Band 5)	4-slot GPRS1900	LTE 2500 (Band 7)
Back	0.121	0.504	0.510	0.161	0.400
Display	0.189	0.650	0.593	0.194	0.411

**Simultaneous transmissions: Combined Body-worn 15 mm 1g SAR results –
WLAN and Individual band Max results - Antenna 2**

Test configuration	WLAN 2450	2-slot GPRS850	WCDMA 850 (Band 5)	4-slot GPRS1900	LTE 2500 (Band 7)
Back	0.121	0.603	0.487	0.173	0.596
Display	0.189	0.557	0.431	0.238	0.533

**Simultaneous transmissions: Combined Body-worn 15 mm 1g SAR results –
WLAN Max + Max combined results - Antenna 1**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Back	0.625	0.631	0.282	0.521
Display	0.839	0.782	0.383	0.600

**Simultaneous transmissions: Combined Body-worn 15 mm 1g SAR results –
WLAN Max + Max combined results - Antenna 2**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Back	0.724	0.608	0.294	0.717
Display	0.746	0.620	0.427	0.722

Note: Simultaneous Transmission Procedures as described in KDB648474 are not required for Body-worn 15 mm configurations for this product.

7.2.6 Combined 1g Body-worn 15 mm SAR data

The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values.

The combinations are done for the maximum Body configuration of the each band or band group. Maximum configurations are given in the Max+Max tables in the Section 7.2 of the report. The same scaling factors are used in plotting as for the individual reported SAR value calculations.

**Simultaneous transmissions: Reported* Combined 1g SAR Body-worn 15 mm results –
SPEAG Combined Multiband algorithm results – Antenna 1**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Back	-	-	-	-
Display	0.627	-	-	-
Plot no	B6	-	-	-

**Simultaneous transmissions: Reported* Combined 1g SAR Body-worn 15 mm results –
SPEAG Combined Multiband algorithm results – Antenna 2**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Back	-	-	-	-
Display	-	-	0.237	0.535
Plot no	-	-	-	-

2-slot GPRS850 Antenna 1 + WLAN2450 has the highest Max+Max result of the 850MHz Antenna 1 and Antenna 2 grouped bands: 2-slot GPRS850 and WCDMA850 (Band 5).

Maximum of the Combined SAR values, namely 2-slot GPRS850 + WLAN2450, in the above table is less than the maximum SAR value for the contributing cellular band. This is due to a) minimal overlap of the SAR distributions of the cellular band with WLAN2450 and b) uncertainties associated with the different methods of calculation. In this case, the maximum SAR values given for the combined Mode in the Summary table in Section 1.2.2 is that for the individual cellular band 2-slot GPRS850.

Note:

* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance.

The highest result within individual zoom scan or individual expanded zoom scan results is given in Section 1.2 for each transmitter. The highest result within contributing individual zoom scan, individual expanded zoom scan, Speag combined algorithm or combined expanded zoom scan results is given in the Section for the simultaneous transmitter combination giving the highest combined value.

7.3 The measured Wireless Router 10 mm SAR values for the test device

7.3.1 GSM/GPRS/EGPRS 850 Wireless Router 10 mm SAR results

Antenna 1 / HW: 1540

2-slot GPRS850									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz		
Upper limit		31.4			Scaling factor*				
Conducted Power		31.3	31.0	31.1	0.1	0.4	0.3	dB	
Time-averaged Power		25.3	25.0	25.1	1.02	1.10	1.07	Lin	
Back	Estimated SAR	0.714	0.747	0.853	0.731	0.819	0.914	0.03	-
	Full SAR	-	-	0.886	-	-	0.949		
Display	Estimated SAR	0.739	0.767	0.852	0.756	0.841	0.913	0.03	-
	Full SAR	-	-	0.885	-	-	0.948		
Top	Estimated SAR	-	0.027	-	-	0.030	-	-	-
	Full SAR	-	-	-	-	-	-		
Bottom	Estimated SAR	-	0.450	-	-	0.493	-	-	-
	Full SAR	-	-	-	-	-	-		
Left	Estimated SAR	-	0.207	-	-	0.227	-	-	-
	Full SAR	-	-	-	-	-	-		
Right	Estimated SAR	-	0.534	-	-	0.586	-	0.00	-
	Full SAR	-	0.530	-	-	0.581	-		
Repeated Back	Estimated SAR	-	-	0.854	-	-	0.915	0.04	W1
	Full SAR	-	-	0.889	-	-	0.953		

Antenna 2 / HW: 1540

2-slot GPRS850									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz		
Upper limit		31.4			Scaling factor*				
Conducted Power		31.2	30.9	31.0	0.2	0.5	0.4	dB	
Time-averaged Power		25.2	24.9	25.0	1.05	1.12	1.10	Lin	
Back	Estimated SAR	0.758	0.661	0.610	0.794	0.742	0.669	0.03	-
	Full SAR	0.791	-	-	0.828	-	-		
Display	Estimated SAR	-	0.632	-	-	0.709	-	-	-
	Full SAR	-	-	-	-	-	-		
Top	Estimated SAR	-	0.019	-	-	0.022	-	-	-
	Full SAR	-	-	-	-	-	-		
Bottom	Estimated SAR	-	0.225	-	-	0.252	-	-	-
	Full SAR	-	-	-	-	-	-		
Left	Estimated SAR	-	0.541	-	-	0.607	-	-	-
	Full SAR	-	-	-	-	-	-		
Right	Estimated SAR	-	0.196	-	-	0.220	-	-	-
	Full SAR	-	-	-	-	-	-		

7.3.2 WCDMA850 (Band 5) Wireless Router 10 mm SAR results

Antenna 1 / HW: 1540

WCDMA850 (Band 5)									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz	CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz		
Upper limit		23.9			Scaling factor*				
Conducted Power		23.8	23.8	23.5	0.1	0.1	0.4	dB	
Time-averaged Power		23.8	23.8	23.5	1.02	1.02	1.10	Lin	
Back	Estimated SAR	0.759	0.808	0.757	0.777	0.827	0.830	0.03	-
	Full SAR	-	-	0.791	-	-	0.867		
Display	Estimated SAR	0.789	0.820	0.792	0.807	0.839	0.868	0.03	-
	Full SAR	-	-	0.824	-	-	0.903		
Top	Estimated SAR	-	0.017	-	-	0.017	-	-	-
	Full SAR	-	-	-	-	-	-		
Bottom	Estimated SAR	-	0.404	-	-	0.413	-	-	-
	Full SAR	-	-	-	-	-	-		
Left	Estimated SAR	-	0.202	-	-	0.207	-	-	-
	Full SAR	-	-	-	-	-	-		
Right	Estimated SAR	-	0.577	-	-	0.590	-	0.00	-
	Full SAR	-	0.573	-	-	0.586	-		
Repeated Display	Estimated SAR	-	-	0.795	-	-	0.872	0.03	W2
	Full SAR	-	-	0.824	-	-	0.903		

Antenna 2 / HW: 1540

WCDMA850 (Band 5)									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz	CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz		
Upper limit		23.9			Scaling factor*				
Conducted Power		23.6	23.6	23.3	0.3	0.3	0.6	dB	
Time-averaged Power		23.6	23.6	23.3	1.07	1.07	1.15	Lin	
Back	Estimated SAR	0.573	0.576	0.544	0.614	0.617	0.625	0.02	-
	Full SAR	-	-	0.568	-	-	0.652		
Display	Estimated SAR	-	0.557	-	-	0.597	-	-	-
	Full SAR	-	-	-	-	-	-		
Top	Estimated SAR	-	0.016	-	-	0.017	-	-	-
	Full SAR	-	-	-	-	-	-		
Bottom	Estimated SAR	-	0.185	-	-	0.198	-	-	-
	Full SAR	-	-	-	-	-	-		
Left	Estimated SAR	-	0.430	-	-	0.461	-	-	-
	Full SAR	-	-	-	-	-	-		
Right	Estimated SAR	-	0.156	-	-	0.167	-	-	-
	Full SAR	-	-	-	-	-	-		

7.3.3 GSM/GPRS/EGPRS 1900 Wireless Router 10 mm SAR results

Antenna 1 / HW: 1540

4-slot GPRS1900									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 512	CH 661	CH 810	CH 512	CH 661	CH 810		
		1850.2 MHz	1880.0 MHz	1909.8 MHz	1850.2 MHz	1880.0 MHz	1909.8 MHz		
Upper limit		25.4			Scaling factor*				
Conducted Power		24.9	25.1	25.2	0.5	0.3	0.2	dB	
Time-averaged Power		21.9	22.1	22.2	1.12	1.07	1.05	Lin	
Back	Estimated SAR	-	0.301	-	-	0.323	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	-	0.377	-	-	0.404	-	-	-
	Full SAR	-	-	-	-	-	-		
Top	Estimated SAR	-	0.039	-	-	0.042	-	-	-
	Full SAR	-	-	-	-	-	-		
Bottom	Estimated SAR	0.419	0.451	0.478	0.470	0.483	0.501	0.01	-
	Full SAR	-	-	0.473	-	-	0.495		
Left	Estimated SAR	-	0.063	-	-	0.068	-	-	-
	Full SAR	-	-	-	-	-	-		
Right	Estimated SAR	-	0.184	-	-	0.197	-	-	-
	Full SAR	-	-	-	-	-	-		

Antenna 2 / HW: 1540

4-slot GPRS1900									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz		
Upper limit		25.4			Scaling factor*				
Conducted Power		24.6	24.8	24.9	0.8	0.6	0.5	dB	
Time-averaged Power		21.6	21.8	21.9	1.20	1.15	1.12	Lin	
Back	Estimated SAR	-	0.315	-	-	0.362	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	-	0.352	-	-	0.404	-	-	-
	Full SAR	-	-	-	-	-	-		
Top	Estimated SAR	-	0.012	-	-	0.014	-	-	-
	Full SAR	-	-	-	-	-	-		
Bottom	Estimated SAR	0.434	0.373	0.349	0.522	0.428	0.392	0.02	W3
	Full SAR	0.450	-	-	0.541	-	-		
Left	Estimated SAR	-	0.181	-	-	0.208	-	-	-
	Full SAR	-	-	-	-	-	-		
Right	Estimated SAR	-	0.035	-	-	0.040	-	-	-
	Full SAR	-	-	-	-	-	-		

7.3.4 LTE2500 (Band 7) Wireless Router 10 mm SAR results

Antenna 1 / HW: 1540

LTE2500 (Band 7) - 20MHz - QPSK - 1 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		23.4			Scaling factor*				
Conducted Power		23.3	23.4	23.0	0.1	-	0.4	dB	
Time-averaged Power		23.3	23.4	23.0	1.02	1.00	1.10	Lin	
Back	Estimated SAR	-	0.690	-	-	0.690	-	0.01	-
	Full SAR	-	0.695	-	-	0.695	-		
Display	Estimated SAR	-	0.665	-	-	0.665	-	-	-
	Full SAR	-	-	-	-	-	-		
Top	Estimated SAR	-	0.037	-	-	0.037	-	-	-
	Full SAR	-	-	-	-	-	-		
Bottom	Estimated SAR	0.686	0.733	-	0.702	0.733	-	-	-
	Full SAR	-	-	-	-	-	-		
Left	Estimated SAR	-	0.117	-	-	0.117	-	-	-
	Full SAR	-	-	-	-	-	-		
Right	Estimated SAR	-	0.269	-	-	0.269	-	-	-
	Full SAR	-	-	-	-	-	-		

LTE2500 (Band 7) - 20MHz - QPSK - 1 RB - Offset 99									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		23.4			Scaling factor*				
Conducted Power		23.2	23.0	23.2	0.2	0.4	0.2	dB	
Time-averaged Power		23.2	23.0	23.2	1.05	1.10	1.05	Lin	
Bottom	Estimated SAR	-	-	0.832	-	-	0.871	0.05	-
	Full SAR	-	-	0.880	-	-	0.921		
Repeated Bottom	Estimated SAR	-	-	0.878	-	-	0.919	0.01	-
	Full SAR	-	-	0.885	-	-	0.927		

(LTE7 Wireless Router / Antenna 1 table continues)

(LTE7 Wireless Router / Antenna 1 table continues)

LTE2500 (Band 7) - 20MHz - QPSK - 50 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		22.2	22.3	22.1	0.2	0.1	0.3	dB	
Time-averaged Power		22.2	22.3	22.1	1.05	1.02	1.07	Lin	
Back	Estimated SAR	-	0.541	-	-	0.554	-	-	-
	Full SAR	-	-	-	-	-	-	-	-
Display	Estimated SAR	-	0.521	-	-	0.533	-	-	-
	Full SAR	-	-	-	-	-	-	-	-
Top	Estimated SAR	-	0.026	-	-	0.026	-	-	-
	Full SAR	-	-	-	-	-	-	-	-
Bottom	Estimated SAR	-	0.558	-	-	0.571	-	-	-
	Full SAR	-	-	-	-	-	-	-	-
Left	Estimated SAR	-	0.088	-	-	0.090	-	-	-
	Full SAR	-	-	-	-	-	-	-	-
Right	Estimated SAR	-	0.204	-	-	0.209	-	-	-
	Full SAR	-	-	-	-	-	-	-	-
LTE2500 (Band 7) - 20MHz - QPSK - 100 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		22.4	22.3	22.2	-	0.1	0.2	dB	
Time-averaged Power		22.4	22.3	22.2	1.00	1.02	1.05	Lin	
Bottom	Estimated SAR	0.547	-	-	0.547	-	-	-	-
	Full SAR	-	-	-	-	-	-	-	-

Antenna 2 / HW: 1540

LTE2500 (Band 7) - 20MHz - QPSK - 1 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		23.4			Scaling factor*				
Conducted Power		22.9	23.0	22.6	0.5	0.4	0.8	dB	
Time-averaged Power		22.9	23.0	22.6	1.12	1.10	1.20	Lin	
Back	Estimated SAR	0.849	0.961	-	0.953	1.054	-	0.01	-
	Full SAR	-	0.974	-	-	1.068	-		
Display	Estimated SAR	0.771	0.853	-	0.865	0.935	-	0.03	-
	Full SAR	-	0.887	-	-	0.973	-		
Top	Estimated SAR	-	0.025	-	-	0.027	-	-	-
	Full SAR	-	-	-	-	-	-		
Bottom	Estimated SAR	-	0.257	-	-	0.282	-	-	-
	Full SAR	-	-	-	-	-	-		
Left	Estimated SAR	-	0.441	-	-	0.484	-	0.00	-
	Full SAR	-	0.444	-	-	0.487	-		
Right	Estimated SAR	-	0.060	-	-	0.066	-	-	-
	Full SAR	-	-	-	-	-	-		
Repeated Back	Estimated SAR	-	0.964	-	-	1.057	-	0.03	W4
	Full SAR	-	0.990	-	-	1.086	-		
LTE2500 (Band 7) - 20MHz - QPSK - 1 RB - Offset 99									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		23.4			Scaling factor*				
Conducted Power		22.8	22.6	22.8	0.6	0.8	0.6	dB	
Time-averaged Power		22.8	22.6	22.8	1.15	1.20	1.15	Lin	
Back	Estimated SAR	-	-	0.816	-	-	0.937	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	-	-	0.773	-	-	0.888	-	-
	Full SAR	-	-	-	-	-	-		

(LTE7 Wireless Router / Antenna 2 table continues)

(LTE7 Wireless Router / Antenna 2 table continues)

LTE2500 (Band 7) - 20MHz - QPSK - 50 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		21.8	21.9	21.7	0.6	0.5	0.7	dB	
Time-averaged Power		21.8	21.9	21.7	1.15	1.12	1.17	Lin	
Back	Estimated SAR	-	0.704	-	-	0.790	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	-	0.623	-	-	0.699	-	-	-
	Full SAR	-	-	-	-	-	-		
Top	Estimated SAR	-	0.017	-	-	0.019	-	-	-
	Full SAR	-	-	-	-	-	-		
Bottom	Estimated SAR	-	0.197	-	-	0.221	-	-	-
	Full SAR	-	-	-	-	-	-		
Left	Estimated SAR	-	0.314	-	-	0.352	-	-	-
	Full SAR	-	-	-	-	-	-		
Right	Estimated SAR	-	0.047	-	-	0.052	-	-	-
	Full SAR	-	-	-	-	-	-		
LTE2500 (Band 7) - 20MHz - QPSK - 100 RB - Offset 0									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz	CH 20850 2510.0 MHz	CH 21100 2535.0 MHz	CH 21350 2560.0 MHz		
Upper limit		22.4			Scaling factor*				
Conducted Power		22.0	21.9	21.8	0.4	0.5	0.6	dB	
Time-averaged Power		22.0	21.9	21.8	1.10	1.12	1.15	Lin	
Back	Estimated SAR	0.666	-	-	0.730	-	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	0.628	-	-	0.689	-	-	-	-
	Full SAR	-	-	-	-	-	-		

7.3.5 WLAN2450 Wireless Router 10 mm SAR results

HW: 1540

WLAN2450 b-mode DSSS 20 MHz									
Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation* [W/kg]	Plot #
		CH 1 2412.0 MHz	CH 6 2437.0 MHz	CH 11 2462.0 MHz	CH 1 2412.0 MHz	CH 6 2437.0 MHz	CH 11 2462.0 MHz		
Data rate		1	11	11	Scaling factor*			Mbps	
Upper limit		18.5	18.5	18.5					
Conducted Power		17.9	17.5	17.6	0.6	1.0	0.9	dB	
Time-averaged Power		17.9	17.5	17.6	1.15	1.26	1.23	Lin	
Back	Estimated SAR	-	0.259	-	-	0.326	-	-	-
	Full SAR	-	-	-	-	-	-		
Display	Estimated SAR	-	0.265	-	-	0.334	-	-	-
	Full SAR	-	-	-	-	-	-		
Top	Estimated SAR	0.362	0.464	0.521	0.416	0.584	0.641	0.02	W5
	Full SAR	-	-	0.543	-	-	0.668		
Bottom	Estimated SAR	-	-	-	-	-	-	-	-
	Full SAR	-	-	-	-	-	-		
Left	Estimated SAR	-	0.018	-	-	0.023	-	-	-
	Full SAR	-	-	-	-	-	-		
Right	Estimated SAR	-	0.020	-	-	0.025	-	-	-
	Full SAR	-	-	-	-	-	-		

Individual Wireless Router 10 mm SAR plots are given in Appendix B.

**Simultaneous transmissions: Combined Wireless Router 10 mm 1g SAR results –
WLAN and Individual band Max results - Antenna 1**

Test configuration	WLAN 2450	2-slot GPRS850	WCDMA 850 (Band 5)	4-slot GPRS1900	LTE 2500 (Band 7)
Back	0.326	0.953	0.867	0.323	0.695
Display	0.334	0.948	0.903	0.404	0.665
Top	0.668	0.030	0.017	0.042	0.037
Bottom	0.000	0.493	0.413	0.495	0.927
Left	0.023	0.227	0.207	0.068	0.117
Right	0.025	0.581	0.586	0.197	0.269

**Simultaneous transmissions: Combined Wireless Router 10 mm 1g SAR results –
WLAN and Individual band Max results - Antenna 2**

Test configuration	WLAN 2450	2-slot GPRS850	WCDMA 850 (Band 5)	4-slot GPRS1900	LTE 2500 (Band 7)
Back	0.326	0.828	0.652	0.362	1.086
Display	0.334	0.709	0.597	0.404	0.973
Top	0.668	0.022	0.017	0.014	0.027
Bottom	0.000	0.252	0.198	0.541	0.282
Left	0.023	0.607	0.461	0.208	0.487
Right	0.025	0.220	0.167	0.040	0.066

**Simultaneous transmissions: Combined Wireless Router 10 mm 1g SAR results –
WLAN Max + Max combined results - Antenna 1**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Back	1.279	1.193	0.649	1.021
Display	1.282	1.237	0.738	0.999
Top	0.698	0.685	0.710	0.705
Bottom	0.493	0.413	0.495	0.927
Left	0.250	0.230	0.091	0.140
Right	0.606	0.611	0.222	0.294

**Simultaneous transmissions: Combined Wireless Router 10 mm 1g SAR results –
WLAN Max + Max combined results - Antenna 2**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Back	1.154	0.978	0.688	1.412
Display	1.043	0.931	0.738	1.307
Top	0.690	0.685	0.682	0.695
Bottom	0.252	0.198	0.541	0.282
Left	0.630	0.484	0.231	0.510
Right	0.245	0.192	0.065	0.091

Note: Simultaneous Transmission Procedures as described in KDB648474 are not required for Wireless Router 10 mm configurations for this product.

1.1.1 Combined 1g Wireless Router 10 mm SAR data

The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values.

The combinations are done for the maximum Wireless Router 10 mm configuration of the each band or band group. Maximum configurations are given in the Max+Max tables in the Section 7.3 of the report. The same scaling factors are used in plotting as for the individual reported SAR value calculations.

**Simultaneous transmissions: Reported* Combined 1g SAR Wireless Router 10 mm results –
SPEAG Combined Multiband algorithm results – Antenna 1**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Back	-	-	-	-
Display	0.919	-	-	-
Top	-	-	-	-
Bottom	-	-	-	-
Left	-	-	-	-
Right	-	-	-	-
Plot no	-	-	-	-

**Simultaneous transmissions: Reported* Combined 1g SAR Wireless Router 10 mm results –
SPEAG Combined Multiband algorithm results – Antenna 2**

Test configuration	2-slot GPRS850 + WLAN 2450	WCDMA 850 (Band 5) + WLAN 2450	4-slot GPRS1900 + WLAN 2450	LTE 2500 (Band 7) + WLAN 2450
Back	-	-	-	1.060
Display	-	-	0.402	-
Top	-	-	-	-
Bottom	-	-	-	-
Left	-	-	-	-
Right	-	-	-	-
Plot no	-	-	-	W6

2-slot GPRS850 Antenna 1 + WLAN2450 has the highest Max+Max result of the 850MHz Antenna 1 and Antenna 2 grouped bands: 2-slot GPRS850 and WCDMA850 (Band 5).

Maximum of the Combined SAR values, namely LTE2500 (Band 7) + WLAN2450, in the above table is less than the maximum SAR value for the contributing cellular band. This is due to a) minimal overlap of the SAR distributions of the cellular band with WLAN2450 and b) uncertainties associated with the different methods of calculation. In this case, the maximum SAR values given for the combined Mode in the Summary table in Section 1.2.1 is that for the individual cellular band LTE2500 (Band 7).

Note:

* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance.

The highest result within individual zoom scan or individual expanded zoom scan results is given in Section 1.2 for each transmitter. The highest result within contributing individual zoom scan, individual expanded zoom scan, Speag combined algorithm or combined expanded zoom scan results is given in the Section for the simultaneous transmitter combination giving the highest combined value.

Speag Combined Multiband Wireless Router 10 mm SAR plots are given in Appendix B.

APPENDIX A: SYSTEM CHECKING SCANS

Plot 1

Date/Time: 2015-10-23 09:16:27

Test Laboratory: TCC Microsoft

Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW

Frequency: **835 MHz**; Duty Cycle: 1:1

Medium: HSL835; Medium Notes: t= 21.5 C

Medium parameters used: f = 835 MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 40.468$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3275
- ConvF(5.95, 5.95, 5.95); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2015-04-21
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1596
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

d=15mm, Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 53.60 V/m

Fast SAR: SAR(1 g) = 2.3 W/kg

Fast SAR(10 g) = 1.55 W/kg

Maximum value of SAR (interpolated) = 2.63 W/kg

d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 53.60 V/m


Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.26 W/kg

SAR(10 g) = 1.49 W/kg

Power Drift = -0.03 dB

Maximum value of SAR (measured) = 2.63 W/kg

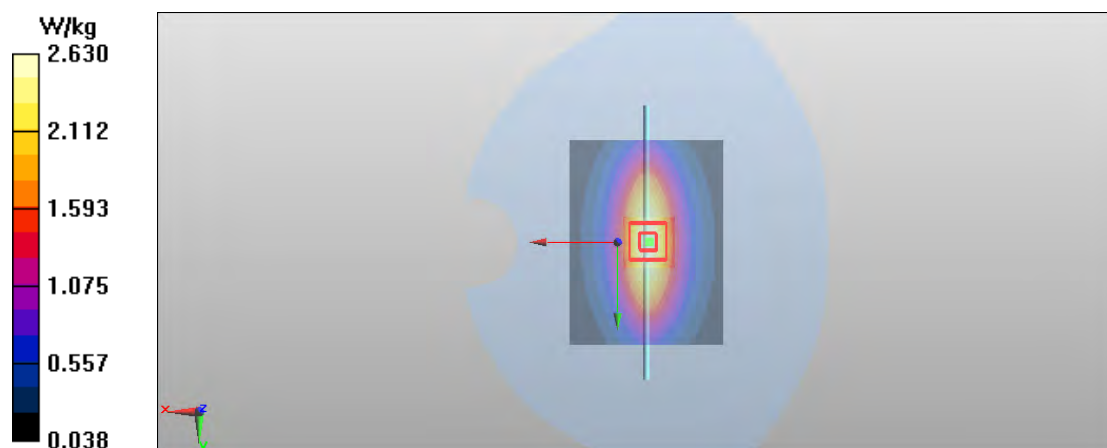

Plot 2

Date/Time: 2015-10-28 12:14:23

Test Laboratory: TCC Microsoft

Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW

Frequency: **1900 MHz**; Duty Cycle: 1:1

Medium: HSL1900; Medium Notes: t= 20,6 C

Medium parameters used: f = 1900 MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 38.39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3276
- ConvF(4.98, 4.98, 4.98); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2015-01-21
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

d=10mm, Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 90.32 V/m

Fast SAR: SAR(1 g) = 10.2 W/kg

Fast SAR(10 g) = 5.29 W/kg

Maximum value of SAR (interpolated) = 13.1 W/kg

d=10mm, Pin=250mW/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 90.32 V/m


Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 9.99 W/kg

SAR(10 g) = 5.22 W/kg

Power Drift = -0.04 dB

Maximum value of SAR (measured) = 12.6 W/kg

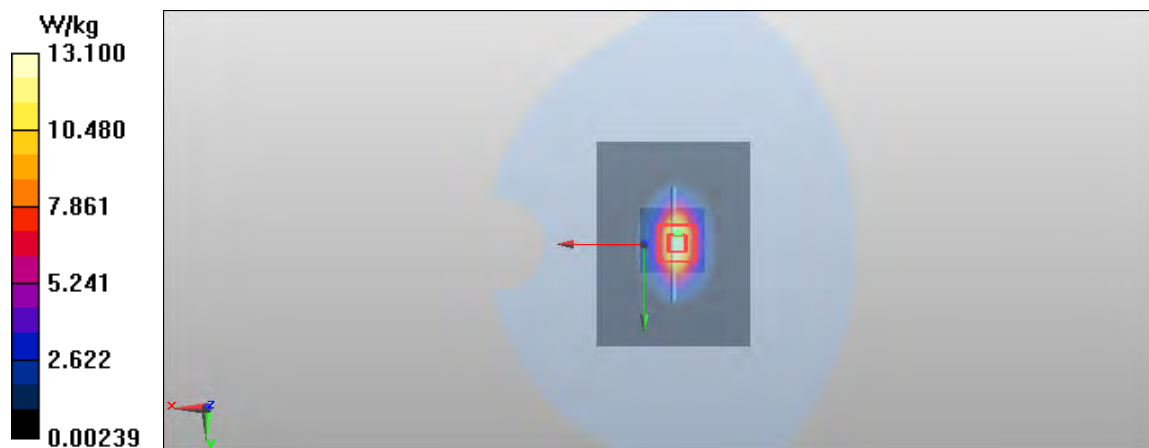

Plot 3

Date/Time: 2015-11-10 09:53:03

Test Laboratory: TCC Microsoft

Type: D2450V2; Serial: D2450V2 - SN:749

Communication System: CW

Frequency: **2450 MHz**; Duty Cycle: 1:1

Medium: HSL 2300-2600; Medium Notes: t= 22,2 C

Medium parameters used: f = 2450 MHz; $\sigma = 1.782$ S/m; $\epsilon_r = 38.567$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3892
- ConvF(7.24, 7.24, 7.24); Calibrated: 2015-04-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2015-04-20
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

d=10mm, Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 90.69 V/m

Fast SAR: SAR(1 g) = 12.9 W/kg

Fast SAR(10 g) = 5.75 W/kg

Maximum value of SAR (interpolated) = 17.2 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.69 V/m


Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 13.1 W/kg

SAR(10 g) = 6.11 W/kg

Power Drift = 0.02 dB

Maximum value of SAR (measured) = 17.2 W/kg

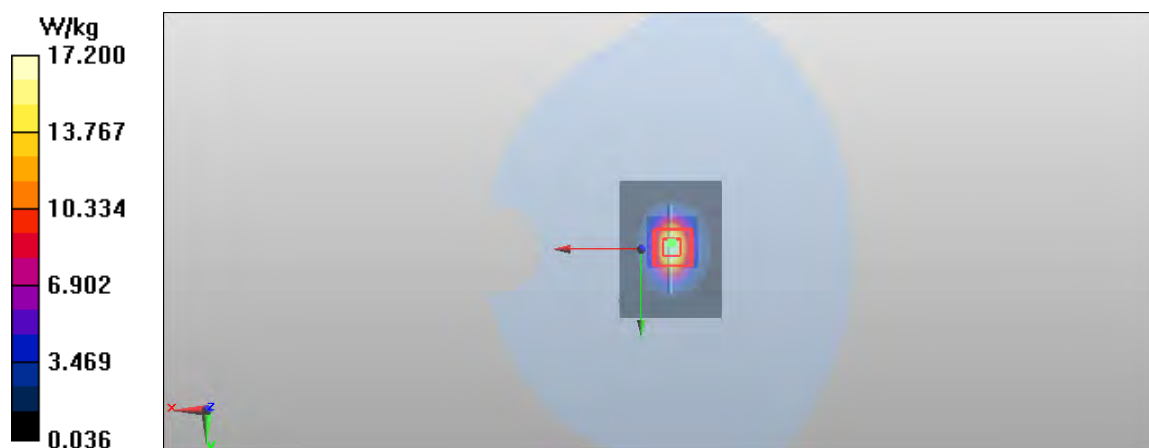

Plot 4

Date/Time: 2015-10-29 07:39:10

Test Laboratory: TCC Microsoft

Type: **D2600V2**; Serial: **D2600V2 - SN:1056**

Communication System: CW

Frequency: **2600 MHz**; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: t = 22.2 C

Medium parameters used: f = 2600 MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 37.671$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3892
- ConvF(7.13, 7.13, 7.13); Calibrated: 2015-04-24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2015-04-20
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

d=10mm, Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 92.70 V/m

Fast SAR: SAR(1 g) = 14.7 W/kg

Fast SAR(10 g) = 6.7 W/kg

Maximum value of SAR (interpolated) = 17.0 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.70 V/m


Peak SAR (extrapolated) = 32.5 W/kg

SAR(1 g) = 14.9 W/kg

SAR(10 g) = 6.62 W/kg

Power Drift = 0.02 dB

Maximum value of SAR (measured) = 17.2 W/kg

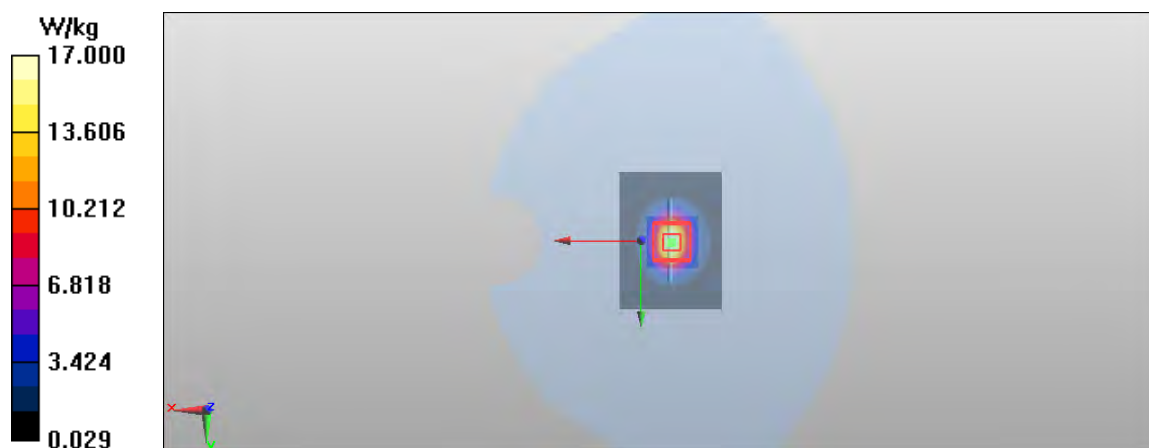

Plot 5

Date/Time: 2015-10-26 08:46:56

Test Laboratory: TCC Microsoft

Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW

Frequency: **835 MHz**; Duty Cycle: 1:1

Medium: BSL835; Medium Notes: $t = 21,8$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 54.089$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3275
- ConvF(5.93, 5.93, 5.93); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2015-04-21
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

d=15mm, Pin=250mW/Area Scan (81x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 52.27 V/m

Fast SAR: SAR(1 g) = 2.4 W/kg

Fast SAR(10 g) = 1.61 W/kg

Maximum value of SAR (interpolated) = 2.75 W/kg

d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 52.27 V/m


Peak SAR (extrapolated) = 3.45 W/kg

SAR(1 g) = 2.38 W/kg

SAR(10 g) = 1.58 W/kg

Power Drift = -0.00 dB

Maximum value of SAR (measured) = 2.77 W/kg

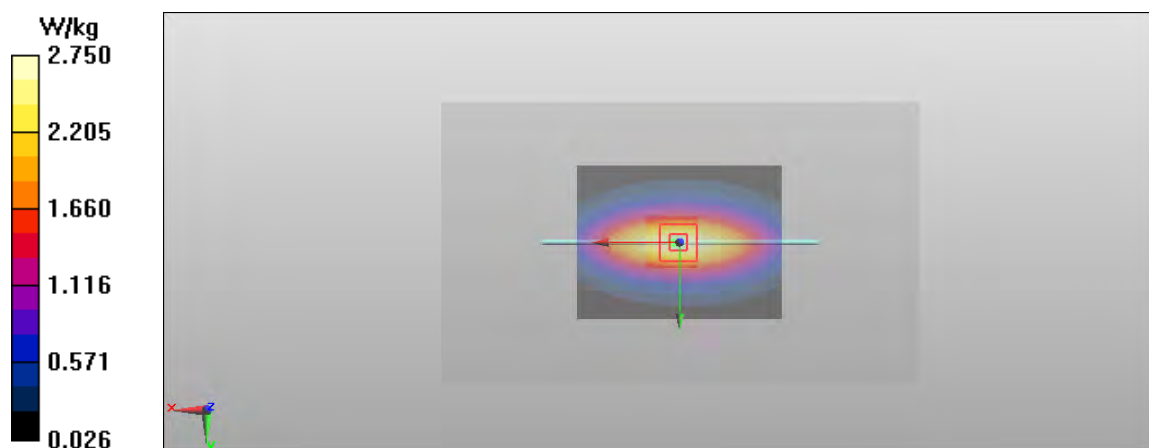

Plot 6

Date/Time: 2015-10-29 18:45:27

Test Laboratory: TCC Microsoft

Type: **D1900V2**; Serial: **D1900V2 - SN:5d013**

Communication System: CW

Frequency: **1900 MHz**; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: t= 20,8 C

Medium parameters used: f = 1900 MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 51.632$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3276
- ConvF(4.72, 4.72, 4.72); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2015-01-21
- Phantom: SAM 2 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/2 (1800MHz), TP-1123/2 (1900MHz)
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7331)

d=10mm, Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 87.12 V/m

Fast SAR: SAR(1 g) = 10.2 W/kg

Fast SAR(10 g) = 5.08 W/kg

Maximum value of SAR (interpolated) = 13.1 W/kg

d=10mm, Pin=250mW/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 87.12 V/m


Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 10.1 W/kg

SAR(10 g) = 5.33 W/kg

Power Drift = -0.01 dB

Maximum value of SAR (measured) = 12.7 W/kg

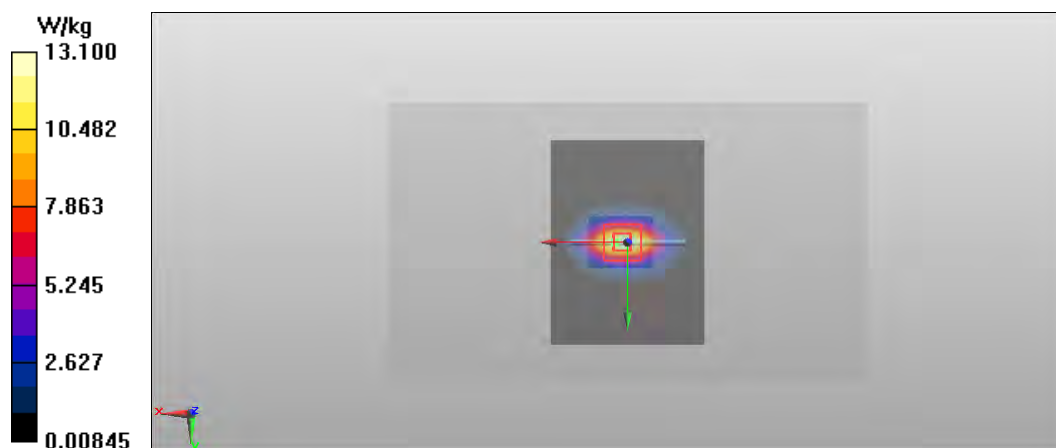

Plot 7

Date/Time: 2015-10-27 10:00:59

Test Laboratory: TCC Microsoft

Type: **D2450V2**; Serial: **D2450V2** - SN:749

Communication System: CW

Frequency: **2450 MHz**; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: t= 22.7 C

Medium parameters used: f = 2450 MHz; σ = 1.903 S/m; ϵ_r = 51.121; ρ = 1000 kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3892
- ConvF(7.32, 7.32, 7.32); Calibrated: 2015-04-24;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2015-04-20
- Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

d=10mm, Pin=250mW/Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 83.77 V/m

Fast SAR: SAR(1 g) = 11.8 W/kg

Fast SAR(10 g) = 5.2 W/kg

Maximum value of SAR (interpolated) = 13.8 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.77 V/m


Peak SAR (extrapolated) = 23.3 W/kg

SAR(1 g) = 11.7 W/kg

SAR(10 g) = 5.44 W/kg

Power Drift = -0.00 dB

Maximum value of SAR (measured) = 13.4 W/kg

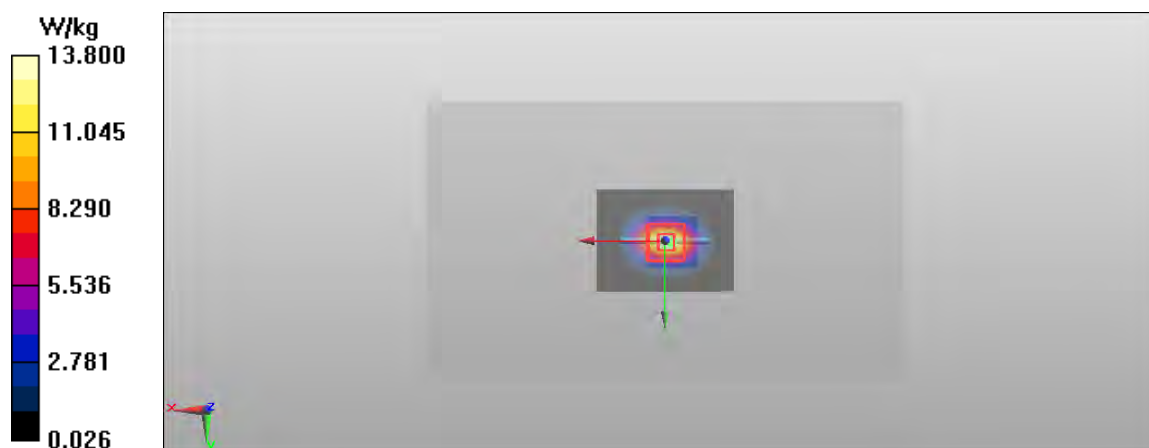

Plot 8

Date/Time: 2015-11-04 08:56:46

Test Laboratory: TCC Microsoft

Type: **D2600V2**; Serial: **D2600V2 - SN:1056**

Communication System: CW

Frequency: **2600 MHz**; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: t= 21.9 C

Medium parameters used: f = 2600 MHz; σ = 2.127 S/m; ϵ_r = 50.173; ρ = 1000 kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3892
- ConvF(7.04, 7.04, 7.04); Calibrated: 2015-04-24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2015-04-20
- Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

d=10mm, Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 86.48 V/m

Fast SAR: SAR(1 g) = 13.7 W/kg

Fast SAR(10 g) = 6.07 W/kg

Maximum value of SAR (interpolated) = 15.8 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.48 V/m


Peak SAR (extrapolated) = 28.4 W/kg

SAR(1 g) = 13.6 W/kg

SAR(10 g) = 6.11 W/kg

Power Drift = -0.02 dB

Maximum value of SAR (measured) = 15.9 W/kg

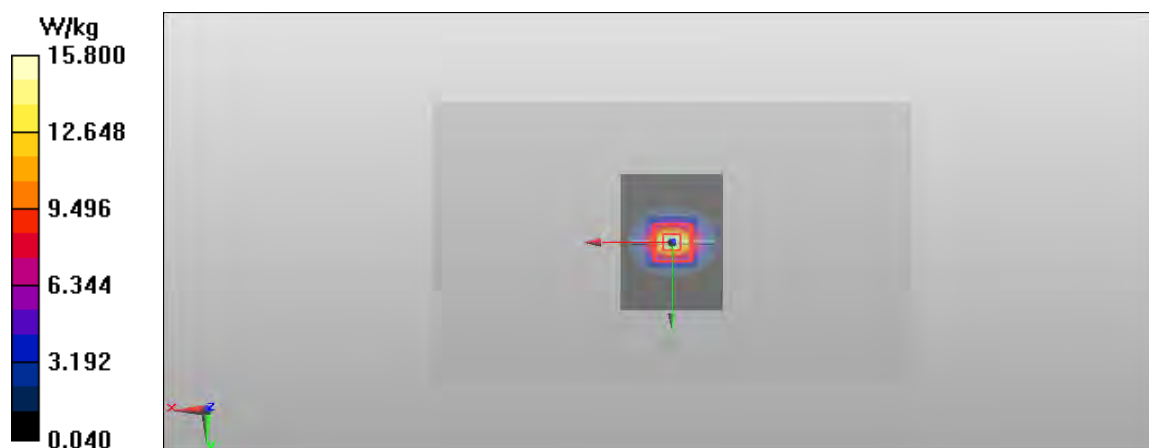

APPENDIX B: MEASUREMENT SCANS

Plot H1

Date/Time: 2015-10-22 16:00:05

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/429631/05

Communication System: 2-slot GPRS850

Frequency: **824.2 MHz**; Duty Cycle: 1:4.19952

Medium: HSL835; Medium Notes: t= 21.7 C

Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.889 S/m; ϵ_r = 40.896; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3275
- ConvF(5.95, 5.95, 5.95); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2015-04-21
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1596
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

2-slot GPRS850 - Left/Cheek - CH 128 - Antenna 2/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 26.220 V/m

Fast SAR: SAR(1 g) = 0.513 W/kg

Fast SAR(10 g) = 0.356 W/kg

Maximum value of SAR (interpolated) = 0.580 W/kg

2-slot GPRS850 - Left/Cheek - CH 128 - Antenna 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.800 V/m


Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.510 W/kg

SAR(10 g) = 0.329 W/kg

Power Drift = 0.03 dB

Maximum value of SAR (measured) = 0.615 W/kg

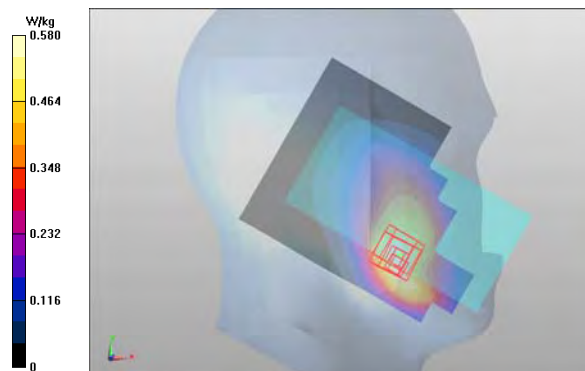

Plot H2

Date/Time: 2015-10-23 10:48:59

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/429631/05

Communication System: WCDMA850

Frequency: **846.6 MHz**; Duty Cycle: 1:1

Medium: HSL835; Medium Notes: t= 21.5 C

Medium parameters used: f = 847 MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 40.395$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3275
- ConvF(5.95, 5.95, 5.95); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2015-04-21
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1596
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

WCDMA850 (Band 5) - Right/Cheek - CH 4233 - Antenna 1/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 23.859 V/m

Fast SAR: SAR(1 g) = 0.441 W/kg

Fast SAR(10 g) = 0.304 W/kg

Maximum value of SAR (interpolated) = 0.521 W/kg

WCDMA850 (Band 5) - Right/Cheek - CH 4233 - Antenna 1/Zoom Scan (6x6x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.056 V/m


Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.456 W/kg

SAR(10 g) = 0.296 W/kg

Power Drift = 0.00 dB

Maximum value of SAR (measured) = 0.542 W/kg

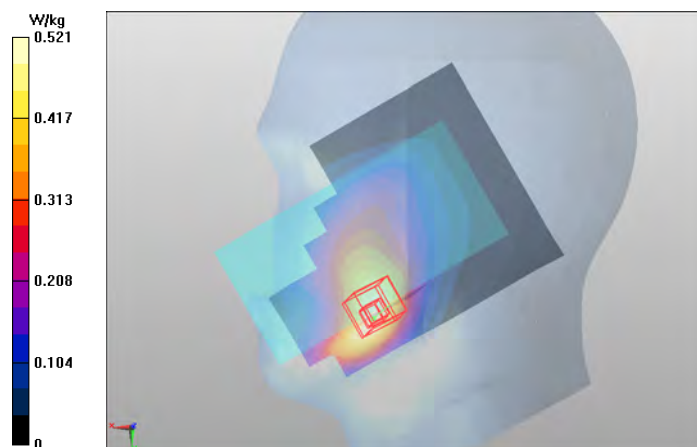

Plot H3

Date/Time: 2015-10-28 23:08:36

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296286/7

Communication System: 4-slot GPRS1900

Frequency: **1850.2 MHz**; Duty Cycle: 1:2.09991

Medium: HSL1900; Medium Notes: t= 20,6 C

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.368 \text{ S/m}$; $\epsilon_r = 38.63$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3276
- ConvF(4.98, 4.98, 4.98); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2015-01-21
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

4-slot GPRS1900 - Left/Cheek - CH 512 - Antenna 2/Area Scan (121x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 9.529 V/m

Fast SAR: SAR(1 g) = 0.230 W/kg

Fast SAR(10 g) = 0.130 W/kg

Maximum value of SAR (interpolated) = 0.288 W/kg

4-slot GPRS1900 - Left/Cheek - CH 512 - Antenna 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.870 V/m


Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.265 W/kg

SAR(10 g) = 0.155 W/kg

Power Drift = 0.10 dB

Maximum value of SAR (measured) = 0.326 W/kg

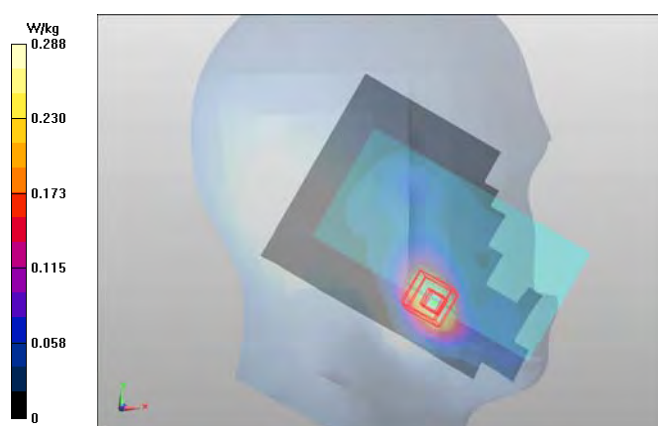

Plot H4

Date/Time: 2015-10-30 12:36:07

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296288/3

Communication System: LTE2500 (Band 7)

Frequency: **2560 MHz**; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: t= 22.1 C

Medium parameters used: f = 2560 MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 37.209$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3892
- ConvF(7.13, 7.13, 7.13); Calibrated: 2015-04-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2015-04-20
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

LTE2500 (Band 7) - Left/Cheek - CH 21350 - 20MHz - QPSK - 1 RB - Offset 99 - Antenna 2 - Repeated/Area

Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 23.506 V/m

Fast SAR: SAR(1 g) = 0.877 W/kg

Fast SAR(10 g) = 0.451 W/kg

Maximum value of SAR (interpolated) = 1.13 W/kg

LTE2500 (Band 7) - Left/Cheek - CH 21350 - 20MHz - QPSK - 1 RB - Offset 99 - Antenna 2 - Repeated/Zoom

Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.506 V/m


Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.851 W/kg

SAR(10 g) = 0.447 W/kg

Power Drift = -0.10 dB

Maximum value of SAR (measured) = 1.22 W/kg

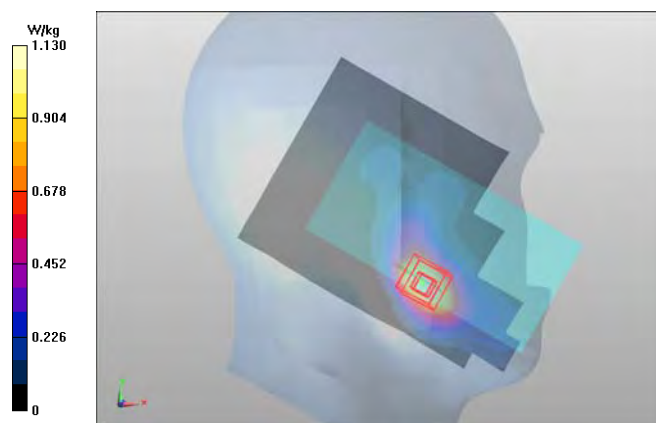

Plot H5

Date/Time: 2015-11-10 13:52:13

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296788/2

Communication System: WLAN2450

Frequency: **2462 MHz**; Duty Cycle: 1:1

Medium: HSL 2300-2600; Medium Notes: t= 22,2 C

Medium parameters used: f = 2462 MHz; $\sigma = 1.793$ S/m; $\epsilon_r = 38.52$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3892
- ConvF(7.24, 7.24, 7.24); Calibrated: 2015-04-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2015-04-20
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

WLAN2450 b-mode - Left/Tilt - CH 11 - 20 MHz DSSS BPSK 1 Mbps - Antenna 1/Area Scan (121x181x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 22.85 V/m

Fast SAR: SAR(1 g) = 0.702 W/kg

Fast SAR(10 g) = 0.312 W/kg

Maximum value of SAR (interpolated) = 0.991 W/kg

WLAN2450 b-mode - Left/Tilt - CH 11 - 20 MHz DSSS BPSK 1 Mbps - Antenna 1/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.95 V/m


Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.714 W/kg

SAR(10 g) = 0.333 W/kg

Power Drift = -0.01 dB

Maximum value of SAR (measured) = 0.934 W/kg

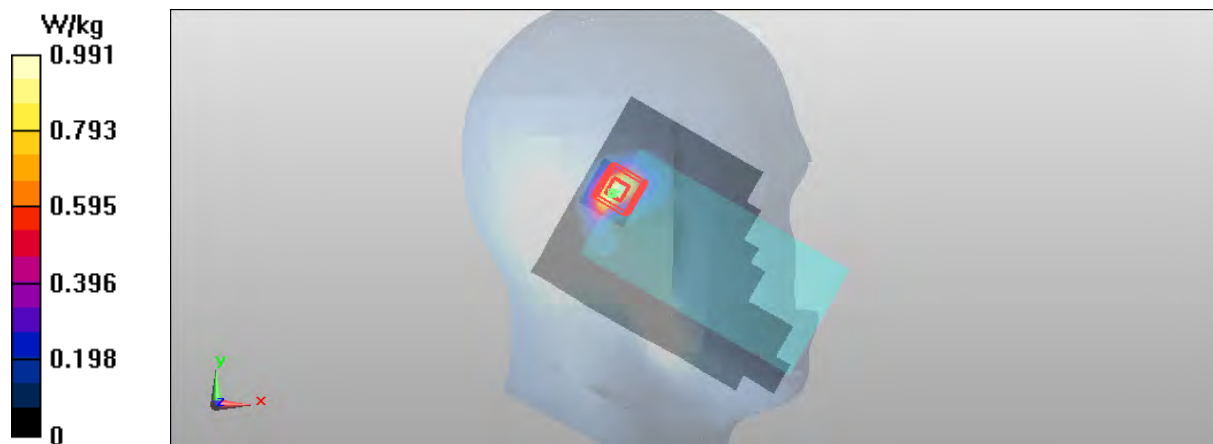

Plot H6

Date/Time: 2015-10-30 12:36:07

DASY Configuration for LTE2500 (Band 7) - Left/Cheek - CH 21350 - 20MHz - QPSK - 1 RB - Offset 99 - Antenna 2/Area Scan:

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296288/3

Communication System: LTE2500 (Band 7); Frequency: 2560 MHz; Duty Cycle: 1:1; PMF: 1

Medium: HSL2450 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 37.209$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Probe: EX3DV4 - SN3892; ConvF(7.13, 7.13, 7.13); Calibrated: 2015-04-24;

Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used))

Electronics: DAE4 Sn538; Calibrated: 2015-04-20

Phantom: SAM2; Type: SAM; Serial: TP-1570

Measurement SW: DASY52, Version 52.8 (8)

Date/Time: 2015-11-10 11:44:02

DASY Configuration for WLAN2450 b-mode - Left/Cheek - CH 6 - 20 MHz DSSS BPSK 1 Mbps - Antenna 1/Area Scan:

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296788/2

Communication System: WLAN2450; Frequency: 2437 MHz; Duty Cycle: 1:1; PMF: 1

Medium: HSL 2300-2600 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.767$ S/m; $\epsilon_r = 38.613$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Probe: EX3DV4 - SN3892; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-04-24;

Sensor-Surface: 3mm (Mechanical Surface Detection)


Electronics: DAE4 Sn538; Calibrated: 2015-04-20

Phantom: SAM2; Type: SAM; Serial: TP-1570

Measurement SW: DASY52, Version 52.8 (8)

Fast SAR of Combined Scans: SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.517 W/kg

Maximum value of SAR (interpolated) = 1.28 W/kg

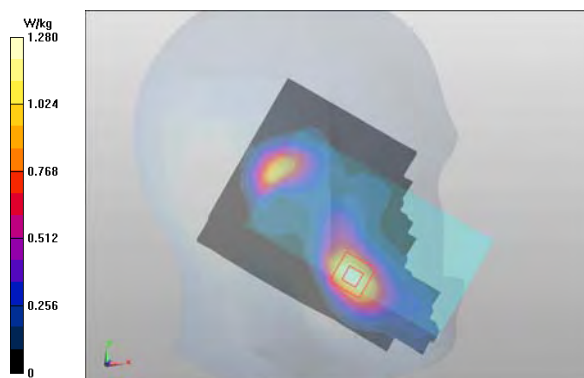

WLAN2450 b-mode was scaled with factor 1.41 and LTE2500 (Band 7) with factor 1.15 before combining in SEMCAD SW.

Plot B1

Date/Time: 2015-10-25 15:14:14

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296310/5

Communication System: 2-slot GPRS850

Frequency: **848.8 MHz**; Duty Cycle: 1:4.19952

Medium: BSL835; Medium Notes: t= 21,7 C

Medium parameters used: f = 849 MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 54.07$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3275
- ConvF(5.93, 5.93, 5.93); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2015-04-21
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

2-slot GPRS850/Body - CH 251 - 15 mm - No Headset - Display - Antenna 1/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 27.007 V/m

Fast SAR: SAR(1 g) = 0.585 W/kg

Fast SAR(10 g) = 0.411 W/kg

Maximum value of SAR (interpolated) = 0.666 W/kg

2-slot GPRS850/Body - CH 251 - 15 mm - No Headset - Display - Antenna 1/Zoom Scan (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.007 V/m

Peak SAR (extrapolated) = 0.781 W/kg

SAR(1 g) = 0.607 W/kg

SAR(10 g) = 0.444 W/kg

Power Drift = -0.06 dB

Maximum value of SAR (measured) = 0.673 W/kg

2-slot GPRS850/Body - CH 251 - 15 mm - No Headset - Display - Antenna 1/Zoom Scan 2 (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 27.007 V/m

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.306 W/kg

Power Drift = -0.06 dB

Maximum value of SAR (measured) = 0.568 W/kg

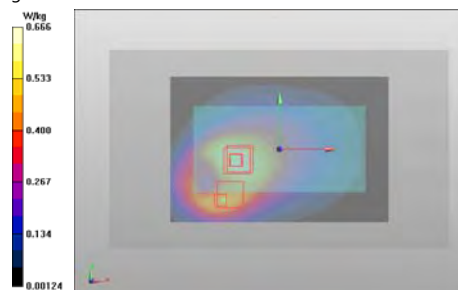

Plot B2

Date/Time: 2015-10-25 14:32:17

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296310/5

Communication System: WCDMA850

Frequency: **846.6 MHz**; Duty Cycle: 1:1

Medium: BSL835; Medium Notes: t= 21,7 C

Medium parameters used: f = 847 MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 54.06$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3275
- ConvF(5.93, 5.93, 5.93); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2015-04-21
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

WCDMA850 (Band 5)/Body - CH 4233 - 15 mm - No Headset - Display - Antenna 1/Area Scan (81x121x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 25.395 V/m

Fast SAR: SAR(1 g) = 0.514 W/kg

Fast SAR(10 g) = 0.362 W/kg

Maximum value of SAR (interpolated) = 0.585 W/kg

WCDMA850 (Band 5)/Body - CH 4233 - 15 mm - No Headset - Display - Antenna 1/Zoom Scan (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.549 V/m


Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.541 W/kg

SAR(10 g) = 0.396 W/kg

Power Drift = 0.01 dB

Maximum value of SAR (measured) = 0.595 W/kg

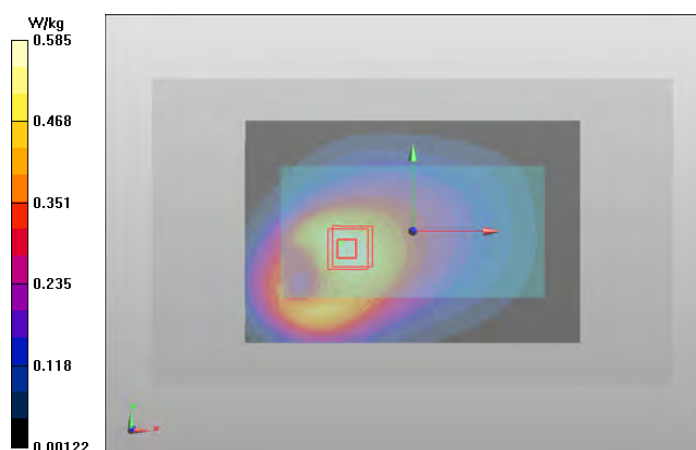

Plot B3

Date/Time: 2015-10-29 23:00:04

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296286/7

Communication System: 4-slot GPRS1900

Frequency: **1850.2 MHz**; Duty Cycle: 1:2.09991

Medium: BSL1900; Medium Notes: t= 20,8 C

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.506 \text{ S/m}$; $\epsilon_r = 51.811$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3276
- ConvF(4.72, 4.72, 4.72); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2015-01-21
- Phantom: SAM 2 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/2 (1800MHz), TP-1123/2 (1900MHz)
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

4-slot GPRS1900/Body - CH 512 - 15 mm - No Headset - Display - Antenna 2/Area Scan (81x121x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 10.844 V/m

Fast SAR: SAR(1 g) = 0.185 W/kg

Fast SAR(10 g) = 0.106 W/kg

Maximum value of SAR (interpolated) = 0.236 W/kg

4-slot GPRS1900/Body - CH 512 - 15 mm - No Headset - Display - Antenna 2/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.095 V/m


Peak SAR (extrapolated) = 0.320 W/kg

SAR(1 g) = 0.198 W/kg

SAR(10 g) = 0.116 W/kg

Power Drift = 0.07 dB

Maximum value of SAR (measured) = 0.242 W/kg

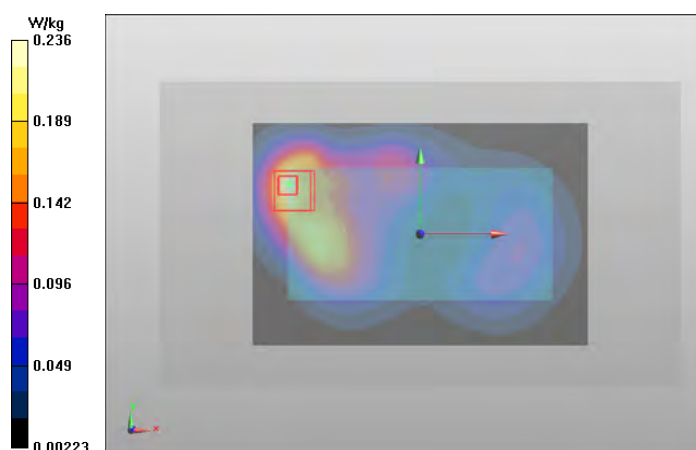

Plot B4

Date/Time: 2015-11-02 23:56:08

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296288/3

Communication System: LTE2500 (Band 7)

Frequency: **2535 MHz**; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: t= 22,0 C

Medium parameters used: f = 2535 MHz; $\sigma = 2.048$ S/m; $\epsilon_r = 50.187$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3892
- ConvF(7.04, 7.04, 7.04); Calibrated: 2015-04-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2015-04-20
- Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

LTE2500 (Band 7)/Body - CH 21100 - 20MHz - QPSK - 1 RB - Offset 0 - 15 mm - No Headset - Back - Antenna

2/Area Scan (121x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 16.564 V/m

Fast SAR: SAR(1 g) = 0.555 W/kg

Fast SAR(10 g) = 0.292 W/kg

Maximum value of SAR (interpolated) = 0.704 W/kg

LTE2500 (Band 7)/Body - CH 21100 - 20MHz - QPSK - 1 RB - Offset 0 - 15 mm - No Headset - Back - Antenna

2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.990 V/m


Peak SAR (extrapolated) = 0.950 W/kg

SAR(1 g) = 0.544 W/kg

SAR(10 g) = 0.296 W/kg

Power Drift = 0.01 dB

Maximum value of SAR (measured) = 0.677 W/kg

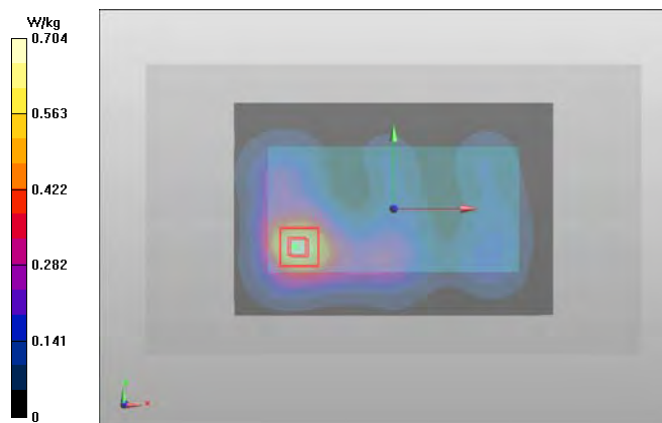

Plot B5

Date/Time: 2015-10-27 12:26:24

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296788/2

Communication System: WLAN2450

Frequency: **2462 MHz**; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: t= 22.7 C

Medium parameters used: f = 2462 MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 51.108$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3892
- ConvF(7.32, 7.32, 7.32); Calibrated: 2015-04-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2015-04-20
- Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

WLAN2450 b-mode/Body - CH 11 - QPSK 11 Mbps - 15mm - No Headset - Display - Antenna 1/Area Scan

(121x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 2.830 V/m

Fast SAR: SAR(1 g) = 0.148 W/kg

Fast SAR(10 g) = 0.073 W/kg

Maximum value of SAR (interpolated) = 0.190 W/kg

WLAN2450 b-mode/Body - CH 11 - QPSK 11 Mbps - 15mm - No Headset - Display - Antenna 1/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.987 V/m


Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.154 W/kg

SAR(10 g) = 0.081 W/kg

Power Drift = 0.10 dB

Maximum value of SAR (measured) = 0.192 W/kg

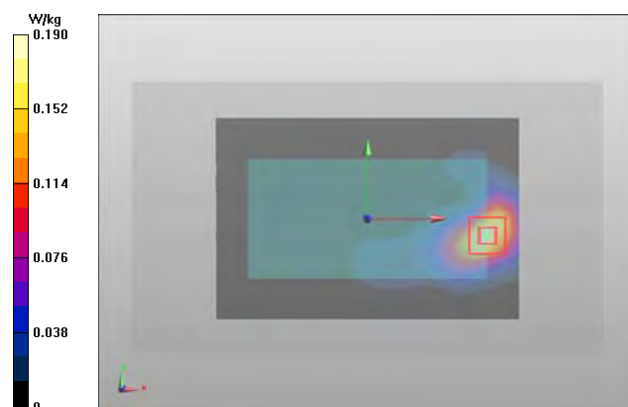

Plot B6

Date/Time: 2015-10-25 15:14:14

DASY Configuration for 2-slot GPRS850/Body - CH 251 - 15 mm - No Headset - Display - Antenna 1/Area Scan:

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296310/5

Communication System: 2-slot GPRS850; Frequency: 848.8 MHz; Duty Cycle: 1:4.19952; PMF: 2.04927

Medium: BSL835 Medium parameters used: $f = 849$ MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 54.07$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: ES3DV3 - SN3275; ConvF(5.93, 5.93, 5.93); Calibrated: 2015-04-27;

Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used))

Electronics: DAE4 Sn1302; Calibrated: 2015-04-21

Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/3

Measurement SW: DASY52, Version 52.8 (8)

Date/Time: 2015-10-27 12:26:24

DASY Configuration for WLAN2450 b-mode/Body - CH 11 - QPSK 11 Mbps - 15mm - No Headset - Display - Antenna 1/Area Scan:

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296788/2

Communication System: WLAN2450; Frequency: 2462 MHz; Duty Cycle: 1:1; PMF: 1

Medium: HSL2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 51.108$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: EX3DV4 - SN3892; ConvF(7.32, 7.32, 7.32); Calibrated: 2015-04-24;

Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE4 Sn538; Calibrated: 2015-04-20

Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/3

Measurement SW: DASY52, Version 52.8 (8)

Fast SAR of Combined Scans: SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.440 W/kg

Maximum value of SAR (interpolated) = 0.711 W/kg

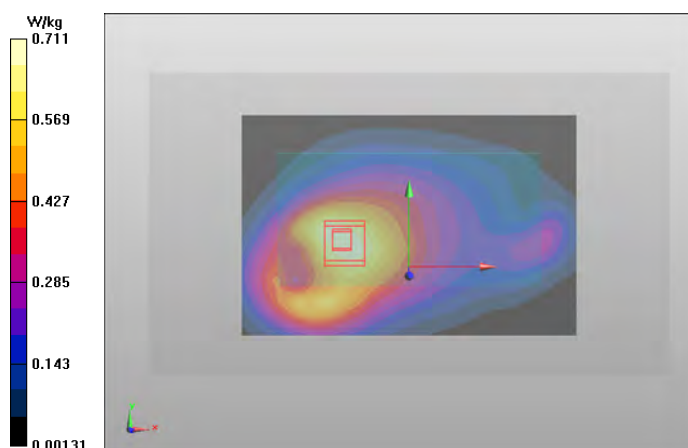

WLAN2450 b-mode was scaled with factor 1.23 and 2-slot GPRS850 with factor 1.07 before combining in SEMCAD SW.

Plot W1

Date/Time: 2015-10-26 16:05:17

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296310/5

Communication System: 2-slot GPRS850

Frequency: **848.8 MHz**; Duty Cycle: 1:4.19952

Medium: BSL835; Medium Notes: t= 21,8 C

Medium parameters used: f = 849 MHz; $\sigma = 0.974$ S/m; $\epsilon_r = 53.996$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3275
- ConvF(5.93, 5.93, 5.93); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2015-04-21
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

2-slot GPRS850/Body - CH 251 - 10 mm - No Headset - Back - Antenna 1 - Repeated/Area Scan (81x121x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 32.187 V/m

Fast SAR: SAR(1 g) = 0.854 W/kg

Fast SAR(10 g) = 0.569 W/kg

Maximum value of SAR (interpolated) = 1.03 W/kg

2-slot GPRS850/Body - CH 251 - 10 mm - No Headset - Back - Antenna 1 - Repeated/Zoom Scan (6x8x7)/Cube

0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 32.187 V/m

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.889 W/kg

SAR(10 g) = 0.518 W/kg

Power Drift = 0.06 dB

Maximum value of SAR (measured) = 1.10 W/kg

2-slot GPRS850/Body - CH 251 - 10 mm - No Headset - Back - Antenna 1 - Repeated/Zoom Scan 2

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 32.187 V/m

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.587 W/kg

Maximum value of SAR (measured) = 0.962 W/kg

Power Drift = 0.06 dB

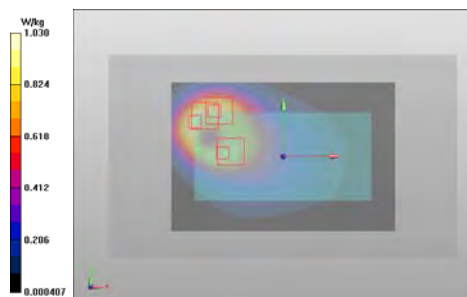

Plot W2

Date/Time: 2015-10-26 14:46:29

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296310/5

Communication System: WCDMA850

Frequency: **846.6 MHz**; Duty Cycle: 1:1

Medium: BSL835; Medium Notes: t= 21,8 C

Medium parameters used: f = 847 MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 54.009$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3275
- ConvF(5.93, 5.93, 5.93); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1302; Calibrated: 2015-04-21
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1123/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

WCDMA850 (Band 5)/Body - CH 4233 - 10 mm - No Headset - Display - Antenna 1 - Repeated/Area Scan

(81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 31.944 V/m

Fast SAR: SAR(1 g) = 0.795 W/kg

Fast SAR(10 g) = 0.515 W/kg

Maximum value of SAR (interpolated) = 0.965 W/kg

WCDMA850 (Band 5)/Body - CH 4233 - 10 mm - No Headset - Display - Antenna 1 - Repeated/Zoom Scan

(5x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 31.944 V/m

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.824 W/kg

SAR(10 g) = 0.481 W/kg

Power Drift = 0.02 dB

Maximum value of SAR (measured) = 1.01 W/kg

WCDMA850 (Band 5)/Body - CH 4233 - 10 mm - No Headset - Display - Antenna 1 - Repeated/Zoom Scan 2

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 31.944 V/m

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.561 W/kg

Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.881 W/kg

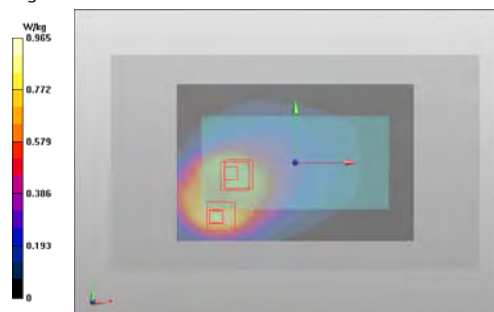

Plot W3

Date/Time: 2015-10-30 14:06:30

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296286/7

Communication System: 4-slot GPRS1900

Frequency: **1850.2 MHz**; Duty Cycle: 1:2.09991

Medium: BSL1900; Medium Notes: t= 20,8 C

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.506 \text{ S/m}$; $\epsilon_r = 51.811$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3276
- ConvF(4.72, 4.72, 4.72); Calibrated: 2015-04-27;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2015-01-21
- Phantom: SAM 2 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/2 (1800MHz), TP-1123/2 (1900MHz)
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

4-slot GPRS1900 - Top_Bottom/Body - CH 512 - 10 mm - No Headset - Bottom - Antenna 2/Area Scan

(41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 18.421 V/m

Fast SAR: SAR(1 g) = 0.434 W/kg

Fast SAR(10 g) = 0.226 W/kg

Maximum value of SAR (interpolated) = 0.578 W/kg

4-slot GPRS1900 - Top_Bottom/Body - CH 512 - 10 mm - No Headset - Bottom - Antenna 2/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.602 V/m


Peak SAR (extrapolated) = 0.786 W/kg

SAR(1 g) = 0.450 W/kg

SAR(10 g) = 0.243 W/kg

Power Drift = -0.04 dB

Maximum value of SAR (measured) = 0.575 W/kg

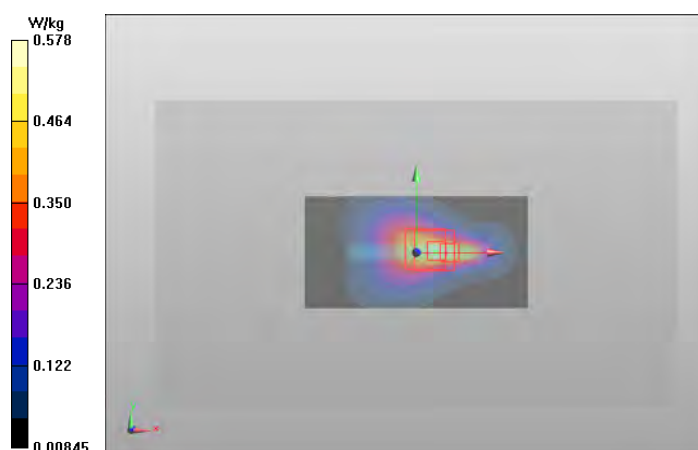

Plot W4

Date/Time: 2015-11-04 23:43:32

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296288/3

Communication System: LTE2500 (Band 7)

Frequency: **2535 MHz**; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: t= 21.9 C

Medium parameters used: f = 2535 MHz; $\sigma = 2.051$ S/m; $\epsilon_r = 50.363$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3892
- ConvF(7.04, 7.04, 7.04); Calibrated: 2015-04-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2015-04-20
- Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

LTE2500 (Band 7)/Body - CH 21100 - 20MHz - QPSK - 1 RB - Offset 0 - 10 mm - No Headset - Back - Antenna 2 - Repeated/Area Scan (121x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 22.932 V/m

Fast SAR: SAR(1 g) = 0.964 W/kg

Fast SAR(10 g) = 0.510 W/kg

Maximum value of SAR (interpolated) = 1.23 W/kg

LTE2500 (Band 7)/Body - CH 21100 - 20MHz - QPSK - 1 RB - Offset 0 - 10 mm - No Headset - Back - Antenna 2 - Repeated/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.685 V/m


Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.990 W/kg

SAR(10 g) = 0.540 W/kg

Power Drift = 0.11 dB

Maximum value of SAR (measured) = 1.20 W/kg

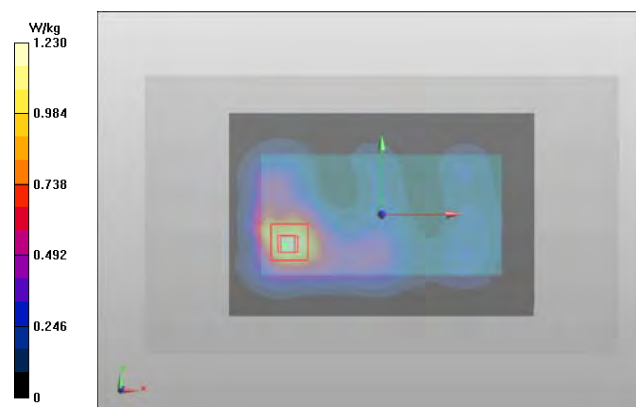

Plot W5

Date/Time: 2015-10-27 15:57:37

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296788/2

Communication System: WLAN2450

Frequency: **2437 MHz**; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: $t = 22.7\text{ C}$

Medium parameters used: $f = 2437\text{ MHz}$; $\sigma = 1.887\text{ S/m}$; $\epsilon_r = 51.168$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3892
- ConvF(7.32, 7.32, 7.32); Calibrated: 2015-04-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2015-04-20
- Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.9 (7117)

WLAN2450 b-mode - Top_Bottom/Body - CH 11 - QPSK 11 MBps - 10mm - No Headset - Top - Antenna 1/Area

Scan (61x121x1): Interpolated grid: $dx = 1.000\text{ mm}$, $dy = 1.000\text{ mm}$

Reference Value = 17.914 V/m

Fast SAR: SAR(1 g) = 0.521 W/kg

Fast SAR(10 g) = 0.223 W/kg

Maximum value of SAR (interpolated) = 0.720 W/kg

WLAN2450 b-mode - Top_Bottom/Body - CH 11 - QPSK 11 MBps - 10mm - No Headset - Top - Antenna

1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx = 5\text{ mm}$, $dy = 5\text{ mm}$, $dz = 5\text{ mm}$

Reference Value = 17.905 V/m


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.543 W/kg

SAR(10 g) = 0.249 W/kg

Power Drift = 0.03 dB

Maximum value of SAR (measured) = 0.719 W/kg

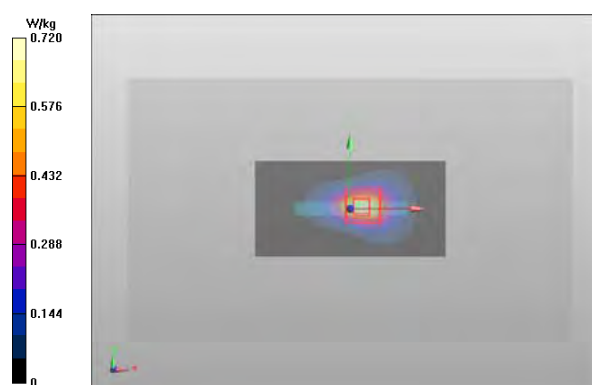

Plot W6

Date/Time: 2015-11-04 23:43:32

DASY Configuration for LTE2500 (Band 7)/Body - CH 21100 - 20MHz - QPSK - 1 RB - Offset 0 - 10 mm - No Headset - Back - Antenna 2 - Repeated/Area Scan:

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296288/3

Communication System: LTE2500 (Band 7); Frequency: 2535 MHz; Duty Cycle: 1:1; PMF: 1

Medium: BSL2450 Medium parameters used: $f = 2535$ MHz; $\sigma = 2.051$ S/m; $\epsilon_r = 50.363$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: EX3DV4 - SN3892; ConvF(7.04, 7.04, 7.04); Calibrated: 2015-04-24;

Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used))

Electronics: DAE4 Sn538; Calibrated: 2015-04-20

Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/3

Measurement SW: DASY52, Version 52.8 (8)

Date/Time: 2015-10-27 13:49:26

DASY Configuration for WLAN2450 b-mode/Body - CH 6 - QPSK 11 Mbps - 10mm - No Headset - Back - Antenna 1/Area Scan:

Test Laboratory: TCC Microsoft

Type: RM-1152, HW:1540; Serial: 004402/74/296788/2

Communication System: WLAN2450; Frequency: 2437 MHz; Duty Cycle: 1:1; PMF: 1

Medium: HSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.887$ S/m; $\epsilon_r = 51.168$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: EX3DV4 - SN3892; ConvF(7.32, 7.32, 7.32); Calibrated: 2015-04-24;

Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE4 Sn538; Calibrated: 2015-04-20

Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: TP-1124/3

Measurement SW: DASY52, Version 52.8 (8)

Fast SAR of Combined Scans: SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.561 W/kg

Maximum value of SAR (interpolated) = 1.35 W/kg

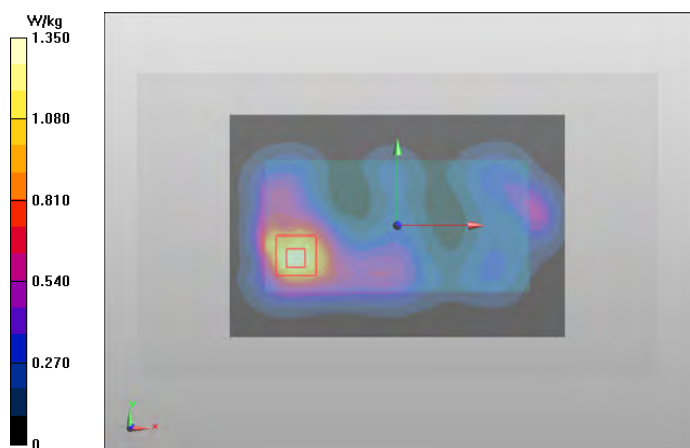

WLAN2450 b-mode was scaled with factor 1.26 and LTE2500 (Band 7) with factor 1.10 before combining in SEMCAD SW.

SAR Report

Type: RM-1152

Appendix_B_FCC_SAR_RM-1152_02

Applicant: Microsoft

Copyright © 2015 TCC Microsoft

APPENDIX C: DIELECTRIC PARAMETERS OF THE TISSUE SIMULANTS

Head tissue simulant dielectric parameters used in the measurements:

f (MHz)	GSM850	Dielectric Parameters					
	Date	CH 128 824.2 MHz		CH 190 836.6 MHz		CH 251 848.8 MHz	
		ϵ_r	s [S/m]	ϵ_r	s [S/m]	ϵ_r	s [S/m]
836	2015-10-22	40.9	0.89	40.8	0.89	40.7	0.90
	2015-10-23	40.6	0.88	40.5	0.89	40.4	0.89
	2015-10-24	40.3	0.87	40.2	0.88	40.2	0.89
f (MHz)	WCDMA850 (Band 5)	Dielectric Parameters					
	Date	CH 4132 826.4 MHz		CH 4175 835.0 MHz		CH 4233 846.6 MHz	
		ϵ_r	s [S/m]	ϵ_r	s [S/m]	ϵ_r	s [S/m]
835	2015-10-22	40.9	0.89	40.8	0.89	40.7	0.90
	2015-10-23	40.6	0.88	40.5	0.89	40.4	0.89
	2015-10-24	40.3	0.88	40.3	0.88	40.2	0.89
f (MHz)	GSM1900	Dielectric Parameters					
	Date	CH 512 1850.2 MHz		CH 661 1880.0 MHz		CH 810 1909.8 MHz	
		ϵ_r	s [S/m]	ϵ_r	s [S/m]	ϵ_r	s [S/m]
1880	2015-10-27	39.3	1.36	39.2	1.39	39.1	1.42
	2015-10-28	38.6	1.37	38.5	1.39	38.3	1.42
f (MHz)	WLAN2450	Dielectric Parameters					
	Date	CH 1 2412.0 MHz		CH 6 2437.0 MHz		CH 11 2462.0 MHz	
		ϵ_r	s [S/m]	ϵ_r	s [S/m]	ϵ_r	s [S/m]
2437	2015-11-10	38.7	1.74	38.6	1.76	38.5	1.79
f (MHz)	LTE2500 (Band 7)	Dielectric Parameters					
	Date	CH 20850 2510.0 MHz		CH 21100 2535.0 MHz		CH 21350 2560.0 MHz	
		ϵ_r	s [S/m]	ϵ_r	s [S/m]	ϵ_r	s [S/m]
2535	2015-10-29	38.0	1.88	37.9	1.90	37.8	1.92
	2015-10-30	37.4	1.83	37.3	1.86	37.2	1.88
	2015-10-31	38.2	1.84	38.1	1.87	38.0	1.89
	2015-11-02	38.0	1.85	37.9	1.87	37.8	1.89

Body tissue simulant dielectric parameters used in the measurements:

f (MHz)	GSM850	Dielectric Parameters					
	Date	CH 128 824.2 MHz		CH 190 836.6 MHz		CH 251 848.8 MHz	
		ϵ_r	s [S/m]	ϵ_r	s [S/m]	ϵ_r	s [S/m]
836	2015-10-25	54.2	0.95	54.1	0.96	54.1	0.97
	2015-10-26	54.2	0.96	54.1	0.97	54.0	0.97
	2015-10-27	54.0	0.95	53.9	0.96	53.8	0.97
f (MHz)	WCDMA850 (Band 5)	Dielectric Parameters					
	Date	CH 4132 826.4 MHz		CH 4175 835.0 MHz		CH 4233 846.6 MHz	
		ϵ_r	s [S/m]	ϵ_r	s [S/m]	ϵ_r	s [S/m]
835	2015-10-25	54.2	0.95	54.1	0.96	54.1	0.96
	2015-10-26	54.2	0.96	54.1	0.96	54.0	0.97
	2015-10-27	54.0	0.96	53.9	0.96	53.8	0.97
f (MHz)	GSM1900	Dielectric Parameters					
	Date	CH 512 1850.2 MHz		CH 661 1880.0 MHz		CH 810 1909.8 MHz	
		ϵ_r	s [S/m]	ϵ_r	s [S/m]	ϵ_r	s [S/m]
1880	2015-10-29	51.8	1.50	51.7	1.53	51.6	1.56
f (MHz)	WLAN2450	Dielectric Parameters					
	Date	CH 1 2412.0 MHz		CH 6 2437.0 MHz		CH 11 2462.0 MHz	
		ϵ_r	s [S/m]	ϵ_r	s [S/m]	ϵ_r	s [S/m]
2437	2015-10-27	51.3	1.86	51.2	1.88	51.1	1.92
f (MHz)	LTE2500 (Band 7)	Dielectric Parameters					
	Date	CH 20850 2510.0 MHz		CH 21100 2535.0 MHz		CH 21350 2560.0 MHz	
		ϵ_r	s [S/m]	ϵ_r	s [S/m]	ϵ_r	s [S/m]
2535	2015-11-02	50.3	2.02	50.2	2.05	50.2	2.06
	2015-11-04	50.4	2.02	50.4	2.05	50.3	2.08
	2015-11-05	50.9	2.00	50.8	2.03	50.7	2.06

APPENDIX D: RELEVANT PAGES FROM PROBE CALIBRATION REPORTS



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **TCC Microsoft**

Certificate No: **ES3-3276_Apr15**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3276**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **April 27, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 

Issued: April 27, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3276

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	6.44	6.44	6.44	0.40	1.55	± 12.0 %
835	41.5	0.90	6.17	6.17	6.17	0.29	2.00	± 12.0 %
1750	40.1	1.37	5.17	5.17	5.17	0.49	1.45	± 12.0 %
1900	40.0	1.40	4.98	4.98	4.98	0.80	1.19	± 12.0 %
2300	39.5	1.67	4.66	4.66	4.66	0.62	1.39	± 12.0 %
2450	39.2	1.80	4.42	4.42	4.42	0.72	1.34	± 12.0 %
2600	39.0	1.96	4.25	4.25	4.25	0.80	1.22	± 12.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3276

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unct. (k=2)
750	55.5	0.96	6.17	6.17	6.17	0.50	1.48	± 12.0 %
835	55.2	0.97	6.09	6.09	6.09	0.28	2.07	± 12.0 %
1750	53.4	1.49	4.91	4.91	4.91	0.58	1.41	± 12.0 %
1900	53.3	1.52	4.72	4.72	4.72	0.53	1.55	± 12.0 %
2300	52.9	1.81	4.44	4.44	4.44	0.76	1.27	± 12.0 %
2450	52.7	1.95	4.32	4.32	4.32	0.80	1.08	± 12.0 %
2600	52.5	2.16	4.18	4.18	4.18	0.80	1.04	± 12.0 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **TCC Microsoft**

Certificate No: **ES3-3275_Apr15**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3275**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **April 27, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	
			Issued: April 29, 2015
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3275

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	6.19	6.19	6.19	0.31	2.01	± 12.0 %
835	41.5	0.90	5.95	5.95	5.95	0.29	2.09	± 12.0 %
1750	40.1	1.37	4.99	4.99	4.99	0.49	1.47	± 12.0 %
1900	40.0	1.40	4.85	4.85	4.85	0.61	1.32	± 12.0 %
2300	39.5	1.67	4.55	4.55	4.55	0.69	1.30	± 12.0 %
2450	39.2	1.80	4.33	4.33	4.33	0.80	1.35	± 12.0 %
2600	39.0	1.96	4.22	4.22	4.22	0.80	1.26	± 12.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3275

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	55.5	0.96	6.04	6.04	6.04	0.54	1.43	± 12.0 %
835	55.2	0.97	5.93	5.93	5.93	0.36	1.83	± 12.0 %
1750	53.4	1.49	4.78	4.78	4.78	0.52	1.60	± 12.0 %
1900	53.3	1.52	4.63	4.63	4.63	0.73	1.36	± 12.0 %
2300	52.9	1.81	4.38	4.38	4.38	0.77	1.23	± 12.0 %
2450	52.7	1.95	4.25	4.25	4.25	0.80	1.11	± 12.0 %
2600	52.5	2.16	4.07	4.07	4.07	0.85	1.35	± 12.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **TCC Microsoft**

Certificate No: **EX3-3892_Apr15**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3892**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **April 24, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:	Name Israe Elnaouq	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	
Issued: April 27, 2015			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3892

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	10.14	10.14	10.14	0.23	1.36	± 12.0 %
835	41.5	0.90	9.65	9.65	9.65	0.21	1.36	± 12.0 %
1750	40.1	1.37	8.13	8.13	8.13	0.35	0.80	± 12.0 %
1900	40.0	1.40	7.92	7.92	7.92	0.35	0.80	± 12.0 %
2300	39.5	1.67	7.47	7.47	7.47	0.21	1.14	± 12.0 %
2450	39.2	1.80	7.24	7.24	7.24	0.24	0.97	± 12.0 %
2600	39.0	1.96	7.13	7.13	7.13	0.35	0.95	± 12.0 %
5200	36.0	4.66	5.07	5.07	5.07	0.35	1.80	± 13.1 %
5300	35.9	4.76	4.84	4.84	4.84	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.78	4.78	4.78	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.60	4.60	4.60	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.52	4.52	4.52	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3892

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	55.5	0.96	9.62	9.62	9.62	0.41	0.92	± 12.0 %
835	55.2	0.97	9.55	9.55	9.55	0.36	1.05	± 12.0 %
1750	53.4	1.49	7.90	7.90	7.90	0.29	0.96	± 12.0 %
1900	53.3	1.52	7.68	7.68	7.68	0.41	0.80	± 12.0 %
2300	52.9	1.81	7.44	7.44	7.44	0.37	0.85	± 12.0 %
2450	52.7	1.95	7.32	7.32	7.32	0.35	0.90	± 12.0 %
2600	52.5	2.16	7.04	7.04	7.04	0.35	0.90	± 12.0 %
5200	49.0	5.30	4.54	4.54	4.54	0.40	1.90	± 13.1 %
5300	48.9	5.42	4.33	4.33	4.33	0.40	1.90	± 13.1 %
5500	48.6	5.65	4.01	4.01	4.01	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.93	3.93	3.93	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.05	4.05	4.05	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

APPENDIX E: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORTS



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **TCC Microsoft**

Certificate No: **D835V2-480_Jan15**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 480**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 16, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Michael Weber** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Technical Manager

Issued: January 19, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.5 $\pm$ 6 %	0.93 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.34 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.13 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.53 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.00 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.8 $\pm$ 6 %	1.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.32 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.02 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.52 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.95 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.9 Ω - 2.3 j Ω
Return Loss	- 30.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.3 Ω - 4.1 j Ω
Return Loss	- 26.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.389 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 28, 2003

DASY5 Validation Report for Head TSL

Date: 16.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 480

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.2, 6.2, 6.2); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.08 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 2.74 W/kg

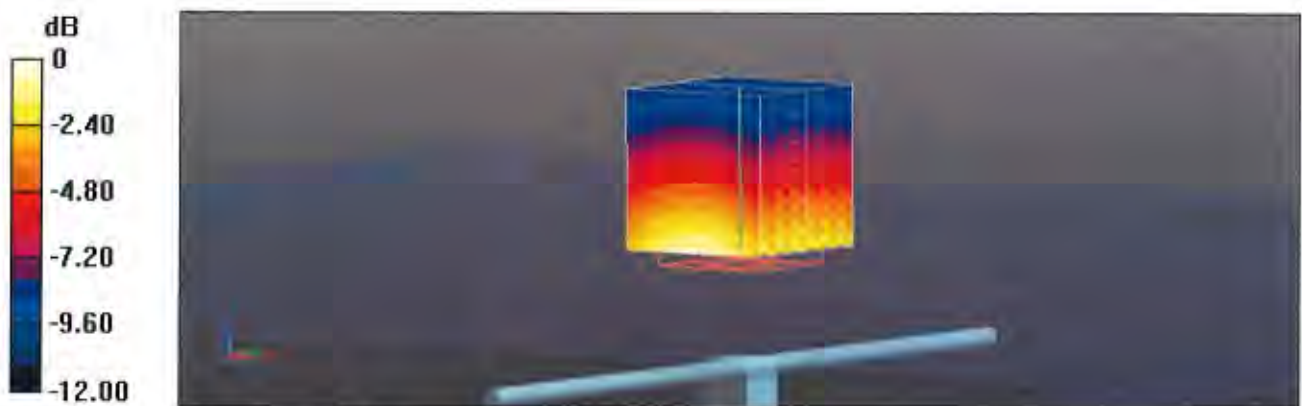

Impedance Measurement Plot for Head TSL

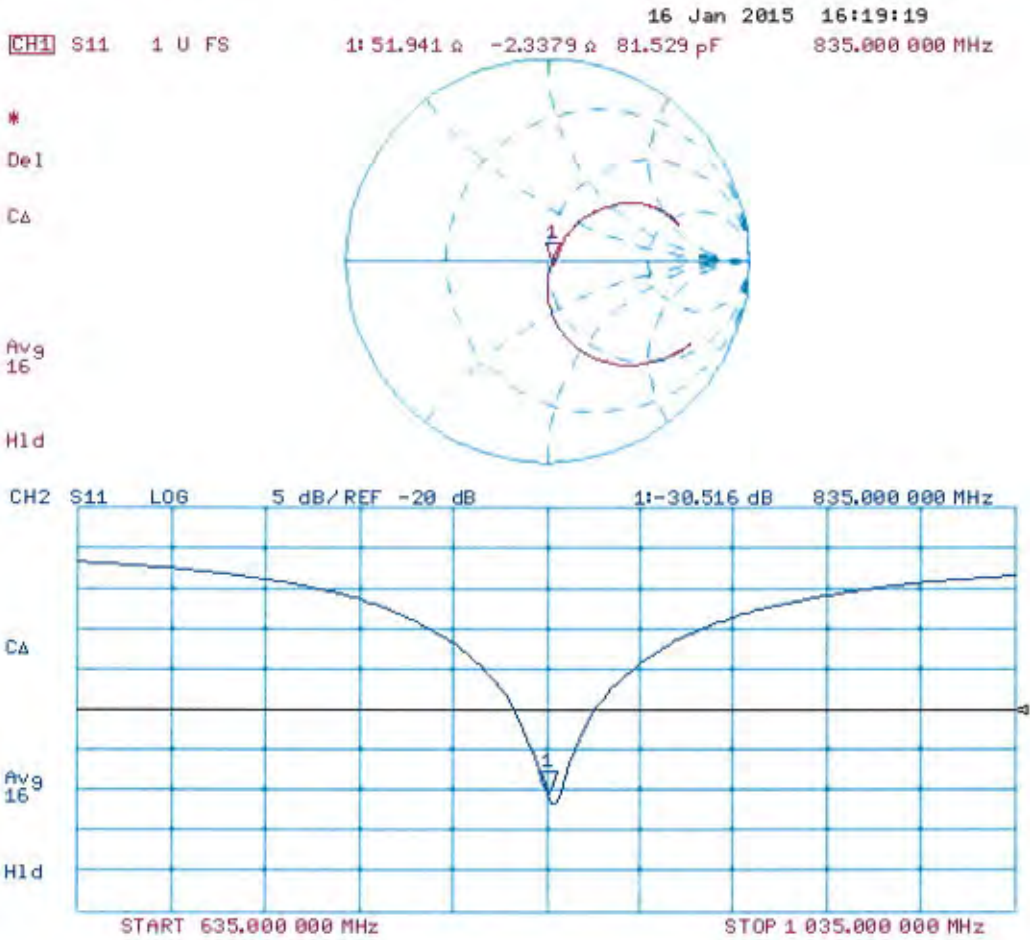

DASY5 Validation Report for Body TSL

Date: 16.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 480

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 55.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.17, 6.17, 6.17); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.43 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.42 W/kg


SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.52 W/kg

Maximum value of SAR (measured) = 2.69 W/kg

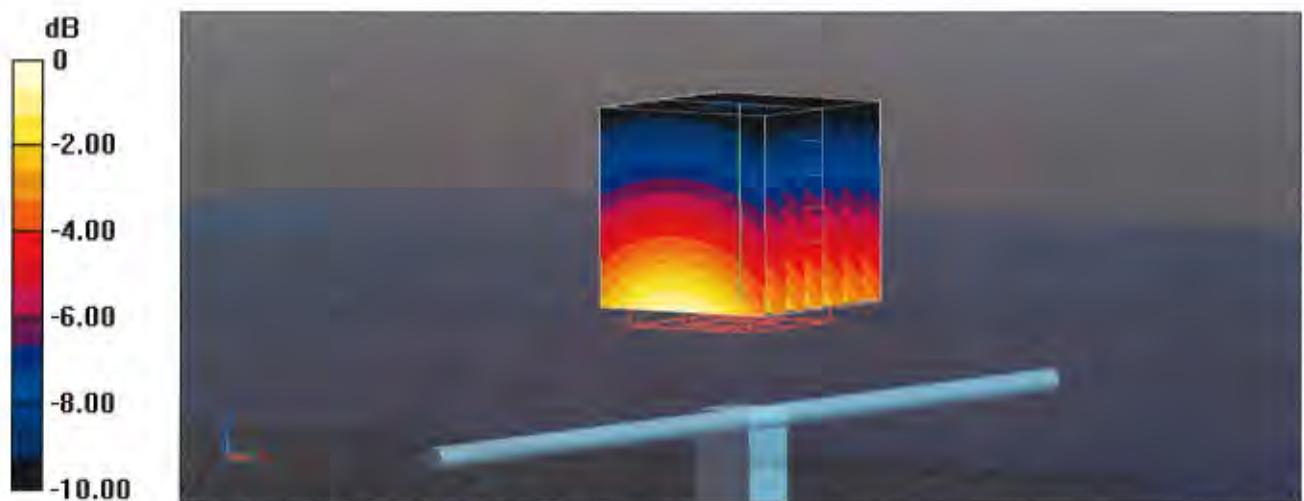

0 dB = 2.69 W/kg = 4.30 dBW/kg

Impedance Measurement Plot for Body TSL

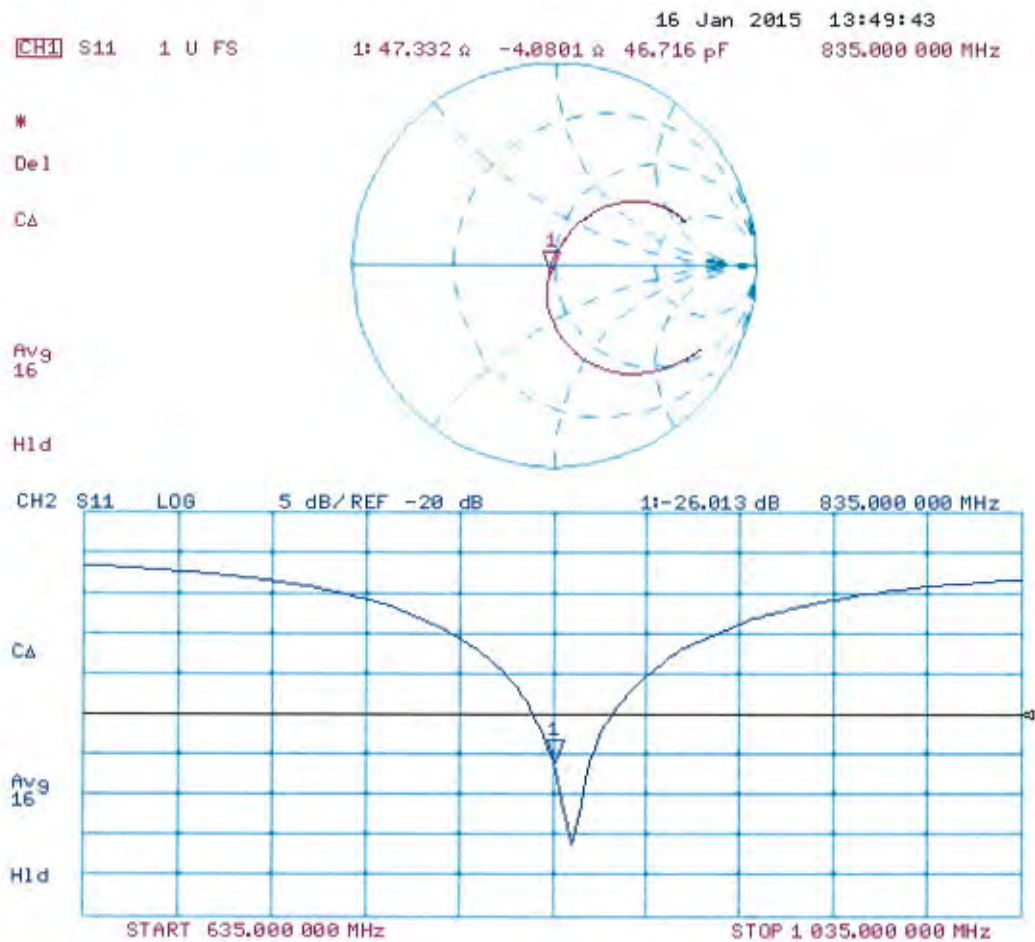



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **TCC Microsoft**

Certificate No: **D1750V2-1082_Jan15**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN: 1082**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 14, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name** Michael Weber **Function** Laboratory Technician

Signature

Approved by: **Name** Katja Pokovic **Technical Manager**

Issued: January 15, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.0 $\pm$ 6 %	1.38 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.6 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.90 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.5 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.8 $\pm$ 6 %	1.49 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.07 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.2 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$50.9 \Omega + 0.5 j\Omega$
Return Loss	- 39.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$46.3 \Omega + 1.0 j\Omega$
Return Loss	- 28.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.219 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 19, 2011

DASY5 Validation Report for Head TSL

Date: 14.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1082

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.2, 5.2, 5.2); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.14 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 16.6 W/kg


SAR(1 g) = 9.24 W/kg; SAR(10 g) = 4.9 W/kg

Maximum value of SAR (measured) = 11.5 W/kg

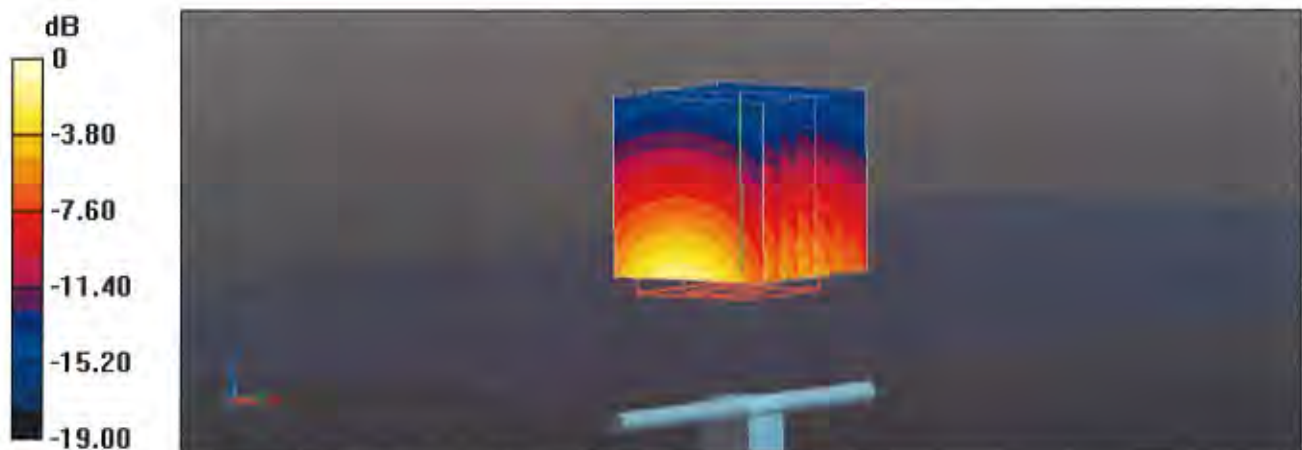

0 dB = 11.5 W/kg = 10.61 dBW/kg

Impedance Measurement Plot for Head TSL

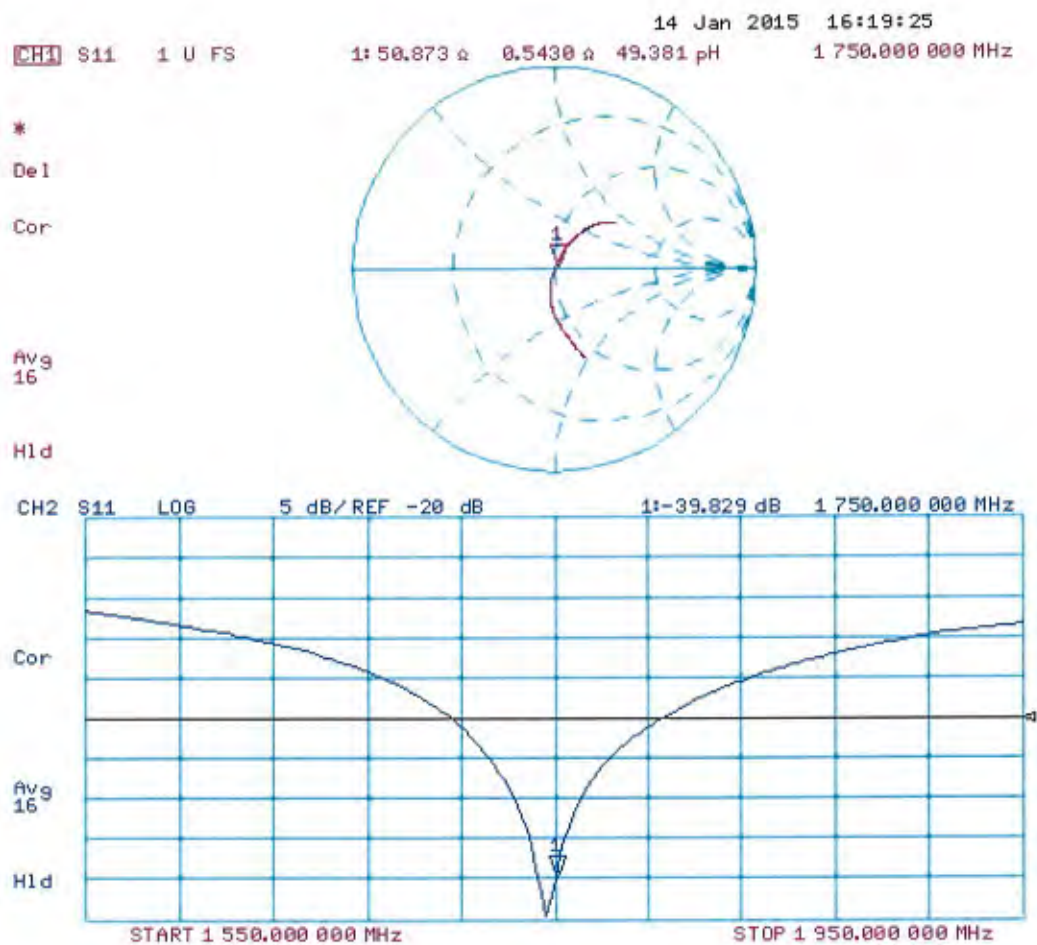

DASY5 Validation Report for Body TSL

Date: 14.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1082

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.88, 4.88, 4.88); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.60 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 9.43 W/kg; SAR(10 g) = 5.07 W/kg

Maximum value of SAR (measured) = 11.7 W/kg

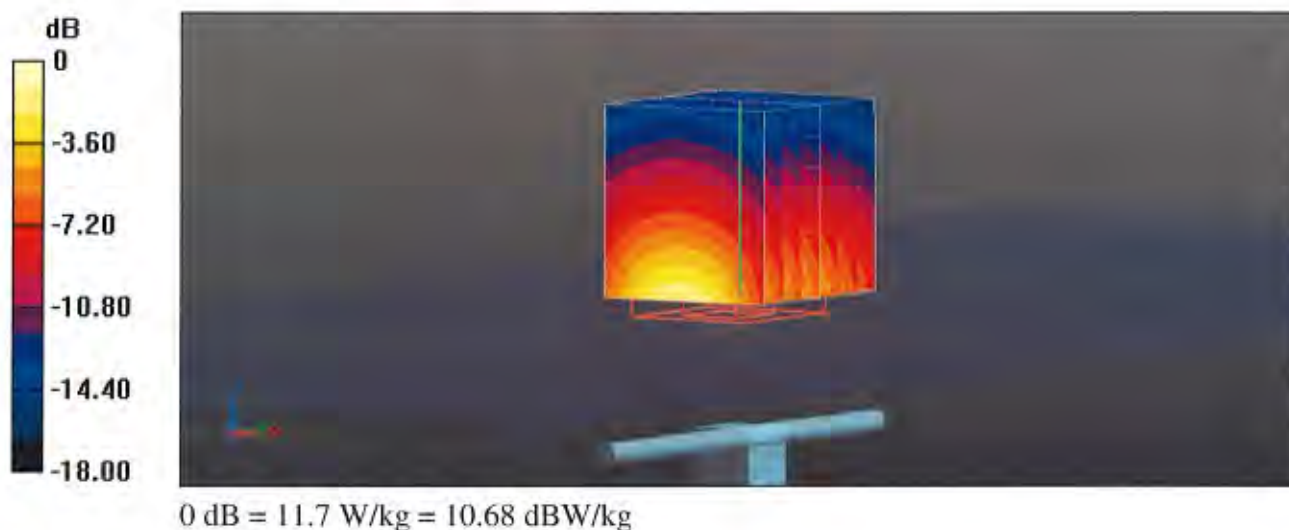

Impedance Measurement Plot for Body TSL

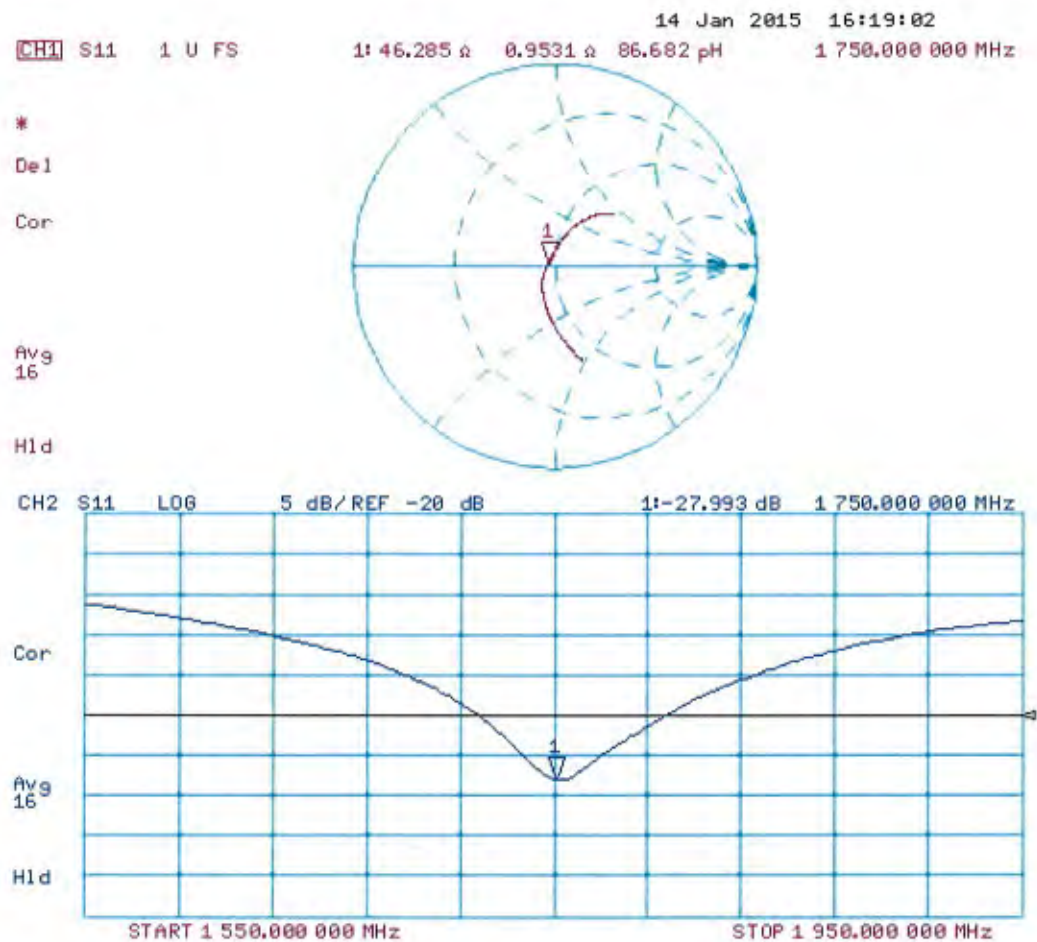



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **TCC Microsoft**

Certificate No: **D1900V2-5d013_Jan15**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d013**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 14, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name** **Michael Weber** **Function** **Laboratory Technician**

Signature

M. Weber

Approved by: **Katja Pokovic** **Technical Manager**

Katja Pokovic

Issued: January 15, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	$\Delta x, \Delta y, \Delta z = 5 \text{ mm}$	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.4 $\pm$ 6 %	1.40 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.2 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	53.0 $\pm$ 6 %	1.51 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.38 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.6 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.5 \Omega + 6.1 j\Omega$
Return Loss	- 23.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$48.1 \Omega + 6.9 j\Omega$
Return Loss	- 22.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.194 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 30, 2002

DASY5 Validation Report for Head TSL

Date: 14.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d013

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5, 5, 5); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.31 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 18.6 W/kg


SAR(1 g) = 10.2 W/kg; SAR(10 g) = 5.3 W/kg

Maximum value of SAR (measured) = 12.8 W/kg

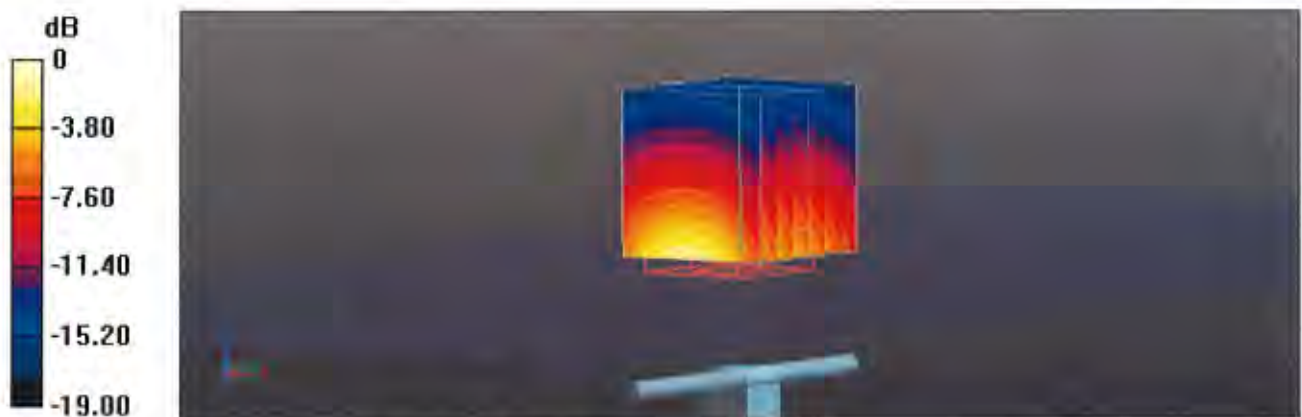

0 dB = 12.8 W/kg = 11.07 dBW/kg

Impedance Measurement Plot for Head TSL

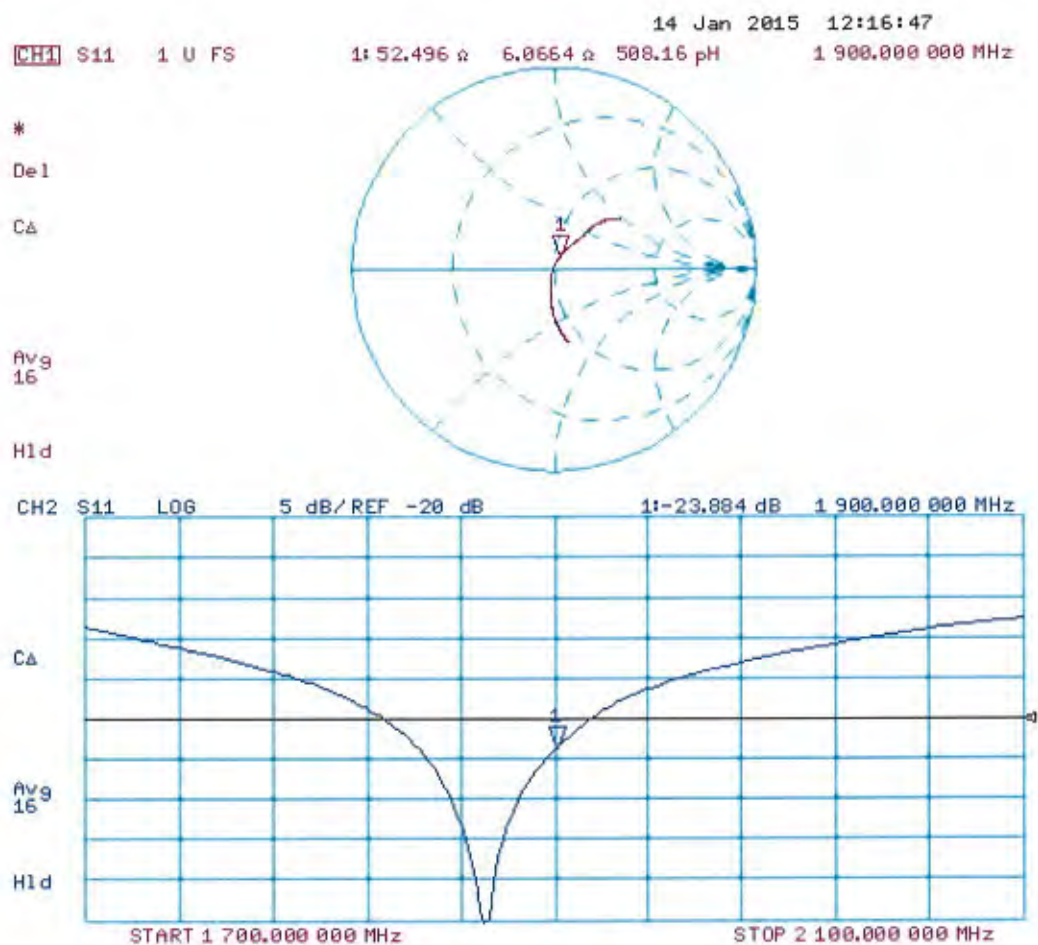

DASY5 Validation Report for Body TSL

Date: 14.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d013

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.65, 4.65, 4.65); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.35 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.1 W/kg


SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.38 W/kg

Maximum value of SAR (measured) = 12.7 W/kg

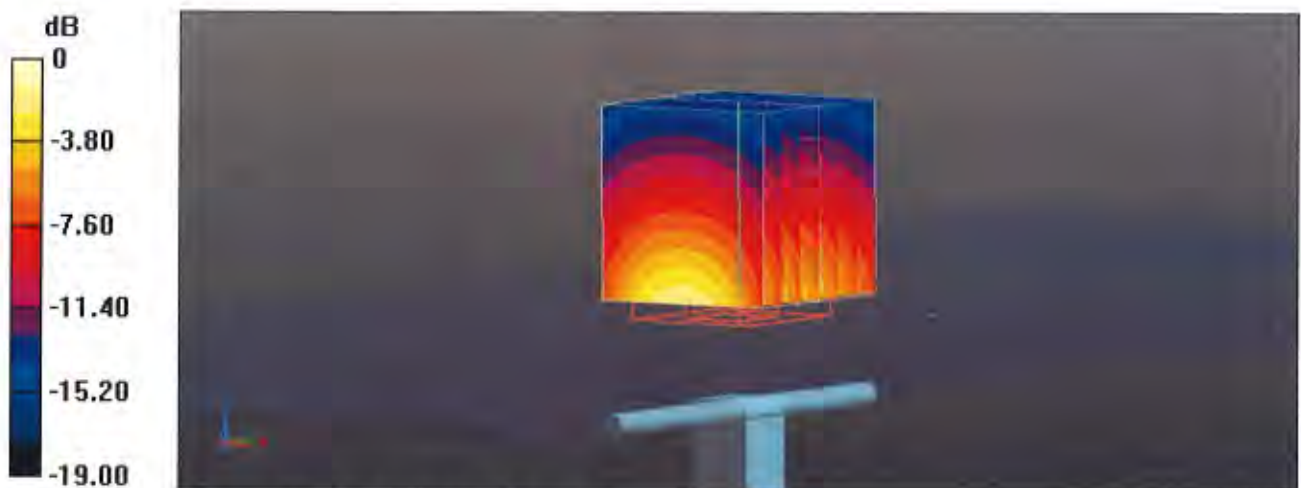

0 dB = 12.7 W/kg = 11.04 dBW/kg

Impedance Measurement Plot for Body TSL

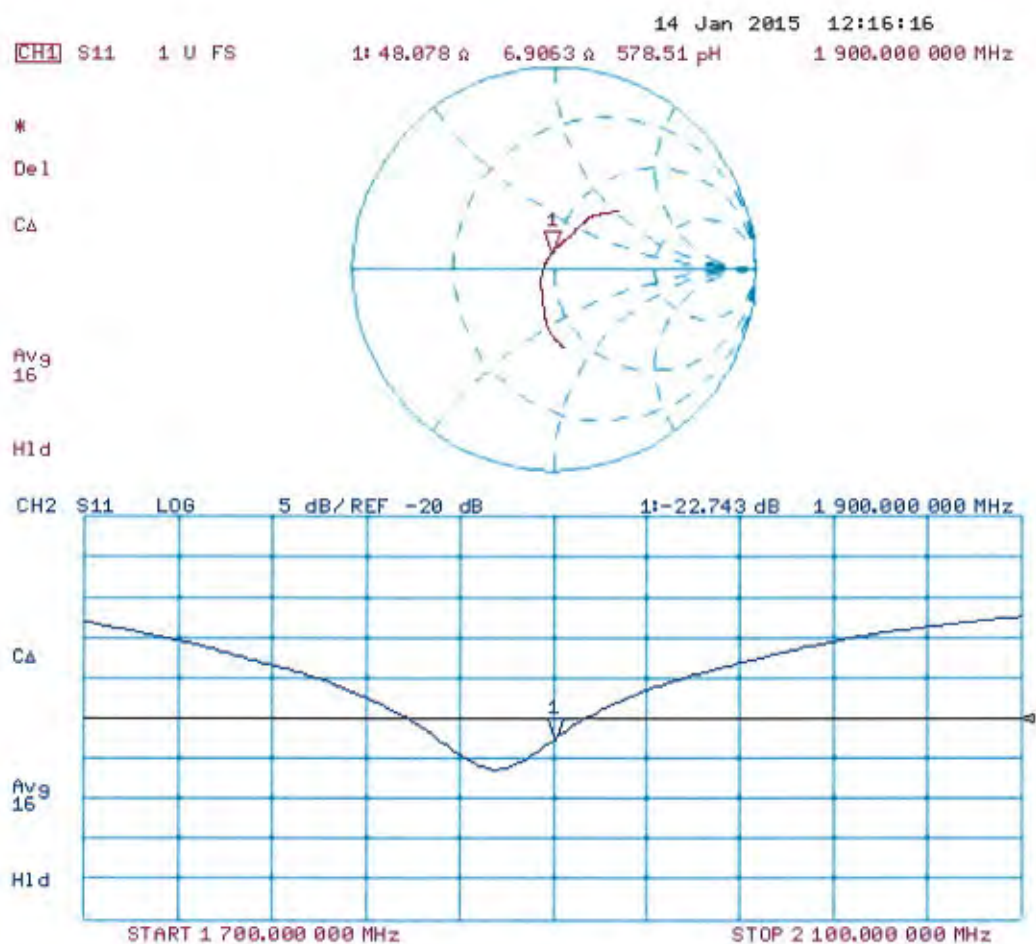



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **TCC Microsoft**

Certificate No: **D2450V2-749_Jan15**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 749**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 15, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 16, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.3 $\pm$ 6 %	1.88 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.4 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.6 $\pm$ 6 %	2.03 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.96 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.5 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.8 \Omega + 3.4 j\Omega$
Return Loss	- 27.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$48.6 \Omega + 4.6 j\Omega$
Return Loss	- 26.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.162 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 01, 2003

DASY5 Validation Report for Head TSL

Date: 15.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 749

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.54, 4.54, 4.54); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.2 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 27.8 W/kg


SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.17 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

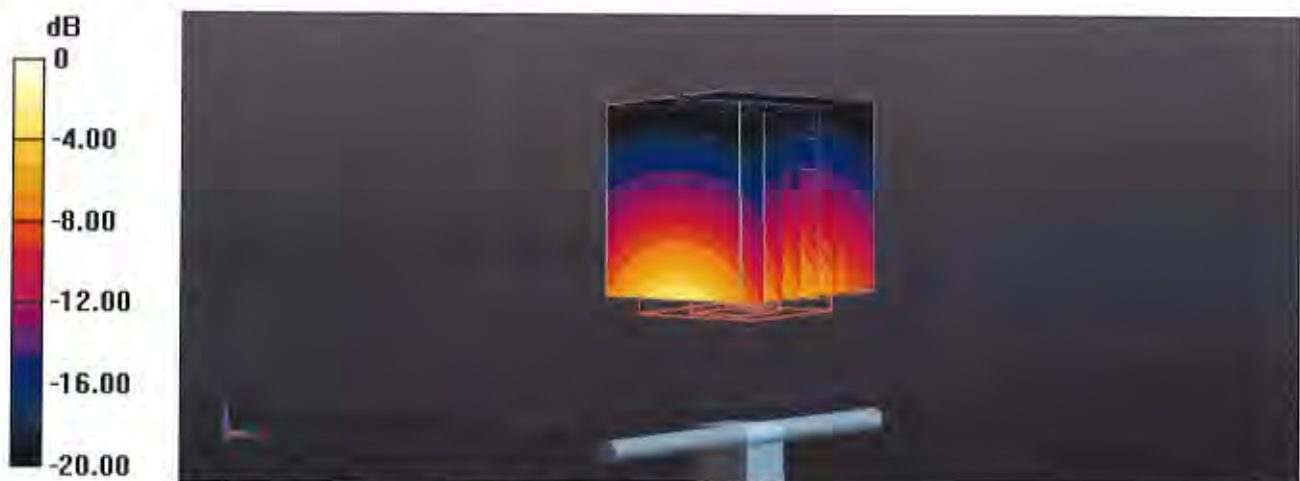

0 dB = 17.5 W/kg = 12.43 dBW/kg

Impedance Measurement Plot for Head TSL

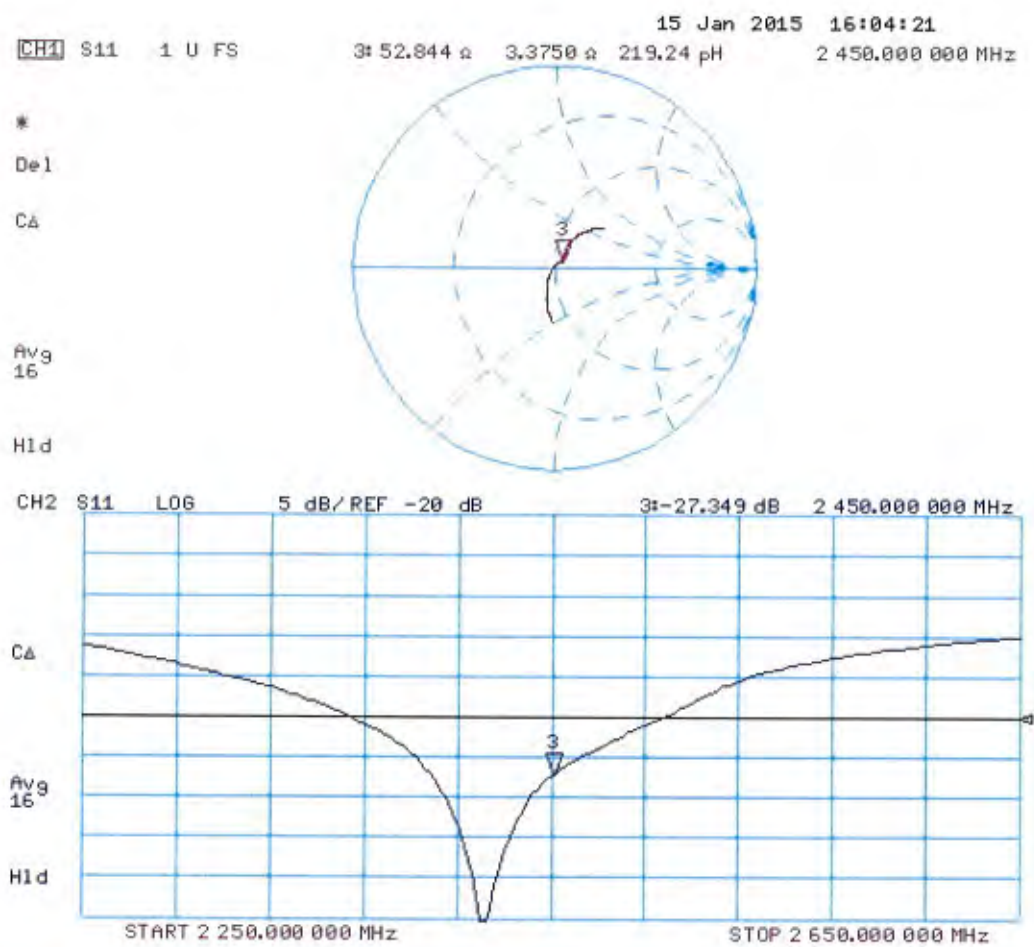

DASY5 Validation Report for Body TSL

Date: 15.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 749

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue 2/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.78 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 27.4 W/kg


SAR(1 g) = 13 W/kg; SAR(10 g) = 5.96 W/kg

Maximum value of SAR (measured) = 16.9 W/kg

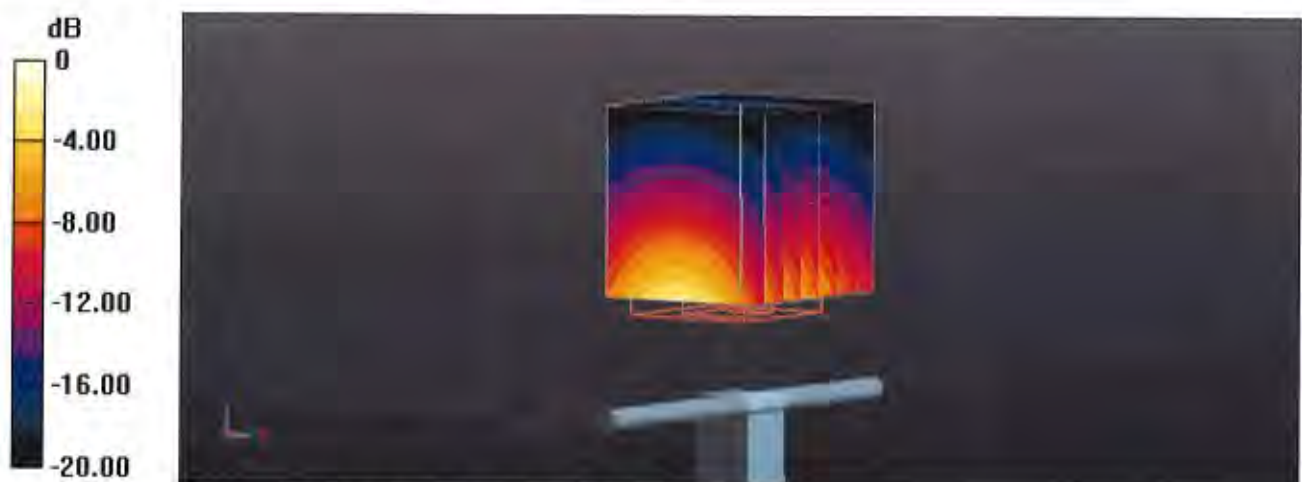

0 dB = 16.9 W/kg = 12.28 dBW/kg

Impedance Measurement Plot for Body TSL

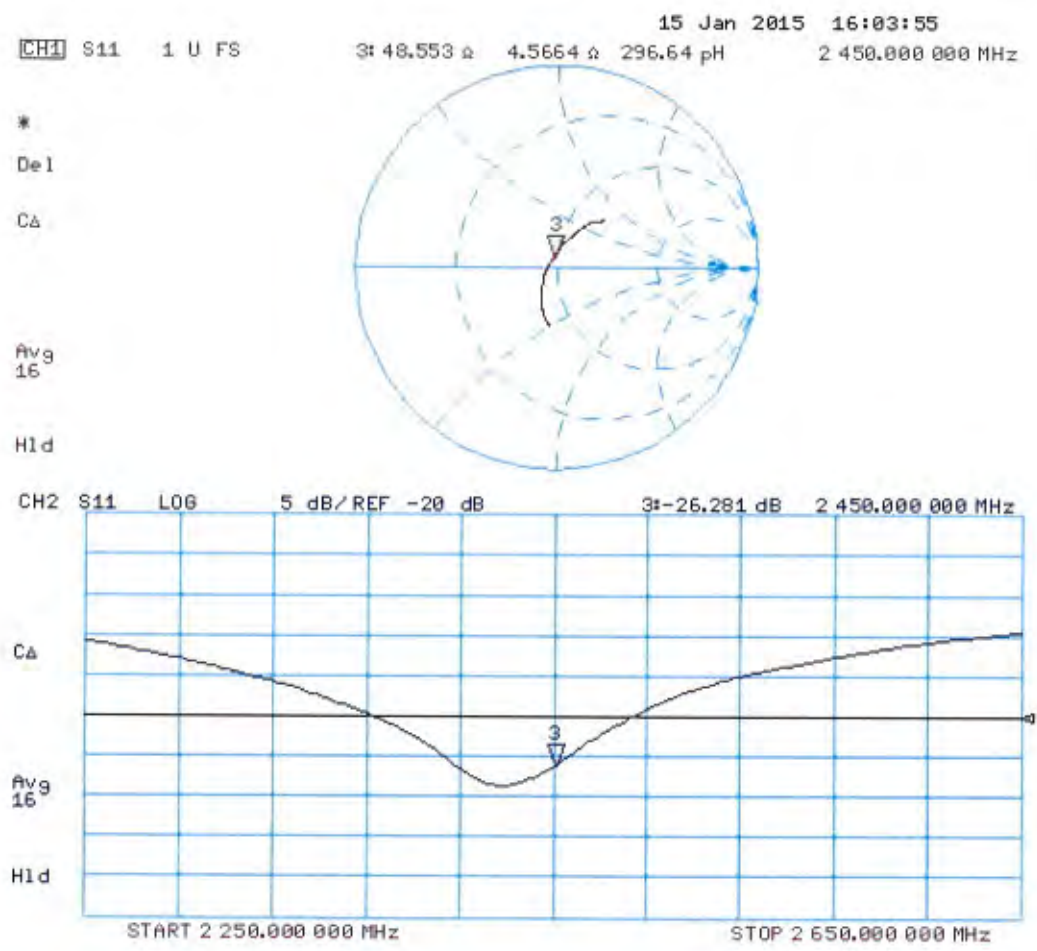



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **TCC Microsoft**

Certificate No: **D2600V2-1056_Jan15**

CALIBRATION CERTIFICATE

Object **D2600V2 - SN: 1056**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 19, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Israe Elnaouq** Name: **Israe Elnaouq** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature

Issued: January 19, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.8 $\pm$ 6 %	2.05 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	56.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.44 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.5 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.5	2.18 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.1 $\pm$ 6 %	2.21 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	14.2 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	55.9 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.8 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.4 Ω - 4.2 j Ω
Return Loss	- 27.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.9 Ω - 4.0 j Ω
Return Loss	- 25.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.150 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 14, 2012

DASY5 Validation Report for Head TSL

Date: 19.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1056

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.05$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.49, 4.49, 4.49); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 101.5 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 30.7 W/kg

SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.44 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

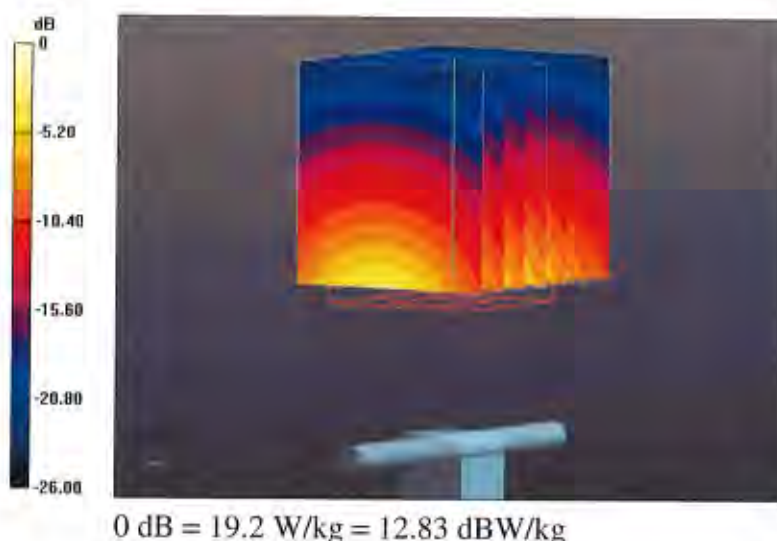

Impedance Measurement Plot for Head TSL

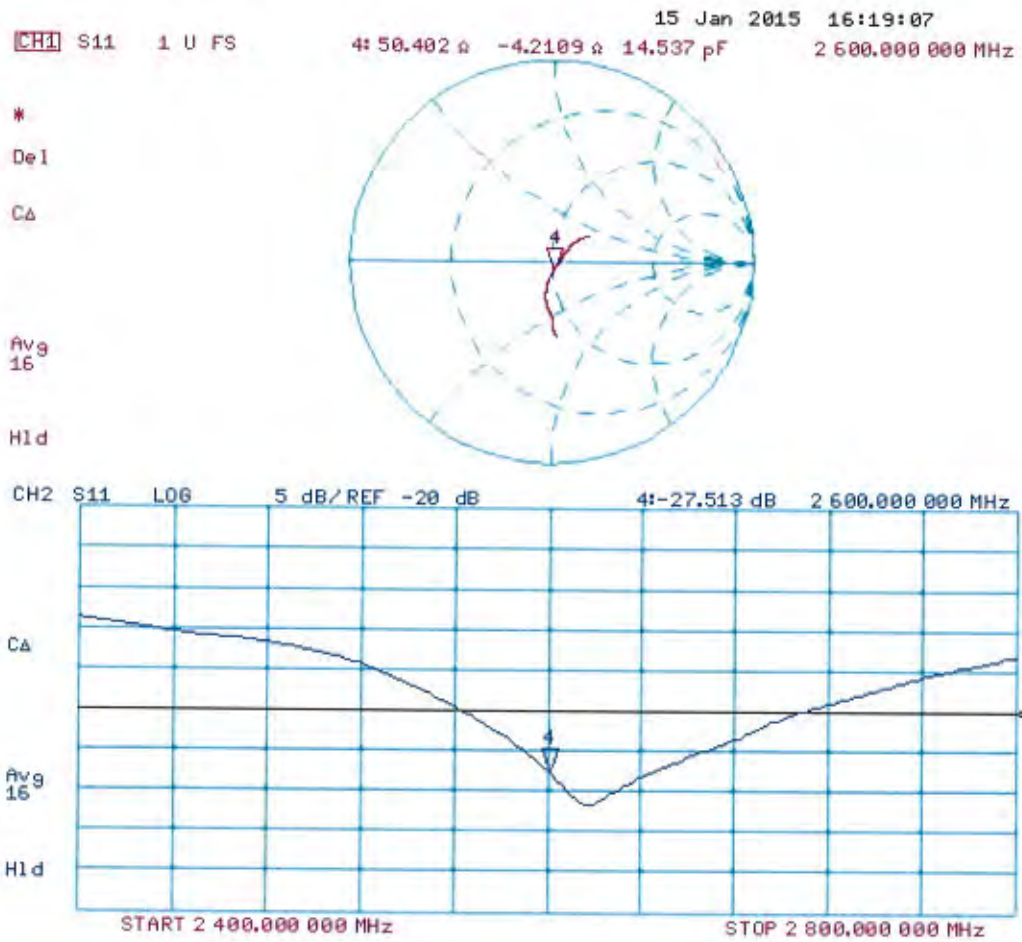

DASY5 Validation Report for Body TSL

Date: 15.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1056

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.21$ S/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.13, 4.13, 4.13); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.02 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 29.8 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.25 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

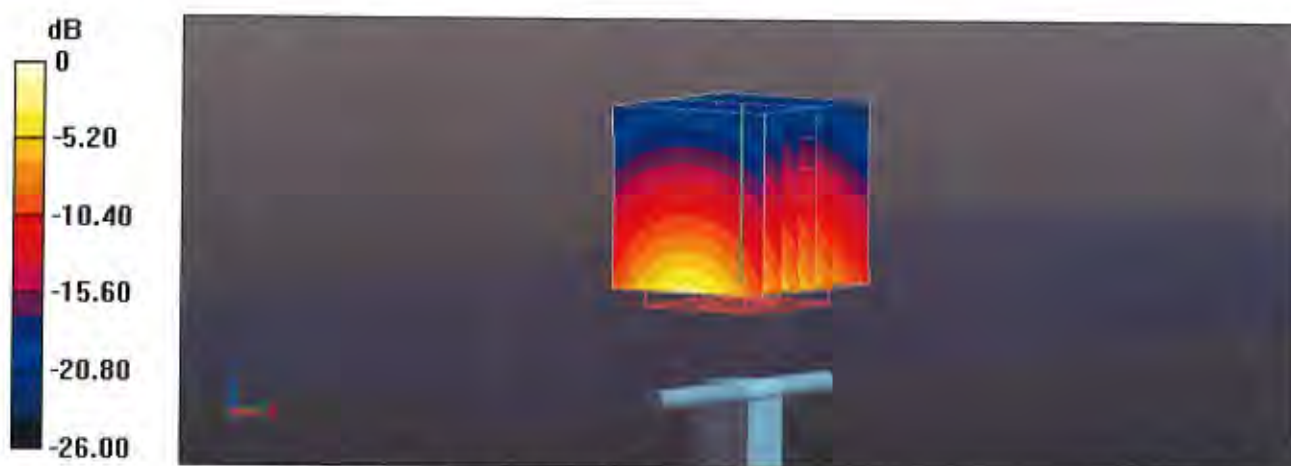

0 dB = 19.1 W/kg = 12.81 dBW/kg

Impedance Measurement Plot for Body TSL

