

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-624_06.doc	Date of Report:	05-Feb-2010
Number of pages:	30	Customer's Contact person:	Lasse Vaattovaara
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 86 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-624 / Battery BL-4J, AC charger AC-8E, Headset WH-102		
FCC ID:	PYARM-624	IC:	661V-RM624
Supplement reports:	The results in this report are based on results from report FCC15C_RM-612_03.		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Christian Andersen, System Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	18-Dec-2009
Testing completed	15-Jan-2010
The customer's contact person	Lasse Vaattovaara
Test Plan referred to	T:\Projects\RM-612\TestPlan_RS\RS_testplan_RM-612.xls
Notes	-
Document name	FCC15C_RM-612_03.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/V) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-612	004401109353637	0501	-	52.50.2009.50	42126
Phone	RM-612	004401109354932	0501	-	52.50.2009.50	42133
Battery	BL-4J	4944559463080100000;0670616	-	-	-	42128
AC charger	AC-8E	1103338312100300342;0675387	-	-	-	42130
Headset	WH-102	06943239443f4104597	-	-	-	42131

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8.2 (a)	6 dB bandwidth	PASSED
15.247(e)	A8.2 (b)	Power spectral density	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Tampere Laboratory.


The test results of PYARM-612 are re-used for certification of the PYARM-624. The table above indicates the results, which will be re-used.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup	4
2.3. Radiated test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))	5
3.1. Test method and limit	5
3.2. WLAN Test results	6
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....	9
4.1. Test method and limit	9
4.2. WLAN Test results	10
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5).....	12
5.1. Test method and limit	12
5.2. WLAN Test results	13
6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	16
6.1. Test method and limit	16
6.2. WLAN Test results	17
7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	19
7.1. Test method and limit	19
7.2. WLAN Test results	20
8. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (a))	21
8.1. Test method and limit	21
8.2. WLAN test results	22
9. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (b))	25
9.1. Test method and limit	25
9.2. WLAN test results	26
10. Test Equipment	29
10.1. Conducted measurements	29
10.2. Radiated measurements	29

2. Test setups


2.1. Conducted RF test setup

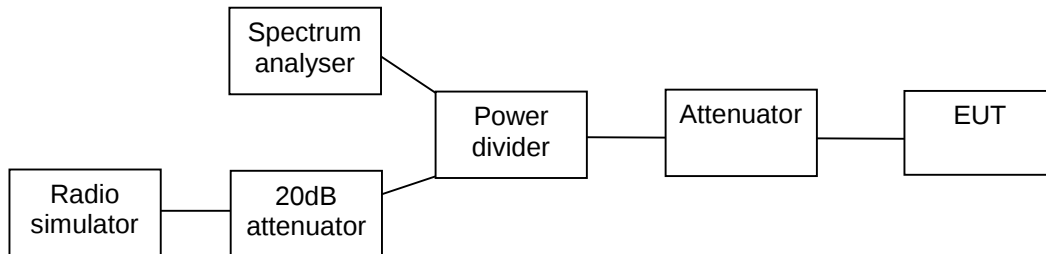

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

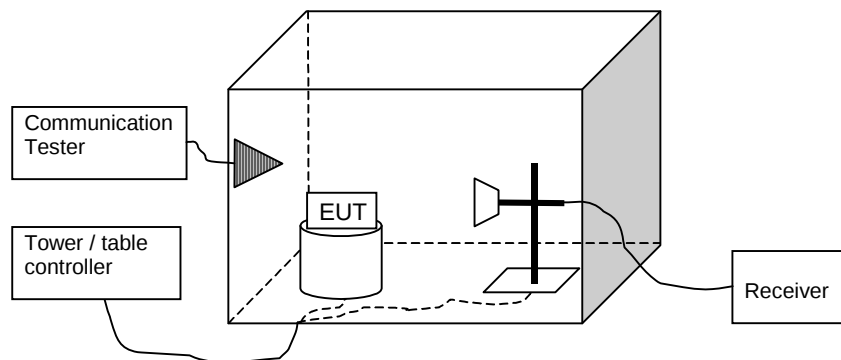

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))

EUT with DUT number	RM-612 DUT 42133
Accessories with DUT numbers	BL-4J DUT 42128
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 35 / 100.0
Date of measurements	08-Jan-2010
Measured by	Jari Jantunen

3.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. WLAN Test results


3.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	P [dBm]	P [W]	Result
1 / 2412	21.98	0.158	PASSED
7 / 2442	22.18	0.165	PASSED
11 / 2462	21.90	0.155	PASSED


Channel 1 / 2412 MHz

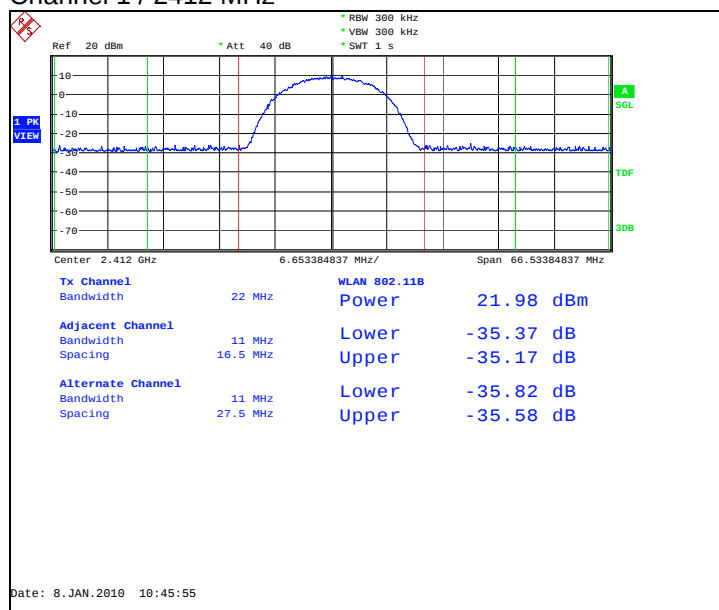

Channel 7 / 2442 MHz

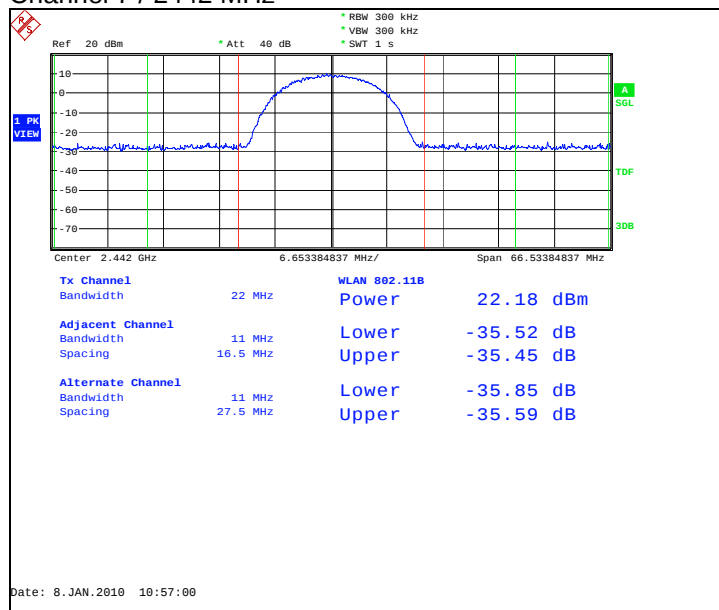


Channel 11 / 2462 MHz

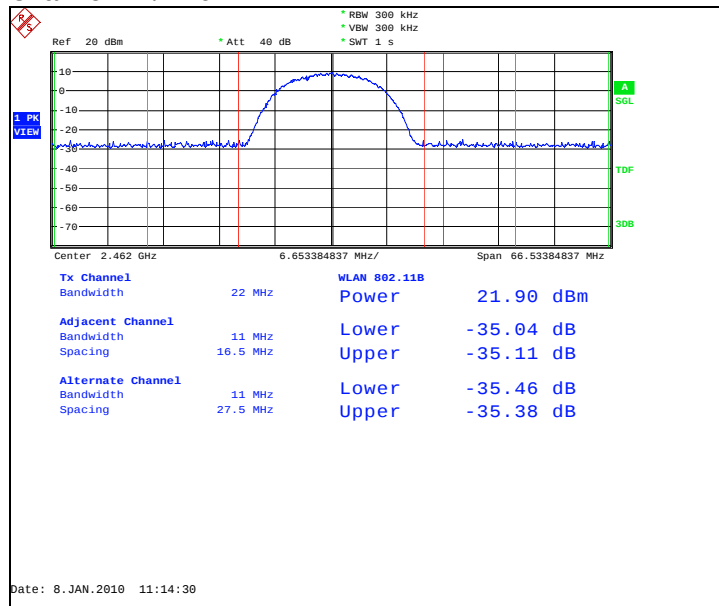


3.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	P [dBm]	P [W]	Result
1 / 2412	15.96	0.039	PASSED
7 / 2442	17.69	0.059	PASSED
11 / 2462	15.99	0.040	PASSED


Channel 1 / 2412 MHz

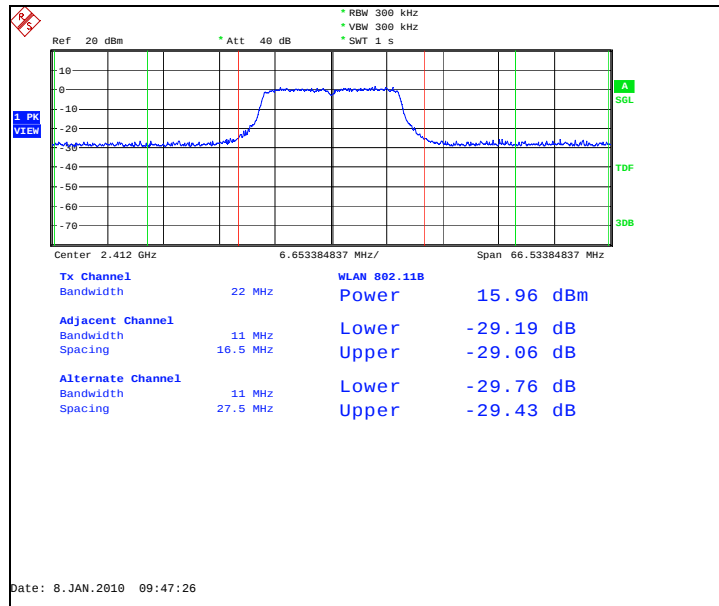

Channel 7 / 2442 MHz

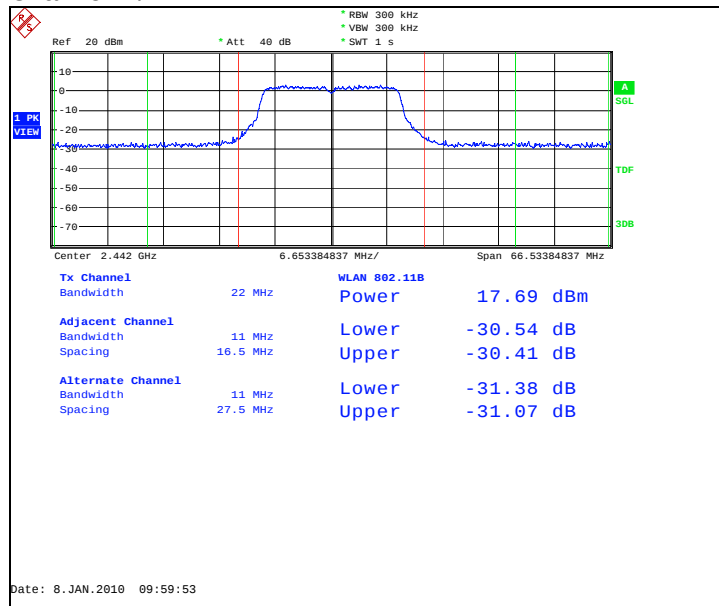

Channel 11 / 2462 MHz

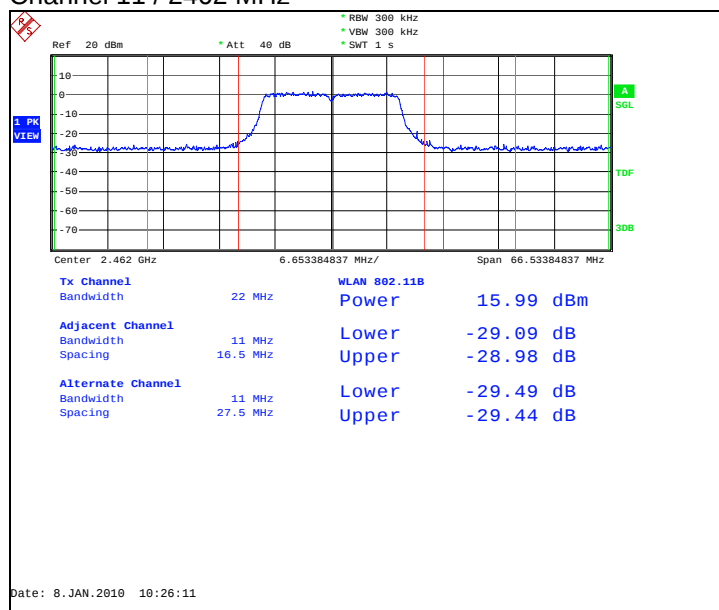

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-612 DUT 42162
Accessories with DUT numbers	BL-4J DUT 42128, AC-8E DUT 42130, WH-102 DUT 42131
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 44 / 99.1
Date of measurements	31-Dec-2009
Measured by	Hannu Söderholm

4.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. WLAN Test results


4.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 1 / 2412 MHz

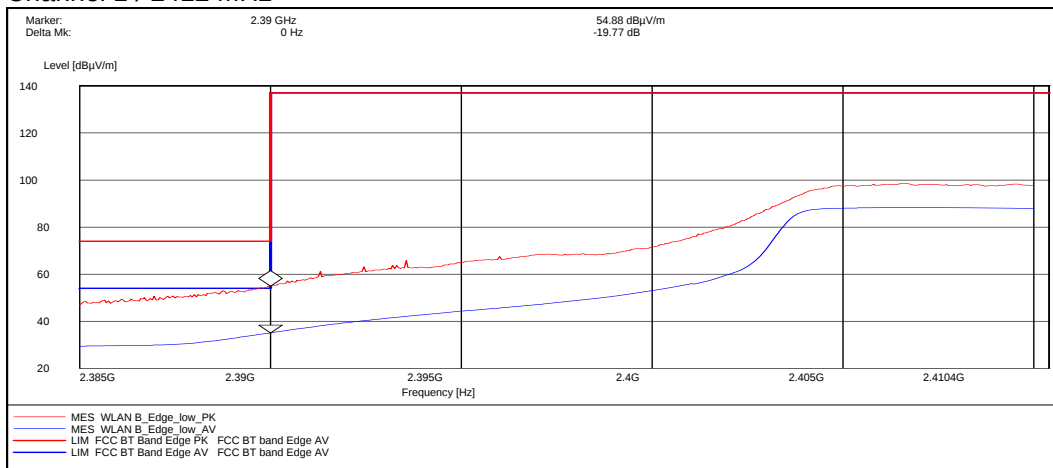

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	54.90	PASSED
Average	35.10	PASSED


Channel 11 / 2462 MHz

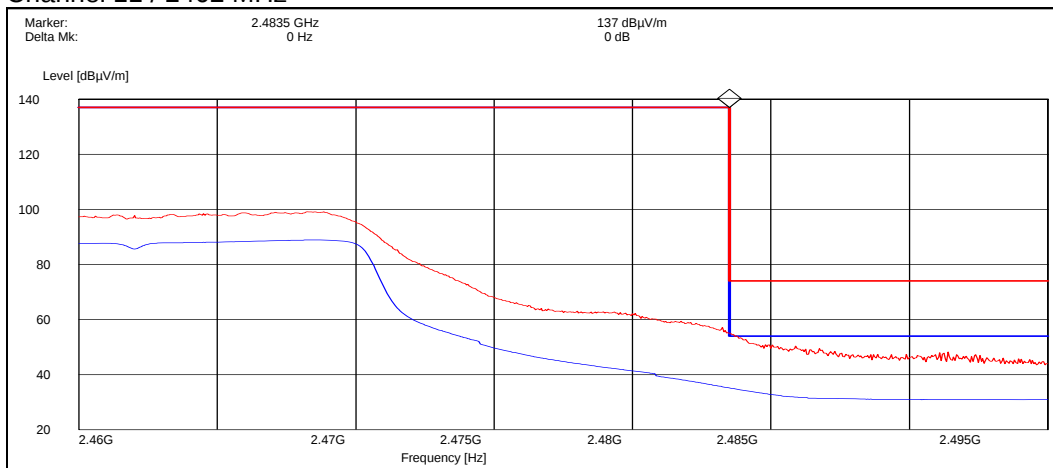

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	55.00	PASSED
Average	35.20	PASSED


4.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel 1 / 2412 MHz

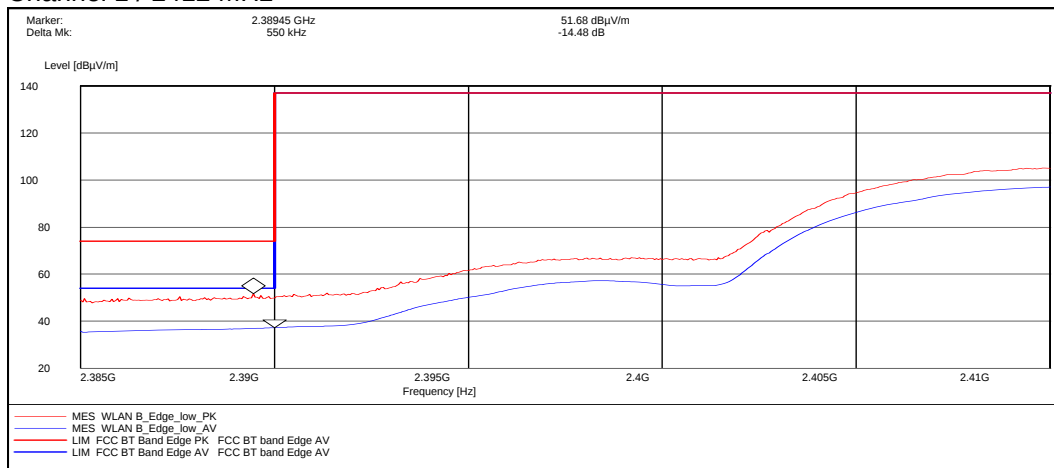

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	51.70	PASSED
Average	37.20	PASSED

Channel 11 / 2462 MHz

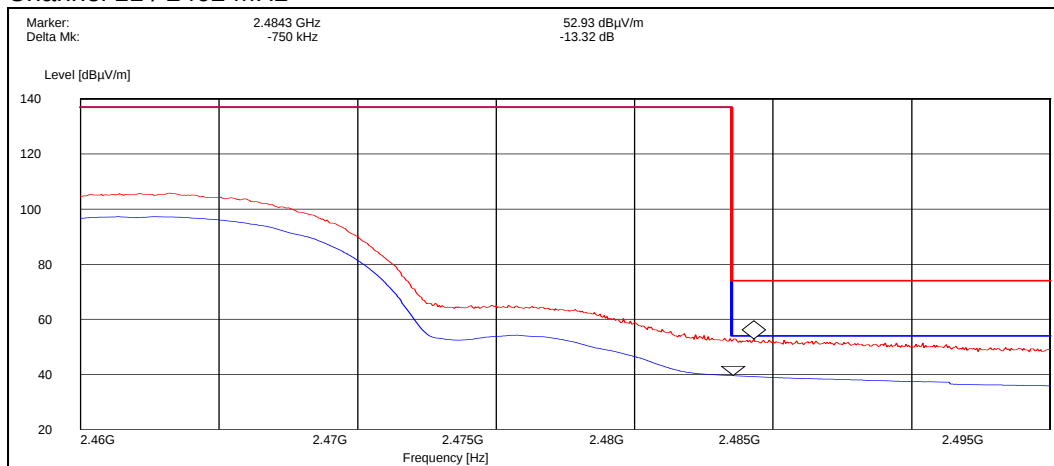

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	52.90	PASSED
Average	39.60	PASSED

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-612 DUT 42133
Accessories with DUT numbers	BL-4J DUT 42128
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 35 / 100.0
Date of measurements	08-Jan-2010
Measured by	Jari Jantunen

5.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. WLAN Test results

5.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate


Channel 1 / 2412 MHz

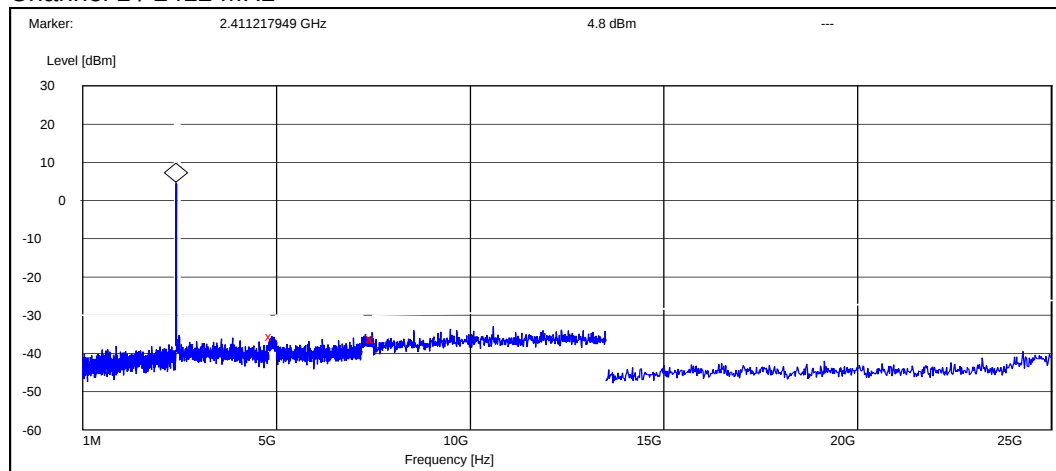

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4882.051282	-40.401420	PASSED
7462.980769	-40.901420	PASSED
7500.000000	-41.101420	PASSED


Channel 7 / 2442 MHz

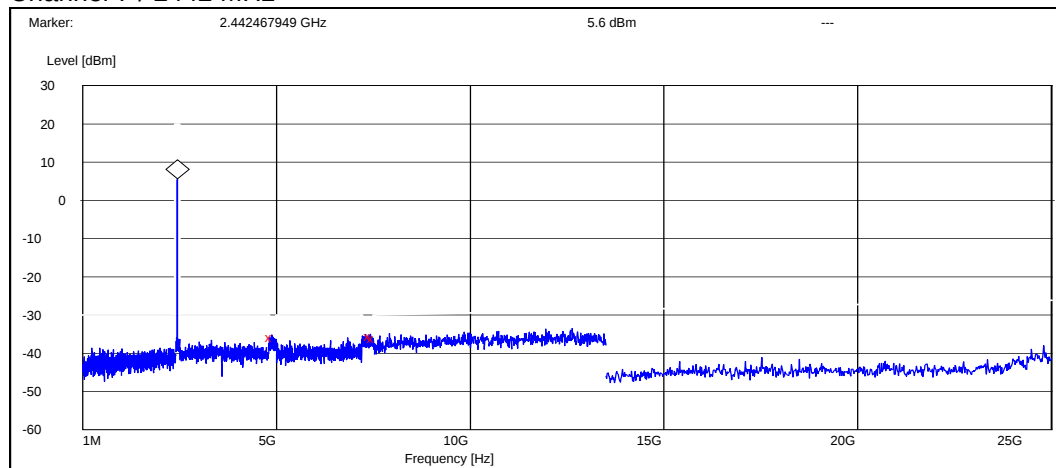

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4884.294872	-41.304894	PASSED
7425.961538	-41.104894	PASSED
7500.000000	-41.604894	PASSED

Channel 11 / 2462 MHz

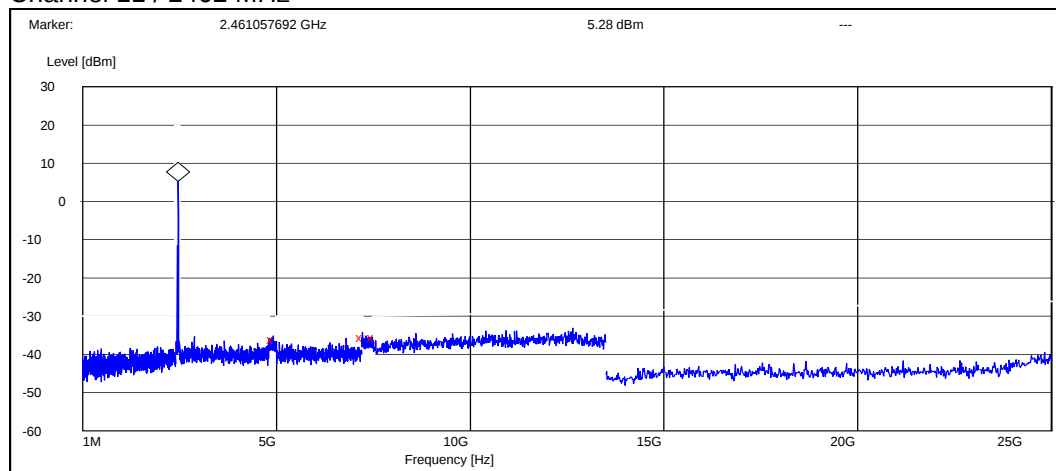


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4916.666667	-41.376534	PASSED
7217.788462	-40.776534	PASSED
7500.000000	-40.776534	PASSED

5.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate


Channel 1 / 2412 MHz

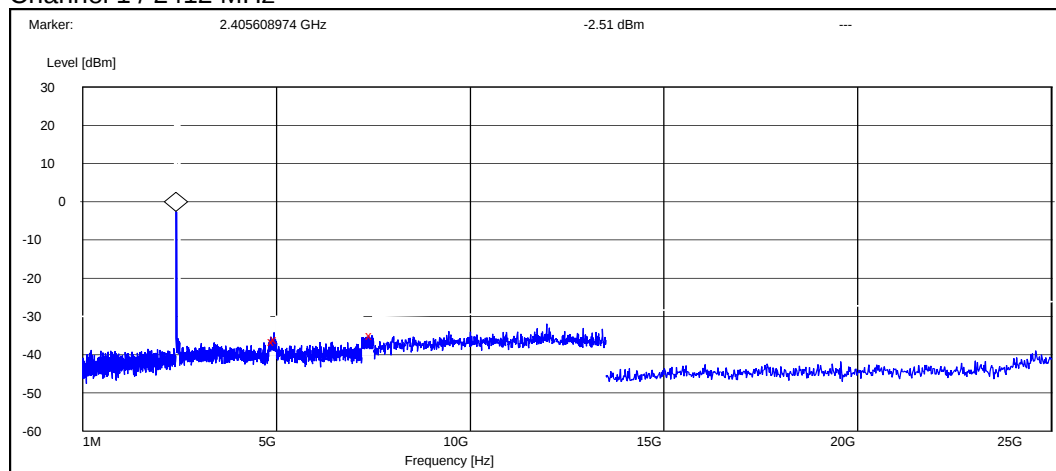

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4931.410256	-33.994645	PASSED
5000.000000	-33.594645	PASSED
7461.057692	-32.494645	PASSED


Channel 7 / 2442 MHz

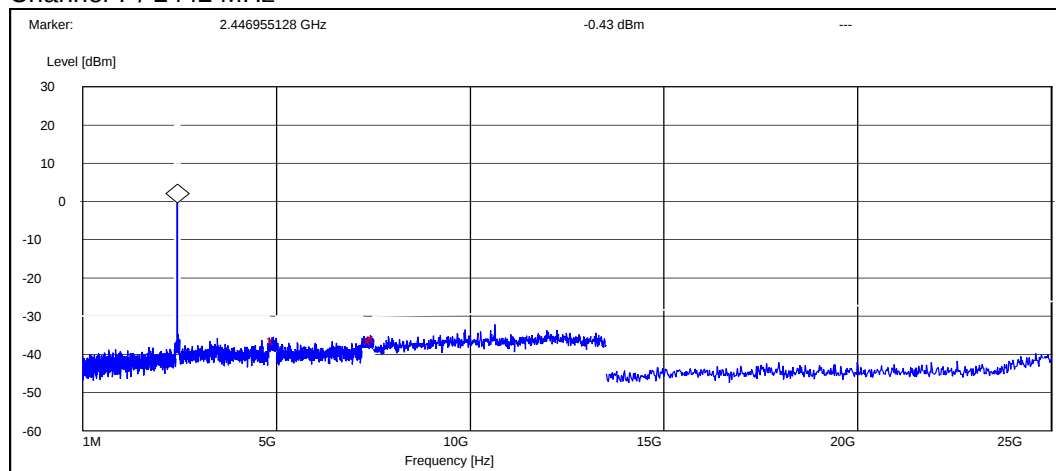

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4926.282051	-35.970566	PASSED
7428.846154	-35.870566	PASSED
7500.000000	-35.370566	PASSED

Channel 11 / 2462 MHz

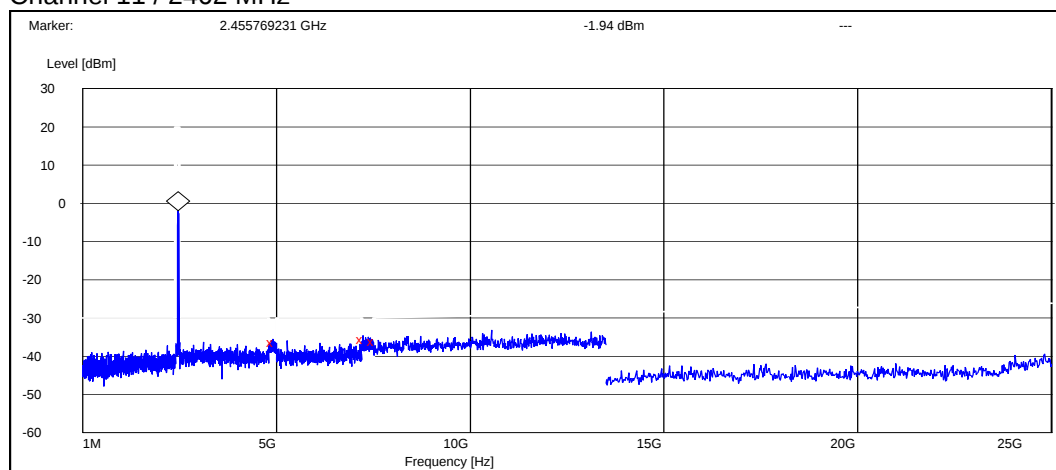

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4909.615385	-34.359700	PASSED
7233.173077	-33.559700	PASSED
7500.000000	-34.159700	PASSED

6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-612 DUT 42126
Accessories with DUT numbers	BL-4J DUT 42128, AC-8E DUT 42130, WH-102 DUT 42131
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 45 / 100.1
Date of measurements	31-Dec-2009
Measured by	Hannu Söderholm

6.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. WLAN Test results

6.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

TX mode, channel 1 / 2412 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	40.40	104.71	41.50	-1.1	HORIZONTAL	PASSED
7236.000000	43.40	147.91	40.80	2.6	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	29.60	30.20	30.70	-1.1	VERTICAL	PASSED
7236.000000	30.30	32.73	27.70	2.6	HORIZONTAL	PASSED

TX mode, channel 7 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
38.176353	24.40	16.60	38.60	-14.2	VERTICAL	PASSED
73.346092	16.40	6.61	40.10	-23.7	VERTICAL	PASSED
75.769940	17.40	7.41	40.80	-23.4	HORIZONTAL	PASSED
108.318236	21.60	12.02	43.60	-22.0	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.269539	42.00	125.89	43.20	-1.2	HORIZONTAL	PASSED
4884.767535	42.50	133.35	43.70	-1.2	HORIZONTAL	PASSED
7301.097194	43.00	141.25	40.10	2.9	HORIZONTAL	PASSED
7313.131263	42.60	134.90	39.60	3.0	HORIZONTAL	PASSED
17498.493988	52.40	416.87	33.50	18.9	HORIZONTAL	PASSED
17821.647295	55.20	575.44	34.40	20.8	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4881.269539	28.90	27.86	30.10	-1.2	HORIZONTAL	PASSED
4883.267535	29.00	28.18	30.20	-1.2	HORIZONTAL	PASSED
7300.097194	30.00	31.62	27.10	2.9	HORIZONTAL	PASSED
7316.631263	30.20	32.36	27.10	3.1	HORIZONTAL	PASSED
17495.493988	39.50	94.41	20.60	18.9	HORIZONTAL	
17827.647295	42.00	125.89	21.20	20.8	HORIZONTAL	

TX mode, channel 11 / 2462 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	45.10	179.89	46.20	-1.1	HORIZONTAL	PASSED
7386.000000	43.00	141.25	39.80	3.2	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	30.80	34.67	31.90	-1.1	HORIZONTAL	PASSED
7386.000000	31.90	39.36	28.70	3.2	HORIZONTAL	PASSED

6.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

TX mode, channel 1 / 2412 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	46.50	211.35	47.60	-1.1	HORIZONTAL	PASSED
7236.000000	43.00	141.25	40.40	2.6	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	30.40	33.11	31.50	-1.1	VERTICAL	PASSED
7236.000000	30.00	31.62	27.40	2.6	HORIZONTAL	PASSED

TX mode, channel 7 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
38.076353	25.70	19.28	39.80	-14.1	VERTICAL	PASSED
75.069940	18.50	8.41	42.00	-23.5	VERTICAL	PASSED
108.056313	21.70	12.16	43.70	-22.0	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.767535	47.30	231.74	48.50	-1.2	HORIZONTAL	PASSED
7268.545090	43.00	141.25	40.30	2.7	HORIZONTAL	PASSED
7318.133267	42.50	133.35	39.40	3.1	HORIZONTAL	PASSED
17462.431864	52.50	421.70	33.80	18.7	HORIZONTAL	PASSED
17763.021042	54.70	543.25	33.80	20.9	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.767535	34.50	53.09	35.70	-1.2	HORIZONTAL	PASSED
7274.545090	29.70	30.55	26.90	2.8	HORIZONTAL	PASSED
7314.133267	30.10	31.99	27.10	3.0	HORIZONTAL	PASSED
17465.431864	39.40	93.33	20.80	18.6	HORIZONTAL	PASSED
17762.021042	42.00	125.89	21.10	20.9	HORIZONTAL	PASSED

TX mode, channel 11 / 2462 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	48.40	263.03	49.50	-1.1	HORIZONTAL	PASSED
7386.000000	42.70	136.46	39.50	3.2	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	35.30	58.21	36.40	-1.1	HORIZONTAL	PASSED
7386.000000	30.20	32.36	27.00	3.2	HORIZONTAL	PASSED

7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-612 DUT 42126
Accessories with DUT numbers	BL-4J DUT 42128, AC-8E DUT 42130, WH-102 DUT 42131
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 52 / 103.1
Date of measurements	15-Jan-2010
Measured by	Jari Jantunen

7.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. WLAN Test results

7.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 7 / 2442 MHz

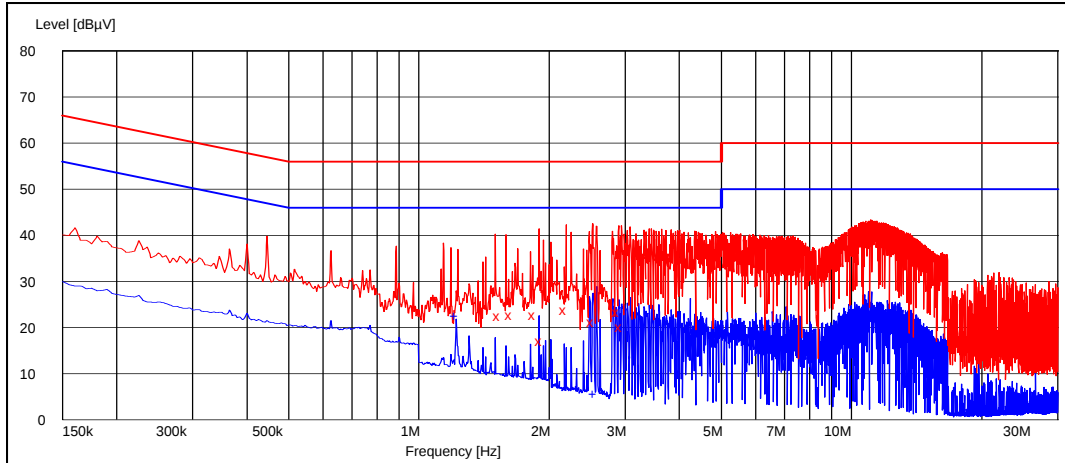

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.535000	22.60	L1	PASSED
1.635000	22.70	L1	PASSED
1.855000	22.70	N	PASSED
1.920000	17.20	N	PASSED
2.185000	23.90	L1	PASSED
2.525000	21.10	L1	PASSED
2.890000	23.30	L1	PASSED
2.935000	20.20	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.220000	22.50	N	PASSED
2.555000	5.70	N	PASSED

8. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (a))

EUT with DUT number	RM-612 DUT 42133
Accessories with DUT numbers	BL-4J DUT 42128
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 35 / 100.0
Date of measurements	08-Jan-2010
Measured by	Jari Jantunen

8.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
≥ 500

8.2. WLAN test results


8.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	6 dB bandwidth [kHz]	Result
1	10737.179	PASSED
7	10737.179	PASSED
11	10817.308	PASSED


Channel 1 / 2412 MHz

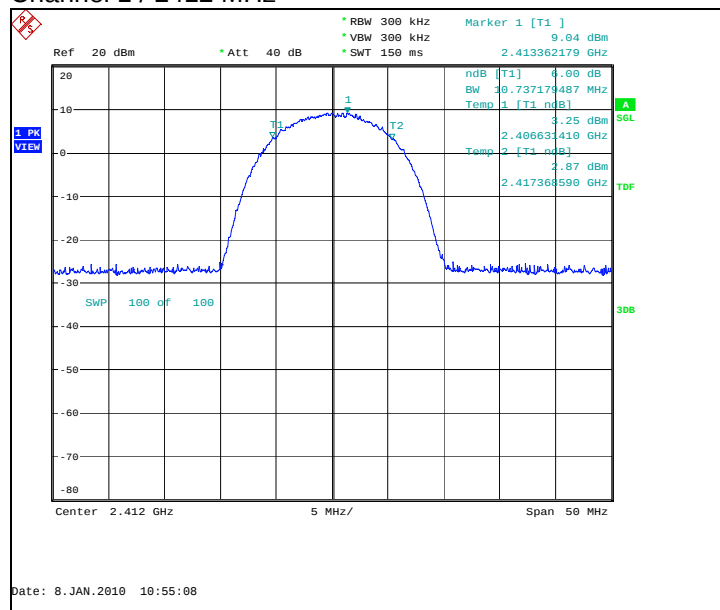

Channel 7 / 2442 MHz

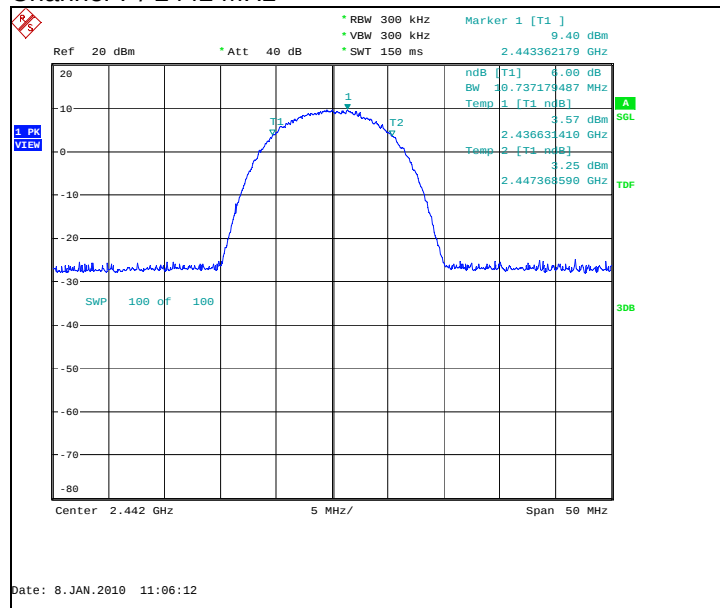


Channel 11 / 2462 MHz

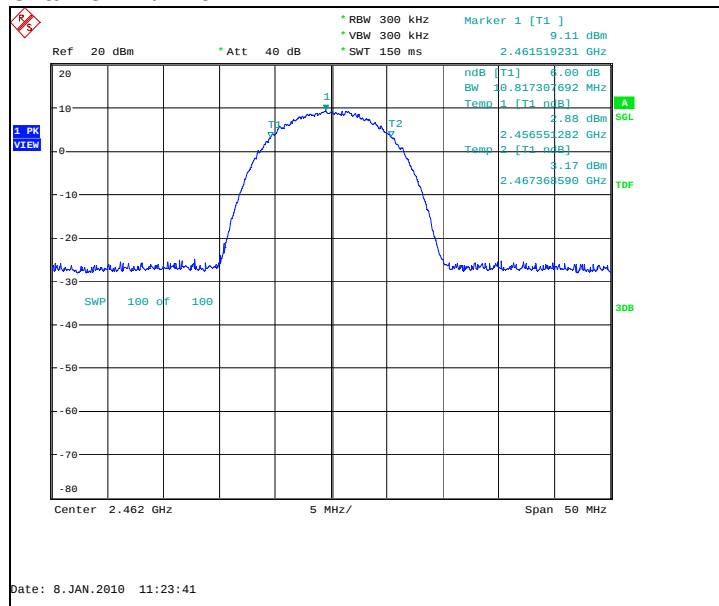


8.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	6 dB bandwidth [kHz]	Result
1	16426.282	PASSED
7	16506.410	PASSED
11	16506.410	PASSED


Channel 1 / 2412 MHz

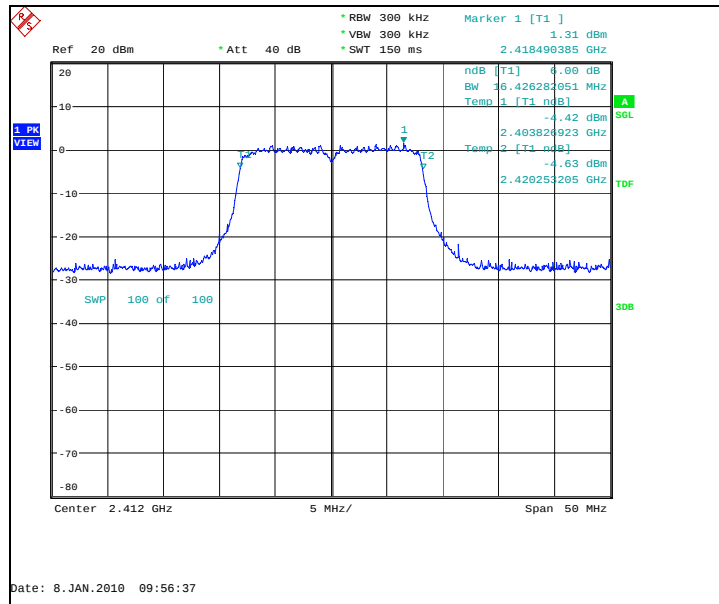

Channel 7 / 2442 MHz

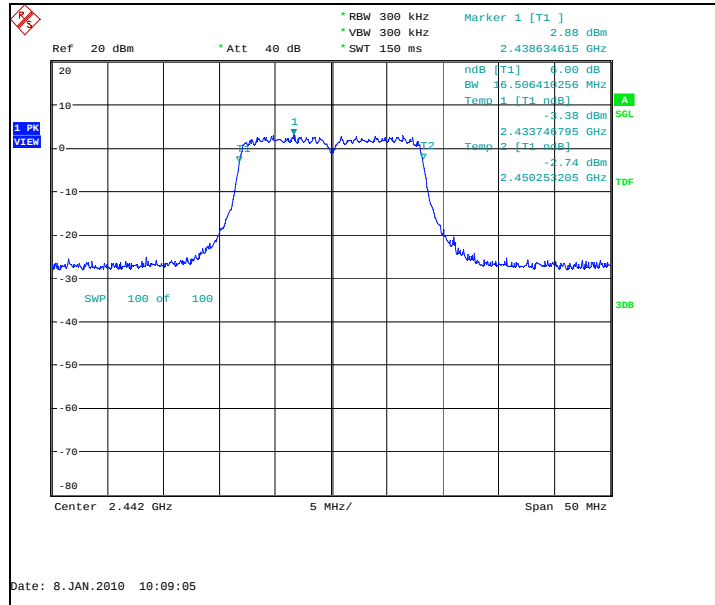

Channel 11 / 2462 MHz

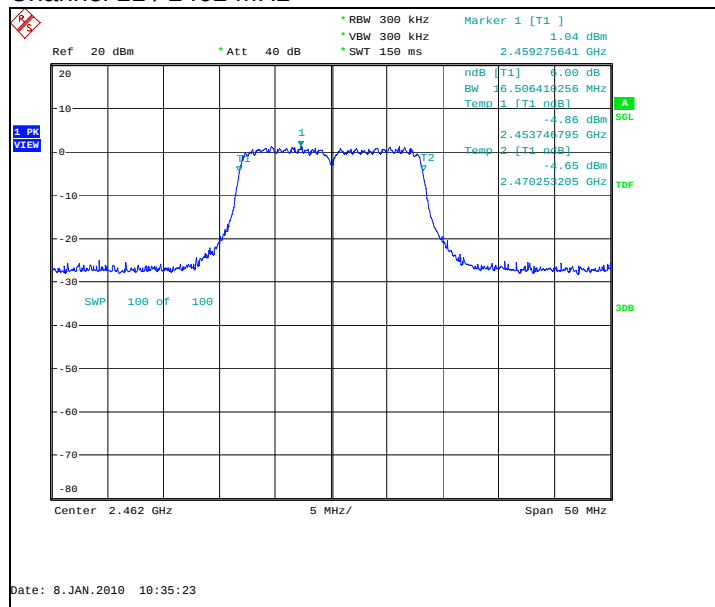

9. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (b))

EUT with DUT number	RM-612 DUT 42133
Accessories with DUT numbers	BL-4J DUT 42128
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 35 / 100.0
Date of measurements	08-Jan-2010
Measured by	Jari Jantunen

9.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements


Limit [dBm] @ 3 kHz
≤ 8

9.2. WLAN test results


9.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-4.93	PASSED
7 / 2442	-4.43	PASSED
11 / 2462	-4.72	PASSED


Channel 1 / 2412 MHz

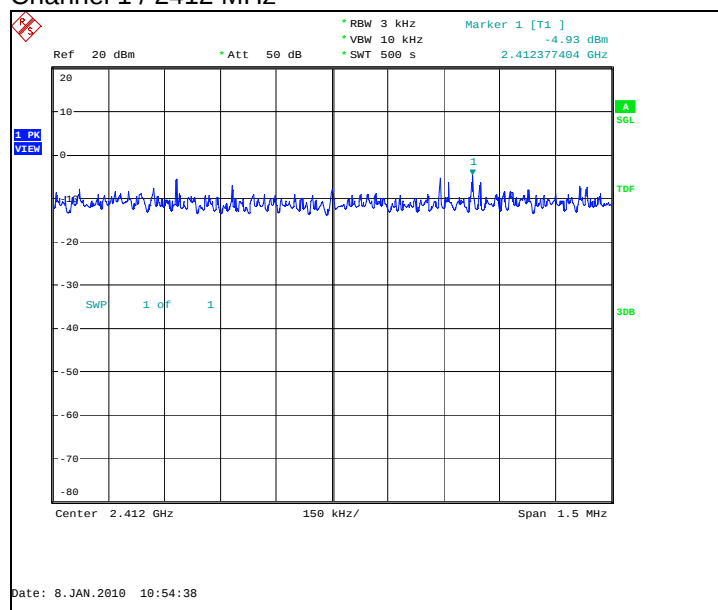

Channel 7 / 2442 MHz

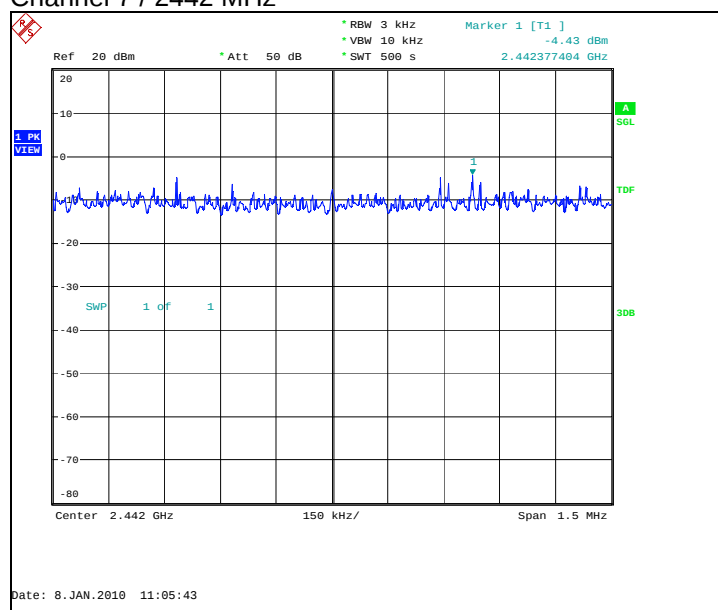


Channel 11 / 2462 MHz

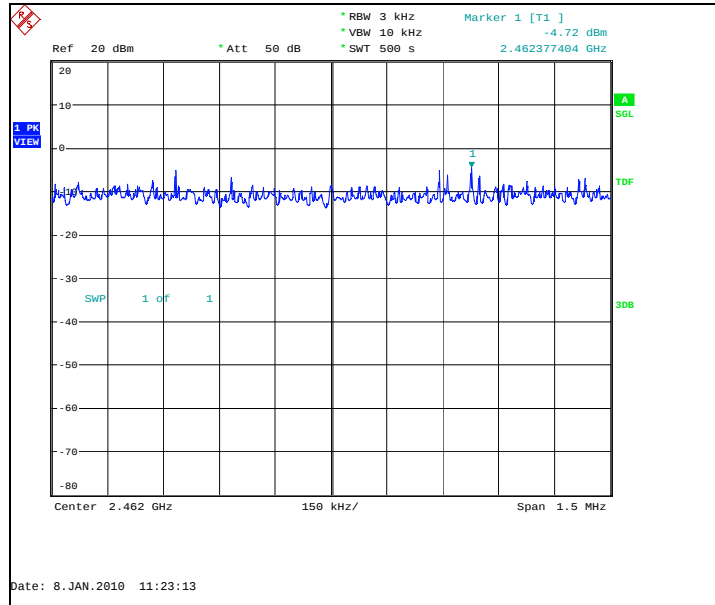


9.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-15.98	PASSED
7 / 2442	-14.07	PASSED
11 / 2462	-14.97	PASSED


Channel 1 / 2412 MHz

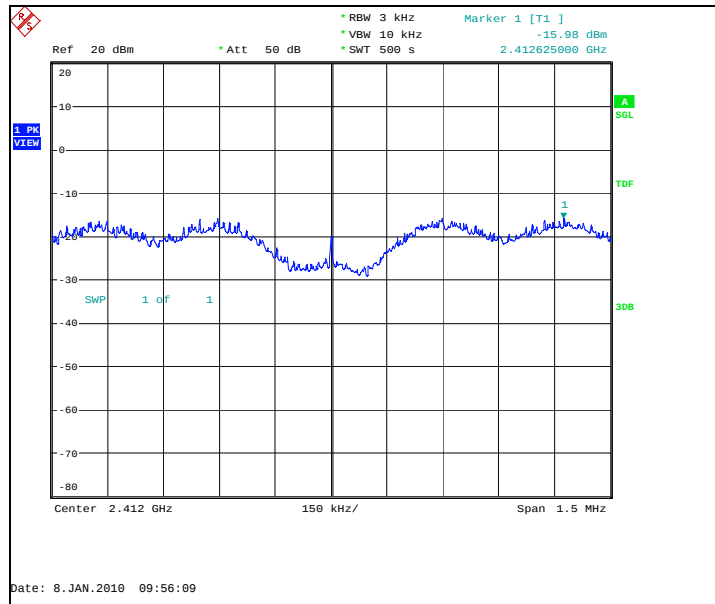

Channel 7 / 2442 MHz

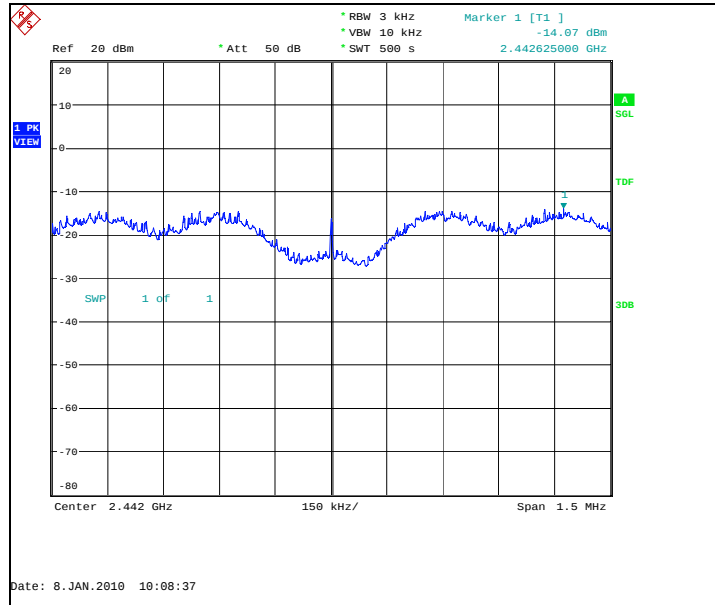

Channel 11 / 2462 MHz

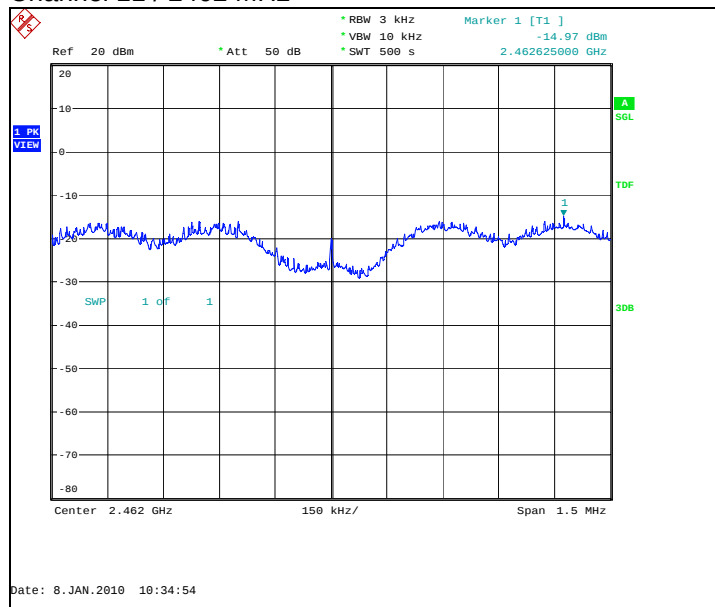

10. Test Equipment

10.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

10.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

