

FCC Part 22/24/27 Compliance Test Report

Test Report no.:	FCC22&24&27_RM-824_06.docx	Date of Report:	13-Jul-2012
Number of pages:	33	Customer's Contact person:	Melava Tia
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-824 / Battery BP-5T		
FCC ID:	PYARM-824	IC:	661V-RM824
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24/27 , TIA-603-C-2004 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 2, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Kalle Hannila, Engineer, EMC & SAR

1. Summary for FCC Part 22/24/27 Compliance Test Report

Date of receipt	09-Jul-2012
Testing completed	13-Jul-2012
The customer's contact person	Melava Tia
Test Plan referred to	T:\Projects\RM-824\TestPlan\RS_testplan_RM-824.xls
Notes	-
Document name	T:\Projects\RM-824\EMC\FCC22&24&27_RM-824_06.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/WCDMA/WLAN/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-824	004402139760817	2210		1225.0001.8422.9704.68	16499
Battery	BP-5T	393213222414010010460670665				16505
Phone	RM-824	004402139760593	2210		1225.0001.8422.9704.68	16501
Battery	BP-5T	393213222414010012260670665				16509
Phone	RM-824	004402139760650	2210		1225.0001.8422.9704.68	16500
Battery	BP-5T	393213222414010010060670665				16504
Phone	RM-824	004402139761625	2210	-	1121 0002 8297 9657 110	16513
Battery	BP-5T	393213222414010011760670665	-	-	-	16514
Headset	WH-208	2023321	-	-	-	16515
AC-Charger	AC-50E	409049207226040151060675619	-	-	-	16516

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
\$2.1046(a)	6.4	Conducted RF output power	NP
\$24.232(b)	6.4	Radiated RF output power	PASSED
\$2.1049(h)	4.6.1	99 % occupied bandwidth	NP
\$24.238(a)	6.5	Band edge compliance	PASSED
\$24.238(a), \$2.1051	6.5	Spurious emissions at antenna terminals	NP
\$24.238(a), \$2.1053	6.5	Spurious radiated emissions	NP
\$2.1055(a)	6.3	Frequency stability, temperature variation	NP
\$2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
\$2.1046(a)	6.4	Conducted RF output power	NP
\$24.232(b)	6.4	Radiated RF output power	PASSED
\$2.1049(h)	4.6.1	99 % occupied bandwidth	NP
\$24.238(a)	6.5	Band edge compliance	PASSED
\$24.238(a), \$2.1051	6.5	Spurious emissions at antenna terminals	NP
\$24.238(a), \$2.1053	6.5	Spurious radiated emissions	NP
\$2.1055(a)	6.3	Frequency stability, temperature variation	NP
\$2.1055(d)	6.3	Frequency stability, voltage variation	NP

LTE1700 (Band 4):

Section in CFR 47	Section in RSS-GEN or RSS-139	Name of the test	Result
\$2.1046(a)	6.4	Conducted RF output power	NP
\$27.50(d)(4)	6.4	Radiated RF output power	PASSED
\$2.1049(h)	4.6.1	99 % occupied bandwidth	NP
\$27.53(h)	6.5	Band edge compliance	PASSED
\$27.53(h), \$2.1051	6.5	Spurious emissions at antenna terminals	NP
\$27.53(h), \$2.1053	6.5	Spurious radiated emissions	NP
\$2.1055(a)	6.3	Frequency stability, temperature variation	NP
\$2.1055(d)	6.3	Frequency stability, voltage variation	NP

LTE700 Lower (Band 17):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
\$2.1046 (a)	N/A	Conducted RF output power	NP
\$27.50(c)(10)	N/A	Radiated RF output power	PASSED
\$2.1049(h)	N/A	99 % occupied bandwidth	NP
\$27.53(g)	N/A	Band edge compliance	PASSED
\$27.53(g), \$2.1051	N/A	Spurious emissions at antenna terminals	NP
\$27.53(g), \$2.1051	N/A	Spurious radiated emissions	NP
\$2.1055(a)	N/A	Frequency stability, temperature variation	NP
\$2.1055(d)	N/A	Frequency stability, voltage variation	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 22/24/27 Compliance Test Report	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Radiated RF output power (FCC §22.913(a), §24.232(b), §27.50(d)(2), §27.53(h), §27.53(g), RSS-132 4.4, RSS-133 6.4)	5
2.2. Test method and limit.....	5
2.3. GSM850 TX Test results.....	6
2.4. GSM850-E1 TX Test results	6
2.5. WCDMA 850 (Band V) Test results.....	6
2.6. GSM1900 TX Test results.....	7
2.7. GSM1900-E1 TX Test results	7
2.8. WCDMA 1900 (Band II) test results	7
2.9. LTE700 Lower (Band 17) test results.....	8
2.10. LTE 1700 (Band IV) test results	9
3. Band edge compliance (FCC §22.917(a), §24.238(a), §27.53(g), §27.53(h), §27.53(g), RSS-132 4.5, RSS-133 6.5)11	
3.2. Test method and limit.....	11
3.3. GSM850 Test results	12
3.4. GSM850-E1 Test results.....	13
3.5. WCDMA 850 (Band V) Test results.....	15
3.6. GSM1900 Test results	17
3.7. GSM1900-E1 Test results.....	19
3.8. WCDMA 1900 (Band II) test results	21
3.9. LTE 1700 (Band IV) test results	23
3.10. LTE700 Lower (Band 17) test results	27
4. Test Equipment.....	32
4.1. Conducted measurements	32
4.2. Radiated measurements	32

2. Radiated RF output power

(FCC §22.913(a), §24.232(b), §27.50(d)(2), §27.53(h), §27.53(g), RSS-132 4.4, RSS-133 6.4)

EUT with DUT number	RM-824, DUT 16499
Accessories with DUT numbers	BP-5T, DUT 16505
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 40 / 101
Date of measurements	11-Jul-2012
Measured by	Kalle Hannila / Jari Keto

2.1.1 Test Setup

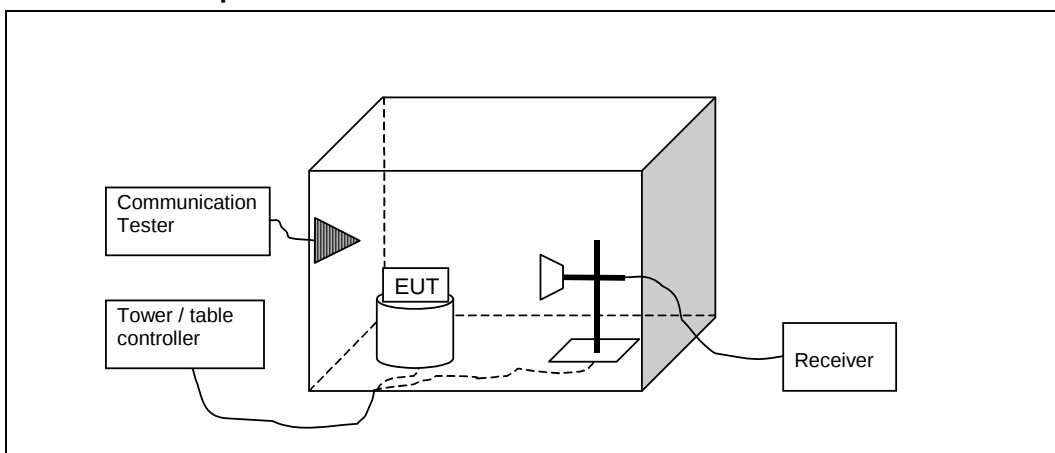

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. The measurement results are obtained as described below:

$$P[dBm] = P_{SUBST\ TX} + P_{MEAS} - P_{SUBST\ RX} - L_{SUBST\ CABLES} + G_{SUBST\ TX\ ANT}$$

Where $P_{SUBST\ TX}$ is signal generator level. P_{MEAS} is measured power level from the EUT. $P_{SUBST\ RX}$ is measured power level in substitute measurement. $L_{SUBST\ CABLE}$ is the loss of the cable between the signal generator and the substitution antenna and $G_{SUBST\ TX\ ANT}$ is substitution antenna gain.

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
704 - 716	3 ERP	34.8
824 - 849	7 ERP	38.5
1710 - 1755	1 EIRP	30

1850 - 1910	2 EIRP	33
-------------	--------	----

2.3. GSM850 TX Test results

Peak detector

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Results
128 / 824.2	25.91	0.39	-8.93	34.84	VERTICAL	PASSED
190 / 836.6	26.7	0.468	-7.55	34.25	VERTICAL	PASSED
251 / 848.8	26.52	0.448	-7.29	33.81	VERTICAL	PASSED

2.4. GSM850-E1 TX Test results

TX mode, channel 128 / 869.2 MHz

Peak detector

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Channel []	Results
128 / 824.2	20.27	0.106	-86.84	107.11	V	---	PASSED

TX mode, channel 190 / 881.6 MHz

Peak detector

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Channel []	Results
190 / 836.6	24.44	0.278	-82.84	107.28	V	---	PASSED

TX mode, channel 251 / 893.8 MHz

Peak detector

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Channel []	Results
251 / 848.8	24.14	0.26	-83.12	107.26	V	---	PASSED

2.5. WCDMA 850 (Band V) Test results

Peak detector

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Results
4132 / 826.4	19.85	0.097	-14.99	34.84	VERTICAL	PASSED
4183 / 836.6	19.81	0.096	-14.44	34.25	VERTICAL	PASSED
4233 / 846.6	20.48	0.112	-13.69	34.17	VERTICAL	PASSED

RMS detector

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
4132 / 826.4	15.79	0.038	-19.05	34.84	VERTICAL	PASSED
4183 / 836.6	15.91	0.039	-18.34	34.25	VERTICAL	PASSED
4233 / 846.6	16.67	0.046	-17.5	34.17	VERTICAL	PASSED

2.6. GSM1900 TX Test results

Peak detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
512 / 1850.2	30.59	1.144	-14.46	45.05	HORIZONTAL	PASSED
661 / 1880	31.06	1.275	-14.24	45.3	HORIZONTAL	PASSED
810 / 1909.8	29.86	0.969	-15.5	45.36	HORIZONTAL	PASSED

2.7. GSM1900-E1 TX Test results

TX mode, channel 512 / 1930.2 MHz

Peak detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Channel []	Results
512 / 1850.2	27.95	0.624	-79.67	107.62	H	---	PASSED

TX mode, channel 661 / 1960.0 MHz

Peak detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Channel []	Results
661 / 1880	28.62	0.728	-79.11	107.73	H	---	PASSED

TX mode, channel 810 / 1989.8 MHz

Peak detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Channel []	Results
810 / 1909.8	27.26	0.533	-80.27	107.53	H	---	PASSED

2.8. WCDMA 1900 (Band II) test results

Peak detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
--------------------------------	------------	----------	-------------------------	-----------------------	--------------	---------

9262 / 1852.4	26.44	0.441	-18.61	45.05	HORIZONTAL	PASSED
9400 / 1880	26.9	0.49	-18.4	45.3	HORIZONTAL	PASSED
9538 / 1907.6	25.81	0.381	-19.73	45.54	HORIZONTAL	PASSED

RMS detector

Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Results
9262 / 1852.4	22.22	0.167	-22.83	45.05	HORIZONTAL	PASSED
9400 / 1880	23.14	0.206	-22.16	45.3	HORIZONTAL	PASSED
9538 / 1907.6	22.03	0.16	-23.51	45.54	HORIZONTAL	PASSED

2.9. LTE700 Lower (Band 17) test results

FDD, CBW 5MHz, QPSK, 1RB, Peak detector

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Results
23755 / 706.5	17.01	0.05	-16.2	33.21	VERTICAL	PASSED
23790 / 710	18.16	0.065	-15.28	33.44	VERTICAL	PASSED
23825 / 713.5	17.08	0.051	-16.56	33.64	VERTICAL	PASSED

FDD, CBW 5MHz, 16QAM, 1RB, Peak detector

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Results
23755 / 706.5	16.86	0.049	-16.35	33.21	VERTICAL	PASSED
23790 / 710	18.29	0.067	-15.15	33.44	VERTICAL	PASSED
23825 / 713.5	17.29	0.054	-16.35	33.64	VERTICAL	PASSED

FDD, CBW 5MHz, QPSK, 25RB, Peak detector

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Results
23755 / 706.5	18.49	0.071	-14.72	33.21	VERTICAL	PASSED
23790 / 710	18.92	0.078	-14.52	33.44	VERTICAL	PASSED
23825 / 713.5	17.79	0.06	-15.85	33.64	VERTICAL	PASSED

FDD, CBW 5MHz, 16QAM, 25RB, Peak detector

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Results
23755 / 706.5	18.78	0.075	-14.43	33.21	VERTICAL	PASSED
23790 / 710	19.4	0.087	-14.04	33.44	VERTICAL	PASSED
23825 / 713.5	18.25	0.067	-13.55	31.8	HORIZONTAL	PASSED

FDD, CBW 10MHz, QPSK, 50RB, Peak detector

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Results
23780 / 709	15.17	0.033	-18.21	33.38	VERTICAL	PASSED

23790 / 710	15.35	0.034	-18.09	33.44	VERTICAL	PASSED
23800 / 711	15.09	0.032	-18.41	33.5	VERTICAL	PASSED

FDD, CBW 10MHz, QPSK, 50RB, RMS detector

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
23780 / 709	9.39	0.009	-23.99	33.38	VERTICAL	PASSED
23790 / 710	9.38	0.009	-24.06	33.44	VERTICAL	PASSED
23800 / 711	9.5	0.009	-24	33.5	VERTICAL	PASSED

FDD, CBW 10MHz, 16QAM, 1RB, Peak detector

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
23755 / 706.5	16.93	0.049	-16.28	33.21	VERTICAL	PASSED
23790 / 710	18.42	0.069	-15.02	33.44	VERTICAL	PASSED
23825 / 713.5	17.43	0.055	-16.21	33.64	VERTICAL	PASSED

FDD, CBW 10MHz, 16QAM, 1RB, RMS detector

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
23755 / 706.5	13.86	0.024	-19.35	33.21	VERTICAL	PASSED
23790 / 710	14.21	0.026	-19.23	33.44	VERTICAL	PASSED
23825 / 713.5	12.43	0.018	-21.21	33.64	VERTICAL	PASSED

2.10. LTE 1700 (Band IV) test results

FDD, CBW 5MHz, QPSK, 1RB, Peak detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
19957 / 1710.7	21.11	0.129	-13.61	34.72	VERTICAL	PASSED
20175 / 1732.5	23.69	0.234	-10.6	34.29	VERTICAL	PASSED
20393 / 1754.3	22.36	0.172	-11.54	33.9	VERTICAL	PASSED

FDD, CBW 5MHz, QPSK, 1RB, RMS detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
19957 / 1710.7	20.18	0.104	-24.12	44.3	HORIZONTAL	PASSED
20175 / 1732.5	22.4	0.174	-21.84	44.24	HORIZONTAL	PASSED
20393 / 1754.3	22.03	0.16	-22.66	44.69	HORIZONTAL	PASSED

FDD, CBW 5MHz, 16QAM, 1RB, Peak detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
19957 / 1710.7	23.57	0.227	-20.73	44.3	HORIZONTAL	PASSED
20175 / 1732.5	26.25	0.421	-17.99	44.24	HORIZONTAL	PASSED

20393 / 1754.3	25.36	0.343	-19.33	44.69	HORIZONTAL	PASSED
----------------	-------	-------	--------	-------	------------	--------

FDD, CBW 5MHz, 16QAM, 1RB, RMS detector


Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Results
19957 / 1710.7	20.65	0.116	-23.65	44.3	HORIZONTAL	PASSED
20175 / 1732.5	22.07	0.161	-22.17	44.24	HORIZONTAL	PASSED
20393 / 1754.3	22.33	0.171	-22.36	44.69	HORIZONTAL	PASSED

3. Band edge compliance

(FCC §22.917(a), §24.238(a), §27.53(g), §27.53(h), §27.53(g), RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-824, DUT 16499
Accessories with DUT numbers	BP-5T, DUT 16505
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 40 / 101
Date of measurements	11-Jul-2012
Measured by	Kalle Hannila / Jari Keto

3.1.1 Test Setup

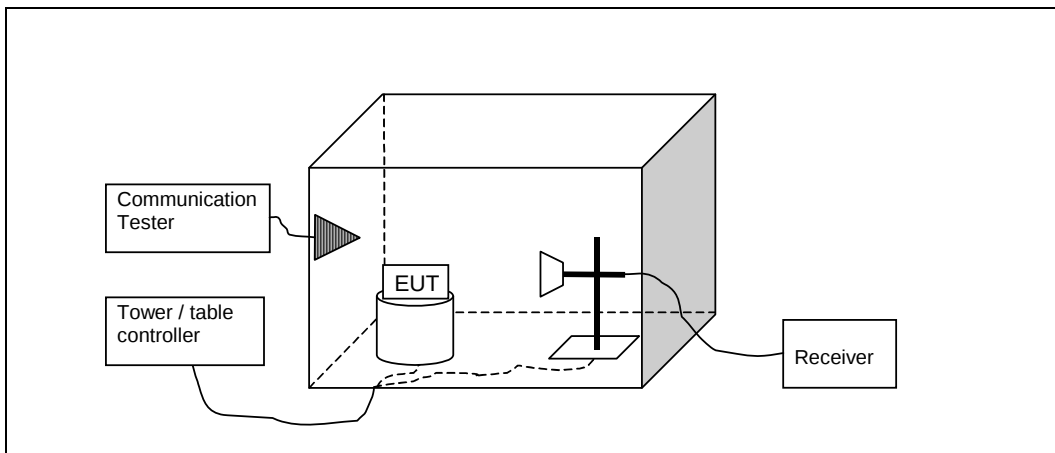

3.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24, 27 and IC standards , RSS-132, RSS-133.


Limits for band edge compliance measurements

Operation band	Frequency range [MHz]	Limit [dBm]
LTE 700 Lower	703.9 – 704 and 716 – 716.1 Below 703.9 and above 716.1	-13 (RBW = 30 kHz, ERP) -13 (RBW = 30 kHz, ERP)
GSM 850 / WCDMA 850	Below 824 and above 849	-13
WCDMA 1700 / LTE 1700	Below 1710 and above 1755	-13
GSM 1900 / WCDMA 1900	Below 1850 and above 1910	-13


3.3. GSM850 Test results

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]	Result
GSM	251 / 848.8	-19.12	PASSED
GSM	128 / 824.2	-19.06	PASSED


GSM, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

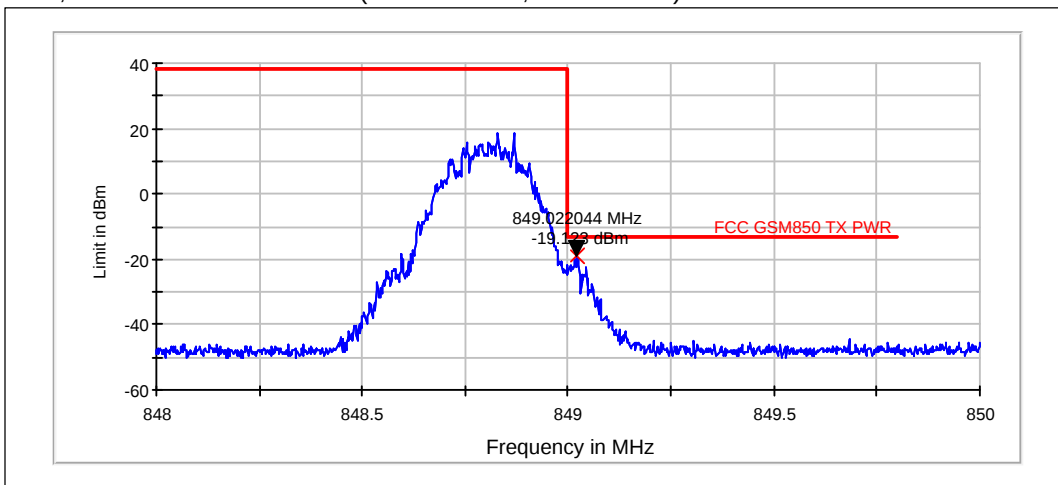

GSM, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

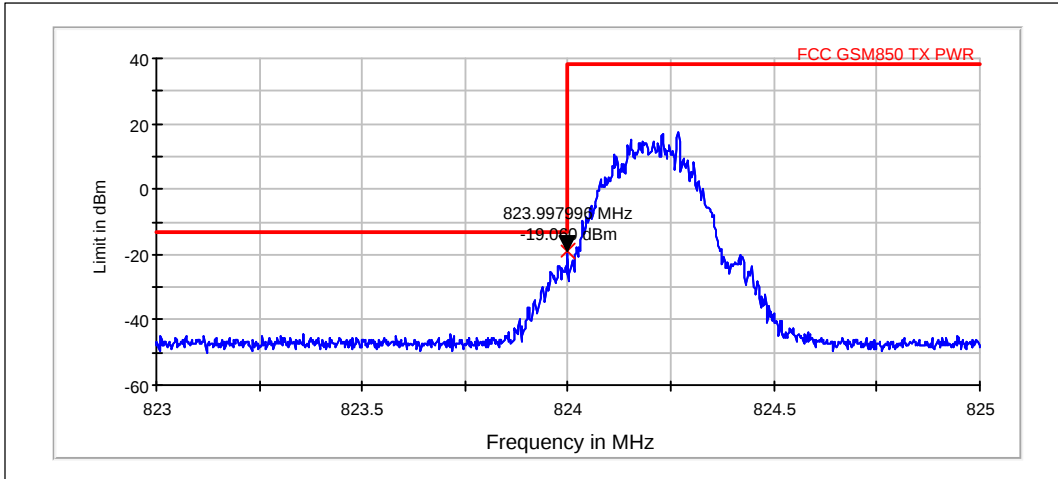


3.4. GSM850-E1 Test results

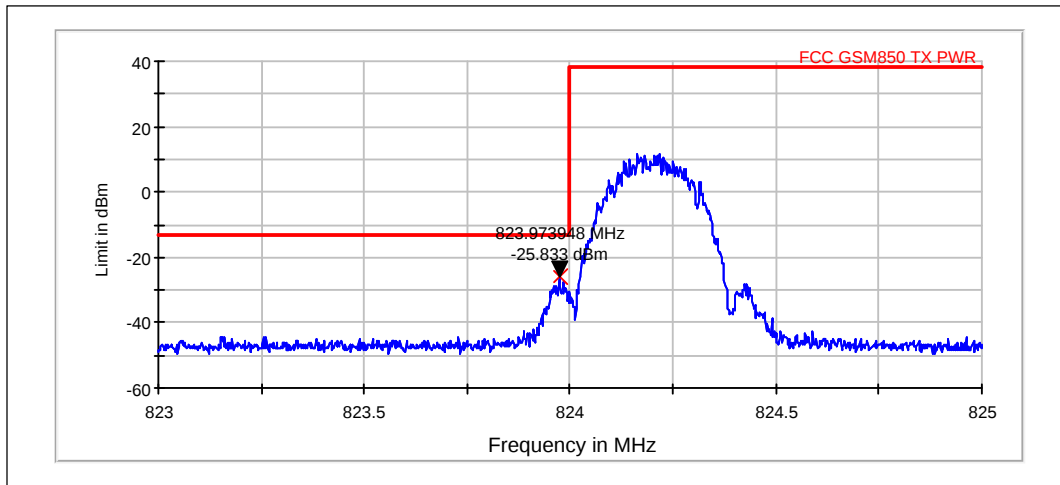

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
E-GPRS(MSC9)	128 / 0	-25.83	PASSED

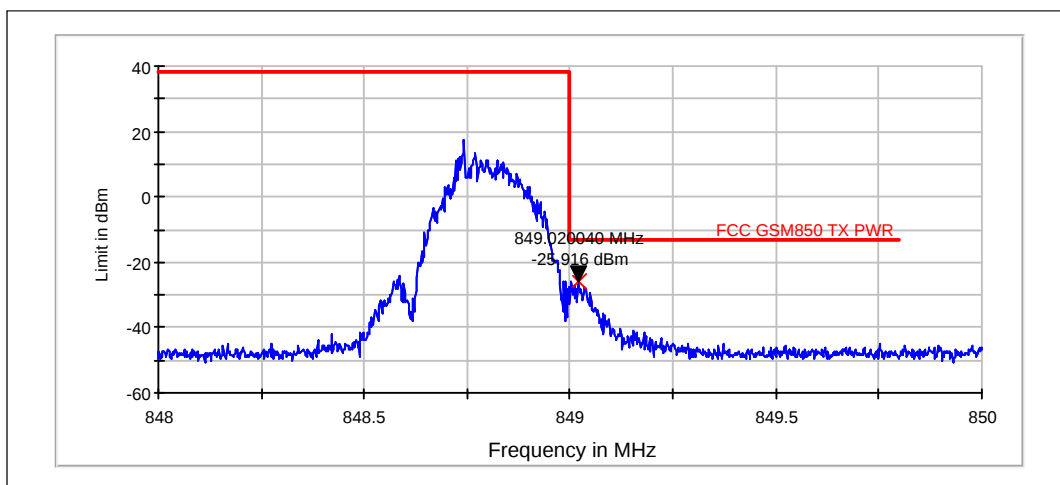

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
E-GPRS(MSC9)	251 / 0	-25.92	PASSED

3.5. WCDMA 850 (Band V) Test results

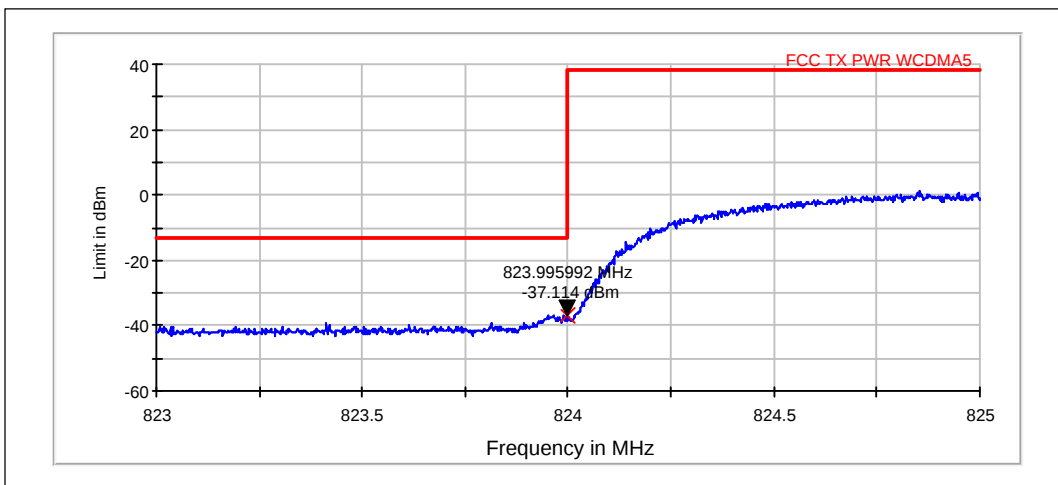

RMS (RBW: 50 kHz, VBW: 50 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD	4132 / 826.4	-37.11	PASSED

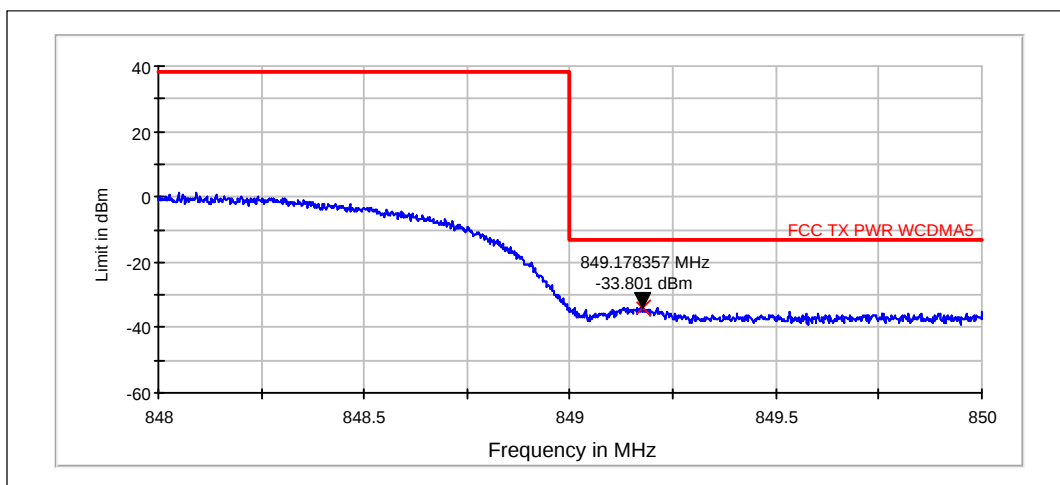

RMS (RBW: 50 kHz, VBW: 50 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD	4233 / 846.6	-33.8	PASSED

3.6. GSM1900 Test results

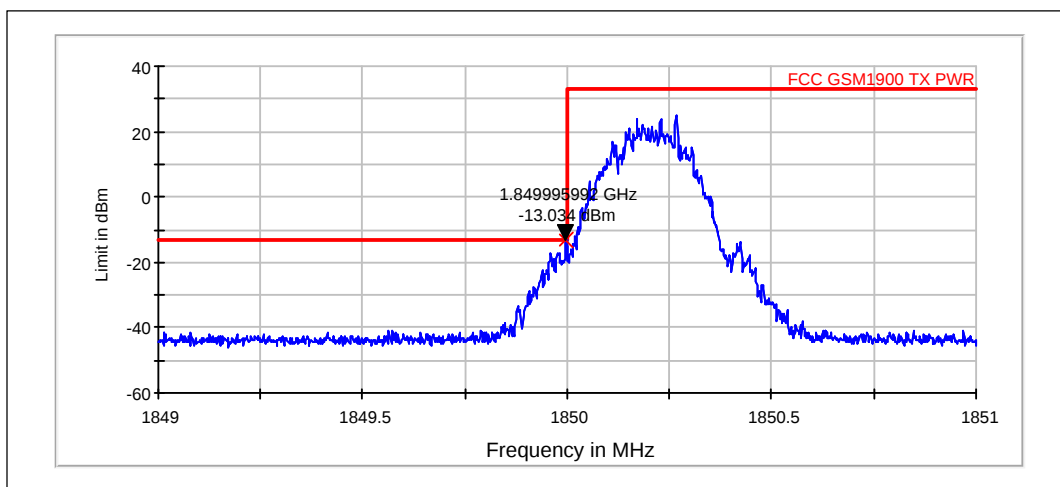

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
	512 / 1850.2	-13.03	PASSED

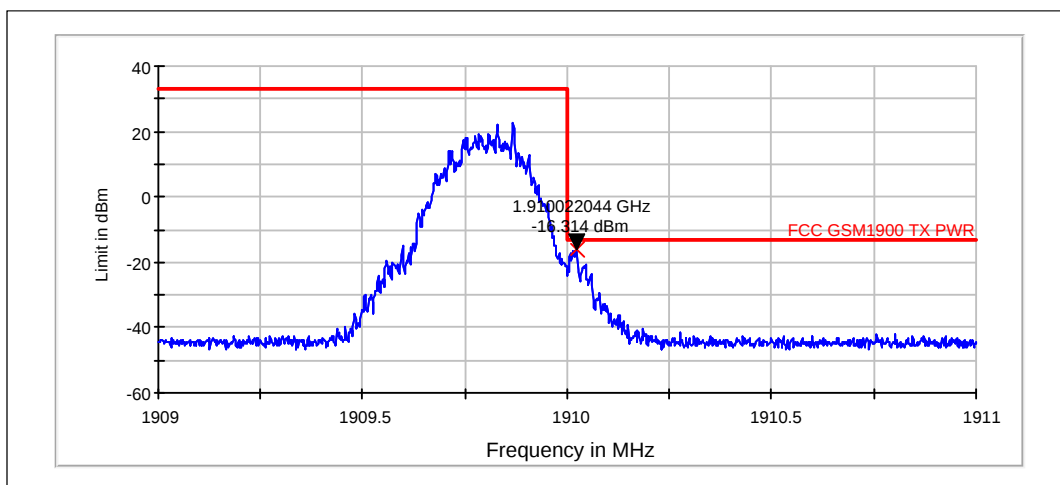

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
	810 / 0	-16.31	PASSED

3.7. GSM1900-E1 Test results

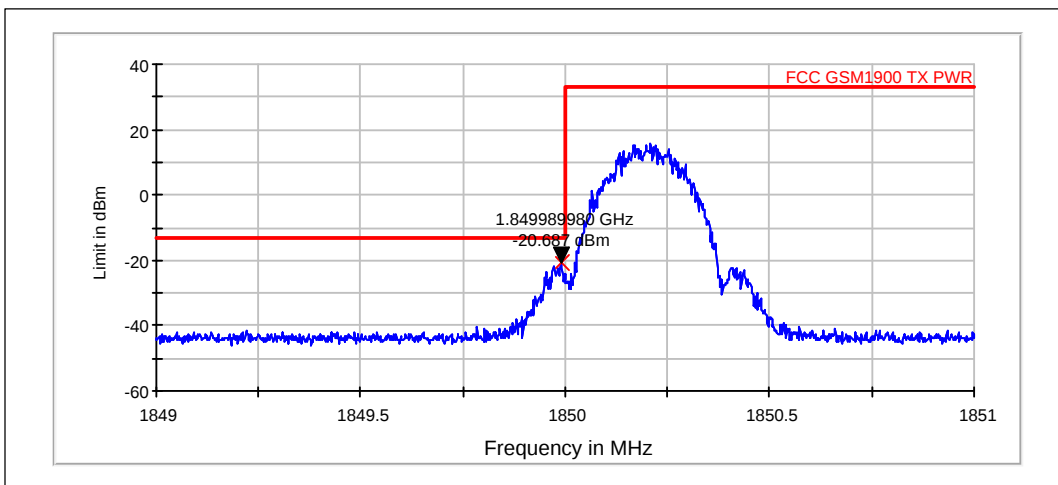

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
E-GPRS(MSC9)	512 / 0	-20.69	PASSED

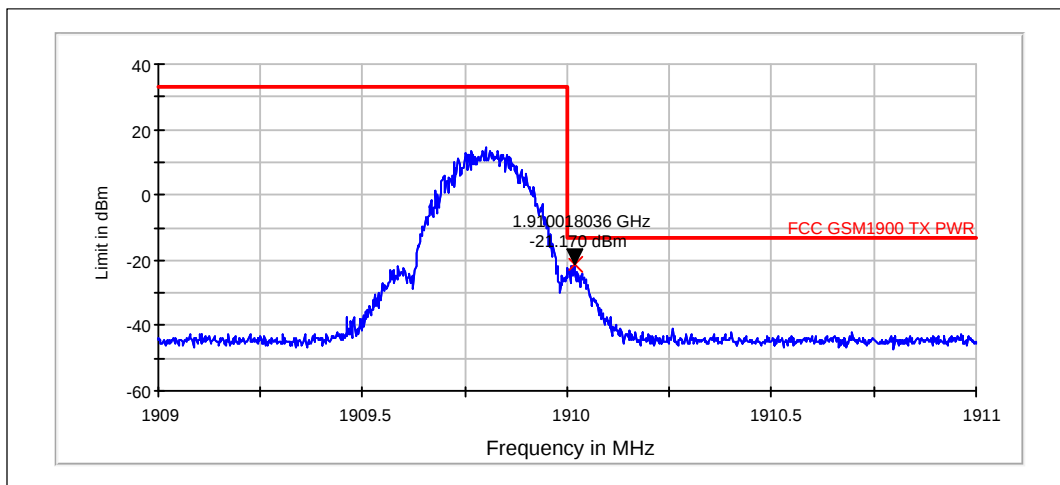

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
E-GPRS(MSC9)	810 / 0	-21.17	PASSED

3.8. WCDMA 1900 (Band II) test results

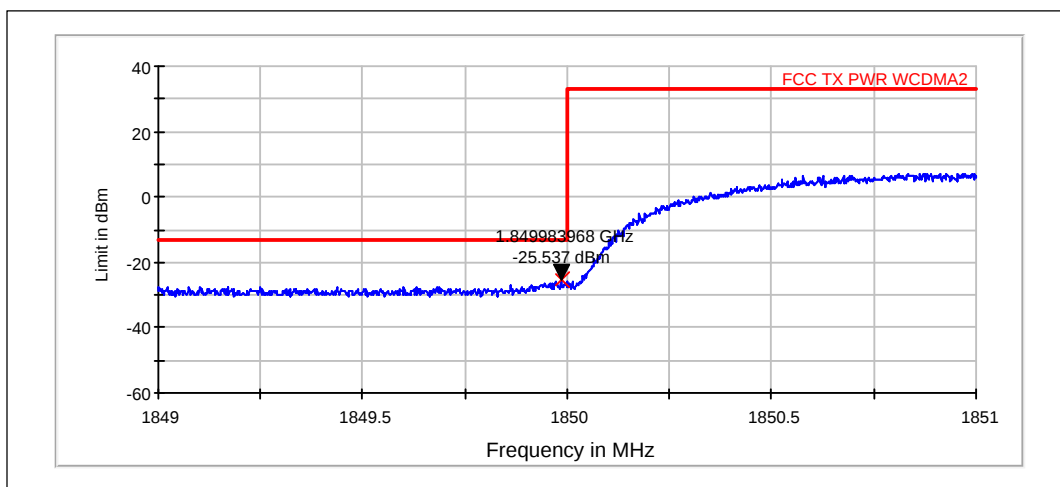

RMS (RBW: 50 kHz, VBW: 50 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD	9262 / 1852.4	-25.54	PASSED

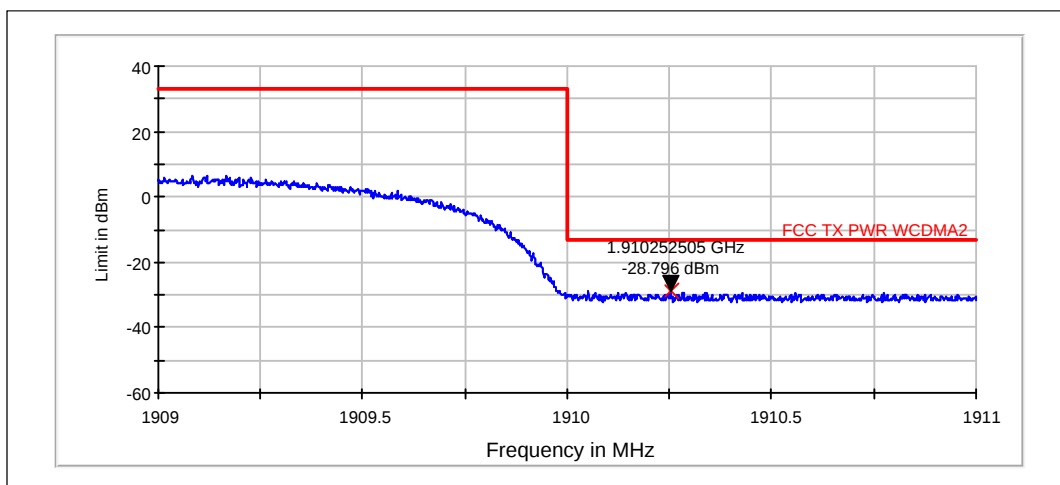

RMS (RBW: 50 kHz, VBW: 50 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD	9538 / 1907.6	-28.8	PASSED

3.9. LTE 1700 (Band IV) test results

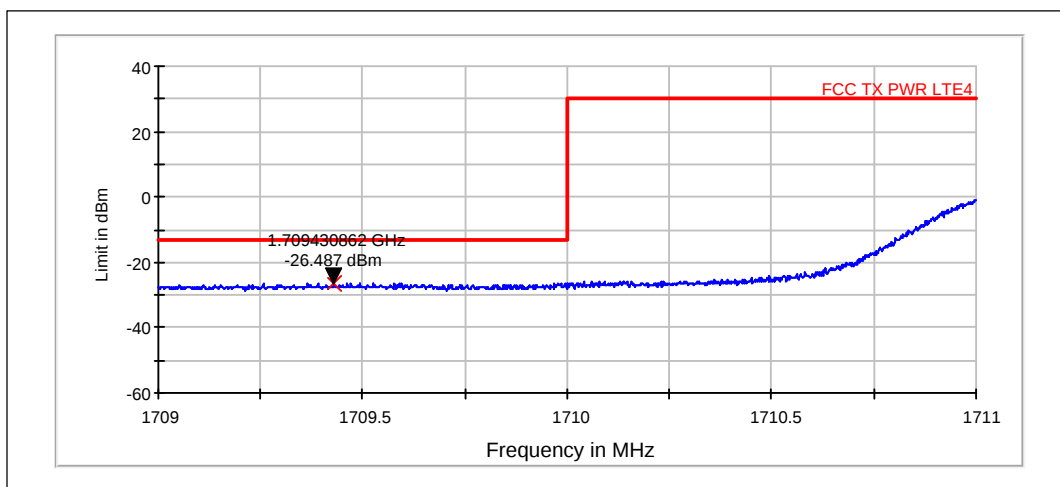


RMS (RBW: 200 kHz, VBW: 200 kHz, Max hold)

Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD, CBW 20MHz, 16QAM, 100 RB	20050 / 1710.7	-26.49	PASSED

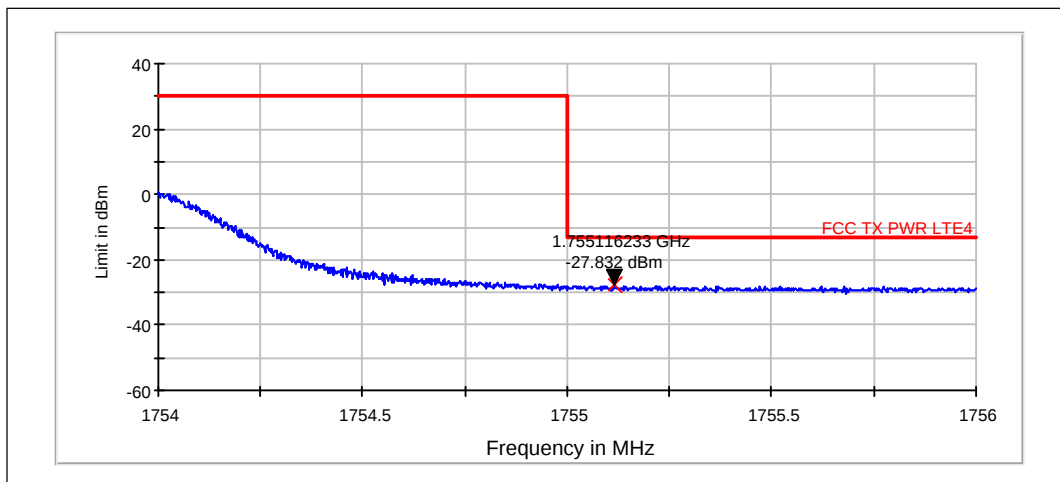


RMS (RBW: 200 kHz, VBW: 200 kHz, Max hold)

Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD, CBW 20MHz, 16QAM, 100 RB	20300 / 1754.3	-27.83	PASSED

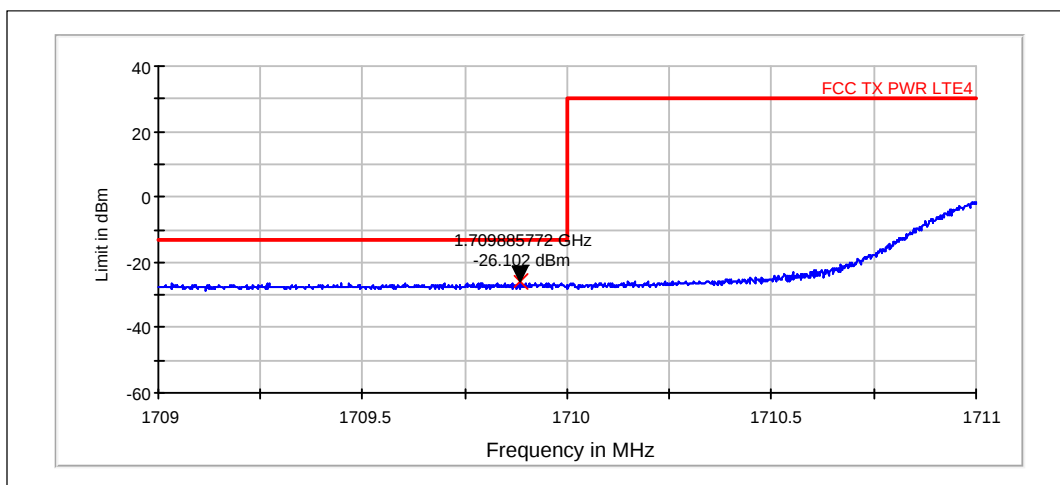

RMS (RBW: 200 kHz, VBW: 200 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD, CBW 20MHz, QPSK, 100 RB	20050 / 1720	-26.1	PASSED

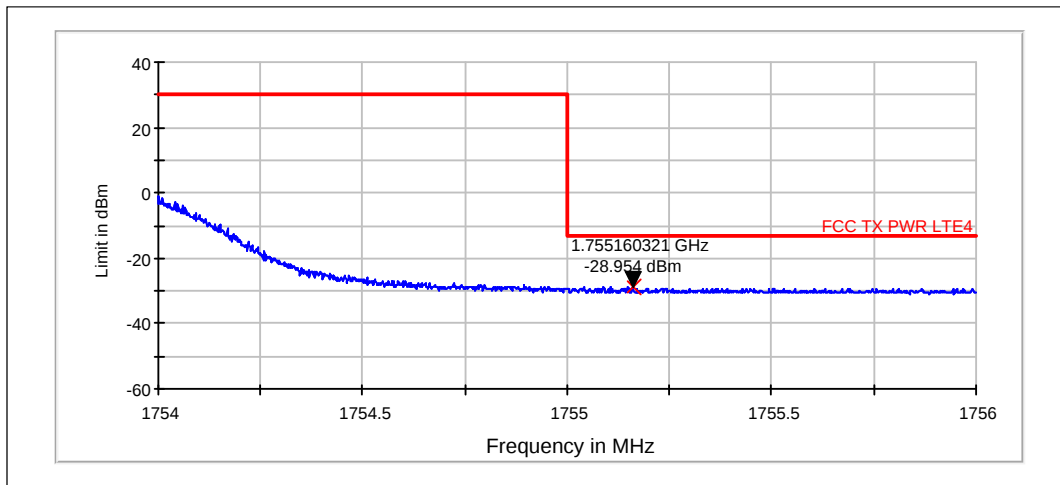

RMS (RBW: 200 kHz, VBW: 200 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD, CBW 20MHz, QPSK, 100 RB	20300 / 1745	-28.95	PASSED

3.10. LTE700 Lower (Band 17) test results

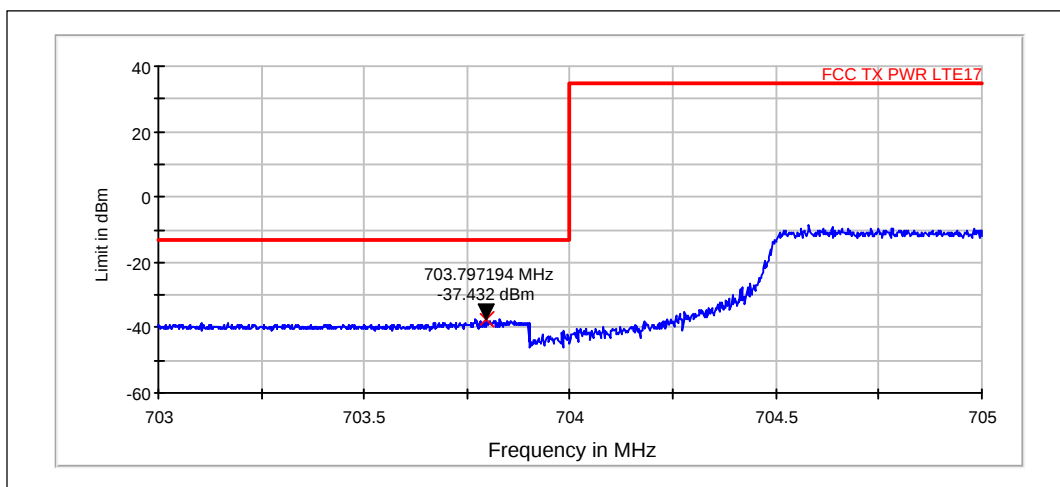


RMS detector

Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD, CBW 10MHz, QPSK, 50 RB	23780 / 709	-37.43	PASSED

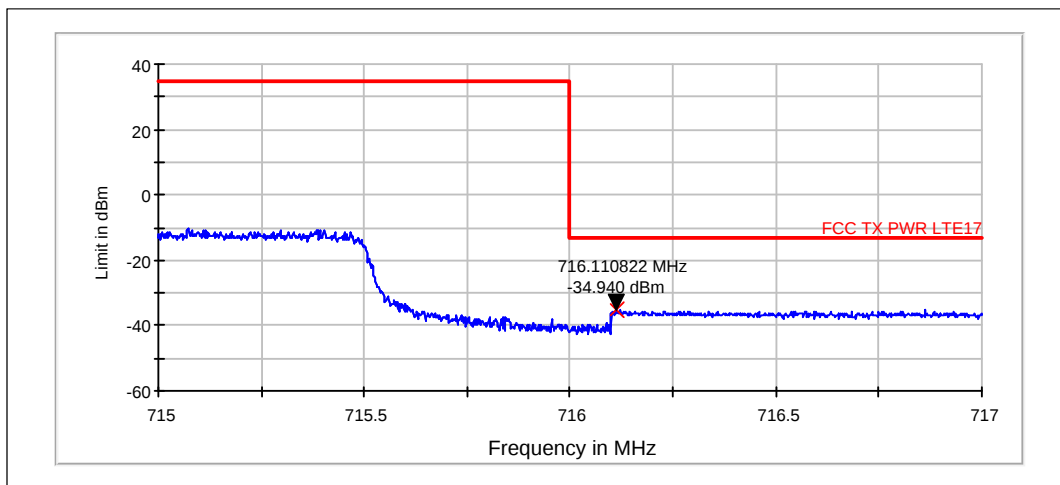


RMS detector

Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD, CBW 10MHz, 16QAM, 50 RB	23800 / 711	-34.94	PASSED

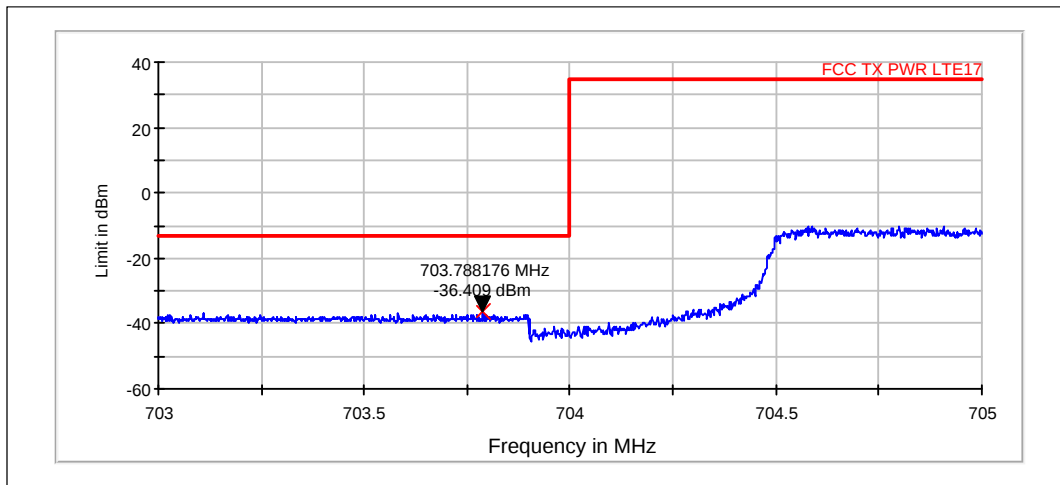

RMS detector

Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD, CBW 10MHz, 16QAM, 50 RB	23780 / 709	-36.41	PASSED

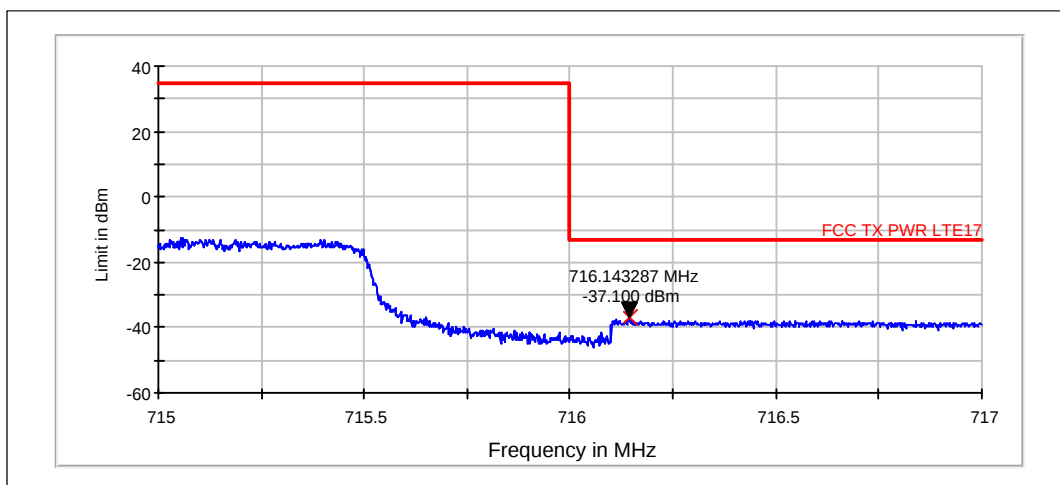

RMS detector

Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD, CBW 10MHz, QPSK, 50 RB	23800 / 711	-37.1	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
6038	Data Logger	Testo 580	Testo	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
2389	Signal Generator	SMJ 100A	R&S	-
6009	GPS Antenna	SA-700	Chronos	-
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	-
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	-
6015	Receiver	ESI	R&S	-
2059	V-network	ESH3-Z6	R&S	-
6044	V-network	ESH3-Z6	R&S	-
1759	LISN 50 µH	ESH3-Z5	R&S	-
2390	Directional Coupler	DC2600	AR	-
1916	Communication Tester	CMTA84	R&S	-
6012	CDN	CDN USB/c	Teseq	-
2388	Bluetooth Tester	CBT	R&S	-
6046	Attenuator 10dB	8493C	Agilent	-
6047	Attenuator 20dB	8493C	Agilent	-
6036	Data Logger	175-H2	Testo	-
6045	Power Splitter	11667B	Agilent	-
6039	USB Interface	5541765	Testo	-
10479	Communication Tester	CMW500	R&S	-
6094	Communication Tester	CMW500	R&S	-
6096	EMC Analyzer	E7405A	HP	-
6098	Signal Generator	8648C	Agilent	-
6103	Bluetooth tester	CBT	R&S	-
6113	Signal Generator	SMF100A	R&S	-
6120	Thermal Chamber	WT 20/40	Weiss	-
6121	Power Splitter	HP11667B	Agilent	-
6122	Power Splitter	HP11667B	Agilent	-
6134	Attenuator 10dB	BW-S10-2W263+	Mini-Circuits	-
6136	Attenuator 20dB	BW-S20-2W263+	Mini-Circuits	-
2359	Temperature Test Chamber	VT4002	Vötsch	-
2347	Communication Tester	CMU200	R&S	-
2180	Communication Tester	CMU200	R&S	-
2156	Communication Tester	CMU200	R&S	-
1999	Receiver	ESIB26	R&S	-
2352	Spectrum Analyzer	FSP-30	R&S	-
2097	Pulse Limiter	ESH3-Z2	R&S	-
2039	Power Supply	PL330QMD	Thurlby	-
1992	Signal Generator	83630B	Agilent	-
2206	Signal Generator	SMX	R&S	-

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6038	Data Logger	Testo 580	Testo	-
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
2389	Signal Generator	SMJ 100A	R&S	-
6009	GPS Antenna	SA-700	Chronos	-

Eq. No	Equipment	Type	Manufacturer	Used in
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	-
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	-
1988	Antenna	HL562	R&S	-
-	RF immunity / Emission Software	EMC32	R&S	-
1917	Communication Tester	CMTA84	R&S	-
2388	Bluetooth Tester	CBT	R&S	-
6037	Data Logger	175-H2	Testo	-
6039	USB Interface	5541765	Testo	-
6087	Antenna	BBHA 9120D	Scharzbeck	-
6088	Antenna	VUBA 9117	Scharzbeck	-
6089	Antenna	HFH2-Z2	R&S	-
10479	Communication Tester	CMW500	R&S	-
6094	Communication Tester	CMW500	R&S	-
6103	Bluetooth tester	CBT	R&S	-
6113	Signal Generator	SMF100A	R&S	-
6115	Open switch and control unit	OSP 130	R&S	-
6116	Open switch and control unit	OSP 150	R&S	-
6130	Notch Filter	WRCD1880-1.1.25/50-10SS	Wainwright	-
6131	Notch Filter	WRCT902.4-0.4/40-8SS	Wainwright	-
6135	Notch Filter	WRCJV2531/2539-2523/2547-60/12SS	Wainwright	-
2140	Antenna	EMCO93110B	EMCO	-
2142	Antenna	3146	EMCO	-
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	-
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22
2347	Communication Tester	CMU200	R&S	-
2180	Communication Tester	CMU200	R&S	-
2156	Communication Tester	CMU200	R&S	-
2176	CDN	CDN 801-M3	Lüthi	-
2027	CDN	M2 (modified) DC1	MEB	-
2028	CDN	M3 (modified) DC2	MEB	-
1984	Antenna	BBHA 9120 D	Schwarzbeck	-
6017	Antenna	SBA 9113	Schwarzbeck	-
2009	Signal Generator	SMP 22	R&S	-
2029	Power Supply	PL330	Thurlby	-
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	-
2353	Receiver	ESIB26	R&S	-
2135	CDN	CDN 801-M3	Lüthi	-