


 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

<b>DECLARATION OF COMPLIANCE</b>		<b>SAR RF EXPOSURE EVALUATION</b>			<b>FCC</b>
<b>Test Lab Information</b>		<b>Name</b>	CELLTECH LABS INC.		
		<b>Address</b>	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada		
<b>Test Lab Accreditation(s)</b>		<b>A2LA</b>	ISO/IEC 17025:2005 (A2LA Test Lab Certificate No. 2470.01)		
<b>Applicant Information</b>		<b>Name</b>	ADAPTIVE DIGITAL SYSTEMS, INC.		
		<b>Address</b>	20322 SW Acacia St. # 200, Newport Beach, CA 92660, USA		
<b>Application Type(s)</b>		<b>FCC</b>	TCB Certification		
<b>Standard(s) Applied</b>		<b>FCC</b>	47 CFR §2.1093		
<b>Procedure(s) Applied</b>		<b>FCC</b>	OET Bulletin 65, Supplement C	<b>FCC</b>	KDB 447498 D01v05
		<b>IEEE</b>	Standard 1528-2003		
<b>Device RF Exposure Category</b>		<b>FCC</b>	Occupational		
<b>Device Identifier(s)</b>		<b>FCC ID:</b>	PYK-ADS-TX502		
<b>Device Model(s)</b>		<b>Model(s)</b>	TX-502		
<b>Test Sample Serial No.</b>		500356			
<b>Date of Sample Receipt</b>		Oct. 10, 2012		<b>Date(s) of Evaluations</b>	Dec. 5 & 7, 2012
<b>Test Sample Hardware Revision No.</b>		n/a		<b>Test Sample Firmware Rev. No.</b>	n/a
<b>Device-Under-Test Description (DUT)</b> VHF Audio Transmitter					
<b>VHF Transmit Frequency Range(s)</b> 150 - 174 MHz (VHF Band)					
<b>Manuf. Rated Output Power</b> 759 mW Conducted Max					
<b>Measured RF Output Power</b>		647 mW	28.11 dBm	Conducted	173.4 MHz
<b>Battery Type Tested</b>		Integrated Lithium-Polymer		4.2 Vdc	
<b>Antenna Type Tested</b>		MMCX Wire (external detachable)			40 cm
		Note: Per applicant, the above-listed antenna is the only antenna supplied with the device			
<b>Audio Accessory Tested</b> Microphone					
<b>Max. SAR Level(s) Evaluated</b>		Body-worn	1.48 W/kg	1g	Occupational
<b>FCC Spatial Peak SAR Limit</b>		Head/Body	8.0 W/kg	1g	
Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 for the Occupational environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and IEEE Standard 1528-2003. All measurements were performed in accordance with the SAR system manufacturer recommendations.					
I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.					
The results and statements contained in this report pertain only to the device(s) evaluated.					
This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.					
<b>Test Report Approved By</b>			<b>Mike Meaker</b>	<b>Engineering Technologist</b>	<b>Celltech Labs Inc.</b>

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502		
<b>DUT Type:</b>	VHF Audio Transmitter			150-174 MHz			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 1 of 48		

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Test Lab Certificate No. 2470.01

## TABLE OF CONTENTS

<b>1.0 INTRODUCTION</b>	<b>4</b>
<b>2.0 SAR MEASUREMENT SYSTEM</b>	<b>4</b>
<b>3.0 NO. OF TEST CHANNELS (<math>N_c</math>)</b>	<b>4</b>
<b>4.0 RF CONDUCTED OUTPUT POWER MEASUREMENT</b>	<b>5</b>
<b>5.0 ACCESSORY LISTING</b>	<b>5</b>
<b>6.0 FLUID DIELECTRIC PARAMETERS</b>	<b>6</b>
<b>7.0 SAR MEASUREMENT SUMMARY</b>	<b>10</b>
<b>8.0 SAR SCALING (MANUFACTURER TUNE-UP TOLERANCE)</b>	<b>10</b>
<b>9.0 SAR PROBE CALIBRATION &amp; MEASUREMENT FREQUENCIES</b>	<b>10</b>
<b>10.0 DETAILS OF SAR EVALUATION</b>	<b>11</b>
<b>11.0 SAR EVALUATION PROCEDURES</b>	<b>11</b>
<b>12.0 SYSTEM PERFORMANCE CHECK</b>	<b>12</b>
<b>13.0 SIMULATED EQUIVALENT TISSUES</b>	<b>13</b>
<b>14.0 SAR LIMITS</b>	<b>13</b>
<b>15.0 ROBOT SYSTEM SPECIFICATIONS</b>	<b>14</b>
<b>16.0 PROBE SPECIFICATION (ET3DV6)</b>	<b>15</b>
<b>17.0 BARSKI PLANAR PHANTOM</b>	<b>15</b>
<b>18.0 DEVICE HOLDER</b>	<b>15</b>
<b>19.0 TEST EQUIPMENT LIST</b>	<b>16</b>
<b>20.0 REFERENCES</b>	<b>17</b>
<b>APPENDIX A - SAR MEASUREMENT PLOTS</b>	<b>18</b>
<b>APPENDIX B - SYSTEM PERFORMANCE CHECK PLOT</b>	<b>25</b>
<b>APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS</b>	<b>34</b>
<b>APPENDIX D - SAR TEST SETUP &amp; DUT PHOTOGRAPHS</b>	<b>39</b>
<b>APPENDIX E - DIPOLE CALIBRATION</b>	<b>46</b>
<b>APPENDIX F - PROBE CALIBRATION</b>	<b>47</b>
<b>APPENDIX G - BARSKI PHANTOM CERTIFICATE OF CONFORMITY</b>	<b>48</b>

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 2 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

### REVISION HISTORY

REVISION NO.	DESCRIPTION	IMPLEMENTED BY	RELEASE DATE
1.0	1st Release	Mike Meaker	Dec. 14, 2012

### TEST REPORT SIGN-OFF

DEVICE TESTED BY	REPORT PREPARED BY	QA REVIEW BY	REPORT APPROVED BY
Mike Meaker	Mike Meaker	Glen Westwell	Mike Meaker

<b>Applicant:</b> Adaptive Digital Systems Inc	<b>FCC ID:</b> PYK-ADS-TX502	<b>Model:</b> TX-502	
<b>DUT Type:</b> VHF Audio Transmitter		<b>150-174 MHz</b>	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 3 of 48

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## 1.0 INTRODUCTION

This measurement report demonstrates that the Adaptive Digital Systems Inc. model: TX-502 VHF audio transmitter complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) for the Occupational Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C 01-01 (see reference [2]) and IEEE Standard 1528-2003 (see reference [3]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

## 2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for Head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.

## 3.0 NO. OF TEST CHANNELS ( $N_c$ )

Device Frequency Range	Band	$N_c$	Test Frequencies (MHz)
150 - 174 MHz	VHF	4	150.0, 161.3, 167.6, 173.4

Note: The number of test channels ( $N_c$ ) was calculated in accordance with the procedures specified in FCC KDB 447498 (see reference [4]).

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 48	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <small>Test Lab Certificate No. 2470.01</small>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## 4.0 RF CONDUCTED OUTPUT POWER MEASUREMENT

Band	Frequency (MHz)	Mode	Power Setting	Measured Power Level		Method
				dBm	Watts	
VHF	150.0	CW	Max	27.19	0.524	Average Conducted
VHF	161.3	CW	Max	27.49	0.561	Average Conducted
VHF	167.6	CW	Max	27.85	0.610	Average Conducted
VHF	173.4	CW	Max	28.11	0.647	Average Conducted

### Notes

1. The test channels were selected in accordance with the procedures specified in FCC KDB 447498 (see reference [4]).
2. The RF conducted output power levels of the DUT were measured by Celltech prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter at the antenna connector of the radio in accordance with FCC 47 CFR §2.1046 (see reference [10]).

## 5.0 ACCESSORY LISTING

Accessory ID # for Test Report	ACCESSORY CATEGORY: ANTENNA		
	Part Number	Description	SAR Evaluation
1	N/A	Detachable MMCX Wire Antenna	Yes
<b>Accessory ID # for Test Report</b>			
Accessory ID # for Test Report	ACCESSORY CATEGORY: BATTERY		
	Part Number	Description	SAR Evaluation
a	N/A	Integrated Li-ion Battery ~4.2V	Yes
<b>Accessory ID # for Test Report</b>			
Accessory ID # for Test Report	ACCESSORY CATEGORY: BODY-WORN		
	Part Number	Description	SAR Evaluation
1	N/A	Cloth Pocket (Does not contain metal)	No
<b>Accessory ID # for Test Report</b>			
Accessory ID # for Test Report	ACCESSORY CATEGORY: AUDIO		
	Part Number	Description	SAR Evaluation
a	N/A	Microphone	Yes

Applicant:	Adaptive Digital Systems Inc	FCC ID:	PYK-ADS-TX502	Model:	TX-502	
DUT Type:	VHF Audio Transmitter			150-174 MHz		
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Test Lab Certificate No. 2470.01

## 6.0 FLUID DIELECTRIC PARAMETERS

FLUID DIELECTRIC PARAMETERS						
Date: 12/03/2012		Frequency: 300 MHz			Tissue: Head	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.200	50.83	0.77	45.3	0.87	12.21%	-11.49%
0.210	51.04	0.76	45.3	0.87	12.67%	-12.64%
0.220	49.6	0.78	45.3	0.87	9.49%	-10.34%
0.230	49.03	0.79	45.3	0.87	8.23%	-9.20%
0.240	48.65	0.8	45.3	0.87	7.40%	-8.05%
0.250	48.54	0.8	45.3	0.87	7.15%	-8.05%
0.260	48	0.81	45.3	0.87	5.96%	-6.90%
0.270	47.34	0.84	45.3	0.87	4.50%	-3.45%
0.280	47.85	0.84	45.3	0.87	5.63%	-3.45%
0.290	47.29	0.86	45.3	0.87	4.39%	-1.15%
0.300	46.72	0.85	45.3	0.87	3.13%	-2.30%
0.310	45.96	0.87	45.3	0.87	1.46%	0.00%
0.320	46.44	0.88	45.3	0.87	2.52%	1.15%
0.330	45.79	0.87	45.3	0.87	1.08%	0.00%
0.340	45.04	0.89	45.3	0.87	-0.57%	2.30%
0.350	45.13	0.88	45.3	0.87	-0.38%	1.15%
0.360	45.21	0.91	45.3	0.87	-0.20%	4.60%
0.370	44.71	0.92	45.3	0.87	-1.30%	5.75%
0.380	44.22	0.93	45.3	0.87	-2.38%	6.90%
0.390	44.42	0.92	45.3	0.87	-1.94%	5.75%
0.400	43.95	0.94	45.3	0.87	-2.98%	8.05%

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	$\rho$ (Kg/m <sup>3</sup> )
Dec 3	300 Head	22.0 °C	21.4 °C	≥ 15 cm	101.1 kPa	30%	1000

Applicant:	Adaptive Digital Systems Inc	FCC ID:	PYK-ADS-TX502	Model:	TX-502	
DUT Type:	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Test Lab Certificate No. 2470.01

<b>FLUID DIELECTRIC PARAMETERS</b>						
<b>Date: 12/05/2012</b>		<b>Frequency: 150 MHz</b>			<b>Tissue: Body</b>	
<b>Freq</b>	<b>Test_e</b>	<b>Test_s</b>	<b>Target_e</b>	<b>Target_s</b>	<b>Deviation Permittivity</b>	<b>Deviation Conductivity</b>
0.050	90.04	0.69	61.9	0.8	45.46%	-13.75%
0.060	84.54	0.7	61.9	0.8	36.58%	-12.50%
0.070	71.26	0.7	61.9	0.8	15.12%	-12.50%
0.080	68.6	0.74	61.9	0.8	10.82%	-7.50%
0.090	70.95	0.72	61.9	0.8	14.62%	-10.00%
0.100	65.32	0.73	61.9	0.8	5.53%	-8.75%
0.110	61.77	0.74	61.9	0.8	-0.21%	-7.50%
0.120	62.5	0.76	61.9	0.8	0.97%	-5.00%
0.130	63.72	0.75	61.9	0.8	2.94%	-6.25%
0.140	63.73	0.75	61.9	0.8	2.96%	-6.25%
0.150	61.56	0.78	61.9	0.8	-0.55%	-2.50%
0.160	65.49	0.77	61.9	0.8	5.80%	-3.75%
0.170	61.13	0.8	61.9	0.8	-1.24%	0.00%
0.1734*	61.4	0.793	61.9	0.8	-0.81%	-0.88%
0.180	61.87	0.78	61.9	0.8	-0.05%	-2.50%
0.190	59.93	0.79	61.9	0.8	-3.18%	-1.25%
0.200	59.92	0.81	61.9	0.8	-3.20%	1.25%
0.210	60.14	0.81	61.9	0.8	-2.84%	1.25%
0.220	59.86	0.81	61.9	0.8	-3.30%	1.25%
0.230	58.59	0.82	61.9	0.8	-5.35%	2.50%
0.240	58.25	0.83	61.9	0.8	-5.90%	3.75%
0.250	58.75	0.84	61.9	0.8	-5.09%	5.00%

\*interpolated using DASY4 software

<b>Test Date</b>	<b>Fluid Type</b>	<b>Ambient Temperature</b>	<b>Fluid Temperature</b>	<b>Fluid Depth</b>	<b>Atmospheric Pressure</b>	<b>Relative Humidity</b>	<b><math>\rho</math> (Kg/m<sup>3</sup>)</b>
Dec 5	150 Body	22.0 °C	20.9 °C	≥ 15 cm	101.3 kPa	30%	1000

<b>Applicant:</b>	<b>Adaptive Digital Systems Inc</b>		<b>FCC ID:</b>	<b>PYK-ADS-TX502</b>	<b>Model:</b>	<b>TX-502</b>	
<b>DUT Type:</b>	<b>VHF Audio Transmitter</b>				<b>150-174 MHz</b>		
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 7 of 48

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

<b>FLUID DIELECTRIC PARAMETERS</b>						
<b>Date: 12/07/2012</b>		<b>Frequency: 300 MHz</b>			<b>Tissue: Head</b>	
<b>Freq</b>	<b>Test_e</b>	<b>Test_s</b>	<b>Target_e</b>	<b>Target_s</b>	<b>Deviation Permittivity</b>	<b>Deviation Conductivity</b>
0.200	52.25	0.78	45.3	0.87	15.34%	-10.34%
0.210	51.33	0.78	45.3	0.87	13.31%	-10.34%
0.220	50.14	0.81	45.3	0.87	10.68%	-6.90%
0.230	49.5	0.8	45.3	0.87	9.27%	-8.05%
0.240	48.32	0.81	45.3	0.87	6.67%	-6.90%
0.250	48.43	0.8	45.3	0.87	6.91%	-8.05%
0.260	48.27	0.83	45.3	0.87	6.56%	-4.60%
0.270	47.58	0.84	45.3	0.87	5.03%	-3.45%
0.280	47.49	0.83	45.3	0.87	4.83%	-4.60%
0.290	47.46	0.86	45.3	0.87	4.77%	-1.15%
<b>0.300</b>	<b>46.85</b>	<b>0.87</b>	<b>45.3</b>	<b>0.87</b>	<b>3.42%</b>	<b>0.00%</b>
0.310	46.58	0.86	45.3	0.87	2.83%	-1.15%
0.320	46.58	0.87	45.3	0.87	2.83%	0.00%
0.330	45.93	0.89	45.3	0.87	1.39%	2.30%
0.340	45.64	0.88	45.3	0.87	0.75%	1.15%
0.350	45.02	0.9	45.3	0.87	-0.62%	3.45%
0.360	44.76	0.9	45.3	0.87	-1.19%	3.45%
0.370	43.86	0.91	45.3	0.87	-3.18%	4.60%
0.380	43.85	0.91	45.3	0.87	-3.20%	4.60%
0.390	43.47	0.93	45.3	0.87	-4.04%	6.90%
0.400	43.39	0.92	45.3	0.87	-4.22%	5.75%

<b>Test Date</b>	<b>Fluid Type</b>	<b>Ambient Temperature</b>	<b>Fluid Temperature</b>	<b>Fluid Depth</b>	<b>Atmospheric Pressure</b>	<b>Relative Humidity</b>	<b><math>\rho</math> (Kg/m<sup>3</sup>)</b>
Dec 7	300 Head	22.0 °C	21.3 °C	≥ 15 cm	101.3 kPa	30%	1000

<b>Applicant:</b>	<b>Adaptive Digital Systems Inc</b>		<b>FCC ID:</b>	<b>PYK-ADS-TX502</b>	<b>Model:</b>	<b>TX-502</b>	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>	
<b>DUT Type:</b>	<b>VHF Audio Transmitter</b>				<b>150-174 MHz</b>			
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 48		

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Test Lab Certificate No. 2470.01

<b>FLUID DIELECTRIC PARAMETERS</b>						
<b>Date: 12/07/2012</b>		<b>Frequency: 150 MHz</b>			<b>Tissue: Body</b>	
<b>Freq</b>	<b>Test_e</b>	<b>Test_s</b>	<b>Target_e</b>	<b>Target_s</b>	<b>Deviation Permittivity</b>	<b>Deviation Conductivity</b>
0.050	86.28	0.68	61.9	0.8	39.39%	-15.00%
0.060	85.52	0.69	61.9	0.8	38.16%	-13.75%
0.070	84.5	0.72	61.9	0.8	36.51%	-10.00%
0.080	66.95	0.69	61.9	0.8	8.16%	-13.75%
0.090	69.09	0.72	61.9	0.8	11.62%	-10.00%
0.100	63.53	0.71	61.9	0.8	2.63%	-11.25%
0.110	69.45	0.73	61.9	0.8	12.20%	-8.75%
0.120	63.54	0.74	61.9	0.8	2.65%	-7.50%
0.130	64.79	0.74	61.9	0.8	4.67%	-7.50%
0.140	62.74	0.77	61.9	0.8	1.36%	-3.75%
0.150	63.33	0.76	61.9	0.8	2.31%	-5.00%
0.160	61.92	0.76	61.9	0.8	0.03%	-5.00%
0.170	63.29	0.78	61.9	0.8	2.25%	-2.50%
0.1734*	62.7	0.777	61.9	0.8	1.29%	-2.88%
0.180	61.61	0.77	61.9	0.8	-0.47%	-3.75%
0.190	61.48	0.79	61.9	0.8	-0.68%	-1.25%
0.200	60.87	0.79	61.9	0.8	-1.66%	-1.25%
0.210	60.08	0.8	61.9	0.8	-2.94%	0.00%
0.220	59.73	0.8	61.9	0.8	-3.51%	0.00%
0.230	59.27	0.8	61.9	0.8	-4.25%	0.00%
0.240	59.18	0.82	61.9	0.8	-4.39%	2.50%
0.250	59.29	0.82	61.9	0.8	-4.22%	2.50%

\*interpolated using DASY4 software

<b>Test Date</b>	<b>Fluid Type</b>	<b>Ambient Temperature</b>	<b>Fluid Temperature</b>	<b>Fluid Depth</b>	<b>Atmospheric Pressure</b>	<b>Relative Humidity</b>	<b><math>\rho</math> (Kg/m<sup>3</sup>)</b>
Dec 7	150 Body	22.0 °C	20.9 °C	≥ 15 cm	101.3 kPa	30%	1000

<b>Applicant:</b>	Adaptive Digital Systems Inc		<b>FCC ID:</b>	<b>PYK-ADS-TX502</b>	<b>Model:</b>	<b>TX-502</b>	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>	
<b>DUT Type:</b>	VHF Audio Transmitter				<b>150-174 MHz</b>			
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 48		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <small>Test Lab Certificate No. 2470.01</small>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## 7.0 SAR MEASUREMENT SUMMARY

SAR EVALUATION RESULTS														
Test Config.	Test Date	Freq.	Cond. Power	Accessories		Device Distance to Planar Phantom		SAR Drift During Test	Measured SAR					
		MHz	Watts	Body-worn	Audio	DUT	Antenna	dB	1g (W/kg)					
BODY	Dec 5	173.4	0.647	n/a	Mic	0 mm	0 mm	-0.160	0.748					
BODY	Dec 7	173.4	0.647	n/a	Mic	4 mm	4 mm	-0.105	1.26					
SAR LIMIT(S)			BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY							
FCC 47 CFR 2.1093			8.0 W/kg		averaged over 1 gram		Occupational							
<b>Notes</b>														
1.	Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.													
2.	The SAR drift of the DUT was measured by the DASY4 system for the duration of each SAR evaluation.													
3.	Repeatability measurements are not required because the SAR is < 4 W/kg.													

## 8.0 SAR SCALING (MANUFACTURER TUNE-UP TOLERANCE)

SAR SCALING TO MANUFACTURER'S MAX. UPPER TOLERANCE SPEC.					
Test Config.	Test Freq. (MHz)	Measured Conducted Power (Watts)	Measured SAR Level 1g (W/kg)*	Scaling to Max. Conducted Power Level (0.759 Watts)	Scaled SAR Level 1g (W/kg)*
0 mm	173.4	0.647	0.748	+ 0.7 dB	0.879
4 mm	173.4	0.647	1.26	+ 0.7 dB	1.48

## 9.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within  $\pm 50$  MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within  $\pm 100$  MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals,  $\pm 25$  MHz  $<$  300 MHz and  $\pm 50$  MHz  $\geq$  300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [5]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	$\pm 25$ MHz $\leq$ 300 MHz
150 MHz	173.4 MHz	23.4 MHz	< 25 MHz

Note: The probe calibration and measurement frequency interval is < 25 MHz; therefore additional steps were not required.

Applicant:	Adaptive Digital Systems Inc	FCC ID:	PYK-ADS-TX502	Model:	TX-502	
DUT Type:	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 10 of 48					

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## 10.0 DETAILS OF SAR EVALUATION

The DUT was compliant for localized Specific Absorption Rate (Occupational Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

1. SAR evaluation was performed with the antenna touching the outer surface of the planar phantom as requested in an FCC KDB Inquiry. "...the entire length of the antenna should be tested while touching the phantom (0 mm gap)...The orientation of the transmitter case does not matter..."
2. SAR evaluation was also performed with the antenna spaced 4mm from the outer surface of the phantom as requested in an FCC KDB Inquiry. "The entire length of the antenna should also be tested at a distance of 2 mm to 5 mm from the phantom (your discretion between 2-5 mm). The orientation of the transmitter case does not matter..."
3. Each evaluation was performed with a fully charged battery.
4. Due to the length of the antenna 2 separate area scans were required to cover its entire length. A zoom scan evaluation was performed at the highest peak according to the procedures in the following section.
5. The DUT was evaluated for SAR in an unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle).
6. The SAR drift of the DUT was measured by the DASY4 system for the duration of the SAR evaluations.
7. The fluid temperature remained within +/-2°C from the fluid dielectric parameter measurement to the completion of each SAR test.
8. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).

## 11.0 SAR EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.  
 (ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.  
 An area scan was determined as follows:
- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.  
 A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 30 mm x 30 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.


<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 11 of 48

## 12.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations system verifications were performed with a planar phantom and 300 MHz SPEAG validation dipole (see Appendix B for system performance check test plot) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [3]). The dielectric parameters of the simulated tissue mixtures were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 398 mW was applied to the dipole. The system was verified to a tolerance of  $\pm 10\%$  from the system manufacturer's dipole calibration target SAR value using 300 MHz tissue-equivalent medium (see Appendix E for system manufacturer's dipole calibration procedures). Additionally the system was verified to meet the internally generated SAR target using 150MHz tissue-equivalent medium with a 300 MHz SPEAG validation dipole transmitting at 300 MHz according to the procedures of FCC KDB 865664 D01v01 (see reference [6]) (See appendix E).

### SYSTEM PERFORMANCE CHECK EVALUATION

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	Target	Meas.	Dev.	Target	Meas.	Dev.	Target	Meas.	Dev.					
Dec 3	Head 300	1.17 $\pm 10\%$	1.12	-4.3%	45.3 $\pm 5\%$	46.7	+3.1%	0.87 $\pm 5\%$	0.85	-2.3%	1000	22.0	21.4	$\geq 15$	30	101.1
Dec 5	Body 150	0.940	0.902	-4.0%	61.9 $\pm 5\%$	61.6	-0.5%	0.80 $\pm 5\%$	0.78	-2.5%	1000	22.0	20.9	$\geq 15$	30	101.3
Dec 7	Head 300	1.17 $\pm 10\%$	1.17	0.0%	45.3 $\pm 5\%$	46.9	+3.5%	0.87 $\pm 5\%$	0.87	0.0%	1000	22.0	21.3	$\geq 15$	30	101.3
Dec 7	Body 150	0.940	0.919	-2.2%	61.9 $\pm 5\%$	63.3	+2.3%	0.80 $\pm 5\%$	0.76	-5.0%	1000	22.0	20.9	$\geq 15$	30	101.3
Notes	1.	The 150MHz SAR values have a coefficient of variation $< 3\%$ .														
	2.	The target dielectric parameters are the nominal values from the SAR system manufacturer's probe calibration (see Appendix F).														
	3.	The fluid temperature remained within $+/- 2^{\circ}\text{C}$ from the fluid dielectric parameter measurement to the completion of the system performance check.														
	4.	The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).														

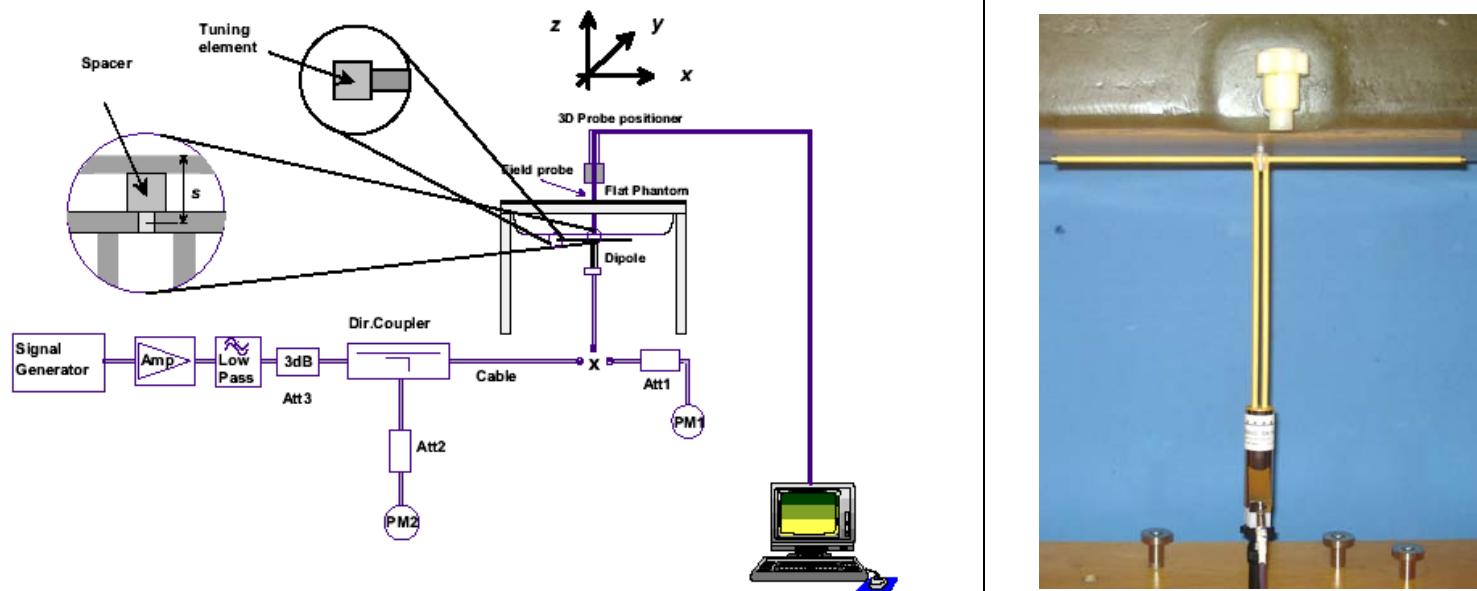

System Performance Check Measurement Setup (IEEE Standard 1528-2003)

SPEAG 300 MHz Validation Dipole Setup

Applicant:	Adaptive Digital Systems Inc	FCC ID:	PYK-ADS-TX502	Model:	TX-502	
DUT Type:	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 12 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## 13.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipes in the DASY4 manual (see references [7] and [8]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [3]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

<b>INGREDIENT</b>	Water	<b>300 MHz Head Tissue Mixture</b>	37.56 %	<b>150 MHz Body Tissue Mixture</b>	46.6 %
	Sugar		55.32 %		49.7 %
	Salt		5.95 %		2.6 %
	HEC		0.98 %		1.0 %
	Bactericide		0.19 %		0.1 %

## 14.0 SAR LIMITS

<b>SAR RF EXPOSURE LIMITS</b>		
<b>FCC 47 CFR 2.1093</b>	<b>(General Population)</b>	<b>(Occupational)</b>
<b>Spatial Average (averaged over the whole body)</b>	0.08 W/kg	0.4 W/kg
<b>Spatial Peak (averaged over any 1 g of tissue)</b>	1.6 W/kg	8.0 W/kg
<b>Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)</b>	4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.		
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.		
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.		

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## 15.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
<b>Positioner</b>	Stäubli Unimation Corp. Robot Model: RX60L
<b>Repeatability</b>	0.02 mm
<b>No. of axis</b>	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
<b>Processor</b>	AMD Athlon XP 2400+
<b>Clock Speed</b>	2.0 GHz
<b>Operating System</b>	Windows XP Professional
<u>Data Converter</u>	
<b>Features</b>	Signal Amplifier, multiplexer, A/D converter, and control logic
<b>Software</b>	Measurement Software: DASY4, V4.7 Build 80
	Postprocessing Software: SEMCAD, V1.8 Build 171
<b>Connecting Lines</b>	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
<b>Function</b>	Real-time data evaluation for field measurements and surface detection
<b>Hardware</b>	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
<b>Connections</b>	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
<b>Model</b>	ET3DV6
<b>Serial No.</b>	1590
<b>Construction</b>	Triangular core fiber optic detection system
<b>Frequency</b>	10 MHz to 6 GHz
<b>Linearity</b>	±0.2 dB (30 MHz to 3 GHz)
<u>Validation Phantom</u>	
<b>Type</b>	Barski Planar Phantom
<b>Shell Material</b>	Fiberglass
<b>Thickness</b>	2.0 ±0.1 mm
<b>Volume</b>	Approx. 70 liters

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Test Lab Certificate No. 2470.01

## 16.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core Built-in shielding against static charges
Calibration:	PEEK enclosure material (resistant to organic solvents, glycol) In air from 10 MHz to 2.5 GHz In Body simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm$ 8%)
Frequency:	10 MHz to > 6 GHz; Linearity: $\pm$ 0.2 dB (30 MHz to 3 GHz)
Directivity:	$\pm$ 0.2 dB in Body tissue (rotation around probe axis) $\pm$ 0.4 dB in Body tissue (rotation normal to probe axis)
Dynamic Range:	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm$ 0.2 dB
Surface Detect:	$\pm$ 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm
Application:	Distance from probe tip to dipole centers: 2.7 mm General dosimetry up to 3 GHz Compliance tests of mobile phone



ET3DV6 E-Field Probe

## 17.0 BARSKI PLANAR PHANTOM

The Barski planar phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table. The planar phantom was used for the DUT SAR evaluations and the system performance check evaluations. See Appendix G for dimensions and specifications of the Barski planar phantom.



Barski Planar Phantom

## 18.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 15 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 ILAC-MRA <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Test Lab Certificate No. 2470.01

## 19.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	19-Apr-12	Biennial
x	-ET3DV6 E-Field Probe	00017	1590	24-Apr-12	Annual
x	-D300V3 Validation Dipole	00220	1009	17-Apr-12	Triennial
x	Barski Planar Phantom	00155	03-01	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	03-May-12	Biennial
x	Gigatronics 80701A Power Sensor	00014	1833542	03-May-12	Biennial
x	Gigatronics 80334A Power Sensor	-	1837001	03-May-12	Biennial
x	HP 8753ET Network Analyzer	00134	US39170292	26-Apr-12	Biennial
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	02-May-12	Biennial
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

Applicant:	Adaptive Digital Systems Inc	FCC ID:	PYK-ADS-TX502	Model:	TX-502	
DUT Type:	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 16 of 48

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 ILAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## 20.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices"; Rule Part 47 CFR §2.1093.
- [2] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [3] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [4] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v05: October 2012.
- [5] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [6] Federal Communications Commission, Office of Engineering and Technology - "SAR Measurement Requirements for 100 MHz to 6 GHz"; KDB 865664 D01v01: October 2012
- [7] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [8] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [9] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."
- [10] Federal Communications Commission - "Measurements Required: RF Power Output"; Rule Part 47 CFR §2.1046.

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 17 of 48

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## APPENDIX A - SAR MEASUREMENT PLOTS

<b>Applicant:</b> Adaptive Digital Systems Inc	<b>FCC ID:</b> PYK-ADS-TX502	<b>Model:</b> TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter		150-174 MHz
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 18 of 48

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Date Tested: 12/05/2012

## Body-Worn SAR - 173.4 MHz - Antenna Touch (Device body and base half of antenna)

**DUT: TX-502; Type: VHF Radio Transmitter; Serial: 500356**

Program Notes: Ambient Temp: 22C; Fluid Temp: 20.9C; Barometric Pressure: 101.3 kPa; Humidity: 30%

Procedure Notes:

Communication System: VHF

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated):  $f = 173.4$  MHz;  $\sigma = 0.793$  mho/m;  $\epsilon_r = 61.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.6, 8.6, 8.6); Calibrated: 24/04/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**173.4MHz - Antenna touch/Area Scan (6x23x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.693 mW/g

**173.4MHz - Antenna touch/Zoom Scan 2 2 (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 33.0 V/m; Power Drift = -0.160 dB

Peak SAR (extrapolated) = 2.44 W/kg

**SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.362 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.742 mW/g

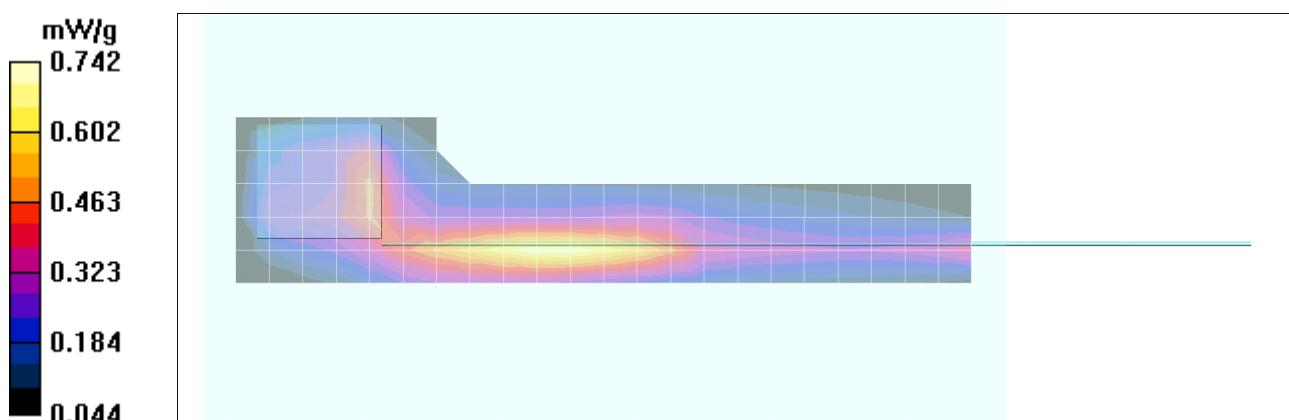

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502			
<b>DUT Type:</b>	VHF Audio Transmitter			150-174 MHz				
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							
	Page 19 of 48							

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Date Tested: 12/05/2012

## Body-Worn SAR - 173.4 MHz - Antenna Touch (Tip half of antenna)

**DUT: TX-502; Type: VHF Radio Transmitter; Serial: 500356**

Program Notes: Ambient Temp: 22C; Fluid Temp: 20.9C; Barometric Pressure: 101.3 kPa; Humidity: 30%

Procedure Notes:

Communication System: VHF

Frequency: 173.4 MHz; Duty Cycle: 1:1


Medium: M150 Medium parameters used (interpolated):  $f = 173.4$  MHz;  $\sigma = 0.793$  mho/m;  $\epsilon_r = 61.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.6, 8.6, 8.6); Calibrated: 24/04/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**173.4MHz - Antenna touch - Tip/Area Scan (4x19x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.482 mW/g

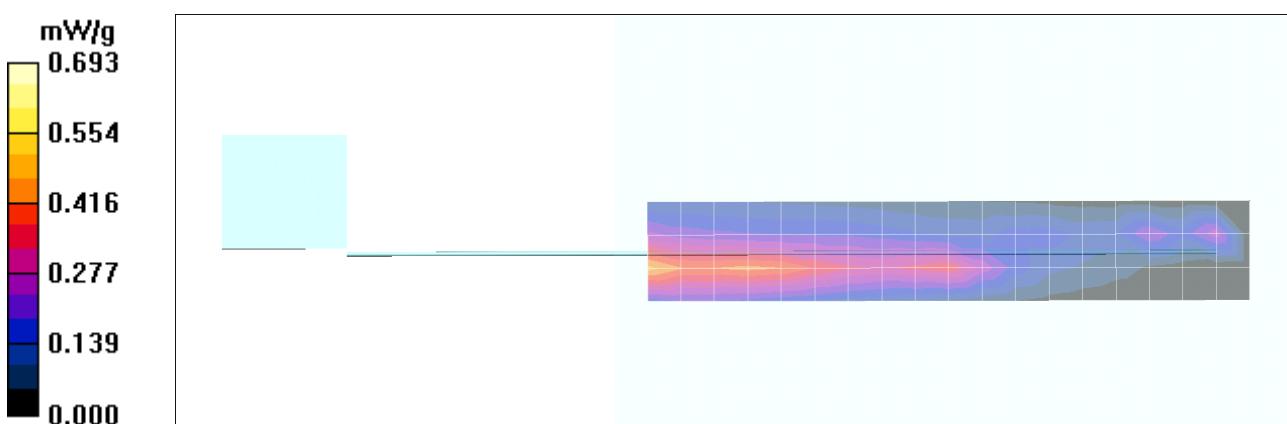


<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502			
<b>DUT Type:</b>	VHF Audio Transmitter			150-174 MHz				
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							
	Page 20 of 48							

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Test Lab Certificate No. 2470.01

## Z-Axis Scan

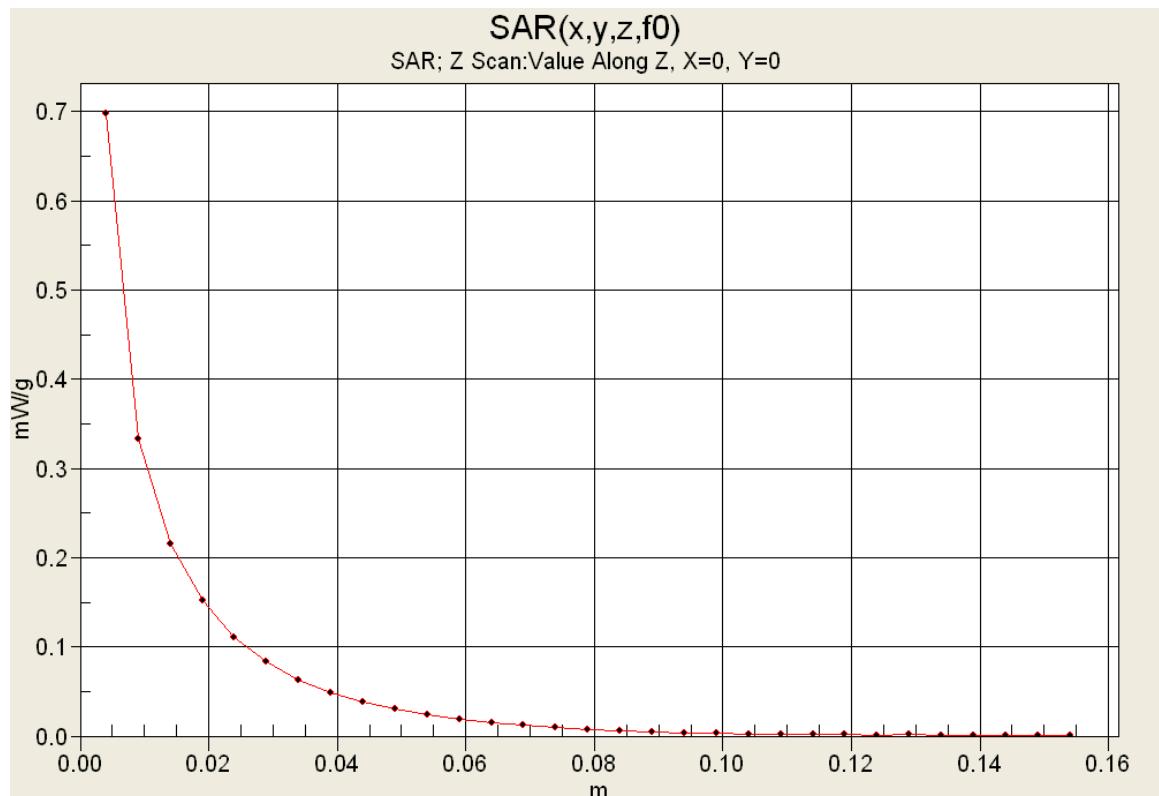

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Date Tested: 12/07/2012

## Body-Worn SAR - 173.4 MHz - Antenna 4mm spacing (Device body and base half of antenna)

**DUT: TX-502; Type: VHF Radio Transmitter; Serial: 500356**

Program Notes: Ambient Temp: 22C; Fluid Temp: 20.9C; Barometric Pressure: 101.3 kPa; Humidity: 30%

Procedure Notes:

Communication System: VHF

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated):  $f = 173.4$  MHz;  $\sigma = 0.777$  mho/m;  $\epsilon_r = 62.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.6, 8.6, 8.6); Calibrated: 24/04/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**173.4MHz - Antenna 4mm 2/Area Scan (6x23x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.34 mW/g

**173.4MHz - Antenna 4mm 2/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 41.3 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 2.34 W/kg

**SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.795 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.33 mW/g

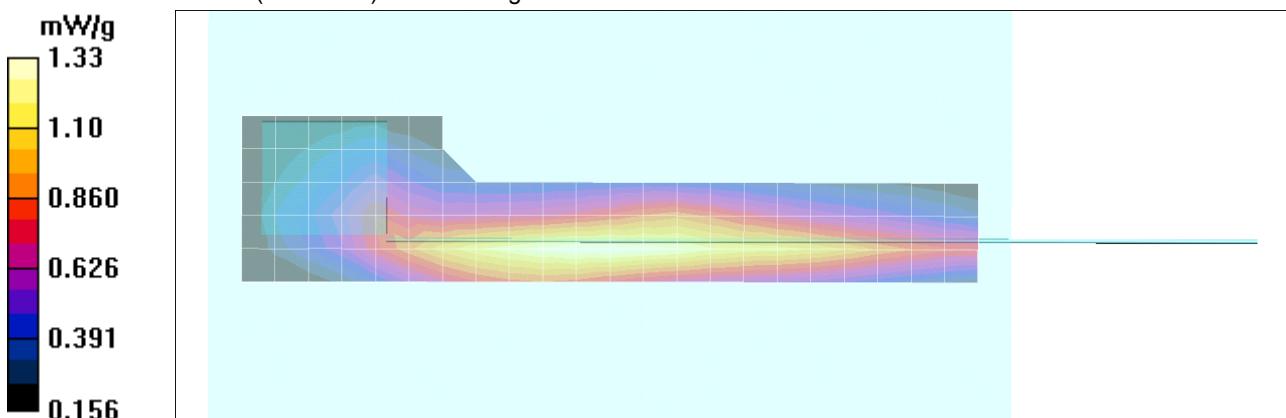

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter			150-174 MHz		
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 22 of 48		

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Date Tested: 12/05/2012

## Body-Worn SAR - 173.4 MHz - Antenna 4mm spacing (Tip half of antenna)

**DUT: TX-502; Type: VHF Radio Transmitter; Serial: 500356**

Program Notes: Ambient Temp: 22C; Fluid Temp: 20.9C; Barometric Pressure: 101.3 kPa; Humidity: 30%

Procedure Notes:

Communication System: VHF

Frequency: 173.4 MHz; Duty Cycle: 1:1


Medium: M150 Medium parameters used (interpolated):  $f = 173.4$  MHz;  $\sigma = 0.777$  mho/m;  $\epsilon_r = 62.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.6, 8.6, 8.6); Calibrated: 24/04/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**173.4MHz - Antenna 4mm - Tip/Area Scan (4x19x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation


Maximum value of SAR (measured) = 1.08 mW/g

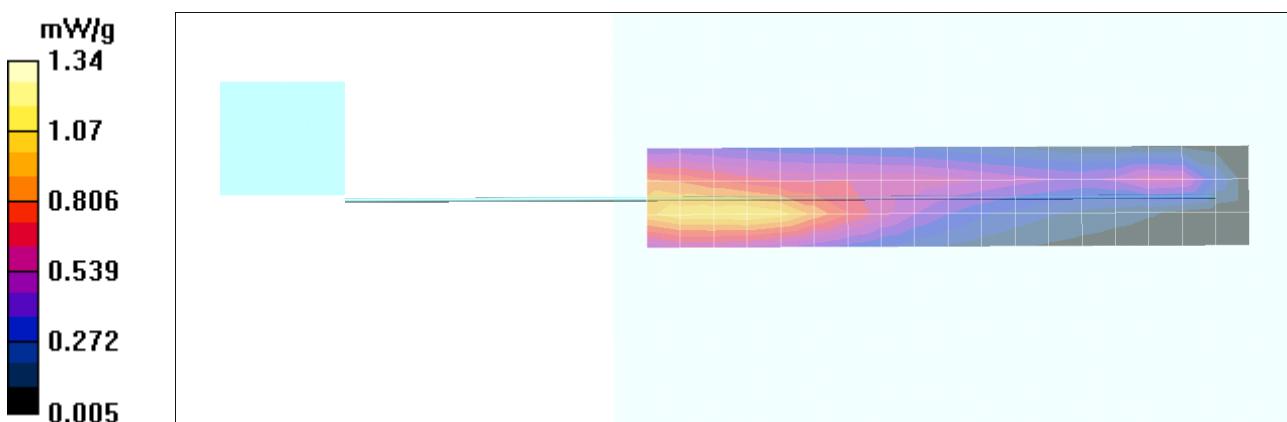

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 23 of 48					

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## Z-Axis Scan

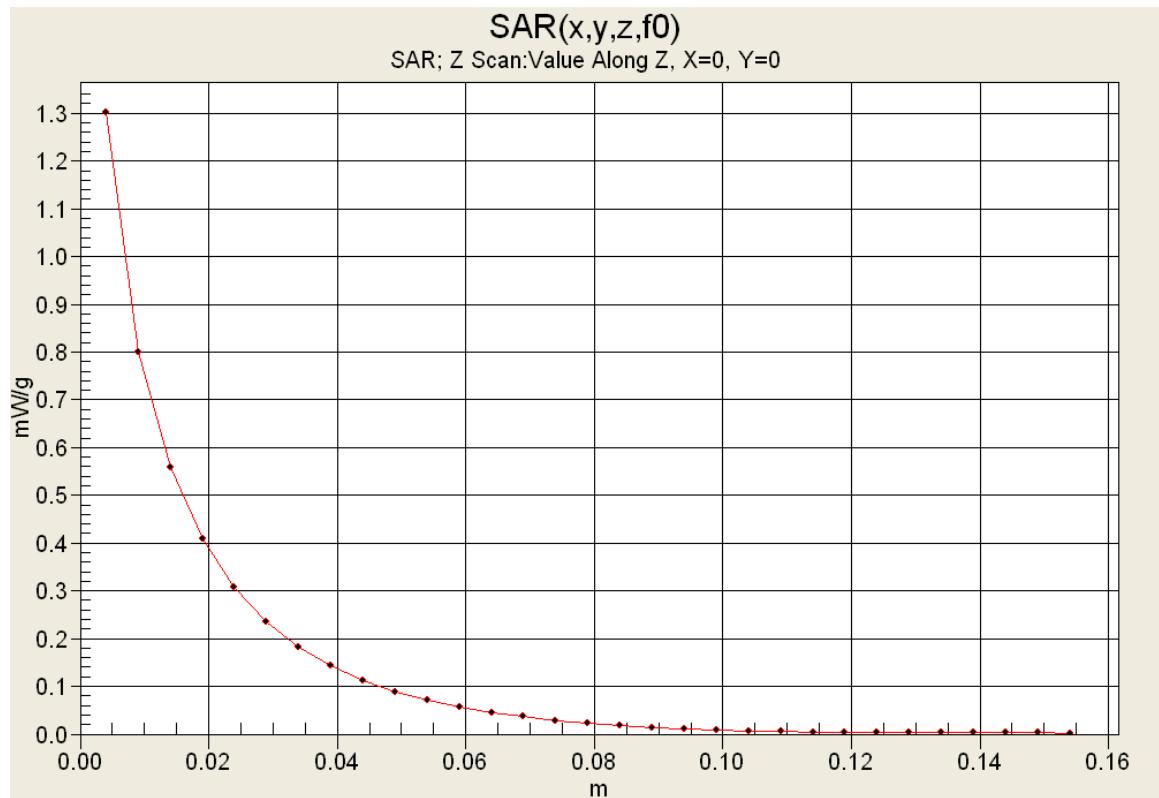

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## APPENDIX B - SYSTEM PERFORMANCE CHECK PLOT

<b>Applicant:</b> Adaptive Digital Systems Inc	<b>FCC ID:</b> PYK-ADS-TX502	<b>Model:</b> TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter		150-174 MHz
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 25 of 48

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Date Tested: 12/03/2012

## System Performance Check - 300 MHz Dipole - Head

**DUT: Dipole 300 MHz; Type: D300V3; Serial: 1009; Calibrated: 17/04/2012**

Program Notes: Ambient Temp: 22.0C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Procedure Notes:

Communication System: CW

Frequency: 300 MHz; Duty Cycle: 1:1

Medium: 300 HSL Medium parameters used:  $f = 300$  MHz;  $\sigma = 0.85$  mho/m;  $\epsilon_r = 46.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 24/04/2012
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Head d=15mm, Pin = 398mW/Area Scan (6x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.02 mW/g


**Head d=15mm, Pin = 398mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.9 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 1.80 W/kg

**SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.744 mW/g**


Maximum value of SAR (measured) = 1.09 mW/g

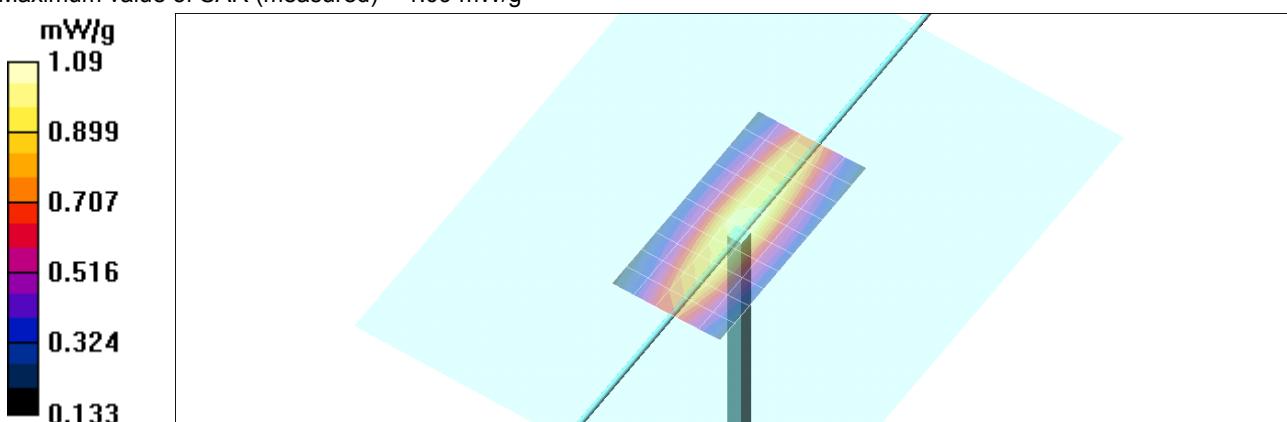

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502			
<b>DUT Type:</b>	VHF Audio Transmitter			150-174 MHz				
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							
	Page 26 of 48							

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## Z-Axis Scan

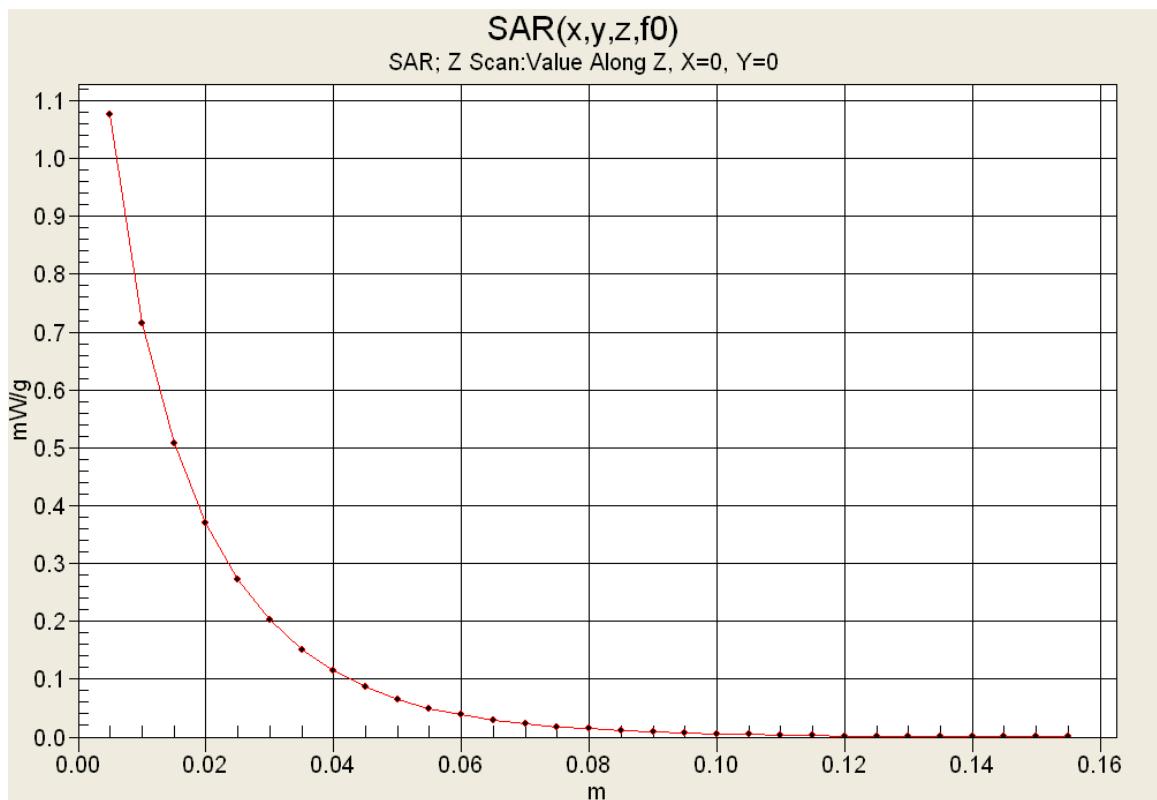

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Date Tested: 12/05/2012

## System Performance Check - 300 MHz Dipole - 150 MHz Body Fluid

**DUT: Dipole 300 MHz; Type: D300V3; Serial: 1009; Calibrated: 17/04/2012**

Program Notes: Ambient Temp: 22C; Fluid Temp: 20.9C; Barometric Pressure: 101.3 kPa; Humidity: 30%

Procedure Notes: 300 MHz Dipole transmitting at 300 MHz using 150 MHz SAR probe calibration and 150 MHz tissue dielectric parameters

Communication System: CW

Frequency: 150 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used:  $f = 150$  MHz;  $\sigma = 0.78$  mho/m;  $\epsilon_r = 61.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.6, 8.6, 8.6); Calibrated: 24/04/2012
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Head d=15mm, Pin = 398mW 2/Area Scan (6x11x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.849 mW/g


**Head d=15mm, Pin = 398mW 2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.8 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.930 mW/g; SAR(10 g) = 0.628 mW/g**


Maximum value of SAR (measured) = 0.902 mW/g

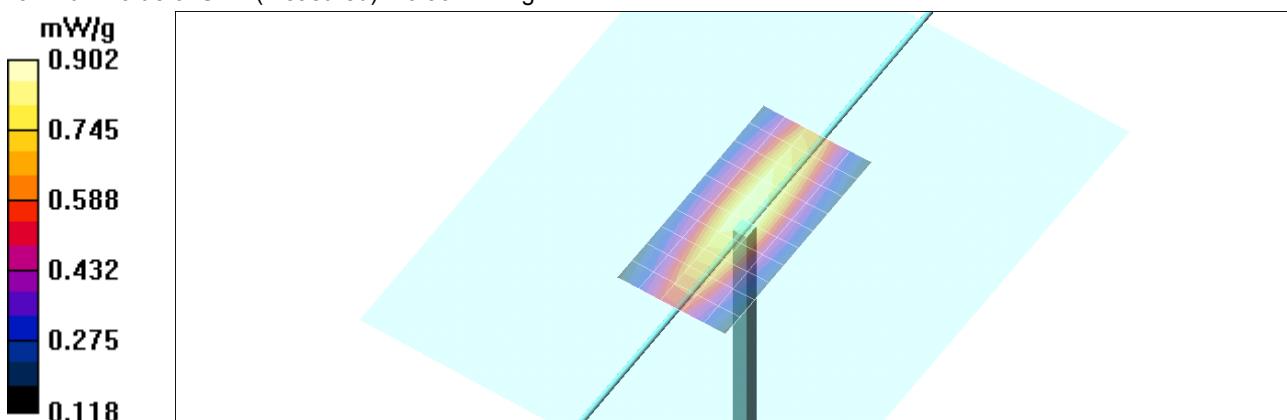

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## Z-Axis Scan

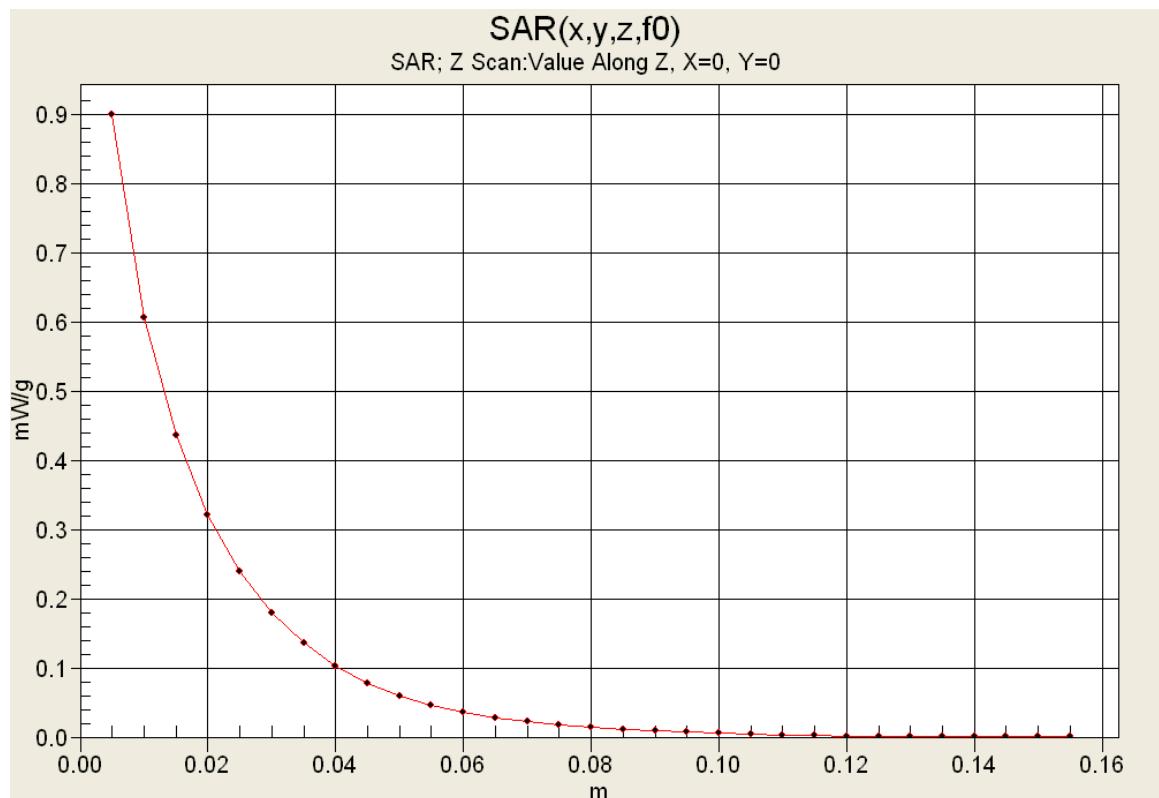

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Date Tested: 12/07/2012

## System Performance Check - 300 MHz Dipole - Head

**DUT: Dipole 300 MHz; Type: D300V3; Serial: 1009; Calibrated: 17/04/2012**

Program Notes: Ambient Temp: 22.0C; Fluid Temp: 21.3C; Barometric Pressure: 101.3 kPa; Humidity: 30%

Procedure Notes:

Communication System: CW

Frequency: 300 MHz; Duty Cycle: 1:1

Medium: 300 HSL Medium parameters used:  $f = 300$  MHz;  $\sigma = 0.87$  mho/m;  $\epsilon_r = 46.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 24/04/2012
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Head d=15mm, Pin = 398mW/Area Scan (6x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.08 mW/g


**Head d=15mm, Pin = 398mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.3 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 1.86 W/kg

**SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.783 mW/g**


Maximum value of SAR (measured) = 1.13 mW/g

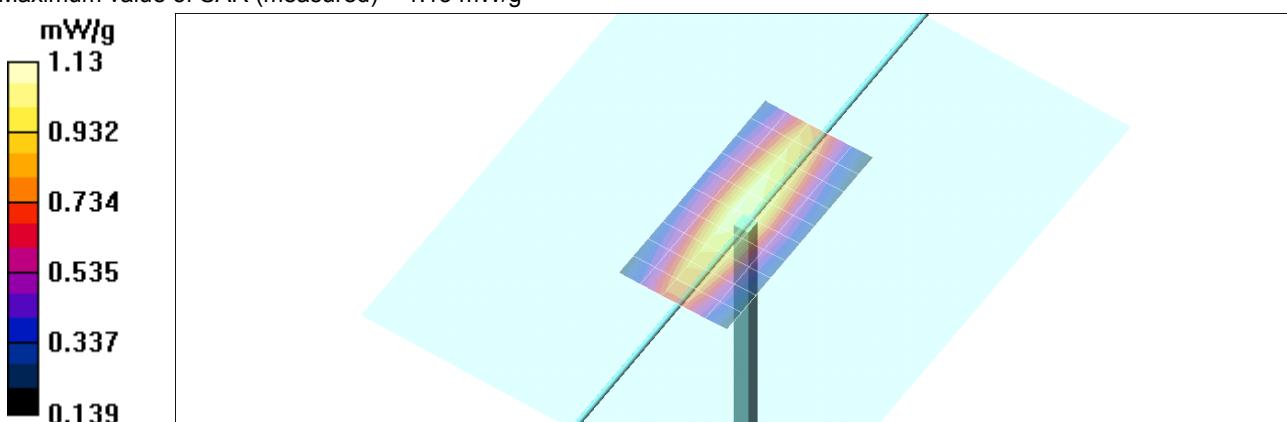

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## Z-Axis Scan

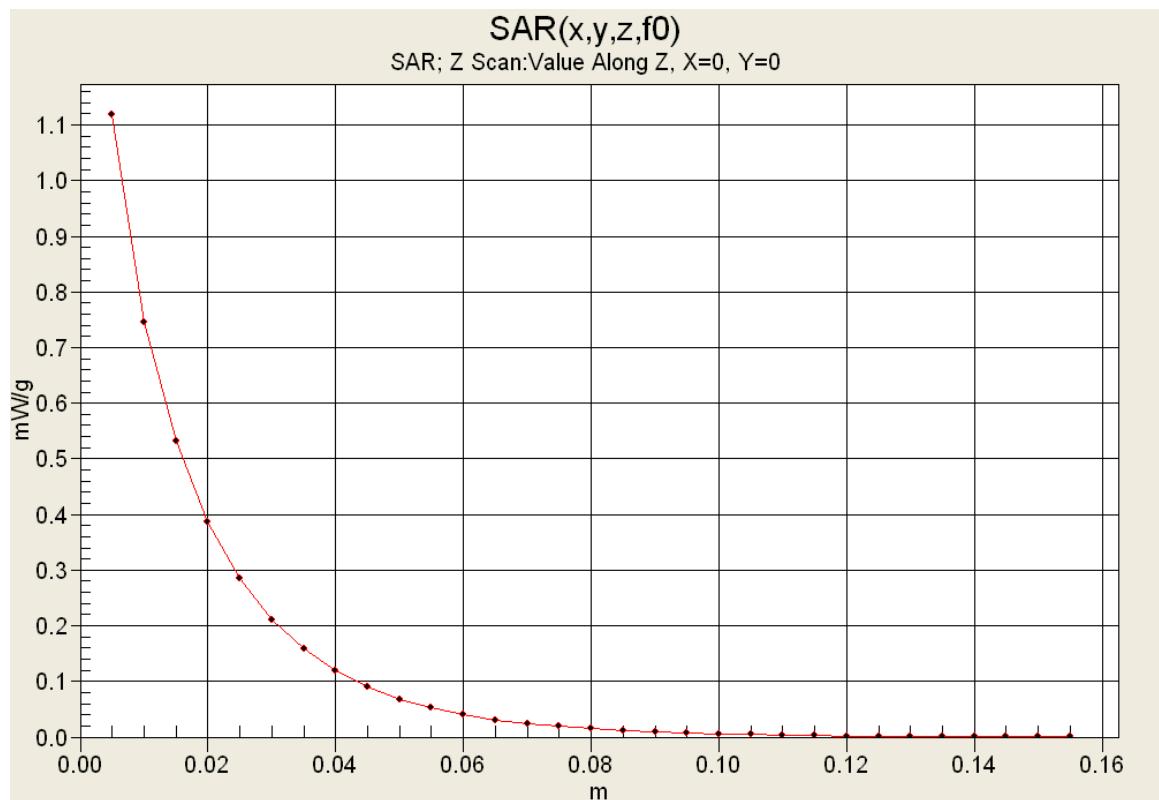

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Date Tested: 12/07/2012

## System Performance Check - 300 MHz Dipole - 150 MHz Body Fluid

**DUT: Dipole 300 MHz; Type: D300V3; Serial: 1009; Calibrated: 17/04/2012**

Program Notes: Ambient Temp: 22C; Fluid Temp: 20.9C; Barometric Pressure: 101.3 kPa; Humidity: 30%

Procedure Notes: 300 MHz Dipole transmitting at 300 MHz using 150 MHz SAR probe calibration and 150 MHz tissue dielectric parameters

Communication System: CW

Frequency: 150 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used:  $f = 150$  MHz;  $\sigma = 0.76$  mho/m;  $\epsilon_r = 63.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>


- Probe: ET3DV6 - SN1590; ConvF(8.6, 8.6, 8.6); Calibrated: 24/04/2012
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Head d=15mm, Pin = 398mW/Area Scan (6x11x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.874 mW/g

**Head d=15mm, Pin = 398mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 34.6 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 1.45 W/kg


**SAR(1 g) = 0.919 mW/g; SAR(10 g) = 0.620 mW/g**  
 Maximum value of SAR (measured) = 0.893 mW/g

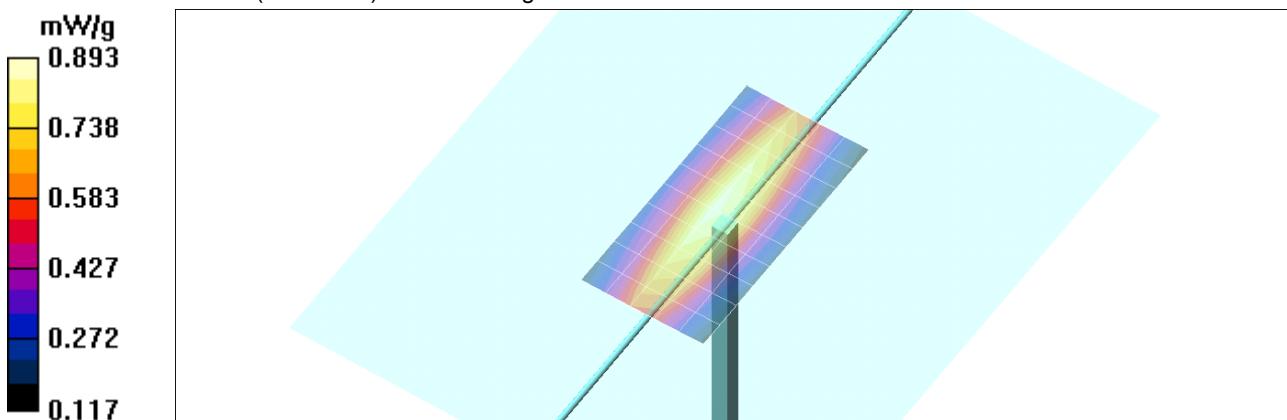

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502				
<b>DUT Type:</b>	VHF Audio Transmitter			150-174 MHz					
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.								
	Page 32 of 48								

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## Z-Axis Scan

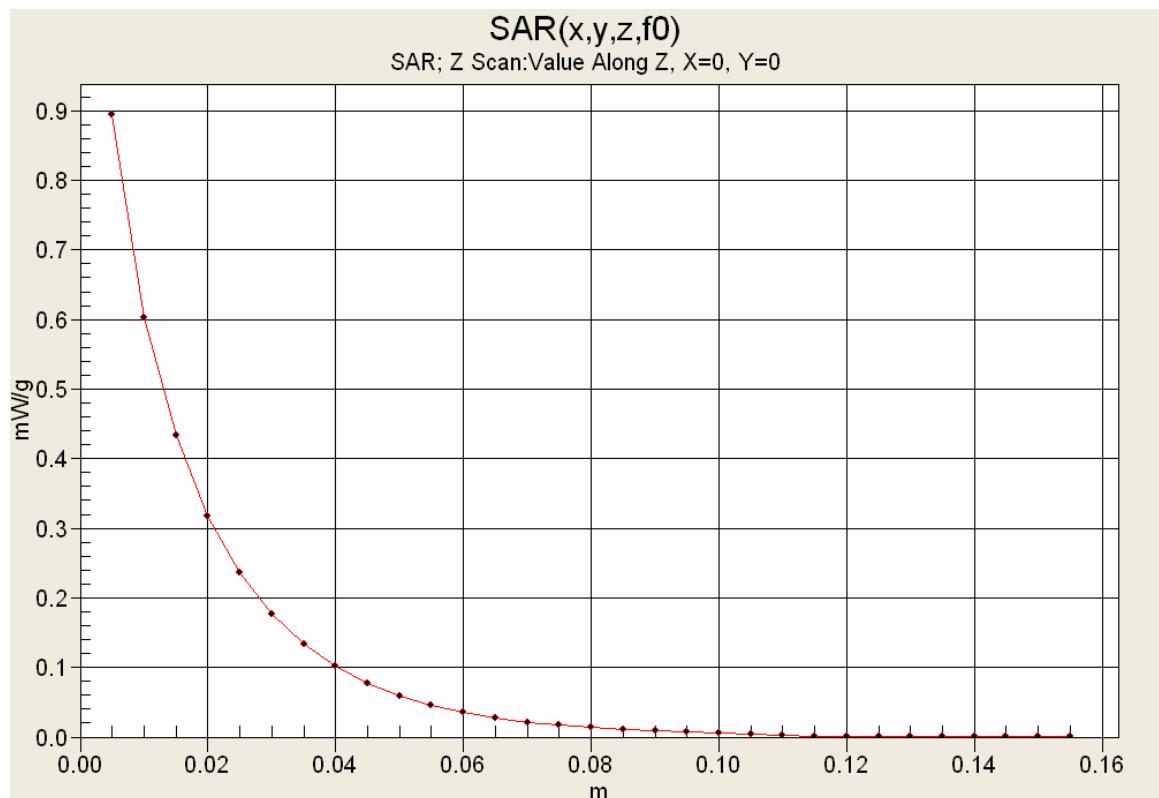

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Test Lab Certificate No. 2470.01

## APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 34 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## 300 MHz Head

\*\*\*\*\*

CellTech Labs

Test Result for UIM Dielectric Parameter

03/Dec/2012

Freq Frequency(GHz)

FCC\_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eHFCC	sH	Test_e	Test_s
0.2000	49.97	0.80	50.83	0.77
0.2100	49.50	0.80	51.04	0.76
0.2200	49.03	0.81	49.60	0.78
0.2300	48.57	0.82	49.03	0.79
0.2400	48.10	0.83	48.65	0.80
0.2500	47.63	0.83	48.54	0.80
0.2600	47.17	0.84	48.00	0.81
0.2700	46.70	0.85	47.34	0.84
0.2800	46.23	0.86	47.85	0.84
0.2900	45.77	0.86	47.29	0.86
0.3000	45.30	0.87	46.72	0.85
0.3100	45.18	0.87	45.96	0.87
0.3200	45.06	0.87	46.44	0.88
0.3300	44.94	0.87	45.79	0.87
0.3400	44.82	0.87	45.04	0.89
0.3500	44.70	0.87	45.13	0.88
0.3600	44.58	0.87	45.21	0.91
0.3700	44.46	0.87	44.71	0.92
0.3800	44.34	0.87	44.22	0.93
0.3900	44.22	0.87	44.42	0.92
0.4000	44.10	0.87	43.95	0.94

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter			150-174 MHz		
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 35 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## 150 MHz Body

\*\*\*\*\*

CellTech Labs  
 Test Result for UIM Dielectric Parameter

05/Dec/2012

Freq Frequency(GHz)

FCC\_eB FCC Limits for Body Epsilon

FCC\_sB FCC Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.0500	64.37	0.72	90.04	0.69
0.0600	64.12	0.73	84.54	0.70
0.0700	63.87	0.74	71.26	0.70
0.0800	63.63	0.74	68.60	0.74
0.0900	63.38	0.75	70.95	0.72
0.1000	63.13	0.76	65.32	0.73
0.1100	62.89	0.77	61.77	0.74
0.1200	62.64	0.78	62.50	0.76
0.1300	62.39	0.78	63.72	0.75
0.1400	62.15	0.79	63.73	0.75
0.1500	61.90	0.80	61.56	0.78
0.1600	61.65	0.81	65.49	0.77
0.1700	61.41	0.82	61.13	0.80
0.1800	61.16	0.82	61.87	0.78
0.1900	60.91	0.83	59.93	0.79
0.2000	60.67	0.84	59.92	0.81
0.2100	60.42	0.85	60.14	0.81
0.2200	60.17	0.86	59.86	0.81
0.2300	59.93	0.86	58.59	0.82
0.2400	59.68	0.87	58.25	0.83
0.2500	59.43	0.88	58.75	0.84

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter			150-174 MHz		
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## 300 MHz Head

\*\*\*\*\*

CellTech Labs

Test Result for UIM Dielectric Parameter

07/Dec/2012

Freq Frequency(GHz)

FCC\_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eHFCC	sH	Test_e	Test_s
0.2000	49.97	0.80	52.25	0.78
0.2100	49.50	0.80	51.33	0.78
0.2200	49.03	0.81	50.14	0.81
0.2300	48.57	0.82	49.50	0.80
0.2400	48.10	0.83	48.32	0.81
0.2500	47.63	0.83	48.43	0.80
0.2600	47.17	0.84	48.27	0.83
0.2700	46.70	0.85	47.58	0.84
0.2800	46.23	0.86	47.49	0.83
0.2900	45.77	0.86	47.46	0.86
0.3000	45.30	0.87	46.85	0.87
0.3100	45.18	0.87	46.58	0.86
0.3200	45.06	0.87	46.58	0.87
0.3300	44.94	0.87	45.93	0.89
0.3400	44.82	0.87	45.64	0.88
0.3500	44.70	0.87	45.02	0.90
0.3600	44.58	0.87	44.76	0.90
0.3700	44.46	0.87	43.86	0.91
0.3800	44.34	0.87	43.85	0.91
0.3900	44.22	0.87	43.47	0.93
0.4000	44.10	0.87	43.39	0.92

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter			150-174 MHz		
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 37 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## 150 MHz Body

\*\*\*\*\*

CellTech Labs  
 Test Result for UIM Dielectric Parameter

07/Dec/2012

Freq Frequency(GHz)

FCC\_eB FCC Limits for Body Epsilon

FCC\_sB FCC Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.0500	64.37	0.72	86.28	0.68
0.0600	64.12	0.73	85.52	0.69
0.0700	63.87	0.74	84.50	0.72
0.0800	63.63	0.74	66.95	0.69
0.0900	63.38	0.75	69.09	0.72
0.1000	63.13	0.76	63.53	0.71
0.1100	62.89	0.77	69.45	0.73
0.1200	62.64	0.78	63.54	0.74
0.1300	62.39	0.78	64.79	0.74
0.1400	62.15	0.79	62.74	0.77
0.1500	61.90	0.80	63.33	0.76
0.1600	61.65	0.81	61.92	0.76
0.1700	61.41	0.82	63.29	0.78
0.1800	61.16	0.82	61.61	0.77
0.1900	60.91	0.83	61.48	0.79
0.2000	60.67	0.84	60.87	0.79
0.2100	60.42	0.85	60.08	0.80
0.2200	60.17	0.86	59.73	0.80
0.2300	59.93	0.86	59.27	0.80
0.2400	59.68	0.87	59.18	0.82
0.2500	59.43	0.88	59.29	0.82

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter			150-174 MHz		
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 38 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

<b>Applicant:</b> Adaptive Digital Systems Inc	<b>FCC ID:</b> PYK-ADS-TX502	<b>Model:</b> TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter		150-174 MHz
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 39 of 48



Date(s) of Evaluation

Dec. 5 & 7, 2012

Test Report Serial No.

101012PYK-T1201-S

Test Report Revision No.

Rev. 1.0 (1st Release)

Test Report Issue Date

Dec. 14, 2012

Description of Test(s)

Specific Absorption Rate


RF Exposure Category

Occupational



Test Lab Certificate No. 2470.01

## BODY-WORN SAR TEST SETUP PHOTOGRAPHS

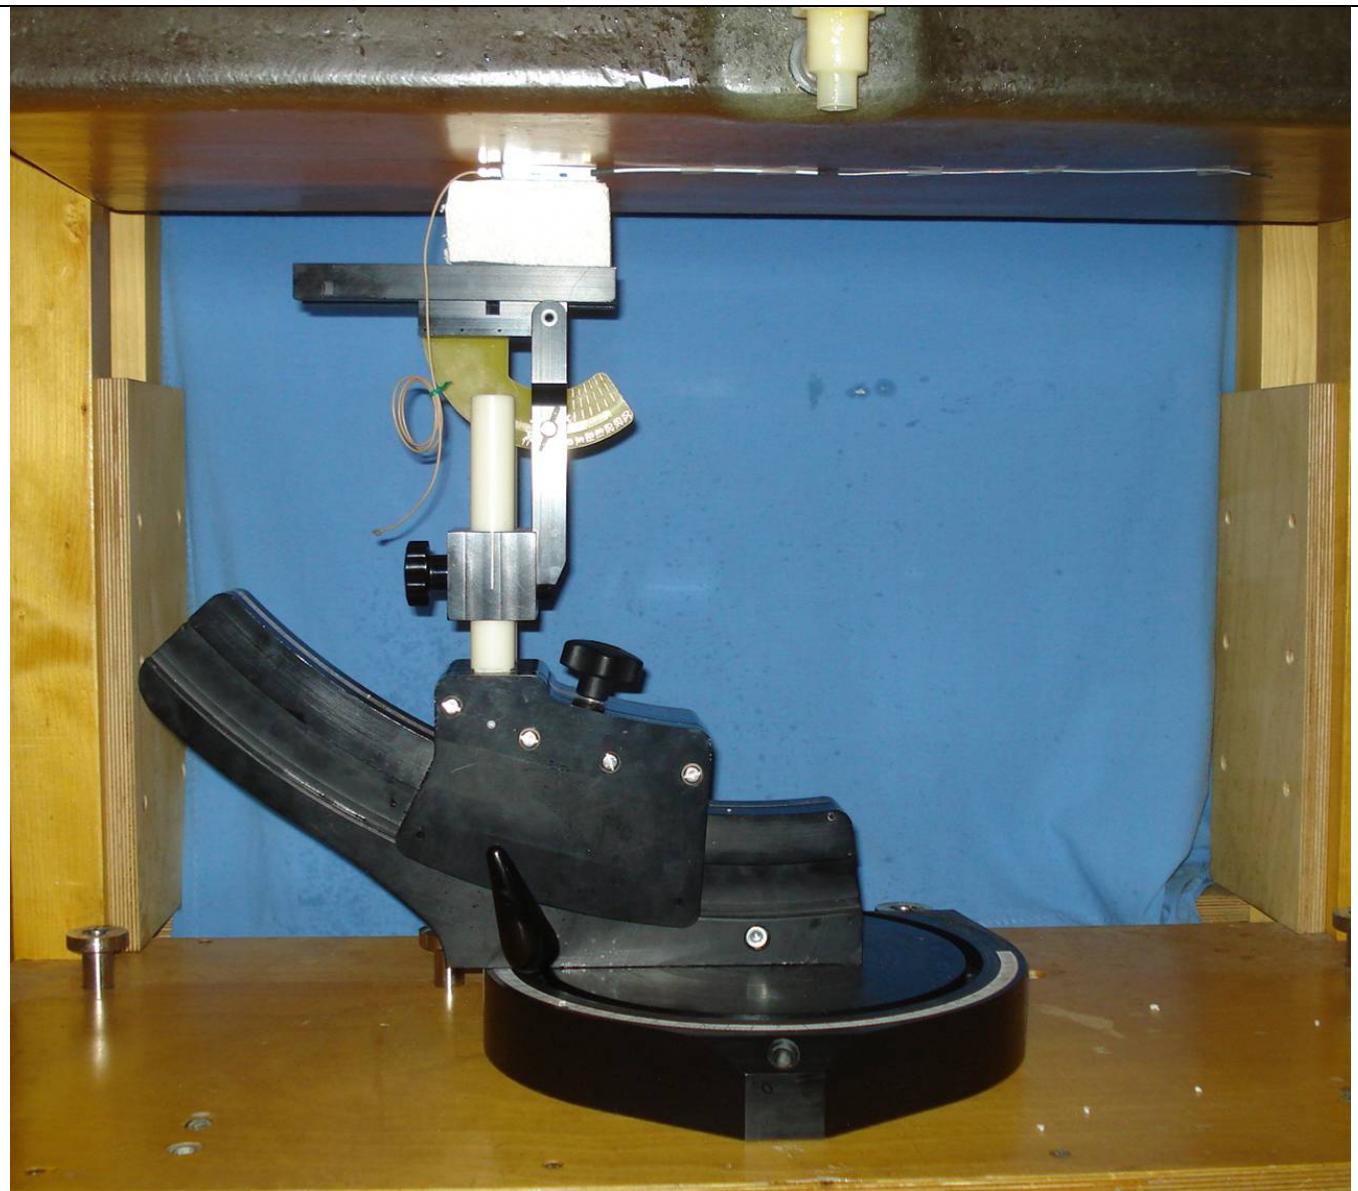

Body-Worn Test Setup - Antenna Touch

Applicant:	Adaptive Digital Systems Inc	FCC ID:	PYK-ADS-TX502	Model:	TX-502	
DUT Type:	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 40 of 48	

**Date(s) of Evaluation**

Dec. 5 &amp; 7, 2012

**Test Report Serial No.**

101012PYK-T1201-S

**Test Report Revision No.**

Rev. 1.0 (1st Release)

**Test Report Issue Date**

Dec. 14, 2012

**Description of Test(s)**

Specific Absorption Rate

**RF Exposure Category**


Occupational



Test Lab Certificate No. 2470.01

**BODY-WORN SAR TEST SETUP PHOTOGRAPHS**

Antenna base area scan position

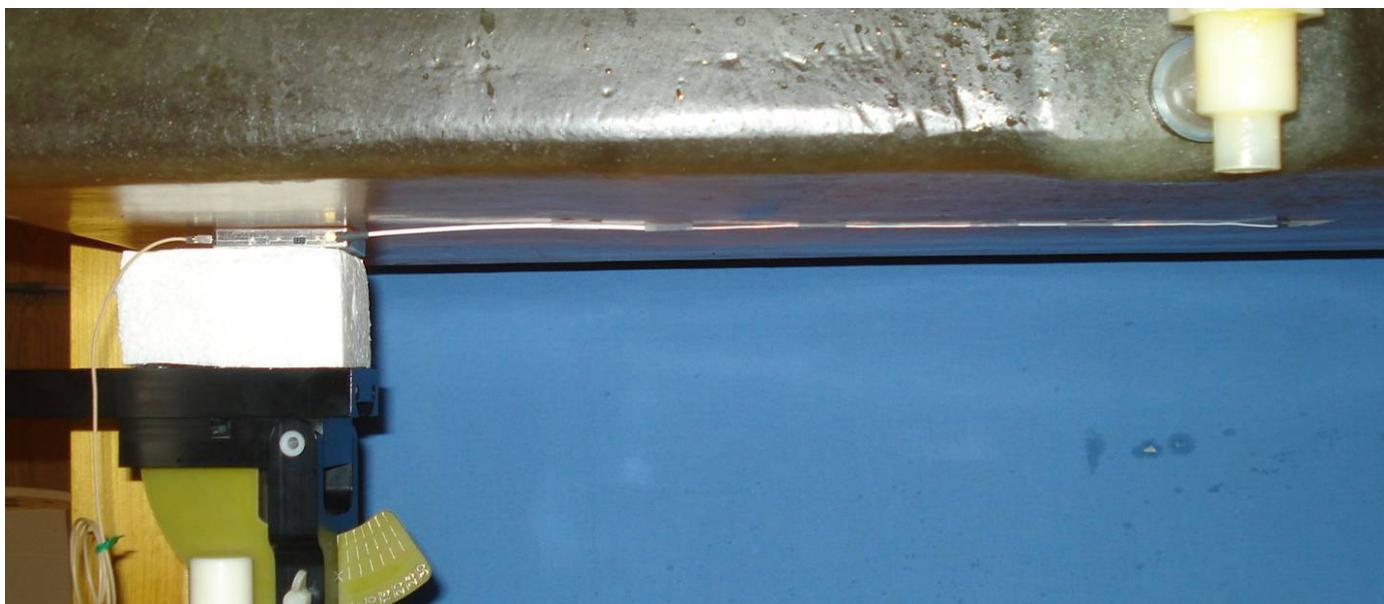

Antenna tip area scan position

Body-worn Test Setup - DUT and antenna touching phantom

Applicant:	Adaptive Digital Systems Inc	FCC ID:	PYK-ADS-TX502	Model:	TX-502	
DUT Type:	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 41 of 48					



Date(s) of Evaluation

Dec. 5 & 7, 2012

Test Report Serial No.

101012PYK-T1201-S

Test Report Revision No.

Rev. 1.0 (1st Release)

Test Report Issue Date

Dec. 14, 2012

Description of Test(s)

Specific Absorption Rate


RF Exposure Category

Occupational



Test Lab Certificate No. 2470.01

## BODY-WORN SAR TEST SETUP PHOTOGRAPHS

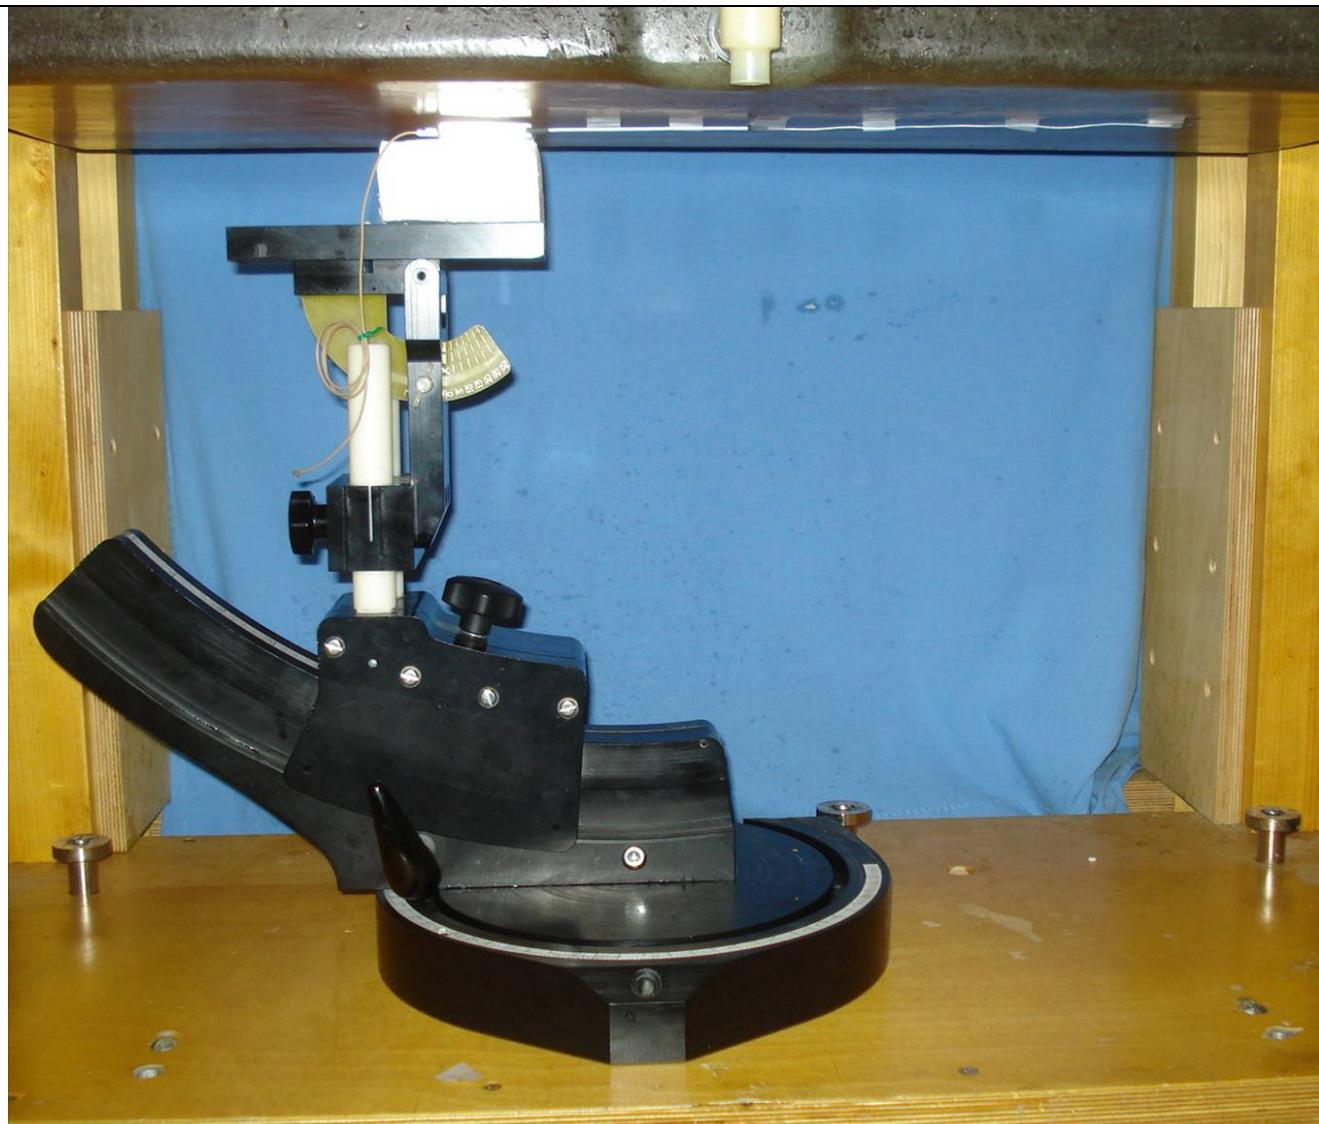


Body-Worn Test Setup - Antenna 4mm spacing


Applicant:	Adaptive Digital Systems Inc	FCC ID:	PYK-ADS-TX502	Model:	TX-502	
DUT Type:	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 42 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## BODY-WORN SAR TEST SETUP PHOTOGRAPHS

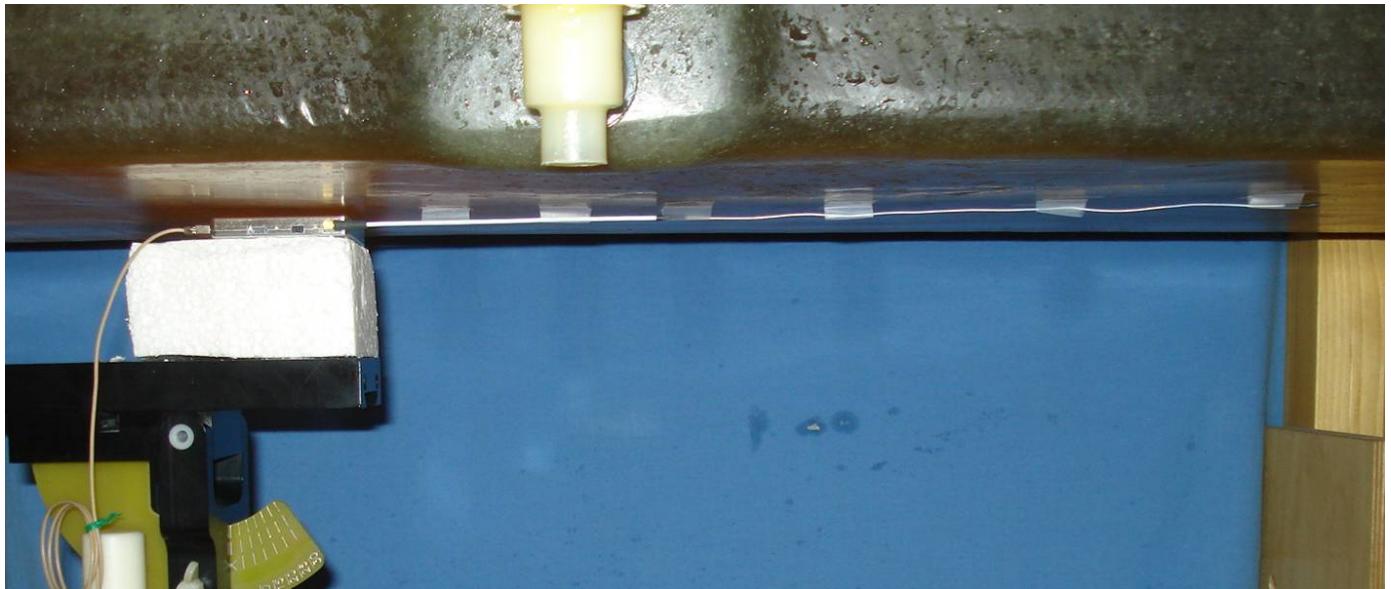

Antenna base area scan position

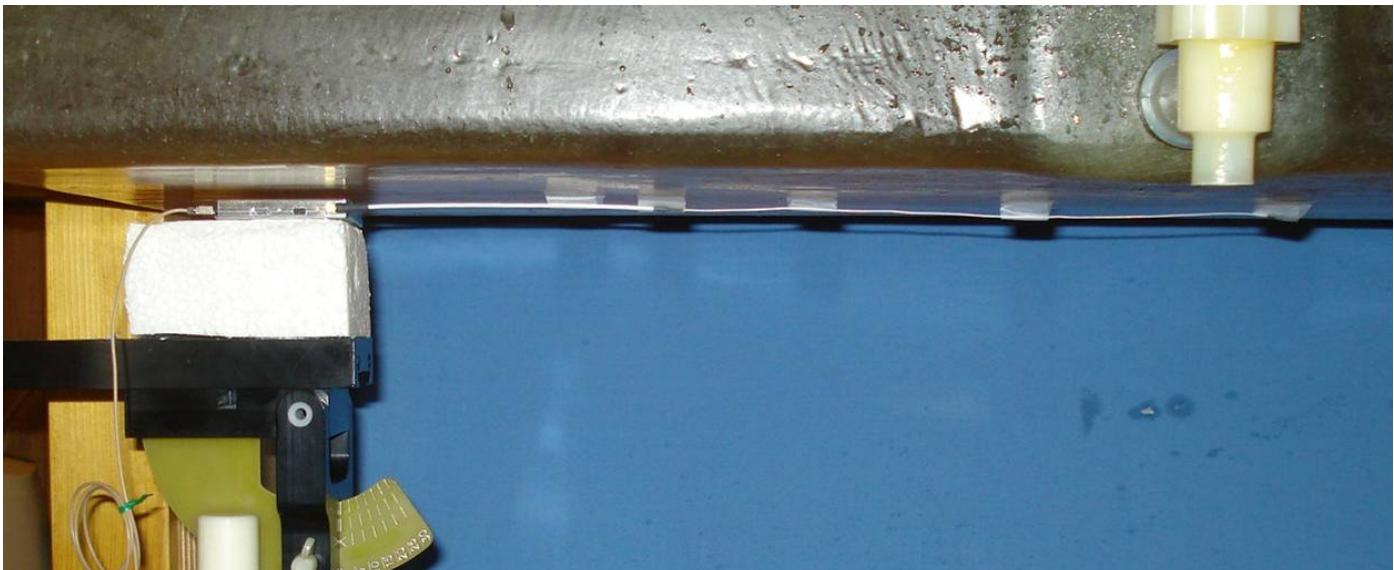

Antenna tip area scan position


Body-worn Test Setup - DUT and antenna 4mm spacing to phantom

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 43 of 48	

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 <b>ILAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

Test Lab Certificate No. 2470.01

## DUT PHOTOGRAPHS

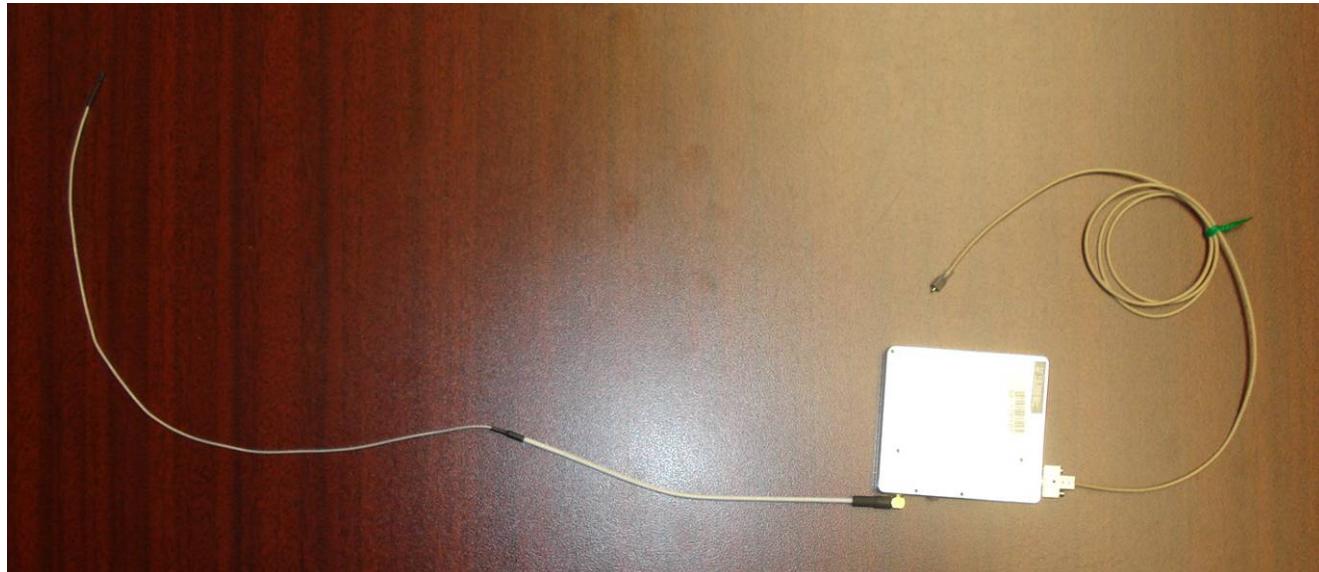

**DUT with Antenna and Mic**

<b>Applicant:</b>	<b>Adaptive Digital Systems Inc</b>		<b>FCC ID:</b>	<b>PYK-ADS-TX502</b>	<b>Model:</b>	<b>TX-502</b>		
<b>DUT Type:</b>	<b>VHF Audio Transmitter</b>				<b>150-174 MHz</b>			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 44 of 48			

## DUT PHOTOGRAPHS



Front of DUT

Back of DUT



Antenna connection side of DUT

<b>Applicant:</b>	Adaptive Digital Systems Inc	<b>FCC ID:</b>	PYK-ADS-TX502	<b>Model:</b>	TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter				150-174 MHz	
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 45 of 48					

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## APPENDIX E - DIPOLE CALIBRATION

<b>Applicant:</b> Adaptive Digital Systems Inc	<b>FCC ID:</b> PYK-ADS-TX502	<b>Model:</b> TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter		150-174 MHz
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 46 of 48



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **D300V3-1009\_Apr12**

## CALIBRATION CERTIFICATE

Object **D300V3 - SN: 1009**

Calibration procedure(s) **QA CAL-15.v6**  
 Calibration procedure for dipole validation kits below 700 MHz

Calibration date: **April 17, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ET3DV6	SN: 1507	30-Dec-11 (No. ET3-1507_Dec11)	Dec-12
DAE4	SN: 900	11-Apr-12 (No. DAE4-900_Apr12)	Apr-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 27, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TS	tissue simulating liquid
ConvF	sensitivity in TS / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TS:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TS parameters:* The measured TS parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.8.1
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	ELI4 Flat Phantom	Shell thickness: $2 \pm 0.2$ mm
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	$dx, dy, dz = 5$ mm	
<b>Frequency</b>	$300$ MHz $\pm 1$ MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	<b>Temperature</b>	<b>Permittivity</b>	<b>Conductivity</b>
<b>Nominal Head TSL parameters</b>	22.0 °C	45.3	0.87 mho/m
<b>Measured Head TSL parameters</b>	$(22.0 \pm 0.2)$ °C	$44.9 \pm 6$ %	0.89 mho/m $\pm 6$ %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	398 mW input power	1.17 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>2.88 mW /g <math>\pm 18.1</math> % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	398 mW input power	0.770 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>1.90 mW /g <math>\pm 17.6</math> % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.8 $\Omega$ - 2.9 $j\Omega$
Return Loss	- 22.2 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.748 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 26, 2009

# DASY5 Validation Report for Head TSL

Date: 17.04.2012

Test Laboratory: SPEAG

**DUT: Dipole 300 MHz; Type: D300V3; Serial: D300V3 - SN: 1009**

Communication System: CW; Frequency: 300 MHz

Medium parameters used:  $f = 300$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 44.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.59, 6.59, 6.59); Calibrated: 30.12.2011;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn900; Calibrated: 11.04.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

## Dipole Calibration for Head Tissue/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 37.838 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.974 mW/g

**SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.770 mW/g**

Maximum value of SAR (measured) = 1.24 mW/g

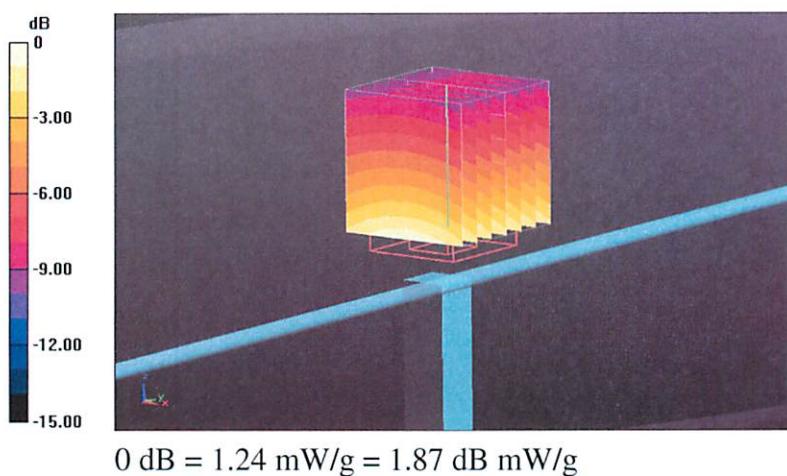

## Impedance Measurement Plot for Head TSL

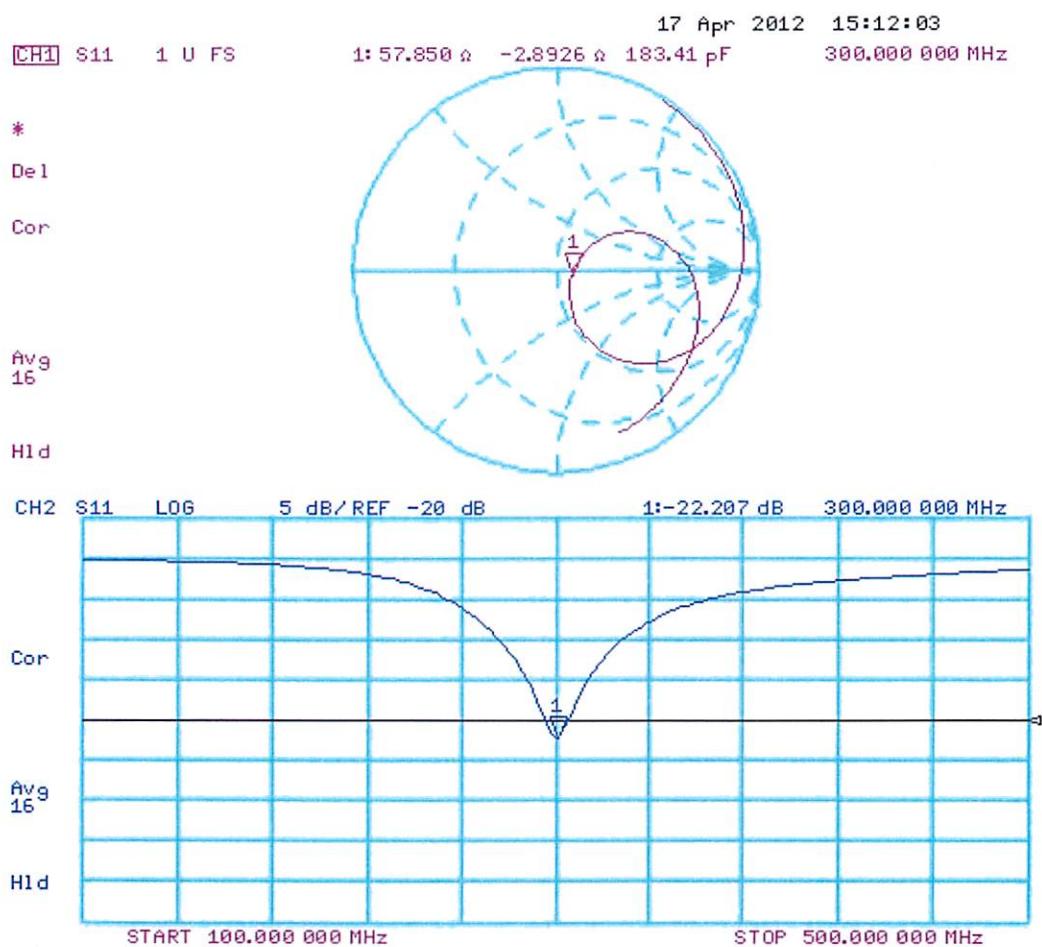

 Celltech Testing and Engineering Services Ltd	Date:	Revision No.
	Dec. 13, 2012	Rev. 1.0
<b>Establishment of 150MHz Head SAR Target for System Verification</b>		 Test Lab Certificate No. 2470.01

A 300MHz Head System Verification was performed to support the results.

### 300 MHZ SYSTEM VERIFICATION

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	Target	Meas.	Dev.	Target	Meas.	Dev.	Target	Meas.	Dev.					
Dec 10	Head 300	1.17 ±10%	1.14	-2.6%	45.3 ±5%	45.8	+1.1%	0.87 ±5%	0.83	-4.6%	1000	22.0	21.2	≥ 15	30	102.5

Five System Verification's were performed with the 300 MHz dipole transmitting at 300 MHz with the Barski Planar phantom filled with 150 MHz Head tissue simulating fluid.

Test #	Test Date	SAR 1g (W/kg)	Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Humid. (%)	Barom. Press. (kPa)
			Target	Meas.	Dev.	Target	Meas.	Dev.					
1	Dec 12	0.916	52.3 ±5%	53.5	+2.3%	0.76 ±5%	0.76	0.0%	1000	21.0	23.5	30	101.0
2	Dec 12	0.917	52.3 ±5%	53.5	+2.3%	0.76 ±5%	0.76	0.0%	1000	21.0	23.5	30	101.0
3	Dec 12	0.892	52.3 ±5%	52.4	+0.2%	0.76 ±5%	0.74	-2.6%	1000	22.0	22.6	30	101.0
4	Dec 12	0.890	52.3 ±5%	52.4	+0.2%	0.76 ±5%	0.74	-2.6%	1000	22.0	22.6	30	101.0
5	Dec 13	0.933	52.3 ±5%	51.2	-2.1%	0.76 ±5%	0.76	0.0%	1000	22.0	21.8	30	101.7

Coefficient of variation for established target

Mean = **0.910 W/kg**

Standard Deviation = 1.64%

Coefficient of Variation = 1.80%

150 MHz SPC Target Coefficient of Variation Calculation			
calc			
SPC values	0.916	4.096E-05	
	0.917	5.476E-05	
	0.892	0.00030976	
	0.89	0.00038416	
	0.933	0.00054756	
Sum of SPC's	4.548	Standard deviation	0.016353593
# of SPC's	5	Mean	0.910
		Coefficient	1.80%

 Celltech Testing and Engineering Services Lab	<u>Date:</u> Dec. 5, 2012			<u>Revision No.</u> Rev. 1.0			 Test Lab Certificate No. 2470.01
	<b>Establishment of 150MHz Body SAR Target for System Verification</b>						

A 300MHz System Verification was performed to support the results (Only head is available at this time).

### 300 MHZ SYSTEM VERIFICATION

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	Target	Meas.	Dev.	Target	Meas.	Dev.	Target	Meas.	Dev.					
Dec 3	Head 300	1.17 ±10%	1.12	-4.3%	45.3 ±5%	46.7	+3.1%	0.87 ±5%	0.85	-2.3%	1000	22.0	21.4	≥ 15	30	101.1

Five System Verification's were performed with the 300 MHz dipole transmitting at 300 MHz with the Barski Planar phantom filled with 150 MHz Body tissue simulating fluid.

Test #	Test Date	SAR 1g (W/kg)	Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Humid. (%)	Barom. Press. (kPa)
			Target	Meas.	Dev.	Target	Meas.	Dev.					
1	Dec 4	0.952	61.9 ±5%	62.4	+0.8%	0.80 ±5%	0.79	-1.3%	1000	22.0	22.9	30	100.4
2	Dec 4	0.951	61.9 ±5%	62.4	+0.8%	0.80 ±5%	0.79	-1.3%	1000	22.0	22.9	30	100.4
3	Dec 4	0.935	61.9 ±5%	61.3	-1.0%	0.80 ±5%	0.78	-2.5%	1000	22.0	22.3	30	100.4
4	Dec 4	0.931	61.9 ±5%	61.3	-1.0%	0.80 ±5%	0.78	-2.5%	1000	22.0	22.3	30	100.4
5	Dec 5	0.929	61.9 ±5%	61.6	-0.5%	0.80 ±5%	0.78	-2.5%	1000	22.0	20.9	30	101.3

Coefficient of variation for established target

Mean = **0.940 W/kg**

Standard Deviation = 0.99%

Coefficient of Variation = 1.05%

150 MHz SPC Target Coefficient of Variation Calculation					
calc					
SPC values	0.952	0.00015376			
	0.951	0.00012996			
	0.935	2.116E-05			
	0.931	7.396E-05			
	0.929	0.00011236			
Sum of SPC's	4.698	Standard deviation	0.009911609		
# of SPC's	5	Mean	0.940		
		Coefficient	1.05%		

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## APPENDIX F - PROBE CALIBRATION

<b>Applicant:</b> Adaptive Digital Systems Inc	<b>FCC ID:</b> PYK-ADS-TX502	<b>Model:</b> TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter		150-174 MHz
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 47 of 48

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Celltech

Certificate No: ET3-1590\_Apr12

## CALIBRATION CERTIFICATE

Object ET3DV6 - SN:1590

Calibration procedure(s) QA CAL-01.v8, QA CAL-12.v7, QA CAL-23.v4, QA CAL-25.v4  
Calibration procedure for dosimetric E-field probes

Calibration date: April 24, 2012

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAE4	SN: 660	10-Jan-12 (No. DAE4-660_Jan12)	Jan-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 26, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

### Glossary:

TSL	tissue simulating liquid
NORM $x,y,z$	sensitivity in free space
ConvF	sensitivity in TSL / NORM $x,y,z$
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- $NORMx,y,z$ : Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).  $NORMx,y,z$  are only intermediate values, i.e., the uncertainties of  $NORMx,y,z$  does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORMx,y,z * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCPx,y,z$ : DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- $PAR$ : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $Ax,y,z; Bx,y,z; Cx,y,z; VRx,y,z$ :  $A, B, C$  are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORMx,y,z * ConvF$  whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6

## SN:1590

Manufactured: March 19, 2001  
Calibrated: April 24, 2012

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

## Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	1.79	1.92	1.60	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	94.8	98.4	88.8	

## Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	0.00	X	0.00	0.00	1.00	143.4	$\pm 4.6\%$
			Y	0.00	0.00	1.00	150.1	
			Z	0.00	0.00	1.00	179.4	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	7.54	7.54	7.54	0.20	2.16	± 13.4 %
750	41.9	0.89	7.11	7.11	7.11	0.29	3.00	± 12.0 %
835	41.5	0.90	6.77	6.77	6.77	0.27	3.00	± 12.0 %
900	41.5	0.97	6.67	6.67	6.67	0.29	3.00	± 12.0 %

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

### Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	7.93	7.93	7.93	0.12	2.07	± 13.4 %
750	55.5	0.96	6.71	6.71	6.71	0.22	3.00	± 12.0 %
835	55.2	0.97	6.54	6.54	6.54	0.27	3.00	± 12.0 %
900	55.0	1.05	6.51	6.51	6.51	0.29	2.92	± 12.0 %

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

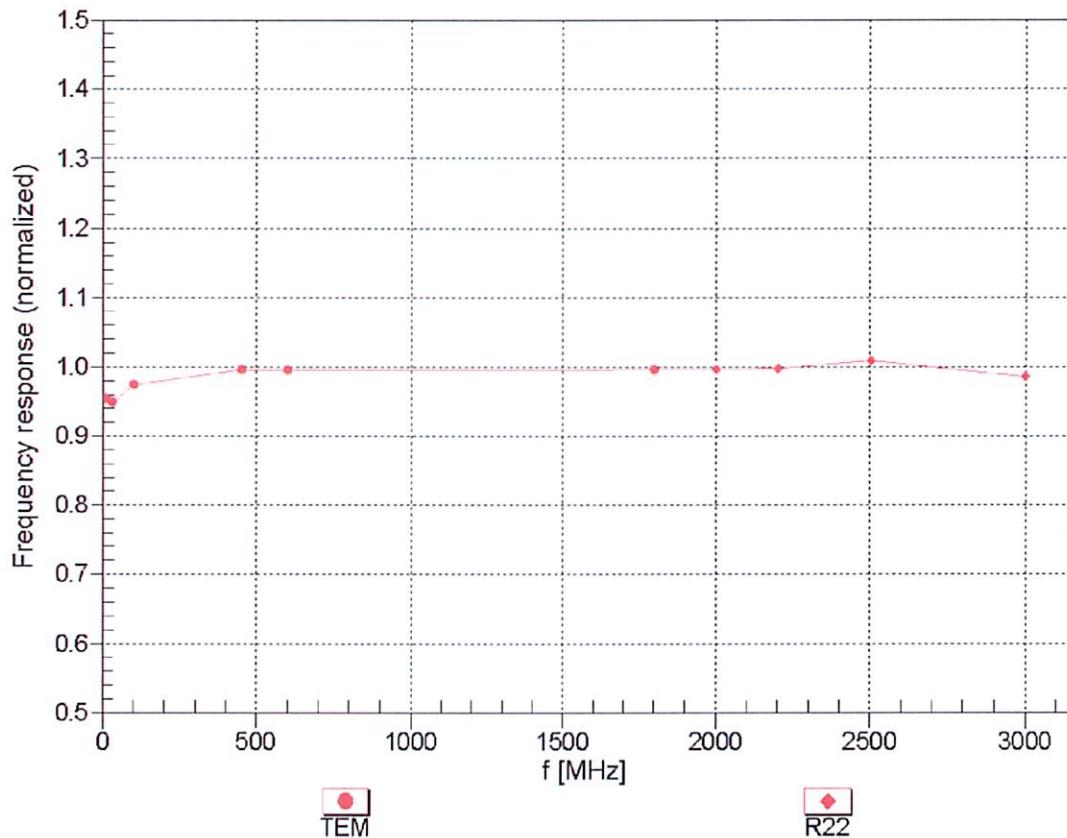



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$



f=600 MHz, TEM

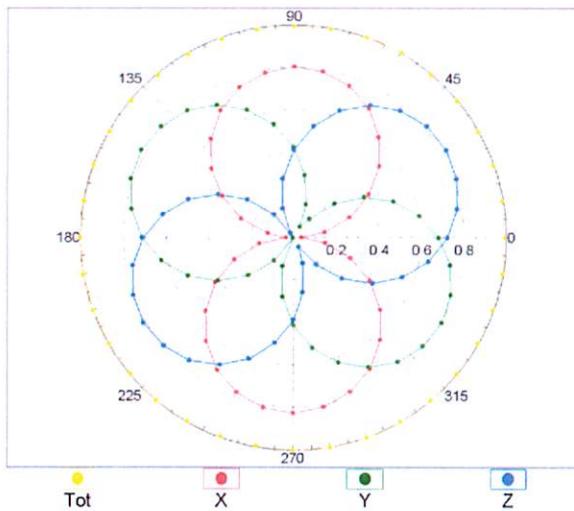

f=1800 MHz, R22

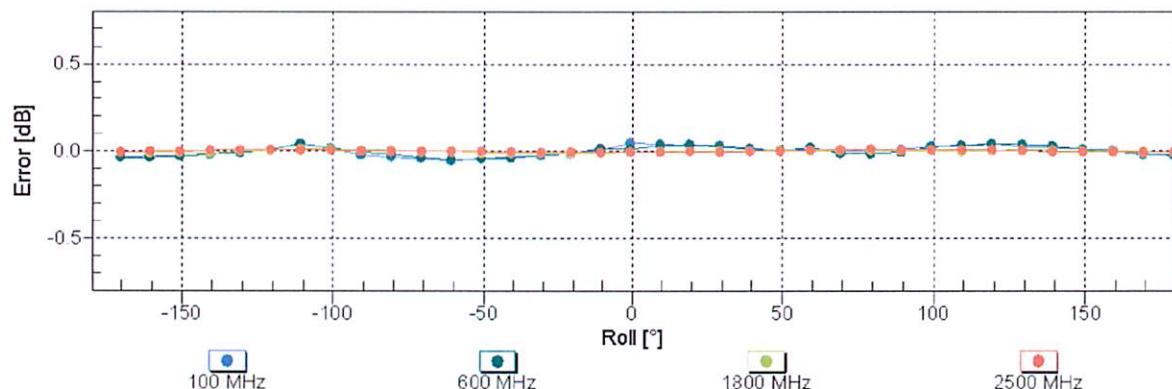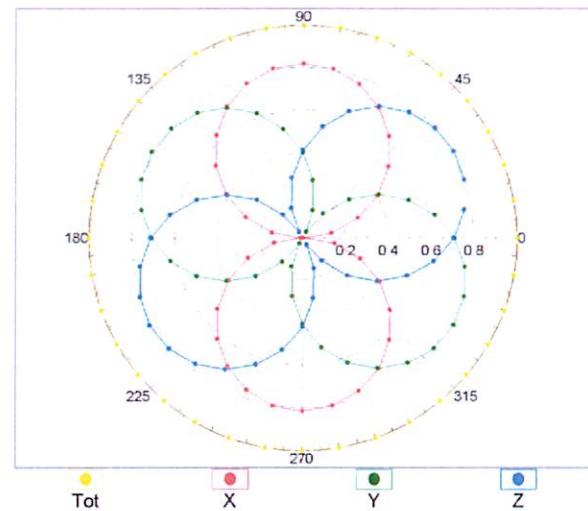
Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

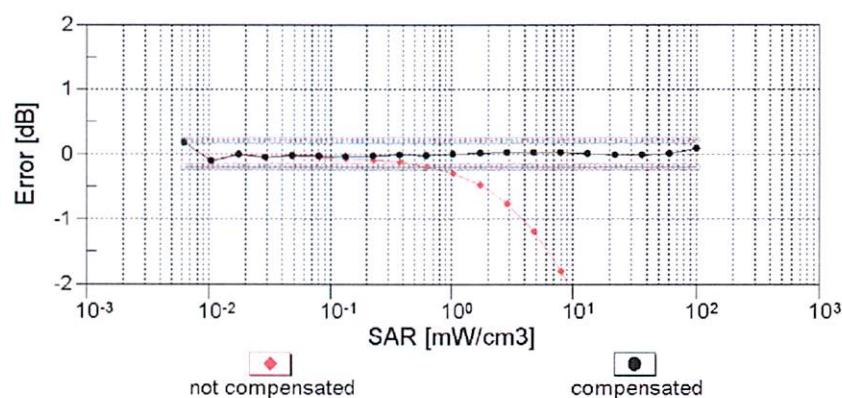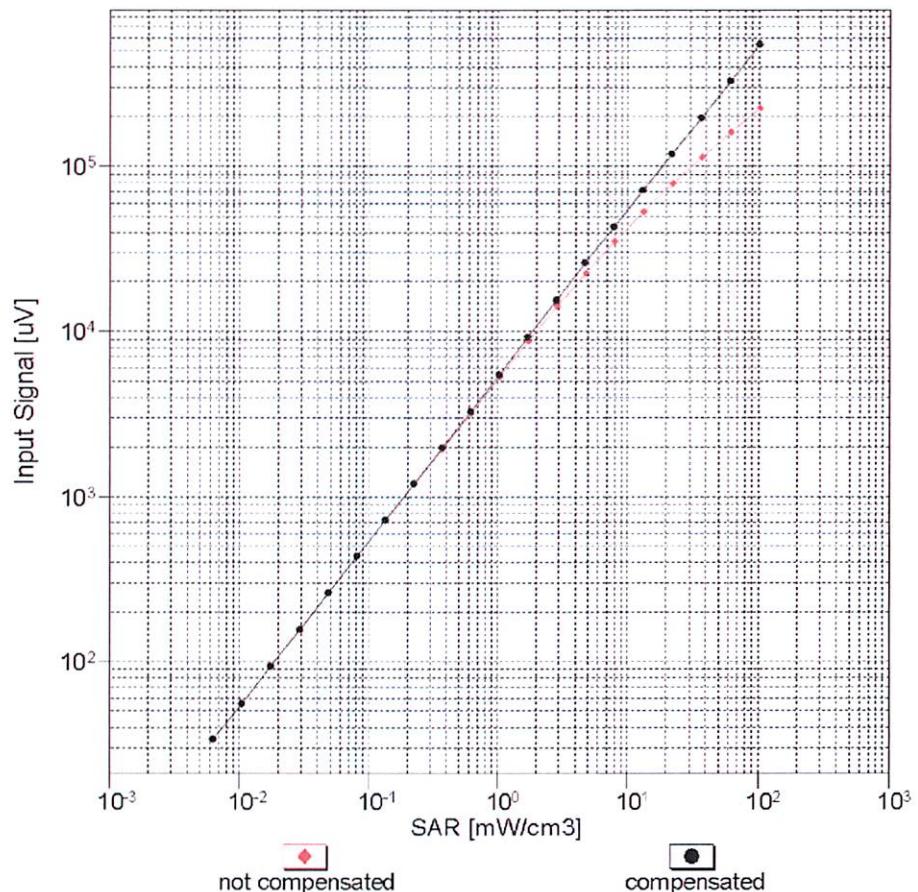


Uncertainty of Linearity Assessment:  $\pm 0.6\% (k=2)$

## Conversion Factor Assessment

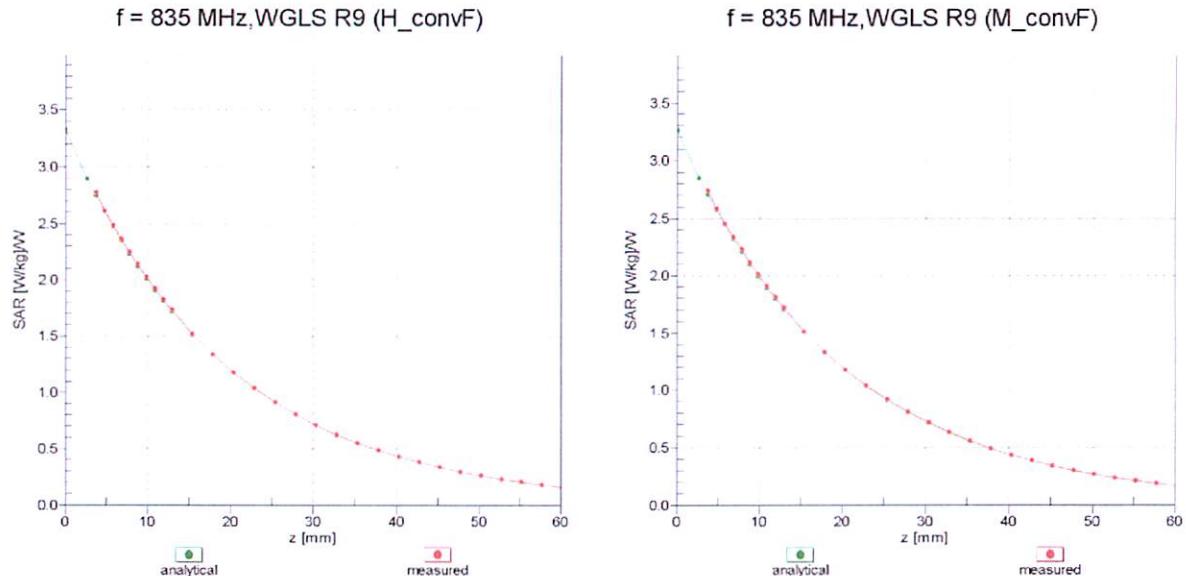

## Deviation from Isotropy in Liquid Error ( $\phi, \theta$ ), $f = 900 \text{ MHz}$

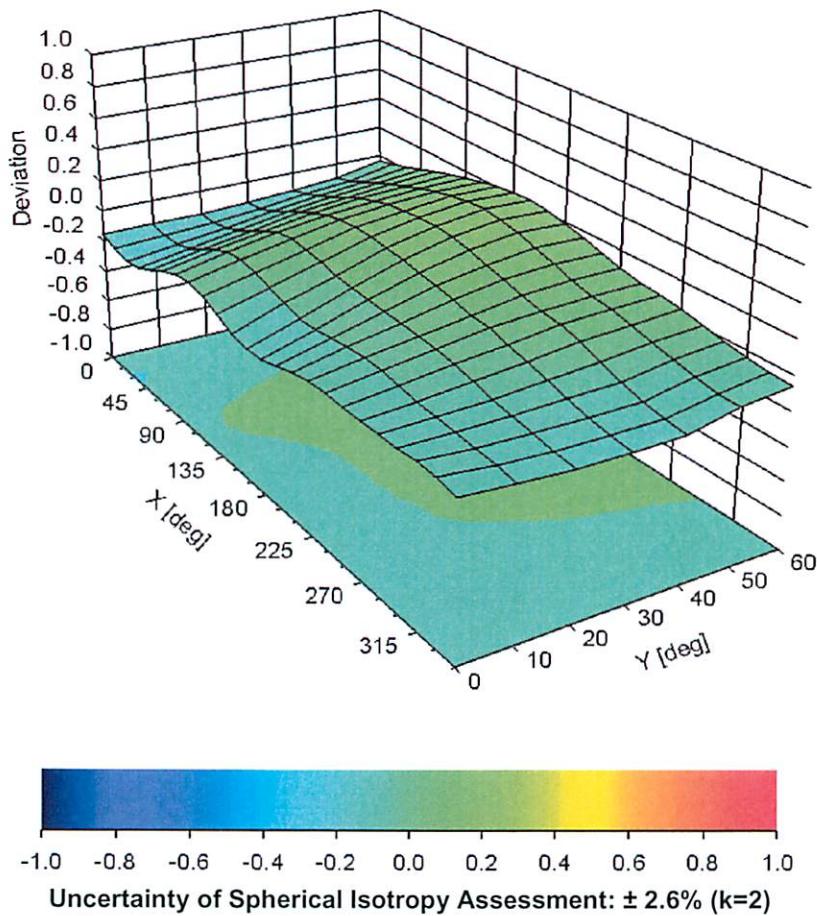

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-170.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

## **Additional Conversion Factors**

**for Dosimetric E-Field Probe**

Type:

**ET3DV6**

Serial Number:

**1590**

Place of Assessment:

**Zurich**

Date of Assessment:

**May 21, 2012**

Probe Calibration Date:

**April 24, 2012**

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 450, 835 and 900 MHz.

Assessed by:



## Dosimetric E-Field Probe ET3DV6 SN:1590

Conversion factor ( $\pm$  standard deviation)

**300  $\pm$  50 MHz**

*ConvF*

**8.3  $\pm$  9 %**

$\epsilon_r = 45.3 \pm 5\%$

$\sigma = 0.87 \pm 5\% \text{ mho/m}$

(head tissue)

### Important Note:

**For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.**

**Please see also DASY Manual.**

## Additional Conversion Factors for Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1590

Place of Assessment:

Zurich

Date of Assessment:

April 27, 2012

Probe Calibration Date:

April 24, 2012

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 450, 835 and 900 MHz.

Assessed by:



## Dosimetric E-Field Probe ET3DV6 SN:1590

Conversion factor ( $\pm$  standard deviation)

150  $\pm$  50 MHz      ConvF      9.3  $\pm$  10%

$\epsilon_r = 52.3 \pm 5\%$   
 $\sigma = 0.76 \pm 5\% \text{ mho/m}$   
(head tissue)

150  $\pm$  50 MHz      ConvF      8.6  $\pm$  10%

$\epsilon_r = 61.9 \pm 5\%$   
 $\sigma = 0.80 \pm 5\% \text{ mho/m}$   
(body tissue)

### Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.

Please see also DASY Manual.

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 5 & 7, 2012	<u>Test Report Serial No.</u> 101012PYK-T1201-S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Dec. 14, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational	

## APPENDIX G - BARSKI PHANTOM CERTIFICATE OF CONFORMITY

<b>Applicant:</b> Adaptive Digital Systems Inc	<b>FCC ID:</b> PYK-ADS-TX502	<b>Model:</b> TX-502	
<b>DUT Type:</b>	VHF Audio Transmitter		150-174 MHz
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 48 of 48

2378 Westlake Road  
Kelowna, B.C. Canada  
V1Z-2V2



Ph. # 250-769-6848  
Fax # 250-769-6334  
E-mail: [barskiind@shaw.ca](mailto:barskiind@shaw.ca)  
Web: [www.bcfiberglass.com](http://www.bcfiberglass.com)

## FIBERGLASS FABRICATORS

### Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01

Date: June 16, 2003

Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05

### Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: 

Daniel Chailler



**Fiberglass Planar Phantom - Top View**



**Fiberglass Planar Phantom - Front View**




**Fiberglass Planar Phantom - Back View**



**Fiberglass Planar Phantom - Bottom View**

## Dimensions of Fiberglass Planar Phantom

(Manufactured by Barski Industries Ltd. - Unit# 03-01)

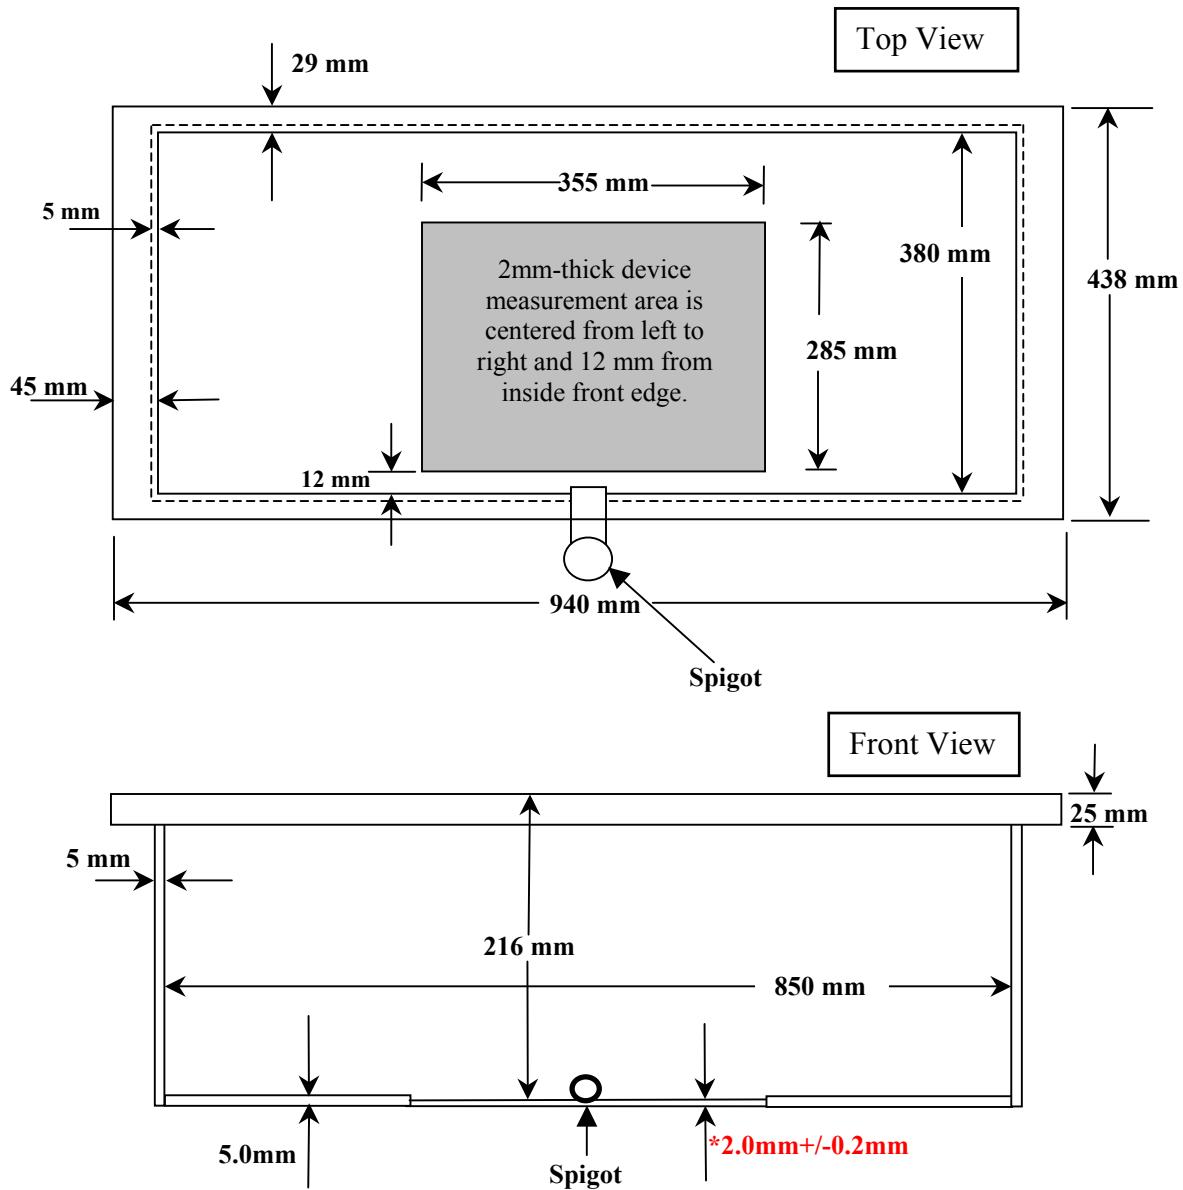

**Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.  
This drawing is not to scale.**