

## Nemko Korea CO., Ltd.

300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA  
TEL(031)322-2333 FAX(031)322-2332

### FCC EVALUATION REPORT FOR CERTIFICATION

#### Manufacture :

Thomson Multimedia Hong Kong Ltd.  
13/F, Ever Gain Centre, 28 On Muk Street,  
Siu Lek, Yuen, Shatin, Hong Kong.

Attn : B. H. Chiu

Dates of Tests : October 05 – October 15, 2001

Test Report No. : **NK 2B E 630.FCC**

Test Site : Nemko Korea Co., Ltd.  
EMC site, Korea.

FCC ID

MODEL

BRAND NAME

CONTACT PERSON

**PYPDPC-5R2**

*DPC-5.2*

*Integra*

**Thomson Multimedia Hong Kong Ltd.**

13/F, Ever Gain Centre, 28 On Muk Street, Siu Lek  
Yuen, Shatin, Hong Kong.

Mr. Bit Hon Chiu

Telephone No. : + 852-2686-2408

FCC Rule Part(s) : **Part 15 & 2**

Classification : FCC Class B Device (5 DVD Changer Player)

Port/Connector(s) : Audio OUT (2), Video OUT (1),  
Component Video OUT (1), RS-232 (1),  
S-Video OUT (1), Digital Coaxial OUT (1)

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

The test results of this report are deemed satisfactory evidence of compliance with Industry Canada Interference-Causing Equipment Standard ICES-003.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Test By : J.Y. YU  
Engineer



Reviewed By : H.H. Kim  
Manager & Chief Engineer

## TABLE OF CONTENTS

---

<b>SCOPE</b>	<b>3</b>
<b>INTRODUCTION (Site Description)</b>	<b>5</b>
<b>PRODUCT INFORMATION</b>	<b>6</b>
<b>DESCRIPTION OF TEST (Conducted Emissions)</b>	<b>7</b>
<b>DESCRIPTION OF TEST (Radiated Emissions)</b>	<b>8</b>
<b>LIST OF SUPPORT EQUIPMENT USED</b>	<b>9</b>
<b>TEST DATA (Conducted Emissions)</b>	<b>10</b>
<b>TEST DATA (Radiated Emissions)</b>	<b>11</b>
<b>PLOTS OF EMISSION</b>	<b>13</b>
Conducted Emissions Diagram	14-17
<b>SAMPLE CALCULATIONS</b>	<b>18</b>
<b>ACCURACY of MEASUREMENT</b>	<b>19</b>
<b>LIST of TEST EQUIPMENT</b>	<b>20</b>
<b>RECOMMENDATION/CONCLUSION</b>	<b>21</b>
<b>APPENDIX A - LABELLING REQUIREMENTS</b>	<b>23</b>
<b>APPENDIX B - CIRCUIT DIAGRAM</b>	<b>24</b>
<b>APPENDIX C - PHOTOGRAPHS of TEST SET-UP</b>	<b>25</b>
LINE-Conducted Test Picture	26
Radiated Test Picture	28
<b>APPENDIX D - EUT PHOTOGRAPHS</b>	<b>29</b>
<b>APPENDIX E - USER's MANUAL</b>	<b>41</b>
<b>APPENDIX F – Schematic Diagrams</b>	<b>42</b>

## MEASUREMENT REPORT

*Scope - Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.*

**Responsible Party\* :** *Thomson Multimedia Hong Kong Ltd.*

**Contact Person :** *Mr. Bit Hon Chiu*

Tel No.: + 852-2686-2408

Fax No.: + 852-2686-2450

**Manufacturer :** *Thomson Multimedia Hong Kong Ltd.*

13/F, Ever Gain Centre, 28 On Muk Street, Siu Lek

Yuen, Shatin, Hong Kong

Tel No.: + 852-2686-2408

- FCC ID: *PYPDPC-5R2*
- Trade / Model: *DPC-5.2*
- Brand Name: *Integra*
- EUT Type: *5 DCD Changer Player*
- Port/Connectors: Audio OUT (2), Video OUT (1),  
Component Video OUT (3),  
S-Video OUT (1), RS-232 (1),  
Digital Coaxial OUT (1)
- Classification: *FCC Class B*
- Rule Part(s): *FCC Part 15 & Part 2, ICES-003*
- Test Procedure(s): ANSI C63.4 (1992)
- Dates of Test: October 05 – October 15 , 2001
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: *NK 2B E 630. FCC*

\* *NOTE: Please refer to the duties and responsibilities of the Responsible Party attached.*

## INTRODUCTION

---

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **Thomson Multimedia Hong Kong Ltd.**

**FCC ID : PYPDPC-5R2, 5 DVD Changer Player.**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address is 300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

The area of Nemko Korea Corporation LTD. EMC Test Site is located in a mountain area at 50 Kilometers (30 miles) southeast and Seoul International Airport (Kimpo Airport), 30 Kilometers (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992.

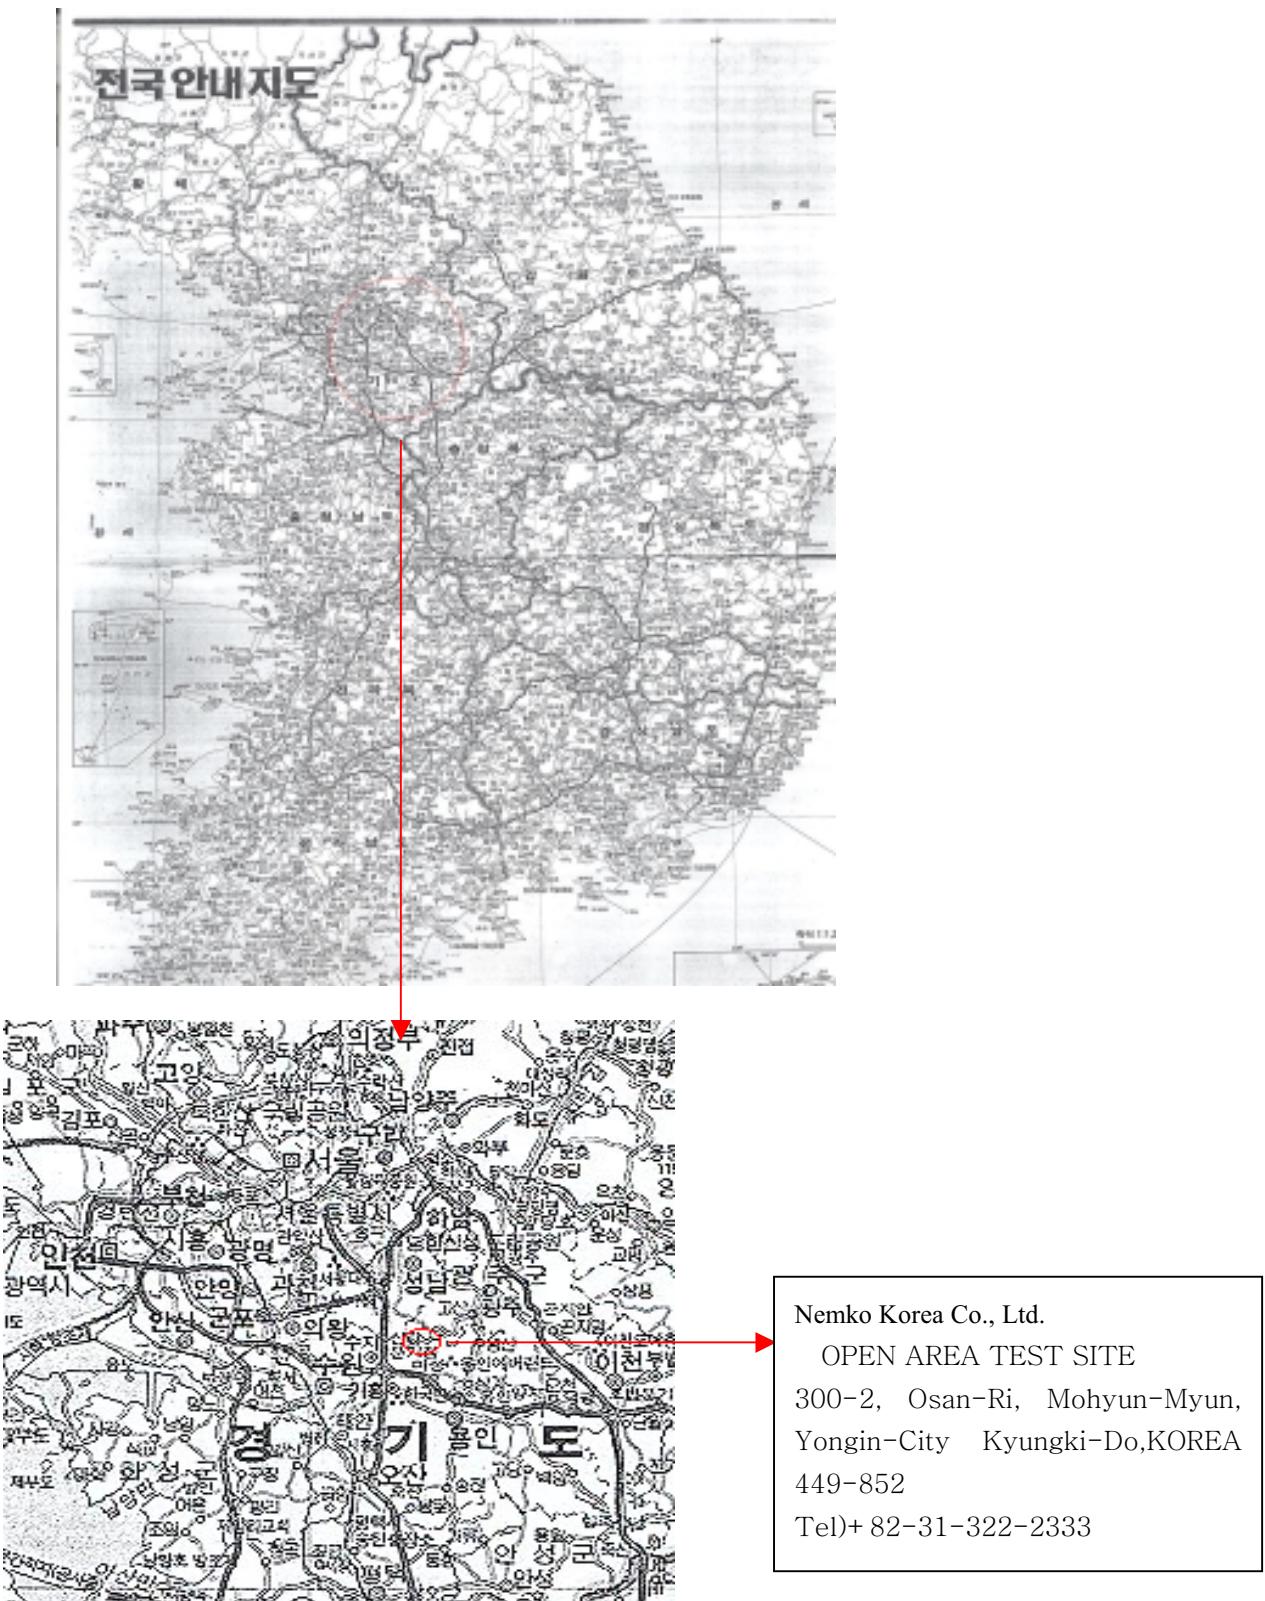


Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab and Kimpo Airport.

## PRODUCT INFORMATION

---

### Equipment Description:

The Equipment Under Test (EUT) is the *Thomson Multimedia Hong Kong Ltd.*  
**FCC ID: PYPDPC-5R2, 5 DVD Changer Player.**

**Clock :** 27.0 MHz (X501)  
 10.0 MHz (X901)

**Chipset(s) :** 74HCU04 (IC501),  
 CXP82324 (IC901)

**Port(s) :** Audio OUT (2), Video OUT (1),  
 Component Video OUT (3),  
 S-Video OUT (1), RS-232 (1),  
 Digital Coaxial OUT (1)

**Power Consumption :** AC 120V/60Hz

### **PWB Description**

Board Name	Part No.	Manufacture	S/N.	Remark
Main	5519763AXX	Thomson Audio Dongguam	N/A	
Front	55183070XX	Thomson Audio Dongguam	N/A	
Rear Output	55197620XX	Thomson Audio Dongguam	N/A	
Mecha Control	55156840XX	Thomson Audio Dongguam	N/A	
SMPS Power	55184690XX	Orientech Co., Ltd.	N/A	

EMI suppression device(s) installed in production:

- see circuit diagram ([Appendix B](#))

EMI suppression device(s) added and/or modified during testing:

- none

## DESCRIPTION OF TESTS

### Conducted Emissions

The Line conducted emission test facility is located inside a 4 X 7 X 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1mX 1.5M wooden table 0.8m height is placed 0.4m away from the vertical wall and 1.5m away from the side of wall of the shielded room

Rohde & Schwarz LISN and PMM lisn L3-32 50ohm/50uH line impedance stabilization network are bonded to the shielded room

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the PMM LISN. Power to the LISN s are filtered by high-current high insertion loss

Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1/2".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF out put of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 450KHz to 30MHz with 20msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver .(Rohde & Schwarz ESCS30).

The detector function was set to CISPR quasi-peak mode.

The bandwidth of receiver was set to 9KHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outletbox and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

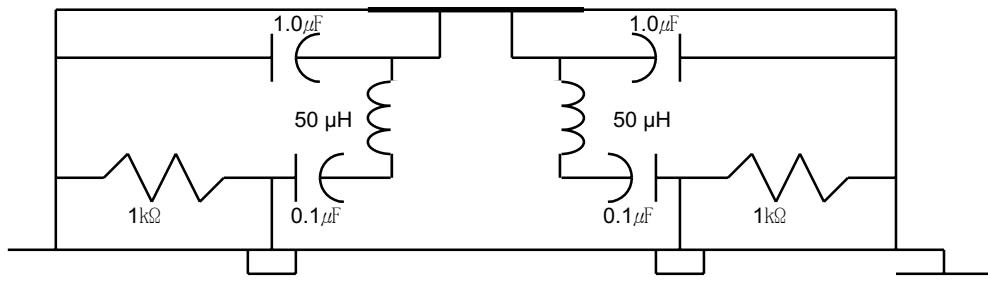


Fig. 2. LISN Schematic Diagram

## Radiated Emissions

Preliminary measurement were made indoors at 1 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found. The spectrum was scanned from 30 to 300MHz using biconical antenna and 30 to 1000MHz using log-eriodic antenna.

Above 1GHz, log periodic antenna (Rohde Schwarz HL025:upto 18GHz) was used.

Final Measurements were made outdoors at 3 or 10m test range using Logibicon Super Antenna(Schwarzbeck, VULB9166) or log periodic antenna.( Rohde Schwarz HL025).

The test equipment was placed on a wooden table.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver.(ESCS30)

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turn table containing the system was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outletbox and computer aux AC outlet,if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R/S signal generator.

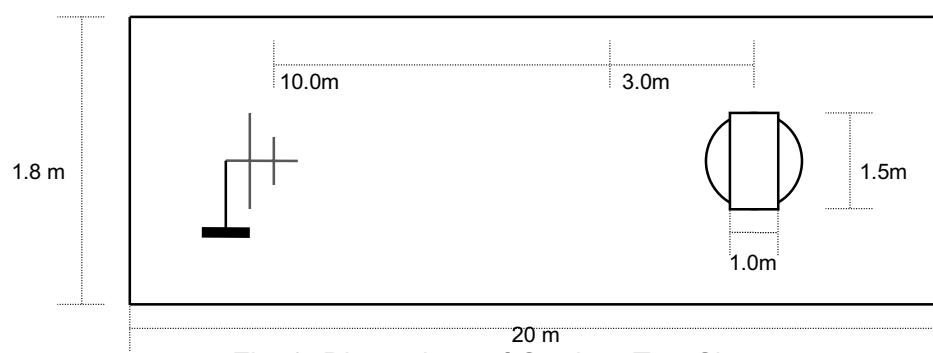


Fig. 3. Dimensions of Outdoor Test Site

## SUPPORT EQUIPMENT USED

---

<i>Description</i>	<i>Model No.</i>	<i>Spec.</i>	<i>Manufacture</i>	<i>S/N</i>	<i>Remark</i>
DVD Player (EUT)	<b>PYPDPC-5R2</b>	120V/60Hz	Thomson	N/A	1.5 M Non Shield Cable
RCA Cable	-	-	-	N/A	1.2 M Shield Cable
S-Video Cable	-	-	-	N/A	1.5 M Shield Cable
Component Video	-	-	-	N/A	1.5 M Shield Cable
Television	TLV-1491XKT	NTSC/PAL	ANAM	N/A	
Notebook	CM2080	P-III	Compaq	5Y12FP74KC49	
Printer	HP692C		HP	SG74TIC206	1.2m Shield D-sub cable
RS-232C	-	-	-	-	1.5m Shielded
Keyboard	SDM4500P	-	Samsung	-	1.8m shield Din cable
PS/2 Mouse	Intellimouse	-	Microsoft Co.	5299	1.8m shield Din cable
Test Disc	TDV-540	-	ABEX	N/A	

## TEST DATA

## Conducted Emissions

FCC ID : PYPDPC-5R2

## 1. Test Mode : DVD Play (Test DVD Disc 1kHz Signal & Color Bar; RS-232 Port Control)

FREQ (MHz)	LEVEL(dB $\mu$ V)	LINE	LIMIT( $\mu$ V)	( $\mu$ V)	MARGIN*(dB)
0.48	29.4	L1	250	29.51	18.6
4.41	33.6	L1	250	47.86	14.4
5.50	27.2	L1	250	22.91	20.8
18.43	35.8	L1	250	61.66	12.2
20.04	33.5	L1	250	47.32	14.5
23.58	25.7	N	250	19.28	22.3

## 2. Test Mode : DVD Play (Test DVD Disc 1kHz Signal & Color Bar)

FREQ (MHz)	LEVEL(dB $\mu$ V)	LINE	LIMIT( $\mu$ V)	( $\mu$ V)	MARGIN*(dB)
0.48	26.9	L1	250	22.13	21.1
3.61	26.8	N	250	21.88	21.2
7.47	27.2	N	250	22.91	20.8
15.69	29.3	L1	250	29.17	18.7
18.43	35.5	N	250	59.57	12.5
20.04	33.8	N	250	48.98	14.2

**Table 1. Line Conducted Emissions Tabulated Data**

## **NOTES:**

1. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
2. The limit for Class B device is  $250\mu V$  from 450 kHz to 30MHz.
3. Line L1 = Hot Line N = Neutral

\* Measurements using CISPR quasi-peak mode



Tested by **Jae Young, Yu**

**TEST DATA****Radiated Emissions****FCC ID : PYPDPC-5R2****Test Mode : DVD Play (Test DVD Disc 1kHz Signal & Color Bar: RS-232 Port Control)**

Frequency (MHz)	Reading (dB $\mu$ V)	Pol* (H/V)	AFCL+ Amp. (dB)**	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
56.83	54.1	H	-22.6	31.5	40.0	8.5
210.05	50.6	H	-14.5	36.1	43.5	7.4
243.00	54.0	H	-13.7	40.3	46.0	5.7
255.07	49.7	H	-13.4	36.3	46.0	9.7
270.07	55.0	V	-13.0	42.0	46.0	4.0
330.09	48.3	H	-11.5	36.8	46.0	9.2
391.26	46.0	V	-9.7	36.3	46.0	9.7
669.24	40.7	V	-2.5	38.2	46.0	7.8
851.33	35.6	V	2.0	37.6	46.0	8.4
972.01	32.4	V	4.4	36.8	46.0	9.2

\* Above 1GHz : Not significant or detectable.

**Table 2. Radiated Measurements at 3meters**

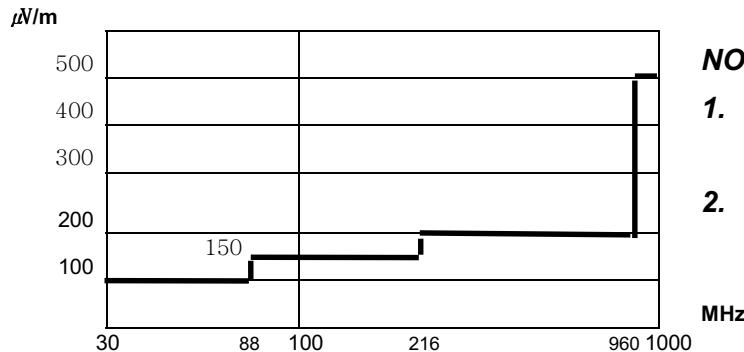


Fig. 4. Limits at 3 meters

**NOTES:**

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 4. Above 1GHz the limit is 500 $\mu$ V/m.

\* Pol. H =Horizontal      V=Vertical

\*\* AFCL+Amp. = Antenna Factor + Cable Loss + Amplifier.

\*\*\* Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.


---

Tested by **Jae Young, Yu**

## ***PLOTS OF EMISSIONS***


---

**1-1. DVD Play (L1)**  
*(RS-232 Port Controlled)*

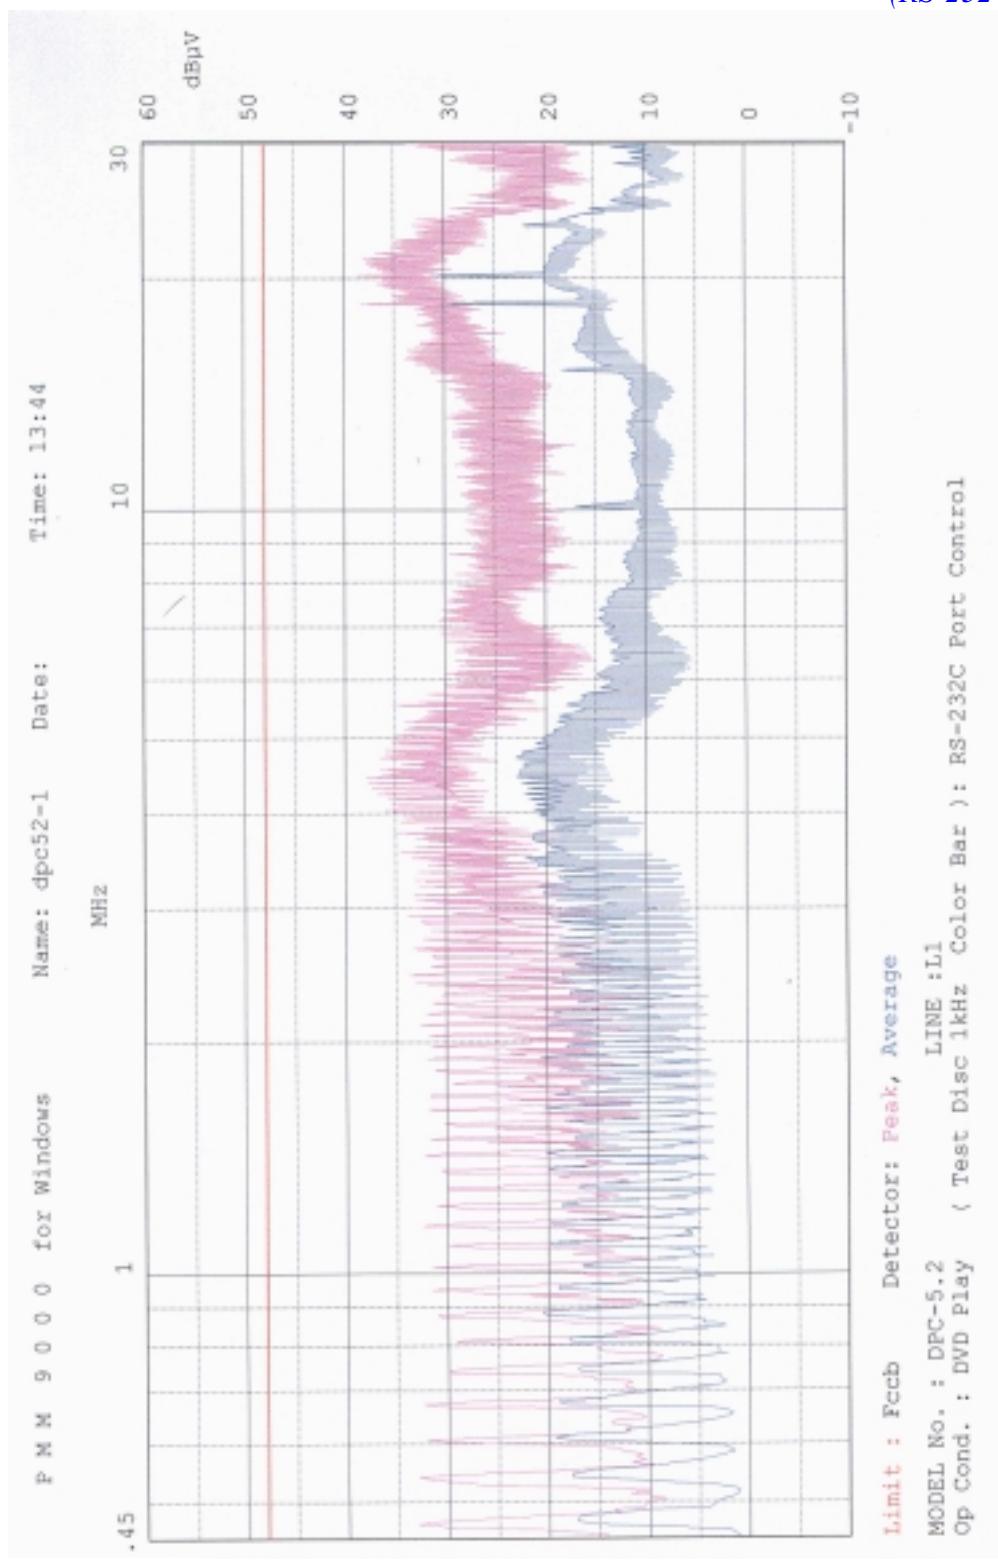


Tested Jae-Young, Yu

**1-2. DVD Play (Neutral)  
(RS-232 Port Controlled)**

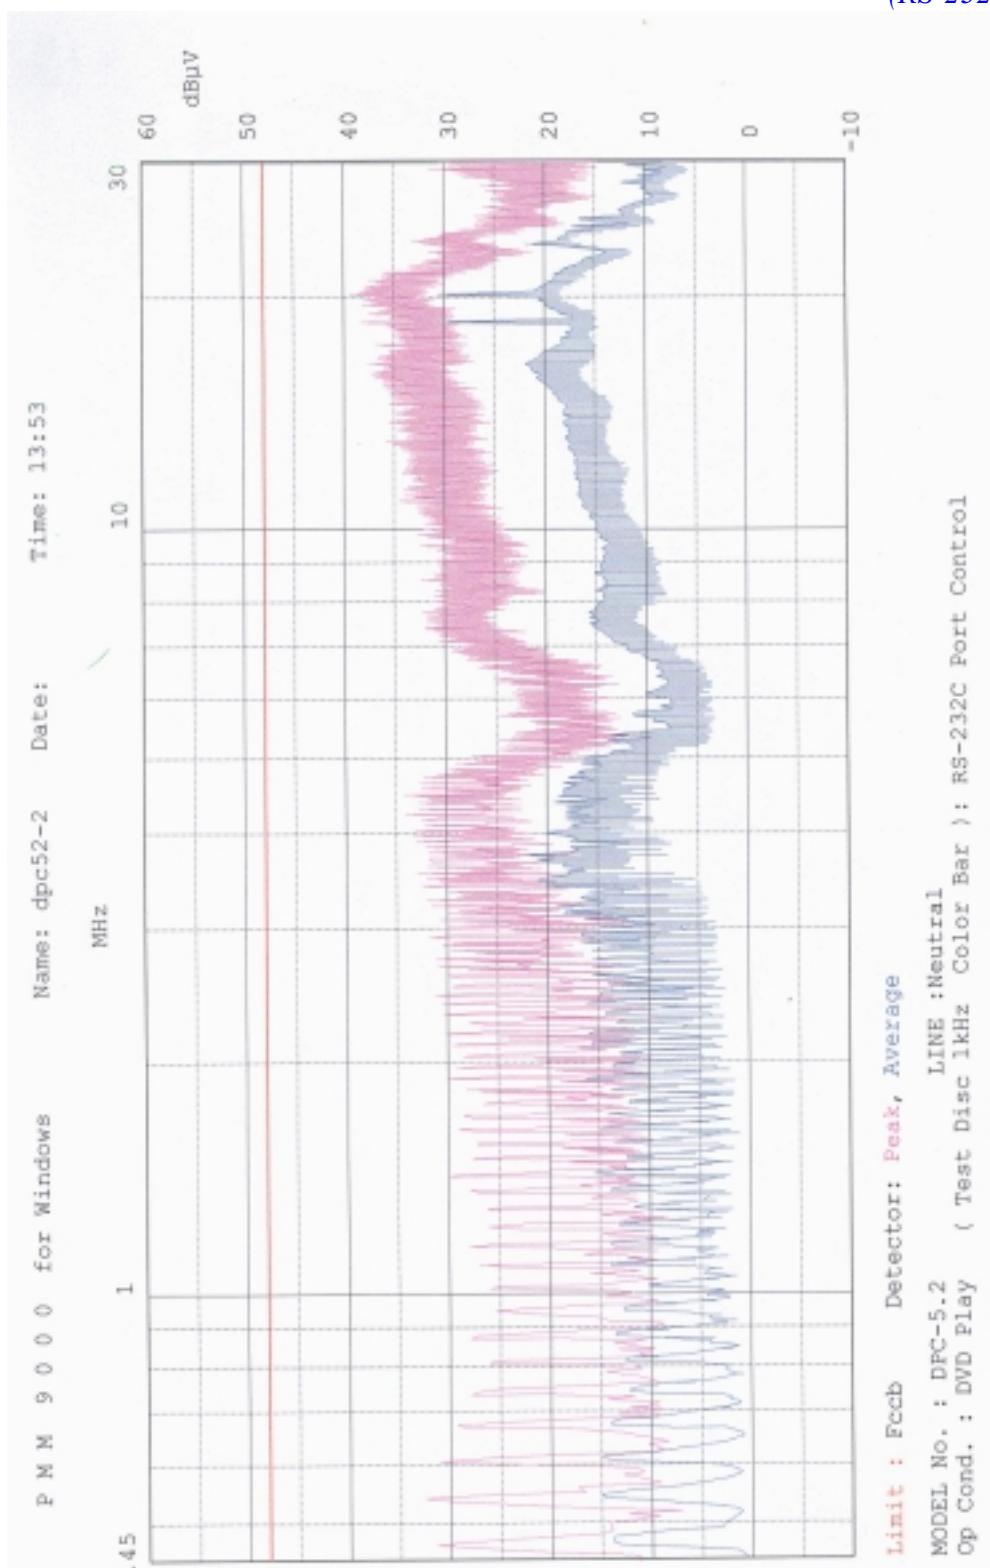


Tested Jae-Young, Yu

**2-1. DVD Play (L1)**

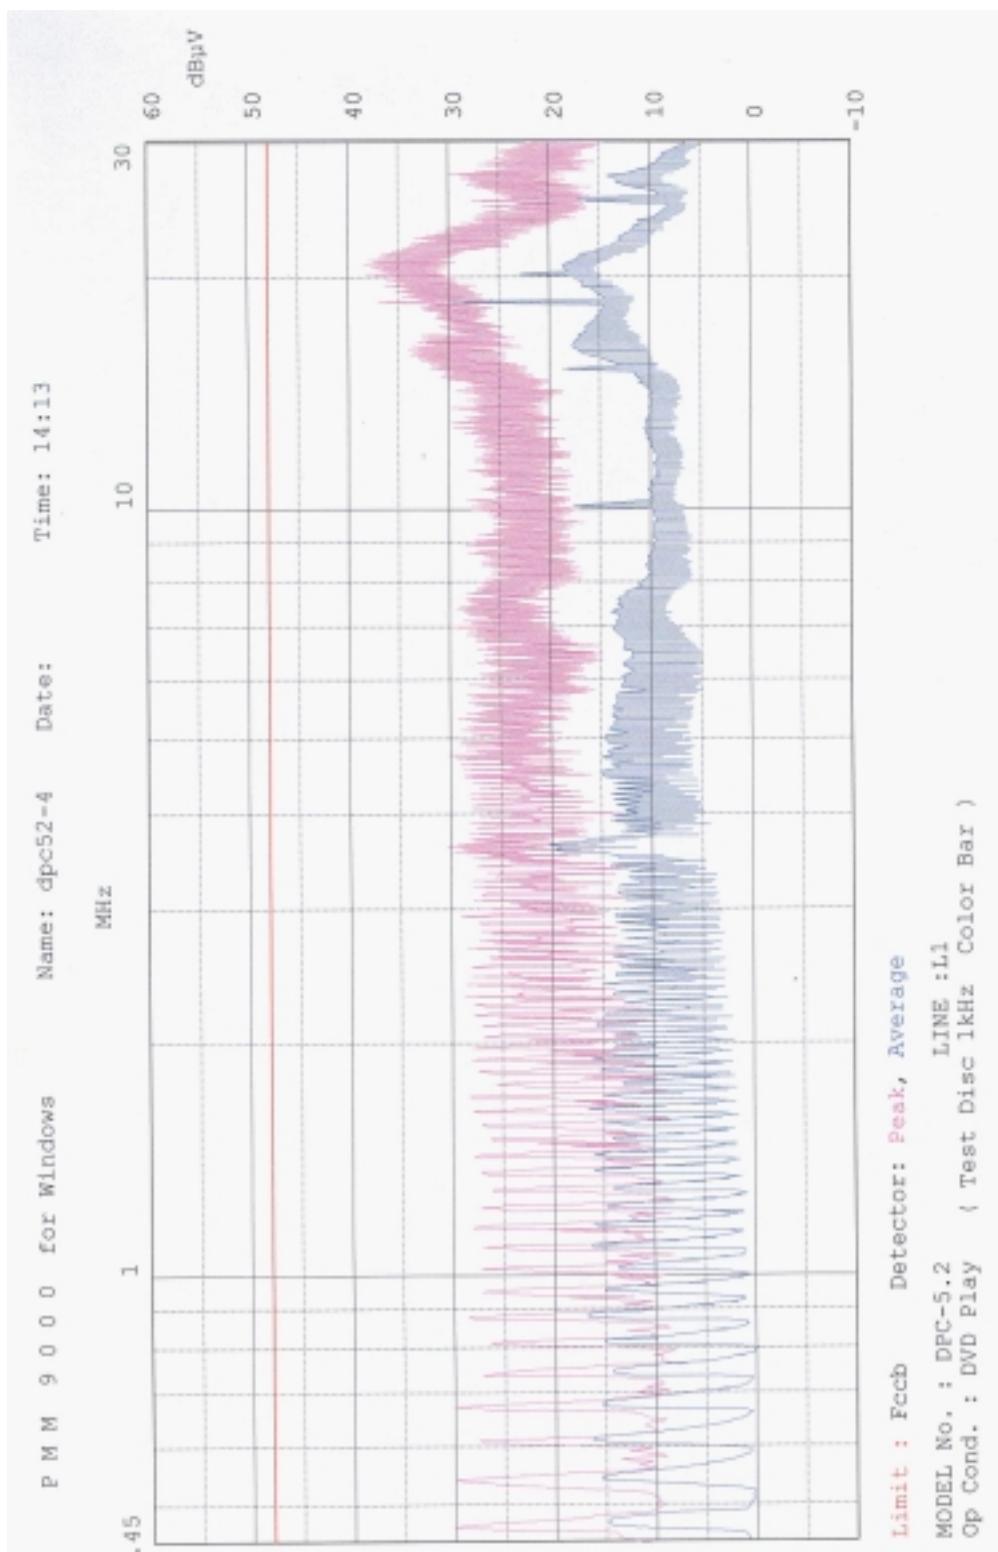

Tested Jae-Young, Yu

**2-2. DVD Play (Neutral)**

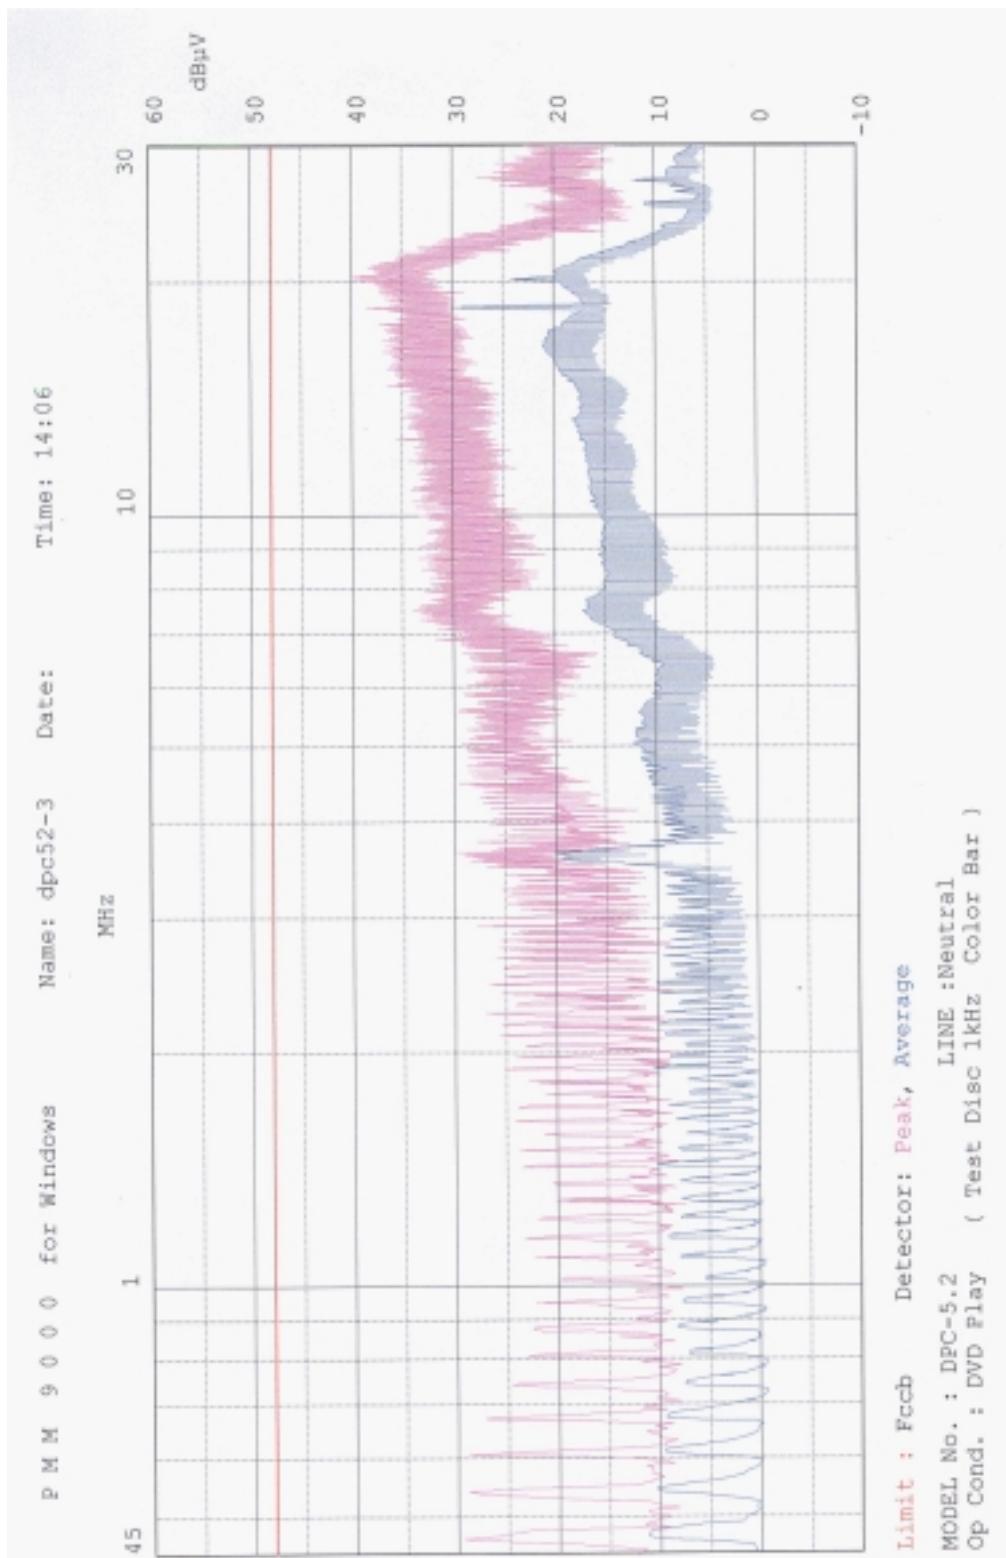

Tested Jae-Young, Yu

## SAMPLE CALCULATIONS

---

$$\text{dB}\mu\text{N} = 20 \log_{10} (\mu\text{N}/\text{m})$$

$$\mu\text{N} = 10^{(\text{dB}\mu\text{N}/20)}$$

### EX. 1.

@20.3 MHz

Class B limit = 250  $\mu\text{N}$  = 48.0 dB $\mu\text{V}$

Reading = 40.8 dB $\mu\text{N}$  (calibrated level)

$$10^{(40.8/20)} = 109.64 \mu\text{V}$$

$$\text{Margin} = 48.0 - 40.8 = 7.2$$

**7.2 dB below limit**

### EX. 2.

@57.7 MHz

Class B limit = 100  $\mu\text{N}/\text{m}$  = 40.0 dB $\mu\text{V}/\text{m}$

Reading = 19.1 dB $\mu\text{N}$  (calibrated level)

Antenna factor + Cable Loss = 10.12 dB

$$\text{Total} = 29.22 \text{ dB}\mu\text{N}/\text{m}$$

$$\text{Margin} = 40.0 - 29.22 = 10.78$$

**10.78 dB below the limit**

## ACCURACY OF MEASUREMENT

---

The Measurement Uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with the confidence level of 95%

### 1. Radiation Uncertainty Calculation

Contribution	Probability Distribution	Uncertainty(+/-dB)
Antenna Factor	Normal (k=2)	± 0.5
Cable Loss	Normal (k=2)	± 0.04
Receiver Specification	Rectangular	± 2.0
Antenna directivity		
Antenna Factor variation with Height		
Antenna Phase Center Variation	Rectangular	± 1.0
Antenna Factor Frequency Interpolation		
Measurement Distance Variation		
Site Imperfections	Rectangular	± 2.0
Mismatch:Receiver VRC $r_i=0.3$		
Antenna VRC $r_R=0.1(B_i)0.4(L_p)$	U-Shaped	+ 0.25 / - 0.26
Uncertainty Limits $20\log(1+/-r_i r_R)$		
System Repeatability	Std.deviation	± 0.05
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.77
Expended Uncertainty U	Normal (k=2)	± 3.5

### 2. Conducted Uncertainty Calculation

Contribution	Probability Distribution	Uncertainty(+/-dB)
Receiver Specification	Normal (k=2)	± 2.0
LISN coupling spec.	Normal (k=2)	± 0.4
Cable and input attenuator cal.	Rectangular	± 0.4
Mismatch:Receiver VRC $r_i=0.3$		
LISN vrc $r_g=0.1$	U-Shaped	± 0.26
Uncertainty Limits $20\log(1+/-r_i r_R)$		
System Repeatability	Std.deviation	± 0.68
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.18
Expended Uncertainty U	Normal (k=2)	± 2.4

**TEST EQUIPMENT**

No.	Instrument	Manufacturer	Model	Calibration
<b>1. EMI TEST SYSTEM</b>				
1	* Test Receiver	R & S	ESCS 30	2001. 02
2	* Test Receiver	PMM	PMM9000	2001. 06
3	* Amplifier	HP	8447F	2001. 05
4	* Amplifier	HP	8447F	2001. 08
5	Spectrum Analyzer	Advantest	R4136	2000. 12
6	* Logbicon Super Antenna	Schwarzbeck	VULB9166	2001. 02
7	Log-Periodic Antenna	R & S	HL025	2001. 02
8	Dipole Antenna	R & S	VHA9103	2001. 05
9	Dipole Antenna	R & S	UHA9105	2001. 05
10	Biconical Antenna	SchwarzbecK	VHA9103	2001. 01
11	Biconical Log Antenna	ARA	LPB-2520/A	2001. 01
12	Asorbing Clamp	R & S	MDS21	2001. 01
13	High Voltage Probe	R & S	ESH2-Z3	2001. 02
14	Signal Generater	R & S	SMP02	2001. 03
15	Matching Pad	R & S	RAM358_5414.02	2001. 05
16	* LISN	R & S	ESH3-Z5	2001. 04
17	* LISN	PMM	L3-9103	2001. 05
18	* Position Controller	EM Eng.	N/A	N/A
19	* Turn Table	EM Eng.	N/A	N/A
20	* Antenna Mast	EM Eng.	N/A	N/A
21	* Anechoic Chamber	EM Eng.	N/A	N/A
22	* Shielded Room	EM Eng.	N/A	N/A

\*) Test Equipment used during the test.

No.	Instrument	Manufacturer	Model	Calibration
<b>2. RADIATED IMMUNITY SYSTEM</b>				
1	Signal Generator	R & S	SMY01	2000. 12
2	Function Generator	HP	33.20A	2001. 02
3	Power Amplifier	Noiseken	NA25MF1G2010C	2001. 04
4	Power Sensor	HP	8482A	2001. 02
5	Power Meter	HP	E4419B	2001.04
6	Biconical Antenna	EMCO	3109	2001. 01
7	Biconical log Antenna	ARA	LPB-2520/A	2001. 01
8	Wideband field probe	CHASE	EMC-20	2001. 01
<b>3. CONDUCTED IMMUNITY SYSTEM</b>				
1	Power Amplifier	Noiseken	NA01K80M5C	2001. 04
2	Current Monitor Probe	Noiseken	NMP-33-1	2001. 02
3	Attenuator	TME	CFA-10NPJ-20	
4	Attenuator	TME	CFA-100ANJJ-3	
5	CDN	Noiseken	NCDN-M1-16A	2001. 02
6	CDN	Noiseken	NCDN-M2-16A	2001. 02
7	CDN	Noiseken	NCDN-M3-16A	2001. 02
8	CDN	Noiseken	NCD-T2	2001. 02
9	CDN	Noiseken	NCD-T4	2001. 02
10	150-50ohm adapter	Noiseken	NCDN-150-50-CF	2001. 02
11	Termination	TME	CT-01BP	N/A
12	Termination	TME	CT-10NP	N/A
13	EM Clamp	Noiseken	NEM-32mm EM Clamp	2001. 02

\*) Test Equipment used during the test.

## ***RECOMMENDATION/CONCLUSION***

---

The data collected shows that the ***Thomson Multimedia Hong Kong Ltd.***


**FCC ID: PYPDPC-5R2, 5 DVD Changer Player.** complies with §15.107 and 15.109 and 15.111 of the FCC Rules. The highest emission observed was at **18.43 MHz** for conducted emissions with a margin of **12.2 dB** and at **270.07 MHz** for radiated emissions with a margin of **4.0 dB**.

## APPENDIX A – SAMPLE LABEL

### Labelling Requirements

The sample label shown shall be *permanently affixed* at a conspicuous location on the device and be readily visible to the user at the time of purchase.

**FCC ID: PYPDPC-5R2**

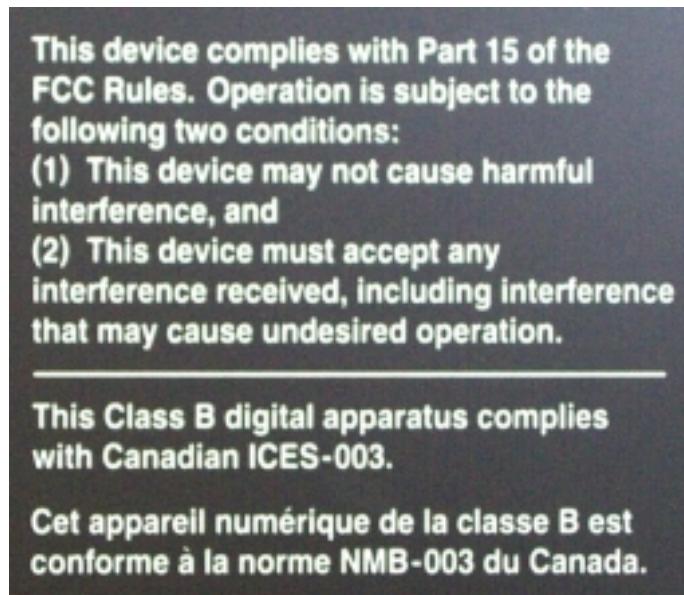

## *APPENDIX B – CIRCUIT DIAGRAM*

---

## *APPENDIX E – USER'S MANUAL*

---

## *APPENDIX F – Schematic Diagrams*

---