



# FCC COMPLIANCE TEST REPORT

*Technical Statement of Conformity*  
in accordance with 47 CFR Part 15 Subpart C

## The product

**Equipment Under Test** : *Bluetooth Keyboard*  
**Model Number** : *QWERTYX-V2*  
**Product Series** : *QWERTYX-V2SV, KBK01-V2, BT-7301*  
**Report Number** : *HA150352-RA*  
**Issue Date** : *27-May-2015*  
**Test Result** : *Compliance*

*is produced by*

*Apogee Inc.*

*1405 Pioneer Street Brea, CA 92821 USA*



**HongAn TECHNOLOGY CO., LTD.**

NO.15-1, CWEISHUH KENG, CWEIPIN VILLAGE,  
LINKOU, TAIPEI COUNTY,  
TAIWAN, R. O. C.

TEL: +886-2-26030362  
FAX: +886-2-26019259  
E-mail: [hatlab@ms19.hinet.net](mailto:hatlab@ms19.hinet.net)

**BSMI Registration No.:** *SL2-IN-E-0023, SL2-A1-E-0023,  
SL2-IS-E-0023, SL2-R1-E-0023,  
SL2-R2-E-0023, SL2-L1-E-0023*

**FCC Designation No.:** *TW1071*  
**TAF Accreditation No.:** *1163*  
**VCCI Registration No.:** *R-2156, C-2329, T-219*

# Contents

<b>1</b>	<b>General Description</b>	<b>6</b>
1.1	<i>Description of EUT</i>	6
1.2	<i>Test Instruments</i>	8
1.3	<i>Auxiliary Equipments</i>	9
1.4	<i>EUT SETUP</i>	9
1.5	<i>Identifying the Final Test Mode</i>	9
1.6	<i>Final Test Mode</i>	10
1.7	<i>Condition of Power Supply</i>	10
1.8	<i>EUT Configuration</i>	10
1.9	<i>Test Methodology</i>	10
1.10	<i>General Test Procedures</i>	10
1.11	<i>Modification</i>	10
1.12	<i>FCC Part 15.205 restricted bands of operations</i>	11
1.13	<i>Qualification of Test Facility</i>	12
<b>2</b>	<b>Power line Conducted Emission Measurement</b>	<b>13</b>
2.1	<i>Test Instruments</i>	13
2.2	<i>Test Arrangement and Procedure</i>	13
2.3	<i>Limit (§ 15.207)</i>	13
2.4	<i>Test Result</i>	13
<b>3</b>	<b>Radiated Emission Test</b>	<b>14</b>
3.1	<i>Test Instruments</i>	14
3.2	<i>Test Arrangement and Procedure</i>	14
3.3	<i>Limit (§ 15.205 &amp; § 15.209)</i>	15
3.4	<i>Test Result</i>	16
<b>4</b>	<b>20 dB Bandwidth</b>	<b>25</b>
4.1	<i>Test Instruments</i>	25
4.2	<i>Test Arrangement and Procedure</i>	25
4.3	<i>Limit</i>	25
4.4	<i>Test Result</i>	25
<b>5</b>	<b>Hopping Frequency Separation</b>	<b>35</b>
5.1	<i>Test Instruments</i>	35
5.2	<i>Test Arrangement and Procedure</i>	35
5.3	<i>Limit (§ 15.247(a)(1))</i>	35
5.4	<i>Test Result</i>	35

<b>6 Number of Hopping Channels</b>	<b>40</b>
6.1 <i>Test Instruments</i>	40
6.2 <i>Test Arrangement and Procedure</i>	40
6.3 <i>Limit (§ 15.247(a)(1)(iii))</i>	40
6.4 <i>Test Result</i>	40
<b>7 Average Time of Occupancy</b>	<b>42</b>
7.1 <i>Test Instruments</i>	42
7.2 <i>Test Arrangement and Procedure</i>	42
7.3 <i>Limit (§ 15.247(a)(1)(iii))</i>	42
7.4 <i>Test Result</i>	42
<b>8 Peak Output Power</b>	<b>62</b>
8.1 <i>Test Instruments</i>	62
8.2 <i>Test Arrangement and Procedure</i>	62
8.3 <i>Limit (§ 15.247(b))</i>	62
8.4 <i>Test Result</i>	62
<b>9 100kHz Bandwidth of Band Edges</b>	<b>67</b>
9.1 <i>Test Instruments</i>	67
9.2 <i>Test Arrangement and Procedure</i>	67
9.3 <i>Limit (§ 15.247(d))</i>	67
9.4 <i>Test Result</i>	67
<b>10 Spurious RF Conducted Emissions</b>	<b>74</b>
10.1 <i>Test Instruments</i>	74
10.2 <i>Test Arrangement and Procedure</i>	74
10.3 <i>Limit (§ 15.247(d))</i>	74
10.4 <i>Test Result</i>	74
<b>11 Antenna requirement</b>	<b>78</b>
11.1 <i>Limit (§ 15.203)</i>	78
11.2 <i>Test Result</i>	78
<b>12 Information about the FHSS characteristics</b>	<b>79</b>
12.1 <i>Pseudorandom Frequency Hopping Sequence</i>	79
12.2 <i>Example of a 79 hopping sequence in data mode:</i>	79
12.3 <i>Equal Hopping Frequency Use</i>	79
<b>13 Photographs of the Tests</b>	<b>80</b>
13.1 <i>Power line Conducted Emission Test (at Mains Terminals)</i>	80
13.2 <i>Radiated Disturbances Emission Test</i>	81
<b>14 Photographs of the EUT</b>	<b>82</b>

# Test Result Certification

<b>Applicant</b>	: Kanex Inc.
<b>Address of Applicant</b>	: 1405 Pioneer Street Brea CA 92821 USA
<b>Manufacturer</b>	: Dongguan You Hong Plastic Electronics Co., LTD.
<b>Address of Manufacturer</b>	: Zhenhua Road, Tielukeng Village, Qishi Town, Dongguan City, China.
<b>Trade Name</b>	: Kanex/ LEXKING
<b>Equipment Under Test</b>	: Bluetooth Keyboard
<b>Model Number</b>	: QWERTYX-V2
<b>Product Series</b>	: QWERTYX-V2SV, KBK01-V2, BT-7301
<b>FCC ID</b>	: PYW-QWERTYX-V2
<b>Filing Type</b>	: Certification
<b>Sample Received Date</b>	: 14-May-2015
<b>Test Standard</b>	:

FCC Part 15 Subpart C §15.247

**Deviations from standard test methods & any other specifications : NONE**

**Remark:**


1. This report details the results of the test carried out on one sample.
2. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in both ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.203, 15.207, 15.209, 15.247.
3. This report applies to the above sample only and shall not be reproduced in part without written approval of HongAn Technology Co., Ltd.



**Documented by:**

2015-05-27

Kay Wang/ ADM. Dept Staff



**Tested by:**

2015-05-22

Eason Hsieh / ENG. Dept. Staff



**Approved by:**

**Date:** 2015-05-27

Peter Chin / Section Manager

## Summary of Test Result

	Test Item	Applicable Standard	Test Result
1	Antenna Requirement	FCC part 15 subpart C §203	Compliance
2	Conducted limits	FCC part 15 subpart C §207	Not applicable
3	Radiated emission limits	FCC part 15 subpart C §209	Compliance
4	20 dB Bandwidth	FCC part 15 subpart C §247(a)(1)	Compliance
5	Hopping Frequency Separation	FCC part 15 subpart C §247(a)(1)	Compliance
6	Number of Hopping Channels	FCC part 15 subpart C §247(a)(1)	Compliance
7	Average Time of Occupancy	FCC part 15 subpart C §247(a)(1)(iii)	Compliance
8	Peak Output Power	FCC part 15 subpart C §247(b)	Compliance
9	100kHz Bandwidth of Band Edges	FCC part 15 subpart C §247(d)	Compliance
10	Spurious RF Conducted Emissions	FCC part 15 subpart C §247(d)	Compliance

# 1 General Description

## 1.1 Description of EUT

Equipment Under Test	:	Bluetooth Keyboard							
Model Number of EUT	:	QWERTYX-V2							
Product Series	:	QWERTYX-V2SV, KBK01-V2, BT-7301							
Power Supply	:	AAA Battery x 2 DC 3 V							
Frequency Range	:	2402~2480 MHz							
Transmit Power	:	-18.78 dBm							
Number of Channels	:	79 Channels							
Carrier Frequency of Each Channel	:	00	2402	20	2422	40	2442	60	2462
		01	2403	21	2423	41	2443	61	2463
		02	2404	22	2424	42	2444	62	2464
		03	2405	23	2425	43	2445	63	2465
		04	2406	24	2426	44	2446	64	2466
		05	2407	25	2427	45	2447	65	2467
		06	2408	26	2428	46	2448	66	2468
		07	2409	27	2429	47	2449	67	2469
		08	2410	28	2430	48	2450	68	2470
		09	2411	29	2431	49	2451	69	2471
		10	2412	30	2432	50	2452	70	2472
		11	2413	31	2433	51	2453	71	2473
		12	2414	32	2434	52	2454	72	2474
		13	2415	33	2435	53	2455	73	2475
		14	2416	34	2436	54	2456	74	2476
		15	2417	35	2437	55	2457	75	2477
		16	2418	36	2438	56	2458	76	2478
		17	2419	37	2439	57	2459	77	2479
		18	2420	38	2440	58	2460	78	2480
		19	2421	39	2441	59	2461	-	-
Antenna Specification	:	PCB Antenna/ Gain: 3 dBi							
Modulation Technique	:	Bluetooth 3.0 FHSS Bluetooth : GFSK							
Transmit Data Rate	:	Bluetooth : 1Mbps							



<b>Specification</b>	<b>Dimensions</b> : 442 mm (L) X 124 mm (W) X 25 mm (H) <b>Weight</b> : 480g <b>Function</b> : The EUT is a Bluetooth Keyboard. ※For more detail specification, please refer to the User Manual.
----------------------	---

## 1.2 Test Instruments

HA1

Instrument Name	Manufacture Mode	Model Number	Serial Number	Last Cal. Date	Next Cal. Date
RF Amplifier	AR	15S1G3	306578	11-AUG-2014	11-AUG-2015
EMI Receiver	R&S	ESCI	100615	03-MAR-2015	03-MAR-2016
Spectrum Analyzer	R&S	FSL6	100323	11-JUN-2014	11-JUN-2015
Spectrum Analyzer	Advantest	R3172	101202158	24-JUN-2014	24-JUN-2015
Preamplifier	WIRELESS	FPA-6592G	060009	09-JUL-2014	09-JUL-2015
Preamplifier	HD	HD17187	004	04-AUG-2014	04-AUG-2015
Bilog Antenna	TESEQ	CBL6111D	25769	03-MAR-2015	03-MAR-2016
Bilog Antenna	Schaffner	CBL6112B	2860	12-AUG-2014	12-AUG-2015
Double-Ridged Waveguide Horn	EMCO	3115	9912-5992	04-MAY-2015	04-MAY-2016
Temp. & Humidity Chamber	Giant Force	GTH-150-20-SP-AR	MMA0907-012	22-JUL-2014	22-JUL-2015
Horn Antenna (18-40GHz)	Com-Power	AH-840	101042	03-Jul-2014	03-Jul-2015
Microwave Preamplifier	Com-Power	PAM-840	461269	02-Jul-2014	02-Jul-2015
L.I.S.N.	Mess Tec	NNB-2/16Z	03/1006	24-Jan-2015	24-Jan-2016
L.I.S.N.	EMCIS	LN2-16	LN04023	01-Aug-2014	01-Aug-2015

※ The test equipments used are calibrated and can be traced to National ITRI and International Standards.

## 1.3 Auxiliary Equipments


### 1.3.1. Provided by HongAn Technology Co., Ltd. for Emission Test.

No.	Equipment	Model No.	Serial No.	EMC Approved	Brand	Description	
						Data Cable	Power Cable
1	Notebook	N61J	N61JV-021A520	FCC DoC	ASUS	Adapter to Notebook Unshielded*1.8 m	AC to Adapter Unshielded*1.8 m
2	Bluetooth Test Board	N/A	N/A	N/A	N/A	N/A	N/A

### 1.3.2. Provided by the Manufacturer

N/A

## 1.4 EUT SETUP

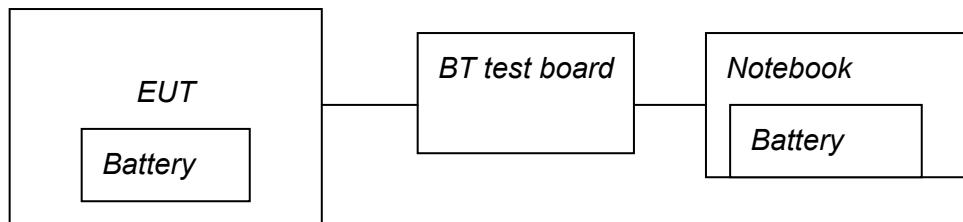

Note: Main Test Sample: QWERTYX-V2

## 1.5 Identifying the Final Test Mode

1. Mode 1: TX BT mode (1Mbps) CH 00.
2. Mode 2: TX BT mode (1Mbps) CH 39.
3. Mode 3: TX BT mode (1Mbps) CH 78.

Note:

1. After pre-test, we identified that the TX (Packet type DH5 and X axis) was most likely to cause maximum disturbance and most likely to be susceptible to disturbance. Therefore, the Final Assessment was performed for the worst case.
2. The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.
3. Channel Low (2402 MHz), Mid (2441 MHz) and High (2480 MHz) were chosen for full testing.
4. According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.
5. new dry batteries were used during all hereafter testing.

## 1.6 Final Test Mode

*Conducted Emission: Mode 1.*

*Field Strength: All Mode.*

*Radiated Emission (30~1000 MHz): Mode 1.*

*Radiated Emission (1~26.5GHz): All Mode.*

## 1.7 Condition of Power Supply

*DC 3 V, AAA battery x 2.*

## 1.8 EUT Configuration

1. *Setup the EUT as shown in Sec.1.4 Block Diagram.*
2. *Turn on the power of all equipments.*
3. *Activate the selected Final Test Mode.*

## 1.9 Test Methodology

*The tests documented in this report were performed in accordance with ANSI C63.4 (2003) and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.203, 15.207, 15.209 and 15.247.*

## 1.10 General Test Procedures

### Conducted Emissions

*The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.3 of ANSI C63.4 (2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.*

### Radiated Emissions

*The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. The EUT was designed to be mounted on back of front seat, according to the requirements in Section 13.4.1 of ANSI C 63.4 (2003), only one axe of the EUT has to be measured.*

## 1.11 Modification

*N/A*

## 1.12 FCC Part 15.205 restricted bands of operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37635-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

## 1.13 Qualification of Test Facility

<b>BSMI Certificate No.</b>	: <i>SL2-IS-E-0023, SL2-IN-E-0023, SL2-R1-E-002 3, SL2-R2-E-0023, SL2-A1-E-0023, SL2-L1-E-0023.</i>
<b>FCC Designation No.</b>	: <i>TW1071</i>
<b>TAF Accreditation No.</b>	: <i>1163</i>
<b>VCCI Certificate No.</b>	: <i>R-2156, C-2329, T-219</i>

## 2 Power line Conducted Emission Measurement

### 2.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

### 2.2 Test Arrangement and Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### 2.3 Limit (§ 15.207)

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency (MHz)	Limits (dBuV)	
	Q.P. (Quasi-Peak)	A. V. (Average)
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### 2.4 Test Result



Not applicable.

### 3 Radiated Emission Test

#### 3.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

#### 3.2 Test Arrangement and Procedure

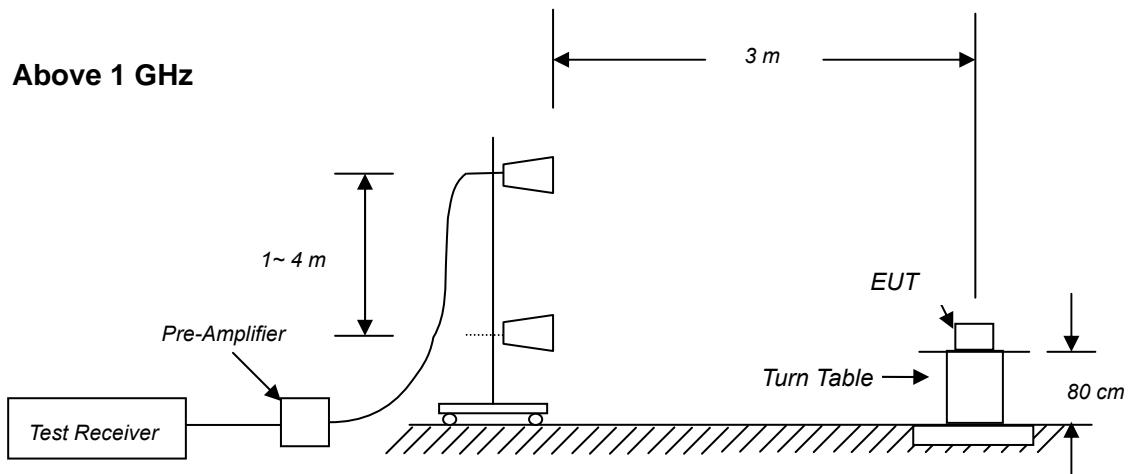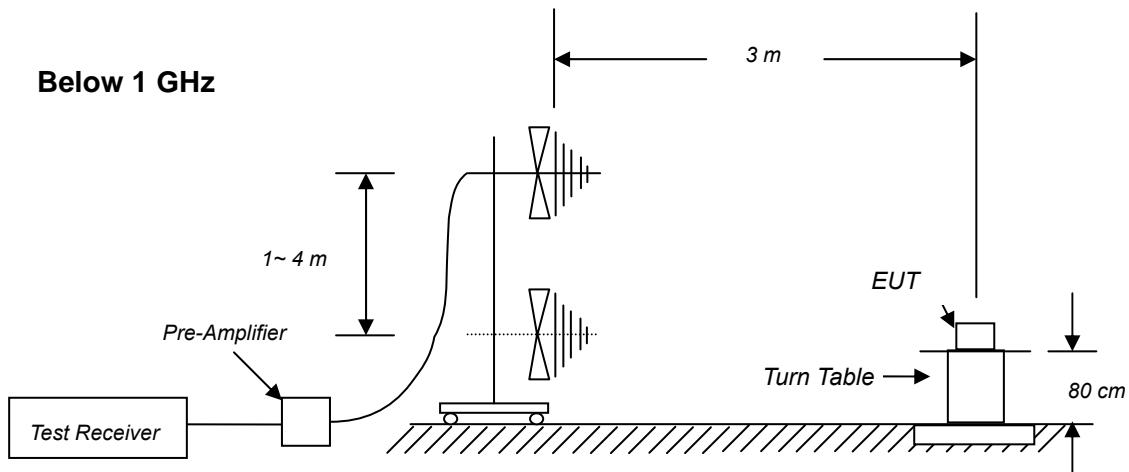

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
  - (a) Below 1 GHz: RBW = 100 kHz/ VBW = 1 MHz/ Sweep = AUTO.
  - (b) Above 1 GHz: Peak: RBW = VBW = 1MHz/ Sweep = AUTO; Average: RBW = 1MHz/ VBW =

10Hz/ Sweep = AUTO.

7. Repeat above procedures until the measurements for all frequencies are complete.

### 3.3 Limit (§ 15.205 & § 15.209)

#### 1.2.1. Limit of Restricted Band of Operation (§ 15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	
13.36-13.41			

### 1.2.2. Limit of Spurious Emission (§ 15.209)

*Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is lesser attenuation.*

Frequency (MHz)	Field strength (microvolts/ meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

*\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.*


## 3.4 Test Result

### Compliance

*The final test data are shown on the following page(s).*

**Radiated Emission Test Data (Below 1 GHz)**

Temperature	: 25.4 °C	Humidity	: 40%
Test Date	: 25-May-2015	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH00 (2402MHz)
EUT Position	: Vertical		

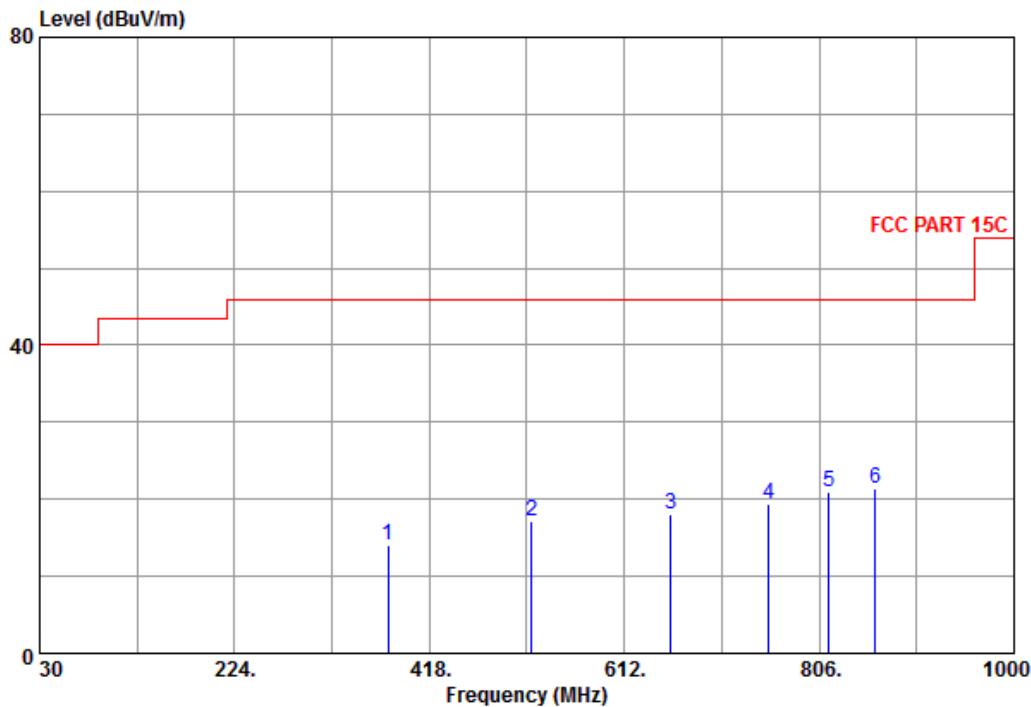

Freq	Reading	C.F	Result	Limit	Margin	A/pos	T/pos	Remark
MHz	dB <sub>UV</sub>	dB	dB <sub>UV</sub> /m	dB <sub>UV</sub> /m	dB			
1 377.260	28.24	-14.16	14.08	46.00	-31.92	---	---	
2 519.850	27.84	-10.74	17.10	46.00	-28.90	---	---	
3 658.560	26.22	-8.10	18.12	46.00	-27.88	---	---	
4 755.560	25.74	-6.36	19.38	46.00	-26.62	---	---	
5 815.700	26.37	-5.32	21.05	46.00	-24.95	---	---	
6 @ 862.260	26.07	-4.57	21.50	46.00	-24.50	---	---	

C.F = Antenna Factor + Cable Loss - Preamp gain  
Result = Reading + C.F ; Margin = Result - Limit


@ : Maximum Data      x : Over Limit

**Remark :**

1. Measuring frequencies from 30 MHz to 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
4. All readings are Peak values. None of the peak value reading exceeds the Q.P. limit. Hence, Q.P. reading was not measured.
5. The IF bandwidth of SPA between 30 MHz to 1 GHz was 100 kHz.

**Radiated Emission Test Data (Below 1 GHz)**

Temperature	:	25.4 °C	Humidity	:	40%
Test Date	:	25-May-2015	Tested by	:	Eason Hsieh
Polarization	:	Horizontal	Channel	:	CH00 (2402MHz)
EUT Position	:	Vertical			

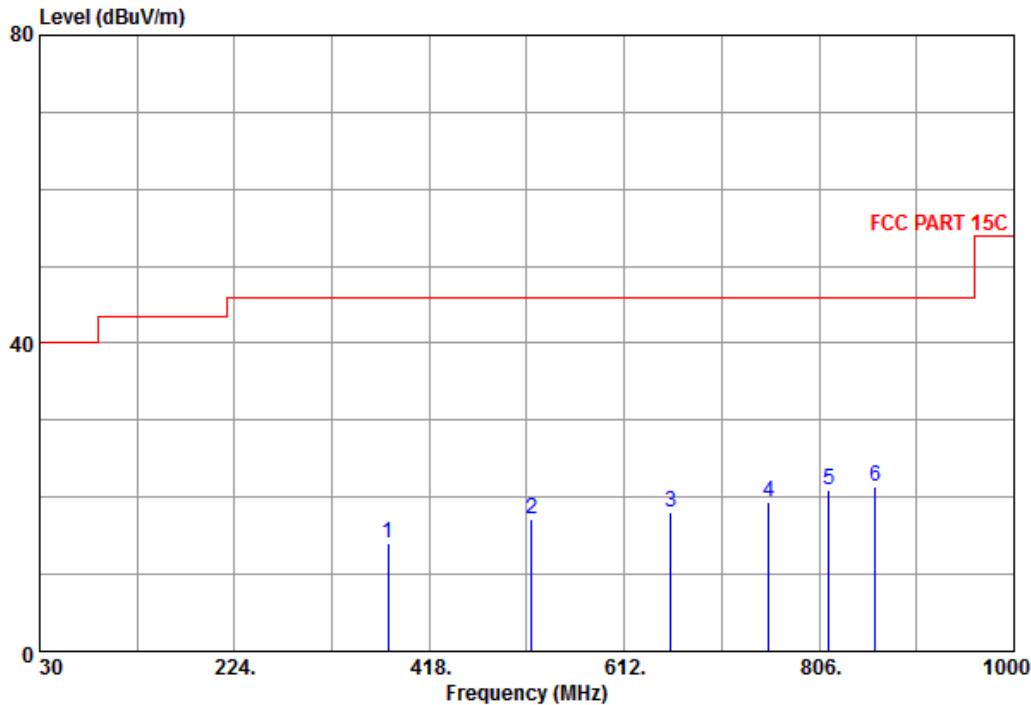

Freq	Reading	C.F	Result	Limit	Margin	A/pos	T/pos	Remark
MHz	dB <sub>UV</sub>	dB	dB <sub>UV</sub> /m	dB <sub>UV</sub> /m	dB			
1 377.260	28.24	-14.16	14.08	46.00	-31.92	---	---	
2 519.850	27.84	-10.74	17.10	46.00	-28.90	---	---	
3 658.560	26.22	-8.10	18.12	46.00	-27.88	---	---	
4 755.560	25.74	-6.36	19.38	46.00	-26.62	---	---	
5 815.700	26.37	-5.32	21.05	46.00	-24.95	---	---	
6 @ 862.260	26.07	-4.57	21.50	46.00	-24.50	---	---	

C.F = Antenna Factor + Cable Loss - Preamp gain  
Result = Reading + C.F ; Margin = Result - Limit


@ :Maximum Data x :Over Limit

**Remark :**

1. Measuring frequencies from 30 MHz to 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
4. All readings are Peak values. None of the peak value reading exceeds the Q.P. limit. Hence, Q.P. reading was not measured.
5. The IF bandwidth of SPA between 30 MHz to 1 GHz was 100 kHz.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature	: 25.4 °C	Humidity	: 40%
Test Date	: 25-May-2015	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH00 (2402MHz)
EUT Position	: Vertical		

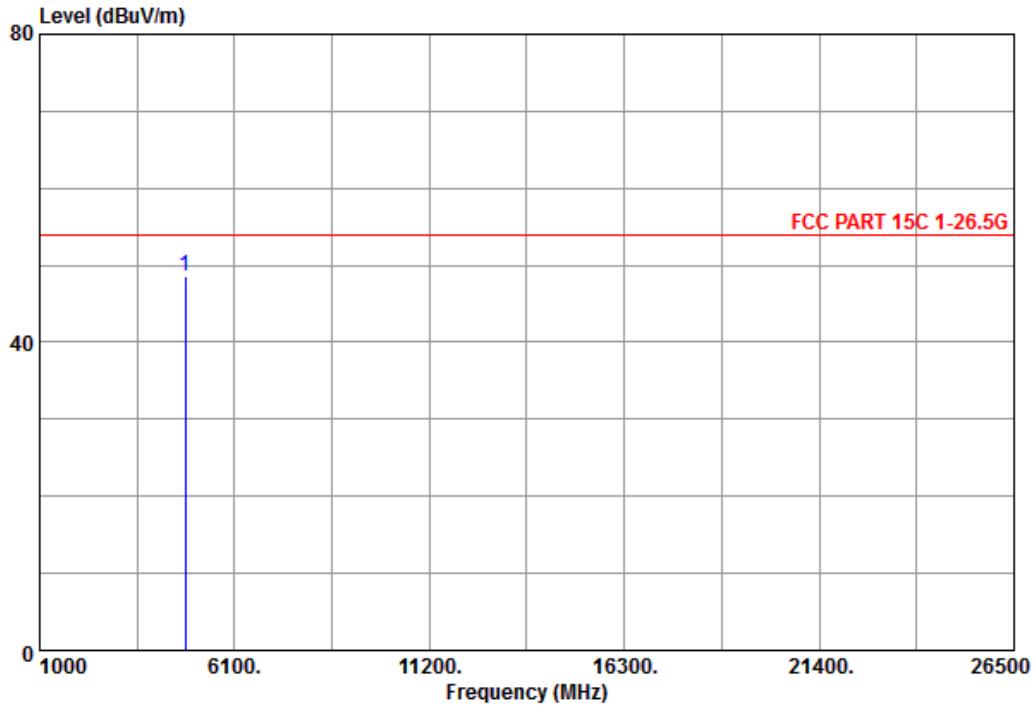

Freq	Reading	C.F	Result	Limit	Margin	A/pos	T/pos	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB			
1 04804.000	48.08	0.49	48.57	54.00	-5.43	---	---	

C.F = Antenna Factor + Cable Loss - Preamp gain  
Result = Reading + C.F ; Margin = Result - Limit


@ :Maximum Data    x :Over Limit

**Remark :**

1. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
  - (a) Peak Setting 1GHz to 10<sup>th</sup> harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature	: 25.4 °C	Humidity	: 40%
Test Date	: 25-May-2015	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH00 (2402MHz)
EUT Position	: Vertical		

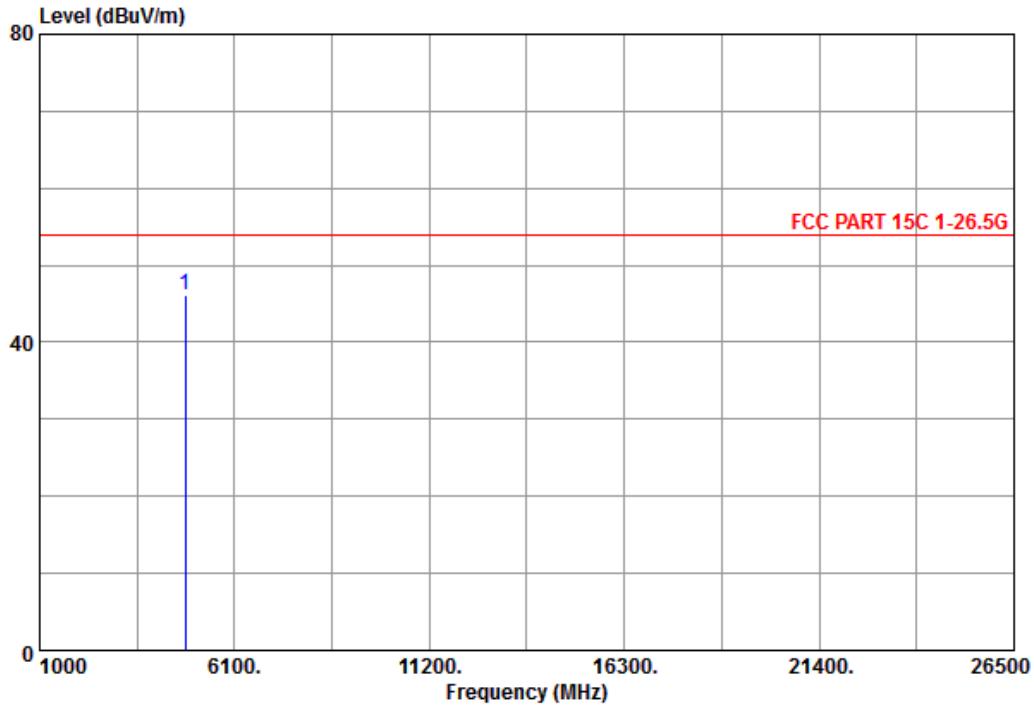

Freq	Reading	C.F	Result	Limit	Margin	A/pos	T/pos	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB			
1 04804.000	45.70	0.49	46.19	54.00	-7.81	---	---	

C.F = Antenna Factor + Cable Loss - Preamp gain  
Result = Reading + C.F ; Margin = Result - Limit


@ :Maximum Data    x :Over Limit

**Remark :**

1. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
  - (a) Peak Setting 1GHz to 10<sup>th</sup> harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature	: 25.4 °C	Humidity	: 40%
Test Date	: 25-May-2015	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH39 (2441MHz)
EUT Position	: Vertical		

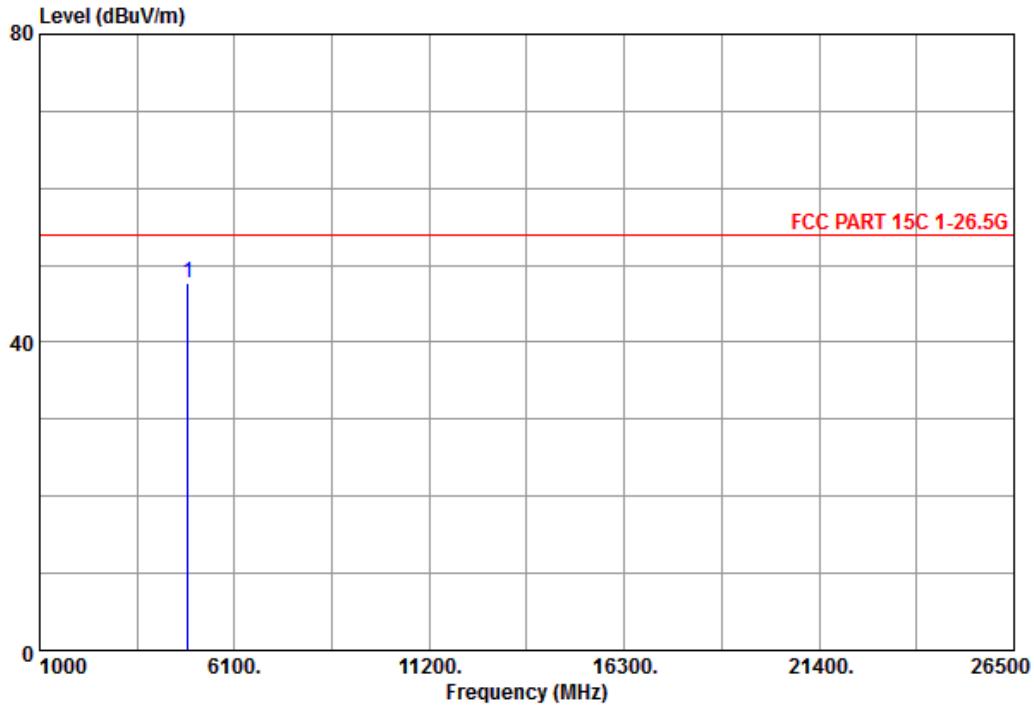

Freq	Reading	C.F	Result	Limit	Margin	A/pos	T/pos	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB			
1 04882.000	46.93	0.80	47.73	54.00	-6.27	---	---	

C.F = Antenna Factor + Cable Loss - Preamp gain  
Result = Reading + C.F ; Margin = Result - Limit


@ :Maximum Data    x :Over Limit

**Remark :**

1. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
  - (a) Peak Setting 1GHz to 10<sup>th</sup> harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature	: 25.4 °C	Humidity	: 40%
Test Date	: 25-May-2015	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH39 (2441MHz)
EUT Position	: Vertical		

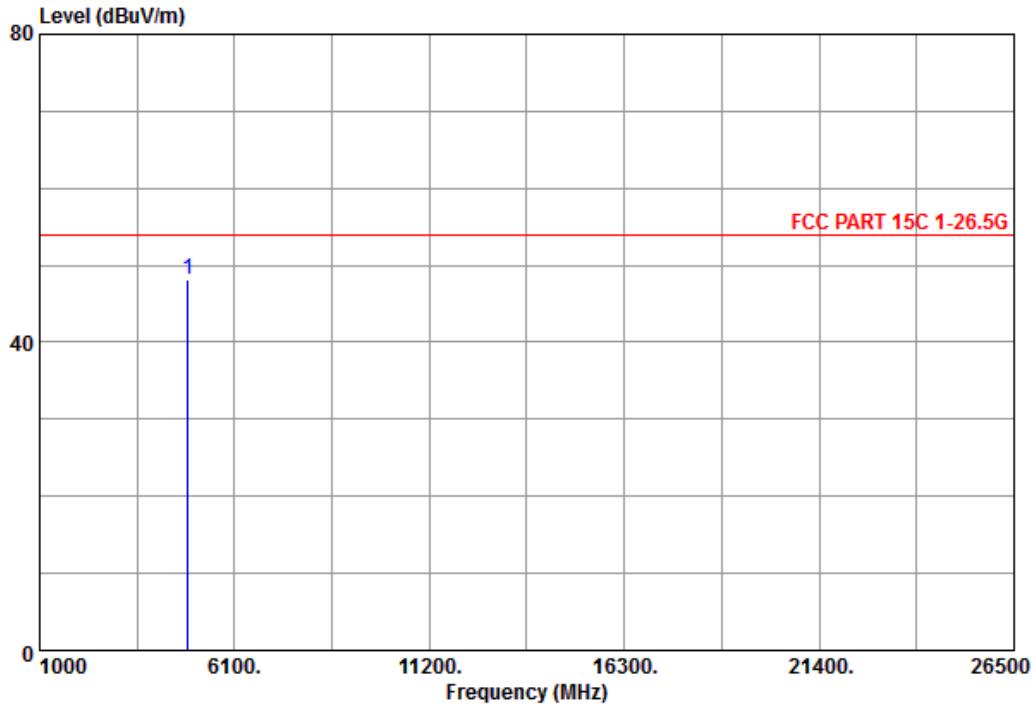

Freq	Reading	C.F	Result	Limit	Margin	A/pos	T/pos	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB			
1 04882.000	47.28	0.80	48.08	54.00	-5.92	---	---	

C.F = Antenna Factor + Cable Loss - Preamp gain  
Result = Reading + C.F ; Margin = Result - Limit


@ :Maximum Data    x :Over Limit

**Remark :**

1. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
  - (a) Peak Setting 1GHz to 10<sup>th</sup> harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature	: 25.4 °C	Humidity	: 40%
Test Date	: 25-May-2015	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH78 (2480MHz)
EUT Position	: Vertical		

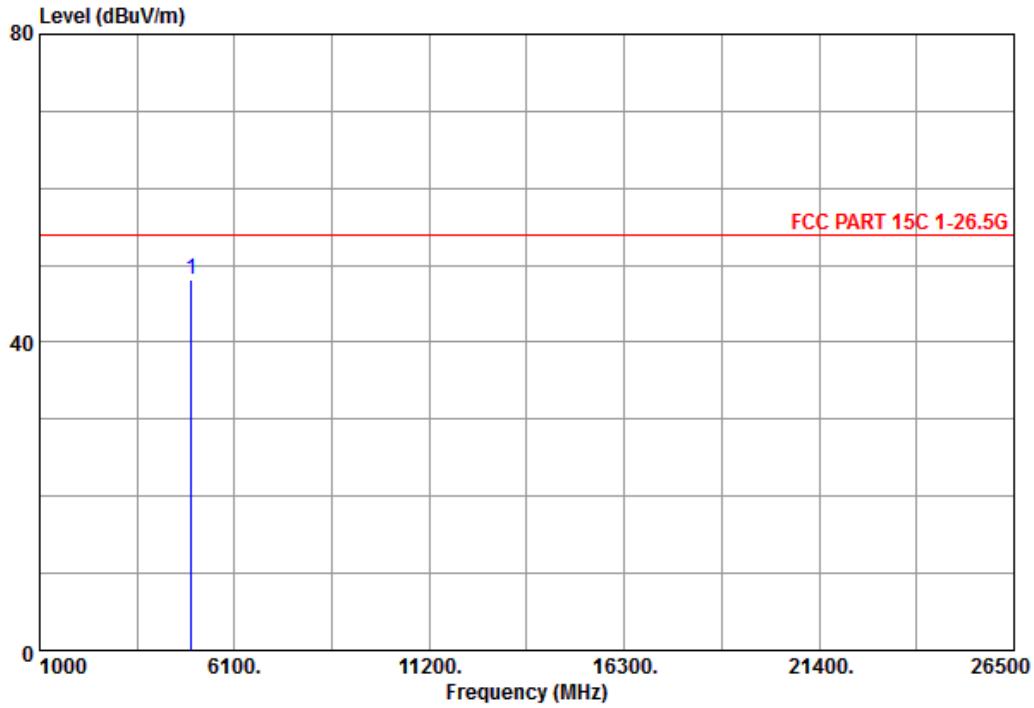

Freq	Reading	C.F	Result	Limit	Margin	A/pos	T/pos	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB			
1 04960.000	46.89	1.15	48.04	54.00	-5.96	---	---	

C.F = Antenna Factor + Cable Loss - Preamp gain  
Result = Reading + C.F ; Margin = Result - Limit

@ :Maximum Data    x :Over Limit


**Remark :**

1. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
  - (a) Peak Setting 1GHz to 10<sup>th</sup> harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature : 25.4 °C  
Test Date : 25-May-2015  
Polarization : Horizontal  
EUT Position : Vertical

Humidity : 40%  
Tested by : Eason Hsieh  
Channel : CH78 (2480MHz)

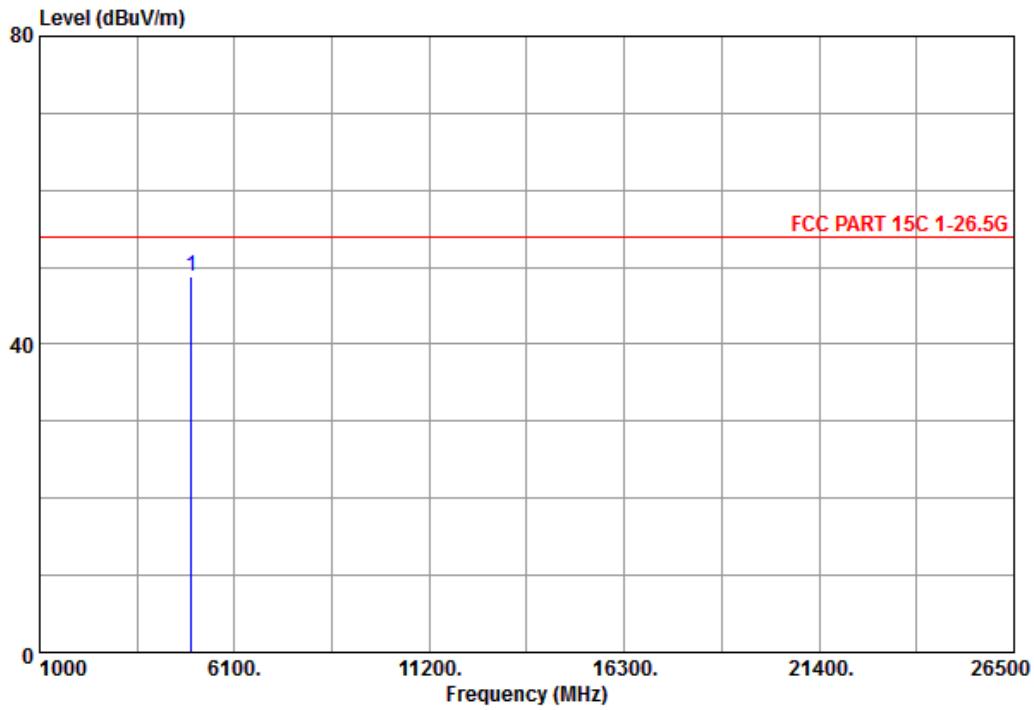

Freq	Reading	C.F	Result	Limit	Margin	A/pos	T/pos	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB			
1 04960.000	47.56	1.15	48.71	54.00	-5.29	---	---	

C.F = Antenna Factor + Cable Loss - Preamp gain  
Result = Reading + C.F ; Margin = Result - Limit

@ :Maximum Data    x :Over Limit

**Remark :**

1. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
  - (a) Peak Setting 1GHz to 10<sup>th</sup> harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

## 4 20 dB Bandwidth

### 4.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

### 4.2 Test Arrangement and Procedure



1. The transmitter output was connected to a spectrum analyzer (through an attenuator, if it's necessary).
2. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 300kHz VBW. Measured the -20 dB bandwidth and plotted the graph.

### 4.3 Limit

None; For report purpose only.

### 4.4 Test Result

No non-compliance noted.

The final test data are shown on the following page(s).

Bluetooth 1 Mbps (DH1)		
Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.0376
Middle	2441	1.0434
High	2480	1.0434


Bluetooth 1 Mbps (DH3)		
Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.0376
Middle	2441	1.0434
High	2480	1.0333

Bluetooth 1 Mbps (DH5)		
Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.0376
Middle	2441	1.0434
High	2480	1.0333




Temperature : 25.4 °C  
Test Date : 25-May-2015  
Test Mode : BT (1 Mbps) DH1


Humidity : 40%  
Tested by : Eason Hsieh  
Channel : 00

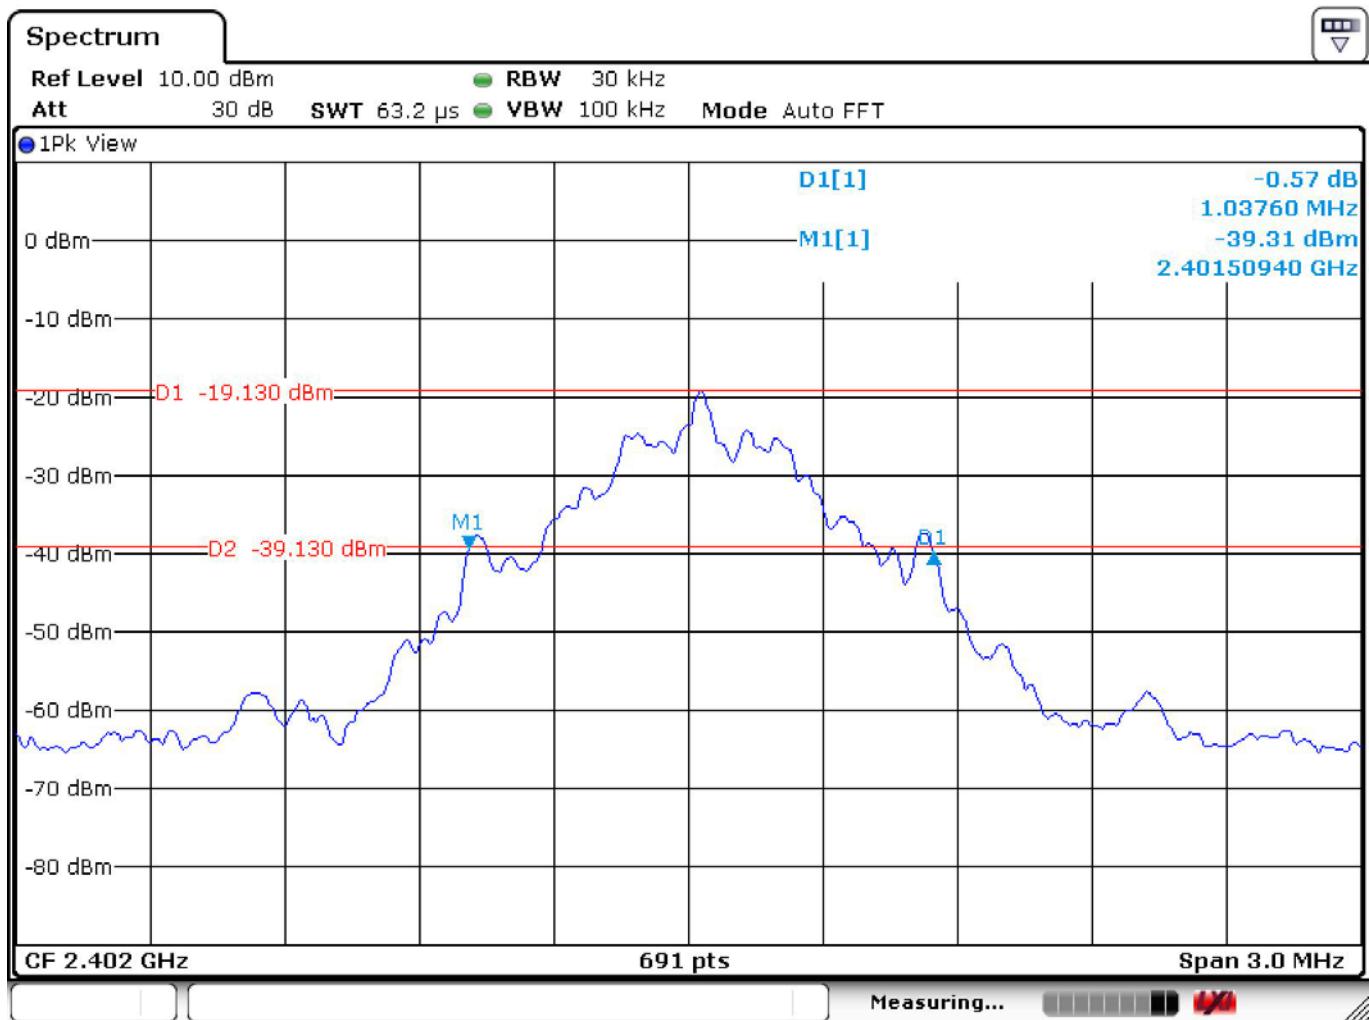


Test Mode : BT (1 Mbps) DH1      Channel : 39

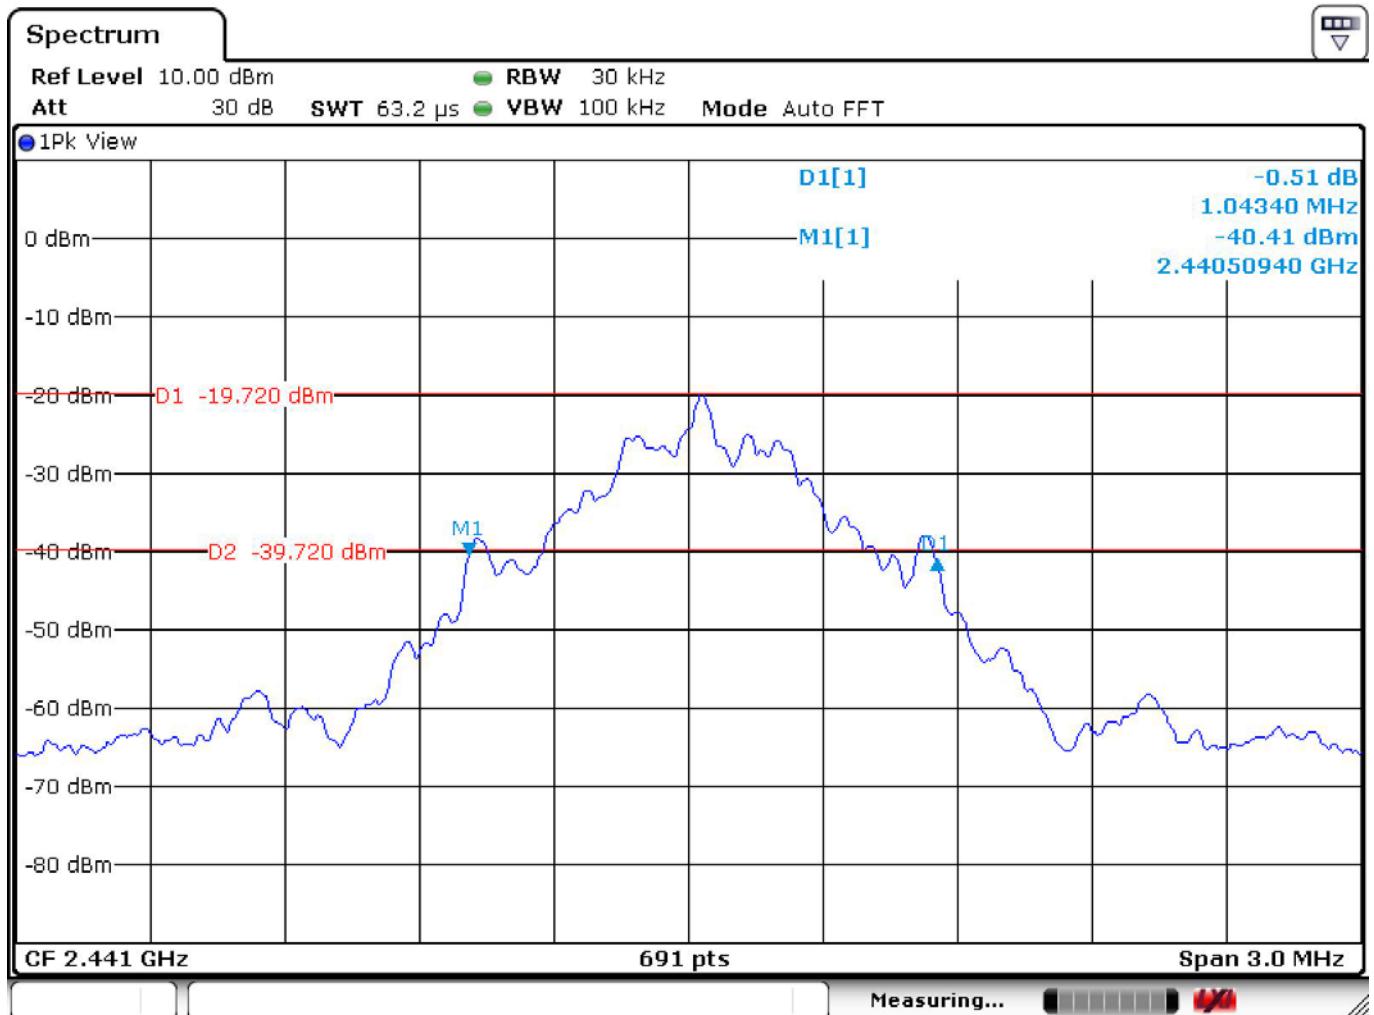


Test Mode : BT (1 Mbps) DH1 Channel : 78

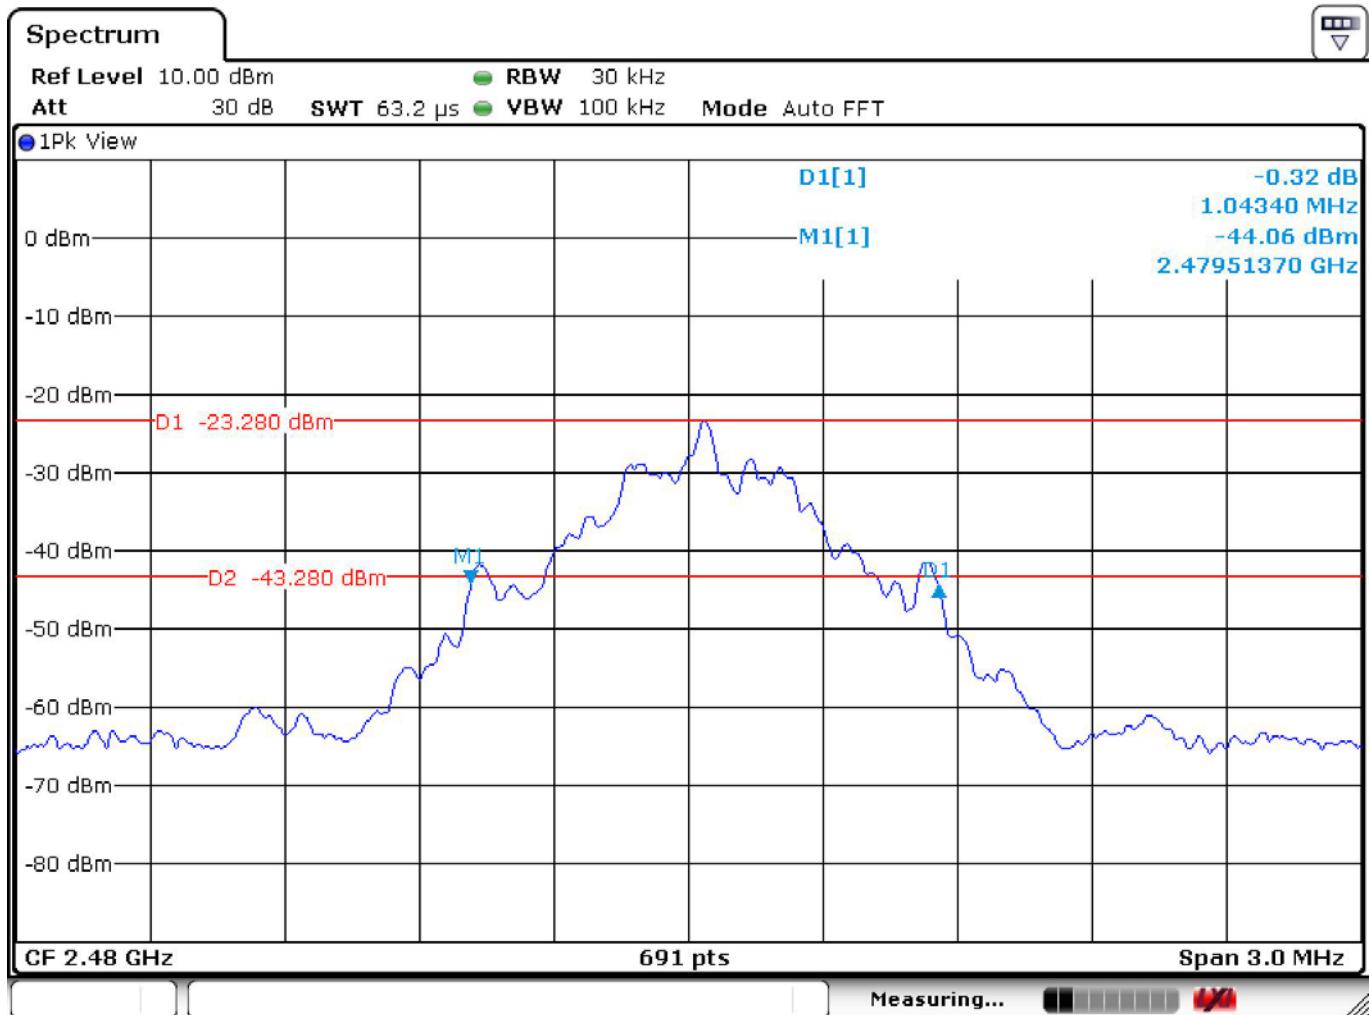


Test Mode : BT (1 Mbps) DH3 Channel : 00

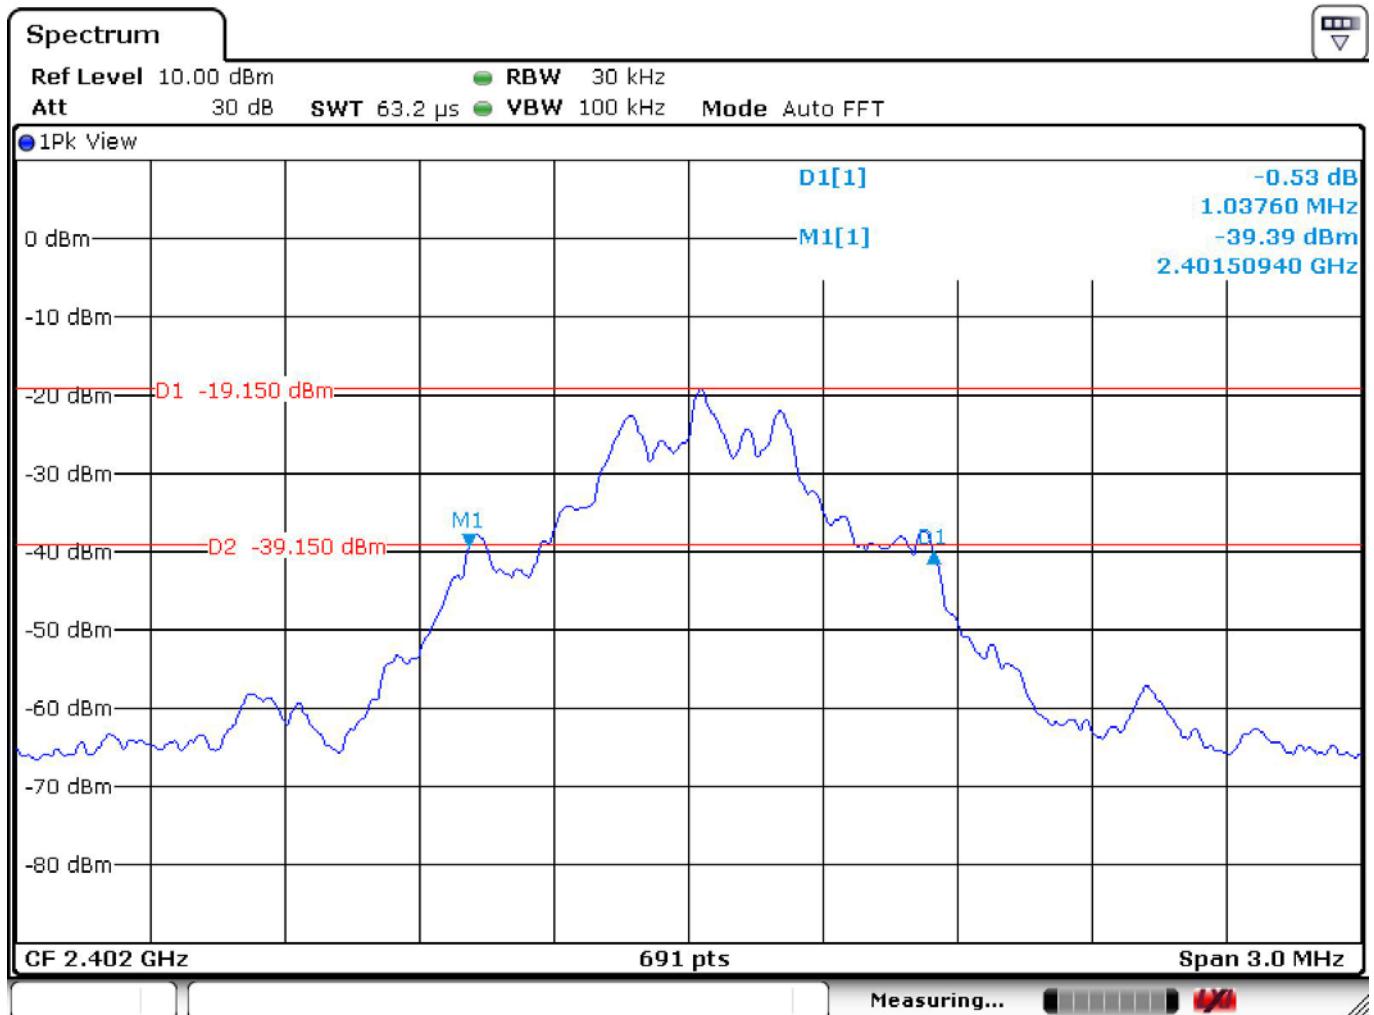


Test Mode : BT (1 Mbps) DH3 Channel : 39

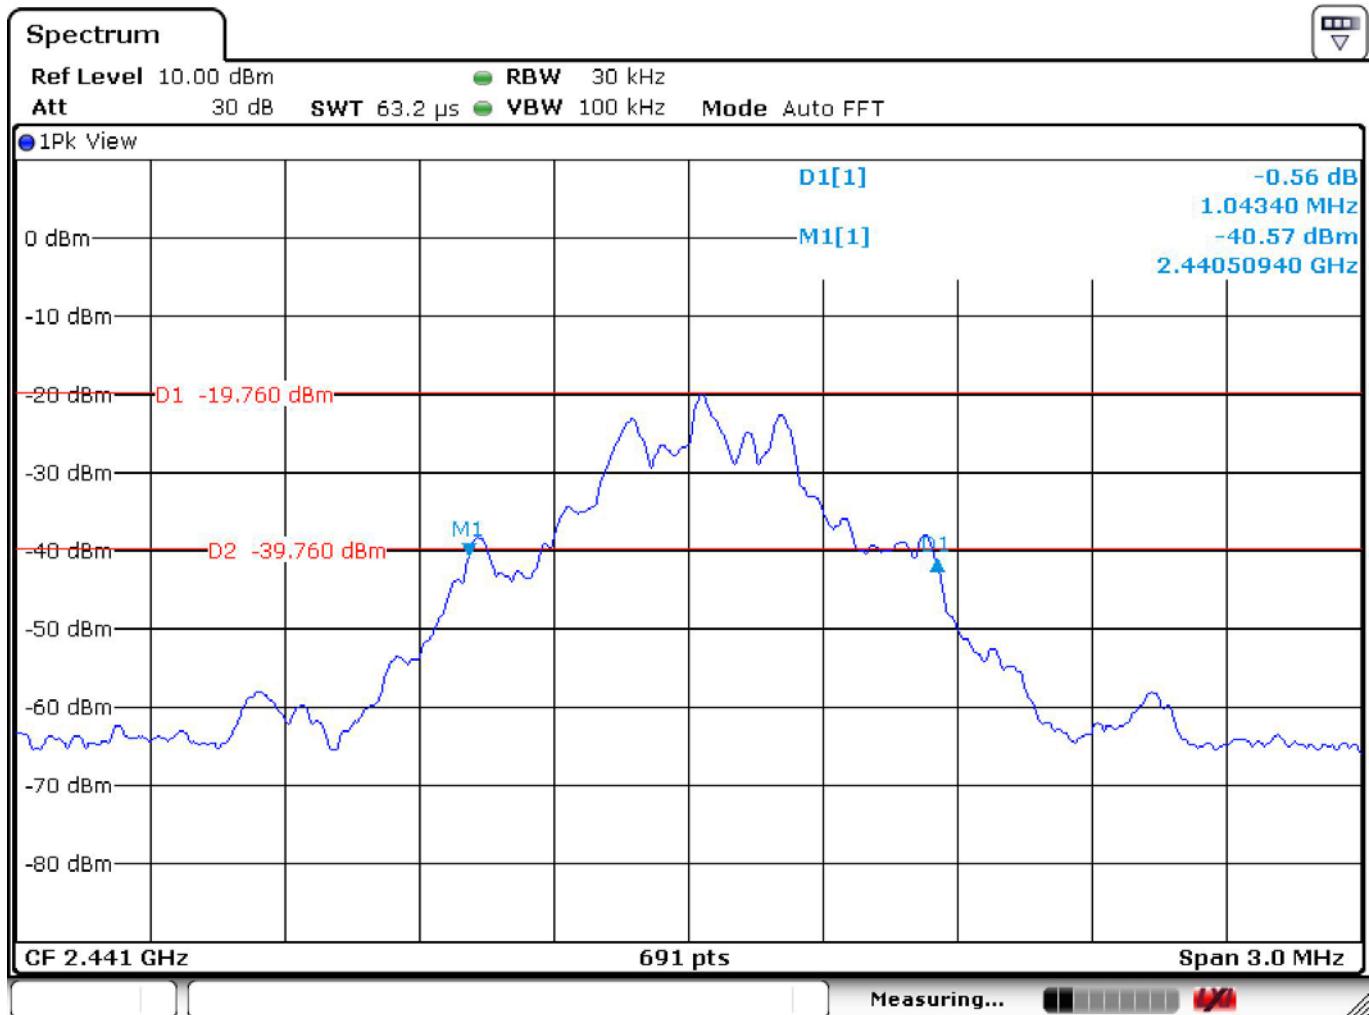


Test Mode : BT (1 Mbps) DH3 Channel : 78

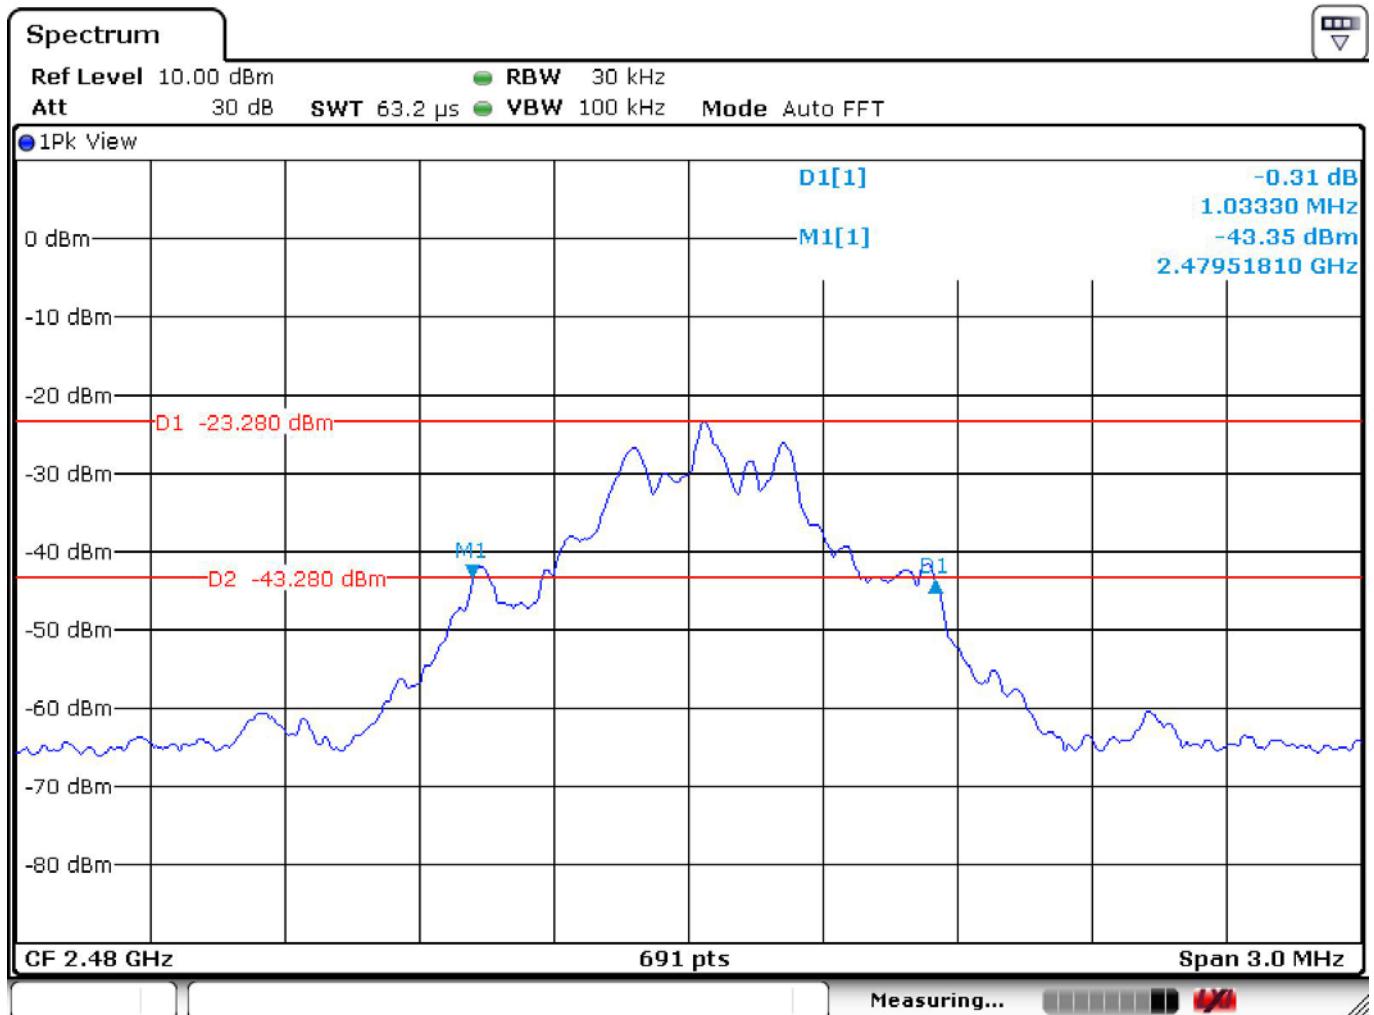


Test Mode : BT (1 Mbps) DH5 Channel : 00

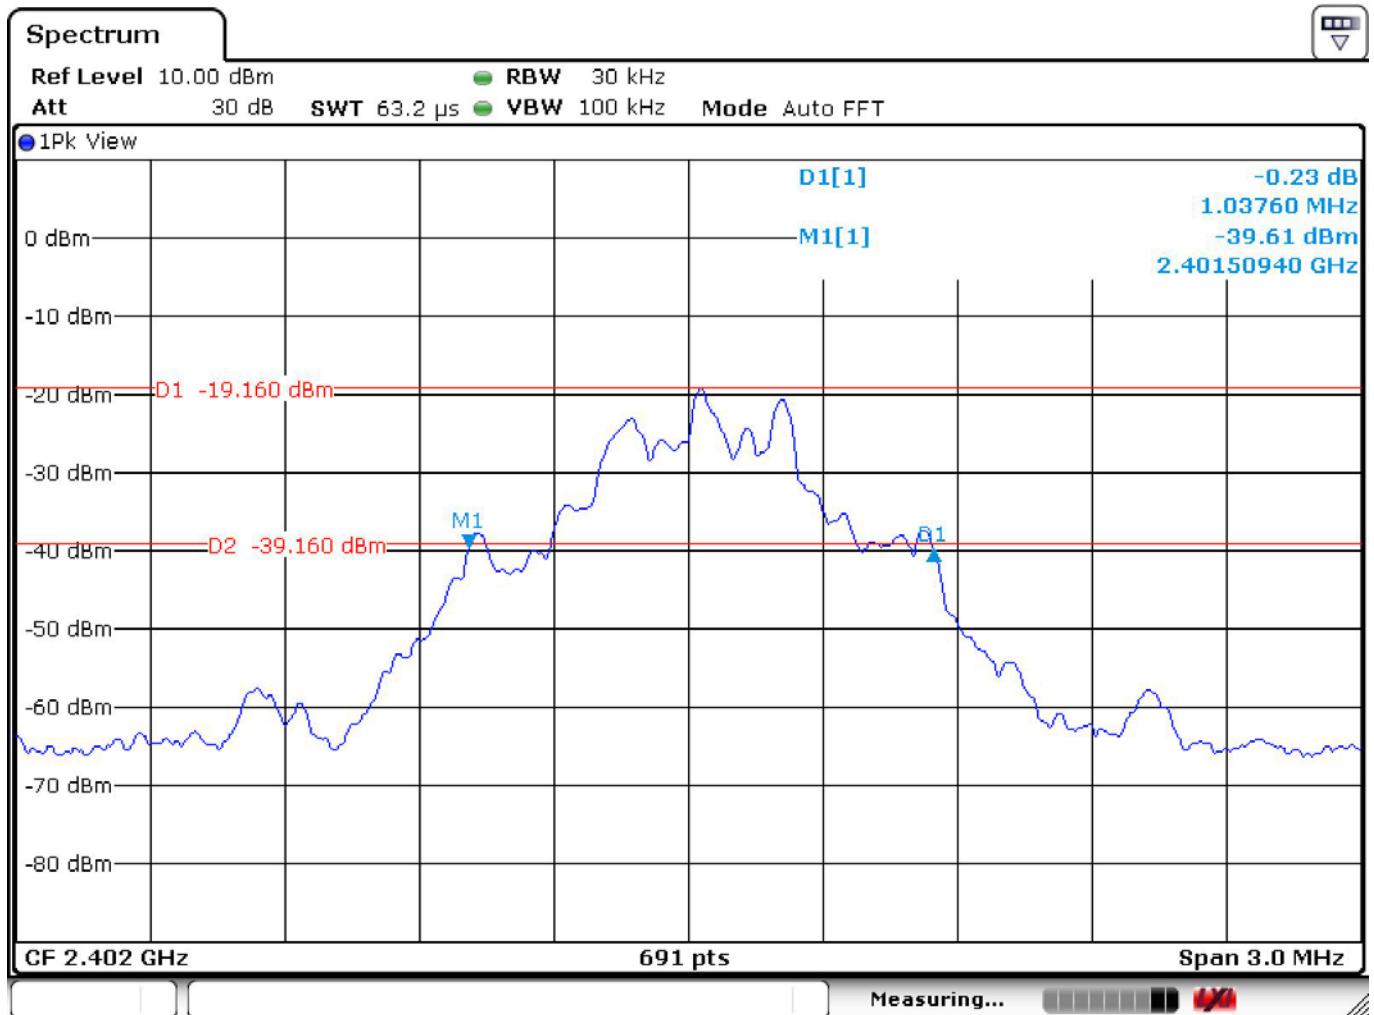

Test Mode : BT (1 Mbps) DH5 Channel : 39

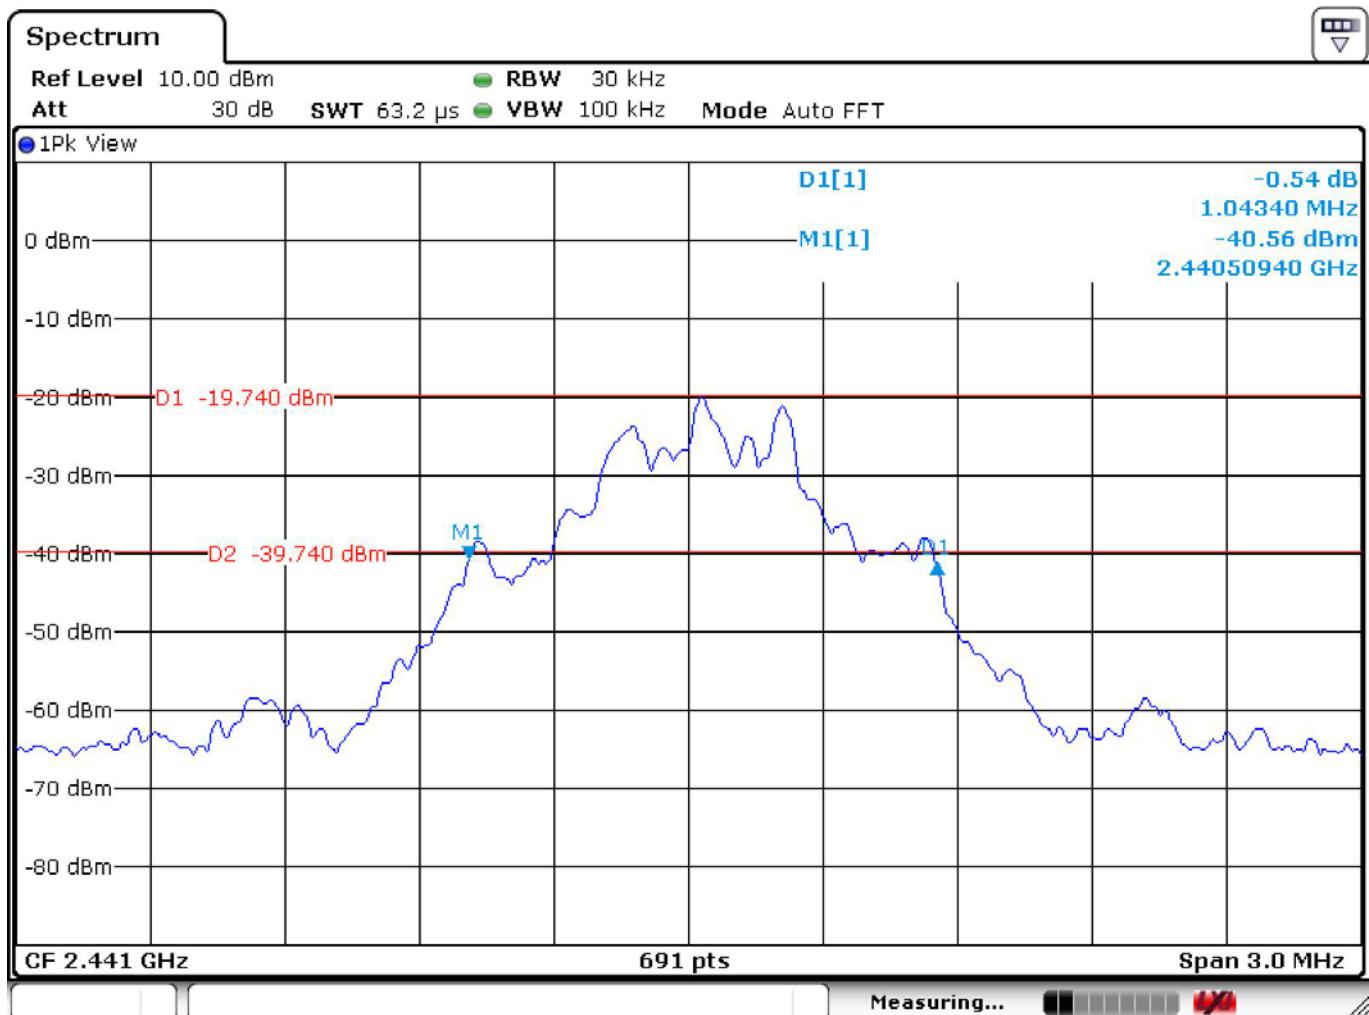

Test Mode : BT (1 Mbps) DH5 Channel : 78

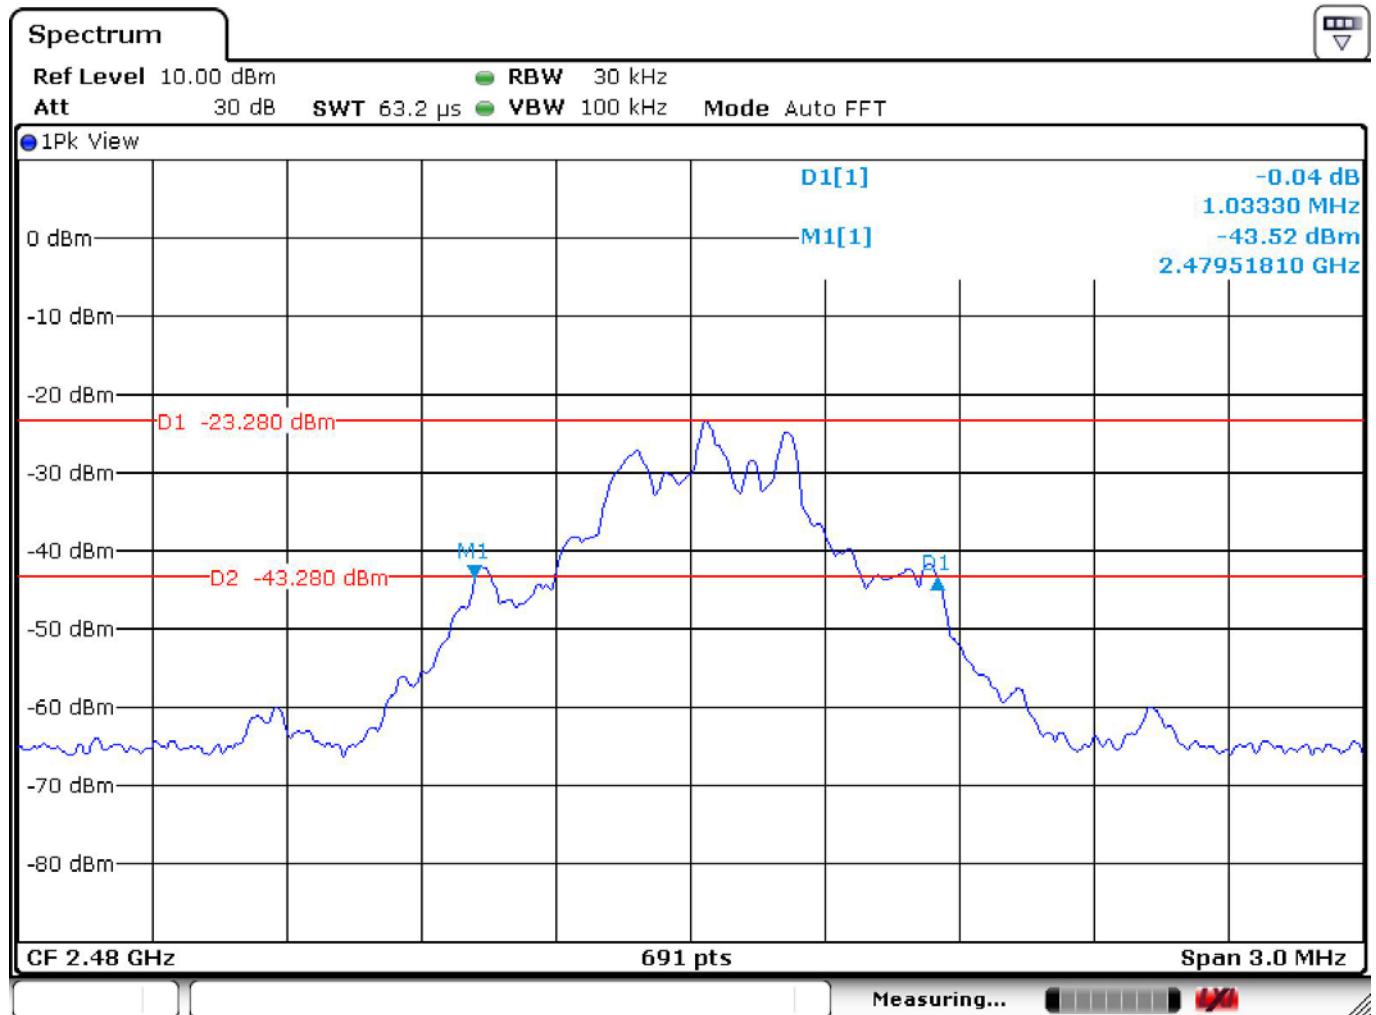


## 5 Hopping Frequency Separation

### 5.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

### 5.2 Test Arrangement and Procedure

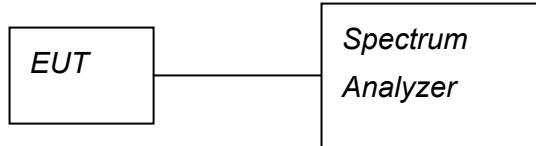

1. The transmitter output was connected to a spectrum analyzer (through an attenuator, if it's necessary).
2. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 300kHz VBW.
3. Mark the peak outputs of two adjacent channels. And, measured the separation between the marked peak outputs of two adjacent channels.

### 5.3 Limit (§ 15.247(a)(1))

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 5.4 Test Result

#### Compliance.

The final test data are shown on the following page(s).


**Bluetooth 1 Mbps DH5**

Channel	Frequency (MHz)	20 dB bandwidth (MHz)	Limit (2/3 of 20dB bandwidth) (MHz)	Result	Verdict
Low	2402	1.0376	0.69173 0.9899		Pass
Middle	2441	1.0434	0.6956 0.9986		Pass
High	2480	1.0333	0.6888 1.0029		Pass




Temperature : 25.4 °C  
Test Date : 25-May-2015  
Test Mode : BT (1 Mbps) DH5

Humidity : 40%  
Tested by : Eason Hsieh  
Channel : Low

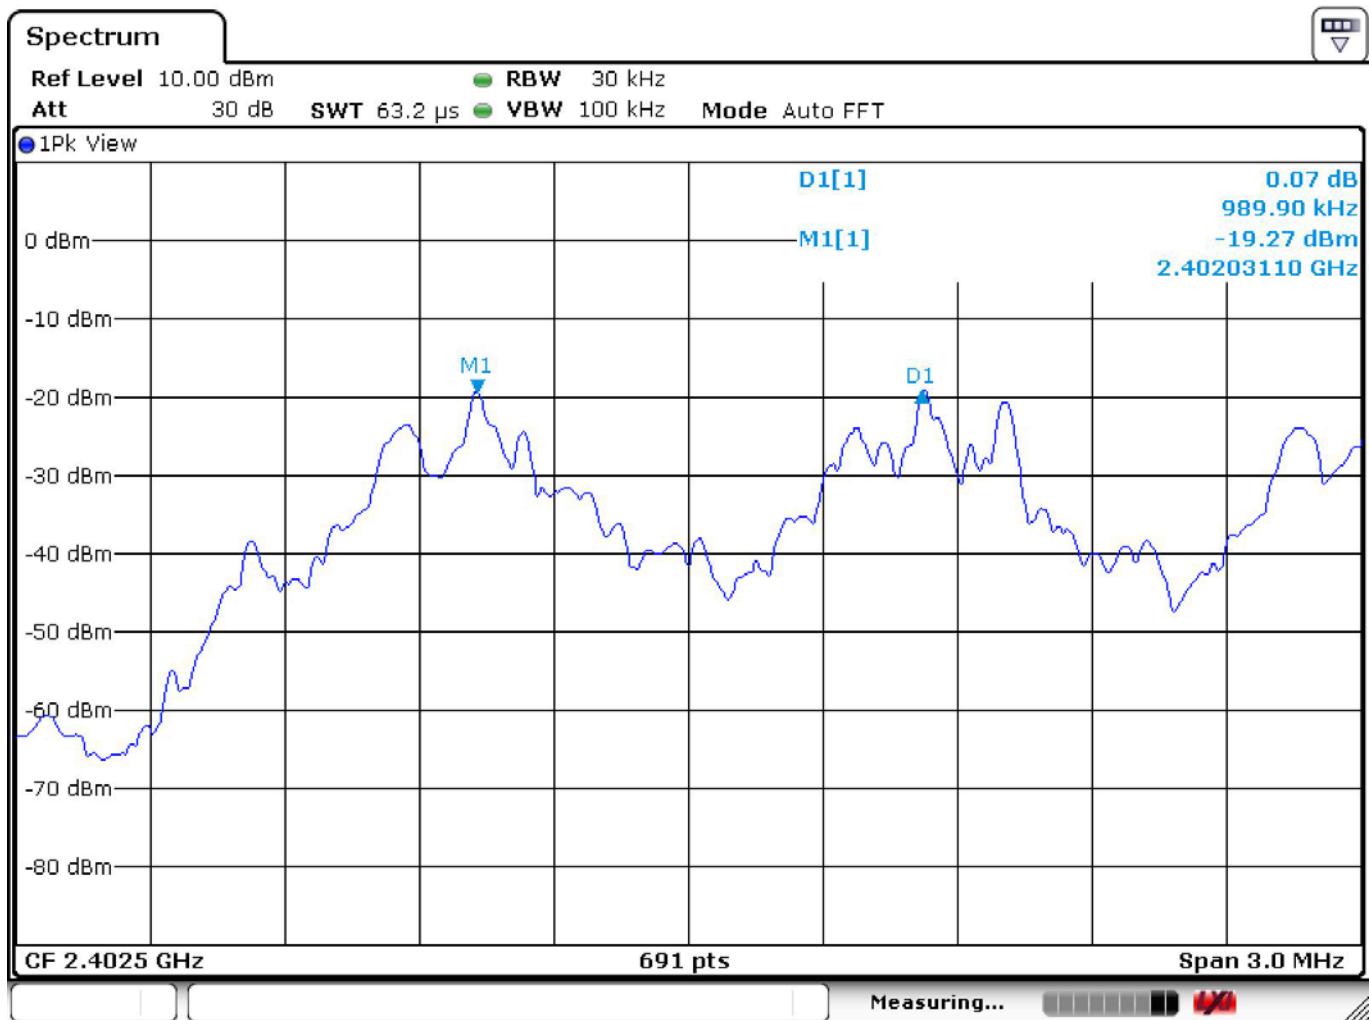


Test Mode : BT (1 Mbps) DH5      Channel : Middle

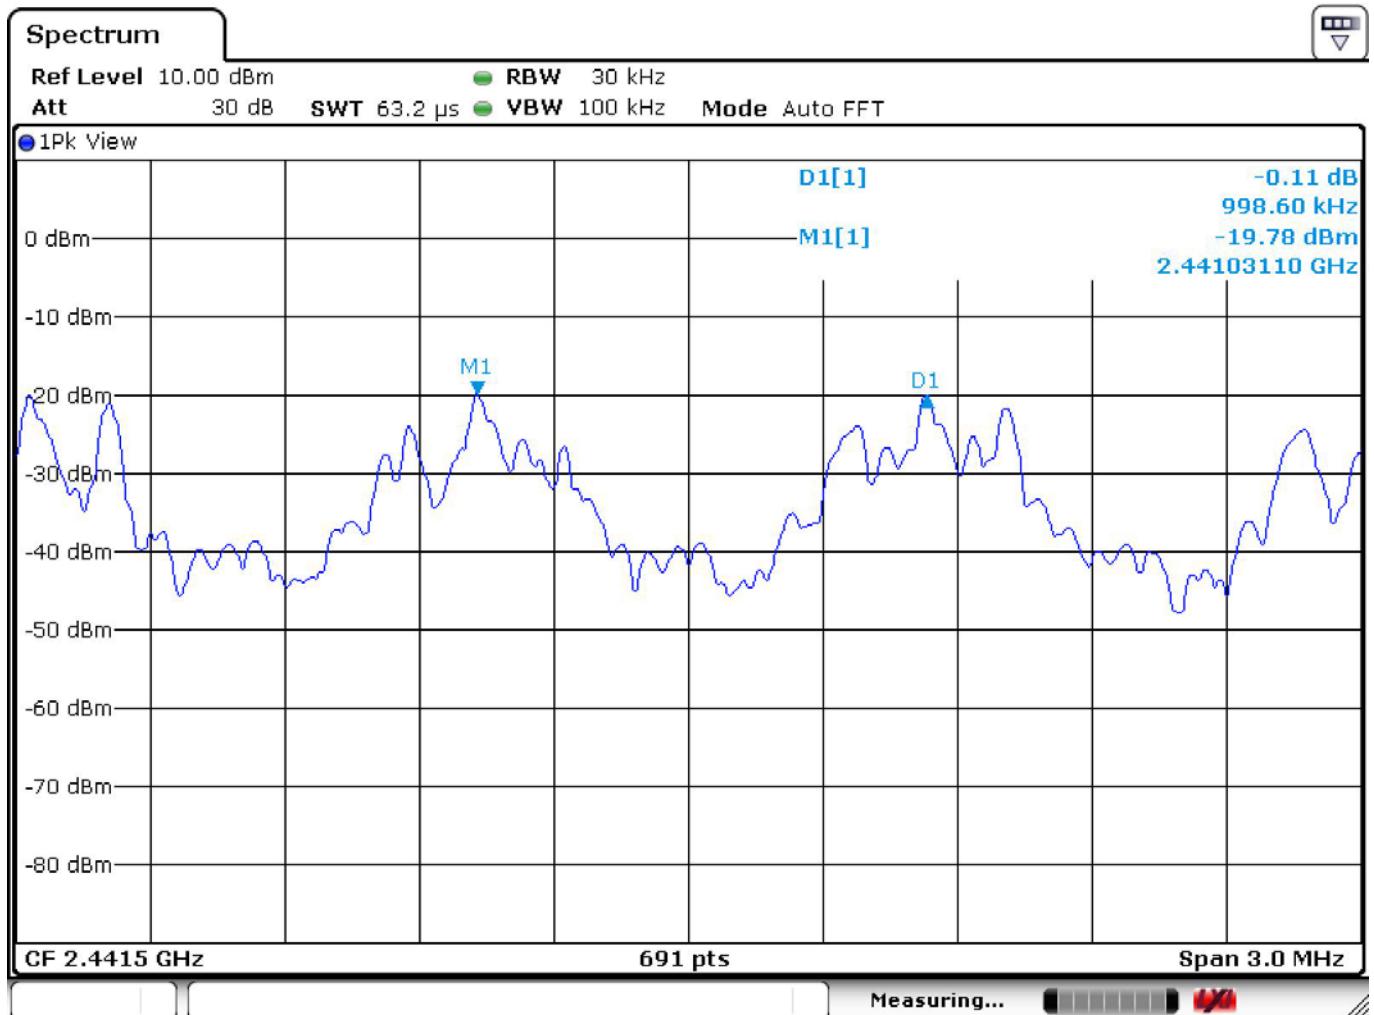

Test Mode : BT (1 Mbps) DH5

Channel : High

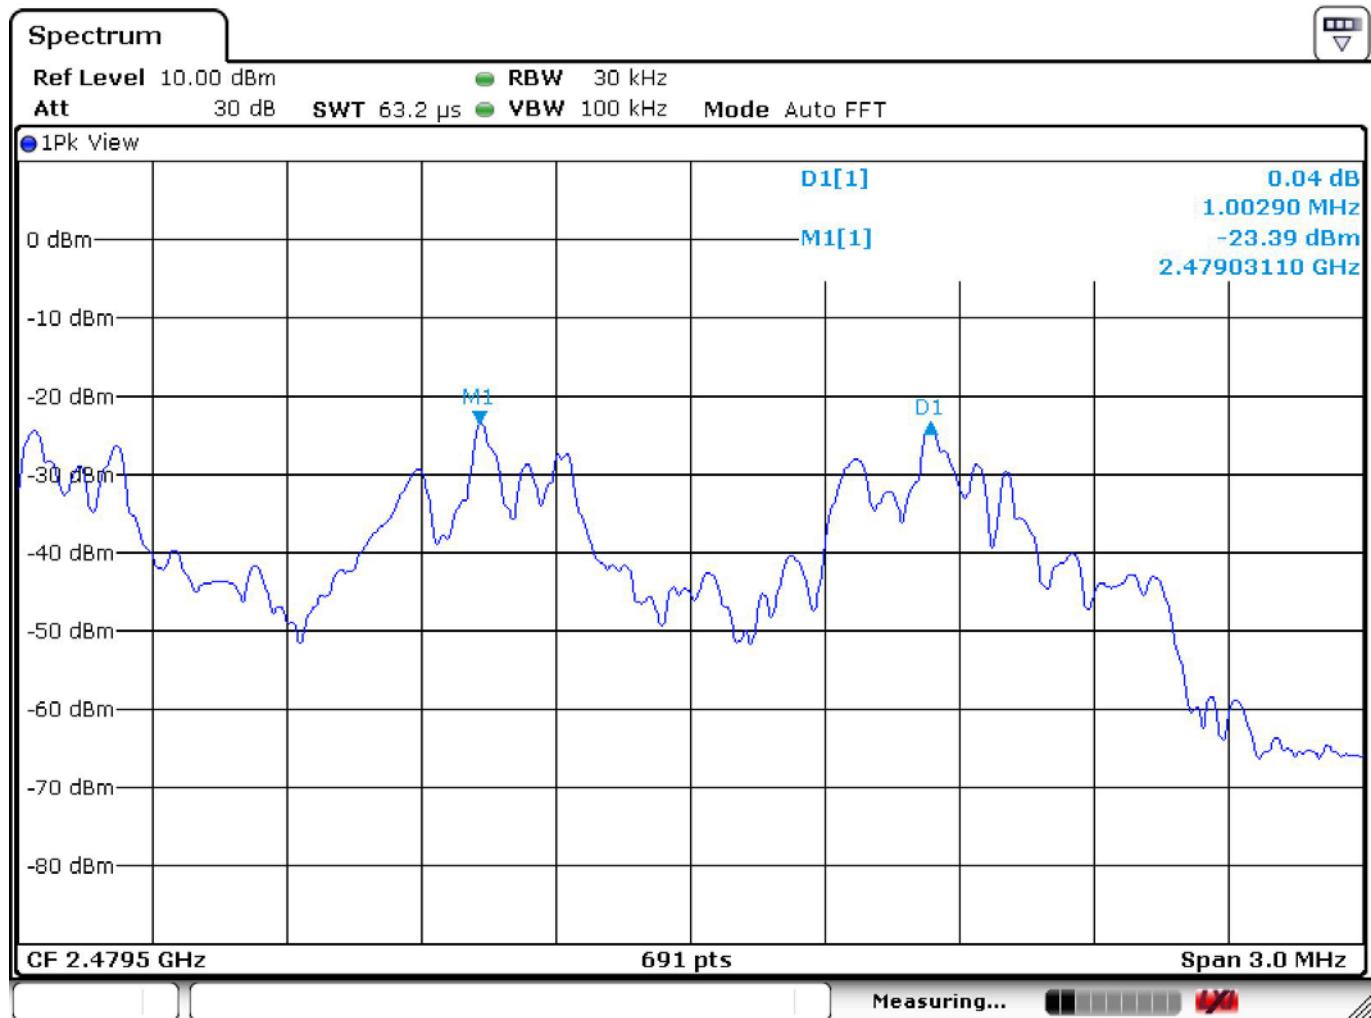


## 6 Number of Hopping Channels

### 6.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

### 6.2 Test Arrangement and Procedure

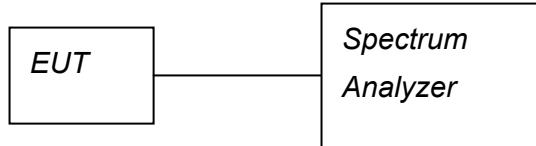

1. The transmitter output was connected to a spectrum analyzer (through an attenuator, if it's necessary).
2. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps.
3. The RBW is set to 100 kHz and VBW is set to 100 kHz.
4. Max Hold.

### 6.3 Limit (§ 15.247(a)(1)(iii))

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 6.4 Test Result

**79 Channels have been used.**

**Compliance.**

The final test data are shown on the following page(s).