

DENSO

DENSO WAVE

FCC ID : PZWDWB003
Model : DWBT003
Applicant : DENSO WAVE INCORPORATED


Issued date : October 15, 2004

Request for Limited Modular Approval

This modular transmitter will be equipped only on Bar code scanner which is produced by DENSO WAVE INCORPORATED or the manufacturer consigned the production by DENSO WAVE INCORPORATED. The modular transmitter complies the module basic requirement (Item 1 to 8) in FCC Public Notice: Part 15 Unlicensed Modular Transmitter Approval(DA00-1407) as indicated below:

[Module basic requirement]

(1) Have its own RF shielding.: This modular transmitter has its own RF shielding. Please refer to the A1 Photo.

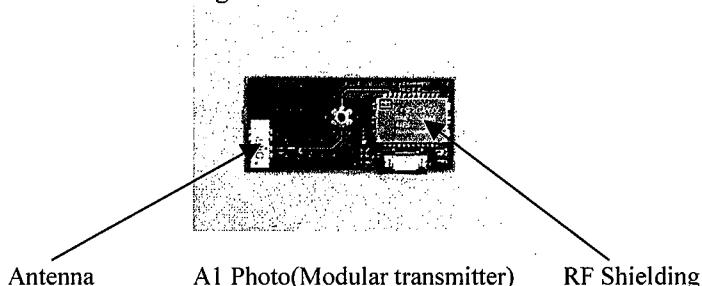

(2) The modular transmitter must have buffered modulation/data inputs.: Data input to Modular transmitter is controlled as not generating excessive data speed and abnormal modulation.

(3) The modular transmitter must have its own power supply regulation.:

The modular transmitter does not have its own power supply, but regulated power of 3.3V is supplied from host equipment Bar code scanner. Therefore, the equipment meets this requirement.

(4) The modular transmitter must comply with the antenna requirements of Section 15.203 and 15.204(c).: meets this requirement.

(5) The modular transmitter must be tested in a stand alone.: The modular transmitter has been performed the testing as a stand alone and then confirmed the compliance. Please refer to the Test report. (No.24AE0222-HO-1)

(6) The modular transmitter must be labeled with its own FCC ID number, and, if the FCC ID is not visible when The module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module.:

The modular transmitter is labeled with its own FCC ID number and is visible from outside by users.

(7) The modular transmitter must comply with any specific rule or operating requirements applicable to the transmitter and the manufacturer must provide adequate instructions along with the module to explain any such requirements.: The necessary explanation to be complied with this requirement is contained in the manual.

(8) The modular transmitter must comply with any applicable RF exposure requirements.: The modular transmitter has 1.0mW of conducted Peak Output power and 1.6mW of eirp.

This kind of equipment is below 24.5mW*

*TCB Exclusion List : General population 60/fGHz mW, d<2.5cm

Yasuo Yamada
Senior Manager
Engineering Center 1
Automatic Data Capture Division Engineering Department
DENSO WAVE INCORPORATED