



KES Co., Ltd.
C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-15T0002
Page (1) of (36)

TEST REPORT

Part 15 Subpart C 15.247

Equipment under test Bluetooth Keyboard Case

Model name CLNK1100

FCC ID PZYCLNK1100

Applicant Core Logic, Inc.

Manufacturer Core Logic, Inc.

Date of test(s) 2015.01.07 ~ 2015.01.16

Date of issue 2015.01.19

Issued to

Core Logic, Inc.

11st FI, 1-B U-Space building 660 Daewangpangy-ro, Bundang-gu,
Seongsam-si Gyeonggi-do 463-400 korea
Tel: +82-2-2191-0833 / Fax: +82-2-2191-0878

Issued by

KES Co., Ltd.

C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si,
Gyeonggi-do, 431-716, Korea
473-29, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
Hyeon-Su Jang Test engineer	Jeff Do Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



Revision history

Revision	Date of issue	Test report No.	Description
-	2015.01.19	KES-RF-15T0002	Initial

TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Information about derivative model	4
1.3.	Device modifications.....	4
2.	Summary of tests	5
3.	Test results	6
3.1	Radiated spurious emissions	6
3.2	Conducted spurious emissions & band edge	15
3.3.	6 dB bandwidth	19
3.4.	Output power	22
3.5.	Power spectral density.....	26
3.6.	AC conducted emissions	30
Appendix A.	Measurement equipment	33
Appendix B.	Test setup photo	34
Appendix C.	Duty Cycle.....	36



1. General information

Applicant: Core Logic, Inc.
Applicant address: 11st FI, 1-B U-Space building 660 Daewangpangy-ro, Bundang-gu,
Seongsam-si Gyeonggi-do 463-400 korea
Test site: KES Co., Ltd.
Test site address: C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
473-29, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
FCC rule part(s): 15.247
Model: CLNK1100
FCC ID: PZYCLNK1100
Test device serial No.: Production Pre-production Engineering

1.1. EUT description

Equipment under test Bluetooth Keyboard Case
Frequency range 2402 MHz ~ 2480 MHz
Modulation technique GFSK
Number of channels 40
Antenna specification Antenna type: PCB, Peak gain: 2 dBi
Power source DC 3.7 V(Battery)

The device contains the following capabilities: Only Bluetooth LE

1.2. Information about derivative model

N/A

1.3. Device modifications

N/A

2. Summary of tests

Reference	Parameter	Test results
15.205 15.209	Radiated spurious emission	Pass
15.247(d)	Conducted spurious emission and band edge	Pass
15.247(a)(2)	6 dB bandwidth	Pass
15.247(b)(3)	Peak output power	Pass
15.247(e)	Power spectral density	Pass
15.207	AC conducted emissions	Pass

Note:


1. The EUT was tested per the guidance of KDB 558074 v03r02. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and/or AC line conducted testing.
2. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

3. Test results


3.1 Radiated spurious emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

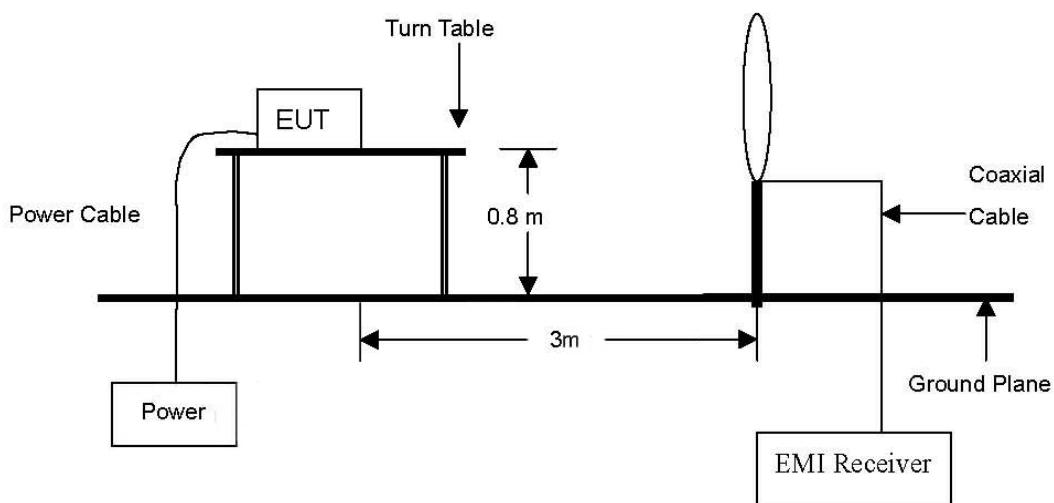

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

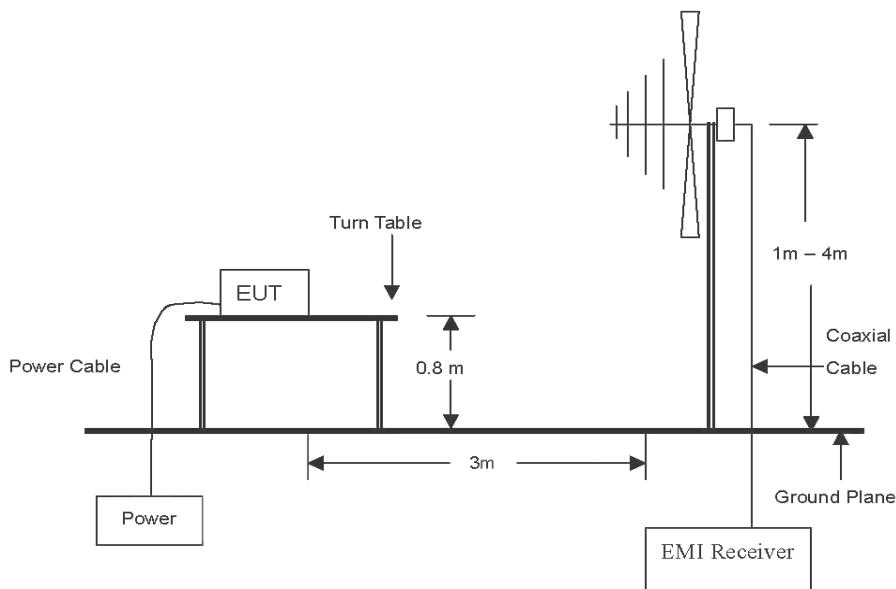

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz emissions.

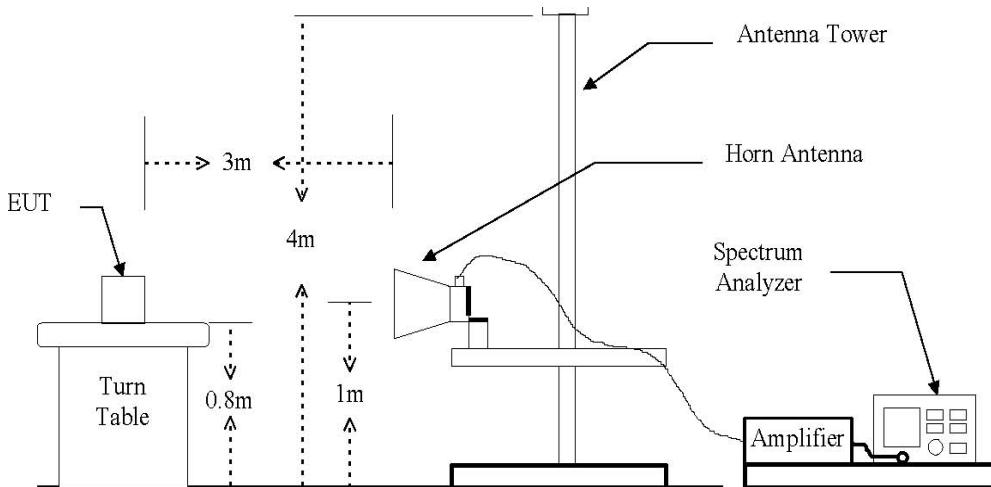

Test procedure

KDB 558074 v03r02 – section 12.1 and 12.2.7

Test settings

Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 v03r02

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 v03r02

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be > 2 x span/RBW)
6. Sweep time = auto 7. Trace (RMS) averaging was performed over at least 100 traces

Note:

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 v03r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20 dB of the respective limits were not reported.
3. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
4. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

5. “*” means restricted band edge.

5. Field strength(dB μ V/m) = Level(dB μ V) + Correction factors(dB/m) + Cable loss(dB) + F_d(dB)

6. Correction factors(dB/m) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB)

7. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)

8. $F_d = 40\log(D_m / D_s)$

Where:

F_d = Distance factor in dB

D_m = Measurement distance in meters

D_s = Specification distance in meters

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (μ V/m)
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.



Test results (Below 30 MHz)

Mode:	Bluetooth LE
Transfer rate:	1 Mbps
Distance of measurement:	3 meter
Operating frequency:	2 480 MHz (Worst case)
Channel:	39

Frequency (MHz)	Level (dB μ V)	Ant. Pol.	Correction factors (dB/m)	F _d (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No signal detected							



Test results (Below 1 000 MHz)

Mode:	Bluetooth LE
Transfer rate:	1 Mbps
Distance of measurement:	3 meter
Operating frequency:	2 480 MHz (Worst case)
Channel:	39

Radiated emissions		Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
46.490	17.03	V	12.86	0.71	30.60	43.50	12.90
176.470	18.49	V	11.36	1.34	31.19	43.50	12.31
212.360	25.75	H	9.77	1.46	36.98	43.50	6.52
274.440	16.24	V	11.93	1.66	29.83	46.00	16.17
321.000	21.96	H	13.16	1.82	36.94	46.00	9.06
404.420	21.82	H	14.98	2.07	38.87	46.00	7.13
452.920	14.75	V	16.22	2.19	33.16	46.00	12.84
548.950	19.45	H	17.71	2.45	39.61	46.00	6.39
577.080	15.17	V	18.26	2.53	35.96	46.00	10.04

Note.

1. All spurious emission at channels are almost the same below 1 GHz, so that high channel was chosen at representative in final test.
2. Actual = Reading + Ant. factor + Cable loss
3. Detector mode: Quasi peak
4. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.



Test results (Above 1 000 MHz)

Mode: Bluetooth LE
Transfer rate: 1 Mbps
Distance of measurement: 3 meter
Operating frequency: 2 402 MHz
Channel: 0

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Detector mode	Pol.	AFCL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2385.4	40.40	Perak	H	3.56	43.96	74.00	30.04
2313.2	46.05	Perak	V	3.28	49.33	74.00	24.67
4803.7	37.35	Perak	H	13.54	50.89	74.00	23.11
4804.7	39.40	Perak	V	13.55	52.95	74.00	21.05

Mode: Bluetooth LE
Transfer rate: 1 Mbps
Distance of measurement: 3 meter
Operating frequency: 2 442 MHz
Channel: 20

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Detector mode	Pol.	AFCL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
4885.6	36.13	Perak	H	14.08	50.21	74.00	23.79
4883.6	38.43	Perak	V	14.07	52.50	74.00	21.50




Mode: Bluetooth LE
Transfer rate: 1 Mbps
Distance of measurement: 3 meter
Operating frequency: 2 480 MHz
Channel: 39

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Detector mode	Pol.	AFCL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2486.5	39.63	Perak	H	4.19	43.82	74.00	30.18
2488.2	41.72	Perak	V	4.20	45.92	74.00	28.08
4959.5	35.18	Perak	H	14.57	49.75	74.00	24.25
4959.5	39.53	Perak	V	14.57	54.10	74.00	19.90
4959.5	25.55	Avg	V	14.57	40.12	54.00	13.88

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.


Test results band edge emissions

- Low channel(Horizontal)

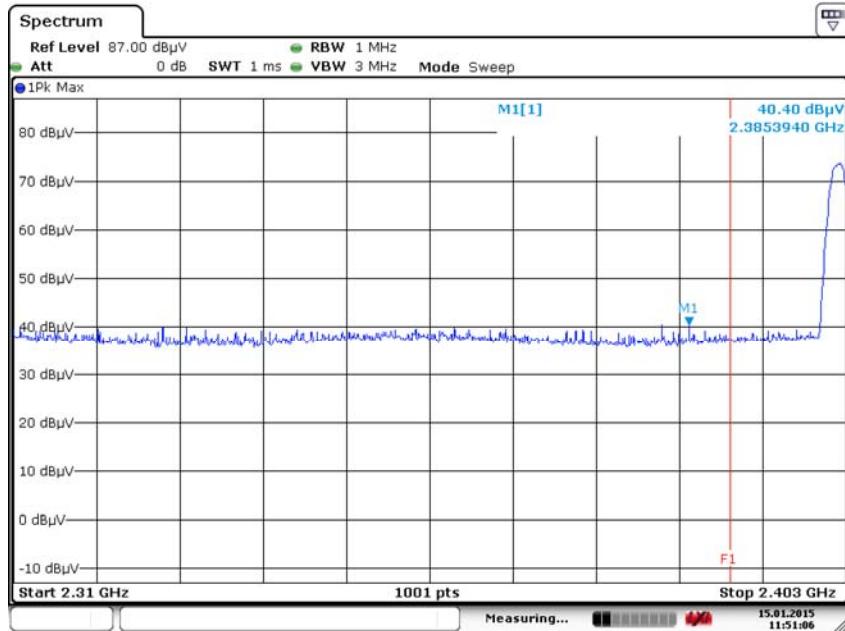

Date: 15.JAN.2015 11:51:06


- Low channel(Vertical)

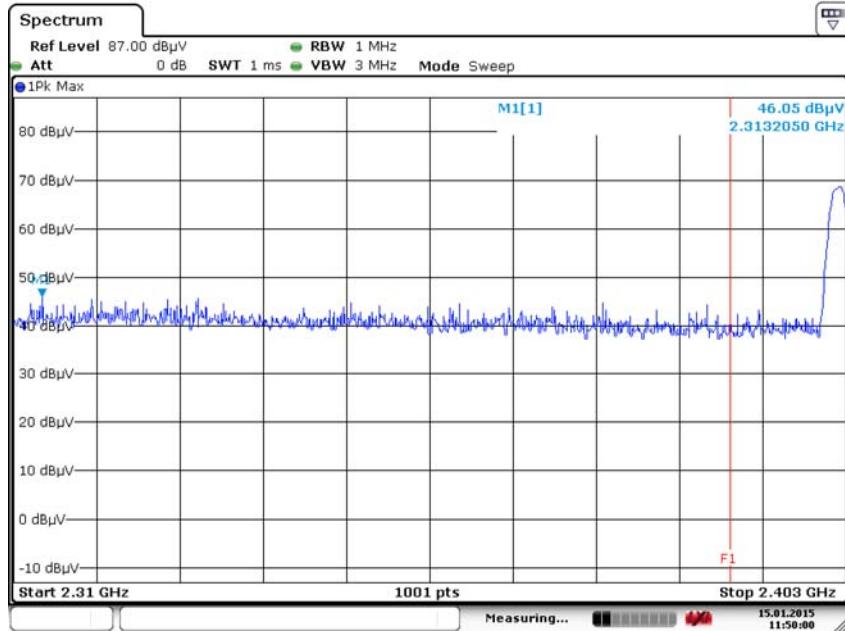

Date: 15.JAN.2015 11:50:00


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

- **High channel(Horizontal)**

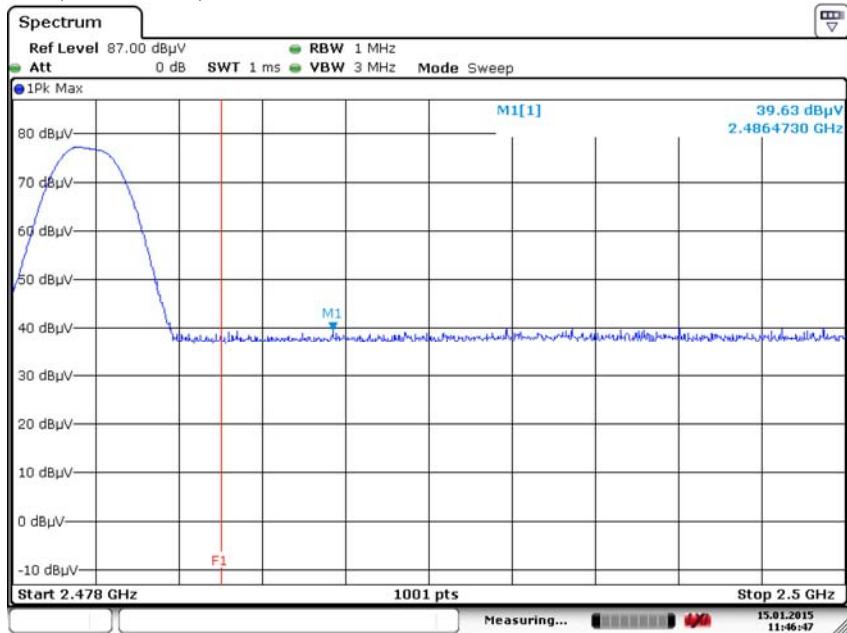

Date: 15.JAN.2015 11:46:48


- **High channel(Vertical)**

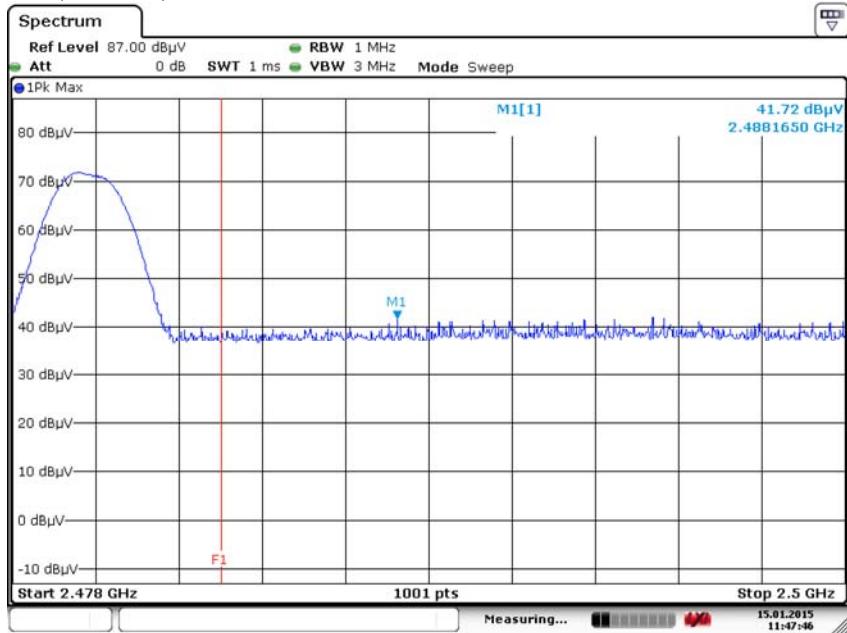

Date: 15.JAN.2015 11:47:46

3.2 Conducted spurious emissions & band edge

Test setup



Test procedure

Band edge

KDB 558074 v03r02 – Section 11.3

Test setting

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100 kHz
4. VBW = 1 MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Out of band emissions

KDB 558074 v03r02 – Section 11.3

KDB 662911 v02r01 – Section E)3)b)

Test setting



1. Start frequency was set to 30 MHz and stop frequency was set to 25 GHz for 2.4 GHz frequencies and 40 GHz for 5 GHz frequencies (separated into two plots per channel)
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Limit


According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))

Test results

Low channel

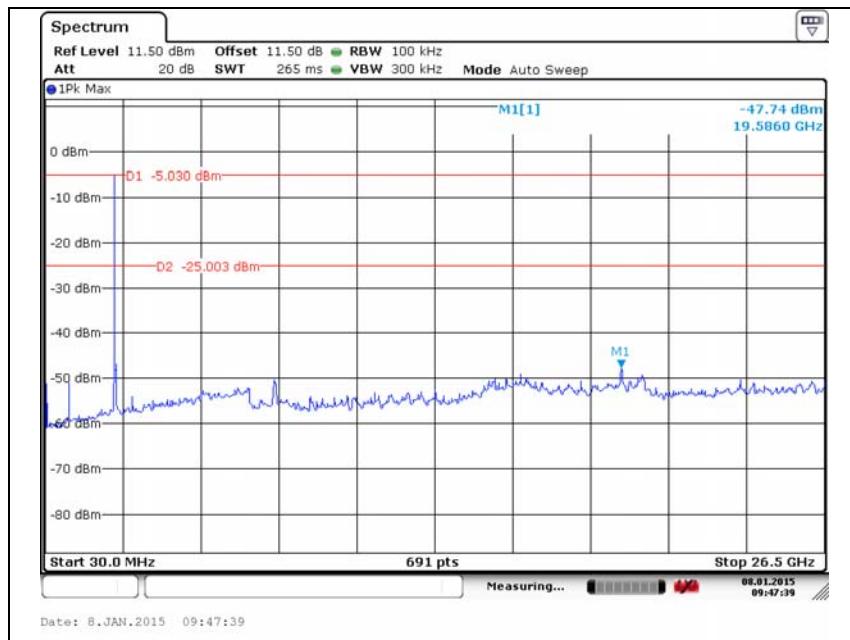
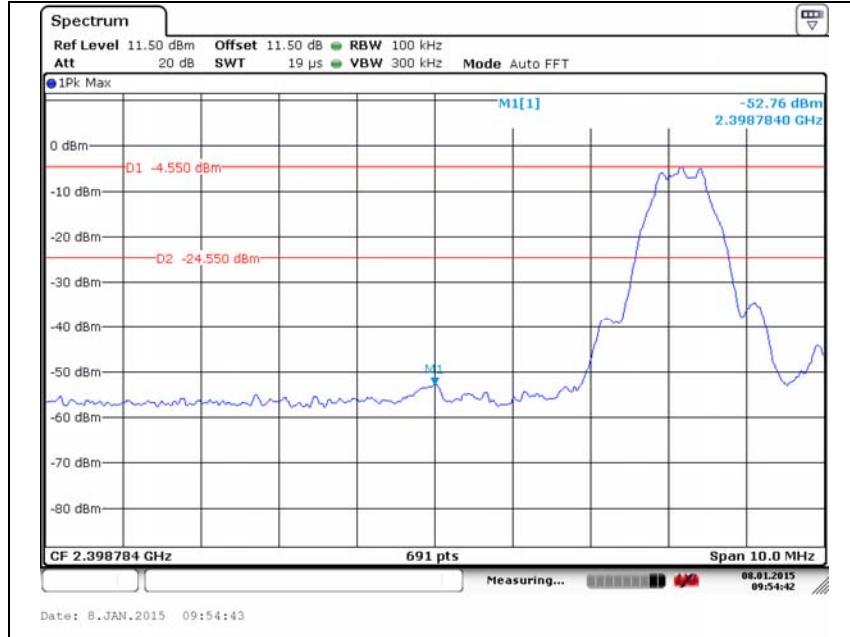


Middle channel

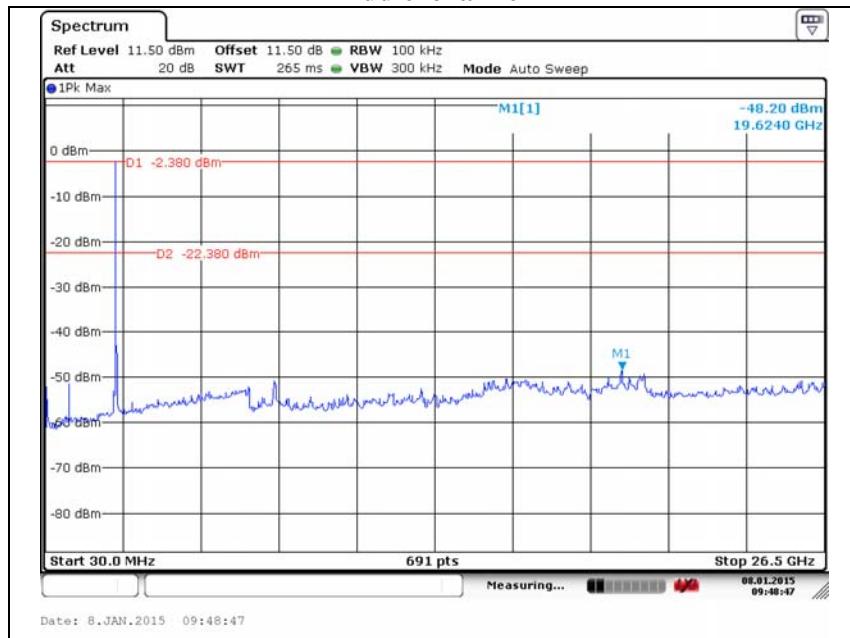

N/A


High channel

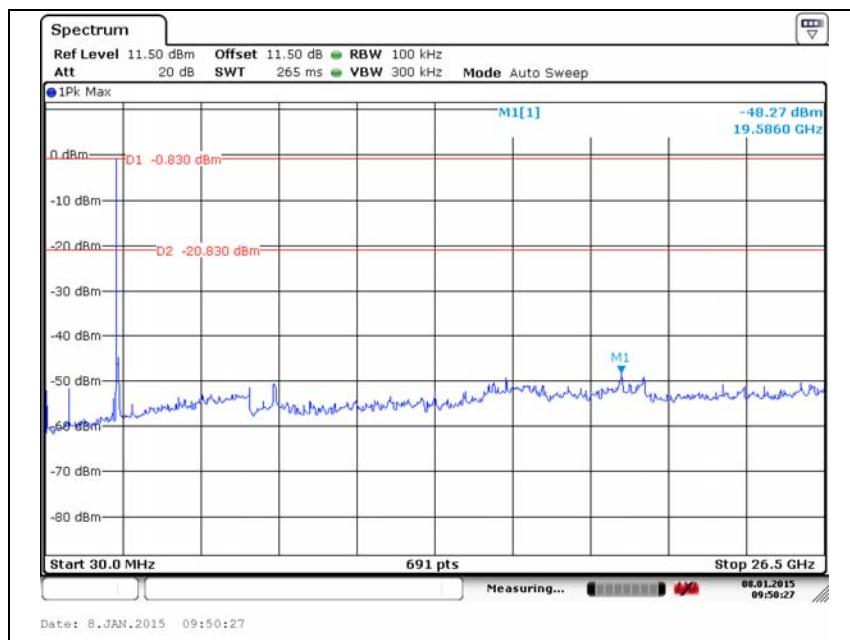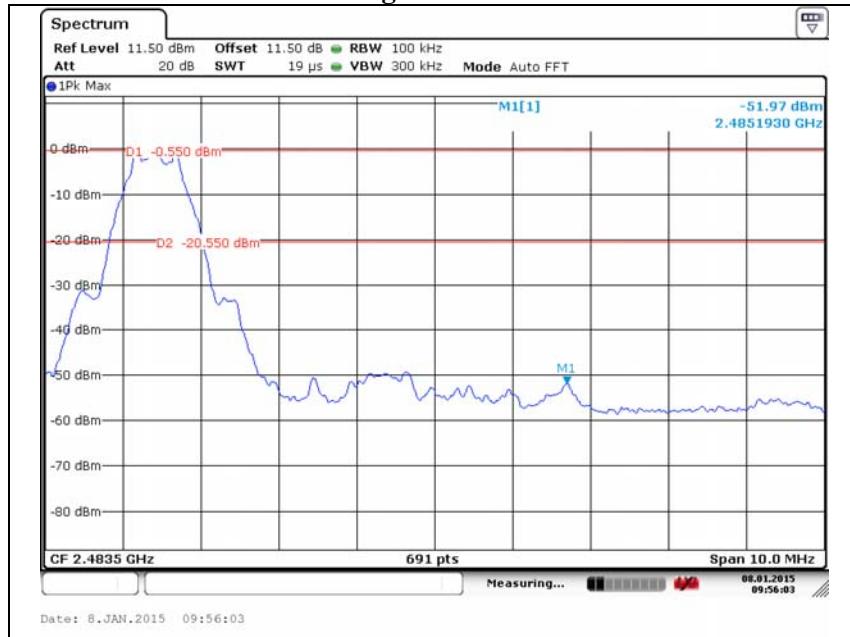

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.3. 6 dB bandwidth

Test setup



Test procedure

KDB 558074 v03r02 – Section 8.2 Option 1

Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth(VBW) $\geq 3 \times$ RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


Test results

Test Mode	Frequency(MHz)	6 dB bandwidth(MHz)	Limit(MHz)
LE	2 402	0.690	0.5
	2 442	0.690	
	2 480	0.699	


Low channel

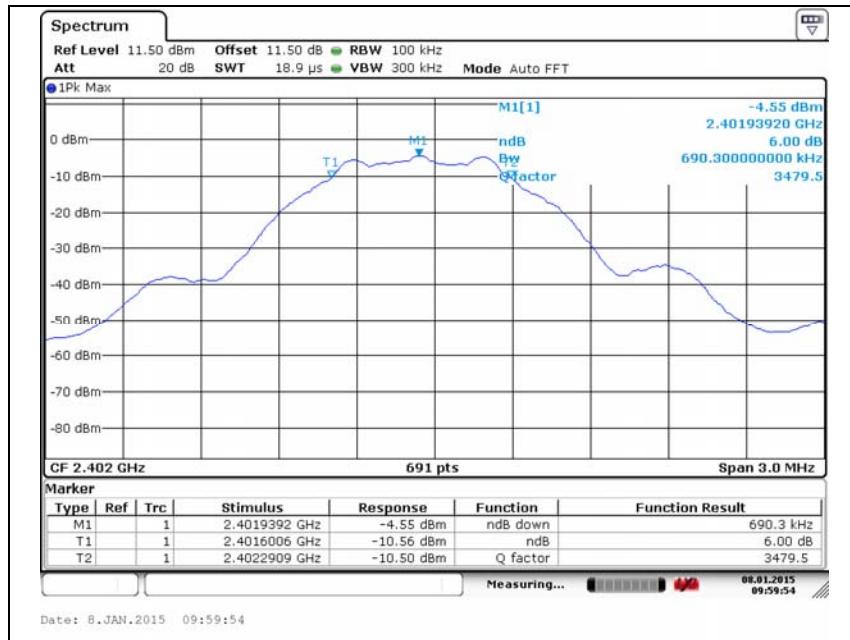

Middle channel

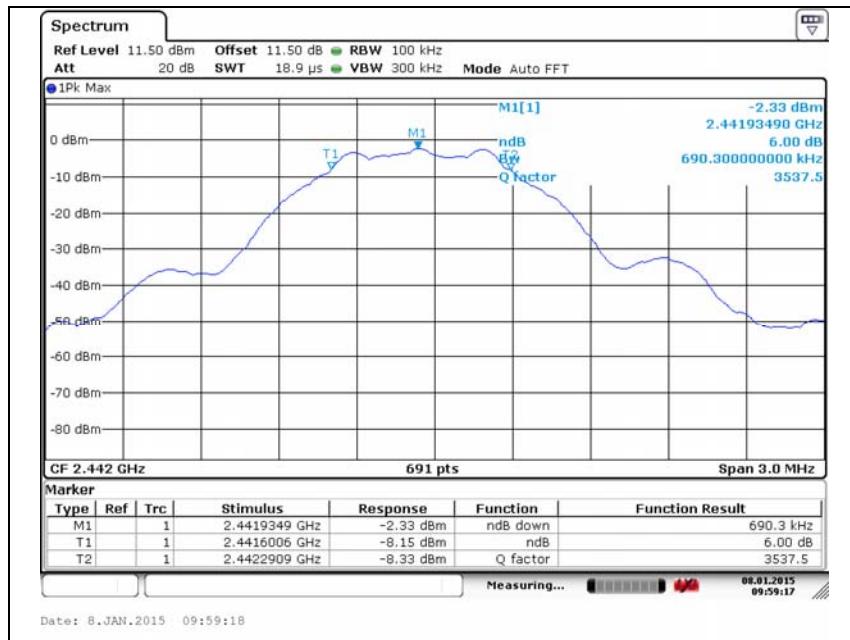


High channel

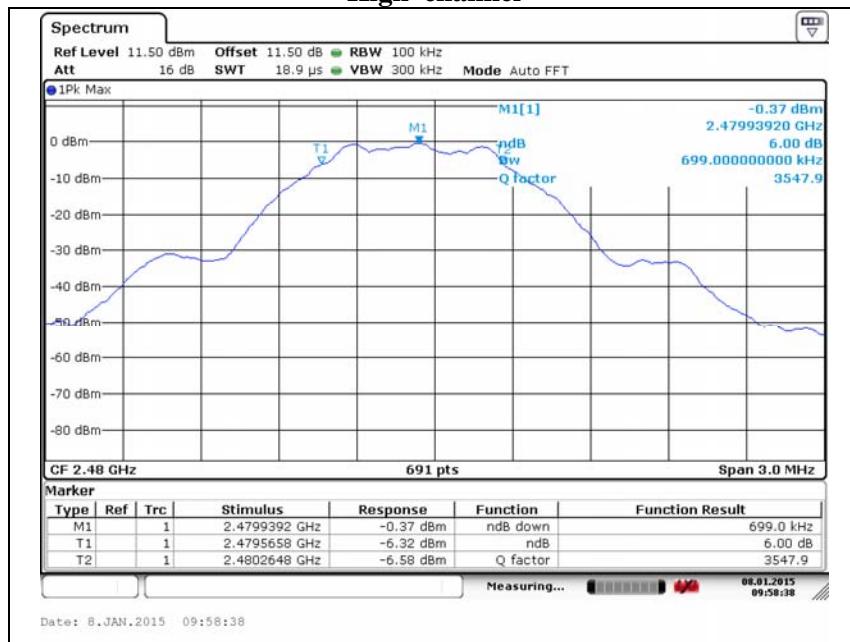

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.4. Output power

Test setup



Test procedure

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

KDB 558074_v03r01 – section 9.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW \geq 3 RBW.
- c) Set span \geq 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Limit

According to §15.247(b)(3), For systems using digital modulation in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted out-put power. Maximum Conducted Out-put Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


According to §15.247(b)(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmit-ting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.




Test results

Test Mode	Frequency(MHz)	Conducted power (dBm)	Limit(dBm)
LE	2 402	-4.13	30
	2 442	-1.92	
	2 480	-0.15	


Low channel

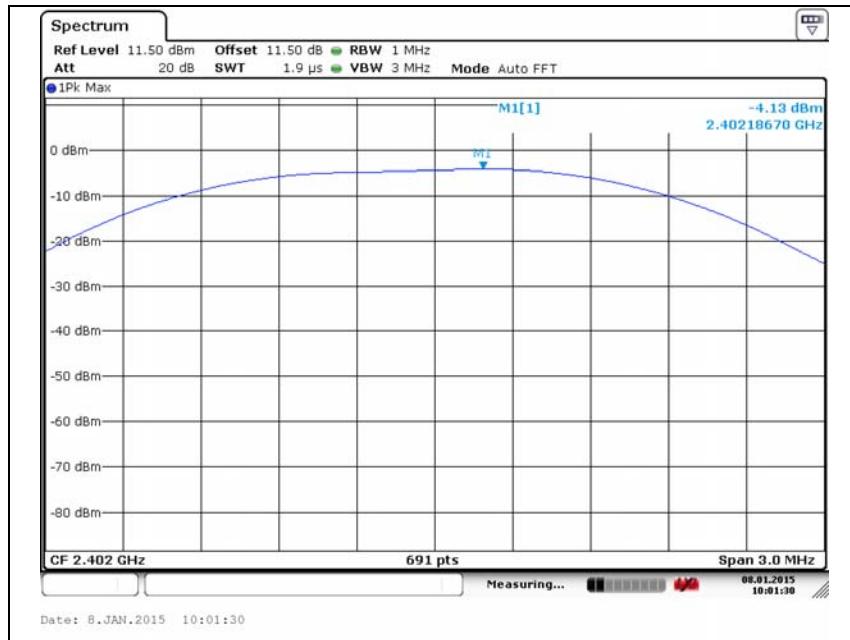

Middle channel

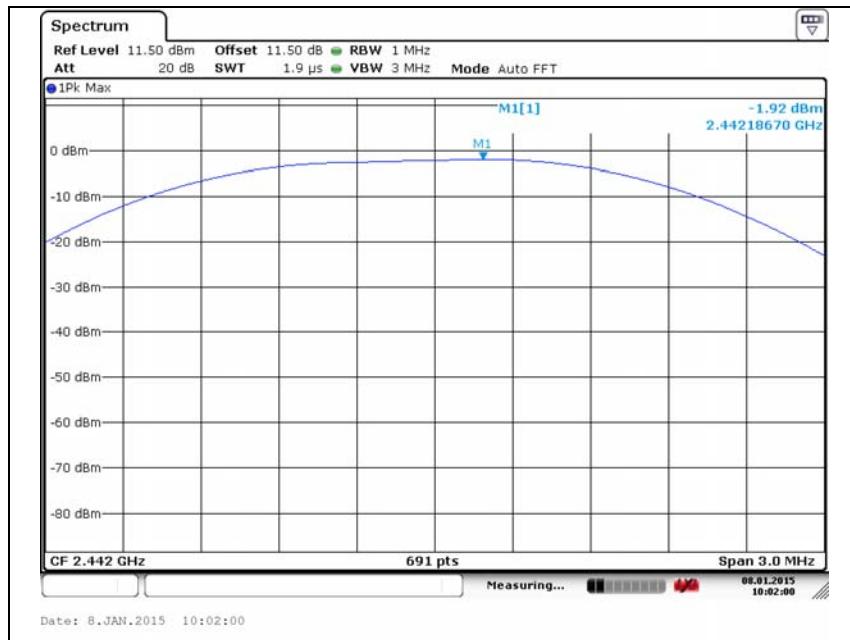


High channel

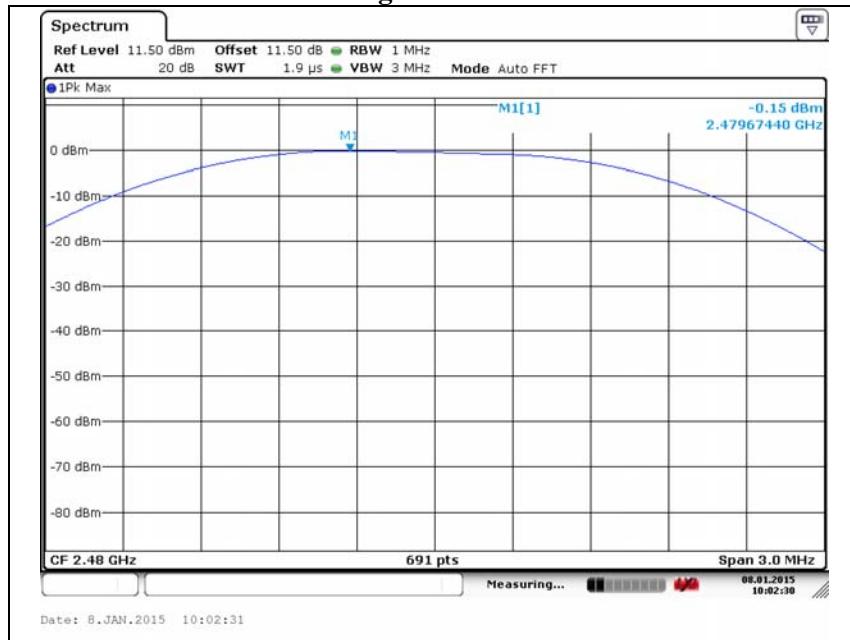

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.5. Power spectral density

Test setup



Test procedure

KDB 558074_v03r02 – section 10.2

Measurement procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS channel bandwidth.
- c) Set the RBW : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW(no less than 3 kHz) and repeat.

Limit


According to §15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.




Test results

Test Mode	Frequency(MHz)	Conducted power (dBm)	Limit(dBm)
LE	2 402	-13.78	8
	2 442	-11.53	
	2 480	-9.75	

Low channel

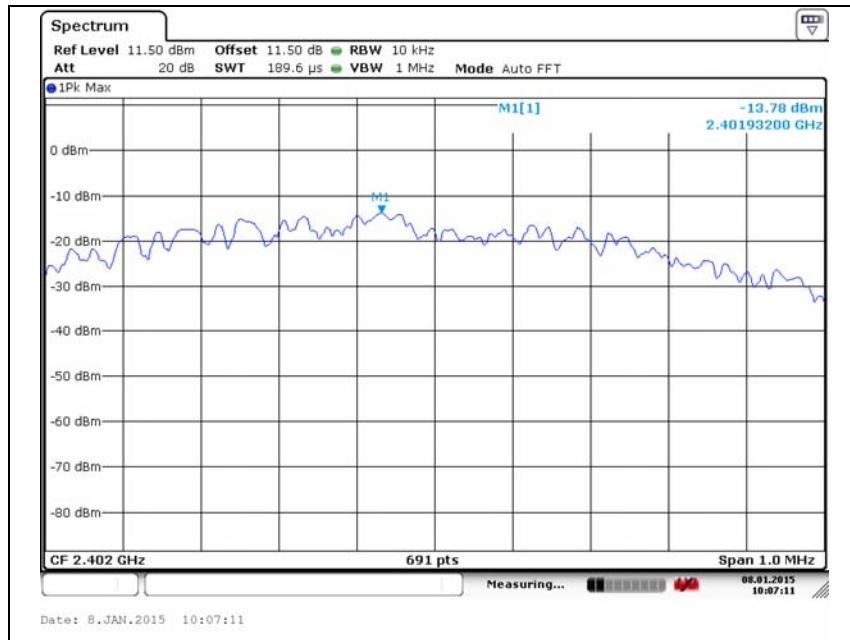


Middle channel

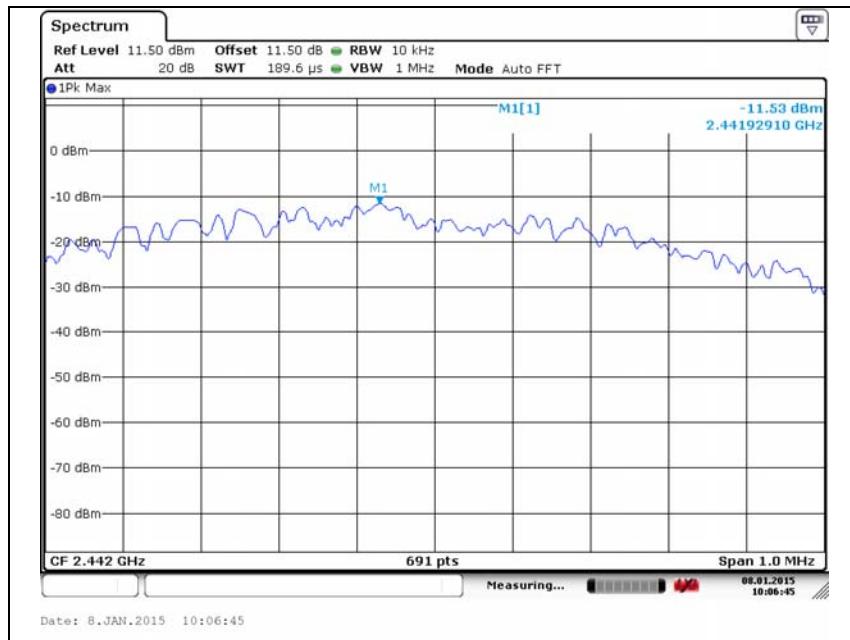

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

High channel

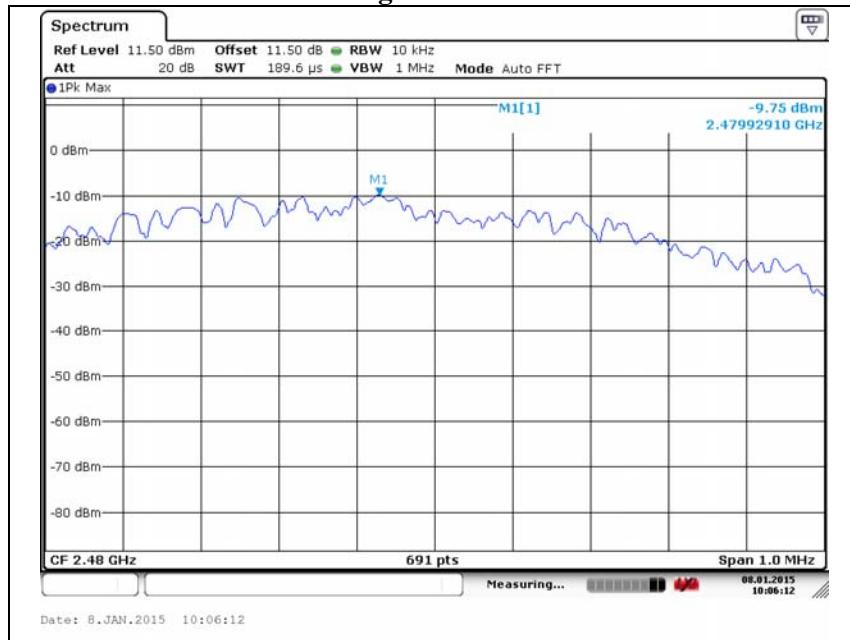

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.6. AC conducted emissions

Frequency range of measurement

150 kHz to 30 MHz

Instrument settings

IF Band Width: 9 kHz

Test procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m. Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit


According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Note.

- Decreases with the logarithm of the frequency.
- All AC Conducted emission at channels are almost the same, so that high channel was chosen at representative in final test.


Test results

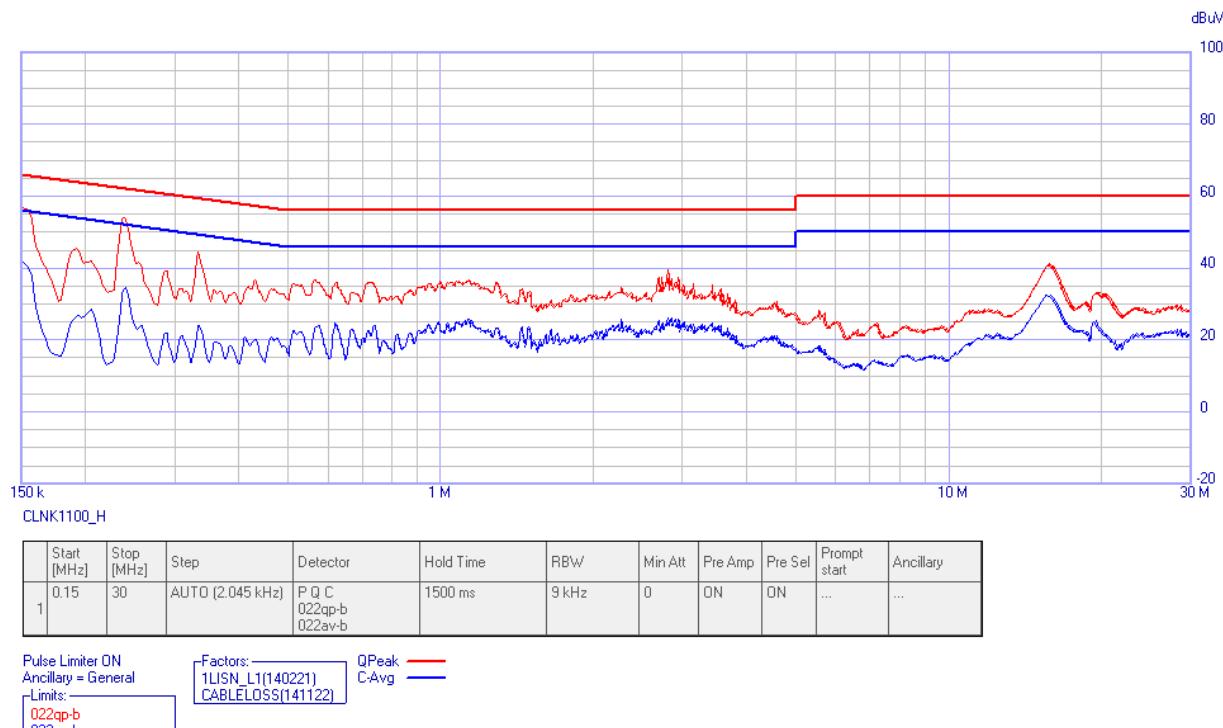

Frequency [MHz]	Q-Peak [dBμV]	Limit [dBμV]	Margin [dB]	C-Avg [dBμV]	Limit [dBμV]	Margin [dB]	Factor (LISN) [dB]	Factor (Cable Loss) [dB]
0.150	56.830	66.000	-9.170	41.840	56.000	-14.160	9.660	0.020
0.154	56.060	65.780	-9.720	40.140	55.780	-15.640	9.660	0.020
0.191	45.620	64.000	-18.380	26.620	54.000	-27.380	9.650	0.030
0.238	53.910	62.170	-8.260	34.000	52.170	-18.170	9.650	0.030
0.334	44.470	59.350	-14.880	23.920	49.350	-25.430	9.650	0.030
0.565	36.830	56.000	-19.170	23.220	46.000	-22.780	9.650	0.030
0.567	36.830	56.000	-19.170	23.220	46.000	-22.780	9.650	0.030
0.725	36.110	56.000	-19.890	22.030	46.000	-23.970	9.650	0.040
0.727	36.110	56.000	-19.890	22.030	46.000	-23.970	9.650	0.040
1.134	36.560	56.000	-19.440	25.720	46.000	-20.280	9.650	0.040
2.802	39.360	56.000	-16.640	26.150	46.000	-19.850	9.660	0.100
15.762	41.150	60.000	-18.850	32.570	50.000	-17.430	9.860	0.280

Note: Hot Line

Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

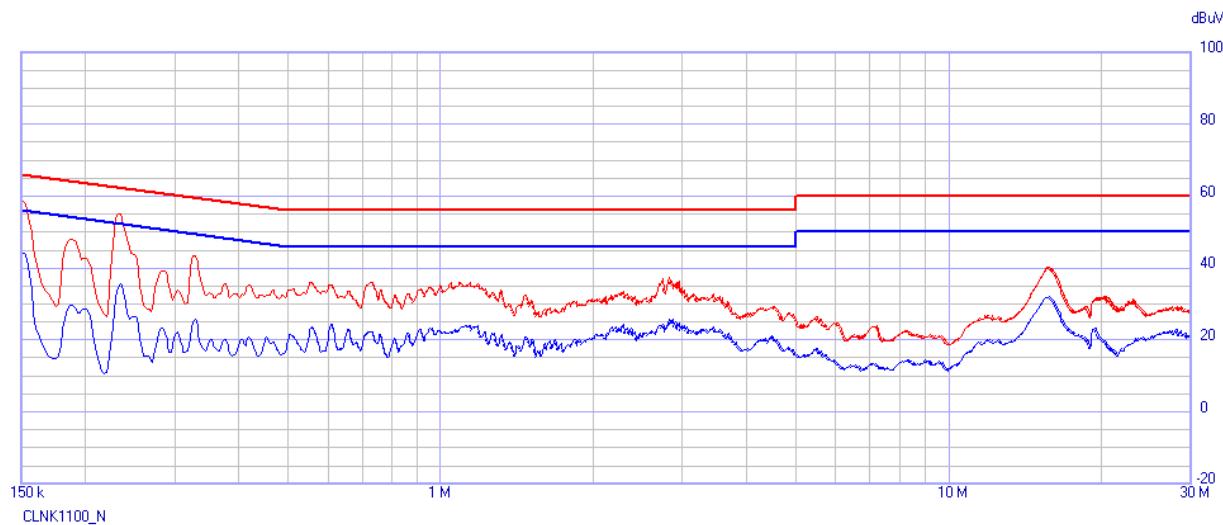

	Start [MHz]	Stop [MHz]	Step	Detector	Hold Time	RBW	Min Att	Pre Amp	Pre Sel	Prompt start	Ancillary
1	0.15	30	AUTO [2.045 kHz]	P.Q.C 022qp-b 022av-b	1500 ms	9 kHz	0	ON	ON

Pulse Limiter ON
 Ancillary = General

Factors: — QPeak — C-Avg
 1LISN, L2(140221)
 CABLELOSS(141122)

Limits: —
 022qp-b
 022av-b

Frequency [MHz]	Q-Peak [dB μ V]	Limit [dB μ V]	Margin [dB]	C-Avg [dB μ V]	Limit [dB μ V]	Margin [dB]	Factor (LISN) [dB]	Factor (Cable Loss) [dB]
0.150	58.800	66.000	-7.200	44.420	56.000	-11.580	9.660	0.020
0.154	54.380	65.780	-11.400	40.530	55.780	-15.250	9.660	0.020
0.187	48.170	64.180	-16.010	29.510	54.180	-24.670	9.660	0.030
0.234	54.890	62.310	-7.420	35.630	52.310	-16.680	9.650	0.030
0.328	43.310	59.500	-16.190	25.860	49.500	-23.640	9.640	0.030
0.555	36.030	56.000	-19.970	23.270	46.000	-22.730	9.650	0.030
0.733	36.070	56.000	-19.930	22.160	46.000	-23.840	9.650	0.040
0.735	36.070	56.000	-19.930	22.160	46.000	-23.840	9.650	0.040
1.093	36.040	56.000	-19.960	22.880	46.000	-23.120	9.650	0.040
2.817	37.500	56.000	-18.500	25.660	46.000	-20.340	9.660	0.100
15.678	40.200	60.000	-19.800	32.070	50.000	-17.930	9.770	0.280

Note: Neutral Line

Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).



Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum analyzer	R&S	FSV30	101389	1 year	2015.04.30
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2015.04.30
Loop antenna	R&S	HFH2-Z2.335.4711.52	826532	2 year	2015.04.25
Trilog-broadband antenna	Schwarzbeck	VULB 9168	9168-385	2 year	2015.05.09
Horn antenna	A.H.	SAS-571	414	2 year	2015.02.28
Preamplifier	HP	8449B	3008A00538	1 year	2015.07.23
Attenuator	HP	8495B	110504721	1 year	2015.04.30
EMI Test Receiver	R&S	ESVS10	826008/014	1 year	2015.04.04
EMI Receiver/Signal Analyzer	Narda S.T.S / PMM	PMM 9010F	020WW31006	1 year	2015.04.04
LISN	R&S	ENV216	101137	1 year	2015.02.21

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook(Laptop)	Samsung Electronics	NP-QX411L	HJV993BB905283V

Appendix B. Test setup photo

Radiated Emission (30MHz~1GHz)





Radiated Emission (Above 1GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.


AC conducted Emission

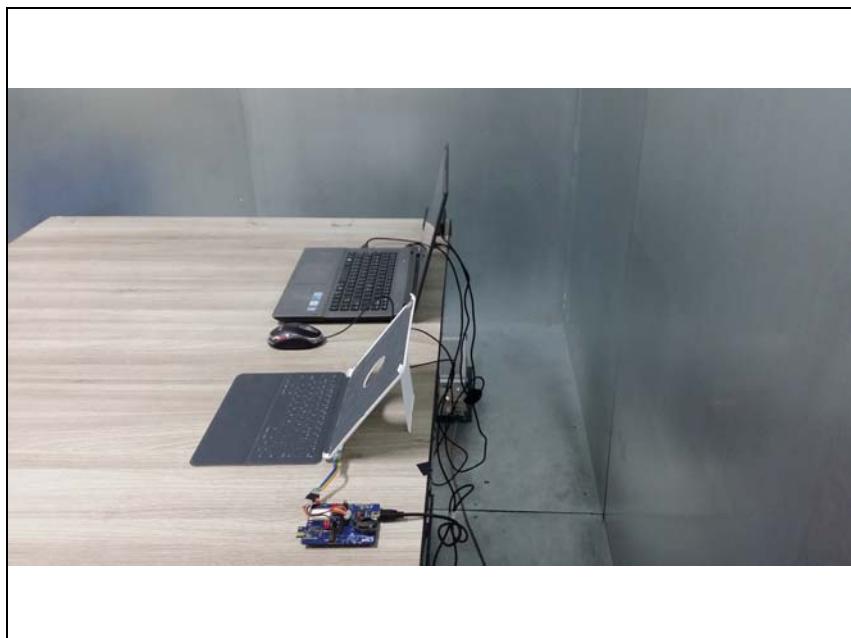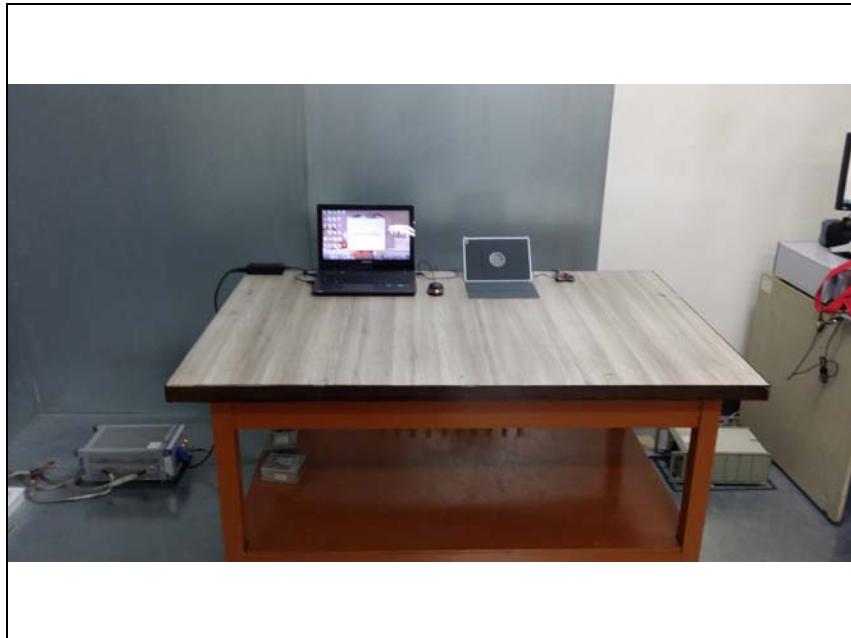

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

Appendix C. Duty Cycle

Frequency (MHz)	Mode	Duty cycle(X) = $\frac{\text{Tx}_{\text{on}} \text{ time}}{(\text{Tx}_{\text{on}} \text{ time} + \text{Tx}_{\text{off}} \text{ time})}$		
		Tx _{on} time (ms)	Tx _{on} time + Tx _{off} time (ms)	X
2 440	LE	0.394	0.626	0.629

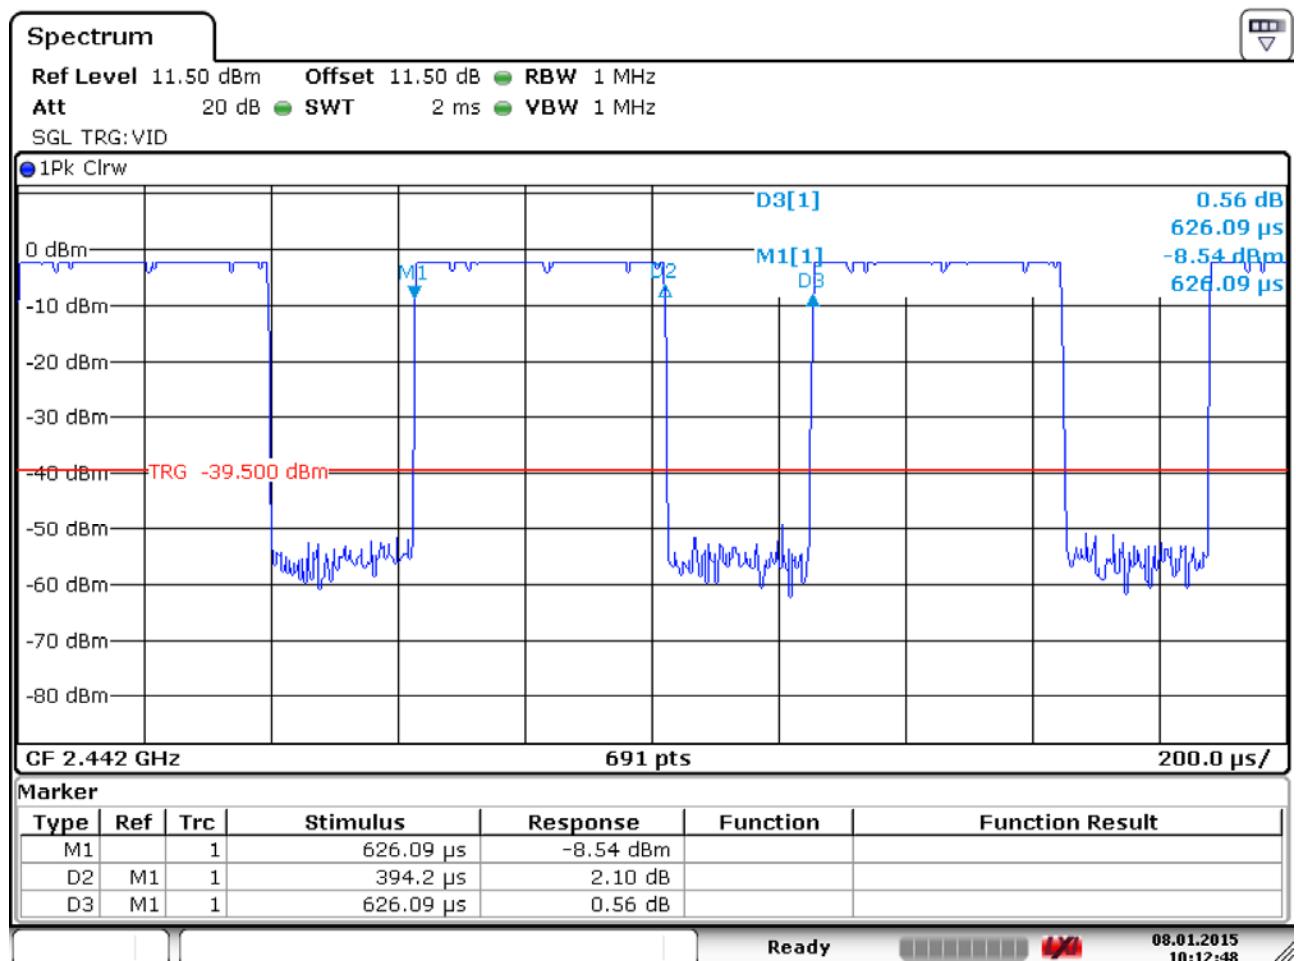

Date: 8.JAN.2015 10:12:49

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.