

RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.

TEL (760) 471-2100 • FAX (760) 471-2121

<http://www.rfexposurelab.com>

CERTIFICATE OF COMPLIANCE SAR EVALUATION

Zebra Technologies Corporation
14000 Summit Drive, Suite 900
Austin, TX 78728

Dates of Test: February 8-9, 2018 & March 18-25, 2019
Test Report Number: SAR.20190324
Revision A

FCC ID:	Q2GEM75U & PD98265NG
IC Certificate:	4596A-EM75U & 1000M-8265NG
Model(s):	iX101L3
Part Number:	90NJ-261S120
Contains Module:	Sierra Wireless Model EM7511, Intel Corp. Model 8265NGW
Test Sample:	Engineering Unit Same as Production
Serial Number:	JCKG009693
Equipment Type:	Wireless Ruggedized Tablet
Classification:	Portable Transmitter Next to Body
TX Frequency Range:	699 – 716 MHz, 777 – 787 MHz, 788 – 798 MHz, 814 – 849 MHz, 1710 – 1780 MHz, 1850 – 1910 MHz, 2496 – 2690 MHz, 3400 – 3800 MHz, 2412 – 2462 MHz, 5180 – 5320 MHz, 5500 – 5700 MHz, 5745 – 5825 MHz
Frequency Tolerance:	± 2.5 ppm
Maximum RF Output:	700 MHz (LTE) – 24.0 dBm, 782 MHz (LTE) – 24.0 dBm, 793 MHz (LTE) – 24.0 dBm, 835 MHz (UMTS) – 24.0 dBm, 835 MHz (LTE) – 24.0 dBm, 1750 MHz (UMTS) – 24.0 dBm; 1750 MHz (LTE) – 24.0 dBm, 1900 MHz (UMTS) – 24.0 dBm, 1900 MHz (LTE) – 24.0 dBm, 2600 MHz (LTE) – 23.0 dBm, 3600 MHz – 23.0 dBm, 2450 MHz (b) – 17.5 dBm, 2450 MHz (g) – 17.5 dBm, 2450 MHz (n20) – 17.5 dBm, 2450 MHz (n40) – 17.5 dBm, 5250 MHz (a) – 16.5 dBm, 5250 MHz (n20) – 16.5 dBm, 5250 MHz (n40) – 16.5 dBm, 5250 MHz (ac) – 13.5 dBm, 5600 MHz (a) – 16.5 dBm, 5600 MHz (n20) – 16.5 dBm, 5600 MHz (n40) – 16.5 dBm, 5600 MHz (ac) – 15.0 dBm, 5800 MHz (a) – 16.5 dBm, 5800 MHz (n20) – 16.5 dBm, 5800 MHz (n40) – 16.5 dBm, 5800 MHz (ac) – 15.0 dBm Conducted
Signal Modulation:	DSSS, OFDM, WCDMA, QPSK, 16QAM
Antenna Type:	Internal
Application Type:	Certification
FCC Rule Parts:	Part 2, 15C, 15E, 22, 24
KDB Test Methodology:	KDB 447498 D01 v06, KDB248227 v02r02, KDB 616217 D04 v01r02, KDB 941225 D01 v03r01, KDB 941225 D05 v02r05
Industry Canada:	RSS-102 Issue 5, Safety Code 6
Maximum SAR Value:	1.43 W/kg Reported
Max. Simultaneous:	0.04 Separation Ratio
Separation Distance:	0 mm

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and IEC 62209-2:2010 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application is subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).



Jay M. Moulton
Vice President



Testing Cert. # 2387.01

Table of Contents

1.	Introduction.....	3
	SAR Definition [5].....	4
2.	SAR Measurement Setup.....	5
	Robotic System.....	5
	System Hardware.....	5
	System Electronics.....	6
	Probe Measurement System.....	6
3.	Probe and Dipole Calibration.....	14
4.	Phantom & Simulating Tissue Specifications.....	15
	Head & Body Simulating Mixture Characterization.....	15
5.	ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2].....	16
	Uncontrolled Environment.....	16
	Controlled Environment.....	16
6.	Measurement Uncertainty.....	17
7.	System Validation.....	18
	Tissue Verification.....	18
	Test System Verification.....	18
8.	SAR Test Data Summary.....	19
	Procedures Used To Establish Test Signal.....	19
	Device Test Condition.....	19
9.	LTE Document Checklist.....	21
10.	FCC 3G Measurement Procedures.....	26
	10.1 Procedures Used to Establish RF Signal for SAR.....	26
	10.2 SAR Measurement Conditions for WCDMA/HSDPA/HSUPA.....	26
	11.4 SAR Measurement Conditions for LTE Bands.....	33
	SAR Data Summary –LTE Band 12.....	72
	SAR Data Summary –LTE Band 13.....	73
	SAR Data Summary –LTE Band 14.....	74
	SAR Data Summary – 850 MHz Body – UMTS Band 5.....	75
	SAR Data Summary –LTE Band 26.....	76
	SAR Data Summary – 1750 MHz Body – UMTS Band 4.....	77
	SAR Data Summary –LTE Band 66.....	78
	SAR Data Summary – 1900 MHz Body – UMTS Band 2.....	79
	SAR Data Summary –LTE Band 2.....	80
	SAR Data Summary –LTE Band 7.....	81
	SAR Data Summary –LTE Band 41.....	82
	SAR Data Summary –LTE Band 42.....	83
	SAR Data Summary –LTE Band 43.....	84
	SAR Data Summary –LTE Band 48.....	85
	SAR Data Summary – 2450 MHz Body 802.11b & BT.....	86
	SAR Data Summary – 5250 MHz Body 802.11a.....	87
	SAR Data Summary – 5600 MHz Body 802.11a.....	88
	SAR Data Summary – 5800 MHz Body 802.11a.....	89
	SAR Data Summary – Simultaneous Evaluation.....	90
12.	Test Equipment List.....	92
13.	Conclusion.....	93
14.	References.....	94
	Appendix A – System Validation Plots and Data.....	95
	Appendix B – SAR Test Data Plots.....	123
	Appendix C – SAR Test Setup Photos.....	142
	Appendix D – Probe Calibration Data Sheets.....	148
	Appendix E – Dipole Calibration Data Sheets.....	237
	Appendix F – Phantom Calibration Data Sheets.....	318
	Appendix G – Validation Summary.....	320

1. Introduction

This measurement report shows compliance of the Zebra Technologies Corporation Model(s) iX101L3 FCC ID: Q2GEM75U & PD98265NG with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices and IC Certificate: 4596A-EM75U & 1000M-8265NG with RSS102 Issue 5 & Safety Code 6. The FCC have adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on August 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC regulated portable devices. [1], [6]

The test results recorded herein are based on a single type test of Zebra Technologies Corporation Model iX101L3 and therefore apply only to the tested sample.

The test procedures, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], IEEE Std.1528 – 2013 Recommended Practice [4], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

The following table indicates all the wireless technologies operating in the iX101L3 Wireless Ruggedized Tablet. The table also shows the tolerance for the power level for each mode (if applicable).

Band	Technology	Class	Setpoint Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 2 – 1900 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 12 – 700 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 13 – 782 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 14 – 793 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 5 – 850 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 4 – 1750 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 7 – 2600 MHz	LTE – FDD	3	22	±1.0	21.0	23.0
Band 26 – 850 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 41 – 2600 MHz	LTE – TDD	3	22	±1.0	21.0	23.0
Band 66 – 1750 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 42 – 3500 MHz	LTE – TDD	3	22	±1.0	21.0	23.0
Band 43 – 3700 MHz	LTE – TDD	3	22	±1.0	21.0	23.0
Band 48 – 3600 MHz	LTE – TDD	3	22	±1.0	21.0	23.0
Band 5 – 850 MHz	UMTS	3	23	±1.0	22.0	24.0
Band 4 – 1750 MHz	UMTS	3	23	±1.0	22.0	24.0
Band 2 – 1900 MHz	UMTS	3	23	±1.0	22.0	24.0
WLAN – 2.4 GHz	802.11b	N/A	16	±1.5	14.5	17.5
WLAN – 2.4 GHz	802.11g/n(Ch. 6)	N/A	16	±1.5	14.5	17.5
WLAN – 5 GHz Band I, II, III, IV	802.11a	N/A	15	±1.5	13.5	16.5

SAR Definition [5]

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms electric field strength (V/m)

2. SAR Measurement Setup

Robotic System

These measurements are performed using the DASY52 automated dosimetric assessment system. The DASY52 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

System Hardware

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the HP Intel Core2 computer with Windows XP system and SAR Measurement Software DASY52, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

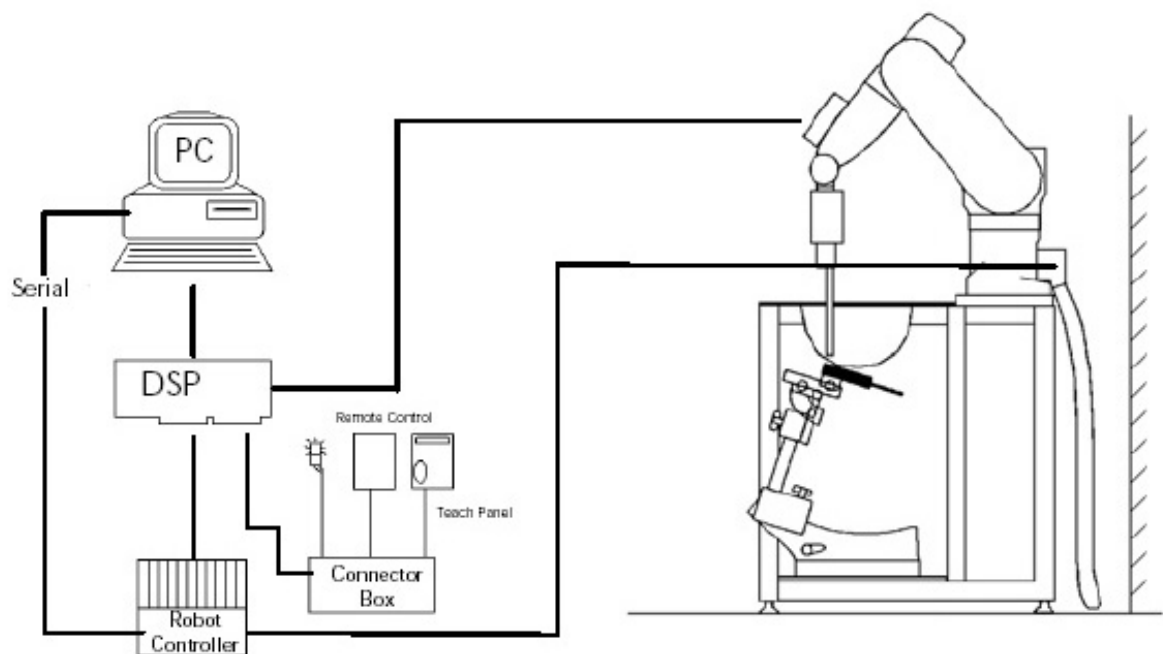


Figure 2.1 SAR Measurement System Setup

System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

Probe Measurement System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration (see Fig. 2.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi fiber line ending at the front of the probe tip. (see Fig. 2.3) It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY52 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.



DAE System

Probe Specifications

Calibration: In air from 10 MHz to 6.0 GHz
In brain and muscle simulating tissue at Frequencies of 450 MHz, 835 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5600 MHz, 5800 MHz

Frequency: 10 MHz to 6 GHz

Linearity: $\pm 0.2\text{dB}$ (30 MHz to 6 GHz)

Dynamic: 10 mW/kg to 100 W/kg

Range: Linearity: $\pm 0.2\text{dB}$

Dimensions: Overall length: 330 mm

Tip length: 20 mm

Body diameter: 12 mm

Tip diameter: 2.5 mm

Distance from probe tip to sensor center: 1 mm

Application: SAR Dosimetry Testing
Compliance tests of wireless device




Figure 2.2 Triangular Probe Configurations



Figure 2.3 Probe Thick-Film Technique

Probe Calibration Process

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor based temperature probe is used in conjunction with the E-field probe

$$SAR = C \frac{\Delta T}{\Delta t}$$

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

where:

Δt = exposure time (30 seconds),

σ = simulated tissue conductivity,

C = heat capacity of tissue (brain or muscle),

ρ = Tissue density (1.25 g/cm³ for brain tissue)

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place.

Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

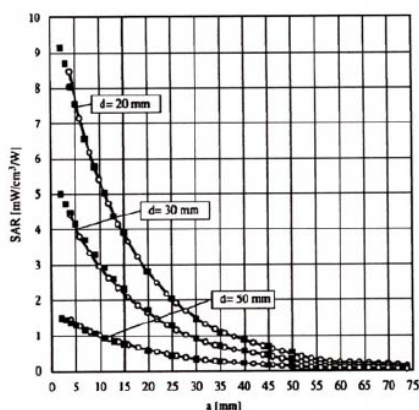


Figure 2.4 E-Field and Temperature Measurements at 900MHz

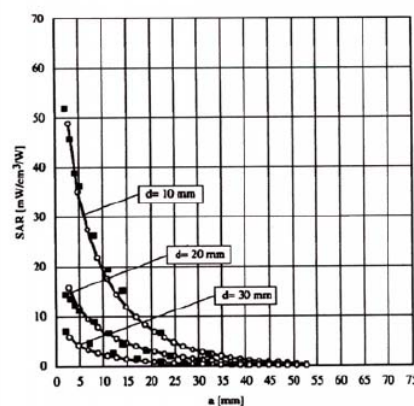


Figure 2.5 E-Field and Temperature Measurements at 1800MHz

Data Extrapolation

The DASY52 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i (i=x,y,z)
 U_i = input signal of channel i (i=x,y,z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x,y,z)
 $Norm_i$ = sensor sensitivity of channel i (i = x,y,z)
 $\mu V/(V/m)^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with P_{pwe} = equivalent power density of a plane wave in W/cm²
 E_{tot} = total electric field strength in V/m

Scanning procedure

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The highest integrated SAR value is the main concern in compliance test applications. These values can mostly be found at the inner surface of the phantom and cannot be measured directly due to the sensor offset in the probe. To extrapolate the surface values, the measurement distances to the surface must be known accurately. A distance error of 0.5mm could produce SAR errors of 6% at 1800 MHz. Using predefined locations for measurements is not accurate enough. Any shift of the phantom (e.g., slight deformations after filling it with liquid) would produce high uncertainties. For an automatic and accurate detection of the phantom surface, the DASY5 system uses the mechanical surface detection. The detection is always at touch, but the probe will move backward from the surface the indicated distance before starting the measurement.
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The scan uses different grid spacings for different frequency measurements. Standard grid spacing for head measurements in frequency ranges ≤ 2GHz is 15 mm in x - and y- dimension. For higher frequencies a finer resolution is needed, thus for the grid spacing is reduced according the following table:

Area scan grid spacing for different frequency ranges	
Frequency range	Grid spacing
≤ 2 GHz	≤ 15 mm
2 – 4 GHz	≤ 12 mm
4 – 6 GHz	≤ 10 mm

Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex B.

- A „zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse” scan. It uses a fine meshed grid where the robot moves the probe in steps along all the 3 axis (x,y and z-axis) starting at the bottom of the Phantom. The grid spacing for the cube measurement is varied according to the measured frequency range, the dimensions are given in the following table:

Zoom scan grid spacing and volume for different frequency ranges			
Frequency range	Grid spacing for x, y axis	Grid spacing for z axis	Minimum zoom scan volume
≤ 2 GHz	≤ 8 mm	≤ 5 mm	≥ 30 mm
2 – 3 GHz	≤ 5 mm	≤ 5 mm	≥ 28 mm
3 – 4 GHz	≤ 5 mm	≤ 4 mm	≥ 28 mm
4 – 5 GHz	≤ 4 mm	≤ 3 mm	≥ 25 mm
5 – 6 GHz	≤ 4 mm	≤ 2 mm	≥ 22 mm

DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex B. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.

Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of all points in the three directions x, y and z. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 1 to 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

SAM PHANTOM

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 2.6)

Phantom Specification

Phantom: SAM Twin Phantom (V4.0)
Shell Material: Vivac Composite
Thickness: 2.0 ± 0.2 mm

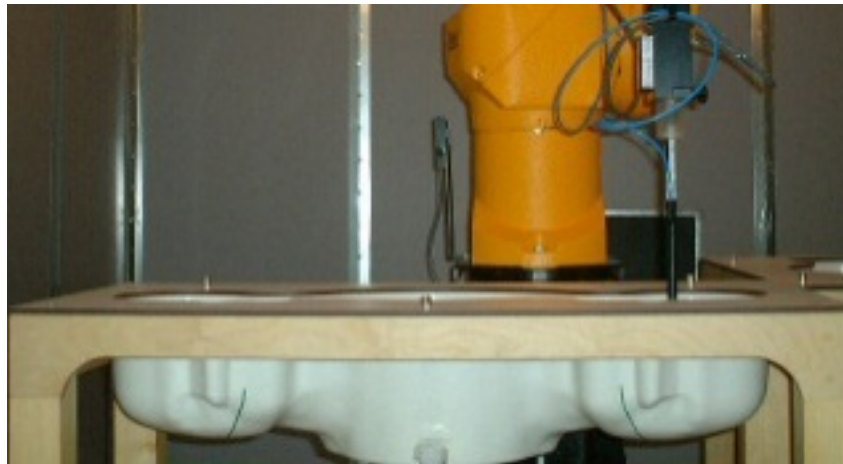


Figure 2.6 SAM Twin Phantom

Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0 the Mounting Device (see Fig. 2.7), enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately, and repeatedly be positioned according to the FCC, CENELEC, IEC and IEEE specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Figure 2.7 Mounting Device

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

3. Probe and Dipole Calibration

See Appendix D and E.

4. Phantom & Simulating Tissue Specifications

Head & Body Simulating Mixture Characterization

The head and body mixtures consist of the material based on the table listed below. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. Body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations.

Table 4.1 Typical Composition of Ingredients for Tissue

Ingredients		Simulating Tissue				
		750 MHz Body	835 MHz Body	1750 MHz Body	1900 MHz Body	2600 MHz Body
Mixing Percentage						
Water		Proprietary Purchased from Speag	52.50	Proprietary Purchased from Speag	69.91	Proprietary Purchased from Speag
Sugar			45.00		0.00	
Salt			1.40		0.13	
HEC			1.00		0.00	
Bactericide			0.10		0.00	
DGBE			0.00		29.96	
Dielectric Constant	Target	55.5	55.20	53.4	53.30	52.51
Conductivity (S/m)	Target	0.96	0.97	1.49	1.52	2.16

Ingredients		Simulating Tissue					
		2450 MHz Body	3500 MHz Body	3700 MHz Body	5250 MHz Body	5600 MHz Body	5785 MHz Body
Mixing Percentage							
Water		73.20	Proprietary Mixture Procured from Speag				
Sugar		0.00					
Salt		0.04					
HEC		0.00					
Bactericide		0.00					
DGBE		26.70					
Dielectric Constant	Target	52.70	51.32	51.05	48.96	48.47	48.25
Conductivity (S/m)	Target	1.95	3.32	3.53	5.35	5.77	5.96

5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 5.1 Human Exposure Limits

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Head	1.60	8.00
SPATIAL AVERAGE SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00

¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

6. Measurement Uncertainty

Measurement uncertainty table is not required per KDB 865664 D01 v01r04 section 2.8.2 page 12. SAR measurement uncertainty analysis is required in the SAR report only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR. The equivalent ratio (1.5/1.6) should be applied to extremity and occupational exposure conditions. The highest reported value is less than 1.5 W/kg. Therefore, the measurement uncertainty table is not required.

7. System Validation

Tissue Verification

Table 7.1 Measured Tissue Parameters

		750 MHz Body		835 MHz Body		1750 MHz Body	
Date(s)		Mar. 20, 2019		Mar. 19, 2019		Mar. 18, 2019	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		55.53	54.69	55.20	54.37	53.43	52.68
Conductivity: σ		0.96	0.94	0.97	0.98	1.49	1.56
		1900 MHz Body		2600 MHz Body		3500 MHz Body	
Date(s)		Mar. 18, 2019		Mar. 7, 2019		Mar. 22, 2019	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		53.30	53.17	52.51	52.09	51.32	51.11
Conductivity: σ		1.52	1.54	2.16	2.20	3.32	3.34
		3700 MHz Body		2450 MHz Body		5200 MHz Body	
Date(s)		Mar. 22, 2019		Feb. 8, 2018		Feb. 8, 2018	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		51.05	50.86	52.70	52.58	49.01	48.94
Conductivity: σ		3.53	3.54	1.95	2.00	5.30	5.34
		5600 MHz Body		5800 MHz Body			
Date(s)		Feb. 8, 2018		Feb. 8, 2018			
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured		
Dielectric Constant: ϵ		48.47	48.36	48.20	48.05		
Conductivity: σ		5.77	5.80	6.00	6.04		

See Appendix A for data of all the channel frequencies tested.


Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at the test frequency by using the system kit. Power is normalized to 1 watt. (Graphic Plots Attached)

Table 7.2 System Dipole Validation Target & Measured

	Test Frequency	Targeted SAR _{1g} (W/kg)	Measure SAR _{1g} (W/kg)	Tissue Used for Verification	Deviation Target and Fast SAR to SAR (%)	Plot Number
20-Mar-2019	750 MHz	8.55	8.65	Body	+ 1.17	1
19-Mar-2019	835 MHz	9.57	9.63	Body	+ 0.63	2
18-Mar-2019	1750 MHz	36.50	37.10	Body	+ 1.64	3
18-Mar-2019	1900 MHz	39.90	40.20	Body	+ 0.75	4
21-Mar-2019	2600 MHz	52.40	53.30	Body	+ 1.72	5
22-Mar-2019	3500 MHz	65.10	65.50	Body	+ 0.61	6
22-Mar-2019	3700 MHz	65.50	65.90	Body	+ 0.61	7
08-Feb-2018	2450 MHz	52.10	52.00	Body	- 0.19	8
08-Feb-2018	5200 MHz	77.40	78.10	Body	+ 0.90	9
08-Feb-2018	5600 MHz	80.70	79.90	Body	- 0.99	10
08-Feb-2018	5800 MHz	78.80	77.90	Body	- 1.14	11

See Appendix A for data plots.

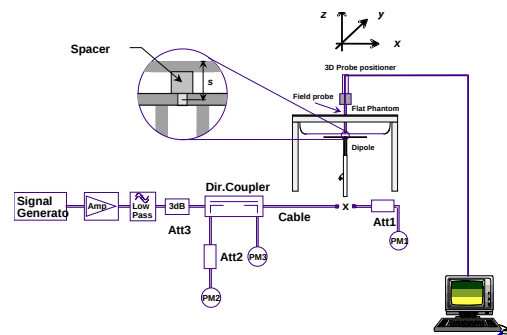
Figure 7.1 Dipole Validation Test Setup

8. SAR Test Data Summary

See Measurement Result Data Pages

See Appendix B for SAR Test Data Plots.
See Appendix C for SAR Test Setup Photos.

Procedures Used To Establish Test Signal

The device was either placed into simulated transmit mode using the manufacturer's test codes or the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Condition

In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a conducted power deviation of more than 5% occurred, the test was repeated. The power drift of each test is measured at the start of the test and again at the end of the test. The drift percentage is calculated by the formula $((\text{end}/\text{start})-1)*100$ and rounded to three decimal places. The drift percentage is calculated into the resultant SAR value on the data sheet for each test.


The EUT was tested in the tablet configuration of the device. The EUT was tested in on all sides of the device where the antenna was within 25 mm of that side. All measurements for the tablet condition were conducted with the side of the device in direct contact with the phantom.

The Bluetooth transmitter does simultaneously transmit with the WiFi transmitter and the WWAN transmitter as well as MIMO capability for the WiFi transmitter. When the BT is turned on, it transmits on Aux and the WiFi transmits on Main. Simultaneous transmission is evaluated on page 90-91.

The device was on a minimum of 10 cm of Styrofoam during each test.

The WCDMA testing was conducted using 12.2 kbps RMC configured in Test Loop Mode 1. The HSPA testing was conducted with HS-DPCCH, E-DPCCH and E-DPDCH all enabled and a 12.2 kbps RMC. FRC was configured according to HS-DPCCH Sub-Test 1 using H-set 1 and QPSK.

Location and Separation Distances

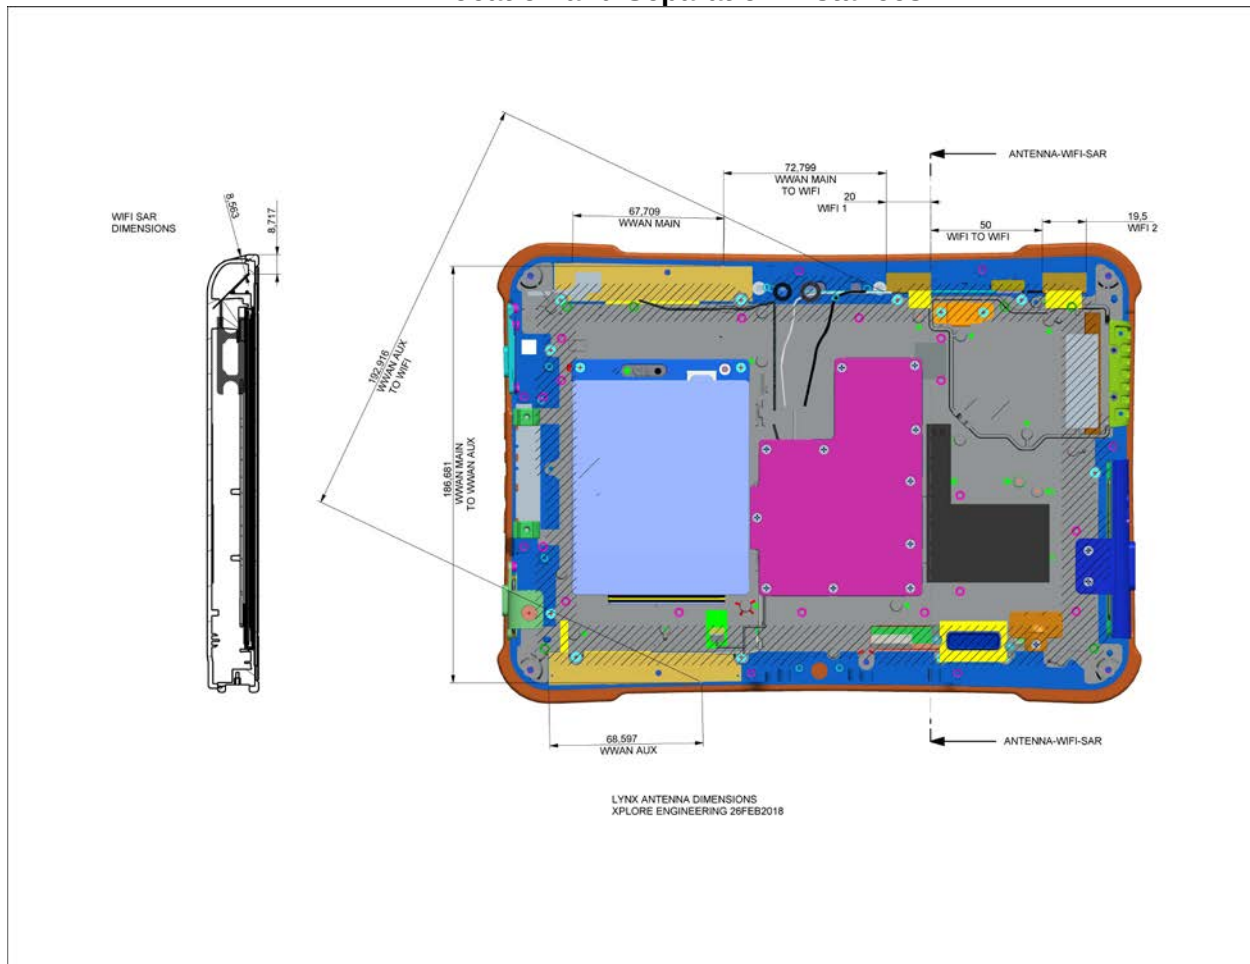

9. LTE Document Checklist

- 1) Identify the operating frequency range of each LTE transmission band used by the device

LTE Operating Band	Uplink (transmit)	Downlink (Receive)	Duplex mode (FDD/TDD)
	Low - high	Low - high	
4 & 66	1710-1780	2110-2200	FDD
5 & 26	814-849	859-894	FDD
13	777-787	746-756	FDD
12	704-716	734-746	FDD
14	788-798	758-768	FDD
2	1850-1915	1930-1995	FDD
7	2500-2570	2620-2690	FDD
41	2496-2690	2496-2690	TDD
42	3400-3600	3400-3600	TDD
43	3600-3800	3600-3800	TDD
48	3550-3700	3550-3700	TDD

- 2) Identify the channel bandwidths used in each frequency band; 1.4, 3, 5, 10, 15, 20 MHz etc

LTE Band Class	Bandwidth (MHz)	Frequency or Freq. Band (MHz)
4	1.4, 3, 5, 10, 15, 20	1710-1755
5	1.4, 3, 5, 10	824-849
26	1.4, 3, 5, 10, 15	814-849
13	5, 10	777-787
12	1.4, 3, 5, 10	704-716
14	5, 10	788-798
2	1.4, 3, 5, 10, 15, 20	1850-1910
30	5, 10	2305-2315
7	5, 10, 15, 20	2500-2570
41	5, 10, 15, 20	2496-2690
66	5, 10, 15, 20	1710-1780
42	5, 10, 15, 20	3400-3600
43	5, 10, 15, 20	3600-3800
48	5, 10, 15, 20	3550-3700

- 3) Identify the high, middle and low (H, M, L) channel numbers and frequencies in each LTE frequency band

LTE Band Class	Bandwidth (MHz)	Frequency (MHz)/Channel #					
		Low		Mid		High	
4	1.4	1710.7	19957	1732.5	20175	1754.3	20393
4	3	1711.5	19965	1732.5	20175	1753.5	20385
4	5	1712.5	19975	1732.5	20175	1752.5	20375
4	10	1715.0	20000	1732.5	20175	1750.0	20350
4	15	1717.5	20025	1732.5	20175	1747.5	20325
4	20	1720.0	20050	1732.5	20175	1745.0	20300
5	1.4	824.7	20407	836.5	20525	848.3	20643
5	3	825.5	20415	836.5	20525	847.5	20635
5	5	826.5	20425	836.5	20525	846.5	20625
5	10	829.0	20450	836.5	20525	844.0	20600
26	1.4	814.7	26697	831.5	26865	848.3	27033
26	3	815.5	26705	831.5	26865	847.5	27025
26	5	816.5	26715	831.5	26865	846.5	27015
26	10	819.0	26740	831.5	26865	844.0	26990
26	15	821.5	24765	831.5	26865	841.5	26995
13	5	779.5	23205	782.0	23230	784.5	23255
13	10	-----	-----	782.0	23230	-----	-----
12	1.4	699.7	23017	707.5	23095	715.3	23173
12	3	700.5	23025	707.5	23095	714.5	23165
12	5	701.5	23035	707.5	23095	713.5	23155
12	10	704.0	23060	707.5	23095	711.0	23130
14	5	790.5	23305	793.0	23330	795.5	23355
14	10	-----	-----	793.0	23330	-----	-----
2	1.4	1850.7	18607	1880.0	18900	1909.3	19193
2	3	1851.5	18615	1880.0	18900	1908.5	19185
2	5	1852.5	18625	1880.0	18900	1907.5	19175
2	10	1855.0	18650	1880.0	18900	1905.0	19150
2	15	1857.5	18675	1880.0	18900	1902.5	19125
2	20	1860.0	18700	1880.0	18900	1900.0	19100
30	5	2307.5	27685	2310	27710	2312.5	27735
30	10	-----	-----	2310	27710	-----	-----
7	5	2502.5	20775	2535	21100	2567.5	21425
7	10	2505.0	20800	2535	21100	2565.0	21400
7	15	2507.5	20825	2535	21100	2562.5	21375
7	20	2510.0	20850	2535	21100	2560.0	21350
41	5	2498.5	39675	2593	40620	2687.5	41565
41	10	2501.0	39700	2593	40620	2685.0	41540
41	15	2503.5	39725	2593	40620	2682.5	41515
41	20	2506.0	39750	2593	40620	2680.0	41490
66	5	1712.5	131997	1755.0	132422	1777.4	132646
66	10	1716.1	132033	1755.0	132422	1774.9	132621
66	15	1717.5	132047	1755.0	132422	1772.4	132596
66	20	1720.0	132072	1755.0	132422	1769.9	132571
42	5	3402.5	41615	3500.0	42590	3597.5	43565
42	10	3405.0	41640	3500.0	42590	3595.0	43540
42	15	3407.5	41665	3500.0	42590	3592.5	43515
42	20	3410.0	41690	3500.0	42590	3590.0	43490
43	5	3602.5	43615	3700.0	44590	3797.5	45565
43	10	3605.0	43640	3700.0	44590	3795.0	45540
43	15	3607.5	43665	3700.0	44590	3792.5	45515
43	20	3610.0	43690	3700.0	44590	3790.0	45490
48	5	3552.5	55265	3625.0	55990	3697.5	56715
48	10	3555.0	55290	3625.0	55990	3595.0	56690
48	15	3557.5	55315	3625.0	55990	3692.5	56665
48	20	3560.0	55340	3625.0	55990	3690.0	56640

- 4) Specify the UE category and uplink modulations used:
 - UE Category: 3
 - Uplink modulations: QPSK and 16QAM
- 5) Include descriptions of the LTE transmitter and antenna implementation; and also identify whether it is a standalone transmitter operating independently of other wireless transmitters in the device or sharing hardware components and/or antenna(s) with other transmitters etc

The device has 2 antennas:

- WWAN Main Antenna
- WWAN Diversity Antenna

- 6) Identify the LTE voice/data requirements in each operating mode and exposure condition with respect to head and body test configurations, antenna locations, handset flip-cover or slide positions, antenna diversity conditions etc

The device is a data only device. Data mode was tested in each operating mode and exposure condition in the body configuration. See test setup photos to see all configurations tested.

- 7) Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design:

- a) Only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards

MPR is mandatory, built-in by design on all production units. It was enabled during testing.

Modulation	Channel Bandwidth/transmission Bandwidth Configuration (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

- b) A-MPR (additional MPR) must be disabled

A-MPR was disabled during testing.

- 8) Include the maximum average conducted output power on the required test channels for each channel bandwidth and UL modulation used in each frequency band:

The maximum average conducted output power for the testing is listed on pages 34-71 of this report. The below table shows the factory set point with the allowable tolerance.

Band	Technology	Class	Setpoint Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 2 – 1900 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 12 – 700 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 13 – 782 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 14 – 793 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 5 – 850 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 4 – 1750 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 7 – 2600 MHz	LTE – FDD	3	22	±1.0	21.0	23.0
Band 26 – 850 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 41 – 2600 MHz	LTE – TDD	3	22	±1.0	21.0	23.0
Band 66 – 1750 MHz	LTE – FDD	3	23	±1.0	22.0	24.0
Band 42 – 3500 MHz	LTE – TDD	3	22	±1.0	21.0	23.0
Band 43 – 3700 MHz	LTE – TDD	3	22	±1.0	21.0	23.0
Band 48 – 3600 MHz	LTE – TDD	3	22	±1.0	21.0	23.0

- 9) Identify all other U.S. wireless operating modes (3G, Wi-Fi, WiMax, Bluetooth etc), device/exposure configurations (head and body, antenna and handset flip-cover or slide positions, antenna diversity conditions etc.) and frequency bands used for these modes

Other wireless modes:

Band	Technology	Class	Setpoint Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 5 – 850 MHz	UMTS	3	23	±1.0	22.0	24.0
Band 4 – 1750 MHz	UMTS	3	23	±1.0	22.0	24.0
Band 2 – 1900 MHz	UMTS	3	23	±1.0	22.0	24.0
WLAN – 2.4 GHz	802.11b	N/A	16	±1.5	14.5	17.5
WLAN – 2.4 GHz	802.11g/n(Ch. 6)	N/A	16	±1.5	14.5	17.5
WLAN – 5 GHz Band I, II, III, IV	802.11a	N/A	14.5	±1.5	13.0	16.5

- 10) Include the maximum average conducted output power measured for the other wireless modes and frequency bands.

The maximum average conducted output power measured for the testing is listed on pages 27-31 of this report. The table in item 9 shows the factory set point with the allowable tolerance.

- 11) When power reduction is applied to certain wireless modes to satisfy SAR compliance for simultaneous transmission conditions, other equipment certification or operating requirements, include the maximum average conducted output power measured in each power reduction mode applicable to the simultaneous voice/data transmission configurations for such wireless configurations and frequency bands; and also include details of the power reduction implementation and measurement setup

Power reduction is required to satisfy SAR compliance for the cellular bands. There are two inductive sensors located on each side of the main antenna. The sensors were measured to determine the distance from the device which they would become active. Both sensors become active at 9 ± 1 mm.

- 12) Include descriptions of the test equipment, test software, built-in test firmware etc. required to support testing the device when power reduction is applied to one or more transmitters/antennas for simultaneous voice/data transmission

Testing at the 0 mm distance did not require any special settings. The power sensor would always be active during this testing. AT commands were used to deactivate the sensors to insure the device could still meet the SAR limits at the minimum distance -1 mm. No special software or firmware was required.

10. FCC 3G Measurement Procedures

Power measurements were performed using a base station simulator under average power.

10.1 Procedures Used to Establish RF Signal for SAR

The device was placed into a simulated call using a base station simulator in a screen room. Such test signals offer a consistent means for testing SAR and recommended for evaluating SAR. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5% occurred, the tests were repeated.

10.2 SAR Measurement Conditions for WCDMA/HSDPA/HSUPA

Configure the call box 8960 to support all WCDMA tests in respect to the 3GPP 34.121 (listed in Table below). Measure the power at Ch4132, 4182 and 4233 for US cell; Ch9262, 9400 and 9538 for US PCS band.

For Rel99

- Set a Test Mode 1 loop back with a 12.2kbps Reference Measurement Channel (RMC).
- Set and send continuously Up power control commands to the device
- Measure the power at the device antenna connector using the power meter with average detector.

For HSDPA Rel 6

- Establish a Test Mode 1 loop back with both 1 12.2kbps RMC channel and a H-Set1 Fixed Reference Channel (FRC). With the 8960 this is accomplished by setting the signal Channel Coding to "Fixed Reference Channel" and configuring for HSET-1 QKSP.
- Set beta values and HSDPA settings for HSDPA Subtest1 according to Table below.
- Send continuously Up power control commands to the device
- Measure the power at the device antenna connector using the power meter with modulated average detector.
- Repeat the measurement for the HSDPA Subtest2, 3 and 4 as given in Table below.

For HSUPA Rel 6

- Use UL RMC 12.2kbps and FRC H-Set1 QPSK, Test Mode 1 loop back. With the 8960 this is accomplished by setting the signal Channel Coding to "E-DCH Test Channel" and configuring the equipment category to Cat5_10ms.
- Set the Absolute Grant for HSUPA Subtest1 according to Table below.
- Set the device power to be at least 5dB lower than the Maximum output power
- Send power control bits to give one TPC_cmd = +1 command to the device. If device doesn't send any E-DPCH data with decreased E-TFCI within 500ms, then repeat this process until the decreased E-TFCI is reported.
- Confirm that the E-TFCI transmitted by the device is equal to the target E-TFCI in Table below. If the E-TFCI transmitted by the device is not equal to the target E-TFCI, then send power control bits to give one TPC_cmd = -1 command to the UE. If UE sends any E-DPCH data with decreased E-TFCI within 500 ms, send new power control bits to give one TPC_cmd = -1 command to the UE. Then confirm that the E-TFCI transmitted by the UE is equal to the target E-TFCI in Table below.
- Measure the power using the power meter with modulated average detector.
- Repeat the measurement for the HSUPA Subtest2, 3, 4 and 5 as given in Table below.

3GPP Release Version	Mode	Cellular Band [dBm]			Sub-Test (See Table Below)	MPR
		4132	4183	4233		
99	WCDMA	23.75	23.89	23.82	-	-
6	HSDPA	23.79	23.82	23.71	1	0
6		23.72	23.79	23.75	2	0
6		23.42	23.47	23.36	3	0.5
6		23.41	23.44	23.39	4	0.5
6	HSUPA	23.71	23.81	23.75	1	0
6		21.91	21.90	21.88	2	2
6		22.95	22.93	22.91	3	1
6		21.84	21.90	21.89	4	2
6		23.69	23.80	23.74	5	0

3GPP Release Version	Mode	AWS Band [dBm]			Sub-Test (See Table Below)	MPR
		1312	1413	1513		
99	WCDMA	23.88	23.90	23.95	-	-
6	HSDPA	23.79	23.82	23.76	1	0
6		23.81	23.75	23.79	2	0
6		23.36	23.34	23.36	3	0.5
6		23.41	23.31	23.39	4	0.5
6	HSUPA	23.84	23.82	23.75	1	0
6		21.97	22.01	21.89	2	2
6		22.94	23.05	22.94	3	1
6		21.99	21.95	22.03	4	2
6		23.82	23.80	23.71	5	0

3GPP Release Version	Mode	PCS Band [dBm]			Sub-Test (See Table Below)	MPR
		9262	9400	9538		
99	WCDMA	23.92	23.97	23.95	-	-
6	HSDPA	23.81	23.85	23.79	1	0
6		23.75	23.79	23.74	2	0
6		23.42	23.36	23.38	3	0.5
6		23.44	23.36	23.40	4	0.5
6	HSUPA	23.88	23.85	23.72	1	0
6		21.92	22.05	21.93	2	2
6		22.91	23.03	22.99	3	1
6		21.95	21.97	22.00	4	2
6		23.85	23.81	23.78	5	0

Sub-Test Setup for Release 6 HSDPA

Sub-Test	β_c	β_d	B_c / β_d	β_{hs}
1	2/15	15/15	2/15	4/15
2	12/15	15/15	15/15	24/15
3	15/15	8/15	15/8	30/15
4	15/15	4/15	15/4	30/15
Δ_{ack} , Δ_{nack} and $\Delta_{cqi} = 8$				

Sub-Test Setup for Release 6 HSUPA

Sub-Test	β_c	β_d	B_c / β_d	β_{hs}	B_{ec}	B_{ed}	MPR	AG Index	E-TFCI
1	11/15	15/15	11/15	22/15	209/225	1039/225	0.0	20	75
2	6/15	15/15	6/15	12/15	12/15	94/75	2.0	12	67
3	15/15	9/15	15/9	30/15	30/15	47/15	1.0	15	92
4	2/15	15/15	2/15	4/15	2/15	56/15	2.0	17	71
5	15/15	15/15	15/15	30/15	24/15	134/15	0.0	21	81
Δ_{ack} , Δ_{nack} and $\Delta_{cqi} = 8$									

Band	Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	Data Rate	Antenna	Avg Power (dBm)	Tune-up Pwr (dBm)
2450 MHz	802.11b	20	2	2417	1 Mbps	Chain A	17.45	17.50
			6	2437			17.50	17.50
			10	2457			17.50	17.50
			2	2417		Chain B	17.44	17.50
			6	2437			17.50	17.50
			10	2457			17.50	17.50
	802.11g	20	2	2417	6 Mbps	Chain A	17.47	17.50
			6	2437			17.44	17.50
			10	2457			17.44	17.50
			2	2417		Chain B	17.39	17.50
			6	2437			17.36	17.50
			10	2457			17.42	17.50
	802.11n	20	2	2417	HTO	Chain A	17.45	17.50
			6	2437			17.37	17.50
			10	2457			17.40	17.50
			2	2417		Chain B	17.41	17.50
			6	2437			17.38	17.50
			10	2457			17.39	17.50
	802.11n	40	4	2427	HTO	Chain A	17.45	17.50
			6	2437			17.37	17.50
			8	2447			17.40	17.50
			4	2427		Chain B	17.41	17.50
			6	2437			17.38	17.50
			8	2447			17.39	17.50
5.15-5.25 GHz	802.11a	20	38	5190	6 Mbps	Chain A	16.42	16.50
			40	5200			16.50	16.50
			44	5220			16.50	16.50
			46	5230			16.47	16.50
			38	5190		Chain B	16.48	16.50
			40	5200			16.50	16.50
			44	5220			16.50	16.50
			46	5230			16.44	16.50
	802.11n	20	38	5190	HTO	Chain A	16.41	16.50
			40	5200			16.38	16.50
			44	5220			16.39	16.50
			46	5230			16.35	16.50
			38	5190		Chain B	16.34	16.50
			40	5200			16.38	16.50
			44	5220			16.39	16.50
			46	5230			16.33	16.50
	802.11n	40	40	5200	HTO	Chain A	16.42	16.50
			46	5230			16.44	16.50
			40	5200	HTO	Chain B	16.48	16.50
	802.11ac	80	46	5230			16.45	16.50
			42	5210	VHTO	Chain A	13.42	13.50
						Chain B	13.44	13.50
5.25-5.35 GHz	802.11a	20	54	5270	6 Mbps	Chain A	16.45	16.50
			56	5280			16.50	16.50
			60	5300			16.50	16.50
			62	5310			16.47	16.50
			52	5260		Chain B	16.44	16.50
			56	5280			16.50	16.50
			60	5300			16.50	16.50
			62	5310			16.48	16.50
	802.11n	20	54	5270	HTO	Chain A	16.42	16.50
			56	5280			16.39	16.50
			60	5300			16.38	16.50
			62	5310			16.40	16.50
			52	5260		Chain B	16.41	16.50
			56	5280			16.33	16.50
			60	5300			16.36	16.50
			62	5310			16.39	16.50
	802.11n	40	54	5270	HTO	Chain A	16.32	16.50
			60	5300			16.34	16.50
			54	5270	HTO	Chain B	16.39	16.50
			60	5300			16.40	16.50
	802.11ac	80	58	5290	VHTO	Chain A	13.35	13.50
						Chain B	13.41	13.50

Band	Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	Data Rate	Antenna	Avg Power (dBm)	Tune-up Pwr (dBm)
5600 MHz	802.11a	20	102	5510	6 Mbps	Chain A	16.42	16.50
			104	5520			16.50	16.50
			108	5540			16.45	16.50
			112	5560			16.47	16.50
			116	5580			16.50	16.50
			120	5600			16.41	16.50
			124	5620			16.50	16.50
			128	5640			16.48	16.50
			132	5660			16.44	16.50
			136	5680			16.50	16.50
			138	5690			16.40	16.50
			102	5510		Chain B	16.39	16.50
			104	5520			16.50	16.50
			108	5540			16.42	16.50
			112	5560			16.47	16.50
			116	5580			16.50	16.50
			120	5600			16.43	16.50
			124	5620			16.50	16.50
			128	5640			16.41	16.50
			132	5660			16.38	16.50
			136	5680			16.50	16.50
			138	5690			16.44	16.50
	802.11n	20	102	5510	HT0	Chain A	16.38	16.50
			104	5520			16.33	16.50
			108	5540			16.35	16.50
			112	5560			16.36	16.50
			116	5580			16.34	16.50
			120	5600			16.40	16.50
			124	5620			16.41	16.50
			128	5640			16.34	16.50
			132	5660			16.31	16.50
			136	5680			16.39	16.50
			138	5690			16.38	16.50
			102	5510		Chain B	16.42	16.50
			104	5520			16.40	16.50
			108	5540			16.37	16.50
			112	5560			16.39	16.50
			116	5580			16.33	16.50
			120	5600			16.36	16.50
			124	5620			16.40	16.50
			128	5640			16.44	16.50
			132	5660			16.41	16.50
			136	5680			16.36	16.50
			138	5690			16.39	16.50
	802.11n	40	104	5520	HT0	Chain A	16.45	16.50
			110	5550			16.40	16.50
			118	5580			16.42	16.50
			126	5610			16.37	16.50
			132	5660			16.38	16.50
			104	5520		Chain B	16.44	16.50
			110	5550			16.40	16.50
			118	5580			16.33	16.50
			126	5610			16.38	16.50
			132	5660			16.35	16.50
	802.11ac	80	106	5530	VHT0	Chain A	14.88	15.00
			122	5610			14.92	15.00
			138	5690			14.86	15.00
			106	5530		Chain B	14.88	15.00
			122	5610			14.91	15.00
			138	5690			14.88	15.00

Band	Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	Data Rate	Antenna	Avg Power (dBm)	Tune-up Pwr (dBm)
5800 MHz	802.11a	20	149	5745	6 Mbps	Chain A	16.50	16.50
			153	5765			16.42	16.50
			157	5785			16.50	16.50
			161	5805			16.44	16.50
			165	5825			16.50	16.50
			150	5750		Chain B	16.50	16.50
			153	5765			16.43	16.50
			157	5785			16.50	16.50
			161	5805			16.44	16.50
			165	5825			16.50	16.50
	802.11n	20	150	5750	HT0	Chain A	16.38	16.50
			153	5765			16.37	16.50
			157	5785			16.40	16.50
			161	5805			16.32	16.50
			164	5820			16.34	16.50
			150	5750		Chain B	16.35	16.50
			153	5765			16.40	16.50
			157	5785			16.39	16.50
			161	5805			16.35	16.50
			164	5820			16.37	16.50
	802.11n	40	152	5760	HT0	Chain A	16.42	16.50
			159	5795			16.45	16.50
			152	5760		Chain B	16.43	16.50
			159	5795			16.40	16.50
	802.11ac	80	155	5775	VHT0	Chain A	14.92	15.00
						Chain B	14.94	15.00

Band	Mode	Channel	Frequency (MHz)	Data Rate	Antenna	Avg Power (dBm)	Tune-up Pwr (dBm)
2450 MHz	Bluetooth v4.0	0	2402	Basic Rate GFSK	Chain B	11.40	11.50
		39	2441			11.47	11.50
		78	2480			11.42	11.50
		0	2402	EDR $\pi/4$ DQPSK		11.42	11.50
		39	2441			11.43	11.50
		78	2480			11.38	11.50
		0	2402	EDR 8-DPSK		11.44	11.50
		39	2441			11.41	11.50
		78	2480			11.43	11.50
		0	2402	Low Energy GFSK		8.99	9.00
		39	2441			8.88	9.00
		78	2480			8.93	9.00

Figure 10.1 Test Reduction Table – WCDMA

Band/ Frequency (MHz)	Technology	Test Position	Required Channel	Tested/ Reduced		
Band 2 1850-1910 MHz	WCDMA	Back	9262	Tested		
			9400	Tested		
			9538	Tested		
		Top	9262	Reduced ¹		
			9400	Tested		
			9538	Reduced ¹		
		Right	9262	Reduced ¹		
			9400	Tested		
			9538	Reduced ¹		
Band 5 824-849 MHz		WCDMA	Back	4132	Tested	
				4183	Tested	
				4233	Tested	
			Top	4132	Tested	
				4183	Tested	
				4233	Tested	
			Right	4132	Reduced ¹	
				4183	Tested	
				4233	Reduced ¹	
Band 4 1710-1755 MHz			WCDMA	Back	1312	Tested
					1413	Tested
					1513	Tested
				Top	1312	Reduced ¹
					1413	Tested
					1513	Reduced ¹
				Right	1312	Reduced ¹
					1413	Tested
					1513	Reduced ¹

Reduced¹ – When the mid channel is 3 dB (0.8 W/kg) below the limit, the remaining channels are not required per KDB 447498 D01 v06 section 4.3.3 page 14.

11.4 SAR Measurement Conditions for LTE Bands

11.4.1 LTE Functionality

The follow table identifies all the channel bandwidths in each frequency band supported by this device.

LTE Band Class	Bandwidth (MHz)	Frequency or Freq. Band (MHz)
4	1.4, 3, 5, 10, 15, 20	1710-1755
5	1.4, 3, 5, 10	824-849
26	1.4, 3, 5, 10, 15	814-849
13	5, 10	777-787
12	1.4, 3, 5, 10	704-716
14	5, 10	788-798
2	1.4, 3, 5, 10, 15, 20	1850-1910
30	5, 10	2305-2315
7	5, 10, 15, 20	2500-2570
41	5, 10, 15, 20	2496-2690
66	5, 10, 15, 20	1710-1780
42	5, 10, 15, 20	3400-3600
43	5, 10, 15, 20	3600-3800
48	5, 10, 15, 20	3550-3700

11.4.2 Test Conditions

All SAR measurements for LTE were performed using the Anritsu MT8820C. A closed loop power control setting allowed the UE to transmit at the maximum output power during the SAR measurements. The Figure 11.1 table indicates all the test reduction utilized for this report.

MPR was enabled for this device. A-MPR was disabled for all SAR test measurements.

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
13	QPSK	5 MHz	25	0	23205	779.5	22.42
					23255	784.5	22.40
			12	6	23205	779.5	22.44
					23255	784.5	22.49
			1	0	23205	779.5	23.48
					23255	784.5	23.36
			1	24	23205	779.5	23.35
					23255	784.5	23.46
		10 MHz	50	0	23230	782.0	22.26
			25	13	23230	782.0	22.51
			1	0	23230	782.0	23.86
			1	24	23230	782.0	23.93
	16QAM	5 MHz	25	0	23205	779.5	21.37
					23255	784.5	21.42
			12	6	23205	779.5	21.34
					23255	784.5	21.39
			1	0	23205	779.5	22.51
					23255	784.5	22.69
			1	24	23205	779.5	22.61
					23255	784.5	22.73
		10 MHz	50	0	23230	782.0	21.26
			25	13	23230	782.0	21.39
			1	0	23230	782.0	22.44
			1	24	23230	782.0	22.38

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
26	QPSK	1.4 MHz	6	0	26697	814.7	22.95
					26865	831.5	22.20
					27033	848.3	22.19
			3	1	26697	814.7	22.44
					26865	831.5	22.51
					27033	848.3	22.70
			1	0	26697	814.7	23.32
					26865	831.5	23.61
					27033	848.3	23.85
			1	5	26697	814.7	23.99
					26865	831.5	23.47
					27033	848.3	23.99
		3 MHz	15	0	26705	815.5	22.22
					26865	831.5	22.11
					27025	847.5	22.41
			8	3	26705	815.5	22.45
					26865	831.5	22.35
					27025	847.5	22.36
			1	0	26705	815.5	23.45
					26865	831.5	23.74
					27025	847.5	23.51
			1	14	26705	815.5	23.26
					26865	831.5	23.36
					27025	847.5	23.45
		5 MHz	25	0	26715	816.5	22.42
					26865	831.5	22.56
					27015	846.5	22.59
			12	6	26715	816.5	22.36
					26865	831.5	22.52
					27015	846.5	22.46
			1	0	26715	816.5	23.39
					26865	831.5	23.32
					27015	846.5	23.59
			1	24	26715	816.5	23.45
					26865	831.5	23.36
					27015	846.5	23.56

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
26	QPSK	10 MHz	50	0	26740	819.0	22.52
					26865	831.5	22.55
					26990	844.0	22.57
			25	12	26740	819.0	22.30
					26865	831.5	22.45
					26990	844.0	22.42
			1	0	26740	819.0	23.65
					26865	831.5	23.30
					26990	844.0	23.23
			1	24	26740	819.0	23.46
					26865	831.5	23.55
					26990	844.0	23.35
		15 MHz	75	0	26765	821.5	22.38
					26865	831.5	22.51
					26995	841.5	22.46
			36	19	26765	821.5	22.86
					26865	831.5	22.86
					26995	841.5	22.81
			1	0	26765	821.5	23.89
					26865	831.5	23.38
					26995	841.5	23.42
			1	37	26765	821.5	23.93
					26865	831.5	23.91
					26995	841.5	24.00

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
26	16QAM	1.4 MHz	6	0	26697	814.7	21.96
					26865	831.5	21.11
					27033	848.3	21.92
			3	1	26697	814.7	21.95
					26865	831.5	21.14
					27033	848.3	21.88
			1	0	26697	814.7	22.94
					26865	831.5	22.12
					27033	848.3	22.91
			1	5	26697	814.7	22.91
					26865	831.5	22.10
					27033	848.3	22.93
		3 MHz	15	0	26705	815.5	21.98
					26865	831.5	21.14
					27025	847.5	21.92
			8	3	26705	815.5	21.76
					26865	831.5	21.10
					27025	847.5	21.82
			1	0	26705	815.5	22.92
					26865	831.5	22.63
					27025	847.5	22.75
			1	14	26705	815.5	22.69
					26865	831.5	22.39
					27025	847.5	22.74
		5 MHz	25	0	26715	816.5	21.01
					26865	831.5	21.96
					27015	846.5	21.01
			12	6	26715	816.5	21.84
					26865	831.5	21.21
					27015	846.5	21.88
			1	0	26715	816.5	22.79
					26865	831.5	22.44
					27015	846.5	22.37
			1	24	26715	816.5	22.21
					26865	831.5	22.07
					27015	846.5	22.75

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
26	16QAM	10 MHz	50	0	26740	819.0	21.30
					26865	831.5	21.62
					26990	844.0	21.53
			25	12	26740	819.0	21.17
					26865	831.5	21.81
					26990	844.0	21.42
			1	0	26740	819.0	22.77
					26865	831.5	22.19
					26990	844.0	22.07
			1	24	26740	819.0	22.24
					26865	831.5	22.96
					26990	844.0	22.25
		15 MHz	75	0	24765	821.5	21.35
					26865	831.5	21.25
					26995	841.5	21.46
			36	19	24765	821.5	21.17
					26865	831.5	21.64
					26995	841.5	21.23
			1	0	24765	821.5	22.79
					26865	831.5	22.07
					26995	841.5	22.21
			1	74	24765	821.5	22.13
					26865	831.5	22.96
					26995	841.5	22.76

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
12	QPSK	1.4 MHz	6	0	23017	699.7	22.51
					23095	707.5	22.60
					23173	715.3	22.48
			3	1	23017	699.7	22.81
					23095	707.5	22.80
					23173	715.3	22.14
			1	0	23017	699.7	23.98
					23095	707.5	23.56
					23173	715.3	23.39
			1	5	23017	699.7	23.98
					23095	707.5	23.81
					23173	715.3	23.87
		3 MHz	15	0	23025	700.5	22.01
					23095	707.5	22.06
					23165	714.5	22.18
			8	3	23025	700.5	22.76
					23095	707.5	22.85
					23165	714.5	22.97
			1	0	23025	700.5	23.91
					23095	707.5	23.97
					23165	714.5	23.88
			1	14	23025	700.5	23.89
					23095	707.5	23.83
					23165	714.5	23.87
		5 MHz	25	0	23035	701.5	22.01
					23095	707.5	22.05
					23155	713.5	22.11
			12	6	23035	701.5	22.87
					23095	707.5	22.91
					23155	713.5	22.93
			1	0	23035	701.5	23.96
					23095	707.5	23.92
					23155	713.5	23.68
			1	24	23035	701.5	23.89
					23095	707.5	23.84
					23155	713.5	23.00

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
12	QPSK	10 MHz	50	0	23060	704.0	22.65
					23095	707.5	22.58
					23130	711.0	22.49
			25	12	23060	704.0	22.66
					23095	707.5	22.68
					23130	711.0	22.59
			1	0	23060	704.0	23.98
					23095	707.5	23.91
					23130	711.0	24.00
			1	24	23060	704.0	23.93
					23095	707.5	23.91
					23130	711.0	23.98
	16QAM	1.4 MHz	6	0	23017	699.7	21.51
					23095	707.5	21.60
					23173	715.3	21.48
			3	1	23017	699.7	21.81
					23095	707.5	21.80
					23173	715.3	21.14
			1	0	23017	699.7	22.98
					23095	707.5	22.01
					23173	715.3	22.12
			1	5	23017	699.7	22.98
					23095	707.5	22.81
					23173	715.3	22.87
		3 MHz	15	0	23025	700.5	21.01
					23095	707.5	21.06
					23165	714.5	21.18
			8	3	23025	700.5	21.76
					23095	707.5	21.85
					23165	714.5	21.97
			1	0	23025	700.5	22.91
					23095	707.5	22.97
					23165	714.5	22.45
			1	14	23025	700.5	22.89
					23095	707.5	22.66
					23165	714.5	22.73

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
12	16QAM	5 MHz	25	0	23035	701.5	21.01
					23095	707.5	21.05
					23155	713.5	21.11
			12	6	23035	701.5	21.87
					23095	707.5	21.91
					23155	713.5	21.93
			1	0	23035	701.5	22.96
					23095	707.5	22.97
					23155	713.5	22.69
			1	24	23035	701.5	22.89
					23095	707.5	22.94
					23155	713.5	22.75
		10 MHz	50	0	23060	704.0	21.65
					23095	707.5	21.58
					23130	711.0	21.49
			25	12	23060	704.0	21.66
					23095	707.5	21.68
					23130	711.0	21.59
			1	0	23060	704.0	22.98
					23095	707.5	22.91
					23130	711.0	22.62
			1	24	23060	704.0	22.13
					23095	707.5	22.11
					23130	711.0	22.18

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
14	QPSK	5 MHz	25	0	23305	790.5	22.35
					23355	795.5	22.35
			12	6	23305	790.5	22.46
					23355	795.5	22.47
			1	0	23305	790.5	23.45
					23355	795.5	23.40
			1	24	23305	790.5	23.49
					23355	795.5	23.44
		10 MHz	50	0	23330	793.0	22.26
			25	13	23330	793.0	22.51
			1	0	23330	793.0	23.98
			1	24	23330	793.0	23.96
	16QAM	5 MHz	25	0	23305	790.5	21.33
					23355	795.5	21.32
			12	6	23305	790.5	21.58
					23355	795.5	21.66
			1	0	23305	790.5	22.48
					23355	795.5	22.55
			1	24	23305	790.5	22.64
					23355	795.5	22.57
		10 MHz	50	0	23330	793.0	21.20
			25	13	23330	793.0	21.48
			1	0	23330	793.0	22.38
			1	24	23330	793.0	22.30

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
7	QPSK	5 MHz	25	0	20775	2502.5	22.39
					21100	2535.0	22.38
					21425	2567.5	22.26
			12	6	20775	2502.5	22.16
					21100	2535.0	22.34
					21425	2567.5	22.22
			1	0	20775	2502.5	23.03
					21100	2535.0	23.08
					21425	2567.5	23.05
			1	24	20775	2502.5	23.16
					21100	2535.0	23.24
					21425	2567.5	23.17

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
7	QPSK	10 MHz	50	0	20800	2505.0	22.19
					21100	2535.0	22.23
					21400	2565.0	22.36
			25	12	20800	2505.0	22.25
					21100	2535.0	22.37
					21400	2565.0	22.42
			1	0	20800	2505.0	23.05
					21100	2535.0	23.06
					21400	2565.0	23.04
			1	24	20800	2505.0	23.08
					21100	2535.0	23.03
					21400	2565.0	23.06
		15 MHz	75	0	20825	2507.5	22.12
					21100	2535.0	22.21
					21375	2562.5	22.28
			36	19	20825	2507.5	22.26
					21100	2535.0	22.21
					21375	2562.5	22.24
			1	0	20825	2507.5	23.07
					21100	2535.0	23.08
					21375	2562.5	23.03
			1	74	20825	2507.5	23.02
					21100	2535.0	23.09
					21375	2562.5	23.06
		20 MHz	100	0	20850	2510.0	22.20
					21100	2535.0	22.24
					21350	2560.0	22.38
			50	25	20850	2510.0	22.69
					21100	2535.0	22.75
					21350	2560.0	22.82
			1	0	20850	2510.0	23.04
					21100	2535.0	23.06
					21350	2560.0	23.09
			1	49	20850	2510.0	23.84
					21100	2535.0	23.82
					21350	2560.0	23.86

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
7	16QAM	5 MHz	25	0	20775	2502.5	21.39
					21100	2535.0	21.38
					21425	2567.5	21.26
			12	6	20775	2502.5	21.16
					21100	2535.0	21.34
					21425	2567.5	21.22
			1	0	20775	2502.5	22.03
					21100	2535.0	22.08
					21425	2567.5	22.05
			1	24	20775	2502.5	22.16
					21100	2535.0	22.24
					21425	2567.5	22.17

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
7	16QAM	10 MHz	50	0	20800	2505.0	21.19
					21100	2535.0	21.23
					21400	2565.0	21.36
			25	12	20800	2505.0	21.25
					21100	2535.0	21.37
					21400	2565.0	21.42
			1	0	20800	2505.0	22.05
					21100	2535.0	22.06
					21400	2565.0	22.04
			1	24	20800	2505.0	22.08
					21100	2535.0	22.03
					21400	2565.0	22.06
		15 MHz	75	0	20825	2507.5	21.12
					21100	2535.0	21.21
					21375	2562.5	21.28
			36	19	20825	2507.5	21.26
					21100	2535.0	21.21
					21375	2562.5	21.24
			1	0	20825	2507.5	22.07
					21100	2535.0	22.08
					21375	2562.5	22.03
			1	74	20825	2507.5	22.02
					21100	2535.0	22.09
					21375	2562.5	22.06
		20 MHz	100	0	20850	2510.0	21.20
					21100	2535.0	21.24
					21350	2560.0	21.38
			50	25	20850	2510.0	21.13
					21100	2535.0	21.15
					21350	2560.0	21.32
			1	0	20850	2510.0	22.04
					21100	2535.0	22.06
					21350	2560.0	22.09
			1	99	20850	2510.0	22.07
					21100	2535.0	22.05
					21350	2560.0	22.03

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
41	QPSK	5 MHz	25	0	39675	2498.5	22.31
					40620	2593.0	22.33
					41565	2687.5	22.25
			12	6	39675	2498.5	22.18
					40620	2593.0	22.39
					41565	2687.5	22.26
			1	0	39675	2498.5	23.04
					40620	2593.0	23.07
					41565	2687.5	23.05
			1	24	39675	2498.5	23.65
					40620	2593.0	23.49
					41565	2687.5	23.56

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
41	QPSK	10 MHz	50	0	39700	2501.0	22.13
					40620	2593.0	22.26
					41540	2685.0	22.39
			25	12	39700	2501.0	22.22
					40620	2593.0	22.35
					41540	2685.0	22.48
			1	0	39700	2501.0	23.01
					40620	2593.0	23.04
					41540	2685.0	23.07
			1	24	39700	2501.0	23.05
					40620	2593.0	23.03
					41540	2685.0	23.06
		15 MHz	75	0	39725	2503.5	22.11
					40620	2593.0	22.22
					41515	2682.5	22.28
			36	19	39725	2503.5	22.25
					40620	2593.0	22.24
					41515	2682.5	22.29
			1	0	39725	2503.5	23.06
					40620	2593.0	23.03
					41515	2682.5	23.04
			1	74	39725	2503.5	23.07
					40620	2593.0	23.05
					41515	2682.5	23.08
		20 MHz	100	0	39750	2506.0	22.23
					40620	2593.0	22.21
					41490	2680.0	22.39
			50	25	39750	2506.0	22.86
					40620	2593.0	22.92
					41490	2680.0	22.87
			1	0	39750	2506.0	23.08
					40620	2593.0	23.02
					41490	2680.0	23.09
			1	49	39750	2506.0	23.66
					40620	2593.0	23.54
					41490	2680.0	23.67

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
41	16QAM	5 MHz	25	0	39675	2498.5	21.32
					40620	2593.0	21.26
					41565	2687.5	21.18
			12	6	39675	2498.5	21.32
					40620	2593.0	21.25
					41565	2687.5	21.49
			1	0	39675	2498.5	22.04
					40620	2593.0	22.07
					41565	2687.5	22.13
			1	24	39675	2498.5	22.06
					40620	2593.0	22.02
					41565	2687.5	22.14

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
41	16QAM	10 MHz	50	0	39700	2501.0	21.26
					40620	2593.0	21.13
					41540	2685.0	21.35
			25	12	39700	2501.0	21.38
					40620	2593.0	21.27
					41540	2685.0	21.42
			1	0	39700	2501.0	22.36
					40620	2593.0	22.29
					41540	2685.0	22.28
			1	24	39700	2501.0	22.34
					40620	2593.0	22.11
					41540	2685.0	22.20
		15 MHz	75	0	39725	2503.5	21.12
					40620	2593.0	21.05
					41515	2682.5	21.13
			36	19	39725	2503.5	21.36
					40620	2593.0	21.37
					41515	2682.5	21.29
			1	0	39725	2503.5	22.25
					40620	2593.0	22.36
					41515	2682.5	22.32
			1	74	39725	2503.5	22.18
					40620	2593.0	22.03
					41515	2682.5	22.26
		20 MHz	100	0	39750	2506.0	21.25
					40620	2593.0	21.18
					41490	2680.0	21.39
			50	25	39750	2506.0	21.13
					40620	2593.0	21.00
					41490	2680.0	21.21
			1	0	39750	2506.0	22.37
					40620	2593.0	22.45
					41490	2680.0	22.26
			1	99	39750	2506.0	22.15
					40620	2593.0	22.28
					41490	2680.0	22.27

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
2	QPSK	1.4 MHz	6	0	18607	1850.7	22.95
					18900	1880.0	22.20
					19193	1909.3	22.19
			3	1	18607	1850.7	22.45
					18900	1880.0	22.56
					19193	1909.3	22.70
			1	0	18607	1850.7	23.67
					18900	1880.0	23.61
					19193	1909.3	23.85
			1	5	18607	1850.7	23.52
					18900	1880.0	23.68
					19193	1909.3	23.64
		3 MHz	15	0	18615	1851.5	22.01
					18900	1880.0	22.11
					19185	1908.5	22.91
			8	3	18615	1851.5	22.95
					18900	1880.0	22.05
					19185	1908.5	22.81
			1	0	18615	1851.5	23.63
					18900	1880.0	23.74
					19185	1908.5	23.67
			1	14	18615	1851.5	23.82
					18900	1880.0	23.73
					19185	1908.5	23.86
		5 MHz	25	0	18625	1852.5	22.83
					18900	1880.0	22.64
					19175	1907.5	22.62
			12	6	18625	1852.5	22.63
					18900	1880.0	22.73
					19175	1907.5	22.68
			1	0	18625	1852.5	23.58
					18900	1880.0	23.56
					19175	1907.5	23.62
			1	24	18625	1852.5	23.45
					18900	1880.0	23.36
					19175	1907.5	23.51

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
2	QPSK	10 MHz	50	0	18650	1855.0	22.52
					18900	1880.0	22.55
					19150	1905.0	22.57
			25	12	18650	1855.0	22.30
					18900	1880.0	22.95
					19150	1905.0	22.42
			1	0	18650	1855.0	23.35
					18900	1880.0	23.30
					19150	1905.0	23.23
			1	24	18650	1855.0	23.46
					18900	1880.0	23.55
					19150	1905.0	23.35
		15 MHz	75	0	18675	1857.5	22.38
					18900	1880.0	22.51
					19125	1902.5	22.46
			36	19	18675	1857.5	22.16
					18900	1880.0	22.86
					19125	1902.5	22.31
			1	0	18675	1857.5	23.49
					18900	1880.0	23.38
					19125	1902.5	23.42
			1	74	18675	1857.5	23.48
					18900	1880.0	23.31
					19125	1902.5	23.29
		20 MHz	100	0	18700	1860.0	22.50
					18900	1880.0	22.52
					19100	1900.0	22.40
			50	25	18700	1860.0	22.89
					18900	1880.0	22.91
					19100	1900.0	22.92
			1	0	18700	1860.0	23.88
					18900	1880.0	23.87
					19100	1900.0	23.84
			1	49	18700	1860.0	23.93
					18900	1880.0	23.95
					19100	1900.0	23.96

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
2	16QAM	1.4 MHz	6	0	18607	1850.7	21.46
					18900	1880.0	21.11
					19193	1909.3	21.42
			3	1	18607	1850.7	21.41
					18900	1880.0	21.14
					19193	1909.3	21.53
			1	0	18607	1850.7	22.16
					18900	1880.0	22.12
					19193	1909.3	22.19
			1	5	18607	1850.7	22.23
					18900	1880.0	22.10
					19193	1909.3	22.13
		3 MHz	15	0	18615	1851.5	21.36
					18900	1880.0	21.14
					19185	1908.5	21.42
			8	3	18615	1851.5	21.26
					18900	1880.0	21.10
					19185	1908.5	12.32
			1	0	18615	1851.5	22.42
					18900	1880.0	22.63
					19185	1908.5	22.55
			1	14	18615	1851.5	22.69
					18900	1880.0	22.39
					19185	1908.5	22.74
		5 MHz	25	0	18625	1852.5	21.21
					18900	1880.0	21.36
					19175	1907.5	21.22
			12	6	18625	1852.5	21.34
					18900	1880.0	21.21
					19175	1907.5	21.18
			1	0	18625	1852.5	22.51
					18900	1880.0	22.44
					19175	1907.5	22.37
			1	24	18625	1852.5	22.21
					18900	1880.0	22.07
					19175	1907.5	22.75

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
2	16QAM	10 MHz	50	0	18650	1855.0	21.30
					18900	1880.0	21.62
					19150	1905.0	21.53
			25	12	18650	1855.0	21.17
					18900	1880.0	21.51
					19150	1905.0	21.42
			1	0	18650	1855.0	22.37
					18900	1880.0	22.19
					19150	1905.0	22.07
			1	24	18650	1855.0	22.24
					18900	1880.0	22.42
					19150	1905.0	22.25
		15 MHz	75	0	18675	1857.5	21.35
					18900	1880.0	21.25
					19125	1902.5	21.46
			36	19	18675	1857.5	21.17
					18900	1880.0	21.64
					19125	1902.5	21.23
			1	0	18675	1857.5	22.27
					18900	1880.0	22.07
					19125	1902.5	22.21
			1	74	18675	1857.5	22.13
					18900	1880.0	22.46
					19125	1902.5	22.31
		20 MHz	100	0	18700	1860.0	21.54
					18900	1880.0	21.50
					19100	1900.0	21.32
			50	25	18700	1860.0	22.39
					18900	1880.0	22.54
					19100	1900.0	22.16
			1	0	18700	1860.0	22.68
					18900	1880.0	22.38
					19100	1900.0	22.74
			1	99	18700	1860.0	22.01
					18900	1880.0	22.71
					19100	1900.0	22.68

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
66	QPSK	1.4 MHz	6	0	131979	1710.7	22.67
					132322	1745.0	22.06
					132665	1779.3	22.61
			3	1	131979	1710.7	22.41
					132322	1745.0	22.32
					132665	1779.3	22.36
			1	0	131979	1710.7	23.38
					132322	1745.0	23.48
					132665	1779.3	23.39
			1	5	131979	1710.7	23.25
					132322	1745.0	23.23
					132665	1779.3	23.34
		3 MHz	15	0	131987	1711.5	22.11
					132322	1745.0	22.09
					132657	1778.5	22.15
			8	3	131987	1711.5	22.02
					132322	1745.0	22.33
					132657	1778.5	22.07
			1	0	131987	1711.5	23.35
					132322	1745.0	23.40
					132657	1778.5	23.53
			1	14	131987	1711.5	23.34
					132322	1745.0	23.42
					132657	1778.5	23.39
		5 MHz	25	0	131997	1712.5	22.49
					132322	1745.0	22.19
					132647	1777.5	22.27
			12	6	131997	1712.5	22.44
					132322	1745.0	22.13
					132647	1777.5	22.64
			1	0	131997	1712.5	23.46
					132322	1745.0	23.31
					132647	1777.5	23.67
			1	24	131997	1712.5	23.52
					132322	1745.0	23.36
					132647	1777.5	23.44

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
66	QPSK	10 MHz	50	0	132022	1715.0	22.36
					132322	1745.0	22.39
					132622	1775.0	22.30
			25	12	132022	1715.0	22.42
					132322	1745.0	22.44
					132622	1775.0	22.47
			1	0	132022	1715.0	23.56
					132322	1745.0	23.59
					132622	1775.0	23.60
			1	24	132022	1715.0	23.54
					132322	1745.0	23.52
					132622	1775.0	23.57
		15 MHz	75	0	132047	1717.5	22.29
					132322	1745.0	22.37
					132597	1772.5	22.32
			36	19	132047	1717.5	22.61
					132322	1745.0	22.67
					132597	1772.5	22.64
			1	0	132047	1717.5	23.49
					132322	1745.0	23.43
					132597	1772.5	23.38
			1	74	132047	1717.5	23.48
					132322	1745.0	23.45
					132597	1772.5	23.50
		20 MHz	100	0	132072	1720.0	22.23
					132322	1745.0	22.28
					132572	1770.0	22.22
			50	25	132072	1720.0	22.35
					132322	1745.0	22.34
					132572	1770.0	22.31
			1	0	132072	1720.0	23.46
					132322	1745.0	23.49
					132572	1770.0	23.44
			1	49	132072	1720.0	23.88
					132322	1745.0	23.96
					132572	1770.0	23.90

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
66	16QAM	1.4 MHz	6	0	131979	1710.7	21.51
					132322	1745.0	21.02
					132665	1779.3	21.52
			3	1	131979	1710.7	21.44
					132322	1745.0	21.90
					132665	1779.3	21.25
			1	0	131979	1710.7	22.39
					132322	1745.0	22.52
					132665	1779.3	22.25
			1	5	131979	1710.7	22.09
					132322	1745.0	22.05
					132665	1779.3	22.21
		3 MHz	15	0	131987	1711.5	21.12
					132322	1745.0	21.19
					132657	1778.5	21.22
			8	3	131987	1711.5	21.02
					132322	1745.0	21.05
					132657	1778.5	21.27
			1	0	131987	1711.5	22.20
					132322	1745.0	22.22
					132657	1778.5	22.51
			1	14	131987	1711.5	22.18
					132322	1745.0	22.32
					132657	1778.5	22.50
		5 MHz	25	0	131997	1712.5	21.53
					132322	1745.0	21.19
					132647	1777.5	21.94
			12	6	131997	1712.5	21.51
					132322	1745.0	21.00
					132647	1777.5	21.59
			1	0	131997	1712.5	22.40
					132322	1745.0	22.03
					132647	1777.5	22.33
			1	24	131997	1712.5	22.62
					132322	1745.0	22.26
					132647	1777.5	22.33

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
66	16QAM	10 MHz	50	0	132022	1715.0	21.37
					132322	1745.0	21.06
					132622	1775.0	21.69
			25	12	132022	1715.0	21.11
					132322	1745.0	21.96
					132622	1775.0	21.44
			1	0	132022	1715.0	22.35
					132322	1745.0	22.91
					132622	1775.0	22.26
			1	24	132022	1715.0	22.00
					132322	1745.0	22.83
					132622	1775.0	22.33
		15 MHz	75	0	132047	1717.5	21.23
					132322	1745.0	21.58
					132597	1772.5	21.61
			36	19	132047	1717.5	21.13
					132322	1745.0	21.17
					132597	1772.5	21.55
			1	0	132047	1717.5	22.38
					132322	1745.0	22.79
					132597	1772.5	22.15
			1	74	132047	1717.5	22.96
					132322	1745.0	22.32
					132597	1772.5	22.19
		20 MHz	100	0	132072	1720.0	21.30
					132322	1745.0	21.65
					132572	1770.0	21.57
			50	25	132072	1720.0	21.21
					132322	1745.0	21.12
					132572	1770.0	21.58
			1	0	132072	1720.0	22.20
					132322	1745.0	22.13
					132572	1770.0	22.75
			1	99	132072	1720.0	22.94
					132322	1745.0	22.35
					132572	1770.0	22.24

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
66	16QAM	10 MHz	50	0	132033	1716.1	22.2
					132422	1755.0	22.1
					132621	1774.9	22.3
			25	12	132033	1716.1	22.3
					132422	1755.0	22.2
					132621	1774.9	22.4
			1	0	132033	1716.1	23.3
					132422	1755.0	23.2
					132621	1774.9	23.2
			1	24	132033	1716.1	23.3
					132422	1755.0	23.1
					132621	1774.9	23.2
		15 MHz	75	0	132047	1717.5	22.1
					132422	1755.0	22.0
					132596	1772.4	22.1
			36	19	132047	1717.5	22.3
					132422	1755.0	22.3
					132596	1772.4	22.2
			1	0	132047	1717.5	22.2
					132422	1755.0	23.3
					132596	1772.4	23.3
			1	74	132047	1717.5	23.1
					132422	1755.0	23.0
					132596	1772.4	23.2
		20 MHz	100	0	132072	1720.0	22.2
					132422	1755.0	22.1
					132571	1769.9	22.3
			50	25	132072	1720.0	22.1
					132422	1755.0	22.0
					132571	1769.9	22.2
			1	0	132072	1720.0	23.3
					132422	1755.0	23.4
					132571	1769.9	23.2
			1	99	132072	1720.0	23.1
					132422	1755.0	23.2
					132571	1769.9	23.2

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
42	QPSK	5 MHz	25	0	41615	3402.5	22.39
					42590	3500.0	22.42
					43565	3597.5	22.35
			12	6	41615	3402.5	22.47
					42590	3500.0	22.56
					43565	3597.5	22.42
			1	0	41615	3402.5	23.29
					42590	3500.0	23.38
					43565	3597.5	23.31
			1	24	41615	3402.5	23.45
					42590	3500.0	23.52
					43565	3597.5	23.49

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
42	QPSK	10 MHz	50	0	41640	3405.0	22.32
					42590	3500.0	22.36
					43540	3595.0	22.29
			25	12	41640	3405.0	22.42
					42590	3500.0	22.46
					43540	3595.0	22.41
			1	0	41640	3405.0	23.36
					42590	3500.0	23.49
					43540	3595.0	23.38
			1	24	41640	3405.0	23.44
					42590	3500.0	23.51
					43540	3595.0	23.46
		15 MHz	75	0	41665	3407.5	22.53
					42590	3500.0	22.59
					43515	3592.5	22.52
			36	19	41665	3407.5	22.41
					42590	3500.0	22.44
					43515	3592.5	22.42
			1	0	41665	3407.5	23.67
					42590	3500.0	23.72
					43515	3592.5	23.64
			1	74	41665	3407.5	23.66
					42590	3500.0	23.69
					43515	3592.5	23.59
		20 MHz	100	0	41690	3410.0	22.33
					42590	3500.0	22.39
					43490	3590.0	22.34
			50	25	41690	3410.0	22.91
					42590	3500.0	22.96
					43490	3590.0	22.92
			1	0	41690	3410.0	23.88
					42590	3500.0	23.83
					43490	3590.0	23.84
			1	49	41690	3410.0	23.96
					42590	3500.0	23.98
					43490	3590.0	23.97

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
42	16QAM	5 MHz	25	0	41615	3402.5	21.32
					42590	3500.0	21.26
					43565	3597.5	21.18
			12	6	41615	3402.5	21.32
					42590	3500.0	21.25
					43565	3597.5	21.49
			1	0	41615	3402.5	22.04
					42590	3500.0	22.07
					43565	3597.5	22.13
			1	24	41615	3402.5	22.06
					42590	3500.0	22.02
					43565	3597.5	22.14

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
42	16QAM	10 MHz	50	0	41640	3405.0	21.26
					42590	3500.0	21.13
					43540	3595.0	21.35
			25	12	41640	3405.0	21.38
					42590	3500.0	21.27
					43540	3595.0	21.42
			1	0	41640	3405.0	22.36
					42590	3500.0	22.29
					43540	3595.0	22.28
			1	24	41640	3405.0	22.34
					42590	3500.0	22.11
					43540	3595.0	22.20
		15 MHz	75	0	41665	3407.5	21.12
					42590	3500.0	21.05
					43515	3592.5	21.13
			36	19	41665	3407.5	21.36
					42590	3500.0	21.37
					43515	3592.5	21.29
			1	0	41665	3407.5	22.25
					42590	3500.0	22.36
					43515	3592.5	22.32
			1	74	41665	3407.5	22.18
					42590	3500.0	22.03
					43515	3592.5	22.26
		20 MHz	100	0	41690	3410.0	21.25
					42590	3500.0	21.18
					43490	3590.0	21.39
			50	25	41690	3410.0	21.13
					42590	3500.0	21.00
					43490	3590.0	21.21
			1	0	41690	3410.0	22.37
					42590	3500.0	22.45
					43490	3590.0	22.26
			1	99	41690	3410.0	22.15
					42590	3500.0	22.28
					43490	3590.0	22.27

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
43	QPSK	5 MHz	25	0	43615	3602.5	22.31
					44590	3700.0	22.33
					45565	3797.5	22.25
			12	6	43615	3602.5	22.18
					44590	3700.0	22.39
					45565	3797.5	22.26
			1	0	43615	3602.5	23.04
					44590	3700.0	23.07
					45565	3797.5	23.05
			1	24	43615	3602.5	23.65
					44590	3700.0	23.49
					45565	3797.5	23.56

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
43	QPSK	10 MHz	50	0	43640	3605.0	22.13
					44590	3700.0	22.26
					45540	3795.0	22.39
			25	12	43640	3605.0	22.22
					44590	3700.0	22.35
					45540	3795.0	22.48
			1	0	43640	3605.0	23.01
					44590	3700.0	23.04
					45540	3795.0	23.07
			1	24	43640	3605.0	23.05
					44590	3700.0	23.03
					45540	3795.0	23.06
		15 MHz	75	0	43665	3607.5	22.11
					44590	3700.0	22.22
					45515	3792.5	22.28
			36	19	43665	3607.5	22.25
					44590	3700.0	22.24
					45515	3792.5	22.29
			1	0	43665	3607.5	23.06
					44590	3700.0	23.03
					45515	3792.5	23.04
			1	74	43665	3607.5	23.07
					44590	3700.0	23.05
					45515	3792.5	23.08
		20 MHz	100	0	43690	3610.0	22.23
					44590	3700.0	22.21
					45490	3790.0	22.39
			50	25	43690	3610.0	22.89
					44590	3700.0	22.90
					45490	3790.0	22.84
			1	0	43690	3610.0	23.08
					44590	3700.0	23.02
					45490	3790.0	23.09
			1	49	43690	3610.0	23.86
					44590	3700.0	23.88
					45490	3790.0	23.82

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
43	16QAM	5 MHz	25	0	43615	3602.5	21.32
					44590	3700.0	21.26
					45565	3797.5	21.18
			12	6	43615	3602.5	21.32
					44590	3700.0	21.25
					45565	3797.5	21.49
			1	0	43615	3602.5	22.04
					44590	3700.0	22.07
					45565	3797.5	22.13
			1	24	43615	3602.5	22.06
					44590	3700.0	22.02
					45565	3797.5	22.14

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
43	16QAM	10 MHz	50	0	43640	3605.0	21.26
					44590	3700.0	21.13
					45540	3795.0	21.35
			25	12	43640	3605.0	21.38
					44590	3700.0	21.27
					45540	3795.0	21.42
			1	0	43640	3605.0	22.36
					44590	3700.0	22.29
					45540	3795.0	22.28
			1	24	43640	3605.0	22.34
					44590	3700.0	22.11
					45540	3795.0	22.20
		15 MHz	75	0	43665	3607.5	21.12
					44590	3700.0	21.05
					45515	3792.5	21.13
			36	19	43665	3607.5	21.36
					44590	3700.0	21.37
					45515	3792.5	21.29
			1	0	43665	3607.5	22.25
					44590	3700.0	22.36
					45515	3792.5	22.32
			1	74	43665	3607.5	22.18
					44590	3700.0	22.03
					45515	3792.5	22.26
		20 MHz	100	0	43690	3610.0	21.25
					44590	3700.0	21.18
					45490	3790.0	21.39
			50	25	43690	3610.0	21.13
					44590	3700.0	21.00
					45490	3790.0	21.21
			1	0	43690	3610.0	22.37
					44590	3700.0	22.45
					45490	3790.0	22.26
			1	99	43690	3610.0	22.15
					44590	3700.0	22.28
					45490	3790.0	22.27

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
48	QPSK	5 MHz	25	0	55265	3552.5	22.31
					55990	3625.0	22.33
					56715	3697.5	22.25
			12	6	55265	3552.5	22.18
					55990	3625.0	22.39
					56715	3697.5	22.26
			1	0	55265	3552.5	23.04
					55990	3625.0	23.07
					56715	3697.5	23.05
			1	24	55265	3552.5	23.65
					55990	3625.0	23.49
					56715	3697.5	23.56

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
48	QPSK	10 MHz	50	0	55290	3555.0	22.13
					55990	3625.0	22.26
					56690	3695.0	22.39
			25	12	55290	3555.0	22.22
					55990	3625.0	22.35
					56690	3695.0	22.48
			1	0	55290	3555.0	23.01
					55990	3625.0	23.04
					56690	3695.0	23.07
			1	24	55290	3555.0	23.05
					55990	3625.0	23.03
					56690	3695.0	23.06
		15 MHz	75	0	55315	3557.5	22.11
					55990	3625.0	22.22
					56665	3692.5	22.28
			36	19	55315	3557.5	22.25
					55990	3625.0	22.24
					56665	3692.5	22.29
			1	0	55315	3557.5	23.06
					55990	3625.0	23.03
					56665	3692.5	23.04
			1	74	55315	3557.5	23.07
					55990	3625.0	23.05
					56665	3692.5	23.08
		20 MHz	100	0	55340	3560.0	22.23
					55990	3625.0	22.21
					56640	3690.0	22.39
			50	25	55340	3560.0	22.83
					55990	3625.0	22.85
					56640	3690.0	22.82
			1	0	55340	3560.0	23.08
					55990	3625.0	23.02
					56640	3690.0	23.09
			1	49	55340	3560.0	23.97
					55990	3625.0	23.98
					56640	3690.0	23.96

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
48	16QAM	5 MHz	25	0	55265	3552.5	21.32
					55990	3625.0	21.26
					56715	3697.5	21.18
			12	6	55265	3552.5	21.32
					55990	3625.0	21.25
					56715	3697.5	21.49
			1	0	55265	3552.5	22.04
					55990	3625.0	22.07
					56715	3697.5	22.13
			1	24	55265	3552.5	22.06
					55990	3625.0	22.02
					56715	3697.5	22.14

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
48	16QAM	10 MHz	50	0	55290	3555.0	21.26
					55990	3625.0	21.13
					56690	3695.0	21.35
			25	12	55290	3555.0	21.38
					55990	3625.0	21.27
					56690	3695.0	21.42
			1	0	55290	3555.0	22.36
					55990	3625.0	22.29
					56690	3695.0	22.28
			1	24	55290	3555.0	22.34
					55990	3625.0	22.11
					56690	3695.0	22.20
		15 MHz	75	0	55315	3557.5	21.12
					55990	3625.0	21.05
					56665	3692.5	21.13
			36	19	55315	3557.5	21.36
					55990	3625.0	21.37
					56665	3692.5	21.29
			1	0	55315	3557.5	22.25
					55990	3625.0	22.36
					56665	3692.5	22.32
			1	74	55315	3557.5	22.18
					55990	3625.0	22.03
					56665	3692.5	22.26
		20 MHz	100	0	55340	3560.0	21.25
					55990	3625.0	21.18
					56640	3690.0	21.39
			50	25	55340	3560.0	21.13
					55990	3625.0	21.00
					56640	3690.0	21.21
			1	0	55340	3560.0	22.37
					55990	3625.0	22.45
					56640	3690.0	22.26
			1	99	55340	3560.0	22.15
					55990	3625.0	22.28
					56640	3690.0	22.27

SAR Data Summary –LTE Band 12

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		BW/ Modulation	Ant.	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.						(dBm)		
0 mm	-----	Back	707.5	23095	10 MHz/QPSK	Main	1	24	0	23.91	0.445	0.45
	-----		707.5	23095	10 MHz/QPSK		25	12	1	22.68	0.364	0.39
	1	Top	707.5	23095	10 MHz/QPSK	Main	1	24	0	23.91	0.502	0.51
	-----		707.5	23095	10 MHz/QPSK		25	12	1	22.68	0.411	0.44
	-----	Right	707.5	23095	10 MHz/QPSK	Main	1	24	0	23.91	0.0232	0.02
	-----		707.5	23095	10 MHz/QPSK		25	12	1	22.68	0.0215	0.02

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

SAR Data Summary –LTE Band 13

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		BW/ Modulation	Ant.	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.						(dBm)		
0 mm	-----	Back	782	23230	10 MHz/QPSK	Main	1	24	0	23.93	0.815	0.83
	-----		782	23230	10 MHz/QPSK		25	12	1	22.51	0.662	0.74
	2	Top	782	23230	10 MHz/QPSK	Main	1	24	0	23.93	0.917	0.93
	-----		782	23230	10 MHz/QPSK		25	12	1	22.51	0.740	0.83
	-----		782	23230	10 MHz/QPSK		50	0	1	22.26	0.431	0.51
	-----	Right	782	23230	10 MHz/QPSK	Main	1	24	0	23.93	0.0777	0.08
	-----		782	23230	10 MHz/QPSK		25	12	1	22.51	0.0592	0.07
	-----	Repeated	782	23230	10 MHz/QPSK	Main	1	24	0	23.93	0.896	0.91

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
 2. Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
 3. Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
 4. Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

SAR Data Summary –LTE Band 14

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		BW/ Modulation	Ant.	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.						(dBm)		
0 mm	-----	Back	793	23330	10 MHz/QPSK	Main	1	24	0	23.96	0.823	0.83
	-----		793	23330	10 MHz/QPSK		25	12	1	22.51	0.665	0.74
	3	Top	793	23330	10 MHz/QPSK	Main	1	24	0	23.96	0.943	0.95
	-----		793	23330	10 MHz/QPSK		25	12	1	22.51	0.763	0.85
	-----		793	23330	10 MHz/QPSK		50	0	1	22.26	0.511	0.61
	-----	Right	793	23330	10 MHz/QPSK	Main	1	24	0	23.96	0.0769	0.08
	-----		793	23330	10 MHz/QPSK		25	12	1	22.51	0.0650	0.07
	-----	Repeated	793	23330	10 MHz/QPSK	Main	1	24	0	23.96	0.924	0.93

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
 2. Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
 3. Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
 4. Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

SAR Data Summary – 850 MHz Body – UMTS Band 5

MEASUREMENT RESULTS

Gap	Plot	Frequency		Modulation	Position	End Power	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.			(dBm)				
0 mm	-----	826.4	4132	WCDMA	Back	23.75	12.2 kbps	Test Loop 1	1.08	1.14
	-----	836.6	4183			23.89	12.2 kbps	Test Loop 1	1.08	1.11
	-----	846.6	4233			23.82	12.2 kbps	Test Loop 1	1.03	1.07
	-----	826.4	4132		Top	23.75	12.2 kbps	Test Loop 1	1.35	1.43
	-----	836.6	4183			23.89	12.2 kbps	Test Loop 1	1.30	1.33
	4	846.6	4233			23.82	12.2 kbps	Test Loop 1	1.36	1.42
	-----	836.6	4183		Right	23.89	12.2 kbps	Test Loop 1	0.143	0.15
	-----	846.6	4233		Repeat	23.82	12.2 kbps	Test Loop 1	1.34	1.40
						Body 1.6 W/kg (mW/g) averaged over 1 gram				

1. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

2. Test Signal Call Mode

☐ Test Code

☒ Base Station Simulator

3. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

4. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary –LTE Band 26

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		BW/ Modulation	Ant.	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.						(dBm)		
0 mm	-----	Back	821.5	26740	15 MHz/QPSK	Main	1	37	0	23.93	0.942	0.96
	-----		831.5	26865	15 MHz/QPSK		1	37	0	23.91	0.984	1.01
	-----		841.5	26990	15 MHz/QPSK		1	37	0	24.00	0.935	0.94
	-----		821.5	26740	15 MHz/QPSK		37	18	1	22.86	0.757	0.78
	-----		831.5	26865	15 MHz/QPSK		37	18	1	22.86	0.804	0.83
	-----		841.5	26990	15 MHz/QPSK		37	18	1	22.81	0.755	0.79
	-----	Top	831.5	26865	15 MHz/QPSK	Main	75	0	1	22.51	0.523	0.59
	-----		821.5	26740	15 MHz/QPSK		1	37	0	23.93	1.12	1.14
	5		831.5	26865	15 MHz/QPSK		1	37	0	23.91	1.23	1.26
	-----		841.5	26990	15 MHz/QPSK		1	37	0	24.00	1.21	1.21
	-----		821.5	26740	15 MHz/QPSK		37	18	1	22.86	0.922	0.95
	-----		831.5	26865	15 MHz/QPSK		37	18	1	22.86	1.01	1.04
	-----	Right	841.5	26990	15 MHz/QPSK	Main	37	18	1	22.81	1.00	1.04
	-----		831.5	26865	15 MHz/QPSK		75	0	1	22.51	0.761	0.85
	-----	Right	831.5	26865	15 MHz/QPSK	Main	1	37	0	23.91	0.105	0.11
	-----		831.5	26865	15 MHz/QPSK		37	18	1	22.86	0.0854	0.09
	-----	Repeat	831.5	26865	15 MHz/QPSK	Main	1	37	0	23.91	1.21	1.24

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

LTE Band 5 is fully within the frequency range of band 26. Therefore, the testing for LTE Band 26 will cover LTE Band 5 requirements.

SAR Data Summary – 1750 MHz Body – UMTS Band 4

MEASUREMENT RESULTS

Gap	Plot	Frequency		Modulation	Position	End Power	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.			(dBm)				
0 mm	-----	1712.4	1312	WCDMA	Back	23.88	12.2 kbps	Test Loop 1	1.15	1.18
	-----	1732.6	1413			23.90	12.2 kbps	Test Loop 1	1.27	1.30
	6	1752.6	1513			23.95	12.2 kbps	Test Loop 1	1.38	1.40
	-----	1732.6	1413		Top	23.90	12.2 kbps	Test Loop 1	0.688	0.70
	-----	1732.6	1413		Right	23.90	12.2 kbps	Test Loop 1	0.156	0.16
	-----	1752.6	1513		Repeated	23.95	12.2 kbps	Test Loop 1	1.36	1.38

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

SAR Data Summary –LTE Band 66

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		BW/ Modulation	Ant.	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.						(dBm)		
0 mm	-----	Back	1720	132072	20 MHz/QPSK	Main	1	49	0	23.88	1.06	1.09
	-----		1745	132322	20 MHz/QPSK		1	49	0	23.96	1.21	1.22
	7		1770	132572	20 MHz/QPSK		1	49	0	23.90	1.22	1.25
	-----		1720	132072	20 MHz/QPSK		50	24	1	22.35	0.872	1.01
	-----		1745	132322	20 MHz/QPSK		50	24	1	22.34	0.983	1.14
	-----		1770	132572	20 MHz/QPSK		50	24	1	22.31	1.00	1.17
	-----		1770	132572	20 MHz/QPSK		100	0	1	22.22	0.734	0.88
	-----	Top	1745	132322	20 MHz/QPSK	Main	1	49	0	23.96	0.627	0.63
	-----		1745	132322	20 MHz/QPSK		50	24	1	22.34	0.502	0.58
	-----	Right	1745	132322	20 MHz/QPSK	Main	1	49	0	23.96	0.148	0.15
	-----		1745	132322	20 MHz/QPSK		50	24	1	22.34	0.126	0.15
	-----	Repeat	1770	132572	20 MHz/QPSK	Main	1	49	0	23.90	1.20	1.23

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
 2. Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
 3. Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
 4. Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

LTE Band 4 is fully within the frequency range of band 66. Therefore, the testing for LTE Band 66 will cover LTE Band 4 requirements.

SAR Data Summary – 1900 MHz Body – UMTS Band 2

MEASUREMENT RESULTS

Gap	Plot	Frequency		Modulation	Position	End Power	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.			(dBm)				
0 mm	-----	1852.4	9262	WCDMA	Back	23.92	12.2 kbps	Test Loop 1	1.05	1.07
	-----	1880.0	9400			23.97	12.2 kbps	Test Loop 1	1.07	1.08
	8	1907.6	9538			23.95	12.2 kbps	Test Loop 1	1.13	1.14
	-----	1880.0	9400		Top	23.97	12.2 kbps	Test Loop 1	0.741	0.75
	-----	1880.0	9400		Right	23.97	12.2 kbps	Test Loop 1	0.297	0.30
	-----	1907.6	9538		Repeated	23.95	12.2 kbps	Test Loop 1	1.11	1.12

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

SAR Data Summary –LTE Band 2

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		BW/ Modulation	Ant.	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.						(dBm)		
0 mm	-----	Back	1860.0	18700	20 MHz/QPSK	Main	1	49	0	23.93	0.944	0.96
	-----		1880.0	18900	20 MHz/QPSK		1	49	0	23.95	0.930	0.94
	9		1900.0	19100	20 MHz/QPSK		1	49	0	23.96	0.986	1.00
	-----		1880.0	18900	20 MHz/QPSK		50	24	1	22.91	0.750	0.77
	-----		1880.0	18900	20 MHz/QPSK		100	0	1	22.52	0.521	0.73
	-----	Top	1880.0	18900	20 MHz/QPSK	Main	1	49	0	23.95	0.662	0.67
	-----		1880.0	18900	20 MHz/QPSK		50	24	1	22.91	0.535	0.55
	-----	Right	1880.0	18900	20 MHz/QPSK	Main	1	49	0	23.95	0.258	0.26
	-----		1880.0	18900	20 MHz/QPSK		50	24	1	22.91	0.208	0.21
	-----	Repeat	1900.0	19100	20 MHz/QPSK	Main	1	49	0	23.96	0.965	0.97

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
 Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
 Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

SAR Data Summary –LTE Band 7

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	10	Back	2510	20850	20 MHz/QPSK	1	49	0	23.84	0.911	0.95
	-----		2535	21100	20 MHz/QPSK	1	49	0	23.82	0.902	0.94
	-----		2560	21350	20 MHz/QPSK	1	49	0	23.86	0.847	0.88
	-----		2510	20850	20 MHz/QPSK	50	24	1	22.69	0.737	0.79
	-----		2535	21100	20 MHz/QPSK	50	24	1	22.75	0.739	0.78
	-----		2560	21350	20 MHz/QPSK	50	24	1	22.82	0.700	0.73
	-----		2535	21100	20 MHz/QPSK	100	0	1	22.24	0.584	0.70
	-----	Top	2510	20850	20 MHz/QPSK	1	49	0	23.84	0.886	0.92
	-----		2535	21100	20 MHz/QPSK	1	49	0	23.82	0.874	0.91
	-----		2560	21350	20 MHz/QPSK	1	49	0	23.86	0.795	0.82
	-----		2535	21100	20 MHz/QPSK	50	24	1	22.75	0.706	0.75
	-----	Right	2535	21100	20 MHz/QPSK	1	49	0	23.82	0.219	0.23
	-----		2535	21100	20 MHz/QPSK	50	24	1	22.75	0.177	0.19
	-----	Repeated	2510	20850	20 MHz/QPSK	1	49	0	23.84	0.893	0.93
Body 1.6 W/kg (mW/g) averaged over 1 gram											

- SAR Measurement
Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary –LTE Band 41

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	-----	Back	2506	39750	20 MHz/QPSK	1	49	0	23.66	0.498	0.54
	-----		2544.5	40135	20 MHz/QPSK	1	49	0	23.59	0.502	0.55
	11		2593	40620	20 MHz/QPSK	1	49	0	23.54	0.514	0.57
	-----		2641.5	41105	20 MHz/QPSK	1	49	0	23.62	0.511	0.56
	-----		2680	41490	20 MHz/QPSK	1	49	0	23.67	0.506	0.55
	-----		2593	40620	20 MHz/QPSK	50	24	1	22.92	0.417	0.43
	-----	Top	2593	40620	20 MHz/QPSK	1	49	0	23.54	0.471	0.52
	-----		2593	40620	20 MHz/QPSK	50	24	1	22.92	0.379	0.39
	-----	Right	2593	40620	20 MHz/QPSK	1	49	0	23.54	0.108	0.12
	-----		2593	40620	20 MHz/QPSK	50	24	1	22.92	0.0881	0.09

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
 Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
 Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05 v02r05 clause 5.4. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4. A duty cycle of 1:1.58 is the highest duty cycle achievable which was used for testing Band 41.

SAR Data Summary –LTE Band 42

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	-----	Back	3500	42590	20 MHz/QPSK	1	49	0	23.98	0.559	0.56
	-----		3500	42590	20 MHz/QPSK	50	24	1	22.96	0.452	0.46
	-----	Top	3410	41690	20 MHz/QPSK	1	49	0	23.96	1.27	1.28
	-----		3455	42140	20 MHz/QPSK	1	49	0	23.95	1.29	1.31
	-----		3500	42590	20 MHz/QPSK	1	49	0	23.98	1.37	1.38
	12		3545	43040	20 MHz/QPSK	1	49	0	23.97	1.40	1.41
	-----		3590	43490	20 MHz/QPSK	1	49	0	23.97	1.33	1.34
	-----		3410	41690	20 MHz/QPSK	50	24	1	22.91	1.03	1.05
	-----		3455	42140	20 MHz/QPSK	50	24	1	22.94	1.05	1.06
	-----		3500	42590	20 MHz/QPSK	50	24	1	22.96	1.12	1.13
	-----		3545	43040	20 MHz/QPSK	50	24	1	22.93	1.15	1.17
	-----		3590	43490	20 MHz/QPSK	50	24	1	22.92	1.08	1.10
	-----		3500	42590	20 MHz/QPSK	100	0	1	22.39	0.823	0.95
	-----	Right	3500	42590	20 MHz/QPSK	1	49	0	23.98	0.0421	0.04
	-----		3500	42590	20 MHz/QPSK	50	24	1	22.96	0.0321	0.03
	-----	Repeated	3545	43040	20 MHz/QPSK	1	49	0	23.97	1.38	1.39

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
 Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
 Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05 v02r05 clause 5.4. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4. A duty cycle of 1:1.58 is the highest duty cycle achievable which was used for testing Band 41.

SAR Data Summary –LTE Band 43

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	-----	Back	3700	44590	20 MHz/QPSK	1	49	0	23.88	0.609	0.63
	-----		3700	44590	20 MHz/QPSK	50	24	1	22.90	0.516	0.53
	-----	Top	3610	43690	20 MHz/QPSK	1	49	0	23.86	1.37	1.42
	13		3655	44140	20 MHz/QPSK	1	49	0	23.87	1.38	4.42
	-----		3700	44590	20 MHz/QPSK	1	49	0	23.88	1.36	1.40
	-----		3745	45040	20 MHz/QPSK	1	49	0	23.84	1.37	1.42
	-----		3790	45490	20 MHz/QPSK	1	49	0	23.82	1.34	1.40
	-----		3610	43690	20 MHz/QPSK	50	24	1	22.89	1.13	1.16
	-----		3655	44140	20 MHz/QPSK	50	24	1	22.90	1.29	1.32
	-----		3700	44590	20 MHz/QPSK	50	24	1	22.90	1.22	1.25
	-----		3745	45040	20 MHz/QPSK	50	24	1	22.87	1.24	1.28
	-----		3790	45490	20 MHz/QPSK	50	24	1	22.84	1.26	1.31
	-----		3700	44590	20 MHz/QPSK	100	0	1	22.21	1.01	1.21
	-----	Right	3700	44590	20 MHz/QPSK	1	49	0	23.88	0.0706	0.07
	-----		3700	44590	20 MHz/QPSK	50	24	1	22.90	0.0553	0.06
	-----	Repeated	3655	44140	20 MHz/QPSK	1	49	0	23.87	1.36	1.40

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
 2. Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
 3. Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
 4. Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05 v02r05 clause 5.4. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4. A duty cycle of 1:1.58 is the highest duty cycle achievable which was used for testing Band 41.

SAR Data Summary –LTE Band 48

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	-----	Back	3625.0	55990	20 MHz/QPSK	1	49	0	23.98	0.535	0.54
	-----		3625.0	55990	20 MHz/QPSK	50	24	1	22.85	0.274	0.28
	-----	Top	3560.0	55340	20 MHz/QPSK	1	49	0	23.97	1.35	1.36
	14		3592.5	55665	20 MHz/QPSK	1	49	0	23.96	1.40	1.41
	-----		3625.0	55990	20 MHz/QPSK	1	49	0	23.98	1.39	1.40
	-----		3657.5	56315	20 MHz/QPSK	1	49	0	23.95	1.38	1.40
	-----		3690.0	56640	20 MHz/QPSK	1	49	0	23.96	1.28	1.29
	-----		3625.0	55990	20 MHz/QPSK	50	24	1	22.85	0.718	0.74
	-----		3625.0	55990	20 MHz/QPSK	100	0	1	22.21	0.523	0.63
	-----	Right	3625.0	55990	20 MHz/QPSK	1	49	0	23.98	0.0449	0.05
	-----		3625.0	55990	20 MHz/QPSK	50	24	1	22.85	0.0178	0.02
	-----	Repeated	3592.5	55665	20 MHz/QPSK	1	49	0	23.96	1.38	1.39

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm




Jay M. Moulton
 Vice President

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05 v02r05 clause 5.4. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4. A duty cycle of 1:1.58 is the highest duty cycle achievable which was used for testing Band 41.

SAR Data Summary – 2450 MHz Body 802.11b & BT

MEASUREMENT RESULTS									
Plot	Gap	Position	Frequency		Modulation	Antenna	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.			(dBm)		
-----	0 mm	Back	2437	6	DSSS	Main	17.50	0.220	0.22
-----			2437	6	DSSS	Aux	17.50	0.256	0.26
-----		Top	2437	6	DSSS	Main	17.50	0.143	0.14
-----			2417	2	DSSS	Aux	17.44	0.329	0.34
15			2437	6	DSSS		17.50	0.368	0.37
-----			2462	11	DSSS		17.50	0.342	0.35
-----		Left	2437	6	DSSS	Aux	17.50	0.119	0.12
-----		Back	2440	39	GFSK	Aux	11.47	0.0641	0.07
-----		Top	2440	39	GFSK		11.47	0.0925	0.11
-----		Left	2440	39	GFSK		11.47	0.0297	0.03
					Body 1.6 W/kg (mW/g) averaged over 1 gram				

- Battery is fully charged for all tests.
Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement
Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☒ Test Code ☐ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

The correction factor for each measurement due to the duty cycle is 1.01. The measured SAR value was first multiplied by the correction factor for the duty cycle; then, it was scaled to the upper end of the tune up tolerance.

SAR Data Summary – 5250 MHz Body 802.11a

MEASUREMENT RESULTS									
Plot	Gap	Position	Frequency		Modulation	Antenna	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.			(dBm)		
-----	0 mm	Back	5300	60	OFDM	Main	16.50	0.145	0.15
-----			5280	56	OFDM	Aux	16.50	0.691	0.70
-----			5300	60	OFDM		16.50	0.692	0.70
-----		Top	5280	56	OFDM	Main	16.50	0.447	0.45
-----			5300	60	OFDM		16.50	0.458	0.46
-----			5280	56	OFDM	Aux	16.50	1.06	1.07
-----			5300	60	OFDM		16.50	1.08	1.09
16			5300	60	OFDM	Aux	16.50	0.0887	0.09
-----		Left	5300	60	OFDM		16.50	1.07	1.08
-----		Repeat	5300	60	OFDM	Aux	16.50	1.07	1.08

Body
1.6 W/kg (mW/g)
averaged over 1 gram

- Battery is fully charged for all tests.
Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement
Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☒ Test Code ☐ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

The correction factor for each measurement due to the duty cycle is 1.01. The measured SAR value was first multiplied by the correction factor for the duty cycle; then, it was scaled to the upper end of the tune up tolerance.

SAR Data Summary – 5600 MHz Body 802.11a

MEASUREMENT RESULTS

Plot	Gap	Position	Frequency		Modulation	Antenna	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.			(dBm)		
----	0 mm	Back	5620	124	OFDM	Main	16.50	0.222	0.22
----			5580	116	OFDM	Aux	16.50	0.637	0.64
----			5620	124	OFDM		16.50	0.594	0.60
----		Top	5580	116	OFDM	Main	16.50	0.757	0.77
----			5620	124	OFDM		16.50	0.762	0.76
----			5580	116	OFDM		16.50	1.13	1.14
17			5620	124	OFDM	Aux	16.50	1.16	1.17
----			5620	124	OFDM		16.50	0.0639	0.06
----		Left	5620	124	OFDM	Aux	16.50	0.0639	0.06
----		Repeat	5620	124	OFDM	Aux	16.50	1.14	1.15

Body
1.6 W/kg (mW/g)
averaged over 1 gram

- Battery is fully charged for all tests.
Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement
Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☒ Test Code ☐ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

The correction factor for each measurement due to the duty cycle is 1.01. The measured SAR value was first multiplied by the correction factor for the duty cycle; then, it was scaled to the upper end of the tune up tolerance.

SAR Data Summary – 5800 MHz Body 802.11a

MEASUREMENT RESULTS

Plot	Gap	Position	Frequency		Modulation	Antenna	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.			(dBm)		
-----	0 mm	Back	5785	157	OFDM	Main	16.50	0.216	0.22
-----			5785	157	OFDM	Aux	16.50	0.604	0.61
-----			5825	165	OFDM		16.50	0.646	0.65
-----		Top	5785	157	OFDM	Main	16.50	0.851	0.86
-----			5825	165	OFDM		16.50	0.905	0.91
-----			5745	149	OFDM	Aux	16.50	1.12	1.13
18			5785	157	OFDM		16.50	1.19	1.20
-----			5825	165	OFDM		16.50	1.16	1.17
-----		Left	5785	157	OFDM	Aux	16.50	0.0711	0.07
-----		Repeat	5785	157	OFDM	Aux	16.50	1.17	1.18

Body
1.6 W/kg (mW/g)
averaged over 1 gram

- Battery is fully charged for all tests.
Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement
Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☒ Test Code ☐ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

The correction factor for each measurement due to the duty cycle is 1.01. The measured SAR value was first multiplied by the correction factor for the duty cycle; then, it was scaled to the upper end of the tune up tolerance.

SAR Data Summary – Simultaneous Evaluation

MEASUREMENT RESULTS - BT								
Frequency		Modulation	Frequency		Modulation	SAR ₁	SAR ₂	SAR Total
MHz	Ch.		MHz	Ch.				
846.6	4233	WCDMA	2440	39	GFSK	1.43	0.11	1.54
5825	157	OFDM	2440	39	GFSK	1.20	0.11	1.31
						Body 1.6 W/kg (mW/g) averaged over 1 gram		

The highest measured SAR value was used to determine simultaneous evaluation. The sum of the two transmitters is less than the limit for both combinations; therefore, the simultaneous transmission meets the requirements of KDB447498 D01 v06 section 4.3.2 page 11.

MEASUREMENT RESULTS – WiFi MIMO								
Frequency		Modulation	Frequency		Modulation	SAR ₁	SAR ₂ - WiFi	SAR Total
MHz	Ch.		MHz	Ch.				
5825	165	OFDM	5785	157	OFDM	0.91	1.20	2.11
						Body 1.6 W/kg (mW/g) averaged over 1 gram		

The WiFi hotspots are a minimum of 80 mm apart. Using the highest reported SAR to calculate the simultaneous Tx using peak separation ratio, the highest ratio would be 0.04 which meets the requirements of KDB 447498 section 4.3.2 3) on page 13. The calculation is shown below.

Simultaneous Separation Ratio Calculation

$$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04 \text{ rounded to two digits}$$

$$(0.91 + 1.20)^{1.5}/80 = 0.04; \text{ WiFi MIMO}$$

MEASUREMENT RESULTS – WWAN and WiFi								
Frequency		Modulation	Frequency		Modulation	SAR ₁	SAR ₂ - WiFi	SAR Total
MHz	Ch.		MHz	Ch.				
846.6	4233	WCDMA	5825	165	OFDM	1.43	0.91	2.34
846.6	4233	WCDMA	5785	157	OFDM	1.43	1.20	2.63
						Body 1.6 W/kg (mW/g) averaged over 1 gram		

The WWAN (Main) to WiFi (Main) hotspots are a minimum of 82 mm apart. The WWAN (Main) to WiFi (Aux) antennas are a minimum of 113 mm apart. Using the highest reported SAR to calculate the simultaneous Tx using peak separation ratio, the highest ratio would be 0.04 which meets the requirements of KDB 447498 section 4.3.2 3) on page 13. The calculation is shown below.

Simultaneous Separation Ratio Calculation

$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04$ rounded to two digits

$(1.43 + 0.91)^{1.5}/82 = 0.04$; WWAN (Main) to WiFi (Main)

$(1.43 + 1.20)^{1.5}/113 = 0.04$; WWAN (Main) to WiFi (Aux)

12. Test Equipment List

Table 12.1 Equipment Specifications

Type	Calibration Due Date	Calibration Done Date	Serial Number
Staubli Robot TX60L	N/A	N/A	F07/55M6A1/A/01
Measurement Controller CS8c	N/A	N/A	1012
ELI4 Flat Phantom	N/A	N/A	1065
Device Holder	N/A	N/A	N/A
Data Acquisition Electronics 4	04/24/2018	04/24/2017	1416
Data Acquisition Electronics 4	04/13/2019	04/13/2018	1416
SPEAG E-Field Probe EX3DV4	04/20/2019	04/20/2018	3662
SPEAG E-Field Probe EX3DV4	08/18/2018	08/18/2017	3693
SPEAG E-Field Probe EX3DV4	08/27/2019	08/27/2018	3693
Speag Validation Dipole D750V2	07/13/2019	07/13/2018	1016
Speag Validation Dipole D835V2	07/13/2019	07/13/2018	4d089
Speag Validation Dipole D1750V2	07/20/2019	07/20/2018	1018
Speag Validation Dipole D1900V2	07/13/2019	07/13/2018	5d116
Speag Validation Dipole D2550V2	07/12/2019	07/12/2018	1003
Speag Validation Dipole D3500V2	04/13/2019	04/13/2018	1061
Speag Validation Dipole D3700V2	04/13/2019	04/13/2018	1024
Speag Validation Dipole D2450V2	08/10/2018	08/10/2015	881
Speag Validation Dipole D5GHzV2	08/11/2018	08/11/2015	1119
Agilent N1911A Power Meter	05/20/2019	03/20/2017	GB45100254
Agilent N1922A Power Sensor	06/21/2019	06/21/2017	MY45240464
Advantest R3261A Spectrum Analyzer	03/26/2019	03/20/2017	31720068
Agilent (HP) 8350B Signal Generator	03/26/2019	03/20/2017	2749A10226
Agilent (HP) 83525A RF Plug-In	03/26/2019	03/20/2017	2647A01172
Agilent (HP) 8753C Vector Network Analyzer	03/26/2019	03/20/2017	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	03/26/2019	03/20/2017	2904A00595
Agilent (HP) 8960 Base Station Sim.	03/30/2019	03/30/2017	MY48360364
Anritsu MT8820C	07/27/2019	07/27/2017	6201176199
Agilent N1911A Power Meter	03/20/2020	03/20/2019	GB45100254
Agilent N1922A Power Sensor	06/21/2019	06/21/2017	MY45240464
Advantest R3261A Spectrum Analyzer	03/25/2020	03/25/2019	31720068
Agilent (HP) 8350B Signal Generator	03/20/2020	03/20/2019	2749A10226
Agilent (HP) 83525A RF Plug-In	03/20/2020	03/20/2019	2647A01172
Agilent (HP) 8753C Vector Network Analyzer	03/20/2020	03/20/2019	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	03/20/2020	03/20/2019	2904A00595
Agilent (HP) 8960 Base Station Sim.	03/19/2020	03/19/2019	MY48360364
Anritsu MT8820C	01/26/2020	01/26/2019	6201176199
Agilent 778D Dual Directional Coupler	N/A	N/A	MY48220184
MiniCircuits BW-N20W5+ Fixed 20 dB Attenuator	N/A	N/A	N/A
MiniCircuits SPL-10.7+ Low Pass Filter	N/A	N/A	R8979513746
Aprel Dielectric Probe Assembly	N/A	N/A	0011
Body Equivalent Matter (750 MHz)	N/A	N/A	N/A
Body Equivalent Matter (835/900 MHz)	N/A	N/A	N/A
Body Equivalent Matter (1750 MHz)	N/A	N/A	N/A
Body Equivalent Matter (1900 MHz)	N/A	N/A	N/A
Body Equivalent Matter (2450 MHz)	N/A	N/A	N/A
Body Equivalent Matter (2600 MHz)	N/A	N/A	N/A
Body Equivalent Matter (3-5 GHz)	N/A	N/A	N/A

13. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC/IC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

14. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996
- [2] ANSI/IEEE C95.1 – 1992, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.
- [3] ANSI/IEEE C95.3 – 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 2002.
- [4] International Electrotechnical Commission, IEC 62209-2 (Edition 1.0), Human Exposure to radio frequency fields from hand-held and body mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), March 2010.
- [5] IEEE Standard 1528 – 2013, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013.
- [6] Industry Canada, RSS – 102 Issue 5, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2015.
- [7] Health Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 2009.

Appendix A – System Validation Plots and Data

Test Result for UIM Dielectric Parameter

Wed 20/Mar/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7000	55.73	0.96	54.98	0.89
0.7040	55.714	0.96	54.956	0.894*
0.7100	55.69	0.96	54.92	0.90
0.7075	55.70	0.96	54.933	0.898*
0.7110	55.686	0.96	54.915	0.901*
0.7200	55.65	0.96	54.87	0.91
0.7300	55.61	0.96	54.81	0.92
0.7400	55.57	0.96	54.77	0.93
0.7500	55.53	0.96	54.69	0.94
0.7600	55.49	0.96	54.62	0.95
0.7700	55.45	0.96	54.58	0.96
0.7800	55.41	0.97	54.57	0.97
0.7820	55.404	0.97	54.556	0.972*
0.7900	55.38	0.97	54.50	0.98
0.7930	55.368	0.97	54.485	0.98*
0.8000	55.34	0.97	54.45	0.98

* value interpolated

Test Result for UIM Dielectric Parameter

Tue 19/Mar/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.8050	55.32	0.97	54.24	0.94
0.8150	55.28	0.97	54.28	0.95
0.8215	55.254	0.97	54.313	0.957*
0.8250	55.24	0.97	54.33	0.96
0.8264	55.234	0.97	54.336	0.963*
0.8315	55.214	0.97	54.356	0.973*
0.8350	55.20	0.97	54.37	0.98
0.8366	55.195	0.972	54.375	0.982*
0.8415	55.181	0.977	54.39	0.987*
0.8450	55.17	0.98	54.40	0.99
0.8466	55.165	0.982	54.406	0.995*
0.8550	55.14	0.99	54.44	1.02
0.8650	55.11	1.01	54.48	1.04

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 18/Mar/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.6900	53.59	1.45	52.89	1.51
1.7000	53.56	1.46	52.85	1.52
1.7100	53.54	1.46	52.81	1.53
1.7124	53.533	1.462	52.803	1.532*
1.7200	53.51	1.47	52.78	1.54
1.7300	53.48	1.48	52.74	1.55
1.7326	53.475	1.48	52.73	1.55*
1.7400	53.46	1.48	52.70	1.55
1.7450	53.445	1.485	52.69	1.555*
1.7500	53.43	1.49	52.68	1.56
1.7526	53.425	1.49	52.675	1.56*
1.7600	53.41	1.49	52.66	1.56
1.7700	53.38	1.50	52.65	1.57
1.7800	53.35	1.51	52.61	1.58
1.7900	53.33	1.51	52.58	1.59

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 18/Mar/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8500	53.30	1.52	53.27	1.49
1.8524	53.30	1.52	53.265	1.492*
1.8600	53.30	1.52	53.25	1.50
1.8700	53.30	1.52	53.23	1.51
1.8800	53.30	1.52	53.21	1.52
1.8900	53.30	1.52	53.19	1.53
1.9000	53.30	1.52	53.17	1.54
1.9076	53.30	1.52	53.155	1.548*
1.9098	53.30	1.52	53.15	1.55*
1.9100	53.30	1.52	53.15	1.55
1.9200	53.30	1.52	53.14	1.57
1.9300	53.30	1.52	53.12	1.58

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 21/Mar/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.4900	52.65	2.01	52.31	2.01
2.5000	52.64	2.02	52.29	2.02
2.5060	52.628	2.032	52.272	2.032*
2.5100	52.62	2.04	52.26	2.04
2.5200	52.61	2.05	52.23	2.06
2.5300	52.60	2.06	52.21	2.08
2.5350	52.595	2.07	52.205	2.09*
2.5400	52.59	2.08	52.20	2.10
2.5495	52.571	2.09	52.181	2.11*
2.5500	52.57	2.09	52.18	2.11
2.5600	52.56	2.11	52.16	2.13
2.5700	52.55	2.12	52.14	2.15
2.5800	52.53	2.13	52.13	2.16
2.5900	52.52	2.15	52.10	2.18
2.5930	52.517	2.153	52.097	2.186*
2.6000	52.51	2.16	52.09	2.20
2.6100	52.50	2.18	52.06	2.21
2.6200	52.48	2.19	52.04	2.22
2.6300	52.47	2.21	52.03	2.24
2.6400	52.46	2.22	52.01	2.25
2.6365	52.464	2.217	52.014	2.247*
2.6500	52.45	2.23	52.00	2.26
2.6600	52.43	2.25	51.98	2.27
2.6700	52.42	2.26	51.96	2.28
2.6800	52.41	2.28	51.94	2.30
2.6900	52.39	2.29	51.91	2.31
2.7000	52.38	2.30	51.90	2.32
2.8000	52.37	2.31	51.88	2.33

* value interpolated

Test Result for UIM Dielectric Parameter

Fri 22/Mar/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
3.3900	51.47	3.20	51.25	3.23
3.4000	51.45	3.21	51.23	3.24
3.4100	51.44	3.23	51.22	3.25
3.4200	51.43	3.24	51.21	3.26
3.4300	51.41	3.25	51.19	3.27
3.4400	51.40	3.26	51.18	3.28
3.4550	51.385	3.275	51.165	3.295*
3.4500	51.39	3.27	51.17	3.29
3.4600	51.37	3.28	51.16	3.30
3.4700	51.36	3.29	51.15	3.31
3.4800	51.35	3.30	51.13	3.32
3.4900	51.33	3.31	51.12	3.33
3.5000	51.32	3.32	51.11	3.34
3.5100	51.31	3.33	51.11	3.35
3.5200	51.29	3.34	51.10	3.36
3.5300	51.28	3.35	51.08	3.37
3.5400	51.27	3.36	51.07	3.38
3.5450	51.26	3.365	51.06	3.385*
3.5500	51.25	3.37	51.05	3.39
3.5600	51.24	3.38	51.03	3.40
3.5700	51.23	3.40	51.02	3.41
3.5800	51.21	3.41	51.00	3.42
3.5900	51.20	3.42	50.98	3.43
3.5925	51.198	3.423	50.978	3.433*
3.6000	51.19	3.43	50.97	3.44
3.6100	51.17	3.44	50.95	3.45
3.6200	51.16	3.45	50.94	3.46
3.6250	51.155	3.455	50.935	3.465*
3.6300	51.15	3.46	50.93	3.47
3.6400	51.13	3.47	50.92	3.48
3.6500	51.12	3.48	50.91	3.49
3.6550	51.115	3.485	50.905	3.495*
3.6575	51.113	3.488	50.903	3.498*
3.6600	51.11	3.49	50.90	3.50
3.6700	51.09	3.50	50.89	3.51
3.6800	51.08	3.51	50.88	3.52
3.6900	51.07	3.52	50.87	3.53
3.7000	51.05	3.53	50.86	3.54
3.7100	51.04	3.54	50.85	3.55
3.7200	51.03	3.55	50.84	3.56
3.7300	51.01	3.57	50.83	3.57
3.7400	51.00	3.58	50.82	3.58
3.7450	50.995	3.585	50.815	3.585*
3.7500	50.99	3.59	50.81	3.59
3.7600	50.97	3.60	50.80	3.60
3.7700	50.96	3.61	50.79	3.61
3.7800	50.95	3.62	50.78	3.62
3.7900	50.93	3.63	50.77	3.63
3.8000	50.92	3.64	50.76	3.64
3.8100	50.91	3.65	50.75	3.65

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 08/Feb/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.4100	52.75	1.91	52.66	1.95
2.4120	52.748	1.912	52.656	1.952*
2.4200	52.74	1.92	52.64	1.96
2.4300	52.73	1.93	52.62	1.97
2.4370	52.716	1.937	52.606	1.984*
2.4400	52.71	1.94	52.60	1.99
2.4500	52.70	1.95	52.58	2.00
2.4600	52.69	1.96	52.57	2.01
2.4620	52.686	1.964	52.566	2.012*
2.4700	52.67	1.98	52.55	2.02
2.4800	52.66	1.99	52.53	2.03

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 08/Feb/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
5.1000	49.15	5.18	49.09	5.22
5.1200	49.12	5.21	49.06	5.25
5.1400	49.10	5.23	49.03	5.27
5.1600	49.07	5.25	49.00	5.29
5.1800	49.04	5.28	48.97	5.31
5.2000	49.01	5.30	48.94	5.34
5.2100	49.00	5.31	48.93	5.35*
5.2200	48.99	5.32	48.92	5.36
5.2400	48.96	5.35	48.89	5.38
5.2600	48.93	5.37	48.86	5.41
5.2800	48.91	5.39	48.84	5.43
5.2900	48.895	5.405	48.825	5.44*
5.3000	48.88	5.42	48.81	5.45
5.3200	48.85	5.44	48.78	5.48
5.3400	48.82	5.46	48.75	5.50
5.3600	48.80	5.49	48.72	5.52
5.3800	48.77	5.51	48.69	5.54
5.4000	48.74	5.53	48.66	5.57
5.4200	48.72	5.56	48.63	5.59
5.4400	48.69	5.58	48.60	5.61
5.4600	48.66	5.60	48.57	5.63
5.4800	48.63	5.63	48.54	5.66
5.5000	48.61	5.65	48.51	5.68
5.5200	48.58	5.67	48.48	5.70
5.5400	48.55	5.70	48.45	5.73
5.5600	48.53	5.72	48.42	5.75
5.5800	48.50	5.74	48.39	5.77
5.6000	48.47	5.77	48.36	5.80
5.6100	48.455	5.78	48.345	5.815*
5.6200	48.44	5.79	48.33	5.83
5.6400	48.42	5.81	48.30	5.85
5.6600	48.39	5.84	48.27	5.87
5.6800	48.36	5.86	48.24	5.90
5.7000	48.34	5.88	48.21	5.93
5.7200	48.31	5.91	48.18	5.95
5.7400	48.28	5.93	48.15	5.97
5.7450	48.273	5.935	48.143	5.978*
5.7600	48.25	5.95	48.12	6.00
5.7750	48.235	5.973	48.098	6.023*
5.7800	48.23	5.98	48.09	6.03
5.7850	48.223	5.985	48.08	6.033*
5.8000	48.20	6.00	48.05	6.04
5.8200	48.17	6.02	48.02	6.06
5.8250	48.165	6.028	48.013	6.068*
5.8400	48.15	6.05	47.99	6.09

* value interpolated

RF Exposure Lab

Plot 1

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1016

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used: $f = 750$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 54.69$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/20/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3693; ConvF(9.77, 9.77, 9.77); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

750 MHz/Verification/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.08 W/kg

750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.227 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.30 W/kg
SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.569 W/kg
Maximum value of SAR (measured) = 1.10 W/kg

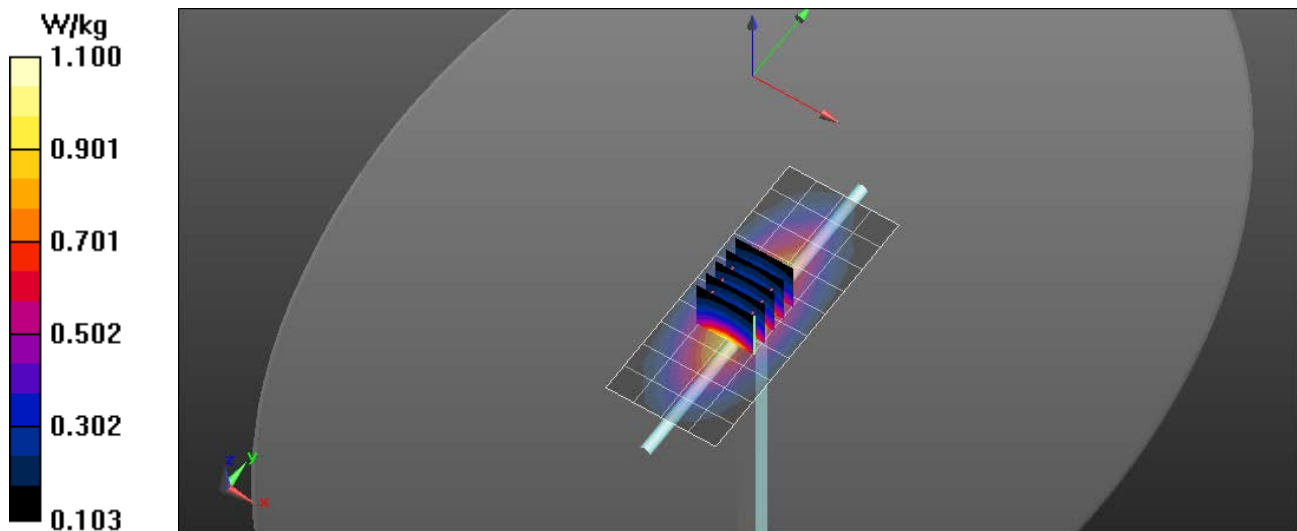

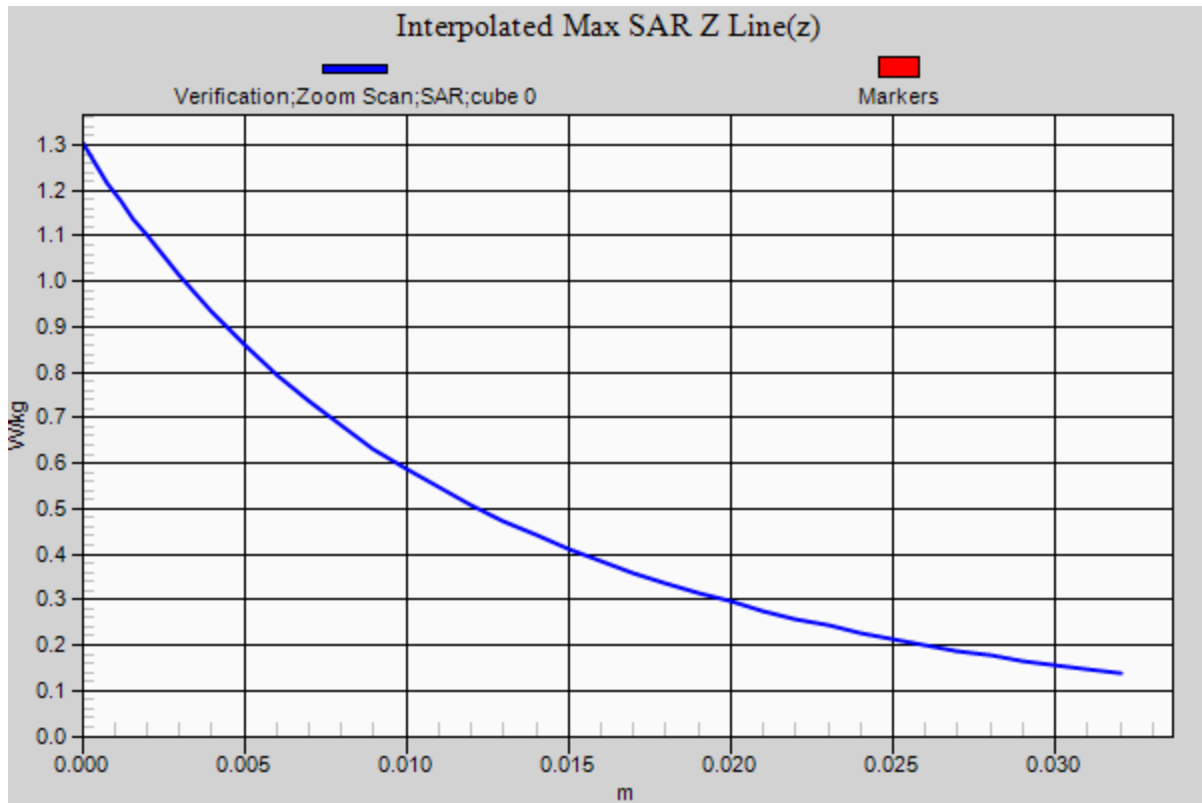

RF Exposure Lab

Plot 2

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d089

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 54.37$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Test Date: Date: 3/19/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3693; ConvF(9.4, 9.4, 9.4); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

835 MHz/Verification/Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.18 W/kg

835 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 31.227 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.47 W/kg
SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.619 W/kg
Maximum value of SAR (measured) = 1.19 W/kg

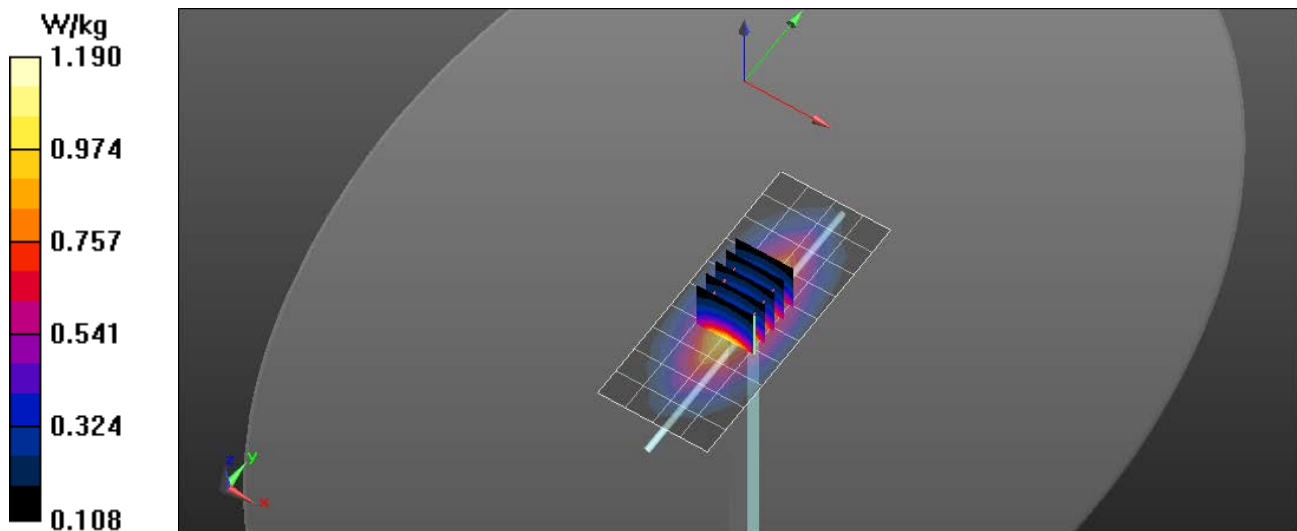

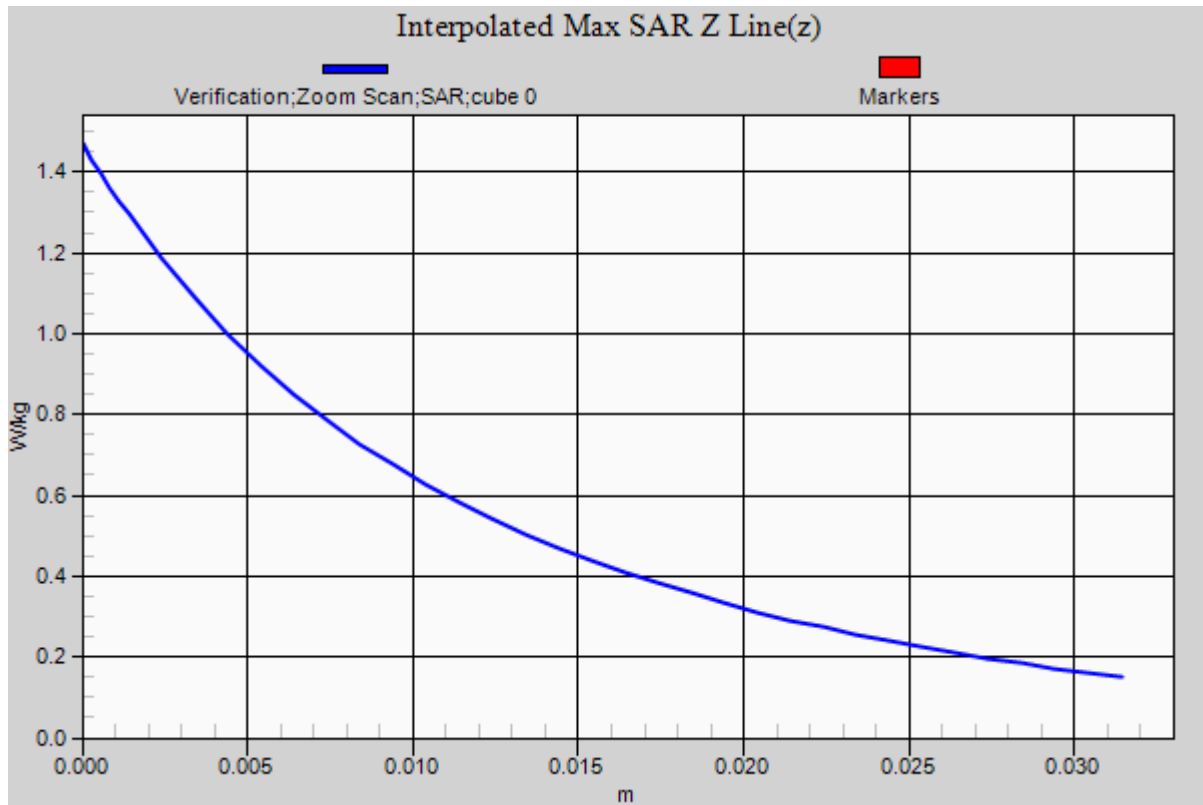

RF Exposure Lab

Plot 3

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1018

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: MSL1750; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/18/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3693; ConvF(7.77, 7.77, 7.77); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1750 MHz/Verification/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.33 W/kg

1750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.227 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 6.89 W/kg
SAR(1 g) = 3.71 W/kg; SAR(10 g) = 2.03 W/kg
Maximum value of SAR (measured) = 5.49 W/kg

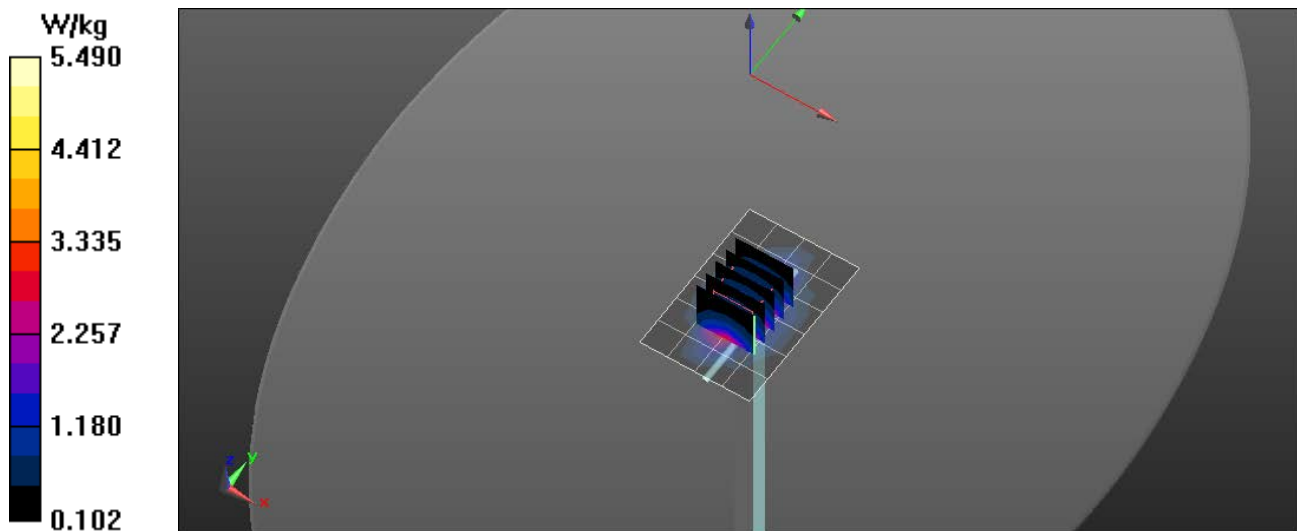

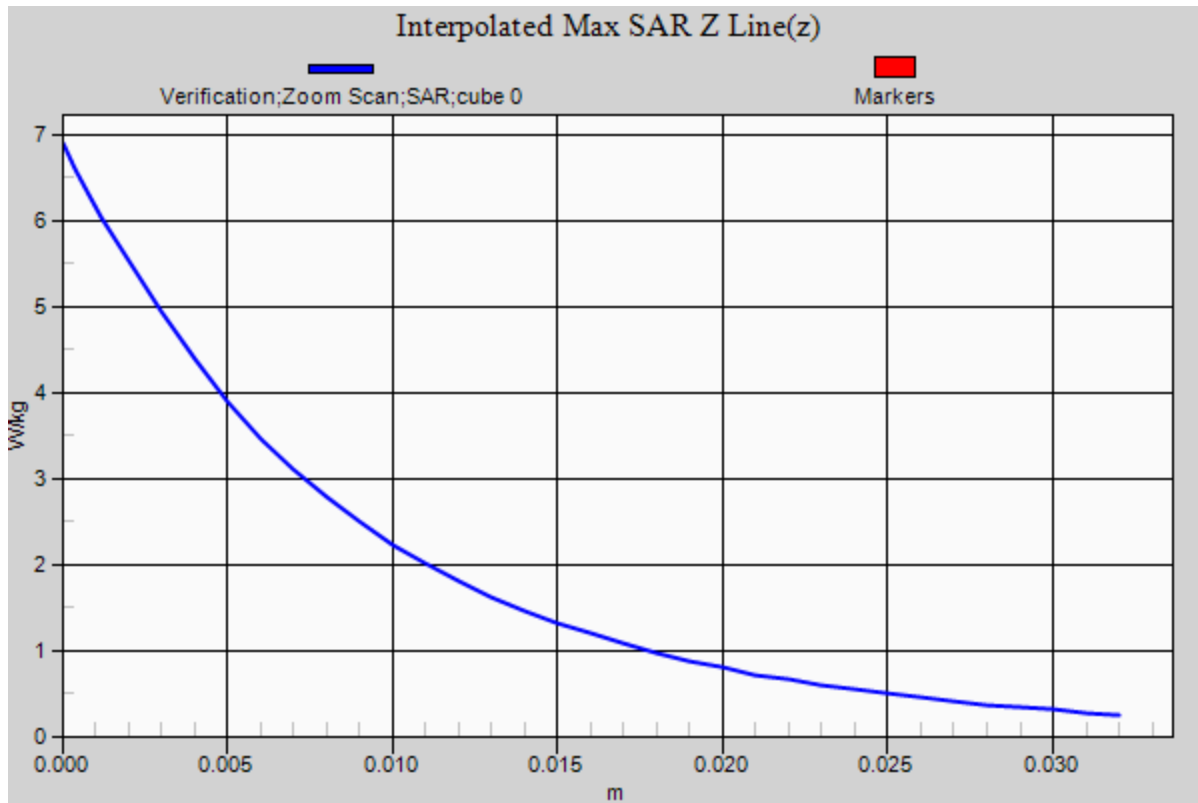

RF Exposure Lab

Plot 4

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d116

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 53.17$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/18/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3693; ConvF(7.44, 7.44, 7.44); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1900 MHz/Verification/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.44 W/kg

1900 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.227 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 7.22 W/kg
SAR(1 g) = 4.02 W/kg; SAR(10 g) = 2.1 W/kg
Maximum value of SAR (measured) = 5.77 W/kg

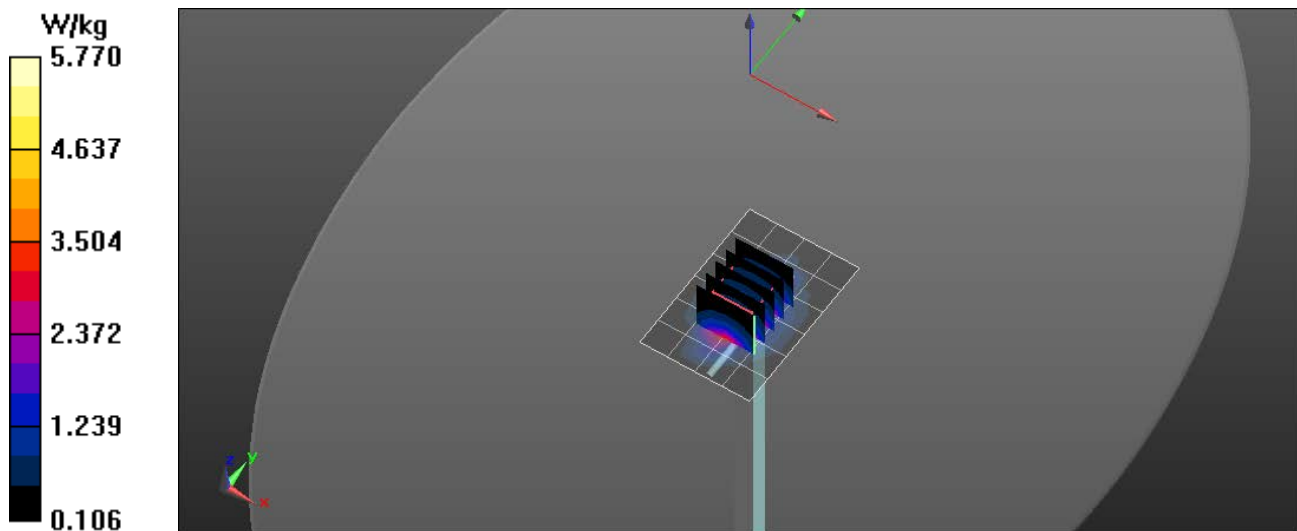

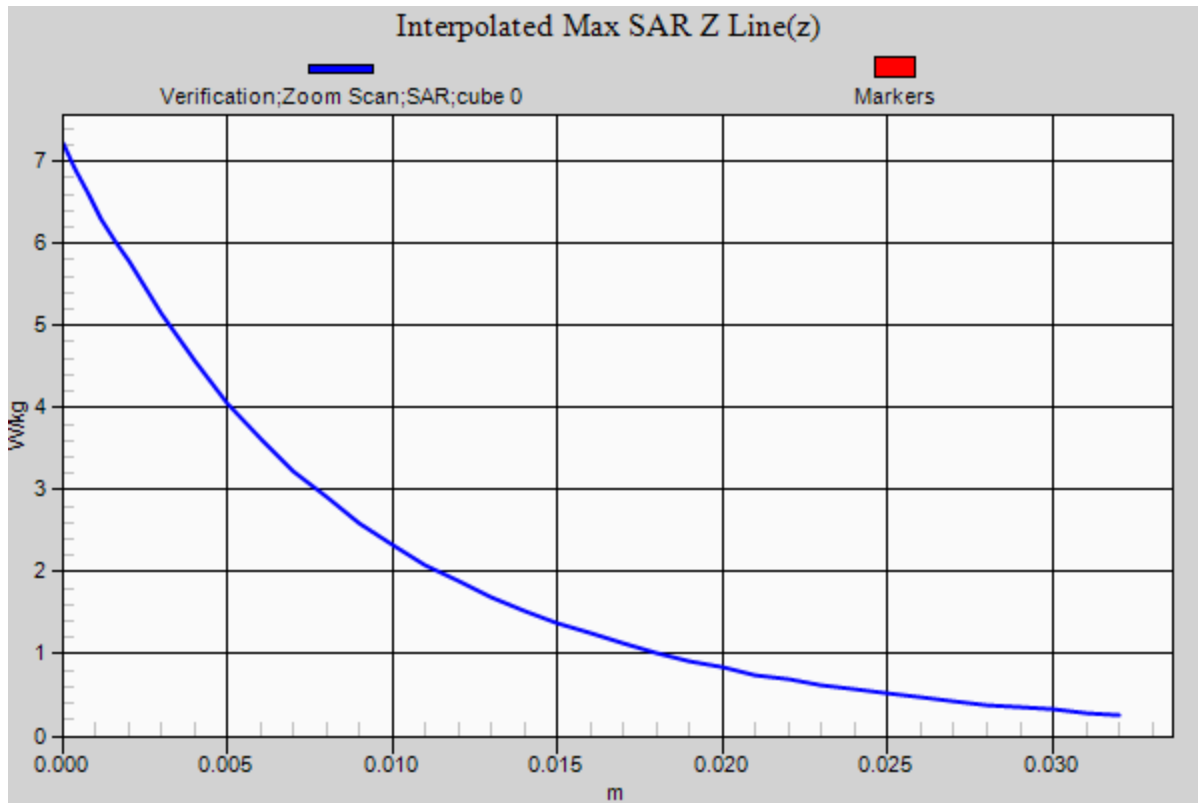

RF Exposure Lab

Plot 5

DUT: Dipole 2550 MHz D2550V2; Type: D2550V2; Serial: D2550V2 - SN:1003


Communication System: CW; Frequency: 2550 MHz; Duty Cycle: 1:1
Medium: MSL2600; Medium parameters used: $f = 2550$ MHz; $\sigma = 2.11$ S/m; $\epsilon_r = 52.18$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/21/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3693; ConvF(7.13, 7.13, 7.13); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2550 MHz Body/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 8.91 W/kg

2550 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.867 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 11.6 W/kg
SAR(1 g) = 5.33 W/kg; SAR(10 g) = 2.43 W/kg
Maximum value of SAR (measured) = 9.18 W/kg

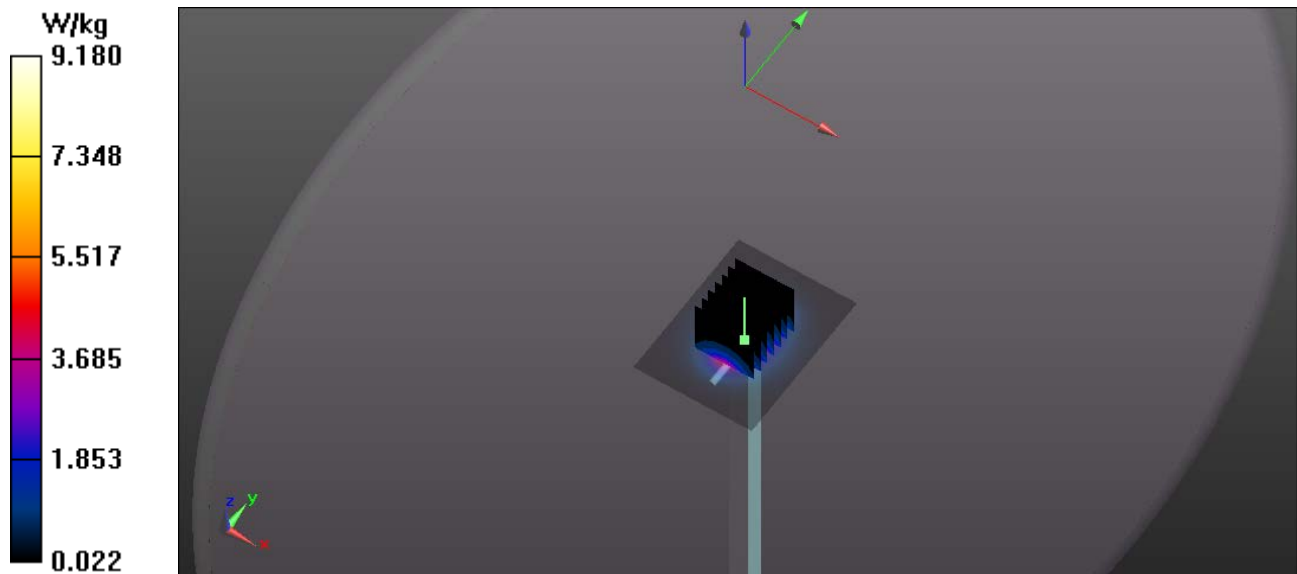

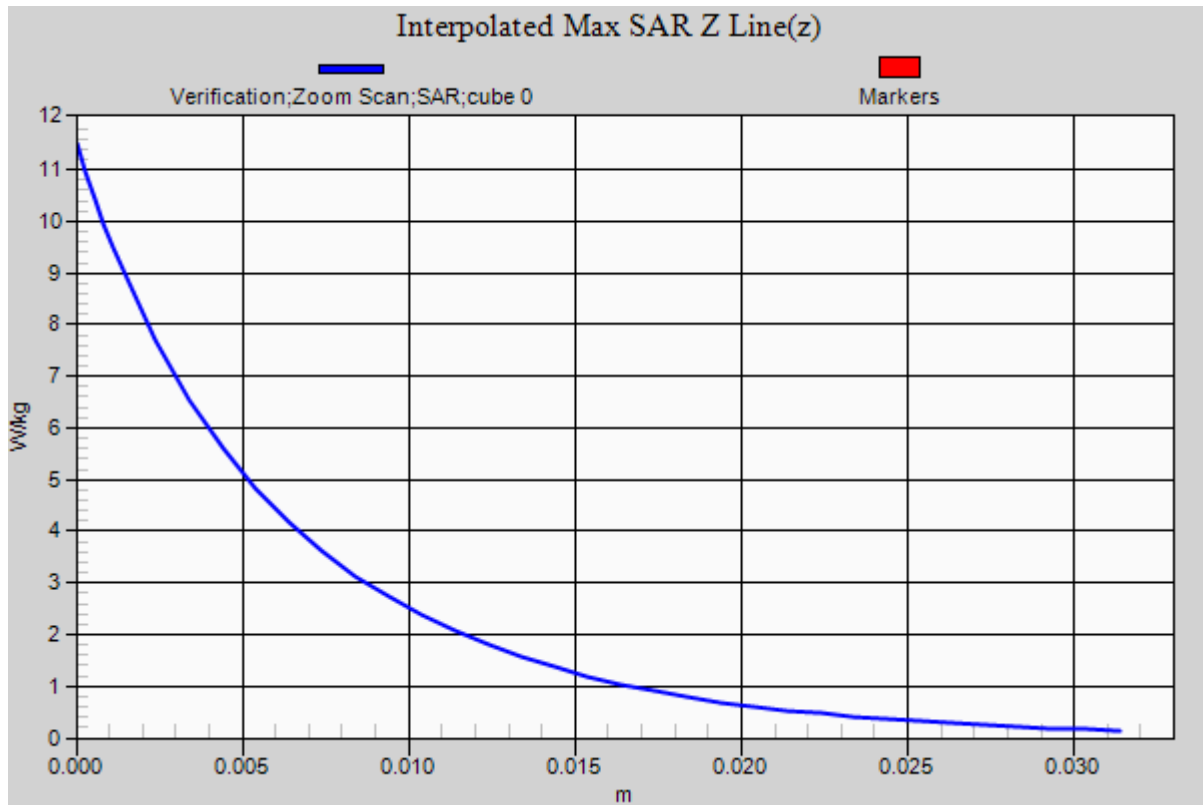

RF Exposure Lab

Plot 6

DUT: Dipole D3500V2; Type: D3500V2; Serial: D3500V2 - SN:1061


Communication System: CW; Frequency: 3500 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.34$ S/m; $\epsilon_r = 51.11$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/22/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(7, 7, 7); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

3500 MHz Body/Verification/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.64 W/kg

3500 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=4mm
Reference Value = 11.892 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.63 W/kg
SAR(1 g) = 0.655 W/kg; SAR(10 g) = 0.245 W/kg
Maximum value of SAR (measured) = 1.70 W/kg

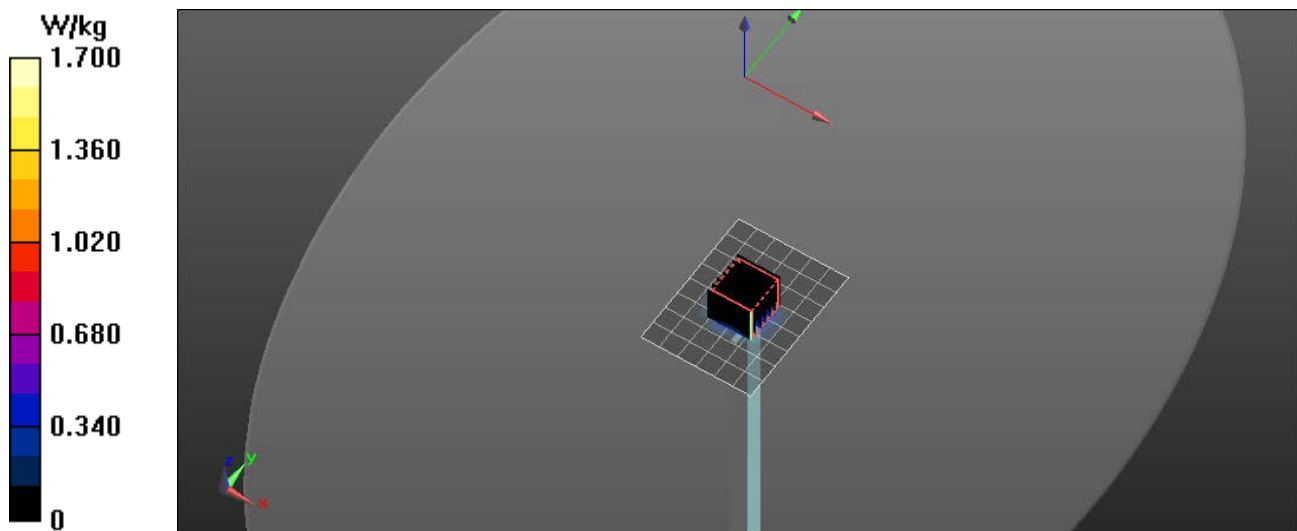

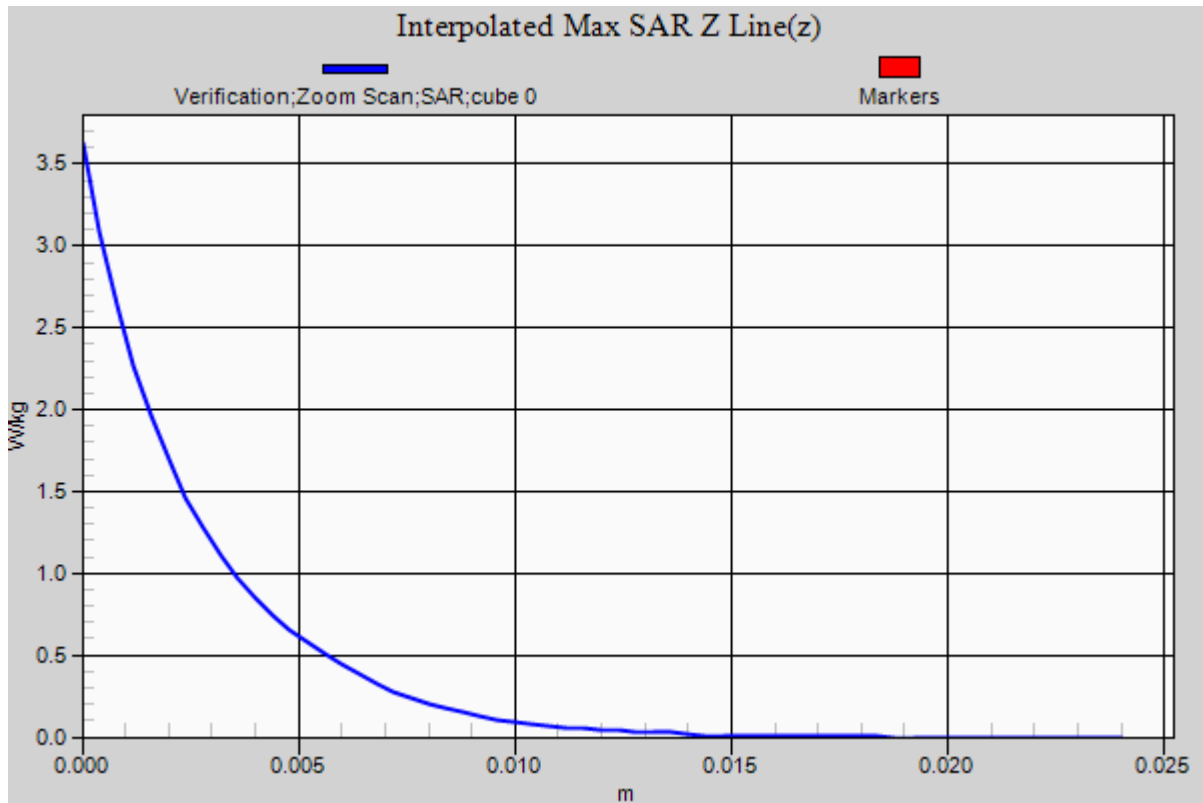

RF Exposure Lab

Plot 7

DUT: Dipole D3700V2; Type: D3700V2; Serial: D3700V2 - SN:1024


Communication System: CW; Frequency: 3700 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 3700$ MHz; $\sigma = 3.54$ S/m; $\epsilon_r = 50.86$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/22/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(6.71, 6.71, 6.71); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

3700 MHz Body/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.55 W/kg

3700 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=4mm
Reference Value = 55.759 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 3.09 W/kg
SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.238 W/kg
Maximum value of SAR (measured) = 1.58 W/kg

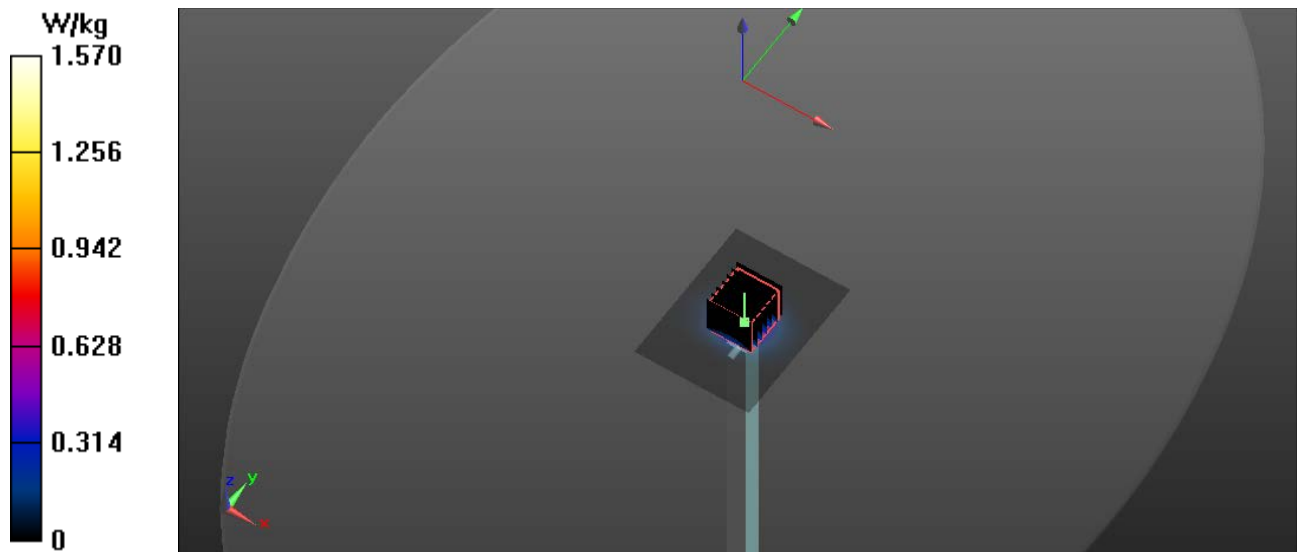

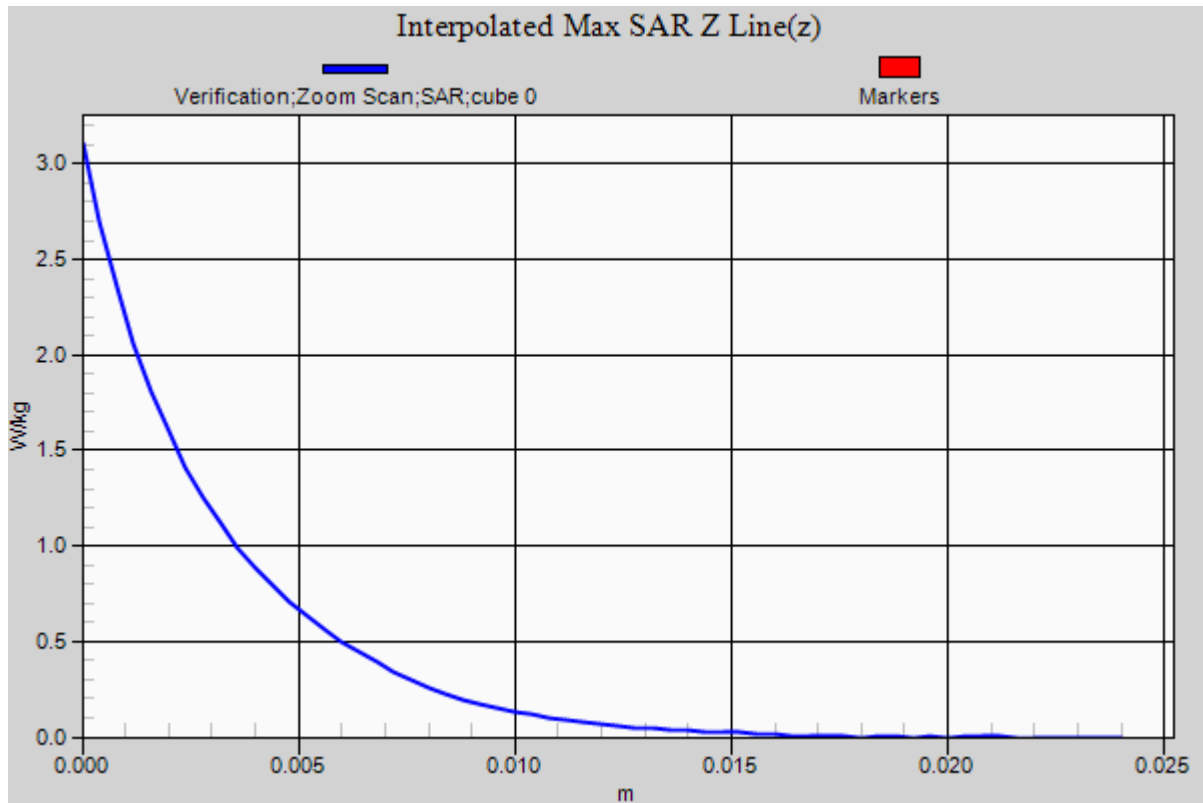

RF Exposure Lab

Plot 8

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN: 881

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ S/m; $\epsilon_r = 52.58$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 2/8/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.26, 7.26, 7.26); Calibrated: 8/18/2017;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1416; Calibrated: 4/24/2017

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Body Verification/2450 MHz/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.85 W/kg

Body Verification/2450 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 54.243 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 11.1 W/kg

P_{in} =100 mW

SAR(1 g) = 5.2 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 8.93 W/kg

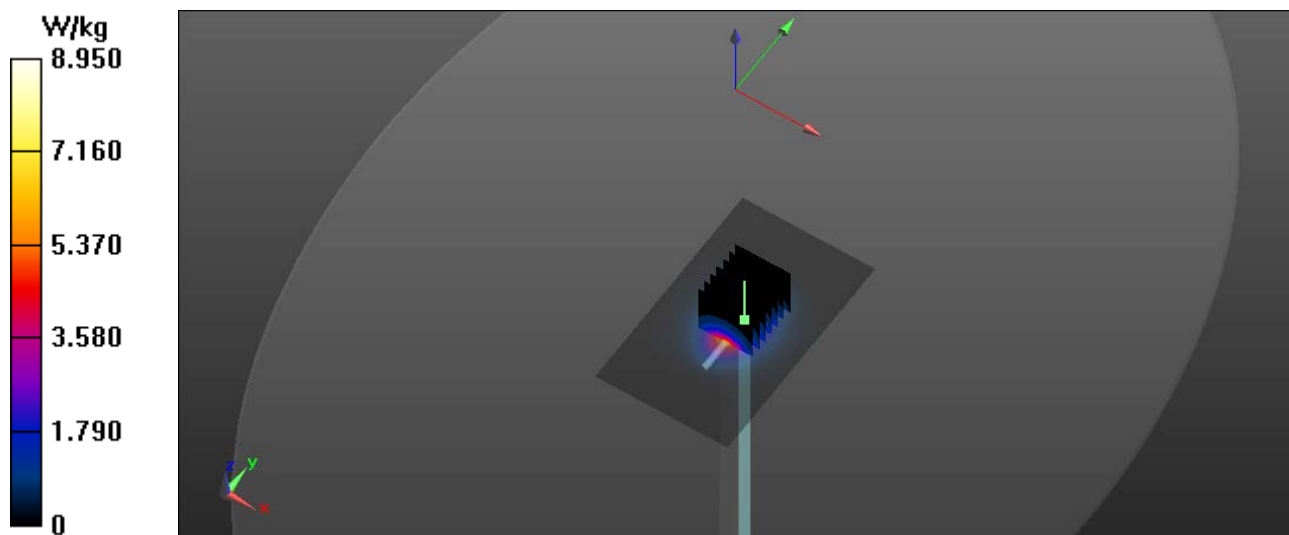

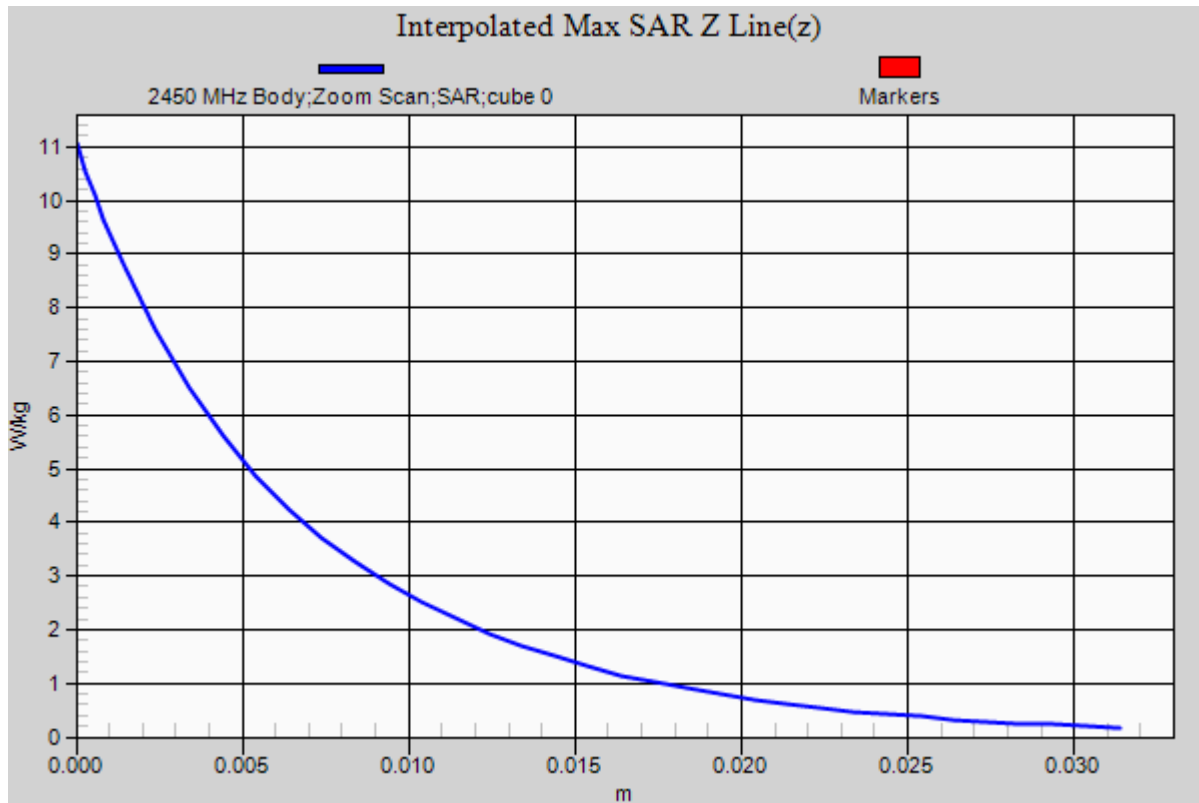

RF Exposure Lab

Plot 9

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1119


Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.34$ S/m; $\epsilon_r = 48.94$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 2/8/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3693; ConvF(4.7, 4.7, 4.7); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/24/2017
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Body Verification/5200 MHz/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.76 W/kg

Body Verification/5200 MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 13.429 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.08 W/kg
Pin=10 mW
SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.219 W/kg
Maximum value of SAR (measured) = 1.87 W/kg

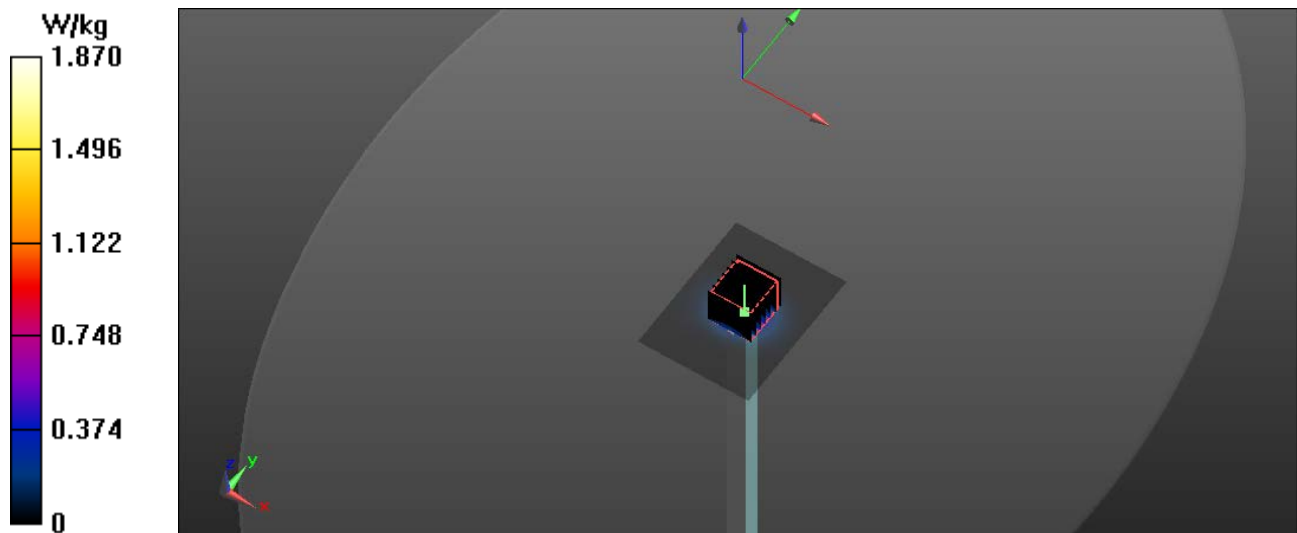

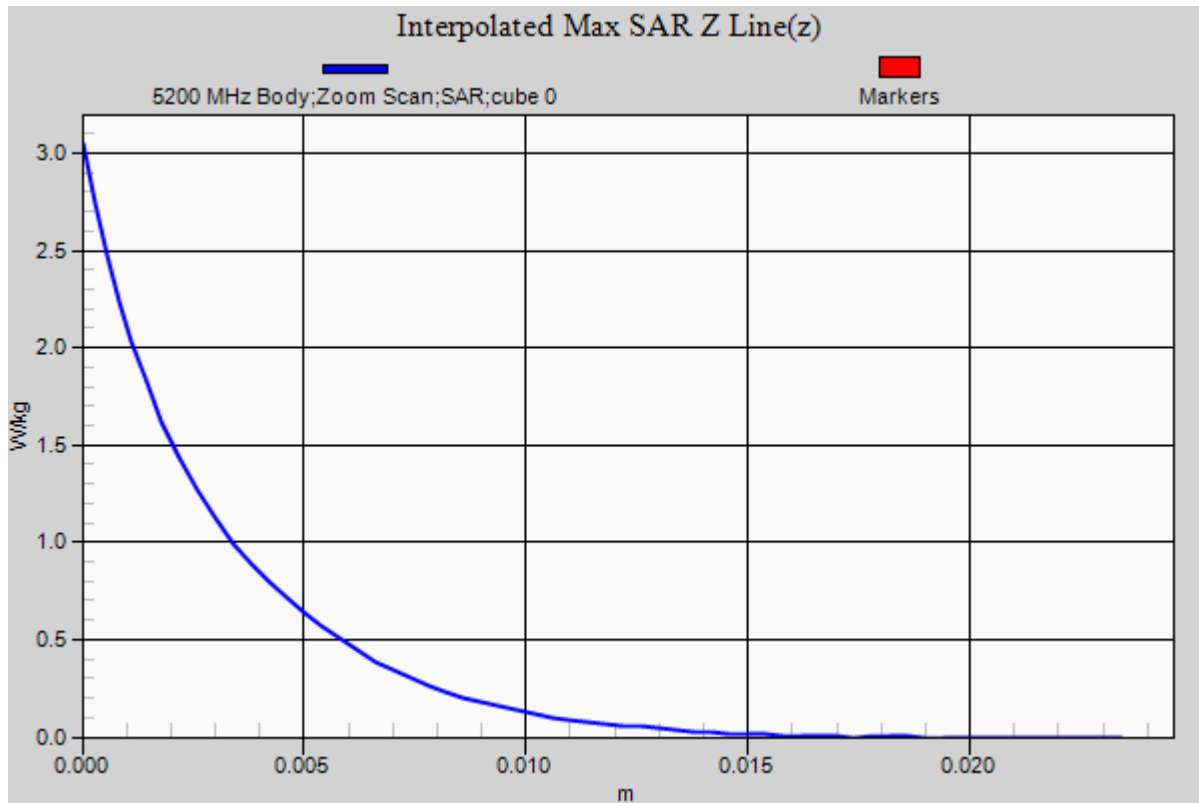

RF Exposure Lab

Plot 10

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1119


Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 5600$ MHz; $\sigma = 5.8$ S/m; $\epsilon_r = 48.36$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 2/8/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3693; ConvF(4, 4, 4); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/24/2017
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Body Verification/5600 MHz/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.89 W/kg

Body Verification/5600 MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 12.967 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 3.35 W/kg
Pin=10 mW
SAR(1 g) = 0.799 W/kg; SAR(10 g) = 0.213 W/kg
Maximum value of SAR (measured) = 2.03 W/kg

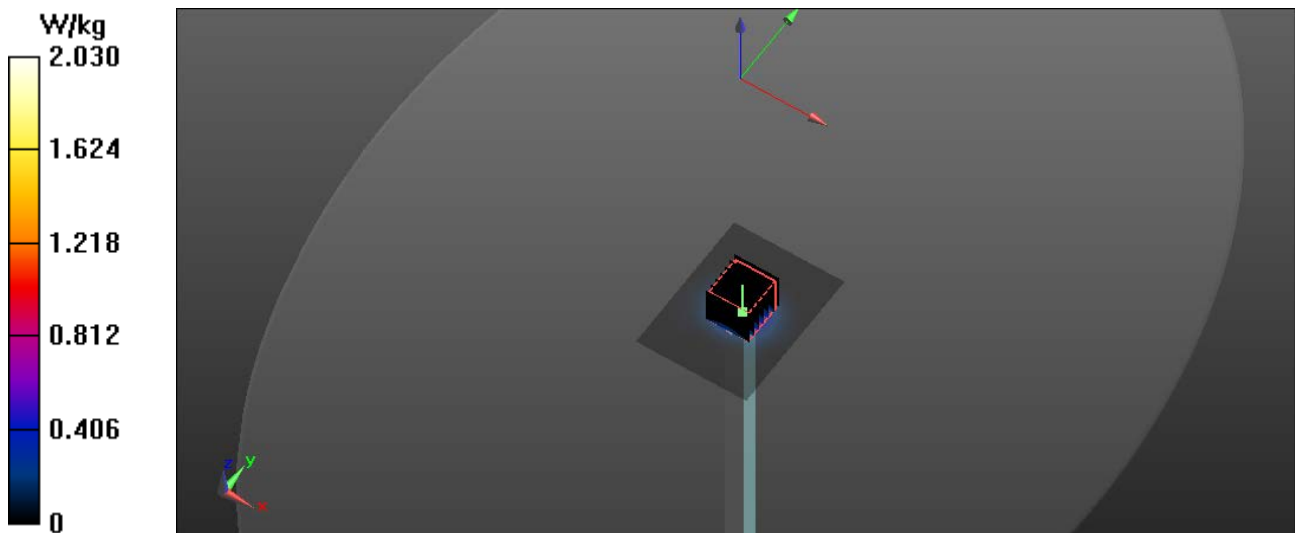

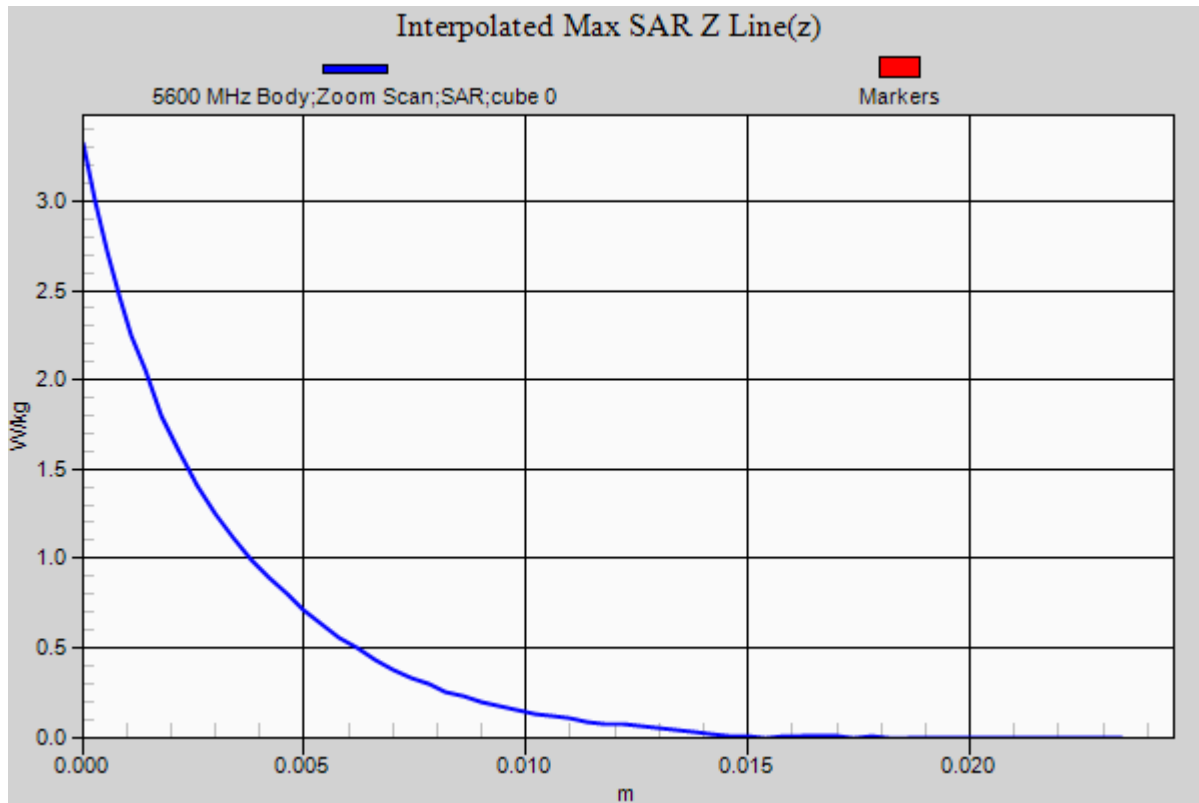

RF Exposure Lab

Plot 11

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1119


Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 5800$ MHz; $\sigma = 6.04$ S/m; $\epsilon_r = 48.05$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 2/8/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3693; ConvF(4.21, 4.21, 4.21); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/24/2017
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Body Verification/5800 MHz/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.69 W/kg

Body Verification/5800 MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 12.497 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 2.87 W/kg
Pin=10 mW
SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.205 W/kg
Maximum value of SAR (measured) = 1.79 W/kg

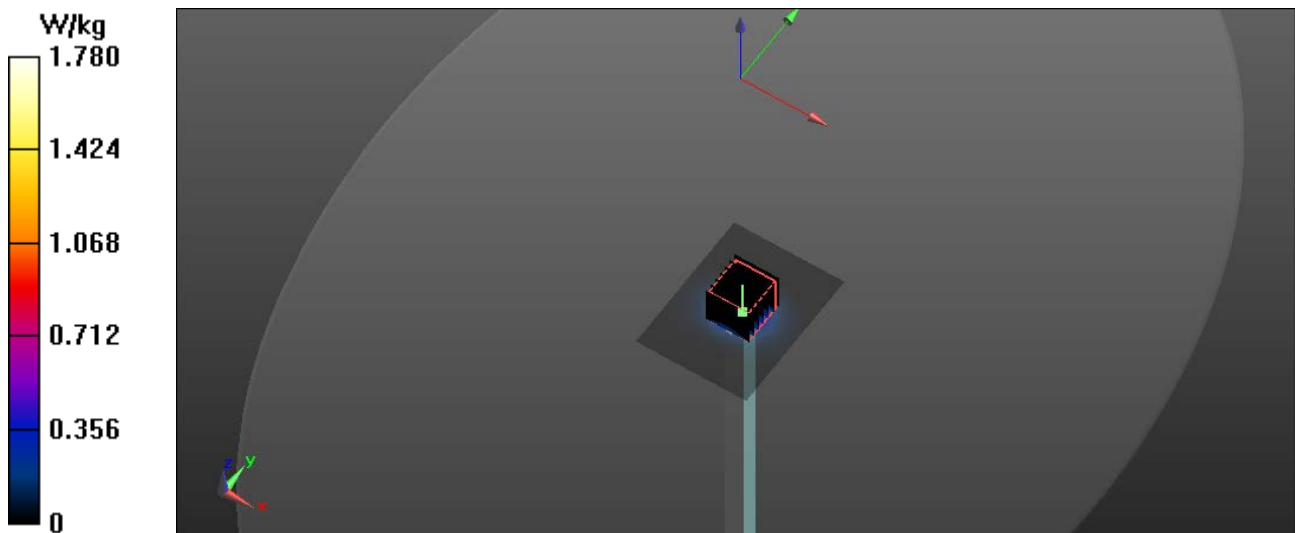

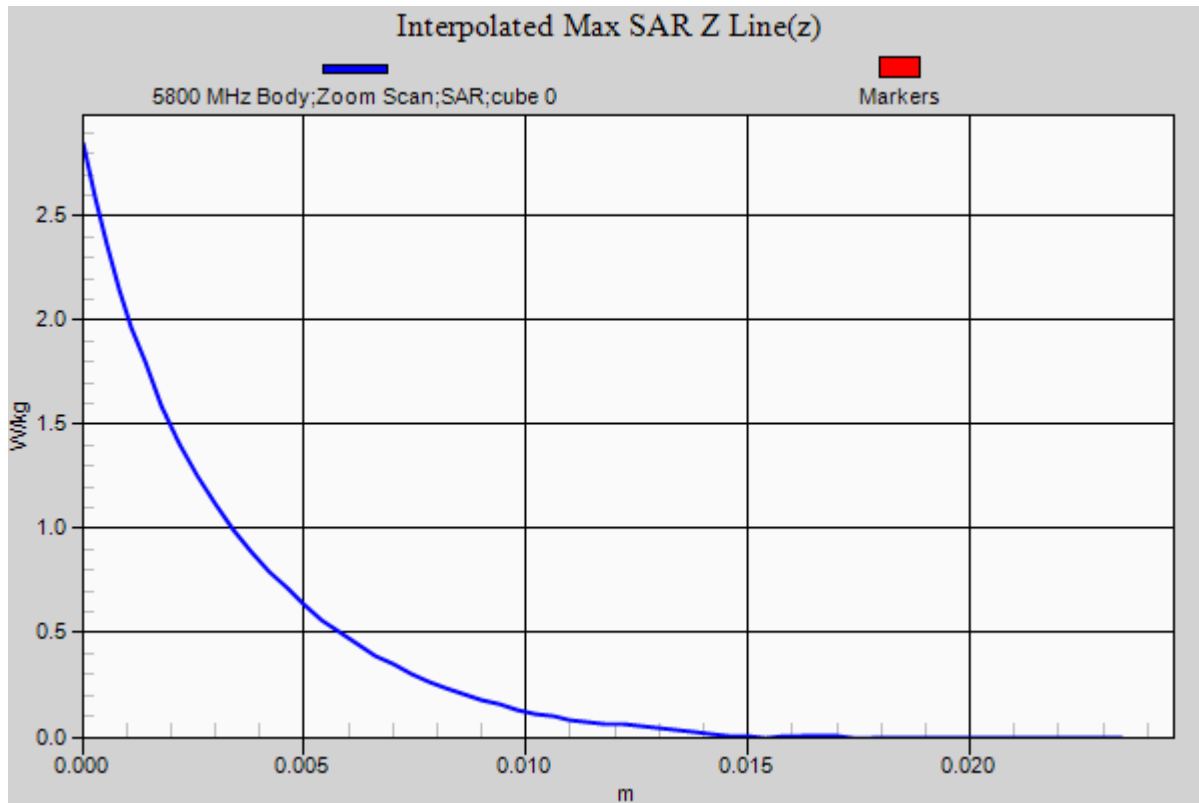

Appendix B – SAR Test Data Plots

RF Exposure Lab

Plot 1

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 54.933$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/20/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.64, 9.64, 9.64); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B12 LTE/Top 1 RB Mid/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.653 W/kg

B12 LTE/Top 1 RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.28 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.830 W/kg

SAR(1 g) = 0.502 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.675 W/kg

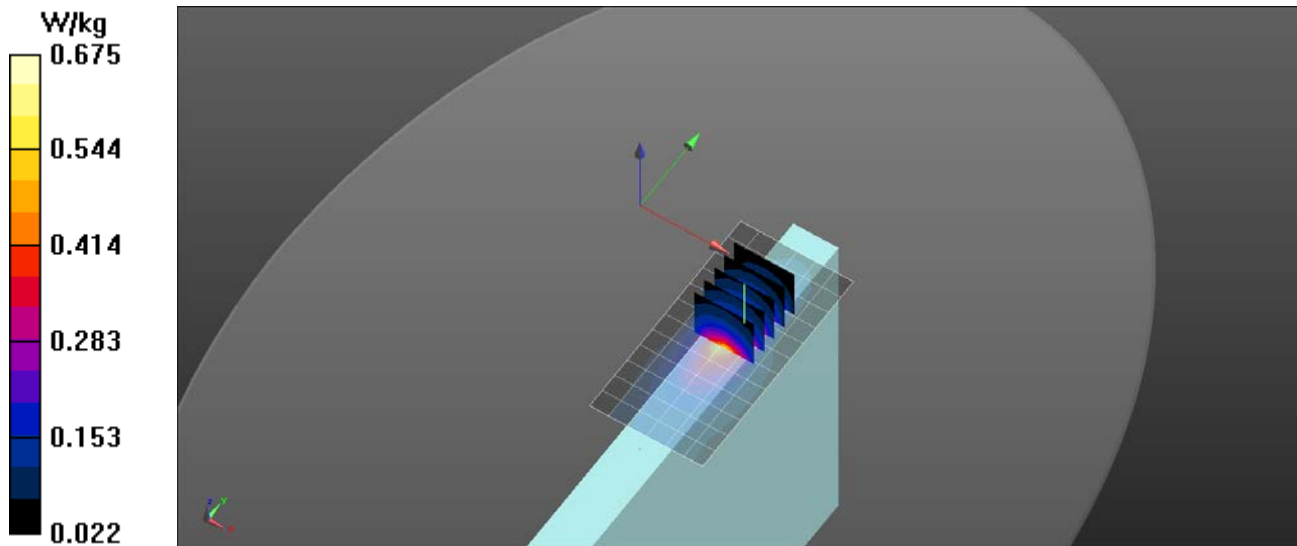

RF Exposure Lab

Plot 2

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.972 \text{ S/m}$; $\epsilon_r = 54.556$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: Date: 3/20/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.64, 9.64, 9.64); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B13 LTE/Top 1 RB Mid/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.20 W/kg

B13 LTE/Top 1 RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.76 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.917 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.22 W/kg

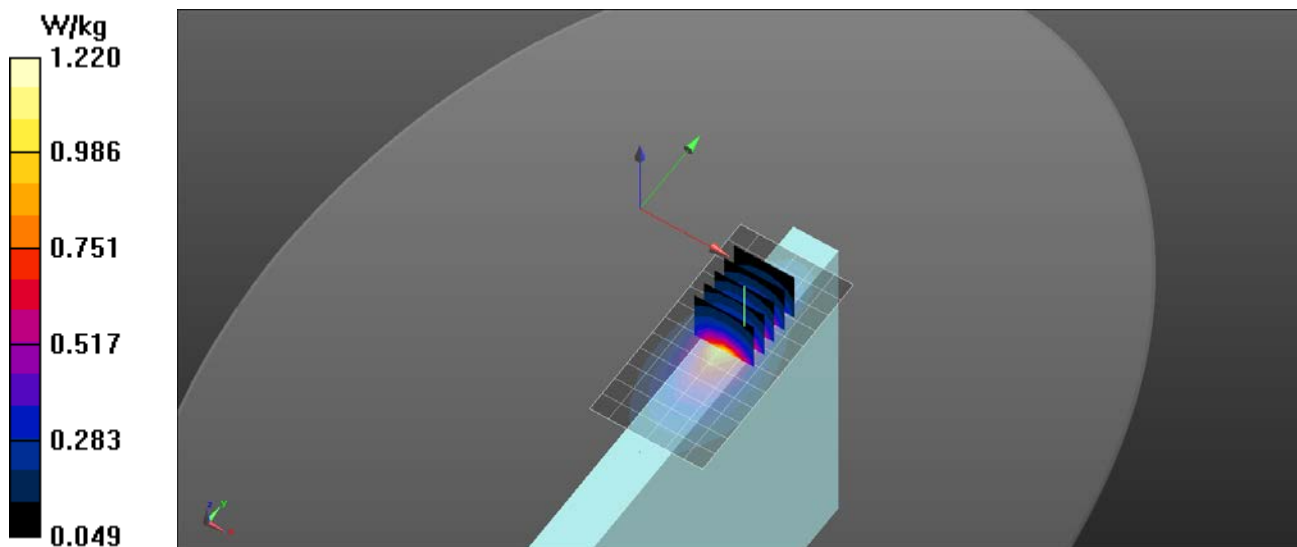

RF Exposure Lab

Plot 3

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 793 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 54.485$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/20/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.64, 9.64, 9.64); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B14 LTE/Top 1 RB Mid/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.24 W/kg

B14 LTE/Top 1 RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.35 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.943 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.26 W/kg

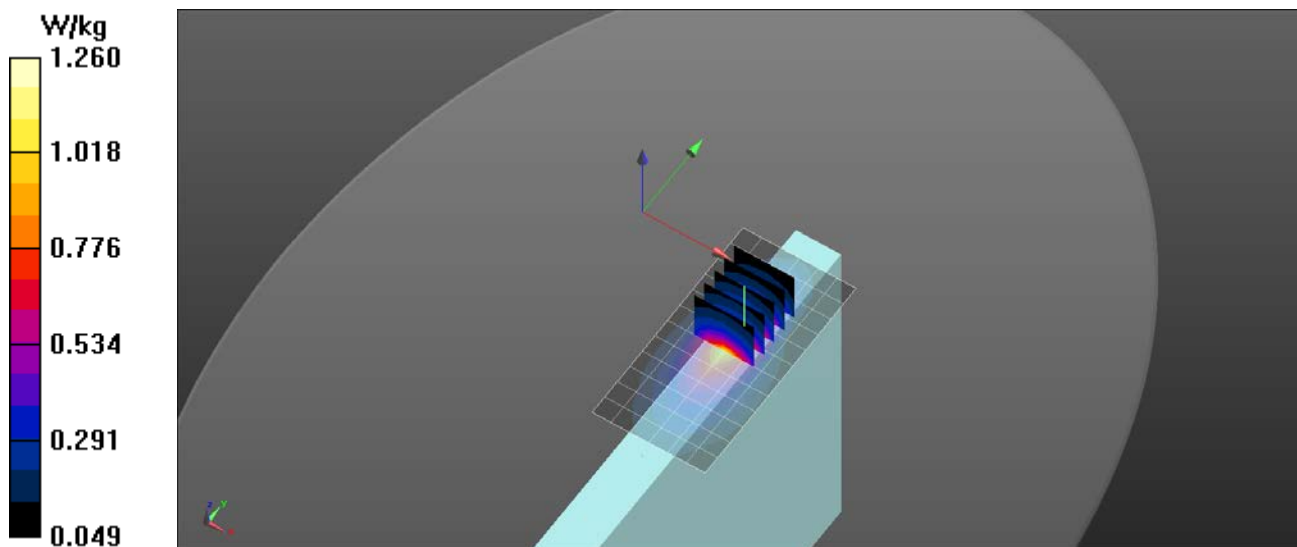

RF Exposure Lab

Plot 4

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: UMTS (WCDMA); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 54.406$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/19/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.4, 9.4, 9.4); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B5 UMTS/Top High/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.64 W/kg

B5 UMTS/Top High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.29 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.36 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.86 W/kg

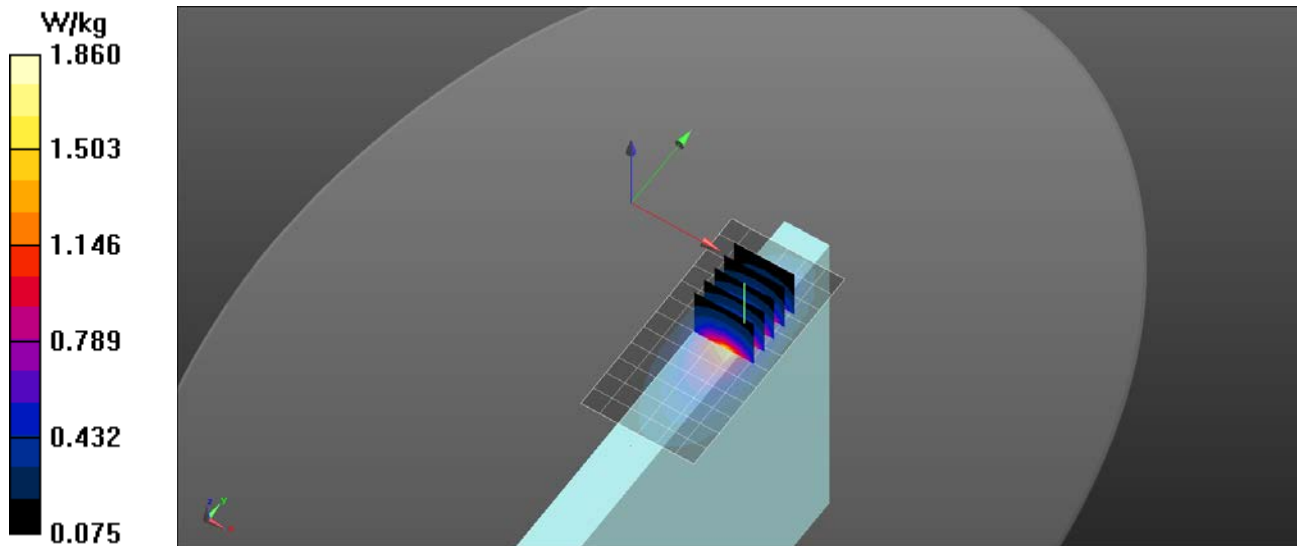

RF Exposure Lab

Plot 5

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: LTE (SC-FDMA, 1 RB, 15 MHz, QPSK); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 54.356$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/19/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.4, 9.4, 9.4); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B26 LTE/Top 1 RB Mid/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.49 W/kg

B26 LTE/Top 1 RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.34 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 1.23 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.66 W/kg

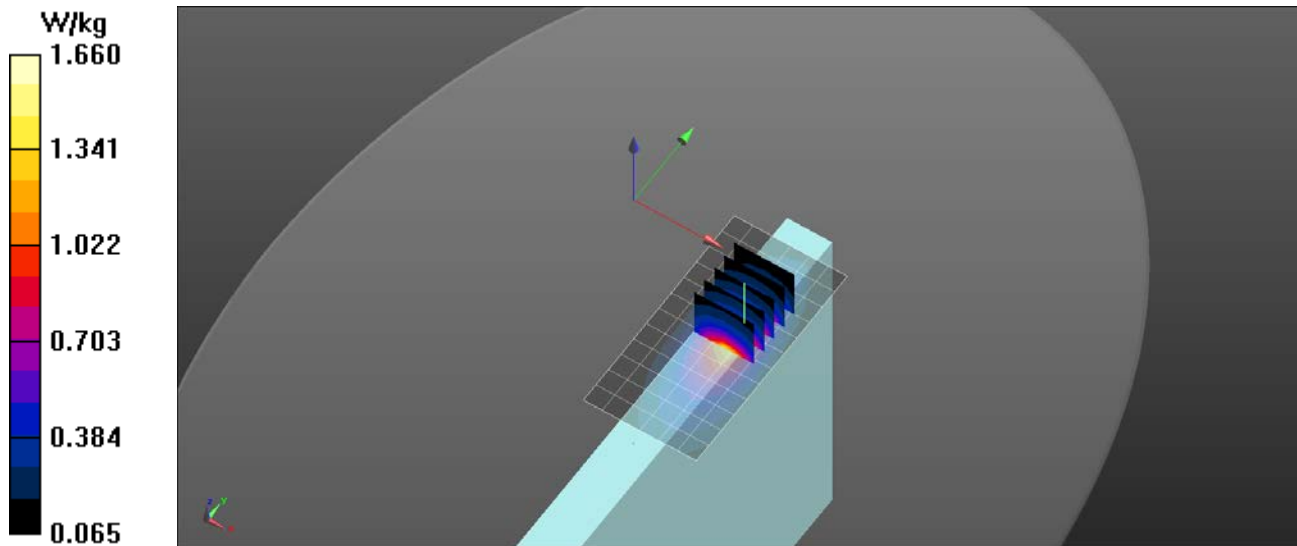

RF Exposure Lab

Plot 6

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: UMTS (WCDMA); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: MSL1750; Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 52.675$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/18/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.77, 7.77, 7.77); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B4 UMTS/Back High/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.77 W/kg

B4 UMTS/Back High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.592 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 1.38 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.88 W/kg

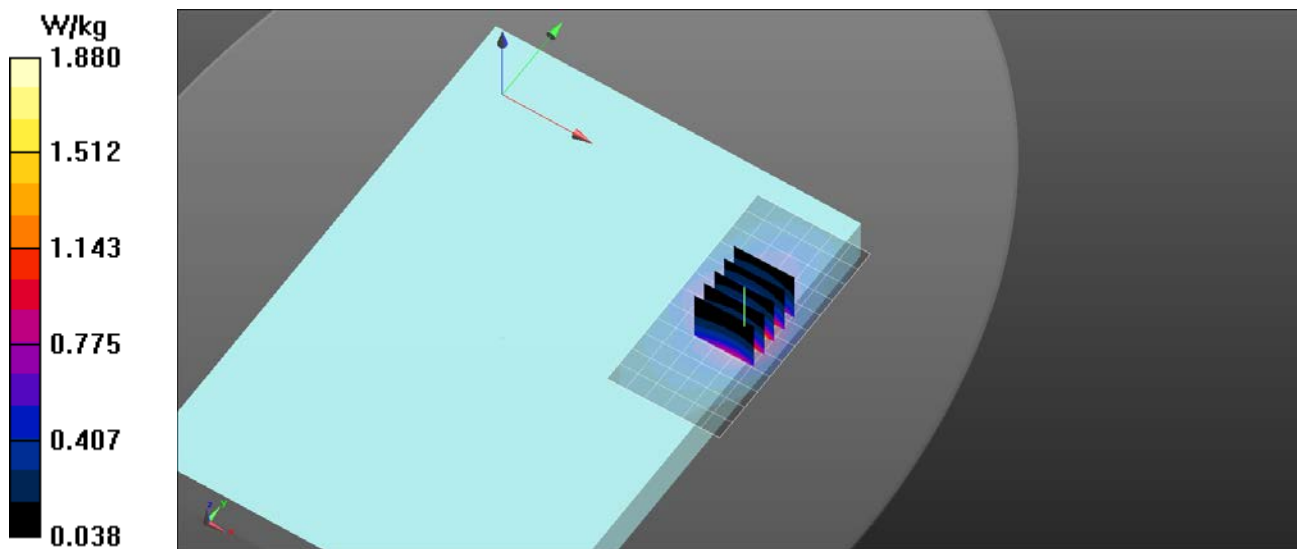

RF Exposure Lab

Plot 7

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium: MSL1750; Medium parameters used: $f = 1770$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 52.65$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/19/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.77, 7.77, 7.77); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B66 LTE/Back 1 RB High/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.60 W/kg

B66 LTE/Back 1 RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.957 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 2.03 W/kg
SAR(1 g) = 1.22 W/kg
Maximum value of SAR (measured) = 1.64 W/kg

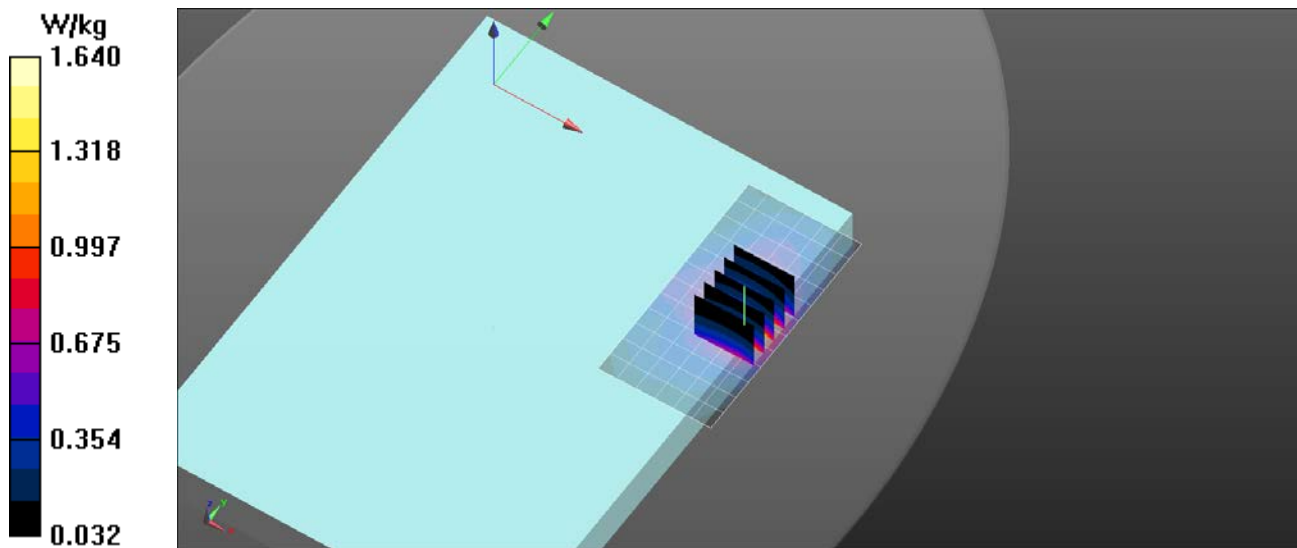

RF Exposure Lab

Plot 8

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: UMTS (WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.548$ S/m; $\epsilon_r = 53.155$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/18/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.44, 7.44, 7.44); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B2 UMTS/Back High/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.44 W/kg

B2 UMTS/Back High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 2.996 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1.13 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.54 W/kg

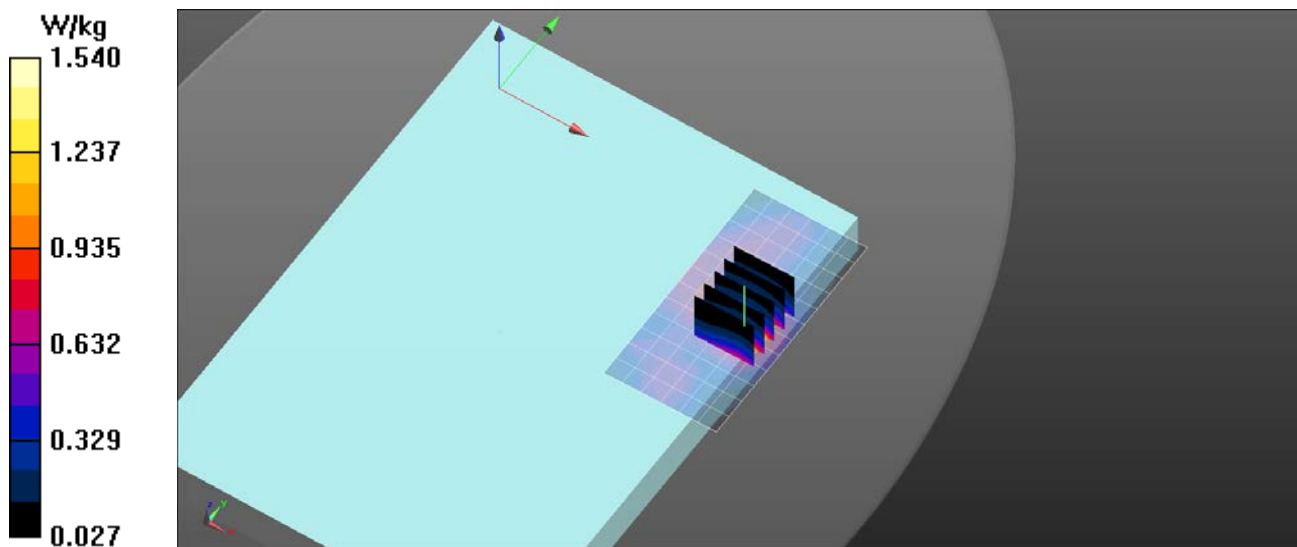

RF Exposure Lab

Plot 9

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 53.17$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/18/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.44, 7.44, 7.44); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B2 LTE/Back 1 RB High/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.26 W/kg

B2 LTE/Back 1 RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.759 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.66 W/kg
SAR(1 g) = 0.986 W/kg
Maximum value of SAR (measured) = 1.35 W/kg

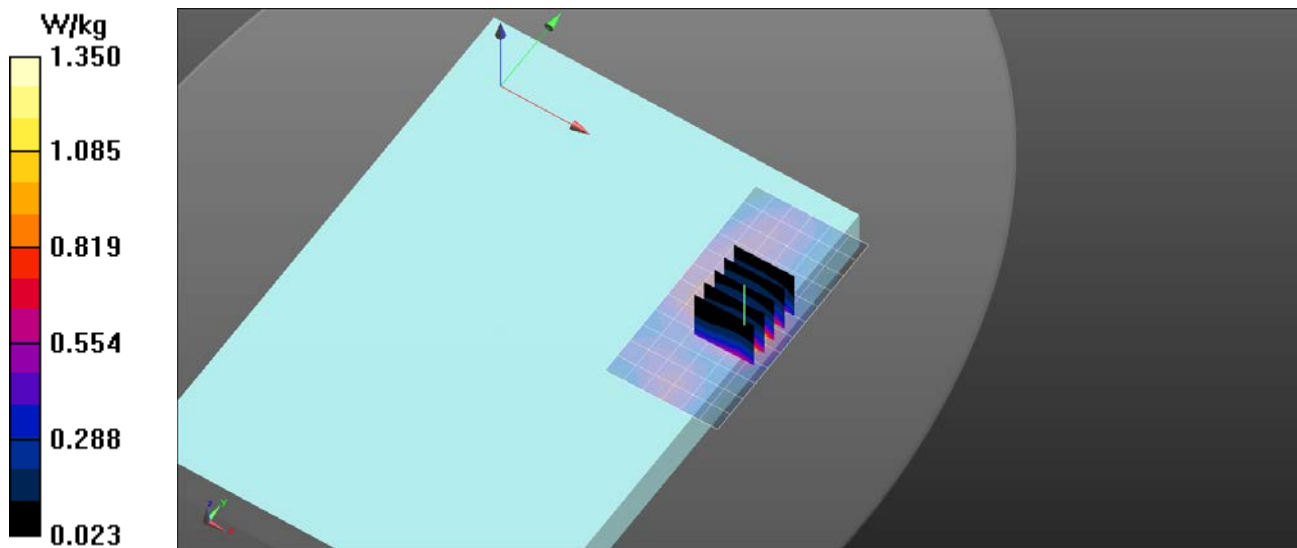

RF Exposure Lab

Plot 10

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: MSL2550; Medium parameters used: $f = 2510$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 52.26$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/21/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.13, 7.13, 7.13); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B7 LTE/Back 1 RB Low/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.24 W/kg

B7 LTE/Back 1 RB Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.373 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.77 W/kg
SAR(1 g) = 0.911 W/kg
Maximum value of SAR (measured) = 1.33 W/kg

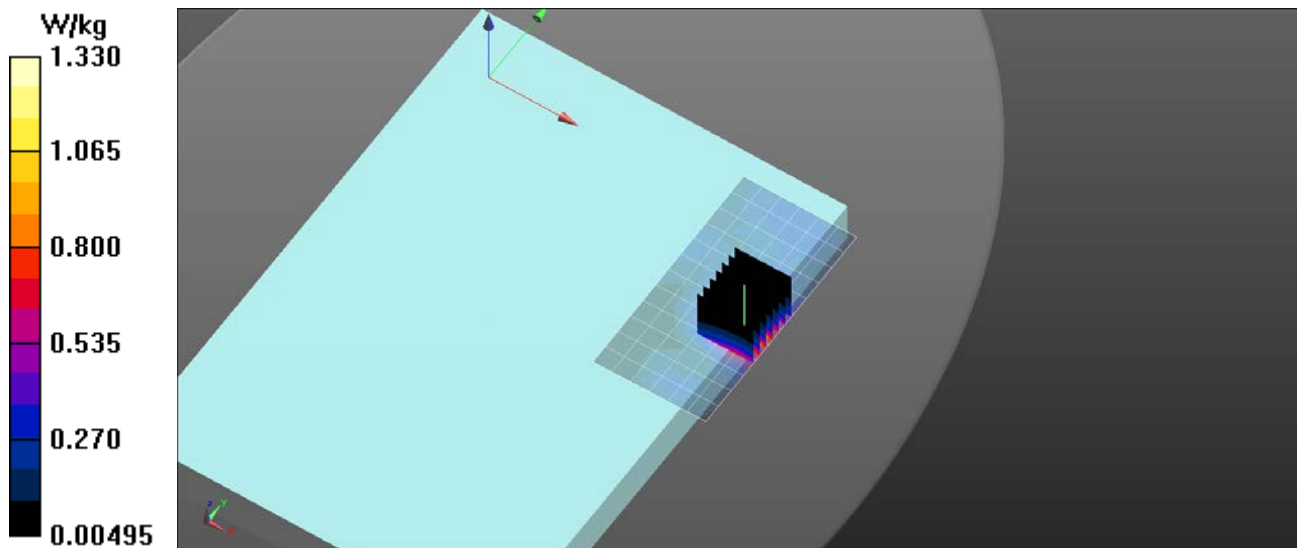

RF Exposure Lab

Plot 11

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:1
Medium: MSL2550; Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.186$ S/m; $\epsilon_r = 52.097$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/21/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.13, 7.13, 7.13); Calibrated: 8/27/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B41 LTE/Back 1 RB Mid/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.735 W/kg

B41 LTE/Back 1 RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.514 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.757 W/kg

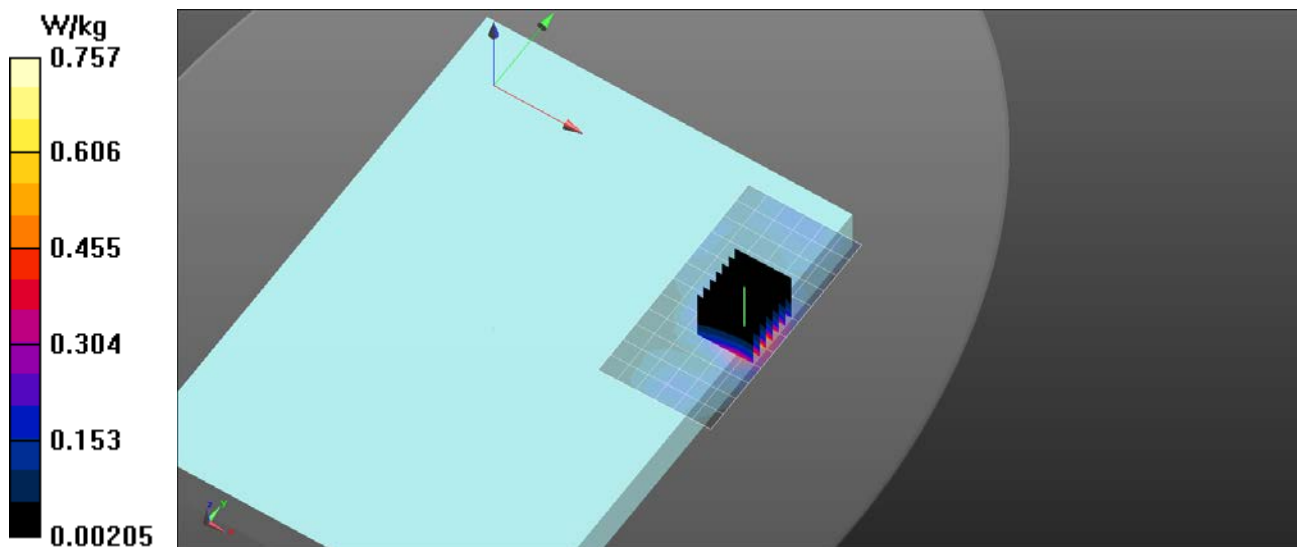

RF Exposure Lab

Plot 12

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 3545 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used (interpolated): $f = 3545$ MHz; $\sigma = 3.385$ S/m; $\epsilon_r = 51.06$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/22/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7, 7, 7); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B42 LTE/Top 1 RB High2/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.18 W/kg

B42 LTE/Top 1 RB High2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm


Reference Value = 2.190 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.29 W/kg

SAR(1 g) = 1.4 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.66 W/kg

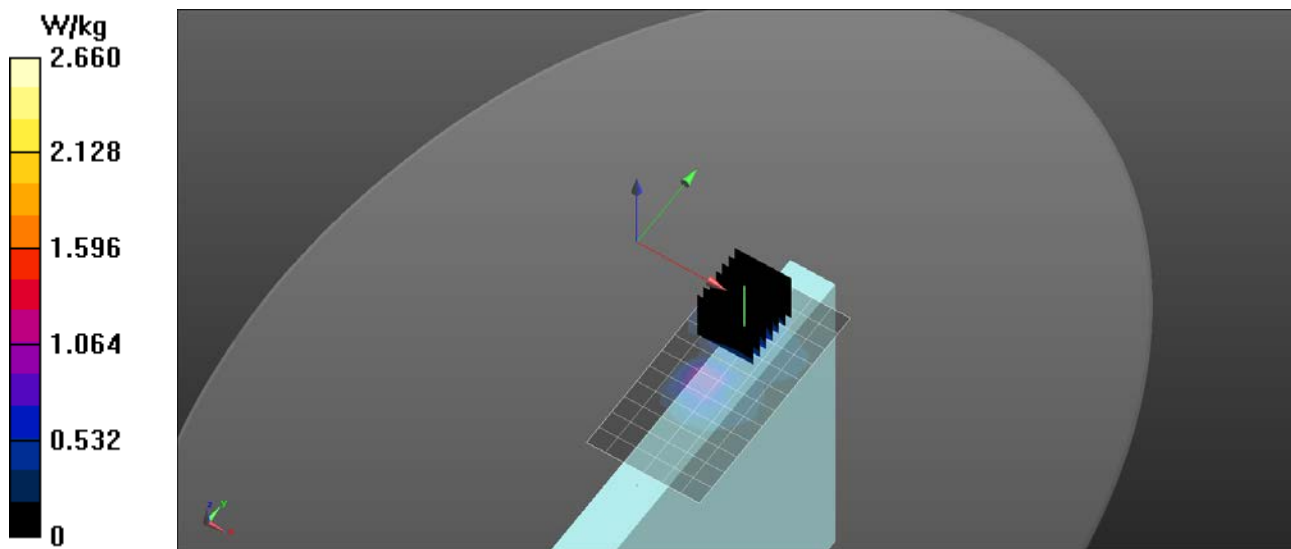

RF Exposure Lab

Plot 13

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 3655 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used (interpolated): $f = 3655$ MHz; $\sigma = 3.495$ S/m; $\epsilon_r = 50.905$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/25/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(6.71, 6.71, 6.71); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B43 LTE/Top 1 RB Low2/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.90 W/kg

B43 LTE/Top 1 RB Low2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm


Reference Value = 2.981 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 4.96 W/kg

SAR(1 g) = 1.38 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.00 W/kg

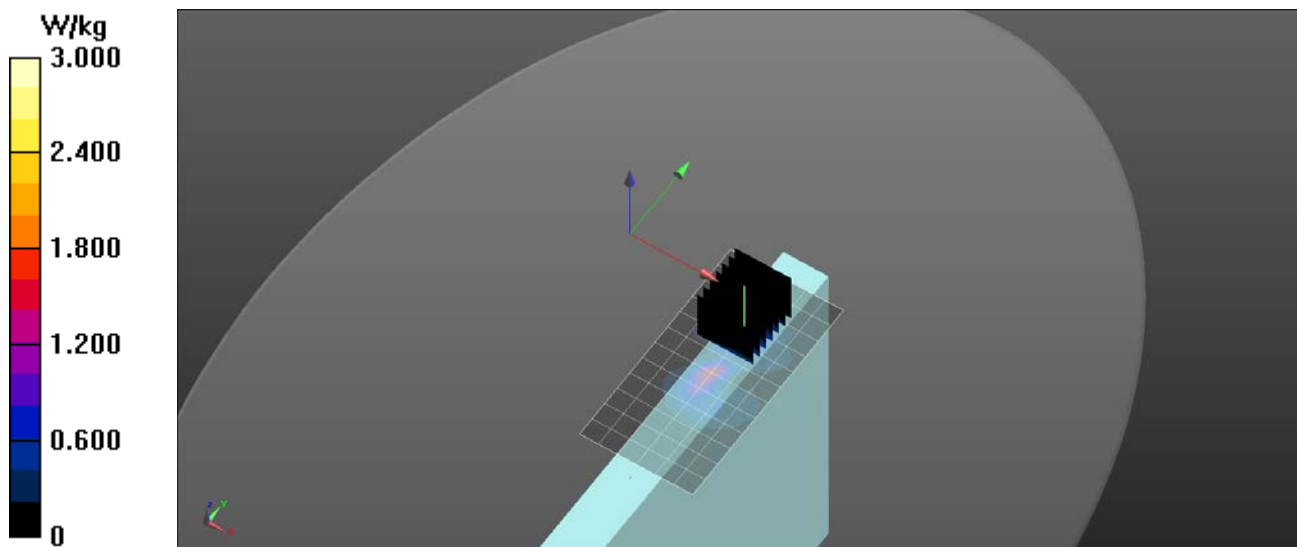

RF Exposure Lab

Plot 14

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 3592.5 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used (interpolated): $f = 3592.5$ MHz; $\sigma = 3.433$ S/m; $\epsilon_r = 50.978$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/22/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7, 7, 7); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/13/2018
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

B48 LTE/Top 1 RB Low2/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.42 W/kg

B48 LTE/Top 1 RB Low2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm


Reference Value = 2.805 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 4.33 W/kg

SAR(1 g) = 1.4 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.67 W/kg

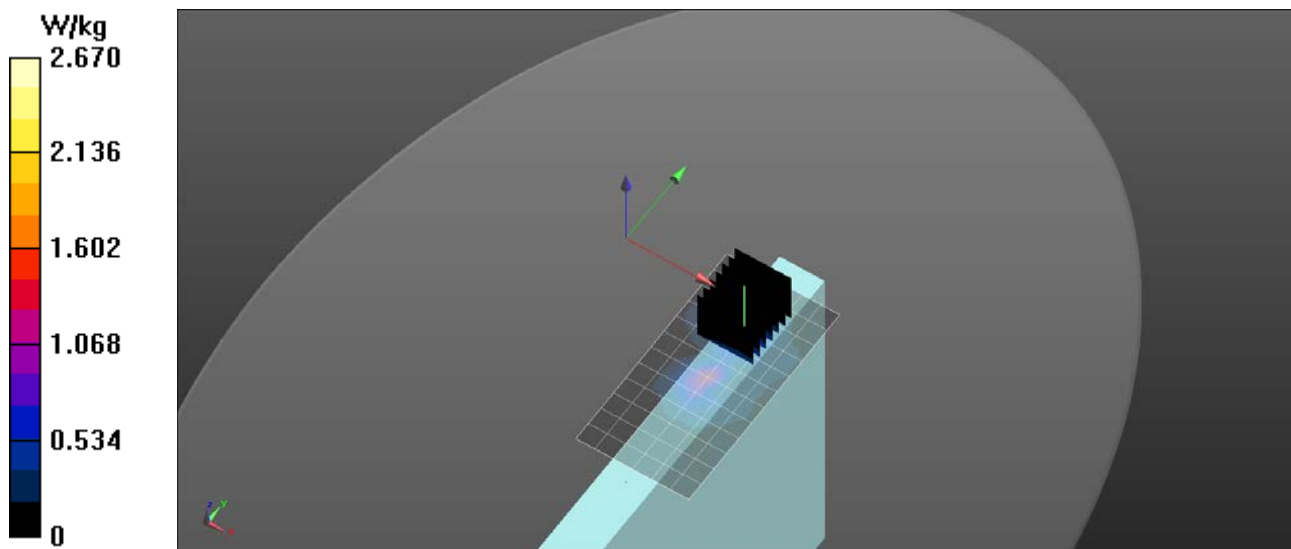

RF Exposure Lab

Plot 15

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: WiFi 802.11b (DSSS, 1 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: MSL2450; Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 52.606$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 2/8/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.26, 7.26, 7.26); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/24/2017
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2450 MHz/Top Tx2 Mid/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.464 W/kg

2450 MHz/Top Tx2 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.177 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.763 W/kg

SAR(1 g) = 0.368 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.565 W/kg

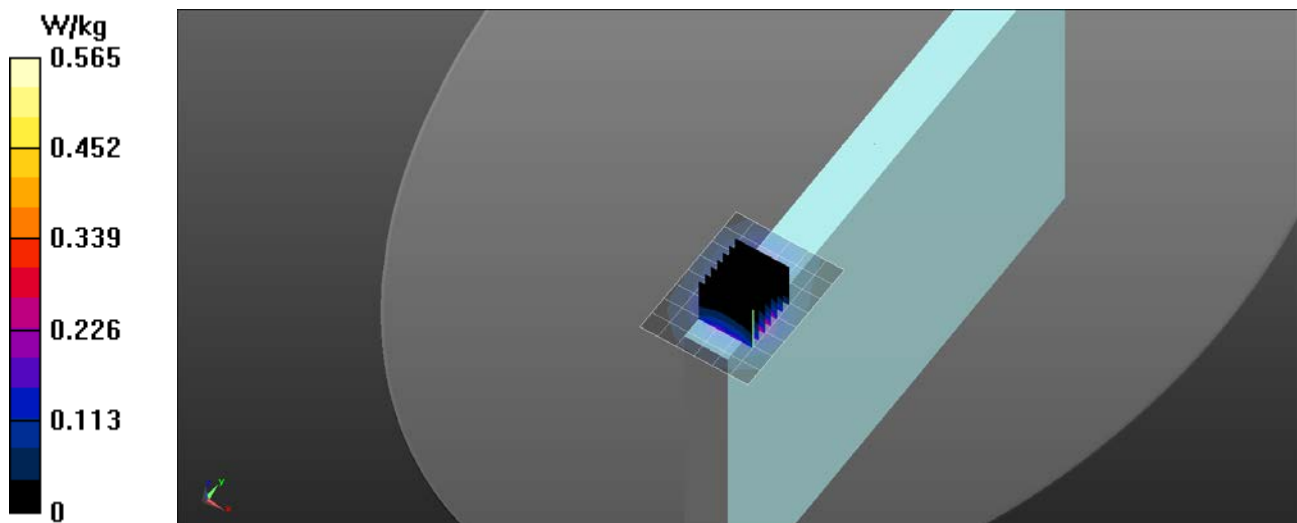

RF Exposure Lab

Plot 16

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: WiFi 802.11a (OFDM, 6 Mbps); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 5300$ MHz; $\sigma = 5.45$ S/m; $\epsilon_r = 48.81$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 2/8/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(4.46, 4.46, 4.46); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/24/2017
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5200 MHz/Top Tx2 60/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.82 W/kg

5200 MHz/Top Tx2 60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 4.58 W/kg
SAR(1 g) = 1.08 W/kg
Maximum value of SAR (measured) = 2.12 W/kg

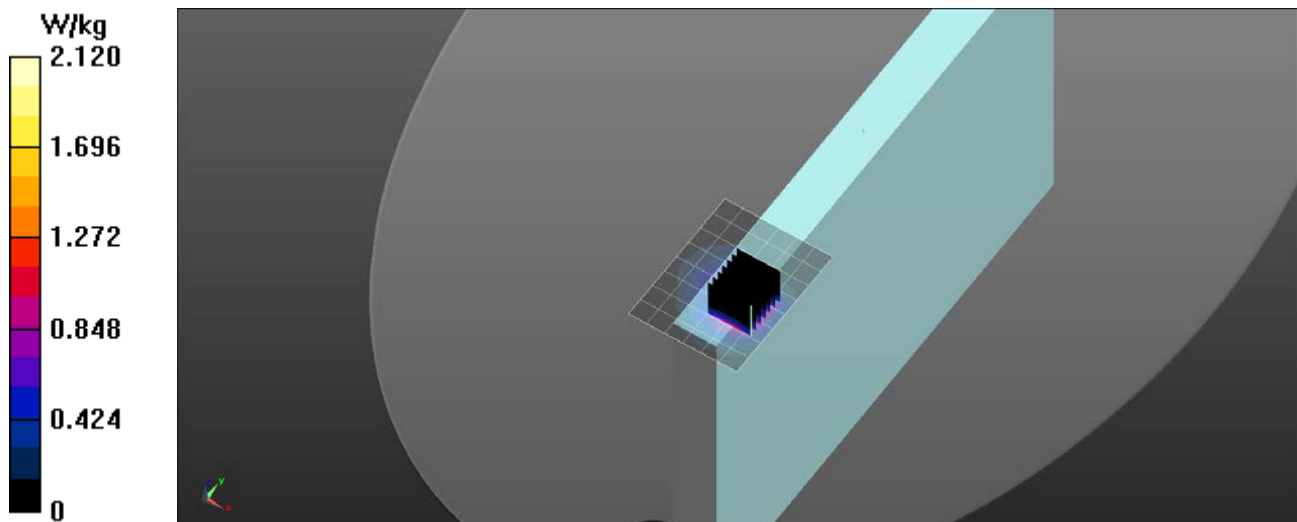

RF Exposure Lab

Plot 17

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: WiFi 802.11a (OFDM, 6 Mbps); Frequency: 5620 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 5620$ MHz; $\sigma = 5.83$ S/m; $\epsilon_r = 48.33$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 2/8/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(4, 4, 4); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/24/2017
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5600 MHz/Top Tx2 124/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.92 W/kg

5600 MHz/Top Tx2 124/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 4.88 W/kg
SAR(1 g) = 1.16 W/kg
Maximum value of SAR (measured) = 2.45 W/kg

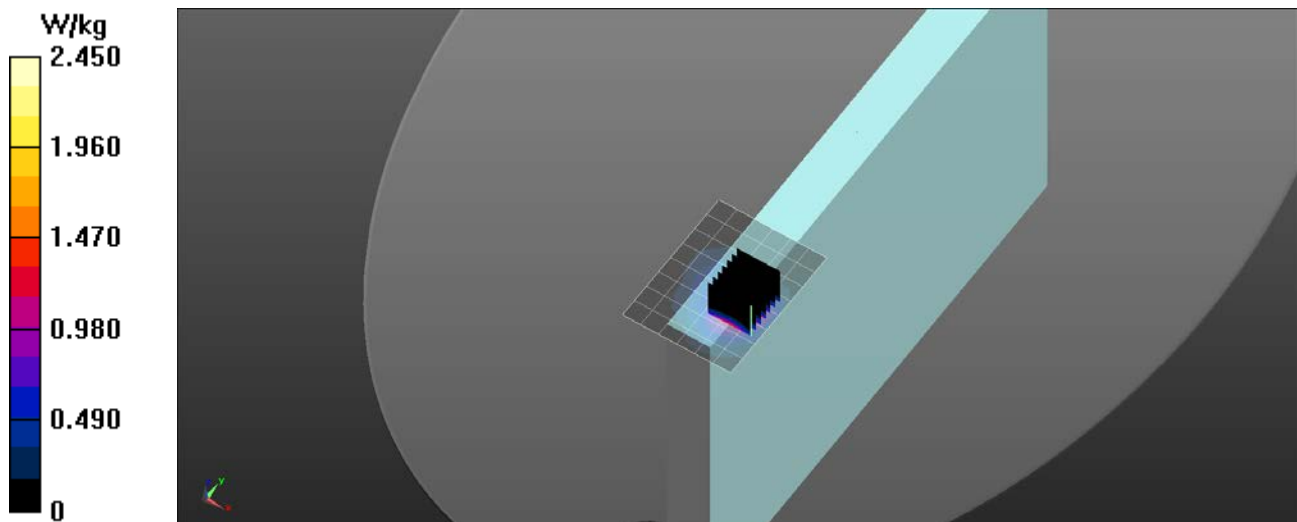

RF Exposure Lab

Plot 18

DUT: iX101L3; Type: Tablet PC; Serial: JCJKG009693

Communication System: WiFi 802.11a (OFDM, 6 Mbps); Frequency: 5785 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.033$ S/m; $\epsilon_r = 48.08$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 2/8/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(4.21, 4.21, 4.21); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/24/2017
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5800 MHz/Top Tx2 157/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.88 W/kg

5800 MHz/Top Tx2 157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 5.28 W/kg

SAR(1 g) = 1.19 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.50 W/kg

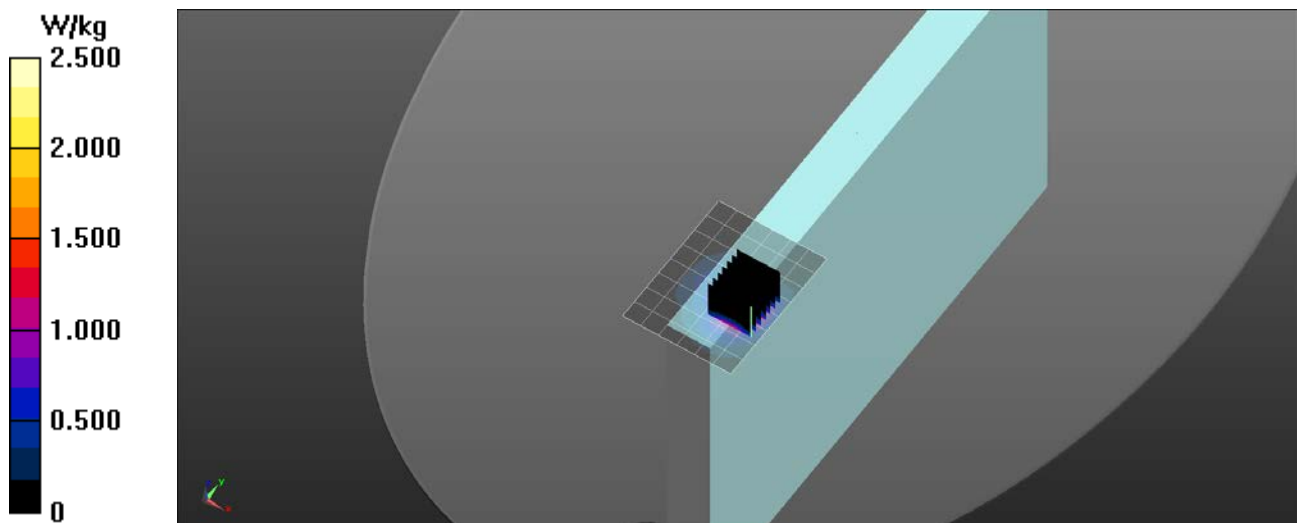

Appendix C – SAR Test Setup Photos



Test Configuration Top 0 mm Gap



Test Configuration Back 0 mm Gap



**Test Configuration Left Side 0 mm Gap
Photo from original testing for WiFi**



Test Configuration Right Side 0 mm Gap



Front of Device



Back of Device

Appendix D – Probe Calibration Data Sheets

gm

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **RF Exposure Lab**

Certificate No: **EX3-3662_Apr18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3662**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **April 20, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Leif Klysner	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 20, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:3662

Manufactured: October 20, 2008
Calibrated: April 20, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.44	0.45	0.48	$\pm 10.1 \%$
DCP (mV) ^B	102.6	97.6	96.4	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB/ μV	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	136.8	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		132.2	
		Z	0.0	0.0	1.0		148.8	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	9.80	9.80	9.80	0.43	0.90	± 12.0 %
900	41.5	0.97	9.29	9.29	9.29	0.40	0.91	± 12.0 %
1750	40.1	1.37	8.29	8.29	8.29	0.29	0.84	± 12.0 %
1900	40.0	1.40	8.01	8.01	8.01	0.37	0.80	± 12.0 %
2300	39.5	1.67	7.71	7.71	7.71	0.35	0.80	± 12.0 %
2450	39.2	1.80	7.39	7.39	7.39	0.28	0.91	± 12.0 %
2600	39.0	1.96	7.14	7.14	7.14	0.36	0.85	± 12.0 %
3500	37.9	2.91	7.08	7.08	7.08	0.25	1.20	± 13.1 %
3700	37.7	3.12	6.99	6.99	6.99	0.25	1.20	± 13.1 %
5250	35.9	4.71	5.04	5.04	5.04	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.81	4.81	4.81	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.89	4.89	4.89	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	9.62	9.62	9.62	0.37	0.98	± 12.0 %
900	55.0	1.05	9.21	9.21	9.21	0.44	0.84	± 12.0 %
1750	53.4	1.49	7.96	7.96	7.96	0.45	0.80	± 12.0 %
1900	53.3	1.52	7.61	7.61	7.61	0.44	0.80	± 12.0 %
2300	52.9	1.81	7.33	7.33	7.33	0.41	0.80	± 12.0 %
2450	52.7	1.95	7.29	7.29	7.29	0.36	0.87	± 12.0 %
2600	52.5	2.16	7.15	7.15	7.15	0.26	0.99	± 12.0 %
3500	51.3	3.31	7.00	7.00	7.00	0.25	1.20	± 13.1 %
3700	51.0	3.55	6.71	6.71	6.71	0.23	1.20	± 13.1 %
5250	48.9	5.36	4.46	4.46	4.46	0.45	1.90	± 13.1 %
5600	48.5	5.77	3.91	3.91	3.91	0.50	1.90	± 13.1 %
5750	48.3	5.94	4.08	4.08	4.08	0.50	1.90	± 13.1 %


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

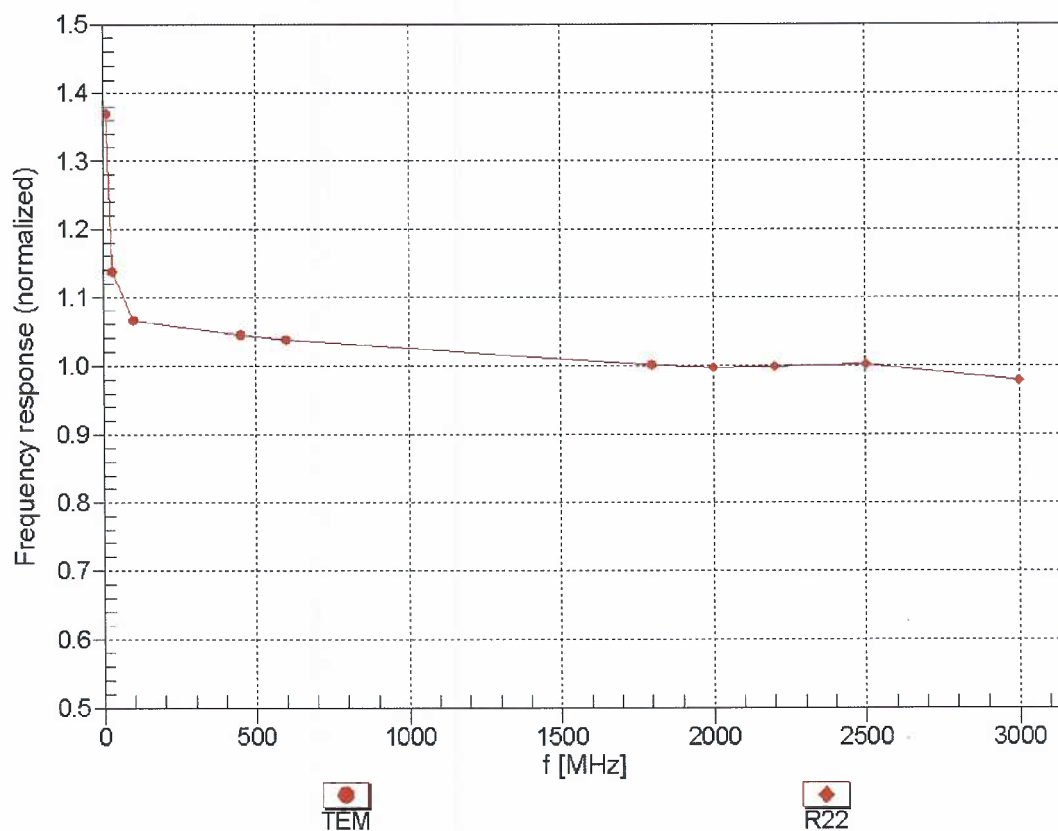



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


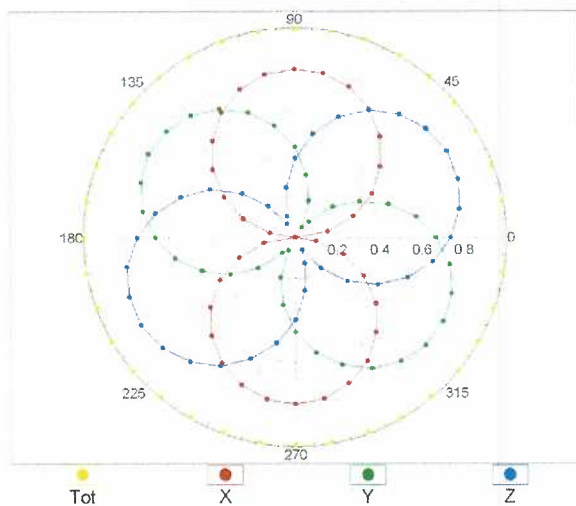


f=1800 MHz,R22

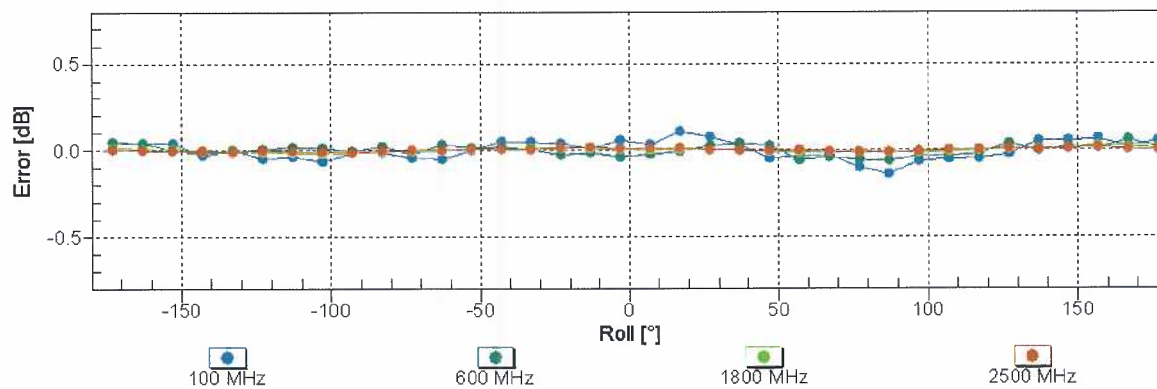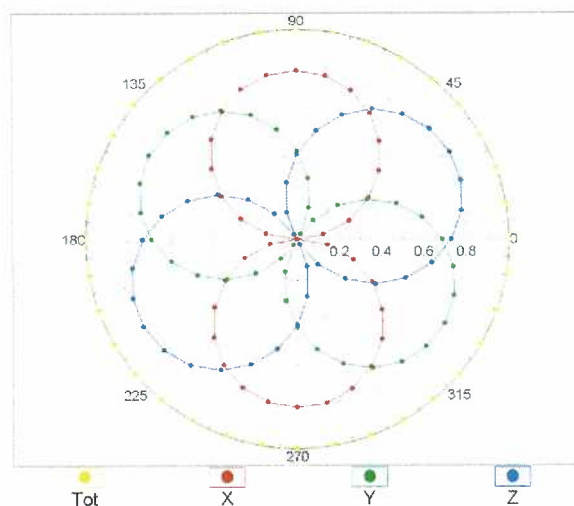


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$)

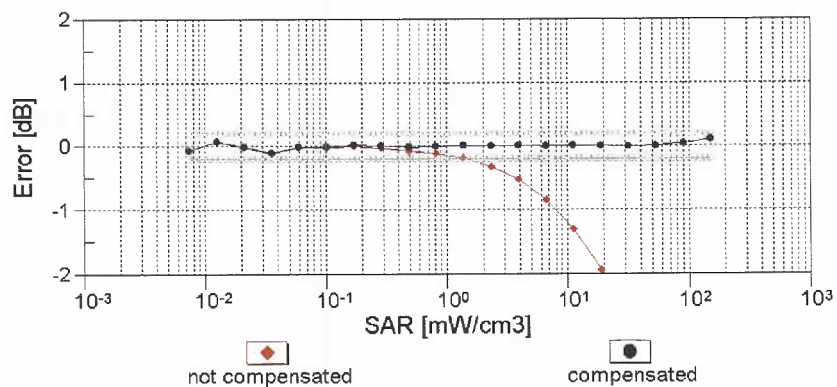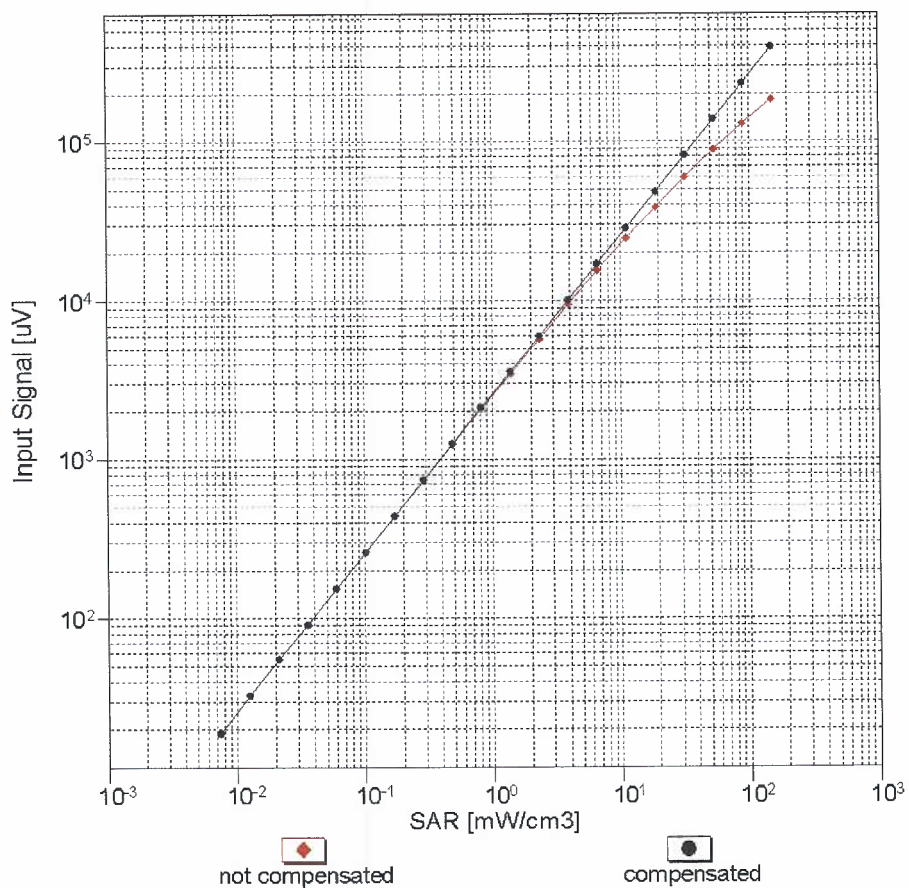



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

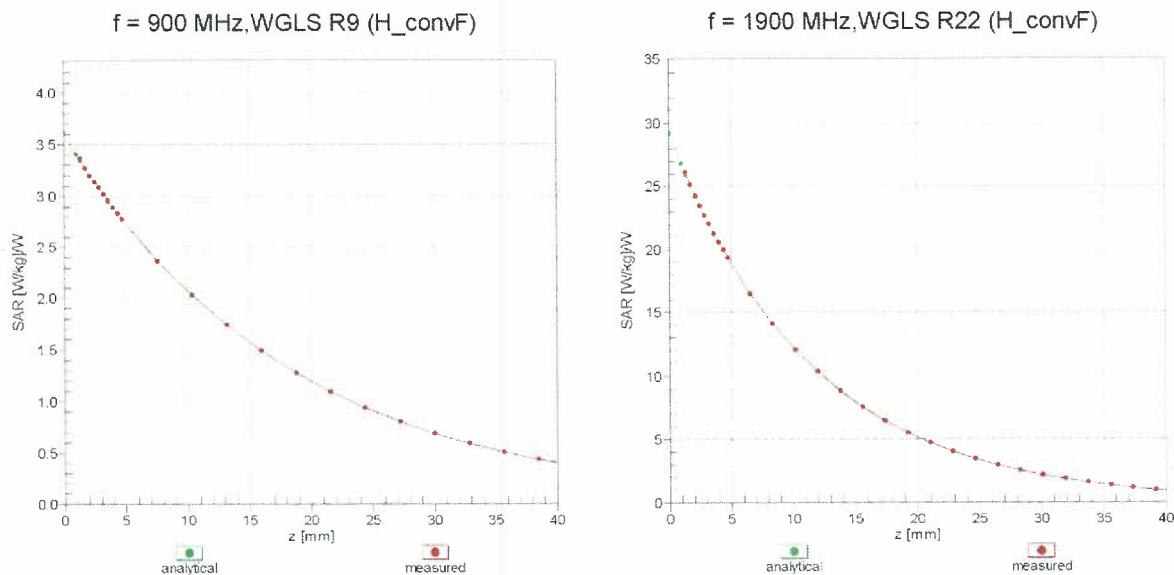

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), $f = 900 \text{ MHz}$

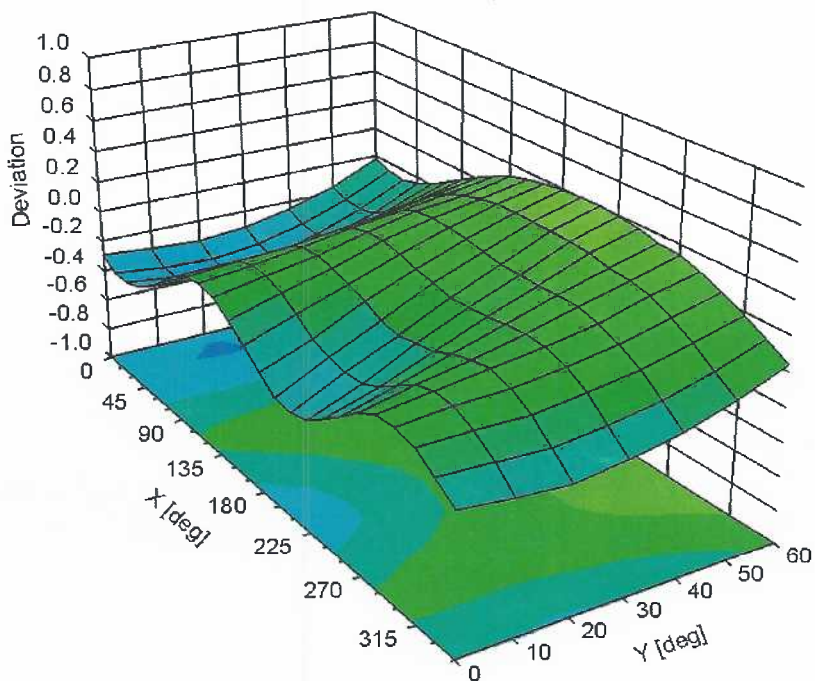

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-22.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **EX3-3693_Aug17**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3693**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **August 18, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	31-Dec-16 (No. ES3-3013_Dec16)	Dec-17
DAE4	SN: 660	7-Dec-16 (No. DAE4-660_Dec16)	Dec-17
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: August 22, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.