

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	

DECLARATION OF COMPLIANCE		FCC PART 15 SUBPART C		IC RSS-210 ISSUE 8	
Test Lab Information	Name	CELLTECH LABS INC.			
	Address	21-364 Lougheed Road, Kelowna B.C. V1X 7R8 Canada			
Test Lab Accreditation	ISO 17025	A2LA Test Lab Certificate No. 2470.01			
Test Site Registration No.	FCC	Accredited Test Facility		IC	3874A-1
	Name	XPLORE TECHNOLOGIES CORPORATION			
Applicant Information	Address	14000 Summit Drive, Suite 900, Austin, Texas, 78728 USA			
Standard(s)/Procedure(s)	FCC	47 CFR Part 15 Subpart C (15.247)		Digital Transmission System (DTS)	
	IC	RSS-210 Issue 8 Annex 8		RSS-Gen Issue 3	
	IEEE	ANSI C63.4:2003			
Application Type(s)	FCC/IC	Class II Permissive Change (Limited Modular Approval)			
Description of Change(s)	FCC/IC	Add Xplore iX104C5 Host Tablet PC & SkyCross Multiband Transmit Diversity Antenna			
Device Identifier(s)	FCC ID:	Q2GI6205-XPL		IC:	4596A-I6205XPL
Test Sample Receipt Date	October 05, 2011		Date(s) of Measurements		October 21-26, 2011
Device Under Test (DUT)	802.11a/b/g/n WLAN Module (PCIe Half Mini Card Form Factor)				
Device Under Test Model	62205ANHMW		Device Under Test Serial No.		G12784-006
DUT Host PC Configuration	Xplore Technologies Rugged Tablet PC				
DUT Host PC Model	Xplore Technologies iX104C5				
DUT Host PC Serial No.	914JP01003G110000B4M000				
Transmitter Freq. Range(s)	2412 - 2462 MHz		5745 - 5825 MHz		
Data Rates (Mbps)	54, 48, 36, 24, 18, 12, 9, 6 (802.11a/g)		11, 5.5, 2, 1 (802.11b)		
	300, 270, 243, 240, 180, 150, 144, 135, 130, 120, 117, 115.5, 90, 86.667, 72.2, 65, 60, 57.8, 45, 43.3, 30, 28.9, 21.7, 15, 14.4, 7.2 (802.11n)				
Modulation Type(s)	CCK, DQPSK, DBPSK (2.4 GHz)		BPSK, QPSK, 16QAM, 64QAM (5 GHz)		
Antenna Type(s) Tested	SkyCross Multiband Antenna	P/N: 25.90A14.001 (MAIN Antenna)		P/N: 25.90A0Q.001 (AUX Antenna)	
Antenna Location(s)	MAIN Antenna - Upper Left Side Edge above Display		AUX Antenna - Upper Right Side Edge above Display		
Antenna Gain Specification	-4.3 dBi (2 GHz Band)		-5.3 dBi (5 GHz Band)		
Power Source(s) Tested	Lithium-ion Battery	7.4V, 7600mAh		Model: iX104	
Co-located WWAN	GPRS/EDGE/CDMA/WCDMA/HSPA	Model: GOBI3000		Does not co-transmit with WLAN	
	FCC ID: Q2GGOBI3K-XPL	IC: 4596A-GOBI3KXPL		Manuf.: Option NV	
Co-located Bluetooth	Class 2 Bluetooth	Model: BCM92070MD_REF		Does co-transmit with WLAN	
	FCC ID: QDS-BRCM1043	IC: 4324A-BRCM1043		Manuf.: Broadcom Corporation	
This wireless device has demonstrated compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR Rule Part 15 Subpart C; Industry Canada RSS-210 Issue 8, RSS-Gen Issue 3 and ANSI C63.4:2003.					
I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.					
The results and statements contained in this report pertain only to the device(s) evaluated.					
This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.					
Test Report Approved By			Sean Johnston	Lab Manager	Celltech Labs Inc.

Applicant:	Xplore Technologies Corp.	FCC ID:	Q2GI6205-XPL	IC:	4596A-I6205XPL	
DUT Type:	Model: 62205ANHMW 802.11abgn WLAN Mini-PCI Express Card installed in iX104C5 Tablet PC (LMA)					
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 1 of 17	

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	

TABLE OF CONTENTS

1.0 SCOPE	4
2.0 REFERENCES	4
2.1 Normative References	4
3.0 FACILITIES AND ACCREDITATIONS	5
4.0 GENERAL INFORMATION	5
4.1 Applicant Information	5
4.2 DUT Description	5
4.3 Rule Part(s) & Classification(s).....	5
4.4 Mode(s) of Operation Tested.....	6
4.5 Configuration Description	6
5.0 PASS/FAIL CRITERIA.....	6
Appendix A – Reference Conducted Output Power Measurements	7
Appendix B – Radiated Transmitter Spurious Emissions.....	9
END OF DOCUMENT	17

FIGURES

Figure B.7-1 - Setup Drawing	12
------------------------------------	----

PHOTOGRAPHS

Photograph B.9-1 – DUT Position A.....	13
Photograph B.9-2 – DUT Position B.....	13
Photograph B.9-3 – DUT Position C.....	13

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	

TEST SUMMARY					
Appendix	Test Description	Procedure Reference	FCC Limit Reference	IC Limit Reference	Result
B	Transmitter Radiated Spurious Emissions	ANSI C63.4	§15.205(a)(b) §15.209(a), §15.247(c)	RSS-210 Issue 8	Pass

REVISION LOG

Revision	Description	Implemented By	Implementation Date
1.0	1st Release	Jon Hughes	January 06, 2012

Test Report Prepared By	Report Preparation Date	QA Review By	QA Review Date
Sean Johnston	December 04, 2011	Jon Hughes	January 05, 2012

Applicant:	Xplore Technologies Corp.	FCC ID:	Q2GI6205-XPL	IC:	4596A-I6205XPL	
DUT Type:	Model: 62205ANHMW 802.11abgn WLAN Mini-PCI Express Card installed in iX104C5 Tablet PC (LMA)					
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 17

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	
					Test Lab Certificate No. 2470.01

1.0 SCOPE

This report outlines the measurements made and results collected during electromagnetic emissions testing of the Xplore Technologies Corporation Model: 62205ANHMW 802.11a/b/g/n WLAN Mini-PCI Express Card installed in the Xplore Technologies Corporation Model: iX104C5 Rugged Tablet PC with SkyCross Multiband Transmit Diversity Antenna. The measurement results were applied against the applicable EMC requirements and limits outlined in the technical rules and regulations set forth in the Federal Communication's Commission Code of Federal Regulations Title 47 Part 15 Subpart C and Industry Canada Radio Standards Specification RSS-210 Issue 8 and RSS-Gen Issue 3.

2.0 REFERENCES

2.1 Normative References

ANSI/ISO 17025:2005	General Requirements for competence of testing and calibration laboratories
IEEE/ANSI C63.4-2003	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CFR Title 47 Part 15 Subpart C	Code of Federal Regulations Title 47: Telecommunication Part 15C: Intentional Radiators
IC Spectrum Management & Telecommunications Policy	Radio Standards Specification RSS-210 Issue 8 - Low-Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment RSS-Gen Issue 3 - General Requirements and Information for the Certification of Radiocommunication Equipment

Applicant:	Xplore Technologies Corp.	FCC ID:	Q2GI6205-XPL	IC:	4596A-I6205XPL	
DUT Type:	Model: 62205ANHMW 802.11abgn WLAN Mini-PCI Express Card installed in iX104C5 Tablet PC (LMA)					
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 4 of 17

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	
					Test Lab Certificate No. 2470.01

3.0 FACILITIES AND ACCREDITATIONS

The facilities used in collecting the test results outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site conforms to the requirements set forth in ANSI C63.4 and is filed and listed with the FCC as an accredited test facility and Industry Canada under File Number IC 3874A-1.

4.0 GENERAL INFORMATION

4.1 Applicant Information

Company Name	XPLORE TECHNOLOGIES CORPORATION
Address	14000 Summit Drive, Suite 900
	Austin, Texas 78728
	United States

4.2 DUT Description

Host PC Type	Rugged Tablet PC	Model	iX104C5	Serial No.	914JP01003G11000 0B4M000
Transmitter Tested	802.11a/b/g/n WLAN	Model	62205ANHMW	Serial No.	G12784-006
Transmit Freq. Range	2412 - 2462 MHz		5745 - 5825 MHz		
Transmitter Identifier(s)	FCC ID: Q2GI6205-XPL		IC: 4596A-I6205XPL		
Power Source Tested	Lithium-ion Battery		7.4V, 7600mAh		Model: iX104
Antenna Type(s) Tested	SkyCross Multiband Transmit Diversity		P/N: 25.90A14.001 (MAIN)		P/N: 25.90A0Q.001 (AUX)
Antenna Gain Spec.	-4.3 dBi (2.4 GHz Band)		-5.3 dBi (5 GHz Band)		

4.3 Rule Part(s) & Classification(s)

Rule Part(s) Applied	FCC	47 CFR §15.247, 15.209, §15.205 (a), (b)
	IC	RSS-210 Issue 8, RSS-Gen Issue 3

 Testing and Engineering Services Lab	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	

4.4 Mode(s) of Operation Tested

Measurements were made with the DUT set to the low, mid and high channel in each band and in 3 orthogonal DUT positions.

The WLAN was configured and exercised using customer supplied test software that allows an operator to set the parameters of the WLAN operation. With the exception of the output power and frequency settings, all other WLAN settings were left on their default settings. The power gain settings were set as described in section appendix A with the worst-case data rate as described in the same section. Software power settings were set as defined by the radio manufacturer for maximum rated power.

Pre-scan measurements were made with the WLAN in each mode (a,b,g & n). The lowest and highest bit rates were tested in each. The lowest, highest and mid-band channels in the mode b, g and a were investigated. The three orthogonal DUT orientations were used to determine worse case orientation. From this preliminary data, it was determined that the lowest rate in each mode, with the DUT in orientation Position A (see Section B.9), produced the highest spurious emissions.

TX Frequency Range:	Mode a: 5745 – 5825 MHz Ch. 149 (5745 MHz), Ch. 157 (5785 MHz) & Ch. 165 (5825 MHz) Mode b & g: 2412 - 2462 MHz Ch. 1 (2412 MHz), Ch. 6 (2437 MHz) & Ch. 11 (2462 MHz) Mode n (20MHz): 2412 – 2462 MHz Ch. 1 (2412 MHz), Ch. 6 (2437 MHz) & Ch. 11 (2462 MHz) Mode n (40MHz): 2412 – 2462 MHz Ch. 3(F) (2422 MHz), Ch. 6(F) (2437 MHz) & Ch. 9(F) (2452 MHz) Mode a: 5745 – 5825 MHz Ch. 149 (5745 MHz), Ch. 157 (5785 MHz) & Ch. 165 (5825 MHz) Mode a: 5745 – 5825 MHz Ch. 151(F)(5755 MHz), Ch. 157(F) (5795 MHz)
	Modulation Type(s): DSSS (CCK, DBPSK, DQPSK), OFDM (BPSK, QPSK, 16QAM, 64QAM)

4.5 Configuration Description

4.5.1 Configuration Justification

The DUT was tested in a configuration described by the client as being typical of normal use.

5.0 PASS/FAIL CRITERIA

Unless otherwise noted in the Appendices, the pass/fail criteria is the limit set forth in the reference standards. The DUT is considered to have passed the requirements if the data collected during the described measurement procedure is no greater than the specified limits as defined. The pass/fail statements made in this report only apply to the unit tested.

Applicant:	Xplore Technologies Corp.	FCC ID:	Q2GI6205-XPL	IC:	4596A-I6205XPL	
DUT Type:	Model: 62205ANHMW 802.11abgn WLAN Mini-PCI Express Card installed in iX104C5 Tablet PC (LMA)					
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 6 of 17

Appendix A – Reference Conducted Output Power Measurements

2.4 GHz Band			
802.11b 1Mbps DSSS			
Duty Cycle 100%			
Channel	Frequency (MHz)	Conducted Average Power (dBm)	
		MAIN - Chain A	AUX - Chain B
1	2412	15.5	15.5
7	2442	15.6	15.5
11	2462	15.4	15.5
802.11g 6Mbps OFDM			
Duty Cycle 99%			
Channel	Frequency (MHz)	Conducted Average Power (dBm)	
		MAIN - Chain A	AUX - Chain B
1	2412	14.0	14.0
7	2442	16.5	16.8
11	2462	14.0	14.0
802.11n HT0 OFDM			
Duty Cycle 99%			
Channel	Frequency (MHz)	Conducted Average Power (dBm)	
		MAIN - Chain A	AUX - Chain B
1	2412	13.0	13.0
7	2442	16.5	16.5
11	2462	12.5	12.5
802.11n MIMO HT16 OFDM			
Duty Cycle 98%			
Channel	Frequency (MHz)	Conducted Average Power (dBm)	
		MAIN - Chain A	AUX - Chain B
1	2412	11.5	11.6
7	2442	13.5	13.5
11	2462	11.5	11.5

5.7-5.8 GHz Band			
802.11a		6Mbps	OFDM
Duty Cycle		99%	
Channel	Frequency (MHz)	Conducted Average Power (dBm)	
		MAIN - Chain A	AUX - Chain B
149	5745	16.1	16.1
153	5765	16.1	16.0
157	5785	16.2	16.1
161	5805	16.1	16.0
165	5825	16.1	16.0
802.11n (20 MHz)		HT0	OFDM
Duty Cycle		99%	
Channel	Frequency (MHz)	Conducted Average Power (dBm)	
		MAIN - Chain A	AUX - Chain B
149	5745	16.0	16.0
153	5765	16.0	16.0
157	5785	16.1	16.1
161	5805	16.0	16.0
165	5825	16.0	16.0
802.11n (40 MHz)		HT0	OFDM
Duty Cycle		99%	
Channel	Frequency (MHz)	Conducted Average Power (dBm)	
		MAIN - Chain A	AUX - Chain B
151(F)	5755	16.0	16.0
159(F)	5795	16.0	16.0

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	
					Test Lab Certificate No. 2470.01

B.3 LIMITS

B.1.1. FCC CFR 47

§15.247 (c):	<i>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in 15.209 (a) is not required.</i>
--------------	---

B.4 ENVIRONMENTAL CONDITIONS

Temperature	25 +/- 5 °C
Humidity	40 +/- 10 %
Barometric Pressure	101 +/- 3 kPa

Applicant:	Xplore Technologies Corp.	FCC ID:	Q2GI6205-XPL	IC:	4596A-I6205XPL	
DUT Type:	Model: 62205ANHMW 802.11abgn WLAN Mini-PCI Express Card installed in iX104C5 Tablet PC (LMA)					
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 10 of 17

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	
					Test Lab Certificate No. 2470.01

B.5 TEST EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	CAL DUE
00072	EMCO	2075	Mini-mast	n/a
00073	EMCO	2080	Turn Table	n/a
00071	EMCO	2090	Multi-Device Controller	n/a
00015	HP	E4408B	Spectrum Analyzer	03May12
00050	Chase	CBL-6111A	Bilog Antenna	03May13
00034	ETS	3115	Double Ridged Guide Horn	29Apr13
00035	ETS	3115	Double Ridged Guide Horn	29Apr13
00051	HP	8566B	Spectrum Analyzer RF Section	03May12
00049	HP	85650A	Quasi-peak Adapter	06May12
00047	HP	85685A	RF Preselector	05May12
00006	R & S	SMR 20	Signal Generator (10MHz-40GHz)	30Apr12
00114	Amplifier Research	DC7154	Directional Coupler (0.8-4.2 GHz)	n/a
00078	Pasternack	PE2214-20	Directional Coupler (1-18 GHz)	n/a
00106	Amplifier Research	5S1G4	Power Amplifier (5W, 800MHz-4.2GHz)	n/a
00041	Amplifier Research	10W1000C	Power Amplifier (0.5 - 1 GHz)	n/a
00007	Gigatronics	8652A	Power Meter	04May12
00014	Gigatronics	80701A	Power Sensor	04May12
00015	Agilent	4408B	Spectrum Analyzer	03May12
00115	Miteq	J54-00102600-35-5A	LNA	n/a
00093	Microtronics	HPM50111	High Pass Filter	n/a
00119	INMAT	18AH-10	10dB attenuator	n/a
00120	Celltech	n/a	Microwave Cable (RX)	n/a
00161/00166	Waveline	899/801-KF	Standard Gain Horn	29Apr13

n/a = not applicable


Applicant:	Xplore Technologies Corp.	FCC ID:	Q2GI6205-XPL	IC:	4596A-I6205XPL	
DUT Type:	Model: 62205ANHWMW 802.11abgn WLAN Mini-PCI Express Card installed in iX104C5 Tablet PC (LMA)					
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 11 of 17

B.6 MEASUREMENT EQUIPMENT SETUP

MEASUREMENT EQUIPMENT CONNECTIONS	The measurement equipment was connected as shown in the B.7.1. A number of antennas were used to cover the applicable frequency range test. The ranges in which each antenna was used are as follows:			
	Frequency Range	Spectrum Analyzer Asset #	LNA/Filter/Attenuator Asset #	Antenna Asset #
	30 MHz - 1GHz	00051		00050
	2 GHz – 3 GHz	00015	00119/00115	00035
	3 GHz – 10 GHz	00015	00093/00115	00035
	10 GHz – 18 GHz	00015	00093/00115	00035
MEASUREMENT EQUIPMENT SETTINGS	18 GHz – 26 GHz	00161	00093/00115	00161
	The spectrum analyzer was set to the following settings:			
	Frequency Range	RBW	VBW	Detector
	MHz	kHz	kHz	
	< 1 GHz	100	300	Peak
	> 1000	1000*	1000	Peak
	Average measurements were performed with video averaging using a VBW of 30 Hz.			

B.7 SETUP DRAWING

Figure B.7-1 - Setup Drawing

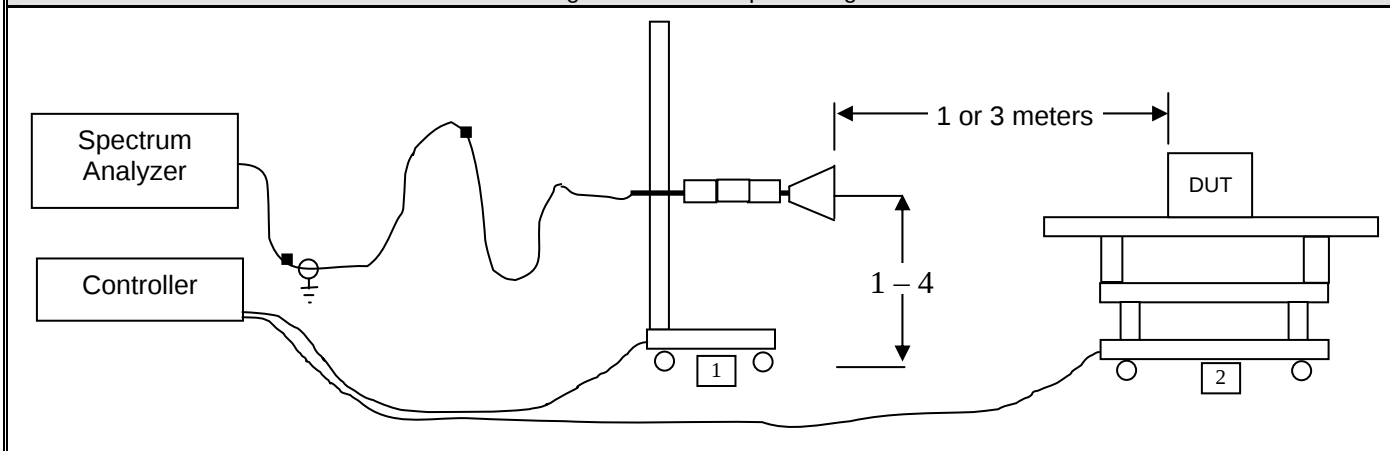

B.8 DUT OPERATING DESCRIPTION

The worst-case data rate was determined from conducted power analysis (see Appendix A). Pre-scan investigations determined the worst-case modes that were applied for the final radiated spurious emission measurements. The transmitter was set to the maximum conducted power setting prescribed by the manufacturer.

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	

B.9 SETUP PHOTOGRAPHS


Photograph B.9-1 – DUT Position A



Photograph B.9-2 – DUT Position B



Photograph B.9-3 – DUT Position C

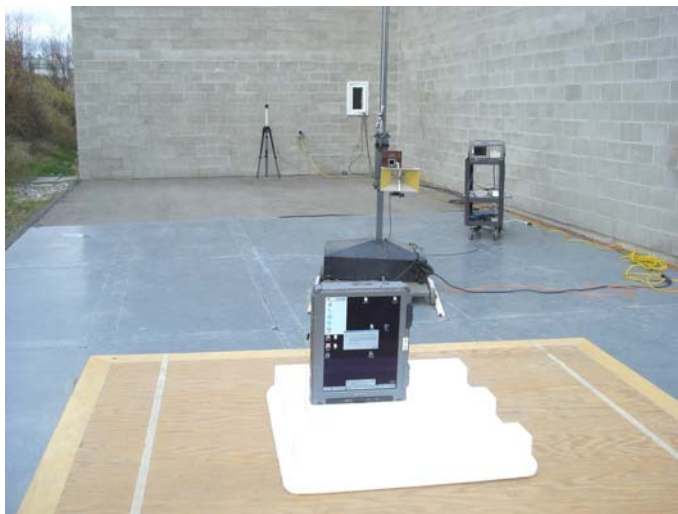

Applicant:	Xplore Technologies Corp.	FCC ID:	Q2GI6205-XPL	IC:	4596A-I6205XPL	
DUT Type:	Model: 62205ANHMW 802.11abgn WLAN Mini-PCI Express Card installed in iX104C5 Tablet PC (LMA)					
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 17

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	

B.10 RADIATED TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT DATA

Spurious Emission Measurements - 802.11g Mode

Freq. (MHz)	Channel/Chain	Level (dBuV)		Polarity	Distance (m)	Corr. factors (dB)	Field Strength (dBuV/m)		Limit distance (m)	Limit (dBuV/m)		Margin (dB)	
		Peak	Average				Peak	Average		Peak	Average	Peak	Average
2412	1												
4824	a	48.7		V	3	4.5	53.2	4.5	3	74	54	20.8	
	b	45.2		V	3	4.5	49.7	4.5	3	74	54	24.3	
4824	a	43.1		H	3	4.4	47.5	4.4	3	74	54	26.5	
	b	40.5		H	3	4.4	44.9	4.4	3	74	54	29.1	
2437	6												
4874	a	49.1	39.6	V	3	4.5	53.6	44.1	3	74	54	20.4	9.9
	b	43.2		V	3	4.5	47.7	4.5	3	74	54	26.3	
4874	a	41.4		H	3	4.4	45.8	4.4	3	74	54	28.2	
	b	42.3		H	3	4.4	46.7	4.4	3	74	54	27.3	
2462	11												
4924	a	43.1		V	3	4.5	47.6	4.5	3	74	54	26.4	
	b	43.5		V	3	4.5	48	4.5	3	74	54	26	
4924	a	41.5		H	3	4.4	45.9	4.4	3	74	54	28.1	
	b	42.3		H	3	4.4	46.7	4.4	3	74	54	27.3	

No emissions were detected for n mode 20MHz and 40MHz and dual chain AB mode.

Formulae:

Total CF = Antenna Factor + Cable Factor + Other Factor (Amplifier Gain, filter loss, etc)

Field Strength = SA Reading + Total CF

Limit Distance Correction = $40 \cdot \log(d1/d2)$ for $F < 30$ MHz, $20 \cdot \log(d1/d2)$ for $F > 30$ MHz:

where d1 is the measurement distance, d2 is the published limit distance

Limit = Specified Limit + Limit Distance Correction

Margin = Limit - Field Strength

Applicant:	Xplore Technologies Corp.	FCC ID:	Q2GI6205-XPL	IC:	4596A-I6205XPL	
DUT Type:	Model: 62205ANHMW 802.11abgn WLAN Mini-PCI Express Card installed in iX104C5 Tablet PC (LMA)					
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 17

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	

RADIATED TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT DATA (CONT.)

Spurious Emission Measurements - 802.11a Mode

Freq. (MHz)	Channel/Chain	Level (dBuV)		Polarity	Distance (m)	Corr. factors (dB)	Corrected Level (dBuV/m)		Limit distance (m)	Limit (dBuV/m)		Margin (dB)	
		Peak	Average				Peak	Average		Peak	Average	Peak	Average
5745	149												
3830	a	nf		V	3	4.2			3	74	54		
7660	a	nf		V	1	8.4			1	83.5	63.5		
11490	a	nf		V	1	15.3			1	83.5	63.5		
3830	b	43.4		V	3	4.2	47.6		3	74	54	26.4	
7660	b	47.5		V	1	8.4	55.9		1	83.5	63.5	27.6	
11490	b	36.1		V	1	15.3	51.4		1	83.5	63.5	32.1	
3830	a	nf		H	3	4.1			3	74	54		
7660	a	nf		H	1	8.4			1	83.5	63.5		
11490	a	nf		H	1	15.2			1	83.5	63.5		
3830	b	41.3		H	3	4.1	45.4		3	74	54		
7660	b	49.5	40.7	H	1	8.4	57.9	49.1	1	83.5	63.5	25.6	14.4
11490	b	41.3		H	1	15.2	56.5		1	83.5	63.5	27	
5785	157												
3856	a	nf		V	3	4.2			3	74	54		
7713	a	nf		V	1	8.4			1	83.5	63.5		
11570	a	nf		V	1	15.3			1	83.5	63.5		
3856	b	43.4		V	3	4.2	47.6		3	74	54	26.4	
7713	b	51		V	1	8.4	59.4		1	83.5	63.5	24.1	
11570	b	38.3		V	1	15.3	53.6		1	83.5	63.5	29.9	
3856	a	nf		H	3	4.1			3	74	54		
7713	a	nf		H	1	8.4			1	83.5	63.5		
11570	a	nf		H	1	15.2			1	83.5	63.5		
3856	b	41.2		H	3	4.1	45.3		3	74	54	28.7	
7713	b	52.2	43.3	H	1	8.4	60.6	51.7	1	83.5	63.5	22.9	11.8
11570	b	38.4		H	1	15.2	53.6		1	83.5	63.5	29.9	
5825	165												
3883	a	nf		V	3	4.2			3	74	54		
7666	a	nf		V	1	8.4			1	83.5	63.5		
11650	a	nf		V	1	15.3			1	83.5	63.5		
3883	b	43.1		V	3	4.2	47.3	4.2	3	74	54	26.7	
7666	b	49.5	39.9	V	1	8.4	57.9	48.3	1	83.5	63.5	25.6	15.2
11650	b	37.1		V	1	15.3	52.4	15.3	1	83.5	63.5	31.1	
3883	a	nf		H	3	4.1			3	74	54		
7666	a	nf		H	1	8.4			1	83.5	63.5		
11650	a	nf		H	1	15.2			1	83.5	63.5		
3883	b	43.2		H	3	4.1	47.3	4.1	3	74	54	26.7	
7666	b	44.2		H	1	8.4	52.6	8.4	1	83.5	63.5	30.9	
11650	b	37.3		H	1	15.2	52.5	15.2	1	83.5	63.5	31	

No emissions were detected for n mode 20MHz and 40MHz and dual chain AB mode.
nf = noise floor

Applicant:	Xplore Technologies Corp.	FCC ID:	Q2GI6205-XPL	IC:	4596A-I6205XPL	
DUT Type:	Model: 62205ANHMW 802.11abgn WLAN Mini-PCI Express Card installed in iX104C5 Tablet PC (LMA)					
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 15 of 17

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	

Formulae:

Total CF = Antenna Factor + Cable Factor + Other Factor (Amplifier Gain, filter loss, etc)

Field Strength = SA Reading + Total CF

Limit Distance Correction = $40 \cdot \log(d1/d2)$ for $F < 30$ MHz, $20 \cdot \log(d1/d2)$ for $F > 30$ MHz:

where d1 is the measurement distance, d2 is the published limit distance

Limit = Specified Limit + Limit Distance Correction

Margin = Limit - Field Strength

PASS/FAIL

In reference to the results outlined in B.10, the DUT passes the requirements as stated in the reference standards.

2 SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Sean Johnston
Lab Manager
Celltech Labs Inc.

Oct. 26, 2011

Date

Applicant:	Xplore Technologies Corp.	FCC ID:	Q2GI6205-XPL	IC:	4596A-I6205XPL	
DUT Type:	Model: 62205ANHMW 802.11abgn WLAN Mini-PCI Express Card installed in iX104C5 Tablet PC (LMA)					
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 16 of 17

	Report Serial No.:	100511Q2G-T1118-E15W-a	Report Revision No.:	Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	Evaluation Dates:	October 21-26, 2011	Report Issue Date:	January 06, 2012	
	FCC Rule Part(s):	47 CFR §15.247 (Subpart C)	IC Standard(s):	RSS-GEN & RSS-210	

END OF DOCUMENT

Applicant:	Xplore Technologies Corp.	FCC ID:	Q2GI6205-XPL	IC:	4596A-I6205XPL	
DUT Type:	Model: 62205ANHMMW 802.11abgn WLAN Mini-PCI Express Card installed in iX104C5 Tablet PC (LMA)					
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 17 of 17