




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/30/2004 9:23:39 AM	DUT Battery Model/No:	
Filename:	5250_3_26_04_WG100 mW_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Xplore	Relative Permittivity:	47.31
Relative Humidity:	50%	Conductivity:	5.296
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	21.60 mm
DUT Position:	rear bystander touching phantom	Max SAR Z-axis Location:	-145.00 mm
Antenna Configuration:	integral	Max E Field:	11.07 V/m
Test Frequency:	5260MHz	SAR 1g:	0.490 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.196 W/kg
Conversion Factors:	0.660 / 0.660 / 0.660	SAR Start:	0.550 W/kg
Type of Modulation:		SAR End:	0.550 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/23/2004
Input Power Level:	max	Extrapolation:	poly4

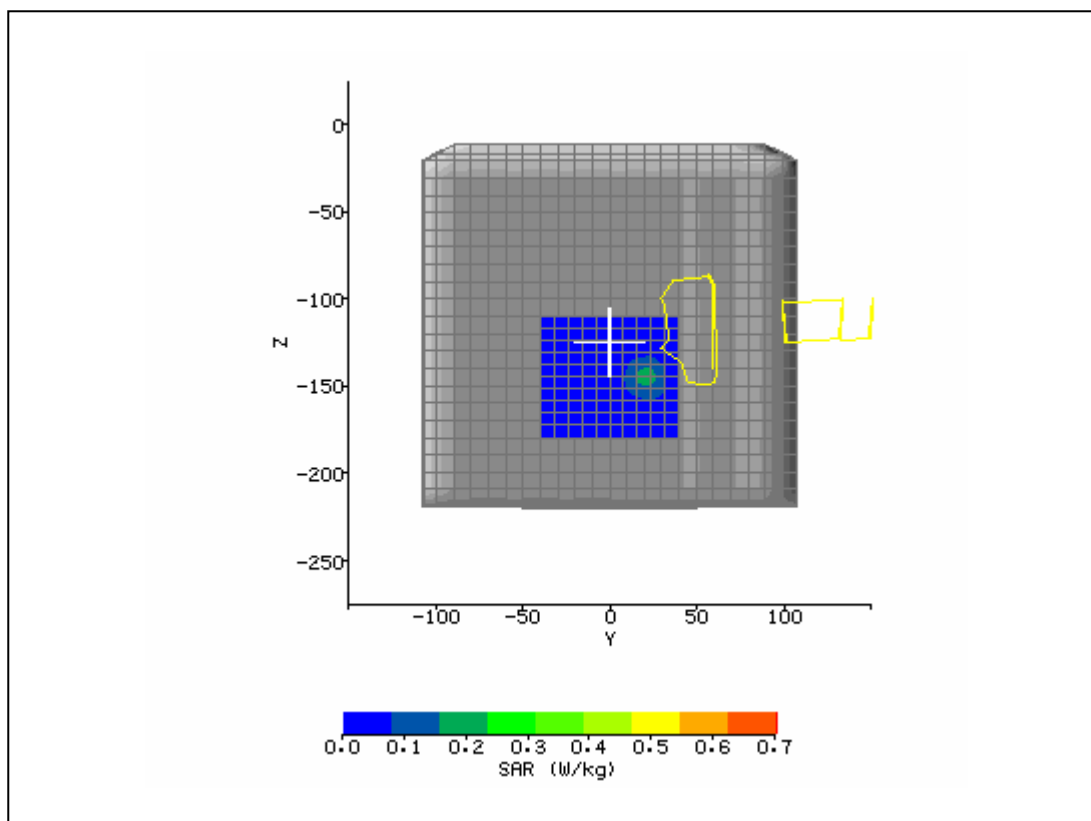


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/30/2004 10:07:55 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Xplore	Relative Permittivity:	47.31
Relative Humidity:	50%	Conductivity:	5.296
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	4.80 mm
DUT Position:	lap	Max SAR Z-axis Location:	-147.10 mm
Antenna Configuration:	integral	Max E Field:	13.83 V/m
Test Frequency:	5260MHz	SAR 1g:	0.891 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.462 W/kg
Conversion Factors:	0.660 / 0.660 / 0.660	SAR Start:	0.866 W/kg
Type of Modulation:		SAR End:	0.866 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/23/2004
Input Power Level:	max	Extrapolation:	poly4

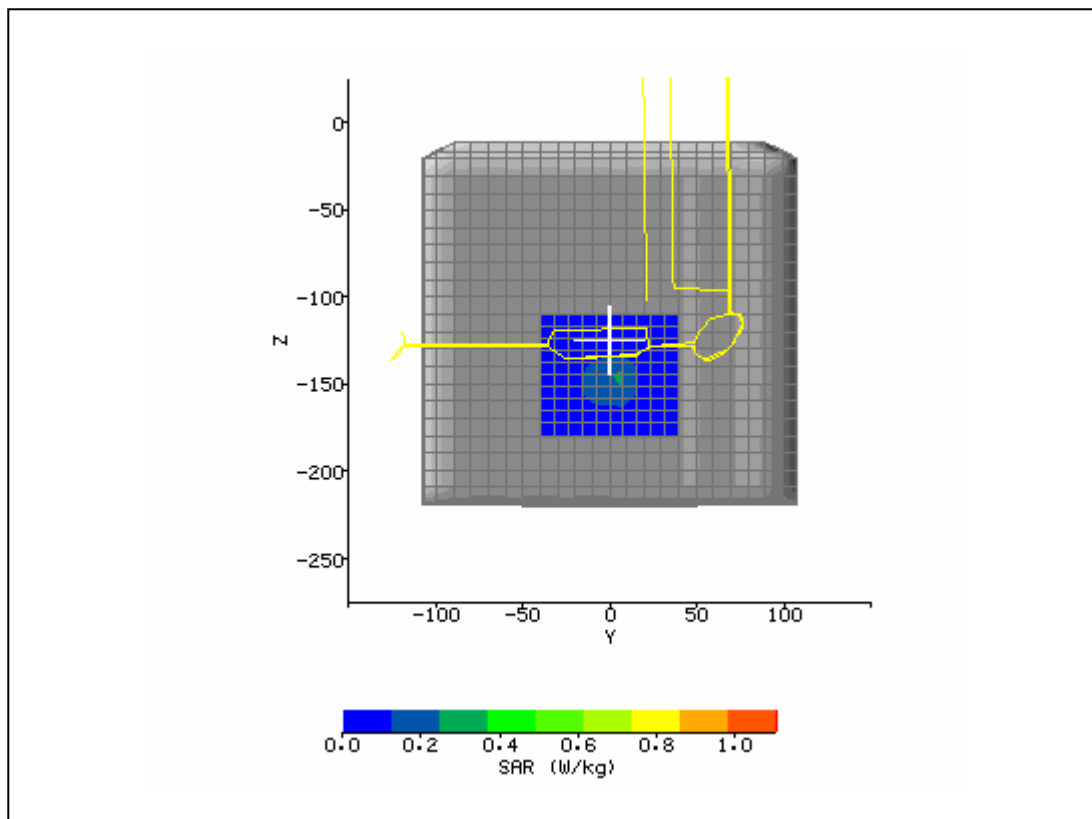


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/30/2004 10:41:20 AM	DUT Battery Model/No:	
Filename:	5260lap_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Xplore	Relative Permittivity:	48.06
Relative Humidity:	50%	Conductivity:	5.352
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	4.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-147.80 mm
Antenna Configuration:	integral	Max E Field:	14.20 V/m
Test Frequency:	5180MHz	SAR 1g:	0.975 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	1.091 W/kg
Conversion Factors:	0.660 / 0.660 / 0.660	SAR Start:	0.904 W/kg
Type of Modulation:		SAR End:	0.914 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.05 dB
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/23/2004
Input Power Level:	max	Extrapolation:	poly4

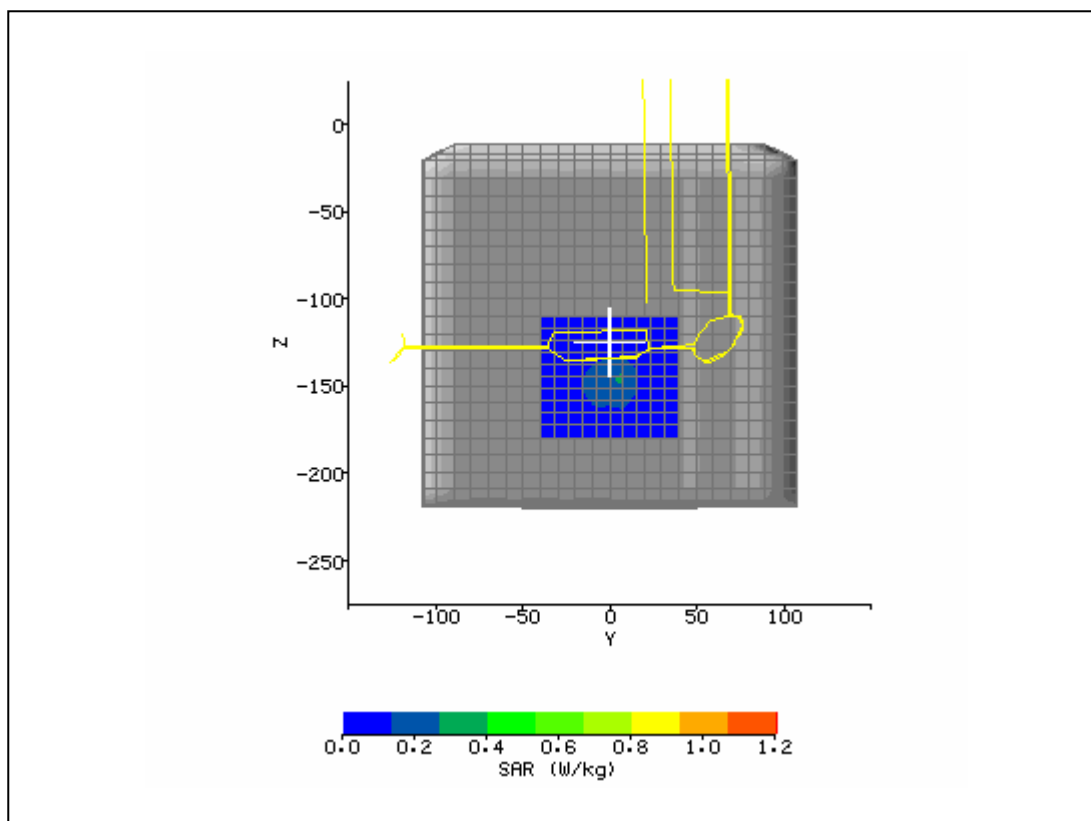


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/30/2004 11:07:36 AM	DUT Battery Model/No:	
Filename:	5180lap_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Xplore	Relative Permittivity:	46.67
Relative Humidity:	50%	Conductivity:	5.179
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	4.80 mm
DUT Position:	lap	Max SAR Z-axis Location:	-147.80 mm
Antenna Configuration:	integral	Max E Field:	15.59 V/m
Test Frequency:	5320MHz	SAR 1g:	1.097 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.911 W/kg
Conversion Factors:	0.660 / 0.660 / 0.660	SAR Start:	1.080 W/kg
Type of Modulation:		SAR End:	1.099 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.07 dB
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/23/2004
Input Power Level:	max	Extrapolation:	poly4

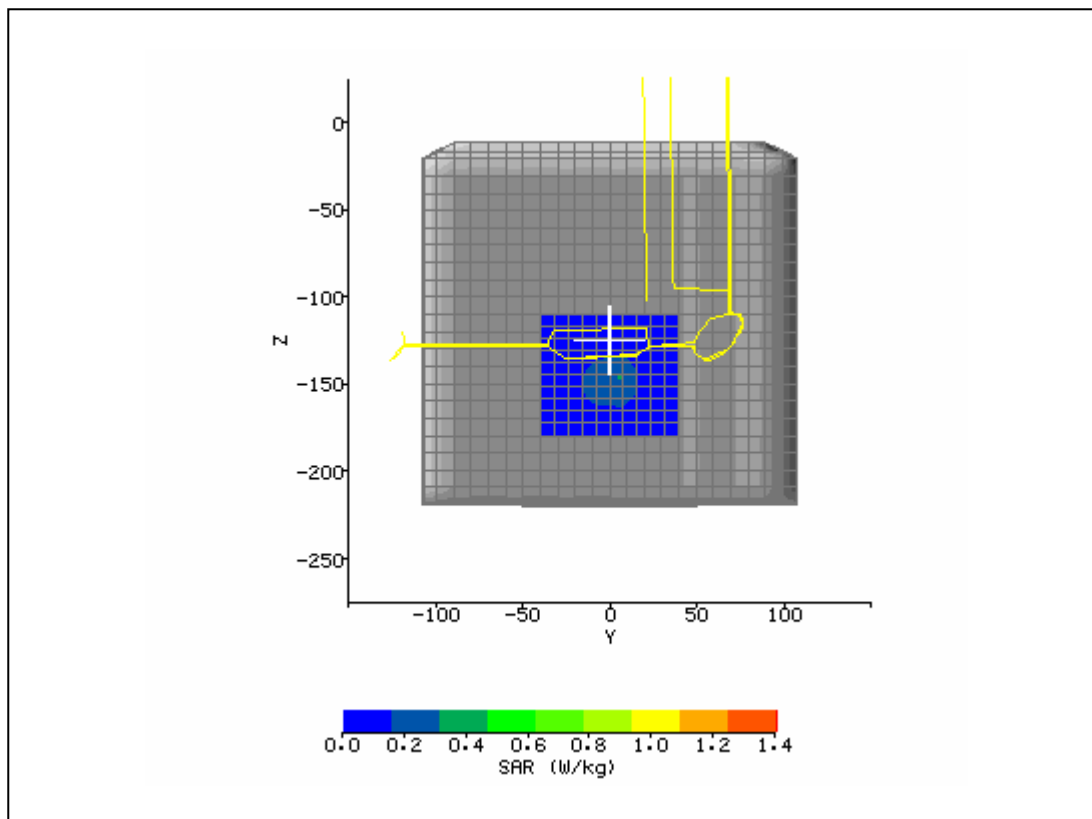


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2004 8:10:31 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Xplore	Relative Permittivity:	47.82
Relative Humidity:	50%	Conductivity:	6.306
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.20 mm
DUT Position:	bystander	Max SAR Z-axis Location:	-145.70 mm
Antenna Configuration:	integral	Max E Field:	9.18 V/m
Test Frequency:	5775MHz	SAR 1g:	0.439 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.420 W/kg
Conversion Factors:	1.122 / 1.122 / 1.122	SAR Start:	0.485 W/kg
Type of Modulation:		SAR End:	0.467 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.16 dB
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/23/2004
Input Power Level:	max	Extrapolation:	poly4

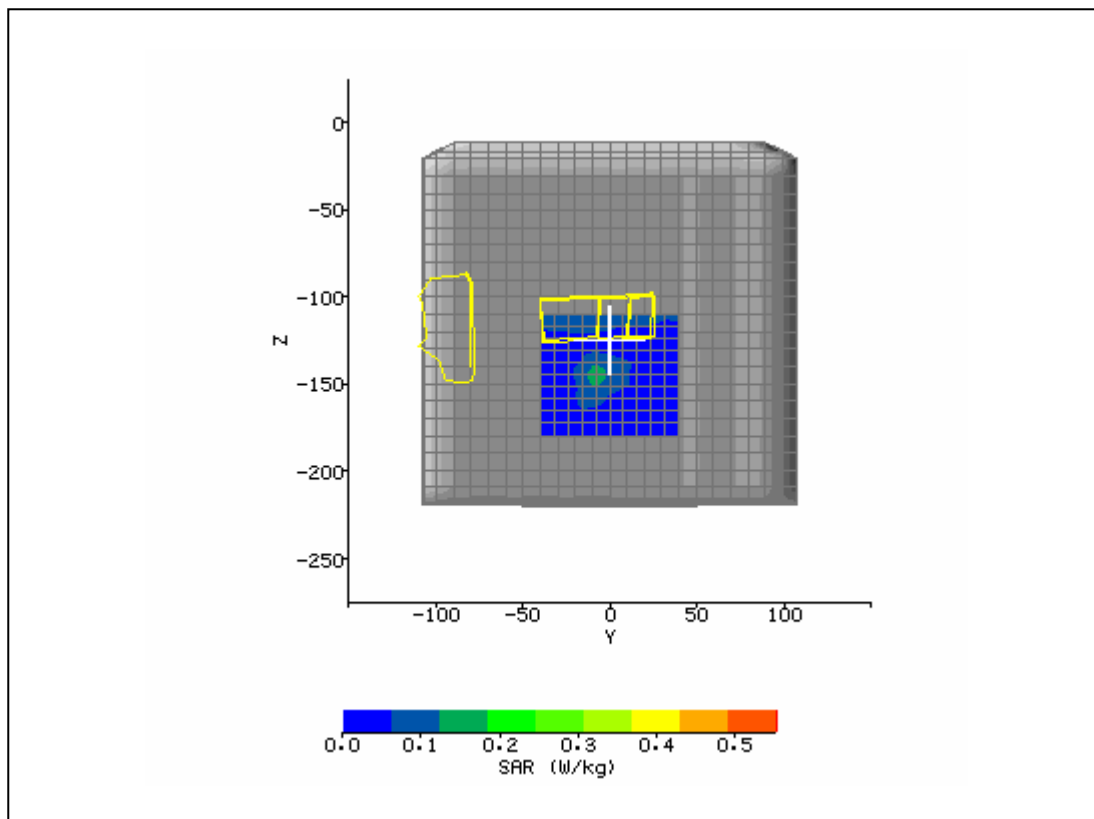

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2004 8:58:01 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Xplore	Relative Permittivity:	47.82
Relative Humidity:	50%	Conductivity:	6.306
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	3.20 mm
DUT Position:	lap	Max SAR Z-axis Location:	-146.40 mm
Antenna Configuration:	integral	Max E Field:	7.42 V/m
Test Frequency:	5775MHz	SAR 1g:	0.292 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.751 W/kg
Conversion Factors:	1.122 / 1.122 / 1.122	SAR Start:	0.317 W/kg
Type of Modulation:		SAR End:	0.317 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/23/2004
Input Power Level:	max	Extrapolation:	poly4

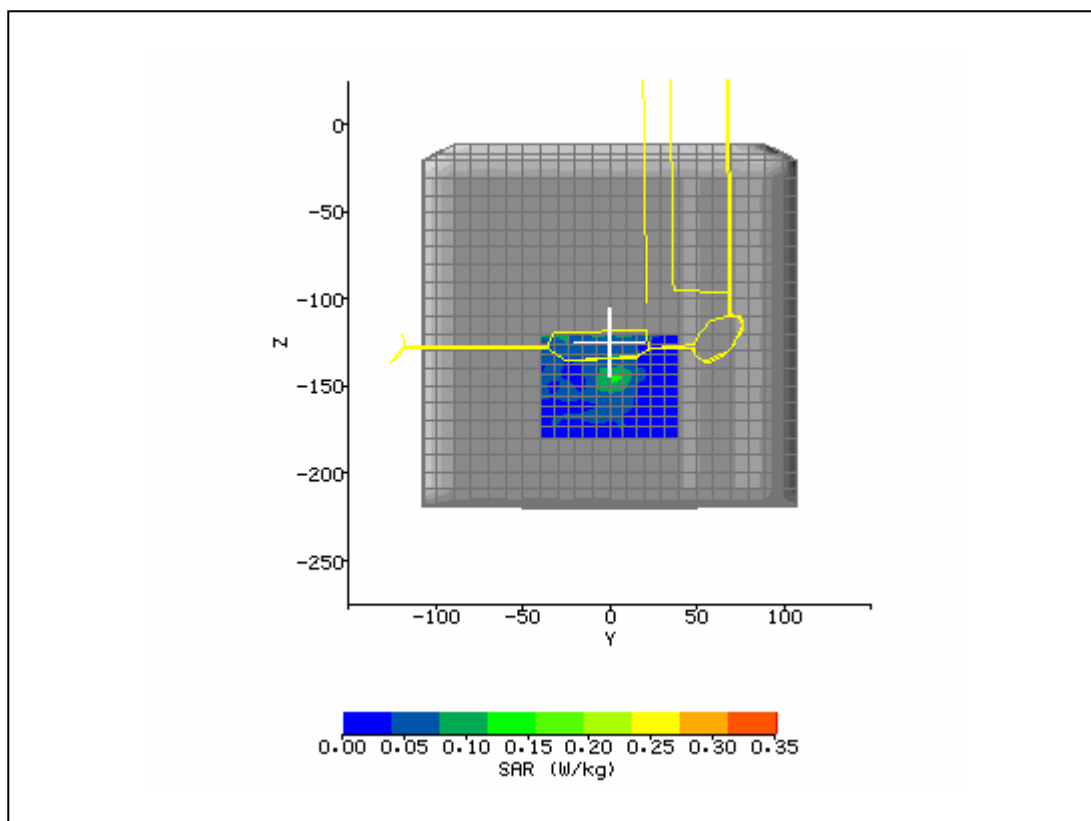

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2004 9:24:43 AM	DUT Battery Model/No:	
Filename:	5775lap_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Xplore	Relative Permittivity:	48.26
Relative Humidity:	50%	Conductivity:	6.229
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	3.20 mm
DUT Position:	bystander	Max SAR Z-axis Location:	-147.00 mm
Antenna Configuration:	integral	Max E Field:	10.64 V/m
Test Frequency:	5745MHz	SAR 1g:	0.560 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.289 W/kg
Conversion Factors:	1.122 / 1.122 / 1.122	SAR Start:	0.669 W/kg
Type of Modulation:		SAR End:	0.669 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/23/2004
Input Power Level:	max	Extrapolation:	poly4

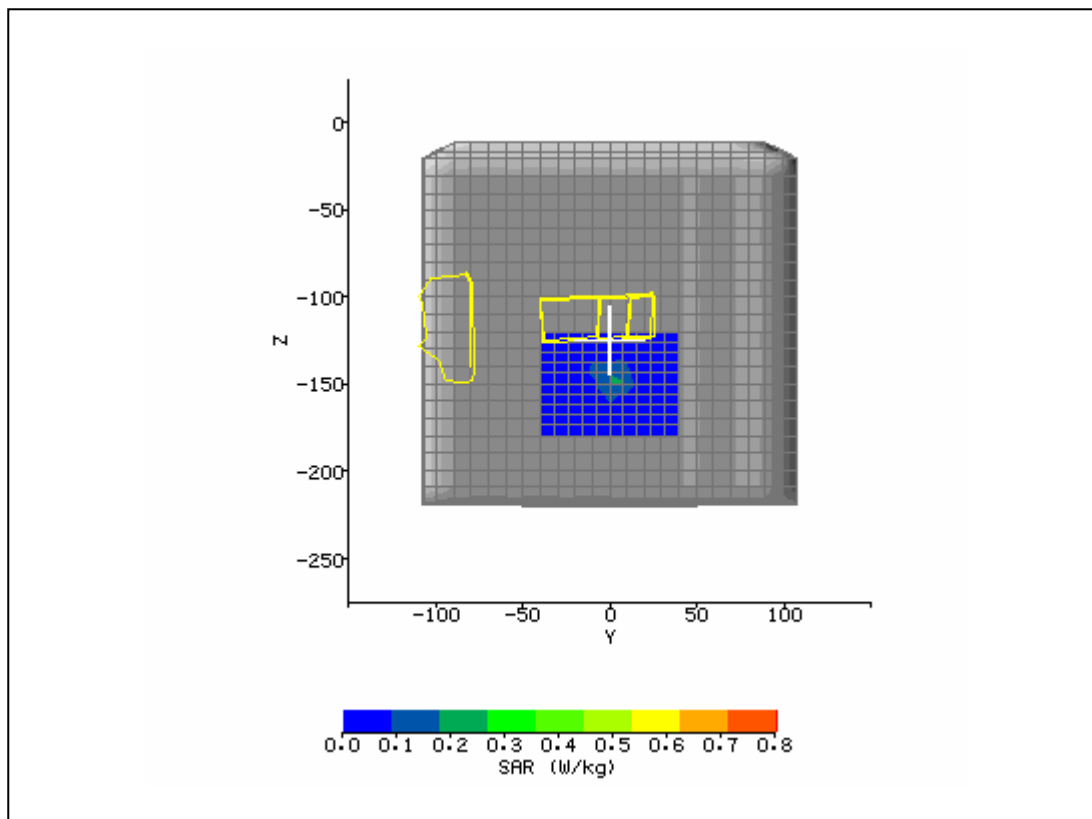

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2004 9:50:53 AM	DUT Battery Model/No:	
Filename:	5745bystander_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Xplore	Relative Permittivity:	46.39
Relative Humidity:	50%	Conductivity:	6.346
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	2.40 mm
DUT Position:	bystander	Max SAR Z-axis Location:	-145.20 mm
Antenna Configuration:	integral	Max E Field:	7.32 V/m
Test Frequency:	5805MHz	SAR 1g:	0.261 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.154 W/kg
Conversion Factors:	1.122 / 1.122 / 1.122	SAR Start:	0.273 W/kg
Type of Modulation:		SAR End:	0.279 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.08 dB
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/23/2004
Input Power Level:	max	Extrapolation:	poly4

