




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	2/17/2005 5:21:38 PM	DUT Battery Model/No:	
Filename:	128_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Xplore iX104	Relative Permittivity:	55.42
Relative Humidity:	50%	Conductivity:	0.987
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-49.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-178.00 mm
Antenna Configuration:	integral	Max E Field:	13.41 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.147 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.077 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.081 W/kg
Type of Modulation:		SAR End:	0.083 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.10 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	2/3/05
Input Power Level:	max	Extrapolation:	poly4

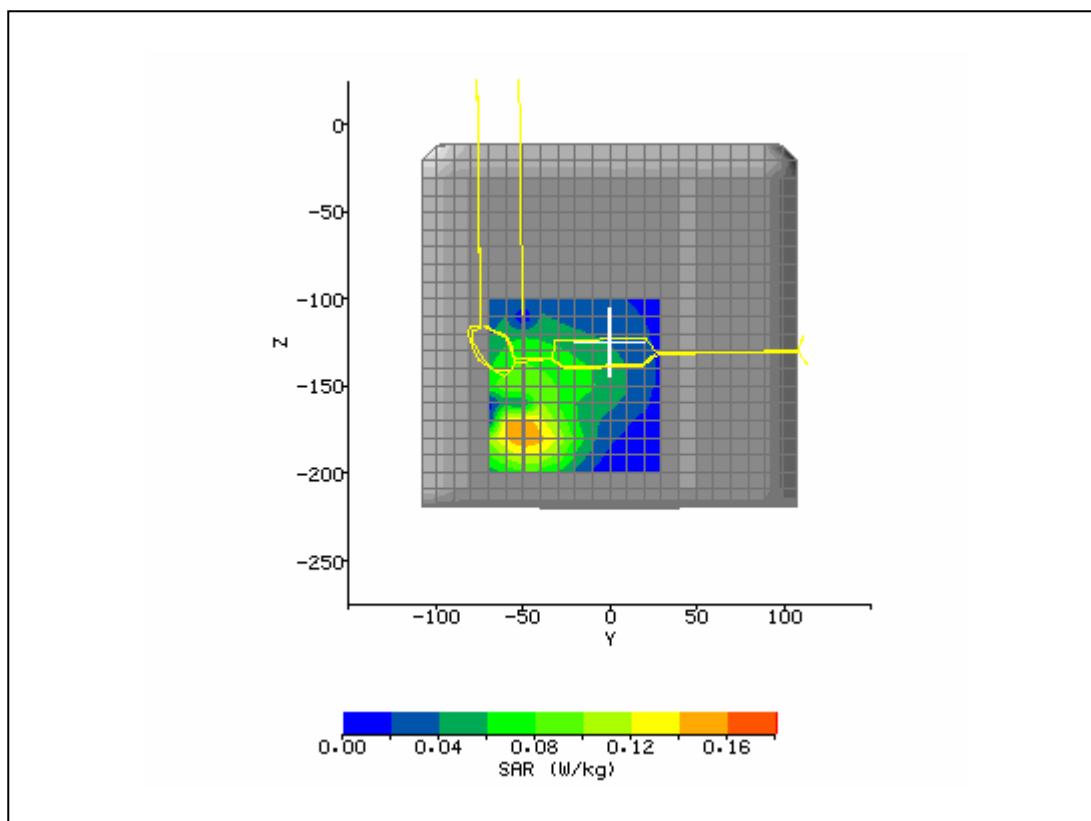


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	2/17/2005 4:51:00 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Xplore iX104	Relative Permittivity:	55.97
Relative Humidity:	50%	Conductivity:	0.981
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-50.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-177.00 mm
Antenna Configuration:	integral	Max E Field:	11.98 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.127 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.086 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.058 W/kg
Type of Modulation:		SAR End:	0.058 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	2/3/05
Input Power Level:	max	Extrapolation:	poly4

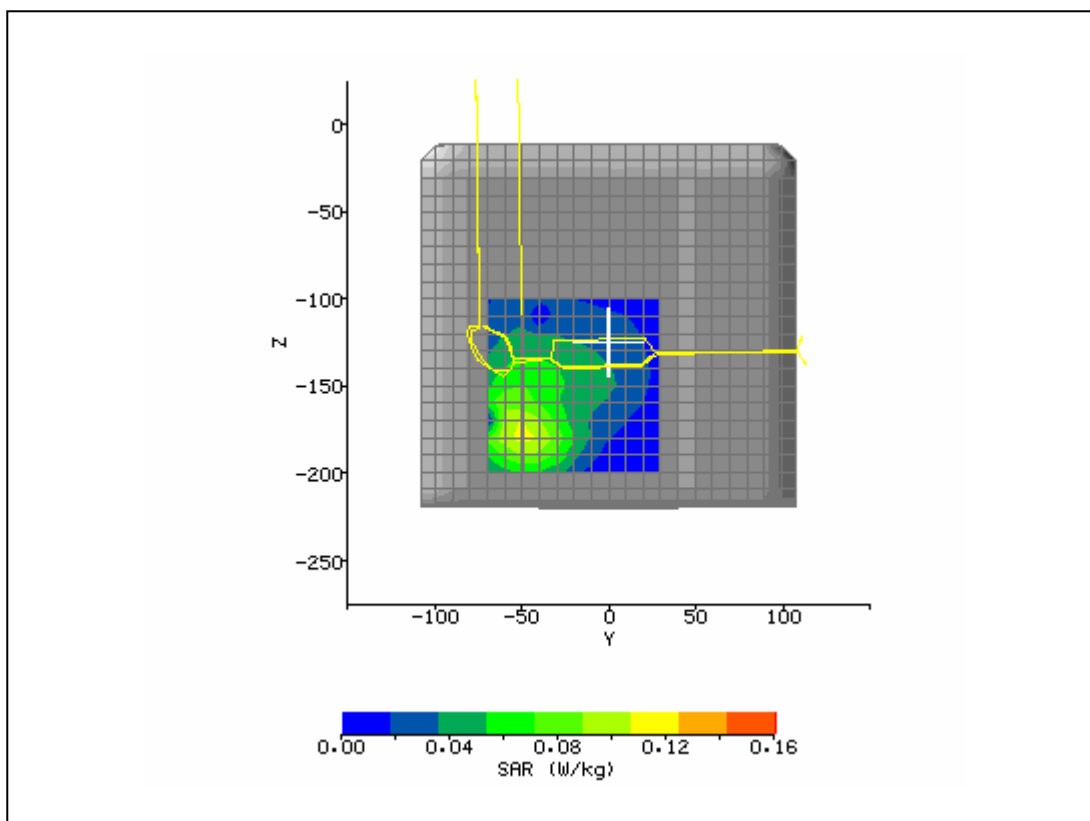


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	2/17/2005 5:52:27 PM	DUT Battery Model/No:	
Filename:	190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Xplore iX104	Relative Permittivity:	55.21
Relative Humidity:	50%	Conductivity:	0.991
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-36.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-175.00 mm
Antenna Configuration:	integral	Max E Field:	18.54 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.299 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.208 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.118 W/kg
Type of Modulation:		SAR End:	0.119 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	2/3/05
Input Power Level:	max	Extrapolation:	poly4

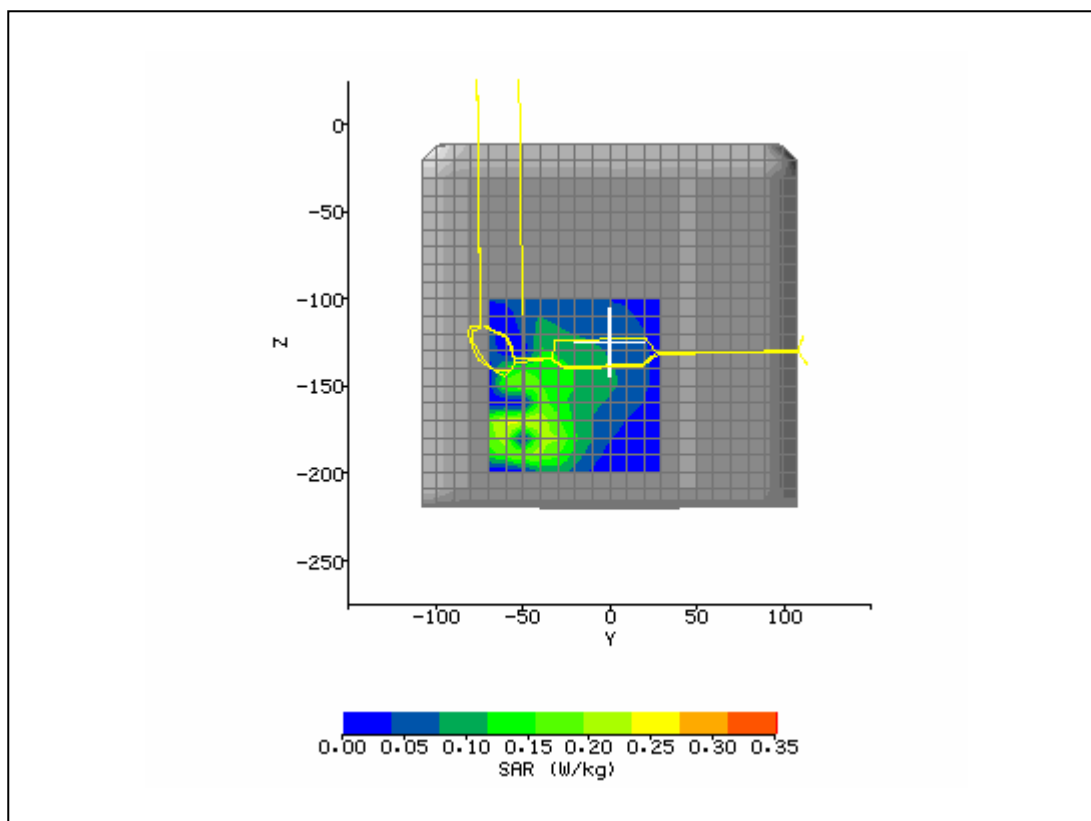

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	2/16/2005 1:19:14 PM	DUT Battery Model/No:	
Filename:	512_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Xplore iX104	Relative Permittivity:	53.12
Relative Humidity:	50%	Conductivity:	1.542
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-28.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-180.00 mm
Antenna Configuration:	integral	Max E Field:	12.57 V/m
Test Frequency:	1880MHz	SAR 1g:	0.212 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.130 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.066 W/kg
Type of Modulation:		SAR End:	0.066 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	2/3/05
Input Power Level:	max	Extrapolation:	poly4

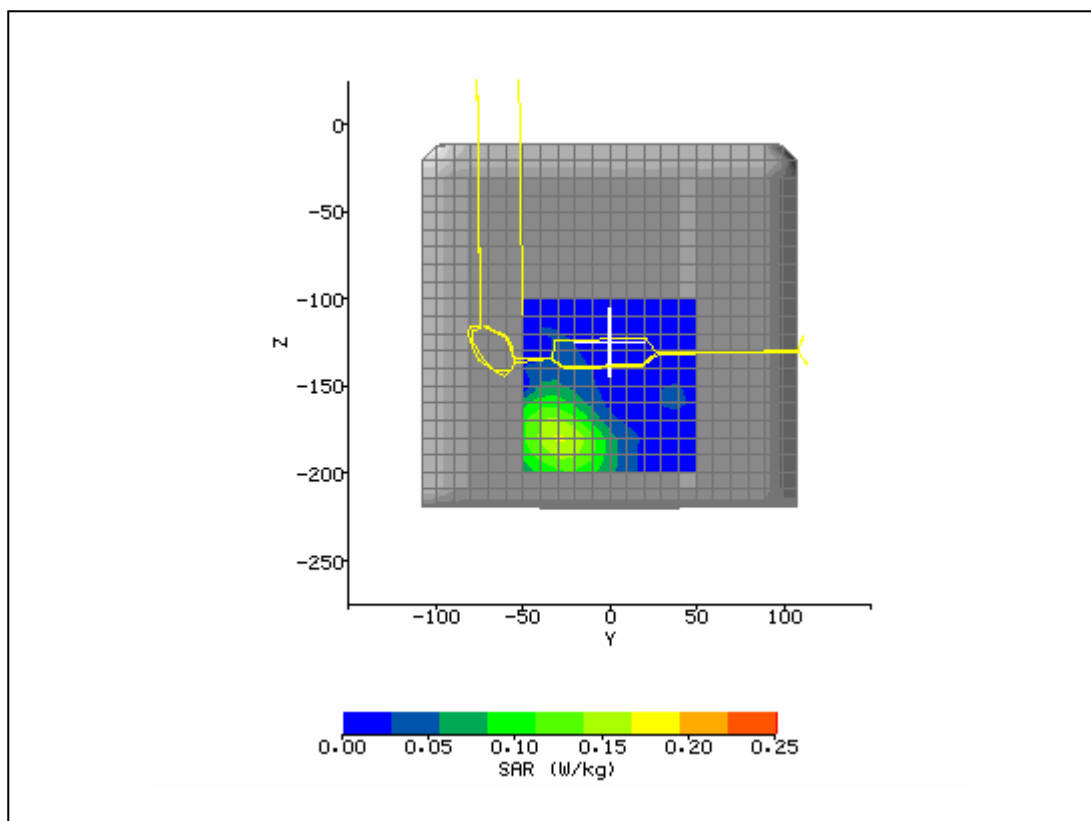

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	2/16/2005 12:33:47 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Xplore iX104	Relative Permittivity:	53.28
Relative Humidity:	50%	Conductivity:	1.525
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-29.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-179.00 mm
Antenna Configuration:	integral	Max E Field:	11.79 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.172 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.100 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.049 W/kg
Type of Modulation:		SAR End:	0.047 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.16 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	2/3/05
Input Power Level:	max	Extrapolation:	poly4

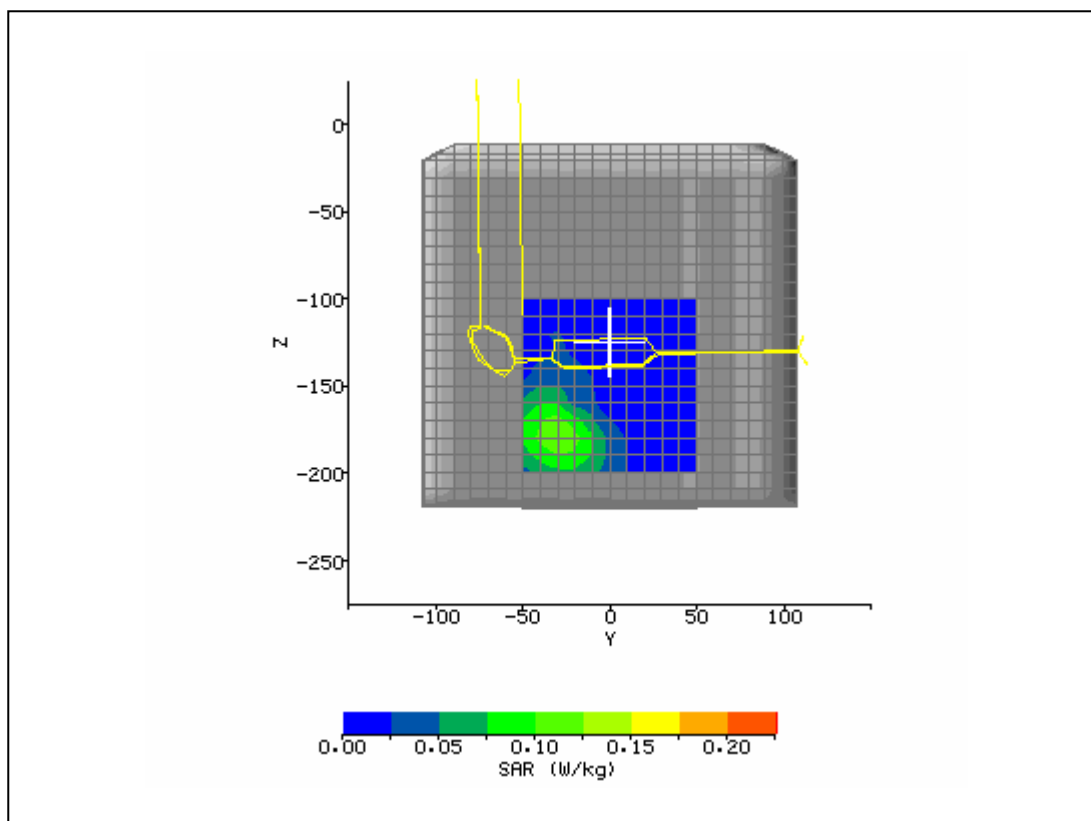

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	2/16/2005 1:49:28 PM	DUT Battery Model/No:	
Filename:	661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Xplore iX104	Relative Permittivity:	53.01
Relative Humidity:	50%	Conductivity:	1.555
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-28.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-181.00 mm
Antenna Configuration:	integral	Max E Field:	12.10 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.183 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.111 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.066 W/kg
Type of Modulation:		SAR End:	0.066 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	2/3/05
Input Power Level:	max	Extrapolation:	poly4

