

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT
OF**

CHIH-KAN Bluetooth Headset

MODEL No.: CKH-10101-01

BRAND NAME: CK

FCC ID: Q2LCKH10101

REPORT NO: 030027-RF-ID

ISSUE DATE: Mar. 25, 2003

Prepared for

**CHIH-KAN Technology Co., Ltd.
No. 24-1, Phi Shin Chou, Ming Ho Vil,
Shan Hsiang, Tainan Country, Taiwan, R.O.C.**

Prepared by

**C&C LABORATORY, CO., LTD.
#B1, 1st Fl., Universal Center,
No. 183, Sec. 1, Tatung Rd., Hsi Chih,
Taipei Hsien, Taiwan, R.O.C.**



TEL: (02)8642-2071~3

FAX: (02) 8642-2256

VERIFICATION OF COMPLIANCE

Applicant: CHIH-KAN Technology Co., Ltd.
No. 24-1, Phi Shin Chou, Ming Ho Vil,
Shan Hsiang, Tainan Country, Taiwan, R.O.C.

Equipment Under Test: CHIH-KAN Bluetooth Headset

BRAND NAME: CK

MODEL No.: CKH-10101-01

Model Difference: N/A

Serial Number: N/A

File Number: 030027-RF-ID

Date of test: Feb 26 ~ Mar 25, 2003

We hereby certify that:

The above equipment was tested by C&C Laboratory Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (1992) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.

The test results of this report relate only to the tested sample identified in this report.

Approved By



Vincent Su / RF Dept. Vice Manager
C&C Laboratory Co., Ltd

Table of Contents

1. GENERAL INFORMATION	5
1.1 Product Description	5
1.2 Related Submittal(s) / Grant (s)	5
1.3 Test Methodology	5
1.4 Test Facility	5
1.5 Special Accessories	5
1.6 Equipment Modifications	5
2. SYSTEM TEST CONFIGURATION	6
2.1 EUT Configuration	6
2.2 EUT Exercise	6
2.3 Test Procedure	6
2.4 Configuration of Tested System	7
3. SUMMARY OF TEST RESULTS	8
4. DESCRIPTION OF TEST MODES	9
5. CONDUCTED EMISSION TEST	10
5.1 Standard Applicable	10
5.2 EUT Setup	10
5.3 Measurement Procedure	10
5.4 Measurement Equipment Used:	11
5.5 Measurement Result	11
6. PEAK OUTPUT POWER MEASUREMENT	12
6.1 Standard Applicable	12
6.2 Measurement Procedure	12
6.3 Measurement Result	12
6.4 Measurement Equipment Used:	12
7. 20dB BAND WIDTH	15
7.1 Standard Applicable	15
7.2 Measurement Procedure	15
7.3 Measurement Result	15
7.4 Measurement Equipment Used:	15
8. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT	18
8.1 Standard Applicable	18
8.2 Measurement Procedure	18
8.3 Measurement Result	18
8.4 Measurement Equipment Used:	18

9. SPURIOUS RADIATED EMISSION TEST	20
9.1 Standard Applicable	20
9.2 EUT Setup	20
9.3 Measurement Procedure	20
9.4 Test SET-UP (Block Diagram of Configuration)	21
9.5 Measurement Equipment Used:	22
9.6 Field Strength Calculation	22
9.7 Measurement Result	22
10. FREQUENCY SEPARATION	37
10.1 Standard Applicable	37
10.2 9.2 Measurement Procedure	37
10.3 Measurement Result	37
10.4 Measurement Equipment Used:	37
11. NUMBER OF HOPPING FREQUENCY	39
11.1 Standard Applicable	39
11.2 Measurement Procedure	39
11.3 Measurement Result	39
11.4 Measurement Equipment Used:	39
12. TIME OF OCCUPANCY (DWELL TIME)	41
12.1 Standard Applicable	41
12.2 Measurement Procedure	41
12.3 Measurement Result	41
12.4 Measurement Equipment Used:	41
13. Peak Power Spectral Density	44
13.1 Standard Applicable	44
13.2 Measurement Procedure	44
13.3 Measurement Result	44
13.4 Measurement Equipment Used:	44
14. ANTENNA REQUIREMENT	47
14.1 Standard Applicable	47
14.2 Antenna Connected Construction	47
15. RF EXPOSURE	48
15.1 Standard Applicable	48

1. GENERAL INFORMATION

1.1 Product Description

The CHIH-KAN Technology Co., Ltd. Model: CKH-10101-01 (referred to as the EUT in this report) is a Bluetooth Headset

The EUT is compliance with Bluetooth Standard.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2402 – 2480MHz 79 channels
- B). Rated output power: 4 dBm
- C). Modulation type: Frequency Hopping Sequence Spread Spectrum (FHSS)
- D). Antenna Designation: Metal Antenna, –1dBi, Non-User Replaceable (Fixed)
- E). Power Supply: Battery 1.5Vdc 100mA

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: Q2LCKH10101 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under a Doc procedure.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (1992). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of C&C Laboratory, Co., Ltd. No. 81-1, 210 Lane, Pa-de 2nd Road, Lu-Chu Hsiang, Taoyuan, Taiwan, R.O.C.. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 1992 and CISPR 22/EN 55022 requirements.

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions


The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-1992. Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** using **CISPR Quasi-Peak and Average detector mode**.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-1992.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

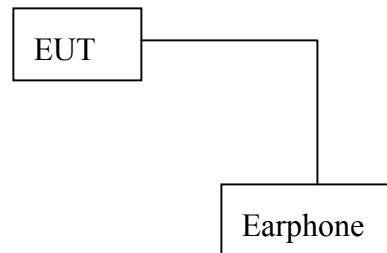

Note:

- (1) Unless otherwise marked as ※ in 『Remark』 column, Neutron consigns the support equipment to the tested system.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	Conducted Emission	Compliant
§15.247(b)	Peak Output Power	Compliant
§15.247(a)(1)(ii)	20dB Bandwidth	Compliant
§15.247(c)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.209(a) (f)	Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(ii)	Number of hopping frequency	Compliant
§15.247(a)(1)(ii)	Time of Occupancy	Compliant
§15.247	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant
§1.1310	RF Exposure	Compliant

4. DESCRIPTION OF TEST MODES

The EUT (Bluetooth Earphone) has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz) 、 mid (2441MHz) and high (2480MHz) with 741k highest data rate are chosen for full testing.

The Radiated Spurious Emission was measured as EUT (CHIH-KAN Bluetooth Headset) stand-up position (Y mode) and lie down position (Y,Z mode) three modes the worst case X mode is reported .

5. CONDUCTED EMISSION TEST

5.1 Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

5.2 EUT Setup

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-1992.
2. The EUT was plug-in the host PC via USB port. The host PC system was placed on the center of the back edge on the test table. The peripherals like modem, monitor printer, K/B, and mouse were placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The keyboard was placed directly in the front of the monitor, flushed with the front tabletop. The mouse was placed next to the Keyboard, flushed with the back of keyboard.
4. The spacing between the peripherals was 10 centimeters.
5. External I/O cables were draped along the edge of the test table and bundle when necessary.
6. The host PC system was connected with 110Vac/60Hz power source.

5.3 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.4 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESHS30	828144/003	08/08/2002	08/07/2003
LISN	R&S	ESH2-Z5	843285/010	12/16/2002	12/15/2003
LISN	EMCO	3825/2	9003-1628	07/26/2002	07/25/2003
Spectrum Analyzer	ADVANTEST	R3261A	91720031	N/A	N/A
2X2 WIRE ISN	R&S	ENY22	100020	06/20/2002	06/19/2003
FOUR WIRE ISN	R&S	ENY41	100006	06/20/2002	06/19/2003

5.5 Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

6. PEAK OUTPUT POWER MEASUREMENT

6.1 Standard Applicable

According to §15.247(b)(2), for direct sequence systems, the maximum peak output power of the intentional radiator shall not exceed 1 Watt.

6.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz)
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.


6.3 Measurement Result

CH	Frequency (MHz)	Reading Power	Cable Loss	Output Power dBm	Output Power W	Limit (W)
LOW	2402.00	3.88	0.60	4.48	0.00281	1
MID	2441.00	2.68	0.60	3.28	0.00213	1
HIGH	2480.00	2.36	0.60	2.96	0.00198	1

6.4 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Power Meter	HP	436A	2709A29027	03/16/2003	03/15/2004
Power Sensor	HP	8481A	2702A61366	03/16/2003	03/15/2004
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/23/2002	07/22/2003
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A	N/A

Peak Power Output Data Plot (CH Low)

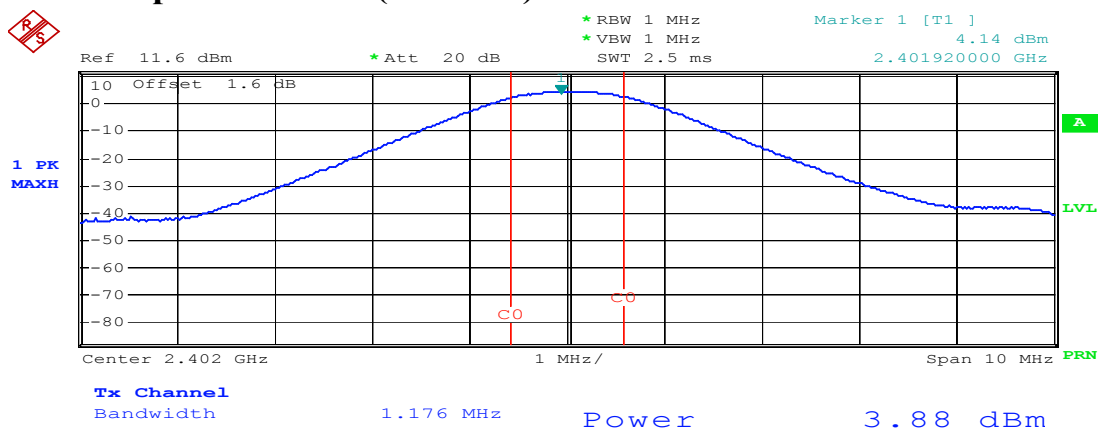


Date: 17.MAR.2003 10:32:17

Peak Power Output Data Plot (CH Mid)

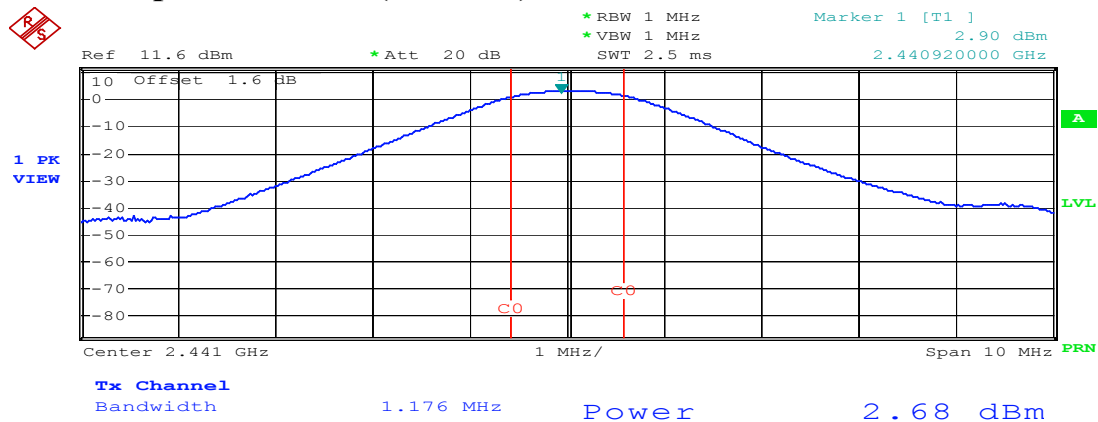

Date: 17.MAR.2003 10:35:38

Peak Power Output Data Plot (CH High)

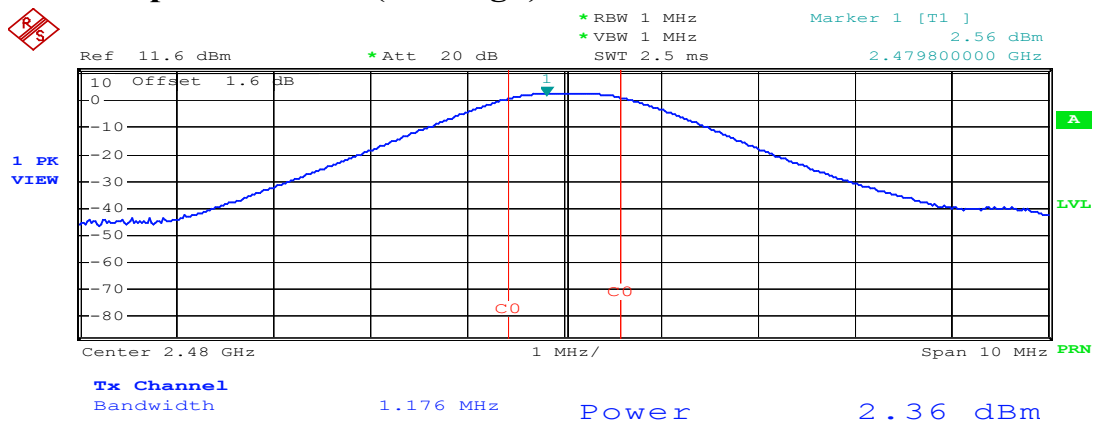

Date: 17.MAR.2003 10:37:40

7. 20dB BAND WIDTH

7.1 Standard Applicable

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz and 5725MHz – 5850MHz bands. The Maximum 20dB bandwidth of the hopping channel is 1MHz.

7.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), Span= 2MHz, Sweep=auto
4. Mark the peak frequency and –20dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured were complete.


7.3 Measurement Result

CH	Bandwidth (MHz)	Bandwidth Limit (MHz)	Result
Lower	0.868	1	PASS
Mid	0.864	1	PASS
Higher	0.864	1	PASS

7.4 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/23/2002	07/22/2003
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A	N/A

20dB Band Width Test Data CH-Low

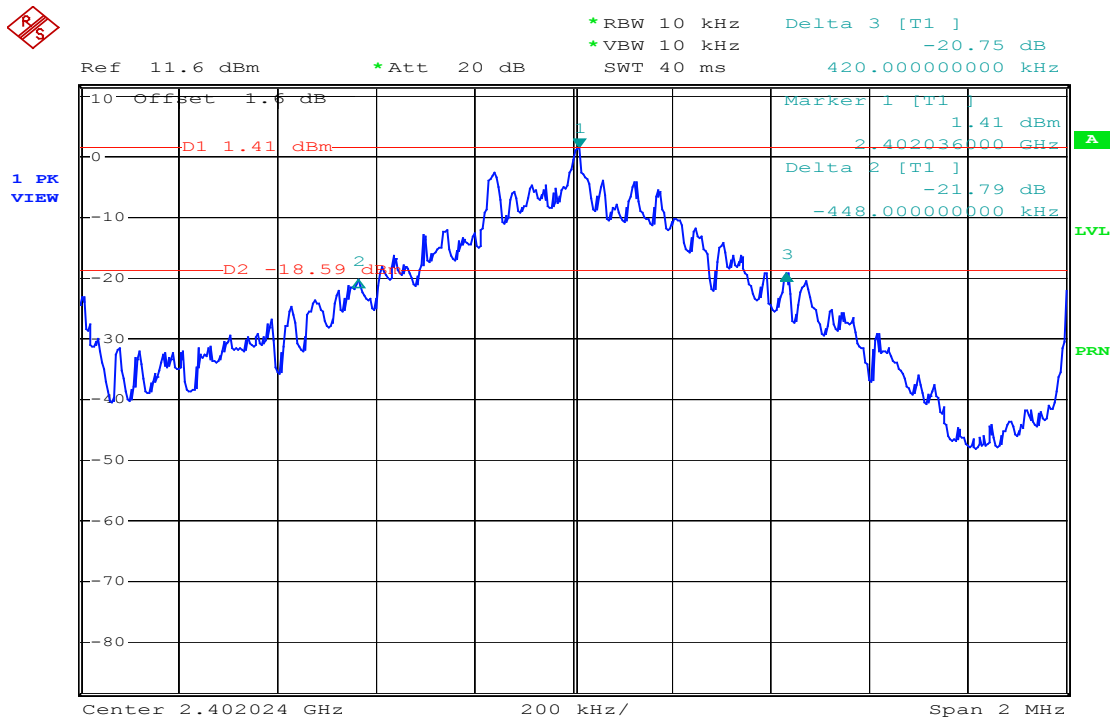


Date: 18.MAR.2003 11:05:33

20dB Band Width Test Data CH-Mid

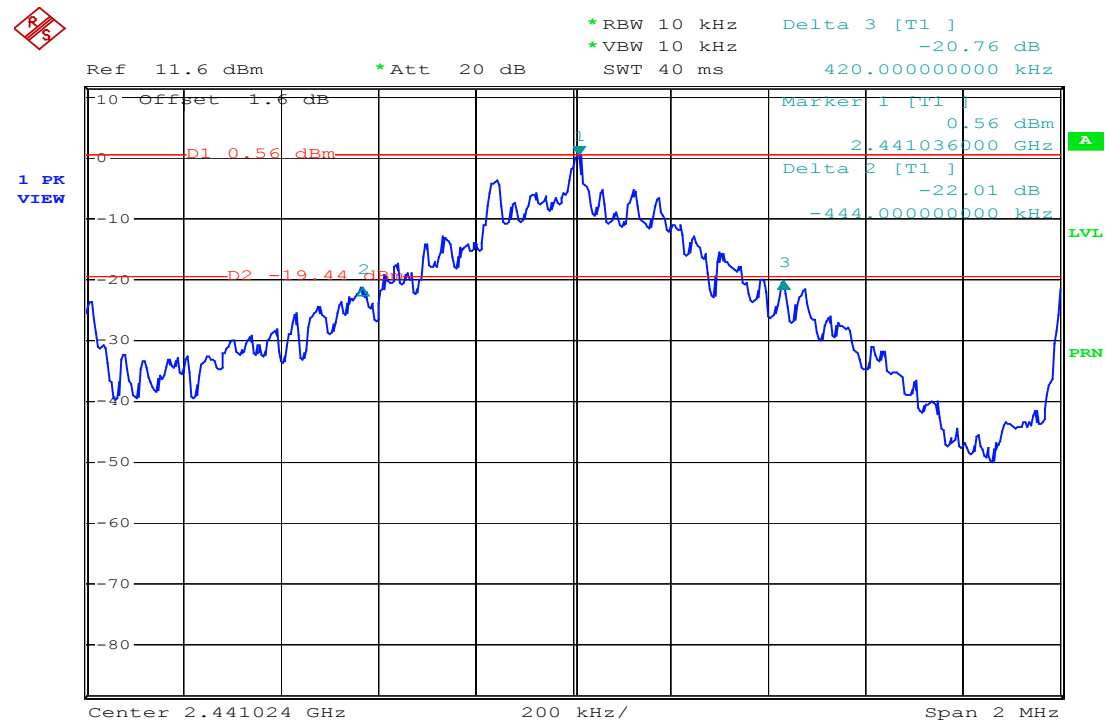

Date: 18.MAR.2003 11:03:13

20dB Band Width Test Data CH-High

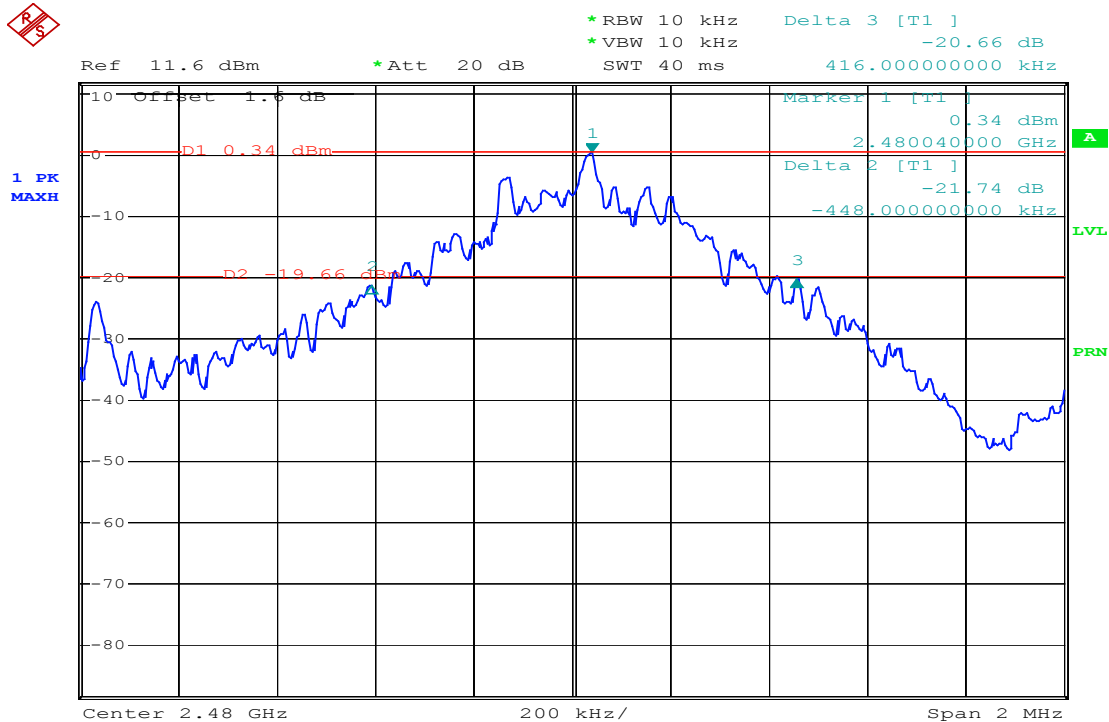

Date: 18.MAR.2003 10:58:29

8. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=30MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.488GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.


8.3 Measurement Result

Refer to attach spectrum analyzer data chart.

8.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/23/2002	07/22/2003
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A	N/A

Band Edges Test Data CH-Low

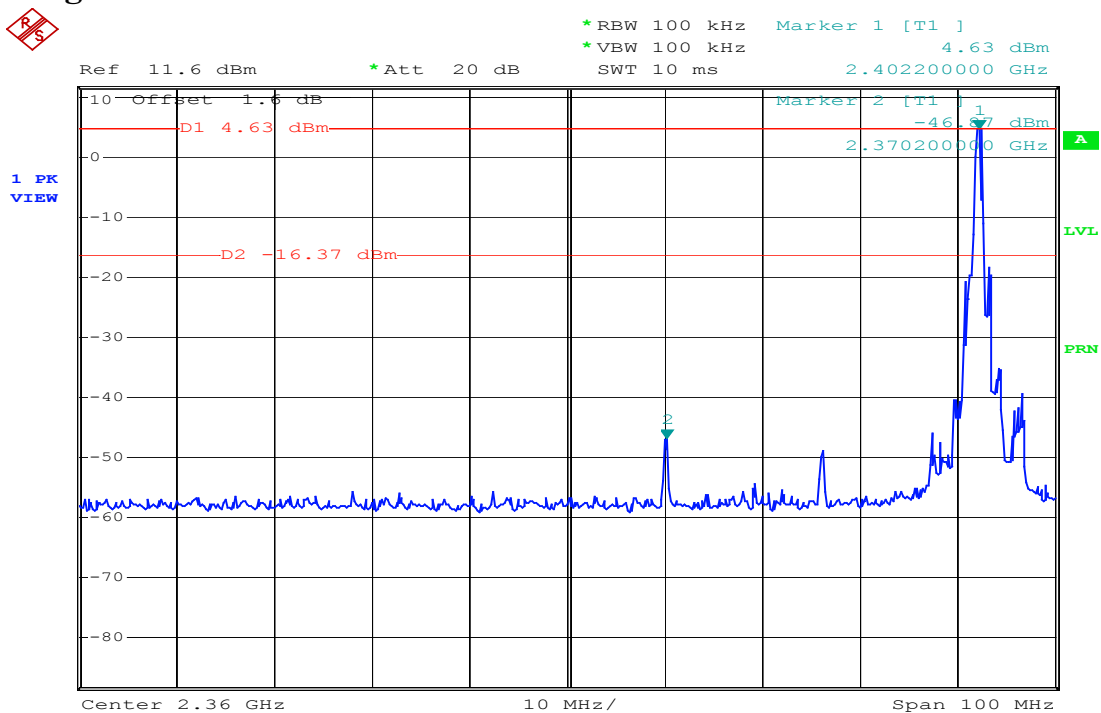

Date: 17.MAR.2003 10:46:38

Band Edges Test Data CH-Low



Date: 18.MAR.2003 10:50:08

9. SPURIOUS RADIATED EMISSION TEST

9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2 EUT Setup


1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4-1992.
2. The EUT was put in the front of the test table. The host PC system was placed on the center of the back edge on the test table. The peripherals like modem, monitor printer, K/B, and mouse were placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The keyboard was placed directly in the front of the monitor, flushed with the front tabletop. The mouse was placed next to the Keyboard, flushed with the back of keyboard.
4. The spacing between the peripherals was 10 centimeters.
5. External I/O cables were draped along the edge of the test table and bundle when necessary.
6. The host PC system was connected with 110Vac/60Hz power source.

9.3 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until all frequency measured were complete.

9.4 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

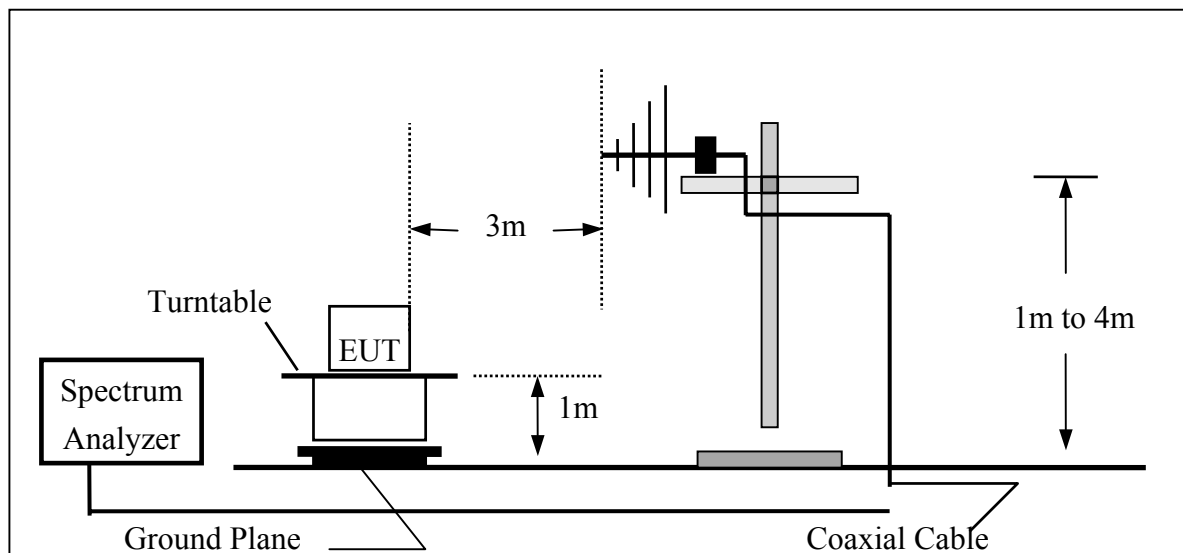

(B) Radiated Emission Test Set-Up Frequency Over 1 GHz

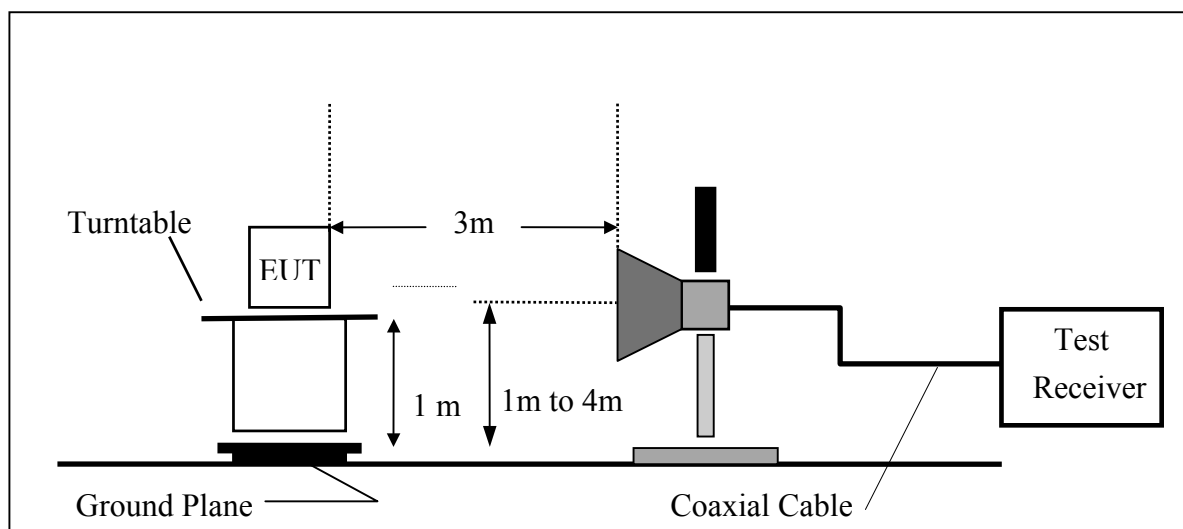

9.5 Measurement Equipment Used:

Open Area Test Site # 3					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	ADVANTEST	R3261A	N/A	03/19/2003	03/18/2004
EMI Test Receiver	R&S	ESVS20	838804/004	01/05/2003	01/04/2004
Pre-Amplifier	HP	8447D	2944A09173	03/04/2003	03/03/2004
Bilog Antenna	SCHWAZBECK	VULB9163	145	07/06/2002	07/05/2003
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R	N.C.R
Site NSA	C&C	N/A	N/A	09/07/2002	09/06/2003
Horn antenna	Schwarzbeck	BBHA 9120	D210	2/24/2003	2/23/2004
Loop Antenna	EMCO	6502	2356	7/11/2002	7/10/2003
Pre-Amplifier	HP	8449B	3008B00965	10/01/2002	10/02/2003

9.6 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.7 Measurement Result


Refer to attach tabular data sheets.

NOTE:

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 100kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.

Conducted Spurious Emission Measurement Result


Ch Low

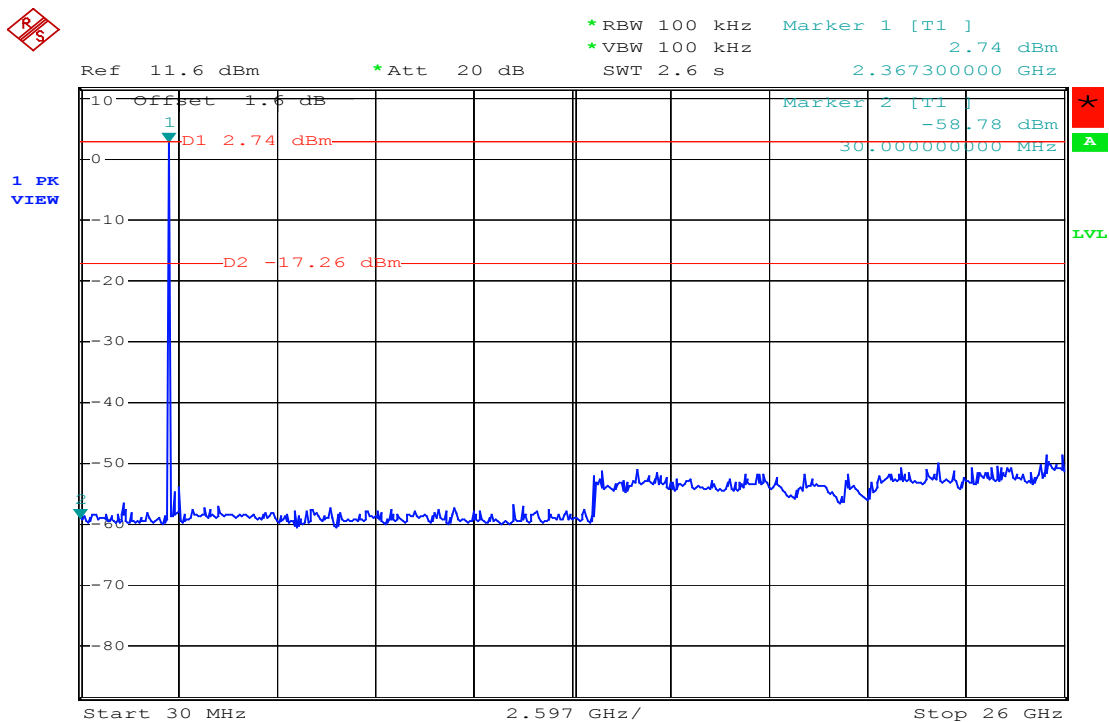

Date: 17.MAR.2003 11:04:01

Conducted Spurious Emission Measurement Result


Ch Mid

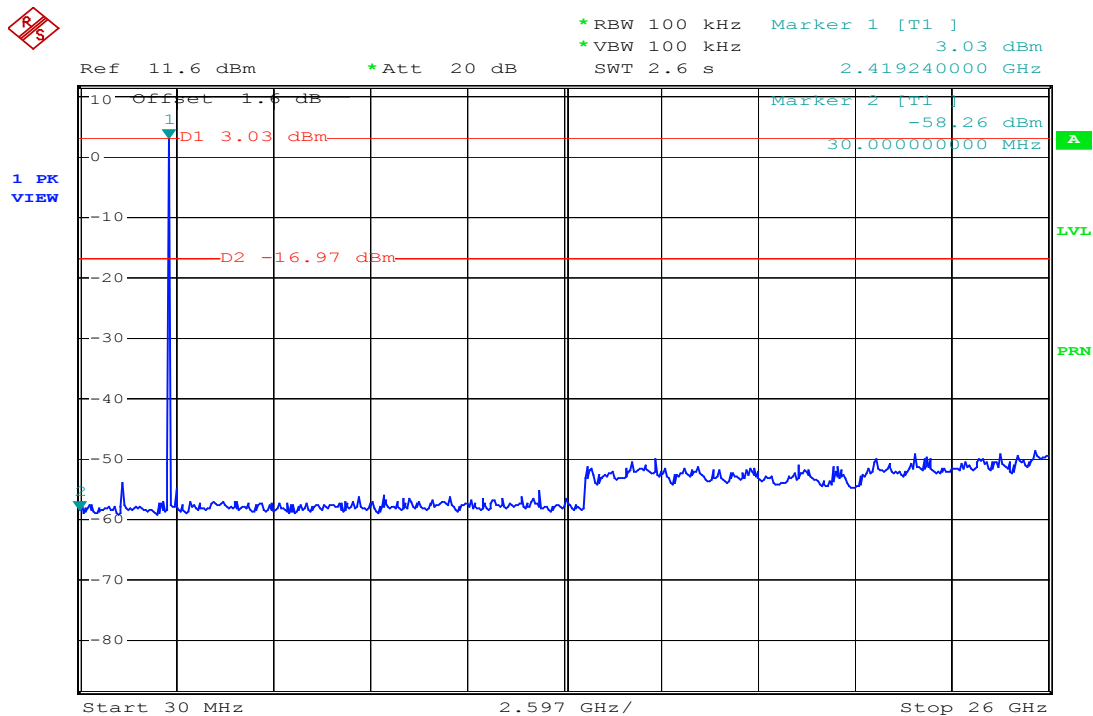

Date: 17.MAR.2003 10:54:38

Conducted Spurious Emission Measurement Result

Ch High

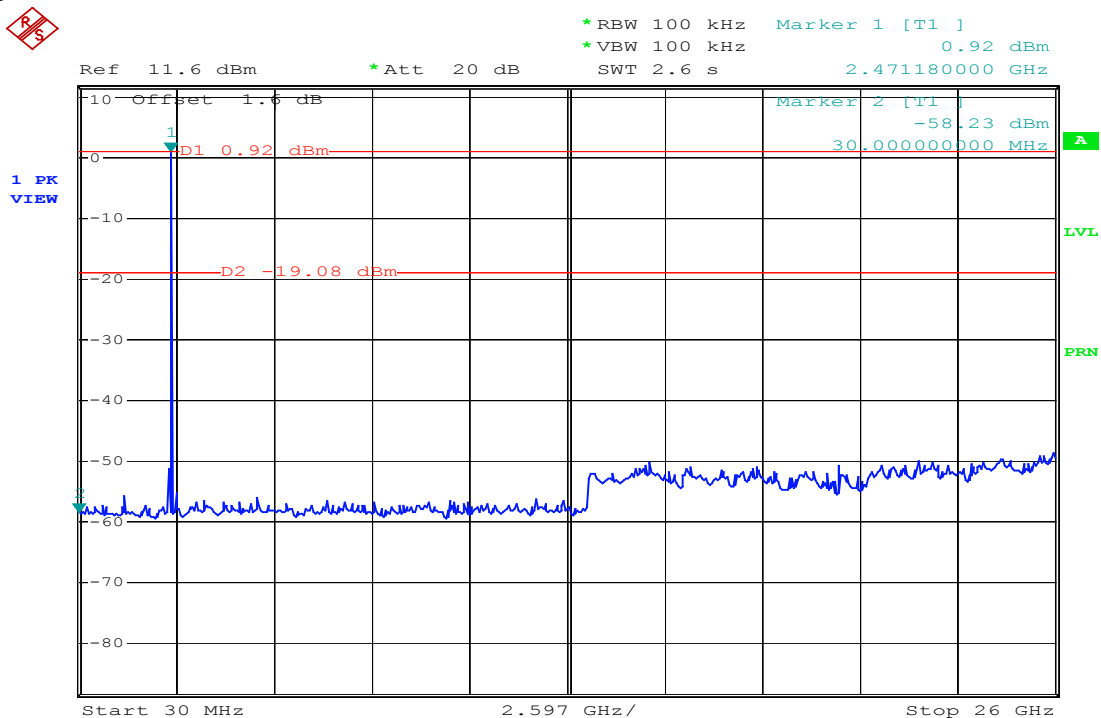

Date: 17.MAR.2003 11:00:09

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode :TX CH Low
 Fundamental Frequency :2402MHz
 Temperature :20 °C
 Humidity :65 %

Test Date : Mar 24, 2003
 Test By : Rico
 Pol :Ver./Hor

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
158.25	V	Peak	56.84	-17.23	39.61	43.50	-3.89
264.45	V	Peak	50.84	-13.27	37.57	46.00	-8.43
332.67	V	Peak	46.17	-11.77	34.40	46.00	-11.60
498.33	V	Peak	50.50	-8.21	42.29	46.00	-3.71
199.20	H	Peak	54.67	-15.59	39.08	43.50	-4.42
299.80	H	Peak	53.00	-14.79	38.21	46.00	-7.79
332.67	H	Peak	47.00	-11.77	35.23	46.00	-10.77
496.00	H	Peak	50.67	-8.25	42.42	46.00	-3.58

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode :TX CH Mid
 Fundamental Frequency :2441MHz
 Temperature :20 °C
 Humidity :65 %

Test Date :Mar 24, 2003
 Test By :Rico
 Pol :Ver./Hor

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
111.90	V	Peak	55.17	-17.90	37.27	43.50	-6.23
264.45	V	Peak	50.67	-13.27	37.40	46.00	-8.60
332.67	V	Peak	44.17	-11.77	32.40	46.00	-13.60
496.00	V	Peak	50.50	-8.25	42.25	46.00	-3.75
197.40	H	Peak	55.34	-15.65	39.69	43.50	-3.81
265.80	H	Peak	52.00	-13.27	38.73	46.00	-7.27
330.33	H	Peak	47.00	-11.89	35.11	46.00	-10.89
498.33	H	Peak	50.17	-8.21	41.96	46.00	-4.04

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode :TX CH High
 Fundamental Frequency :2480MHz
 Temperature :20 °C
 Humidity :65 %

Test Date :Mar 24, 2003
 Test By :Rico
 Pol :Ver./Hor

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
111.90	V	Peak	55.17	-17.90	37.27	43.50	-6.23
264.45	V	Peak	50.67	-13.27	37.40	46.00	-8.60
332.67	V	Peak	44.17	-11.77	32.40	46.00	-13.60
496.00	V	Peak	50.50	-8.25	42.25	46.00	-3.75
197.40	H	Peak	55.34	-15.65	39.69	43.50	-3.81
265.80	H	Peak	52.00	-13.27	38.73	46.00	-7.27
330.33	H	Peak	47.00	-11.89	35.11	46.00	-10.89
498.33	H	Peak	50.17	-8.21	41.96	46.00	-4.04

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	:Link	Test Date	:Mar 24, 2003
Temperature	:20 °C	Test By	:Rico
Humidity	:65 %	Pol	:Ver./Hor

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
150.96	V	Peak	4.51	11.15	15.66	43.50	-27.84
155.28	V	Peak	4.48	11.26	15.74	43.50	-27.76
224.40	V	Peak	6.16	15.31	21.47	46.00	-24.53
224.40	H	Peak	7.17	15.31	22.48	46.00	-23.52
240.60	H	Peak	4.06	15.94	20.00	46.00	-26.00
256.26	H	Peak	5.51	16.16	21.67	46.00	-24.33

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode :TX CH Low
 Fundamental Frequency :2402MHz
 Temperature :20 °C
 Humidity :65%

Test Date :Mar 24, 2003
 Test By :Rico
 Pol :Ver

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)	
1196.67	58.34		-10.65	47.69		74.00	54.00	-6.31
1456.67	53.67		-9.66	44.01		74.00	54.00	-9.99
1593.33	52.67		-8.98	43.69		74.00	54.00	-10.31
1993.33	50.67		-8.01	42.66		74.00	54.00	-11.34
2123.30	50.34		-7.48	42.86		74.00	54.00	-11.14
4805.34	51.50		-0.16	51.34		74.00	54.00	-2.66
7208.01	----		----	----		----	----	----
9610.68	----		----	----		----	----	----
12013.35	----		----	----		----	----	----
14416.02	----		----	----		----	----	----
16818.69	----		----	----		----	----	----
19221.36	----		----	----		----	----	----
21624.03	----		----	----		----	----	----
24026.70	----		----	----		----	----	----

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode :TX CH Low
 Fundamental Frequency :2402MHz
 Temperature :20 °C
 Humidity :65%

Test Date :Mar 24, 2003
 Test By :Rico
 Pol :Hor

Freq. (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CL CF(dB)	Actual FS Peak (dBuV/m)	Actual FS AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
1200.0	55.67	----	-10.63	45.04	----	74.00	54.00	-8.96
1463.3	53.50	----	-9.62	43.88	----	74.00	54.00	-10.12
1593.3	49.84	----	-8.98	40.86	----	74.00	54.00	-13.14
4804.0	----							
7206.0	----							
9608.0	----							
12010.0	----							
14412.0	----							
16814.0	----							
19216.0	----							
21618.0	----							
24020.0	----							

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode :TX CH Mid
 Fundamental Frequency :2441MHz
 Temperature :20 °C
 Humidity :65%

Test Date :Mar 24, 2003
 Test By :Rico
 Pol :Ver.

Freq. (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CL CF(dB)	Actual FS Peak (dBuV/m)	Actual FS AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
1220.0	59.67	----	-10.57	49.10	----	74.00	54.00	-4.90
1990.0	49.34	----	-8.02	41.32	----	74.00	54.00	-12.68
2123.3	50.17	----	-7.48	42.69	----	74.00	54.00	-11.31
4883.3	50.00	----	-0.10	49.90	----	74.00	54.00	-4.10
7325.0	----	----	----	----	----	----	----	----
9766.7	----	----	----	----	----	----	----	----
12208.4	----	----	----	----	----	----	----	----
14650.0	----	----	----	----	----	----	----	----
17091.7	----	----	----	----	----	----	----	----
19533.4	----	----	----	----	----	----	----	----
21975.0	----	----	----	----	----	----	----	----
24416.7	----	----	----	----	----	----	----	----

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode :TX CH Mid
 Fundamental Frequency :2441MHz
 Temperature :20 °C
 Humidity :65%

Test Date :Mar 24, 2003
 Test By :Rico
 Pol :Hor

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)	
1220.0	55.84	----	-10.65	45.19	----	74.00	54.00	-8.81
1460.0	52.17	----	-9.64	42.53	----	74.00	54.00	-11.47
2393.3	49.50	----	-6.38	43.12	----	74.00	54.00	-10.88
4882.0	----	----	----	----	----	----	----	----
7323.0	----	----	----	----	----	----	----	----
9764.0	----	----	----	----	----	----	----	----
12205.0	----	----	----	----	----	----	----	----
14646.0	----	----	----	----	----	----	----	----
17087.0	----	----	----	----	----	----	----	----
19528.0	----	----	----	----	----	----	----	----
21969.0	----	----	----	----	----	----	----	----
24410.0	----	----	----	----	----	----	----	----

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode :TX CH High
 Fundamental Frequency :2480MHz
 Temperature :20 °C
 Humidity :65%

Test Date :Mar 24, 2003
 Test By :Rico
 Pol :Ver

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)	
1220.0	55.67	----	-10.65	45.02	----	74.00	54.00	-8.98
1593.3	51.17	----	-8.98	42.19	----	74.00	54.00	-11.81
1993.3	50.34	----	-8.01	42.33	----	74.00	54.00	-11.67
2120.0	50.00	----	-7.49	42.51	----	74.00	54.00	-11.49
4960.0	----	----	----	----	----	----	----	----
7440.0	----	----	----	----	----	----	----	----
9920.0	----	----	----	----	----	----	----	----
12400.0	----	----	----	----	----	----	----	----
14880.0	----	----	----	----	----	----	----	----
17360.0	----	----	----	----	----	----	----	----
19840.0	----	----	----	----	----	----	----	----
22320.0	----	----	----	----	----	----	----	----
24800.0	----	----	----	----	----	----	----	----

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode :TX CH High
 Fundamental Frequency :2480MHz
 Temperature :30 °C
 Humidity :55%

Test Date :Mar 24, 2003
 Test By :Rico
 Pol :Hor

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)	
1240.0	55.34	----	-10.65	44.69	----	74.00	54.00	-9.31
1463.3	52.17	----	-9.62	42.55	----	74.00	54.00	-11.45
1593.3	50.00	----	-8.98	41.02	----	74.00	54.00	-12.98
4960.0	45.50	----	0.18	45.68	----	74.00	54.00	-8.32
7440.0	----	----	----	----	----	----	----	----
9920.0	----	----	----	----	----	----	----	----
12400.0	----	----	----	----	----	----	----	----
14880.0	----	----	----	----	----	----	----	----
17360.0	----	----	----	----	----	----	----	----
19840.0	----	----	----	----	----	----	----	----
22320.0	----	----	----	----	----	----	----	----
24800.0	----	----	----	----	----	----	----	----

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	:LINK	Test Date	:Mar 24, 2003
Temperature	:20 °C	Test By	:Rico
Humidity	:65%	Pol	:Ver

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)	
1064.0	40.60	----	-9.98	30.62	----	74.00	54.00	-23.38
1196.0	46.18	----	-9.04	37.14	----	74.00	54.00	-16.86
1460.0	44.66	----	-7.86	36.80	----	74.00	54.00	-17.20
4932.0	----	----	----	----	----	----	----	----
7398.0	----	----	----	----	----	----	----	----
9864.0	----	----	----	----	----	----	----	----
12330.0	----	----	----	----	----	----	----	----
14796.0	----	----	----	----	----	----	----	----
17262.0	----	----	----	----	----	----	----	----
19728.0	----	----	----	----	----	----	----	----
22194.0	----	----	----	----	----	----	----	----
24660.0	----	----	----	----	----	----	----	----

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	:LINK	Test Date	:Mar 24, 2003
Temperature	:20 °C	Test By	:Rico
Humidity	:65%	Pol	:Ver

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)	
1196.0	39.70	----	-9.04	30.66	----	74.00	54.00	-23.34
4932.0	----		----	----		----	----	----
7398.0	----		----	----		----	----	----
9864.0	----		----	----		----	----	----
12330.0	----		----	----		----	----	----
14796.0	----		----	----		----	----	----
17262.0	----		----	----		----	----	----
19728.0	----		----	----		----	----	----
22194.0	----		----	----		----	----	----
24660.0	----		----	----		----	----	----

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.

10. FREQUENCY SEPARATION

10.1 Standard Applicable

According to §15.247(a), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 20dB bandwidth of the hopping channel, whichever is greater.

10.2 9.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel .
4. Set the spectrum analyzer as RBW,VBW=3KHz, Adjust Span to 3.0 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.


10.3 Measurement Result

Channel separation	Limit	Result
MHz	kHz	
1.002	≥ 25	PASS

10.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/23/2002	07/22/2003
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A	N/A

Frequency Separation Test Data

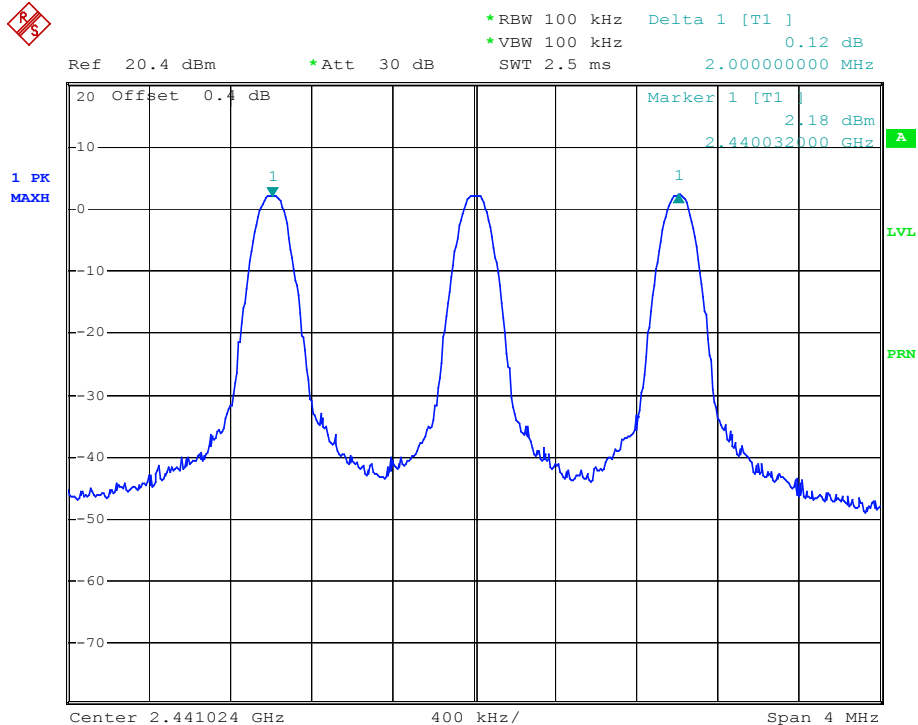

Date: 18.MAR.2003 07:45:43

11. NUMBER OF HOPPING FREQUENCY

11.1 Standard Applicable

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz and 5725MHz – 5850MHz bands shall use at least 75 hopping frequencies.

11.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW,VBW=100KHz,
5. Max hold, view and count how many channel in the band.

11.3 Measurement Result


Total no of hopping channel	Limit (CH)	Measurement result (CH)	Result
	75	79	PASS

11.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/23/2002	07/22/2003
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A	N/A


Channel Number

2.400GHz – 2.441GHz

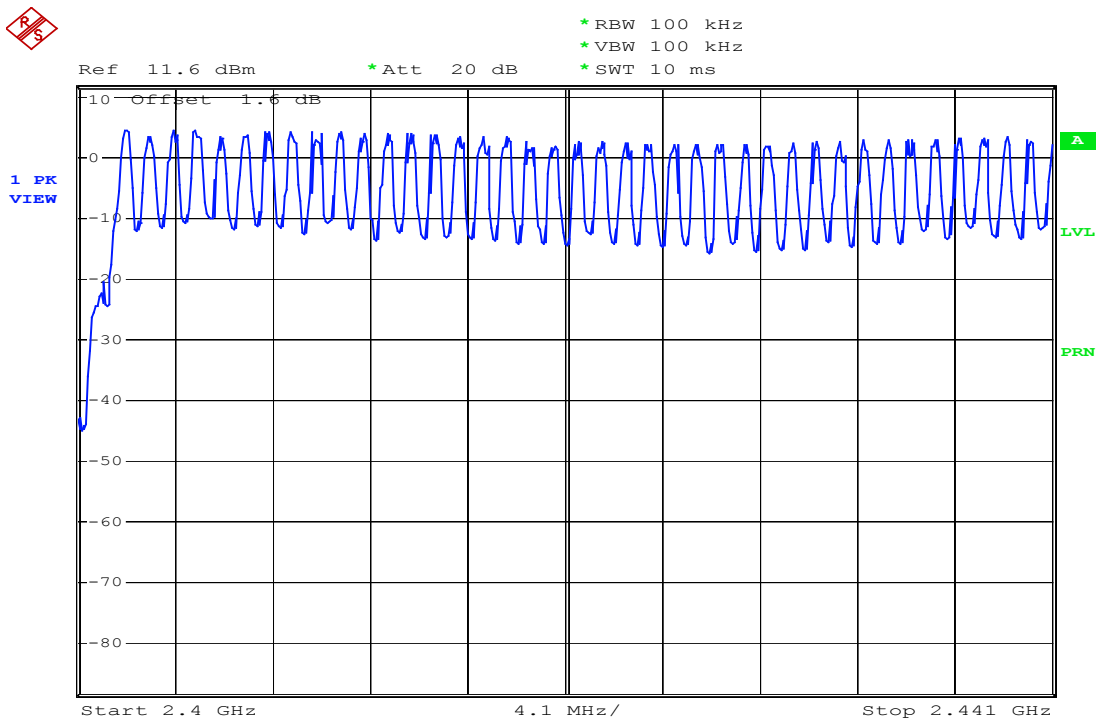

Date: 17.MAR.2003 12:02:35

2.441 GHz – 2.4835GHz

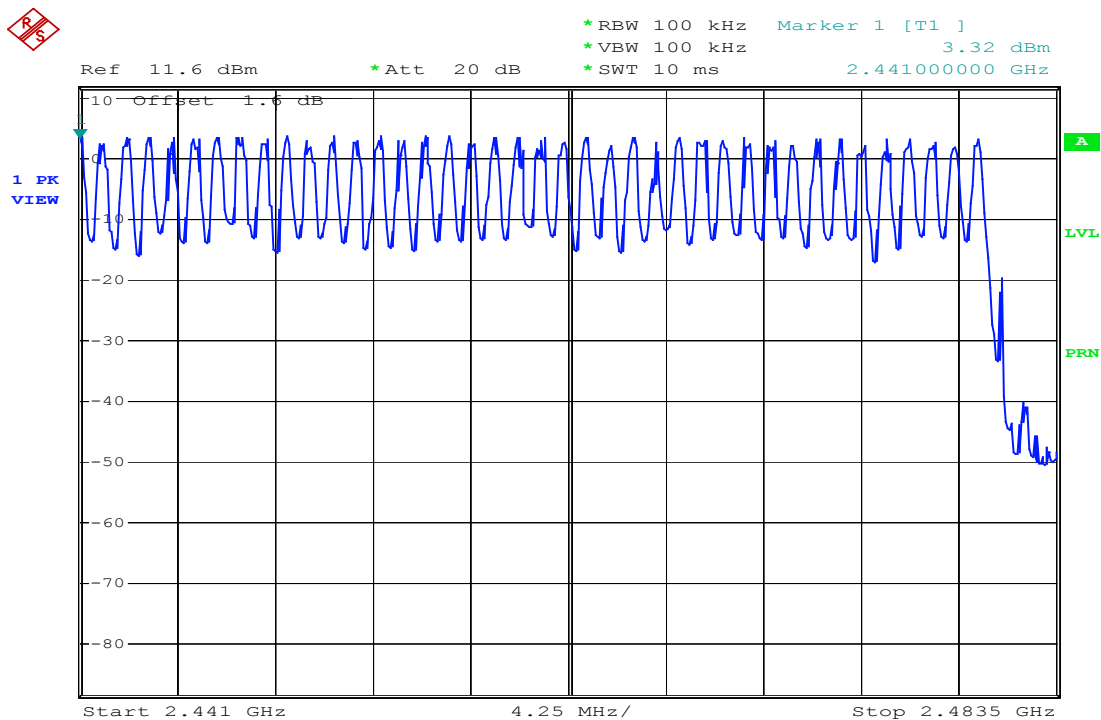

Date: 17.MAR.2003 12:00:23

12. TIME OF OCCUPANCY (DWELL TIME)

12.1 Standard Applicable

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz and 5725MHz – 5850MHz bands. The average time of occupancy on any frequency shall not greater than 0.4 s within a 30s period.

12.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW,VBW=100KHz, Span = 0Hz , Adjust Sweep = 30s.
5. Repeat above procedures until all frequency measured were complete.

12.3 Measurement Result

A period time = $0.38 \text{ (ms)} * 79 = 33.18 \text{ (s)}$

CH Low: $0.38 \text{ (ms)} * 1600/79 * 33.18 = 255.36 \text{ (ms)}$

CH Mid: $0.38 \text{ (ms)} * 1600/79 * 33.18 = 255.36 \text{ (ms)}$

CH High: $0.38 \text{ (ms)} * 1600/79 * 33.18 = 255.36 \text{ (ms)}$


CH	Pulse Time (ms)	Total of Dwell Time (ms)	Period time (ms)	Limit (ms)
Low	0.38	255.36	33.18	400.00
Mid	0.38	255.36	33.18	400.00
High	0.38	255.36	33.18	400.00

12.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/23/2002	07/22/2003
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A	N/A


Dwell Time Test Data

CH LOW

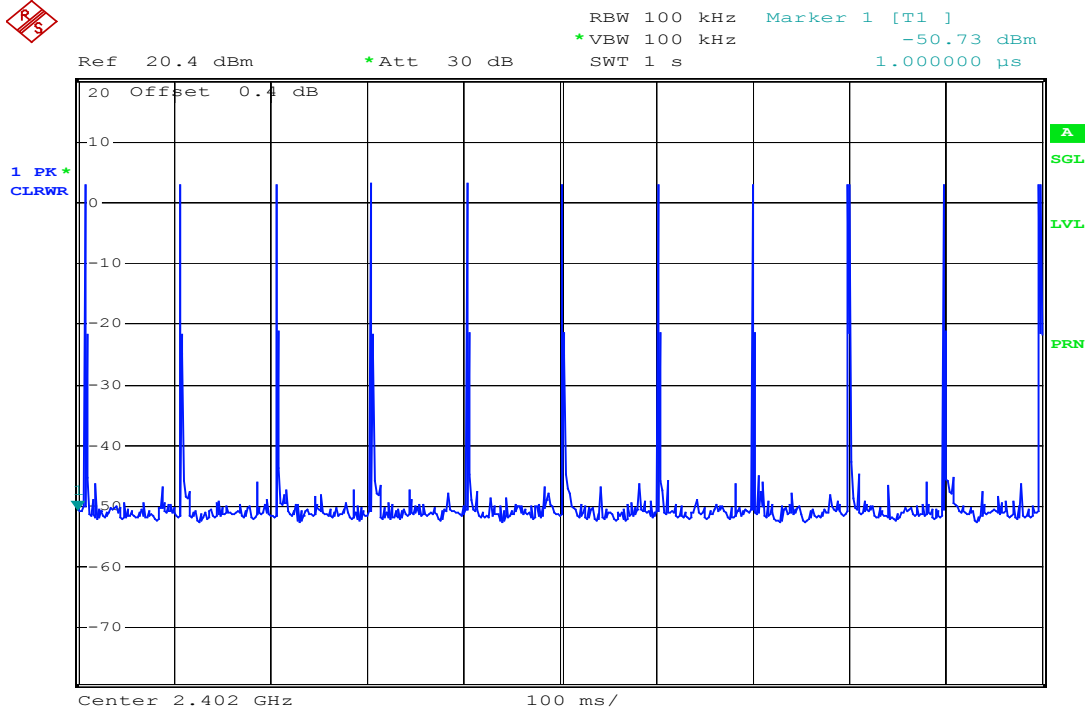


Date: 18.MAR.2003 07:55:11

CH MID

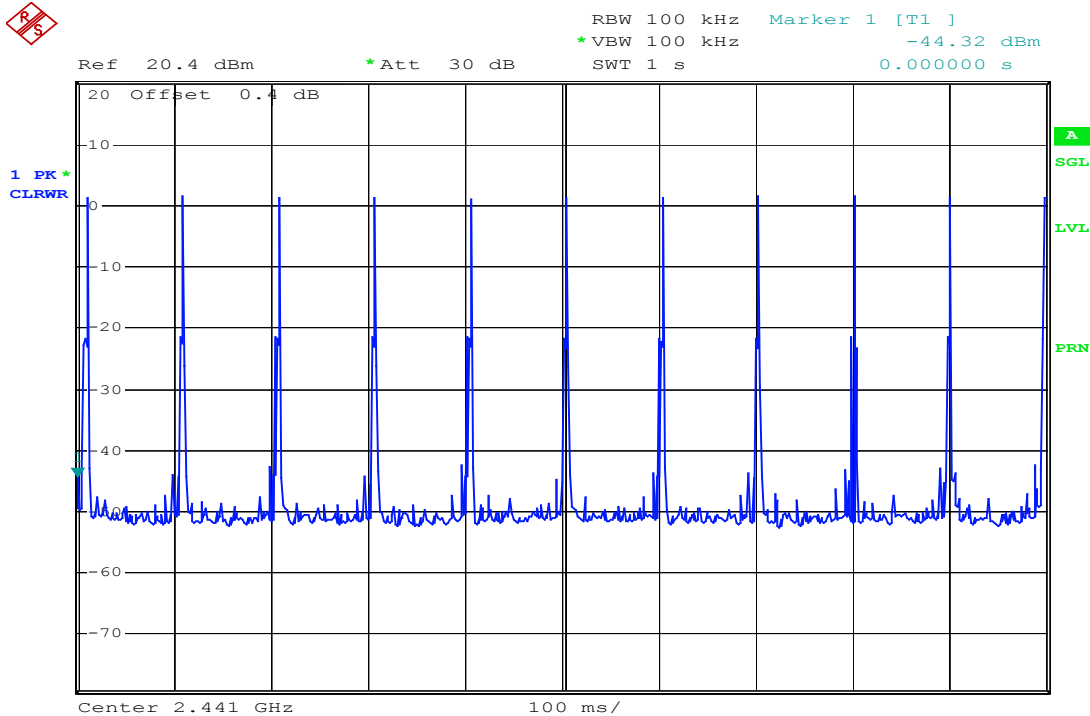

Date: 18.MAR.2003 07:56:52

CH HIGH

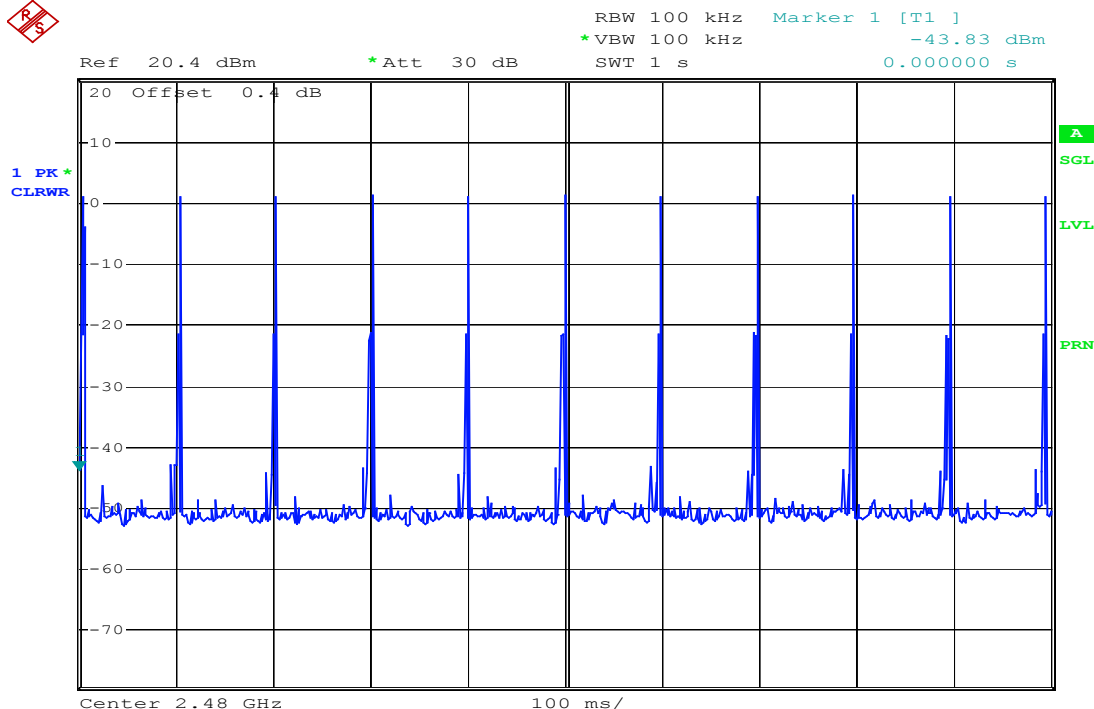

Date: 18.MAR.2003 07:58:01

13. Peak Power Spectral Density

13.1 Standard Applicable

According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

13.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3KHz, VBW = 3KHz, Span = 300KHz, Sweep=100s
4. Record the max. reading.
5. Repeat above procedures until all frequency measured were complete.


13.3 Measurement Result

CH	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
Low	-5.97	0.60	-5.37	8
Mid	-7.89	0.60	-7.29	8
High	-7.68	0.60	-7.08	8

13.4 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/23/2002	07/22/2003
Plotter	HP	7475A	2938A29027	N/A	N/A
Low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A	N/A

Power Spectral Density Test Plot (CH-Low)

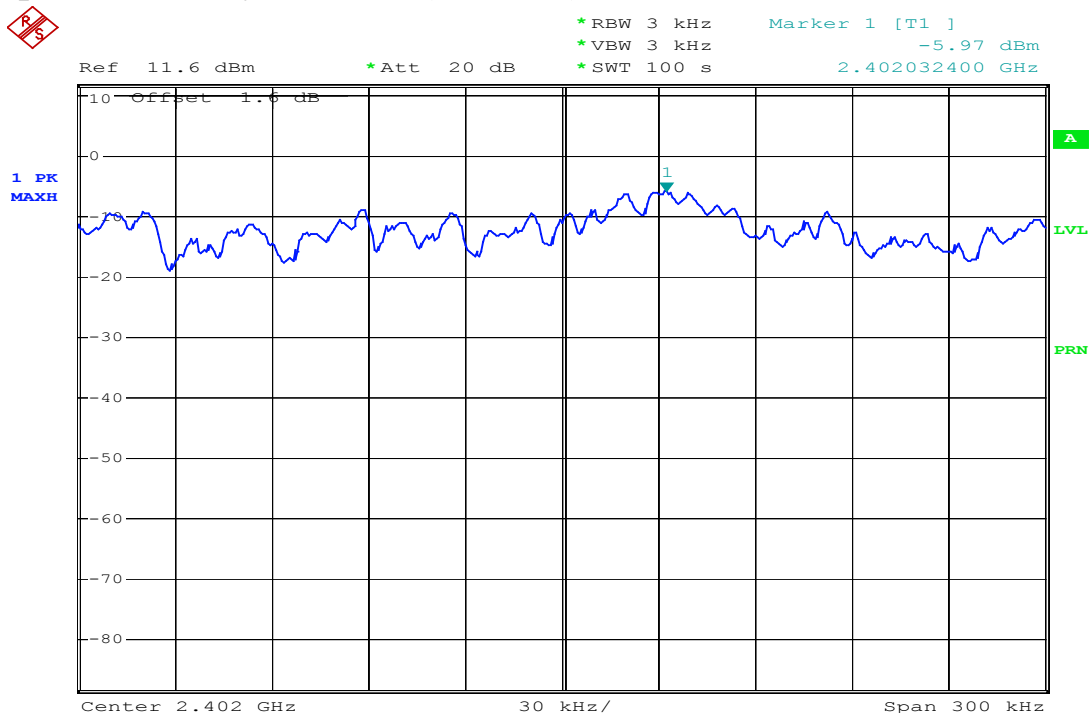


Date: 17.MAR.2003 11:46:47

Power Spectral Density Test Plot (CH-Mid)

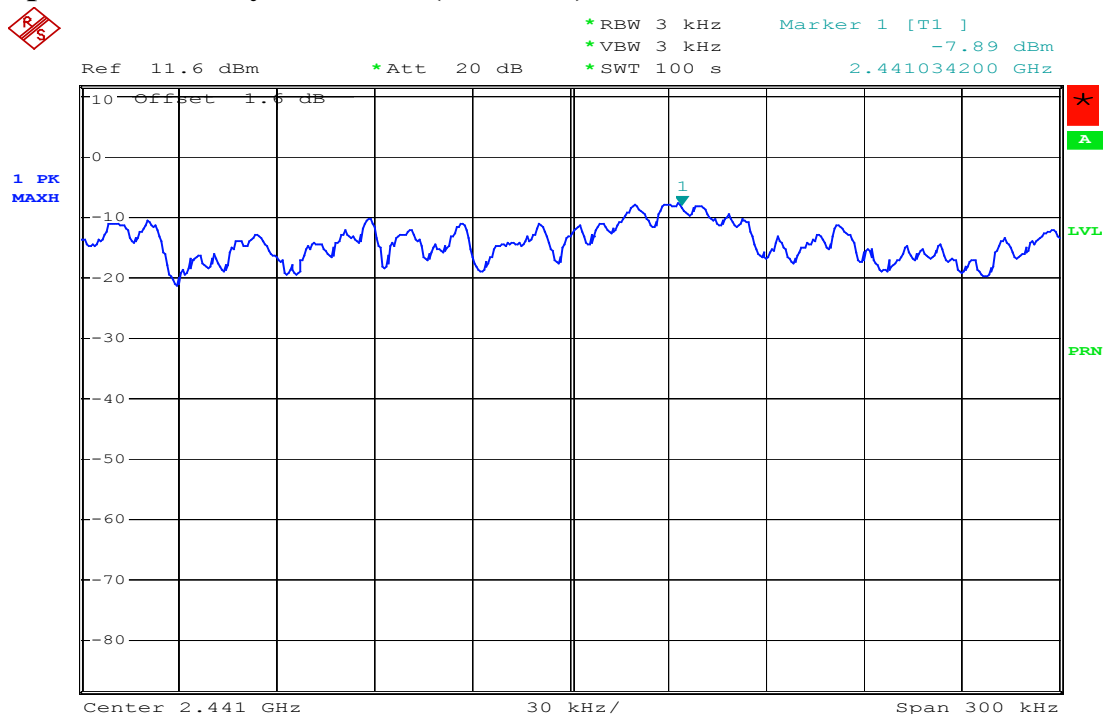

Date: 17.MAR.2003 11:18:57

Power Spectral Density Test Plot (CH-High)

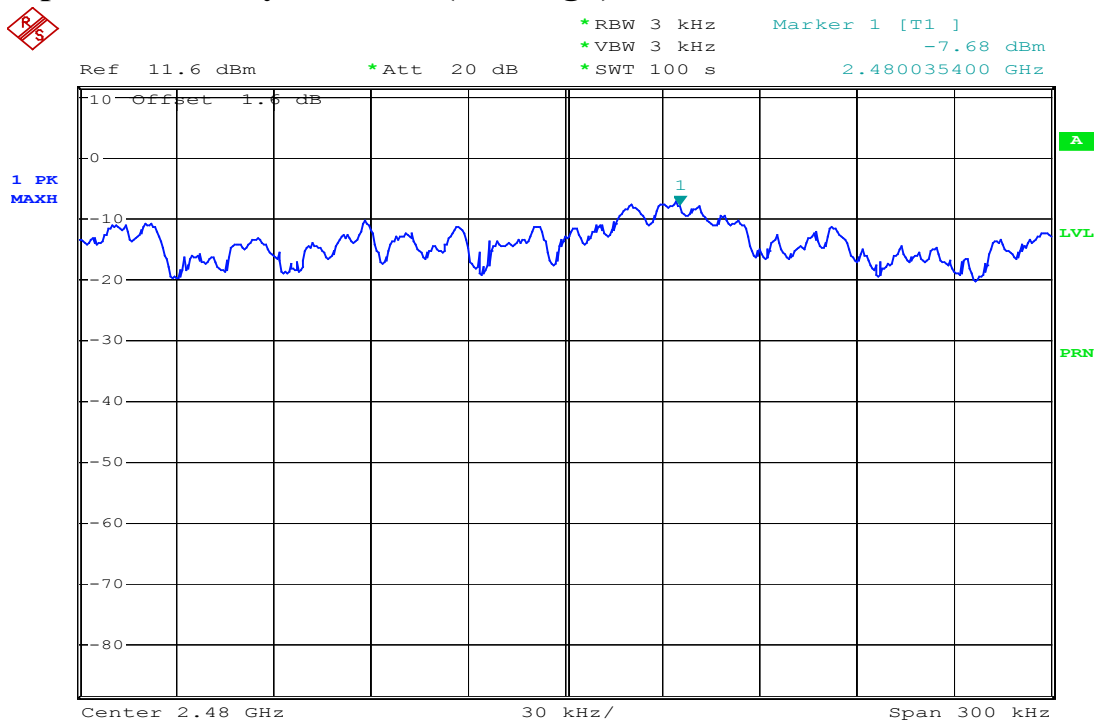

Date: 17.MAR.2003 11:16:43

14. ANTENNA REQUIREMENT

14.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.246(1), if transmitting antennas of directional gain greater than 6dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

14.2 Antenna Connected Construction

The directional gains of antenna used for transmitting is -1 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

15. RF EXPOSURE

15.1 Standard Applicable

According to §15.247(b)(4) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

The Max. output power is $-2.45\text{dBm}(0.568\text{mW})$ at 2480MHz , which is lower than general population low threshold $60/F(60/2.480=24.19\text{mW})$, The SAR is not required.