

RoHS COMPLIANT

MECHANICAL

Antenna Cover : PU

Antenna Base : PC+ABS


Color : Black

ELECTRICAL

Frequency : 2.4GHz high gain

Connector : SMA Male RP

Cable : Coaxial Cable RG-174

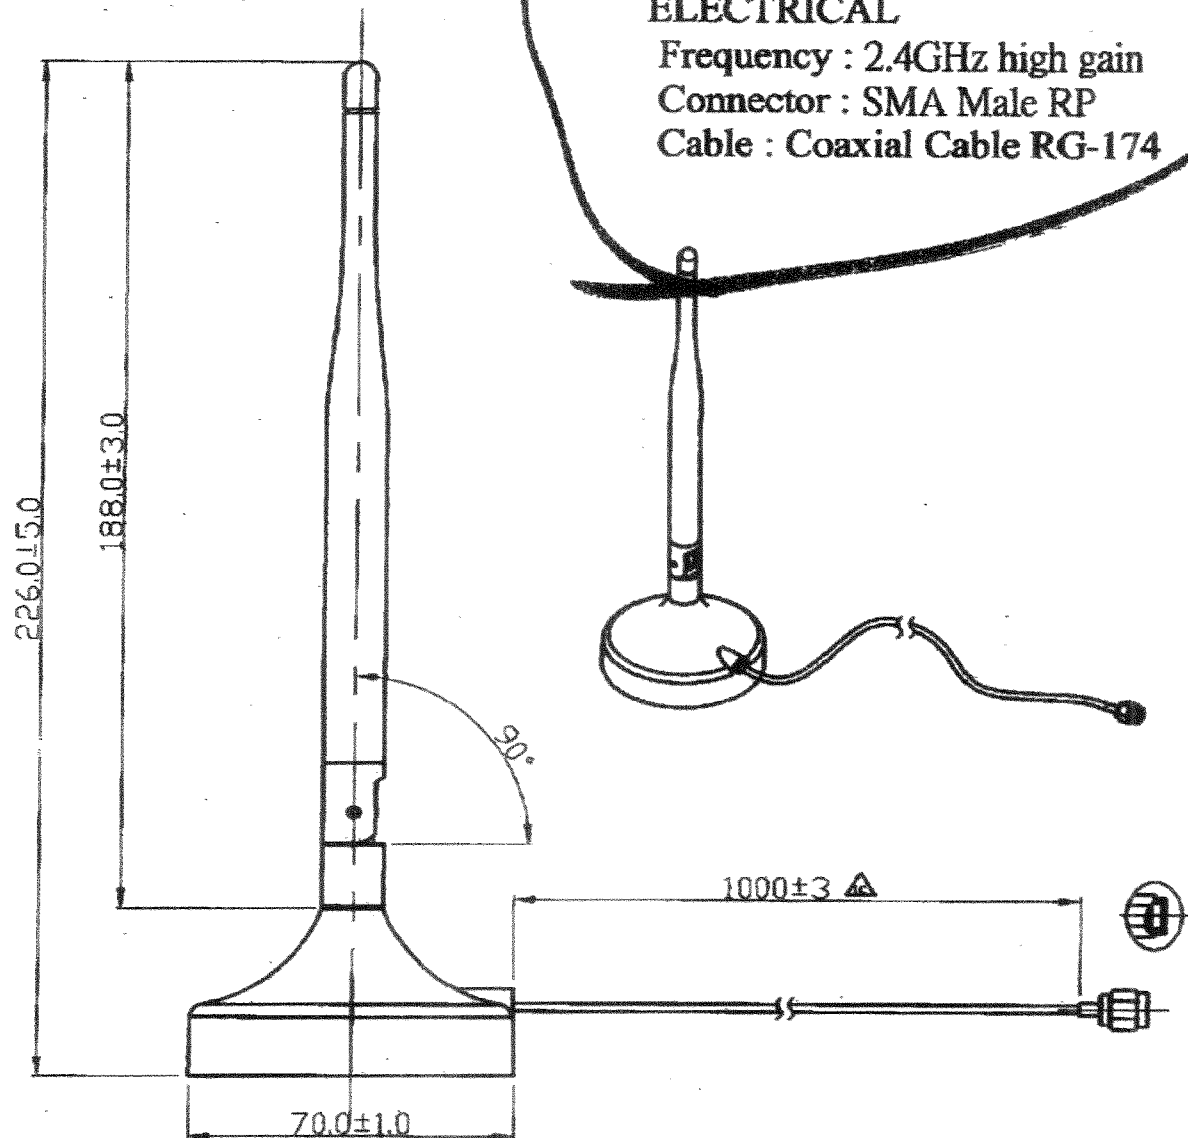

※凡標註△記號者，為品管檢驗之尺寸

設計DR. Marco 2006/11/08	核准 Jerry 2006/11/08	容許公差 .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	品名 ARTICLE 6642-2.4G-SMA
版本說明 REVISION NOTE			圖號 DWG NO. 6642A03041-10M
KINSUN 慶陞		單位 UNIT mm	比例 SCALE 1/1
		張數 SHEET 1/1	版本 REV. A

TECHNICAL DATA

Electrical Properties

Frequency Range: 2.4~2.5GHz

Impedance: 50 Ohm nominal

V.S.W.R : ≤ 2.0

Gain: 4dBi $\pm$ 0.25

Radiation: Omni

Polarization: Vertical

Electrical Wave: Dipole Array

Connector: SMA MALE-RP

Mechanical Properties

Antenna Cover: PU

Color : BLACK

Operation Temperature:-20°C~+60°C

Storage Temperature:-30°C~+75°C