

## TEST REPORT

**Report Number: 21040366HKG-005**

Application for Original Grant of 47 CFR Part 15 Certification

Single New of RSS-247 Issue 2 Equipment

**FCC ID: Q2O-BLSN13A**

**IC: 152B-BLSN13A**

**Prepared and Checked by:**

Signed On File

Wong Cheuk Ho, Herbert  
Lead Engineer

**Approved by:**

Wong Kwok Yeung, Kenneth  
Senior Lead Engineer  
Date: May 31, 2021

## TEST REPORT

### GENERAL INFORMATION

<b>Applicant Name:</b>	Lenbrook Industries Limited
<b>Applicant Address:</b>	633 Granite Court, Pickering, Ontario, Canada, L1W 3K1
<b>FCC Specification Standard:</b>	FCC Part 15, October 1, 2019 Edition
<b>FCC ID:</b>	Q2O-BLSN13A
<b>FCC Model(s):</b>	NODE
<b>IC Specification Standard:</b>	RSS-247 Issue 2, February 2017 RSS-Gen Issue 5 Amendment 1, March 2019
<b>IC:</b>	152B-BLSN13A
<b>PMN:</b>	Wireless Music Streamer
<b>HVIN:</b>	NODE
<b>Type of EUT:</b>	Spread Spectrum Transmitter
<b>Description of EUT:</b>	Wireless Music Streamer
<b>Serial Number:</b>	N/A
<b>Sample Receipt Date:</b>	April 09, 2021
<b>Date of Test:</b>	April 09, 2021 to May 26, 2021
<b>Report Date:</b>	May 31, 2021
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%
<b>Conclusion:</b>	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-247 Issue 2 Certification.

**TEST REPORT****TABLE OF CONTENTS**

<b>1.0 TEST RESULTS SUMMARY &amp; STATEMENT OF COMPLIANCE .....</b>	<b>4</b>
1.1 Summary of Test Results.....	4
1.2 Statement of Compliance.....	4
<b>2.0 GENERAL DESCRIPTION.....</b>	<b>5</b>
2.1 Product Description .....	5
2.2 Test Methodology .....	6
2.3 Test Facility .....	6
2.4 Related Submittal(s) Grants .....	6
<b>3.0 SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
3.1 Justification .....	7
3.2 EUT Exercising Software .....	8
3.3 Details of EUT and Description of Accessories.....	9
3.4 Measurement Uncertainty.....	9
<b>4.0 TEST RESULTS .....</b>	<b>10</b>
4.1 Maximum Conducted Output Power at Antenna Terminals .....	10
4.2 Minimum 6dB RF Bandwidth.....	12
4.3 Maximum Power Spectral Density .....	21
4.4 Out of Band Conducted Emissions .....	30
4.5 Field Strength Calculation.....	51
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions.....	52
4.6.1 Radiated Emission Configuration Photograph .....	52
4.6.2 Radiated Emission Data.....	52
4.6.3 Radiated Emission Test Setup.....	66
4.6.4 Transmitter Duty Cycle Calculation .....	67
4.7 AC Power Line Conducted Emission .....	68
4.7.1 AC Power Line Conducted Emission Configuration Photograph .....	68
4.7.2 AC Power Line Conducted Emission Data.....	68
4.7.3 Conducted Emission Test Setup .....	71
<b>5.0 EQUIPMENT LIST .....</b>	<b>72</b>

## TEST REPORT

### 1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

#### 1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-247/ RSS-Gen# Section	Results	Details See Section
Antenna Requirement	15.203	7.1.2#	Pass	2.1
Max. Conducted Output Power (Peak)	15.247(b)(3)&(4)	5.4(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	5.2(1)	Pass	4.2
Max. Power Density (average)	15.247(e)	5.2(2)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	5.5	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	5.5	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4#	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

#### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2019 Edition

RSS-247 Issue 2, February 2017

RSS-Gen Issue 5 Amendment 1, March 2019

## TEST REPORT

### 2.0 GENERAL DESCRIPTION

#### 2.1 Product Description

The Equipment-Under-Test (EUT) NODE is a Wireless Music Streamer. The EUT contains both WLAN (WiFi) and Bluetooth modules. The EUT can accept analog audio signal, digital audio signal and wireless audio signal via Bluetooth devices. An iOS/Android apps Bluesound installed in Smartphone can act as the remote control of the EUT. The EUT is powered by 100-240VAC.

For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps.

For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 2422.000MHz to 2452.000MHz with 9 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 150Mbps

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

The circuit description is saved with filename: descri.pdf.

## TEST REPORT

### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v05r01 (11-February-2019). All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 5 Amendment 1, March 2019.

### 2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042H.

### 2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

## TEST REPORT

### 3.0 SYSTEM TEST CONFIGURATION

#### 3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by a 120VAC.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209 / RSS-247 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 / RSS-247 Section 5.5 Limits.

## TEST REPORT

### 3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes and data rates have been tested, and the worst-case data is included in this report.

For simultaneous transmission, both WiFi and Bluetooth portions are also switched on when taking radiated emission for determining worst-case spurious emission

### 3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

## TEST REPORT

### 3.3 Details of EUT and Description of Accessories

#### Details of EUT:

The EUT is powered by 120VAC.

#### Description of Accessories:

1. Earphone with cable of 1.2m meter long
2. Subwoofer coaxial cable of 1.5m long with termination
3. Digital Out coaxial cable of 1.5m long with termination
4. Trigger Out coaxial cable of 1.5m long with termination
5. IR In coaxial cable of 1.5m long with termination
6. 4GB USB flash drive  
(Provided by Intertek)
7. LAN cable of 1.5m long with termination
8. Power Cable of 2m long
9. Analog In coaxial cable of 1.5m long with termination
10. Audio Out coaxial cable of 1.5m long with termination  
(Provided by Applicant)

### 3.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level (k=2). In case, the measured value is within guard band region, undetermined decision will be used. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are  $\pm 5.3\text{dB}$  and  $\pm 0.99\text{dB}$  respectively. The value of the Measurement uncertainty for conducted emission test is  $\pm 4.2\text{dB}$ .

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.


## TEST REPORT

### 4.0 TEST RESULTS

#### 4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

##### RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

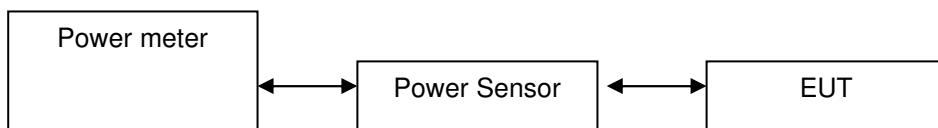

The antenna port of the EUT was connected to the input of a spectrum analyzer.

- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 9.1.2 was used.
- The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 2 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	8.8	7.6
Middle Channel: 2437	8.5	7.1
High Channel: 2462	10.2	10.5

IEEE 802.11g (OFDM, 6 Mbps) Antenna Gain = 2 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	13.8	24.0
Middle Channel: 2437	13.2	20.9
High Channel: 2462	14.5	28.2

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 2 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	14.5	28.2
Middle Channel: 2437	13.5	22.4
High Channel: 2462	15.4	34.7

**TEST REPORT****4.1 Maximum Conducted Output Power at Antenna Terminals – Cont'd**

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 2 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2422	15.5	35.5
Middle Channel: 2437	14.5	28.2
High Channel: 2452	16.2	41.7

Cable loss : 0.5 dB External Attenuation : 0 dBCable loss, external attenuation:  included in OFFSET function  
 added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)

max. conducted (peak) output level = 10.2 dBm

IEEE 802.11g (OFDM, 9 Mbps)

max. conducted (peak) output level = 14.5 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)

max. conducted (peak) output level = 15.4 dBm

IEEE 802.11n (40MHz) (OFDM, MCS0)

max. conducted (peak) output level = 16.2 dBm

Limits:

 1W (30dBm) for antennas with gains of 6dBi or less \_\_\_\_W (\_\_\_\_dBm) for antennas with gains more than 6dBi

## TEST REPORT

### 4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	8.24
Middle Channel: 2437	8.24
High Channel: 2462	8.24

IEEE 802.11g (OFDM, 6 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	15.64
Middle Channel: 2437	15.64
High Channel: 2462	15.28

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	16.20
Middle Channel: 2437	16.20
High Channel: 2462	15.28

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2422	35.52
Middle Channel: 2437	35.52
High Channel: 2452	35.52

#### Limits


6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth are saved as below.

## TEST REPORT


### PLOTS OF 6dB RF BANDWIDTH

#### 802.11b, Lowest Channel

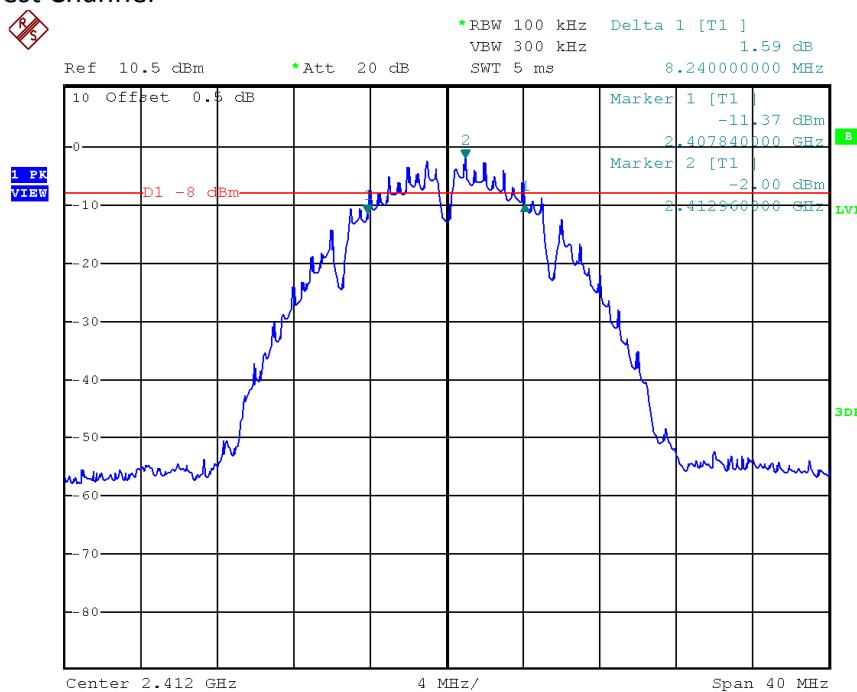

Date: 4.MAY.2021 10:54:50

#### 802.11b, Middle Channel

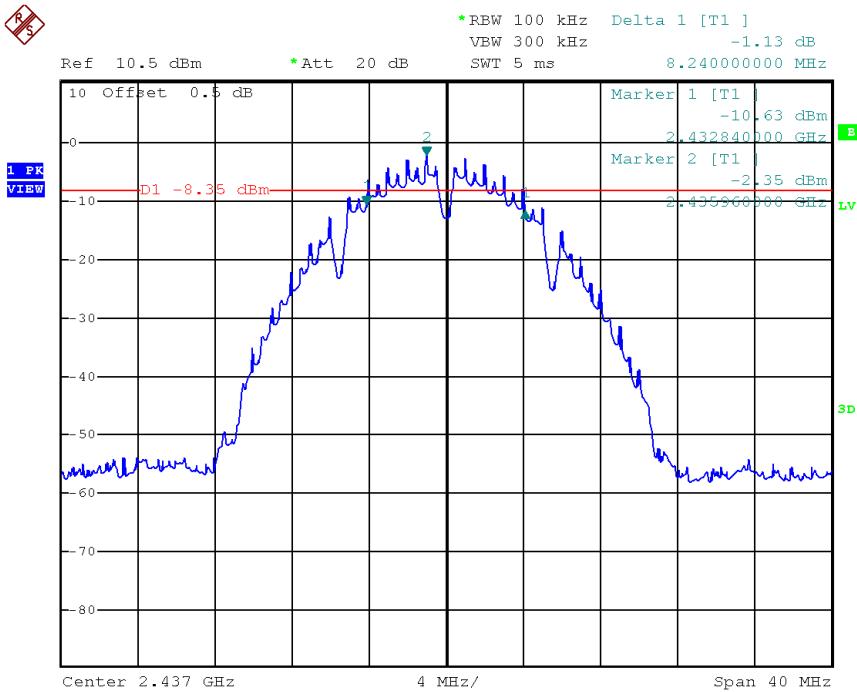


Date: 4.MAY.2021 10:56:26

# TEST REPORT

## PLOTS OF 6dB RF BANDWIDTH

## 802.11b, Highest Channel

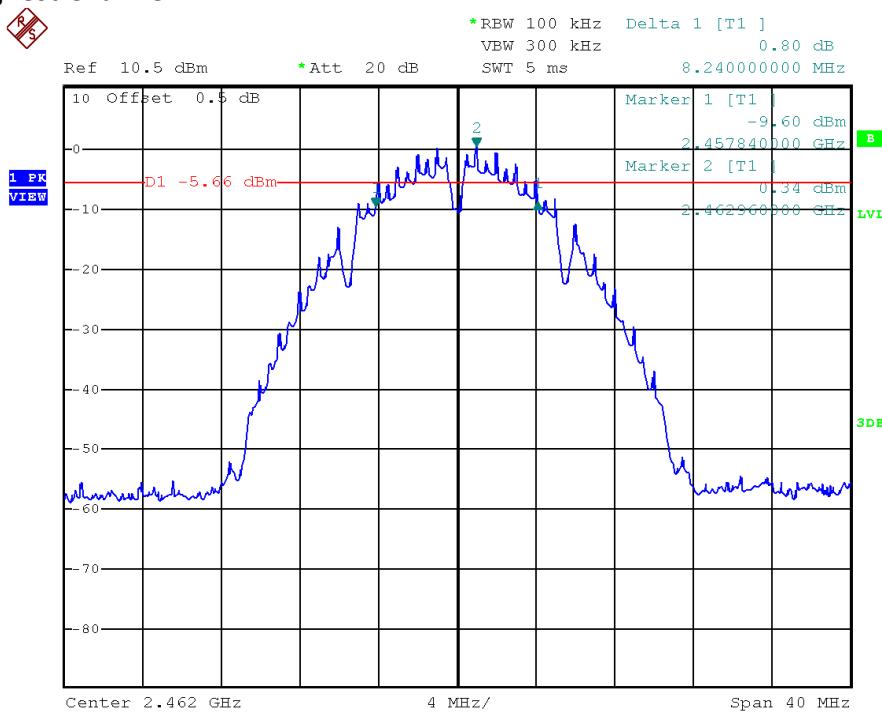


Date: 4.MAY.2021 10:58:59

## TEST REPORT


### PLOTS OF 6dB RF BANDWIDTH

#### 802.11g, Lowest Channel

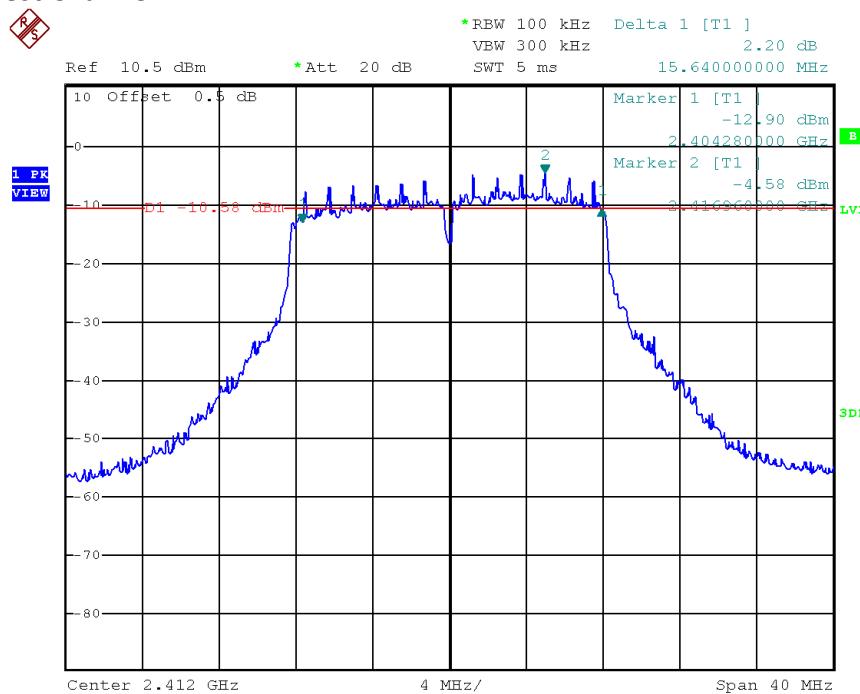

Date: 4.MAY.2021 11:11:03

#### 802.11g, Middle Channel

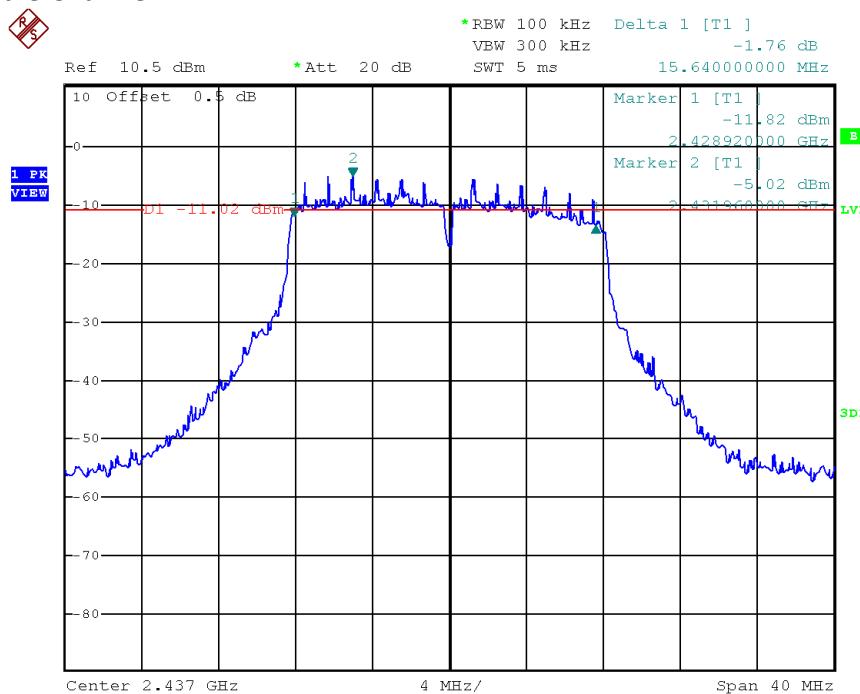


Date: 4.MAY.2021 11:08:34

## TEST REPORT

### PLOTS OF 6dB RF BANDWIDTH

802.11g, Highest Channel

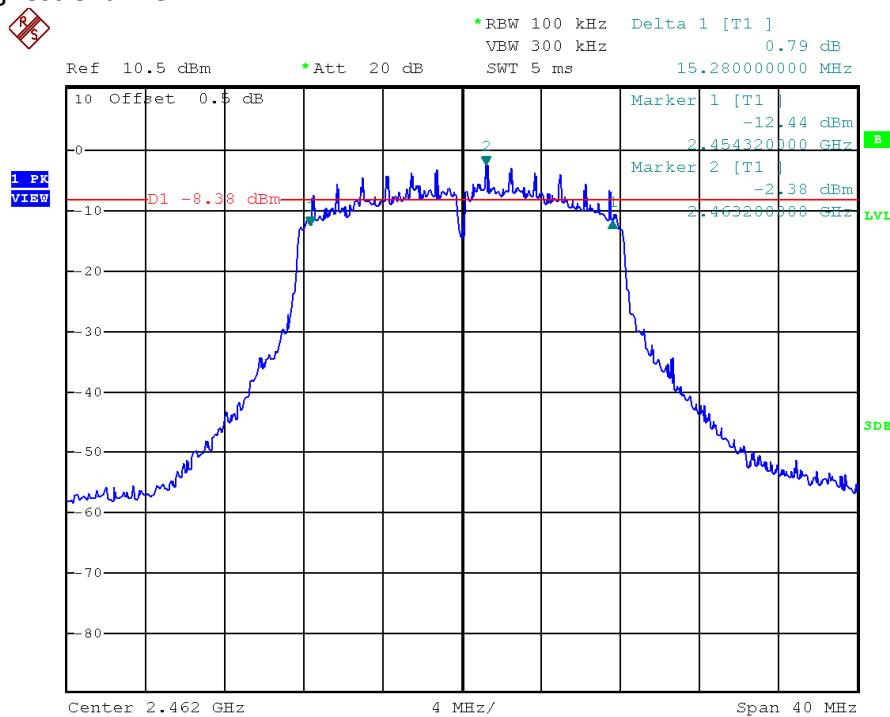


Date: 4.MAY.2021 11:14:22

## TEST REPORT


### PLOTS OF 6dB RF BANDWIDTH

802.11n (20MHz), Lowest Channel

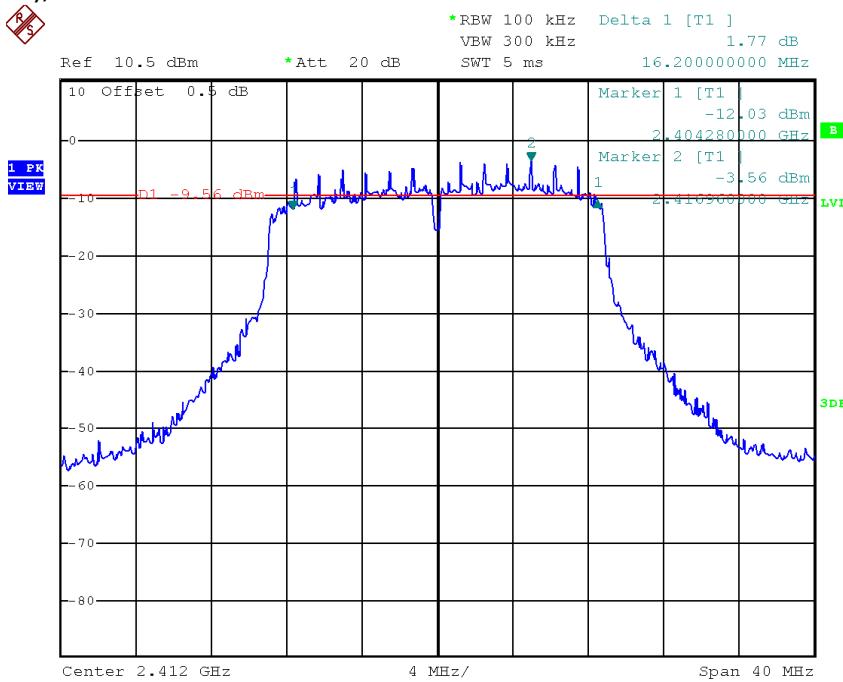

Date: 4.MAY.2021 11:24:05

802.11n (20MHz), Middle Channel

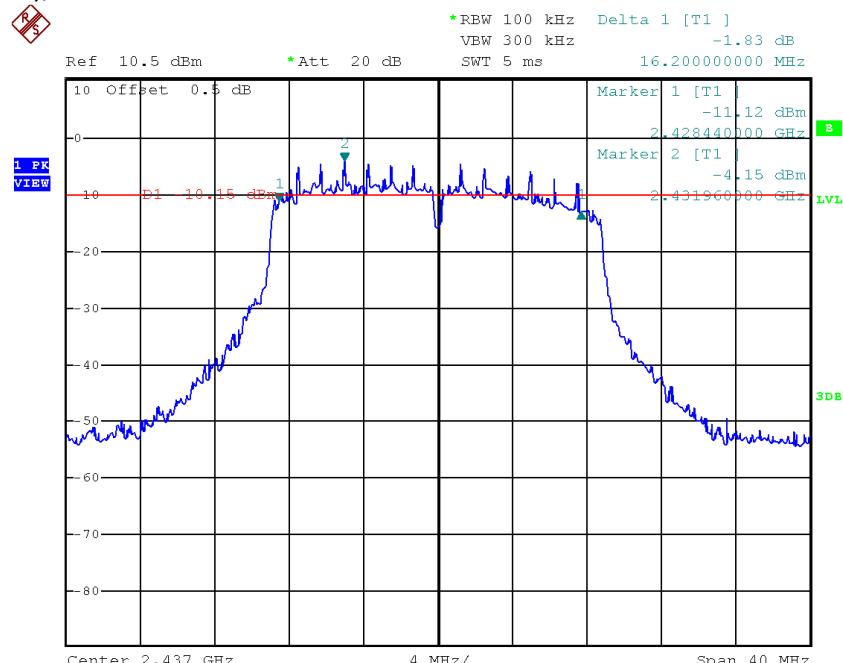


Date: 4.MAY.2021 11:22:18

## TEST REPORT

### PLOTS OF 6dB RF BANDWIDTH

802.11n (20MHz), Highest Channel

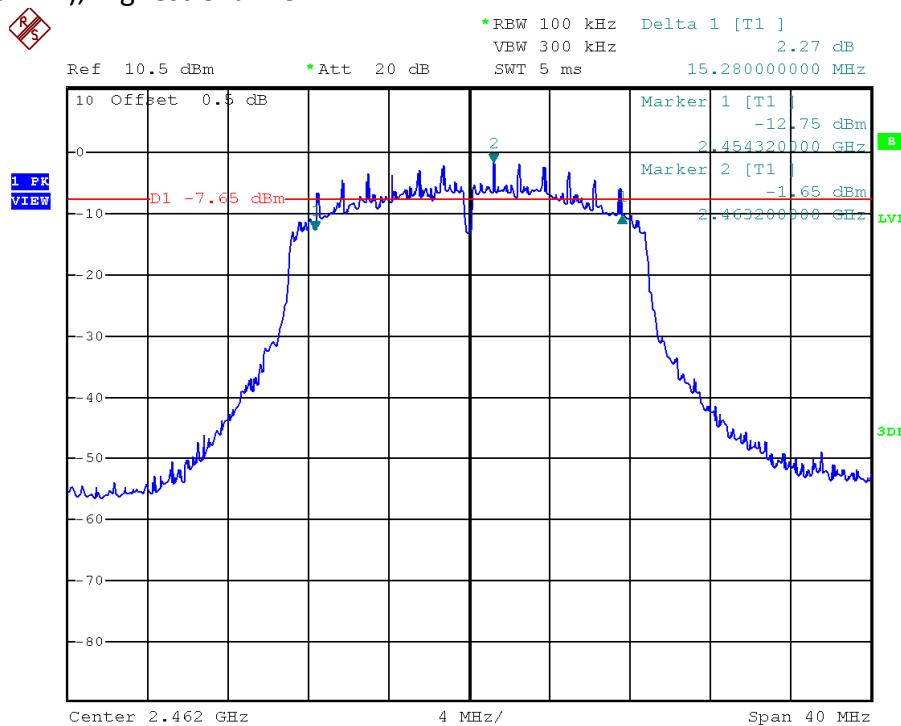


Date: 4.MAY.2021 11:25:34

## TEST REPORT


### PLOTS OF 6dB RF BANDWIDTH

802.11n (40MHz), Lowest Channel

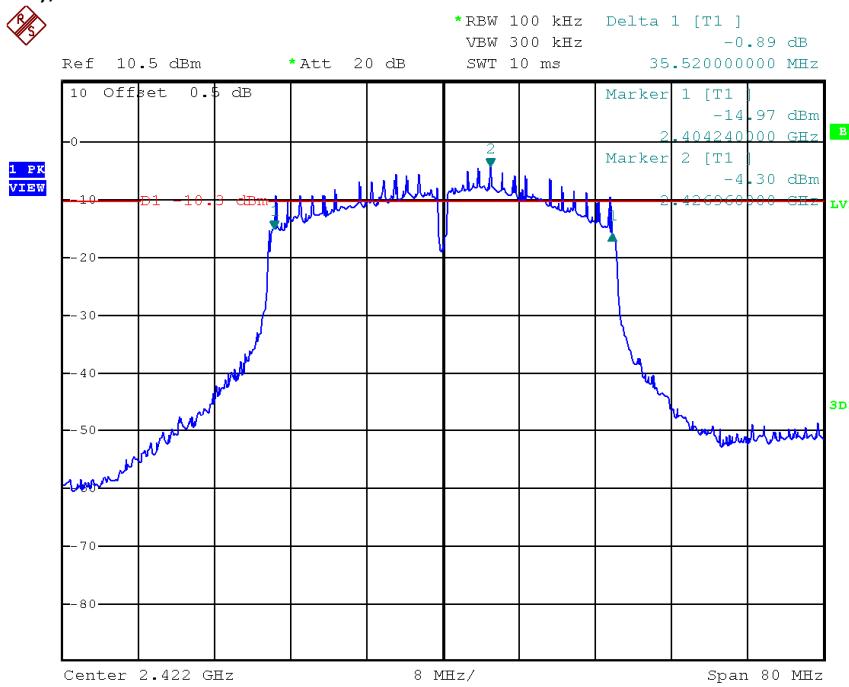

Date: 4.MAY.2021 11:35:41

802.11n (40MHz), Middle Channel

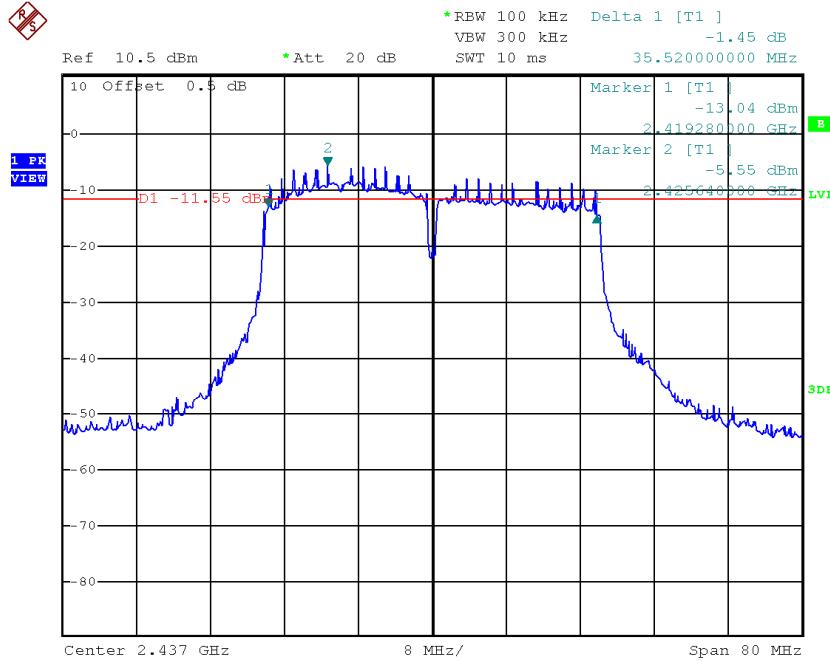


Date: 4.MAY.2021 11:30:59

## TEST REPORT

### PLOTS OF 6dB RF BANDWIDTH

802.11n (40MHz), Highest Channel

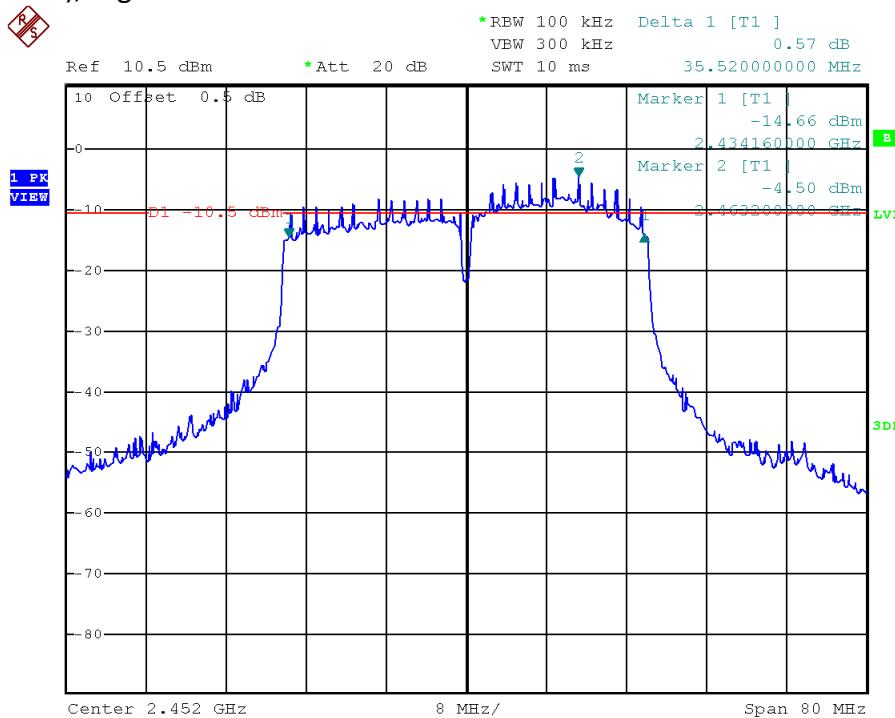

Date: 4.MAY.2021 11:32:35

## TEST REPORT

### 4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-1.88
Middle Channel: 2437	-2.20
High Channel: 2462	0.46

IEEE 802.11g (OFDM, 6 Mbps)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-4.68
Middle Channel: 2437	-4.98
High Channel: 2462	-2.46

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-3.64
Middle Channel: 2437	-4.14
High Channel: 2462	-1.26

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2422	-4.22
Middle Channel: 2437	-4.94
High Channel: 2452	-4.62

Cable Loss: 0.5 dB


Limit:  
8dBm

The plots of power spectral density are as below.

## TEST REPORT


### PLOTS OF POWER SPECTRAL DENSITY

#### 802.11b, Lowest channel

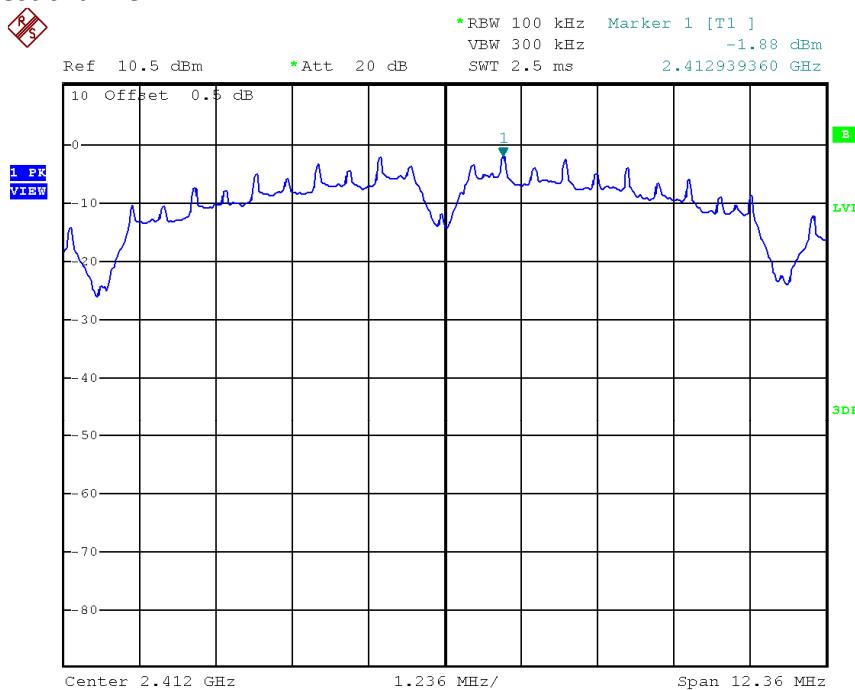

Date: 4.MAY.2021 13:27:15


#### 802.11b, Middle channel

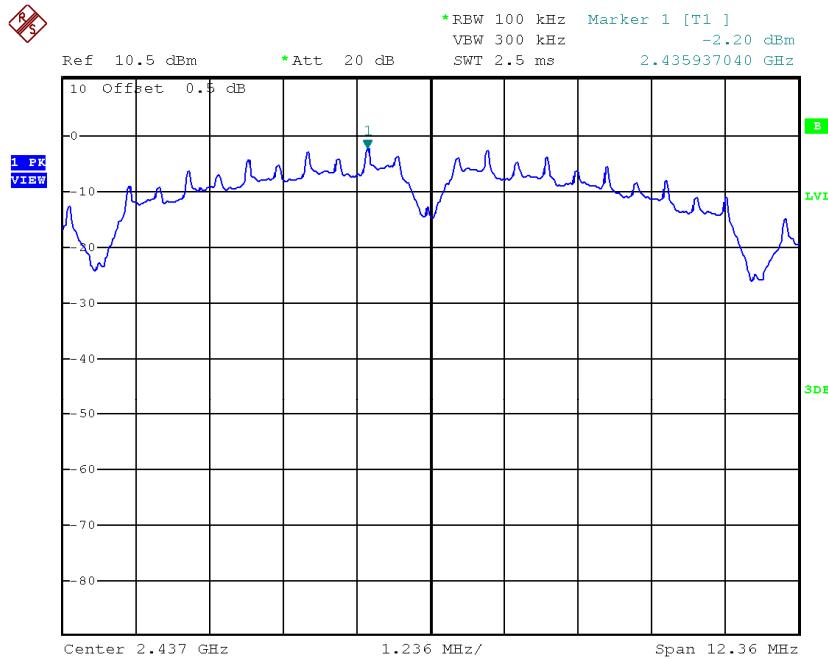

Date: 4.MAY.2021 13:28:12

**TEST REPORT****PLOTS OF POWER SPECTRAL DENSITY**

802.11b, Highest channel

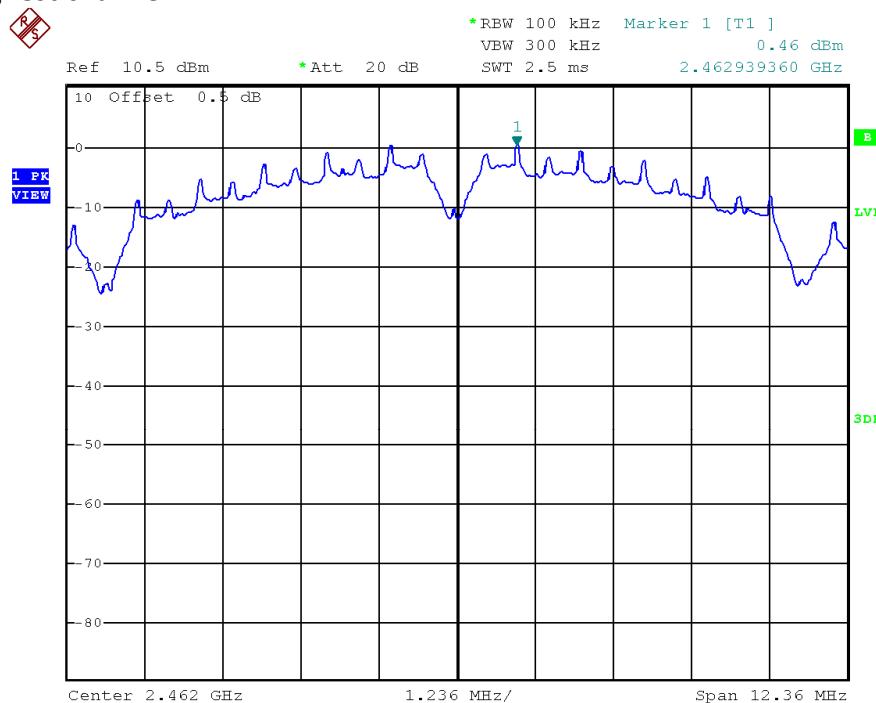


Date: 4.MAY.2021 13:29:06

## TEST REPORT


### PLOTS OF POWER SPECTRAL DENSITY

#### 802.11g, Lowest channel

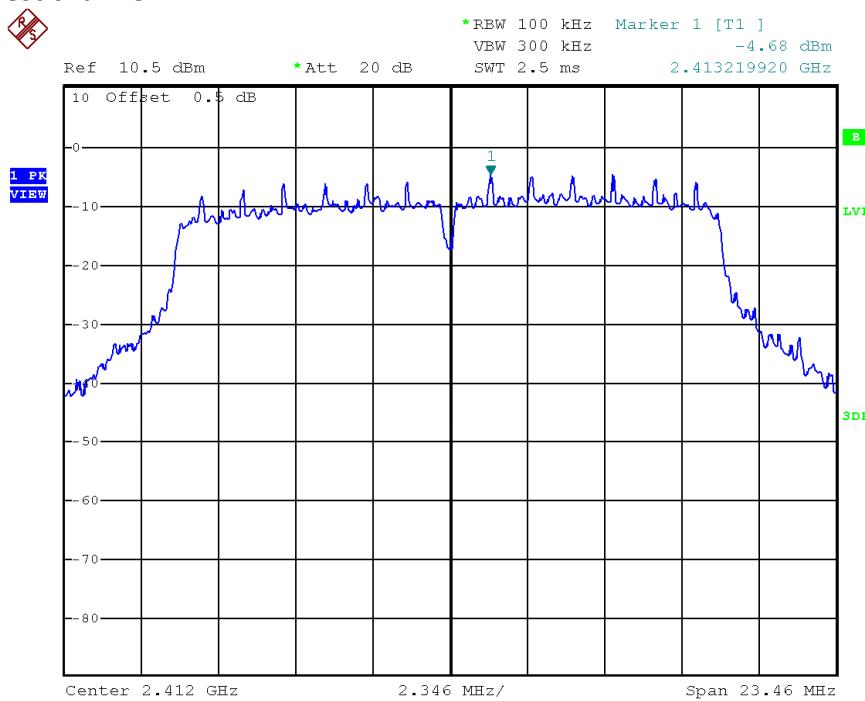

Date: 4.MAY.2021 13:23:26


#### 802.11g, Middle channel

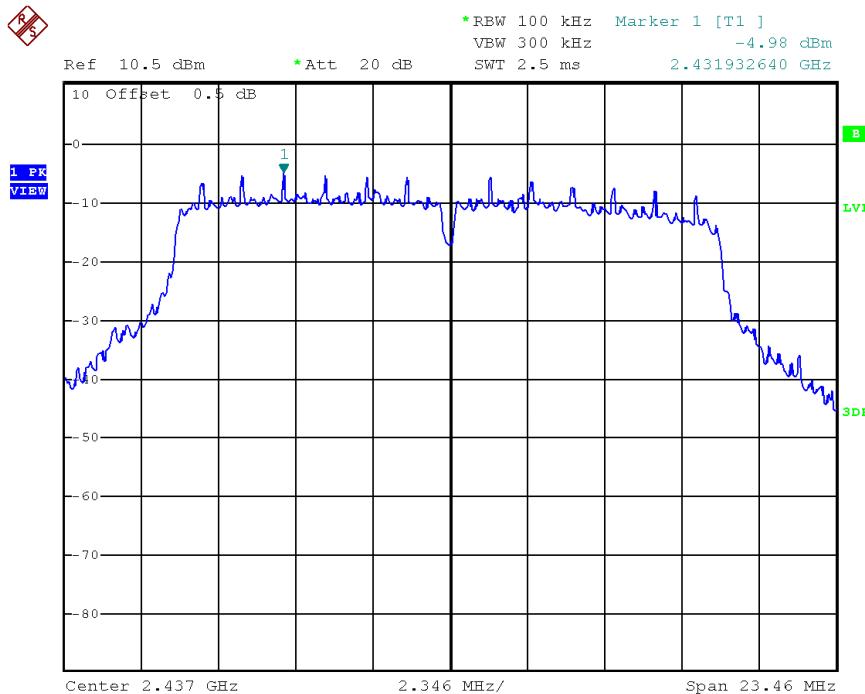

Date: 4.MAY.2021 13:24:27

**TEST REPORT****PLOTS OF POWER SPECTRAL DENSITY**

802.11g, Highest channel

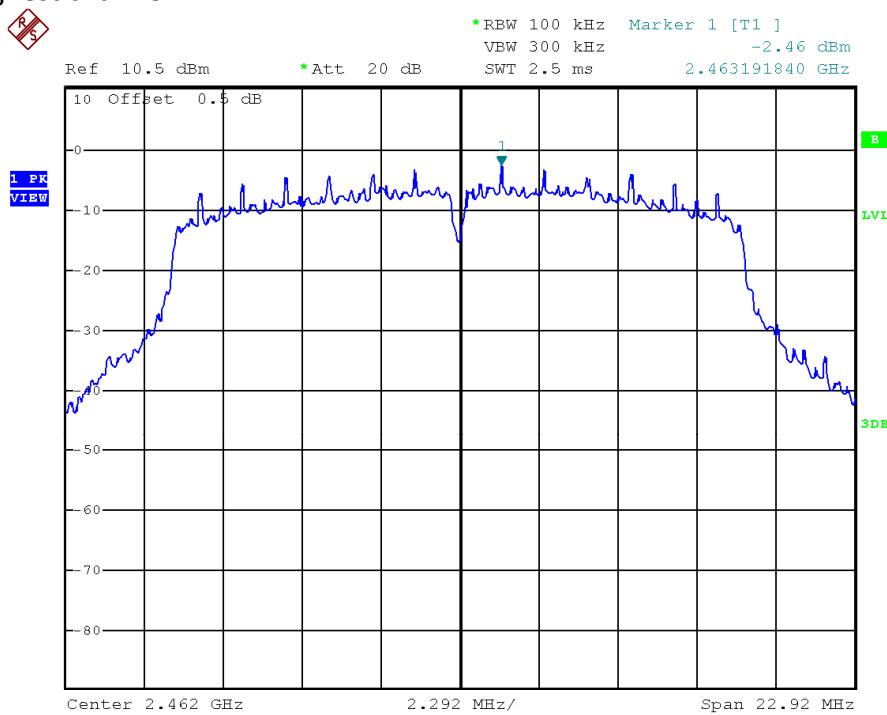


Date: 4.MAY.2021 13:25:53

## TEST REPORT


### PLOTS OF POWER SPECTRAL DENSITY

802.11n (20MHz), Lowest channel

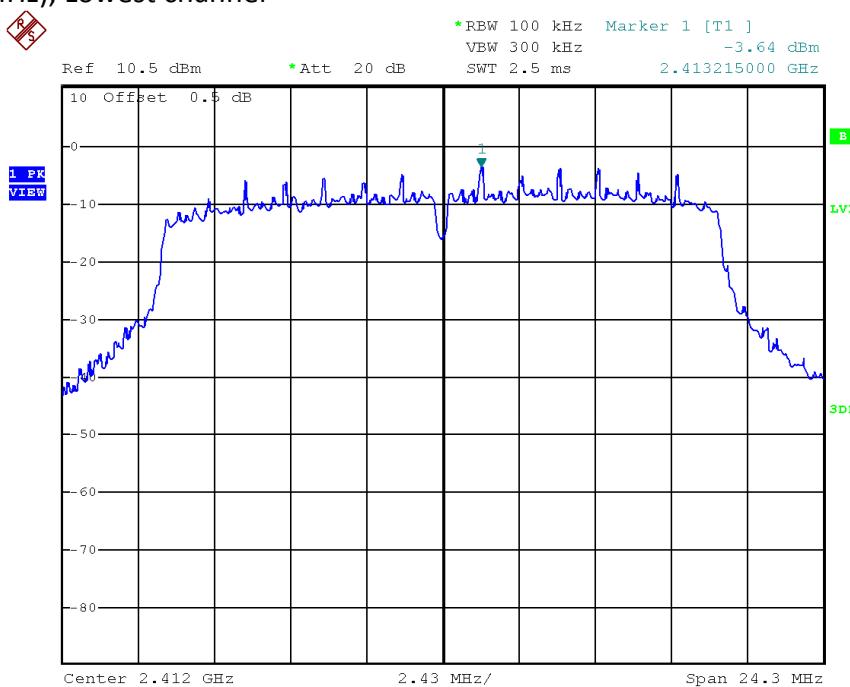

Date: 4.MAY.2021 13:31:27


802.11n (20MHz), Middle channel

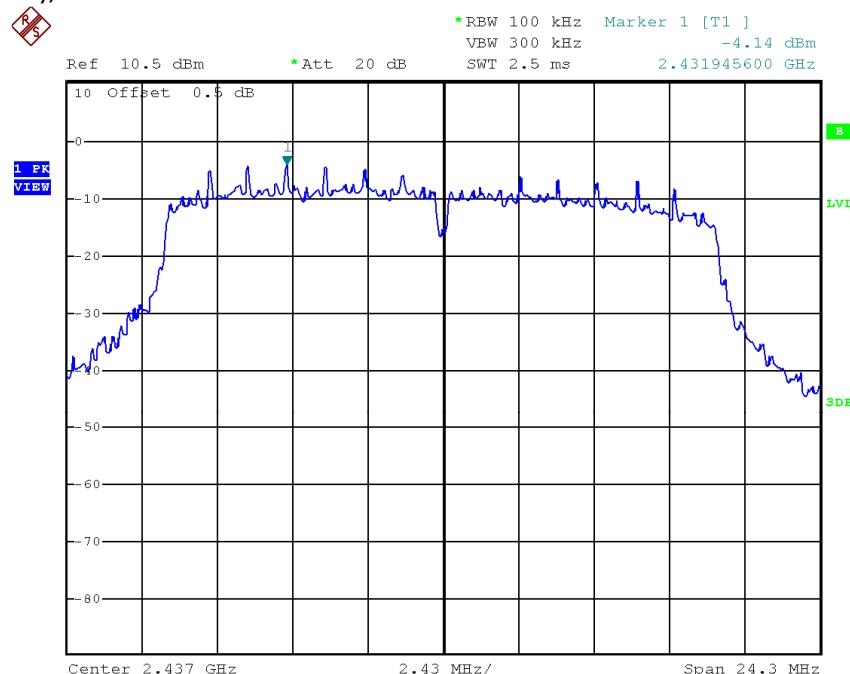

Date: 4.MAY.2021 13:32:39

**TEST REPORT****PLOTS OF POWER SPECTRAL DENSITY**

802.11n (20MHz), Highest channel

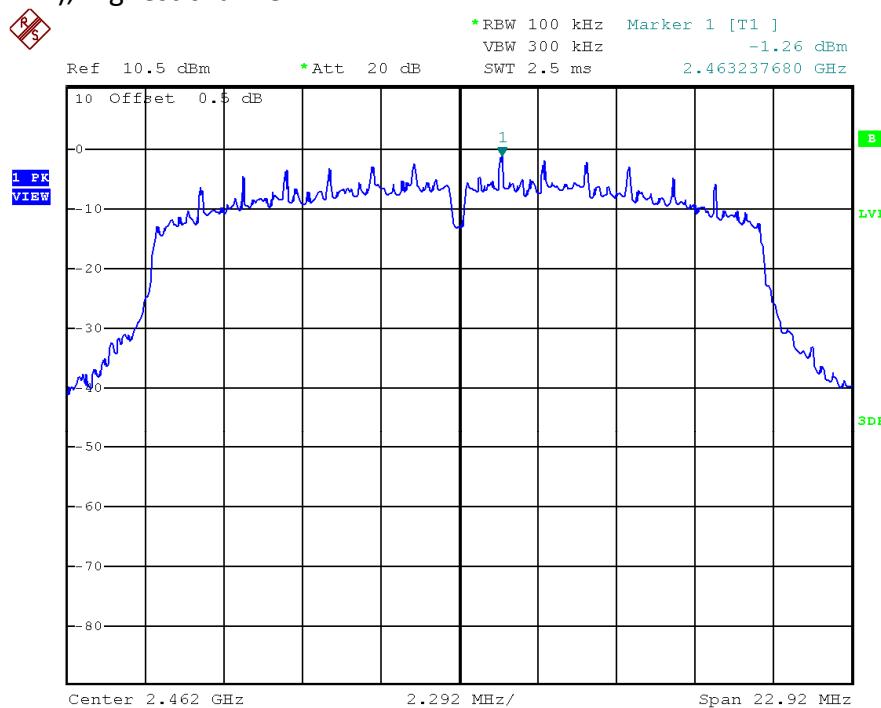


Date: 4.MAY.2021 13:34:05

## TEST REPORT


### PLOTS OF POWER SPECTRAL DENSITY

802.11n (40MHz), Lowest channel

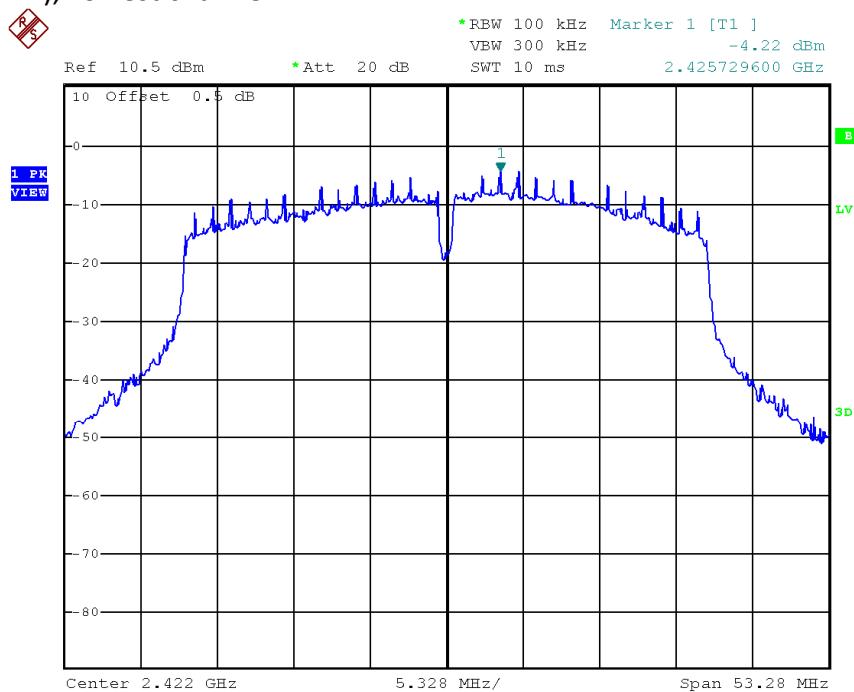

Date: 4.MAY.2021 13:36:19


802.11n (40MHz), Middle channel

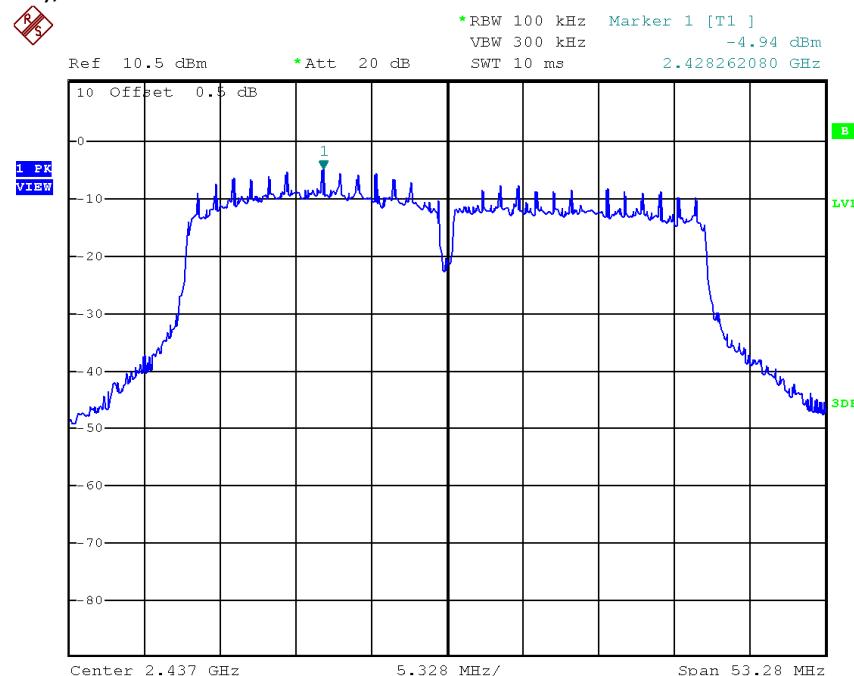

Date: 4.MAY.2021 13:37:43

**TEST REPORT****PLOTS OF POWER SPECTRAL DENSITY**

802.11n (40MHz), Highest channel

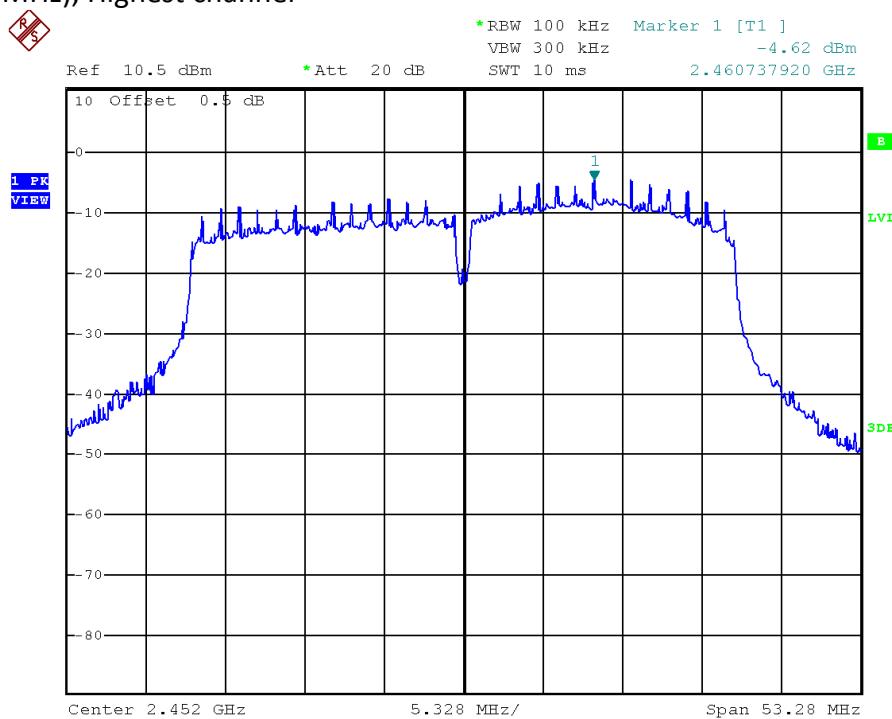

Date: 4.MAY.2021 13:38:52

## TEST REPORT

### 4.4 Out of Band Conducted Emissions

For 802.11b/g/n20MHz & Bluetooth 4.0, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for 802.11b/g/n20MHz & n20MHz.

The measurement procedures under sections 11 of KDB558074 D01 v05r01 (11-February-2019) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.


Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the maximum measured in-band peak PSD level.

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

#### 802.11b, Lowest Channel, Bandedge

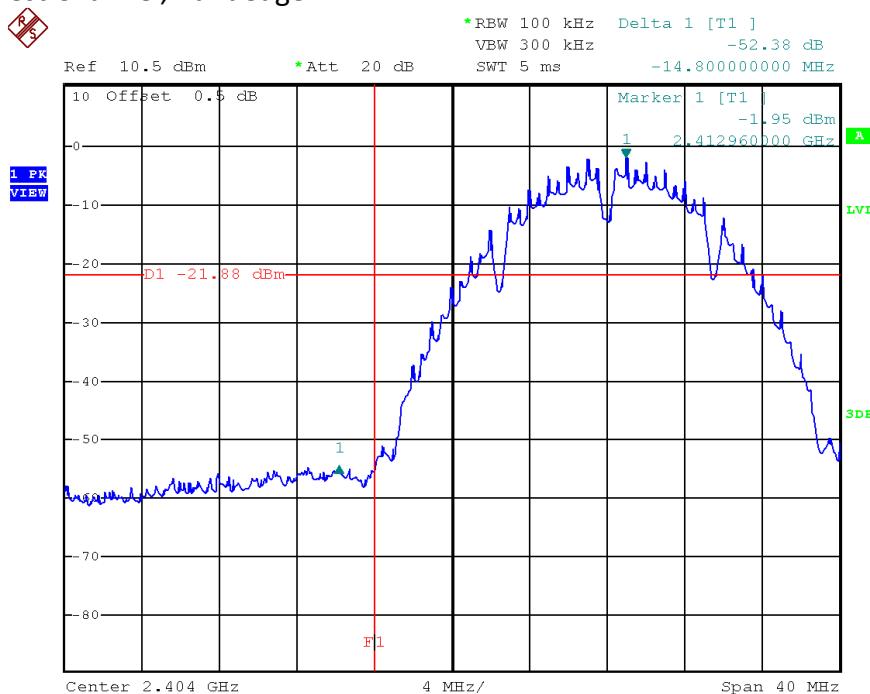

Date: 4.MAY.2021 14:22:50

#### 802.11b, Highest Channel, Bandedge

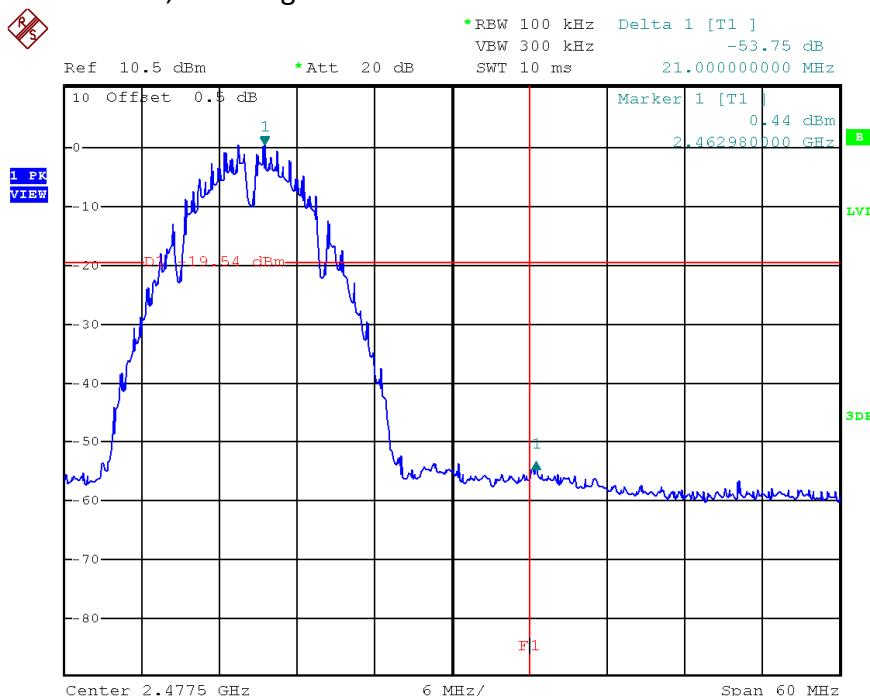


Date: 4.MAY.2021 14:25:01

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

#### 802.11b, Lowest Channel, Plot A

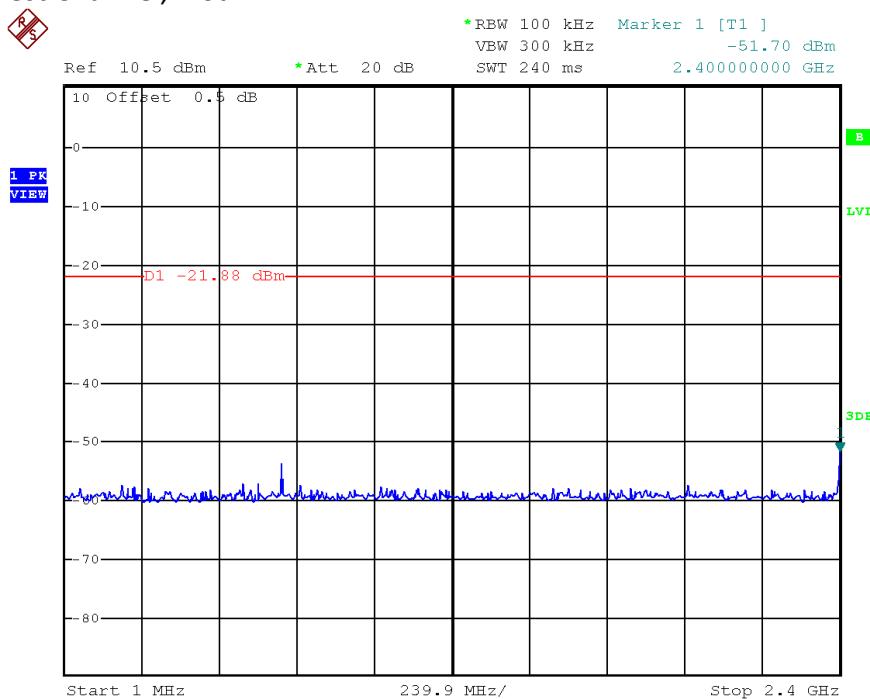

Date: 4.MAY.2021 13:47:42

#### 802.11b, Lowest Channel, Plot B

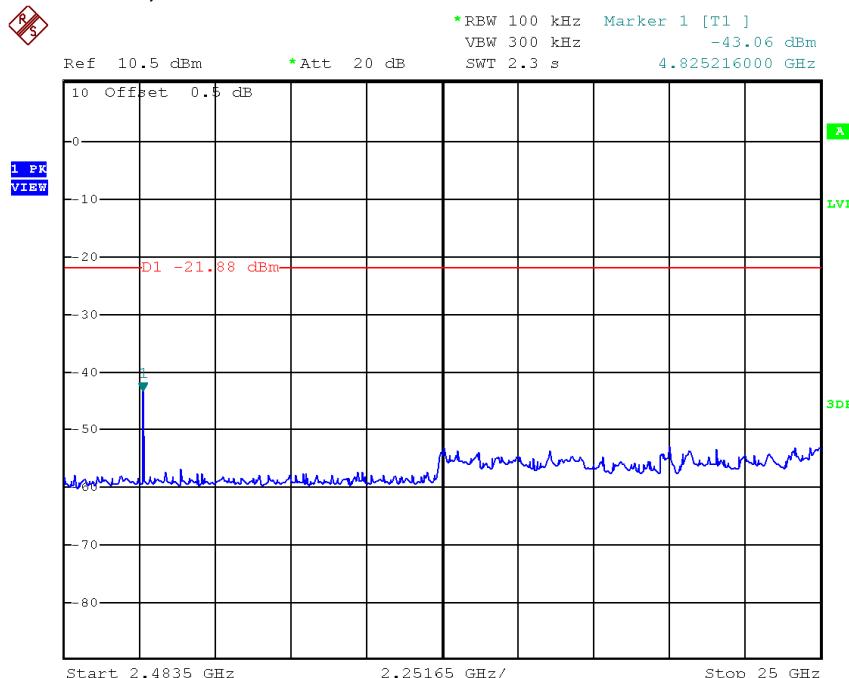


Date: 4.MAY.2021 13:51:16

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

#### 802.11b, Middle Channel, Plot A

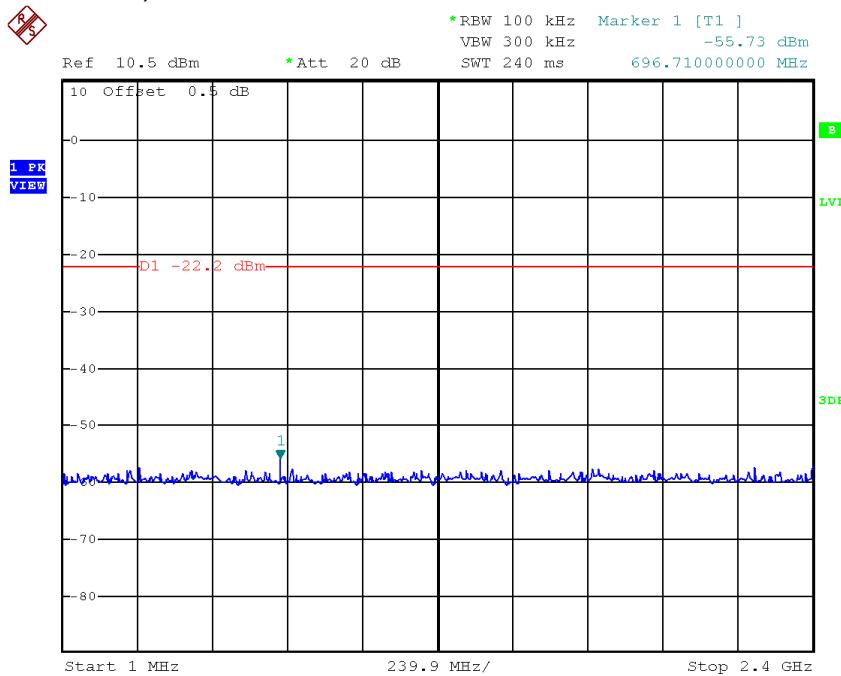

Date: 4.MAY.2021 13:53:25

#### 802.11b, Middle Channel, Plot B

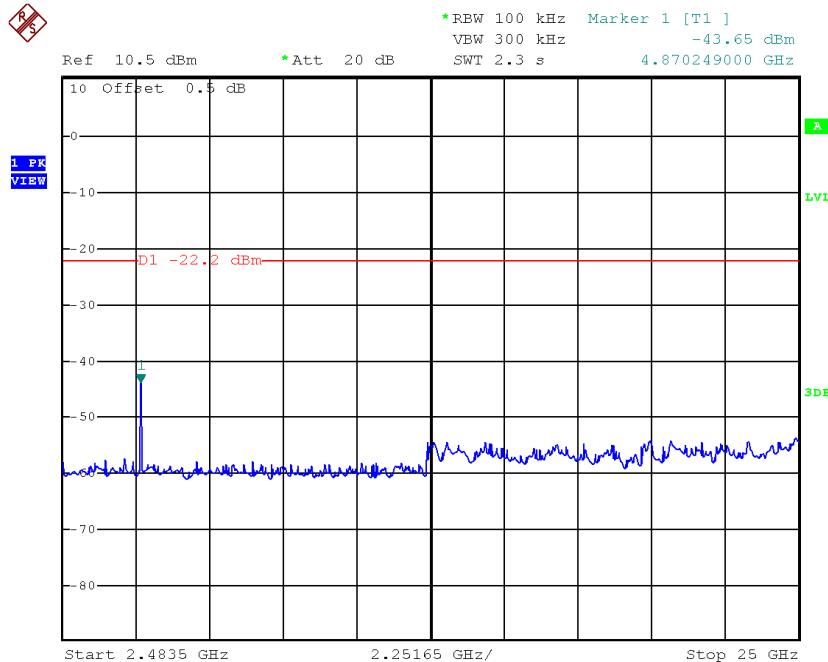


Date: 4.MAY.2021 13:54:25

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

#### 802.11b, Highest Channel, Plot A

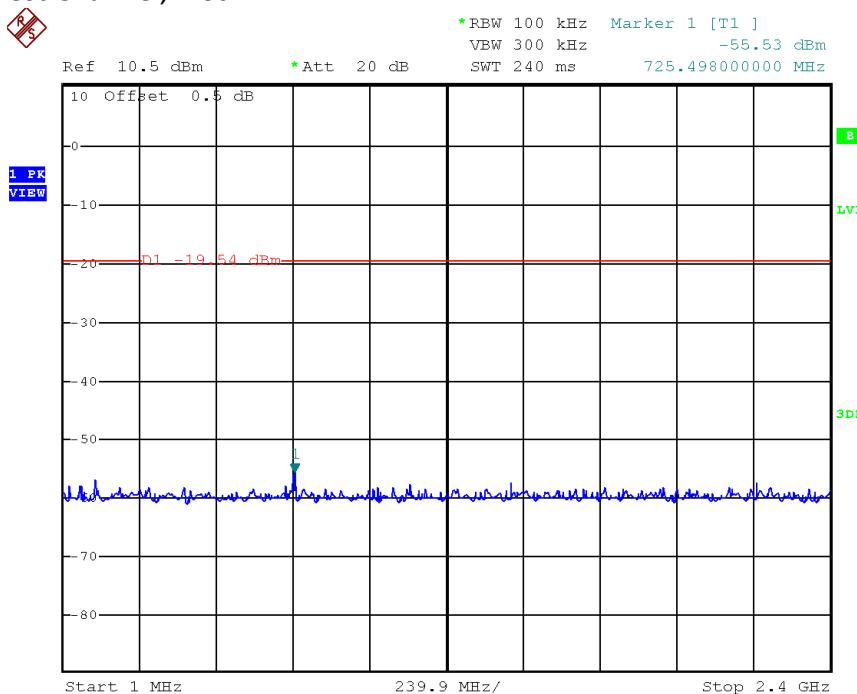

Date: 4.MAY.2021 13:56:09

#### 802.11b, Highest Channel, Plot B

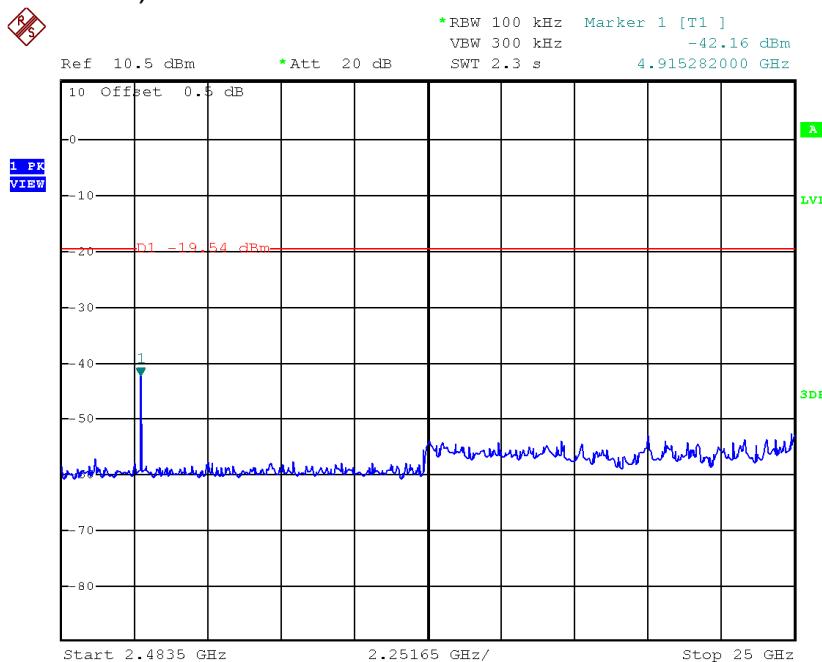


Date: 4.MAY.2021 13:57:05

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Lowest Channel, Bandedge

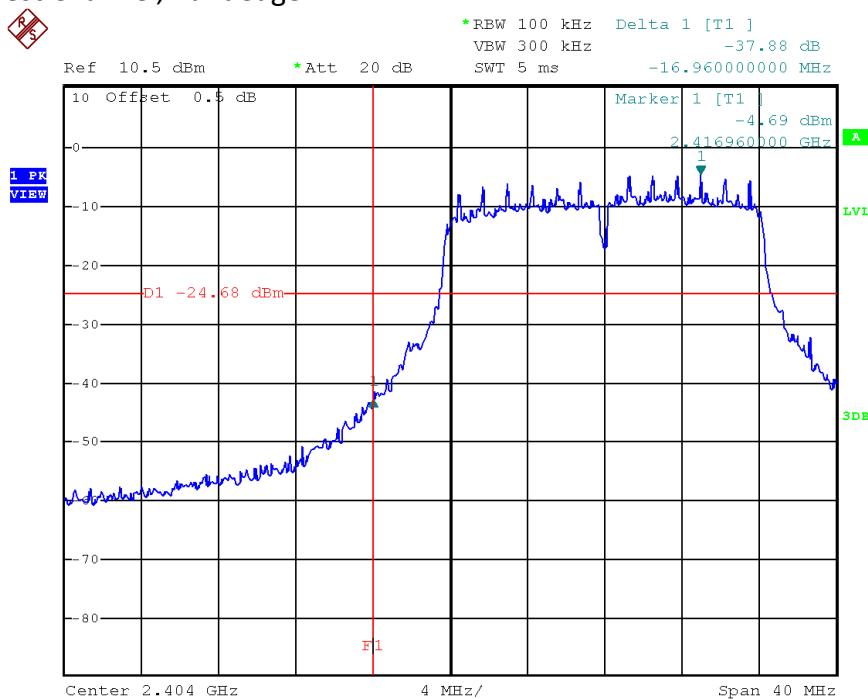

Date: 4.MAY.2021 14:27:07

802.11g, Highest Channel, Bandedge

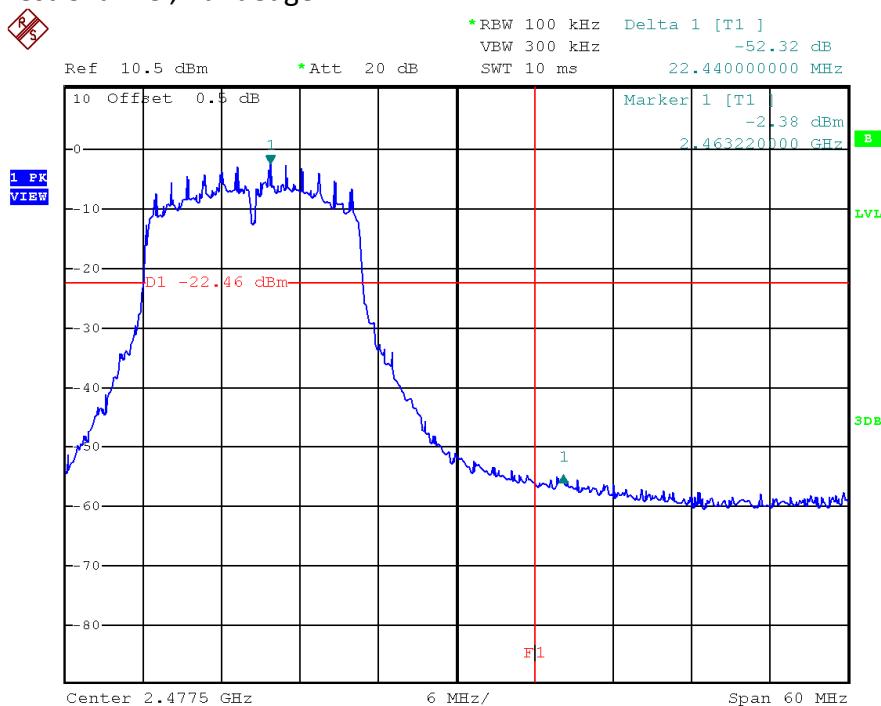


Date: 4.MAY.2021 14:28:30

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

#### 802.11g, Lowest Channel, Plot A

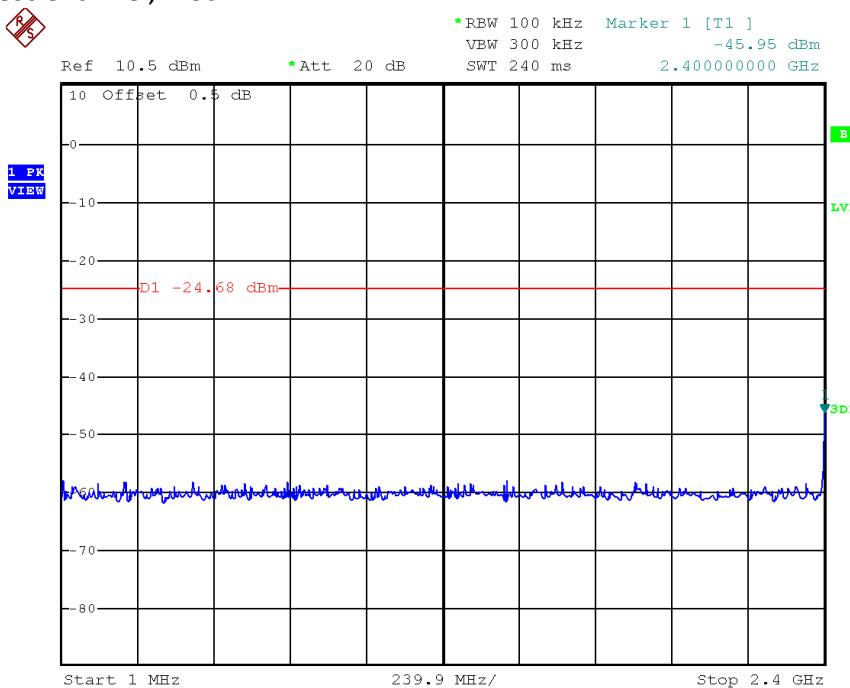

Date: 4.MAY.2021 13:58:40

#### 802.11g, Lowest Channel, Plot B

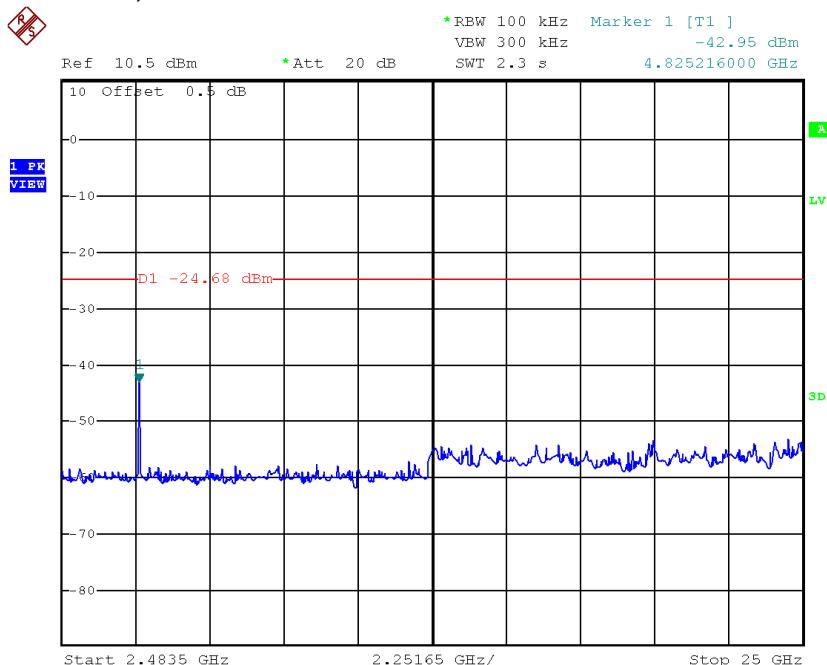


Date: 4.MAY.2021 13:59:34

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

#### 802.11g, Middle Channel, Plot A

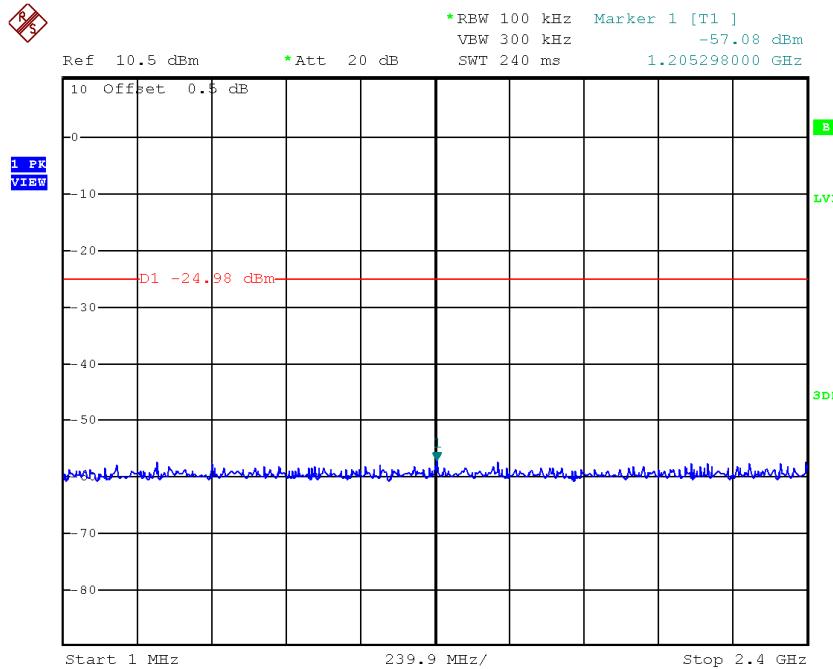

Date: 4.MAY.2021 14:00:52

#### 802.11g, Middle Channel, Plot B

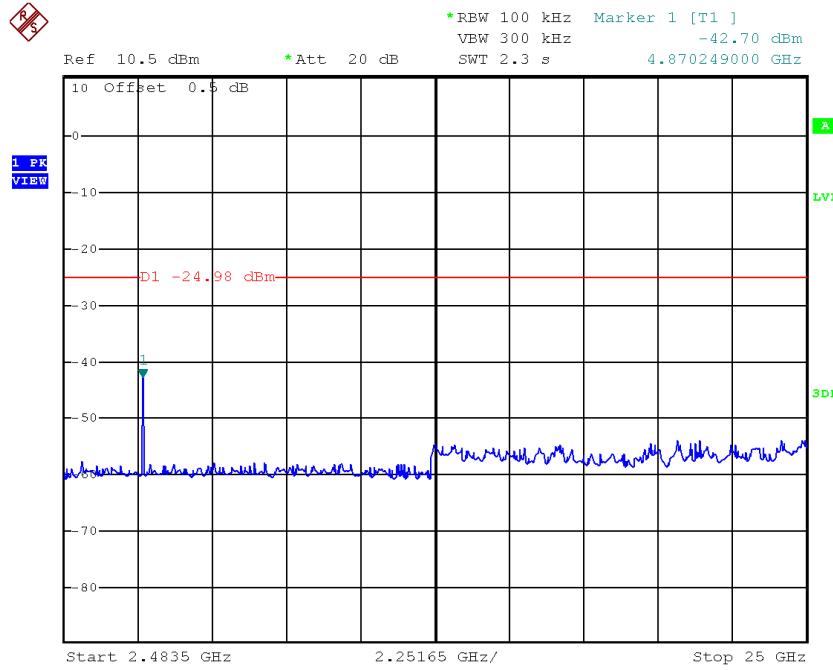


Date: 4.MAY.2021 14:01:48

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Highest Channel, Plot A

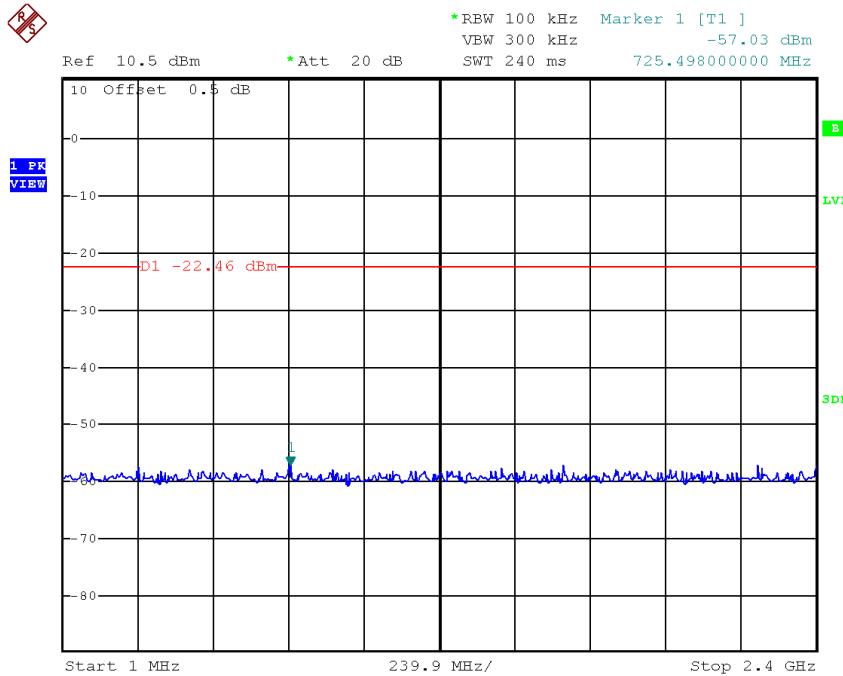

Date: 4.MAY.2021 14:03:27

802.11g, Highest Channel, Plot B

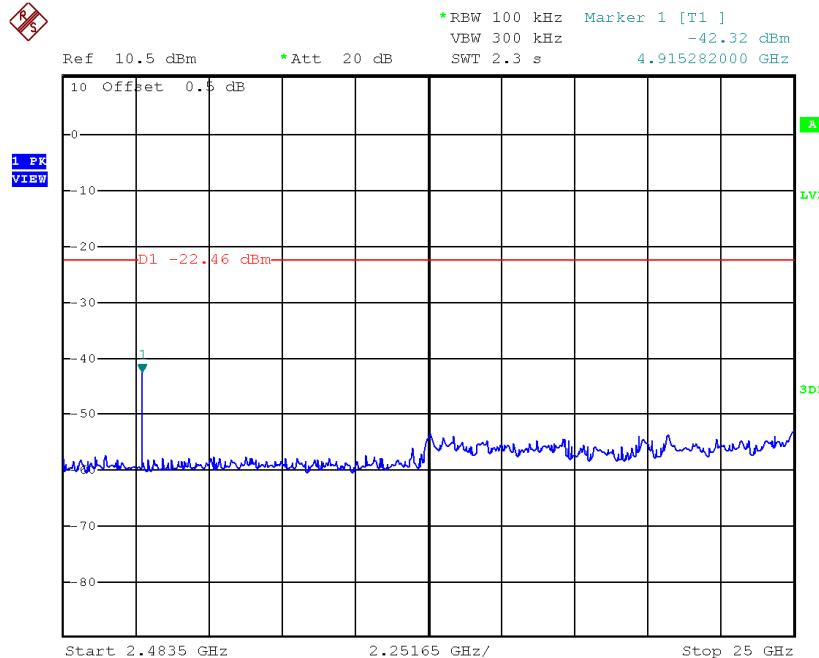


Date: 4.MAY.2021 14:04:55

## TEST REPORT


## PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

## 802.11n (20MHz), Lowest Channel, Bandedge

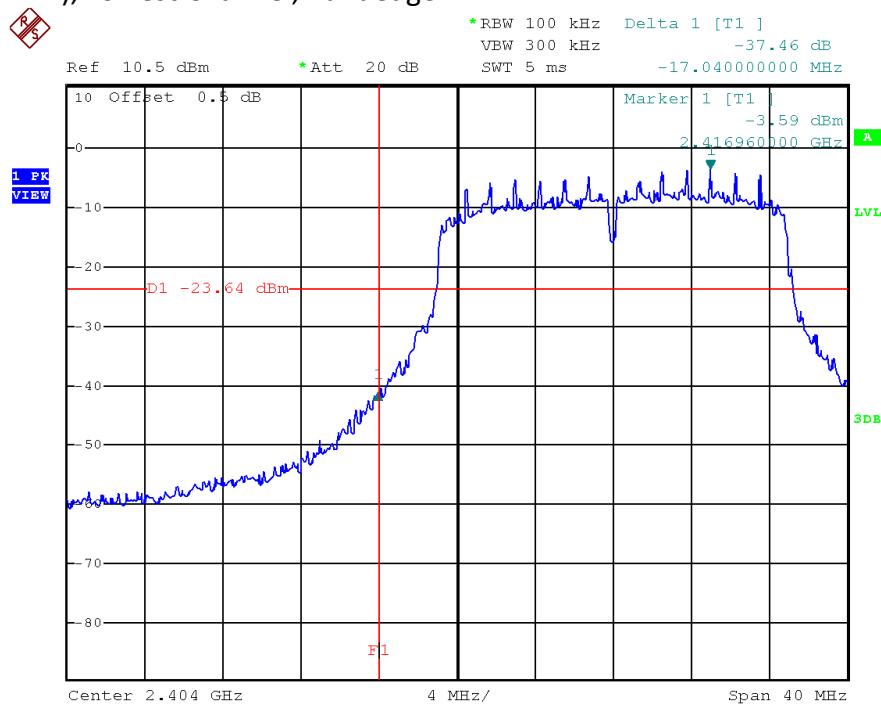

Date: 4.MAY.2021 14:30:55

## 802.11n (20MHz), Highest Channel, Bandedge

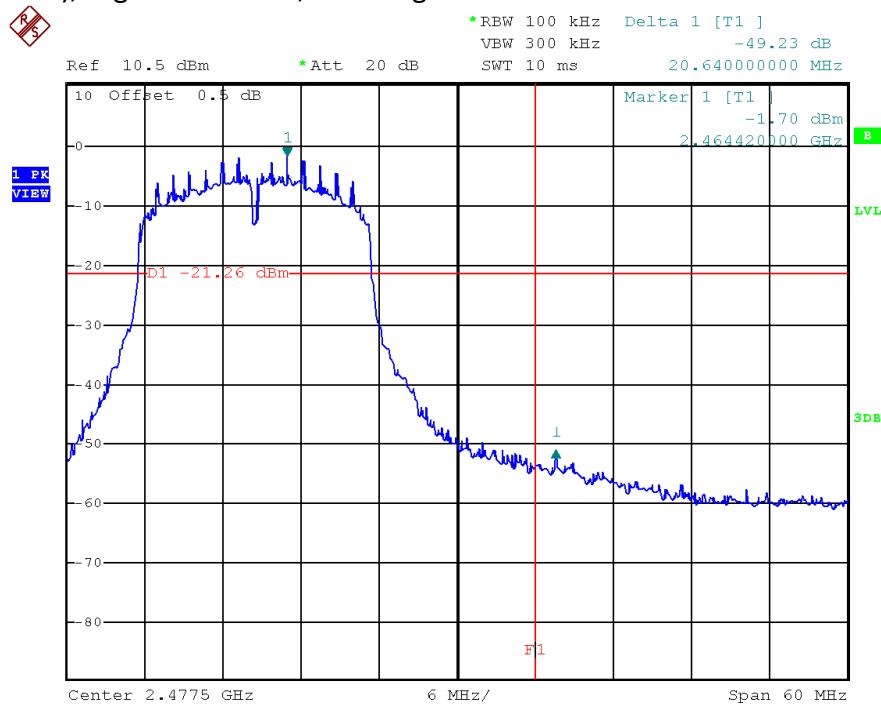


Date: 4.MAY.2021 14:32:13

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Lowest Channel, Plot A

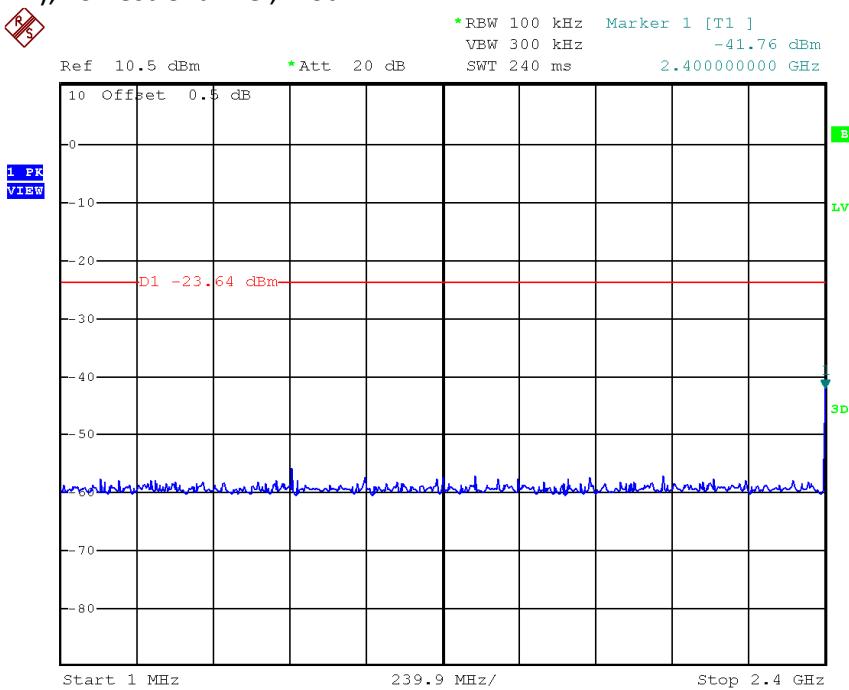

Date: 4.MAY.2021 14:06:46

802.11n (20MHz), Lowest Channel, Plot B

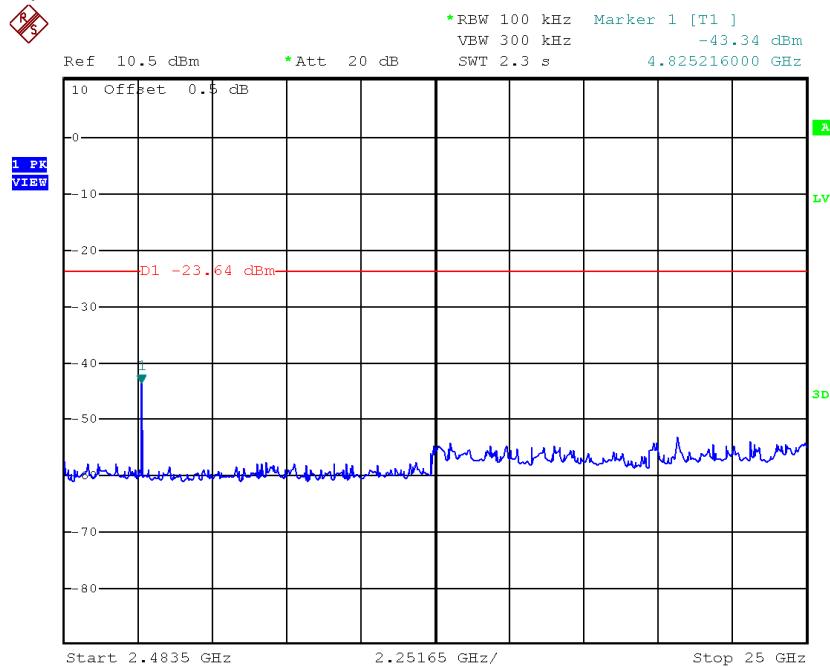


Date: 4.MAY.2021 14:07:40

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Middle Channel, Plot A

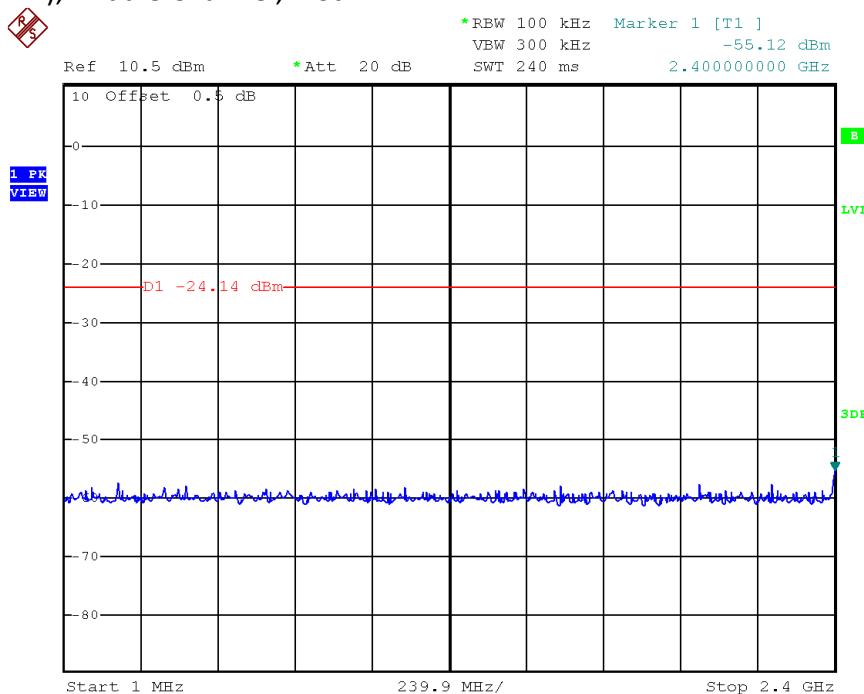

Date: 4.MAY.2021 14:08:48

802.11n (20MHz), Middle Channel, Plot B

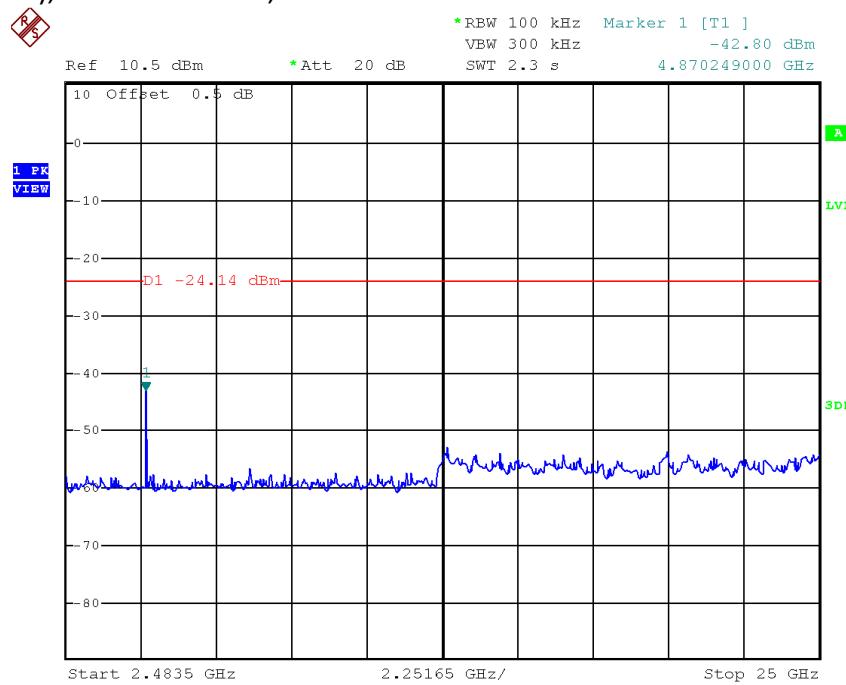


Date: 4.MAY.2021 14:09:43

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Highest Channel, Plot A

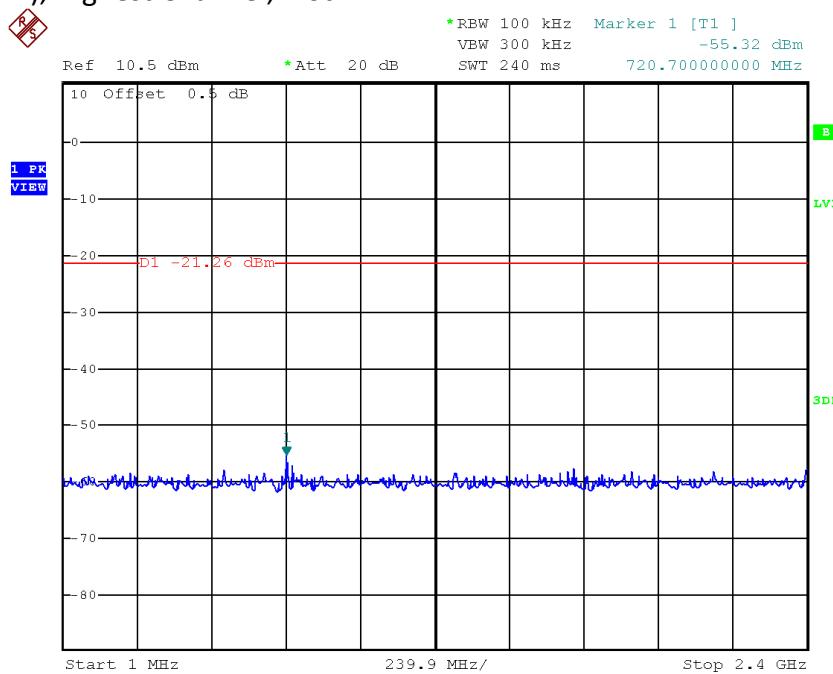

Date: 4.MAY.2021 14:10:56

802.11n (20MHz), Highest Channel, Plot B

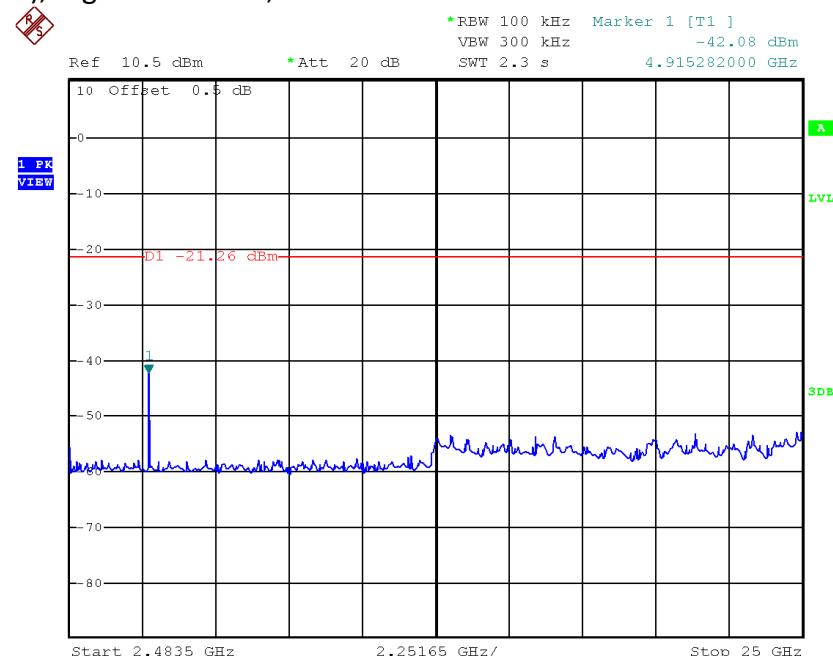


Date: 4.MAY.2021 14:12:15

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Lowest Channel, Bandedge

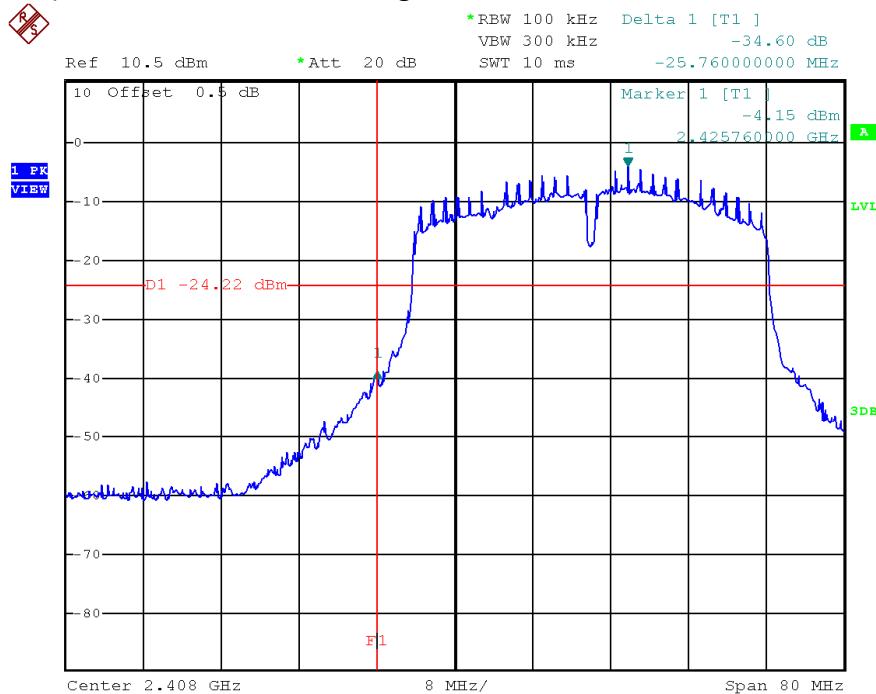

Date: 4.MAY.2021 14:35:45

802.11n (40MHz), Highest Channel, Bandedge

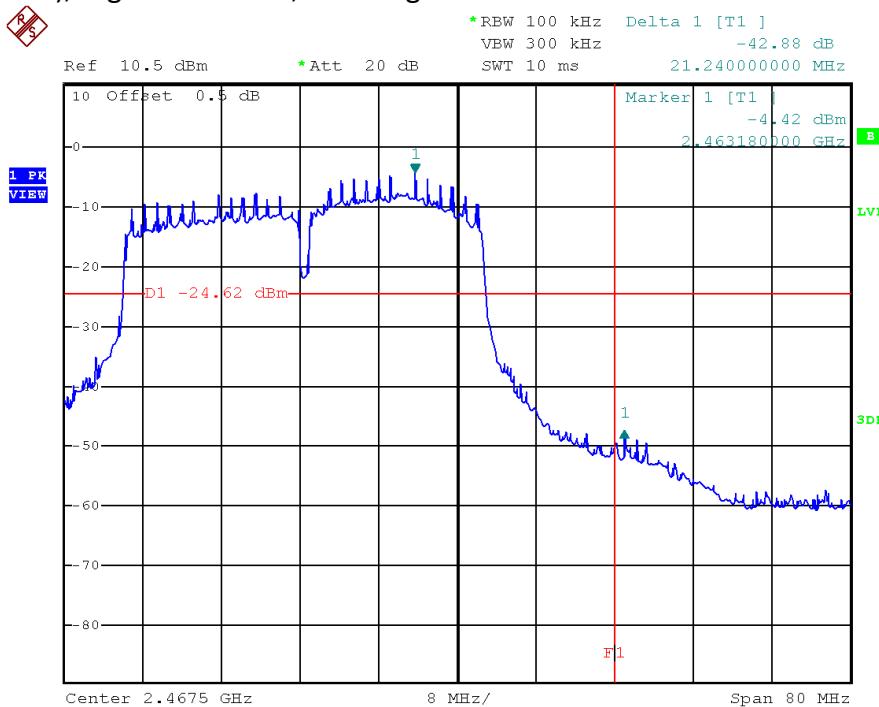


Date: 4.MAY.2021 14:37:24

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Lowest Channel, Plot A

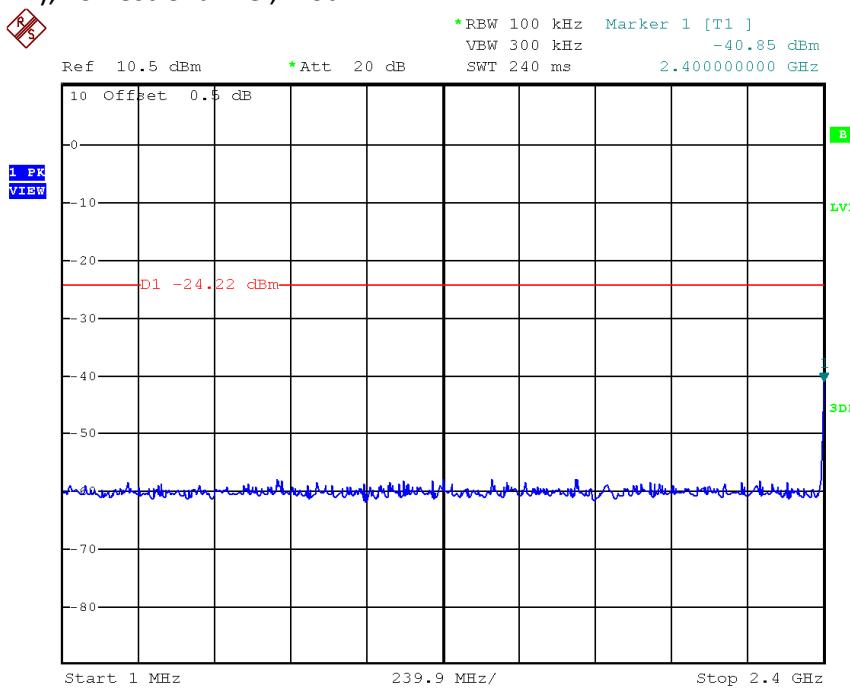

Date: 4.MAY.2021 14:13:23

802.11n (40MHz), Lowest Channel, Plot B

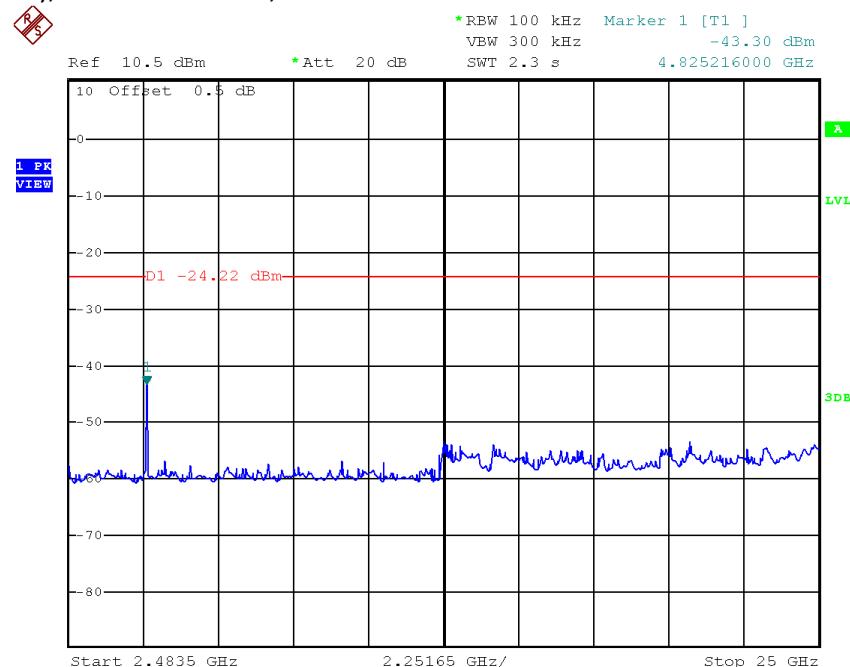


Date: 4.MAY.2021 14:14:19

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Middle Channel, Plot A

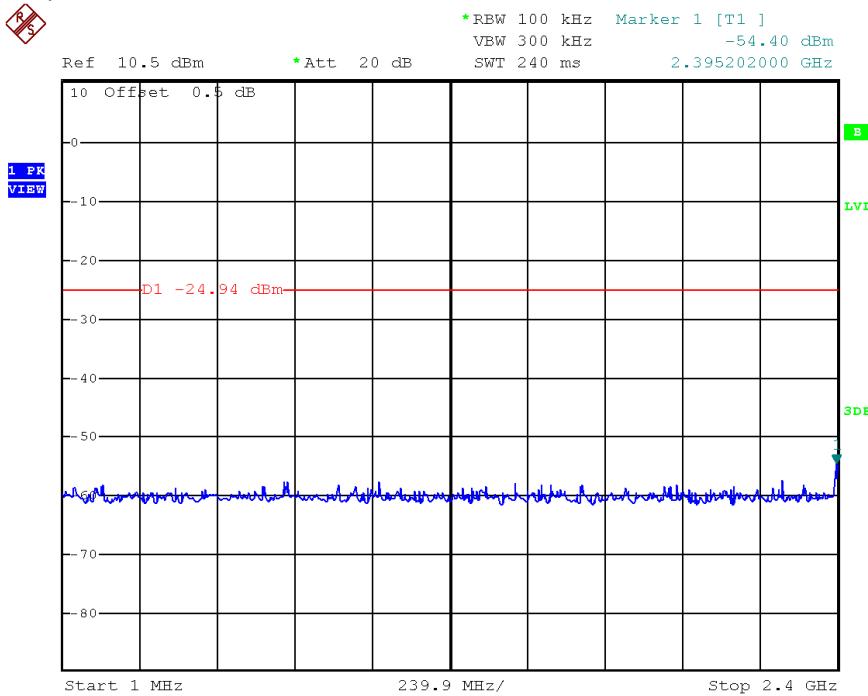

Date: 4.MAY.2021 14:15:26

802.11n (40MHz), Middle Channel, Plot B

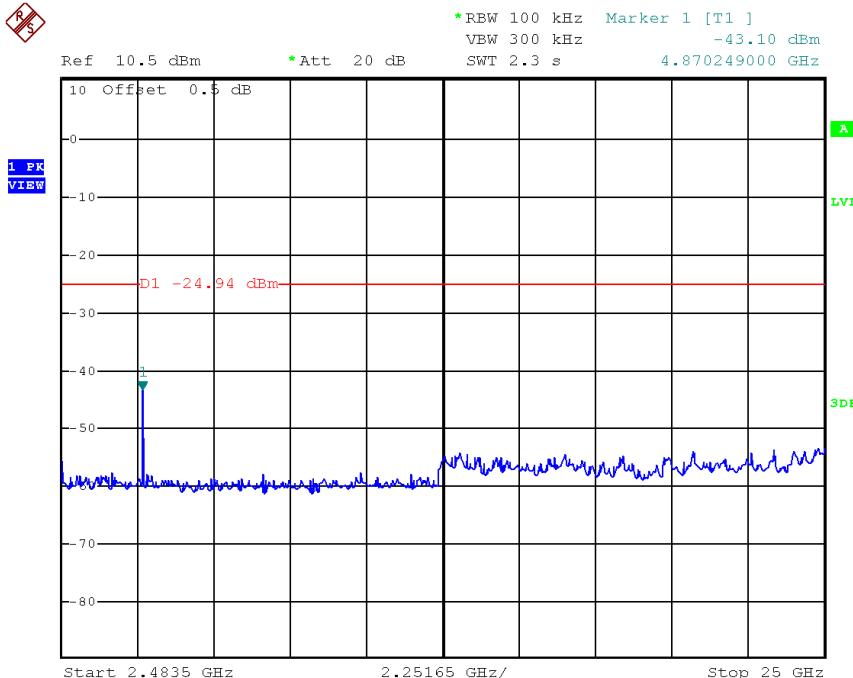


Date: 4.MAY.2021 14:17:29

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Highest Channel, Plot A

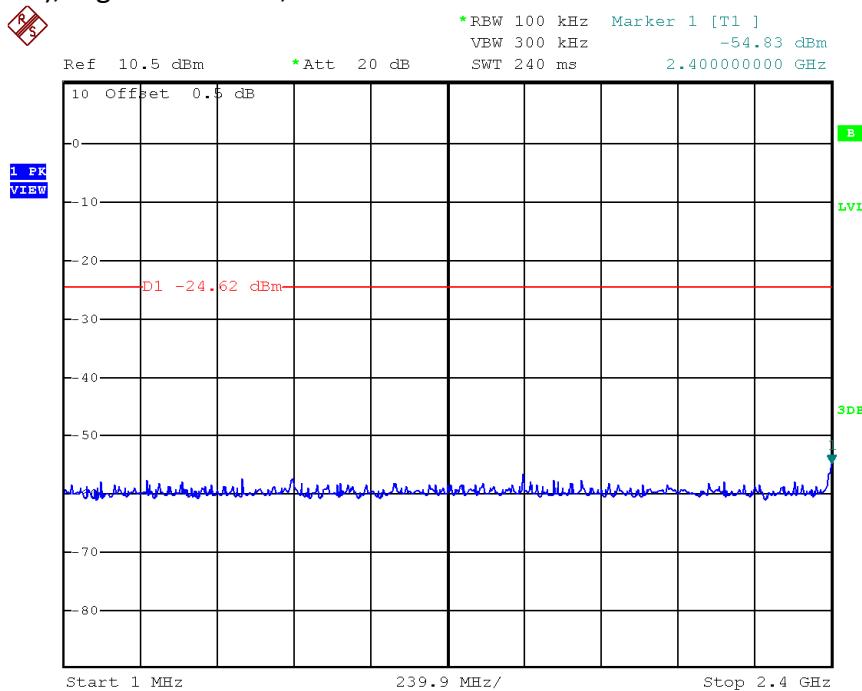

Date: 4.MAY.2021 14:18:52

802.11n (40MHz), Highest Channel, Plot B

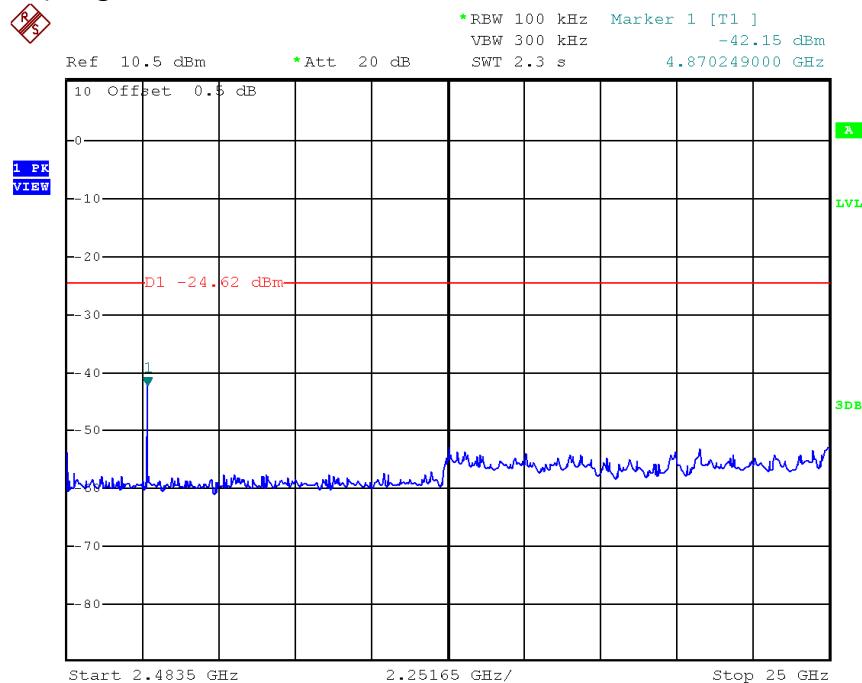


Date: 4.MAY.2021 14:19:58

## TEST REPORT

### Occupied Bandwidth Results: (802.11b)

(802.11b)	Occupied Bandwidth (MHz)
Low Channel: 2412	13.52
Middle Channel: 2437	13.36
High Channel: 2462	12.56

The worst case is shown as below

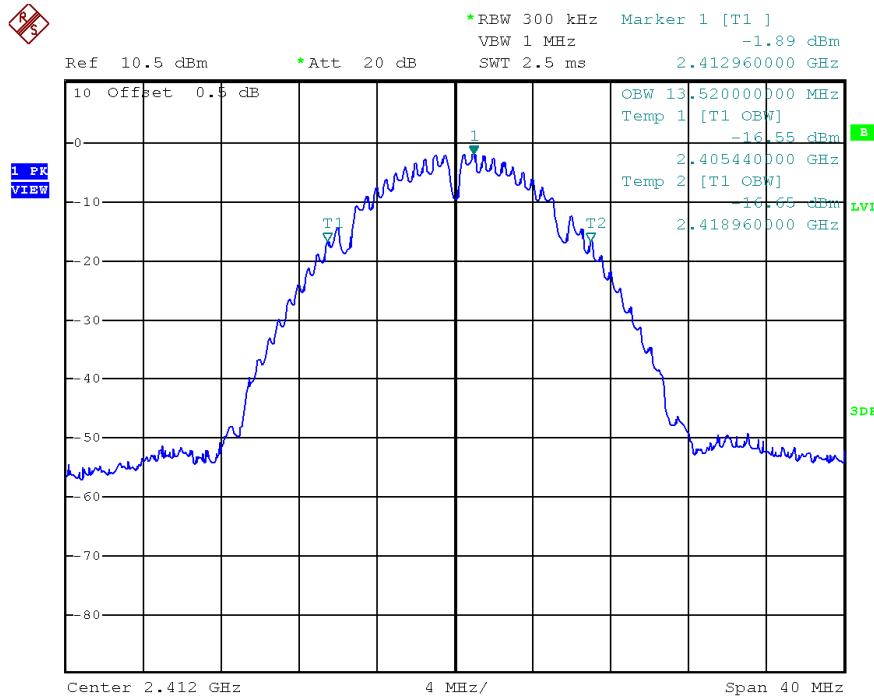


## TEST REPORT

### Occupied Bandwidth Results: (802.11g)

(802.11g)	Occupied Bandwidth (MHz)
Low Channel: 2412	16.48
Middle Channel: 2437	16.40
High Channel: 2462	16.16

The worst case is shown as below

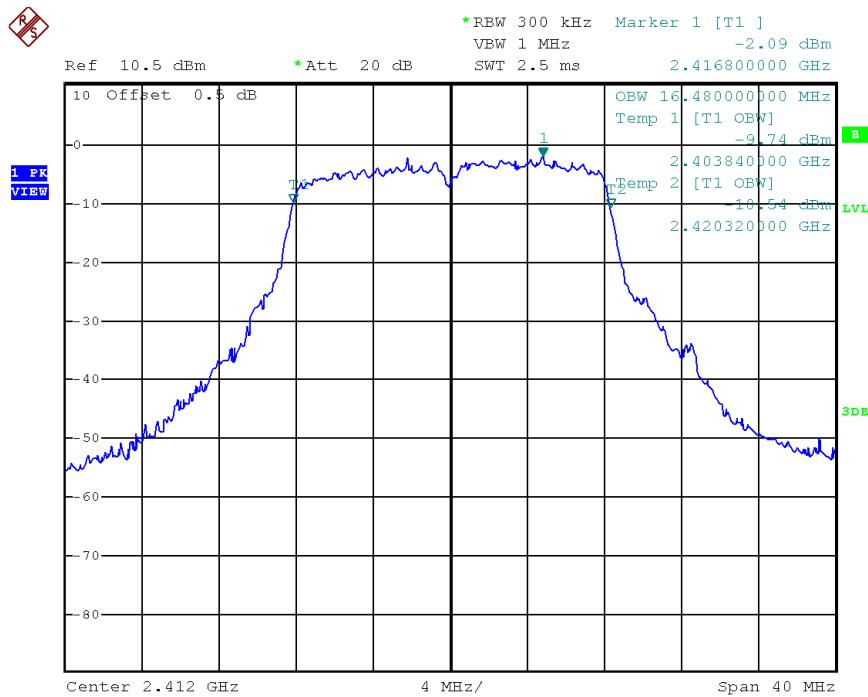

## TEST REPORT

### Occupied Bandwidth Results: (802.11n HT20)

#### (802.11n HT20)


#### Occupied Bandwidth (MHz)

Low Channel: 2412 17.60

Middle Channel: 2437 17.52

High Channel: 2462 17.28

The worst case is shown as below

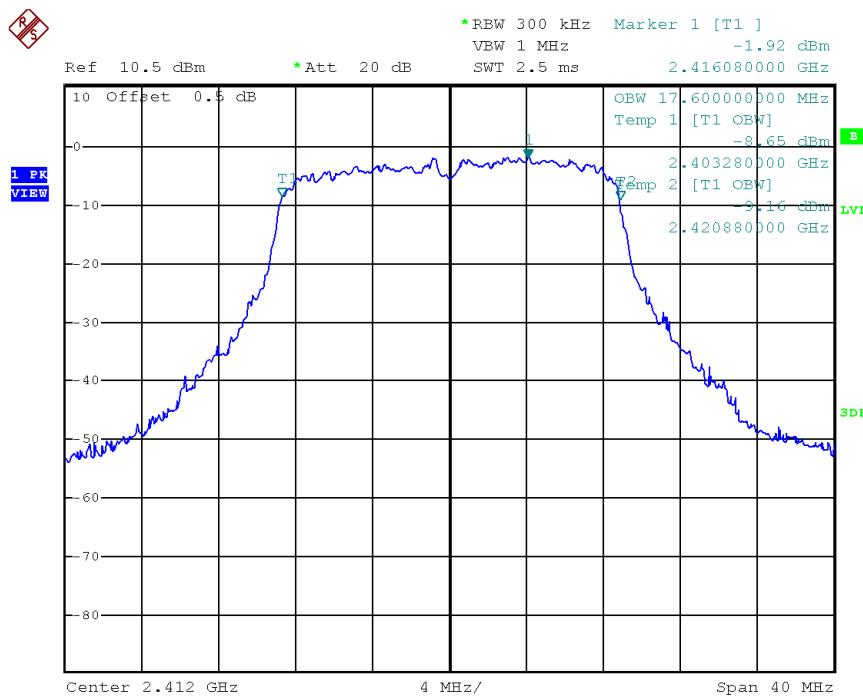

## TEST REPORT

### Occupied Bandwidth Results: Bluetooth

**(802.11n HT20)**


**Occupied Bandwidth (MHz)**

Low Channel: 2422 35.84

Middle Channel: 2437 36.48

High Channel: 2452 36.32

The worst case is shown as below

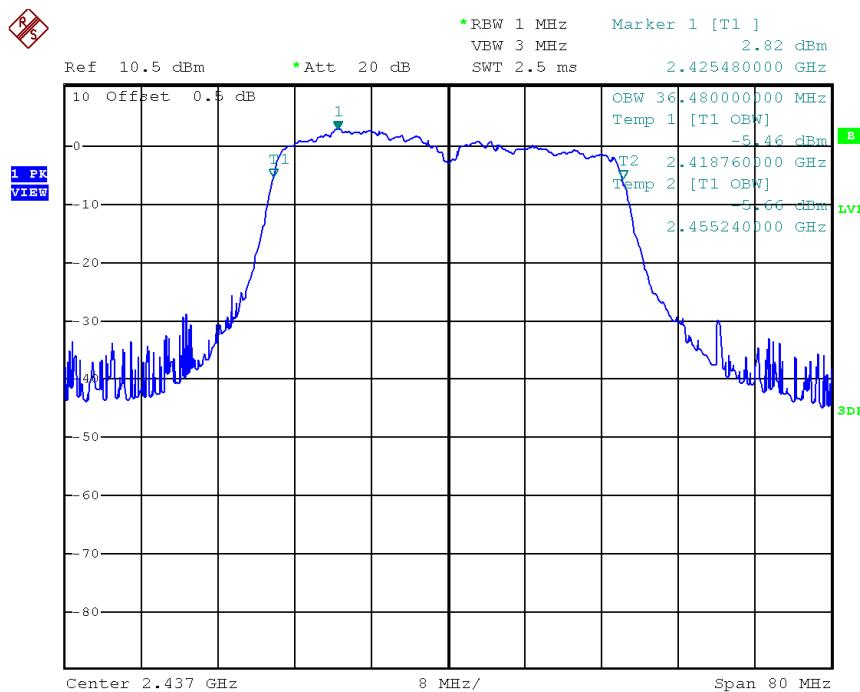

## TEST REPORT

### 4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in  $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0  $\text{dB}\mu\text{V}$  is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0  $\text{dB}\mu\text{V}/\text{m}$ . This value in  $\text{dB}\mu\text{V}/\text{m}$  is converted to its corresponding level in  $\mu\text{V}/\text{m}$ .

RA = 62.0  $\text{dB}\mu\text{V}$

AF = 7.4 dB

CF = 1.6 dB

AG = 29.0 dB

PD = 0.0 dB

AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

## TEST REPORT

### 4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

#### 4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission  
at

599.996 MHz

The worst-case radiated emission configuration photographs are saved with filename: config photos.pdf

#### 4.6.2 Radiated Emission Data

The data in tables 1-13 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 1.2 dB margin

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 1  
 IEEE 802.11b (DSSS, 1 Mbps)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2390.000	47.0	33	29.4	43.4	54.0	-10.6
V	4824.000	38.7	33	34.9	40.6	54.0	-13.4
H	12060.000	23.2	33	40.5	30.7	54.0	-23.3

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2390.000	60.8	33	29.4	57.2	74.0	-16.8
V	4824.000	45.3	33	34.9	47.2	74.0	-26.8
H	12060.000	31.0	33	40.5	38.5	74.0	-35.5

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: TX-Channel 06

**Table 2**  
**IEEE 802.11b (DSSS, 1 Mbps)**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	4874.000	38.3	33	34.9	40.2	54.0	-13.8
V	7311.000	25.1	33	37.9	30.0	54.0	-24.0
H	12185.000	22.5	33	40.5	30.0	54.0	-24.0

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	4874.000	44.7	33	34.9	46.6	74.0	-27.4
V	7311.000	33.3	33	37.9	38.2	74.0	-35.8
H	12185.000	30.6	33	40.5	38.1	74.0	-35.9

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: TX-Channel 11

**Table 3**  
**IEEE 802.11b (DSSS, 1 Mbps)**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2483.500	46.0	33	29.4	42.4	54.0	-11.6
V	4924.000	38.3	33	34.9	40.2	54.0	-13.8
V	7386.000	25.8	33	37.9	30.7	54.0	-23.3
H	12310.000	23.2	33	40.5	30.7	54.0	-23.3

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2483.500	60.4	33	29.4	56.8	74.0	-17.2
V	4924.000	44.3	33	34.9	46.2	74.0	-27.8
V	7386.000	33.6	33	37.9	38.5	74.0	-35.5
H	12310.000	30.9	33	40.5	38.4	74.0	-35.6

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: TX-Channel 01

**Table 4**  
**IEEE 802.11g (OFDM, 6 Mbps)**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2390.000	55.0	33	29.4	51.4	54.0	-2.6
V	4824.000	28.8	33	34.9	30.7	54.0	-23.3
H	12060.000	23.2	33	40.5	30.7	54.0	-23.3

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2390.000	72.0	33	29.4	68.4	74.0	-5.6
V	4824.000	36.6	33	34.9	38.5	74.0	-35.5
H	12060.000	31.0	33	40.5	38.5	74.0	-35.5

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: TX-Channel 06

Table 5  
 IEEE 802.11g (OFDM, 6 Mbps)

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	4874.000	27.3	33	34.9	29.2	54.0	-24.8
V	7311.000	25.1	33	37.9	30.0	54.0	-24.0
H	12185.000	22.5	33	40.5	30.0	54.0	-24.0

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	4874.000	36.5	33	34.9	38.4	74.0	-35.6
V	7311.000	33.4	33	37.9	38.3	74.0	-35.7
H	12185.000	30.6	33	40.5	38.1	74.0	-35.9

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: TX-Channel 11

Table 6  
 IEEE 802.11g (OFDM, 6 Mbps)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2483.500	46.4	33	29.4	42.8	54.0	-11.2
V	4924.000	27.7	33	34.9	29.6	54.0	-24.4
V	7386.000	25.8	33	37.9	30.7	54.0	-23.3
H	12310.000	23.2	33	40.5	30.7	54.0	-23.3

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2483.500	61.1	33	29.4	57.5	74.0	-16.5
V	4924.000	36.8	33	34.9	38.7	74.0	-35.3
V	7386.000	33.6	33	37.9	38.5	74.0	-35.5
H	12310.000	30.9	33	40.5	38.4	74.0	-35.6

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: TX-Channel 01

**Table 7**  
**IEEE 802.11n (20MHz) (OFDM, MCS0)**

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2390.000	54.4	33	29.4	50.8	54.0	-3.2
V	4824.000	28.3	33	34.9	30.2	54.0	-23.8
H	12060.000	23.2	33	40.5	30.7	54.0	-23.3

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2390.000	71.8	33	29.4	68.2	74.0	-5.8
V	4824.000	36.7	33	34.9	38.6	74.0	-35.4
H	12060.000	31.0	33	40.5	38.5	74.0	-35.5

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: TX-Channel 06

**Table 8**  
**IEEE 802.11n (20MHz) (OFDM, MCS0)**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	4874.000	28.9	33	34.9	30.8	54.0	-23.2
V	7311.000	25.1	33	37.9	30.0	54.0	-24.0
H	12185.000	22.5	33	40.5	30.0	54.0	-24.0

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	4874.000	36.7	33	34.9	38.6	74.0	-35.4
V	7311.000	33.4	33	37.9	38.3	74.0	-35.7
H	12185.000	30.6	33	40.5	38.1	74.0	-35.9

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: TX-Channel 11

**Table 9**  
**IEEE 802.11n (20MHz) (OFDM, MCS0)**

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Avergae (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2483.500	46.8	33	29.4	43.2	54.0	-10.8
V	4924.000	28.5	33	34.9	30.4	54.0	-23.6
V	7386.000	25.8	33	37.9	30.7	54.0	-23.3
H	12310.000	23.2	33	40.5	30.7	54.0	-23.3

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2483.500	61.4	33	29.4	57.8	74.0	-16.2
V	4924.000	36.3	33	34.9	38.2	74.0	-35.8
V	7386.000	33.6	33	37.9	38.5	74.0	-35.5
H	12310.000	30.9	33	40.5	38.4	74.0	-35.6

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: TX-Channel 3

Table 10  
 IEEE 802.11n (40MHz) (OFDM, MCS0)

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	2390.000	56.2	33	29.4	52.6	54.0	-1.4
V	4844.000	28.4	33	34.9	30.3	54.0	-23.7
V	12110.000	23.2	33	40.5	30.7	54.0	-23.3

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	2390.000	76.1	33	29.4	72.5	74.0	-1.5
V	4844.000	36.8	33	34.9	38.7	74.0	-35.3
V	12110.000	31.0	33	40.5	38.5	74.0	-35.5

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: TX-Channel 6

Table 11  
 IEEE 802.11n (40MHz) (OFDM, MCS0)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	4874.000	28.2	33	34.9	30.1	54.0	-23.9
V	7311.000	25.1	33	37.9	30.0	54.0	-24.0
H	12185.000	22.5	33	40.5	30.0	54.0	-24.0

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	4874.000	37.0	33	34.9	38.9	74.0	-35.1
V	7311.000	33.4	33	37.9	38.3	74.0	-35.7
H	12185.000	31.0	33	40.5	38.5	74.0	-35.5

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: TX-Channel 9

Table 12  
 IEEE 802.11n (40MHz) (OFDM, MCS0)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	2483.500	49.0	33	29.4	45.4	54.0	-8.6
H	4904.000	28.8	33	34.9	30.7	54.0	-23.3
V	7356.000	25.8	33	37.9	30.7	54.0	-23.3
V	12260.000	23.2	33	40.5	30.7	54.0	-23.3

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	2483.500	70.4	33	29.4	66.8	74.0	-7.2
H	4904.000	36.5	33	34.9	38.4	74.0	-35.6
V	7356.000	33.6	33	37.9	38.5	74.0	-35.5
V	12260.000	30.9	33	40.5	38.4	74.0	-35.6

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

## TEST REPORT

Mode: Bluetooth and WiFi Operating

Table 13

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	56.782	39.2	16	11.0	34.2	40.0	-5.8
V	93.564	38.2	16	11.0	33.2	43.5	-10.3
V	137.548	40.2	16	14.0	38.2	43.5	-5.3
V	199.992	36.4	16	16.0	36.4	43.5	-7.1
V	228.728	39.8	16	18.0	41.8	46.0	-4.2
V	399.934	33.8	16	25.0	42.8	46.0	-3.2
V	599.996	31.8	16	29.0	44.8	46.0	-1.2
H	800.058	28.6	16	31.0	43.6	46.0	-2.4


NOTES:

1. Quasi-Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.


## TEST REPORT

### 4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

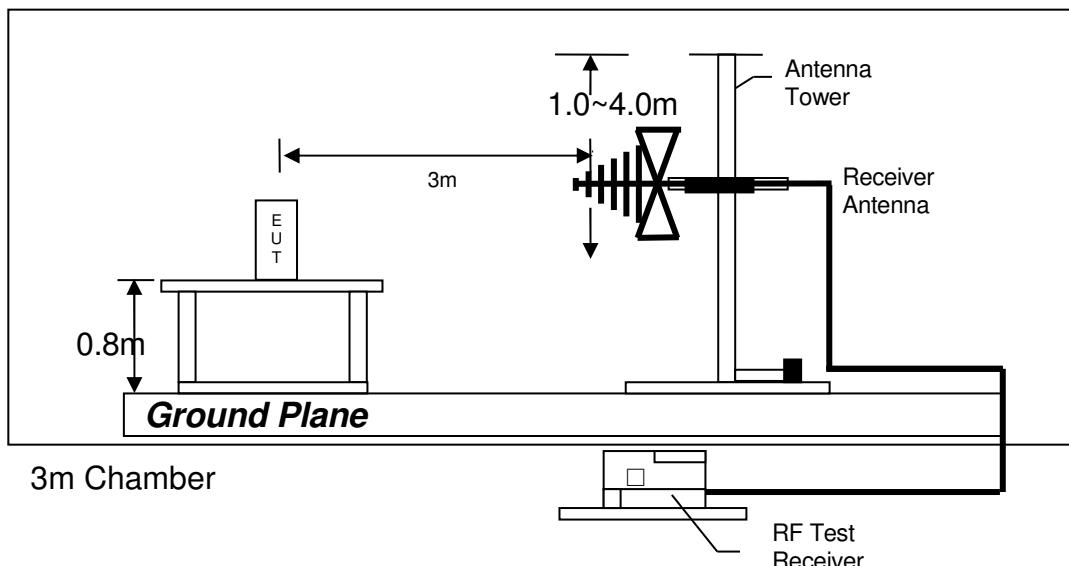

Test setup of radiated emissions up to 1GHz

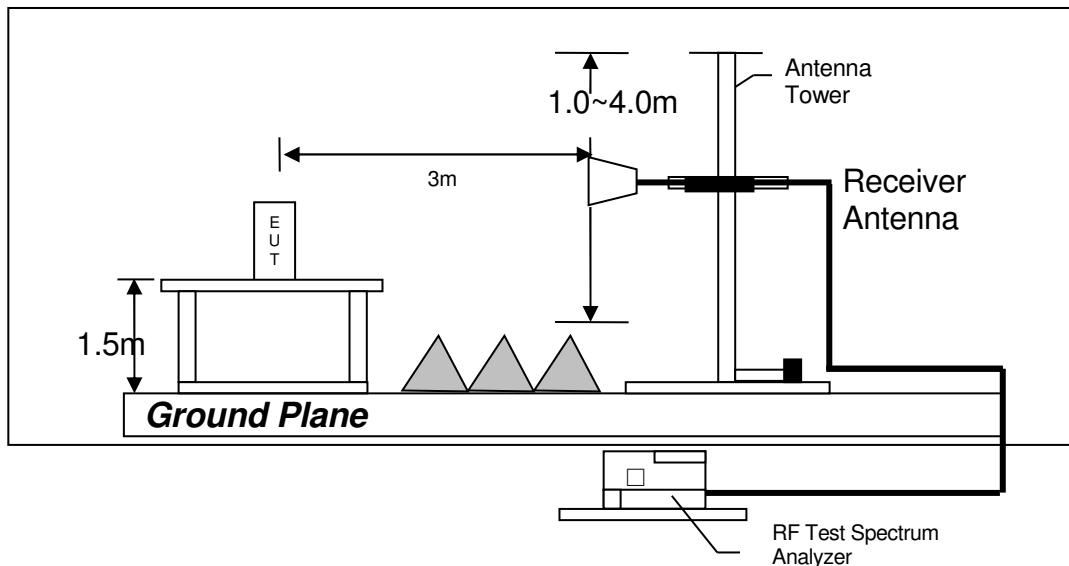

Test setup of radiated emissions above 1GHz

## TEST REPORT

### 4.6.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

## TEST REPORT

### 4.7 AC Power Line Conducted Emission

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

#### 4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration  
at  
1.793 MHz

The worst-case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

#### 4.7.2 AC Power Line Conducted Emission Data


The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 22.9 dB margin

## TEST REPORT

### AC POWER LINE CONDUCTED EMISSION

Worst Case: Bluetooth and WiFi Operating

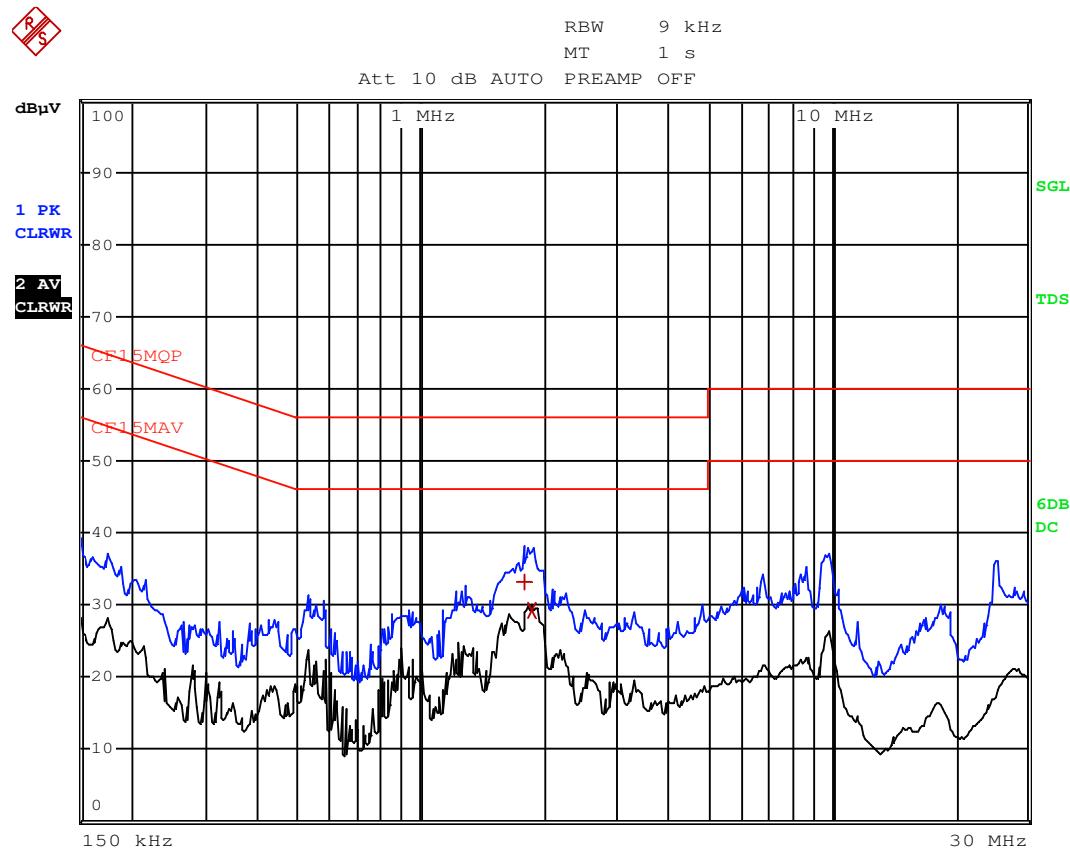


**TEST REPORT****Worst Case: Bluetooth and WiFi Operating**

EDIT PEAK LIST (Final Measurement Results)						
TRACE	FREQUENCY	LEVEL	dB $\mu$ V	DELTA	LIMIT	dB
1 Quasi Peak	1.7925 MHz	33.13	N	-22.86		
2 CISPR Average	1.869 MHz	29.27	N	-16.72		

## TEST REPORT

### 4.7.3 Conducted Emission Test Setup

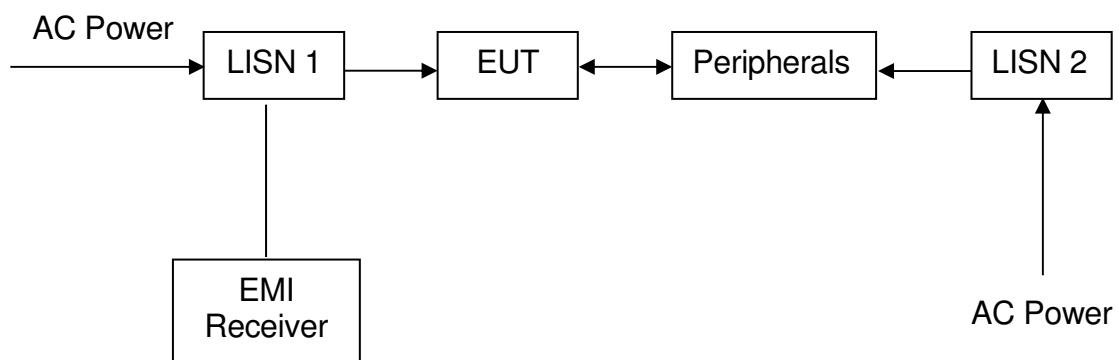

## TEST REPORT

### 5.0 EQUIPMENT LIST

#### 1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna (20MHz to 200MHz)
Registration No.	EW-3156	EW-2466	EW-2512
Manufacturer	ROHDE SCHWARZ	ROHDE SCHWARZ	EMCO
Model No.	ESR26	FSP30	3104C
Calibration Date	January 25, 2021	September 05, 2020	June 03, 2020
Calibration Due Date	January 25, 2022	September 05, 2021	December 03, 2021
Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-0447	EW-0194	EW-2313
Manufacturer	EMCO	EMCO	ELECTROMETRI
Model No.	3146	3115	EM-6876
Calibration Date	September 25, 2019	June 03, 2021	December 17, 2019
Calibration Due Date	June 25, 2021	June 03, 2022	June 17, 2021
Equipment	RF Cable 14m (1GHz to 26.5GHz)	14m Double Shield RF Cable (20MHz to 6GHz)	12 metre RF Cable 40GHz
Registration No.	EW-2781	EW-2074	EW-2774
Manufacturer	GREATBILLION	RADIALL	GREATBILLION
Model No.	SMA m/SHF5MPU /SMA m ra14m,26G	N(m)-RG142-BNC(m) L= 14M	SMA m-m ra 12m 40G outdoor
Calibration Date	November 24, 2020	August 29, 2020	September 12, 2020
Calibration Due Date	November 24, 2021	August 29, 2021	September 12, 2021

**TEST REPORT**

## 2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver
Registration No.	EW-2454	EW-2501	EW-2500
Manufacturer	RADIALL	ROHDESGHARZ	ROHDESGHARZ
Model No.	bnc m st / 142 /bnc m ra 240cm	ENV-216	ESCI
Calibration Date	November 10, 2020	September 11, 2020	March 29, 2021
Calibration Due Date	November 10, 2021	September 11, 2021	March 29, 2022

**TEST REPORT**

## 3) Conductive Measurement Test

Equipment	5m RF Cable (40GHz)	RF Power Meter with Power Sensor (N1921A)	Spectrum Analyzer
Registration No.	EW-2701	EW-2270	EW-2466
Manufacturer	RADIALL	N/A	ROHDE SCHWARZ
Model No.	sma m-m 5m 40G	AGILENTTECH	FSP30
Calibration Date	November 24, 2020	September 03, 2020	September 05, 2020
Calibration Due Date	November 24, 2021	September 03, 2021	September 05, 2021

## 4) Bandedge &amp; Bandwidth Measurement

Equipment	5m RF Cable (40GHz)	Spectrum Analyzer
Registration No.	EW-2701	EW-2466
Manufacturer	RADIALL	ROHDE SCHWARZ
Model No.	sma m-m 5m 40G	FSP30
Calibration Date	November 24, 2020	September 05, 2020
Calibration Due Date	November 24, 2021	September 05, 2021

**END OF TEST REPORT**