

TEST REPORT

Report No.: 18081638HKG-002

Application For Certification
(Original Grant)

FCC ID: Q20-NADM10

IC: 152B-NADM10

Transceiver

This report contains the data of Bluetooth 3.0 portion only.

Prepared and Checked by:

Approved by:

Signed On File
Wong Cheuk Ho, Herbert
Lead Engineer

Wong Kwok Yeung, Kenneth
Senior Lead Engineer
Date: February 14, 2019

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

TEST REPORT

GENERAL INFORMATION

Grantee:	Lenbrook Industries Ltd
Grantee Address:	633 Granite Court, Pickering ON L1W 3K1, Canada.
Contact Person:	Taresh Vadgama
Tel:	+1 9058310799 ext 4236
Fax:	N/A
e-mail:	TVadgama@lenbrook.com
Manufacturer:	Dongguan Kwan Hong Electronic Co., Ltd
Manufacturer Address:	Kwan Hong Bldg, Xiao Bian 2 nd Industrial Zone, Chang An, Dongguan, Gunagdong, China.
Brand Name:	NAD
Model / HVIN:	M10
PMN:	BluOS STREAMING AMPLIFIER
Additional Model:	N/A
Type of EUT:	Transceiver
Description of EUT:	BluOS STREAMING AMPLIFIER
Serial Number:	N/A
FCC ID / IC:	Q2O-NADM10 / 152B-NADM10
Date of Sample Submitted:	November 05, 2018
Date of Test:	November 05, 2018 to February 14, 2019
Report No.:	18081638HKG-002
Report Date:	February 14, 2019
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

TEST REPORT

SUMMARY OF TEST RESULT

Test Specification	Reference	Results
Transmitter Power Line Conducted Emissions	15.207 / RSS-Gen 8.8	Pass
Radiated Emission	15.249, 15.209 /	Pass
Radiated Emission on the Bandedge	RSS-210 B.10, RSS-210 4.4	
Radiated Emission in Restricted Bands	15.205 / RSS-210 4.1	Pass

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2017 Edition

RSS-210 Issue 9, August 2016

RSS-Gen Issue 5, April 2018

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.

2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

TEST REPORT

TABLE OF CONTENTS

1.0	GENERAL DESCRIPTION	5
1.1	Product Description	5
1.2	Related Submittal(s) Grants	6
1.3	Test Methodology.....	7
1.4	Test Facility	7
2.0	SYSTEM TEST CONFIGURATION.....	8
2.1	Justification.....	8
2.2	EUT Exercising Software.....	8
2.3	Special Accessories	8
2.4	Measurement Uncertainty.....	8
2.5	Support Equipment List and Description.....	8
3.0	EMISSION RESULTS.....	9
3.1	Field Strength Calculation	9
3.2	Radiated Emission Configuration Photograph.....	10
3.3	Radiated Emission Data	10
3.4	Conducted Emission Configuration Photograph	10
3.5	Conducted Emission Data	10
4.0	EQUIPMENT PHOTOGRAPHS	17
5.0	PRODUCT LABELLING.....	17
6.0	TECHNICAL SPECIFICATIONS	17
7.0	INSTRUCTION MANUAL.....	17
8.0	MISCELLANEOUS INFORMATION	18
8.1	Radiated Emission on the Bandedge.....	18
8.2	Discussion of Pulse Desensitization.....	21
8.3	Calculation of Average Factor	21
8.4	Emissions Test Procedures.....	22
8.5	Occupied Bandwidth.....	26
9.0	CONFIDENTIALITY REQUEST	27
10.0	EQUIPMENT LIST	28

TEST REPORT

1.0 GENERAL DESCRIPTION

1.1 Product Description

The Equipment-Under-Test (EUT) M10 is a BluOS STREAMING AMPLIFIER. The EUT contains both WLAN (WiFi) and Bluetooth modules. The Bluetooth module has Bluetooth 4.0 BLE and Bluetooth 3.0 features. The EUT can accept analog audio signal, digital audio signal and wireless audio signal via Bluetooth devices. The EUT has internal power amplifiers and loudspeaker. The EUT is powered by 100-120VAC, 200-240VAC. The NFC is a 13.56MHz passive tag only.

For the WLAN (WiFi) module:

For 2.400-2.4835GHz:

The Equipment Under Test (EUT) operates at frequency range of 2412MHz to 2462MHz with 11 channels. For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps.

For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 2422.000MHz to 2452.000MHz with 7 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

For 5.15-5.25GHz:

The Equipment Under Test (EUT) operates at frequency range of 5180MHz to 5240MHz with 4 channels.

For 802.11a mode, it operates at frequency range of 5180.00MHz to 5250.000MHz with 4 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 5180.00MHz to 5250.000MHz with 4 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65.0Mbps.

For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 5190.00MHz to 5230.000MHz with 2 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 135.0Mbps.

For 802.11ac (with 20MHz bandwidth) mode, it operates at frequency range of 5180.00MHz to 5250.000MHz with 4 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 86.7Mbps.

For 802.11ac (with 40MHz bandwidth) mode, it operates at frequency range of 5190.00MHz to 5230.000MHz with 2 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 180Mbps.

For 802.11ac (with 80MHz bandwidth) mode, it operates at frequency 5210MHz. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 390Mbps.

TEST REPORT

For 5.725-5.850GHz:

The Equipment Under Test (EUT) operates at frequency range of 5745MHz to 5825MHz with 5 channels. For 802.11a mode, it operates at frequency range of 5745.00MHz to 5825.000MHz with 5 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 5745MHz to 5825MHz with 5 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 216.6Mbps.

For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 5755.00MHz to 5795.000MHz with 2 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 450Mbps.

For 802.11ac (with 20MHz bandwidth) mode, it operates at frequency range of 5745MHz to 5825MHz with 5 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 260Mbps.

For 802.11ac (with 40MHz bandwidth) mode, it operates at frequency range of 5755.00MHz to 5795.000MHz with 2 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 600Mbps.

For 802.11ac (with 80MHz bandwidth) mode, it operates at frequency 5775MHz. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 1300Mbps.

For the Bluetooth module:

For Bluetooth 4.0 BLE mode, it occupies a frequency range from 2402MHz to 2480MHz (40 channels with channel spacing of 2MHz). It transmits via GFSK modulation.

For Bluetooth 3.0 mode, it occupies a frequency range from 2402MHz to 2480MHz (79 channels with channel spacing of 1MHz). It transmits via GFSK modulation.

The antenna(s) used in the EUT is internal, integral.

The circuit description is saved with filename: descri.pdf.

This report contains the data of Bluetooth 4.0 BLE portion only.1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver (Bluetooth portion).

TEST REPORT

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC and IC No. 2042V-1.

TEST REPORT

2.0 SYSTEM TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by 120VAC.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

For simultaneous transmission, both WiFi and Bluetooth portions are also switched on when taking radiated emission for determining worst-case spurious emission.

2.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated testing was designed to exercise the various system components in a manner similar to a typical use.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

2.5 Support Equipment List and Description

1. IR-in cable of 2 meter long with termination
2. 12V-trigger cable of 2 meter long with termination
3. HDMI cable of 2 meter long with termination
4. 4GB USB flash drive
5. Pair of loudspeaker with cable of 0.5 meter long
6. LAN cable of 2 meter long with termination
7. Power Cable of 2 meter long
8. 5 X Analog coaxial cable of 2 meter long with termination
(Provided by Intertek)

TEST REPORT

3.0 EMISSION RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in dB μ V/m

RR = RA - AG - AV in dB μ V

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}\mu\text{V/m}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V/m}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$LF = 9.0 \text{ dB}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$

TEST REPORT

3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 56.410 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 0.2 dB

3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 0.690 MHz

For electronic filing, the worst case line-conducted configuration photographs are saved with filename: conducted photo.pdf.

3.5 Conducted Emission Data

For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Pass by 4.9 dB

TEST REPORT

CONDUCTED EMISSION

Model: M10

Date of Test: January 28, 2019

Worst-Case Operating Mode: WiFi + Bluetooth Audio Playing

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV	DELTA	LIMIT dB
2 CISPR Average	195 kHz	43.36 N	-10.45	
1 Quasi Peak	199.5 kHz	51.54 L1	-12.08	
1 Quasi Peak	222 kHz	42.78 N	-19.95	
2 CISPR Average	276 kHz	35.28 L1	-15.64	
2 CISPR Average	294 kHz	36.73 L1	-13.67	
1 Quasi Peak	370.5 kHz	34.23 L1	-24.25	
1 Quasi Peak	492 kHz	44.14 N	-11.99	
2 CISPR Average	492 kHz	39.92 L1	-6.20	
1 Quasi Peak	690 kHz	45.99 L1	-10.00	
2 CISPR Average	690 kHz	41.12 L1	-4.87	
1 Quasi Peak	852 kHz	39.06 L1	-16.93	
2 CISPR Average	883.5 kHz	38.95 N	-7.04	
2 CISPR Average	1.2795 MHz	39.50 N	-6.49	
1 Quasi Peak	1.473 MHz	39.98 N	-16.02	
2 CISPR Average	1.671 MHz	35.33 N	-10.66	
1 Quasi Peak	1.869 MHz	38.79 N	-17.20	
1 Quasi Peak	2.157 MHz	33.40 N	-22.60	
2 CISPR Average	2.3595 MHz	32.32 L1	-13.67	
1 Quasi Peak	3.93 MHz	33.08 L1	-22.91	
2 CISPR Average	3.9345 MHz	30.14 L1	-15.85	

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV	DELTA	LIMIT dB
1 Quasi Peak	4.317 MHz	28.11 N	-27.88	
2 CISPR Average	4.722 MHz	31.04 N	-14.95	
2 CISPR Average	5.8965 MHz	28.41 N	-21.59	
1 Quasi Peak	6.099 MHz	37.91 L1	-22.09	
1 Quasi Peak	8.151 MHz	33.86 N	-26.13	
2 CISPR Average	8.1555 MHz	24.62 N	-25.37	
1 Quasi Peak	12.2865 MHz	43.72 N	-16.27	
2 CISPR Average	12.2865 MHz	43.69 N	-6.30	
1 Quasi Peak	26.3355 MHz	29.45 L1	-30.54	


Note: Measurement Uncertainty is ± 4.2 dB at a level of confidence of 95%.

TEST REPORT

Model: M10

Date of Test: January 28, 2019

Worst-Case Operating Mode: WiFi + Bluetooth Audio Playing

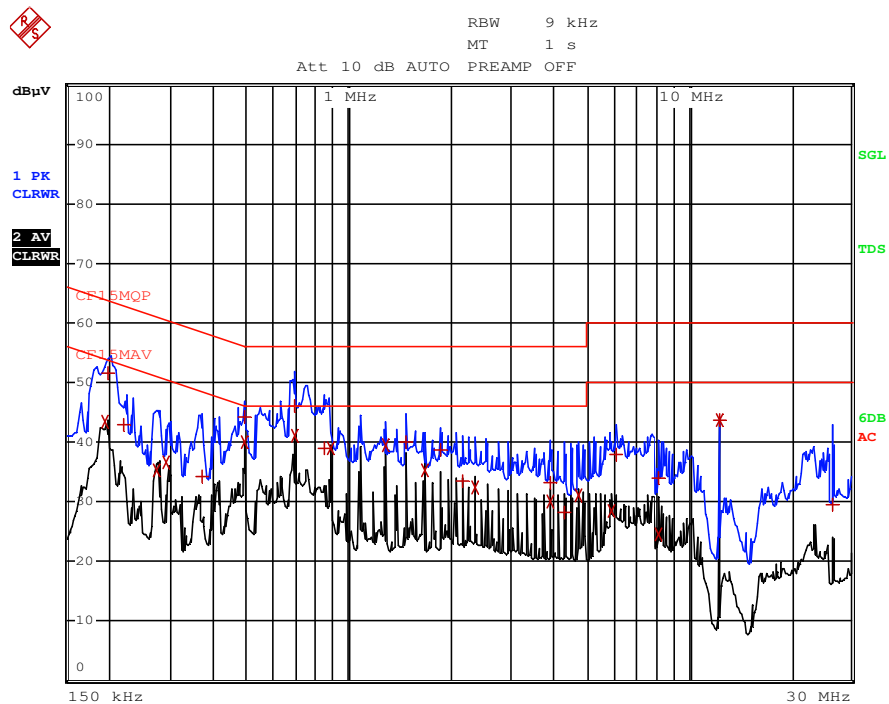

Note: Measurement Uncertainty is ± 4.2 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: M10

Date of Test: February 14, 2019

Worst-Case Operating Mode: Transmitting (Bluetooth 3.0)

Table 1
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Lowest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2402.000	81.8	33	29.4	78.2	94.0	-15.8
H	4804.000	36.7	33	34.9	38.6	54.0	-15.4
H	7206.000	35.7	33	37.9	40.6	54.0	-13.4
H	9608.000	32.4	33	40.4	39.8	54.0	-14.2
H	12010.000	30.3	33	40.5	37.8	54.0	-16.2
H	14412.000	30.8	33	40.0	37.8	54.0	-16.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2402.000	106.2	33	29.4	102.6	114.0	-11.4
H	4804.000	48.5	33	34.9	50.4	74.0	-23.6
H	7206.000	45.7	33	37.9	50.6	74.0	-23.4
H	9608.000	43.0	33	40.4	50.4	74.0	-23.6
H	12010.000	45.3	33	40.5	52.8	74.0	-21.2
H	14412.000	45.4	33	40.0	52.4	74.0	-21.6

- NOTES:
1. Peak Detector Data unless otherwise stated.
 2. Average measurement method is according to ANSI C63.10
 3. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative sign in the column shows value below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
 7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: M10

Date of Test: February 14, 2019

Worst-Case Operating Mode: Transmitting (Bluetooth 3.0)

Table 2
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Middle Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2442.000	82.0	33	29.4	78.4	94.0	-15.6
H	4884.000	37.9	33	34.9	39.8	54.0	-14.2
H	7326.000	34.7	33	37.9	39.6	54.0	-14.4
H	9768.000	30.8	33	40.4	38.2	54.0	-15.8
H	12210.000	30.9	33	40.5	38.4	54.0	-15.6
H	14652.000	33.1	33	38.4	38.5	54.0	-15.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2442.000	107.4	33	29.4	103.8	114.0	-10.2
H	4884.000	48.7	33	34.9	50.6	74.0	-23.4
H	7326.000	45.5	33	37.9	50.4	74.0	-23.6
H	9768.000	43.8	33	40.4	51.2	74.0	-22.8
H	12210.000	45.3	33	40.5	52.8	74.0	-21.2
H	14652.000	46.8	33	38.4	52.2	74.0	-21.8

- NOTES:
1. Peak Detector Data unless otherwise stated.
 2. Average measurement method is according to ANSI C63.10
 3. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative sign in the column shows value below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
 7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: M10

Date of Test: February 14, 2019

Worst-Case Operating Mode: Transmitting (Bluetooth 3.0)

Table 3
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2480.000	82.6	33	29.4	79.0	94.0	-15.0
H	4960.000	37.9	33	34.9	39.8	54.0	-14.2
H	7440.000	33.9	33	37.9	38.8	54.0	-15.2
H	9920.000	32.2	33	40.4	39.6	54.0	-14.4
H	12400.000	30.9	33	40.5	38.4	54.0	-15.6
H	14880.000	34.2	33	38.4	39.6	54.0	-14.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2480.000	108.4	33	29.4	104.8	114.0	-9.2
H	4960.000	48.9	33	34.9	50.8	74.0	-23.2
H	7440.000	45.7	33	37.9	50.6	74.0	-23.4
H	9920.000	42.8	33	40.4	50.2	74.0	-23.8
H	12400.000	44.9	33	40.5	52.4	74.0	-21.6
H	14880.000	46.8	33	38.4	52.2	74.0	-21.8

- NOTES:
1. Peak Detector Data unless otherwise stated.
 2. Average measurement method is according to ANSI C63.10
 3. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative sign in the column shows value below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
 7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: M10

Date of Test: February 14, 2019

Worst-Case Operating Mode: WiFi + Bluetooth Audio Playing

Table 4
Pursuant to FCC Part 15 Section 15.209 / RSS-210 4.4 Requirement

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	45.124	40.4	16	10.0	34.4	40.0	-5.6
V	56.410	44.8	16	11.0	39.8	40.0	-0.2
V	191.858	34.5	16	16.0	34.5	43.5	-9.0
V	214.476	33.0	16	17.0	34.0	43.5	-9.5
V	323.954	32.0	16	24.0	40.0	46.0	-6.0
V	424.966	29.0	16	25.0	38.0	46.0	-8.0
V	485.988	33.6	16	26.0	43.6	46.0	-2.4
V	624.962	29.4	16	29.0	42.4	46.0	-3.6
H	749.960	29.5	16	30.0	43.5	46.0	-2.5
H	972.002	23.0	16	33.0	40.0	54.0	-14.0

- NOTES:
1. Quasi-Peak Detector Data unless otherwise stated.
 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative sign in the column shows value below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
 6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 PRODUCT LABELLING

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States and Canada.

TEST REPORT

8.0 MISCELLANEOUS INFORMATION

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).



8.1 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209 / RSS-210 4.4, whichever is the lesser attenuation, which meet the requirement of part 15.249(d) / RSS-210 B.10.

TEST REPORT

PEAK MEASUREMENT

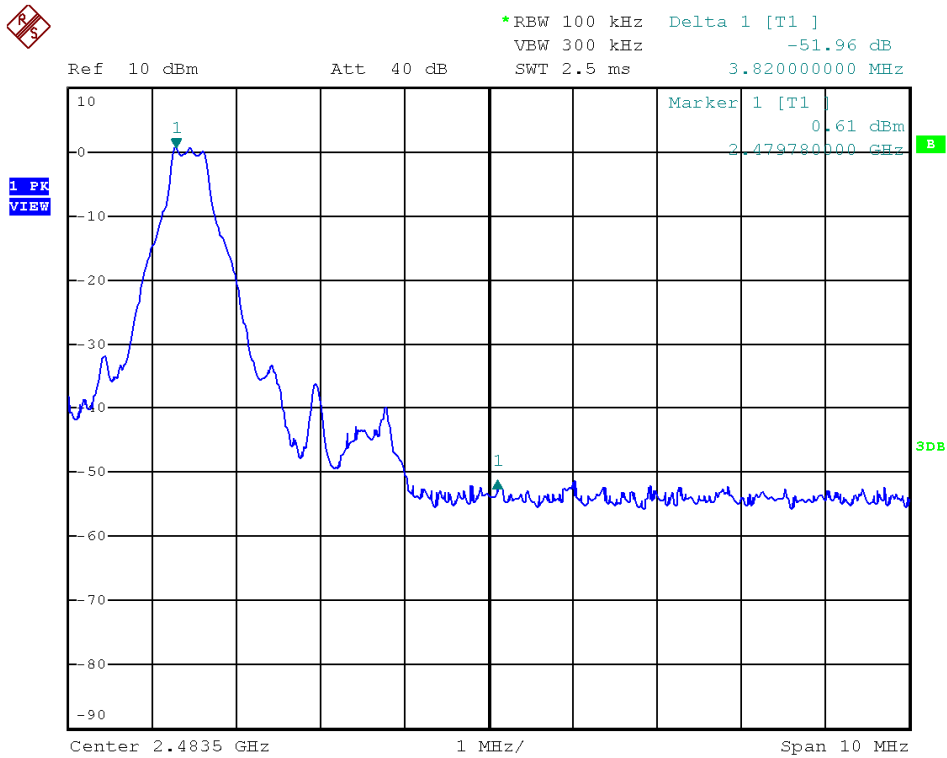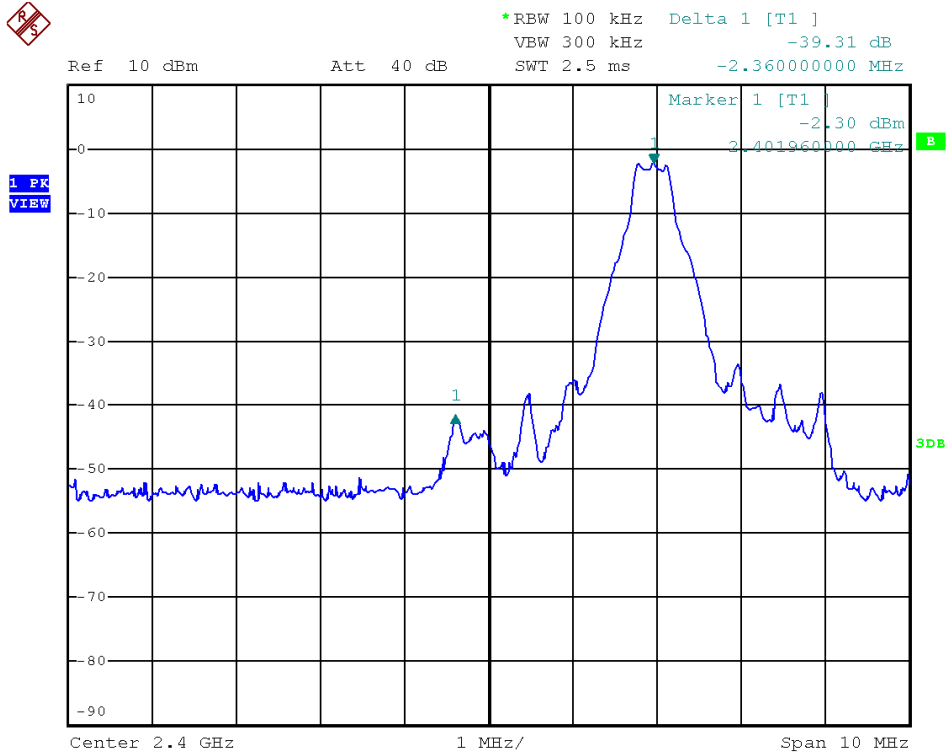

TEST REPORT

PEAK MEASUREMENT

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=102.6 dB μ V/m – 39.3 dB

=63.3 dB μ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=78.2 dB μ V/m – 39.3 dB

=38.9 dB μ V/m

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=104.8 dB μ V/m – 52.0 dB

=52.8 dB μ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=79.0 dB μ V/m – 52.0 dB

=27.0 dB μ V/m

The resultant field strength meets the general radiated emission limit in Section 15.209 / RSS-210 4.4, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

TEST REPORT

8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (T_{eff}) is approximately $625\mu s$ for a digital "1" bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 3MHz, so the pulse desensitivity factor is 0dB.

8.3 Calculation of Average Factor

N/A

TEST REPORT

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

TEST REPORT

8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


TEST REPORT

8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

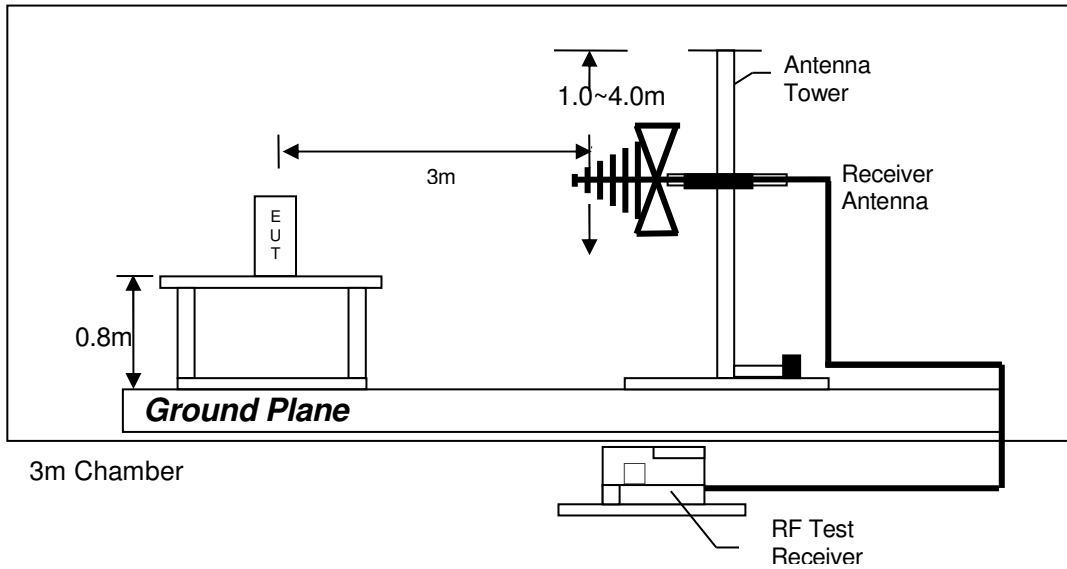

Test setup of radiated emissions up to 1GHz

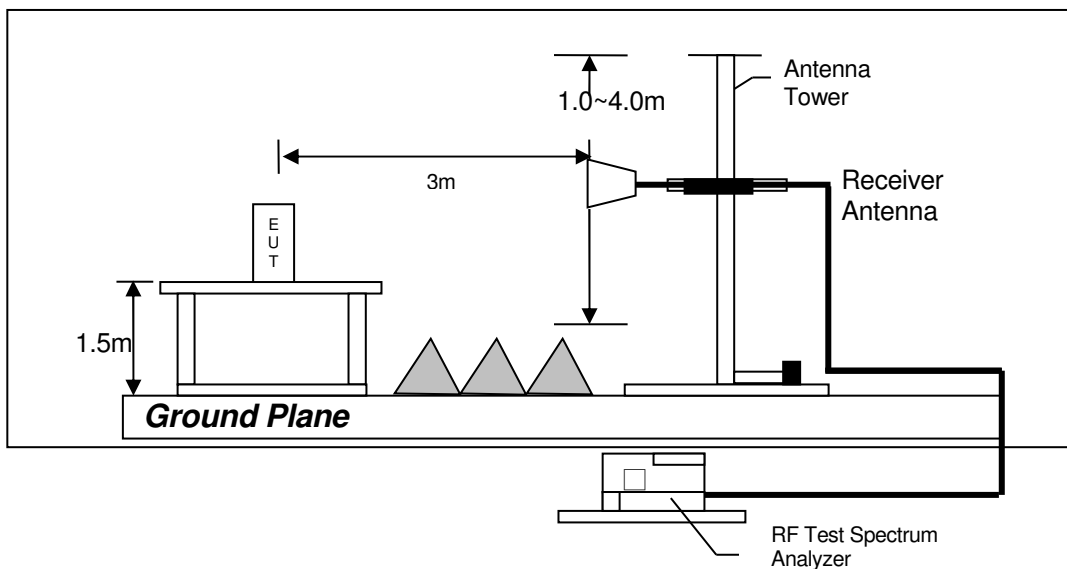

Test setup of radiated emissions above 1GHz


TEST REPORT

8.4.2 Conducted Emission Test Procedures

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4.3 Conducted Emission Test Setup

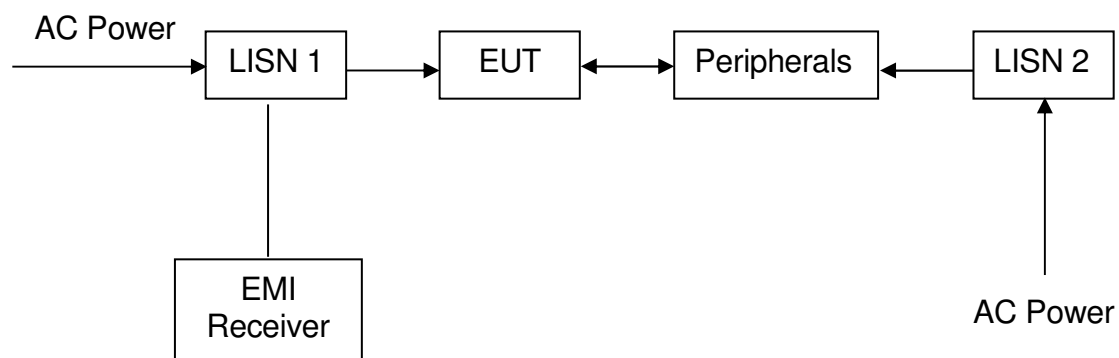


TEST REPORT

8.5 Occupied Bandwidth

Occupied Bandwidth Results:

Bluetooth (MHz)	Occupied Bandwidth (kHz)
Low Channel: 2402	840
Middle Channel: 2442	840
High Channel: 2480	834

The worst case is shown as below

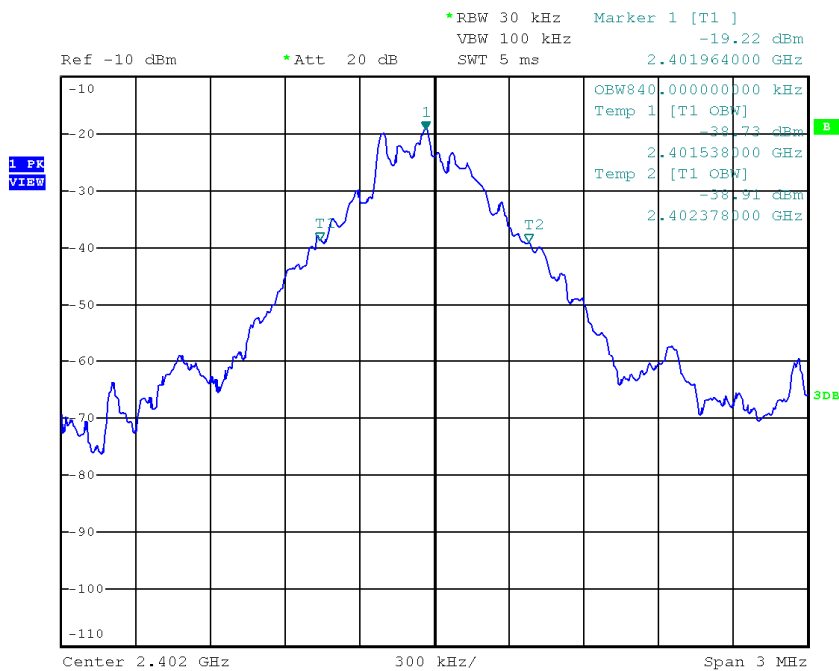

TEST REPORT

9.0 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

TEST REPORT

10.0 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna
Registration No.	EW-2666	EW-3110	EW-0571
Manufacturer	R&S	R&S	EMCO
Model No.	ESCI7	FSP30	3104C
Calibration Date	August 28, 2018	March 05, 2018	February 27, 2018
Calibration Due Date	August 28, 2019	March 05, 2019	August 27, 2019

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	14m Double Shield RF Cable (20MHz to 6GHz)
Registration No.	EW-0447	EW-1015	EW-2505
Manufacturer	EMCO	EMCO	RADIALL
Model No.	3148	3115	nm / br5d / sma 14m
Calibration Date	January 17, 2018	November 17, 2017	October 27, 2018
Calibration Due Date	July 17, 2019	May 17, 2019	October 27, 2019

Equipment	RF Cable 14m (1GHz to 26.5GHz)	RF Pre-amplifier 3 pcs (9kHz to 40GHz)	Pyramidal Horn Antenna
Registration No.	EW-2781	EW-3006	EW-0905
Manufacturer	GREATBILLION	SCHWARZBECK	EMCO
Model No.	SMA m/SHF5MPU /SMA m ra14m,26G	BBV 9718 BBV9744 BBV 9721	3160-09
Calibration Date	October 27, 2018	April 26, 2018	August 18, 2017
Calibration Due Date	October 27, 2019	April 26, 2019	February 18, 2019

Equipment	Active Loop H-field (9kHz to 30MHz)	Notch Filter (cutoff frequency 2.4GHz to 2.5GHz)
Registration No.	EW-2313	EW-2213
Manufacturer	ELECTROMETRI	MICROTRONICS
Model No.	EM-6876	BRM50701-02
Calibration Date	March 08, 2018	May 24, 2018
Calibration Due Date	September 08, 2019	May 24, 2019

TEST REPORT

2) Bandedge/Bandwidth Measurement

Equipment	RF Cable (up to 40GHz) 1.5m length	Spectrum Analyzer
Registration No.	EW-3104	EW-3110
Manufacturer	N/A	R&S
Model No.	SMA-M to SMA-M	FSP30
Calibration Date	July 03, 2018	March 05, 2018
Calibration Due Date	July 03, 2019	March 05, 2019

TEST REPORT

3) Conducted Emissions Test

Equipment	Artificial Mains Network	RF Cable 240cm (RG142)	EMI Test Receiver
Registration No.	EW-2501	EW-2454	EW-2666
Manufacturer	ROHDESCHWARZ	RADIAL	R&S
Model No.	ENV-216	bnc m st / 142 /bnc m ra 240cm	ESCI7
Calibration Date	Feb. 14, 2018	March 27, 2018	August 28, 2018
Calibration Due Date	Feb. 14, 2019	March 27, 2019	August 28, 2019

END OF TEST REPORT