

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
Dongguan ShengYu Electronic Technology Co., Ltd

NFC waterproof bluetooth speaker
Model No.: SA-W989, 8037281

FCC ID: Q2RSA-W989

Prepared for : Dongguan ShengYu Electronic Technology Co., Ltd
Address : NO.180 KangYi Road. ChangShanTou Village.
QingXi Town. DongGuan, GuangDong, 523657,
China

Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Chan Yuan New Material Port, Keyuan
Rd. Science & Industry Park, Nan Shan, Shenzhen,
Guangdong P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report No. : ATE20151555
Date of Test : July 21-23, 2015
Date of Report : July 30, 2015

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels	6
1.3. Special Accessory and Auxiliary Equipment	6
1.4. Description of Test Facility	7
1.5. Measurement Uncertainty	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. POWER LINE CONDUCTED MEASUREMENT	11
5.1. Block Diagram of Test Setup.....	11
5.2. Power Line Conducted Emission Measurement Limits.....	11
5.3. Configuration of EUT on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	12
5.6. Power Line Conducted Emission Measurement Results	13
6. 6DB BANDWIDTH MEASUREMENT	19
6.1. Block Diagram of Test Setup.....	19
6.2. The Requirement For Section 15.247(a)(2).....	19
6.3. EUT Configuration on Measurement	19
6.4. Operating Condition of EUT	19
6.5. Test Procedure	19
6.6. Test Result	20
7. MAXIMUM PEAK OUTPUT POWER	22
7.1. Block Diagram of Test Setup.....	22
7.2. The Requirement For Section 15.247(b)(3).....	22
7.3. EUT Configuration on Measurement	22
7.4. Operating Condition of EUT	22
7.5. Test Procedure	22
7.6. Test Result	23
8. POWER SPECTRAL DENSITY MEASUREMENT.....	25
8.1. Block Diagram of Test Setup.....	25
8.2. The Requirement For Section 15.247(e).....	25
8.3. EUT Configuration on Measurement	25
8.4. Operating Condition of EUT	25
8.5. Test Procedure	26
8.6. Test Result	27
9. BAND EDGE COMPLIANCE TEST	29
9.1. Block Diagram of Test Setup.....	29
9.2. The Requirement For Section 15.247(d)	29
9.3. EUT Configuration on Measurement	29
9.4. Operating Condition of EUT	30

9.5.	Test Procedure	30
9.6.	Test Result	30
10.	RADIATED SPURIOUS EMISSION TEST	37
10.1.	Block Diagram of Test Setup.....	37
10.2.	The Limit For Section 15.247(d)	38
10.3.	Restricted bands of operation	38
10.4.	Configuration of EUT on Measurement	39
10.5.	Operating Condition of EUT	39
10.6.	Test Procedure	39
10.7.	The Field Strength of Radiation Emission Measurement Results	40
11.	CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST	53
11.1.	Block Diagram of Test Setup.....	53
11.2.	The Requirement For Section 15.247(d)	53
11.3.	EUT Configuration on Measurement	53
11.4.	Operating Condition of EUT	54
11.5.	Test Procedure	54
11.6.	Test Result	54
12.	ANTENNA REQUIREMENT.....	58
12.1.	The Requirement	58
12.2.	Antenna Construction	58

Test Report Certification

Applicant : Dongguan ShengYu Electronic Technology Co., Ltd
Manufacturer : Dongguan ShengYu Electronic Technology Co., Ltd
EUT Description : NFC waterproof bluetooth speaker
(A) MODEL NO.: SA-W989, 8037281
(B) TRADE NAME.: HEADRUSH
(C) POWER SUPPLY: DC 3.7V & DC 5V (Power by USB port)

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

The EUT was tested according to DTS test procedure of April 09, 2013 KDB558074 D01 DTS Meas Guidance v03 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : July 21-23, 2015
Date of Report : July 30, 2015

Prepared by : 
(Bob Wang, Engineer)

Approved & Authorized Signer : 
(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	NFC waterproof bluetooth speaker
Model Number	:	SA-W989, 8037281
		(Note: We hereby state that these models are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement. Therefore only model SA-W989 is tested for EMC tests.)
Bluetooth version	:	Bluetooth V4.0 LE
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40
Antenna Gain	:	0dBi
Antenna type	:	PCB Antenna
Power Supply	:	DC 3.7V & DC 5V (Power by USB port)
Modulation mode	:	GFSK
Applicant	:	Dongguan ShengYu Electronic Technology Co., Ltd
Address	:	NO.180 KangYi Road. ChangShanTou Village. QingXi Town. DongGuan, GuangDong, 523657, China
Manufacturer	:	Dongguan ShengYu Electronic Technology Co., Ltd
Address	:	NO.180 KangYi Road. ChangShanTou Village. QingXi Town. DongGuan, GuangDong, 523657, China
Date of sample received	:	July 17, 2015
Date of Test	:	July 21-23, 2015

1.2.Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.3.Special Accessory and Auxiliary Equipment

N/A

1.4. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.5. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 11, 2015	Jan. 10, 2016
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 11, 2015	Jan. 10, 2016
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 11, 2015	Jan. 10, 2016
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 11, 2015	Jan. 10, 2016
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2015	Jan. 14, 2016
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2015	Jan. 14, 2016
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2015	Jan. 14, 2016
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 15, 2015	Jan. 14, 2016
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 11, 2015	Jan. 10, 2016
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 11, 2015	Jan. 10, 2016
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 11, 2015	Jan. 10, 2016
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 11, 2015	Jan. 10, 2016

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode


The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

3.2.Configuration and peripherals

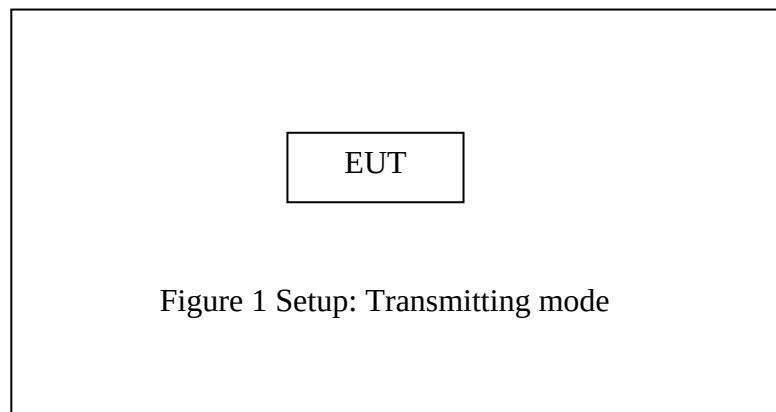


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. POWER LINE CONDUCTED MEASUREMENT

5.1. Block Diagram of Test Setup

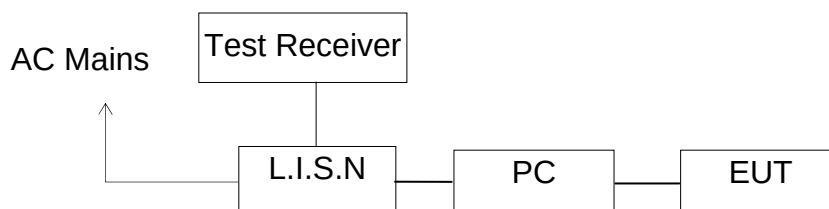

(EUT: NFC waterproof bluetooth speaker)

5.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0
NOTE1: The lower limit shall apply at the transition frequencies.		
NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.		

5.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in test mode and measure it.

5.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

5.6.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Test mode : Charging AC 120V; 60Hz								
MEASUREMENT RESULT: "BTSP003_fin"								
2015-7-21 17:29								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.196000	55.50	10.6	64	8.3	QP	L1	GND	
3.035000	38.10	11.7	56	17.9	QP	L1	GND	
5.217500	34.60	11.8	60	25.4	QP	L1	GND	
MEASUREMENT RESULT: "BTSP003_fin2"								
2015-7-21 17:29								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.196000	38.10	10.6	54	15.7	AV	L1	GND	
2.945000	28.40	11.7	46	17.6	AV	L1	GND	
5.271500	27.30	11.8	50	22.7	AV	L1	GND	
MEASUREMENT RESULT: "BTSP004_fin"								
2015-7-21 17:31								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.186000	55.30	10.6	64	8.9	QP	N	GND	
3.300500	38.10	11.7	56	17.9	QP	N	GND	
5.690000	32.30	11.8	60	27.7	QP	N	GND	
MEASUREMENT RESULT: "BTSP004_fin2"								
2015-7-21 17:31								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.186000	34.90	10.6	54	19.3	AV	N	GND	
3.336500	29.20	11.7	46	16.8	AV	N	GND	
5.195000	28.30	11.8	50	21.7	AV	N	GND	

Test mode : Charging AC 240V; 60Hz								
MEASUREMENT RESULT: "MD-0605-01_fin"								
2015-7-21	17:35:31							
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	
MHz	dBμV	dB	dBμV	dB				
0.180000	53.60	10.5	65	10.9	QP	L1	GND	
3.145000	39.90	11.1	56	16.1	QP	L1	GND	
5.150000	36.40	11.2	60	23.6	QP	L1	GND	
MEASUREMENT RESULT: "MD-0605-01_fin2"								
2015-7-21	17:35:31							
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	
MHz	dBμV	dB	dBμV	dB				
0.180000	37.90	10.5	55	16.6	AV	L1	GND	
2.860000	28.90	11.0	46	17.1	AV	L1	GND	
5.150000	28.50	11.2	50	21.5	AV	L1	GND	
MEASUREMENT RESULT: "MD-0605-02_fin"								
2015-7-21	17:38:35							
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	
MHz	dBμV	dB	dBμV	dB				
0.174000	53.70	10.5	65	11.1	QP	N	GND	
2.995000	38.20	11.1	56	17.8	QP	N	GND	
5.160000	36.30	11.2	60	23.7	QP	N	GND	
MEASUREMENT RESULT: "MD-0605-02_fin2"								
2015-7-21	17:38:35							
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	
MHz	dBμV	dB	dBμV	dB				
0.174000	34.80	10.5	55	20.0	AV	N	GND	
2.900000	31.20	11.0	46	14.8	AV	N	GND	
5.140000	29.00	11.2	50	21.0	AV	N	GND	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: NFC waterproof bluetooth speaker M/N:SA-W989
 Manufacturer: ShengYu
 Operating Condition: Charging
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: L 120V/60Hz
 Comment: Report No.:ATE20151555
 Start of Test: 2015-7-21 / 17:27:11

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

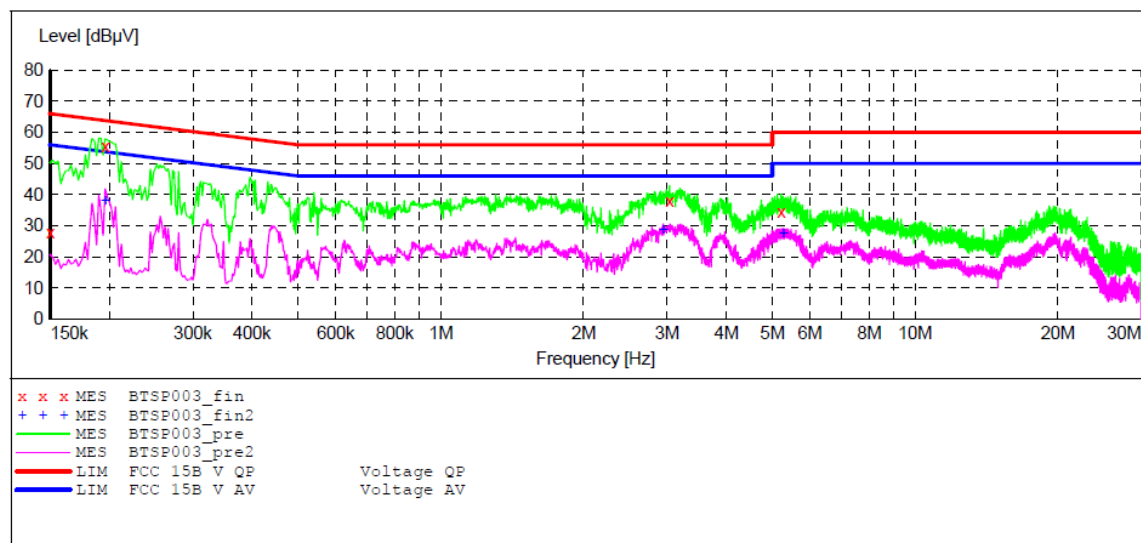

MEASUREMENT RESULT: "BTSP003_fin"

2015-7-21 17:29

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.196000	55.50	10.6	64	8.3	QP	L1	GND
3.035000	38.10	11.7	56	17.9	QP	L1	GND
5.217500	34.60	11.8	60	25.4	QP	L1	GND

MEASUREMENT RESULT: "BTSP003_fin2"

2015-7-21 17:29

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.196000	38.10	10.6	54	15.7	AV	L1	GND
2.945000	28.40	11.7	46	17.6	AV	L1	GND
5.271500	27.30	11.8	50	22.7	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: NFC waterproof bluetooth speaker M/N:SA-W989
 Manufacturer: ShengYu
 Operating Condition: Charging
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: N 120V/60Hz
 Comment: Report No.:ATE20151555
 Start of Test: 2015-7-21 / 17:29:39

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz	LISN (ESH3-Z5)
Average						

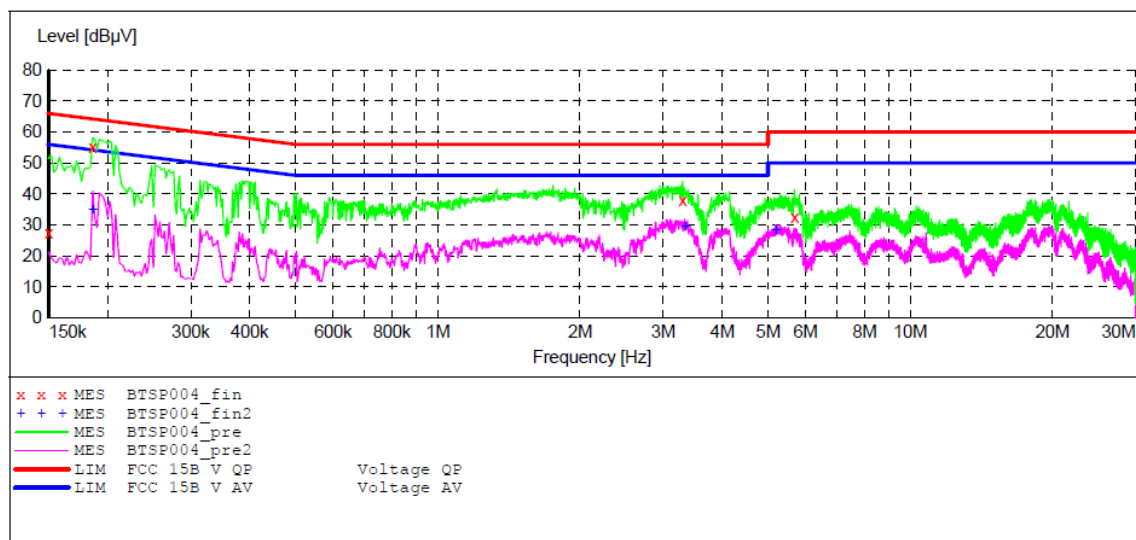

MEASUREMENT RESULT: "BTSP004_fin"

2015-7-21 17:31

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.186000	55.30	10.6	64	8.9	QP	N	GND
3.300500	38.10	11.7	56	17.9	QP	N	GND
5.690000	32.30	11.8	60	27.7	QP	N	GND

MEASUREMENT RESULT: "BTSP004_fin2"

2015-7-21 17:31

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.186000	34.90	10.6	54	19.3	AV	N	GND
3.336500	29.20	11.7	46	16.8	AV	N	GND
5.195000	28.30	11.8	50	21.7	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: NFC waterproof bluetooth speaker M/N:SA-W989
 Manufacturer: ShengYu
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: star
 Test Specification: L 240V/60Hz
 Comment: Report No.:ATE20151555
 Start of Test: 2015-7-21 / 17:35:20

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 Average
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

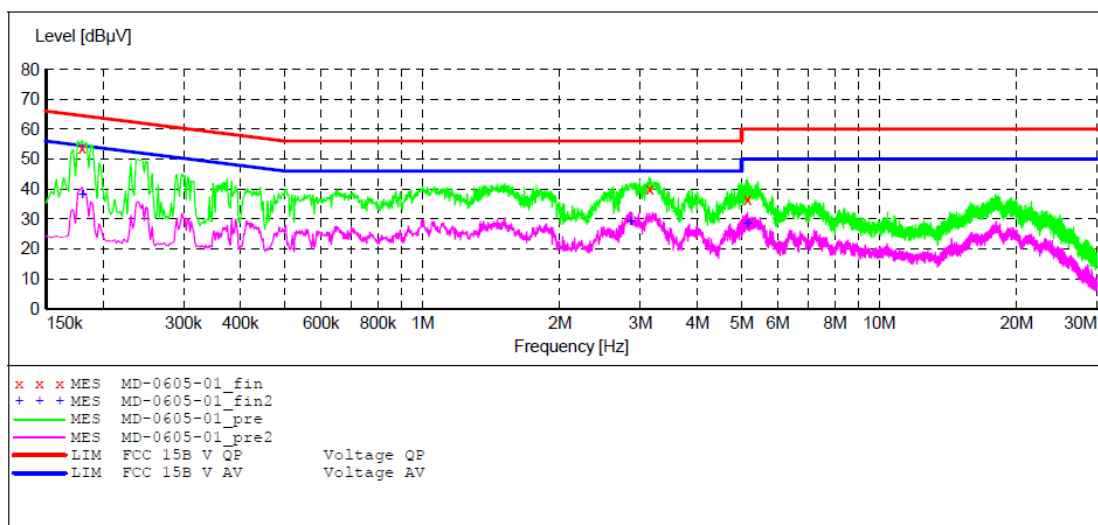

MEASUREMENT RESULT: "MD-0605-01_fin"

2015-7-21 17:35:31

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.180000	53.60	10.5	65	10.9	QP	L1	GND
3.145000	39.90	11.1	56	16.1	QP	L1	GND
5.150000	36.40	11.2	60	23.6	QP	L1	GND

MEASUREMENT RESULT: "MD-0605-01_fin2"

2015-7-21 17:35:31

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.180000	37.90	10.5	55	16.6	AV	L1	GND
2.860000	28.90	11.0	46	17.1	AV	L1	GND
5.150000	28.50	11.2	50	21.5	AV	L1	GND

ACCURATE TECHNOLOGY CO.,LTD


CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: NFC waterproof bluetooth speaker M/N:SA-W989
 Manufacturer: ShengYu
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: star
 Test Specification: N 240V/60Hz
 Comment: Report No.,:ATE20151555
 Start of Test: 2015-7-21 / 17:38:24

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak Average	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak Average	1.0 s	9 kHz	NSLK8126 2008

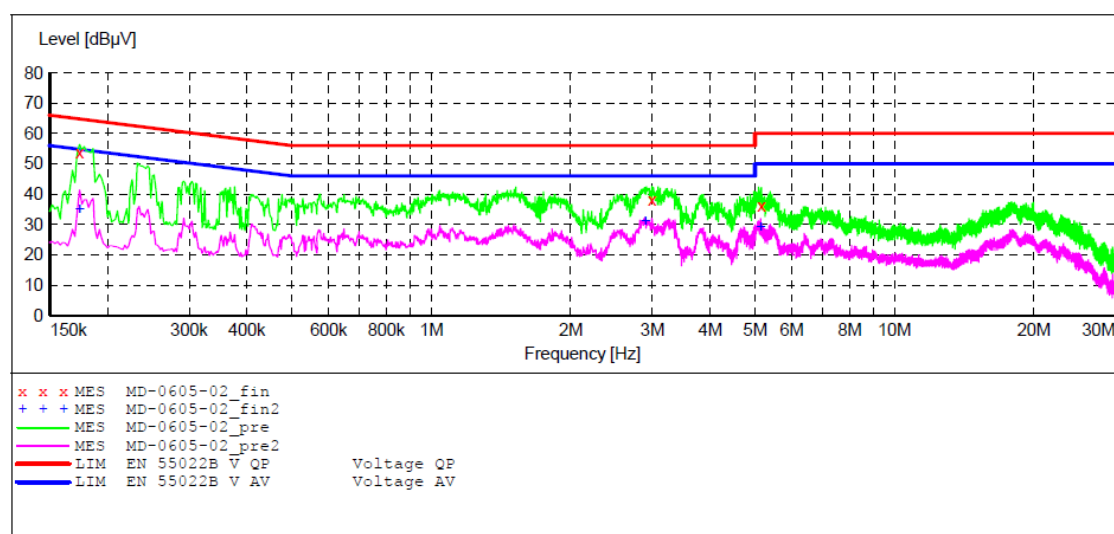

MEASUREMENT RESULT: "MD-0605-02_fin"

2015-7-21 17:38:35

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.174000	53.70	10.5	65	11.1	QP	N	GND
2.995000	38.20	11.1	56	17.8	QP	N	GND
5.160000	36.30	11.2	60	23.7	QP	N	GND

MEASUREMENT RESULT: "MD-0605-02_fin2"

2015-7-21 17:38:35

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.174000	34.80	10.5	55	20.0	AV	N	GND
2.900000	31.20	11.0	46	14.8	AV	N	GND
5.140000	29.00	11.2	50	21.0	AV	N	GND

6. 6DB BANDWIDTH MEASUREMENT

6.1. Block Diagram of Test Setup



(EUT: NFC waterproof bluetooth speaker)

6.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 5.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

20dB bandwidth

1. Set resolution bandwidth (RBW) = 1%-5% OBW.


2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst-case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the -20 dB levels with respect to the reference level

6.6.Test Result


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	PASS/FAIL
0	2402	0.692	0.5	PASS
19	2440	0.676	0.5	PASS
39	2480	0.672	0.5	PASS

The spectrum analyzer plots are attached as below.


channel 0

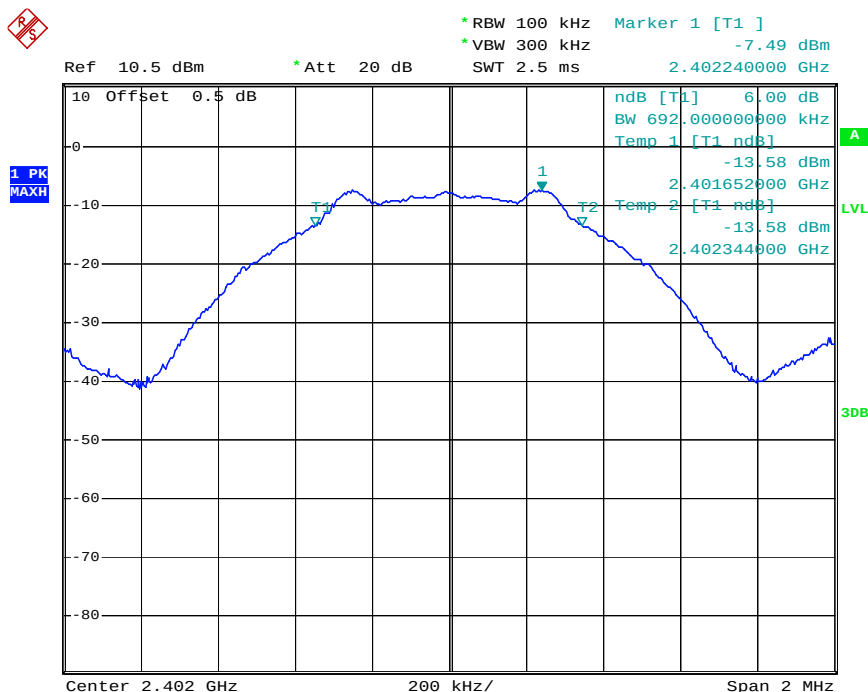

channel 19

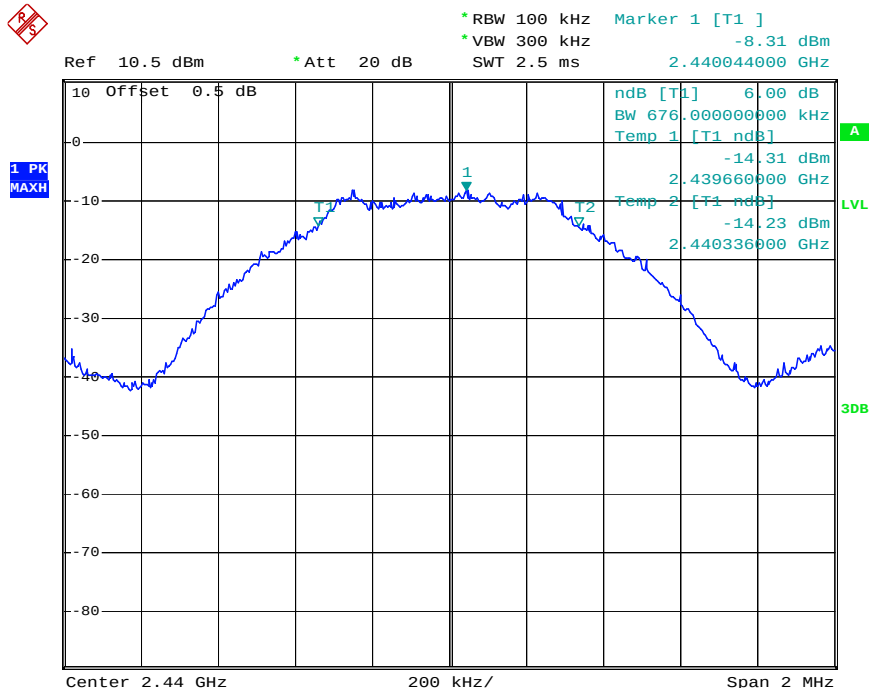

channel 39

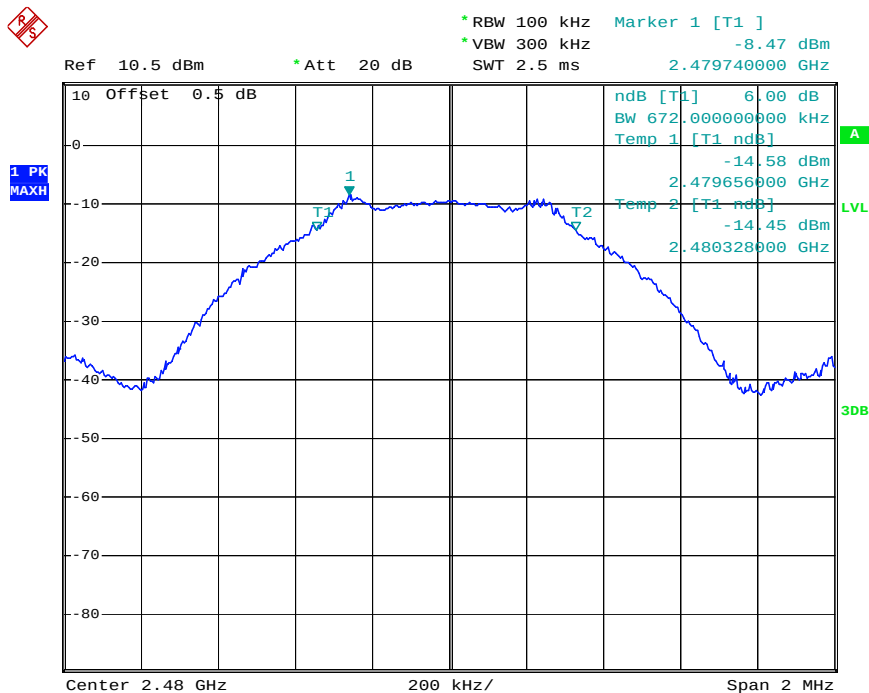

7. MAXIMUM PEAK OUTPUT POWER

7.1. Block Diagram of Test Setup



(EUT: NFC waterproof bluetooth speaker)

7.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 6.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The EUT was tested according to DTS test procedure of Jun 05, 2014 KDB558074 D01 DTS Meas Guidance v03r02 for compliance to FCC 47CFR 15.247 requirements.

7.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.


7.5.3. Set RBW = 1-5% of the OBW, not to exceed 1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = auto, Set span to at least 1.5 times the OBW, Detector = RMS.

7.5.4. Measurement the Maximum conducted (average) output power.


7.6.Test Result

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-7.59	30	PASS
19	2440	-7.58	30	PASS
39	2480	-7.63	30	PASS


The spectrum analyzer plots are attached as below.

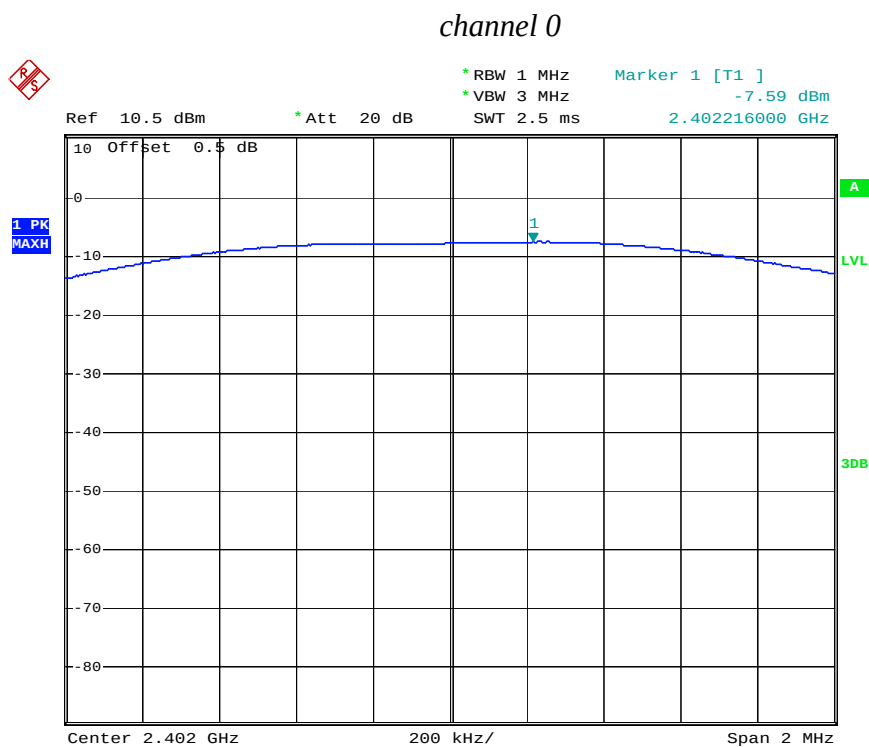

channel 19

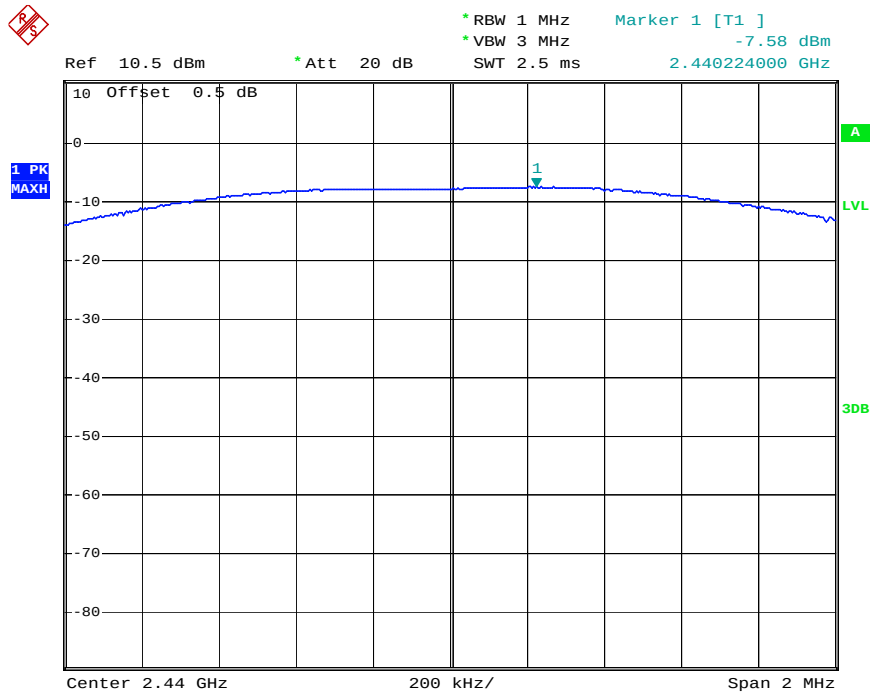

channel 39

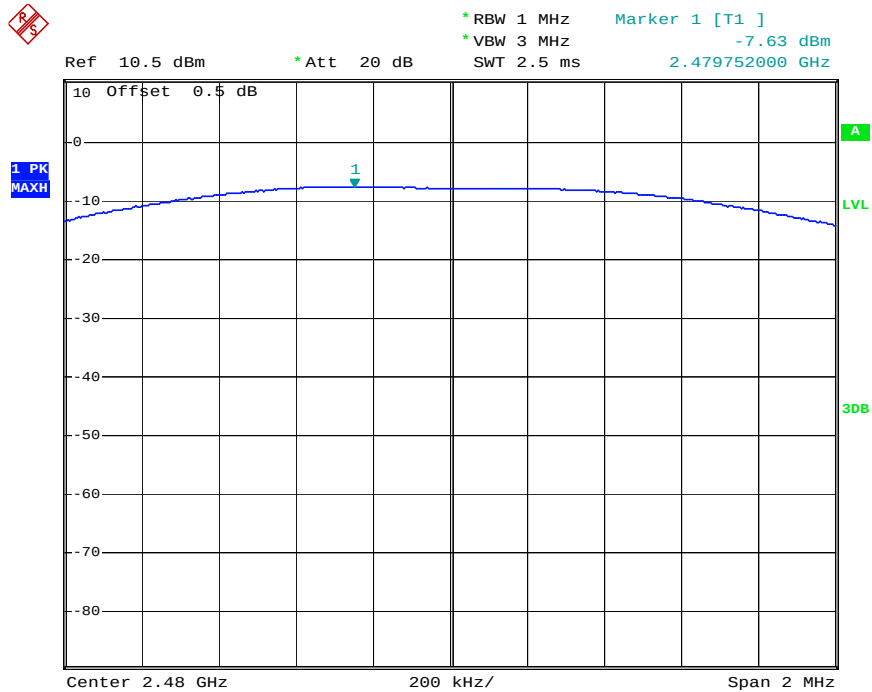

8. POWER SPECTRAL DENSITY MEASUREMENT

8.1. Block Diagram of Test Setup



(EUT: NFC waterproof bluetooth speaker)

8.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 7.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The EUT was tested according to DTS test procedure of April 09, 2013 KDB558074 D01 DTS Meas Guidance v03 for compliance to FCC 47CFR 15.247 requirements.

8.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.3. Measurement Procedure PKPSD:

8.5.4. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


8.5.5. Measurement the maximum power spectral density.

8.6. Test Result


CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
0	2402	-20.08	8	PASS
19	2440	-20.10	8	PASS
39	2480	-20.37	8	PASS

The spectrum analyzer plots are attached as below.


channel 0

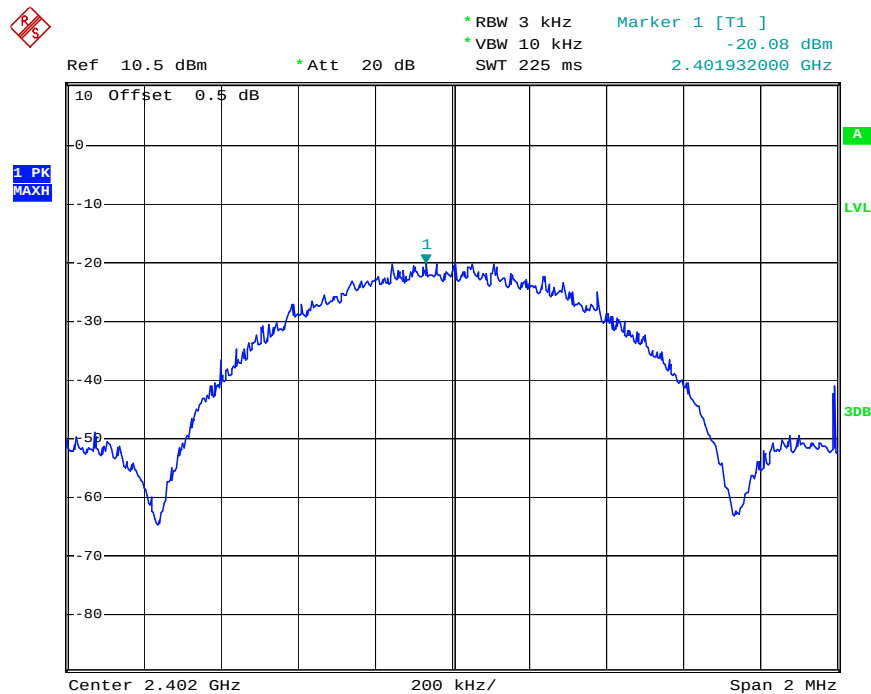

channel 19

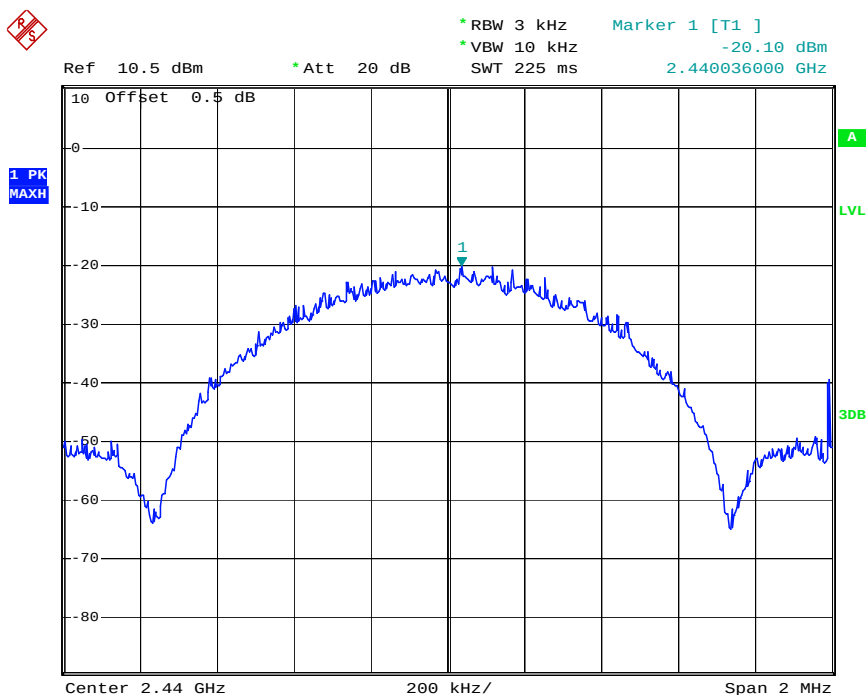

channel 39

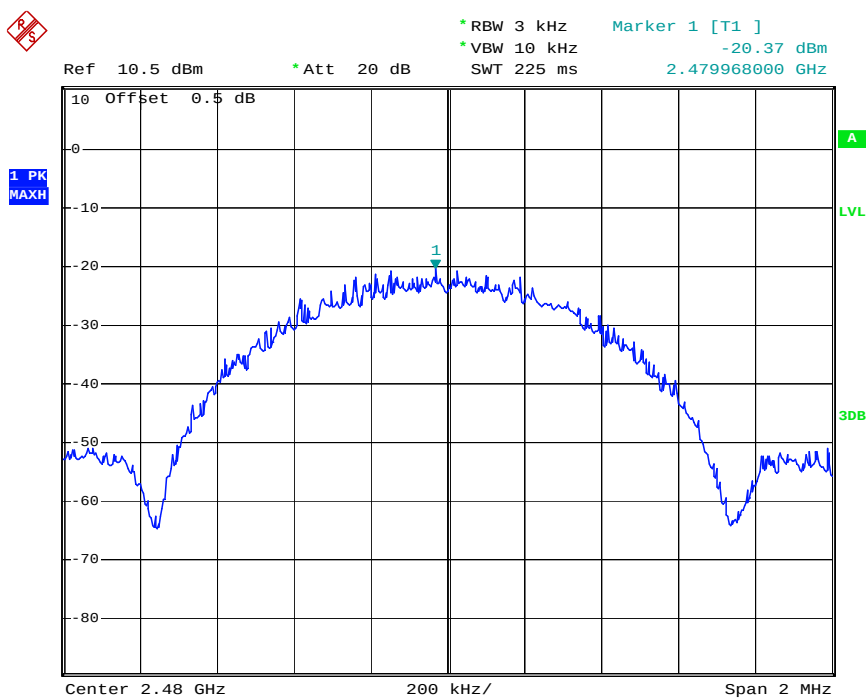

9. BAND EDGE COMPLIANCE TEST

9.1. Block Diagram of Test Setup



(EUT: NFC waterproof bluetooth speaker)

9.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4.Operating Condition of EUT

9.4.1.Setup the EUT and simulator as shown as Section 8.1.

9.4.2.Turn on the power of all equipment.

9.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

9.5.Test Procedure

Conducted Band Edge:

9.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

9.5.2.Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

9.5.3. Radiate Band Edge:

9.5.4.The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

9.5.5.The turntable was rotated for 360 degrees to determine the position of maximum emission level.

9.5.6.EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

9.5.7.Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

9.5.8.RBW=1MHz, VBW=1MHz


9.5.9.The band edges was measured and recorded.

9.6.Test Result


Pass

Channel	Frequency	Delta peak to band emission	Limit(dBc)
0	2399.3MHz	29.98	20
39	2486.0MHz	44.63	20

channel 0

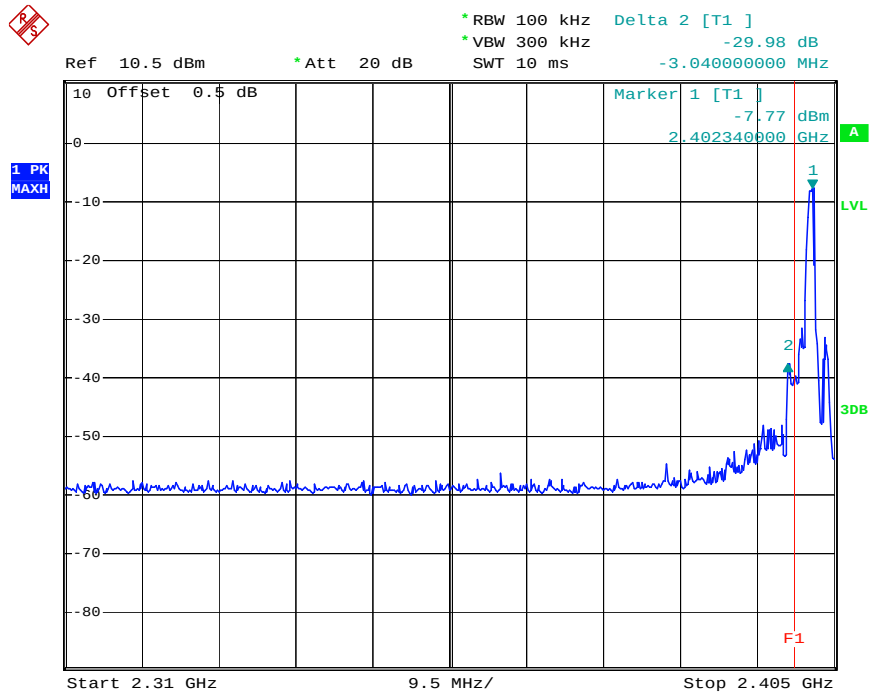

channel 39

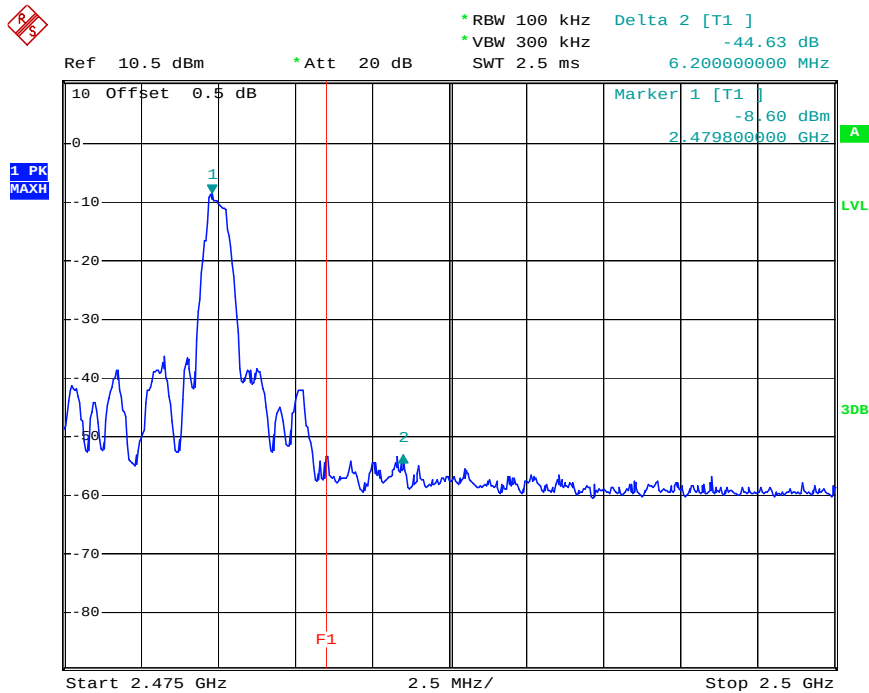

Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

Test Procedure:

The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

Let the EUT work in TX modes then measure it.

We select 2402MHz, 2480MHz TX frequency to transmit(GFSK mode).

During the radiated emission test, the spectrum analyzer was set with the following configurations:

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- 3.All modes of operation were investigated and the worst-case emissions are reported.

Job No.: STAR2015 #435

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2402MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Vertical

Power Source: DC 5V


Date: 15/07/23/

Time: 10/46/22

Engineer Signature: Star

Distance: 3m

Note: Report NO.:ATE20151555

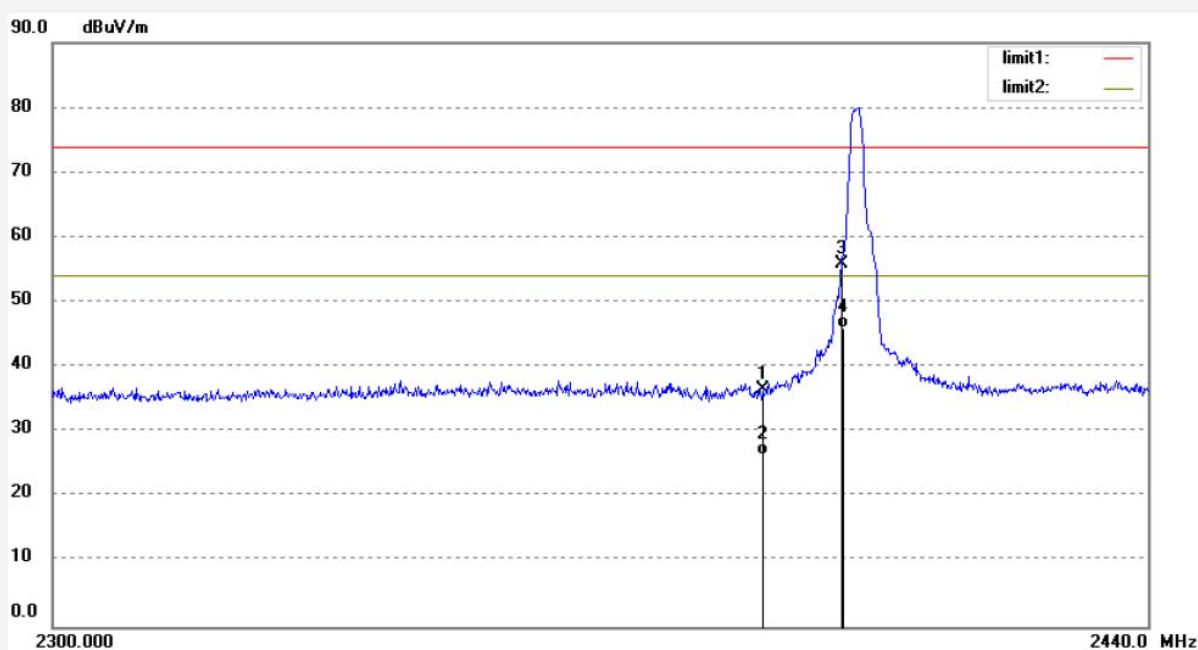

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	43.98	-7.53	36.45	74.00	-37.55	peak			
2	2390.000	33.97	-7.53	26.44	54.00	-27.56	AVG			
3	2400.000	63.45	-7.46	55.99	74.00	-18.01	peak			
4	2400.000	53.55	-7.46	46.09	54.00	-7.91	AVG			

Job No.: STAR2015 #436

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2402MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Horizontal

Power Source: DC 5V


Date: 15/07/23/

Time: 10/47/39

Engineer Signature: Star

Distance: 3m

Note: Report NO.:ATE20151555

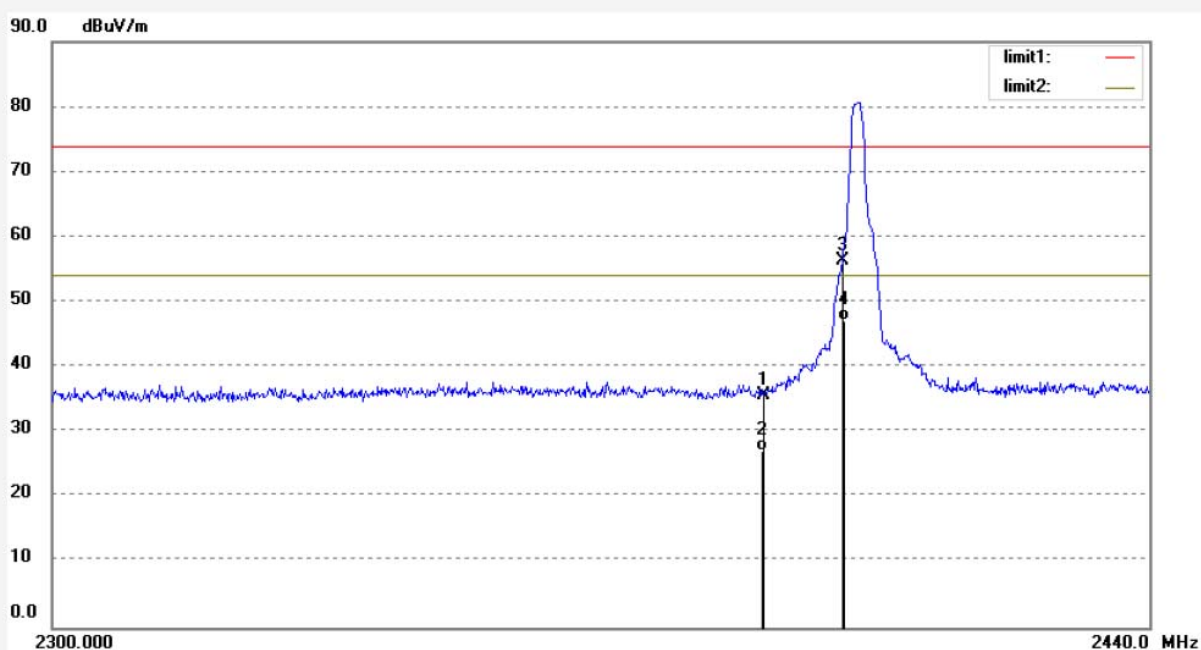

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	43.13	-7.53	35.60	74.00	-38.40	peak			
2	2390.000	34.59	-7.53	27.06	54.00	-26.94	AVG			
3	2400.000	63.72	-7.46	56.26	74.00	-17.74	peak			
4	2400.000	54.69	-7.46	47.23	54.00	-6.77	AVG			

Job No.: STAR2015 #433

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2480MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Horizontal

Power Source: DC 5V


Date: 15/07/23/

Time: 10/42/28

Engineer Signature: Star

Distance: 3m

Note: Report NO.:ATE20151555

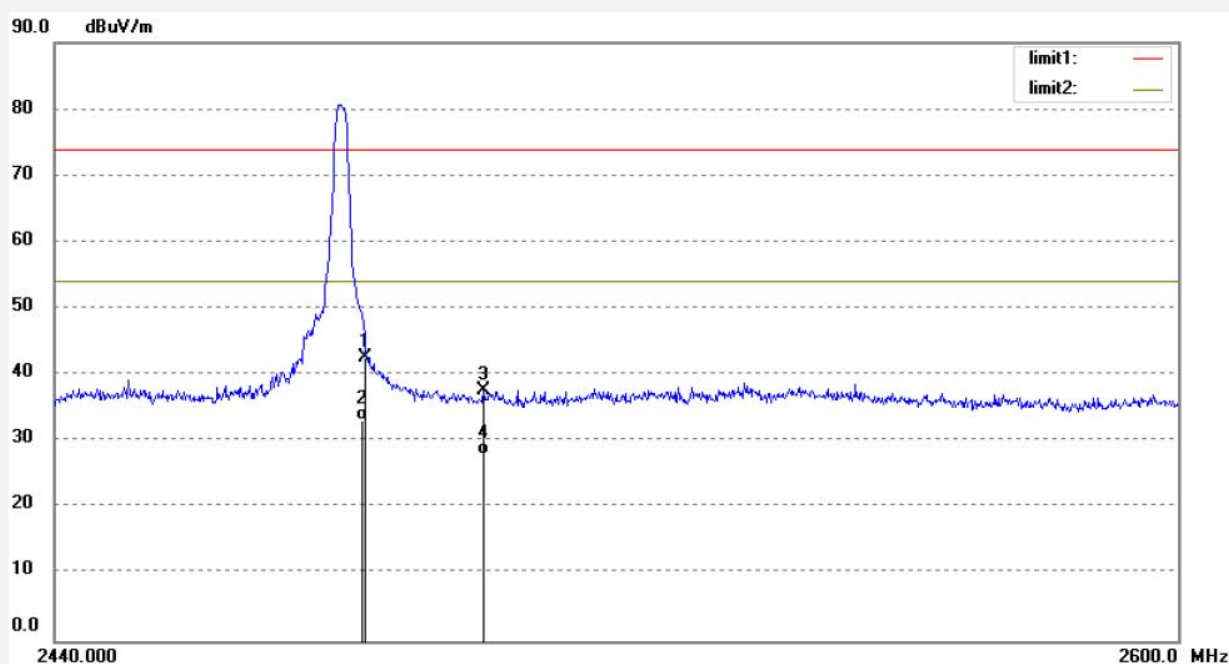

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	50.03	-7.37	42.66	74.00	-31.34	peak			
2	2483.500	40.67	-7.37	33.30	54.00	-20.70	AVG			
3	2500.000	45.20	-7.40	37.80	74.00	-36.20	peak			
4	2500.000	35.33	-7.40	27.93	54.00	-26.07	AVG			

Job No.: STAR2015 #434

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2480MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Vertical

Power Source: DC 5V


Date: 15/07/23/

Time: 10/43/43

Engineer Signature: Star

Distance: 3m

Note: Report NO.:ATE20151555

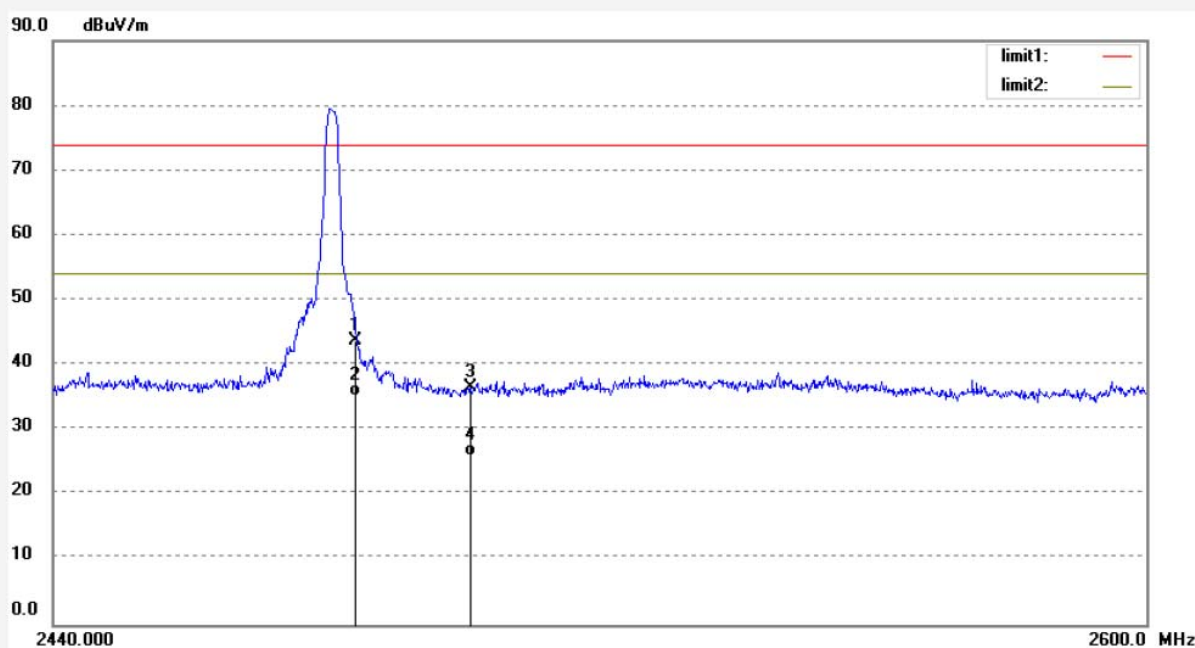


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	51.11	-7.37	43.74	74.00	-30.26	peak			
2	2483.500	42.67	-7.37	35.30	54.00	-18.70	AVG			
3	2500.000	43.94	-7.40	36.54	74.00	-37.46	peak			
4	2500.000	33.46	-7.40	26.06	54.00	-27.94	AVG			

10.RADIATED SPURIOUS EMISSION TEST

10.1.Block Diagram of Test Setup

10.1.1.Block diagram of connection between the EUT and peripherals

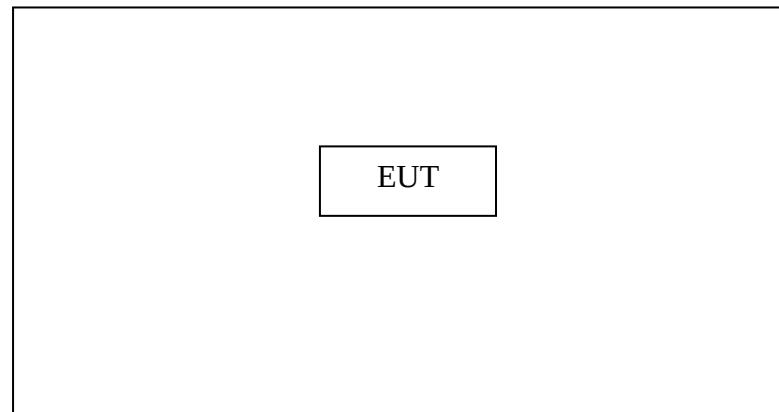


Setup: Transmitting mode

(EUT: NFC waterproof bluetooth speaker)

10.1.2.Semi-Anechoic Chamber Test Setup Diagram


Below 1GHz

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

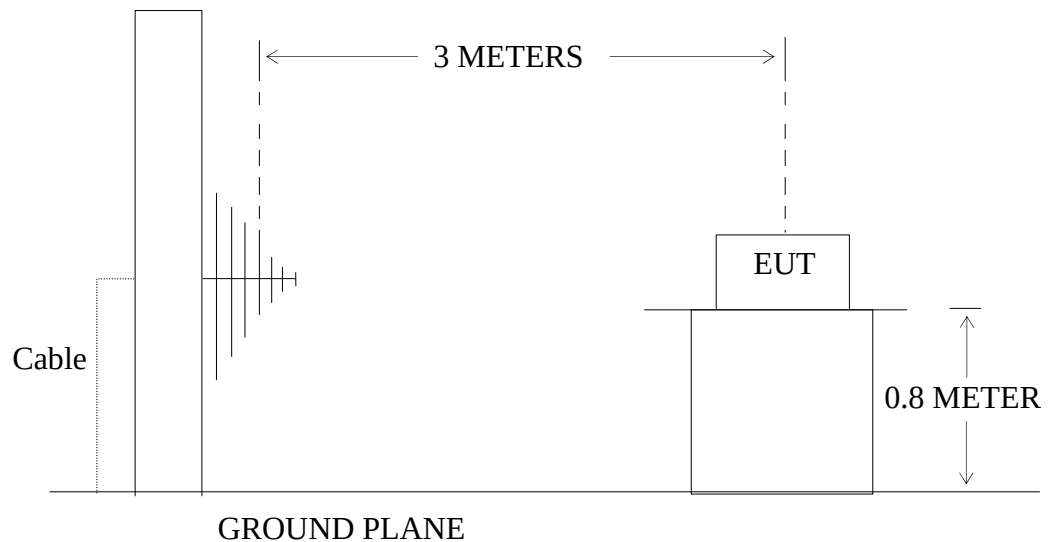

Above 1GHz

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

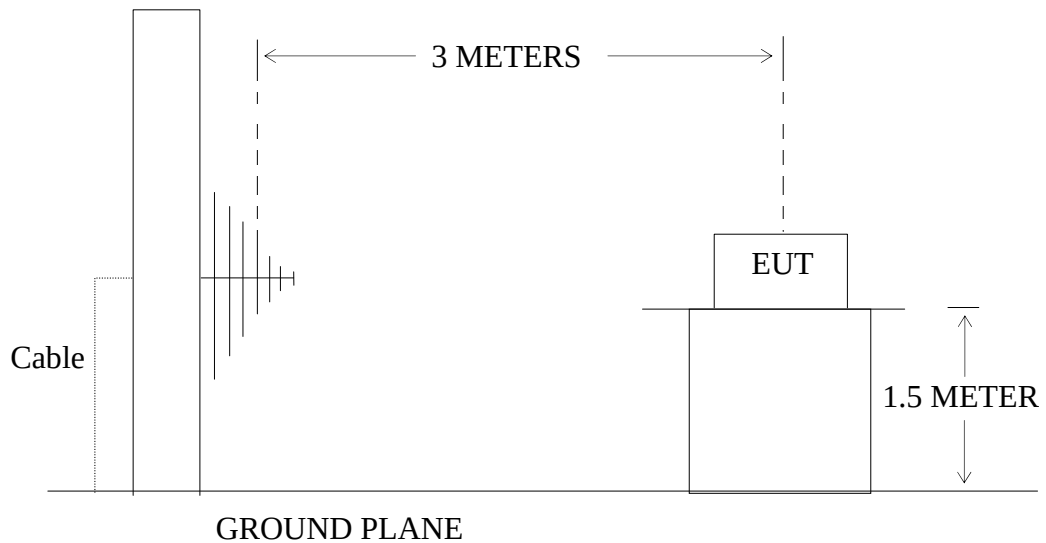

10.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.Restricted bands of operation

10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5

6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5.Operating Condition of EUT

10.5.1.Setup the EUT and simulator as shown as Section 9.1.

10.5.2.Turn on the power of all equipment.

10.5.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

10.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

10.7.The Field Strength of Radiation Emission Measurement Results

PASS.

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3.The radiation emissions from 18-25GHz are not reported, because the test values lower than the limits of 20dB.



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #1258

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2402MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Horizontal

Power Source: DC 5V


Date: 2015/07/22

Time: 16:50:46

Engineer Signature: Star

Distance: 3m

Note: Report No.:ATE20151555

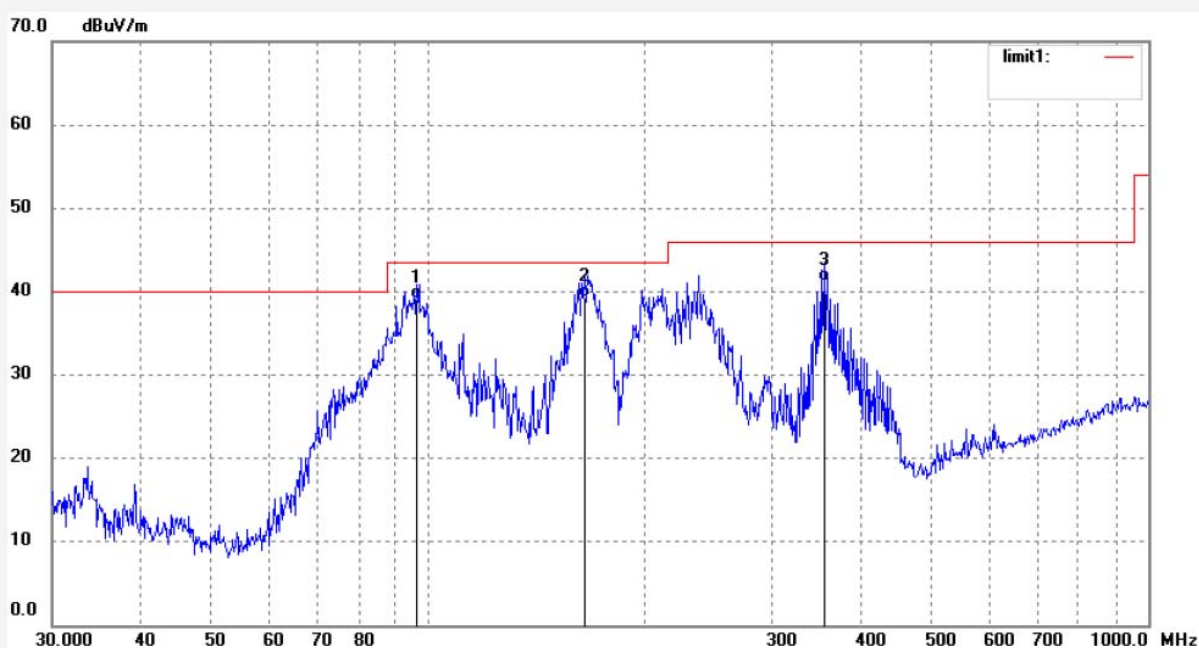


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	96.3230	60.65	-21.52	39.13	43.50	-4.37	QP			
2	164.8912	60.10	-20.83	39.27	43.50	-4.23	QP			
3	354.6912	55.64	-14.47	41.17	46.00	-4.83	QP			

Job No.: STAR2015 #1259
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: NFC waterproof bluetooth speaker
Mode: TX 2402MHz
Model: SA-W989
Manufacturer: ShengYu

Polarization: Vertical
Power Source: DC 5V
Date: 2015/07/22
Time: 16:51:44
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20151555

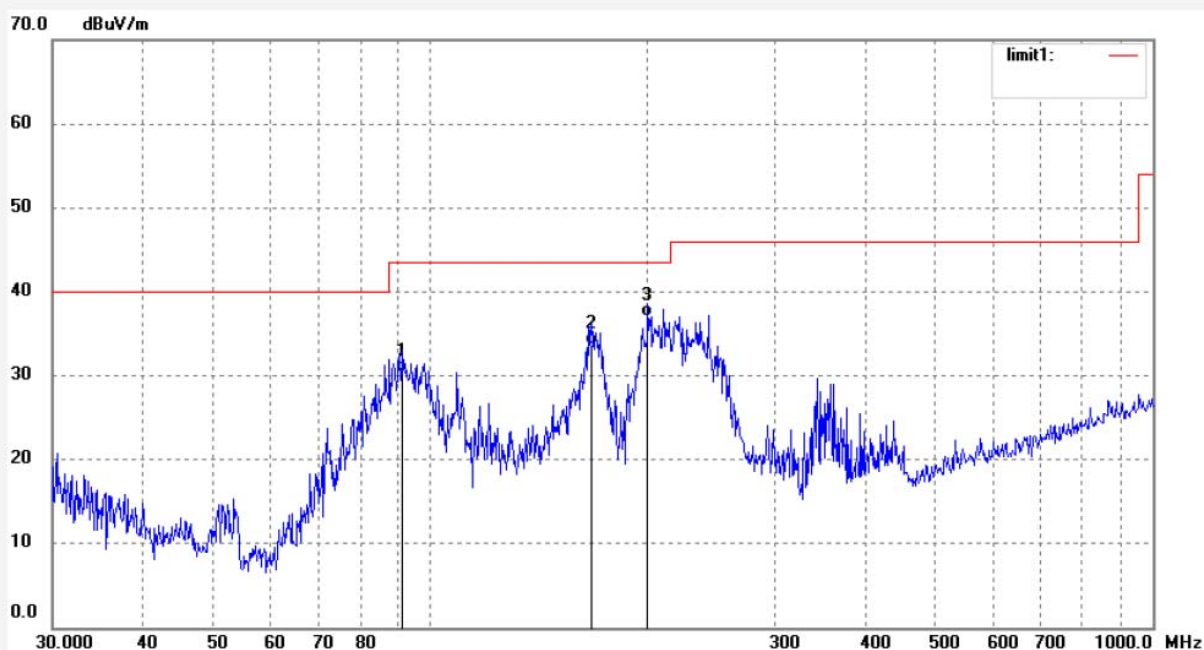

Job No.: STAR2015 #1260

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2440MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Vertical

Power Source: DC 5V


Date: 2015/07/22

Time: 16:52:17

Engineer Signature: Star

Distance: 3m

Note: Report No.:ATE20151555

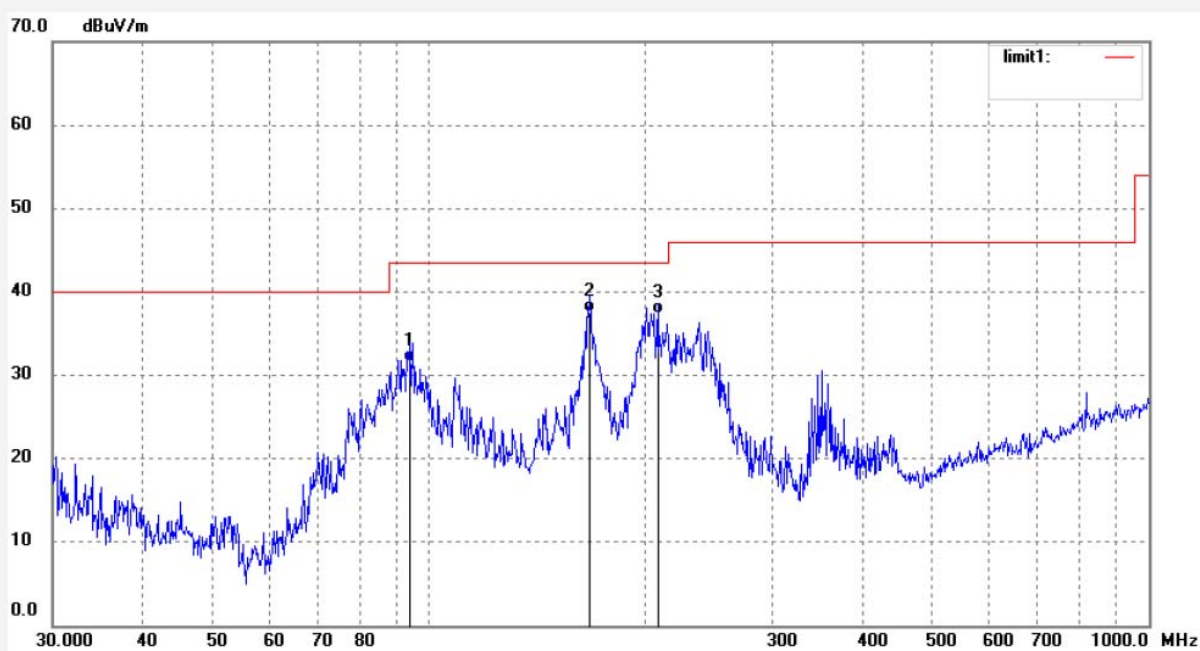

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	93.9829	53.10	-21.57	31.53	43.50	-11.97	QP			
2	167.2249	58.15	-20.58	37.57	43.50	-5.93	QP			
3	207.9260	55.78	-18.50	37.28	43.50	-6.22	QP			

Job No.: STAR2015 #1261

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2440MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Horizontal

Power Source: DC 5V


Date: 2015/07/22

Time: 16:53:01

Engineer Signature: Star

Distance: 3m

Note: Report No.:ATE20151555

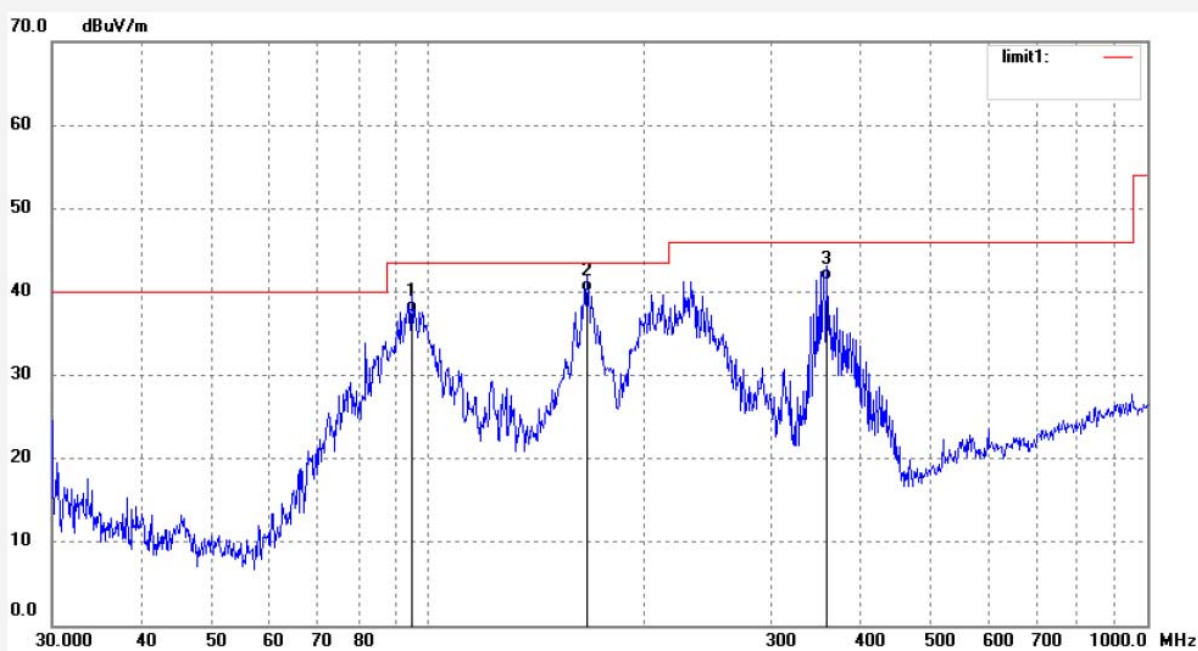

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	94.9788	58.97	-21.48	37.49	43.50	-6.01	QP			
2	166.6385	60.70	-20.64	40.06	43.50	-3.44	QP			
3	358.4497	55.78	-14.34	41.44	46.00	-4.56	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #1262

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2480MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Horizontal

Power Source: DC 5V


Date: 2015/07/22

Time: 16:53:44

Engineer Signature: Star

Distance: 3m

Note: Report No.:ATE20151555

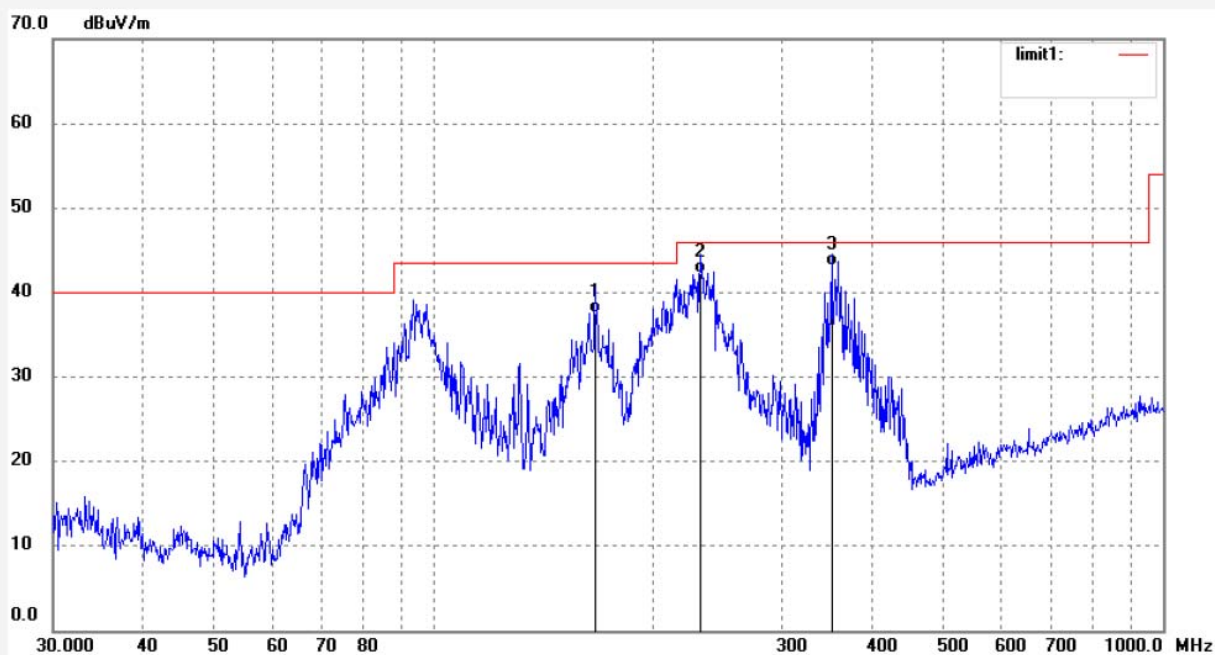

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	166.6385	58.11	-20.64	37.47	43.50	-6.03	QP			
2	231.8531	60.61	-18.30	42.31	46.00	-3.69	QP			
3	350.9722	57.66	-14.59	43.07	46.00	-2.93	QP			

Job No.: STAR2015 #1263

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2480MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Vertical

Power Source: DC 5V


Date: 2015/07/22

Time: 16:54:49

Engineer Signature: Star

Distance: 3m

Note: Report No.:ATE20151555

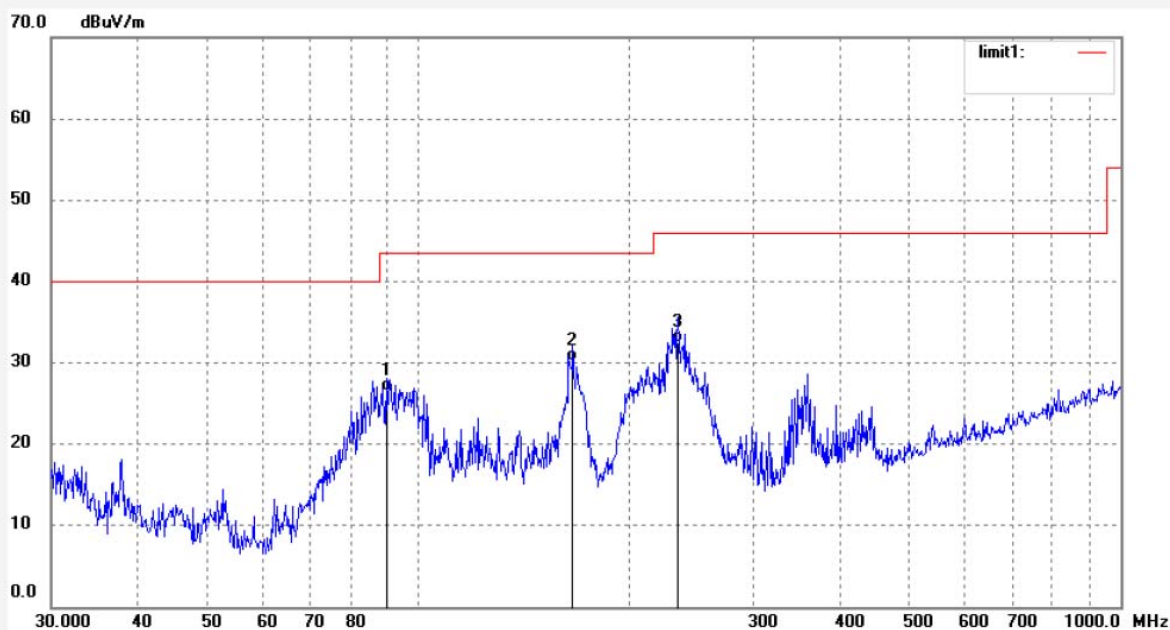

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	90.1025	48.47	-21.93	26.54	43.50	-16.96	QP			
2	166.0540	50.97	-20.70	30.27	43.50	-13.23	QP			
3	234.3099	50.67	-18.29	32.38	46.00	-13.62	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #1264

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2402MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Vertical

Power Source: DC 5V


Date: 2015/07/22

Time: 16:56:15

Engineer Signature: Star

Distance: 3m

Note: Report No.:ATE20151555

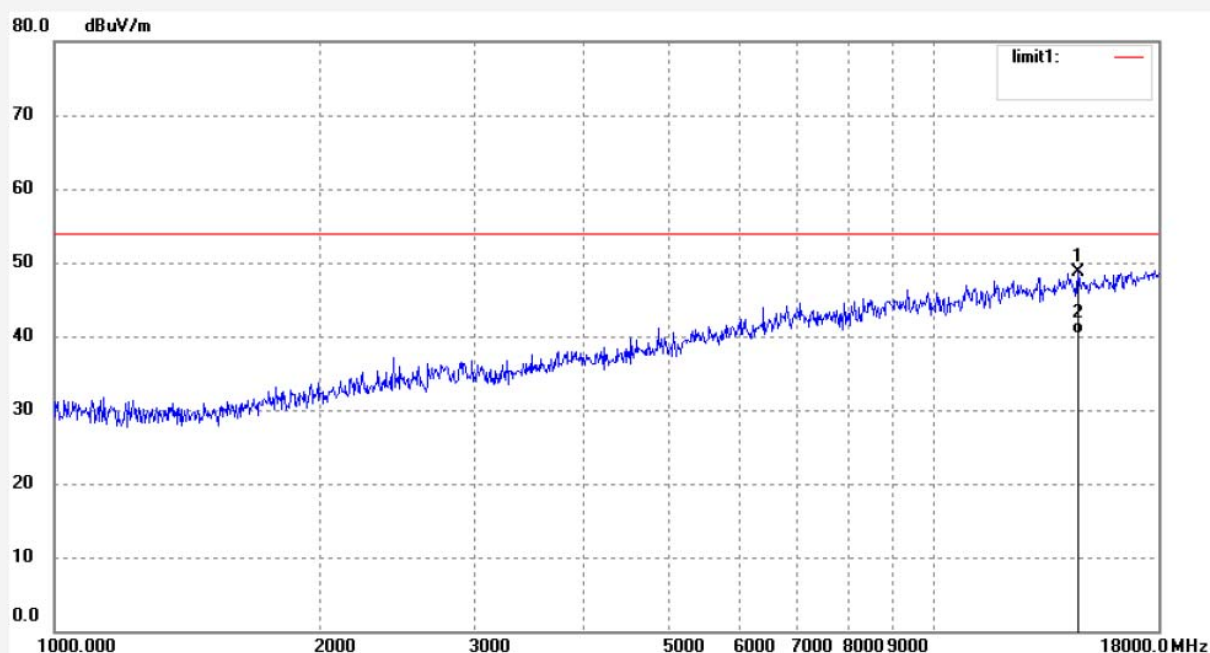

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	14596.737	34.51	14.14	48.65	74.00	-25.35	peak			
2	14596.737	26.10	14.14	40.24	54.00	-13.76	AVG			

Job No.: STAR2015 #1265

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2402MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Horizontal

Power Source: DC 5V


Date: 2015/07/22

Time: 16:57:01

Engineer Signature: Star

Distance: 3m

Note: Report No.:ATE20151555

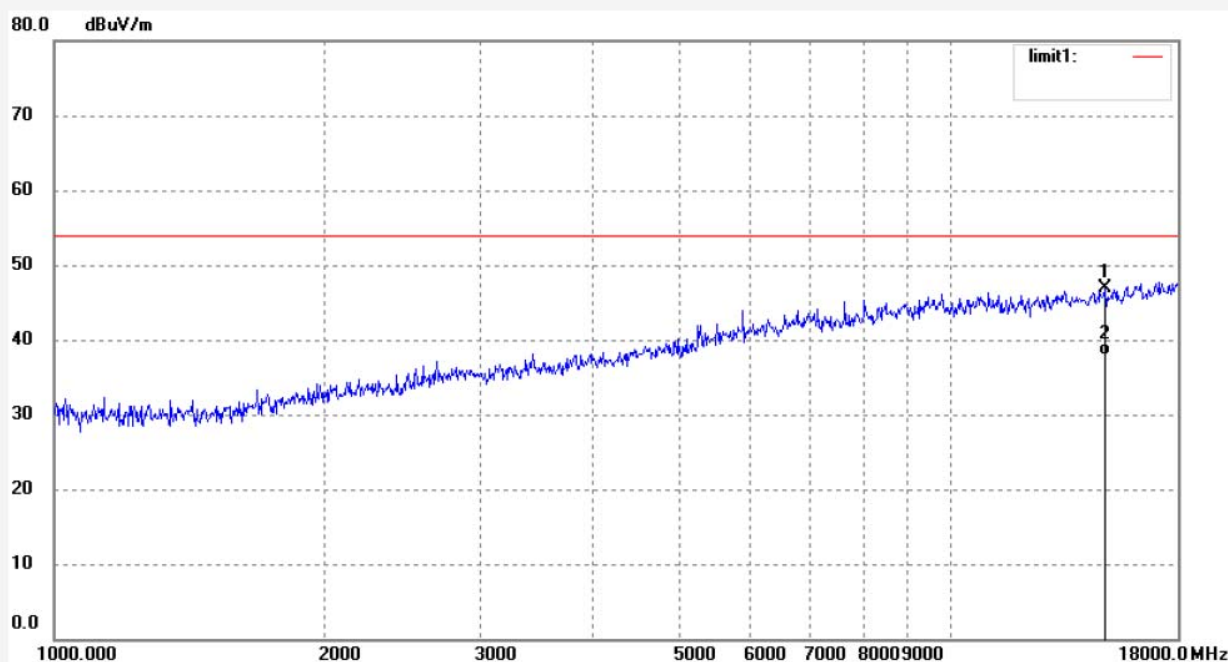

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	14940.624	33.48	13.42	46.90	74.00	-27.10	peak			
2	14940.624	24.58	13.42	38.00	54.00	-16.00	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #1266

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2440MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Horizontal

Power Source: DC 5V


Date: 2015/07/22

Time: 16:57:55

Engineer Signature: Star

Distance: 3m

Note: Report No.:ATE20151555

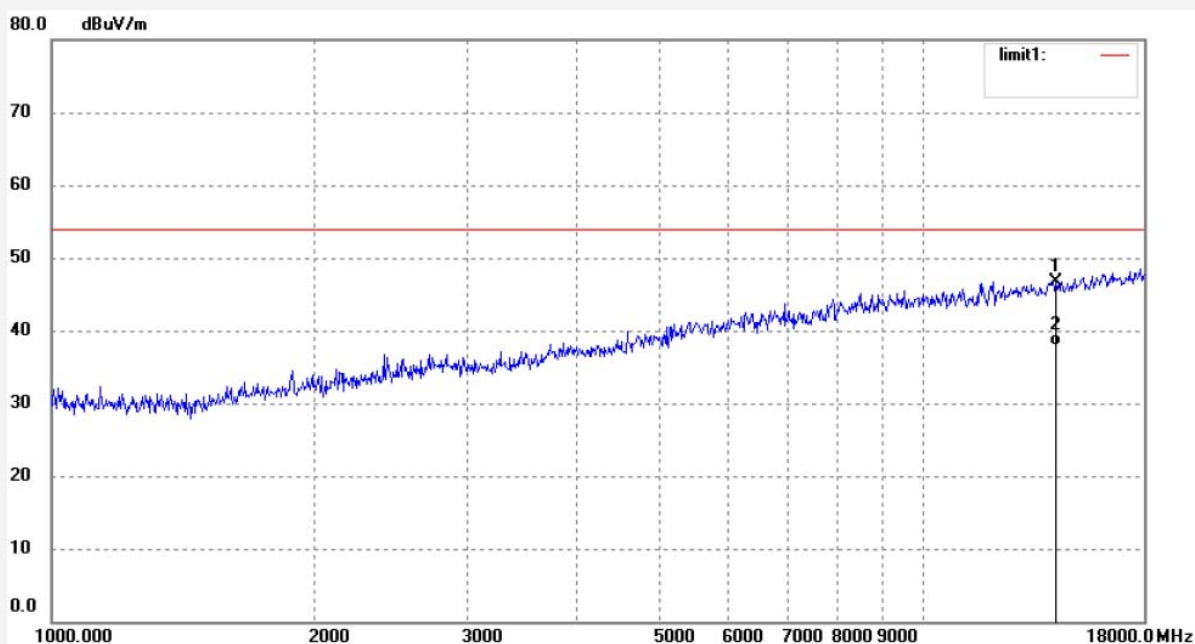

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	14260.764	33.71	13.06	46.77	74.00	-27.23	peak			
2	14260.764	24.88	13.06	37.94	54.00	-16.06	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #1267

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2440MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Vertical

Power Source: DC 5V


Date: 2015/07/22

Time: 16:59:11

Engineer Signature: Star

Distance: 3m

Note: Report No.:ATE20151555

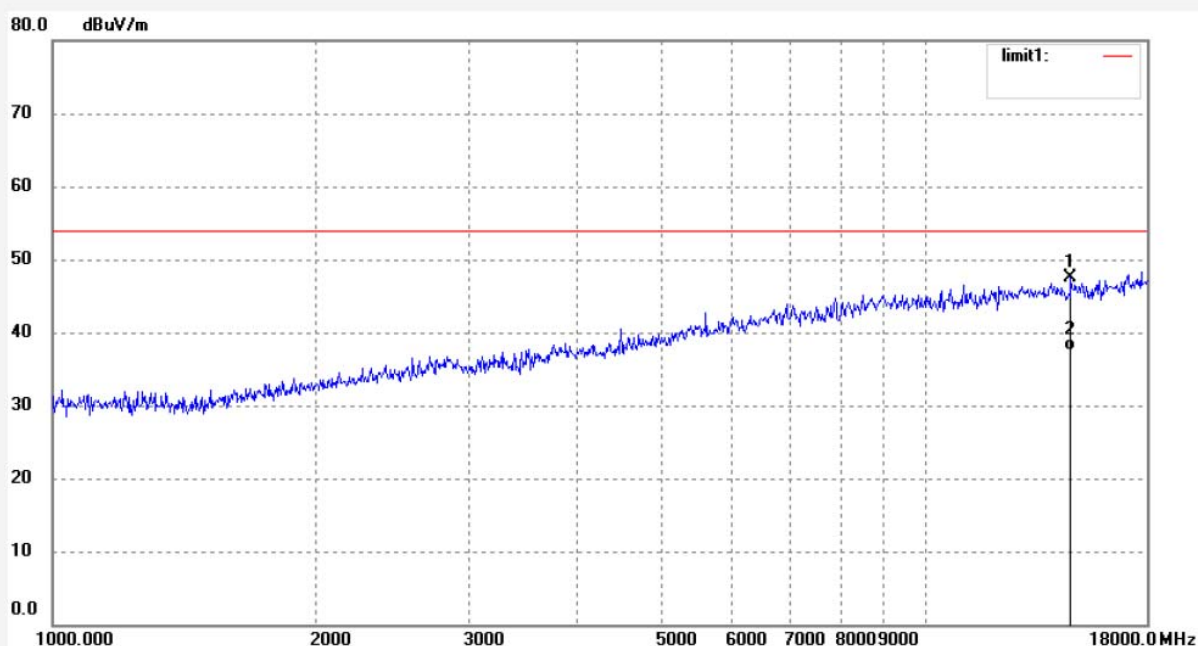

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	14724.757	33.71	13.87	47.58	74.00	-26.42	peak			
2	14724.757	23.61	13.87	37.48	54.00	-16.52	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR2015 #1268
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: NFC waterproof bluetooth speaker
Mode: TX 2480MHz
Model: SA-W989
Manufacturer: ShengYu

Polarization: Vertical
Power Source: DC 5V
Date: 2015/07/22
Time: 17:00:04
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20151555

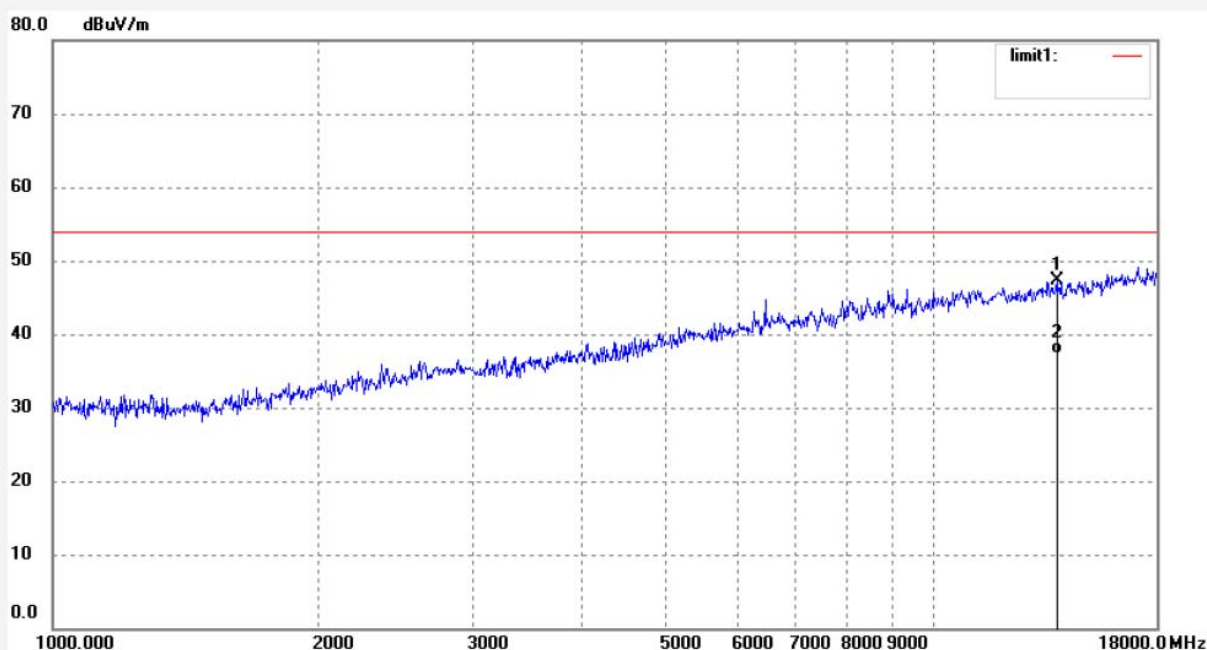

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	13851.652	35.92	11.30	47.22	74.00	-26.78	peak			
2	13851.652	25.96	11.30	37.26	54.00	-16.74	AVG			

Job No.: STAR2015 #1269

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: NFC waterproof bluetooth speaker

Mode: TX 2480MHz

Model: SA-W989

Manufacturer: ShengYu

Polarization: Horizontal

Power Source: DC 5V


Date: 2015/07/22

Time: 17:00:56

Engineer Signature: Star

Distance: 3m


Note: Report No.:ATE20151555

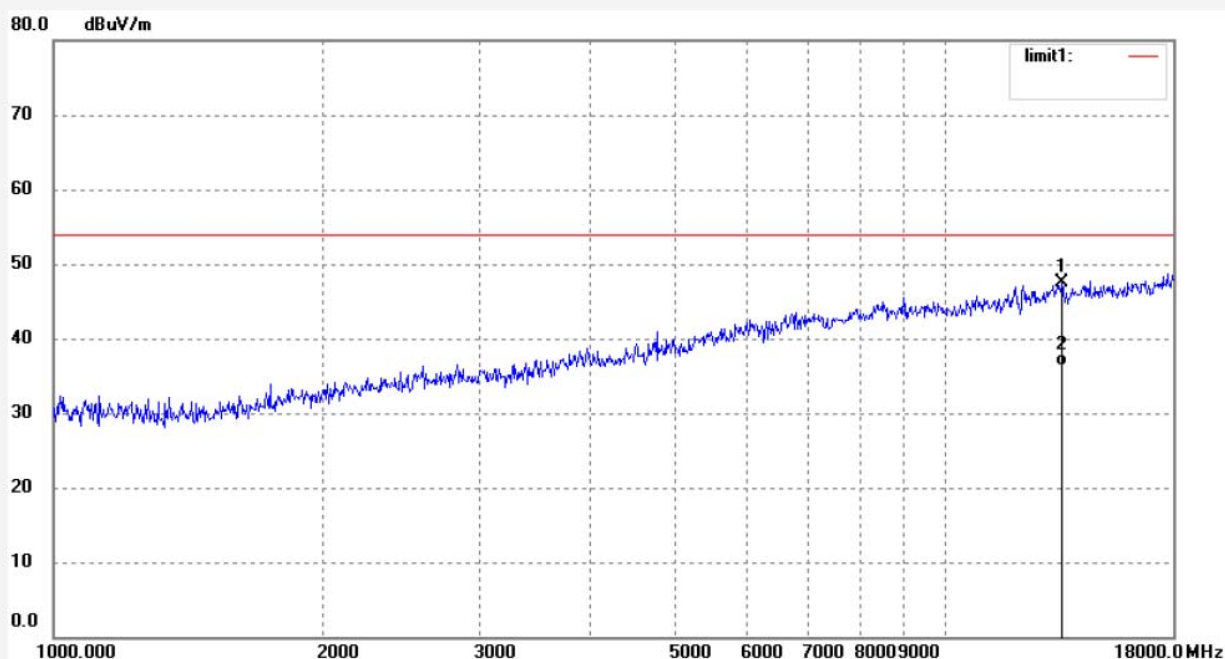

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	13532.830	36.94	10.48	47.42	74.00	-26.58	peak			
2	13532.830	25.82	10.48	36.30	54.00	-17.70	AVG			

11.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

11.1.Block Diagram of Test Setup



(EUT: NFC waterproof bluetooth speaker)

11.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 10.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

11.5.Test Procedure

11.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

11.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz



11.5.3.The Conducted Spurious Emission was measured and recorded.

11.6.Test Result



Pass.

The spectrum analyzer plots are attached as below.



BLE Channel Low 2402MHz

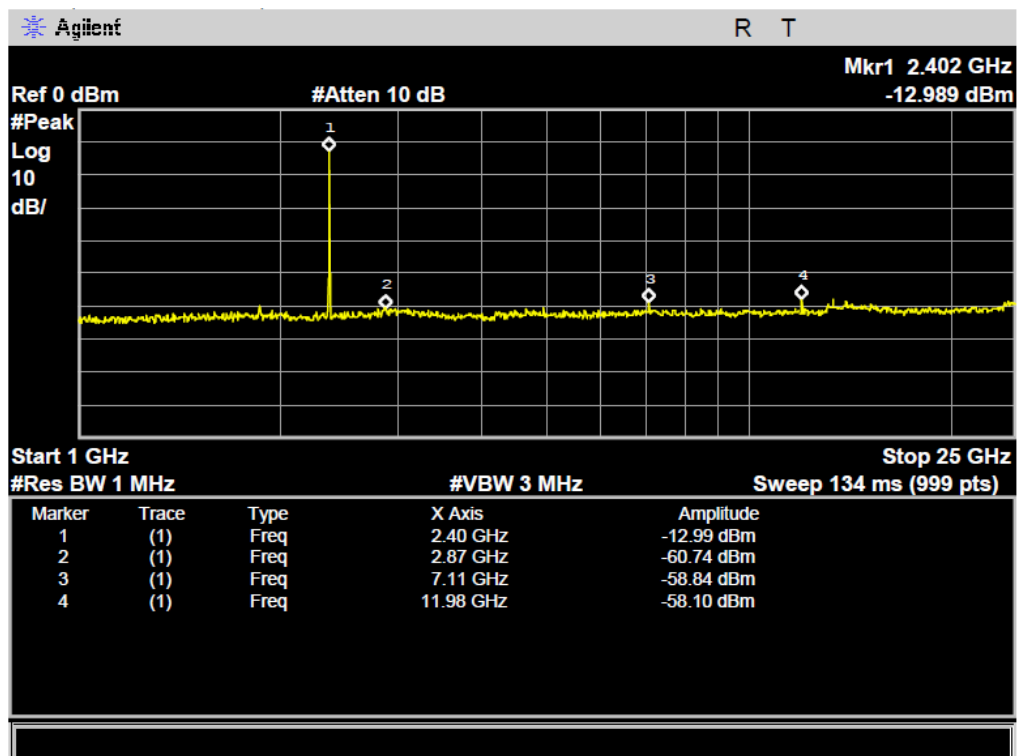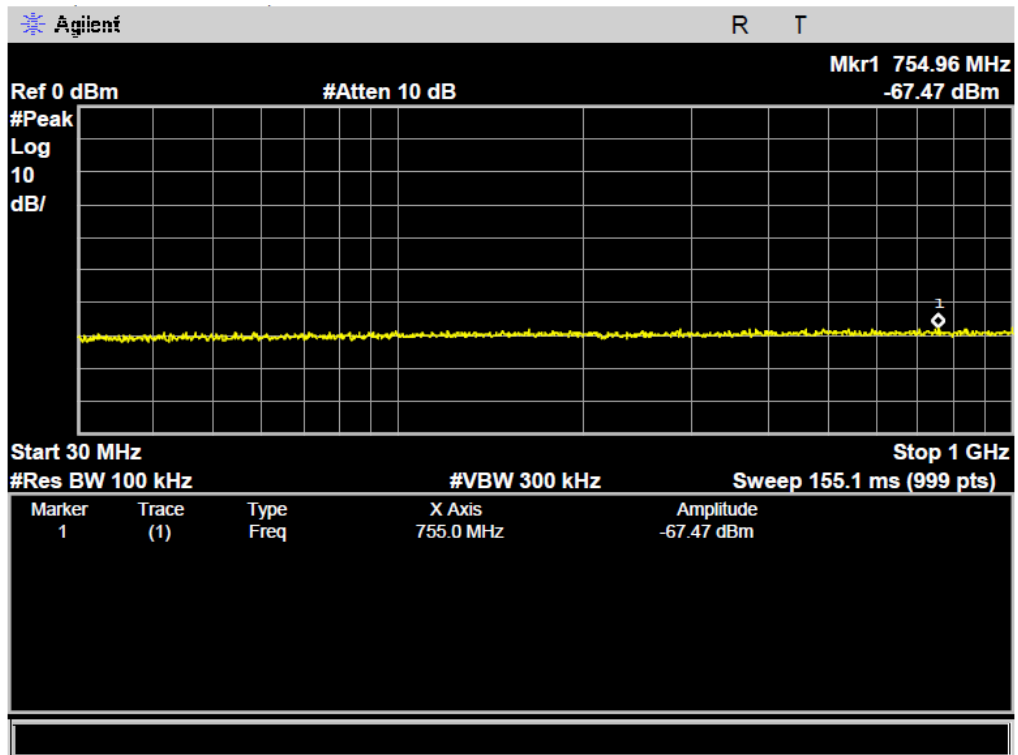

BLE Channel Middle 2440MHz

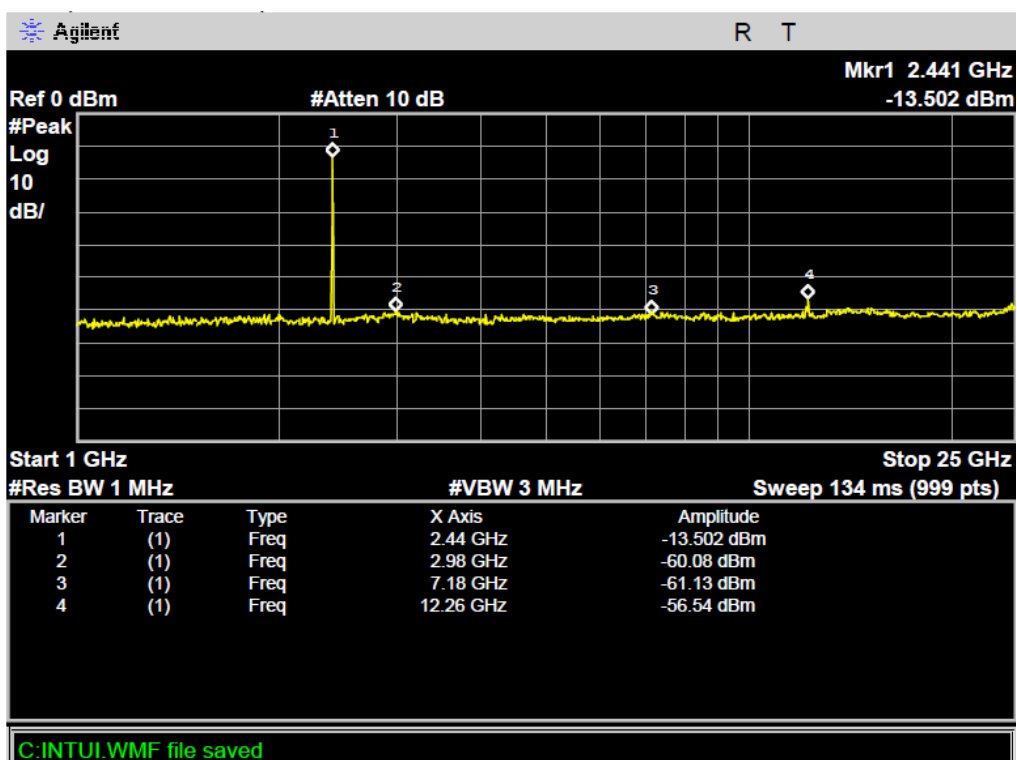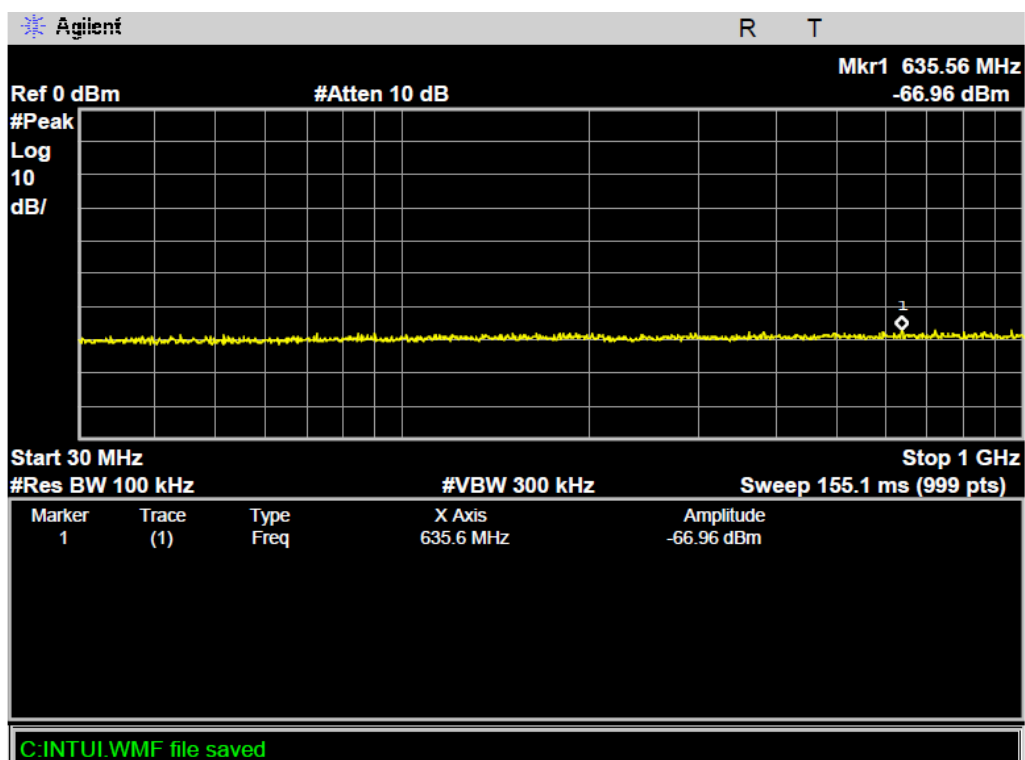

BLE Channel High 2480MHz

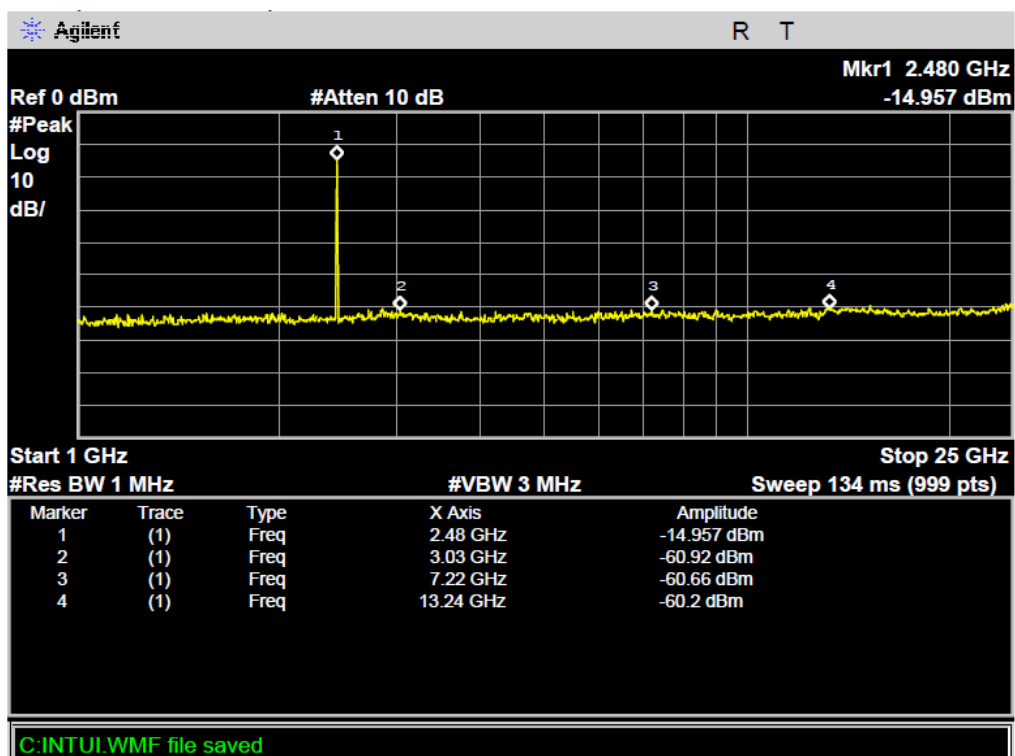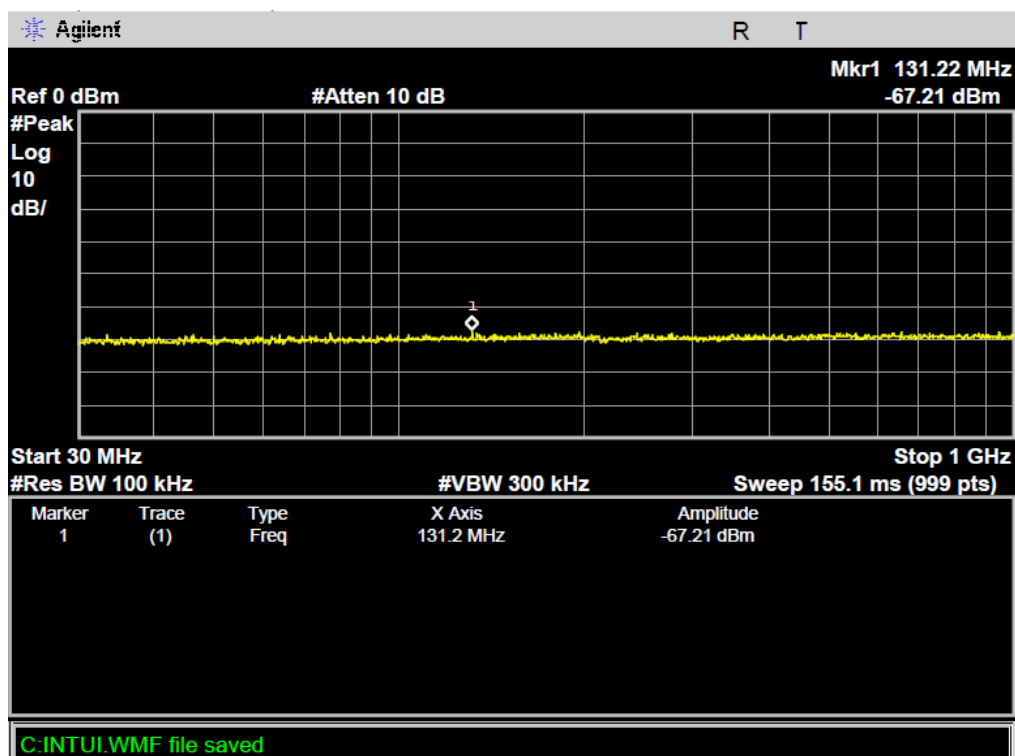


12.ANTENNA REQUIREMENT

12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 0 dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

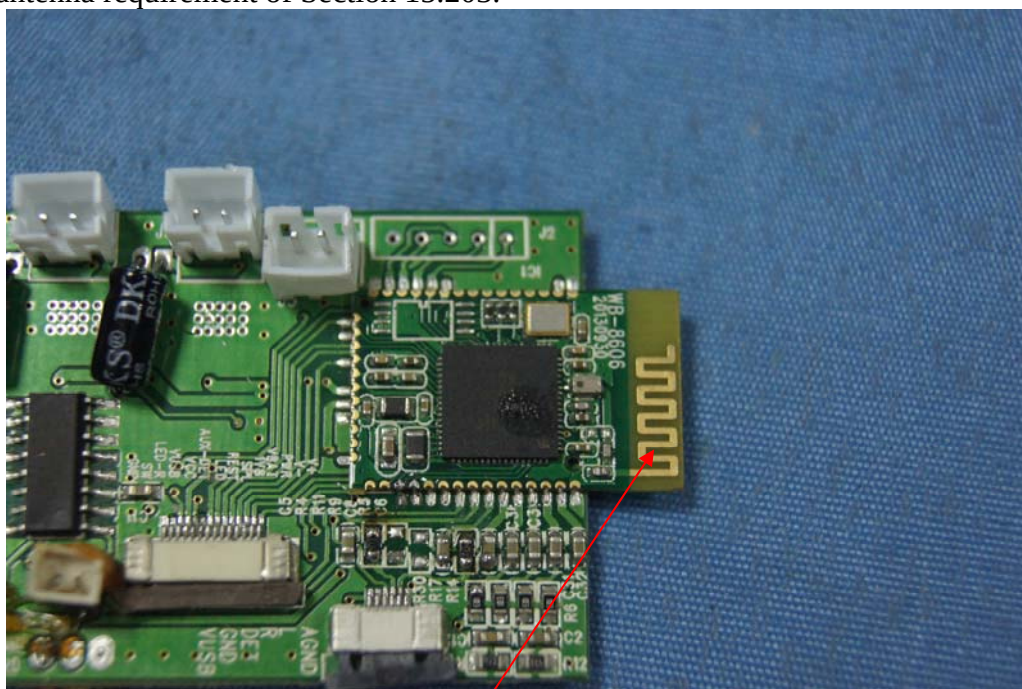

Antenna