

TEST REPORT

Equipment Under Test : Bluetooth Dongle
Model No. : YBU-1200

Applicant : Yasing Technology Corp
Address of Applicant : 1F No.50, Ta Hsueh Rd., Hsinchu 300, Taiwan R.O.C.

Standards:

FCC Part 15 subpart C

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan E&E Services or testing done by SGS Taiwan E&E Services in connection with distribution or use of the product described in this report must be approved by SGS Taiwan E&E Services in writing.

Tested by : Alex Hsieh **Date** : May. 15, 2003

Approved by : Robert Chang **Date** : Jun 20, 2003

Contents

1. General Information

1.1 Testing Laboratory.....	3
1.2 Details of Applicant.....	3
1.3 Description of EUT(s).....	3
1.4 Operation Procedure.....	4
1.5 Testing Method.....	4

2. Summary of Results.....

3. Instruments List.....

4. Measurements.....

4.1 Conducted Limits.....	8
4.2 Radiated emission Limits, general requirement.....	11
4.3 Channel Spacing.....	18
4.4 20db bandwidth / No. of channels.....	19
4.5 Average time of Occupancy.....	24
4.6 Peak output power.....	29
4.7 Band-edge emission.....	33
4.8 Spurious Emission under 25Ghz.....	35

APPENDIX

Photographs of Test Setup.....	47
Photographs of EUT.....	48-49

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. (FCC Registration number: 573967)

1F, No. 134, Wukung Road, Wuku industrial zone

Taipei county , Taiwan , R.O.C.

Telephone : +886-2-2299-3279

Fax : +886-2-2298-2698

Internet : <http://www.sgs.com.tw>

1.2 Details of Applicant

Applicant : Yasing Technology Corp

Address of Applicant: 1F No.50, Ta Hsueh Rd.,Hsinchu 300,
Taiwan R.O.C.

Contact: Mr. Eric Deng

Telephone: +886-3-5750500

1.3 Description of EUT(s)

1	Product name	Bluetooth Dongle
2	Product ID	YBU-1200
3	Supply Voltage	USB Power Supply 5V±10%
4	Antenna Gain	1 dBi
5	Carrier Frequency	2402MHz to 2480MHz
6	Modulation Method	GFSK,1Mbps,0.5BT Gaussian
7	Hopping	1600hops/sec, 1MHz channel space
8	Output Interface	USB
9	Operation Temperature	-20 to +60 degree
10	Compliant	Bluetooth Specification Ver1.1

1.4 Operation Procedure

The Bluetooth is a FHSS system, and the output power and operating frequency are NOT End-user adjustable. Applicant offer a engineering software "BlueSuite" installed on PC to control the EUT. Setting of the software parameters are set as default. Operating frequency are set as testing required. The output power is set as Ext=255, Int=55 (at max. power). Inside the BlueSuite software, there is a BlueTest to control EUT hopping on or off. We select "Txdata1" (which modulated by pseudo-random sequence)and assign the transmit channel(as below). When the EUT is required to transmit in hopping on mode. We select "Txdata2"

The lowest operating frequency within Bluetooth specification is 2402Mhz, and highest operating frequency is 2480Mhz. So the frequency above are used as the lowest and highest frequency in the testing, and the middle frequency is set as 2441Mhz.

1.5 Testing Method

The testing standard follows CFR 47, Part 15.247 and ANSI C63.4 1992, and measurement method according to Public Notice DA00-705 (March 2000).

The Testing procedure is as following:

- a. The EUT was plug in the USB port of PC and placed on the top of a rotating table 0.8 meters above the ground at a 3m chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1

MHz for Peak detection at frequency above 1GHz.

3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4. During the Output power testing, the manufacturer attach a test fixture which is a short cable that replace the antenna. So we use conducted method to measure the power. Hence the EIRP is the output power plus the antenna gain in dBi. Due to cable loss, the real value will equal to measured value(show on the instrument) add cable loss.

2. Summary of Results

subclause	Parameter to be measures	Verdict	Page
15.207	Conducted Limits	PASS	8
15.209	Radiated emission Limits, general requirement	PASS	11
15.247(a)(1)	Channel Spacing	PASS	18
15.247(a)(1)(ii)	20db bandwidth / No. of channels	PASS	19
15.247(a)(1)(ii)	Average Time of Occupancy	PASS	24
15.247(b)(1)	Peak Output power	PASS	29
15.247(c)	Band-Edge Emission	PASS	33
15.247(c)	Spurious Emission under 25Ghz	PASS	35

3. Instruments List

Instrument	Model	Serial number	Calibration date
Desktop PC	HP Pavillion 723D	N/A	N/A
Spectrum Analyzer	Agilent E7405A	US40240202	Jun 01, 2002
Spectrum Analyzer	R&S FSP 40	100034	Mar. 27, 2003
Antenna	Schwarzbeck BBHA9170A	184/185	July 01, 2002
Antenna	Schwarzbeck BBHA9120A	309/320	July 01, 2002
Antenna	Schwarzbeck VULB9163	152	July 01, 2002
Signal generator	R&S SMR 40	100210	Feb. 11, 2003
EMC Analyzer	HP 8594EM	3624A00203	Dec. 13, 2002
EMI Test Receiver	R&S ESCS 30	828985/004	Oct. 11, 2002
Transient Limiter	HP 11947A	3107A02062	Jul. 24, 2002
L.I.S.N	Rolf-Heine NNB-2/16Z	99012	Oct. 08, 2002

4. Measurements

4.1 Conducted Limits

SUBCLAUSE 15.207

Line

Product Name: Bluetooth dongle Test Date: May,26,2003

Model No.: YBU-1200 Tester : Gallon

Test Mode: Operation Mode Temperature: 26 °C

Test Result: PASS Humidity: 57 %

Main

Terminals:L

FREQ MHz	QP1 dBuV	AVG1 dBuV	Factor	QP2 dBuV	AVG2 dBuV	QP Limit	AV Limit	QP Offset	AV Offset
0.15	28.8	12.5	3.00	31.80	15.50	66.00	56.00	-34.20	-40.50
0.17	25.1	17.4	2.96	28.06	20.36	65.04	55.04	-36.98	-34.68
0.2	22	12.8	2.90	24.90	15.70	63.61	53.61	-38.71	-37.91
0.28	30.4	27.5	2.82	33.22	30.32	60.91	50.91	-27.69	-20.59
0.49	20.3	14.7	2.91	23.21	17.61	56.19	46.19	-32.98	-28.58
1.3	16.4	10.9	2.89	19.29	13.79	56.00	46.00	-36.71	-32.21

1." -" denotes the emission level was - 10 dB beneath the Average limit, so nothing need to re-check anymore.

2. QP1/ AVG1 value means the QP/AV reading without the factor.

3. QP2/AVG2 value means the QP/AV final reading with the factor.

Neural

Product Name: Bluetooth dongle Test Date: May,26,2003

Model No.: YBU-1200 Tester : Gallon

Test Mode: Operation Mode Temperature: 26 °C

Test Result: PASS Humidity: 57 %

Main

Terminals:N

FREQ MHz	QP1 dBuV	AVG1 dBuV	Factor	QP2 dBuV	AVG2 dBuV	QP Limit	AV Limit	QP Offset	AV Offset
0.17	29.7	17.6	2.96	32.66	20.56	65	55.04	-32.4	-34.48
0.21	26.80	17.30	2.89	29.69	20.19	63.27	53.27	-33.58	-33.08
0.28	32.40	29.80	2.82	35.22	32.62	60.91	50.91	-25.69	-18.29
0.45	19.10	13.80	2.95	22.05	16.75	56.93	46.93	-34.88	-30.18
1.31	16.00	10.60	2.89	18.89	13.49	56.00	46.00	-37.11	-32.51
2.35	16.50	11.10	3.11	19.61	14.21	56.00	46.00	-36.39	-31.79

1." -" denotes the emission level was - 10 dB beneath the Average limit, so nothing need to re-check anymore.

2. QP1/ AVG1 value means the QP/AV reading without the factor.


3. QP2/AVG2 value means the QP/AV final reading with the factor.

4.1.1 Limits (EN55022)

Frequency range Mhz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

4.2 Radiated emission Limits, general requirement SUBCLAUSE 15.209


1. Transmit at 2402Mhz, The Spectrum setting : RBW=120Khz , VBW=120Khz, **Vertical**

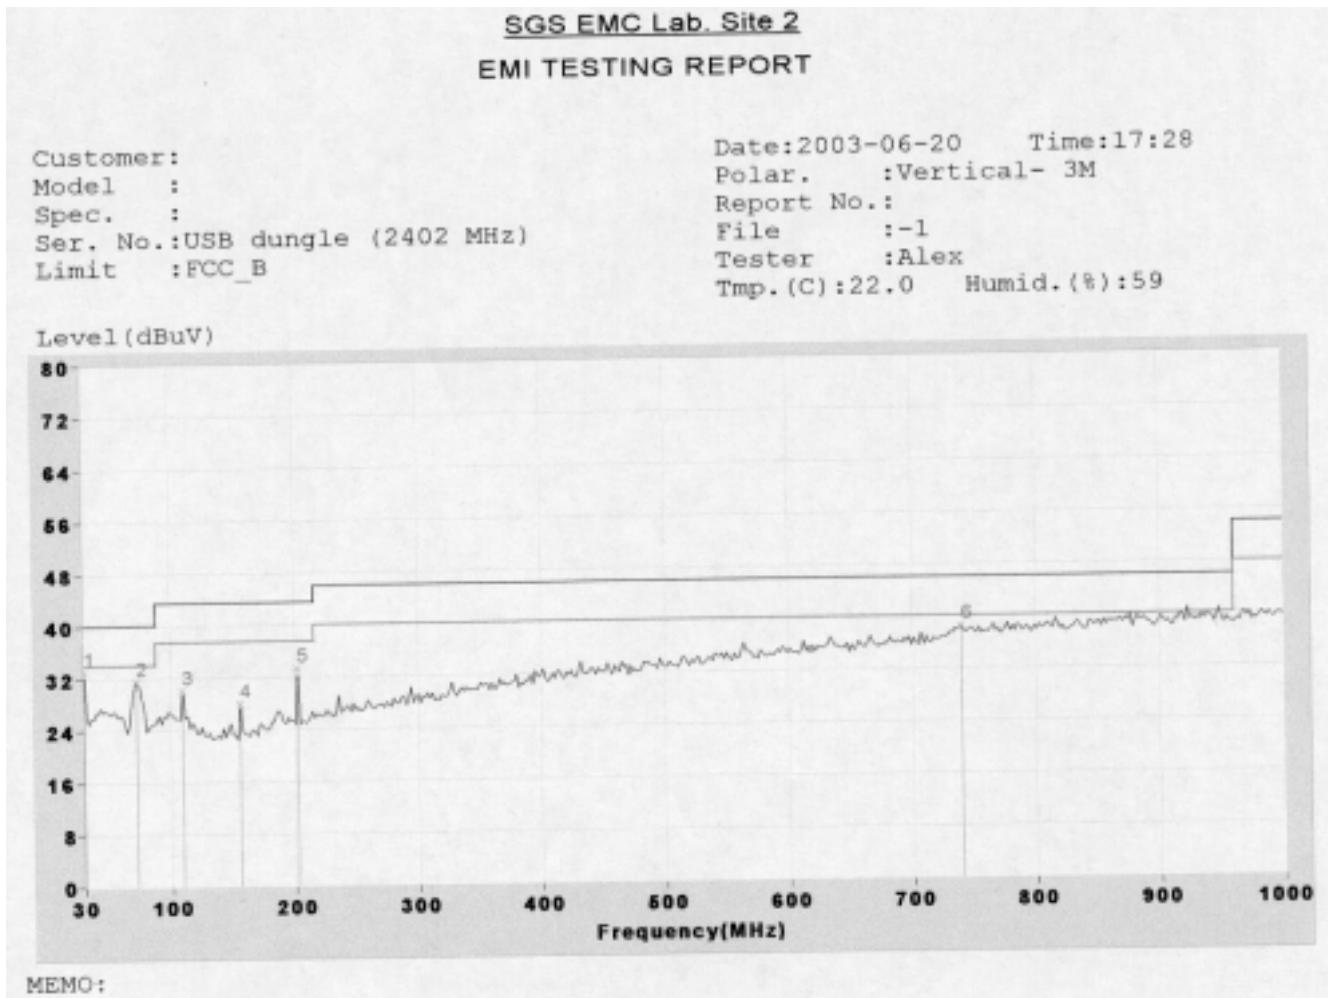

Freq(Mhz)	Level (dbuV/m)	Over Limit (db)	Limit Line (dbuV/m)	Read level (dbuV)	Antenna factor(db/m)	Cable loss (db)
30.00	33.14	-6.86	40.0	21.68	11.08	0.38
72.68	31.49	-8.51	40.0	23.90	6.95	0.64
109.54	30.07	-13.43	43.5	18.27	11.04	0.76
156.10	28.00	-15.50	43.5	19.30	7.82	0.88

202.66	33.30	-10.20	43.5	21.94	10.36	1.00
740.04	38.40	-7.60	46.0	15.18	20.91	2.31

2. Transmit at 2402Mhz, The Spectrum setting : RBW=120Khz , VBW=120Khz, **Horizontal**

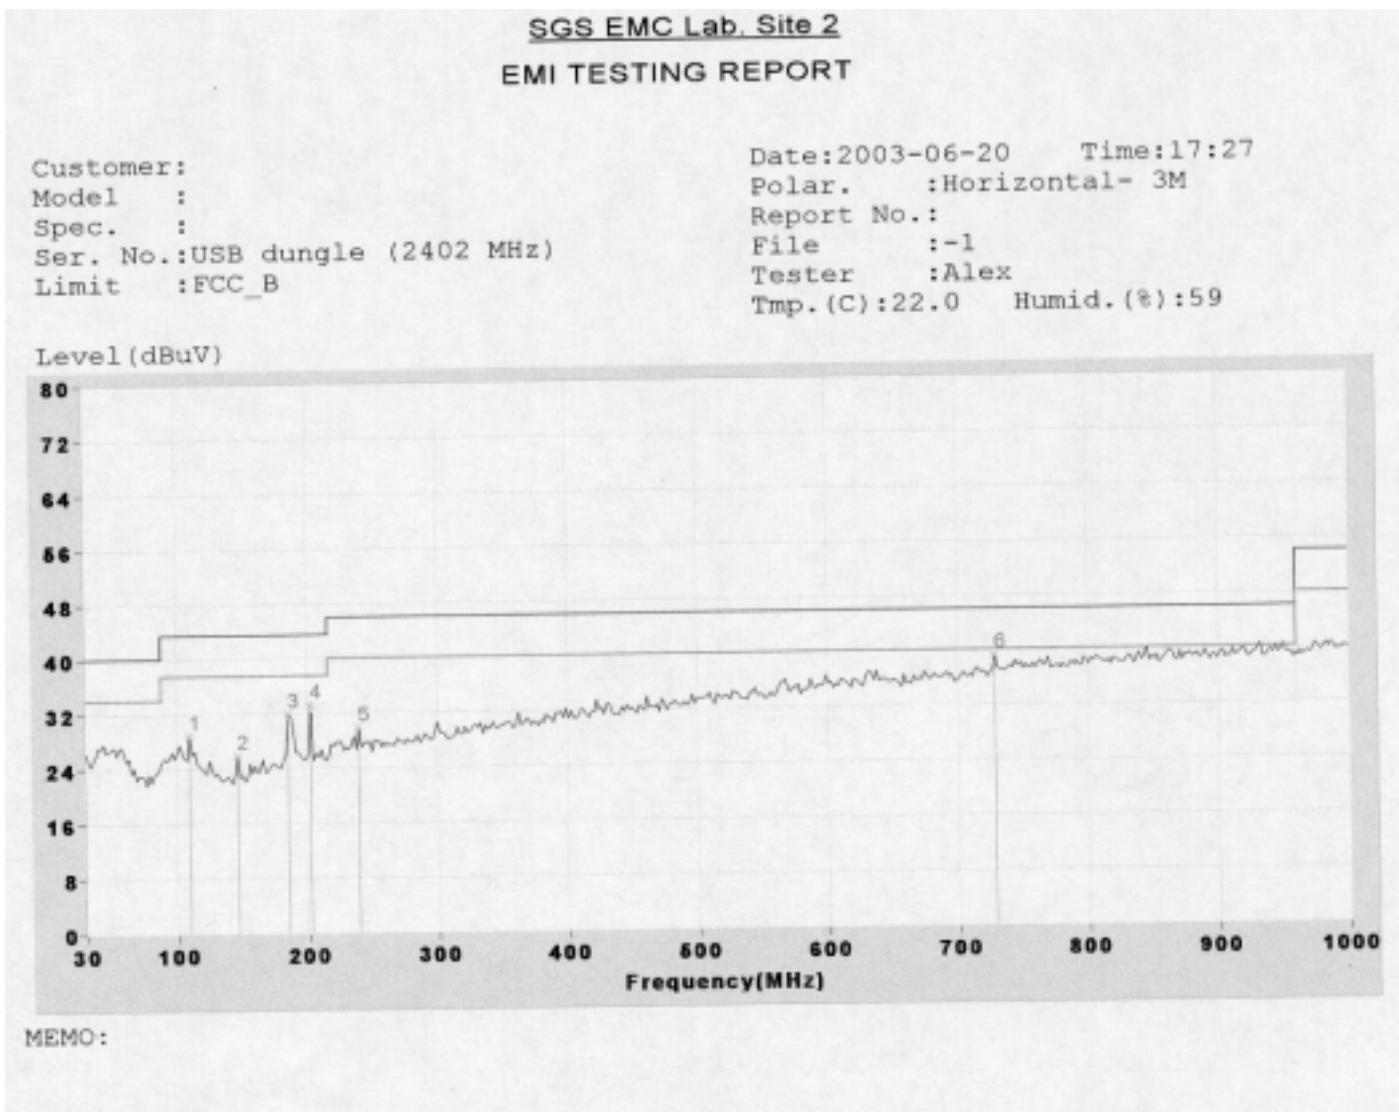

Freq(Mhz)	Level (dbuV/m)	Over Limit (db)	Limit (dbuV/m)	Line (dbuV/m)	Read level (dbuV)	Antenna factor(db/m)	Cable loss (db)
109.54	28.77	-14.73	43.5	16.96	11.04	0.76	
146.40	25.79	-17.71	43.5	17.53	7.41	0.86	
185.20	31.87	-11.63	43.5	21.16	9375	0.85	

202.66	33.18	-10.32	43.5	21.82	10.36	1.00
239.52	29.75	-16.25	46.0	16.59	12.08	1.09
728.40	39.15	-6.85	46.0	16.37	20.50	2.28


3. Transmit at 2441Mhz, The Spectrum setting : RBW=120Khz , VBW=120Khz, **Vertical**

SGS EMC Lab. Site 2
EMI TESTING REPORT

Customer:
Model :
Spec. :
Ser. No.:USB dungle (2441 MHz)
Limit :FCC_B

Date:2003-06-20 Time:17:33
Polar. :Vertical- 3M
Report No.:
File : -1
Tester :Alex
Tmp. (C):22.0 Humid. (%):59

Level (dBuV)

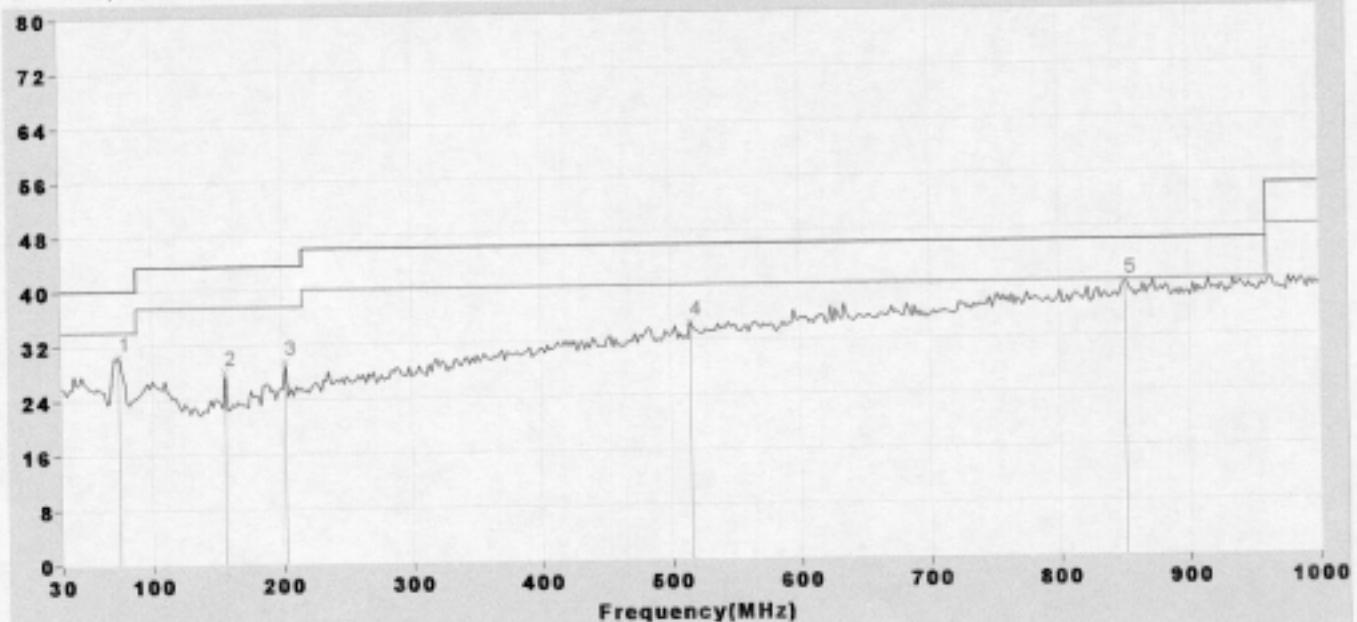


MEMO:

Freq(Mhz)	Level (dbuV/m)	Over (db)	Limit	Limit (dbuV/m)	Line	Read (dbuV)	level	Antenna factor(db/m)	Cable (db)	loss
74.62	30.29	-9.61		40.0		23.12		6.62		0.65
156.10	28.11	-15.39		43.5		19.41		7.82		0.88

202.66	29.52	-13.98	43.5	18.16	10.36	1.00
515.00	34.51	-11.49	46.0	15.17	17.46	1.89
850.62	39.78	-6.22	46.0	15.61	21.67	2.51


4. Transmit at 2441Mhz, The Spectrum setting : RBW=120Khz , VBW=120Khz, **Horizontal**

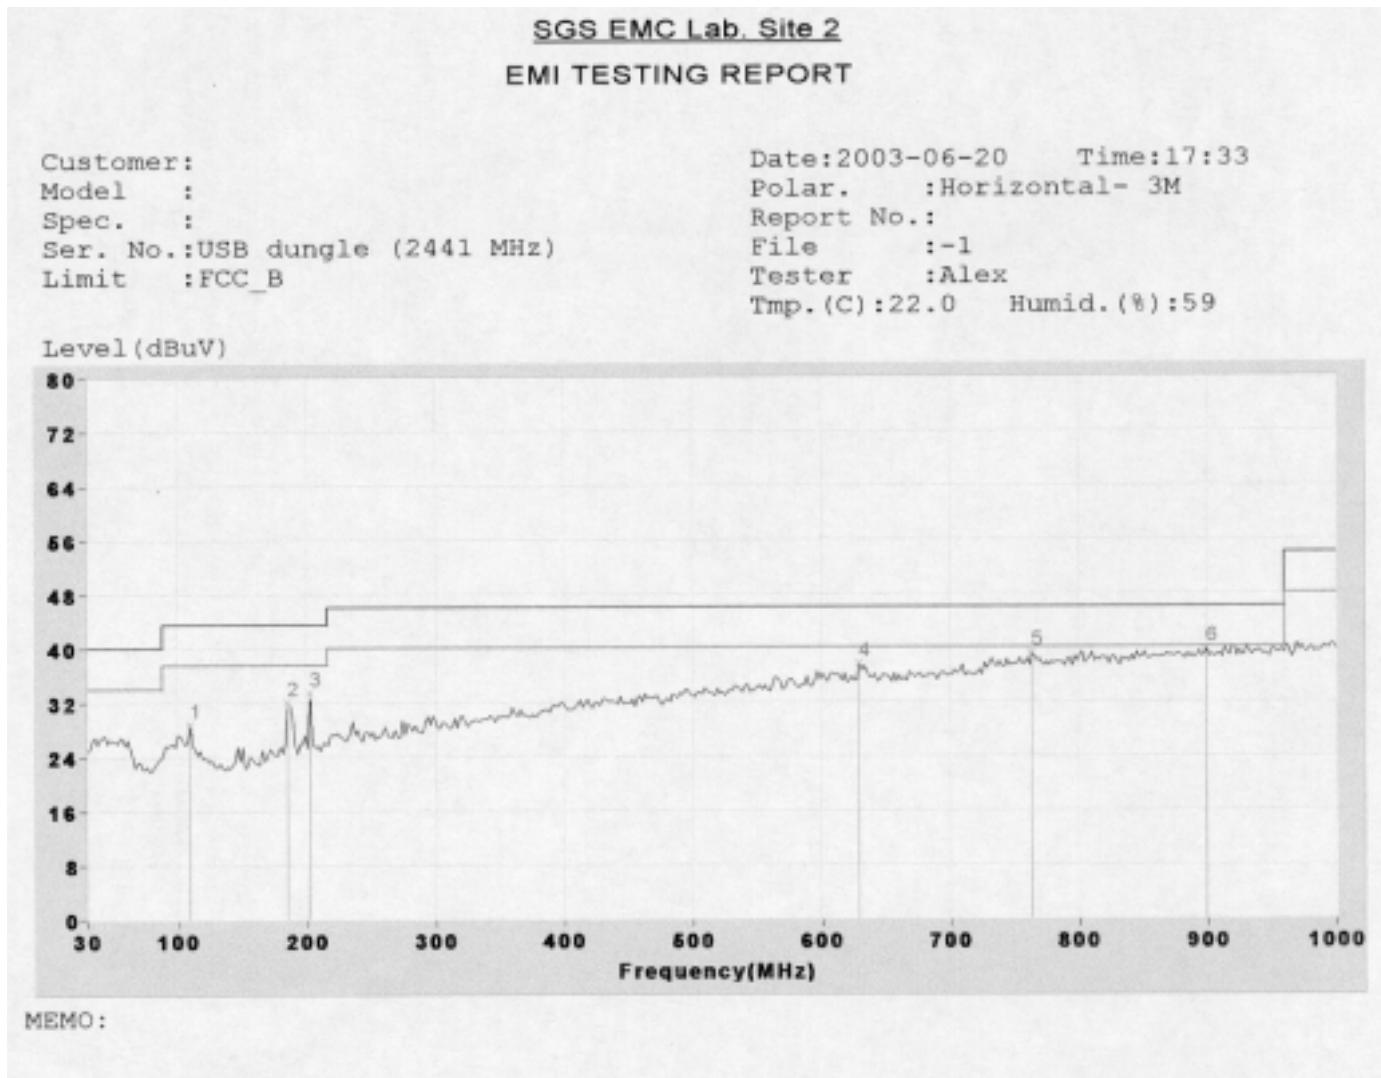

Freq(Mhz)	Level (dbuV/m)	Over Limit (db)	Limit (dbuV/m)	Line (dbuV/m)	Read level (dbuV)	Antenna factor(db/m)	Cable loss (db)
109.54	28.83	-14.67	43.5	17.02	11.04		0.76


185.20	32.06	-11.44	43.5	21.36	9.75	0.95
202.66	33.48	-10.02	43.5	22.12	10.36	1.00
629.46	37.65	-8.35	46.0	16.04	19.49	2.13
763.32	39.16	-6.84	46.0	15.89	20.91	2.36
899.12	39.73	-6.27	46.0	15.00	22.16	2.57

5. Transmit at 2480Mhz, The Spectrum setting : RBW=120Khz , VBW=120Khz, **Vertical**

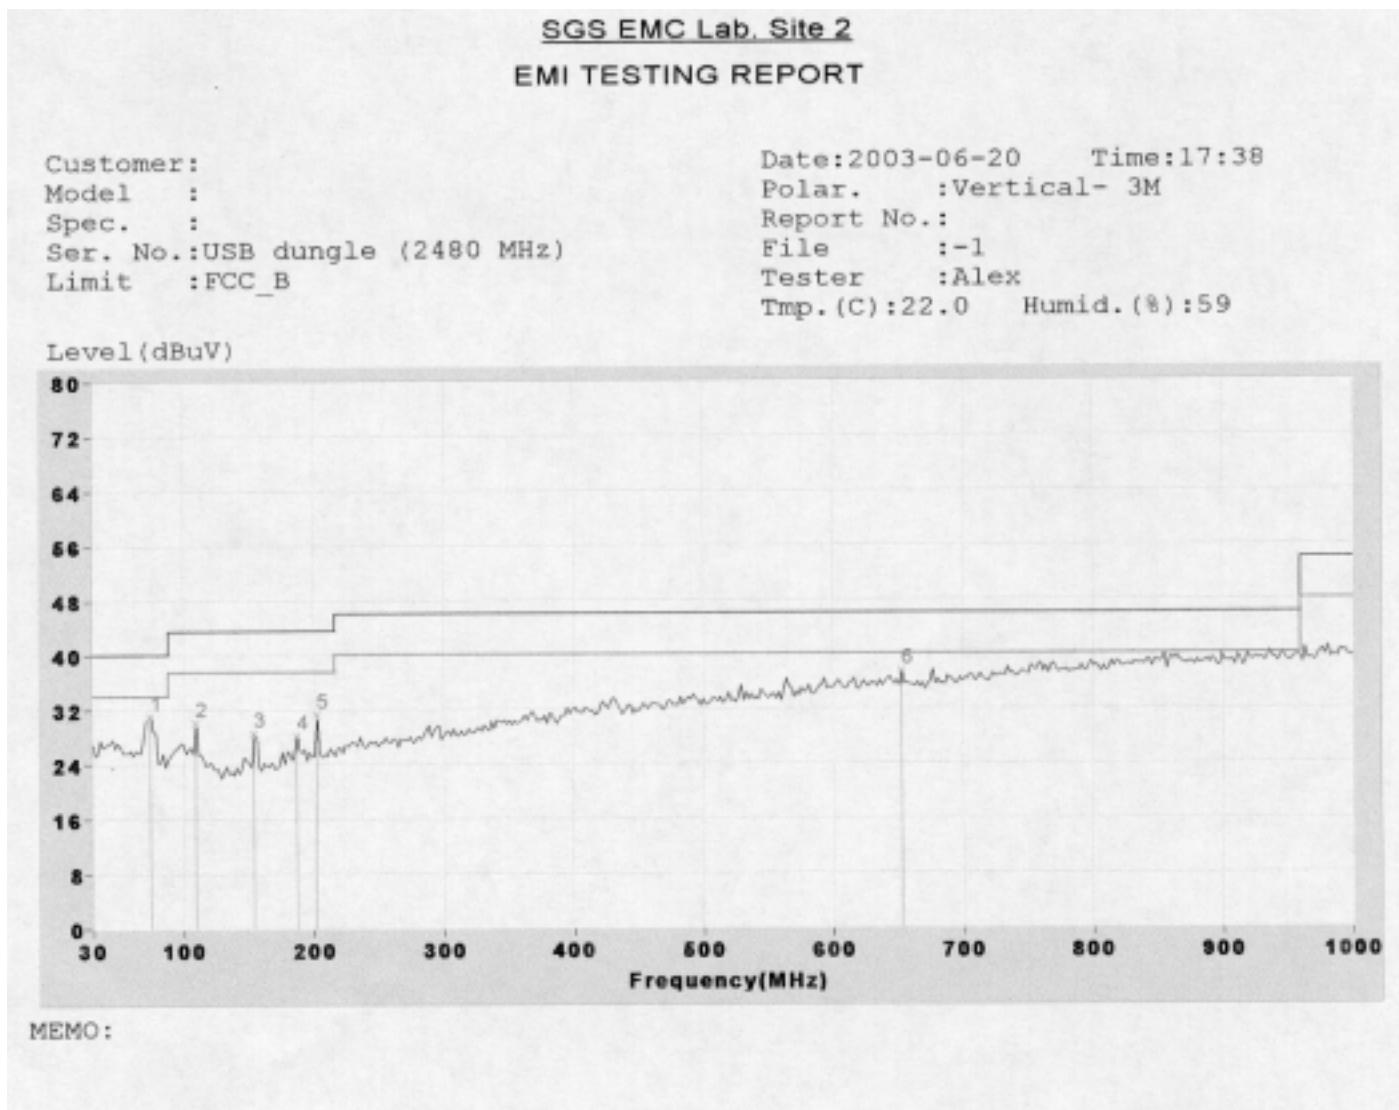

)		
74.62	31.00	-9.00	40.0	23.74	6.62	0.65
109.54	30.09	-13.41	43.5	18.28	11.04	0.76
154.16	28.56	-14.94	43.5	19.98	7.71	0.88
187.14	28.20	-15.30	43.5	17.31	9.94	0.96
202.66	31.24	-12.26	43.5	19.88	10.36	1.00
652.74	37.41	-8.59	46.0	15.69	19.57	2.16

6. Transmit at 2480Mhz, The Spectrum setting : RBW=120Khz , VBW=120Khz, **Horizontal**

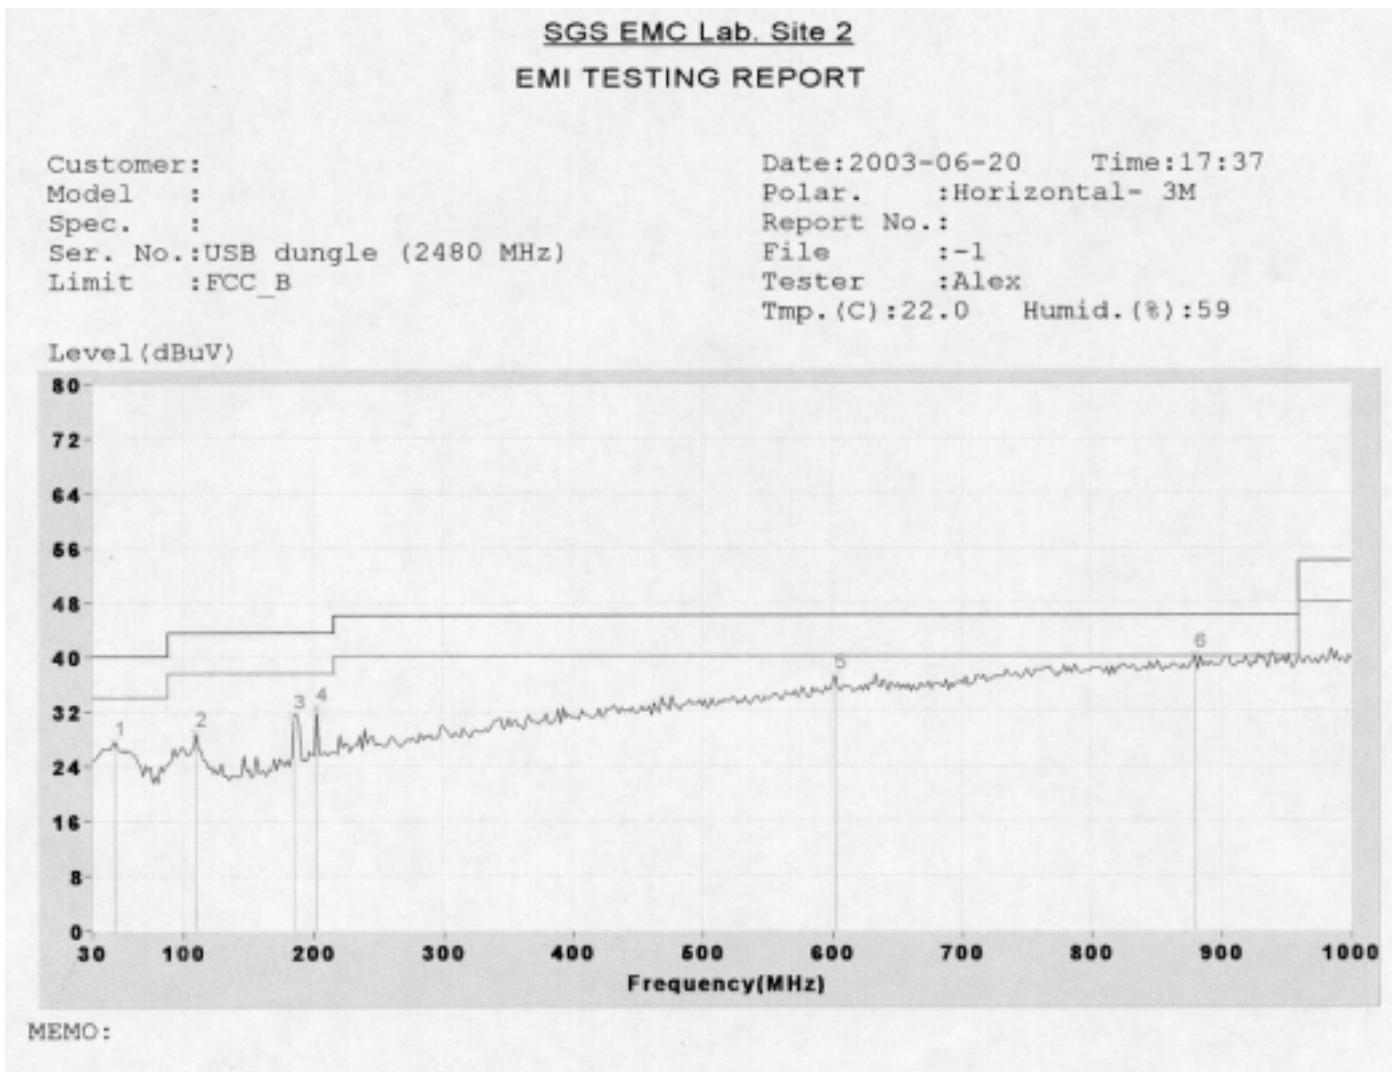


Freq(Mhz)	Level (dbuV/m)	Over Limit (db)	Limit Line (dbuV/m)	Read level (dbuV)	Antenna factor(db/m)	Cable loss (db)
47.46	27.50	-12.50	40.0	14.84	12.15	0.51
109.54	28.80	-14.70	43.5	16.99	11.04	0.76
185.20	31.38	-12.12	43.5	20.68	9.75	0.95
202.66	32.50	-11.00	43.5	21.14	10.36	1.00
602.30	37.17	-8.83	46.0	15.75	19.32	2.09
879.72	40.19	-5.81	46.0	15.53	22.12	2.54


4.2.1 Limits

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

4.3 Channel Spacing


SUBCLAUSE15.247(a)(1)

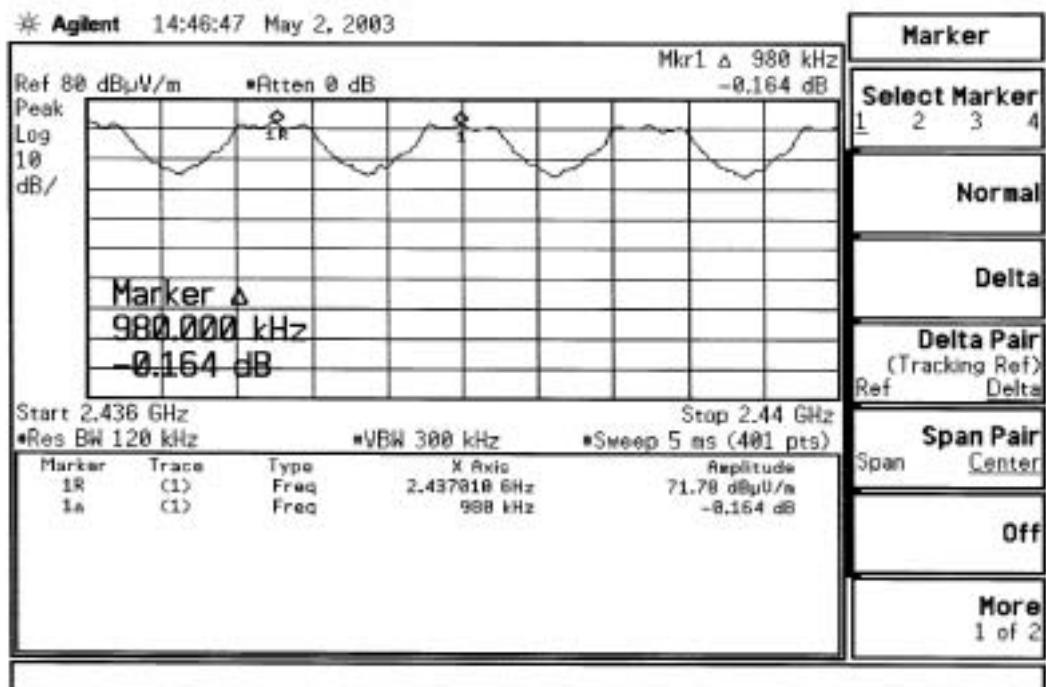

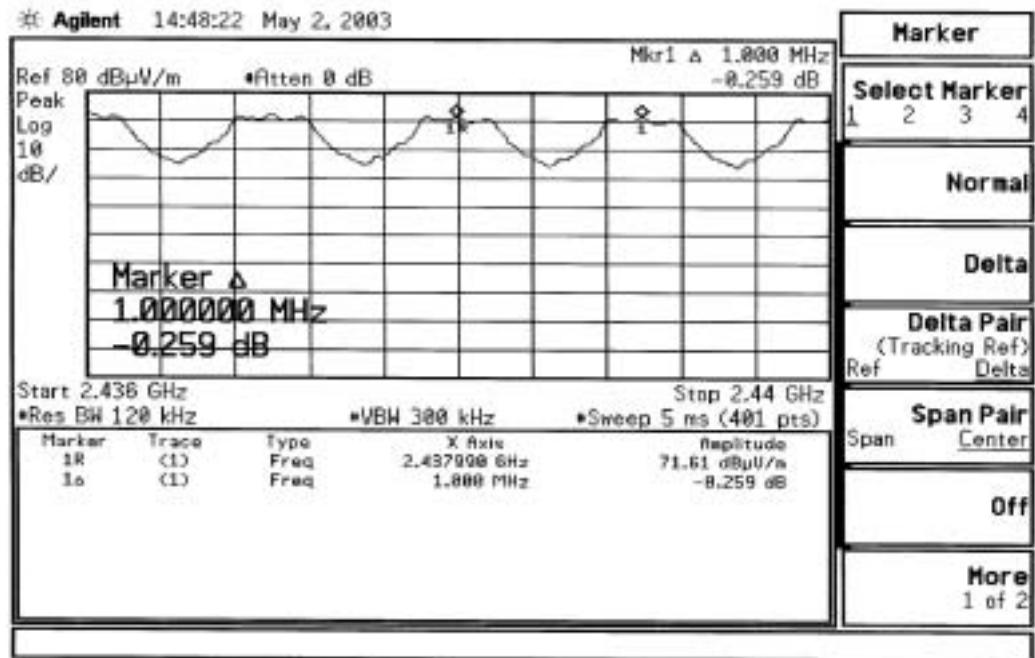

4.4 No. of carrier frequency / 20db Bandwidth


SUBCLAUSE15.247(a)(1)(ii)

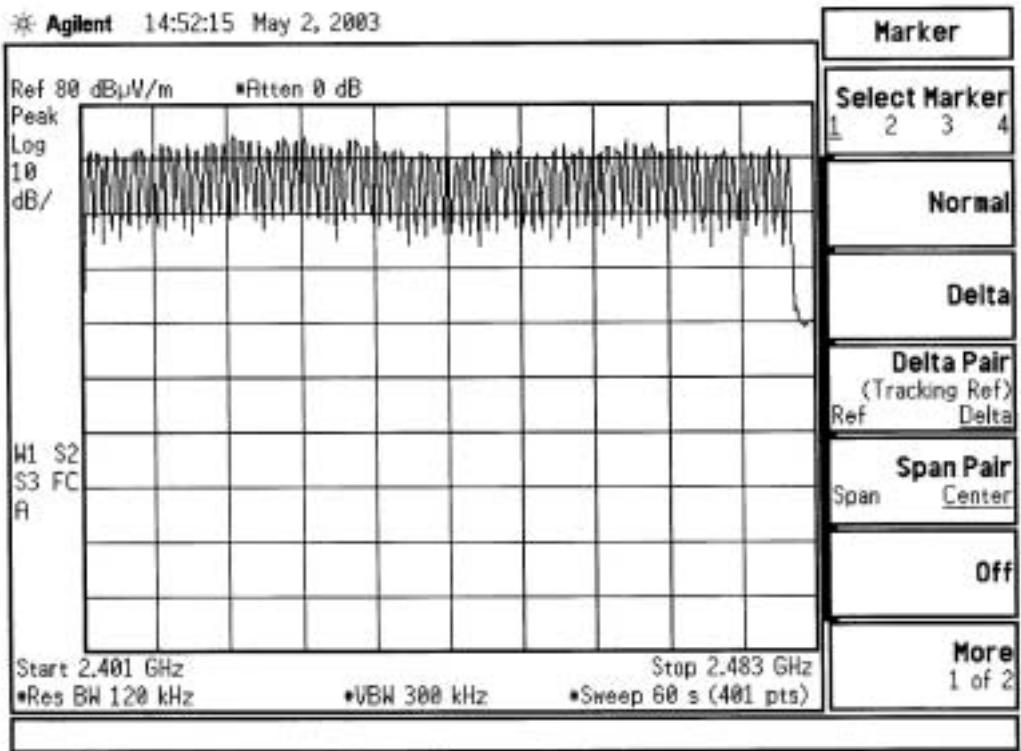

Number of channels = 79

Split the whole frequency band into two.


* Agilent 14:54:15 May 2, 2003

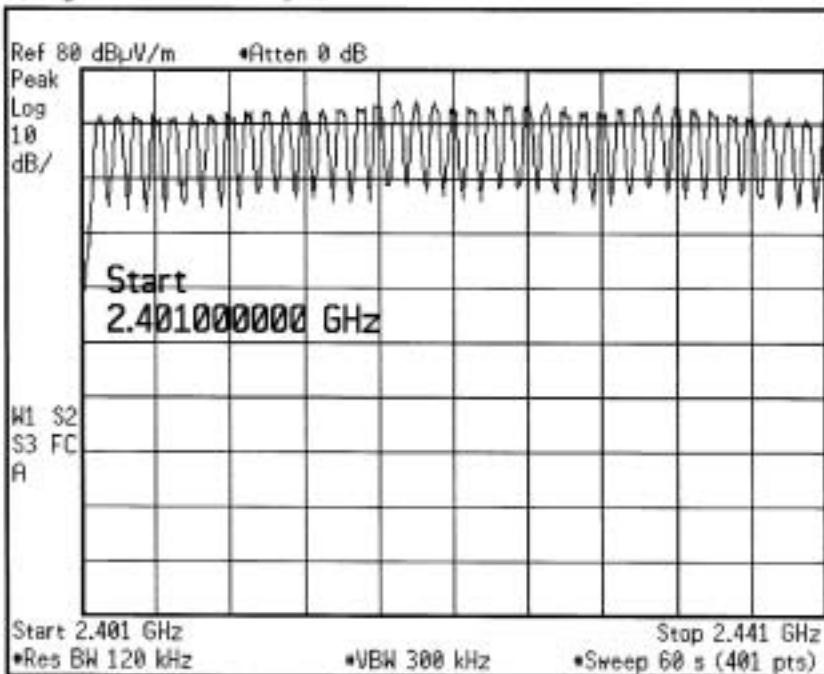

Freq/Channel

Center Freq
2.421000000 GHzStart Freq
2.401000000 GHzStop Freq
2.441000000 GHzCF Step
4.000000000 MHz
Auto ManFreq Offset
0.000000000 HzSignal Track
On OffScale Type
Log Lin


* Agilent 14:55:48 May 2, 2003

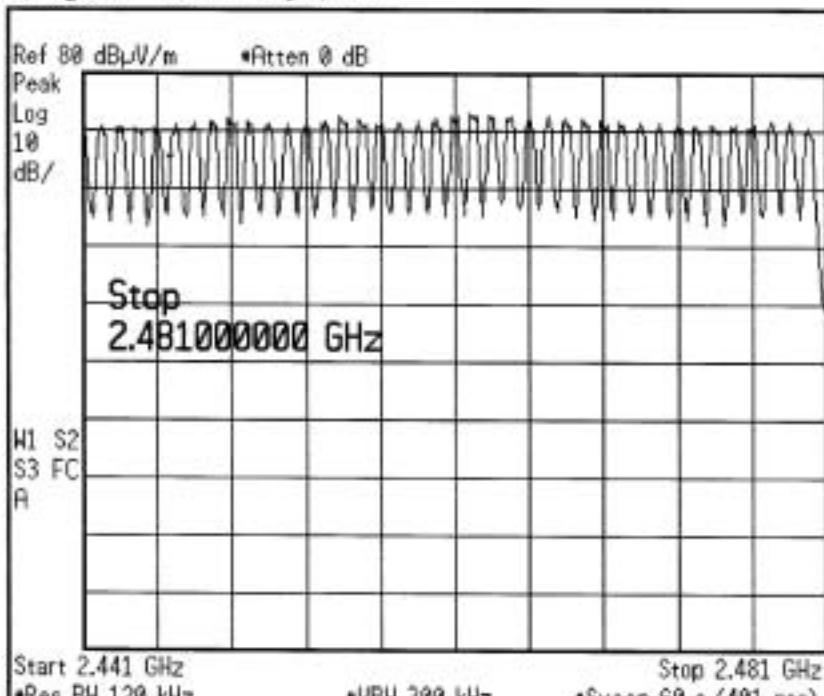

Freq/Channel


Center Freq
2.461000000 GHzStart Freq
2.441000000 GHzStop Freq
2.481000000 GHzCF Step
4.000000000 MHz
Auto ManFreq Offset
0.000000000 HzSignal Track
On OffScale Type
Log Lin

20dB bandwidth at lowest (2402Mhz), middle(2441Mhz), highest channel(2480Mhz)

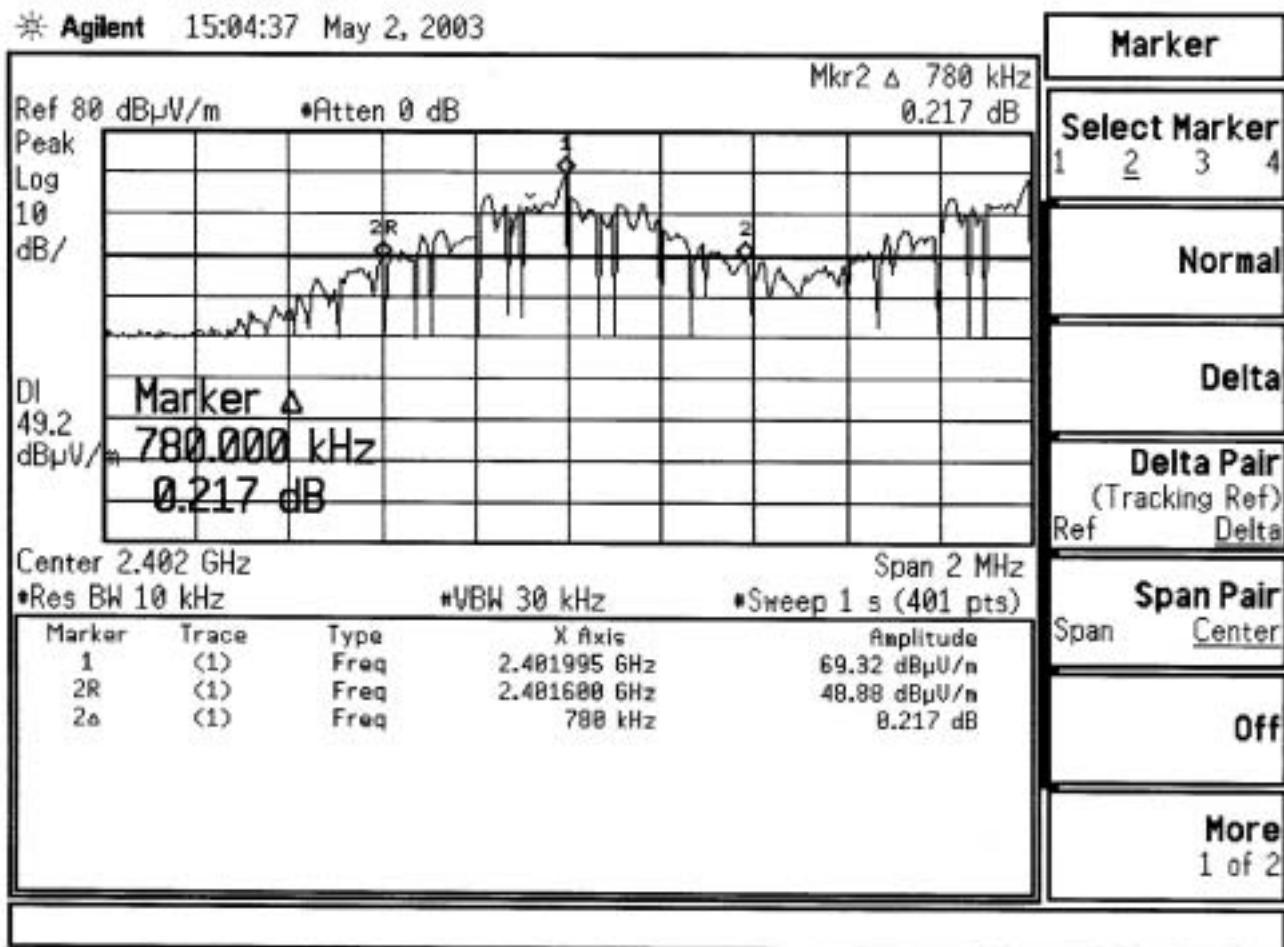


Channel bandwidth = 780 KHZ

※ Agilent 15:07:56 May 2, 2003

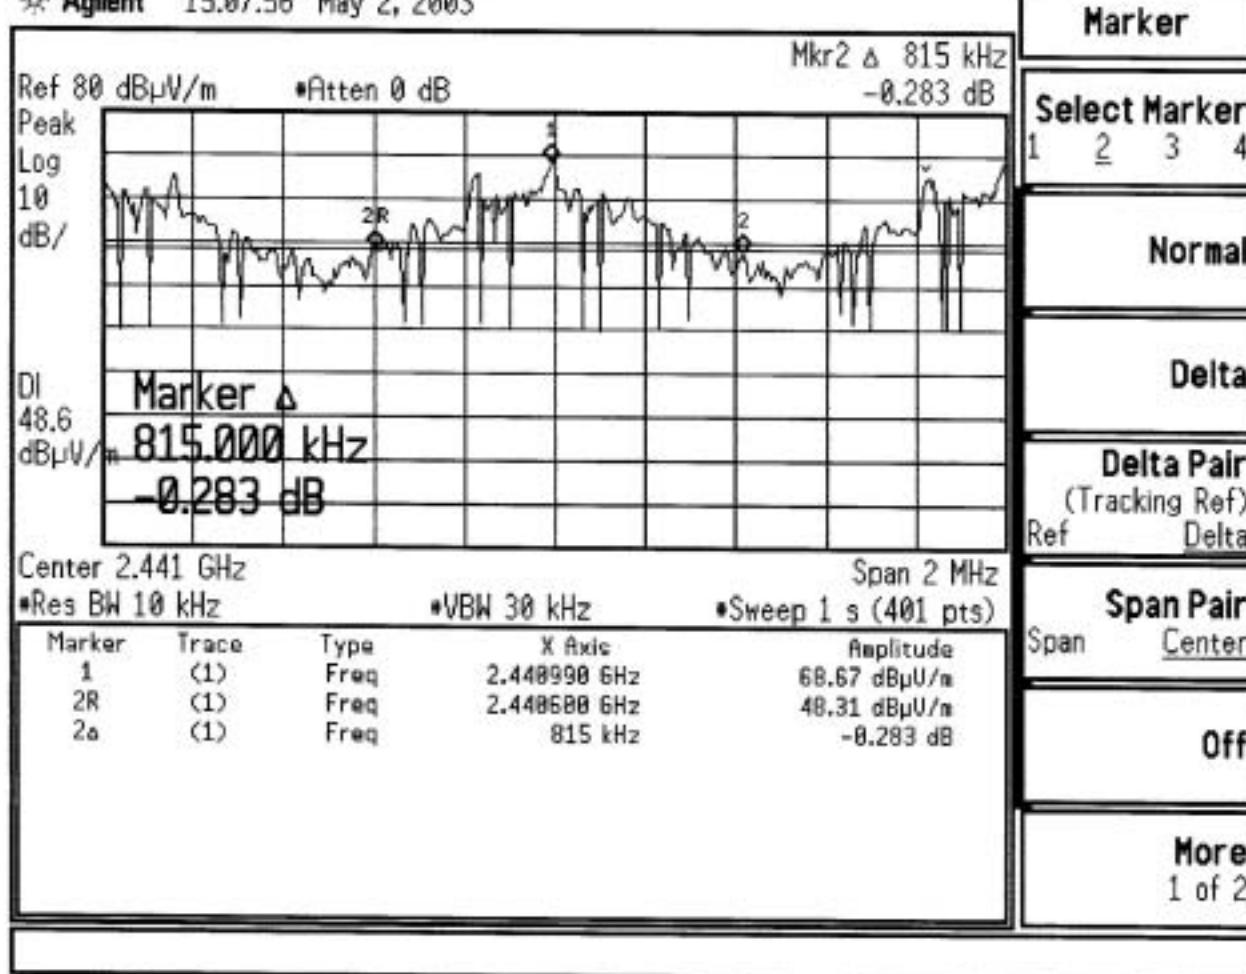

Channel bandwidth =815 KHZ


* Agilent 15:12:19 May 2, 2003

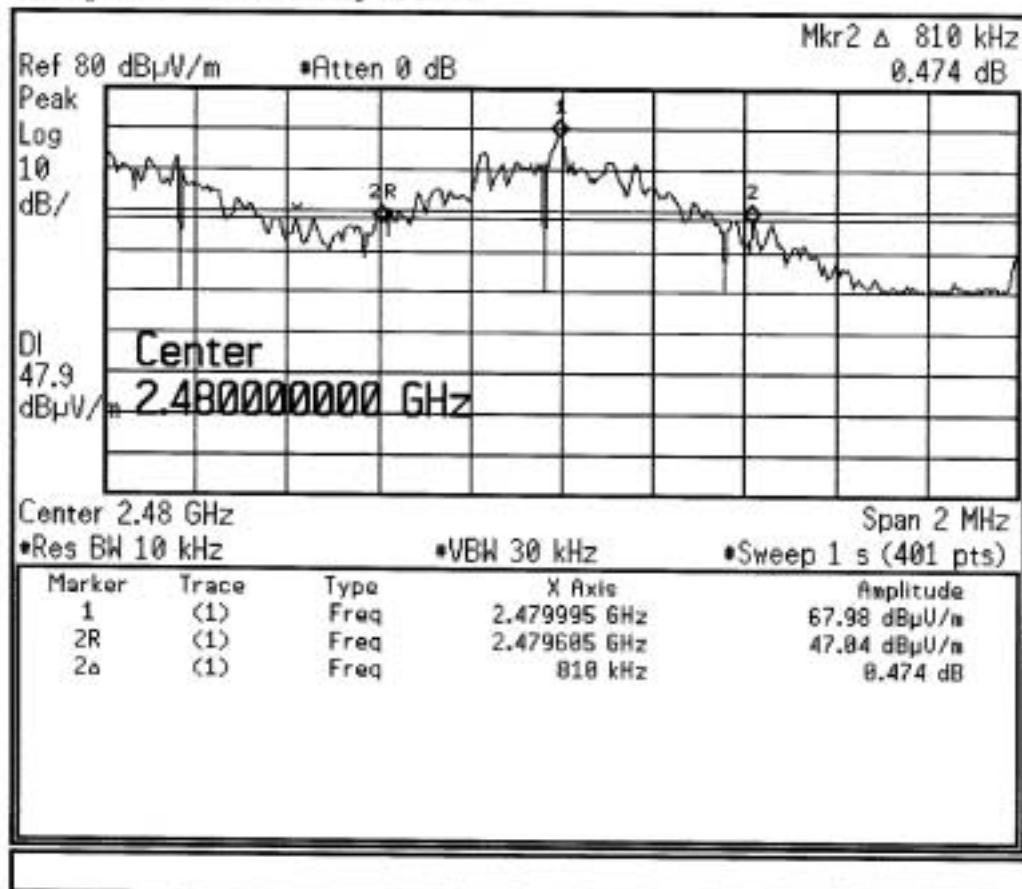


Freq/Channel
Center Freq 2.480000000 GHz
Start Freq 2.479000000 GHz
Stop Freq 2.481000000 GHz
CF Step 200.000000 kHz
Auto Man
Freq Offset
0.00000000 Hz
Signal Track
On Off
Scale Type
Log Lin

Channel bandwidth =810 KHZ


* Agilent 11:44:31 Jul 3, 2003

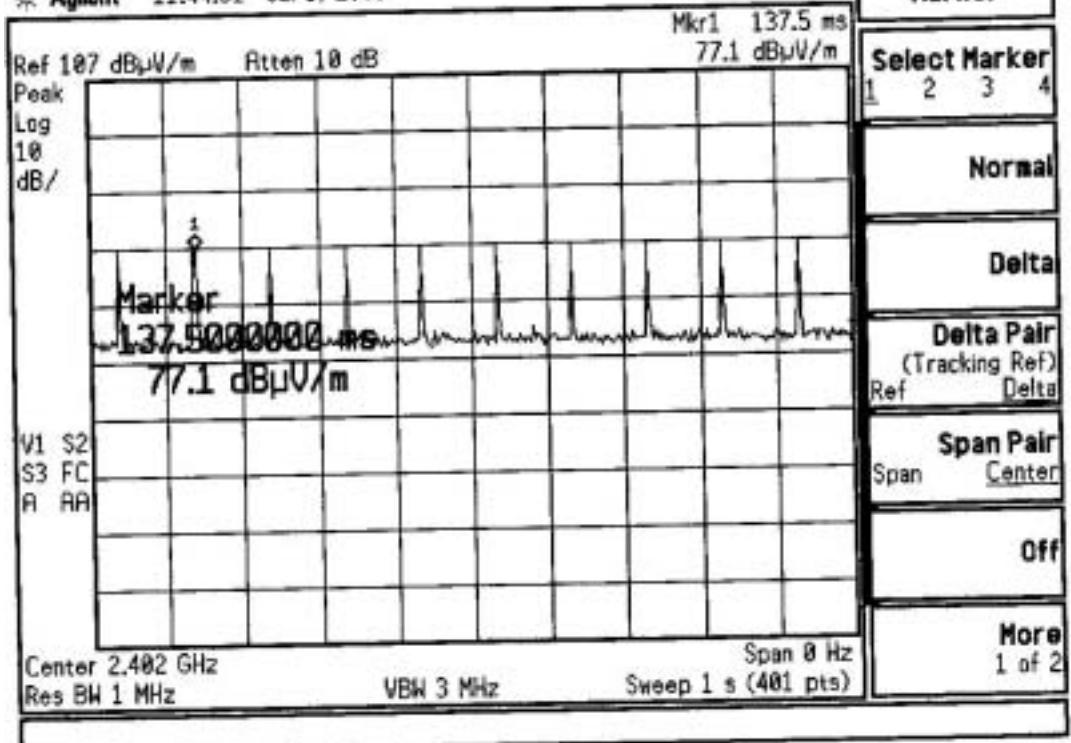

* Agilent 11:53:53 Jul 3, 2003

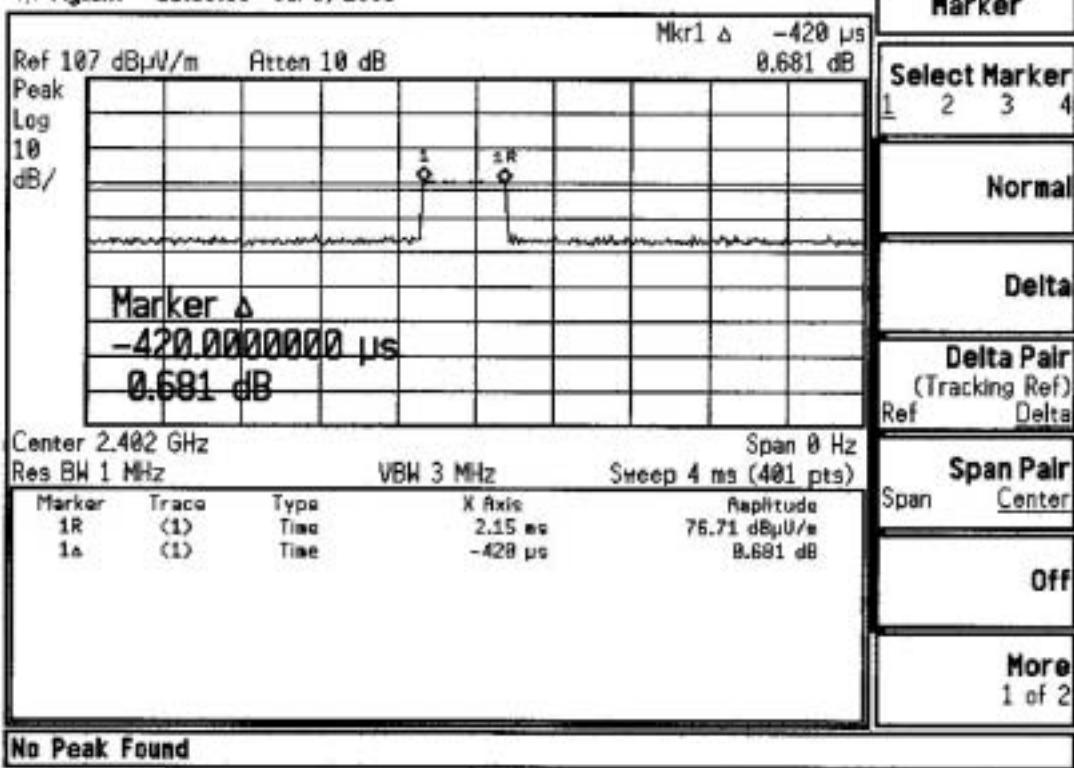

* Agilent 11:46:05 Jul 3, 2003

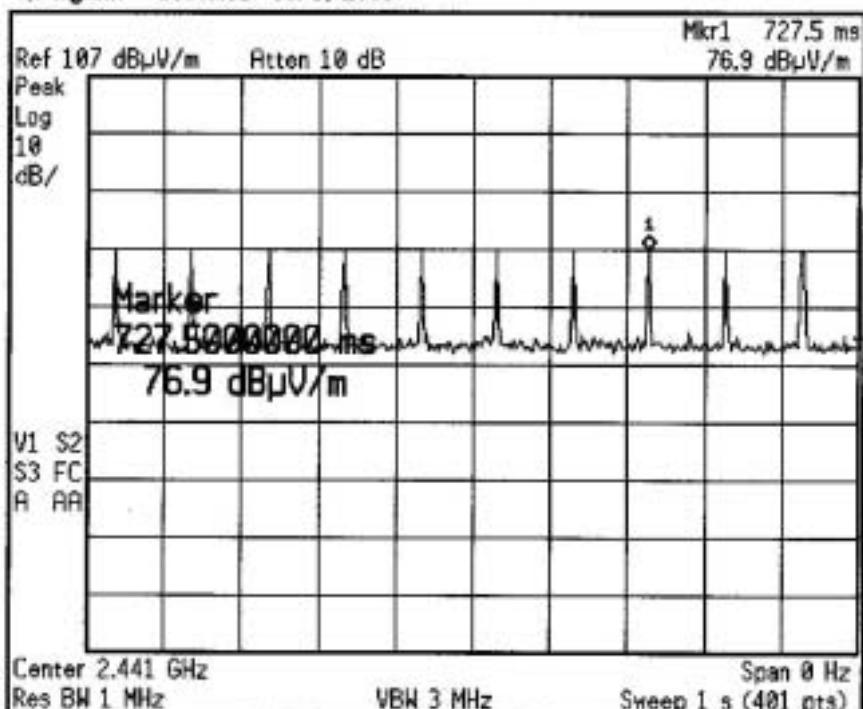

Peak Search

Meas Tools

Next Peak

Next Pk Right


Next Pk Left

Min Search

Pk-Pk Search

More
1 of 2

* Agilent 11:52:10 Jul 3, 2003

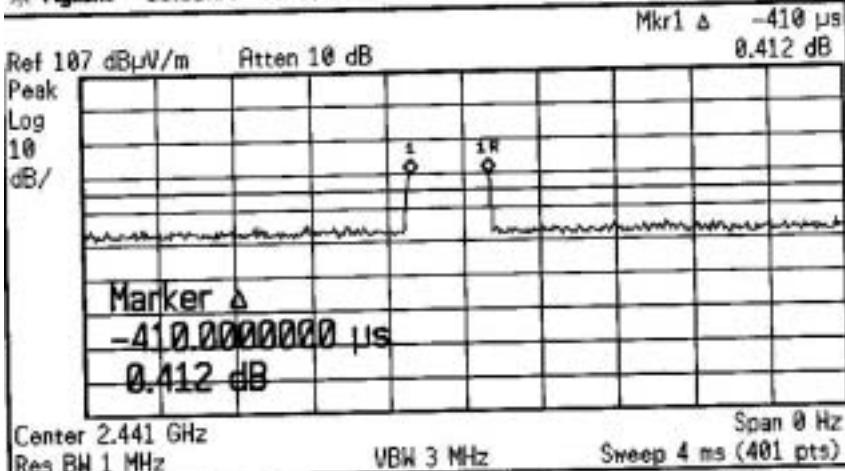

Marker

Select Marker

1 2 3 4

Normal



Delta

Delta Pair
(Tracking Ref)
Ref DeltaSpan Pair
Span Center

Off

More
1 of 2

No Peak Found

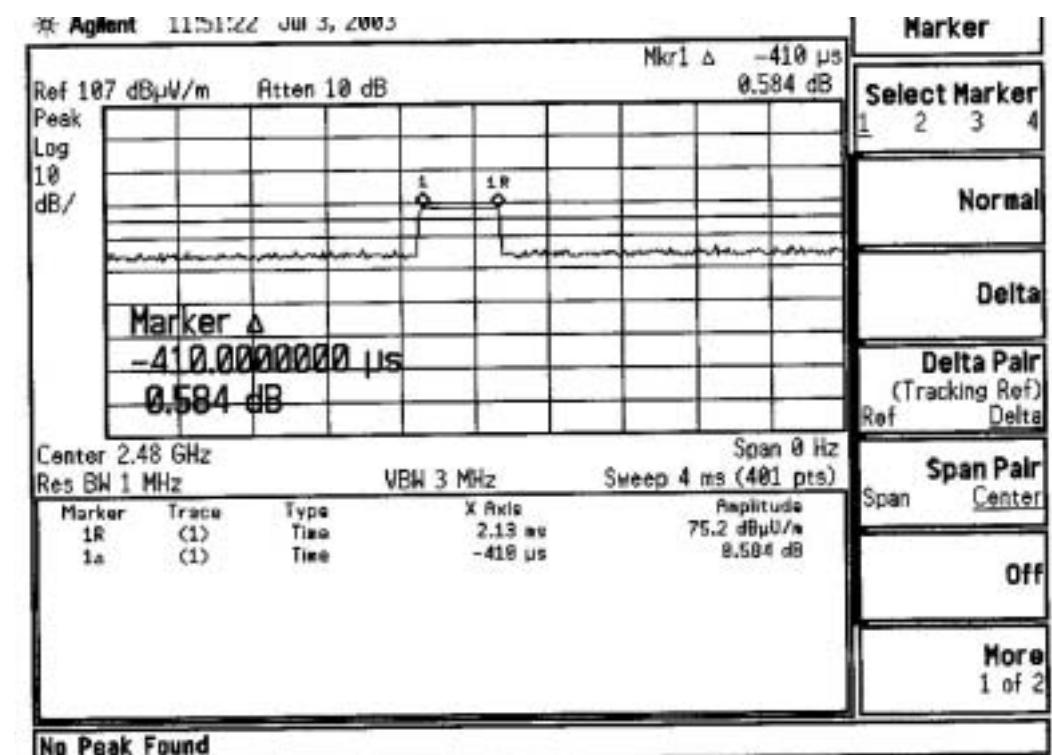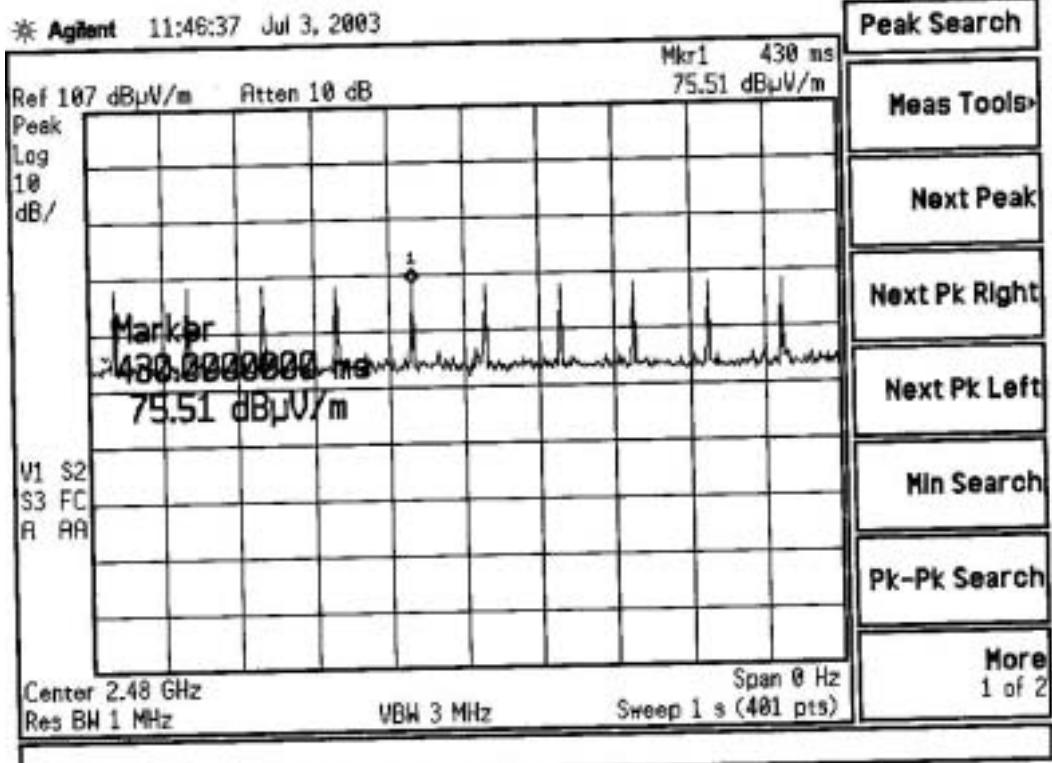

4.5.1 calculation


At channel 2401, 2441and 2480Mhz, there are 1 bursts in 1 sec. Time period of each burst is 420 μ Sec(worst case). So the occupancy time within 30 second is $420 \times 10 \times 30 = 126000 \mu$ Sec = 126 mSec = 0.126 Sec.

4.5.2 Limits

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

The EUT comply with the requirement in Sec 15.247(a)(1) that use at least 75 hopping frequencies. The maximum 20dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

Transmitter transmit at lowest channel (2402Mhz)

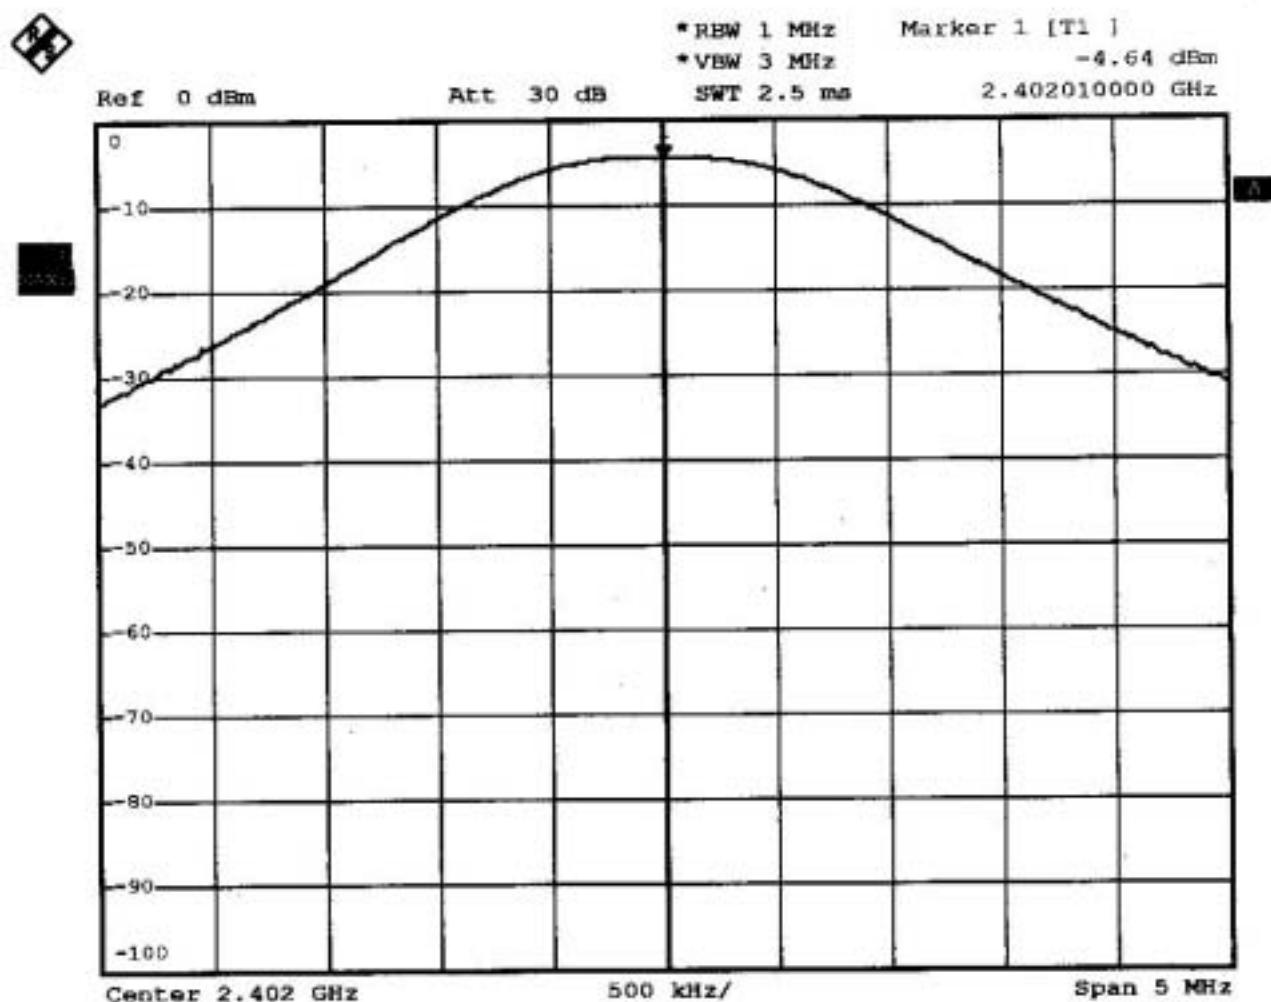


Date: 20.JUN.2003 18:17:56

The Power (ERP) = Output power + cable loss + antenna gain

$$= -4.64 \text{ dbm} + 2.7 \text{ db} + 1 \text{ dBi} = -0.94 \text{ dbm}$$

Transmitter transmit at middle channel (2441Mhz)

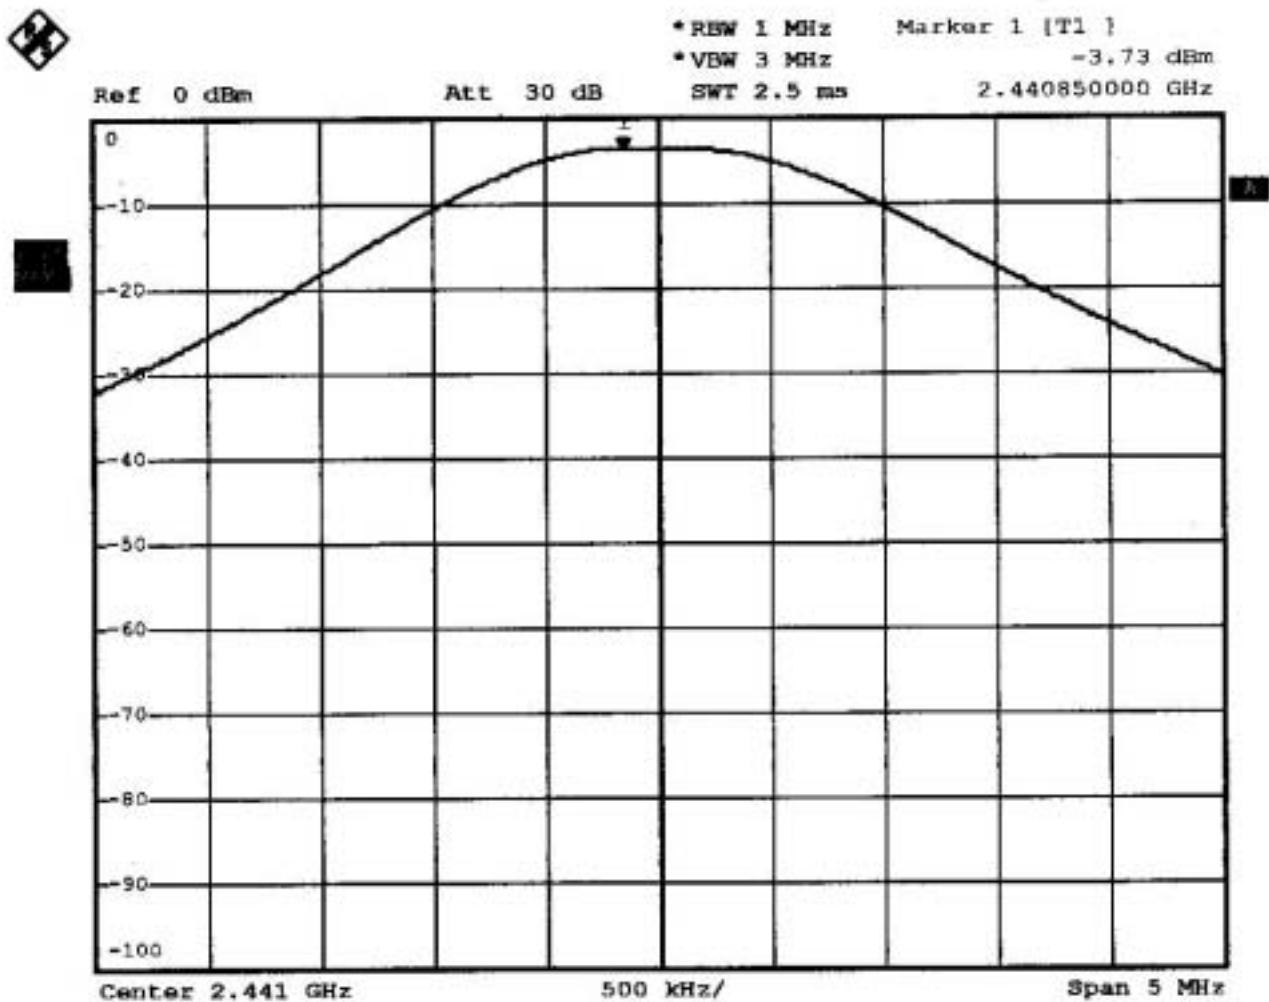


Date: 20.JUN.2003 18:18:38

The Power (ERP) = Output power + cable loss + antenna gain

$$= -3.73 \text{ dbm} + 2.7 \text{ db} + 1 \text{ dBi} = -0.03 \text{ dbm}$$

Transmitter transmit at highest channel (2480Mhz)

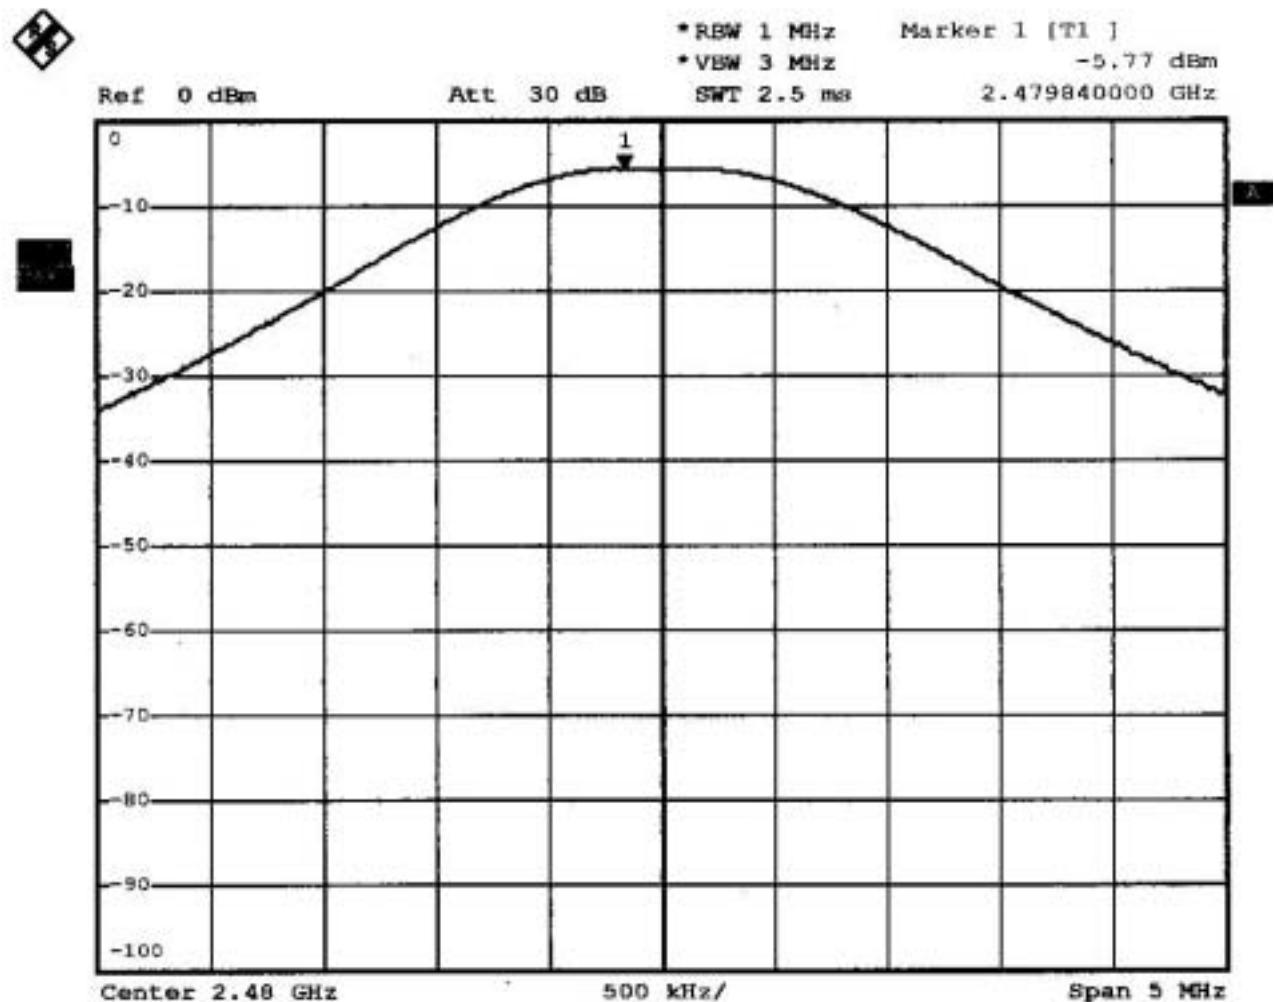

Date: 20.JUN.2003 18:19:22

The Power (ERP) = Output power + cable loss + antenna gain


$$= -5.77 \text{ dbm} + 2.7 \text{ db} + 1 \text{ dBi} = -2.07 \text{ dbm}$$

So the max power happens at 2441Mhz , which equals to -0.03 dbm = 1 mW


Limits:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing At least 75 hopping channels, all frequency hopping systems in the 5725-5850MHz Band, and all direct sequence systems: 1 Watt.

* Agilent 11:06:27 Jul 3, 2003

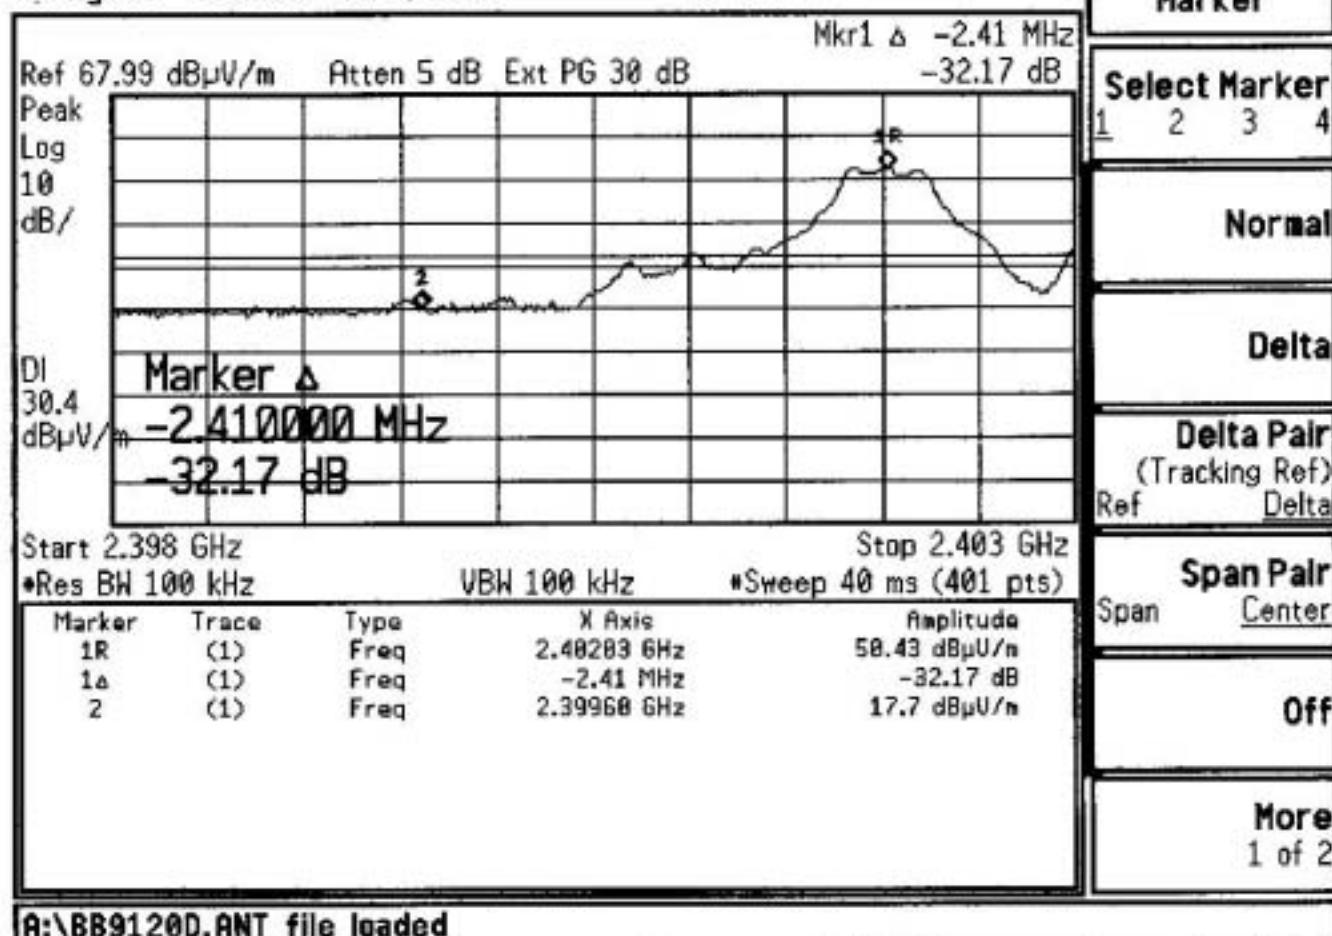

* Agilent 11:09:09 Jul 3, 2003

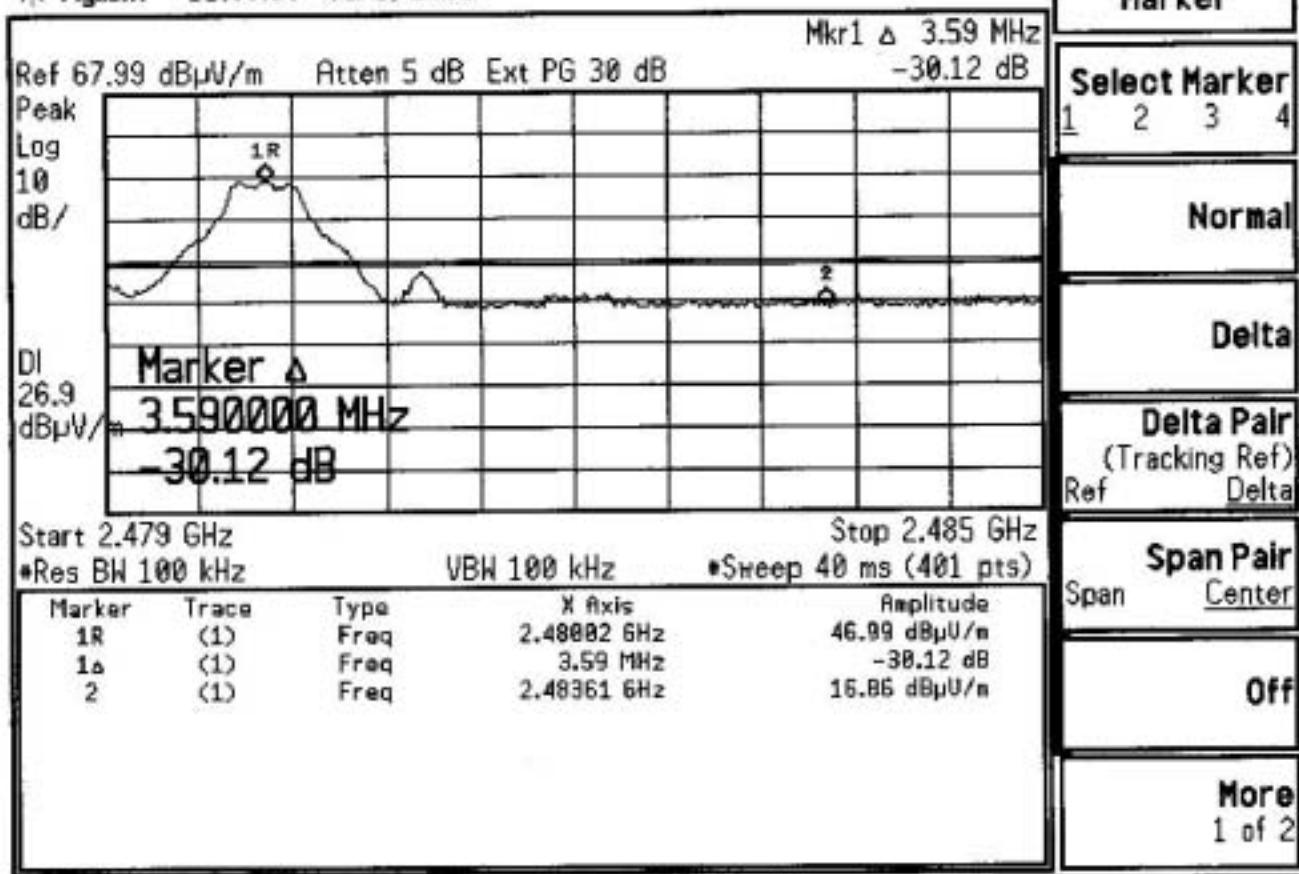

A:\BB9120D.ANT file loaded

	Lower bandedge	Upper bandedge
Bandedge difference from main channel	32.17 db	30.12 db

4.7.1 Limits


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, and it must comply with the limit in 15.209.

4.8 Spurious Emission under 25Ghz (from 1Ghz) SUBCLAUSE15.247(c)


1. Transmit at 2402Mhz

1Ghz – 18Ghz , Vertical

* Agilent 16:23:25 Jun 30, 2003

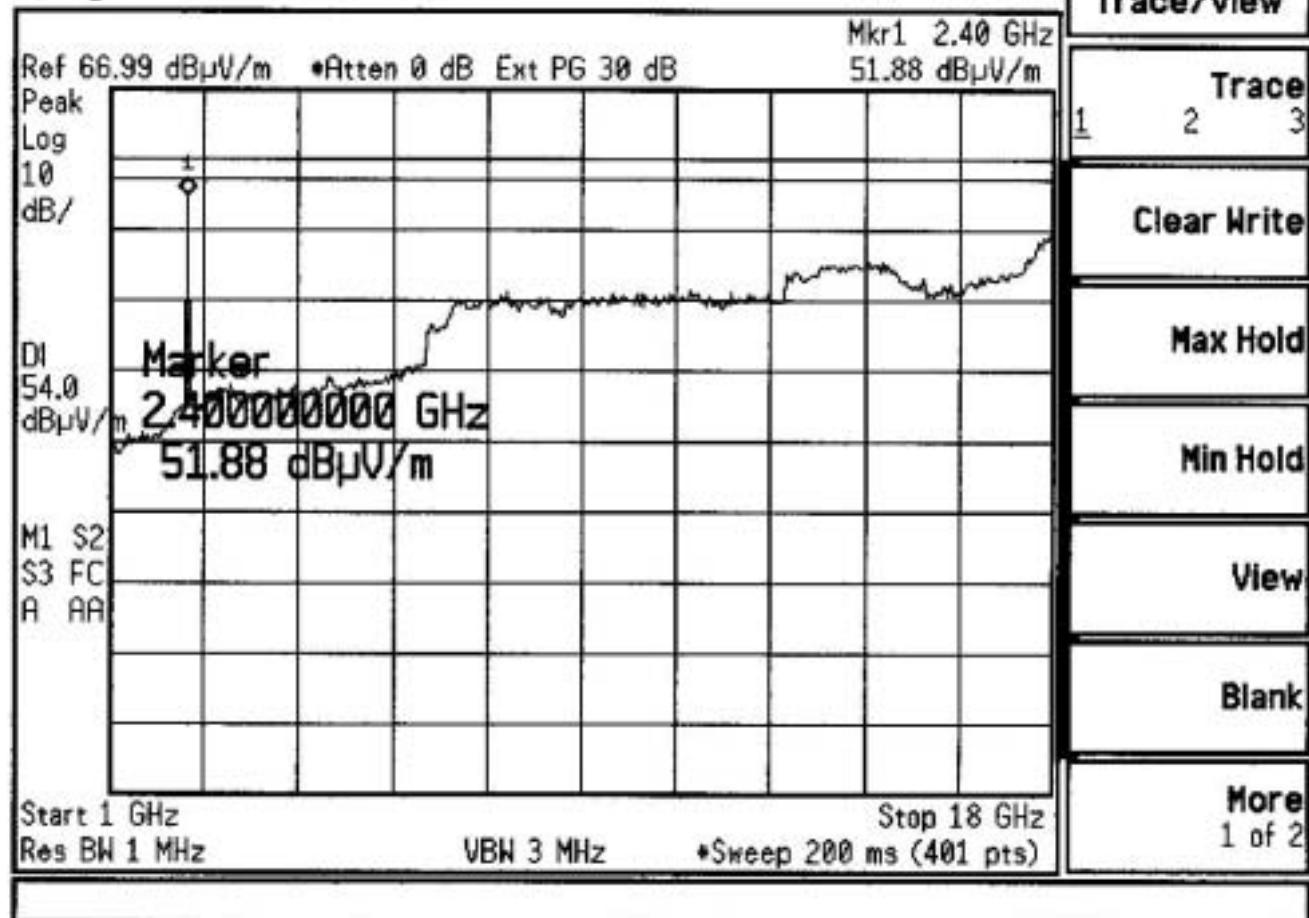


18Ghz – 25Ghz , Vertical

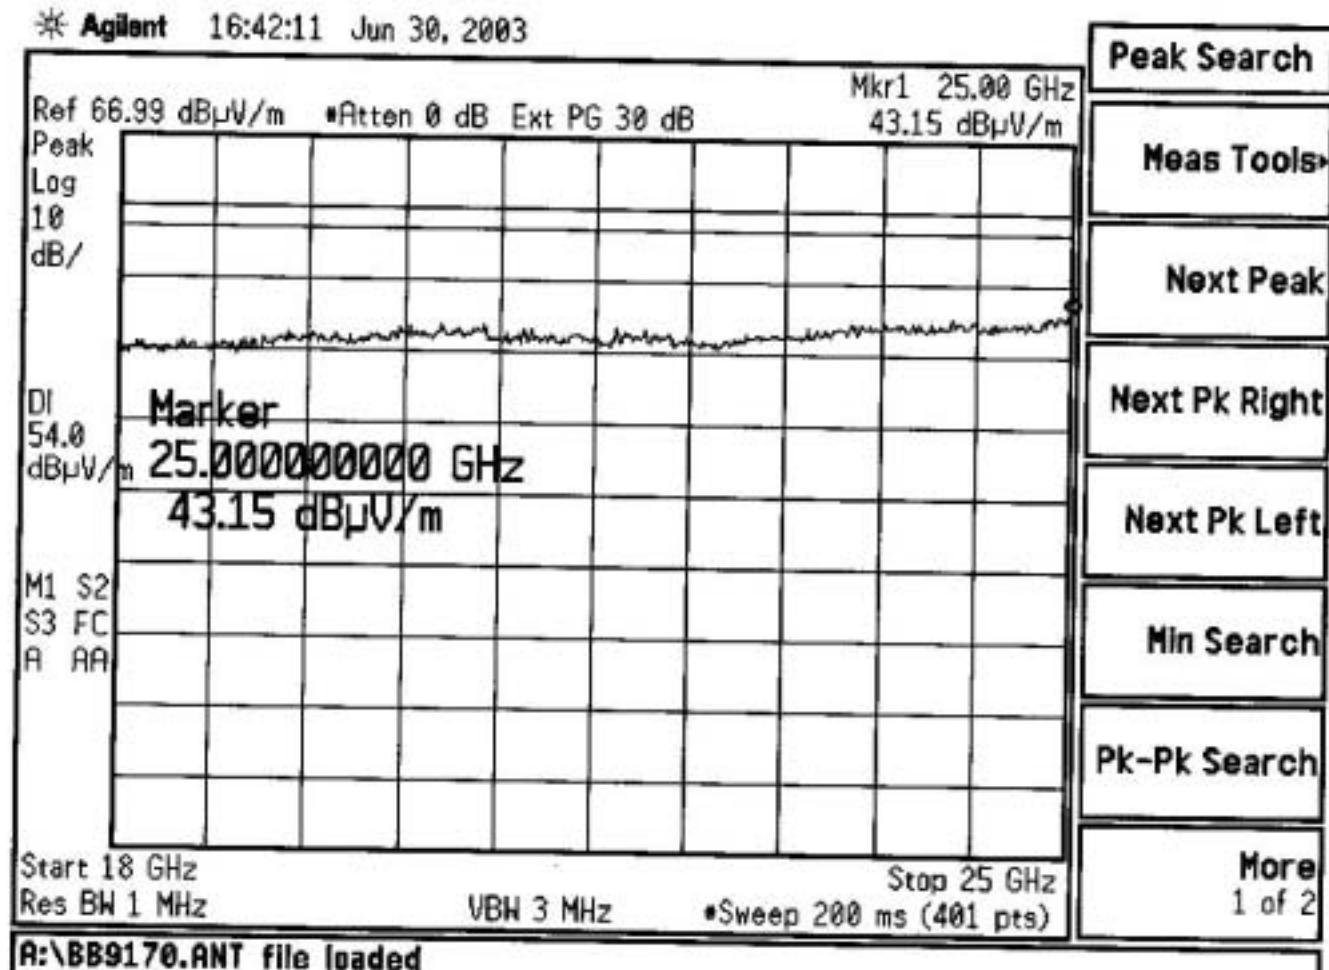


1Ghz – 18Ghz , Horizontal

* Agilent 16:21:24 Jun 30, 2003

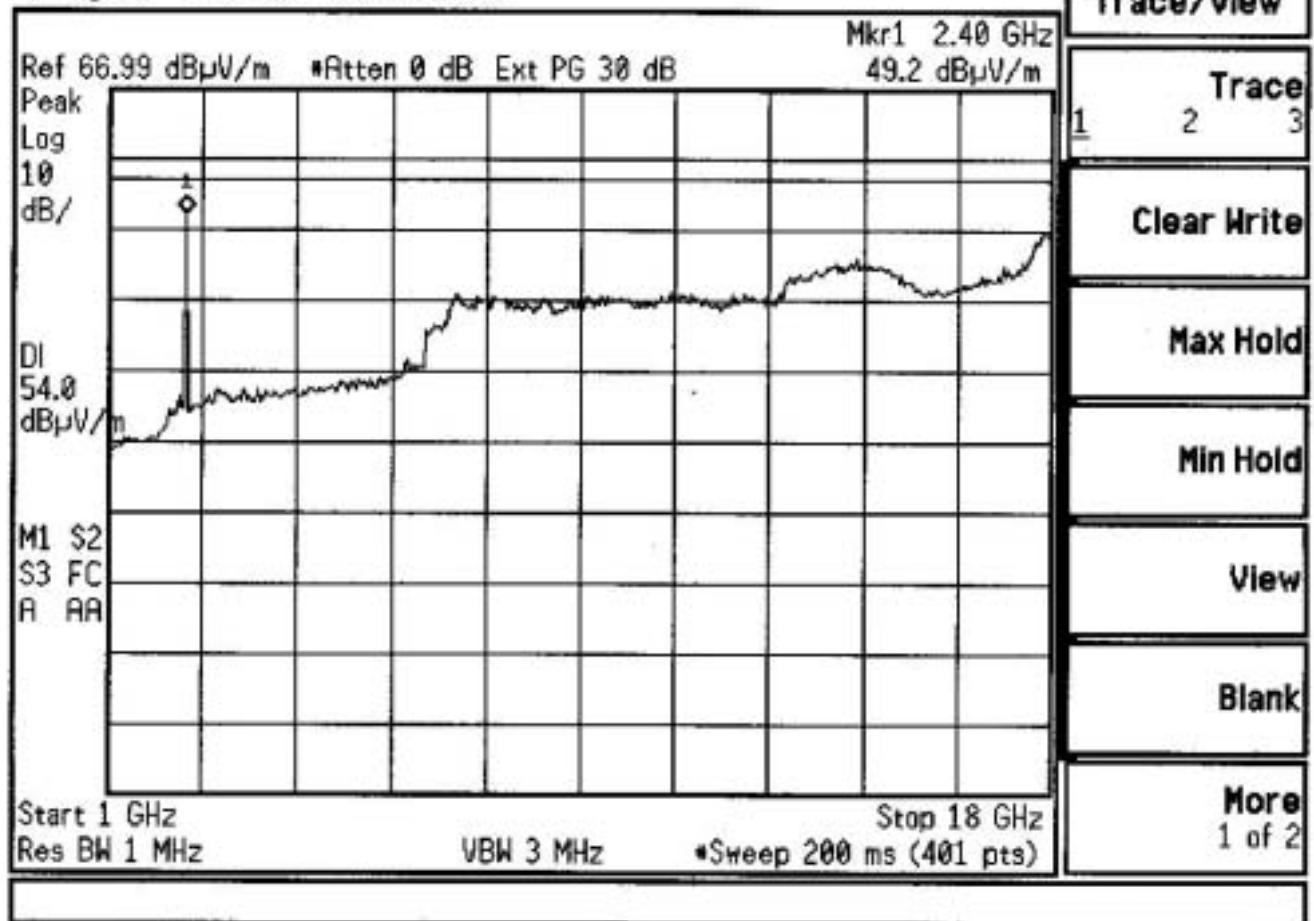


18Ghz – 25Ghz , Horizontal

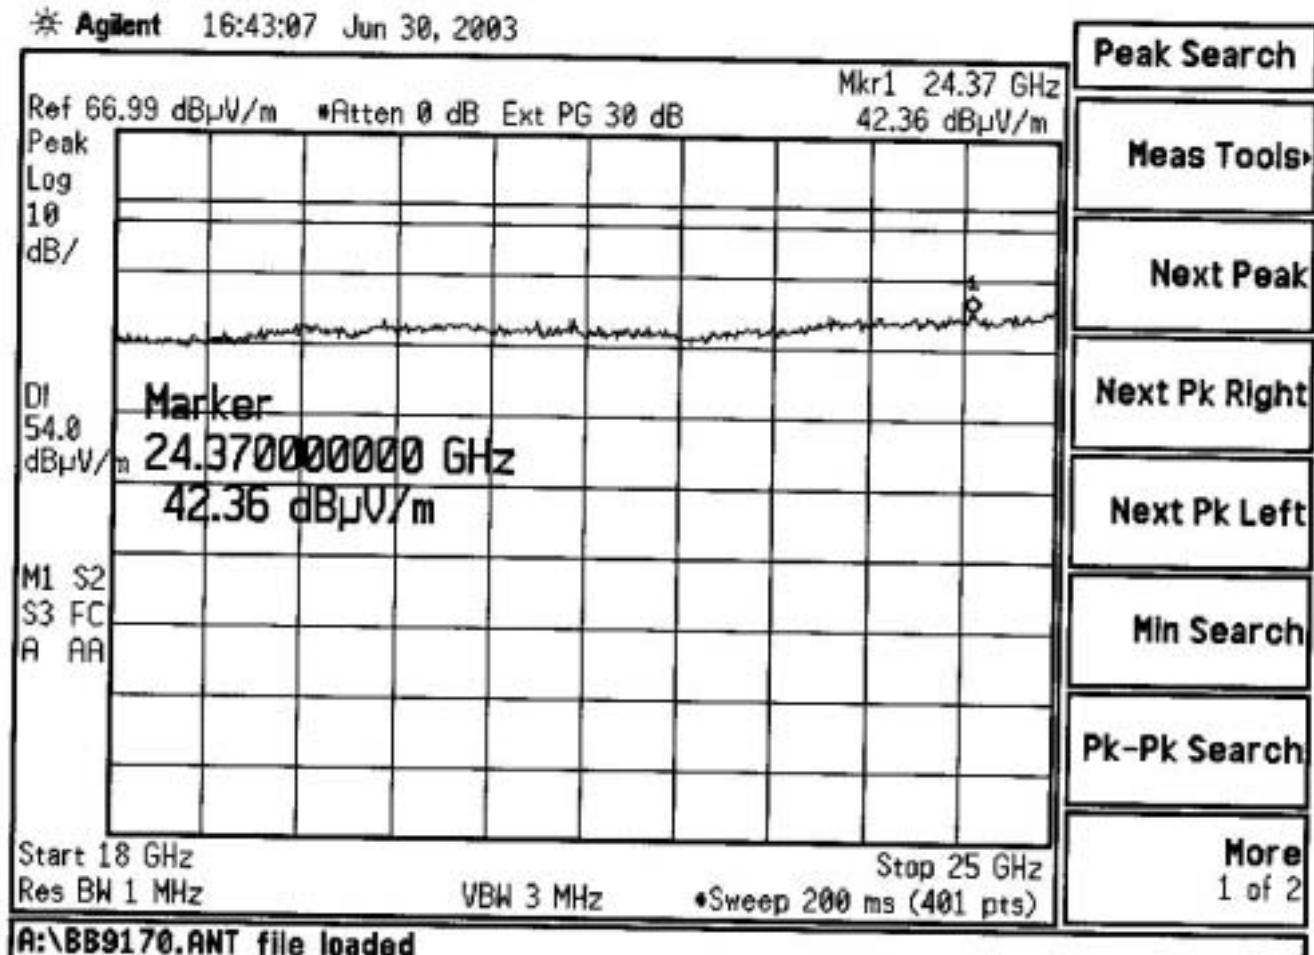

2. Transmit at 2441Mhz


1Ghz – 18Ghz , Vertical

* Agilent 16:29:39 Jun 30, 2003

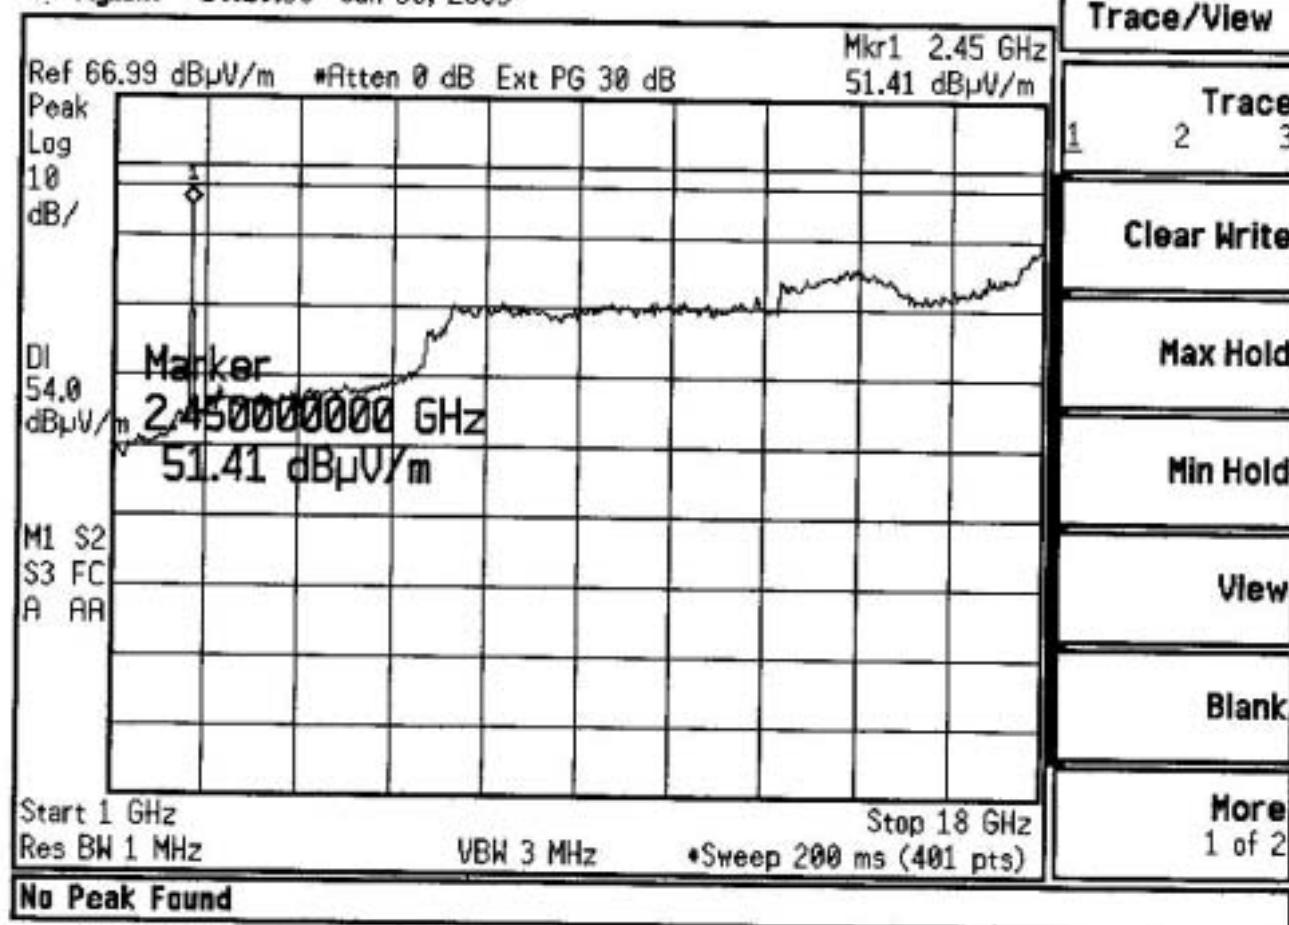

18Ghz – 25Ghz , Vertical

* Agilent 16:40:51 Jun 30, 2003

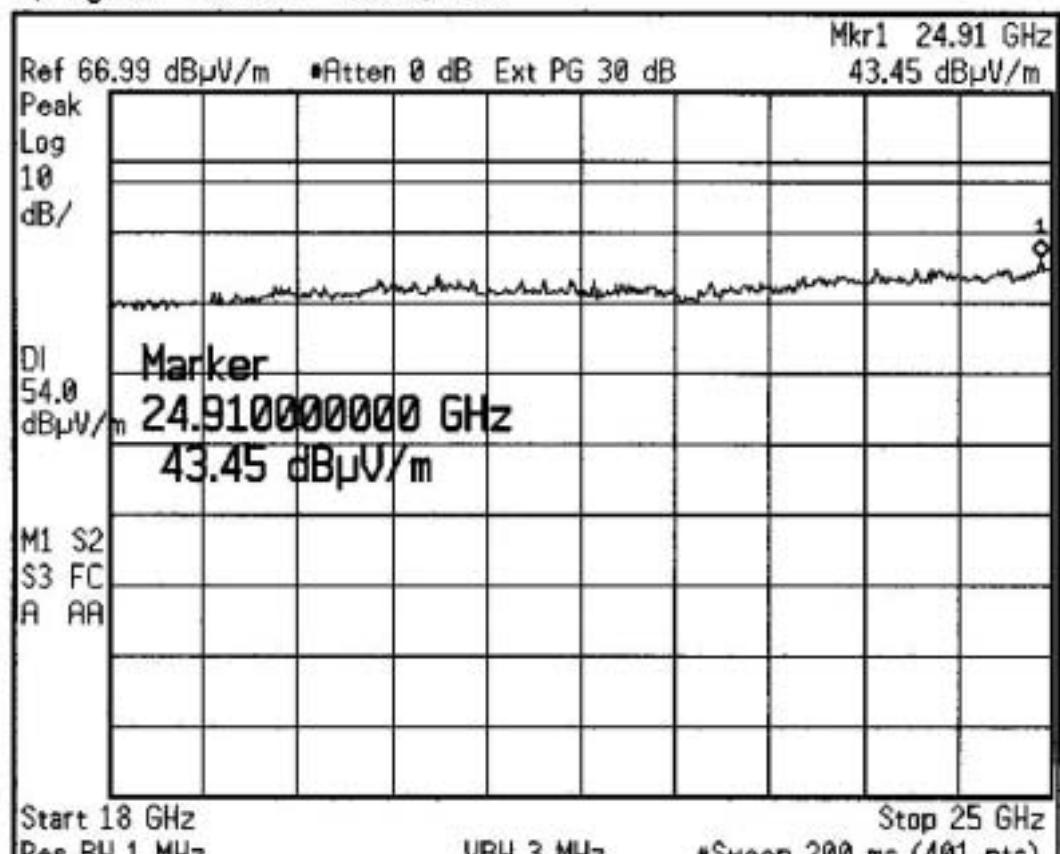


- Peak Search
- Meas Tools
- Next Peak
- Next Pk Right
- Next Pk Left
- Min Search
- Pk-Pk Search
- More 1 of 2

A:\BB9170.ANT file loaded


1Ghz – 18Ghz , Horizontal

* Agilent 16:28:33 Jun 30, 2003

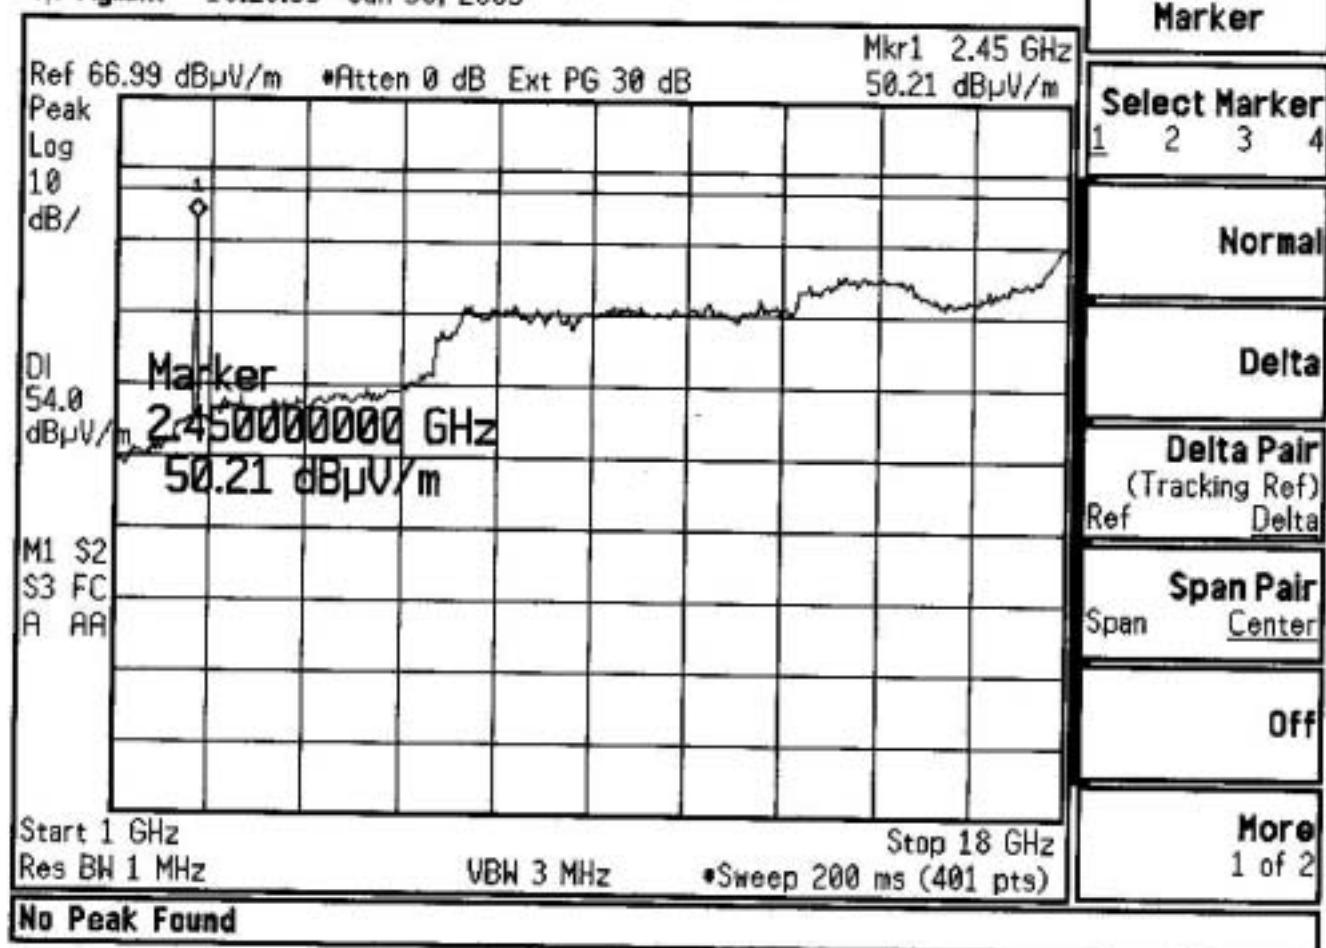

18Ghz – 25Ghz , Horizontal

Agilent 16:39:34 Jun 30, 2003

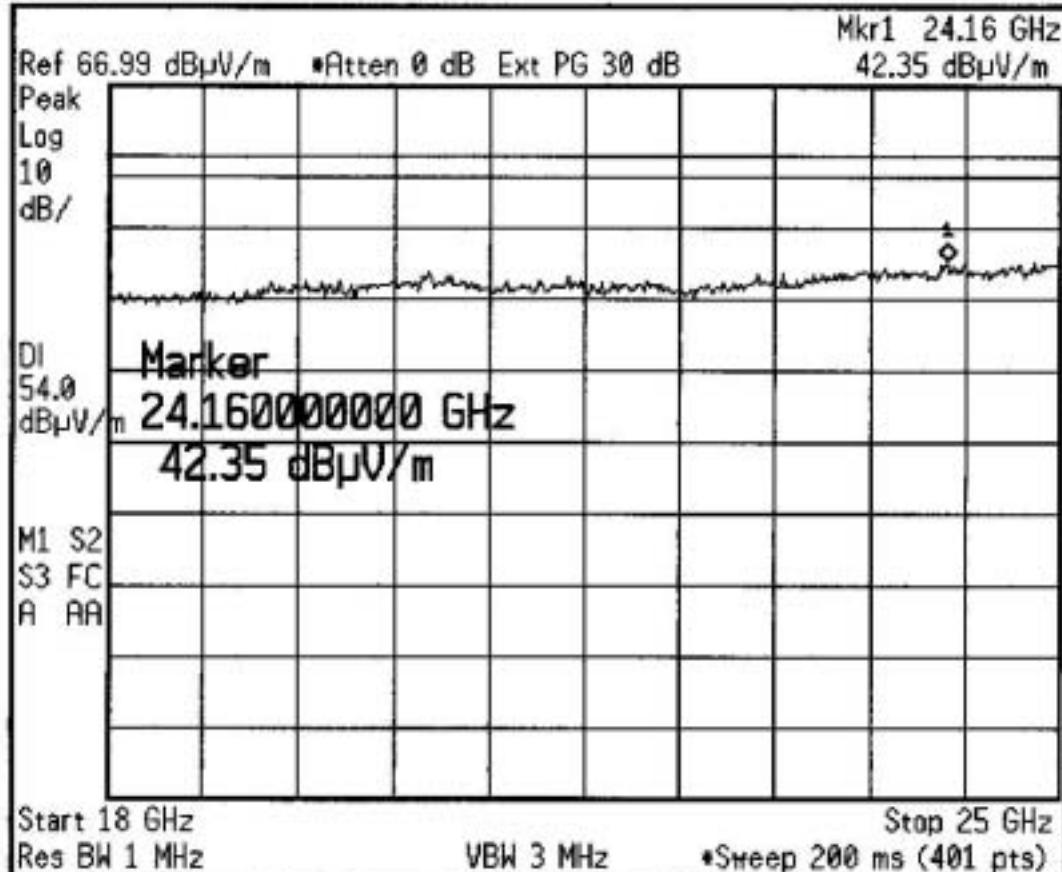

A:\BB9170.ANT file loaded

Peak Search

Meas Tools

Next Peak

Next Pk Right


Next Pk Left

Min Search

Pk-Pk Search


More
1 of 2

3. Transmit at 2480Mhz 1Ghz – 18Ghz , Vertical

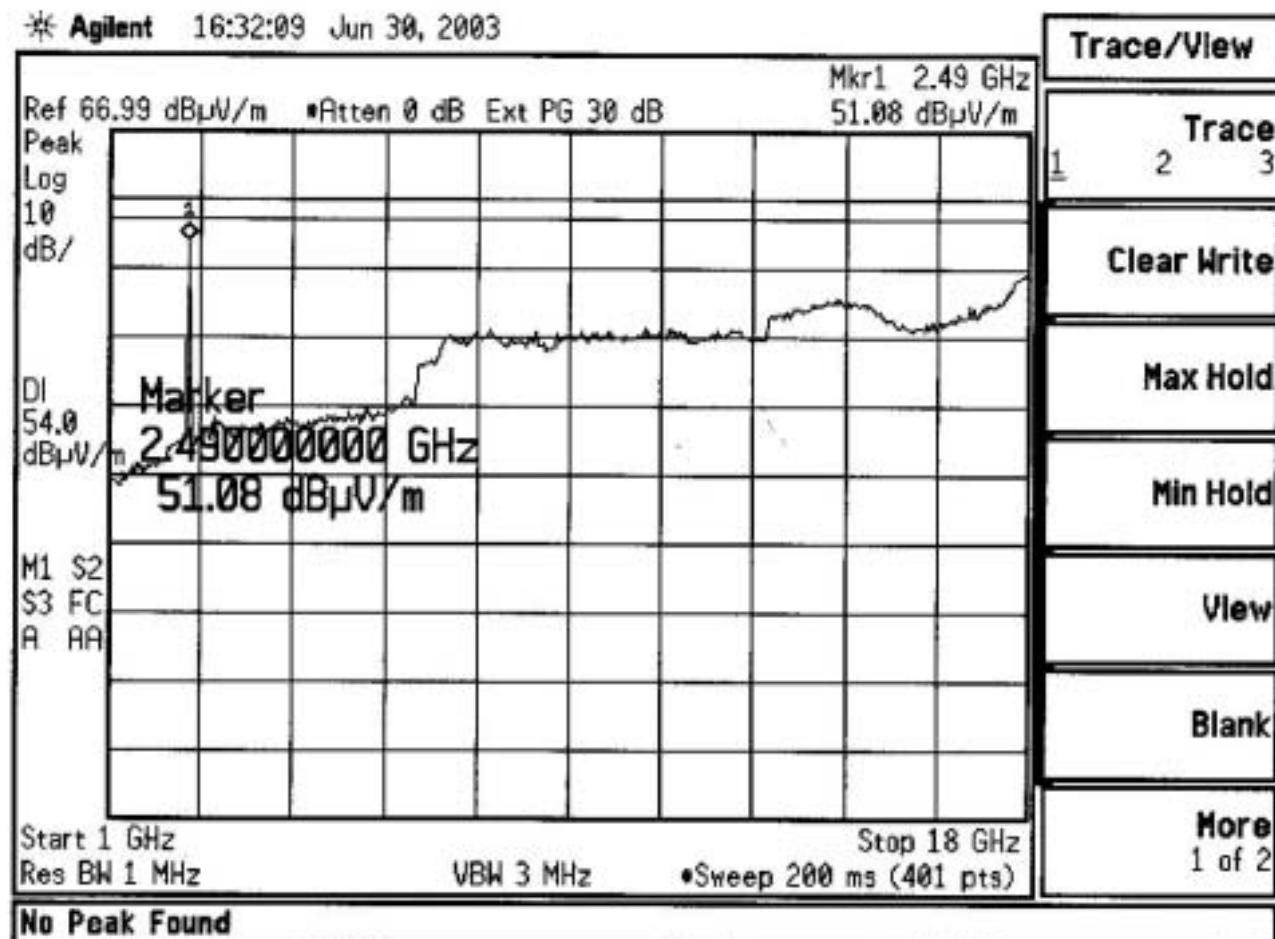


18Ghz – 25Ghz , Vertical

Agilent 16:38:51 Jun 30, 2003

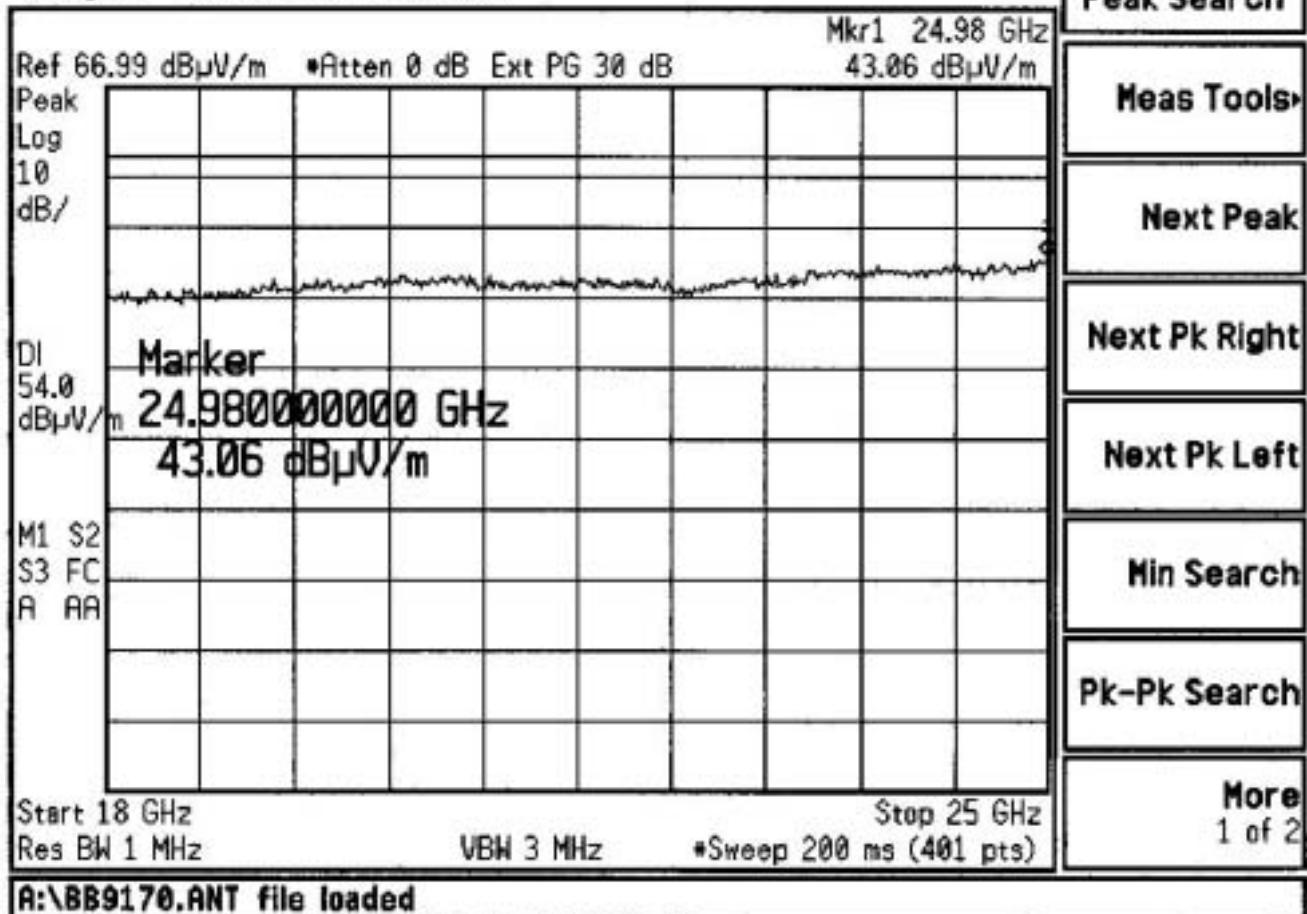


1Ghz – 18Ghz , Horizontal

* Agilent 16:32:56 Jun 30, 2003

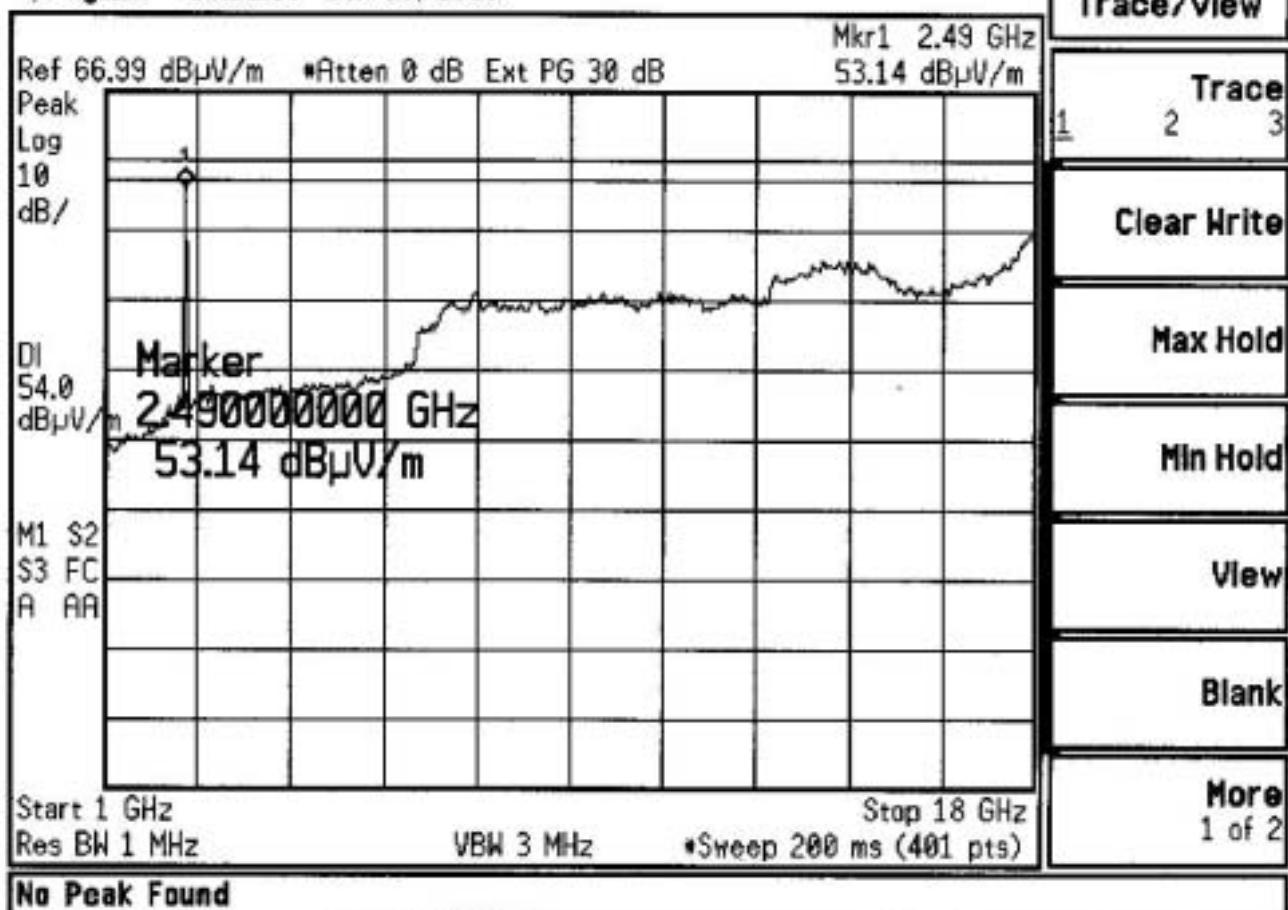

18Ghz – 25Ghz , Horizontal

* Agilent 16:38:01 Jun 30, 2003

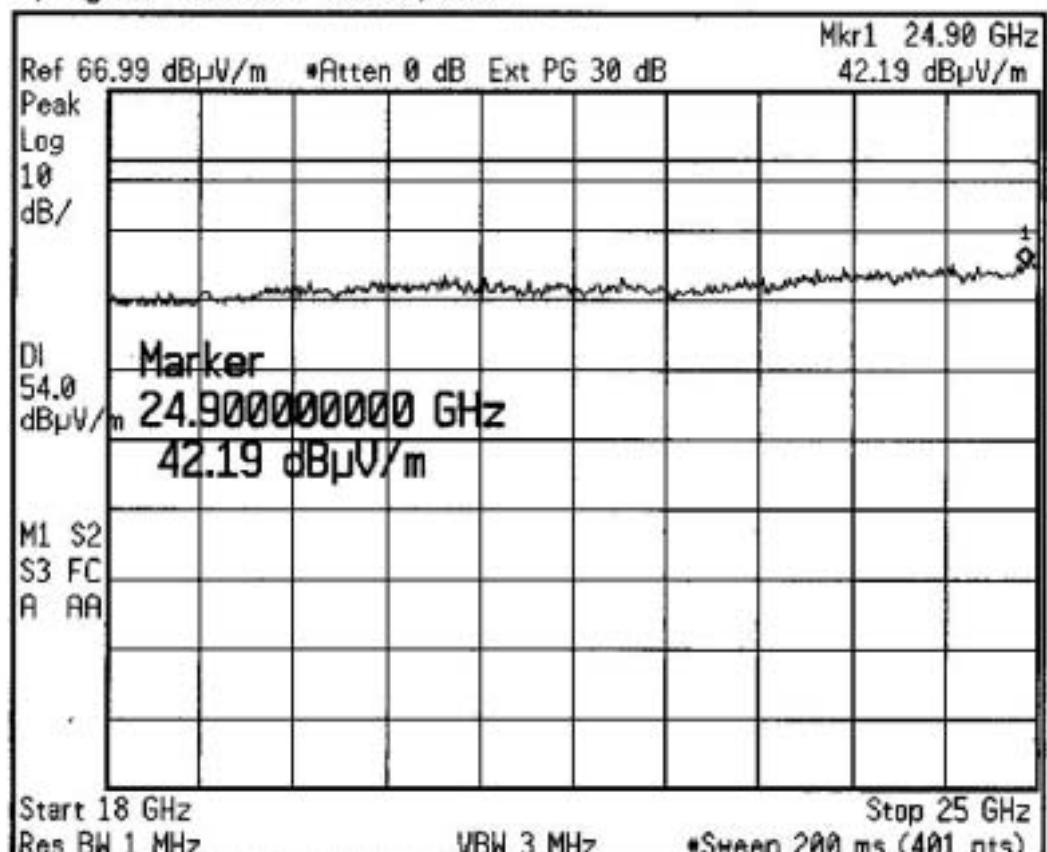

Peak Search

Meas Tools

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

More 1 of 2

APPENDIX: Photographs of Test Setup

(The Photos are saved separately)

APPENDIX : Photographs of EUT

Internal Photos

(The Photos are saved separately)

External Photos

(The Photos are saved separately)