

Company: RADWIN

Test of: RADWIN JET DUO

To: FCC CFR 47 Part 15 Subpart E 15.407 &
ISED RSS-247 Issue 2

Report No.: RDWN50-U4 Rev A

COMPLETE TEST REPORT



COMPLETE TEST REPORT

FROM



Test of: RADWIN JET DUO

To: FCC CFR 47 Part 15 Subpart E 15.407 & ISED RSS-247 Issue 2

Test Report Serial No.: RDWN50-U4 Rev A

This report supersedes: NONE

Applicant: RADWIN
27 Habarzel Street
Tel Aviv, 69710
Israel

Product Function: Dual Band 3.x and 5.x GHz Base Station
Outdoor Radio with Beamforming Antenna

Issue Date: 26th February 2018

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION.....	4
1.1. TESTING ACCREDITATION.....	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE.....	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS.....	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s)	13
5.4. Antenna Details	13
5.5. Cabling and I/O Ports	13
5.6. Test Configurations.....	14
5.7. Equipment Modifications	14
5.8. Deviations from the Test Standard	14
6. TEST SUMMARY	15
7. TEST EQUIPMENT CONFIGURATION(S)	16
7.1. Radiated Emissions - 3m Chamber	16
7.2. ac Wireline	18
8. MEASUREMENT AND PRESENTATION OF TEST DATA	20
9. TEST RESULTS	21
9.1. Peak Transmit Power	21
9.2. 6 dB & 99% Bandwidth	27
9.3. Power Spectral Density	32
9.4. TX Spurious & Restricted Band Emissions	38
9.4.1. RADWIN Ltd. SA0199500 11 dBi	38
9.4.2. RADWIN Ltd. SA0199500 20.5 dBi	44
9.5. Restricted Edge & Band-Edge Emissions	47
9.5.1. RADWIN Ltd. SA0199500 11 dBi	47
9.5.2. RADWIN Ltd. SA0199500 20.5 dBi	56
9.6. Digital Emissions	65
9.7. AC Wireline Conducted Emissions (150 kHz – 30 MHz).....	68
A. APPENDIX - GRAPHICAL IMAGES	70
A.1. 6 dB & 99% Bandwidth	71
A.2. Power Spectral Density	83
A.3. Radiated	107
A.3.1. TX Spurious & Restricted Band Emissions	107
A.3.1.1. RADWIN Ltd. SA0199500 11 dBi	107
A.3.1.2. RADWIN Ltd. SA0199500 20.5 dBi	110
A.3.2. Restricted Edge & Band-Edge Emissions	113
A.3.2.3. RADWIN Ltd. SA0199500 11 dBi	113
A.3.2.4. RADWIN Ltd. SA0199500 20.5 dBi	121

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	21 st November 2017	
Draft #2	22 nd December 2017	
Rev A	26 th February 2018	Initial Release

In the above table the latest report revision will replace all earlier versions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

3. TEST RESULT CERTIFICATE

Manufacturer: RADWIN
27 Habarzel Street
Tel Aviv 69710
Israel

Model: RADWIN JET DUO

Equipment Type: Dual Band 3.x and 5.x GHz Base
Station Outdoor Radio with
Beamforming Antenna

S/N's: Prototype

Test Date(s): 25th October – 20th November 2017

Tested By: MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA

Telephone: +1 925 462 0304
Fax: +1 925 462 0306

Website: www.micomlabs.com

STANDARD(S)

FCC CFR 47 Part 15 Subpart E 15.407
ISED RSS-247 Issue 2

TEST RESULTS

EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

Graeme Grieve
Quality Manager MiCOM Labs, Inc.

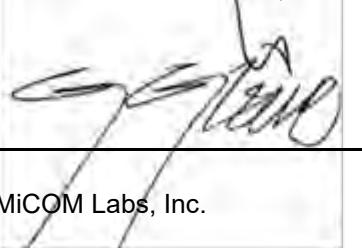

Gordon Hurst
President & CEO MiCOM Labs, Inc.

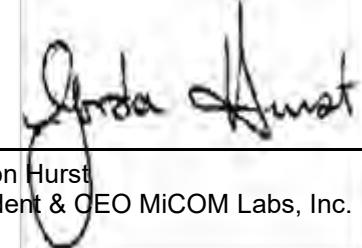

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911 D01 & D02	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 926956 D01 v02	22nd August 2016	U-NII Device Transition Plan
III	KDB 789033 D02 v01r04	2nd May 2017	Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E)
IV	KDB 412172 D01	7th August 2015	Guidance Determining ERP and EIRP of an RF transmitting device
V	A2LA	August 2017	R105 - Requirement's When Making Reference to A2LA Accreditation Status
VI	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VII	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VIII	CISPR 32	2015	Electromagnetic compatibility of multimedia equipment - Emission requirements
IX	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
X	FCC 47 CFR Part 15.407	2016	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
XI	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
XII	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XIII	RSS-Gen Issue 4	November 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
XIV	KDB 644545 D03 v01	August 14th 2014	Guidance for IEEE 802.11ac New Rules
XV	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.
XVI	KDB 662911 D01	October 31 st 2013	Emission testing of transmitters with multiple outputs in the same band
XVII	KDB 662911 D01	October 25 th 2011	MIMO with Cross-Polarized Antenna

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the RADWIN JET DUO to FCC CFR 47 Part 15 Subpart E 15.407 and ISED RSS-247 Issue 2. Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 5725 to 5850 MHz bands incorporating Dynamic Frequency Selection.
Applicant:	RADWIN 27 Habarzel Street Tel Aviv 69710 Israel
Manufacturer:	RADWIN
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	RDWN50-U4
Date EUT received:	16 th October 2017
Standard(s) applied:	FCC CFR 47 Part 15 Subpart E 15.407, ISED RSS-247 Issue 2
Dates of test (from - to):	25 th – 26 th October 2017
No of Units Tested:	1
Product Family Name:	RADWIN JET
Model(s):	RADWIN JET DUO
Location for use:	Outdoors
Declared Frequency Range(s):	5725 - 5850 MHz;
Type of Modulation:	BPSK, QPSK, 16QAM, 64QAM, 256QAM
EUT Modes of Operation:	5725 - 5850 MHz: 10MHz; 20MHz; 40MHz; 80MHz;
Declared Nominal Output Power (dBm):	30
Transmit/Receive Operation:	Transceiver
Rated Input Voltage and Current:	POE: 115Vac 60 Hz / 55 Vdc 1 A
Operating Temperature Range:	-40°C to +60°C
ITU Emission Designator:	10 MHz 10M0W7W 20 MHz 20M0W7W 40 MHz 40M0W7W 80 MHz 80M0W7W
Equipment Dimensions:	2.6 / 14.2 / 13.9 in
Weight:	14.0 lb
Hardware Rev:	Prototype
Software Rev:	Prototype

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.2. Scope Of Test Program

RADWIN JET DUO

The scope of the test program was to test the RADWIN JET DUO configurations in the frequency ranges 5725 - 5850 MHz; for compliance against the following specification:

FCC CFR 47 Part 15 Subpart E 15.407


Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 5725 – 5850 MHz bands.

ISED RSS-247 Issue 2

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

The following antennas were tested to 5725 – 5850 MHz for transmitter spurious and band edge Integral Antenna 11 dBi (non-beamforming) and Antenna 11 dBi (with 9.5 dBi Beamforming) = 20.5 dBi

RADWIN JET DUO

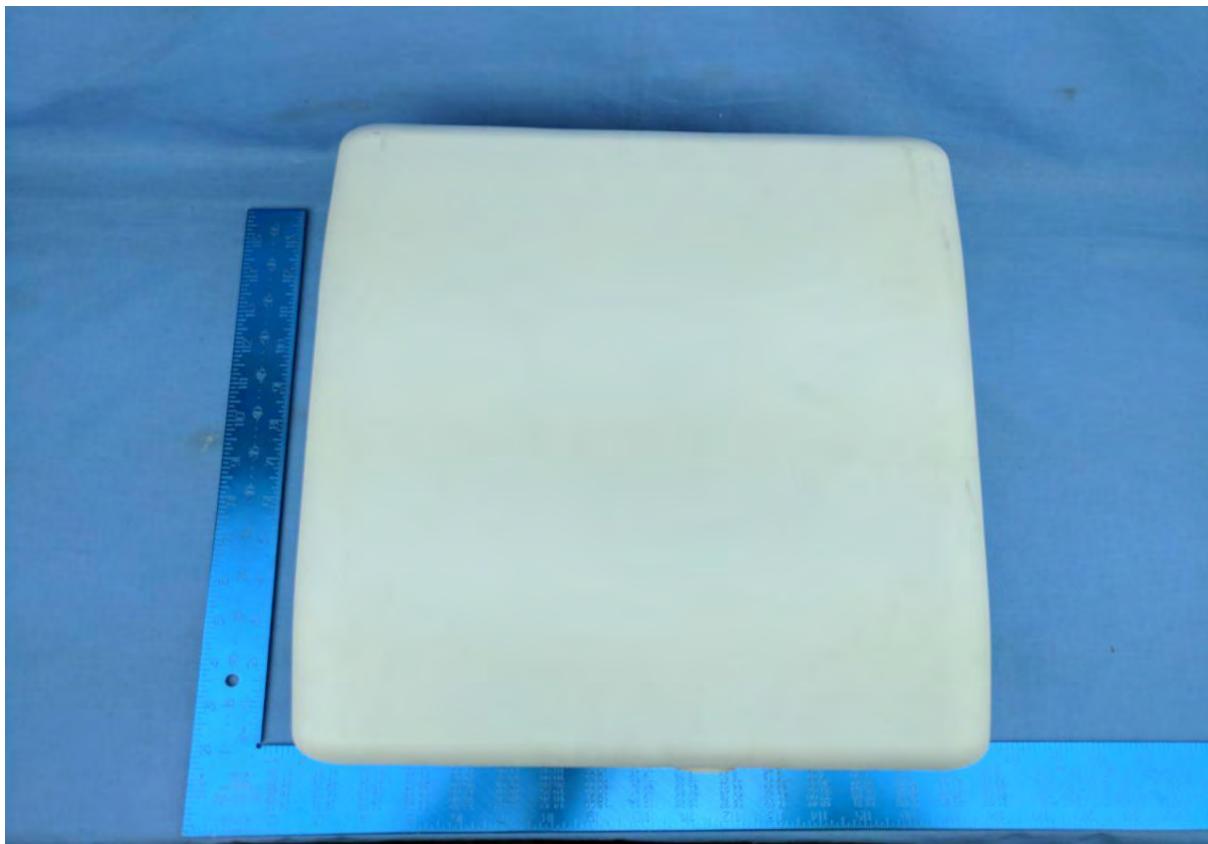

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.3. Equipment Model(s) and Serial Number(s)

Type	Description	Manufacturer	Model	Serial no.	Delivery Date
EUT	Dual Band 3.x and 5.x GHz Base Station Outdoor Radio with Beamforming Antenna	RADWIN Ltd.	RADWIN JET DUO	Prototype	16 th October 2017

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	RADWIN Ltd.	SA0199500	Panel	11.0	9.5	12	Yes	5725 - 5850
integral	RADWIN Ltd.	SA0199500*	Panel	11.0	8.5	16	Yes	5725 - 5850
integral	RADWIN Ltd.	SA0199500	Panel	11.0	-	85	Yes	5725 - 5850
BF Gain - Beamforming Gain Dir BW - Directional BeamWidth X-Pol - Cross Polarization								

*Covered by Antenna with (11.0 dBi +9.5 dBi Beamforming gain)

5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# of Ports	Screened	Conn Type	Data Type	Bit Rate
Ethernet	>30m	1	Yes	RJ-45	Packet Data	10/100/1000

5.6. Test Configurations

Results for the following configurations are provided in this report:

Channel Bandwidths	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
5725 - 5850 MHz				
10MHz	3.25	5,730.00	5,787.00	5,845.00
20MHz	6.50	5,735.00	5,787.00	5,840.00
40MHz	13.50	5,745.00	5,787.00	5,830.00
80MHz	29.30	5,765.00	5,787.00	5,810.00

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

6. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
Radiated Test Method	Complies	
Peak Transmit Power	Complies	View Data
6 dB & 99% Bandwidth	Complies	View Data
Power Spectral Density	Complies	View Data
TX Spurious & Restricted Band Emissions	Complies	-
RADWIN Ltd. SA0199500 11 dBi	Complies	View Data
RADWIN Ltd. SA0199500 20.5 dBi	Complies	View Data
Restricted Edge & Band-Edge Emissions	Complies	-
RADWIN Ltd. SA0199500 11 dBi	Complies	View Data
RADWIN Ltd. SA0199500 20.5 dBi	Complies	View Data
Digital Emissions	Complies	View Data
Conducted Emissions AC mains	Complies	View Data


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions above 1GHz.

Radiated Emissions Above 1GHz Test Setup

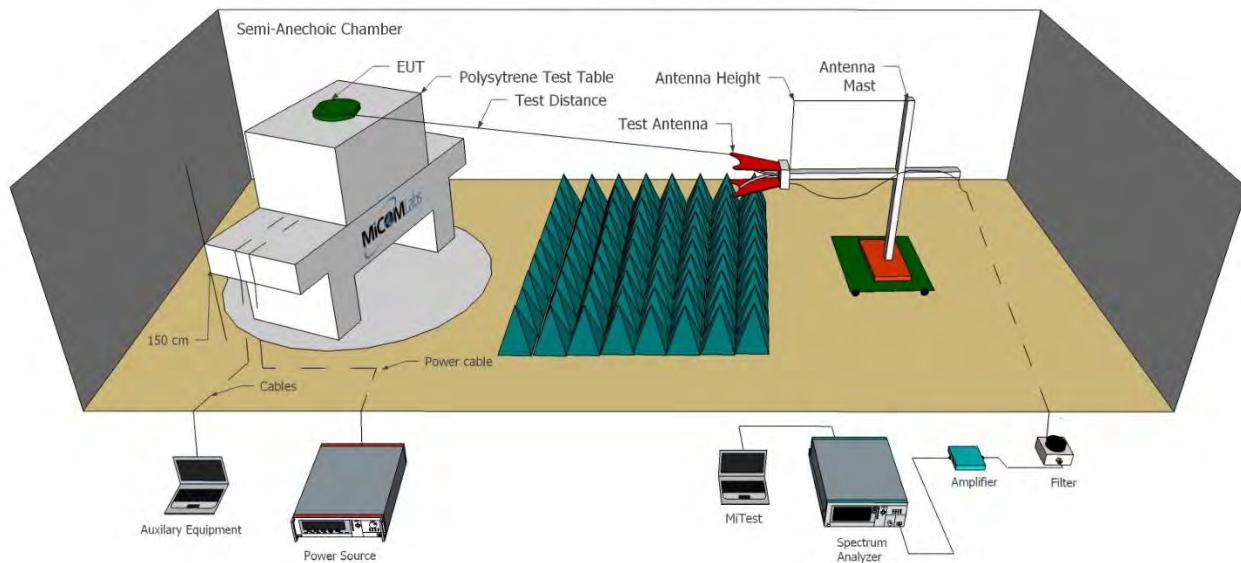

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.


Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	30 Nov 2017
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	2 May 2018
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	5 Oct 2018
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	21 Sep 2018
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	6 Oct 2018
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	12 Oct 2018
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	12 Oct 2018
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	12 Oct 2018
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software v1.0	MiCOM	Rad Emissions Test Software	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	4 Oct 2018
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	4 Oct 2018
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	4 Oct 2018
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	6 Oct 2018
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	6 Oct 2018
482	Cable - Amp to Antenna	SRC Haverhill	157-3051574	482	6 Oct 2018

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7.2. ac Wireline

The ac Wireline Conducted Emissions test was performed using the conducted test set-up shown in the diagram below.

Test Measurement Set up

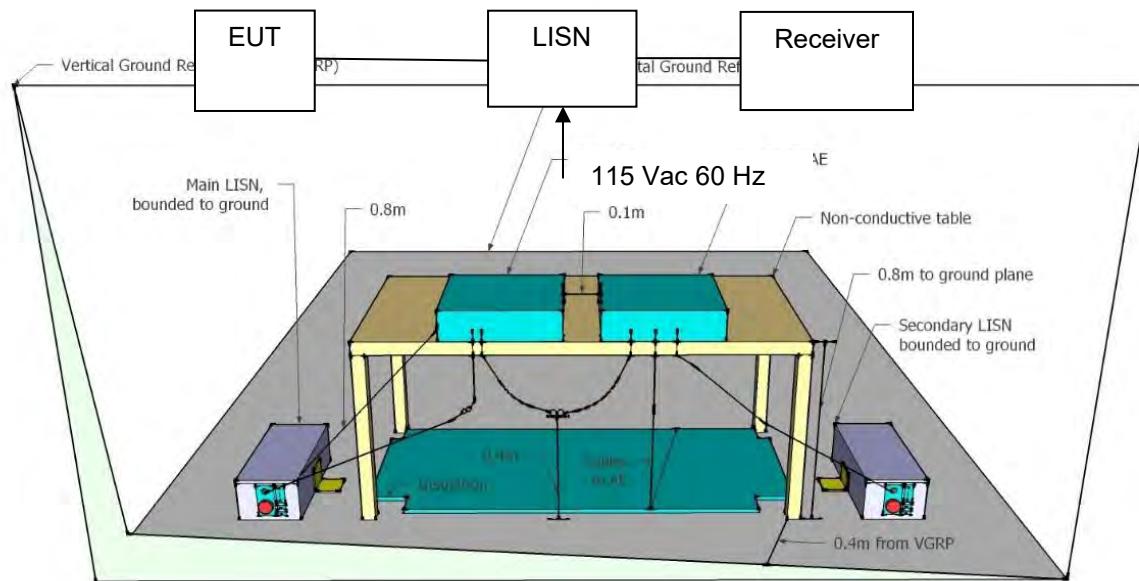

This test report may be reproduced in full only. The document may only be updated by MICOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 19 of 129

Assets Utilized for ac Wireline Emission Testing

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Termometer	Control Company	4196	E2846	30 Nov 2017
184	Pulse Limiter	Rhode & Schwarz	ESH3Z2	357.8810.52	6 Oct 2018
190	LISN (two-line V-network)	Rhode & Schwarz	ESH3Z5	836679/006	18 Oct 2018
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	2 May 2018
307	BNC-CABLE	Megaphase	1689 1GVT4	15F50B002	6 Oct 2018
316	Dell desktop computer workstation	Dell	Desktop	WS04	Not Required
372	AC Variable PS	California Instruments	1251P	L06951	Cal when used
388	LISN (3 Phase) 9kHz - 30MHz	Rhode & Schwarz	ESH2-Z5	892107/022	20 Oct 2018
496	MiTest Conducted Emissions test software.	MiCOM	Conducted Emissions Test Software Version 1.0	496	Not Required
CCEMC01	Confidence Check.	MiCOM	CCEMC01	None	2 Apr 2018

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9. TEST RESULTS

9.1. Peak Transmit Power

Test Conditions for Maximum Output Power			
Standard:	FCC CFR 47:15.407, RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Maximum Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a), RSS-247: Sec 6.2.4.1	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D02 General UNII Test Procedures New Rules v01		

Test Procedure for Maximum Output Power Measurement

Spectrum Analyzer Method. KDB 789033 defines a methodology using spectrum analyzer. Where power shall be calculated by integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99% occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a). Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document. Supporting KDB's referenced below.

KDB 662911 D01 & KDB 662911 D02

KDB 412172 D01 Guidance Determining ERP and EIRP of an RF transmitting device was used for converting radiated to conducted RF power.

Radiated measurements used for compliance with conducted limits, the following steps are required to ensure that the total emission power is determined for equipment driving cross polarized antennas:

- (1) Measure radiated emissions with vertical and horizontal polarizations of the measurement antenna;
- (2) Convert each radiated measurement to transmit power based on the antenna gain;

EIRP level to an equivalent electric field strength using the following relationship:

$$E = EIRP - 20 \log(D) + 104.8$$

Where:

E = electric field strength in $\text{dB}\mu\text{V/m}$,

$EIRP$ = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- (3) Sum the powers across the two polarizations to compare the resultant electric field strength level to the applicable limit.

Calculated Power = $A + G + Y + 10 \log(1/x) \text{ dBm}$

A = Total Power $[10^{\text{a}/10} + 10^{\text{b}/10} + 10^{\text{c}/10} + 10^{\text{d}/10}]$

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits Maximum Conducted Output Power

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3), RSS-247: 6.2.4.1

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Pt-Pt Operation

Equipment Configuration for RF Output Power					
Variant:	10MHz	Duty Cycle (%):	99		
Data Rate:	3.25 MBit/s	Antenna Gain (dBi):	11.0		
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable		
TPC:	Not Applicable	Tested By:	OC		
Engineering Test Notes:	For Pt-Pt Operation no EIRP limitation				

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Conducted Limit	Margin	EUT Power Setting
	H	V	dBm	dBm	Numeric	Numeric
5730	25.15	23.74	28.28	30.00	-1.72	21.5
5787	28.17	22.38	29.96	30.00	-0.04	19.0
5845	28.11	21.84	29.80	30.00	-0.20	20.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

Pt-mPt Operation

Equipment Configuration for RF Output Power					
Variant:	10MHz	Duty Cycle (%):	99		
Data Rate:	3.25 MBit/s	Antenna Gain (dBi):	11.0		
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable		
TPC:	Not Applicable	Tested By:	OC		
Engineering Test Notes:	For Pt-mPt Operation EIRP limited to 36 dBm EIRP				

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit
	H	V	dBm	dBm/EiRP
5730	21.87	20.46	25.00	36.00
5787	23.21	17.42	25.00	36.00
5845	23.31	17.04	25.00	36.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Equipment Configuration for RF Output Power

Variant:	20MHz	Duty Cycle (%):	99
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	OC
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit	Margin	EUT Power Setting
	H	V	dBm	dB	Numeric	Numeric
5735	26.56	24.0	29.25	30.00	-0.75	21.5
5787	27.69	22.15	29.53	30.00	-0.47	19.5
5840	27.76	21.65	29.48	30.00	-0.52	21.0

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

Pt-mPt Operation

Equipment Configuration for RF Output Power

Variant:	20MHz	Duty Cycle (%):	99
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	OC
Engineering Test Notes:	For Pt-mPt Operation EIRP limited to 36 dBm EIRP		

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit
	H	V	dBm	dBm/EiRP
5735	22.31	19.75	25.00	36.00
5787	23.16	17.62	25.00	36.00
5840	23.28	17.17	25.00	36.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Equipment Configuration for RF Output Power

Variant:	40MHz	Duty Cycle (%):	99
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit	Margin	EUT Power Setting
	H	V	dBm	dB	Numeric	Numeric
5745	27.47	23.91	29.83	30.00	-0.17	20.0
5787	27.98	22.89	29.92	30.00	-0.08	19.0
5830	27.37	21.74	29.19	30.00	-0.81	19.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

Pt-mPt Operation

Equipment Configuration for RF Output Power

Variant:	40MHz	Duty Cycle (%):	99
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:	For Pt-mPt Operation EIRP limited to 36 dBm EIRP		

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit
	H	V	dBm	dBm/EiRP
5745	22.64	19.08	25.00	36.00
5787	23.06	17.97	25.00	36.00
5830	23.18	17.55	25.00	36.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Equipment Configuration for RF Output Power

Variant:	80MHz	Duty Cycle (%):	99
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit	Margin	EUT Power Setting
	H	V	dBm	dB	Numeric	Numeric
5765	27.82	23.65	30.00	30.00	0.00	19.5
5787	27.67	22.35	29.56	30.00	-0.44	19.5
5810	28.19	22.36	29.97	30.00	-0.03	19.0

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

Pt-mPt Operation

Equipment Configuration for RF Output Power

Variant:	80MHz	Duty Cycle (%):	99
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:	For Pt-mPt Operation EIRP limited to 36 dBm EIRP		

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit
	H	V	dBm	dBm/EiRP
5765	17.64	14.08	25.00	36.00
5787	23.11	17.79	25.00	36.00
5810	23.22	17.39	25.00	36.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.2. 6 dB & 99% Bandwidth

Conducted Test Conditions for 6 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.407, RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	6 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a), RSS-247: 6.2.4.1	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for 6 dB and 99% Bandwidth Measurement

The bandwidth at 6 dB and 99 % is measured radiated, in a 3 meter chamber, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported. In this case Vertical a (V) and Horizontal for port b (H).

Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document.

Equipment Configuration for 6 dB & 99% Occupied Bandwidth

Variant:	10 MHz Bandwidth	Duty Cycle (%):	100
Data Rate:	3.25 MBit/s	Antenna Gain (dBi):	11
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Frequency	Measured 6 dB Bandwidth (MHz)		6 dB Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5730.0	8.94	-	-	8.94	8.94	
5787.0	8.98	-	-	8.98	8.98	
5845.0	8.93	-	-	8.93	8.93	

Test Frequency	Measured 99% Bandwidth (MHz)		99% Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5730.0	8.98	-	-	8.98	8.98	
5787.0	9.05	-	-	9.05	9.05	
5845.0	9.06	-	-	9.06	9.06	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

The above values are representative of the worst case value between polarities and based on the power measurements.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Equipment Configuration for 6 dB & 99% Occupied Bandwidth

Variant:	20 MHz Bandwidth	Duty Cycle (%):	100
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	11
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)		6 dB Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5735.0	<u>17.83</u>	-	-	17.83	17.83	
5787.0	<u>17.87</u>	-	-	17.87	17.87	
5840.0	<u>17.95</u>	-	-	17.95	17.95	

Test Frequency	Measured 99% Bandwidth (MHz)		99% Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5735.0	<u>17.87</u>	-	-	17.87	17.87	
5787.0	<u>18.04</u>	-	-	18.04	18.04	
5840.0	<u>18.03</u>	-	-	18.03	18.03	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

The above values are representative of the worst case value between polarities and based on the power measurements.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Equipment Configuration for 6 dB & 99% Occupied Bandwidth

Variant:	40 MHz Bandwidth	Duty Cycle (%):	100
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	11
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)		6 dB Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5745.0	36.52		-	36.52	36.52	
5787.0	36.52		-	36.52	36.52	
5830.0	36.40		-	36.40	36.40	

Test Frequency	Measured 99% Bandwidth (MHz)		99% Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5745.0	36.87		-	36.87	36.87	
5787.0	36.87		-	36.87	36.87	
5830.0	36.87		-	36.87	36.87	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

The above values are representative of the worst case value between polarities and based on the power measurements.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Equipment Configuration for 6 dB & 99% Occupied Bandwidth

Variant:	80MHz	Duty Cycle (%):	100
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	11
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	OC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)		6 dB Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5765.0	<u>76.95</u>		-	76.95	76.95	
5787.0	<u>76.31</u>		-	76.31	76.31	
5810.0	<u>76.63</u>		-	76.63	76.63	

Test Frequency	Measured 99% Bandwidth (MHz)		99% Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5765.0	<u>76.95</u>		-	76.95	76.95	
5787.0	<u>76.95</u>		-	76.95	76.95	
5810.0	<u>76.95</u>		-	76.95	76.95	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

The above values are representative of the worst case value between polarities and based on the power measurements.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.3. Power Spectral Density

Conducted Test Conditions for Power Spectral Density

Standard:	FCC CFR 47:15.407, RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a), RSS-247: 6.2.4.1	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D02 General UNII Test Procedures New Rules v01		

Test Procedure for Power Spectral Density

The In-Band power spectral density was measured using the measure and sum approach per FCC KDB 662911 (D02 Multiple Transmitter Output v02)

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with N transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were calculated on a computer, and the results read back into the spectrum analyzer as a data file to produce a representative plot of total spectral power density.

Calculated Power = $A + 10 \log (1/x)$ dBm

$A = \text{Total Power Spectral Density} [10 \log_{10} (10a/10 + 10b/10 + 10c/10 + 10d/10)]$

$x = \text{Duty Cycle}$

Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document. Supporting KDB's referenced below.

KDB 662911 D01 & KDB 662911 D02

Radiated measurements used for compliance with conducted limits, the following steps are required to ensure that the total emission power is determined for equipment driving cross polarized antennas:

- (1) Measure radiated emissions with vertical and horizontal polarizations of the measurement antenna;
- (2) Convert each radiated measurement to transmit power based on the antenna gain;

EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log (D) + 104.8$$

Where:

E = electric field strength in $\text{dB}\mu\text{V}/\text{m}$,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- (3) Sum the powers or PSDs across the two polarizations to compare the resultant electric field strength level to the applicable limit.

Calculated Power = $A + G + Y + 10 \log (1/x)$ dBm

$A = \text{Total Power} [10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

$G = \text{Antenna Gain}$

$Y = \text{Beamforming Gain}$

$x = \text{Duty Cycle (average power measurements only)}$

Limits Maximum Power Spectral Density

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3), RSS-247: 6.2.4.1

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 34 of 129

Equipment Configuration for Power Spectral Density

Variant:	10 MHz	Duty Cycle (%):	100
Data Rate:	3.25 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	OC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density		Summation Peak Marker + DCCF (+0.0 dB)	Limit	Margin
	(dBm/MHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
5730.0	17.25	16.29	20.58	30.0	-9.42
5787.0	15.57	12.69	18.15	30.0	-11.85
5845.0	14.01	11.23	16.62	30.0	-13.38

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Equipment Configuration for Power Spectral Density

Variant:	20 MHz	Duty Cycle (%):	100
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	OC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density		Summation Peak Marker + DCCF (+0.0 dB)	Limit	Margin
	(dBm/MHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
5735.0	14.89	14.51	18.49	30.0	-11.51
5787.0	14.40	10.59	16.68	30.0	-13.32
5840.0	12.09	11.20	15.45	30.0	-14.55

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Equipment Configuration for Power Spectral Density			
Variant:	40 MHz	Duty Cycle (%):	100.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	OC
Engineering Test Notes:			

Test Measurement Results					
Test Frequency	Measured Power Spectral Density			Summation Peak Marker + DCCF (+0.00 dB)	Margin
	(dBm/MHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
5745.0	12.47	11.34	15.72	30.0	-14.28
5787.0	11.91	9.72	14.73	30.0	-15.28
5830.0	10.24	7.13	11.93	30.0	-18.07

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density			
Variant:	80 MHz	Duty Cycle (%):	100.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	OC
Engineering Test Notes:			

Test Measurement Results					
Test Frequency	Measured Power Spectral Density			Summation Peak Marker + DCCF (+0.00 dB)	Margin
	(dBm/MHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
5765.0	7.78	5.36	10.52	30.0	-19.48
5787.0	9.74	5.61	11.93	30.0	-18.07
5810.0	8.14	5.82	10.92	30.0	-9.08

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

9.4. TX Spurious & Restricted Band Emissions

9.4.1. RADWIN Ltd. SA0199500 11 dBi

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.407, RSS-247	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (b), 15.205, 15.209 RSS-247: 6.2.4.2	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(3) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(4) The provisions of §15.205 apply to intentional radiators operating under this section.

(5) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Limits for Restricted Bands (15.205, 15.209)

Peak emission: 68.23 dBuV/m

Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

FO = Distance Falloff Factor
NFL = Notch Filter Loss

Example:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB μ V/m);

$$E = \frac{1000000 \times \sqrt{30P}}{3} \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dB μ V/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m

48 dBmV/m = 250 mV/m

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

(3) Cable locating equipment operated pursuant to §15.213.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 41 of 129

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN Ltd. SA0199500 11 dBi	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5730.00	Data Rate:	3.25 MBit/s
Power Setting:	25	Tested By:	SB

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	3433.46	65.94	2.60	-16.02	52.52	Max Peak	Vertical	182	11	68.2	-15.7	Pass	
#2	3433.46	49.78	2.60	-16.02	36.36	Max Avg	Vertical	182	11	54.0	-17.6	Pass	
#3	5727.15	81.24	3.16	-12.86	71.54	Fundamental	Vertical	200	0	--	--		
#4	11456.95	64.35	4.65	-0.84	68.16	Max Peak	Horizontal	148	37	68.2	-0.1	Pass	
#5	11456.95	49.16	4.65	-0.84	52.97	Max Avg	Horizontal	148	37	54.0	-1.0	Pass	
#6	11457.21	57.81	4.65	-0.82	61.64	Peak (Scan)	Horizontal	148	0	68.2	-6.6	Pass	
#7	11463.82	60.93	4.60	-0.76	64.77	Max Peak	Vertical	136	0	68.2	-3.5	Pass	
#8	11463.82	45.48	4.60	-0.76	49.32	Max Avg	Vertical	136	0	54.0	-4.7	Pass	
#9	16456.29	46.77	5.74	-0.02	52.49	Peak (NRB)	Horizontal	148	0	--	--	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 42 of 129

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN Ltd. SA0199500 11 dBi	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5787.00	Data Rate:	3.25 MBit/s
Power Setting:	28	Tested By:	OC

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5789.98	78.05	3.21	-12.81	68.45	Fundamental	Horizontal	151	0	--	--	Pass	
#2	6070.12	64.51	3.25	-11.84	55.92	Max Peak	Horizontal	147	330	68.2	-12.3	Pass	
#3	11568.01	62.56	4.65	-0.55	66.66	Max Peak	Vertical	136	333	68.2	-1.6	Pass	
#4	11568.01	45.70	4.65	-0.55	49.80	Max Avg	Vertical	136	333	54.0	-4.2	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 43 of 129

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN Ltd. SA0199500 11 dBi	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5845.00	Data Rate:	3.25 MBit/s
Power Setting:	27	Tested By:	OC

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5847.32	75.71	3.20	-12.74	66.17	Fundamental	Horizontal	151	0	--	--		
#2	6069.80	65.67	3.24	-11.88	57.03	Max Peak	Horizontal	170	52	68.2	-11.2	Pass	
#3	11685.00	60.97	4.93	-0.45	65.45	Max Peak	Horizontal	156	21	68.2	-2.8	Pass	
#4	11685.00	44.09	4.93	-0.45	48.57	Max Avg	Horizontal	156	21	54.0	-5.4	Pass	
#5	11695.58	56.97	4.88	-0.61	61.24	Max Peak	Horizontal	152	48	68.2	-7.0	Pass	
#6	11695.58	40.55	4.88	-0.61	44.82	Max Avg	Horizontal	152	48	54.0	-9.2	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 44 of 129

9.4.2. RADWIN Ltd. SA0199500 20.5 dBi (11dBi Gain + 9.5 dB Beamforming)

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN Ltd. SA0199500 20.5 dBi	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	9.5	Duty Cycle (%):	
Channel Frequency (MHz):	5730.00	Data Rate:	3.25 MBit/s
Power Setting:	21.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz														
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail		
#1	5726.60	79.03	3.16	-12.86	69.33	Fundamental	Vertical	100	0	--	--			
#2	6071.69	61.91	3.25	-11.79	53.37	Max Peak	Vertical	163	12	68.2	-14.9	Pass		
#3	11460.68	55.79	4.63	-0.79	59.63	Max Peak	Horizontal	134	4	68.2	-8.6	Pass		
#4	11460.68	40.74	4.63	-0.79	44.58	Max Avg	Horizontal	134	4	54.0	-9.4	Pass		

Test Notes: EUT powered by POE and connected to laptop outside chamber

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 45 of 129

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN Ltd. SA0199500 20.5 dBi	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	9.5	Duty Cycle (%):	
Channel Frequency (MHz):	5787.00	Data Rate:	3.25 MBit/s
Power Setting:	28	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz														
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail		
#1	5789.43	78.17	3.21	-12.79	68.59	Fundamental	Horizontal	100	0	--	--			
#2	6042.08	72.05	3.24	-12.32	62.97	Max Peak	Vertical	143	0	68.2	-5.3	Pass		
#3	6069.58	74.34	3.24	-11.88	65.70	Max Peak	Vertical	155	1	68.2	-2.5	Pass		
#4	6102.01	73.75	3.24	-11.86	65.13	Max Peak	Vertical	155	1	68.2	-3.1	Pass		
#5	11574.70	61.59	4.56	-0.46	65.69	Max Peak	Horizontal	160	3	68.2	-2.5	Pass		
#6	11574.70	47.92	4.56	-0.46	52.02	Max Avg	Horizontal	160	3	54.0	-2.0	Pass		

Test Notes: EUT powered by POE and connected to laptop outside chamber

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 46 of 129

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN Ltd. SA0199500 20.5 dBi	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	9.5	Duty Cycle (%):	
Channel Frequency (MHz):	5845.00	Data Rate:	3.25 MBit/s
Power Setting:	17	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5847.32	71.09	3.20	-12.74	61.55	Fundamental	Horizontal	151	0	--	--		
#2	6072.68	59.75	3.25	-11.75	51.25	Peak (NRB)	Vertical	151	0	--	--	Pass	
#3	6250.07	60.36	3.23	-11.86	51.73	Peak (NRB)	Vertical	151	0	--	--	Pass	

Test Notes: EUT powered by POE and connected to laptop outside chamber

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.5. Restricted Edge & Band-Edge Emissions

9.5.1. RADWIN Ltd. SA0199500 11 dBi

RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

5725 MHz Radiated Lower Band-Edge Emissions

RADWIN Ltd. SA0199500 11 dBi		Band-Edge Freq	Limit 122.2dB μ V/m	Limit 68.2dB μ V/m	Power Setting
Channel Bandwidth(s)	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
10MHz	5730.00	5725.00	111.27	65.73	28
20MHz	5735.00	5725.00	107.19	65.30	28
40MHz	5745.00	5725.00	102.71	66.0	28
80MHz	5765.00	5725.00	95.54	67.90	22.5

5850 MHz Radiated Higher Band-Edge Emissions

RADWIN Ltd. SA0199500 11 dBi		Band-Edge Freq	Limit 122.2dB μ V/m	Limit 68.2dB μ V/m	Power Setting
Channel Bandwidth(s)	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
10MHz	5845.00	5850.00	114.22	67.76	27
20MHz	5840.00	5850.00	92.09	67.95	27.5
40MHz	5830.00	5850.00	100.90	68.01	27.5
80MHz	5810.00	5850.00	95.53	67.63	21

Click on the links to view the data.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 48 of 129

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 11 dBi	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5730.00	Data Rate:	3.25 MBit/s
Power Setting:	28	Tested By:	SB

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5633.48	26.22	3.21	36.30	65.73	Max Avg	Vertical	152	15	68.2	-2.5	Pass	
#2	5725.00	71.60	3.17	36.50	111.27	Max Avg	Vertical	152	15	122.2	-10.9	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 49 of 129

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 11 dBi	Variant:	20MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5735.00	Data Rate:	6.50 MBit/s
Power Setting:	28	Tested By:	SB

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5604.98	25.76	3.24	36.30	65.30	Max Avg	Horizontal	152	15	68.2	-2.9	Pass	
#2	5725.00	67.52	3.17	36.50	107.19	Max Avg	Horizontal	152	15	122.2	-15.0	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 50 of 129

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 11 dBi	Variant:	40MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5745.00	Data Rate:	13.50 MBit/s
Power Setting:	28	Tested By:	SB

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5647.91	27.10	3.20	36.30	66.60	Max Avg	Horizontal	152	11	68.2	-1.6	Pass	
#2	5725.00	63.04	3.17	36.50	102.71	Max Avg	Horizontal	152	11	122.2	-19.5	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 51 of 129

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 11 dBi	Variant:	80MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5765.00	Data Rate:	29.3 MBit/s
Power Setting:	22.5	Tested By:	SB

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5645.74	28.40	3.20	36.30	67.90	Max Avg	Horizontal	152	11	68.2	-0.3	Pass	
#2	5725.00	55.87	3.17	36.50	95.54	Max Avg	Horizontal	152	11	122.2	-26.7	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 52 of 129

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 11 dBi	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5845.00	Data Rate:	3.25 MBit/s
Power Setting:	27	Tested By:	SB

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	74.32	3.20	36.70	114.22	Max Avg	Horizontal	152	11	122.2	-7.98	Pass	
#3	5925.79	27.77	3.19	36.80	67.76	Max Avg	Horizontal	152	11	68.2	-0.5	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 53 of 129

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 11 dBi	Variant:	20MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5840.00	Data Rate:	6.50 MBit/s
Power Setting:	27.5	Tested By:	SB

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	52.19	3.20	36.70	92.09	Max Avg	Horizontal	152	11	122.2	-30.11	Pass	
#3	5968.78	27.77	3.28	36.90	67.95	Max Avg	Horizontal	152	11	68.2	-0.3	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 54 of 129

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 11 dBi	Variant:	40MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5830.00	Data Rate:	13.50 MBit/s
Power Setting:	27.5	Tested By:	SB

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	61.00	3.20	36.70	100.90	Max Avg	Horizontal	152	11	122.2	-21.3	Pass	
#3	5971.08	27.82	3.29	36.90	68.01	Max Avg	Horizontal	152	11	68.2	-0.2	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 55 of 129

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 11 dBi	Variant:	80MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5810.00	Data Rate:	29.30 MBit/s
Power Setting:	21	Tested By:	SB

Test Measurement Results

5770.00 - 6000.00 MHz														
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail		
#1	5850.00	55.63	3.20	36.70	95.53	Max Avg	Horizontal	152	11	68.2	-26.67	Pass		
#3	5948.04	27.60	3.23	36.80	67.63	Max Avg	Horizontal	152	11	68.2	-0.6	Pass		
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--		

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.5.2. RADWIN Ltd. SA0199500 20.5 dBi (11dBi Gain + 9.5 dB Beamforming)

RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

5725 MHz Radiated Lower Band-Edge Emissions

RADWIN Ltd. SA0199500 20.5 dBi		Band-Edge Freq	Limit 122.2dB μ V/m	Limit 68.2dB μ V/m	Power Setting
Channel Bandwidth(s)	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
10MHz	5730.00	5725.00	121.12	67.00	18
20MHz	5735.00	5725.00	114.81	67.96	21.5
40MHz	5745.00	5725.00	108.81	67.88	19
80MHz	5765.00	5725.00	101.58	67.02	17.5

5850 MHz Radiated Higher Band-Edge Emissions

RADWIN Ltd. SA0199500 20.5 dBi		Band-Edge Freq	Limit 122.2dB μ V/m	Limit 68.2 dB μ V/m	Power Setting
Channel Bandwidth(s)	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
10MHz	5845.00	5850.00	117.22	68.17	16.5
20MHz	5840.00	5850.00	108.59	66.71	16
40MHz	5830.00	5850.00	103.39	68.17	17
80MHz	5810.00	5850.00	101.27	67.64	15

Click on the links to view the data.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 57 of 129

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 20.5 dBi	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	9.5	Duty Cycle (%):	
Channel Frequency (MHz):	5730.00	Data Rate:	3.25 MBit/s
Power Setting:	18	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5647.62	27.50	3.20	36.30	67.00	Max Avg	Horizontal	147	2	68.2	-1.2	Pass	
#2	5725.00	81.45	3.17	36.50	121.12	Max Avg	Horizontal	147	2	122.2	-1.1	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 58 of 129

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 20.5 dBi	Variant:	20MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	9.5	Duty Cycle (%):	
Channel Frequency (MHz):	5735.00	Data Rate:	6.50 MBit/s
Power Setting:	21.5	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5638.53	28.47	3.19	36.30	67.96	Max Avg	Horizontal	147	2	68.2	-0.3	Pass	
#2	5725.00	75.14	3.17	36.50	114.81	Max Avg	Horizontal	147	2	122.2	-7.4	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 59 of 129

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 20.5 dBi	Variant:	40MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	9.5	Duty Cycle (%):	
Channel Frequency (MHz):	5745.00	Data Rate:	13.50 MBit/s
Power Setting:	19	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5646.82	28.18	3.20	36.30	67.68	Max Avg	Horizontal	147	2	68.2	-0.6	Pass	
#2	5725.00	69.14	3.17	36.50	108.81	Max Avg	Horizontal	147	2	122.2	-13.4	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 60 of 129

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 20.5 dBi	Variant:	80MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	9.5	Duty Cycle (%):	
Channel Frequency (MHz):	5765.00	Data Rate:	29.30 MBit/s
Power Setting:	17.5	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5654.76	29.50	3.22	36.30	69.02	Max Avg	Horizontal	147	2	71.9	-2.9	Pass	
#2	5725.00	61.91	3.17	36.50	101.58	Max Avg	Horizontal	147	2	122.2	-20.6	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 61 of 129

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 20.5 dBi	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	9.5	Duty Cycle (%):	
Channel Frequency (MHz):	5845.00	Data Rate:	3.25 MBit/s
Power Setting:	16.5	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	77.32	3.20	36.70	117.22	Max Avg	Horizontal	147	2	122.2	-5.0	Pass	
#3	5972.00	28.00	3.29	36.90	68.17	Max Avg	Horizontal	147	2	68.2	-0.5	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 62 of 129

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 20.5 dBi	Variant:	20MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	9.5	Duty Cycle (%):	
Channel Frequency (MHz):	5840.00	Data Rate:	6.50 MBit/s
Power Setting:	16	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	68.69	3.20	36.70	108.59	Max Avg	Horizontal	147	2	122.2	-13.6	Pass	
#3	5962.79	26.64	3.27	36.80	66.71	Max Avg	Horizontal	147	2	68.2	-1.5	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 63 of 129

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 20.5 dBi	Variant:	40MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	9.5	Duty Cycle (%):	
Channel Frequency (MHz):	5830.00	Data Rate:	13.50 MBit/s
Power Setting:	17	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	63.49	3.20	36.70	103.39	Max Avg	Horizontal	147	2	122.2	-18.9	Pass	
#3	5954.03	28.13	3.25	36.80	68.17	Max Avg	Horizontal	147	2	68.2	-0.1	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 64 of 129

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN Ltd. SA0199500 20.5 dBi	Variant:	80MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	9.5	Duty Cycle (%):	
Channel Frequency (MHz):	5810.00	Data Rate:	29.30 MBit/s
Power Setting:	15	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	61.37	3.20	36.70	101.27	Max Avg	Horizontal	147	2	122.2	-21.0	Pass	
#3	5929.14	27.66	3.18	36.80	67.64	Max Avg	Horizontal	147	2	68.2	-0.6	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.6. Digital Emissions

FCC, Part 15 Subpart C §15.205/ §15.209, RSS-GEN: 8.9, 8.10
Industry Canada RSS-Gen §8.9, 8.10

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3dB\mu V/m$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$


$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$



Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 66 of 129

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

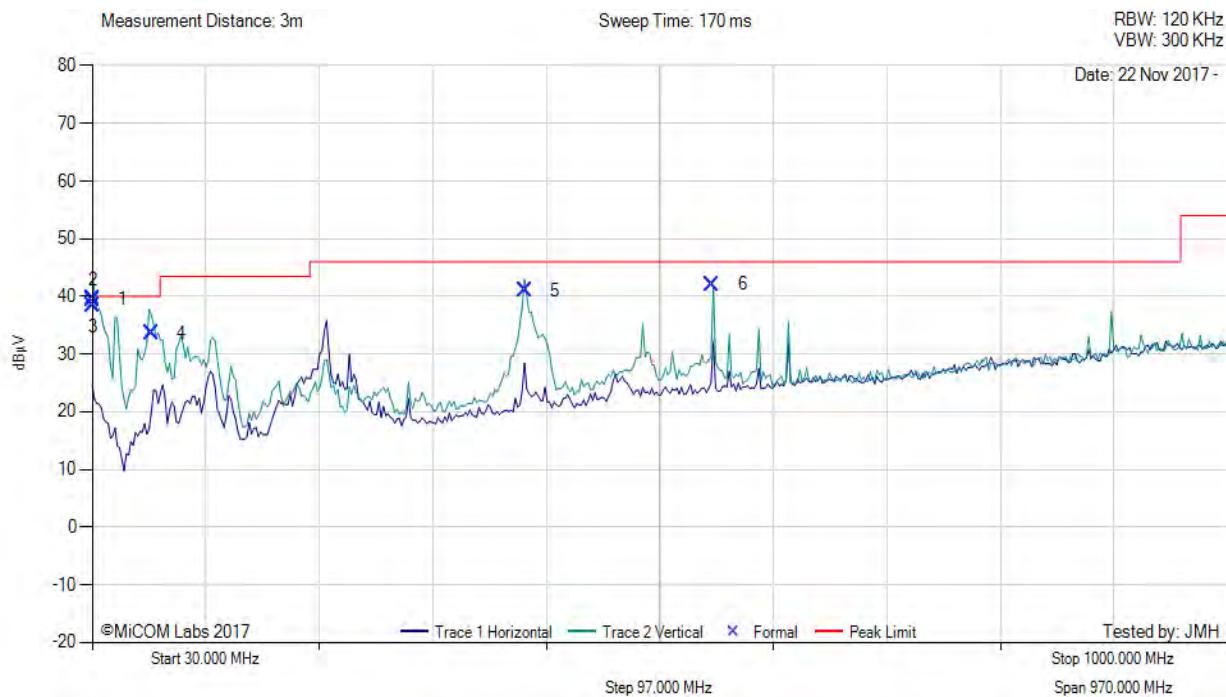

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB _μ V	Cable Loss dB	AF dB	Level dB _μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB _μ V/m	Margin dB	Pass /Fail	
1	30.01	46.55	3.41	-10.38	39.58	MaxQP	Vertical	101	274	40.0	-0.4	Pass	
2	30.48	46.36	3.41	-10.38	39.39	MaxQP	Vertical	100	0	40.0	-0.6	Pass	
3	30.87	45.36	3.41	-10.38	38.39	MaxQP	Vertical	120	0	40.0	-1.6	Pass	
4	80.40	53.31	3.72	-23.42	33.61	MaxQP	Vertical	109	327	40.0	-6.4	Pass	
5	400.02	51.10	4.88	-15.05	40.93	MaxQP	Vertical	118	356	46.0	-5.1	Pass	
6	560.00	48.73	5.34	-11.98	42.09	MaxQP	Vertical	169	353	46.0	-3.9	Pass	

Test Notes: EUT powered by POE, connected to laptop outside chamber


9.7. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §8.8

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Set-up is shown in Section 4.1 Test Equipment Configurations/Radiated Testing

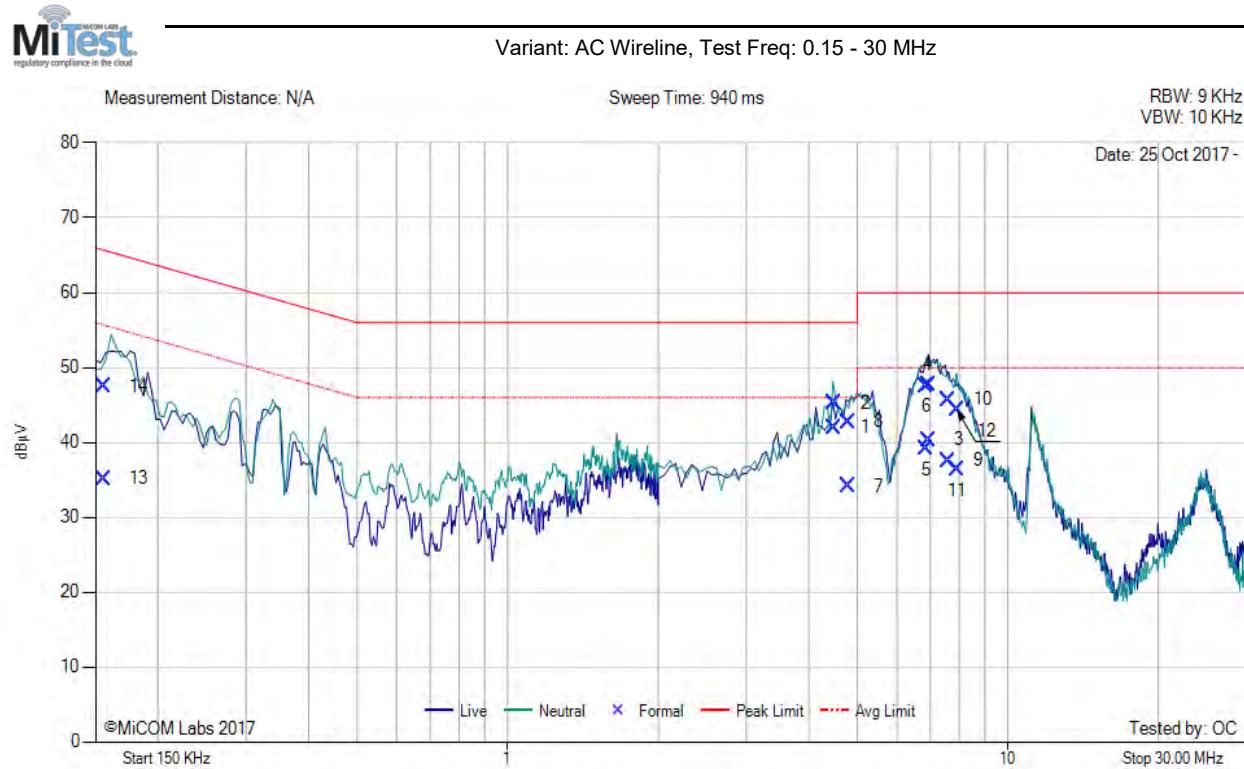

Num	Frequency MHz	Raw dB μ V	Cable Loss dB	Factor dB	Total Correction dB μ V	Corrected Value dB μ V	Measurement Type	Line	Limit dB μ V/m	Margin dB	Pass /Fail
1	4.505	31.73	0.25	10.07	10.32	42.05	Max Avg	Neutral	46.0	-4.0	Pass
2	4.505	34.98	0.25	10.07	10.32	45.30	Max Qp	Neutral	56.0	-10.7	Pass
3	6.933	29.82	0.36	10.17	10.53	40.35	Max Avg	Live	50.0	-9.7	Pass
4	6.933	37.09	0.36	10.17	10.53	47.62	Max Qp	Live	60.0	-12.4	Pass
5	6.886	28.66	0.36	10.17	10.53	39.19	Max Avg	Neutral	50.0	-10.8	Pass
6	6.886	37.05	0.36	10.17	10.53	47.58	Max Qp	Neutral	60.0	-12.4	Pass
7	4.790	23.85	0.26	10.08	10.34	34.19	Max Avg	Live	46.0	-11.8	Pass
8	4.790	32.42	0.26	10.08	10.34	42.76	Max Qp	Live	56.0	-13.2	Pass
9	7.591	27.02	0.41	10.16	10.57	37.59	Max Avg	Live	50.0	-12.4	Pass
10	7.591	35.12	0.41	10.16	10.57	45.69	Max Qp	Live	60.0	-14.3	Pass
11	7.916	25.72	0.43	10.17	10.60	36.32	Max Avg	Neutral	50.0	-13.7	Pass
12	7.916	33.72	0.43	10.17	10.60	44.32	Max Qp	Neutral	60.0	-15.7	Pass
13	0.156	25.20	0.05	9.92	9.97	35.17	Max Avg	Neutral	55.8	-20.7	Pass
14	0.156	37.50	0.05	9.92	9.97	47.47	Max Qp	Neutral	65.8	-18.4	Pass

Test Notes: Model: JET DUO. PoE powered configuration. 120V, 60Hz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: RADWIN JET DUO
To: FCC Part 15.407, ISED RSS-247 Issue 2
Serial #: RDWN50-U4 Rev A
Issue Date: 26th February 2018
Page: 70 of 129

A. APPENDIX - GRAPHICAL IMAGES

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.1. 6 dB & 99% Bandwidth

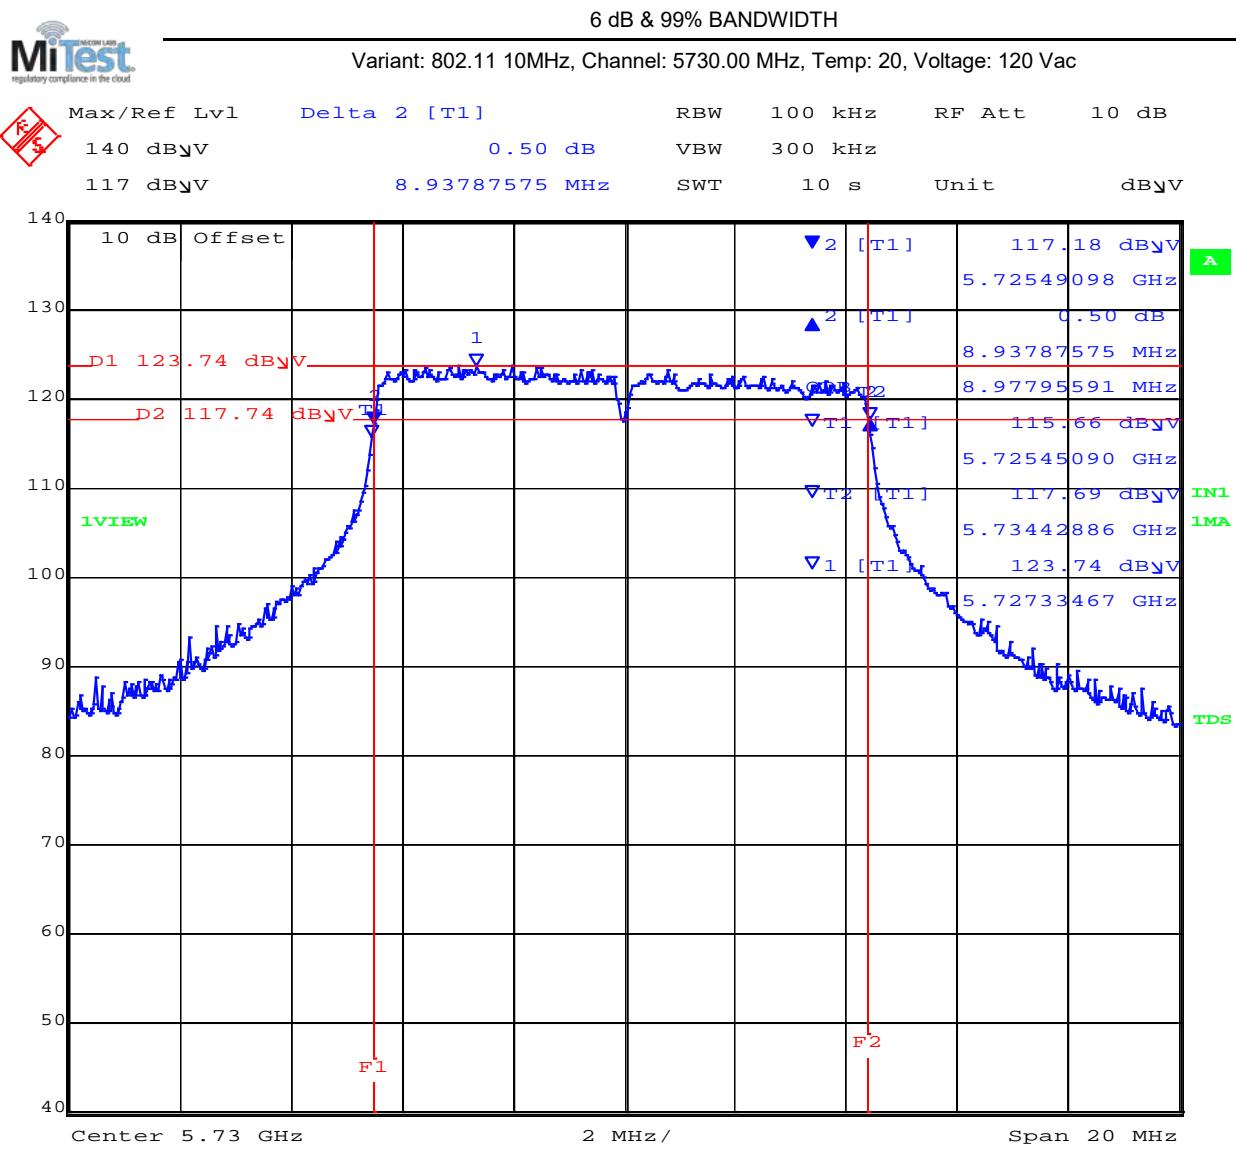


Date: 16.NOV.2017 15:27:37

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	T1 : 5725.45090 MHz : 115.66 dBuV T2 : 5734.42886 MHz : 117.69 dBuV	Measured 6 dB Bandwidth: 8.94 MHz Measured 99% Bandwidth: 8.98 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

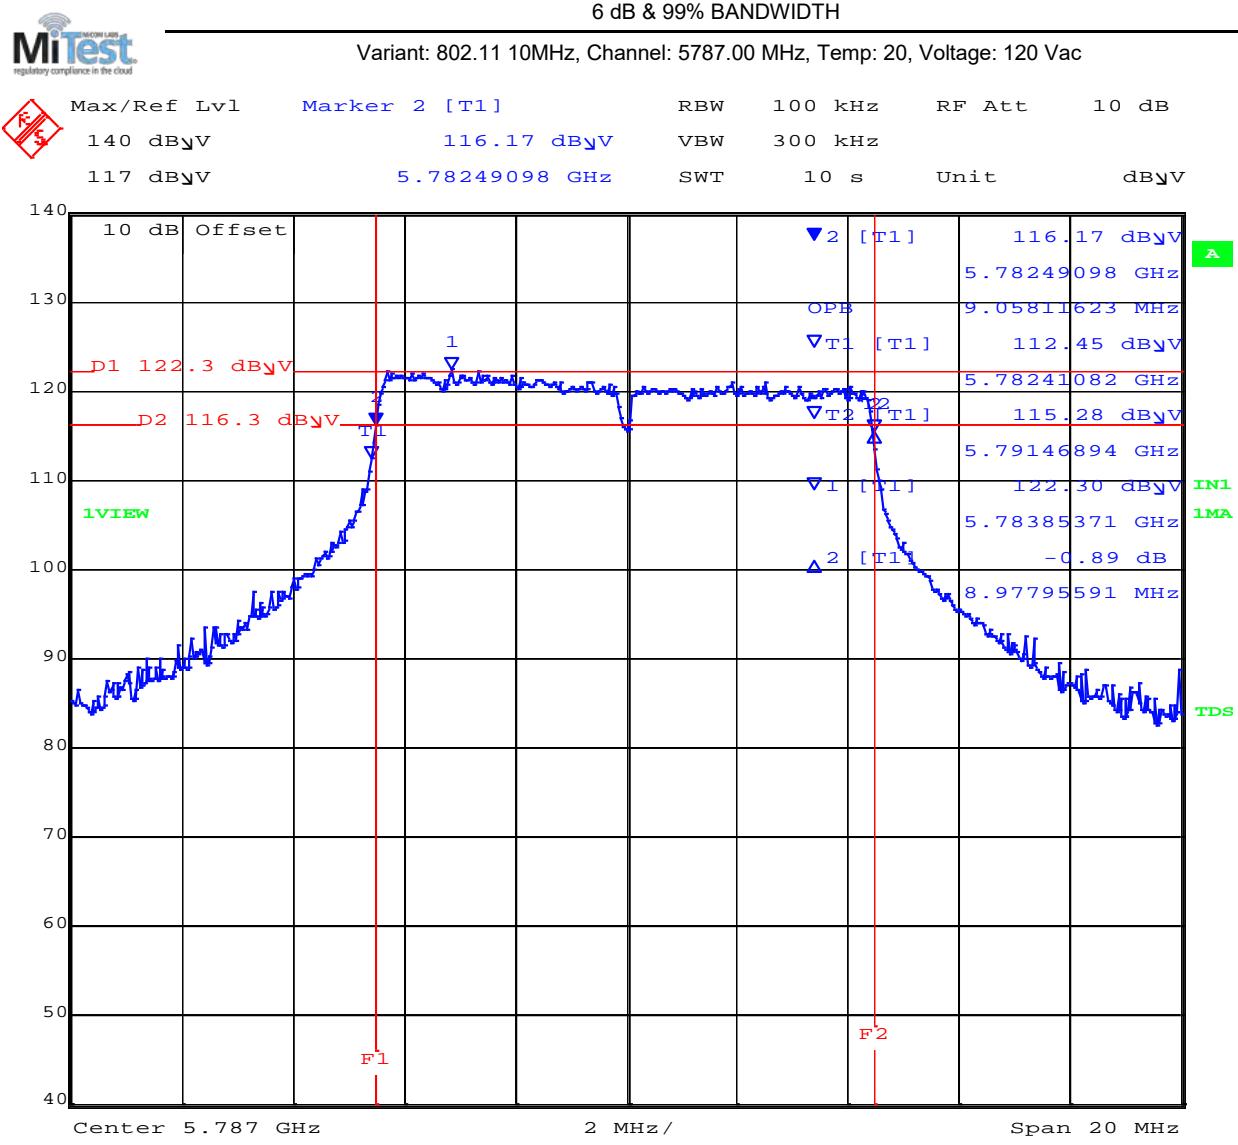


Date: 16.NOV.2017 15:24:42

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	T1 : 5782.41082 MHz : 112.45 dB _u V T2 : 5791.46894 MHz : 115.28 dB _u V	Measured 6 dB Bandwidth: 8.98 MHz Measured 99% Bandwidth: 9.05 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

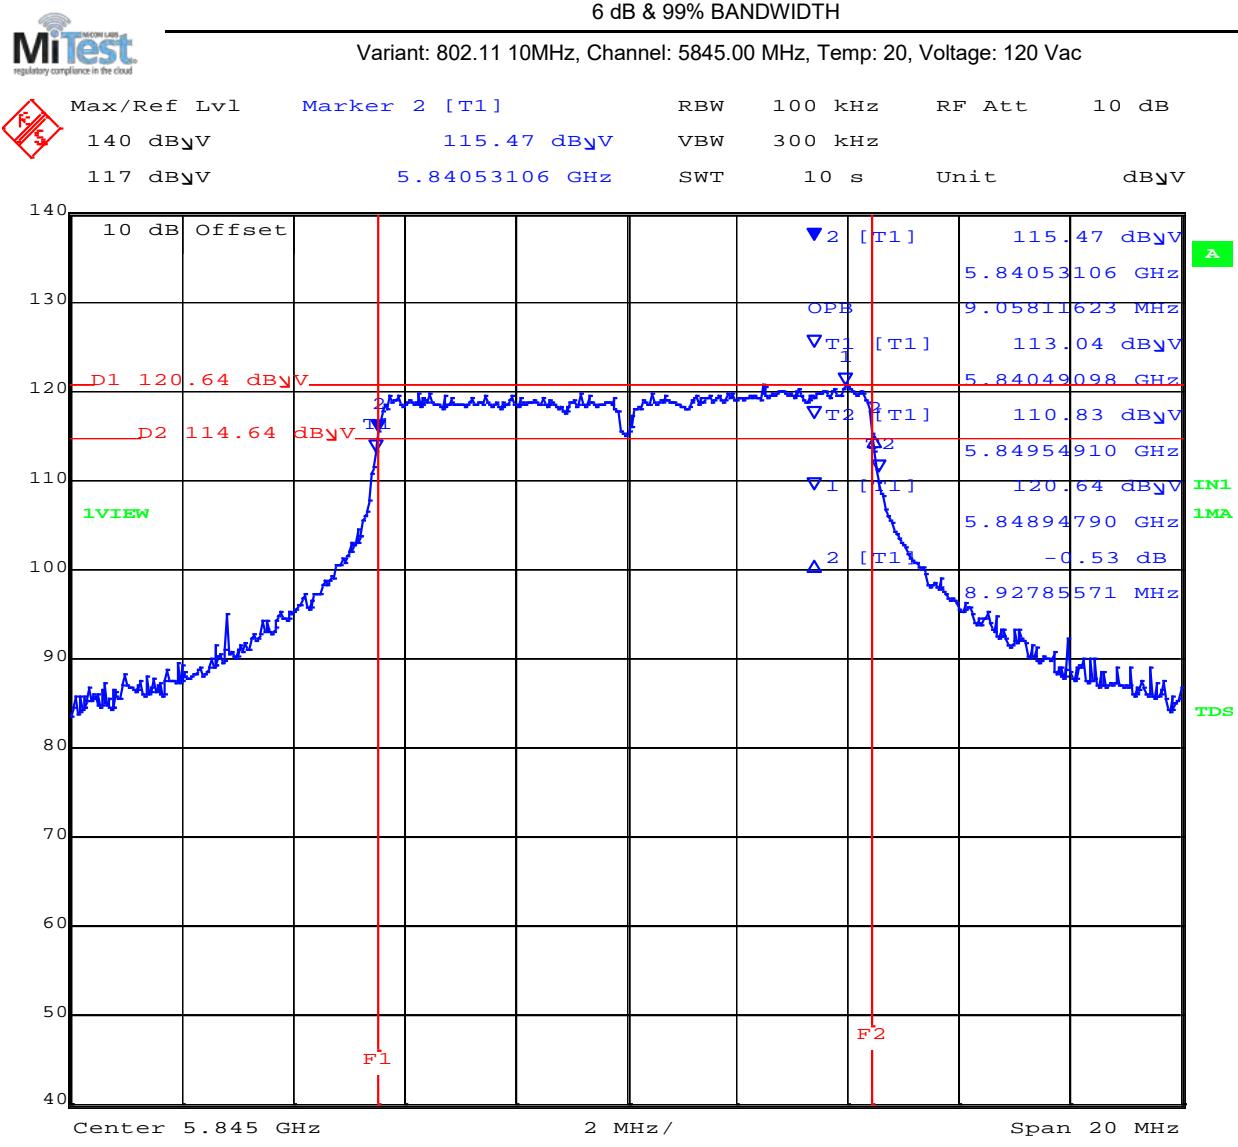


Date: 16.NOV.2017 15:21:30

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	T1 : 5840.49098 MHz : 113.04 dB _u V T2 : 5849.54910 MHz : 110.83 dB _u V	Measured 6 dB Bandwidth: 8.93 MHz Measured 99% Bandwidth: 9.06 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

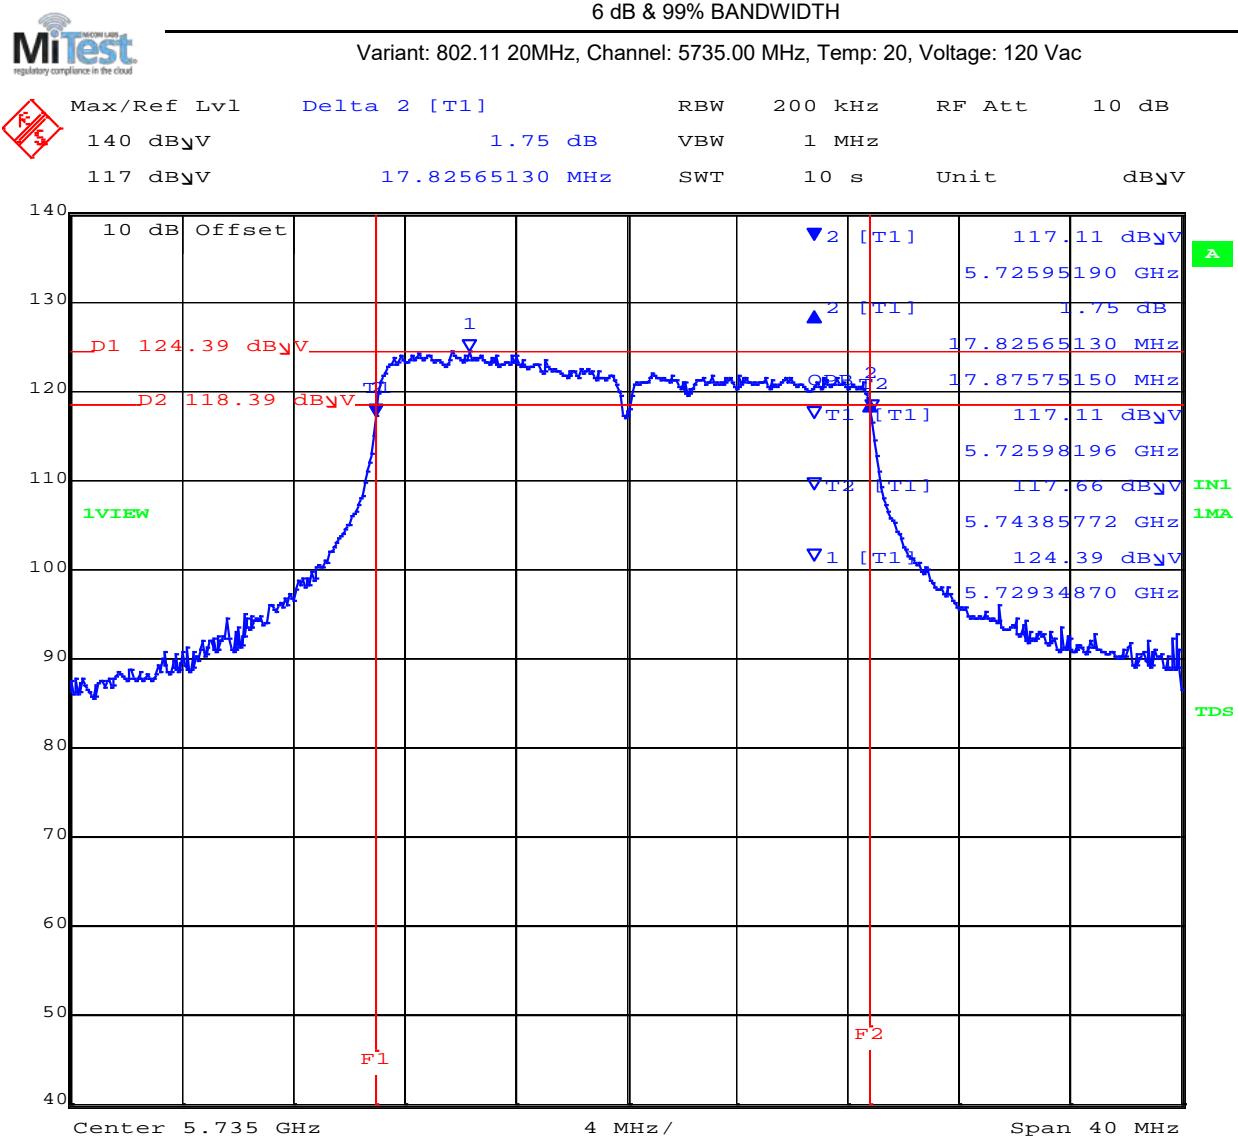


Date: 16.NOV.2017 15:10:49

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	T1 : 5725.98196 MHz : 117.11 dB _u V T2 : 5743.85772 MHz : 117.66 dB _u V	Measured 6 dB Bandwidth: 17.83 MHz Measured 99% Bandwidth: 17.87 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

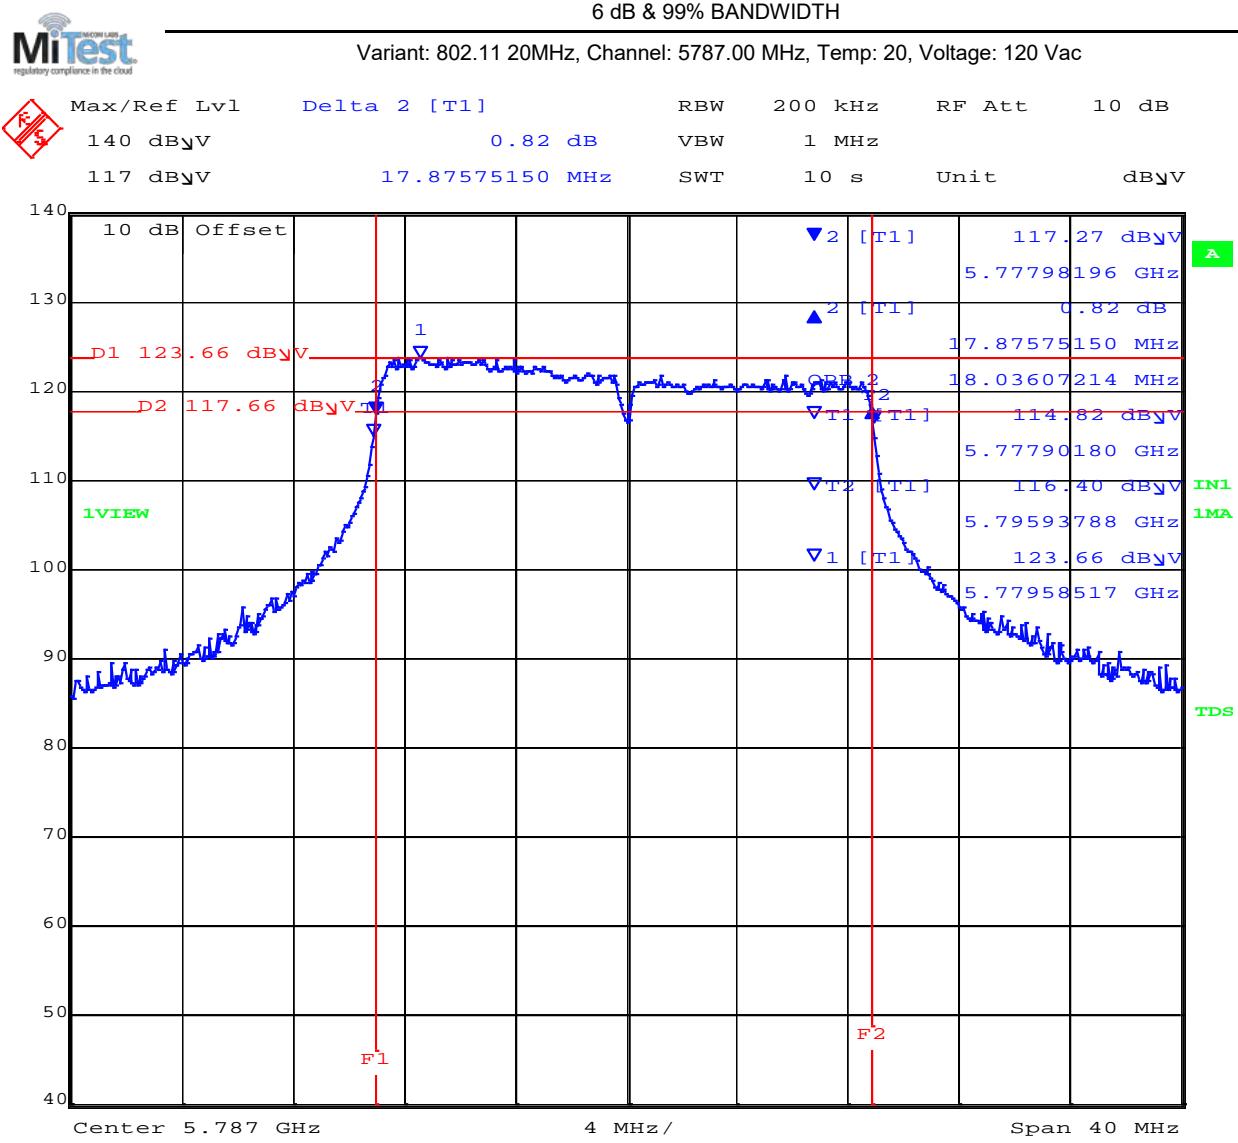


Date: 16.NOV.2017 15:13:49

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	T1 : 5777.90180 MHz : 114.82 dB _V T2 : 5795.93788 MHz : 116.40 dB _V	Measured 6 dB Bandwidth: 17.87 MHz Measured 99% Bandwidth: 18.04 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

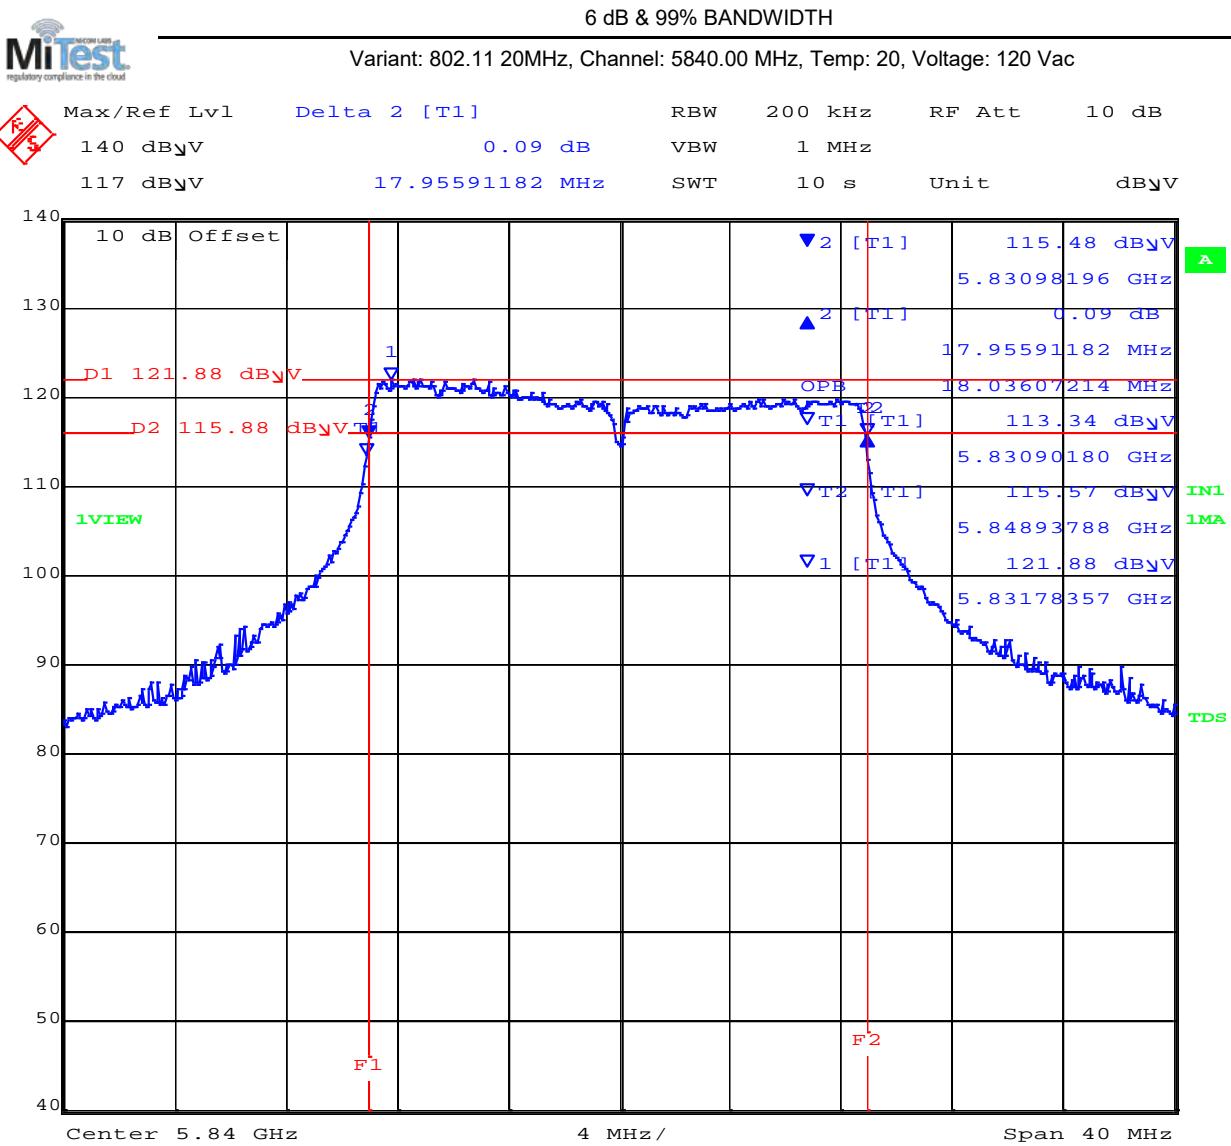


Date: 16.NOV.2017 15:17:13

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	T1 : 5830.901880 MHz : 113.34 dBuV T2 : 5848.93788 MHz : 115.57 dBuV	Measured 6 dB Bandwidth: 17.95 MHz Measured 99% Bandwidth: 18.03 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

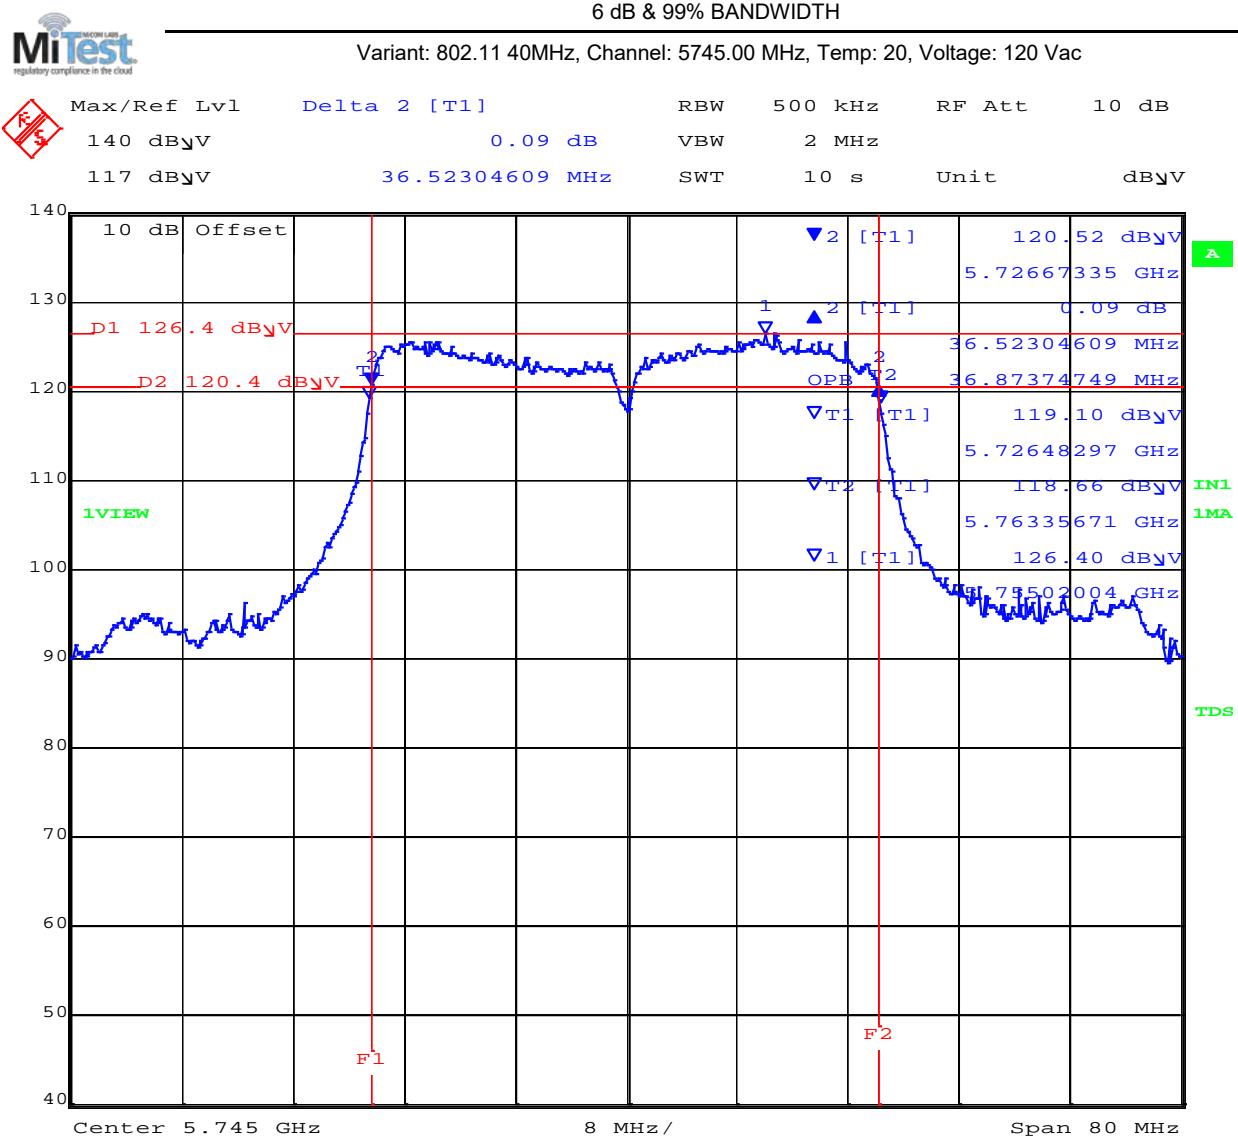


Date: 16.NOV.2017 15:07:02

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	T1 : 5726.48297 MHz : 119.10 dB _y V T2 : 5763.35671 MHz : 118.66 dB _y V	Measured 6 dB Bandwidth: 36.52 MHz Measured 99% Bandwidth: 36.87 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

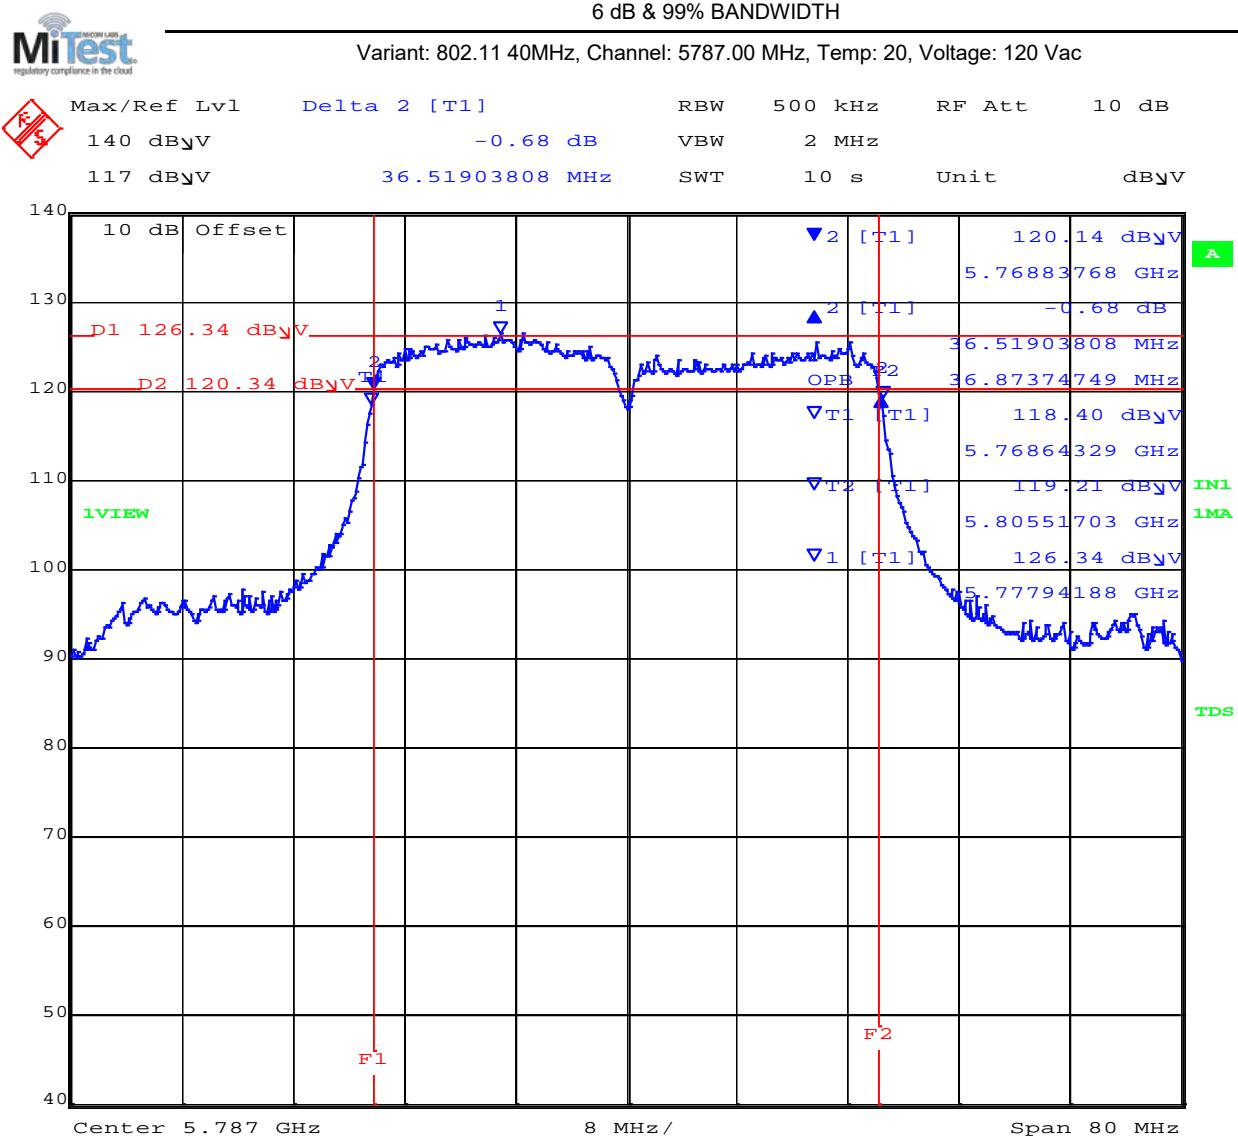


Date: 16.NOV.2017 15:03:55

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	T1 : 5768.64329 MHz : 118.40 dB _{uV} T2 : 5805.51703 MHz : 119.21 dB _{uV}	Measured 6 dB Bandwidth: 36.52 MHz Measured 99% Bandwidth: 36.87 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

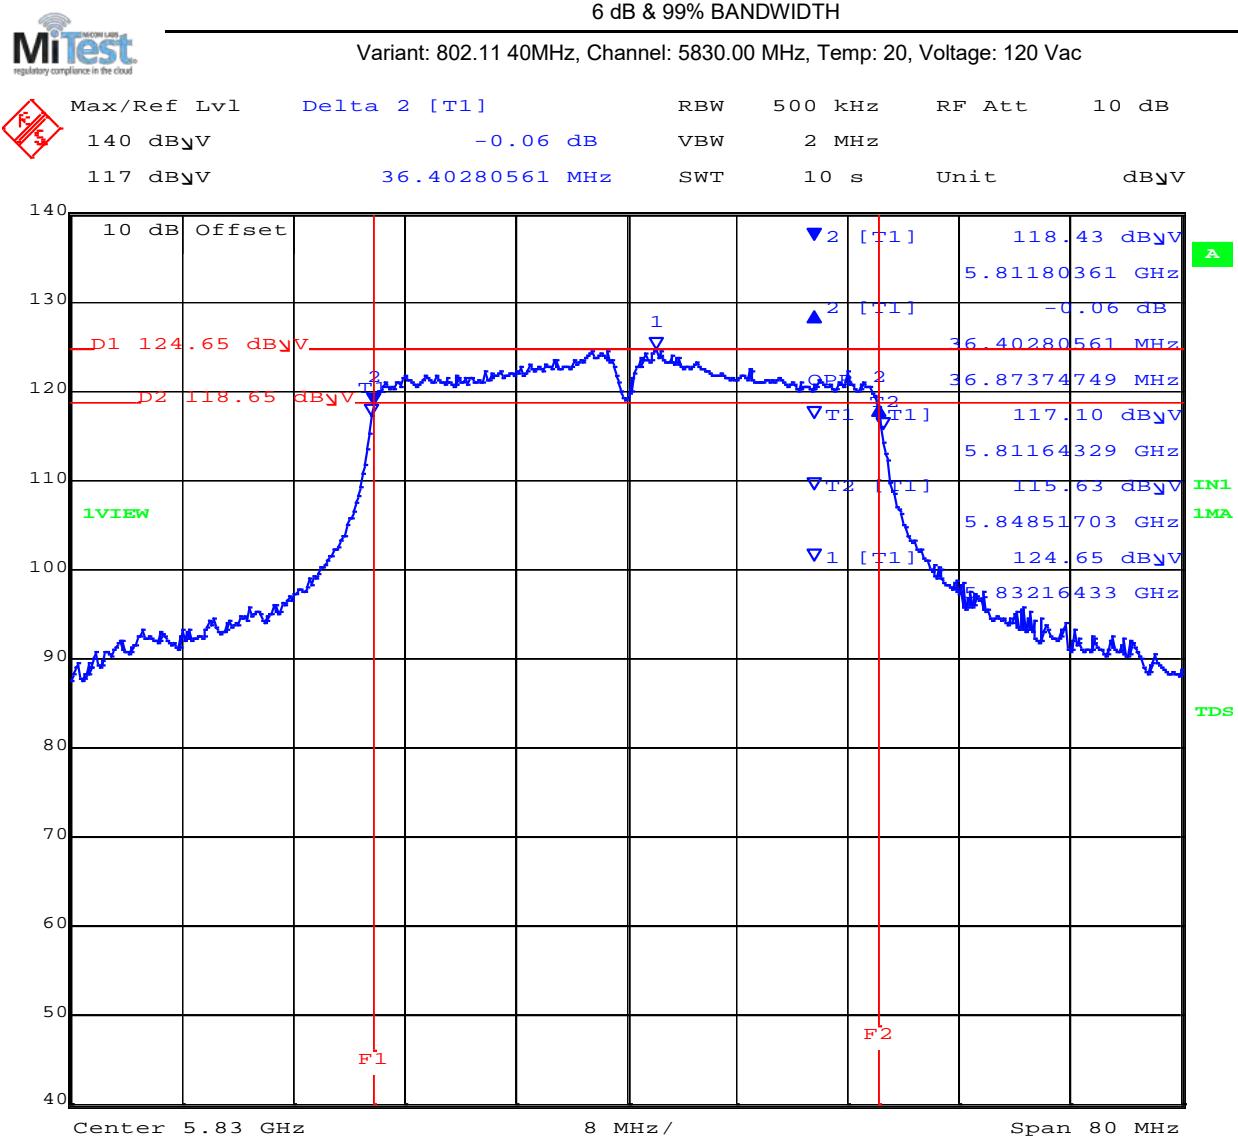


Date: 16.NOV.2017 15:00:13

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	T1 : 5811.64329 MHz : 117.10 dB _{uV} T2 : 5848.51703 MHz : 115.63 dB _{uV}	Measured 6 dB Bandwidth: 36.40MHz Measured 99% Bandwidth: 36.87 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

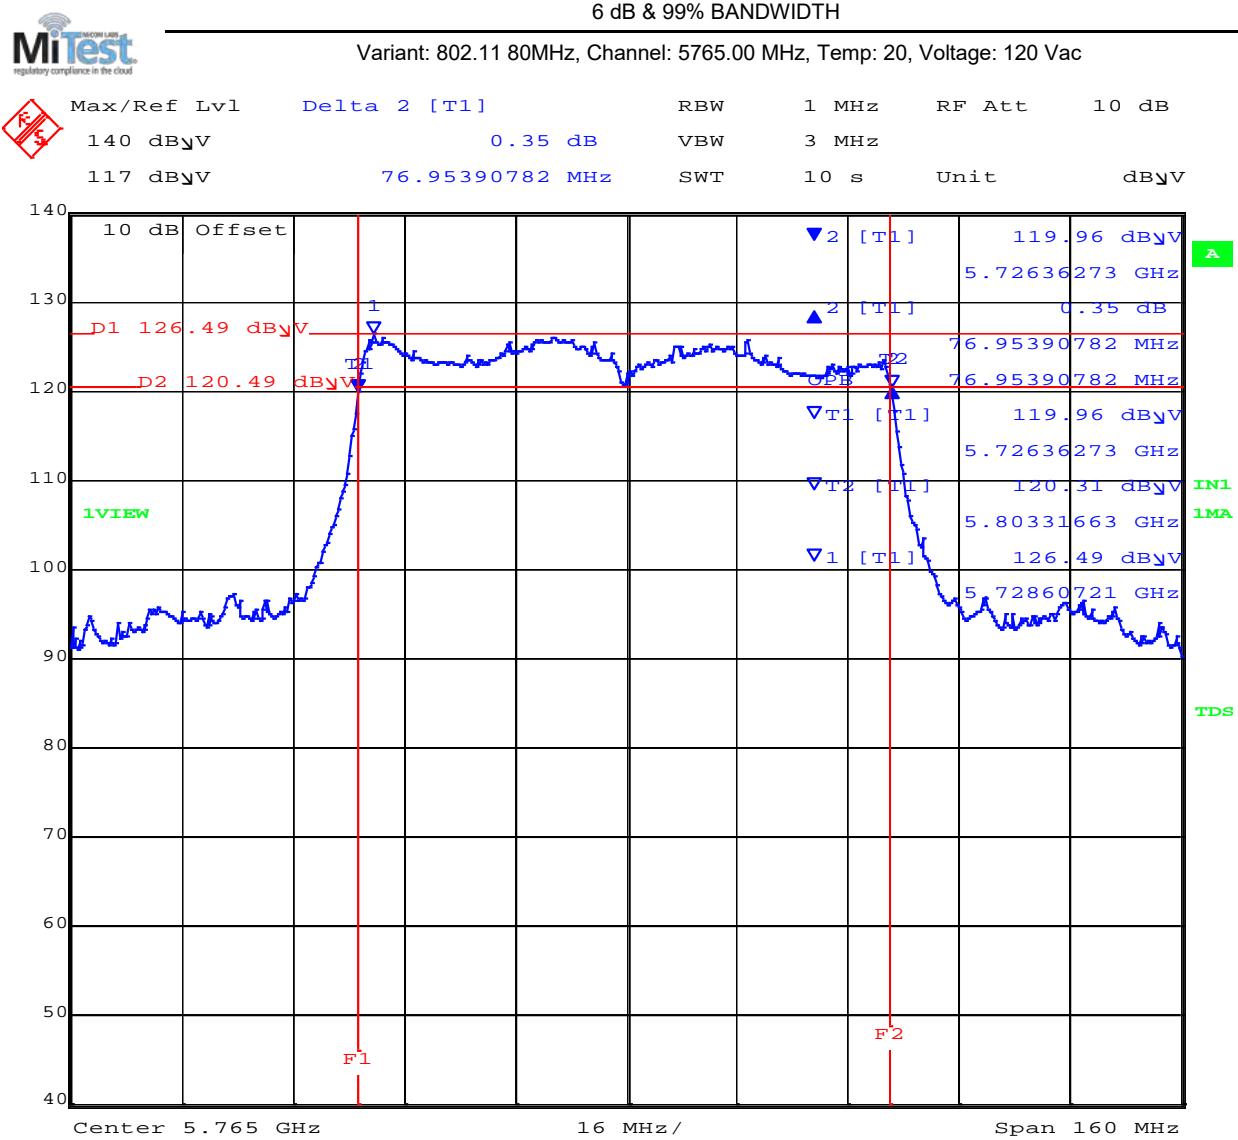


Date: 16.NOV.2017 14:49:20

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	T1 : 5726.36273 MHz : 119.96 dB _u V T2 : 5803.31663 MHz : 120.31 dB _u V	Measured 6 dB Bandwidth: 76.95 MHz Measured 99% Bandwidth: 76.95 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

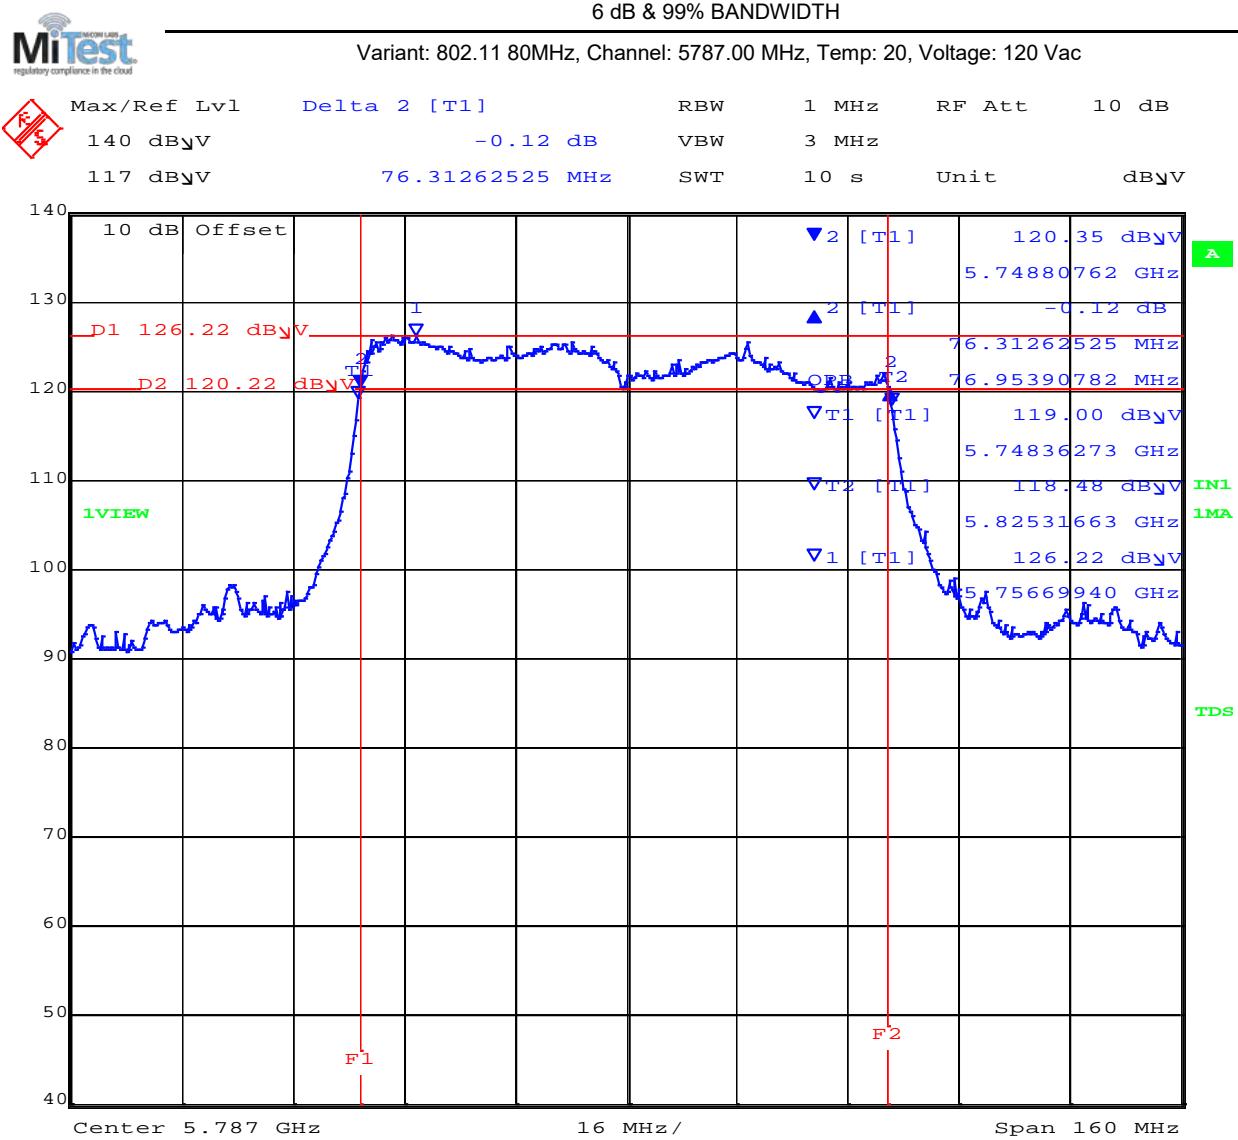


Date: 16.NOV.2017 14:53:06

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	T1 : 5748.36273 MHz : 119.00 dB _u V T2 : 5825.31663 MHz : 118.48 dB _u V	Measured 6 dB Bandwidth: 76.31 MHz Measured 99% Bandwidth: 76.95 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

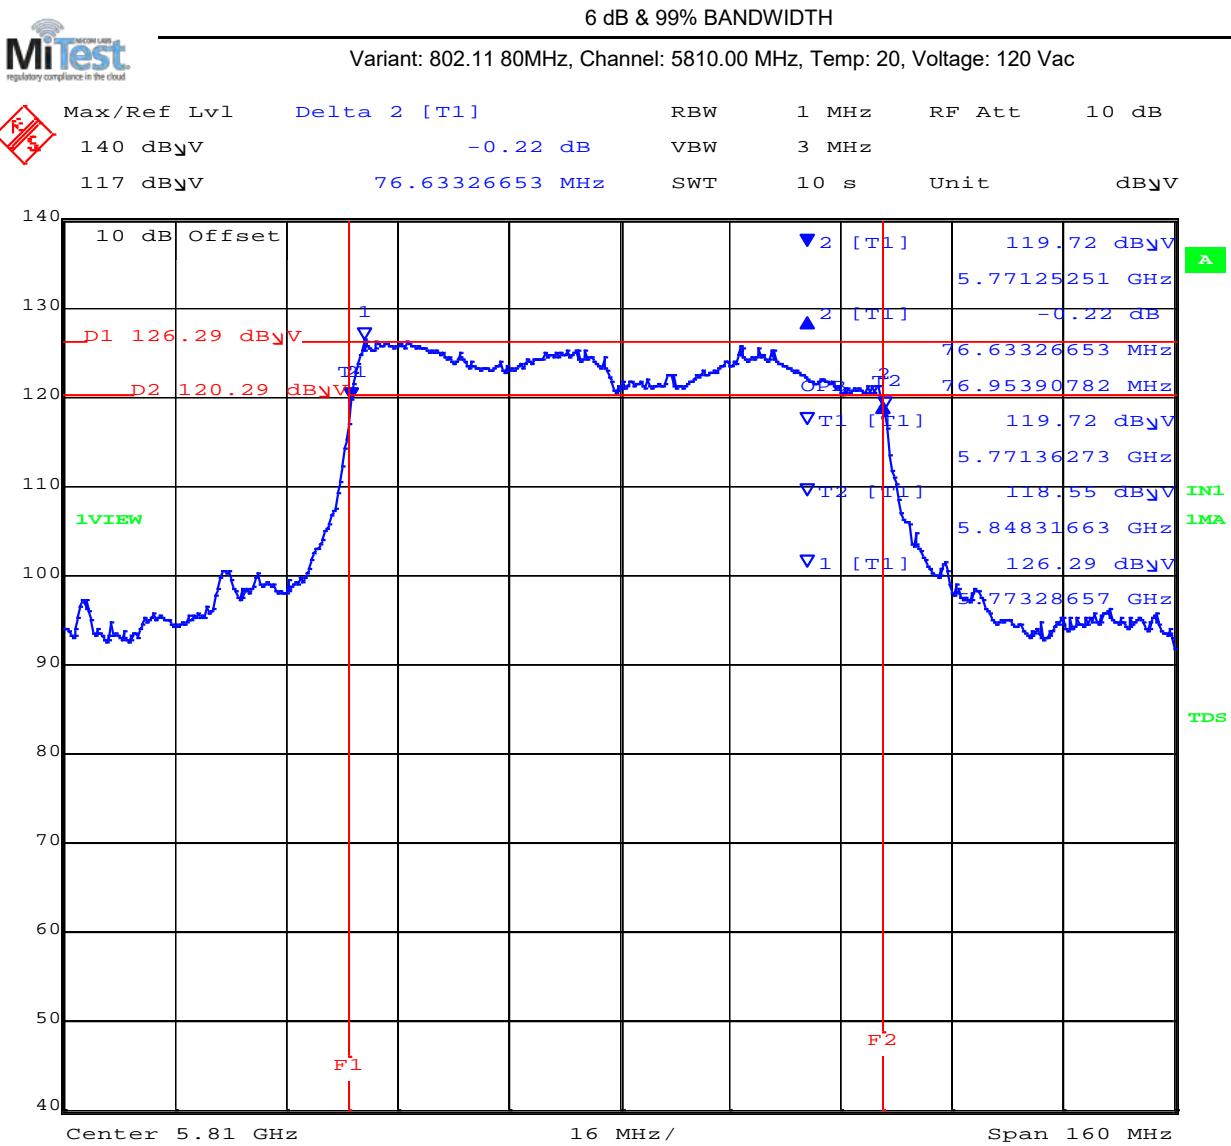


Analyzer Setup		
Marker:Frequency:Amplitude		
Test Results		
Detector = MAX PEAK	T1 : 5771.36273 MHz : 119.72 dBuV	Measured 6 dB Bandwidth: 76.63 MHz
Sweep Count = 0	T2 : 5848.31663 MHz : 118.55 dBuV	Measured 99% Bandwidth: 76.95 MHz
RF Atten (dB) = 0		
Trace Mode = MAX HOLD		

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.2. Power Spectral Density

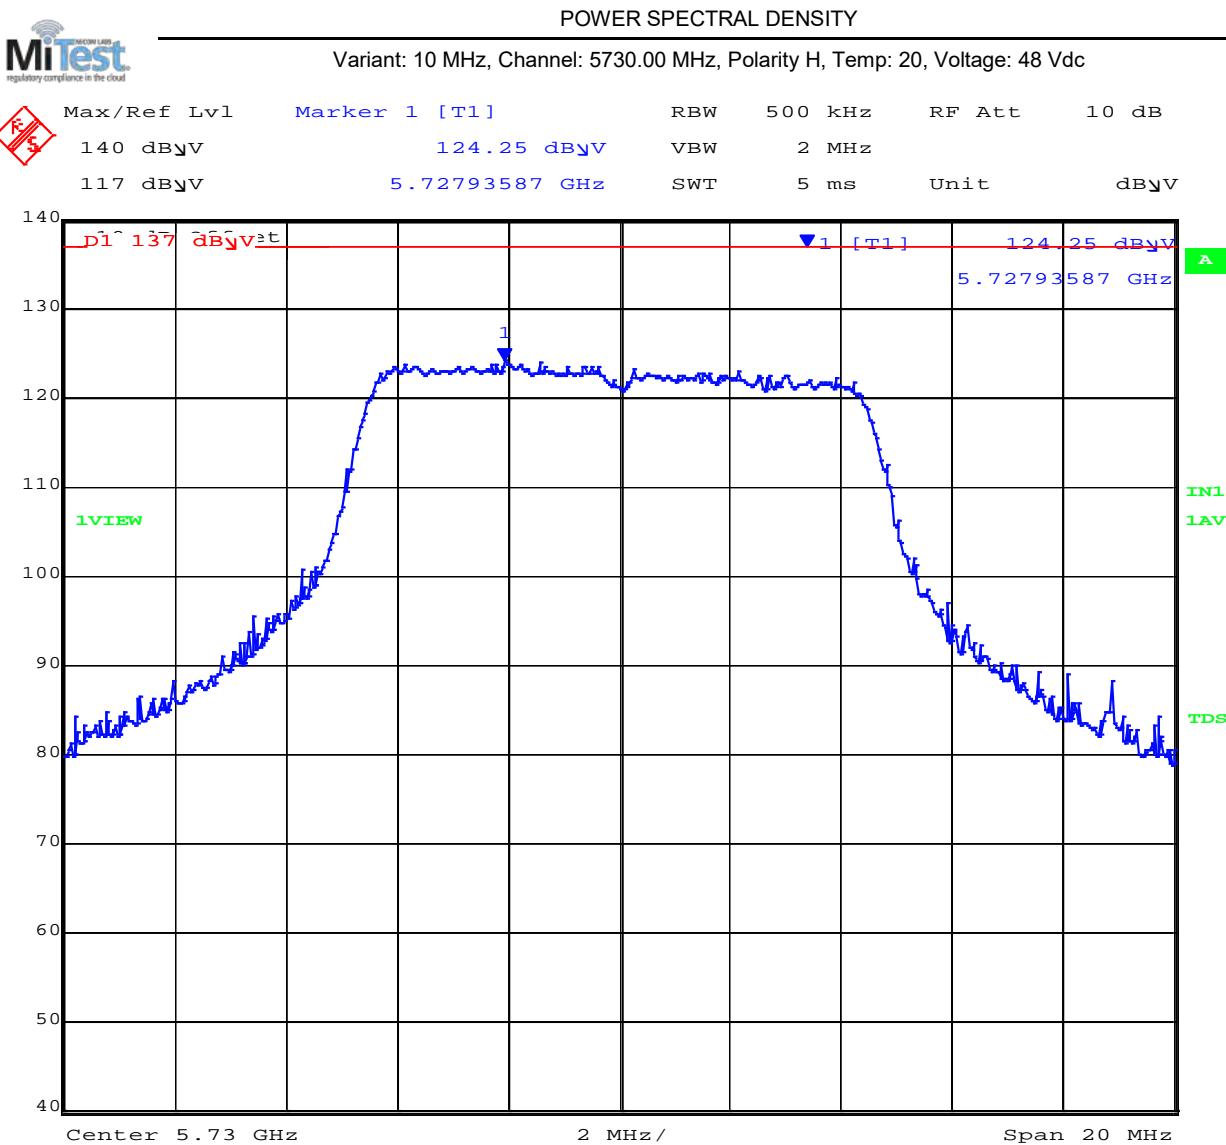

Date: 16.NOV.2017 15:47:18

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5727.934 MHz : 124.25 dB _{uV/m}	Limit: ≤ 30.00 dBm, 137 dB _{uV/m}


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 10 MHz, Channel: 5730.00 MHz, Polarity V Temp: 20, Voltage: 48 Vdc

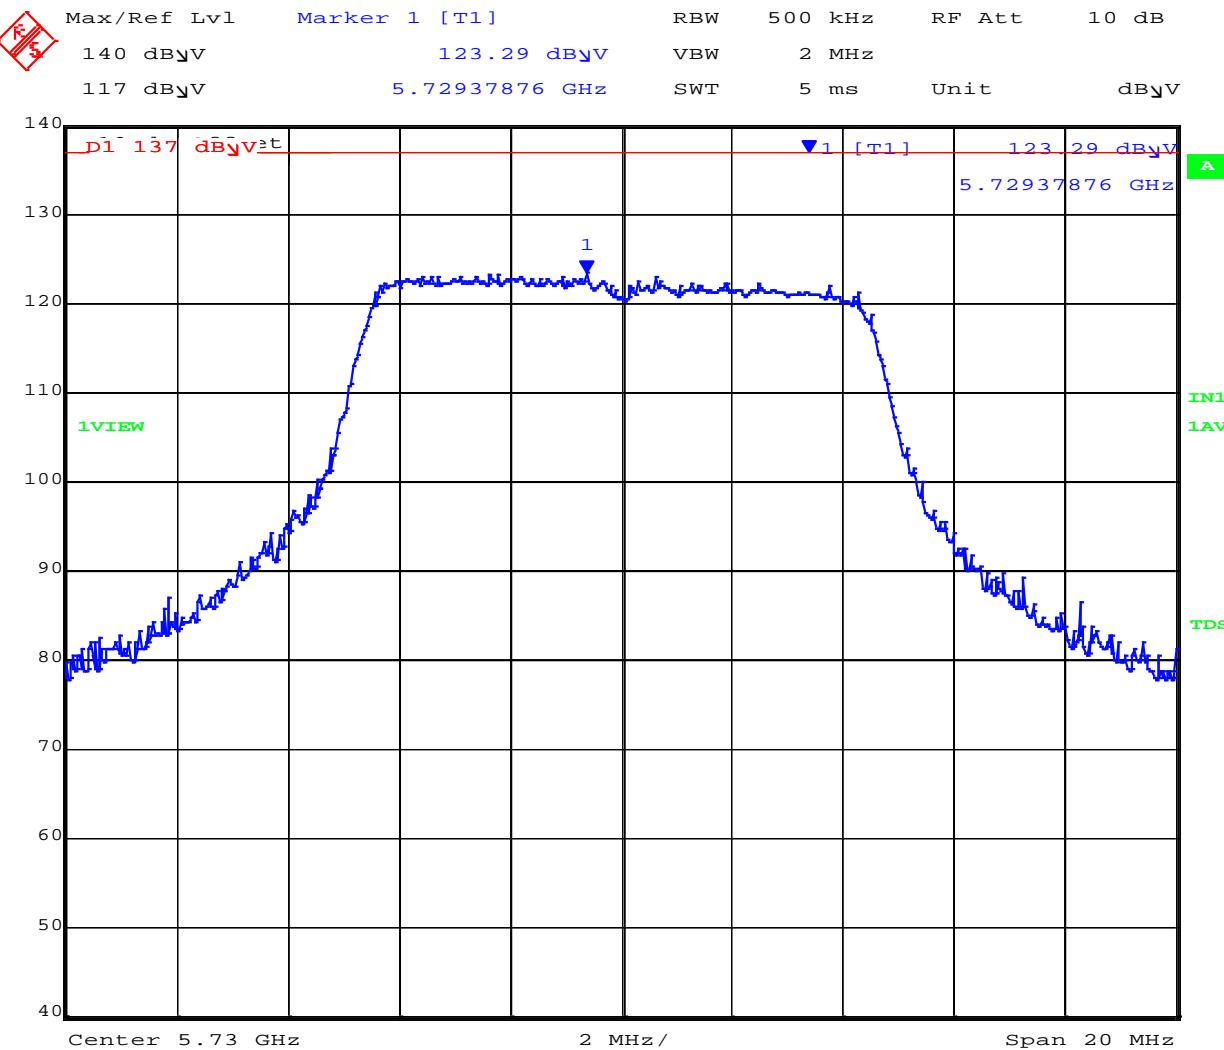


Date: 16.NOV.2017 15:53:06

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5729.38 MHz :123.29 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

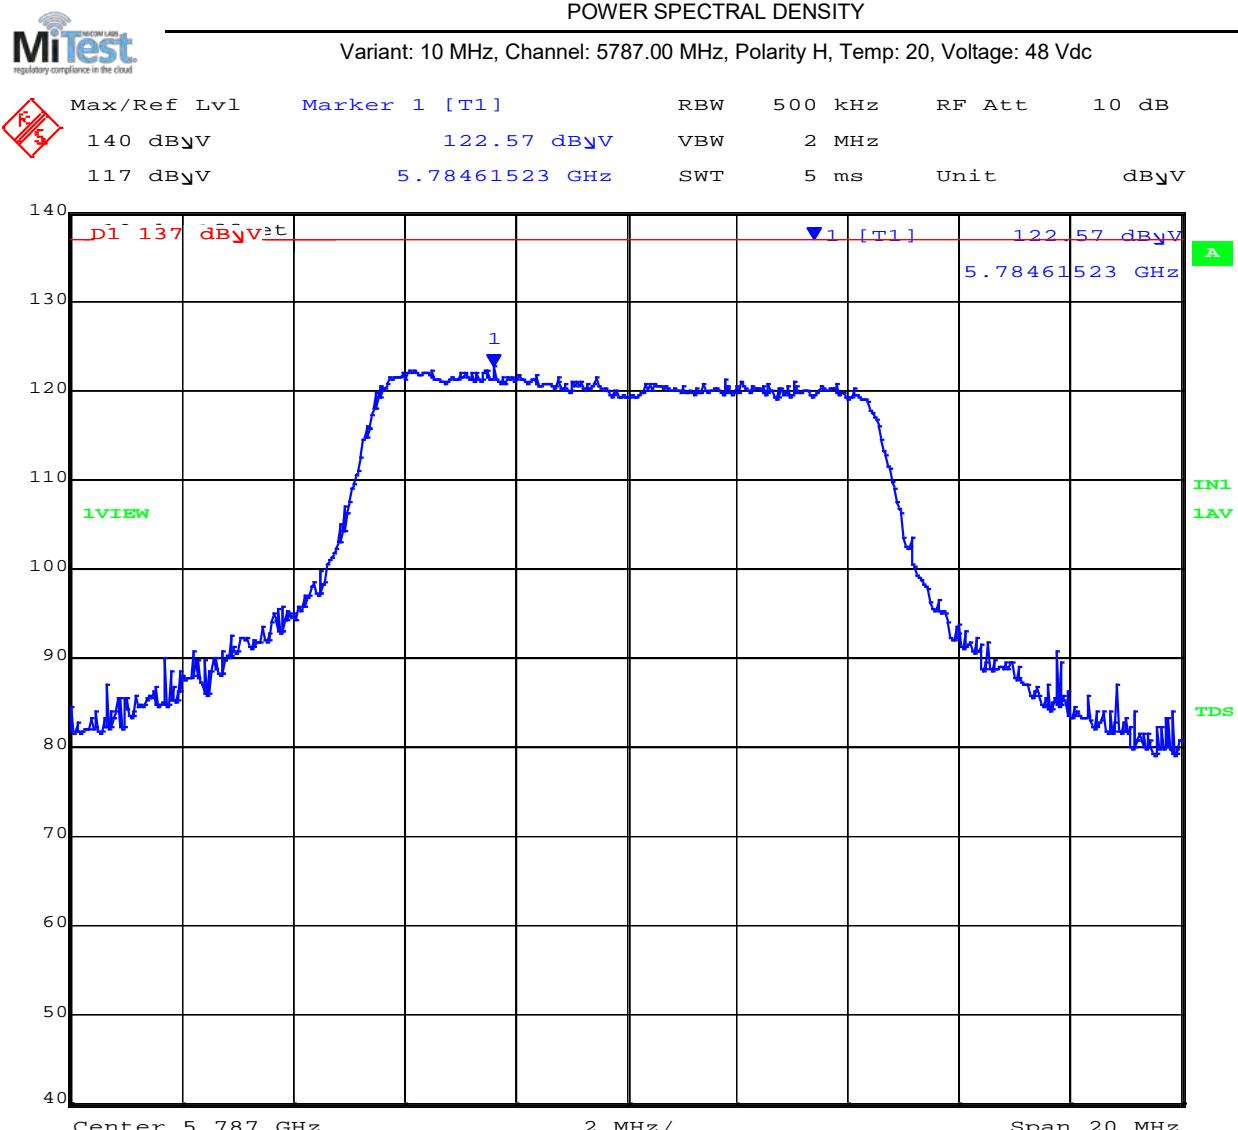


Date: 16.NOV.2017 15:56:11

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5784.62 MHz : 122.57 dB _{uV} /m	Limit: ≤ 30.00 dBm, 137 dB _{uV} m

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

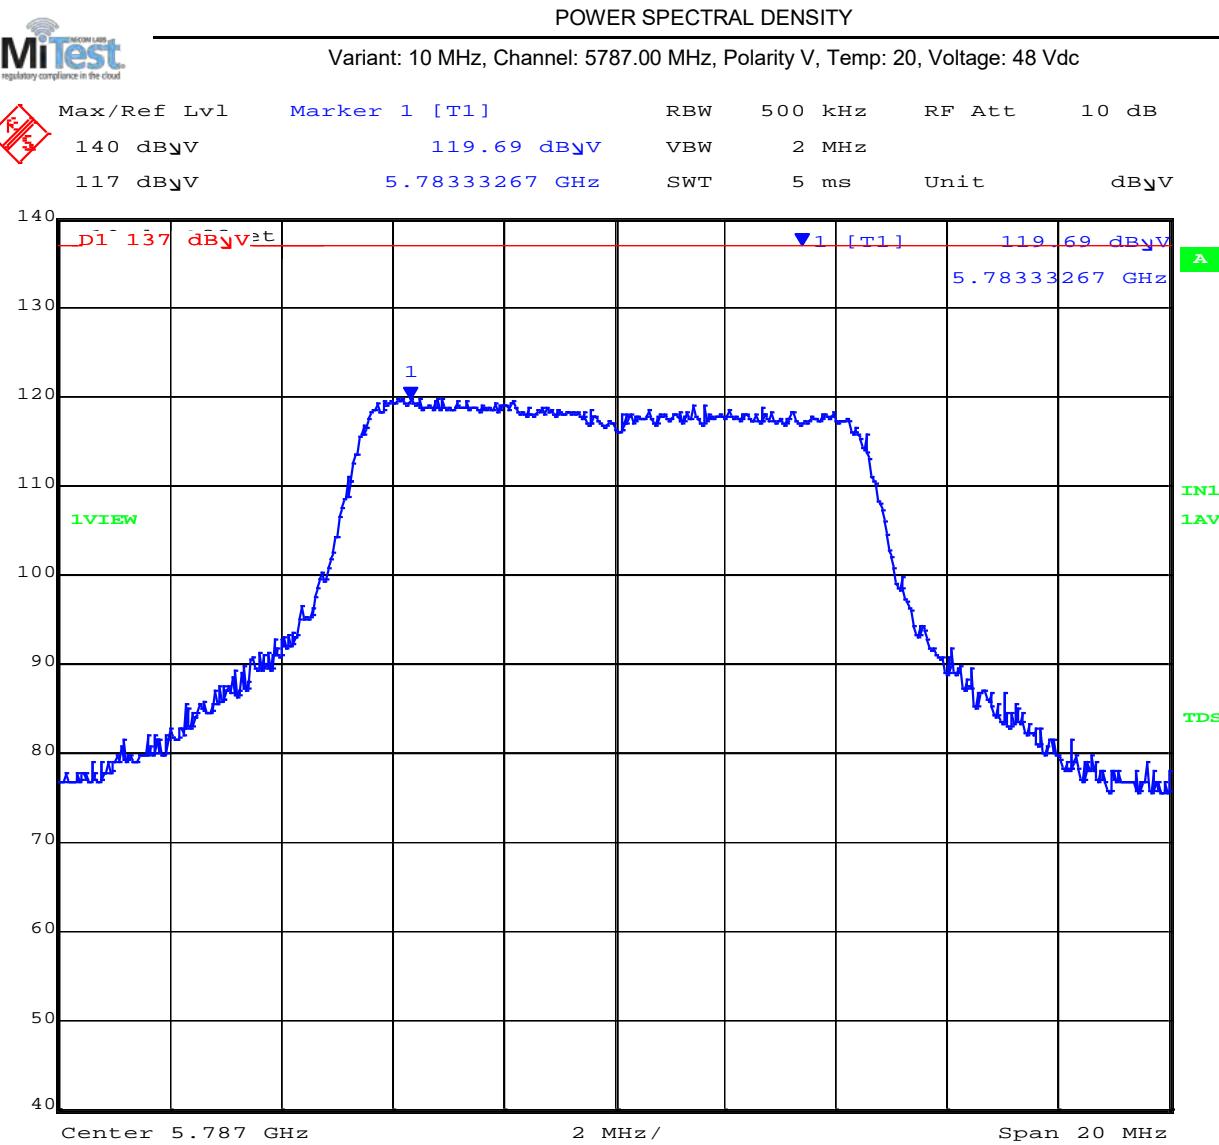

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5783.33 MHz : 119.69 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

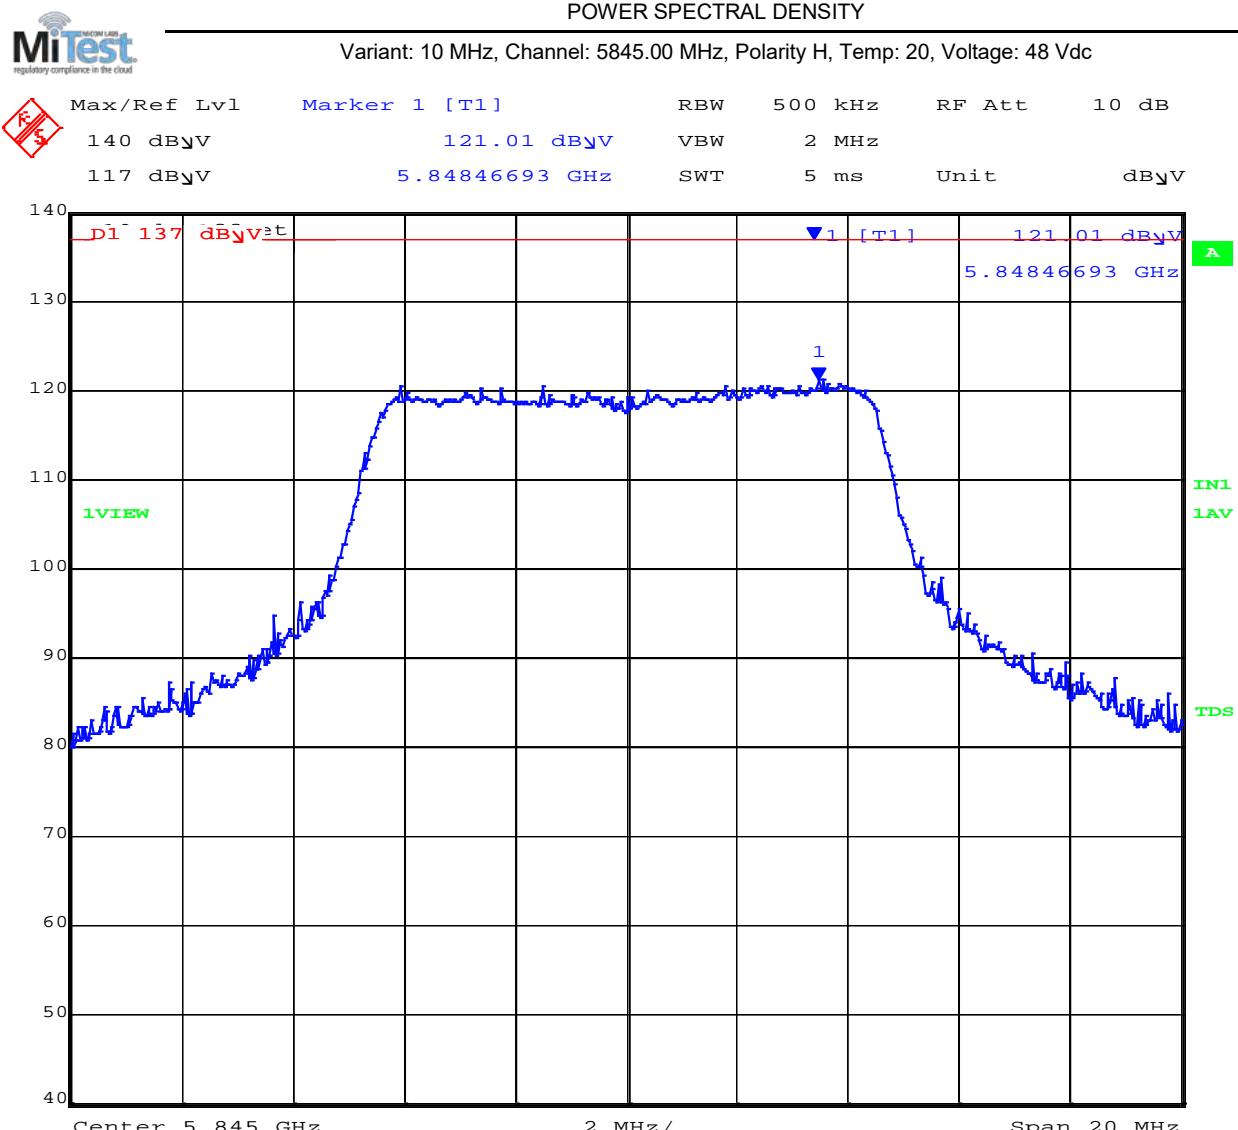

Date: 16.NOV.2017 15:58:35

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5848.47 MHz : 121.01 dB _u V/m	Limit: ≤ 30.00 dBm, 137 dB _u Vm


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 10 MHz, Channel: 5845.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

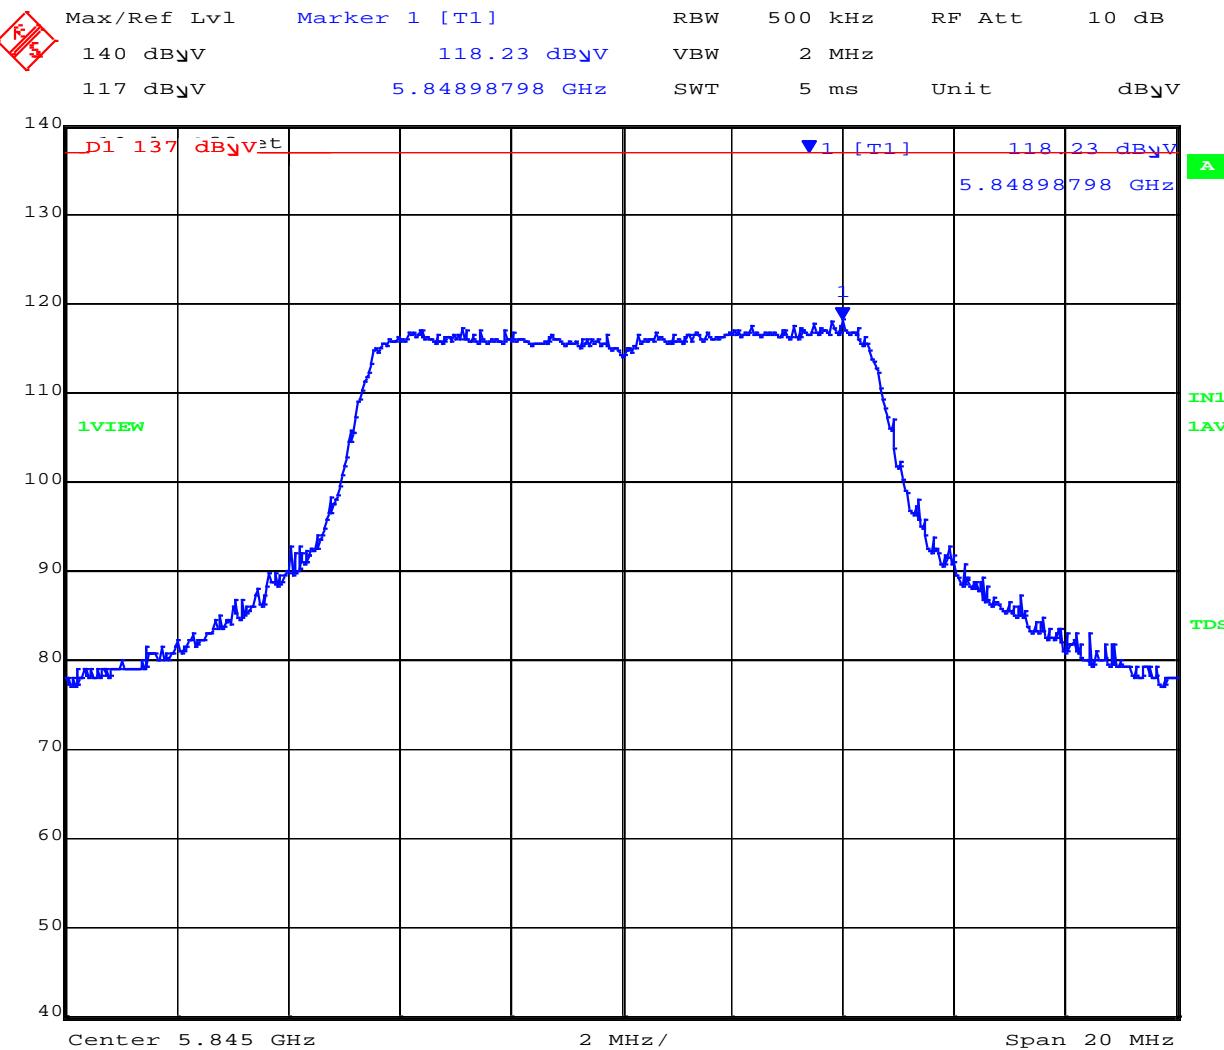


Date: 16.NOV.2017 15:59:29

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5848.99 MHz : 118.23 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

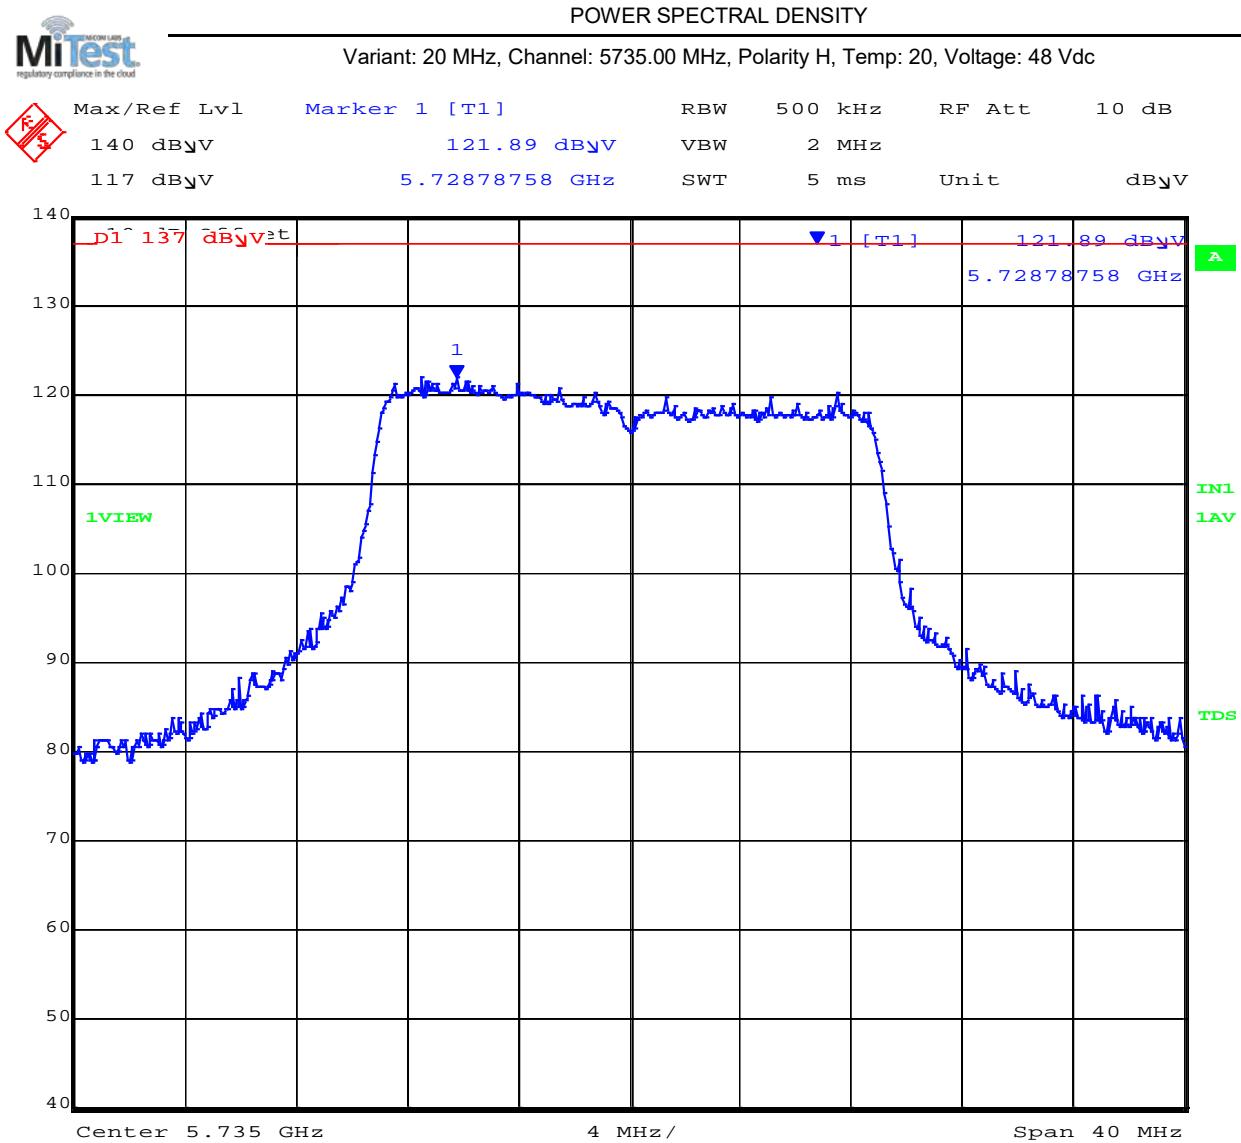


Date: 16.NOV.2017 16:01:43

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5728.79 MHz : 121.89 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

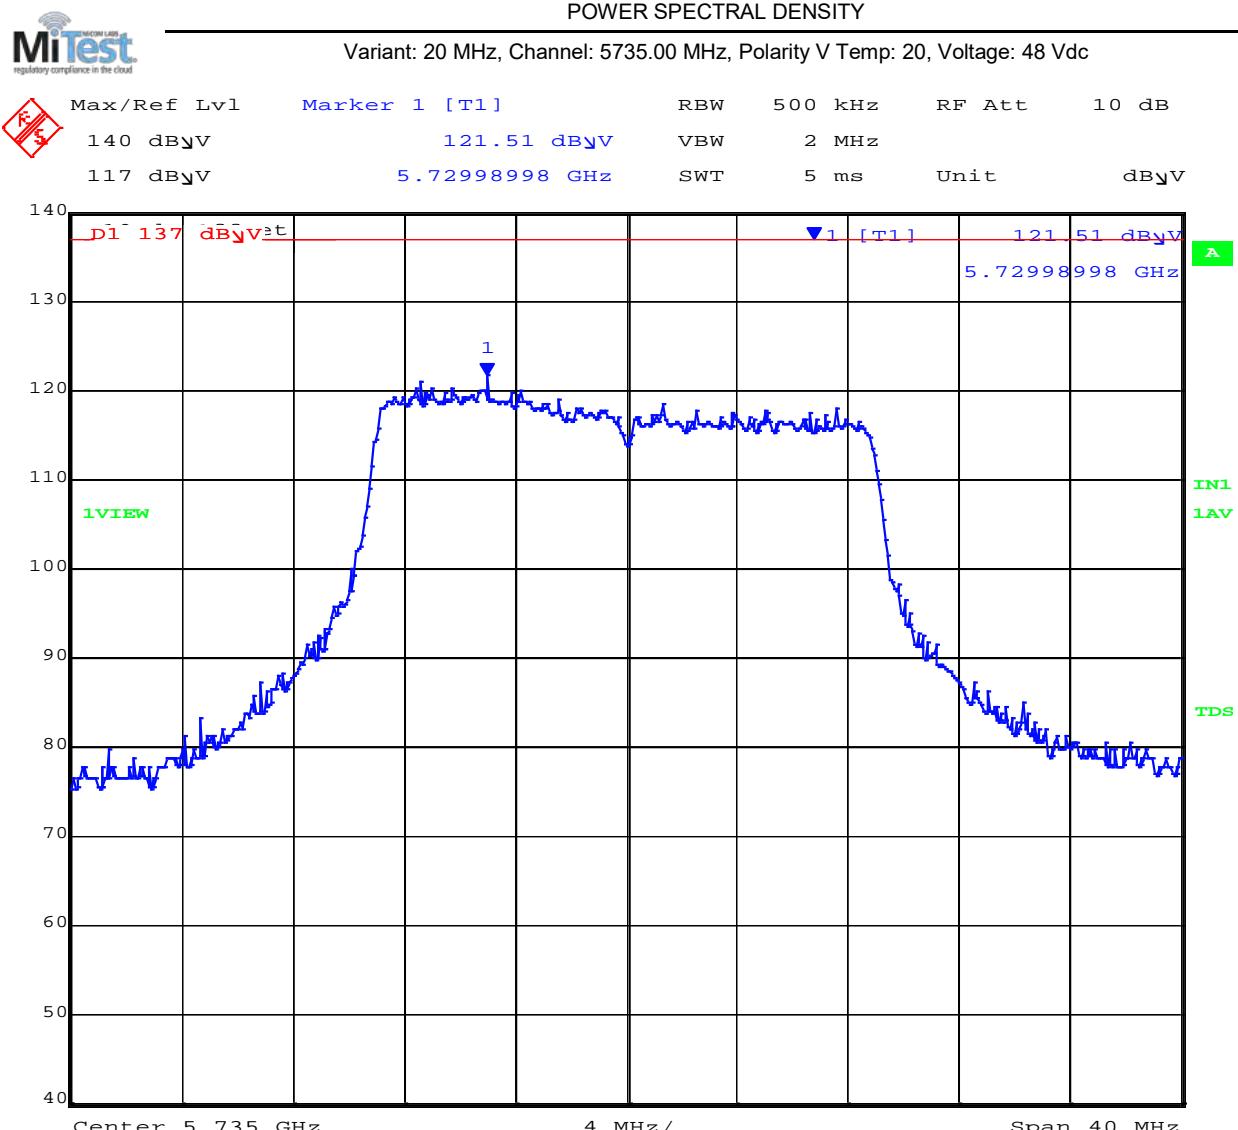

Date: 16.NOV.2017 16:03:03

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5729.99 MHz :121.51 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 20 MHz, Channel: 5787.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

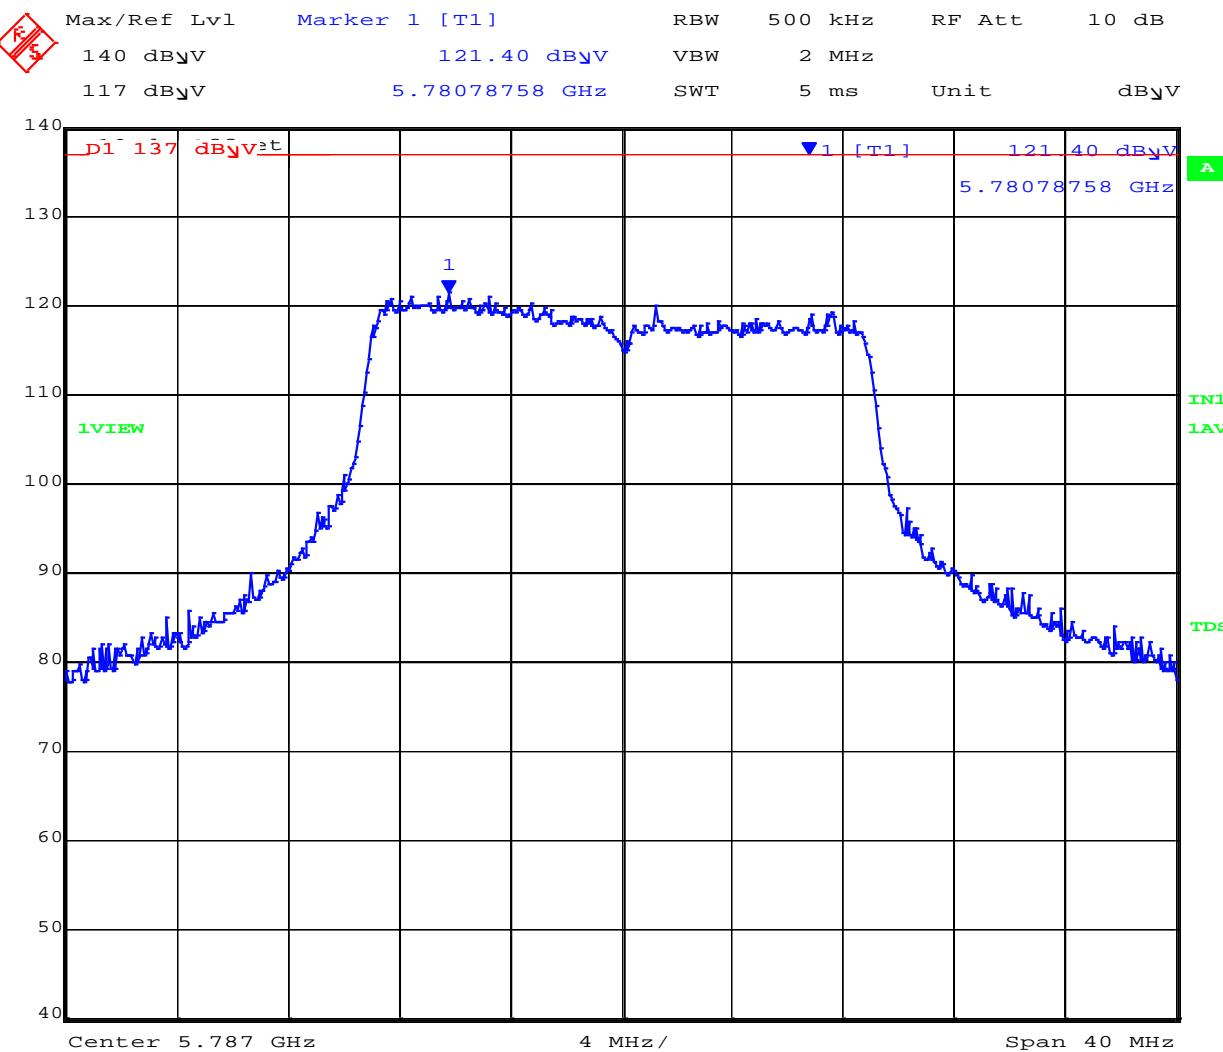

Date: 16.NOV.2017 16:05:27

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5780.79 MHz : 121.40 dB _{uV} /m	Limit: ≤ 30.00 dBm, 137 dB _{uV} m


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 20 MHz, Channel: 5787.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

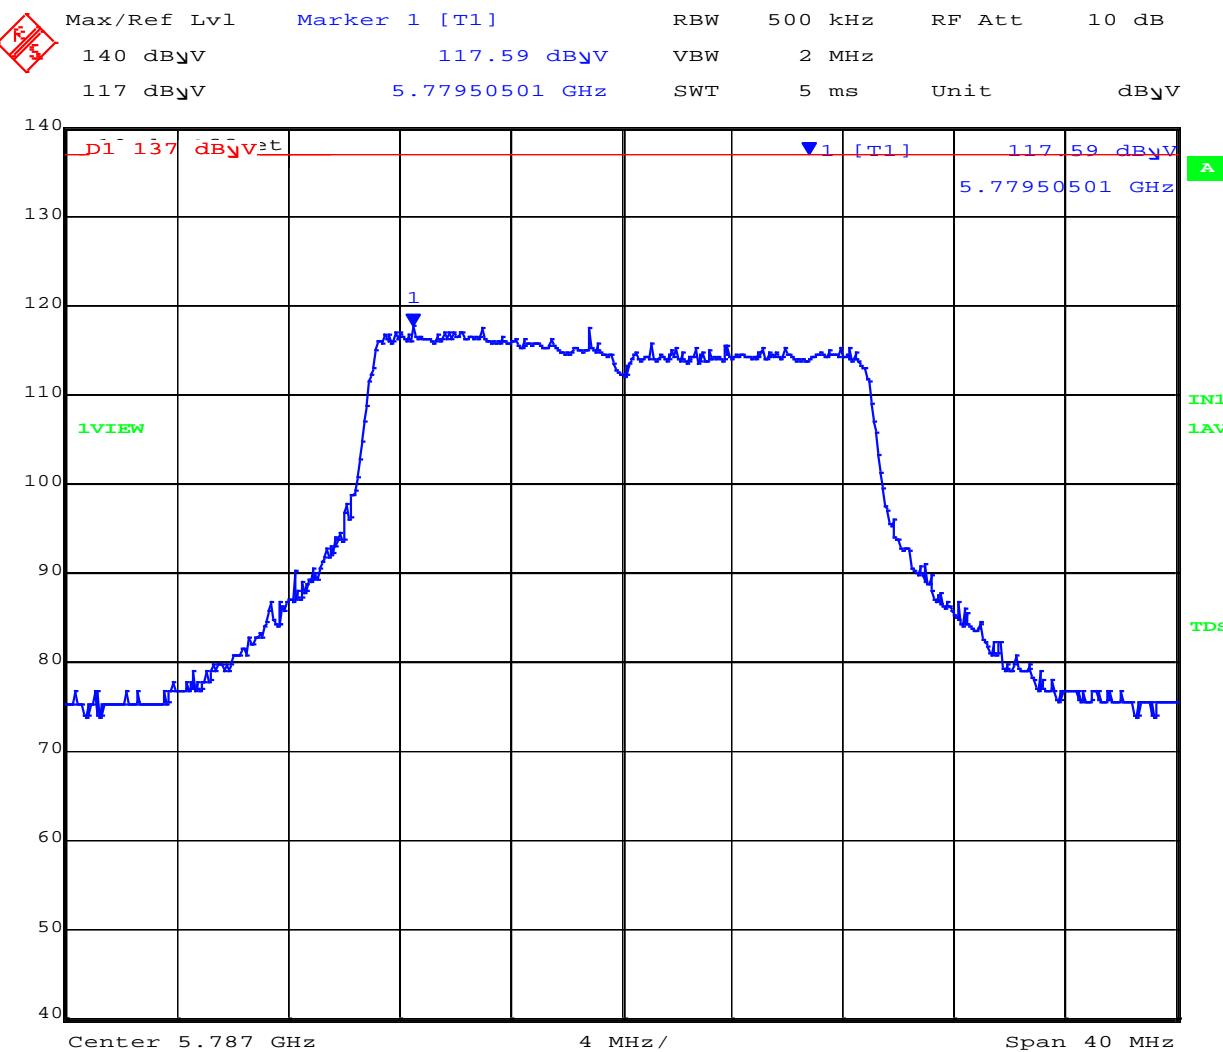

Date: 16.NOV.2017 16:04:51

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5779.51 MHz : 117.59 dB _V /m	Limit: ≤ 30.00 dBm, 137 dB _V m


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 20 MHz, Channel: 5840.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

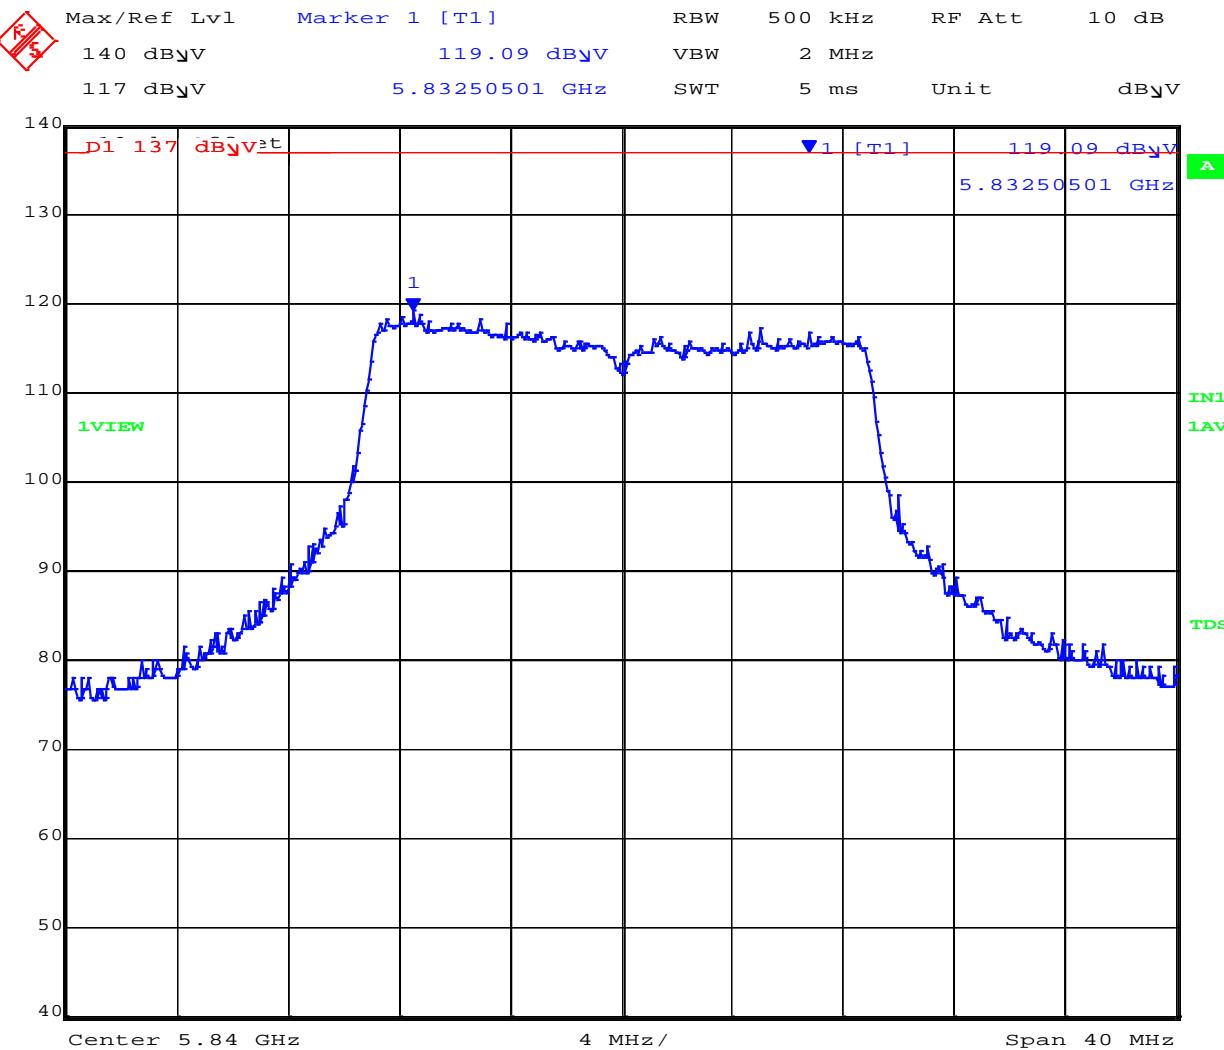

Date: 16.NOV.2017 16:06:24

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5832.51 MHz : 119.09 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 20 MHz, Channel: 5840.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

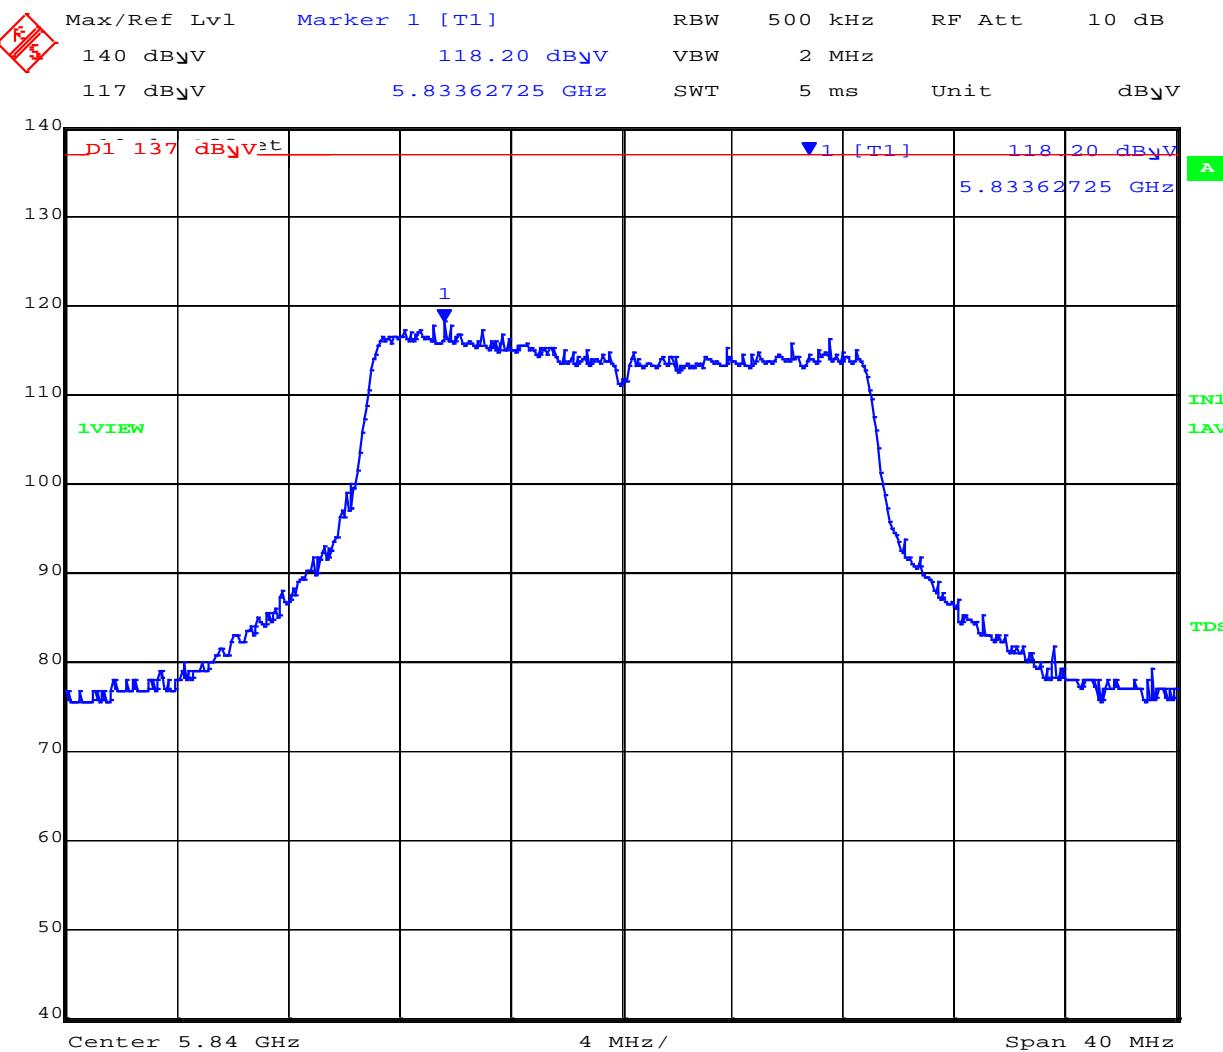


Date: 16.NOV.2017 16:07:07

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5833.63 MHz : 118.20 dB _u V/m	Limit: ≤ 30.00 dBm, 137 dB _u Vm


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

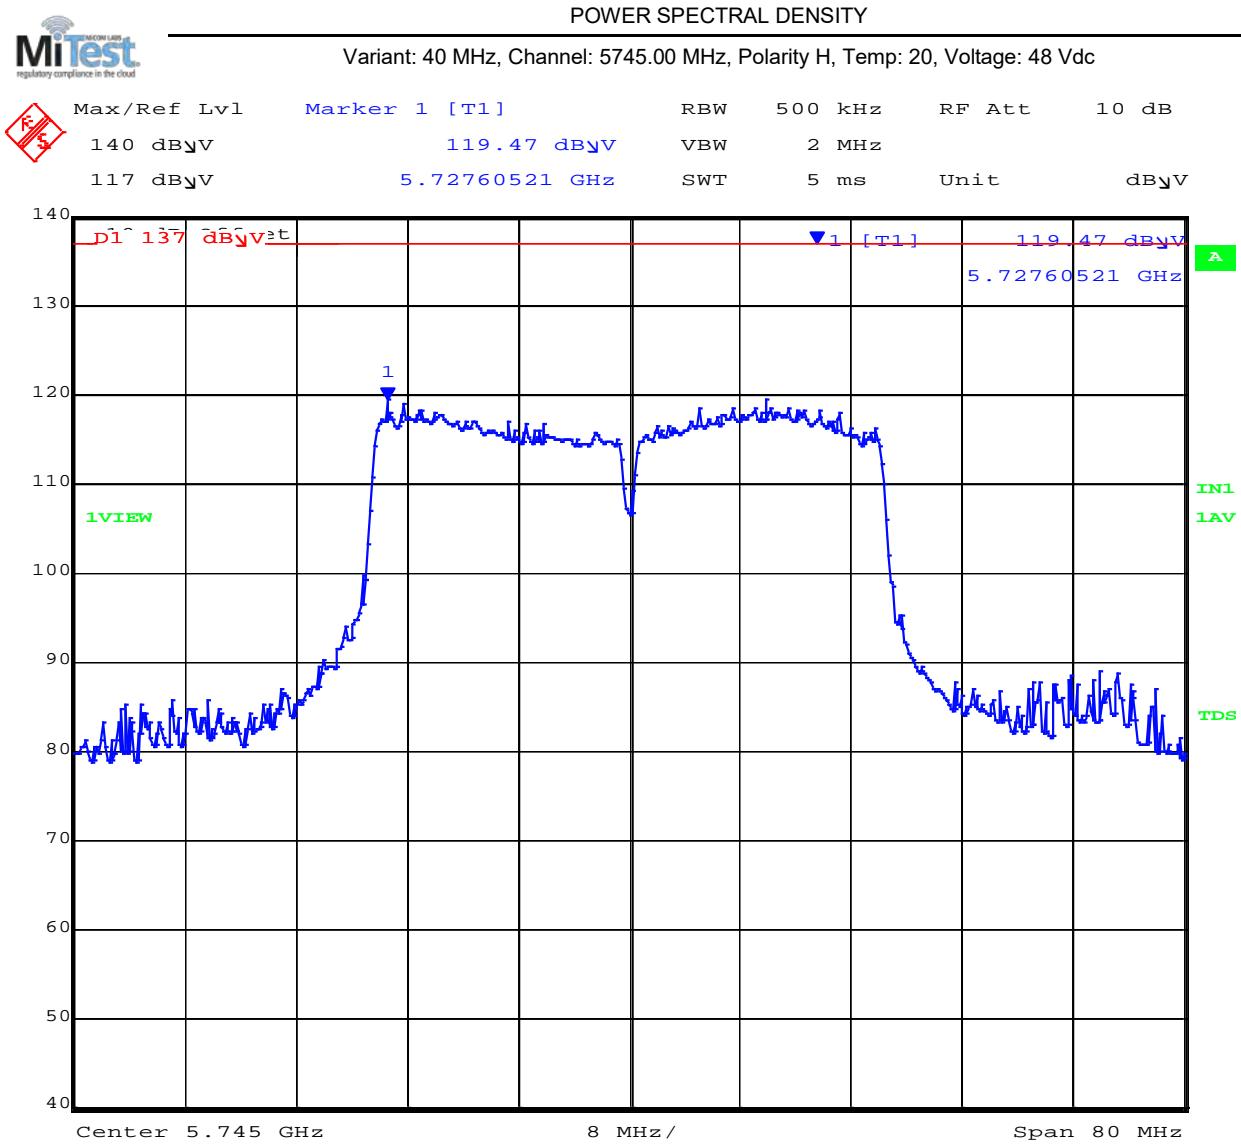

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

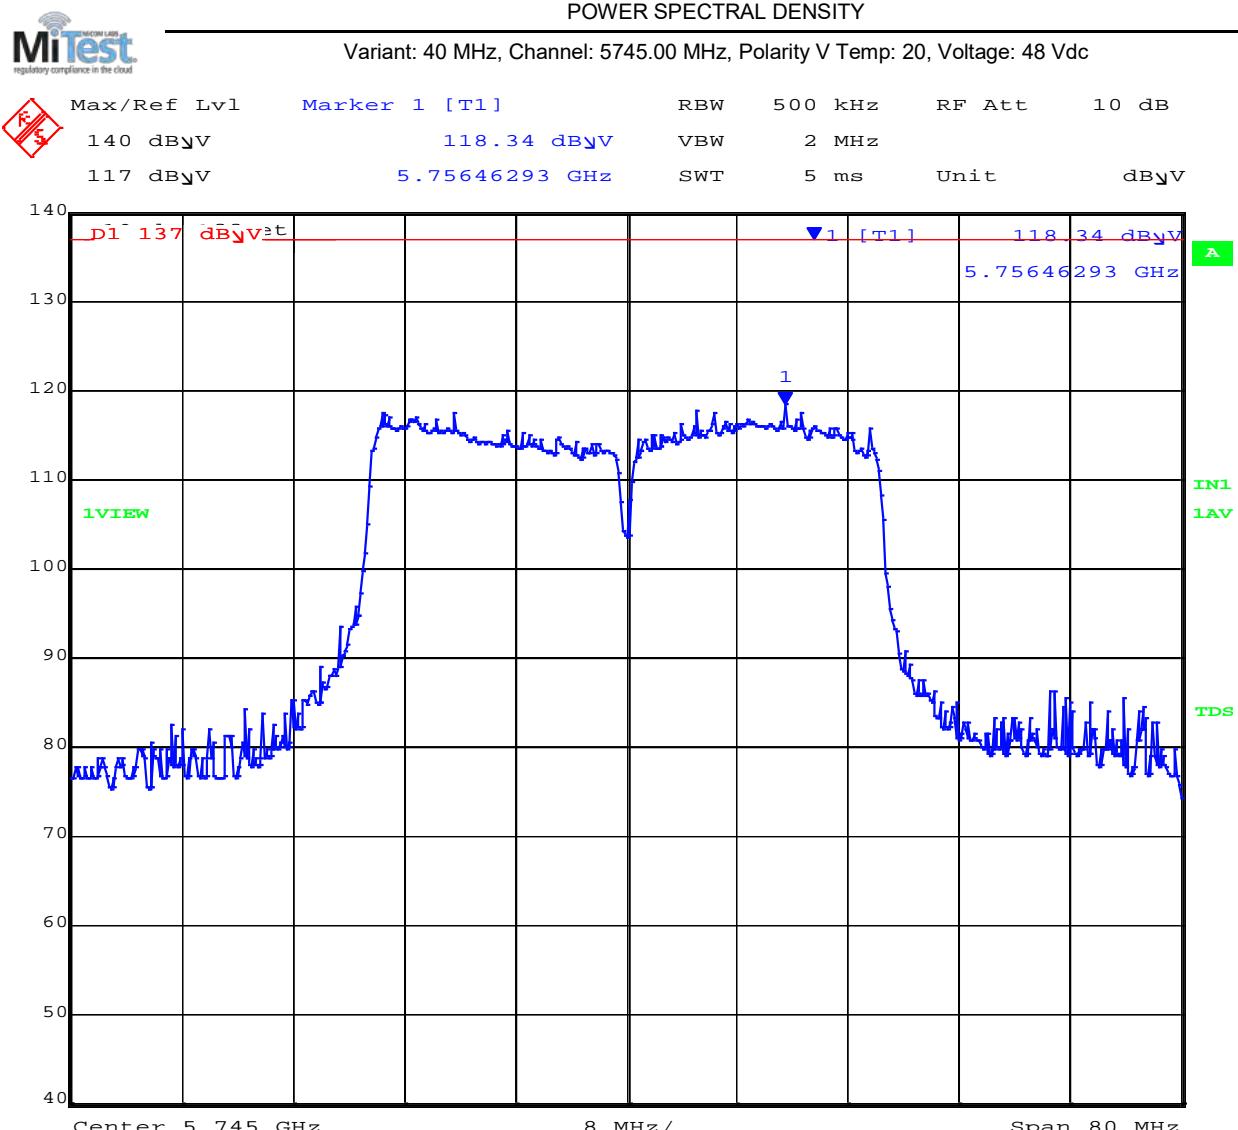


Date: 16.NOV.2017 16:07:54

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5756.46 MHz :118.34 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

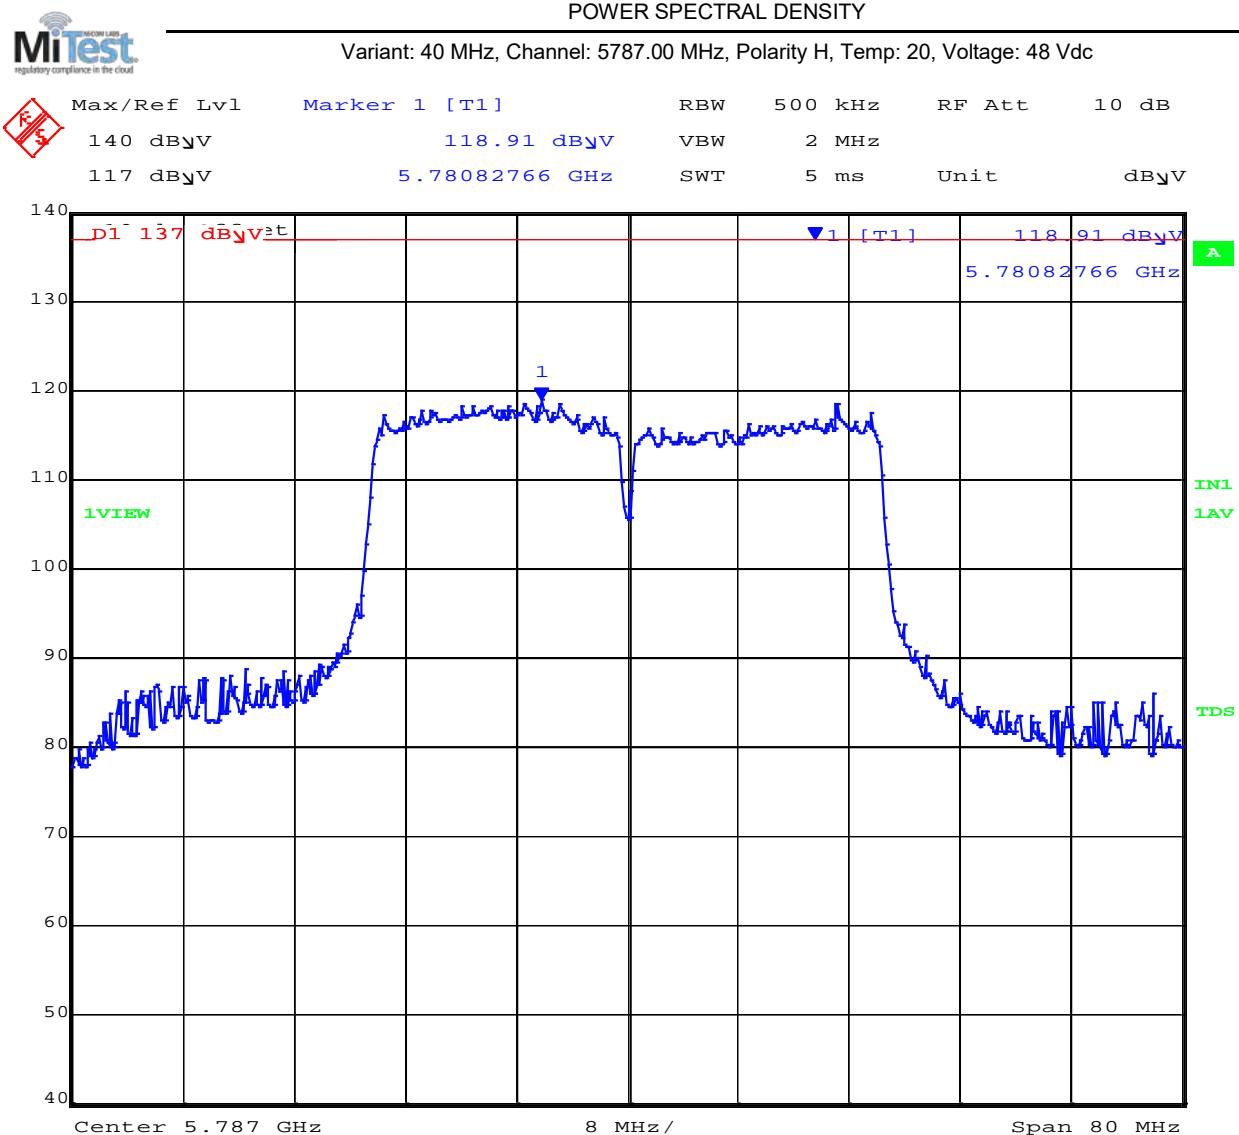

Date: 16.NOV.2017 16:10:25

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5780.91 MHz : 118.91 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 40 MHz, Channel: 5787.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

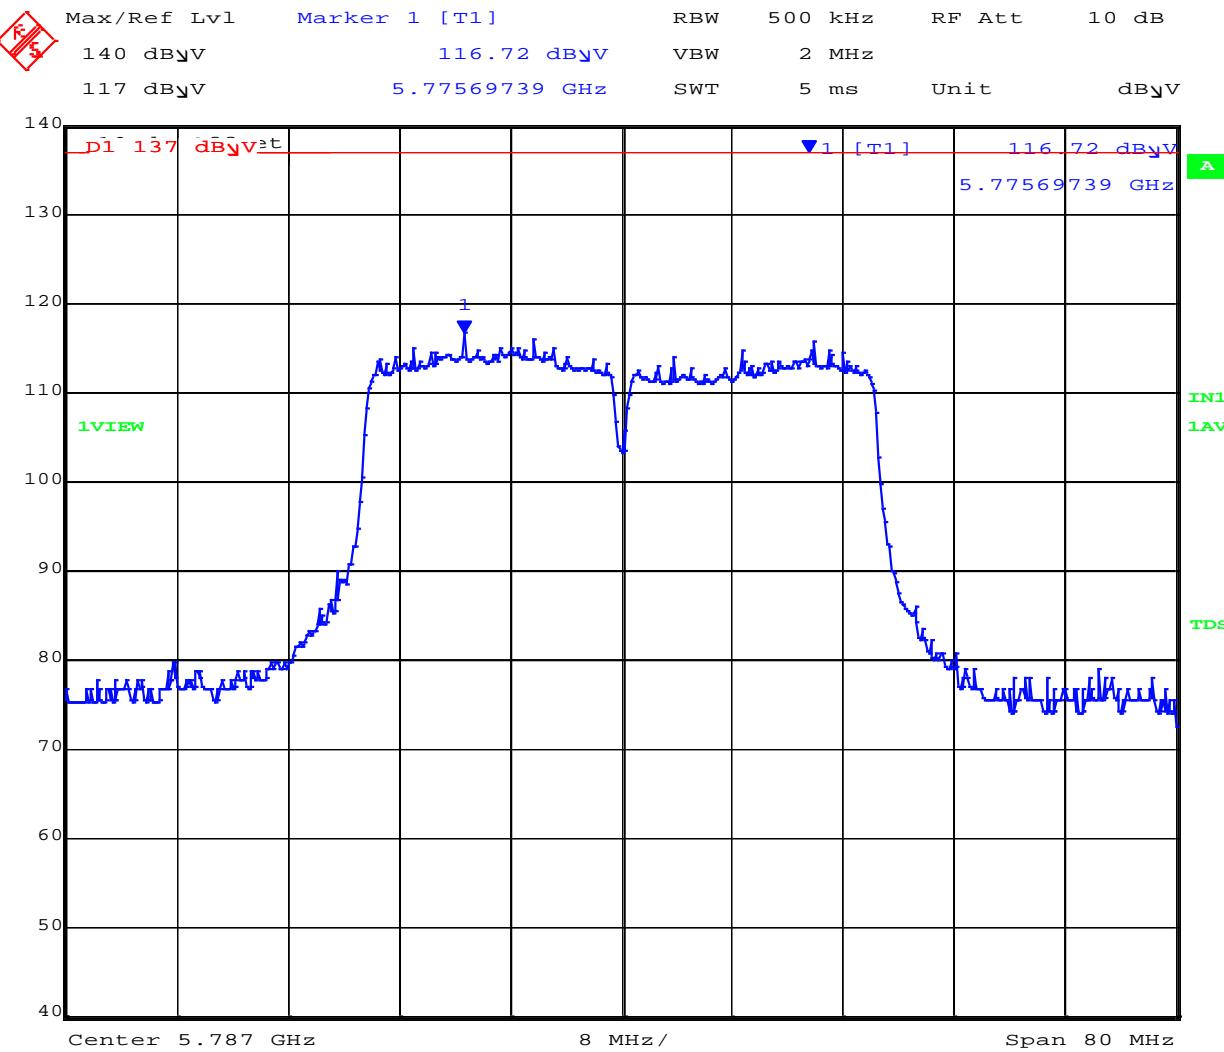


Date: 16.NOV.2017 16:11:08

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5775.70 MHz : 116.72 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

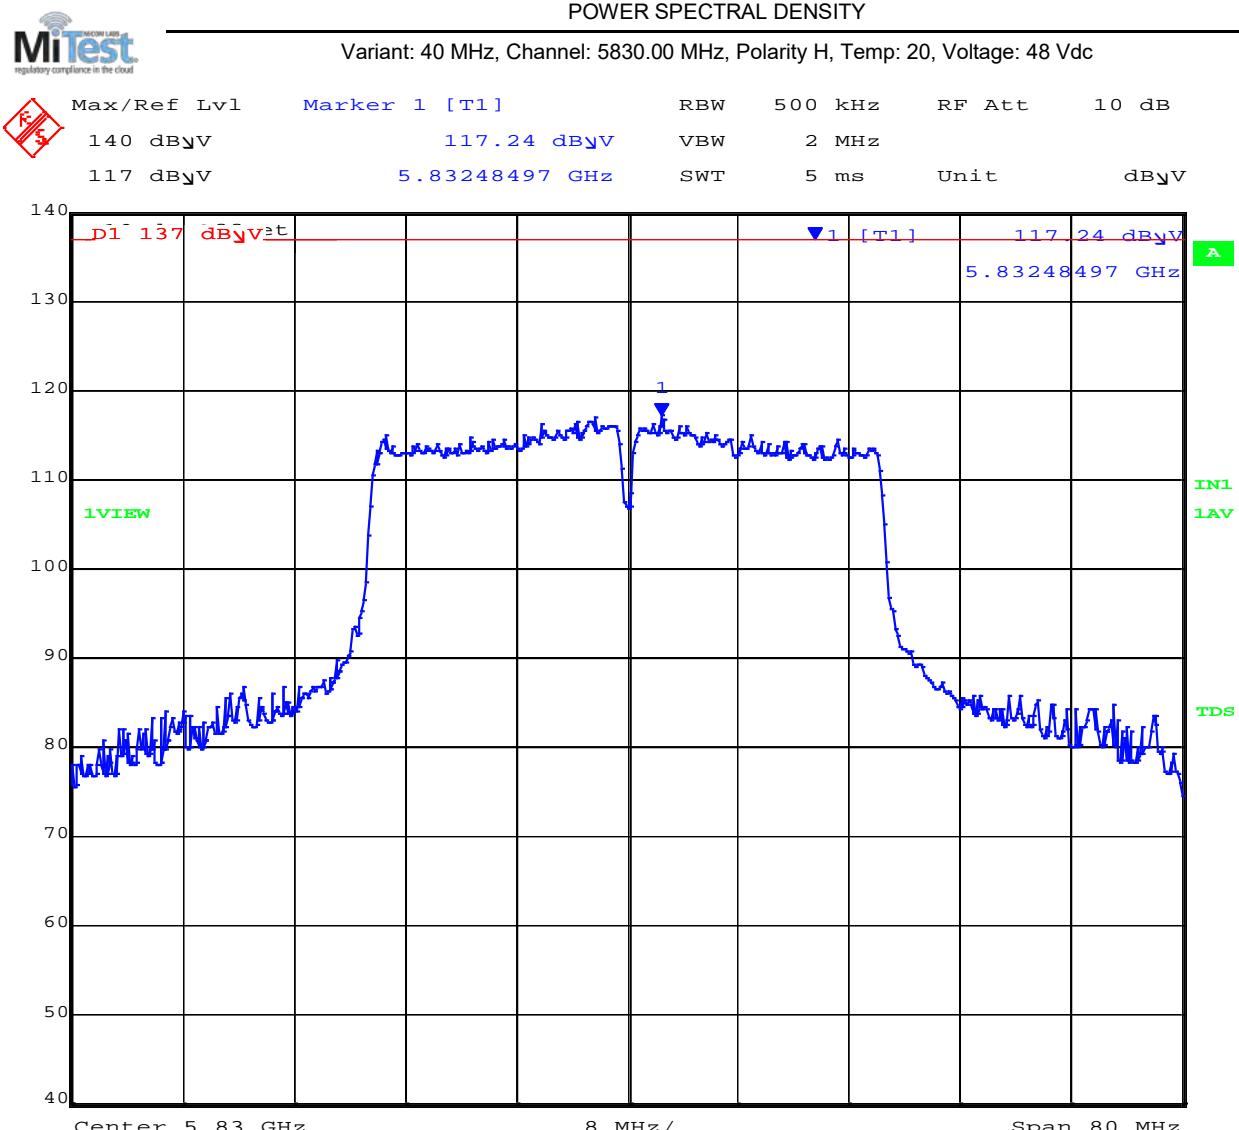


Date: 16.NOV.2017 16:12:50

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5832.48 MHz : 117.24 dB _u V/m	Limit: ≤ 30.00 dBm, 137 dB _u Vm

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

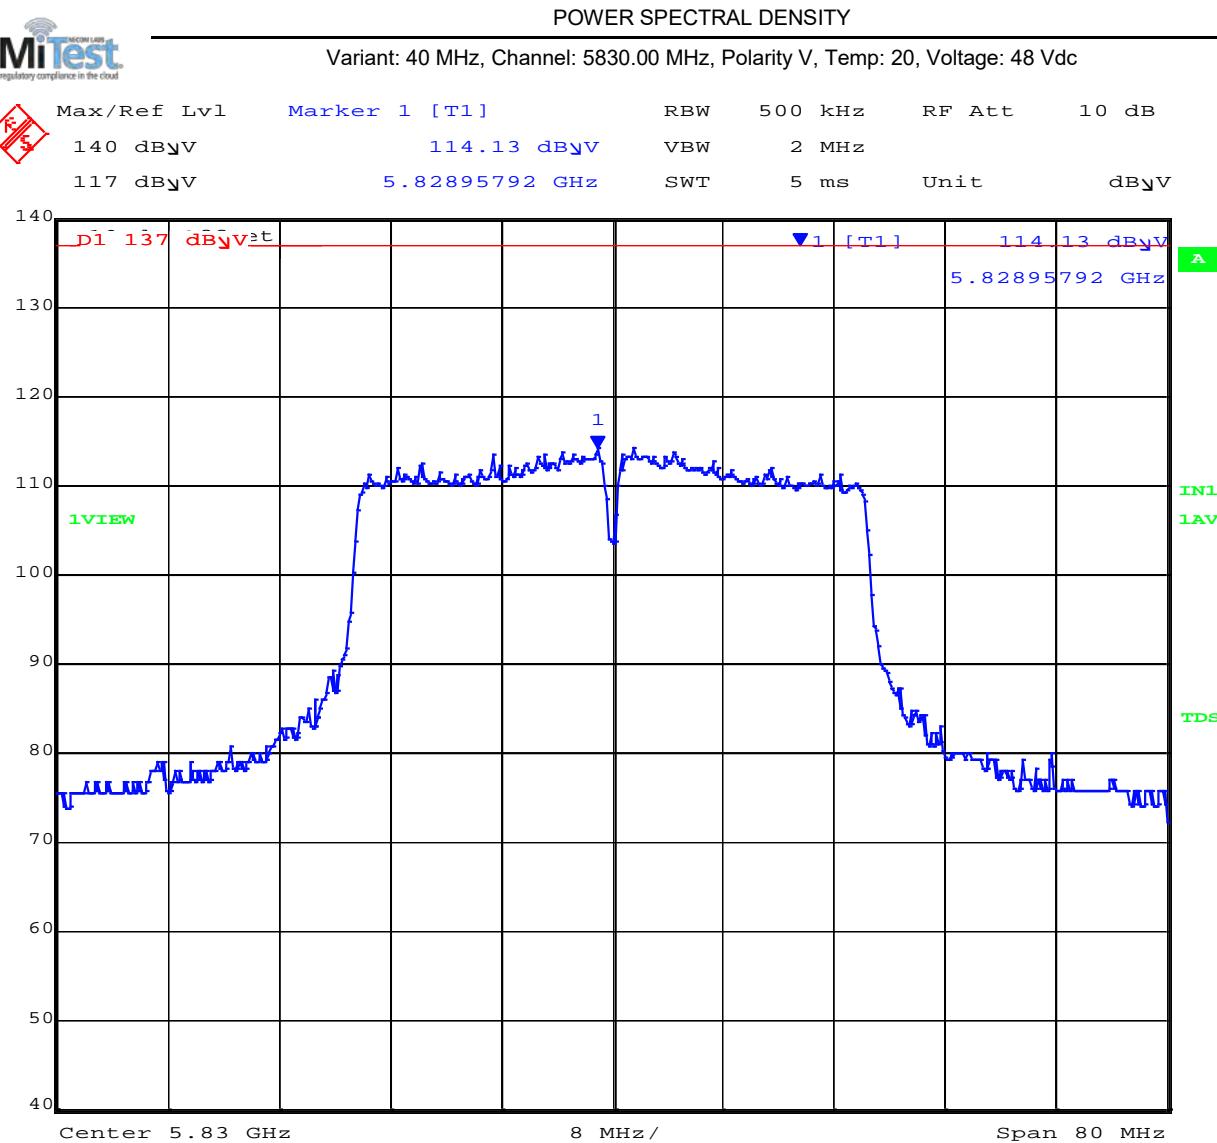

Analyzer Setup		Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW		M1 : 5828.96 MHz : 114.13 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

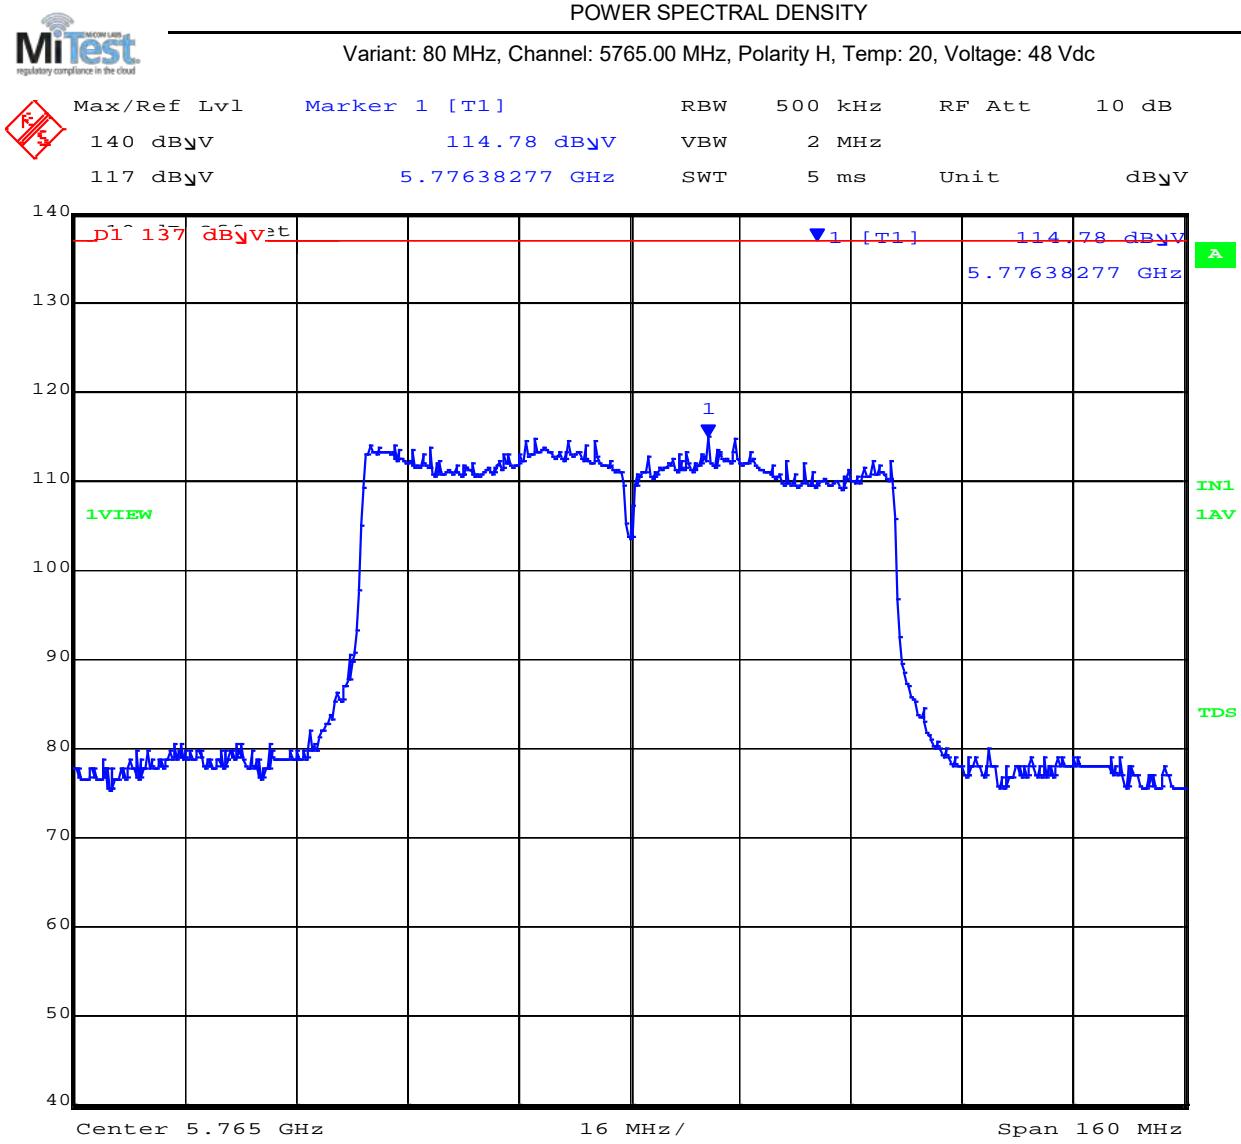

Date: 16.NOV.2017 16:13:43

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5776.38 MHz : 114.78 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 80 MHz, Channel: 5765.00 MHz, Polarity V Temp: 20, Voltage: 48 Vdc

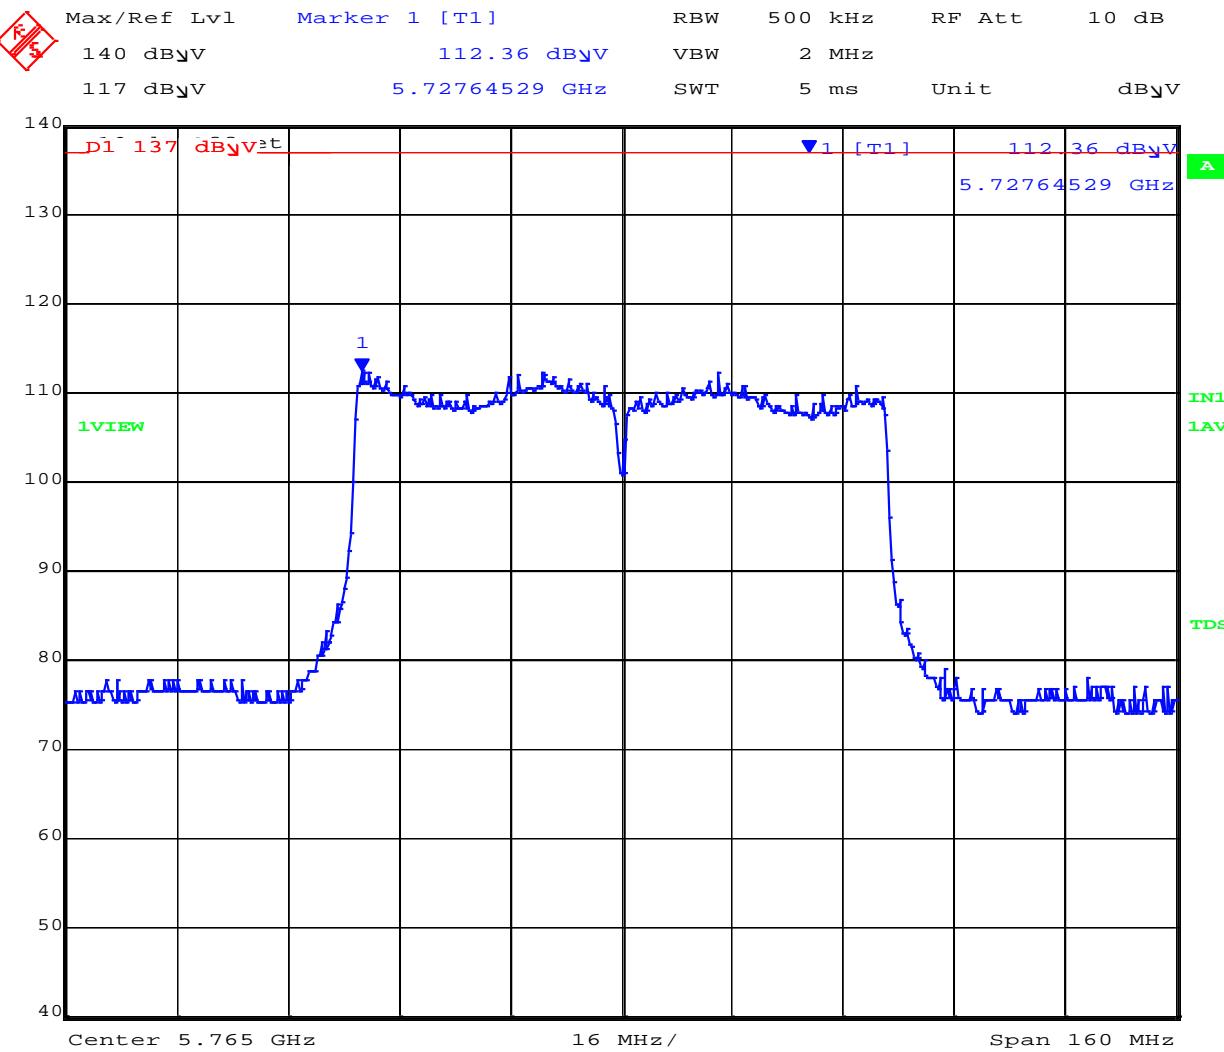


Date: 16.NOV.2017 16:14:26

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5727.65 MHz : 112.36 dB _{uV} /m	Limit: ≤ 30.00 dBm, 137 dB _{uV} m


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

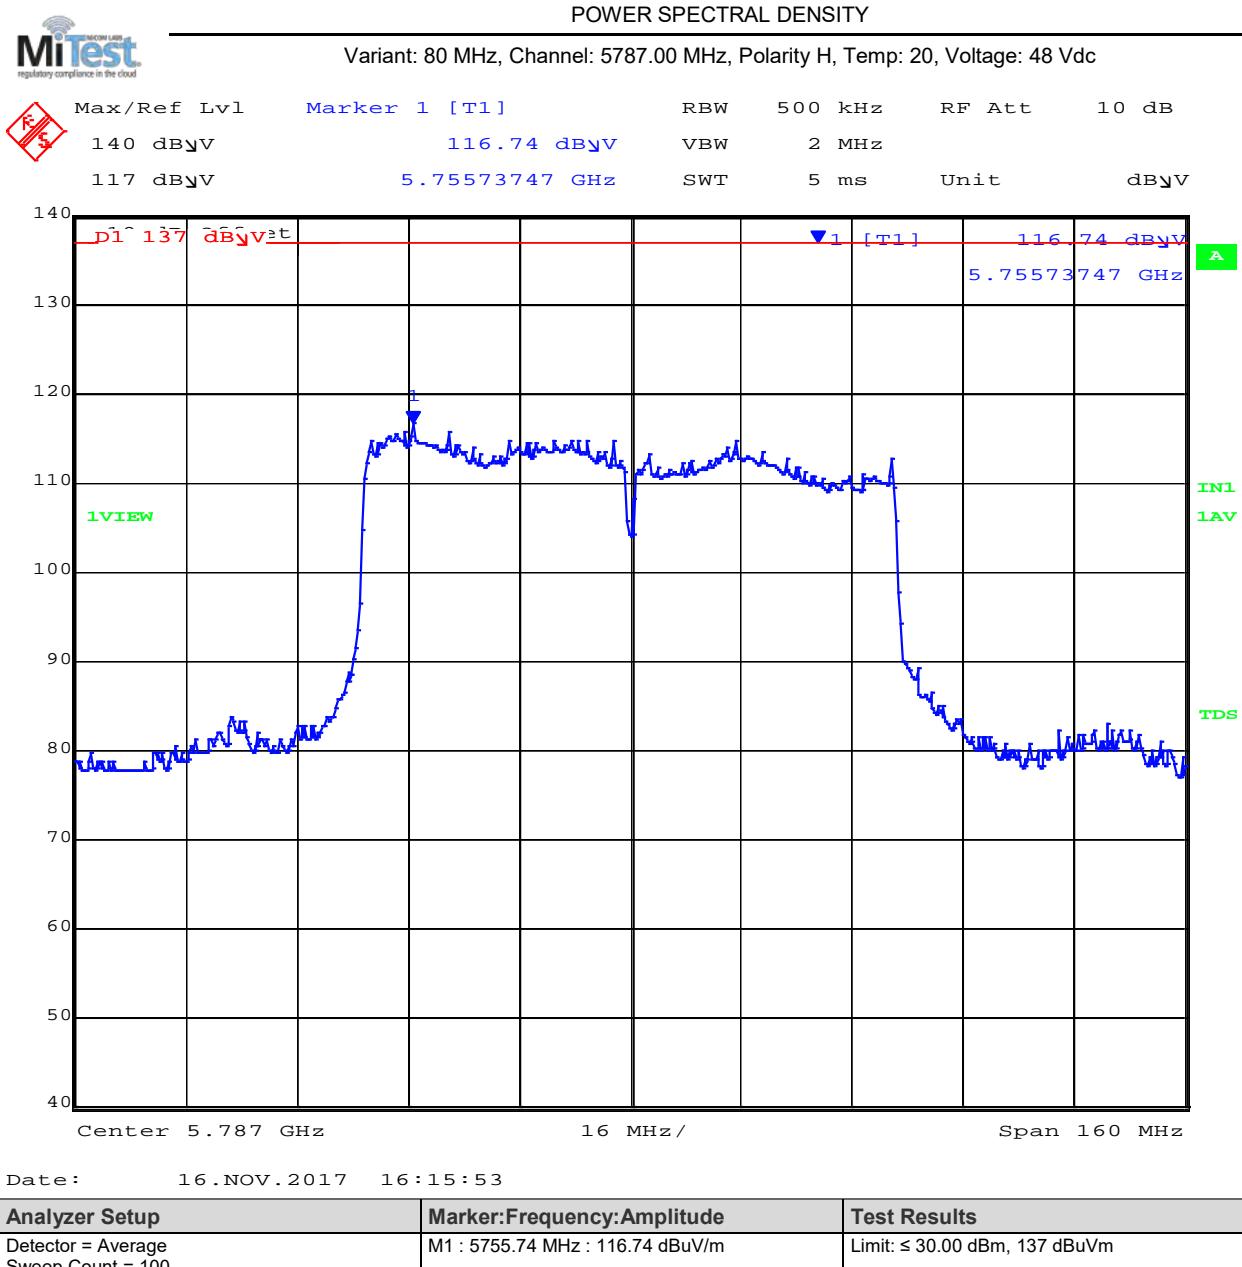


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

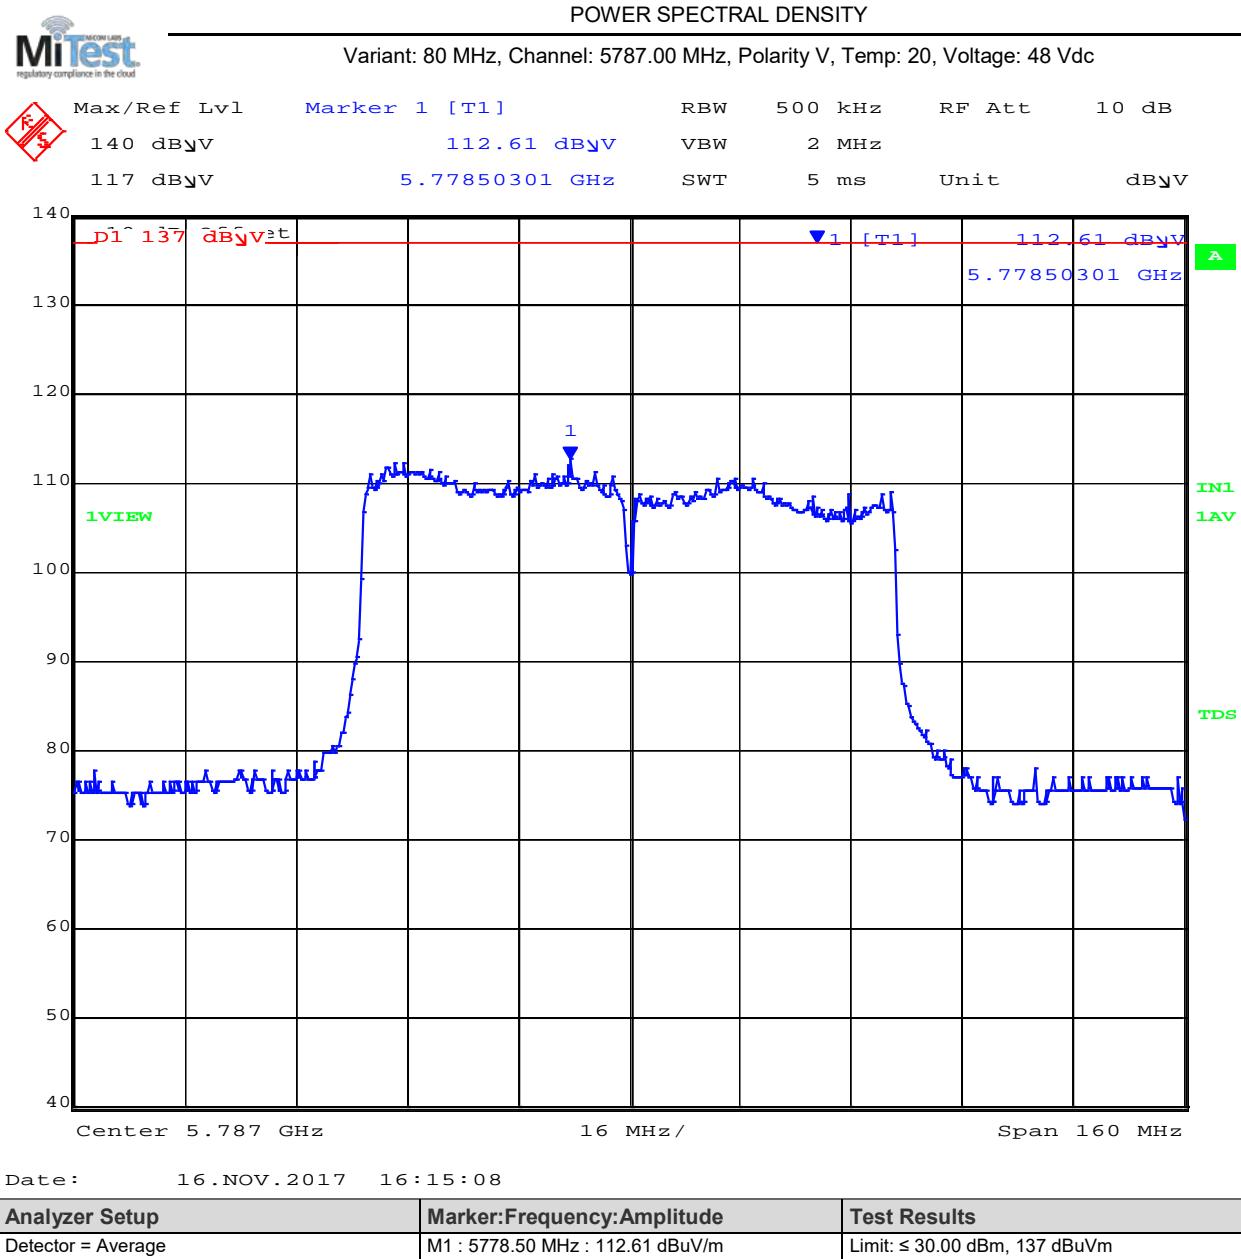

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

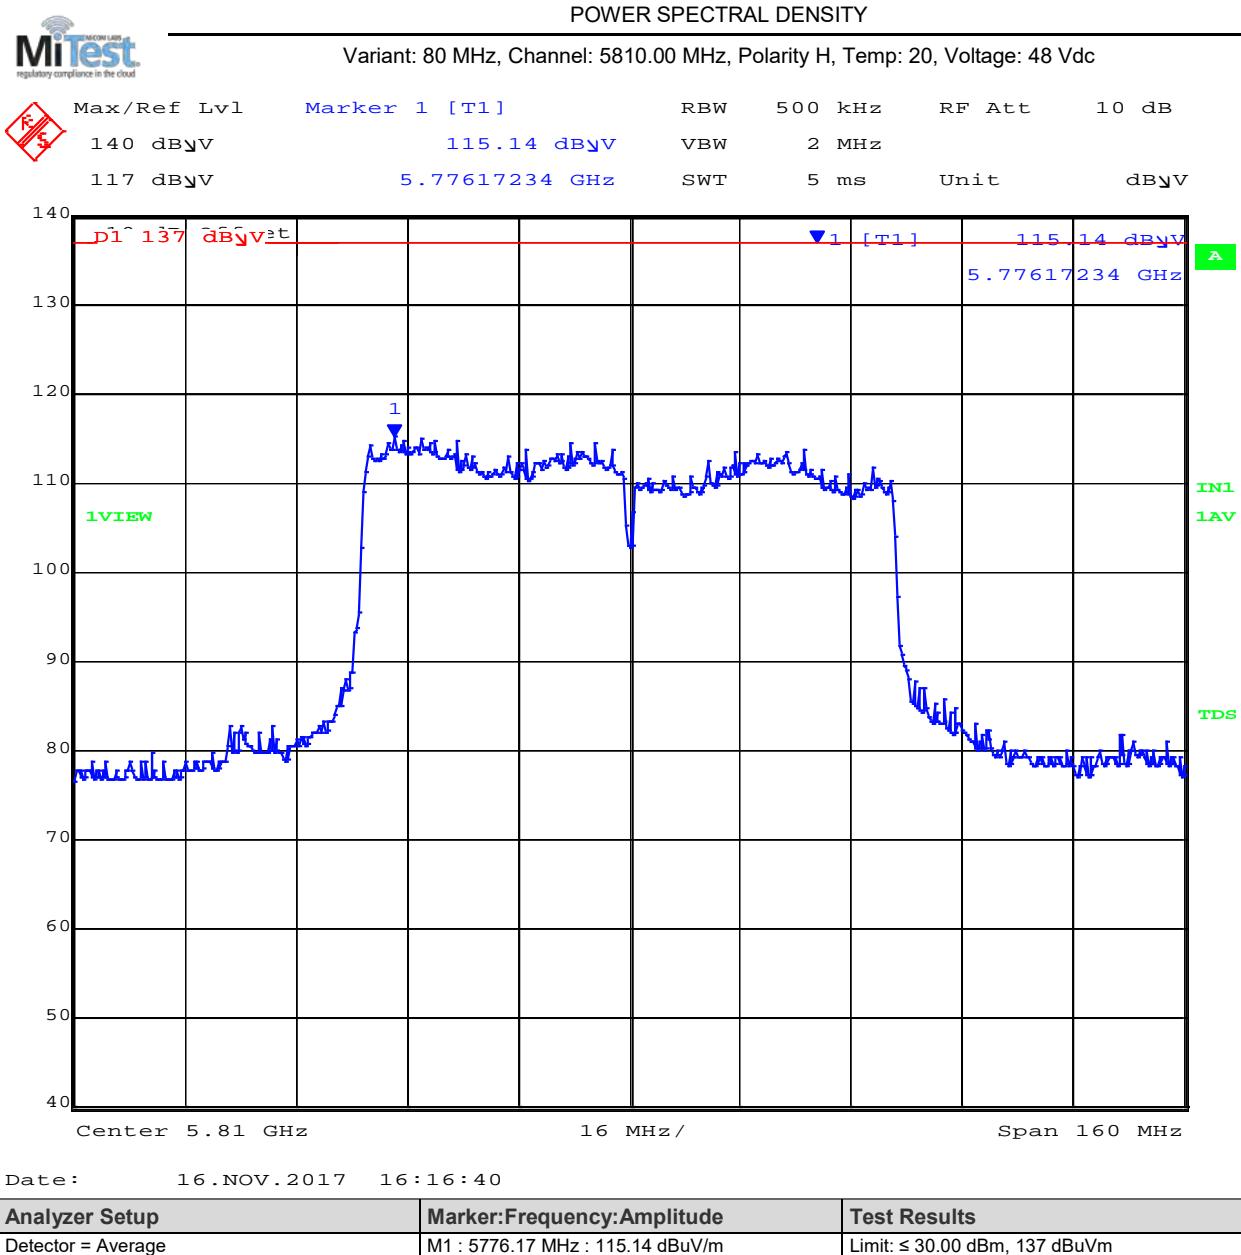


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 80 MHz, Channel: 5810.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

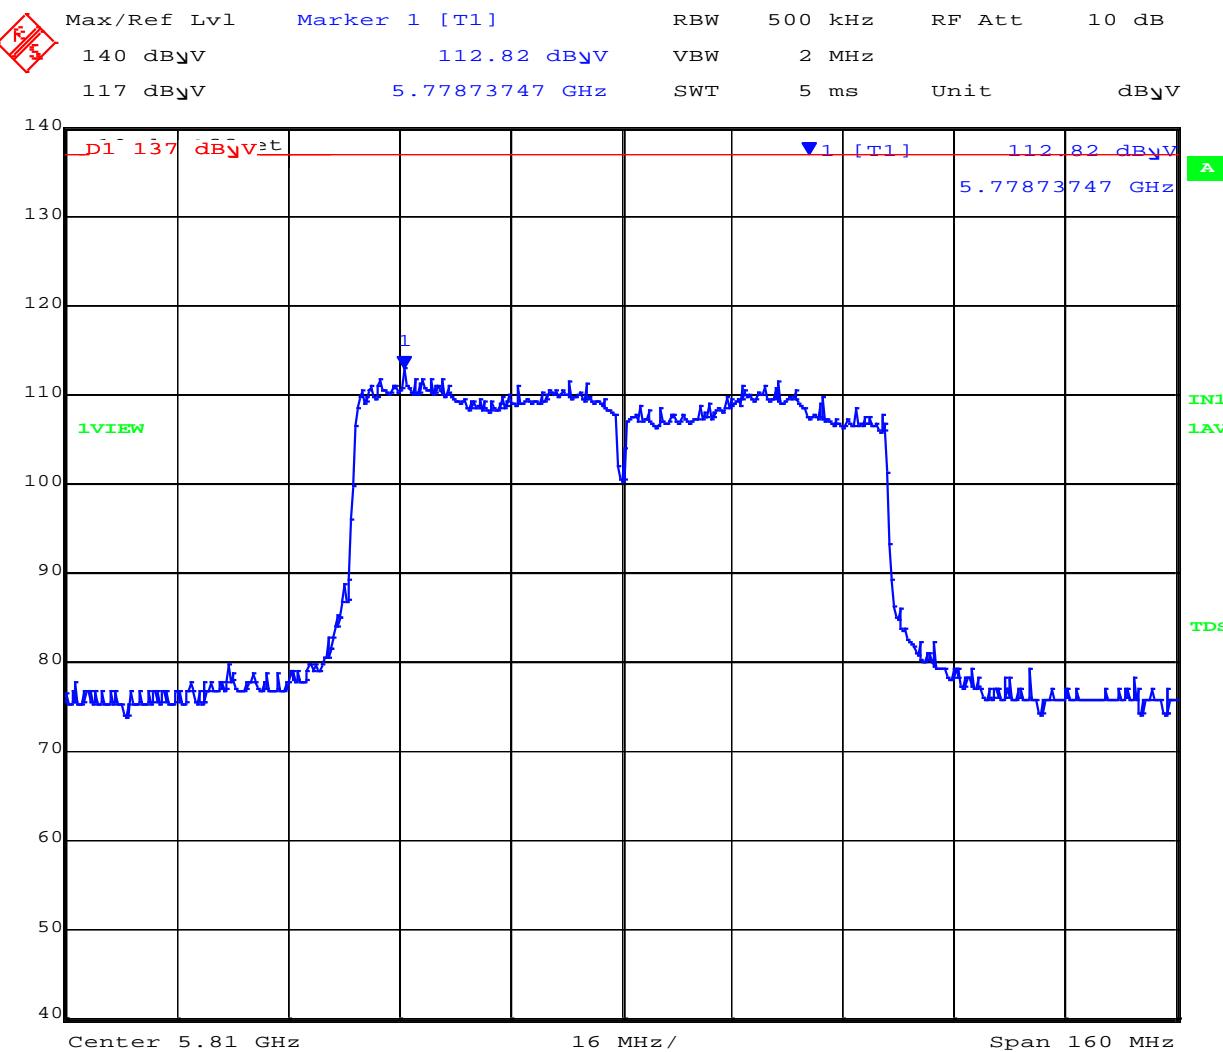

Date: 16.NOV.2017 16:17:27

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5778.73 MHz : 112.82 dBuV/m	Limit: ≤ 30.00 dBm, 137 dBuVm


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.3. Radiated

A.3.1. TX Spurious & Restricted Band Emissions

A.3.1.1. RADWIN Ltd. SA0199500 11 dBi

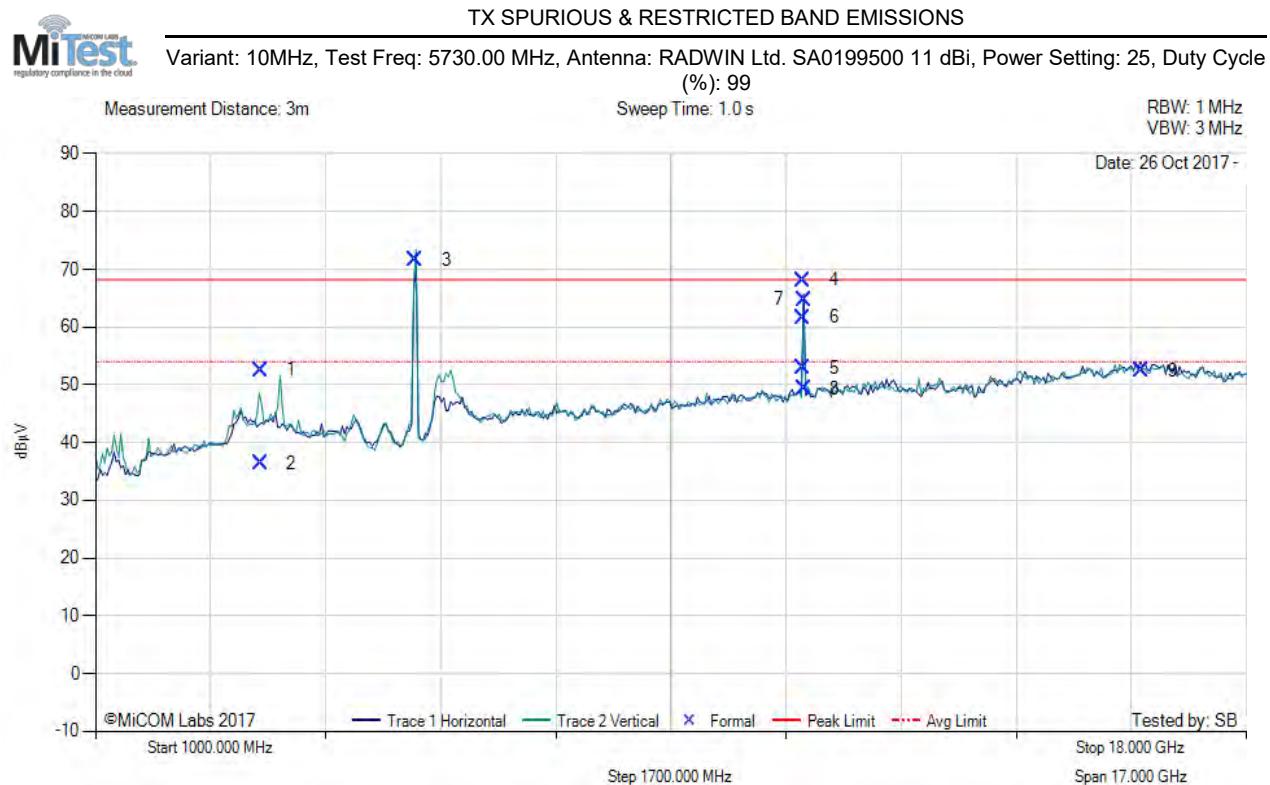


1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	3433.46	65.94	2.60	-16.02	52.52	Max Peak	Vertical	182	11	68.2	-15.7	Pass	
2	3433.46	49.78	2.60	-16.02	36.36	Max Avg	Vertical	182	11	54.0	-17.6	Pass	
3	5727.15	81.24	3.16	-12.86	71.54	Fundamental	Vertical	200	0	--	--		
4	11456.95	64.35	4.65	-0.84	68.16	Max Peak	Horizontal	148	37	68.2	-0.1	Pass	
5	11456.95	49.16	4.65	-0.84	52.97	Max Avg	Horizontal	148	37	54.0	-1.0	Pass	
6	11457.21	57.81	4.65	-0.82	61.64	Peak (Scan)	Horizontal	148	0	68.2	-6.6	Pass	
7	11463.82	60.93	4.60	-0.76	64.77	Max Peak	Vertical	136	0	68.2	-3.5	Pass	
8	11463.82	45.48	4.60	-0.76	49.32	Max Avg	Vertical	136	0	54.0	-4.7	Pass	
9	16456.29	46.77	5.74	-0.02	52.49	Peak (NRB)	Horizontal	148	0	--	--	Pass	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



TX SPURIOUS & RESTRICTED BAND EMISSIONS

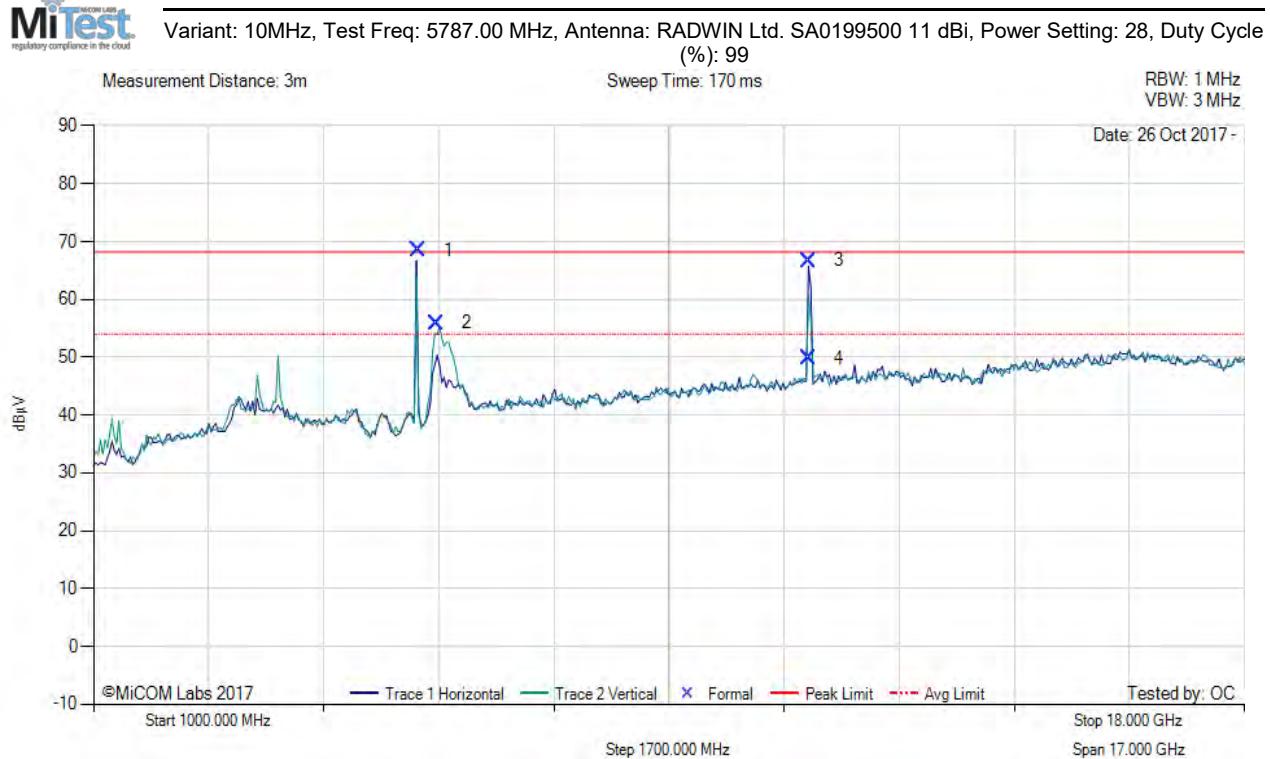


1000.00 - 18000.00 MHz														
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail		
1	5789.98	78.05	3.21	-12.81	68.45	Fundamental	Horizontal	151	0	--	--	Pass		
2	6070.12	64.51	3.25	-11.84	55.92	Max Peak	Horizontal	147	330	68.2	-12.3	Pass		
3	11568.01	62.56	4.65	-0.55	66.66	Max Peak	Vertical	136	333	68.2	-1.6	Pass		
4	11568.01	45.70	4.65	-0.55	49.80	Max Avg	Vertical	136	333	54.0	-4.2	Pass		

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



TX SPURIOUS & RESTRICTED BAND EMISSIONS

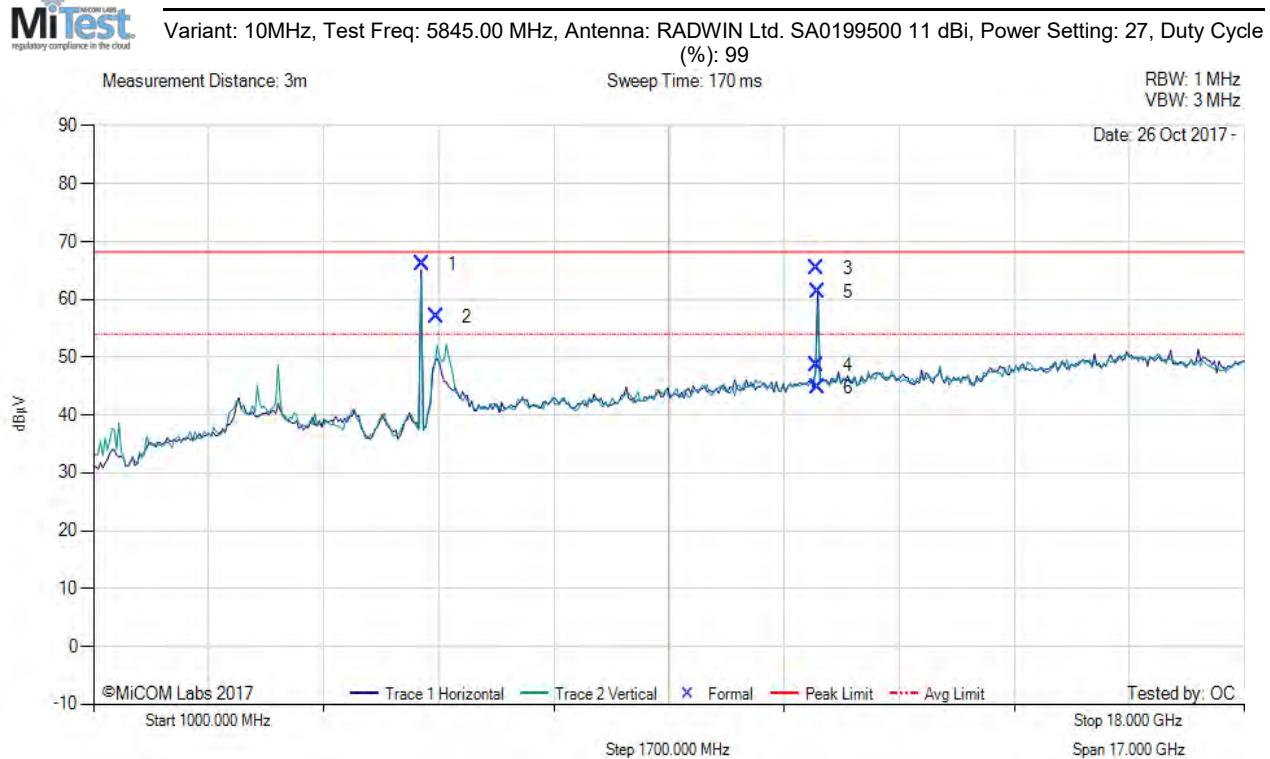


1000.00 - 18000.00 MHz														
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail		
1	5847.32	75.71	3.20	-12.74	66.17	Fundamental	Horizontal	151	0	--	--			
2	6069.80	65.67	3.24	-11.88	57.03	Max Peak	Horizontal	170	52	68.2	-11.2	Pass		
3	11685.00	60.97	4.93	-0.45	65.45	Max Peak	Horizontal	156	21	68.2	-2.8	Pass		
4	11685.00	44.09	4.93	-0.45	48.57	Max Avg	Horizontal	156	21	54.0	-5.4	Pass		
5	11695.58	56.97	4.88	-0.61	61.24	Max Peak	Horizontal	152	48	68.2	-7.0	Pass		
6	11695.58	40.55	4.88	-0.61	44.82	Max Avg	Horizontal	152	48	54.0	-9.2	Pass		

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.3.1.2. RADWIN Ltd. SA0199500 20.5 dBi (11 dBi Gain + 9.5 dBm Beamforming)

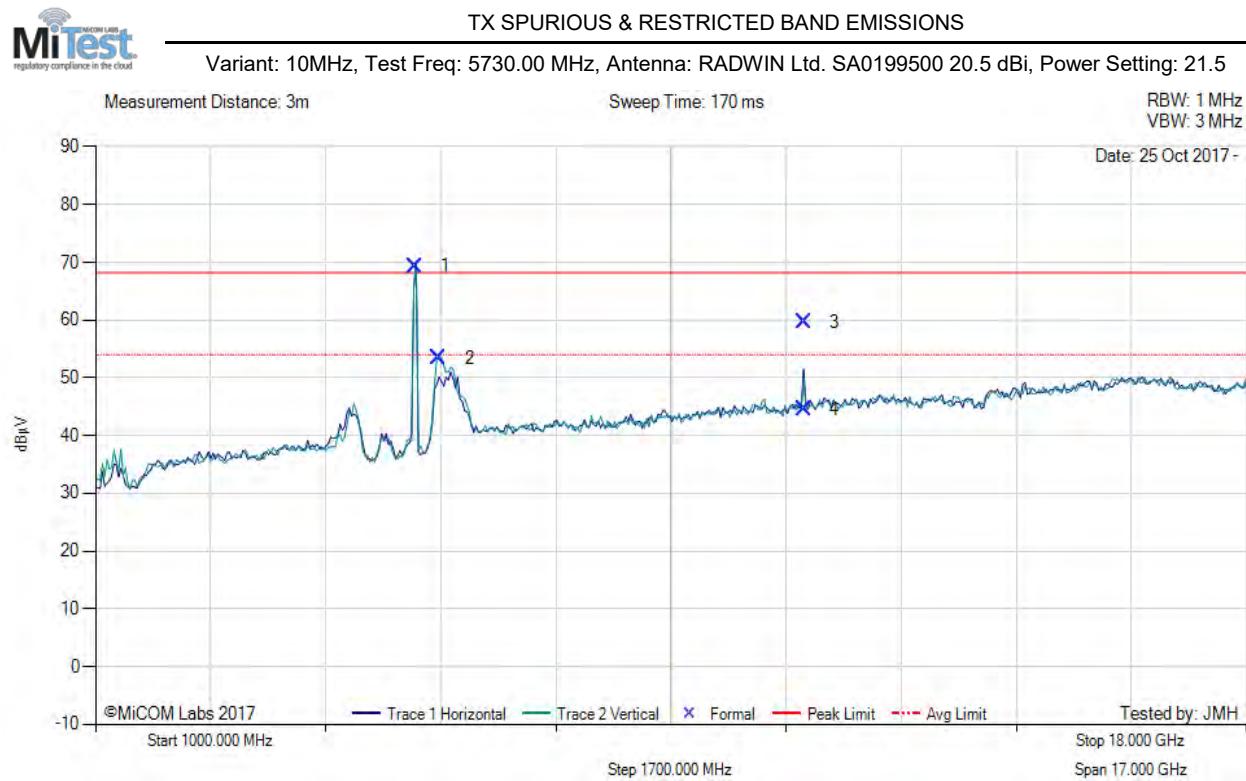


1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	5726.60	79.03	3.16	-12.86	69.33	Fundamental	Vertical	100	0	--	--		
2	6071.69	61.91	3.25	-11.79	53.37	Max Peak	Vertical	163	12	68.2	-14.9	Pass	
3	11460.68	55.79	4.63	-0.79	59.63	Max Peak	Horizontal	134	4	68.2	-8.6	Pass	
4	11460.68	40.74	4.63	-0.79	44.58	Max Avg	Horizontal	134	4	54.0	-9.4	Pass	

Test Notes: EUT powered by POE and connected to laptop outside chamber

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS

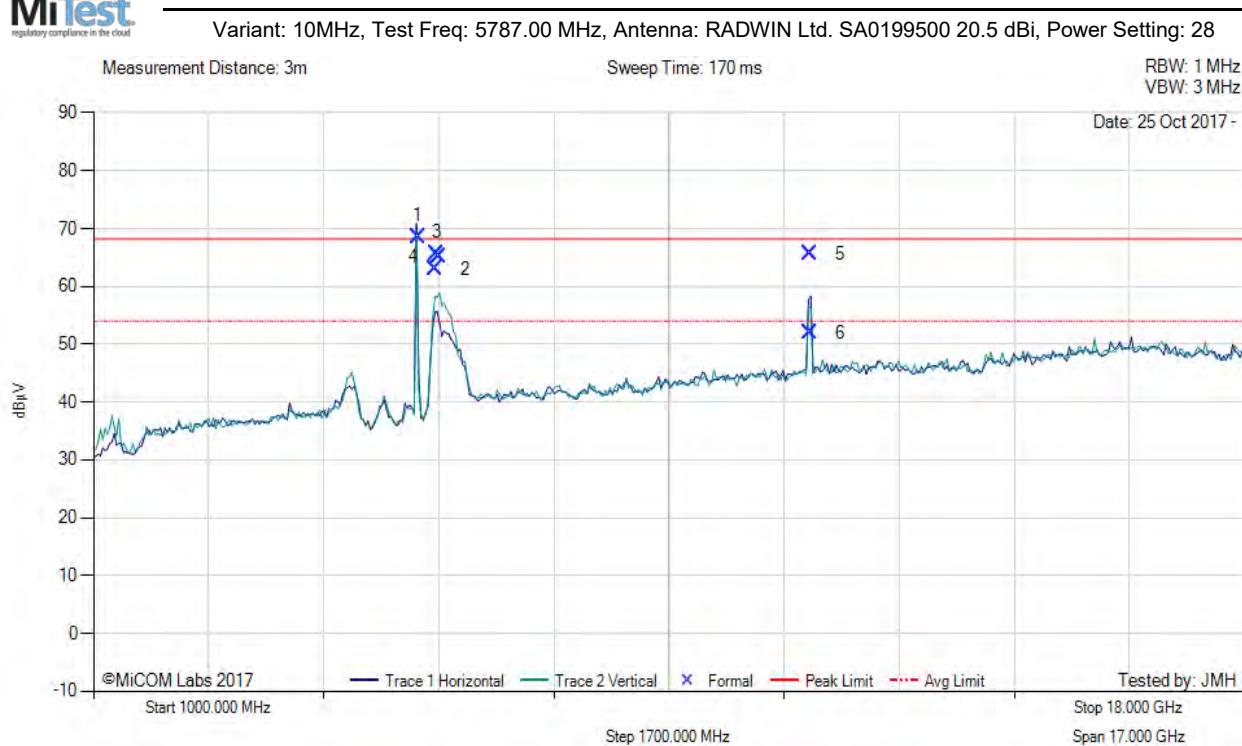


1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	5789.43	78.17	3.21	-12.79	68.59	Fundamental	Horizontal	100	0	--	--		
2	6042.08	72.05	3.24	-12.32	62.97	Max Peak	Vertical	143	0	68.2	-5.3	Pass	
3	6069.58	74.34	3.24	-11.88	65.70	Max Peak	Vertical	155	1	68.2	-2.5	Pass	
4	6102.01	73.75	3.24	-11.86	65.13	Max Peak	Vertical	155	1	68.2	-3.1	Pass	
5	11574.70	61.59	4.56	-0.46	65.69	Max Peak	Horizontal	160	3	68.2	-2.5	Pass	
6	11574.70	47.92	4.56	-0.46	52.02	Max Avg	Horizontal	160	3	54.0	-2.0	Pass	

Test Notes: EUT powered by POE and connected to laptop outside chamber

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS

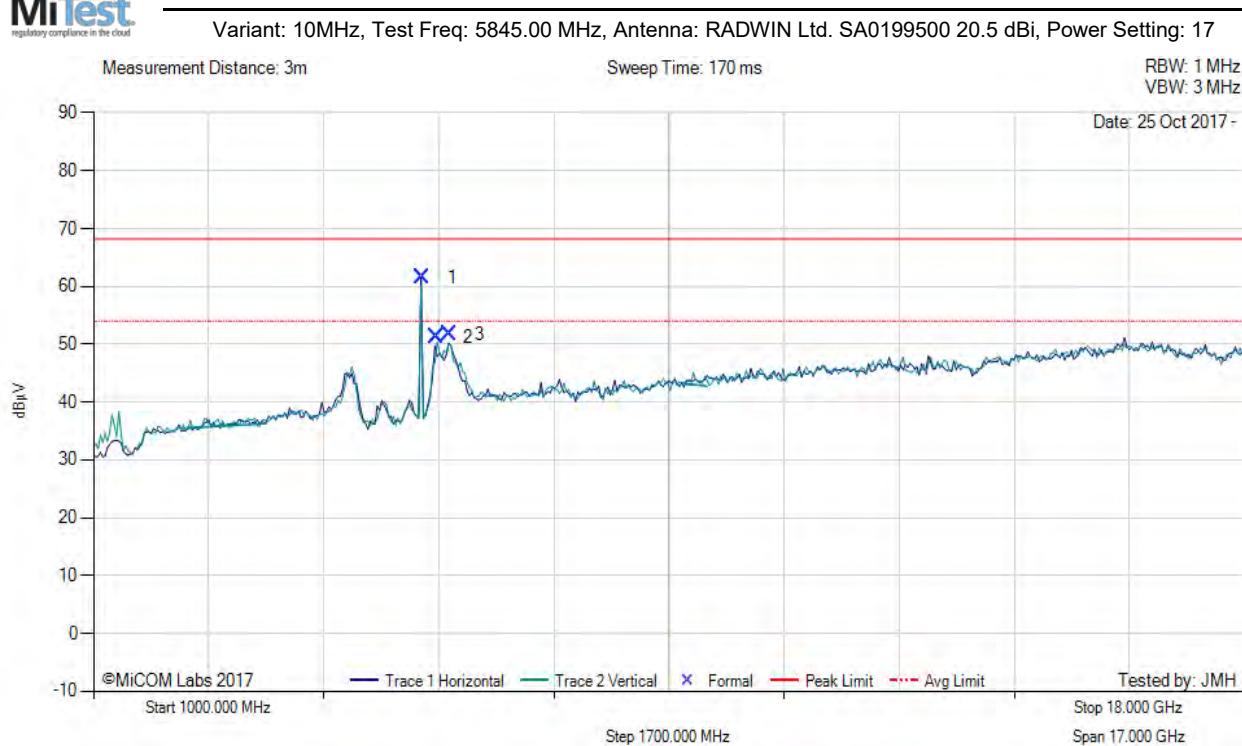

1000.00 - 18000.00 MHz														
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail		
1	5847.32	71.09	3.20	-12.74	61.55	Fundamental	Horizontal	151	0	--	--			
2	6072.68	59.75	3.25	-11.75	51.25	Peak (NRB)	Vertical	151	0	--	--	Pass		
3	6250.07	60.36	3.23	-11.86	51.73	Peak (NRB)	Vertical	151	0	--	--	Pass		


Test Notes: EUT powered by POE and connected to laptop outside chamber

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.3.2. Restricted Edge & Band-Edge Emissions

A.3.2.3. RADWIN Ltd. SA0199500 11 dBi

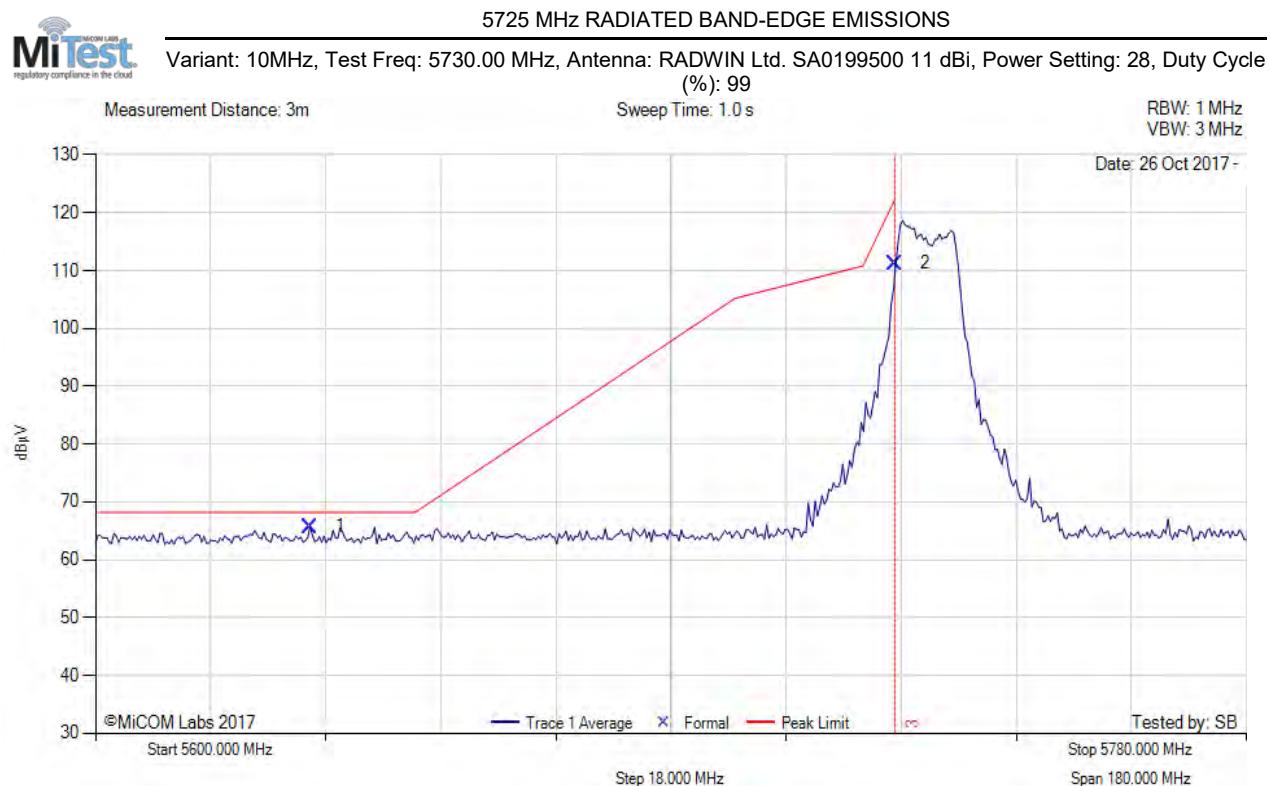


5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	5633.48	26.22	3.21	36.30	65.73	Max Avg	Vertical	152	15	68.2	-2.5	Pass	
2	5725.00	71.60	3.17	36.50	111.27	Max Avg	Vertical	152	15	122.2	-10.9	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



5725 MHz RADIATED BAND-EDGE EMISSIONS

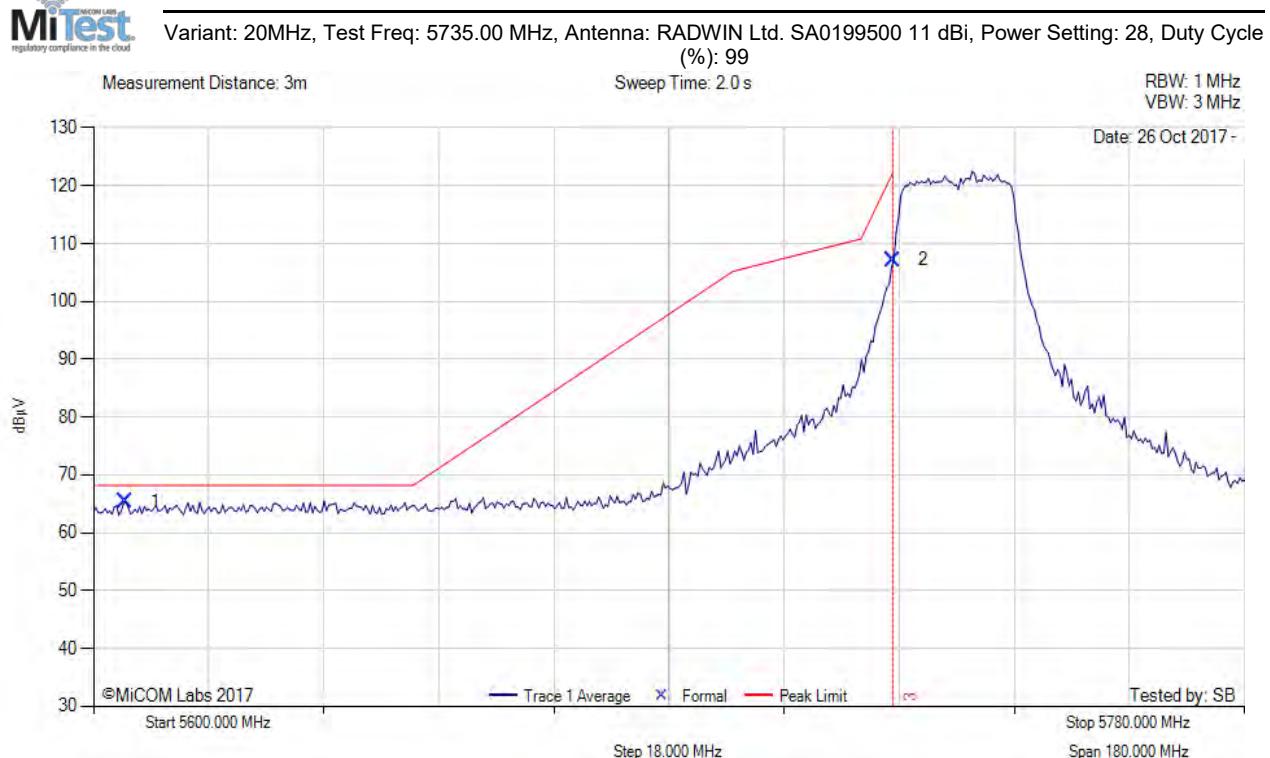

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5604.98	25.76	3.24	36.30	65.30	Max Avg	Horizontal	152	15	68.2	-2.9	Pass	
2	5725.00	67.52	3.17	36.50	107.19	Max Avg	Horizontal	152	15	122.2	-15.0	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




5725 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 40MHz, Test Freq: 5745.00 MHz, Antenna: RADWIN Ltd. SA0199500 11 dBi, Power Setting: 28, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 2.0 s

RBW: 1 MHz
VBW: 3 MHz

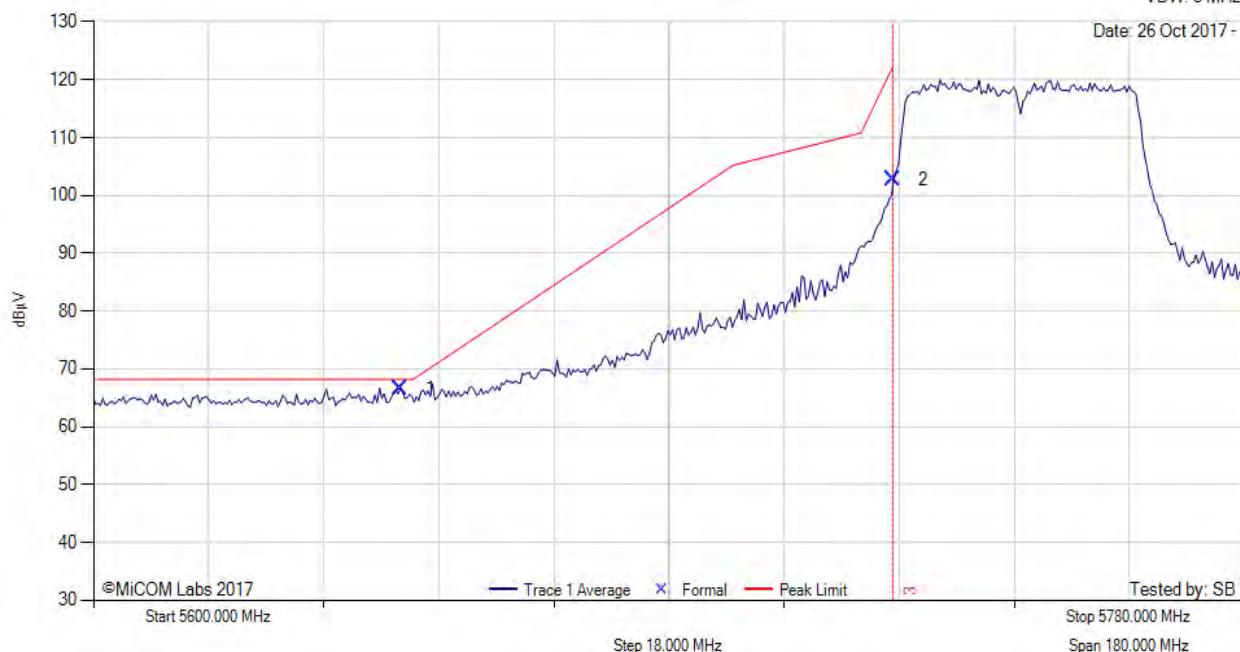


5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	5647.91	27.10	3.20	36.30	66.60	Max Avg	Horizontal	152	11	68.2	-1.6	Pass	
2	5725.00	63.04	3.17	36.50	102.71	Max Avg	Horizontal	152	11	122.2	-19.5	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



5725 MHz RADIATED BAND-EDGE EMISSIONS

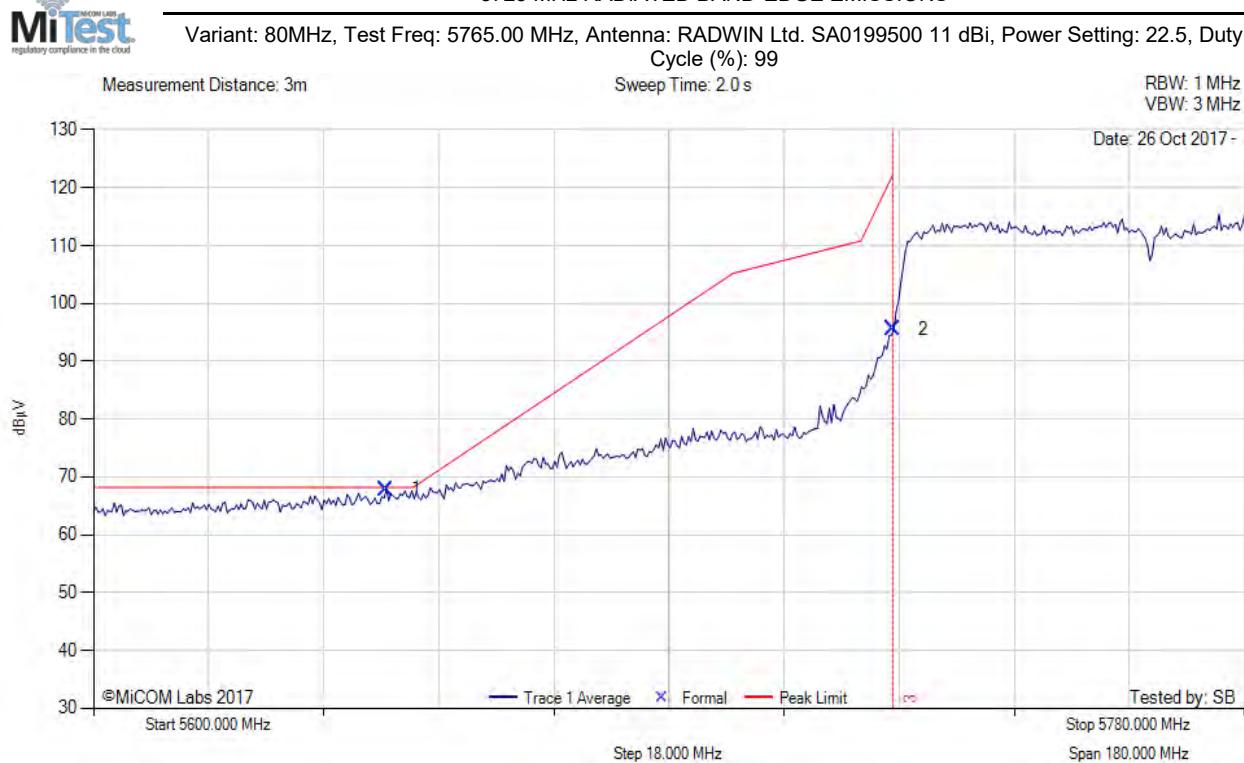


5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5645.74	28.40	3.20	36.30	67.90	Max Avg	Horizontal	152	11	68.2	-0.3	Pass	
2	5725.00	55.87	3.17	36.50	95.54	Max Avg	Horizontal	152	11	122.2	-26.7	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



5850 MHz RADIATED BAND-EDGE EMISSIONS

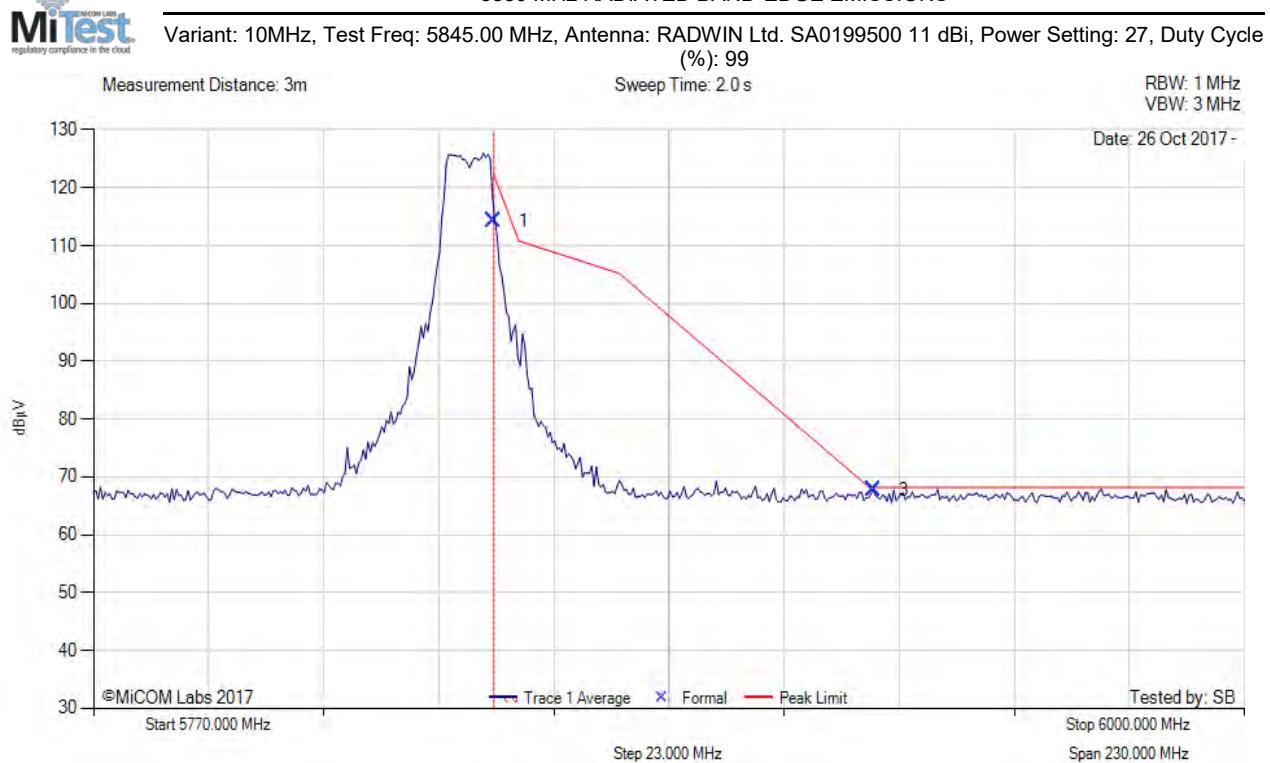


5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5850.00	74.32	3.20	36.70	114.22	Max Avg	Horizontal	152	11	123.2	-8.01	Pass	
3	5925.79	27.77	3.19	36.80	67.76	Max Avg	Horizontal	152	11	68.2	-0.5	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



5850 MHz RADIATED BAND-EDGE EMISSIONS

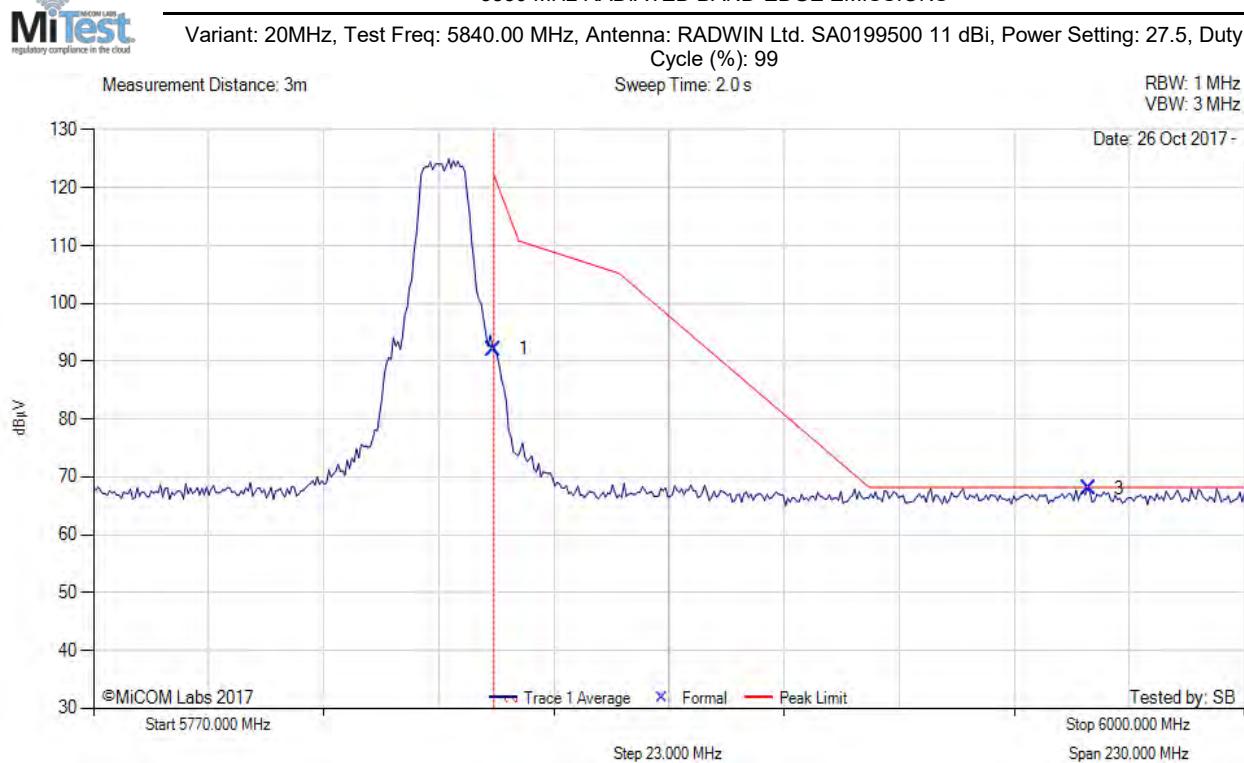


5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	5850.00	52.19	3.20	36.70	92.09	Max Avg	Horizontal	152	11	122.2	-30.11	Pass	
3	5968.78	27.77	3.28	36.90	67.95	Max Avg	Horizontal	152	11	68.2	-0.3	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5850 MHz RADIATED BAND-EDGE EMISSIONS

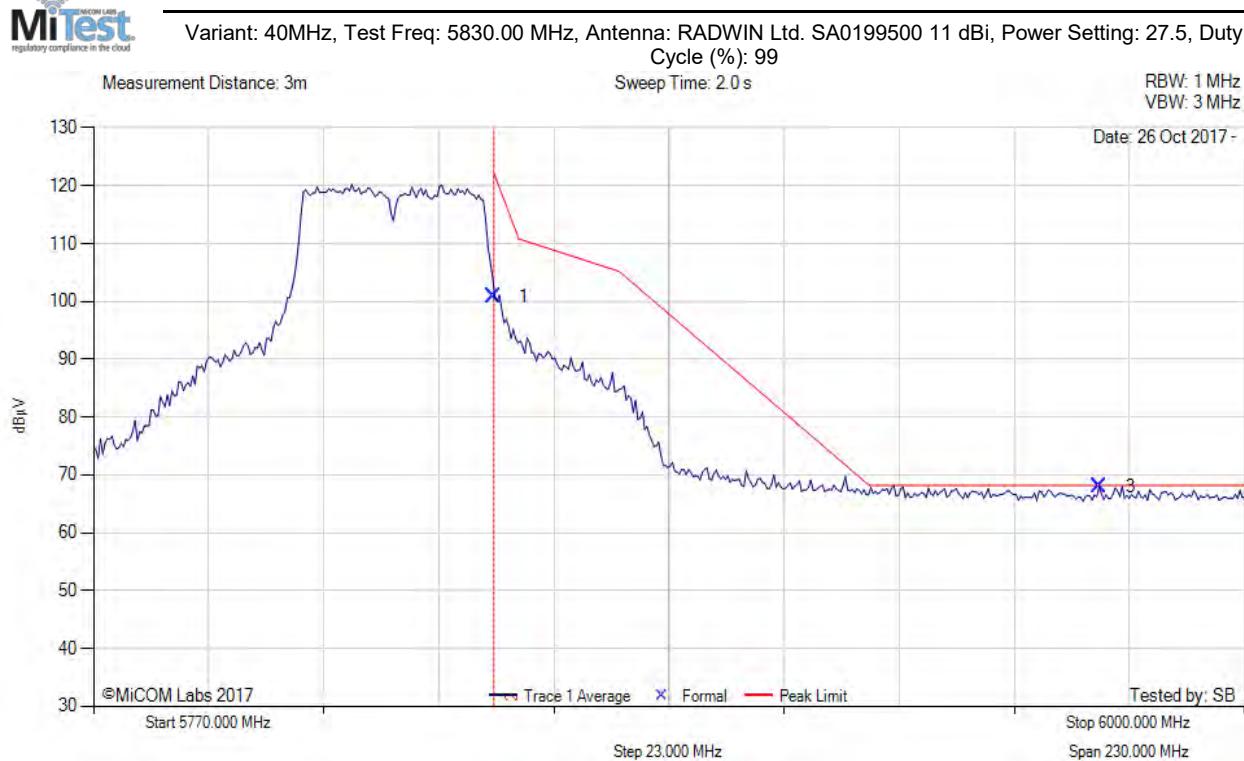


5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	5850.00	61.00	3.20	36.70	100.90	Max Avg	Horizontal	152	11	122.2	-21.3	Pass	
3	5971.08	27.82	3.29	36.90	68.01	Max Avg	Horizontal	152	11	68.2	-0.2	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



5850 MHz RADIATED BAND-EDGE EMISSIONS

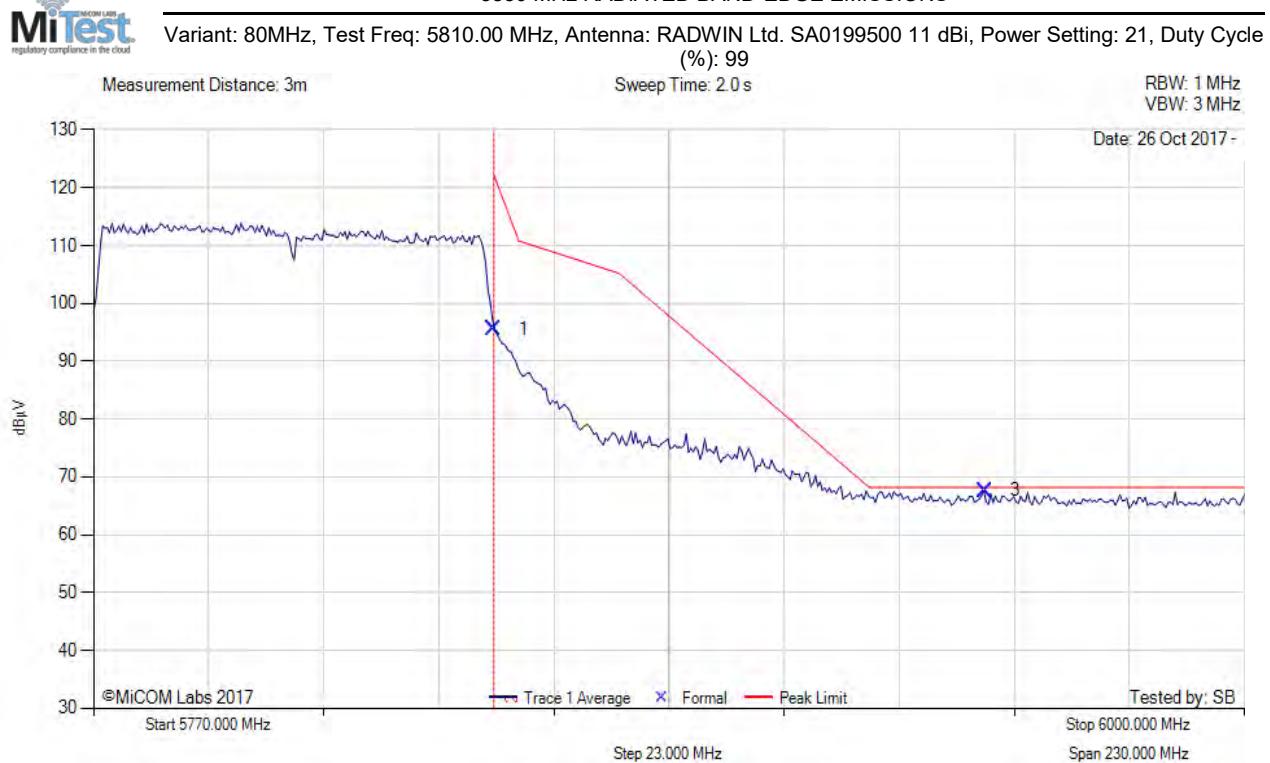


5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5850.00	55.63	3.20	36.70	95.53	Max Avg	Horizontal	152	11	122.2	-26.67	Pass	
3	5948.04	27.60	3.23	36.80	67.63	Max Avg	Horizontal	152	11	68.2	-0.6	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.3.2.4. RADWIN Ltd. SA0199500 20.5 dBi (11 dBi Gain + 9.5 dBm Beamforming)

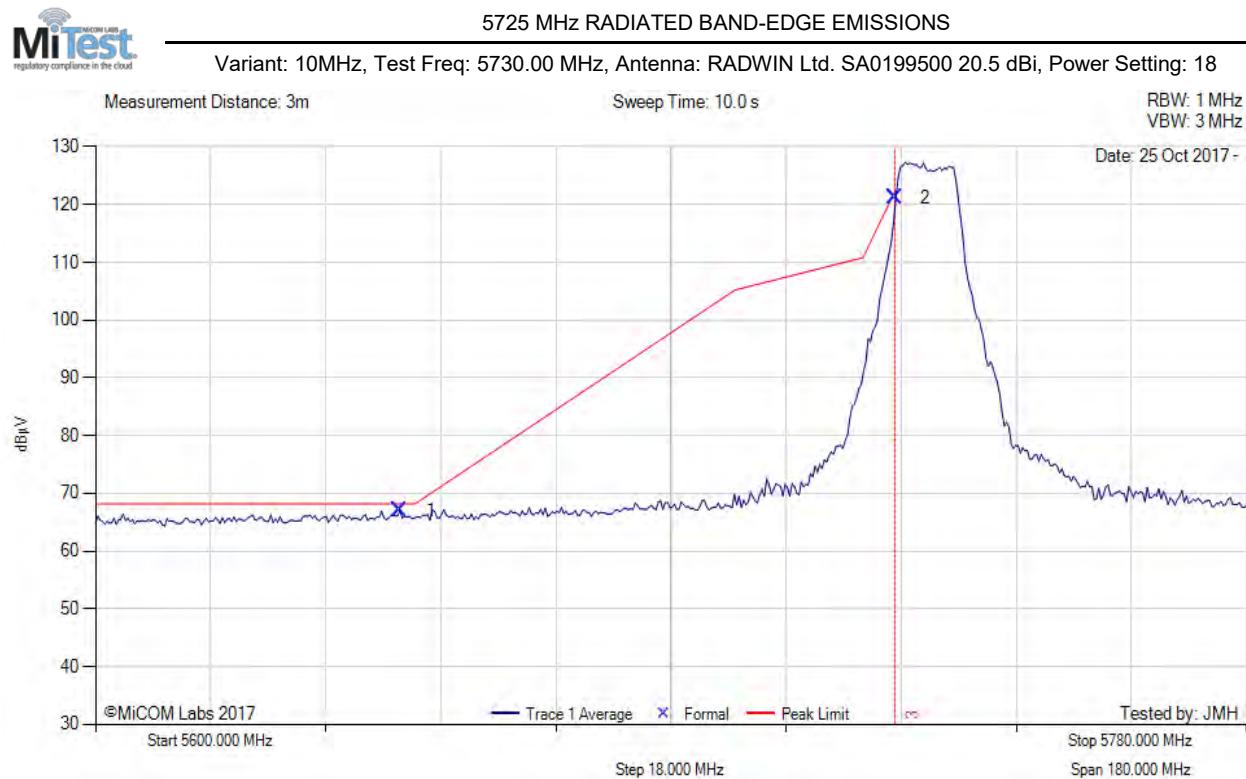


5600.00 - 5780.00 MHz												
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5647.62	27.50	3.20	36.30	67.00	Max Avg	Horizontal	147	2	68.2	-1.2	Pass
2	5725.00	81.45	3.17	36.50	121.12	Max Avg	Horizontal	147	2	122.2	-1.1	Pass
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT powered by POE and connected to laptop outside chamber

[back to matrix](#)



5725 MHz RADIATED BAND-EDGE EMISSIONS

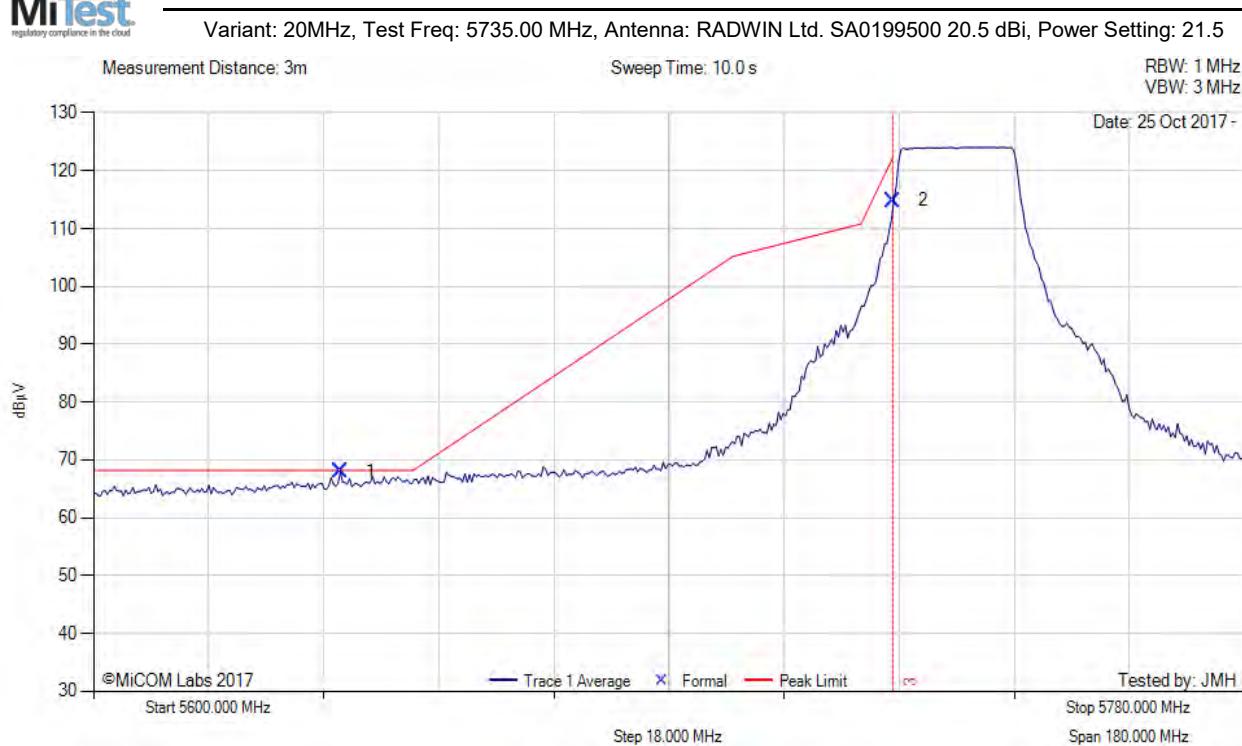


5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5638.53	28.47	3.19	36.30	67.96	Max Avg	Horizontal	147	2	68.2	-0.3	Pass	
2	5725.00	75.14	3.17	36.50	114.81	Max Avg	Horizontal	147	2	122.2	-7.4	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

[back to matrix](#)

5725 MHz RADIATED BAND-EDGE EMISSIONS

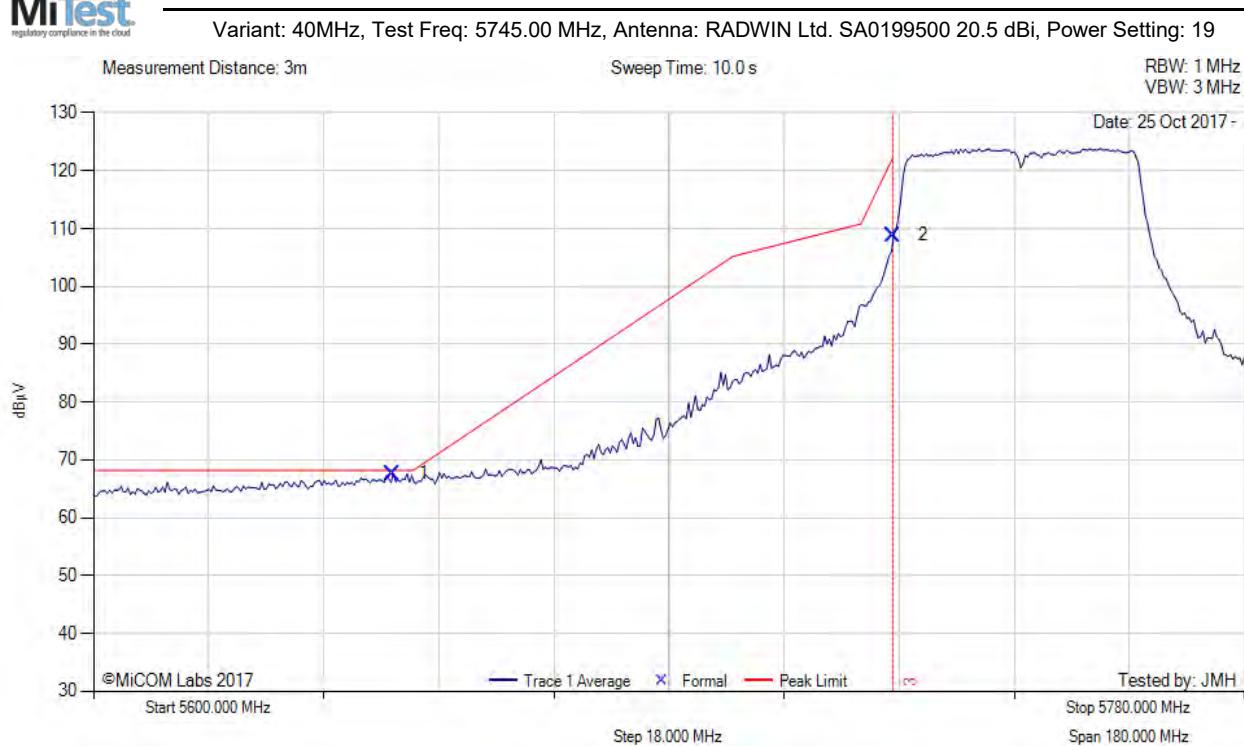


5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	5646.82	28.18	3.20	36.30	67.68	Max Avg	Horizontal	147	2	68.2	-0.6	Pass	
2	5725.00	69.14	3.17	36.50	108.81	Max Avg	Horizontal	147	2	122.2	-13.4	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

[back to matrix](#)



5725 MHz RADIATED BAND-EDGE EMISSIONS

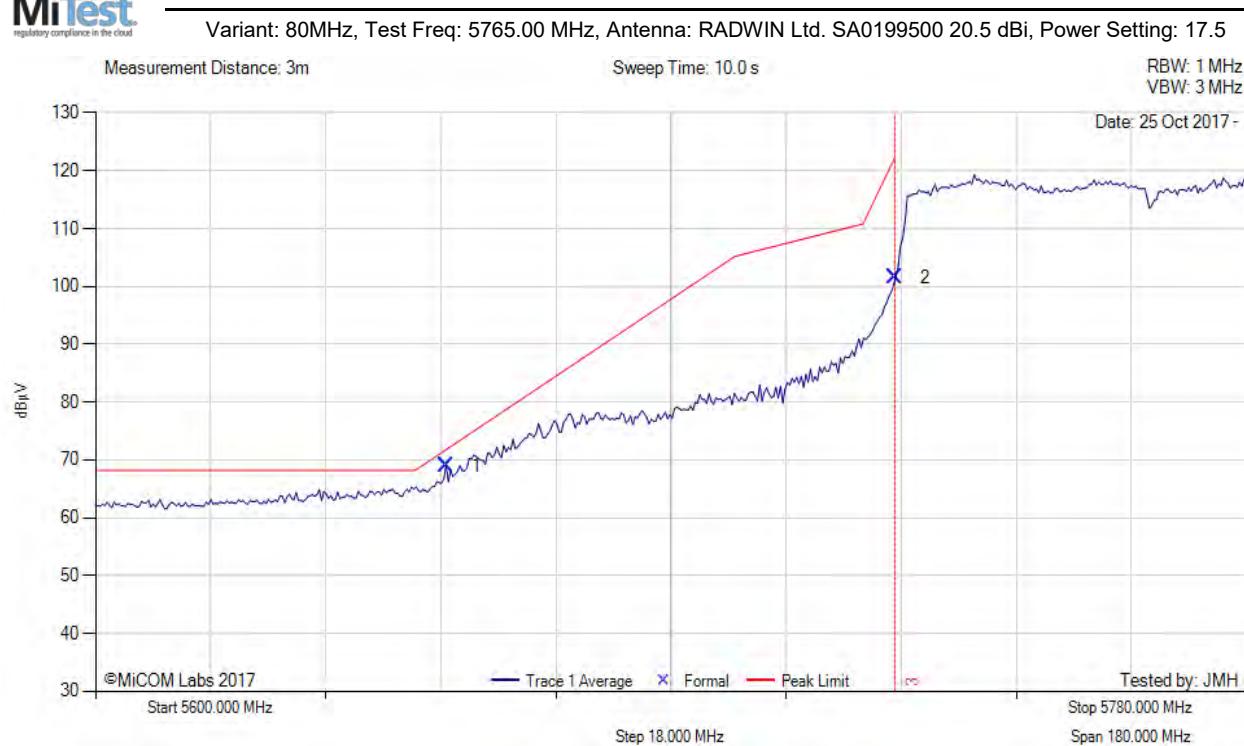

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	5654.76	29.50	3.22	36.30	69.02	Max Avg	Horizontal	147	2	71.9	-2.9	Pass	
2	5725.00	61.91	3.17	36.50	101.58	Max Avg	Horizontal	147	2	122.2	-20.6	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	


Test Notes: EUT powered by POE and connected to laptop outside chamber

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



5850 MHz RADIATED BAND-EDGE EMISSIONS

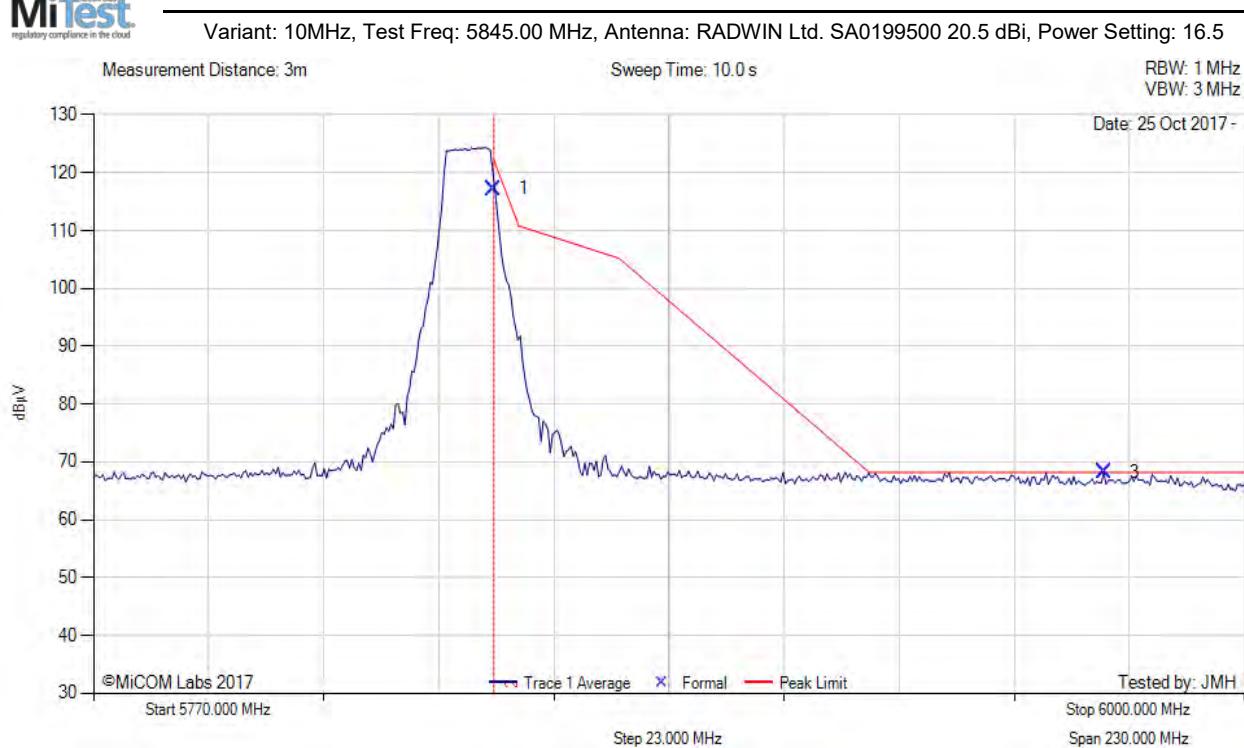


5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	5850.00	77.32	3.20	36.70	117.22	Max Avg	Horizontal	147	2	122.2	-5.0	Pass	
3	5972.00	28.00	3.29	36.90	68.17	Max Avg	Horizontal	147	2	68.2	-0.5	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS

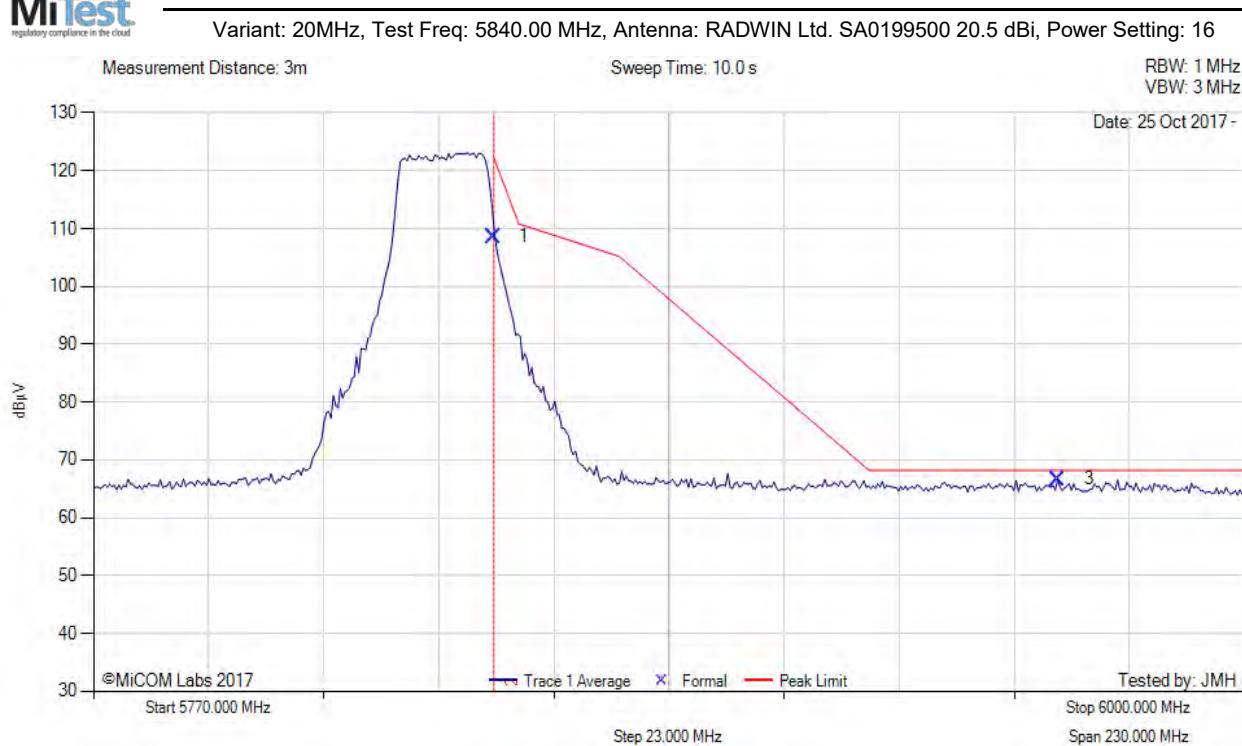


5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	5850.00	68.69	3.20	36.70	108.59	Max Avg	Horizontal	147	2	122.2	-13.6	Pass	
3	5962.79	26.64	3.27	36.80	66.71	Max Avg	Horizontal	147	2	68.2	-1.5	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS

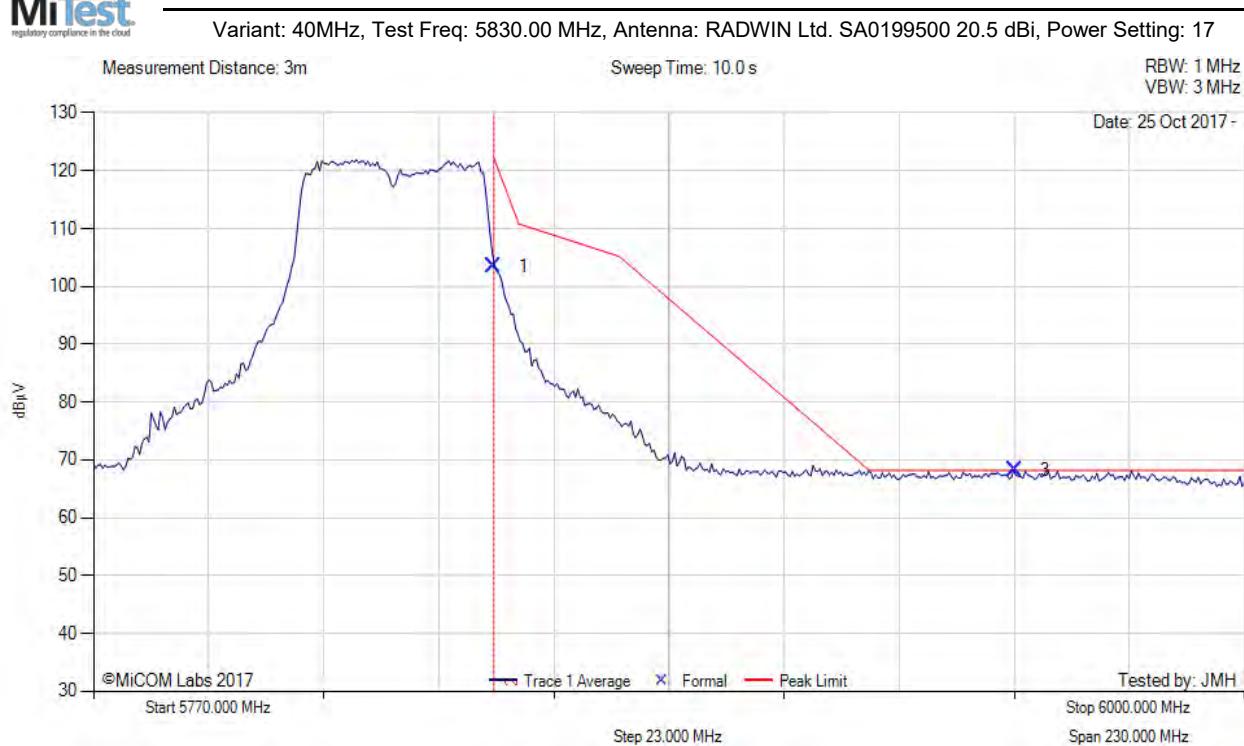


5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	5850.00	63.49	3.20	36.70	103.39	Max Avg	Horizontal	147	2	122.2	-18.9	Pass	
3	5954.03	28.13	3.25	36.80	68.17	Max Avg	Horizontal	147	2	68.2	-0.1	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS

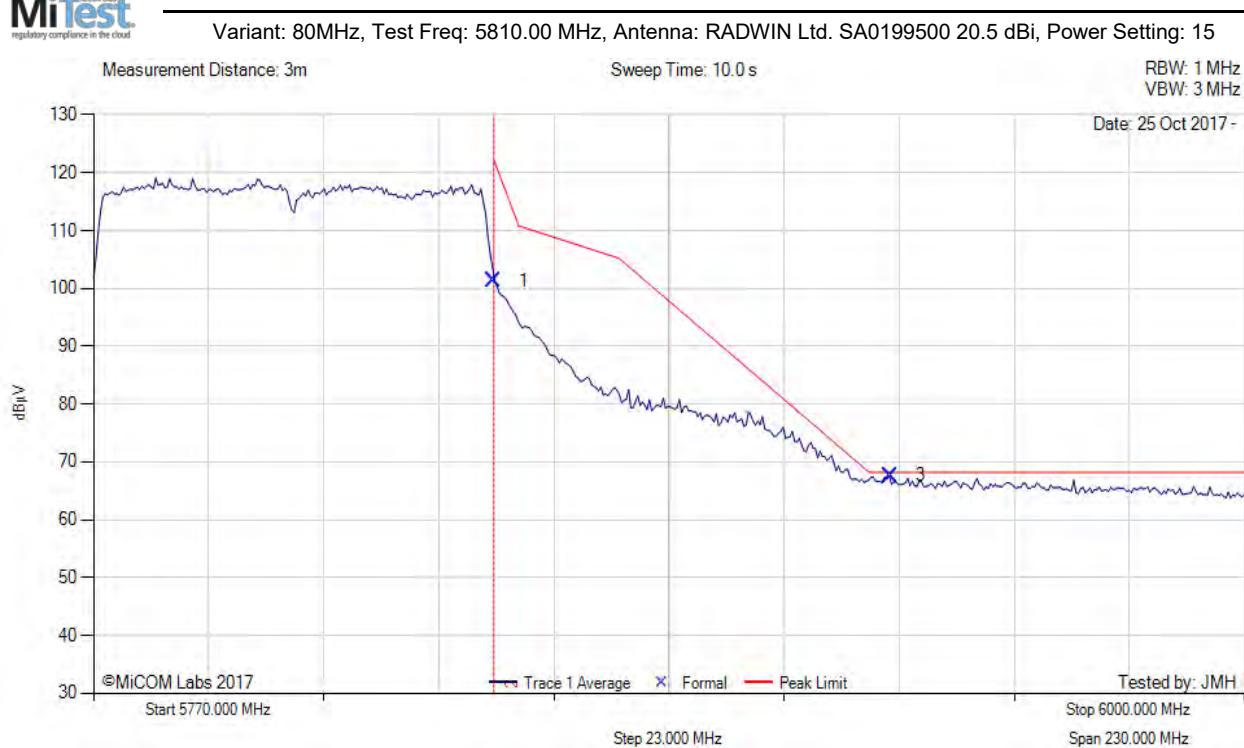

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5850.00	61.37	3.20	36.70	101.27	Max Avg	Horizontal	147	2	122.2	-21.0	Pass	
3	5929.14	27.66	3.18	36.80	67.64	Max Avg	Horizontal	147	2	68.2	-0.6	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE and connected to laptop outside chamber

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com