



REGULATORY COMPLIANCE TEST REPORT

FCC CFR 47 15.407, RSS-247 Issue 2

Report No.: RDWN73-U3 Rev A

Company: Radwin

Model Name: NEO, NEO DUO



REGULATORY COMPLIANCE TEST REPORT

Company Name: Radwin

Model Name: NEO, NEO DUO

To: FCC CFR 47 Part 15 Subpart E 15.407, RSS-247

Test Report Serial No.: RDWN73-U3 Rev A

This report supersedes: NONE

Applicant: Radwin
27 Habarzel Street
Tel Aviv, 6971039
Israel

Issue Date: 12th April 2021

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	4
1.1. TESTING ACCREDITATION	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. EMC TEST SUMMARY	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s)	13
5.4. Antenna Details	13
5.5. Cabling and I/O Ports	13
5.6. Test Configurations	13
5.7. Equipment Modifications	14
5.8. Deviations from the Test Standard	14
6. TEST SUMMARY	15
7. TEST EQUIPMENT CONFIGURATION(S)	16
7.1. Radiated Emissions - 3m Chamber	16
8. MEASUREMENT AND PRESENTATION OF TEST DATA	18
9. TEST RESULTS	19
9.1. Peak Transmit Power	19
9.1.1. <i>Non-Beamforming</i>	22
9.1.2. <i>Beamforming</i>	26
9.2. 6 dB & 99% Bandwidth	30
9.3. Power Spectral Density	35
9.3.1. <i>Non-Beamforming</i>	37
9.3.2. <i>Beamforming</i>	41
9.4. Radiated	45
9.4.1. <i>TX Spurious & Restricted Band Emissions</i>	48
9.4.1.1. RADWIN MR0269440	48
9.4.1.2. RADWIN MR0269440BF	51
9.4.2. <i>Restricted Edge & Band-Edge Emissions</i>	54
9.4.2.3. RADWIN MR0269440	54
9.4.2.4. RADWIN MR0269440BF	63
A. APPENDIX - GRAPHICAL IMAGES	72
A.1. 6 dB & 99% Bandwidth	73
A.2. Power Spectral Density	97
A.2.1 <i>Non-Beamforming</i>	97
A.2.2 <i>Beamforming</i>	121
A.3. Radiated	145
A.3.1. <i>TX Spurious & Restricted Band Emissions</i>	145
A.3.1.1. RADWIN MR0269440	145
A.3.1.2. RADWIN MR0269440BF	148
A.3.2. <i>Restricted Edge & Band-Edge Emissions</i>	151
A.3.2.3. RADWIN MR0269440	151
A.3.2.4. RADWIN MR0269440BF	159

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017
General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates
technical competence for a defined scope and the operation of a laboratory quality management system
(refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 24th day of February 2020.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2021

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

1.2. RECOGNITION

MiCOM Labs, Inc is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Site Designation #: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 Test Company #: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA 2	NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB- Telecommunications Certification Bodies (TCB)

FCB – Foreign Certification Body

CAB – Conformity Assessment Body

NB – Notified Body;

AB – Approved Body

MRA – Mutual Recognition Agreement

MRA Phases

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



Accredited Product Certification Body

A2LA has accredited

MiCOM LABS

Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 Requirements for bodies certifying products, processes and services. This product certification body also meets the A2LA R322 – Specific Requirements – Notified Body Accreditation Requirements and A2LA R308 – Specific Requirements - ISO-IEC 17065 - Telecommunication Certification Body Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.

Presented this 24th day of February 2020



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2021



For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body (TCB)

Industry Canada – Certification Body, CAB Identifier – US0159

Europe – Notified Body (NB), NB Identifier - 2280

UK – Approved Body (AB), AB Identifier - 2280

Japan – Recognized Certification Body (RCB), RCB Identifier - 210

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	6 th April 2021	Draft for comment
Draft #2	8 th April 2021	
Rev A	12 th April 2021	Initial Release

In the above table the latest report revision will replace all earlier versions.

3. TEST RESULT CERTIFICATE

Manufacturer: Radwin
27 Habarzel Street
Tel Aviv 6971039
Israel

Tested By: MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA

Model: NEO, NEO DUO

Telephone: +1 925 462 0304

Equipment Type: 5 GHz Single, Dual Carrier
Beamforming Base Station

Fax: +1 925 462 0306

S/N's: Prototype #1

Test Date(s): 16th – 31st March 2021

Website: www.micomlabs.com

STANDARD(S)

**FCC CFR 47 Part 15 Subpart E 15.407
ISED RSS-247 Issue 2**

TEST RESULTS

EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


Approved & Released for MiCOM Labs, Inc. by:



Graeme Grieve
Quality Manager MiCOM Labs, Inc.

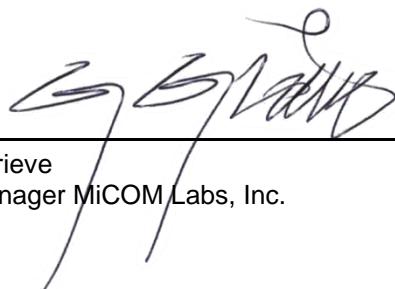

Gordon Hurst
President & CEO MiCOM Labs, Inc.



4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911 D01 & D02	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 905462 D07 v02	22nd August 2016	Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements.
III	KDB 926956 D01 v02	22nd August 2016	U-NII Device Transition Plan
IV	A2LA	5th October 2020	R105 - Requirement's When Making Reference to A2LA Accreditation Status
V	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VI	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VII	CISPR 32	2015	Electromagnetic compatibility of multimedia equipment - Emission requirements
VIII	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
IX	FCC 06-96	Jun 30 2006	Memorandum Opinion and Order
X	FCC 47 CFR Part 15.407	2020	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
XI	ICES-003	Issue 7 ; October 15,2020	Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
XII	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
XIII	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XIV	RSS-Gen Issue 5	March 2019 Amendment 1	General Requirements for Compliance of Radio Apparatus
XV	FCC 47 CFR Part 2.1033	2020	FCC requirements and rules regarding photographs and test setup diagrams.
XVI	KDB 905462 D02 v02	April 8 2016	Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 5250 to 5350 MHz and 5470 to 5725 MHz bands incorporating Dynamic Frequency Selection.
XVII	KDB 789033 D02 V02r01	14th December, 2017	Guidelines For Compliance Testing Of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. EMC TEST SUMMARY

5.1. Technical Details

Details	Description
Purpose:	Test of the Radwin NEO, NEO DUO to FCC CFR 47 Part 15 Subpart E 15.407. Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 5725 to 5850 MHz bands Included in this test report is the testing for ISED RSS 15 247 Issue 2.
Applicant:	Radwin 27 Habarzel Street Tel Aviv 6971039 Israel
Manufacturer:	Radwin
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	RDWN73-U3
Date EUT received:	15 th March 2021
Standard(s) applied:	FCC CFR 47 Part 15 Subpart E 15.407, ISED RSS 15 247 Issue 2.
No of Units Tested:	1
Product Family Name:	NEO
Model(s):	NEO, NEO DUO
Location for use:	Outdoors
Declared Frequency Range(s):	5725 - 5850 MHz
Type of Modulation:	BPSK, QPSK, 16QAM, 64QAM, 256QAM
EUT Modes of Operation:	5725 - 5850 MHz: 10MHz; 20MHz; 40MHz; 80MHz;
Declared Nominal Output Power (dBm):	+26 dBm
Transmit/Receive Operation:	Transceiver
Rated Input Voltage and Current:	55V DC
Operating Temperature Range:	-35 to +60 °C (client declaration)
ITU Emission Designator:	10M0W7W, 20M0W7W, 40M0W7W, 80M0W7W
Equipment Dimensions:	3.5 / 13.4 12.8 in
Weight:	7.74 lb
Hardware Rev:	Prototype
Software Rev:	Prototype

5.2. Scope Of Test Program

Radwin NEO, NEO DUO

The scope of the test program was to test the Radwin NEO DUO, Dual Carrier 5.x GHz Base Station with Beamforming Antenna configurations in the frequency ranges 5725 - 5850 MHz for compliance against the following specification:

FCC CFR 47 Part 15 Subpart E 15.407

Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 5725 - 5850 MHz.

RSS-247 Issue 2

Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and License-Exempt Local Area Network (LE-LEN) Devices.

As the RADWIN NEO DUO has integrated beamforming antenna this program was completed radiatively.

System Test and Measurement Configurations

The RADWIN NEO DUO consists of 2 identical radios each with 2 ports driving one cross polarized antenna per radio. Each radio can transmit on all available frequencies, but both radios cannot transmit on the same frequency simultaneously.

The RADWIN NEO consists of 1 radio with 2 antenna ports which drive a cross polarized antenna.

As the unit's RF modules were identical only a single radio of the RADWIN NEO DUO was exercised, and results duplicated where necessary for the 2nd radio.

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/ Support)	Equipment Description	Manufacturer	Model No.	Serial No.
EUT	Dual Carrier 5.x GHz Base Station with Beamforming Antenna	RADWIN	RADWIN NEO DUO	Prototype
Support	POE Power Supply	Sinpro	CPU55A-270-1	--
Support	Laptop	Dell	--	--

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	RADWIN	MR0269440	Sector	11.0	-	90	Yes	5725 - 5850
integral	RADWIN	MR0269440BF	Directional	11.0	6.0	30	Yes	5725 - 5850

BF Gain - Beamforming Gain
 Dir BW - Directional BeamWidth
 X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# of Ports	Screened	Conn Type	Data Type	Bit Rate	Environment	Config
Ethernet PoE IN	>30m	1			Packet Data	1000	End-User	Without Primary Protection

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
5725 - 5850 MHz				
10MHz	39.00	5,730.00	5785.00	5845.00
20MHz	78.00	5,735.00	5785.00	5840.00
40MHz	180.00	5745.00	5785.00	5830.00
80MHz	390.00	5765.00	5785.00	5810.00

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

6. TEST SUMMARY

List of Measurements


Test Header	Result	Data Link
Peak Transmit Power	Complies	View Data
6 dB & 99% Bandwidth	Complies	View Data
Power Spectral Density	Complies	View Data
Radiated	Complies	-
TX Spurious & Restricted Band Emissions	Complies	-
RADWIN MR0269440	Complies	View Data
RADWIN MR0269440BF	Complies	View Data
Restricted Edge & Band-Edge Emissions	Complies	-
RADWIN MR0269440	Complies	View Data
RADWIN MR0269440BF	Complies	View Data
Digital Emissions	Complies	See RDWN73-U4 Report
AC Wireline	Complies	

7. TEST EQUIPMENT CONFIGURATION(S)


7.1. Radiated Emissions - 3m Chamber

Test Setup for Radiated Emissions for above and below 1 GHz

Radiated Emissions Below 1GHz Test Setup

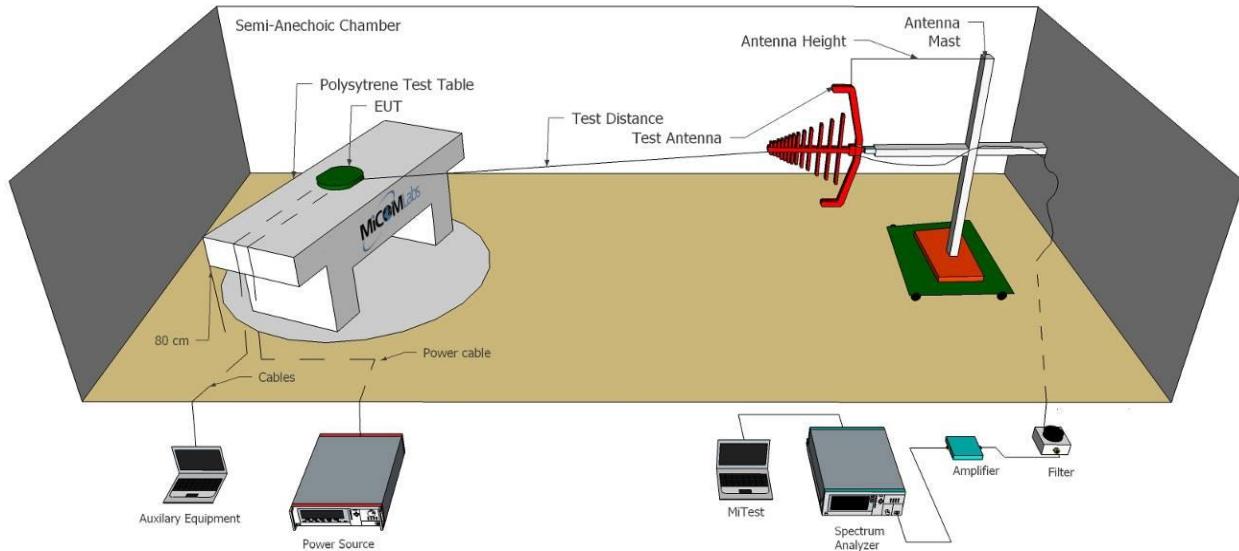

Radiated Emissions Above 1GHz Test Setup

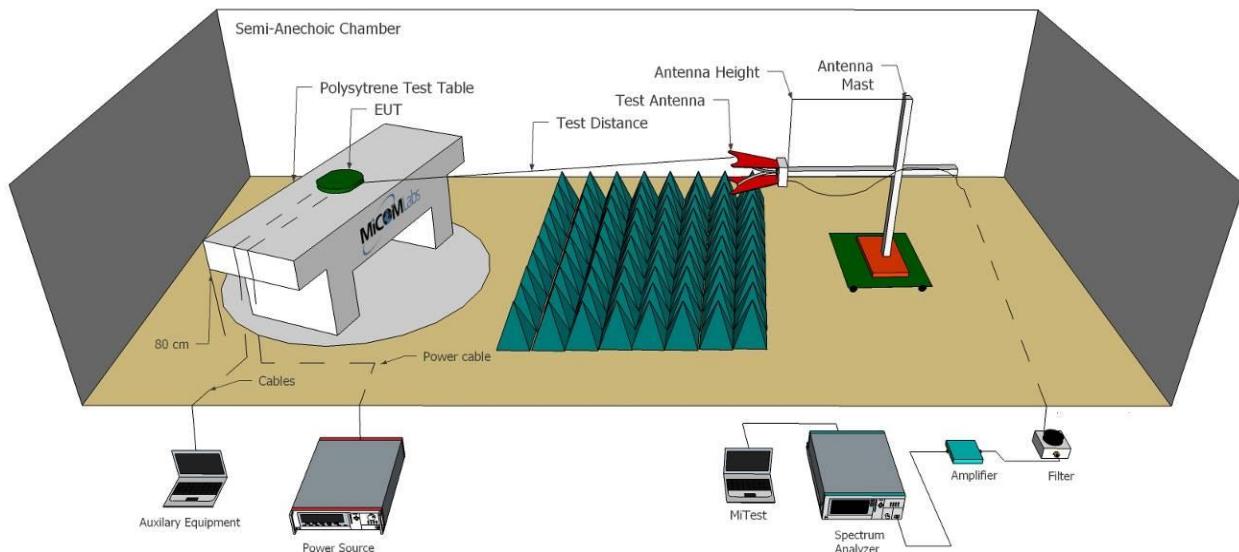

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	26 Apr 2021
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	4 Apr 2021
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	4 May 2021
378	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100107/040	12 Jun 2021
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	9 May 2021
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	12 May 2021
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	9 May 2021
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	4 May 2021
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	4 May 2021
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	4 May 2021
466	Low Pass Filter DC-1500 MHz	Mini-Circuits	NLP-1750+	VUU10401438	4 May 2021
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	4 May 2021
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	4 May 2021
510	Barometer/Thermometer	Control Company	68000-49	170871375	20 Dec 2021
518	Cable - Amp to Antenna	SRC Haverhill	157-3051574	518	4 May 2021
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	4 May 2021

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

9. TEST RESULTS

9.1. Peak Transmit Power

Conducted Test Conditions for Maximum Conducted Output Power			
Standard:	FCC CFR 47:15.407 RSS-247: 6.2.4.1	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Maximum Conducted Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)(1)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D02 General UNII Test Procedures New Rules v01		

Test Procedure for Maximum Output Power Measurement

Spectrum Analyzer Method. KDB 789033 defines a methodology using spectrum analyzer. Where power shall be calculated by integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99% occupied bandwidth of the signal. However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a). Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document. Supporting KDB's referenced below.

KDB 662911 D01 & KDB 662911 D02

NOTE: KDB 412172 D01 was used to determine the EIRP from the results of a power measurements performed under far-field conditions with respect to all transmit and receive (measurement) antennas.

Radiated measurements used for compliance with conducted limits, the following steps are required to ensure that the total emission power is determined for equipment driving cross polarized antennas:

- (1) Measure radiated emissions with vertical and horizontal polarizations of the measurement antenna;
- (2) Convert each radiated measurement to transmit power based on the antenna gain;

EIRP level to an equivalent electric field strength using the following relationship:

$$E = EIRP - 20 \log(D) + 104.8$$

Where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- (3) Sum the powers across the two polarizations to compare the resultant electric field strength level to the applicable limit.

$$\text{Calculated Power} = A + G + Y + 10 \log(1/x) \text{ dBm}$$

A = Total Power $[10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits Maximum Conducted Output Power

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3), RSS-247: 6.2.4.1

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Consolidated Power Results, EIRP Limits

The EUT was tested for Radiated Output Power and the following tables define the worst case compliant results defined for each Antenna

Output Power - Consolidated Summary Table

Antenna Type – Integrated (outdoor use only)

Antenna	Gain	Channel Bandwidth	Channel	Combined Output Power (H+V)	Calc EIRP	Limit	Margin	Power Setting
Model Number	dBi	MHz	MHz	dBm	dBm/ EIRP	dBm/ EIRP	dB	
MR0269440	11.0	10	5730	24.95	35.95	36.00	-0.05	5.0
			5785	24.84	35.84	36.00	-0.16	6.0
			5845	24.57	35.57	36.00	-0.43	6.0
		20	5735	24.90	35.9	36.00	-0.1	5.5
			5785	24.64	35.64	36.00	-0.36	6.0
			5840	24.92	35.92	36.00	-0.08	6.5
		40	5745	24.87	35.87	36.00	-0.13	6.5
			5785	24.91	35.91	36.00	-0.09	6.5
			5830	24.92	35.92	36.00	-0.08	6.5
		80	5765	24.50	35.5	36.00	-0.5	6.5
			5785	24.98	35.98	36.00	-0.02	6.0
			5810	24.98	35.98	36.00	-0.02	6.5
MR0269440BF	17.0	10	5730	18.48	35.48	36.00	-0.52	-1.0
			5785	18.66	35.66	36.00	-0.34	-1.0
			5845	18.71	35.71	36.00	-0.29	-0.5
		20	5735	18.93	35.93	36.00	-0.07	-1.0
			5785	18.64	35.64	36.00	-0.36	-0.5
			5840	18.55	35.55	36.00	-0.45	-0.5
		40	5745	18.68	35.68	36.00	-0.32	-1.0
			5785	18.58	35.58	36.00	-0.42	-1.0
			5830	18.50	35.5	36.00	-0.5	-1.0
		80	5765	18.74	35.74	36.00	-0.26	-1.0
			5785	18.68	35.68	36.00	-0.32	-1.0
			5810	18.76	35.76	36.00	-0.24	-1.0

9.1.1. Non-Beamforming

The following table identifies the power referenced to the "antenna ports"

Equipment Configuration for RF Output Power					
Variant:	10MHz Bandwidth		Duty Cycle (%):	99	
Data Rate:	39 MBit/s		Antenna Gain (dBi):	11.0	
Modulation:	256QAM		Beam Forming Gain (Y)(dB):	Not Applicable	
TPC:	Not Applicable		Tested By:	JMH	
Engineering Test Notes:					

Test Measurement Results

Test Frequency (MHz)	Measured Output Power		Calculated Total Power	Limit	Margin	EUT Power Setting
	H	V	dBm	dB	Numeric	Numeric
5730	21.11	21.22	24.95	25.00	-0.05	5.0
5785	20.77	21.32	24.84	25.00	-0.16	6.0
5845	20.42	21.12	24.57	25.00	-0.43	6.0

Traceability to Industry Recognized Test Methodologies
Work Instruction: WI-01 MEASURING RF OUTPUT POWER
Uncertainty: ±1.33 dB

NOTE: KDB 412172 D01 was used to determine the EIRP from the results of a power measurements performed under far-field conditions with respect to all transmit and receive (measurement) antennas.

Equipment Configuration for RF Output Power

Variant:	20MHz Bandwidth	Duty Cycle (%):	99
Data Rate:	78 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	256 QAM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit	Margin	EUT Power Setting
	H	V	dBm	dB	Numeric	Numeric
5735	21.08	21.15	24.90	25.00	-0.10	5.5
5785	20.58	21.12	24.64	25.00	-0.36	6.0
5840	20.81	21.45	24.92	25.00	-0.08	6.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

NOTE: KDB 412172 D01 was used to determine the EIRP from the results of a power measurements performed under far-field conditions with respect to all transmit and receive (measurement) antennas.

Equipment Configuration for RF Output Power

Variant:	40MHz Bandwidth	Duty Cycle (%):	91
Data Rate:	180 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	256 QAM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit	Margin	EUT Power Setting
	H	V	dBm	dB	Numeric	Numeric
5745	21.57	20.55	24.87	25.00	-0.13	6.5
5785	21.57	20.64	24.91	25.00	-0.09	6.5
5830	21.59	20.63	24.92	25.00	-0.08	6.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

NOTE: KDB 412172 D01 was used to determine the EIRP from the results of a power measurements performed under far-field conditions with respect to all transmit and receive (measurement) antennas.

Equipment Configuration for RF Output Power

Variant:	80MHz Bandwidth	Duty Cycle (%):	85
Data Rate:	390 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	256 QAM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit	Margin	EUT Power Setting
	H	V	dBm	dB	Numeric	Numeric
5765	21.3	20.05	24.50	25.00	-0.50	6.5
5785	21.62	20.74	24.98	25.00	-0.02	6.0
5810	21.72	20.6	24.98	25.00	-0.02	6.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

NOTE: KDB 412172 D01 was used to determine the EIRP from the results of a power measurements performed under far-field conditions with respect to all transmit and receive (measurement) antennas.

9.1.2 Beamforming

Equipment Configuration for RF Output Power

Variant:	10MHz Bandwidth	Duty Cycle (%):	99
Data Rate:	39 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	6.0
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit	Margin	EUT Power Setting
	H	V	dBm			
5730	20.19	21.15	18.48	19.00	-0.52	-1.0
5785	20.8	20.95	18.66	19.00	-0.34	-1.0
5845	20.71	21.14	18.71	19.00	-0.29	-0.5

Traceability to Industry Recognized Test Methodologies

Work Instruction: WI-01 MEASURING RF OUTPUT POWER

Uncertainty: ± 1.33 dB

NOTE: KDB 412172 D01 was used to determine the EIRP from the results of a power measurements performed under far-field conditions with respect to all transmit and receive (measurement) antennas.

Equipment Configuration for RF Output Power

Variant:	20MHz Bandwidth	Duty Cycle (%):	99
Data Rate:	78 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	256 QAM	Beam Forming Gain (Y)(dB):	6.0
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit	Margin	EUT Power Setting
	H	V	dBm	dB	Numeric	Numeric
5735	20.65	21.59	18.93	19.00	-0.07	-1.0
5785	20.74	20.97	18.64	19.00	-0.36	-0.5
5840	20.27	21.22	18.55	19.00	-0.45	-0.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

NOTE: KDB 412172 D01 was used to determine the EIRP from the results of a power measurements performed under far-field conditions with respect to all transmit and receive (measurement) antennas.

Equipment Configuration for RF Output Power

Variant:	40MHz Bandwidth	Duty Cycle (%):	91
Data Rate:	180 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	256 QAM	Beam Forming Gain (Y)(dB):	6.0
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit	Margin	EUT Power Setting
	H	V	dBm	dB	Numeric	Numeric
5745	20.34	21.39	18.68	19.00	-0.32	-1.0
5785	20.66	20.93	18.58	19.00	-0.42	-1.0
5830	20.18	21.19	18.50	19.00	-0.50	-1.0

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

NOTE: KDB 412172 D01 was used to determine the EIRP from the results of a power measurements performed under far-field conditions with respect to all transmit and receive (measurement) antennas.

Equipment Configuration for RF Output Power

Variant:	80MHz Bandwidth	Duty Cycle (%):	85
Data Rate:	390 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	256 QAM	Beam Forming Gain (Y)(dB):	6.0
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Output Power		Calculated Total Power	Limit	Margin	EUT Power Setting
	H	V	dBm	dB	Numeric	Numeric
5765	20.75	21.16	18.74	19.00	-0.26	-1.0
5785	20.93	20.87	18.68	19.00	-0.32	-1.0
5810	20.82	21.12	18.76	19.00	-0.24	-1.0

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

NOTE: KDB 412172 D01 was used to determine the EIRP from the results of a power measurements performed under far-field conditions with respect to all transmit and receive (measurement) antennas.

9.2. 6 dB & 99% Bandwidth

Conducted Test Conditions for 6 dB and 99% Bandwidth						
Standard:	FCC CFR 47:15.407, RSS-247	Ambient Temp. (°C):	24.0 - 27.5			
Test Heading:	6 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45			
Standard Section(s):	15.407 (a), RSS-247: 6.2.4.1	Pressure (mBars):	999 - 1001			
Reference Document(s):	See Normative References					
Test Procedure for 6 dB and 99% Bandwidth Measurement The bandwidth at 6 dB and 99 % is measured radiated, in a 3 meter chamber, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported. In this case Vertical a (V) and Horizontal for port b (H).						
Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document.						

Equipment Configuration for 6 dB & 99% Occupied Bandwidth

Variant:	10 MHz Bandwidth	Duty Cycle (%):	99
Data Rate:	39 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Frequency	Measured 6 dB Bandwidth (MHz)		6 dB Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5730.0	9.09	9.09		9.09	9.09	
5785.0	9.01	9.17		9.17	9.01	
5845.0	8.97	9.09		9.09	8.97	

Test Frequency	Measured 99% Bandwidth (MHz)		99% Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5730.0	9.81	9.93		9.81	9.93	
5785.0	9.89	9.89		9.89	9.89	
5845.0	9.89	9.89		9.89	9.89	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 6 dB & 99% Occupied Bandwidth

Variant:	20 MHz Bandwidth	Duty Cycle (%):	99
Data Rate:	78 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)		6 dB Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5735.0	17.87	17.79		17.87	17.79	
5785.0	17.95	18.03		18.03	17.95	
5840.0	17.87	17.95		17.95	17.87	

Test Frequency	Measured 99% Bandwidth (MHz)		99% Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5735.0	18.43	18.59		18.59	18.43	
5785.0	18.43	18.43		18.43	18.43	
5840.0	18.43	18.51		18.51	18.43	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 6 dB & 99% Occupied Bandwidth

Variant:	40 MHz Bandwidth	Duty Cycle (%):	91
Data Rate:	180 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)		6 dB Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5745.0	36.71	36.71		36.71	36.71	
5785.0	36.71	36.71		36.71	36.71	
5830.0	36.56	36.40		36.56	36.40	

Test Frequency	Measured 99% Bandwidth (MHz)		99% Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5745.0	36.87	37.71		37.87	37.71	
5785.0	36.87	36.71		36.87	36.71	
5830.0	36.71	36.71		36.71	36.71	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 6 dB & 99% Occupied Bandwidth

Variant:	80MHz Bandwidth	Duty Cycle (%):	85
Data Rate:	390 MBit/s	Antenna Gain (dBi):	11.0
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)		6 dB Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5765.0	76.63	76.63		76.63	76.63	
5785.0	76.63	76.63		76.63	76.63	
5810.0	76.63	76.63		76.63	76.63	

Test Frequency	Measured 99% Bandwidth (MHz)		99% Bandwidth (MHz)			
	MHz	H	V	Highest	Lowest	
5765.0	75.99	75.99		76.63	75.99	
5785.0	75.99	75.99		75.99	75.99	
5810.0	75.99	75.99		75.99	75.99	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.3. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
Standard:	FCC CFR 47:15.407 RSS-247: 6.2.4.1	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D02 General UNII Test Procedures New Rules v01		

Test Procedure for Power Spectral Density

The In-Band power spectral density was measured using the measure and sum approach per FCC KDB 662911 (D01 Multiple Transmitter Output v02.)

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with N transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were calculated on a computer, and the results read back into the spectrum analyzer as a data file to produce a representative plot of total spectral power density.

Calculated Power = $A + 10 \log (1/x) \text{ dBm}$

A = Total Power Spectral Density $[10 \log_{10} (10a/10 + 10b/10 + 10c/10 + 10d/10)]$

x = Duty Cycle

Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document. Supporting KDB's referenced below.

KDB 662911 D01 & KDB 662911 D02

Radiated measurements used for compliance with conducted limits, the following steps are required to ensure that the total emission power is determined for equipment driving cross polarized antennas:

- (1) Measure radiated emissions with vertical and horizontal polarizations of the measurement antenna;
- (2) Convert each radiated measurement to transmit power based on the antenna gain;

EIRP level to an equivalent electric field strength using the following relationship:
 $E = \text{EIRP} - 20 \log (D) + 104.8$

Where:

E = electric field strength in $\text{dB}\mu\text{V/m}$,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- (3) Sum the powers or PSDs across the two polarizations to compare the resultant electric field strength level to the applicable limit.

Calculated Power = $A + G + Y + 10 \log (1/x) \text{ dBm}$

A = Total Power $[10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits Maximum Power Spectral Density

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3), RSS-247: 6.2.4.1

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

9.3.1. Non-Beamforming

Equipment Configuration for Power Spectral Density

Variant:	10 MHz Bandwidth	Duty Cycle (%):	99
Data Rate:	39 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density		Summation Peak Marker + DCCF (+0.0 dB)	Limit	Margin
	(dBm/500 kHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
5730.0	9.46	12.62	15.10	25.00	-9.90
5785.0	10.39	11.93	15.01	25.00	-9.99
5845.0	9.08	11.60	14.30	25.00	-10.70

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF – Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

KDB 789033 - D02 General UNII Test Procedures New Rules v01 was used to calculate the above Power Spectral Density

Equipment Configuration for Power Spectral Density

Variant:	20 MHz Bandwidth	Duty Cycle (%):	99
Data Rate:	78 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density		Summation Peak Marker + DCCF (+0.0 dB)	Limit	Margin
	(dBm/500 kHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
7350	<u>7.89</u>	<u>9.55</u>	12.58	25.00	-12.42
5785.0	<u>8.73</u>	<u>9.47</u>	12.90	25.00	-12.10
5840.0	<u>8.27</u>	<u>10.66</u>	13.41	25.00	-11.59

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

KDB 789033 - D02 General UNII Test Procedures New Rules v01 was used to calculate the above Power Spectral Density

Equipment Configuration for Power Spectral Density

Variant:	40 MHz Bandwidth	Duty Cycle (%):	91
Data Rate:	180 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density		Summation Peak Marker + DCCF (+0.41 dB)	Limit	Margin
	(dBm/500 kHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
5745.0	4.67	6.87	10.10	25.00	-14.90
5785.0	4.99	6.75	10.15	25.00	-14.85
5830.0	4.94	7.73	10.75	25.00	14.25

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF – Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

KDB 789033 - D02 General UNII Test Procedures New Rules v01 was used to calculate the above Power Spectral Density

Equipment Configuration for Power Spectral Density

Variant:	80 MHz Bandwidth	Duty Cycle (%):	85
Data Rate:	390 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density		Summation Peak Marker + DCCF (+0.71 dB)	Limit	Margin
	(dBm/500 KHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
5765.0	1.63	3.53	7.17	25.00	-17.83
5785.0	3.00	3.77	7.89	25.00	-17.11
5810.0	0.89	3.50	6.88	25.00	-18.12

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF – Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

KDB 789033 - D02 General UNII Test Procedures New Rules v01 was used to calculate the above Power Spectral Density

9.3.2. Beamforming

Equipment Configuration for Power Spectral Density

Variant:	10 MHz Bandwidth	Duty Cycle (%):	99
Data Rate:	39 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	6.0
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density		Summation Peak Marker + DCCF (+0.00 dB)	Limit	Margin
	(dBm/500 KHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
5730.0	8.01	8.08	5.83	19.0	-13.17
5785.0	7.96	8.48	6.01	19.0	-12.99
5845.0	7.57	8.82	6.02	19.0	-12.98

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF – Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

KDB 789033 - D02 General UNII Test Procedures New Rules v01 was used to calculate the above Power Spectral Density

Equipment Configuration for Power Spectral Density

Variant:	20 MHz Bandwidth	Duty Cycle (%):	99
Data Rate:	78 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	6.0
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density		Summation Peak Marker + DCCF (+0.00dB)	Limit	Margin
	(dBm/500 KHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
5735.0	6.04	6.26	3.93	19.0	-15.07
5785.0	5.95	6.76	4.16	19.0	-14.84
5840.0	5.50	6.71	3.93	19.0	-15.07

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

DCCF – Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

KDB 789033 - D02 General UNII Test Procedures New Rules v01 was used to calculate the above Power Spectral Density

Equipment Configuration for Power Spectral Density

Variant:	40 MHz Bandwidth	Duty Cycle (%):	91
Data Rate:	180 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	6.0
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density		Summation Peak Marker + DCCF (+0.41 dB)	Limit	Margin
	(dBm/500 KHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
5745.0	3.72	4.56	2.35	19.0	-16.65
5785.0	4.01	3.31	1.87	19.0	-17.13
5830.0	3.41	3.59	1.69	19.0	-17.31

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF – Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

KDB 789033 - D02 General UNII Test Procedures New Rules v01 was used to calculate the above Power Spectral Density

Equipment Configuration for Power Spectral Density

Variant:	80 MHz Bandwidth	Duty Cycle (%):	85
Data Rate:	390 MBit/s	Antenna Gain (dBi):	11.00
Modulation:	256QAM	Beam Forming Gain (Y)(dB):	6.0
TPC:	Not Applicable	Tested By:	JMH
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density		Summation Peak Marker + DCCF (+0.71 dB)	Limit	Margin
	(dBm/500 kHz)				
MHz	H	V	dBm/MHz	dBm/MHz	dB
5765.0	-1.08	-0.39	-2.23	19.0	-21.23
5785.0	1.00	0.87	-0.58	19.0	-19.58
5810.0	-2.38	-0.78	-3.02	19.0	-22.02

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF – Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

KDB 789033 - D02 General UNII Test Procedures New Rules v01 was used to calculate the above Power Spectral Density

9.4. Radiated

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (b), 15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Limits for Restricted Bands (15.205, 15.209)

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

FS = R + AF + CORR - FO

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor
CORR = Correction Factor = $CL - AG + NFL$
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss

Example:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB μ V/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dB μ V/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:
 Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m
 48 dBmV/m = 250 mV/m

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

(3) Cable locating equipment operated pursuant to §15.213.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

9.4.1. TX Spurious & Restricted Band Emissions

9.4.1.1. RADWIN MR0269440

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN MR0269440	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5730.00	Data Rate:	13.00 MBit/s
Power Setting:	6.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	4809.74	59.91	2.85	-12.42	50.34	Max Peak	Horizontal	188	329	68.2	-17.9	Pass
#2	4809.74	45.75	2.85	-12.42	36.18	Max Avg	Horizontal	188	329	54.0	-17.8	Pass
#3	5726.62	61.48	3.17	-11.21	53.44	Fundamental	Vertical	200	0	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN MR0269440	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5785.00	Data Rate:	13.00 MBit/s
Power Setting:	6.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	4808.30	61.30	2.85	-12.43	51.72	Max Peak	Horizontal	184	352	68.2	-16.5	Pass	
#2	4808.30	47.35	2.85	-12.43	37.77	Max Avg	Horizontal	184	352	54.0	-16.2	Pass	
#3	5786.18	63.50	3.14	-10.96	55.68	Fundamental	Vertical	200	0	--	--		
#4	6250.18	52.52	3.25	-9.49	46.28	Peak (NRB)	Vertical	200	56	--	--	Pass	

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN MR0269440	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5845.00	Data Rate:	13.00 MBit/s
Power Setting:	6.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	4809.00	61.04	2.85	-12.42	51.47	Max Peak	Horizontal	183	0	68.2	-16.8	Pass	
#2	4809.00	46.98	2.85	-12.42	37.41	Max Avg	Horizontal	183	0	54.0	-16.6	Pass	
#3	5842.36	64.46	3.18	-10.75	56.89	Fundamental	Vertical	200	0	--	--		
#4	6279.29	51.78	3.34	-9.42	45.70	Peak (NRB)	Vertical	200	48	--	--	Pass	

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

9.4.1.2. RADWIN MR0269440BF

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN MR0269440BF	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	6	Duty Cycle (%):	99
Channel Frequency (MHz):	5730.00	Data Rate:	13.00 MBit/s
Power Setting:	0.0	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	4774.45	63.84	2.92	-12.47	54.29	Max Peak	Horizontal	177	3	68.2	-13.9	Pass	
#2	4774.45	49.70	2.92	-12.47	40.15	Max Avg	Horizontal	177	3	54.0	-13.9	Pass	
#3	4810.30	64.56	2.85	-12.42	54.99	Max Peak	Horizontal	192	0	68.2	-13.2	Pass	
#4	4810.30	50.49	2.85	-12.42	40.92	Max Avg	Horizontal	192	0	54.0	-13.1	Pass	
#5	5728.25	59.94	3.16	-11.21	51.89	Fundamental	Horizontal	200	0	--	--		
#6	6250.07	56.47	3.25	-9.49	50.23	Peak (NRB)	Vertical	200	0	--	--	Pass	

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN MR0269440BF	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	6	Duty Cycle (%):	99
Channel Frequency (MHz):	5785.00	Data Rate:	13.00 MBit/s
Power Setting:	0.0	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	4749.38	63.38	2.83	-12.36	53.85	Max Peak	Horizontal	186	354	68.2	-14.4	Pass	
#2	4749.38	49.48	2.83	-12.36	39.95	Max Avg	Horizontal	186	354	54.0	-14.1	Pass	
#3	4809.53	64.83	2.85	-12.42	55.26	Max Peak	Horizontal	179	0	68.2	-13.0	Pass	
#4	4809.53	50.59	2.85	-12.42	41.02	Max Avg	Horizontal	179	0	54.0	-13.0	Pass	
#5	5788.66	62.15	3.14	-10.90	54.39	Fundamental	Vertical	200	0	--	--		
#6	6249.75	56.48	3.25	-9.50	50.23	Peak (NRB)	Vertical	200	0	--	--	Pass	

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	RADWIN MR0269440BF	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	6	Duty Cycle (%):	99
Channel Frequency (MHz):	5845.00	Data Rate:	13.00 MBit/s
Power Setting:	0.0	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	4776.12	63.60	2.89	-12.46	54.03	Max Peak	Horizontal	178	6	68.2	-14.2	Pass	
#2	4776.12	50.01	2.89	-12.46	40.44	Max Avg	Horizontal	178	6	54.0	-13.6	Pass	
#3	5843.68	62.46	3.20	-10.74	54.92	Fundamental	Horizontal	200	0	--	--		
#4	6250.11	56.49	3.25	-9.49	50.25	Peak (NRB)	Vertical	200	0	--	--	Pass	

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.

9.4.2. Restricted Edge & Band-Edge Emissions

9.4.2.3. RADWIN MR0269440

RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

5725 MHz Radiated Lower Band-Edge Emissions

RADWIN MR0269440		Band-Edge Freq	Limit 68.2dB μ V/m	Limit 122.23 dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
10MHz	5725.00	5725.00	-0.39	0.6	11.5
20MHz	5725.00	5725.00	-0.5	12.1	11.0
40MHz	5725.00	5725.00	-0.5	-20.7	10.5
80MHz	5725.00	5725.00	-0.1	-24.00	9.5

5850 MHz Radiated Higher Band-Edge Emissions

RADWIN MR0269440		Band-Edge Freq	Limit 122.2dB μ V/m	Limit 98.2dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
10MHz	5850.00	5850.00	-6.9	-0.2	11.5
20MHz	5850.00	5850.00	-15.7	-0.5	11.5
40MHz	5850.00	5850.00	-19.9	-0.3	11.5
80MHz	5850.00	5850.00	-25.3	-0.6	9.5

Click on the links to view the data.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5730.00	Data Rate:	13.00 MBit/s
Power Setting:	11.5	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5639.25	29.85	3.11	34.64	67.60	Max Peak	Vertical	185	29	68.2	-0.6	Pass	
#2	5725.00	80.43	3.19	34.72	118.34	Max Peak	Vertical	185	29	122.2	-3.9	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440	Variant:	20MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5735.00	Data Rate:	13.00 MBit/s
Power Setting:	11.0	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5648.27	30.01	3.08	34.63	67.72	Max Peak	Vertical	185	29	68.2	-0.5	Pass	
#2	5725.00	72.16	3.19	34.72	110.07	Max Peak	Vertical	185	29	122.2	-12.1	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440	Variant:	40MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	90
Channel Frequency (MHz):	5745.00	Data Rate:	13.00 MBit/s
Power Setting:	10.5	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5646.82	30.06	3.08	34.63	67.77	Max Peak	Vertical	185	29	68.2	-0.5	Pass	
#2	5725.00	63.58	3.19	34.72	101.49	Max Peak	Vertical	185	29	122.2	-20.7	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440	Variant:	80MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	85
Channel Frequency (MHz):	5765.00	Data Rate:	13.00 MBit/s
Power Setting:	9.5	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5645.02	30.45	3.08	34.63	68.16	Max Peak	Vertical	185	29	68.2	-0.1	Pass	
#2	5725.00	60.25	3.19	34.72	98.16	Max Peak	Vertical	185	29	122.2	-24.0	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440	Variant:	10MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5845.00	Data Rate:	13.00 MBit/s
Power Setting:	11.5	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	77.18	3.24	34.96	115.38	Max Peak	Vertical	185	29	122.2	-6.9	Pass	
#3	5926.37	29.78	3.17	35.11	68.06	Max Peak	Vertical	185	29	68.2	-0.2	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440	Variant:	20MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5840.00	Data Rate:	13.00 MBit/s
Power Setting:	11.5	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	68.35	3.24	34.96	106.55	Max Peak	Vertical	185	29	122.2	-15.7	Pass	
#3	5954.95	29.37	3.21	35.13	67.71	Max Peak	Vertical	185	29	68.2	-0.5	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440	Variant:	40MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	90
Channel Frequency (MHz):	5830.00	Data Rate:	13.00 MBit/s
Power Setting:	11.5	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	64.16	3.24	34.96	102.36	Max Peak	Vertical	185	29	122.2	-19.9	Pass	
#3	5925.91	29.63	3.17	35.11	67.91	Max Peak	Vertical	185	29	68.2	-0.3	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440	Variant:	80MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	85
Channel Frequency (MHz):	5810.00	Data Rate:	13.00 MBit/s
Power Setting:	9.5	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	58.72	3.24	34.96	96.92	Max Peak	Vertical	185	29	122.2	-25.3	Pass	
#3	5925.91	29.38	3.17	35.11	67.66	Max Peak	Vertical	185	29	68.2	-0.6	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

9.4.2.4. RADWIN MR0269440BF

RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

5725 MHz Radiated Lower Band-Edge Emissions

RADWIN MR0269440BF		Band-Edge Freq	Limit 68.2dB μ V/m	Limit 122.2dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
10MHz	5725.00	5725.00	-0.4	-5.8	6.0
20MHz	5725.00	5725.00	-0.2	-14.3	6.0
40MHz	5725.00	5725.00	-0.5	-19.8	6.0
80MHz	5725.00	5725.00	-0.4	-25.9	4.0

5850 MHz Radiated Higher Band-Edge Emissions

RADWIN MR0269440BF		Band-Edge Freq	Limit 122.2dB μ V/m	Limit 68.2dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
10MHz	5850.00	5850.00	-10.5	-0.5	6.0
20MHz	5850.00	5850.00	-17.5	-0.6	6.0
40MHz	5850.00	5850.00	-22.9	-0.3	6.0
80MHz	5850.00	5850.00	-29.3	-0.3	3.5

Click on the links to view the data.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440BF	Variant:	10MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	6.0	Duty Cycle (%):	99
Channel Frequency (MHz):	5730.00	Data Rate:	13.00 MBit/s
Power Setting:	6.0	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5645.38	30.17	3.08	34.63	67.88	Max Peak	Vertical	186	359	68.2	-0.4	Pass	
#2	5725.00	78.52	3.19	34.72	116.43	Max Peak	Vertical	186	359	122.2	-5.8	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440BF	Variant:	20MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	6	Duty Cycle (%):	99
Channel Frequency (MHz):	5735.00	Data Rate:	13.00 MBit/s
Power Setting:	6.0	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5640.33	30.31	3.10	34.64	68.05	Max Peak	Vertical	186	359	68.2	-0.2	Pass	
#2	5725.00	69.99	3.19	34.72	107.90	Max Peak	Vertical	186	359	122.2	-14.3	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440BF	Variant:	40MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	6.0	Duty Cycle (%):	90
Channel Frequency (MHz):	5745.00	Data Rate:	13.00 MBit/s
Power Setting:	6.0	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5645.38	29.99	3.08	34.63	67.70	Max Peak	Vertical	186	359	68.2	-0.5	Pass	
#2	5725.00	64.54	3.19	34.72	102.45	Max Peak	Vertical	186	359	122.2	-19.8	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440BF	Variant:	80MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	6.0	Duty Cycle (%):	85
Channel Frequency (MHz):	5765.00	Data Rate:	13.00 MBit/s
Power Setting:	4.0	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5637.81	29.94	3.11	34.64	67.79	Max Peak	Vertical	186	359	68.2	-0.4	Pass	
#2	5725.00	58.36	3.19	34.72	96.27	Max Peak	Vertical	186	359	122.2	-25.9	Pass	
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440BF	Variant:	10MHz
Antenna Gain (dBi):	11.00	Modulation:	OFDM
Beam Forming Gain (Y):	6	Duty Cycle (%):	99
Channel Frequency (MHz):	5845.00	Data Rate:	13.00 MBit/s
Power Setting:	6.0	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	73.55	3.24	34.96	111.75	Max Peak	Vertical	188	358	122.2	-10.5	Pass	
#3	5932.83	29.42	3.21	35.11	67.74	Max Peak	Vertical	188	358	68.2	-0.5	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440BF	Variant:	20MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	6.0	Duty Cycle (%):	99
Channel Frequency (MHz):	5840.00	Data Rate:	13.00 MBit/s
Power Setting:	6.0	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	66.53	3.24	34.96	104.73	Max Peak	Vertical	188	358	122.2	-17.5	Pass	
#3	5925.91	29.39	3.17	35.11	67.67	Max Peak	Vertical	188	358	68.2	-0.6	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440BF	Variant:	40MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	6.0	Duty Cycle (%):	90
Channel Frequency (MHz):	5830.00	Data Rate:	13.00 MBit/s
Power Setting:	6.0	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	61.16	3.24	34.96	99.36	Max Peak	Vertical	188	358	122.2	-22.9	Pass	
#3	5925.91	29.66	3.17	35.11	67.94	Max Peak	Vertical	188	358	68.2	-0.3	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.



Title: Radwin NEO, NEO DUO
To: FCC CFR 47 Subpart E 15.407, ISED RSS 247
Serial #: RDWN73-U3 Rev A

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	RADWIN MR0269440BF	Variant:	80MHz
Antenna Gain (dBi):	11.0	Modulation:	OFDM
Beam Forming Gain (Y):	6.0	Duty Cycle (%):	85
Channel Frequency (MHz):	5810.00	Data Rate:	13.00 MBit/s
Power Setting:	3.5	Tested By:	JMH


Test Measurement Results

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
#1	5850.00	54.71	3.24	34.96	92.91	Max Peak	Vertical	188	358	122.2	-29.3	Pass	
#3	5976.61	29.56	3.18	35.18	67.92	Max Peak	Vertical	188	358	68.2	-0.3	Pass	
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

A. APPENDIX - GRAPHICAL IMAGES

A.1. 6 dB & 99% Bandwidth

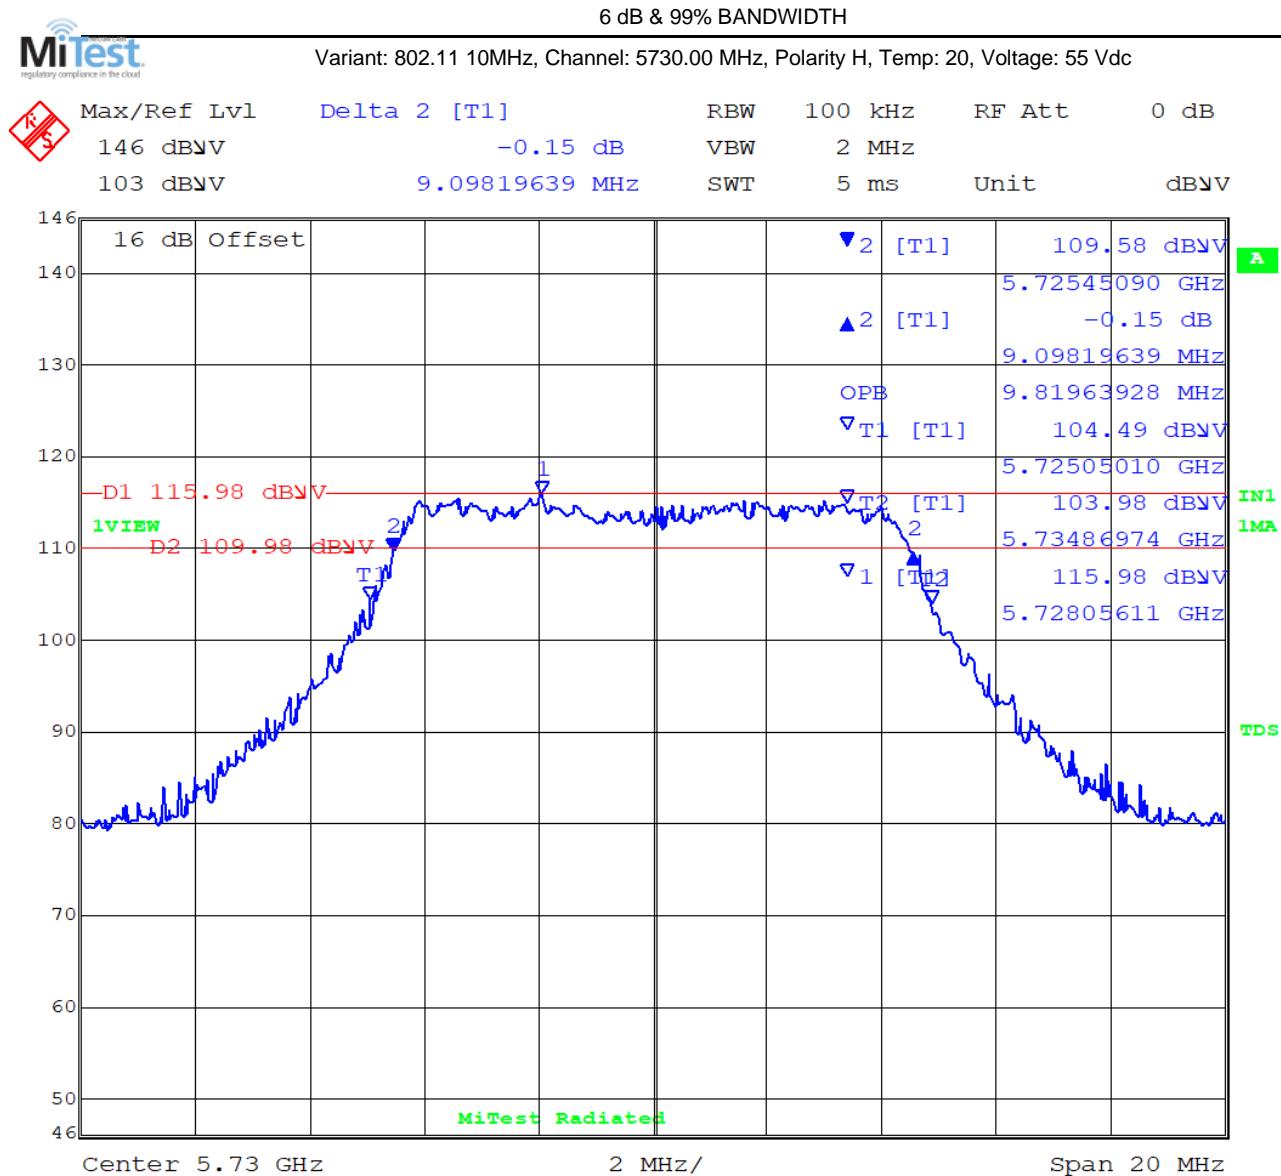

Date: 24.MAR.2021 17:26:25


Analyzer Setup	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD	Measured 6 dB Bandwidth: 9.09 MHz Measured 99% Bandwidth: 9.81 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 10MHz, Channel: 5730.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

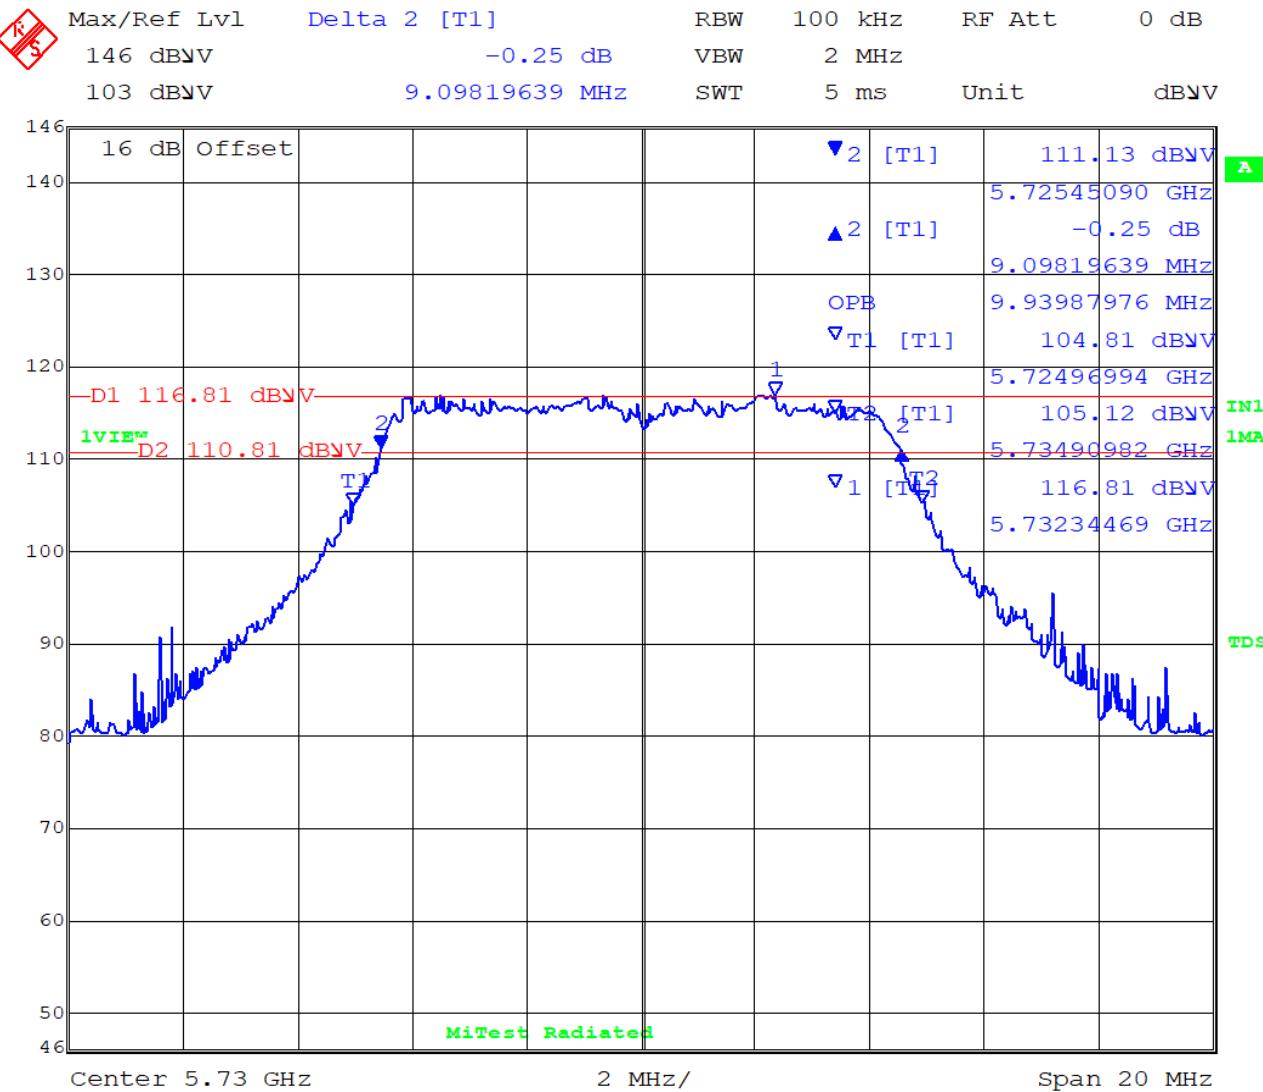

Date: 24.MAR.2021 17:29:45

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 9.09 MHz Measured 99% Bandwidth: 9.93 MHz


[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 10MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 55 Vdc

Max/Ref Lvl	Delta 2 [T1]	RBW	100 kHz	RF Att	0 dB
146 dB _V	-0.83 dB	VBW	2 MHz		
103 dB _V	9.01803607 MHz	SWT	5 ms	Unit	dB _V

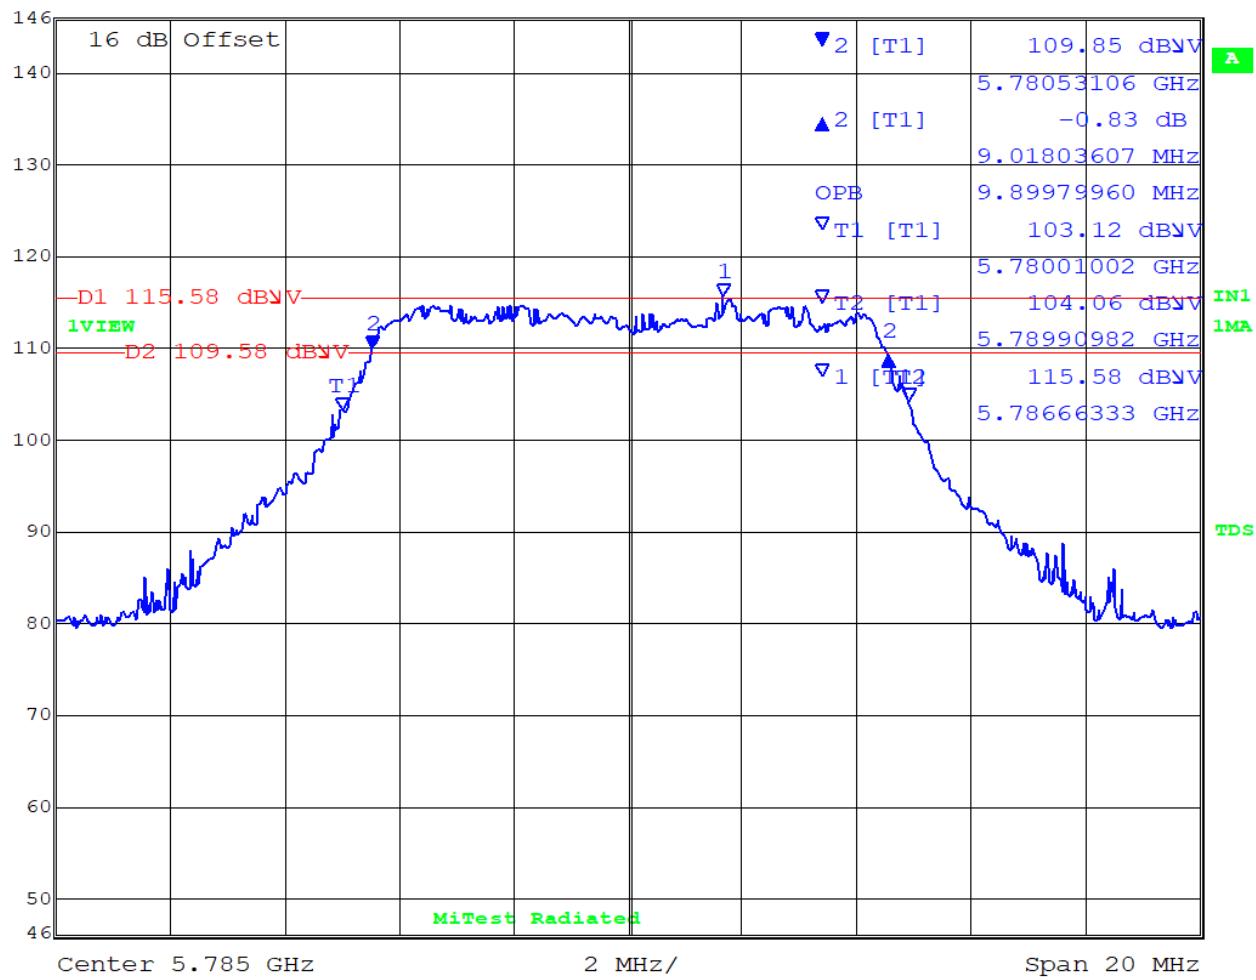

Date: 24.MAR.2021 17:38:24

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 9.01MHz Measured 99% Bandwidth: 9.89 MHz


[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 10MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

Max/Ref Lvl	Delta 2 [T1]	RBW	100 kHz	RF Att	0 dB
146 dB _V	-0.38 dB	VBW	2 MHz		
103 dB _V	9.17835671 MHz	SWT	5 ms	Unit	dB _V

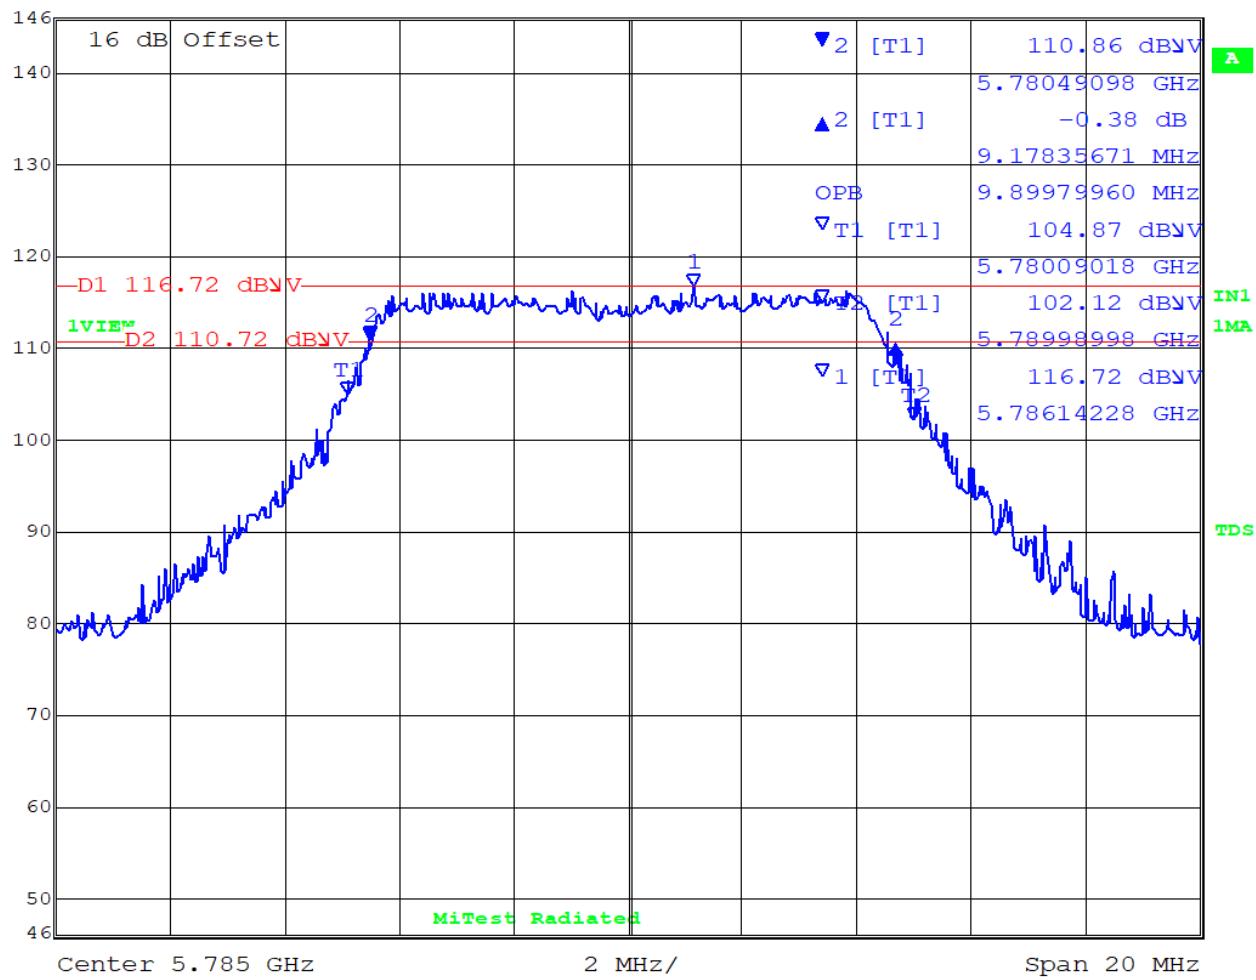

Date: 24.MAR.2021 17:36:53

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 9.17 MHz Measured 99% Bandwidth: 9.89 MHz


[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 10MHz, Channel: 5845.00 MHz, Polarity H, Temp: 20, Voltage: 55 Vdc

	Max/Ref Lvl	Delta 2 [T1]	RBW	100 kHz	RF Att	0 dB
	146 dB _{UV}	-0.16 dB	VBW	2 MHz		
	103 dB _{UV}	8.97795591 MHz	SWT	5 ms	Unit	dB _{UV}

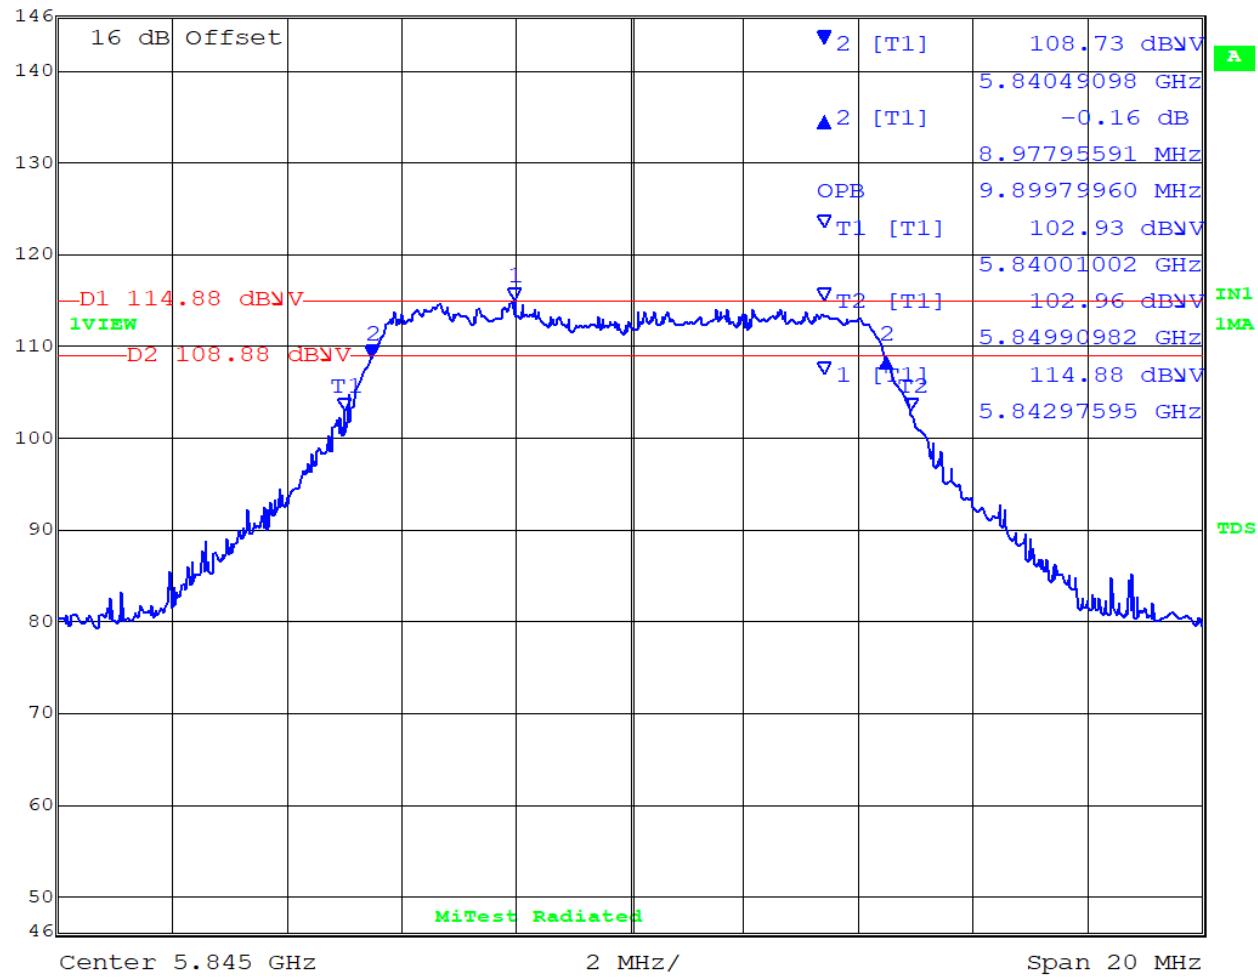

Date: 24.MAR.2021 17:45:20


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 8.97 MHz Measured 99% Bandwidth: 9.89 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 10MHz, Channel: 5845.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

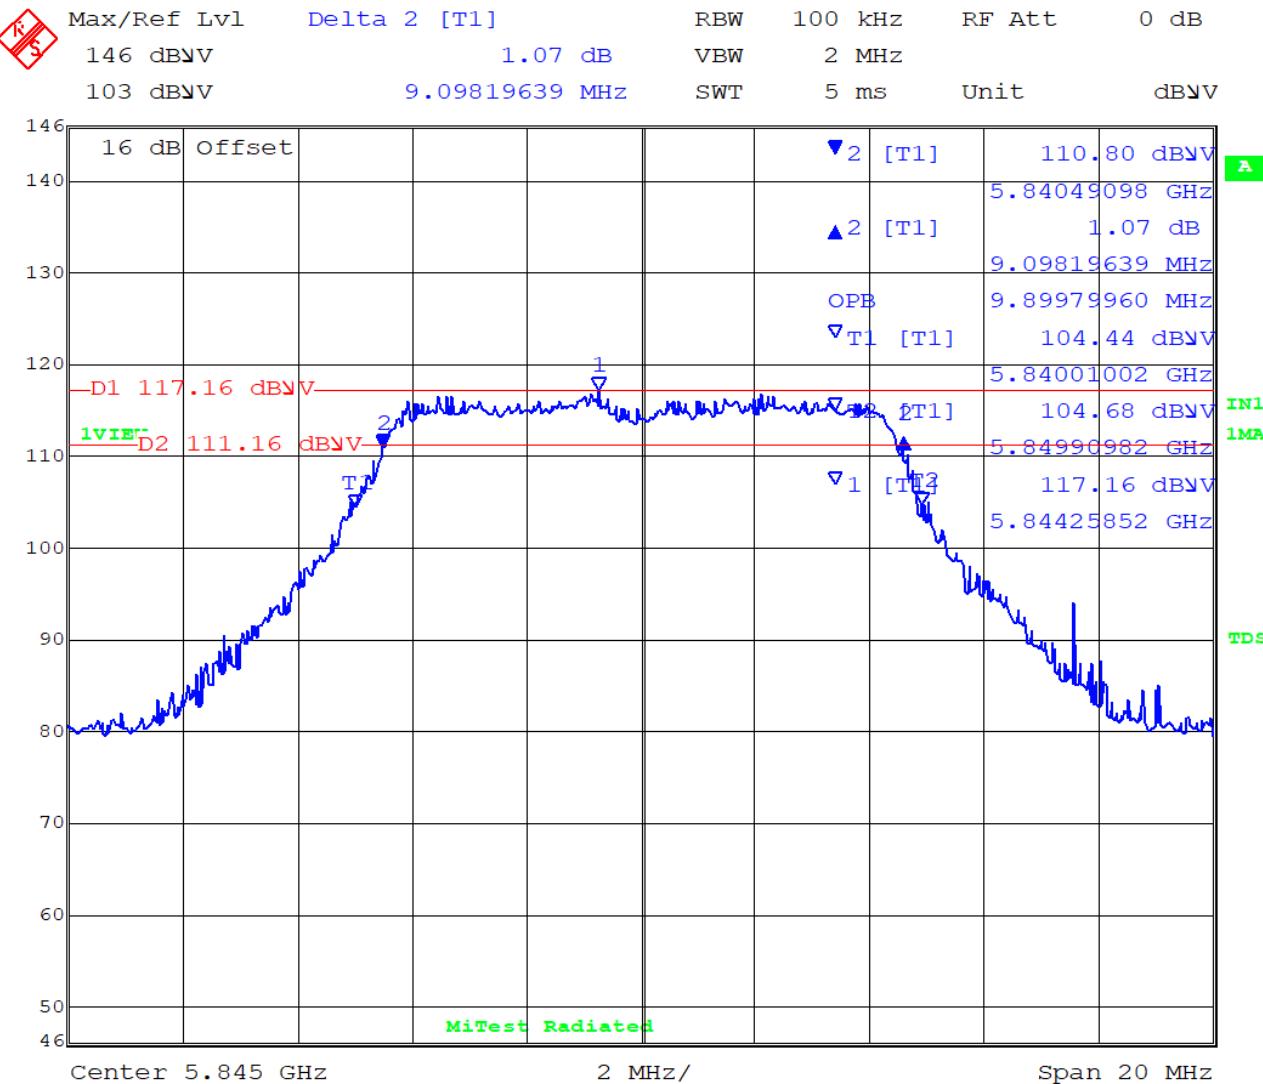

Date: 24.MAR.2021 17:42:57


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 9.09 MHz Measured 99% Bandwidth: 9.89 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 20MHz, Channel: 5735.00 MHz, Polarity H, Temp: 20, Voltage: 55 Vdc

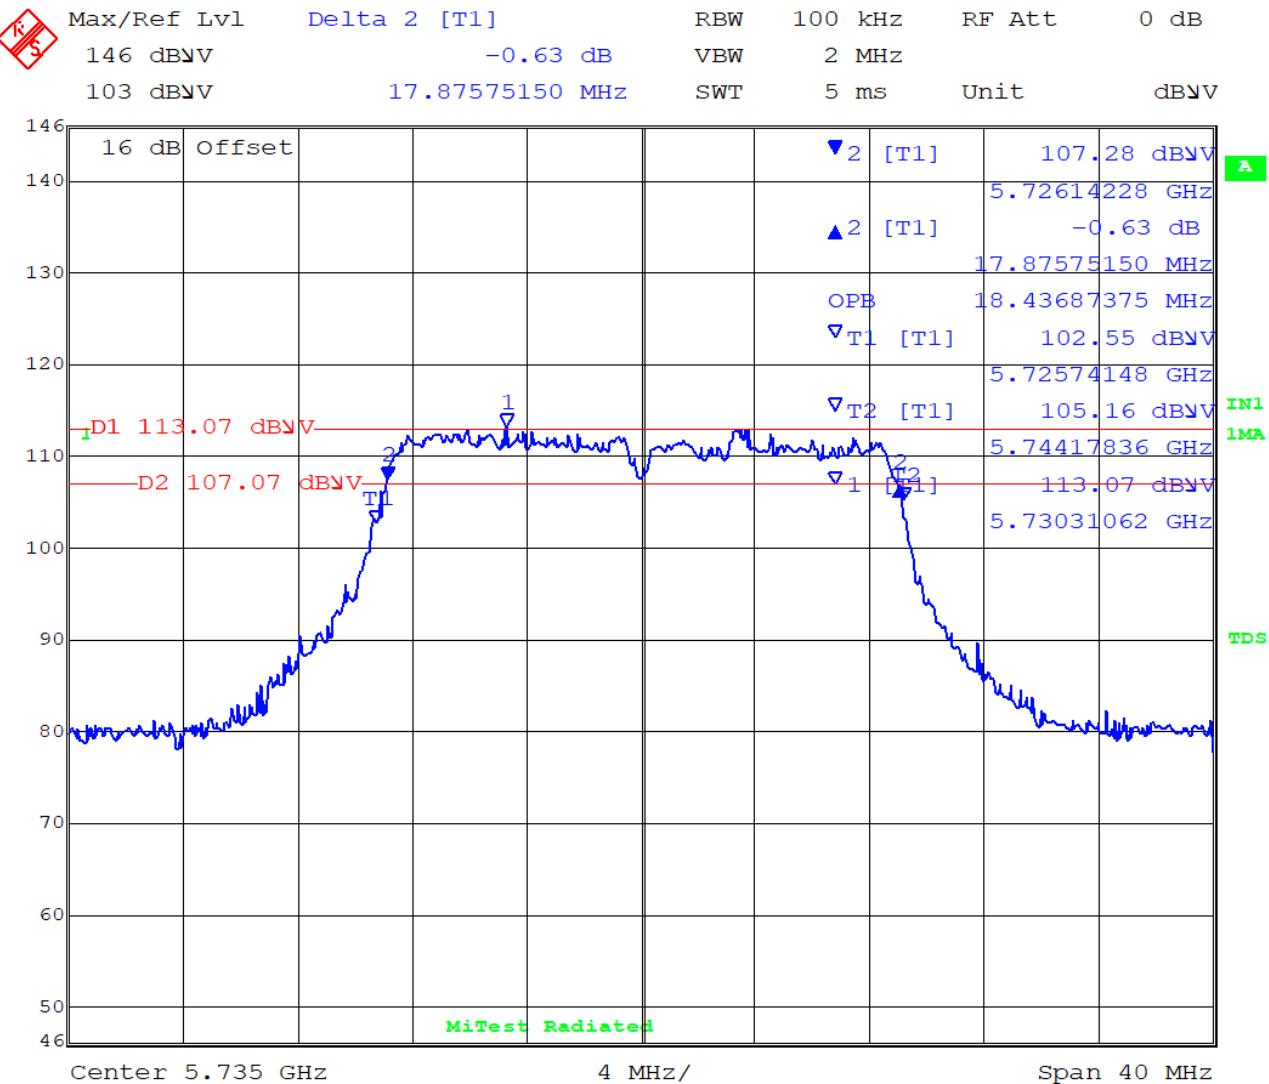

Date: 24.MAR.2021 17:22:42


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 17.87 MHz Measured 99% Bandwidth: 18.43 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 20MHz, Channel: 5735.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

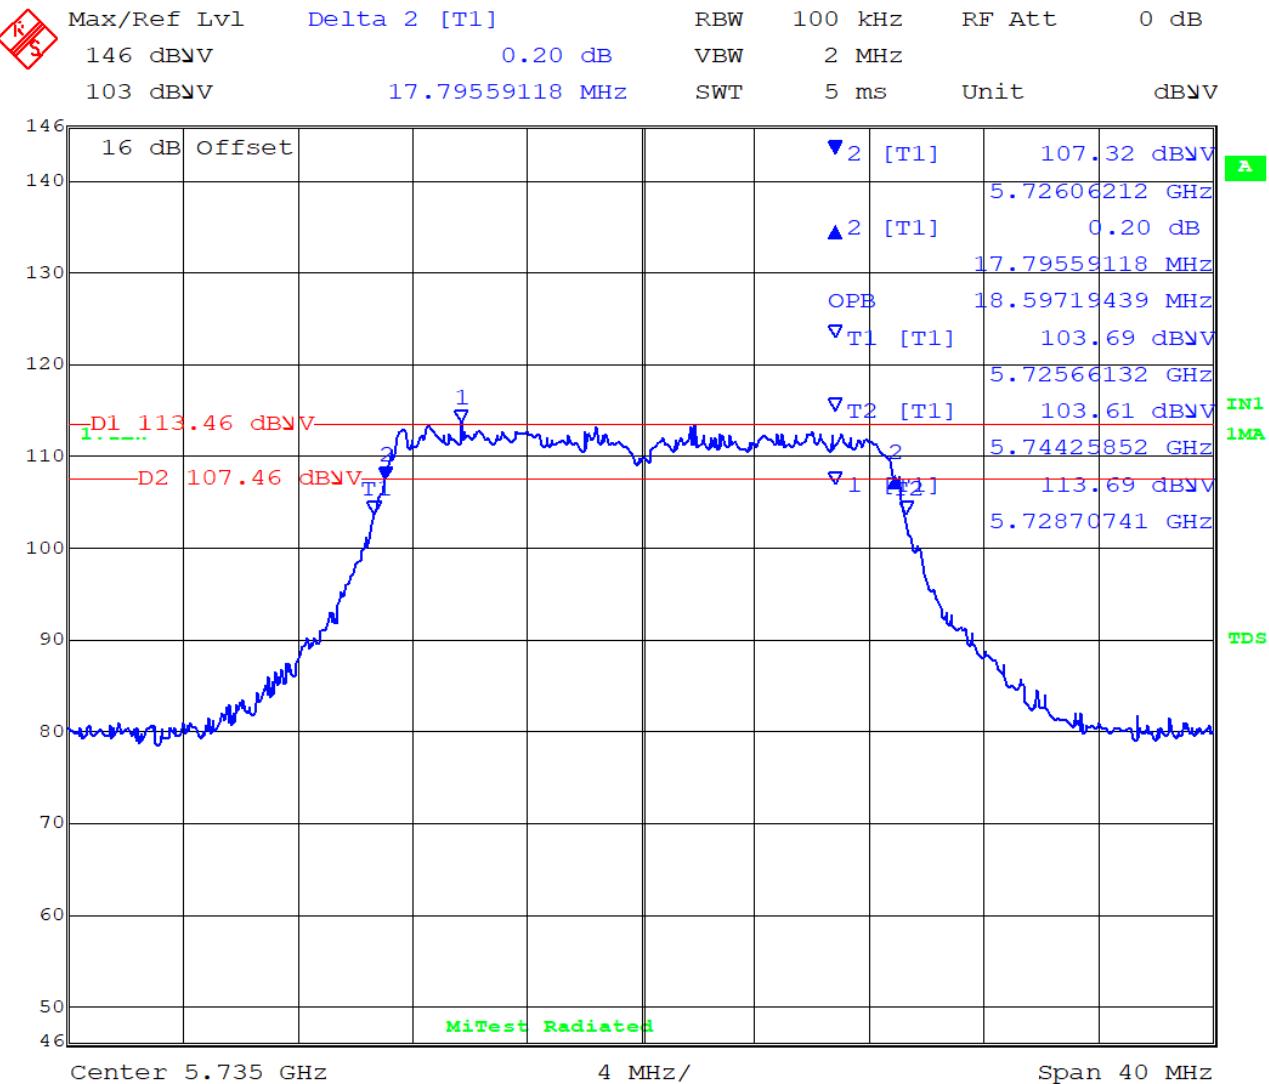

Date: 24.MAR.2021 17:19:37


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 17.79 MHz Measured 99% Bandwidth: 18.59 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 20MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 55 Vdc

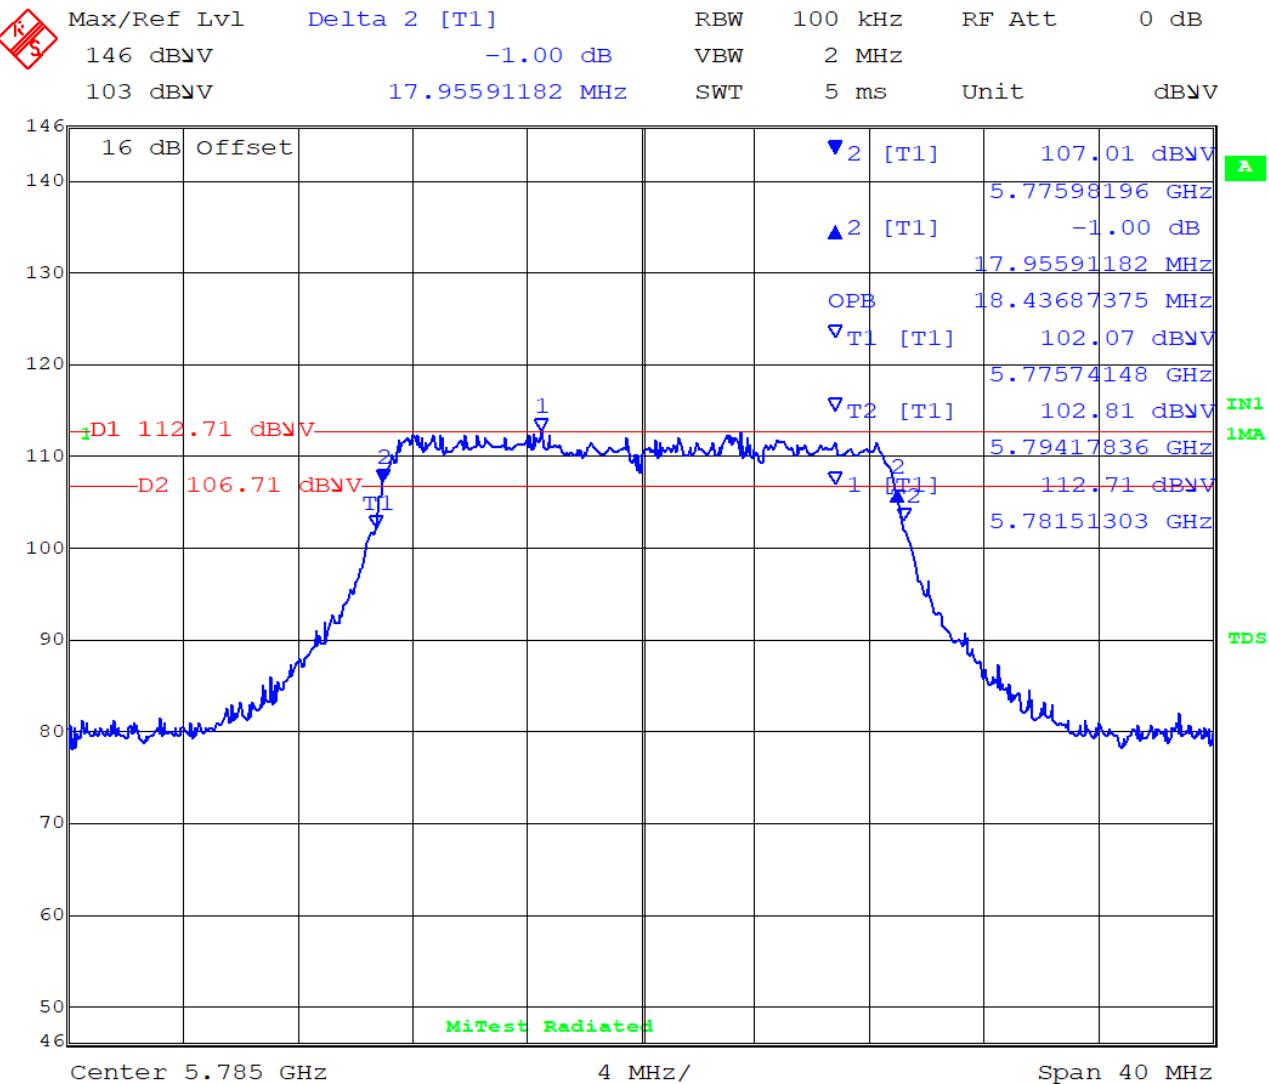

Date: 24.MAR.2021 17:10:58


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 17.95 MHz Measured 99% Bandwidth: 18.43 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 20MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

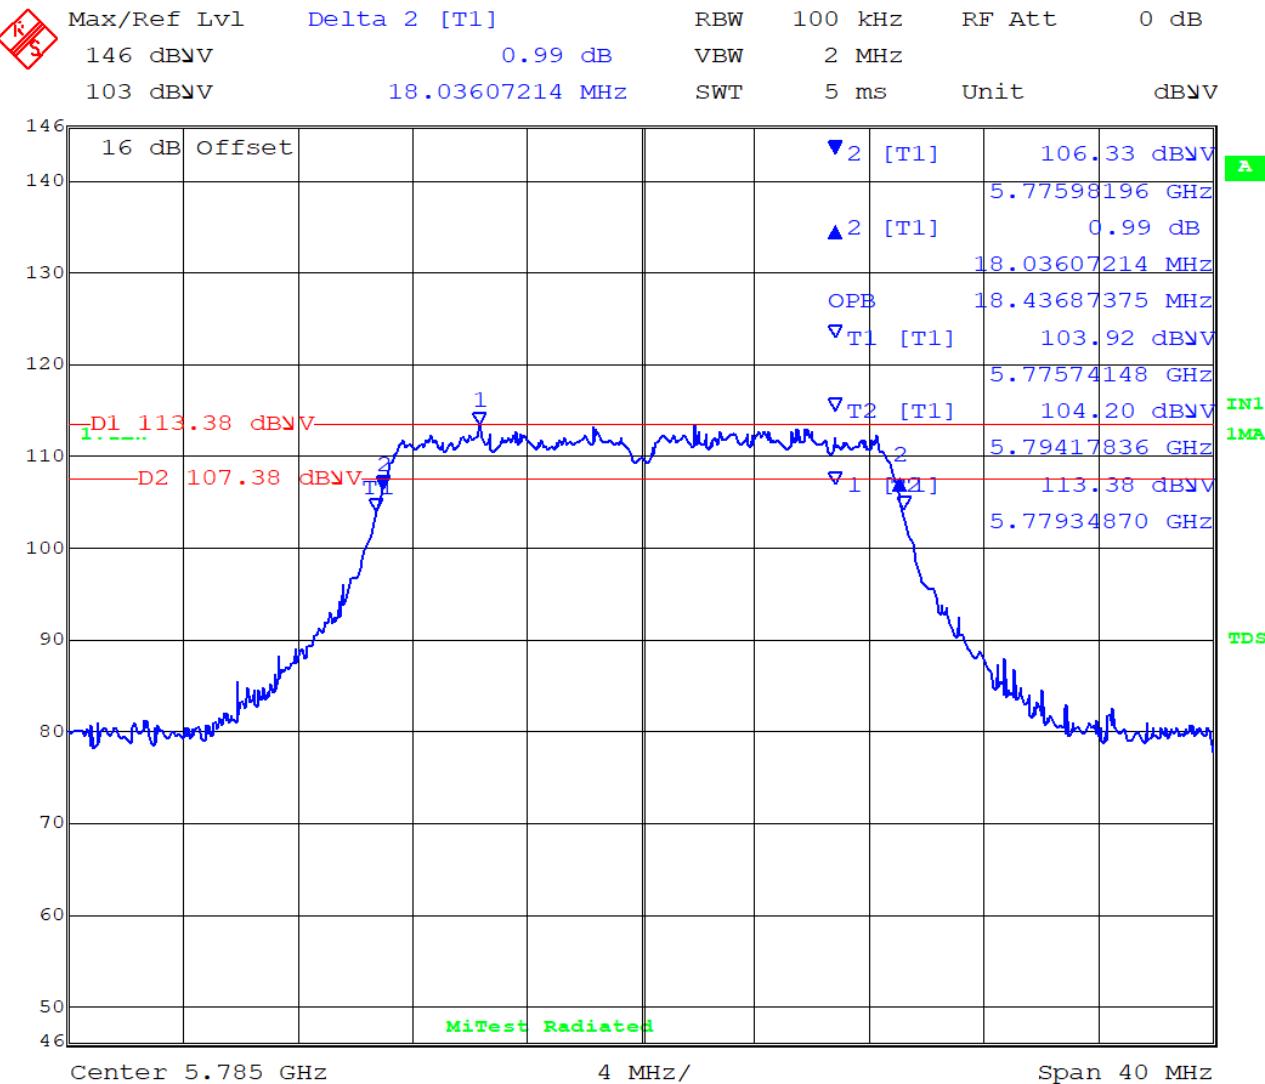

Date: 24.MAR.2021 17:08:17


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 18.03 MHz Measured 99% Bandwidth: 18.43 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 20MHz, Channel: 5840.00 MHz, Polarity H, Temp: 20, Voltage: 55 Vdc

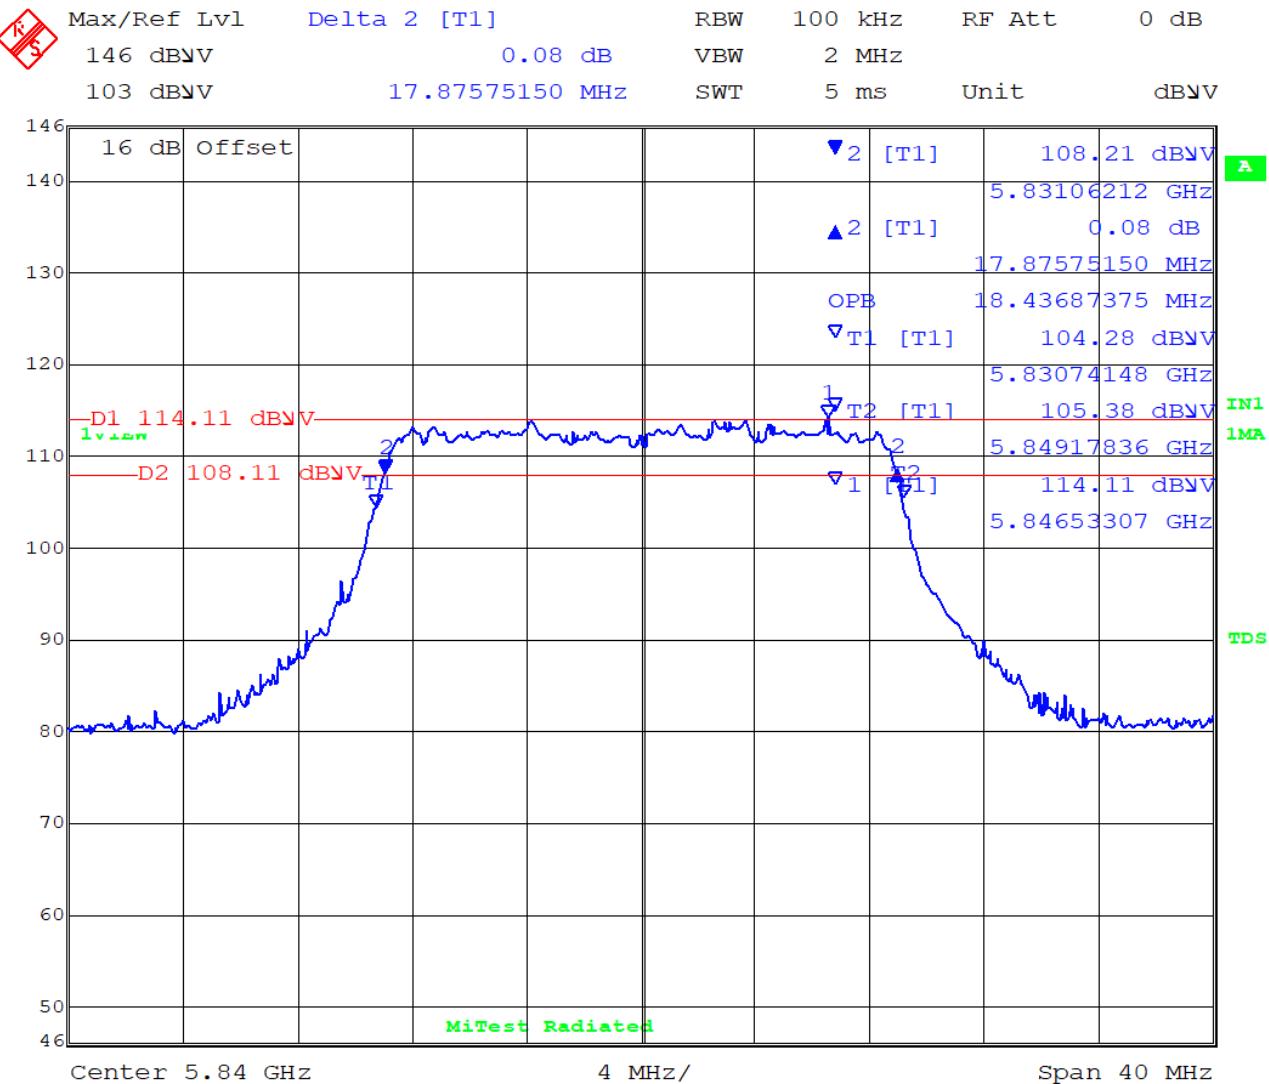

Date: 24.MAR.2021 16:59:49


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 17.87 MHz Measured 99% Bandwidth: 18.43 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 20MHz, Channel: 5840.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

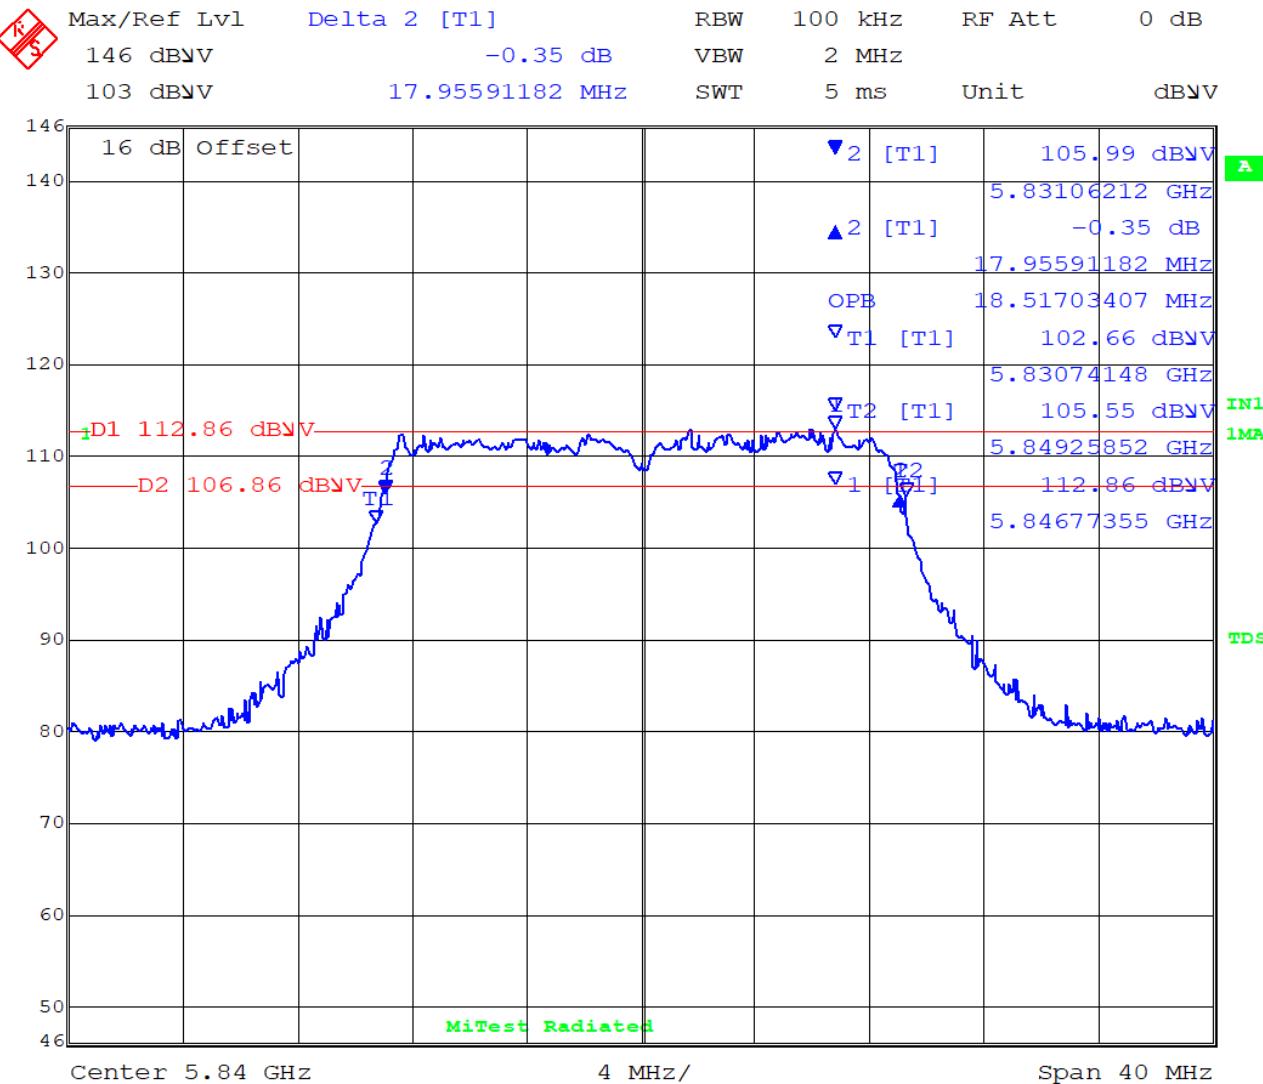

Date: 24.MAR.2021 17:13:13


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 17.95 MHz Measured 99% Bandwidth: 18.51 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 40MHz, Channel: 5745.00 MHz, Polarity H, Temp: 20, Voltage: 55 Vdc

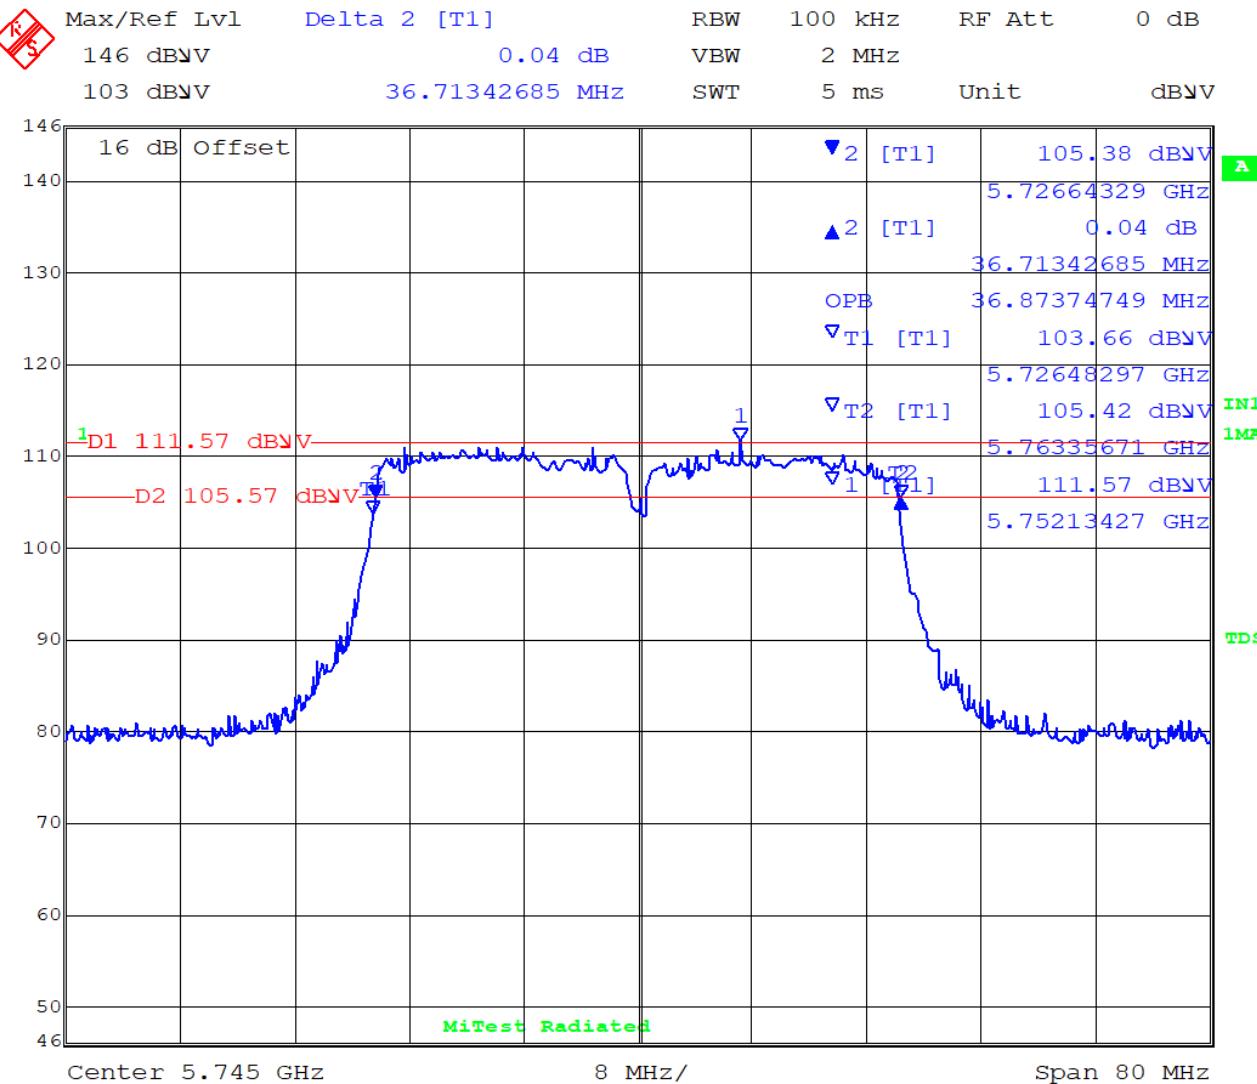

Date: 24.MAR.2021 17:56:04


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 36.71 MHz Measured 99% Bandwidth: 36.87 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 40MHz, Channel: 5745.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

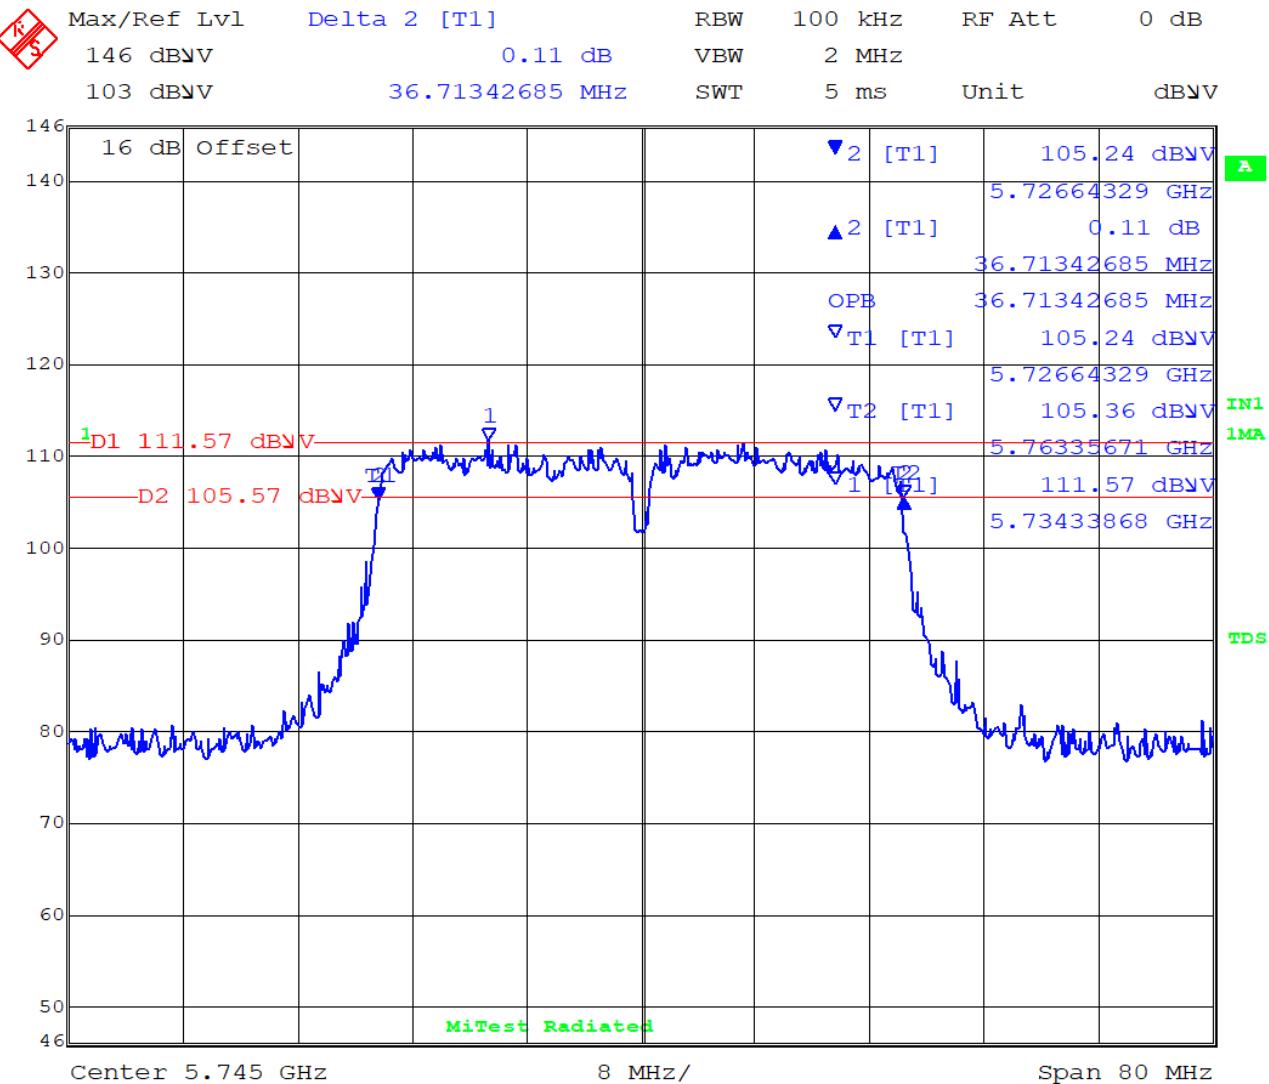

Date: 24.MAR.2021 17:54:14

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 36.71 MHz Measured 99% Bandwidth: 36.71 MHz


[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 40MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 55 Vdc

Max/Ref Lvl	Delta 2 [T1]	RBW	100 kHz	RF Att	0 dB
146 dB _V	-0.71 dB	VBW	2 MHz		
103 dB _V	36.71342685 MHz	SWT	5 ms	Unit	dB _V

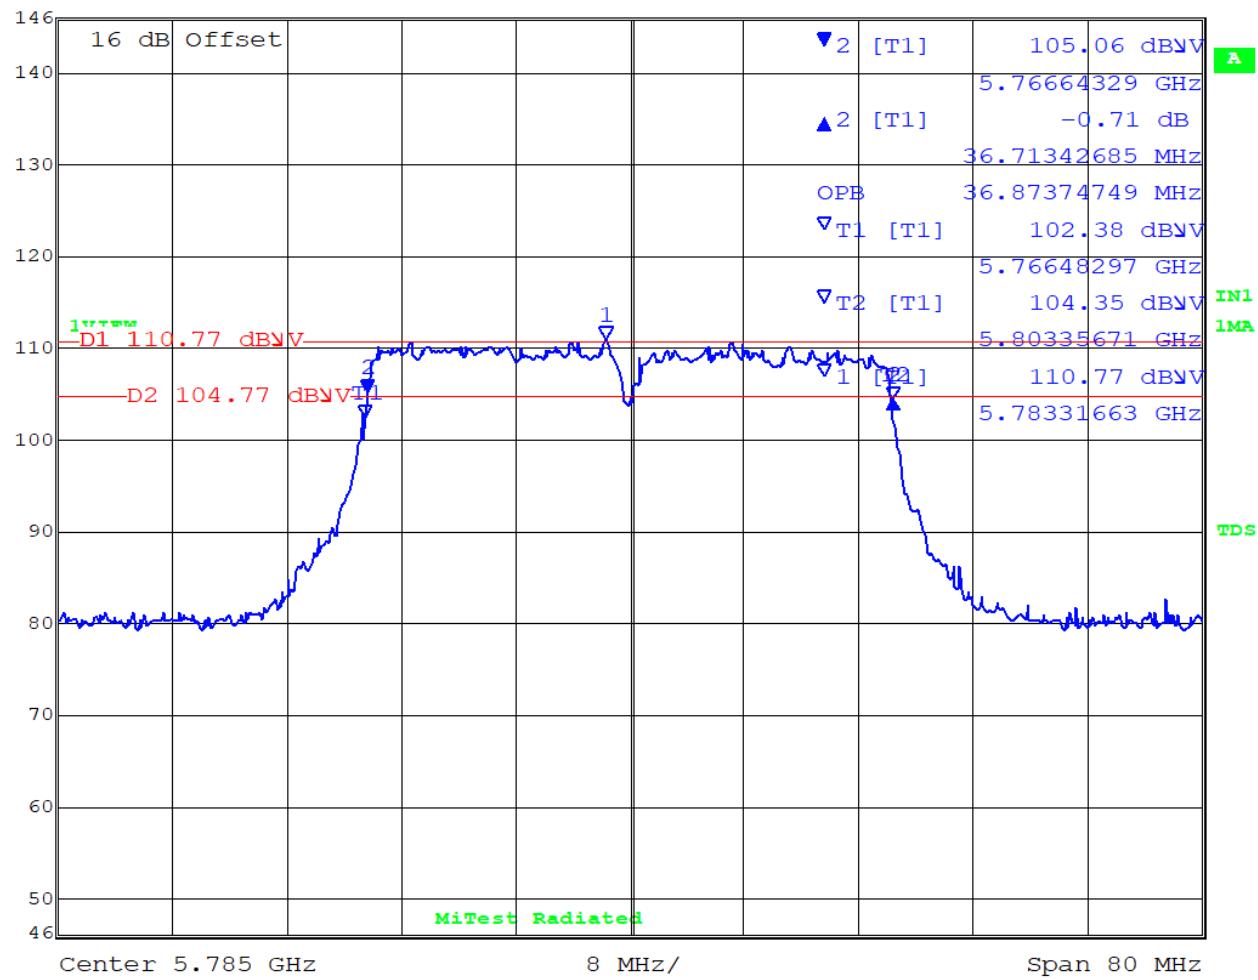

Date: 24.MAR.2021 17:48:57

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 36.71 MHz Measured 99% Bandwidth: 36.87 MHz


[back to matrix](#)

6 dB & 99% BANDWIDTH

 MiTest
regulatory compliance in the cloud

Variant: 802.11 40MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

Max/Ref Lvl	Delta 2 [T1]	RBW	100 kHz	RF Att	0 dB
146 dBV	0.25 dB	VBW	2 MHz		
103 dBV	36.71342685 MHz	SWT	5 ms	Unit	dBV

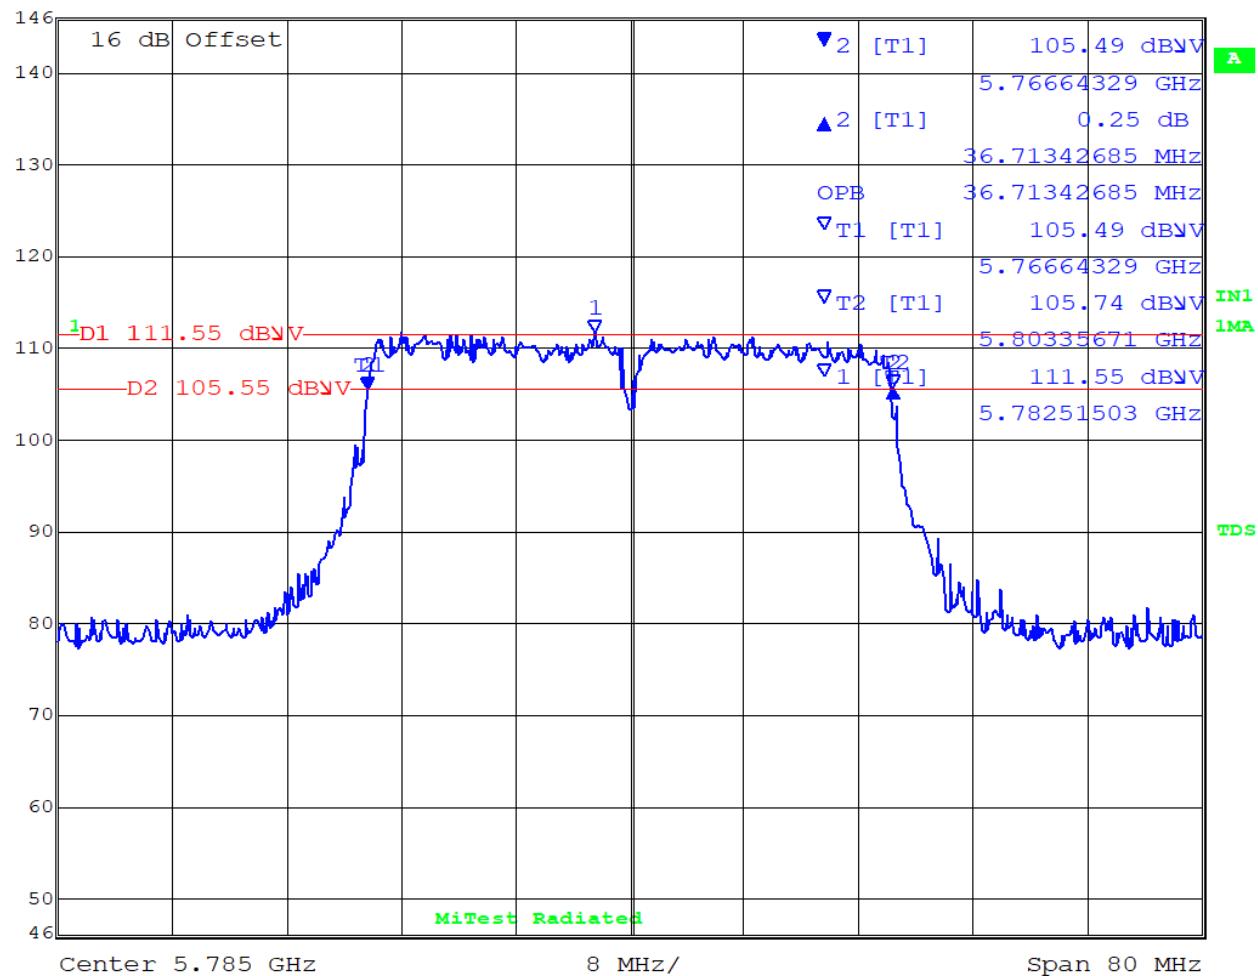

Date: 24.MAR.2021 17:51:21


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 36.71 MHz Measured 99% Bandwidth: 36.71 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 40MHz, Channel: 5830.00 MHz, Polarity H, Temp: 20, Voltage: 55 Vdc

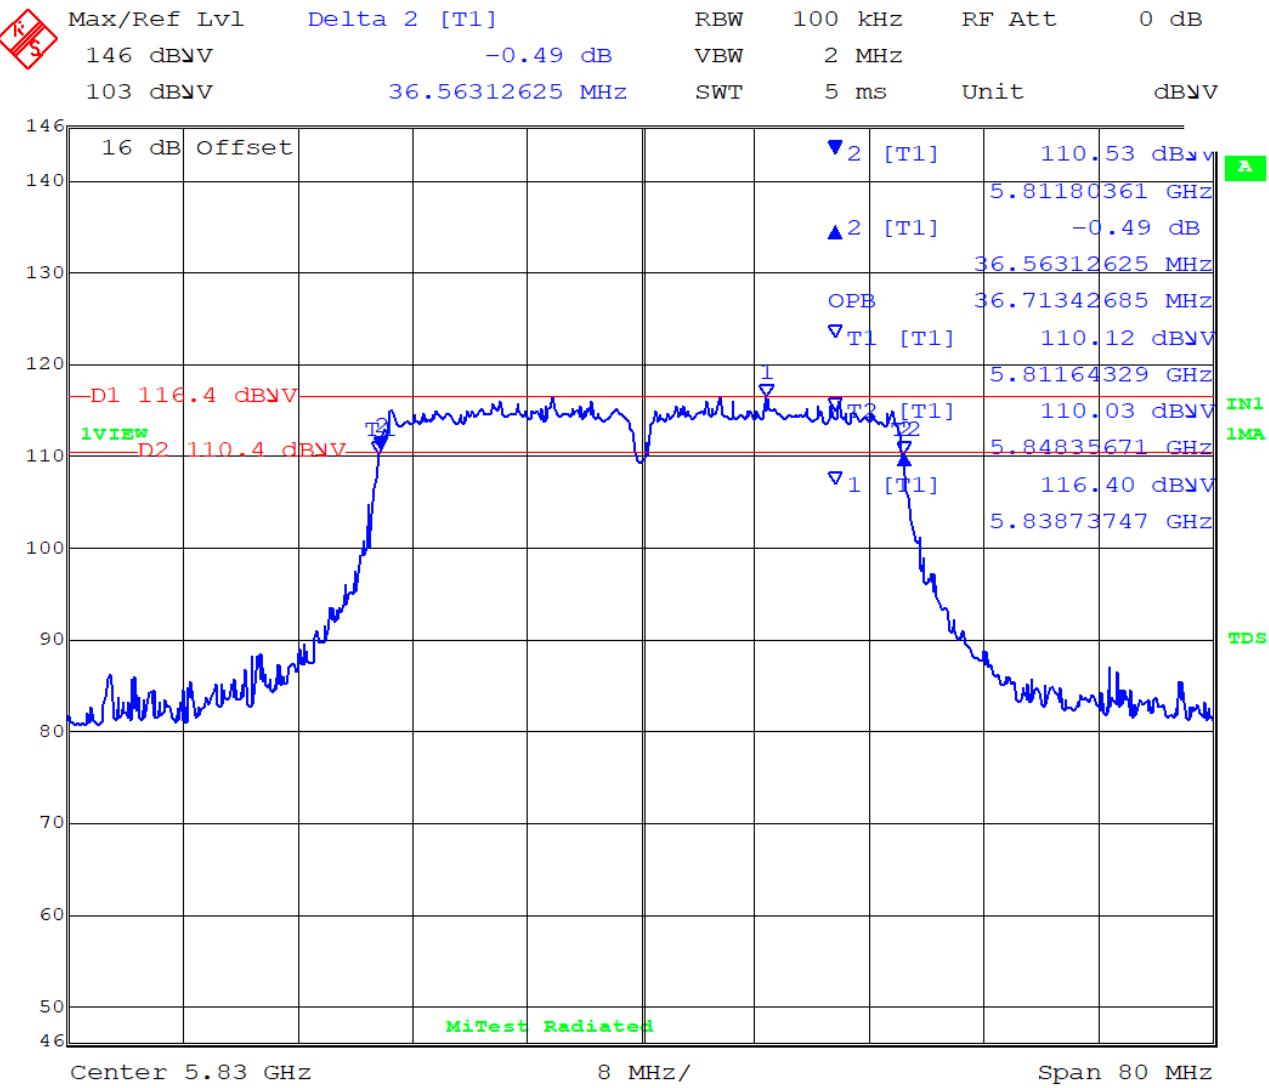

Date: 24.MAR.2021 13:19:30


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 36.56MHz Measured 99% Bandwidth: 36.71 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 40MHz, Channel: 5830.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

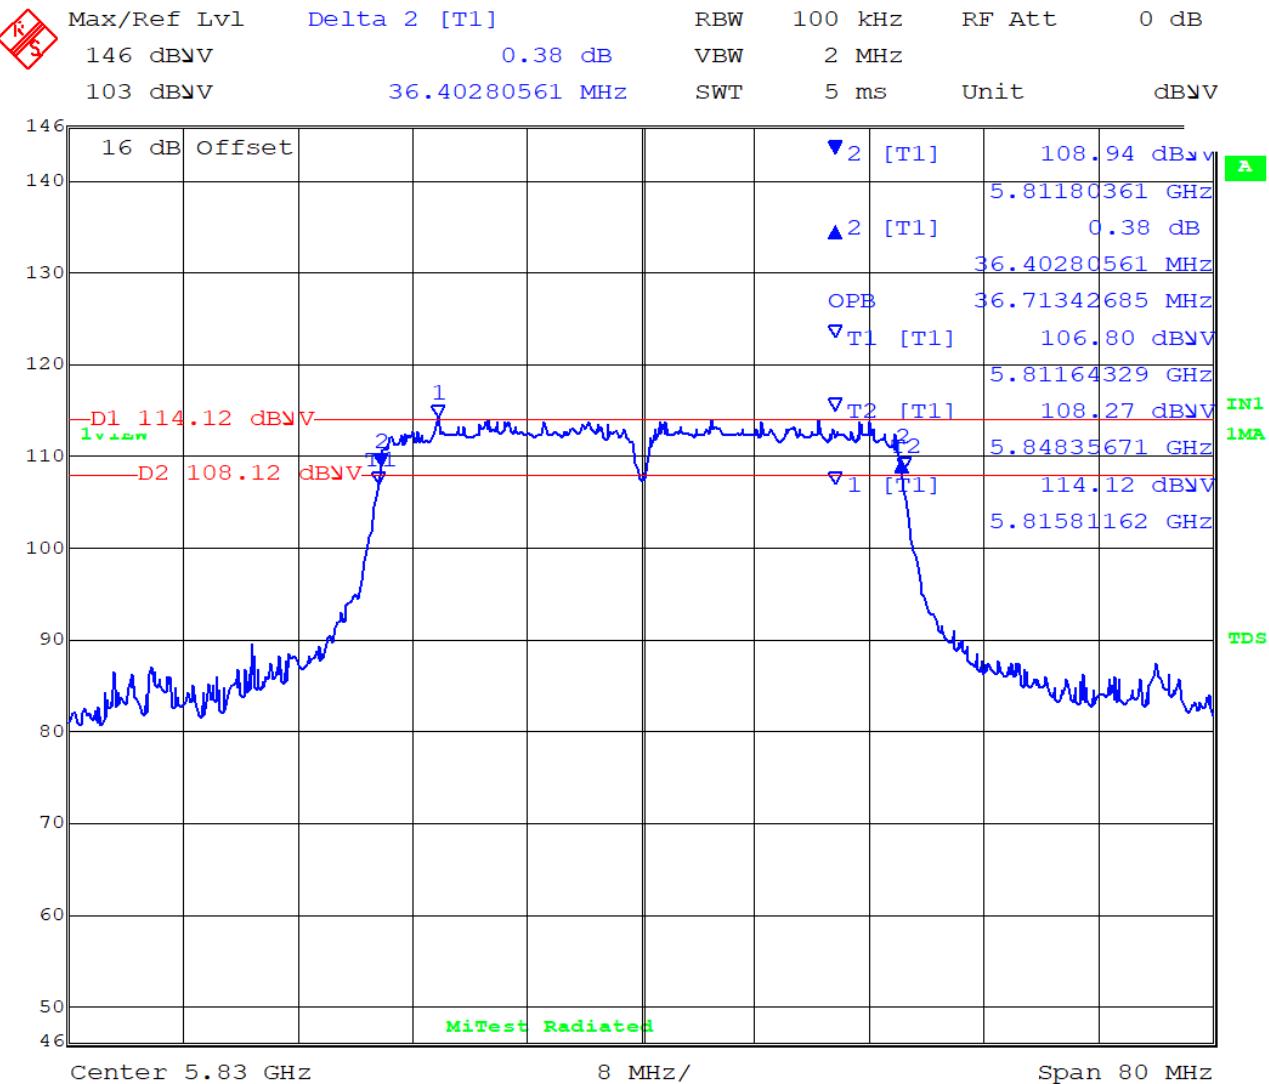

Date: 24.MAR.2021 13:21:35


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 36.40MHz Measured 99% Bandwidth: 36.71 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 80MHz, Channel: 5765.00 MHz, Polarity H, Temp: 20, Voltage: 55 Vdc

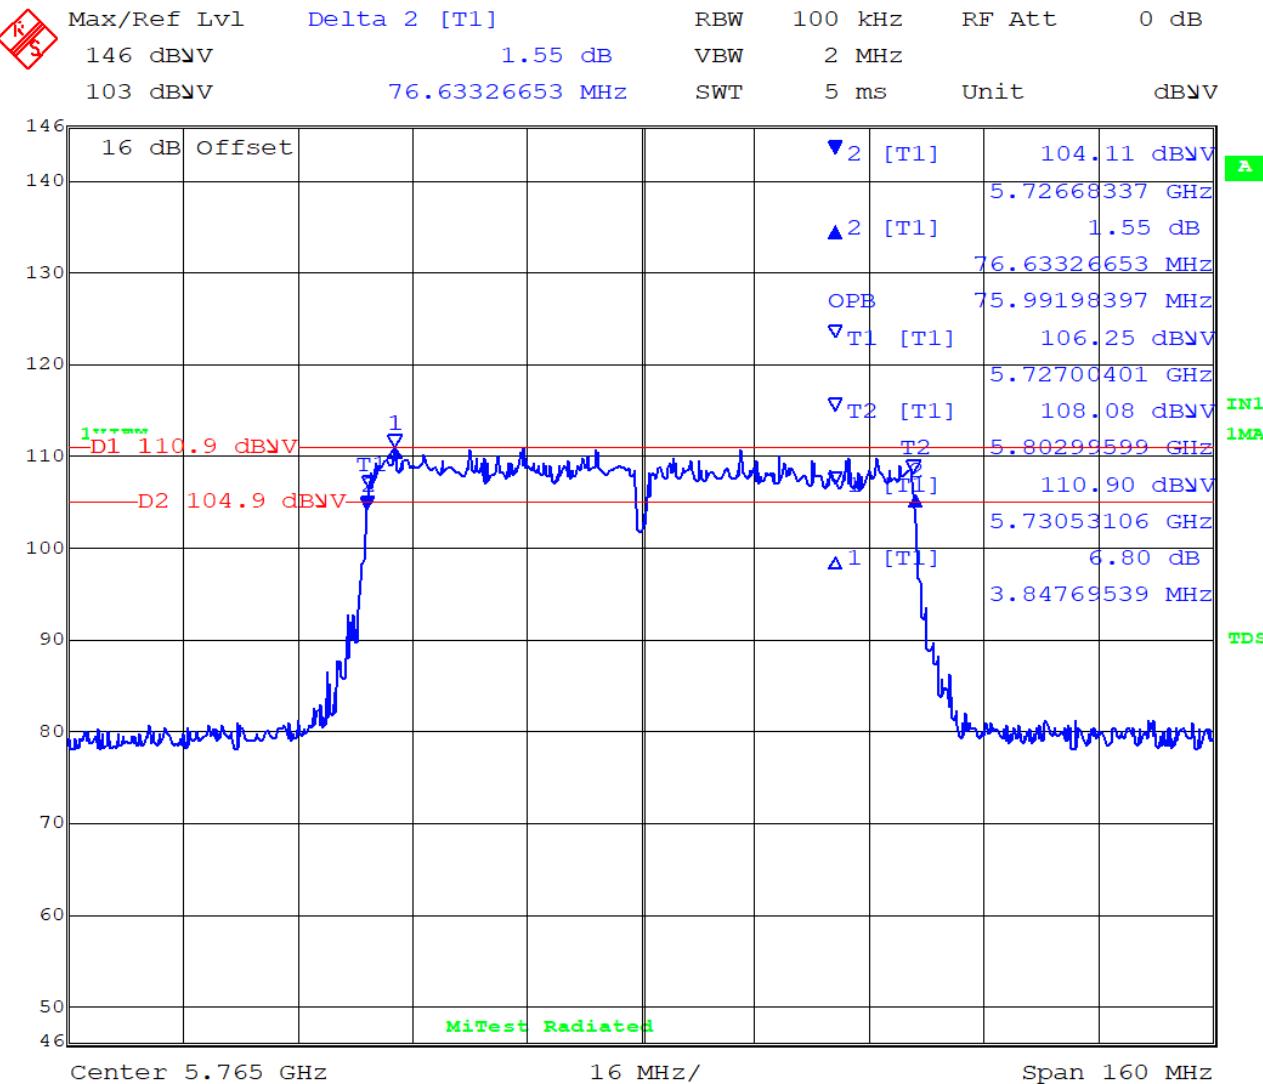

Date: 24.MAR.2021 11:47:10


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 76.63 MHz Measured 99% Bandwidth: 75.99 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 80MHz, Channel: 5765.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

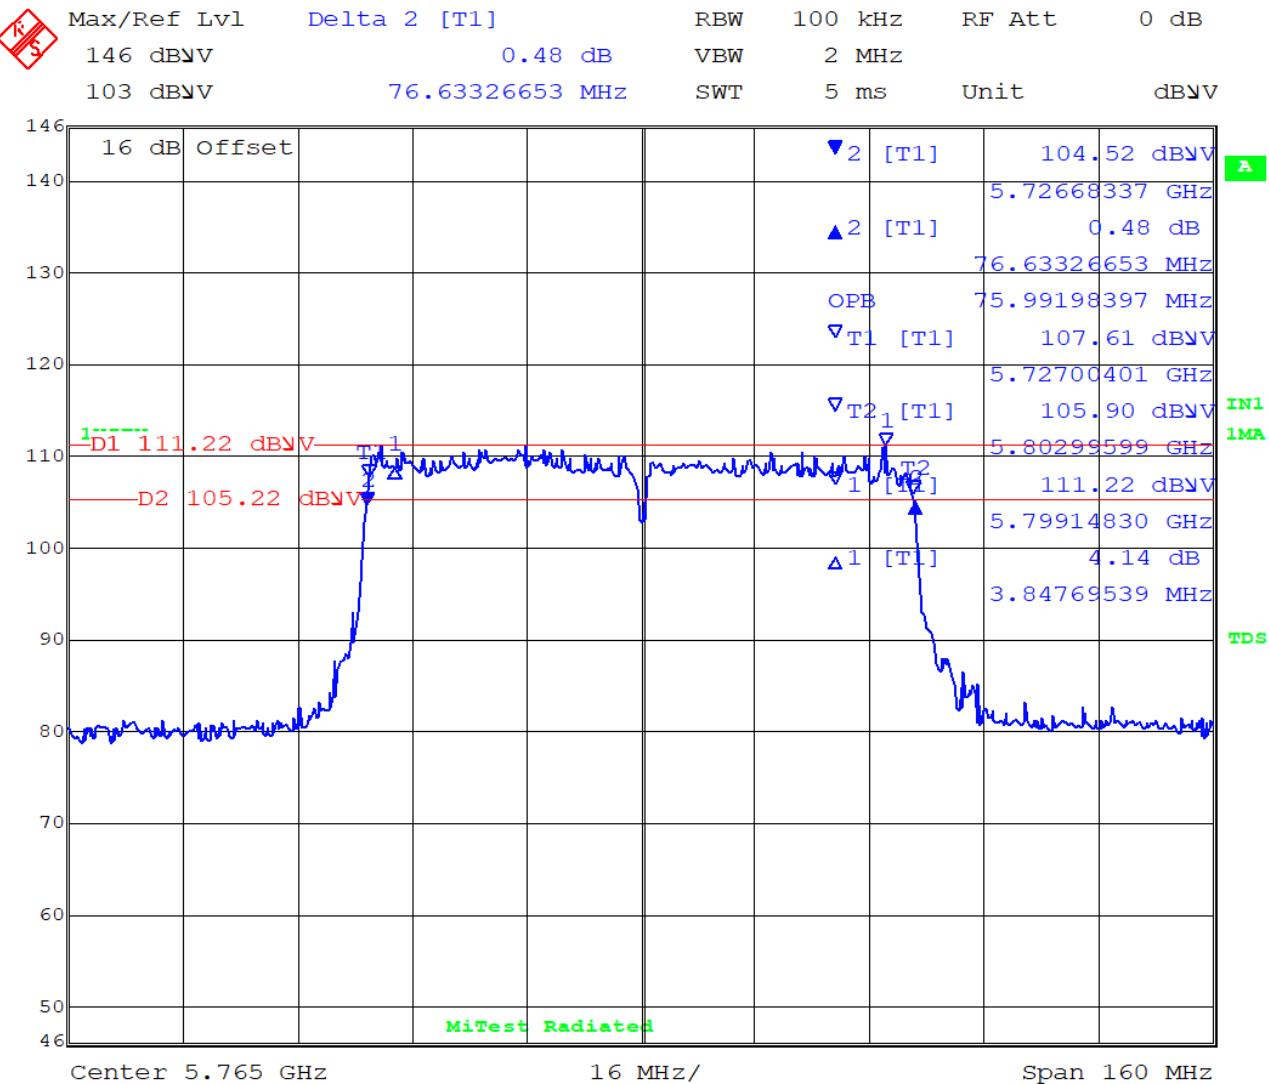

Date: 24.MAR.2021 11:50:12


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 76.63 MHz Measured 99% Bandwidth: 75.99 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 80MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 55 Vdc

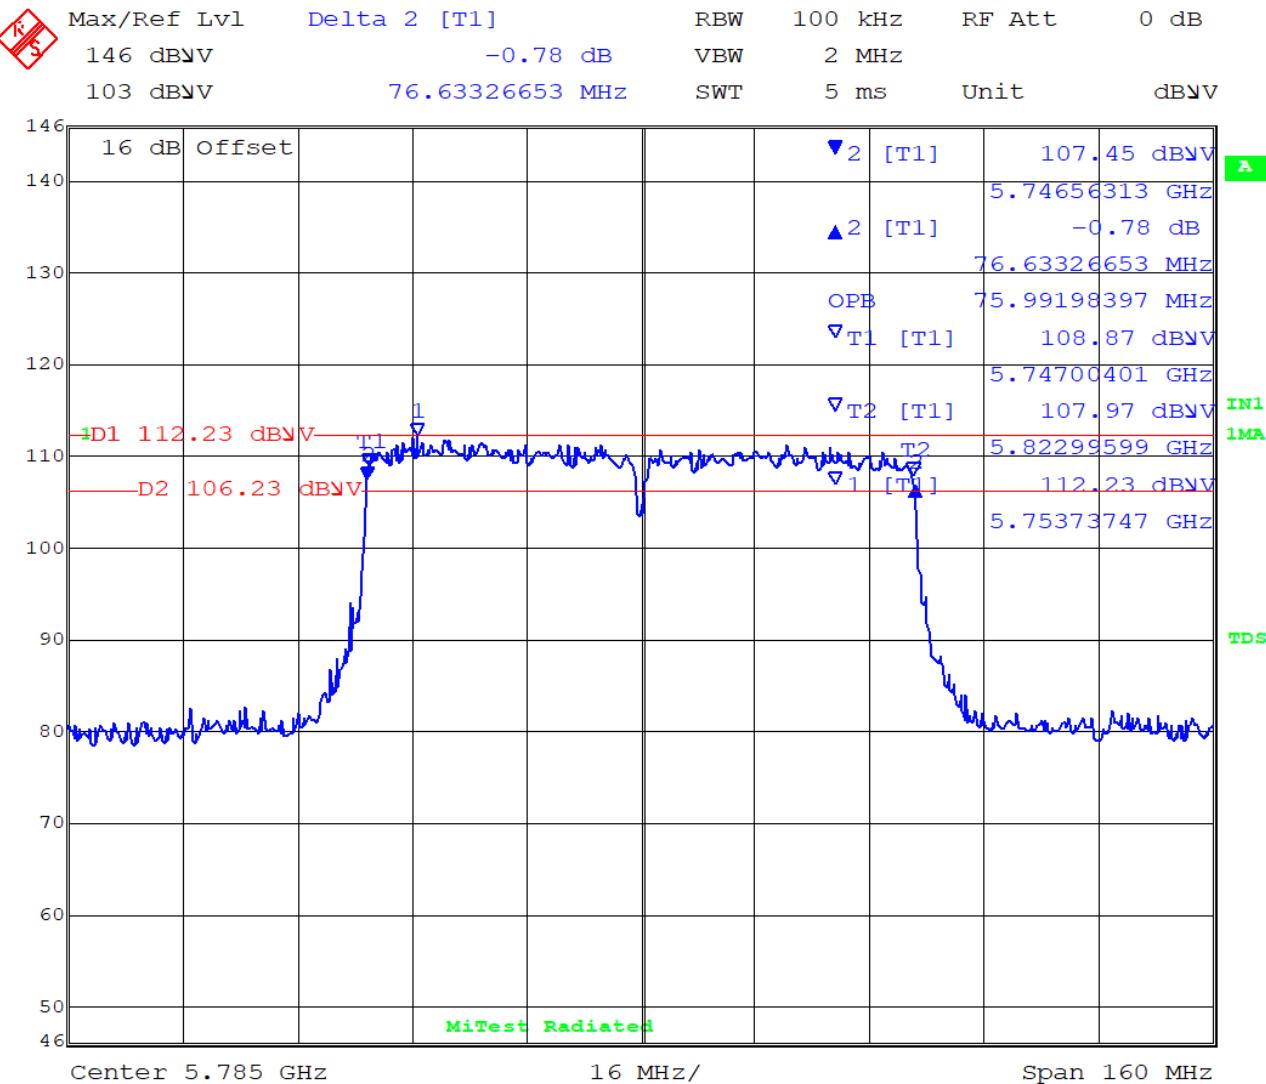

Date: 24.MAR.2021 11:57:45


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 76.63 MHz Measured 99% Bandwidth: 75.99MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 80MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

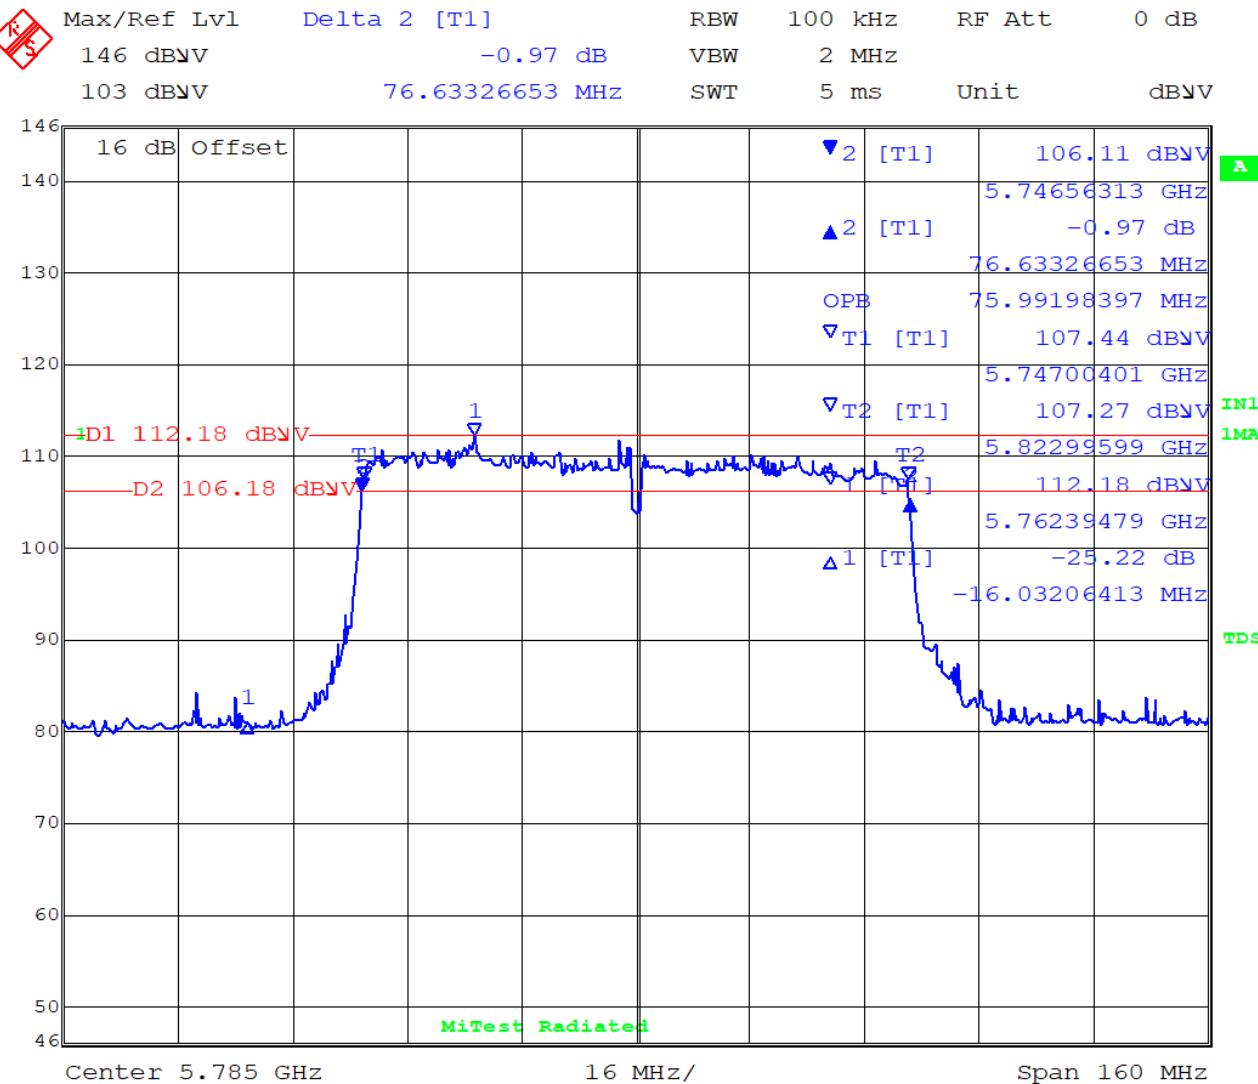

Date: 24.MAR.2021 11:54:05

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 76.63 MHz Measured 99% Bandwidth: 75.99 MHz


[back to matrix](#)

6 dB & 99% BANDWIDTH

 MiTest
regulatory compliance in the cloud

Variant: 802.11 80MHz, Channel: 5810.00 MHz, Polarity H, Temp: 20, Voltage: 55 Vdc

Max/Ref Lvl	Delta 2 [T1]	RBW	100 kHz	RF Att	0 dB
146 dB _{UV}	-0.97 dB	VBW	2 MHz		
103 dB _{UV}	76.63326653 MHz	SWT	5 ms	Unit	dB _{UV}

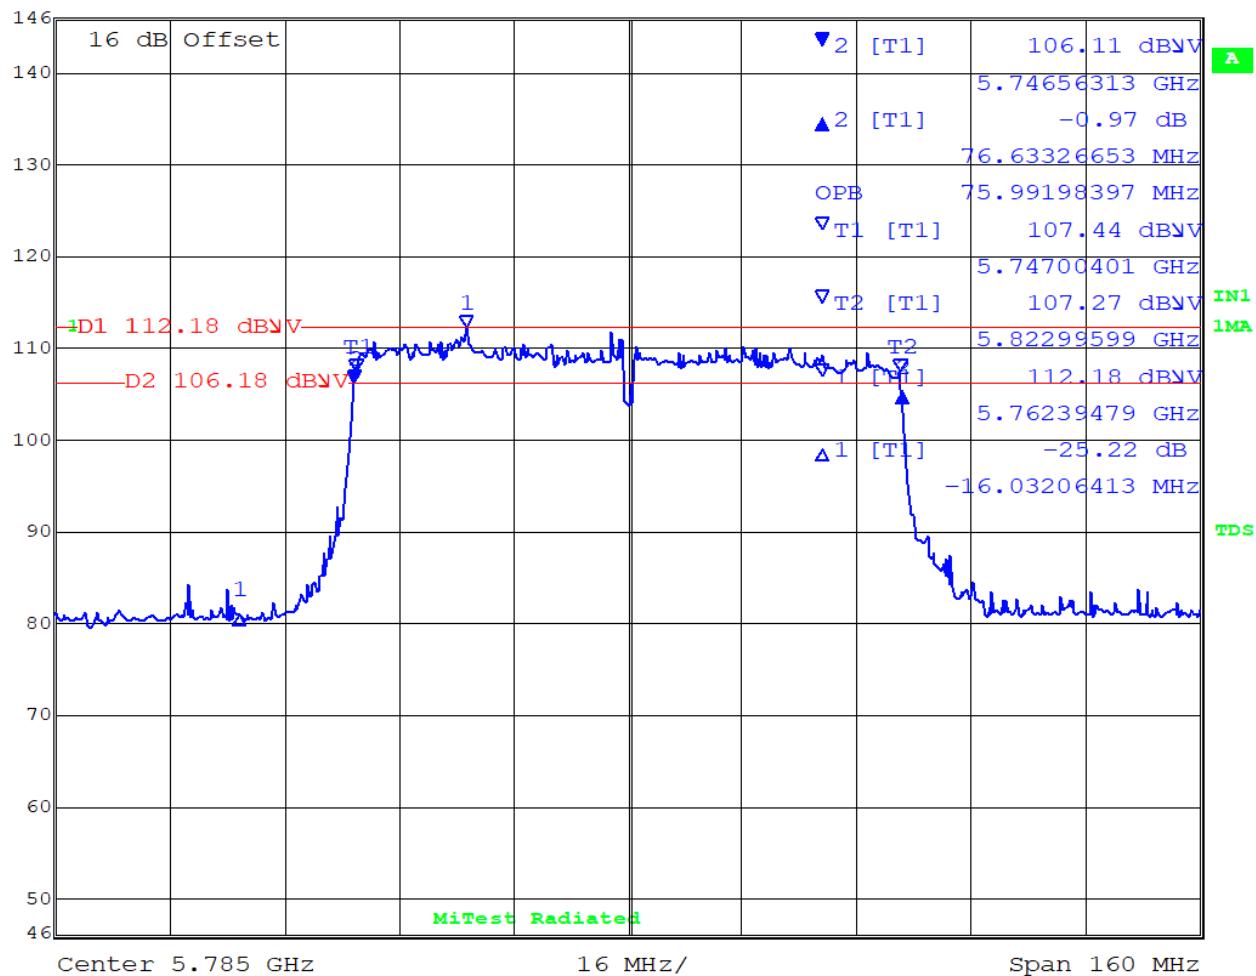

Date: 24.MAR.2021 11:54:05


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 76.63 MHz Measured 99% Bandwidth: 75.99 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11 80MHz, Channel: 5810.00 MHz, Polarity V, Temp: 20, Voltage: 55 Vdc

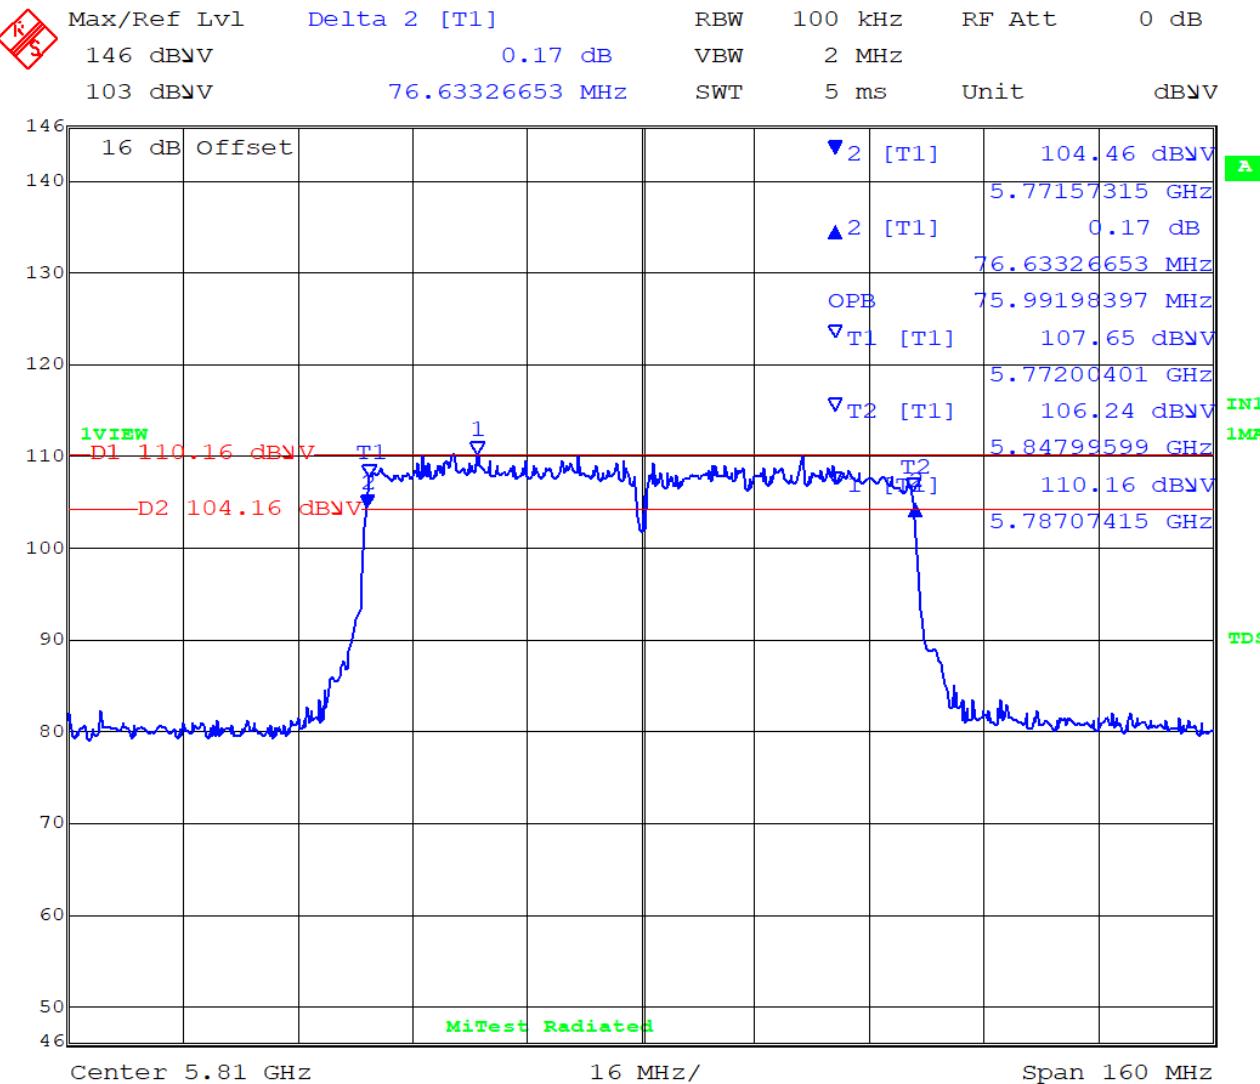


Date: 24.MAR.2021 12:02:07

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAX HOLD		Measured 6 dB Bandwidth: 76.63 MHz Measured 99% Bandwidth: 75.99 MHz

[back to matrix](#)

A.2. Power Spectral Density

A.2.1 Non-Beamforming

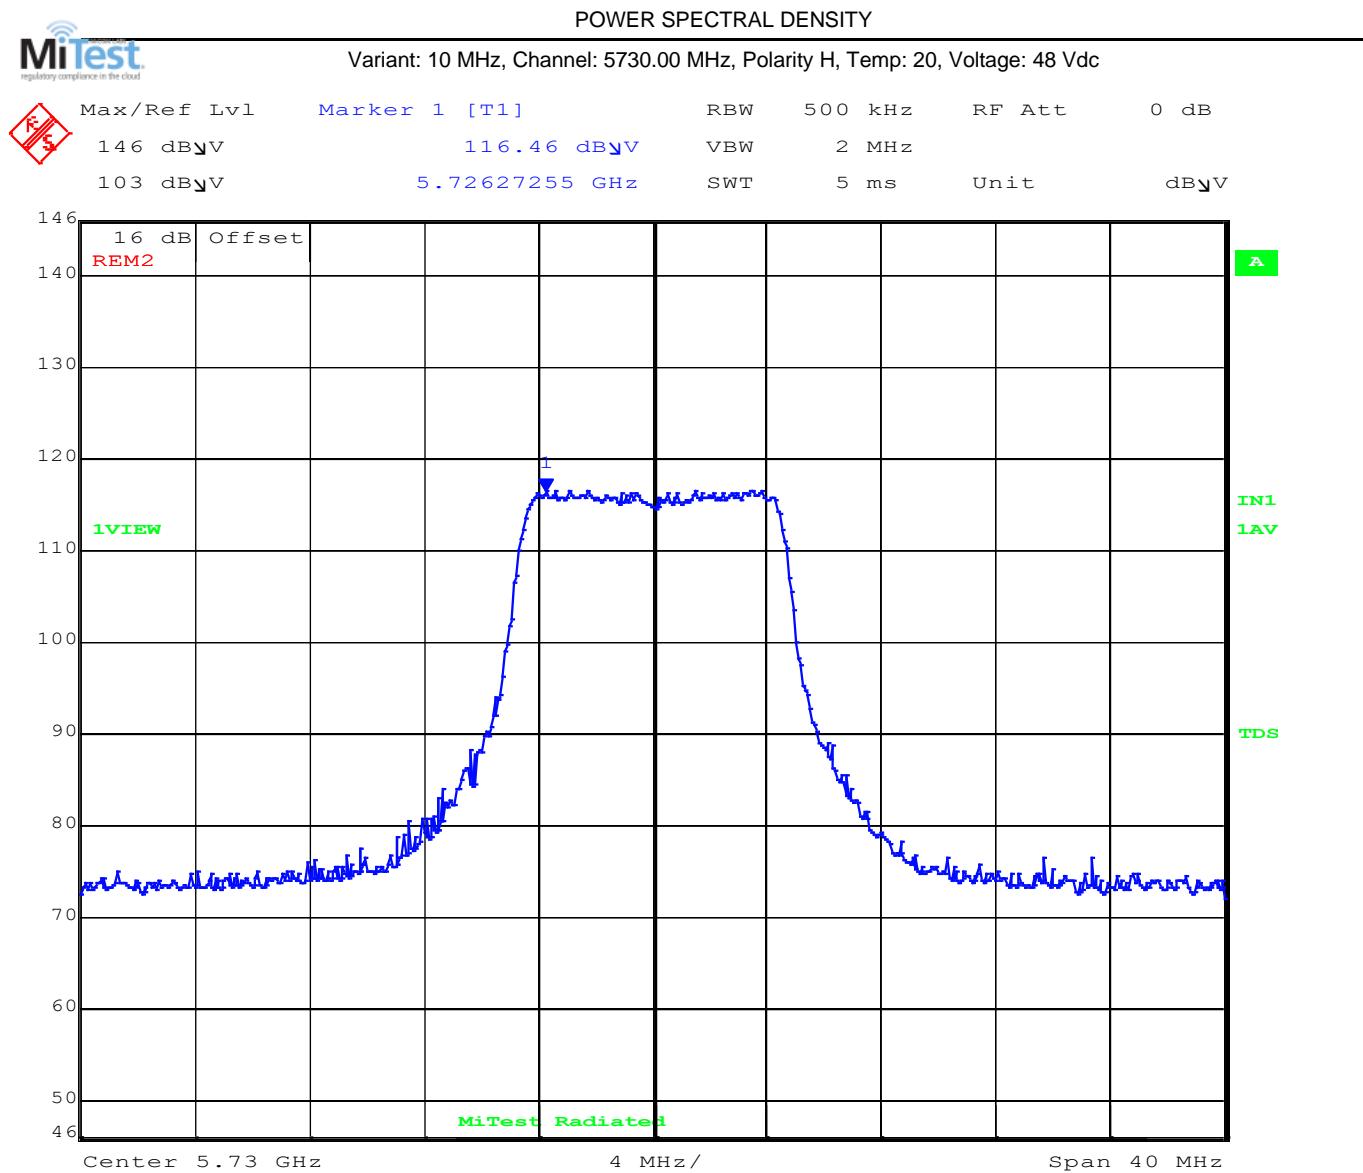


[back to matrix](#)

POWER SPECTRAL DENSITY

 MiTest
regulatory compliance in the cloud

Variant: 10 MHz, Channel: 5730.00 MHz, Polarity V Temp: 20, Voltage: 48 Vdc

Max/Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	0 dB
146 dB _V	119.62 dB _V	VBW	2 MHz		
103 dB _V	5.73204409 GHz	SWT	5 ms	Unit	dB _V

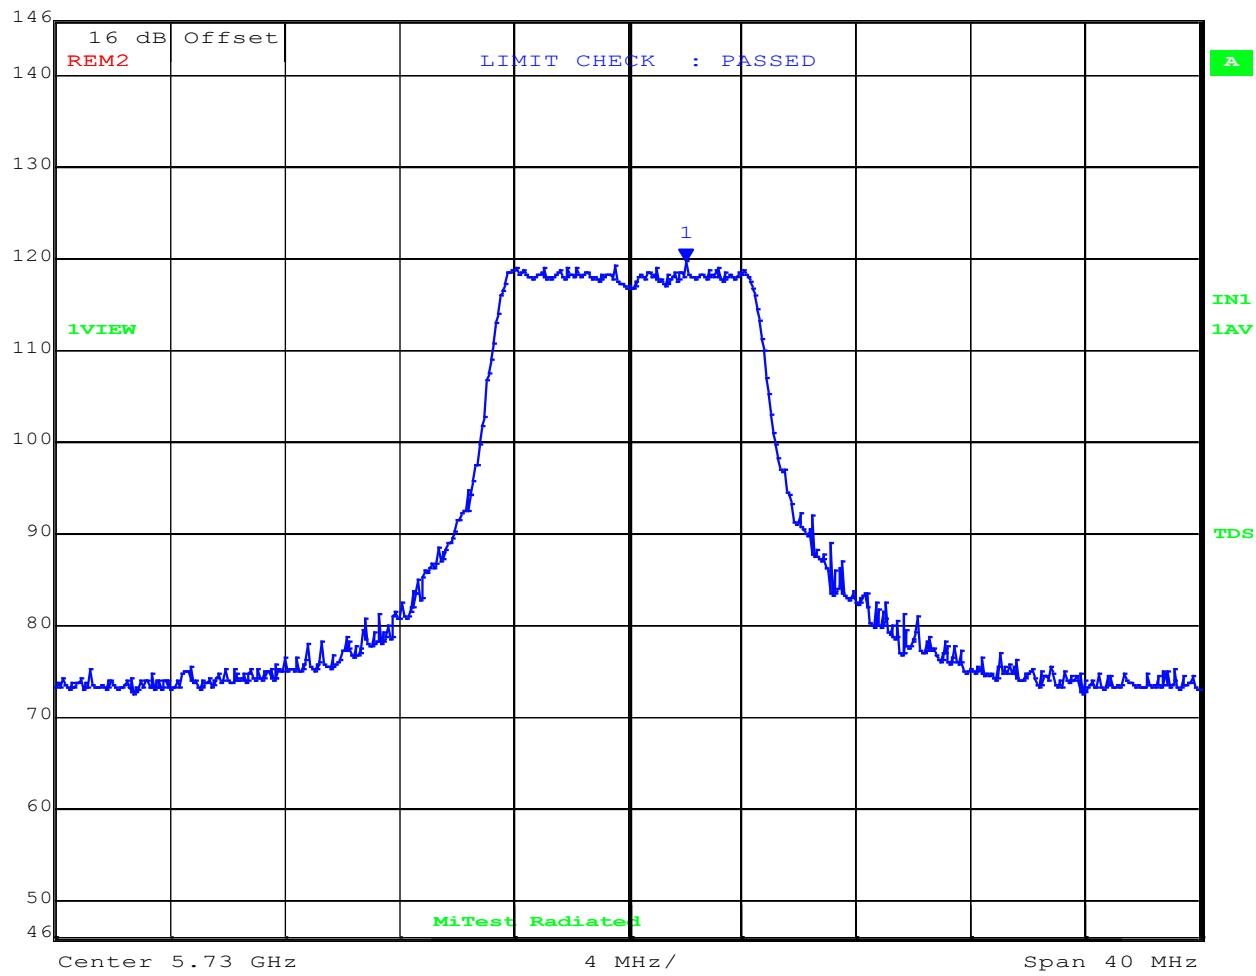

Date: 23.MAR.2021 08:08:20


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5732.04 MHz :119.62 dBuV/m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 10 MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

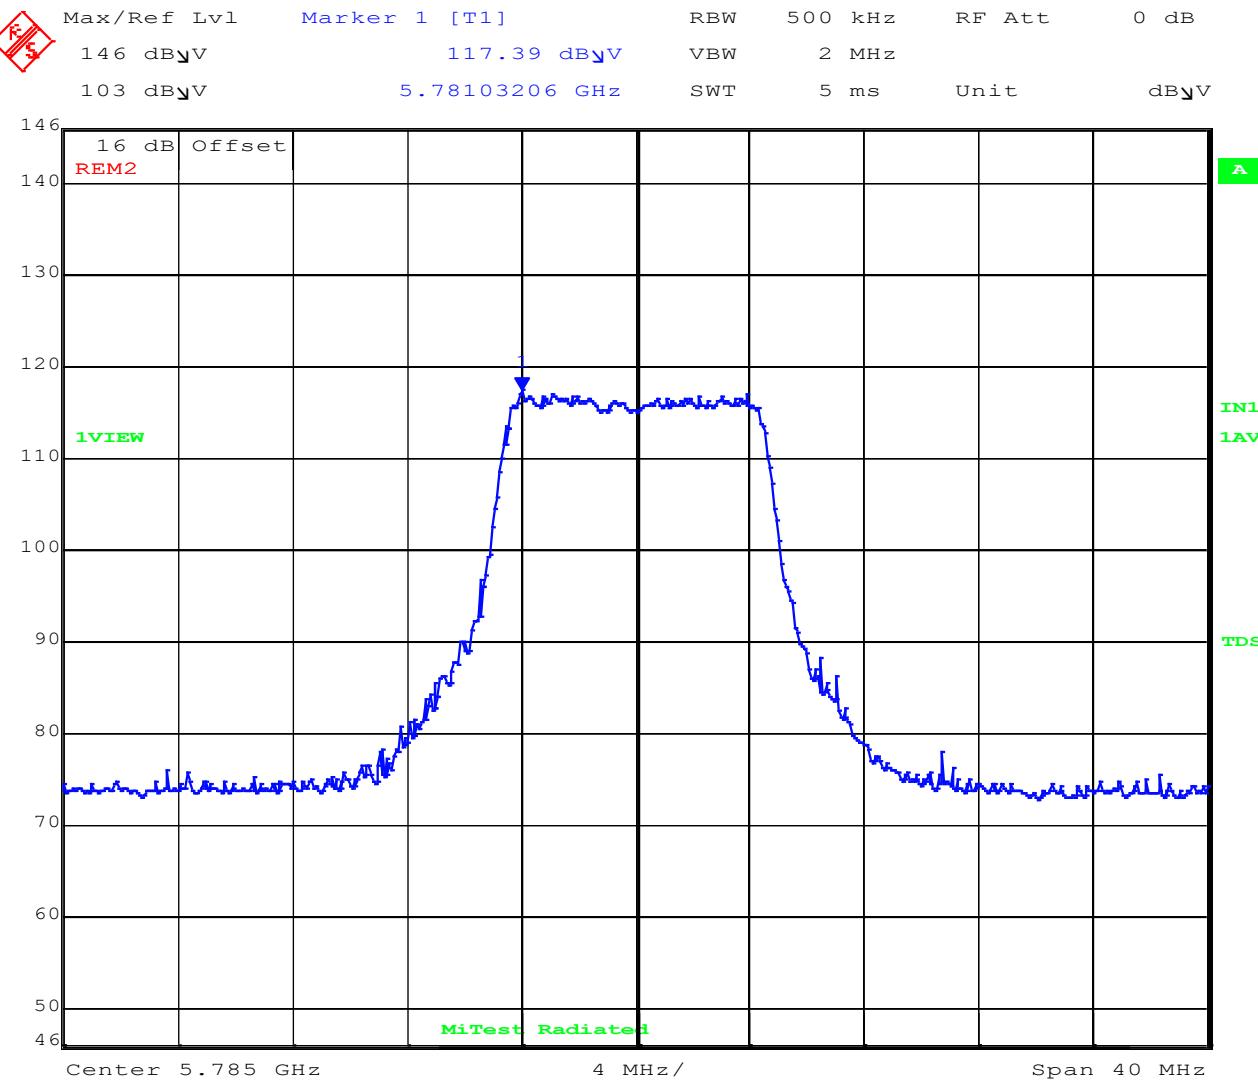

Date: 23.MAR.2021 08:22:49


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5781.03 MHz : 117.39 dB _{uV} /m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 10 MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

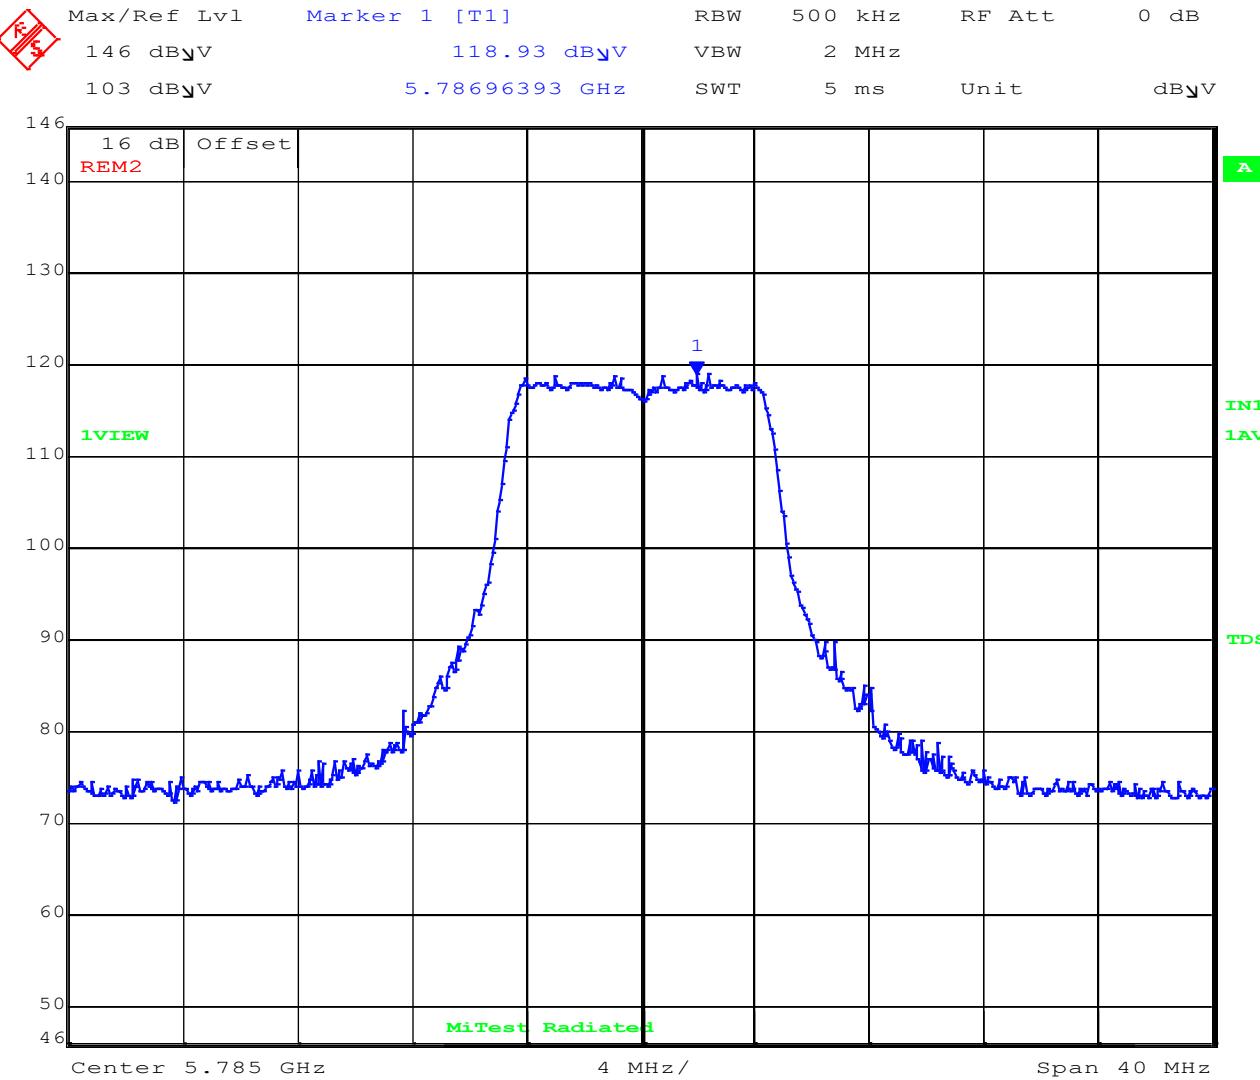

Date: 23.MAR.2021 08:23:42


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5786.96 MHz : 118.93 dB _{uV} /m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 10 MHz, Channel: 5845.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

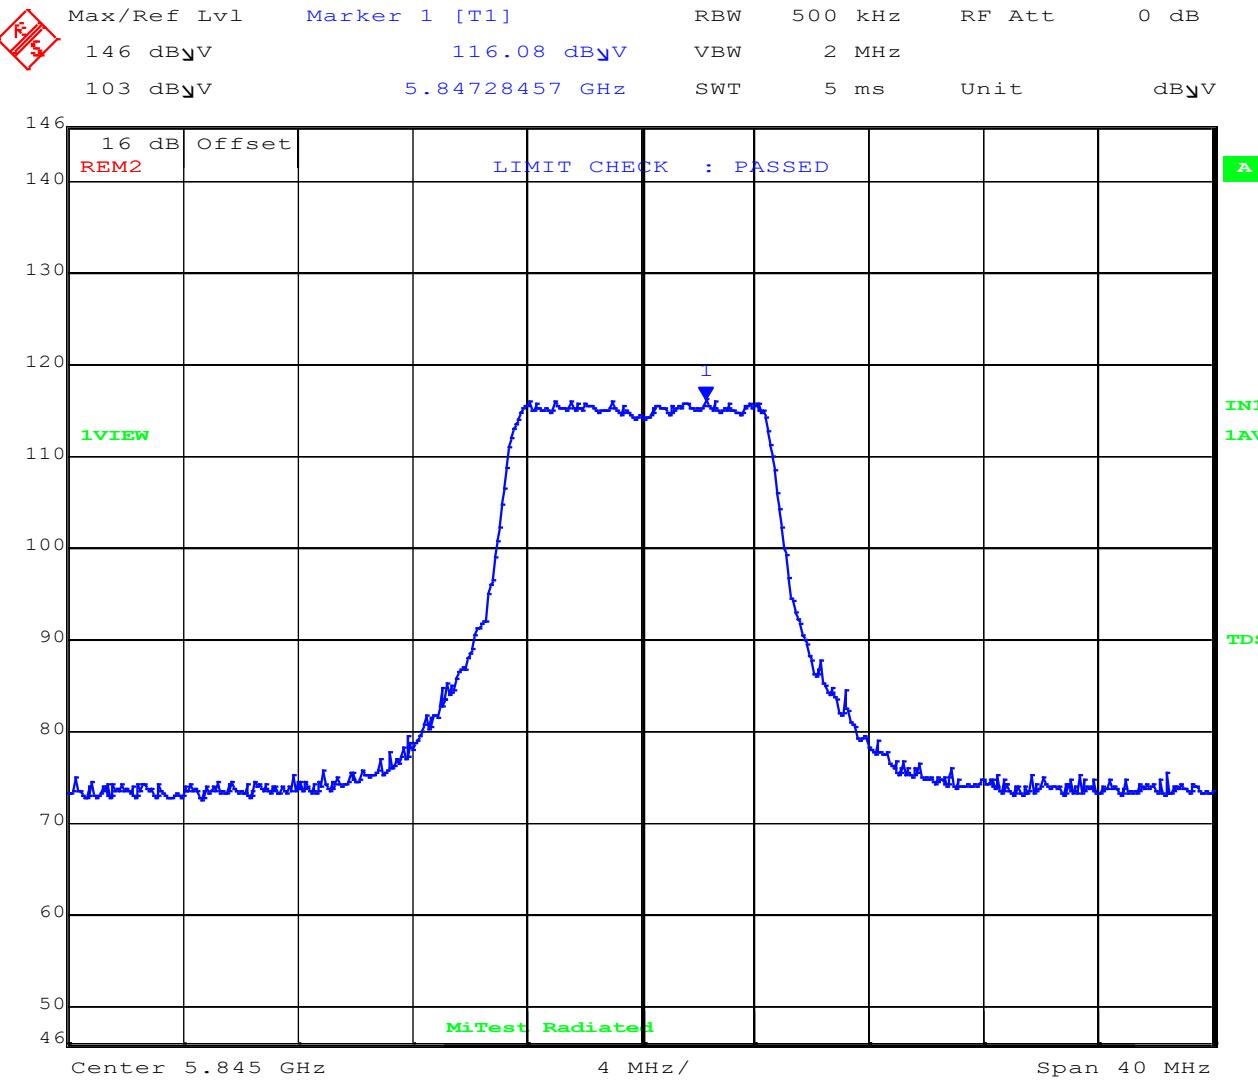

Date: 23.MAR.2021 08:27:33


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5847.28 MHz : 116.08 dB _{uV} /m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 10 MHz, Channel: 5845.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

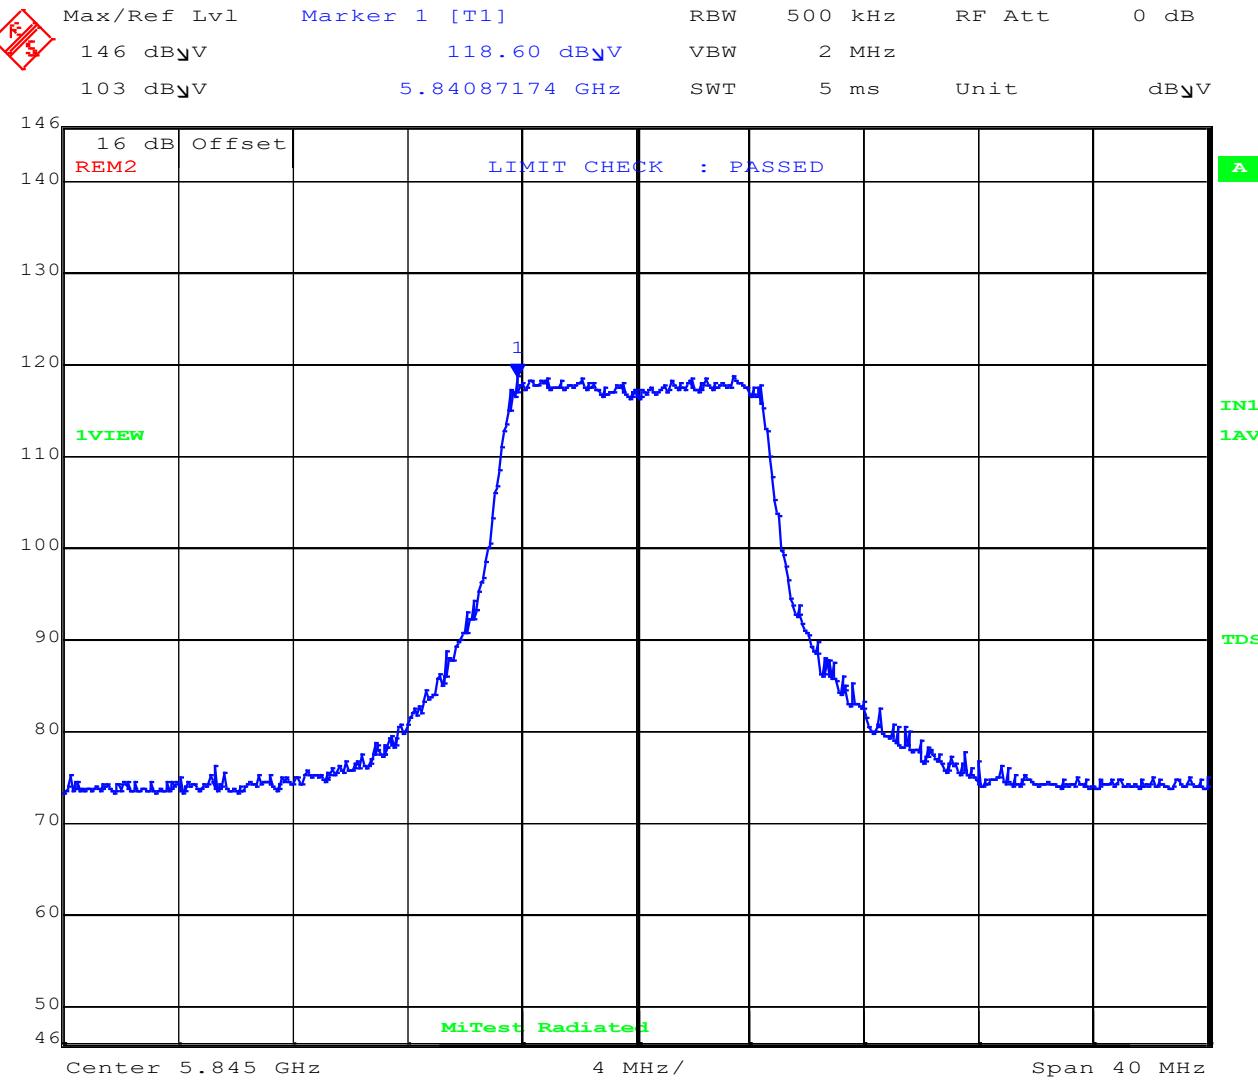

Date: 23.MAR.2021 08:25:50


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5840.87 MHz : 118.60 dB _{uV} /m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 20 MHz, Channel: 5735.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

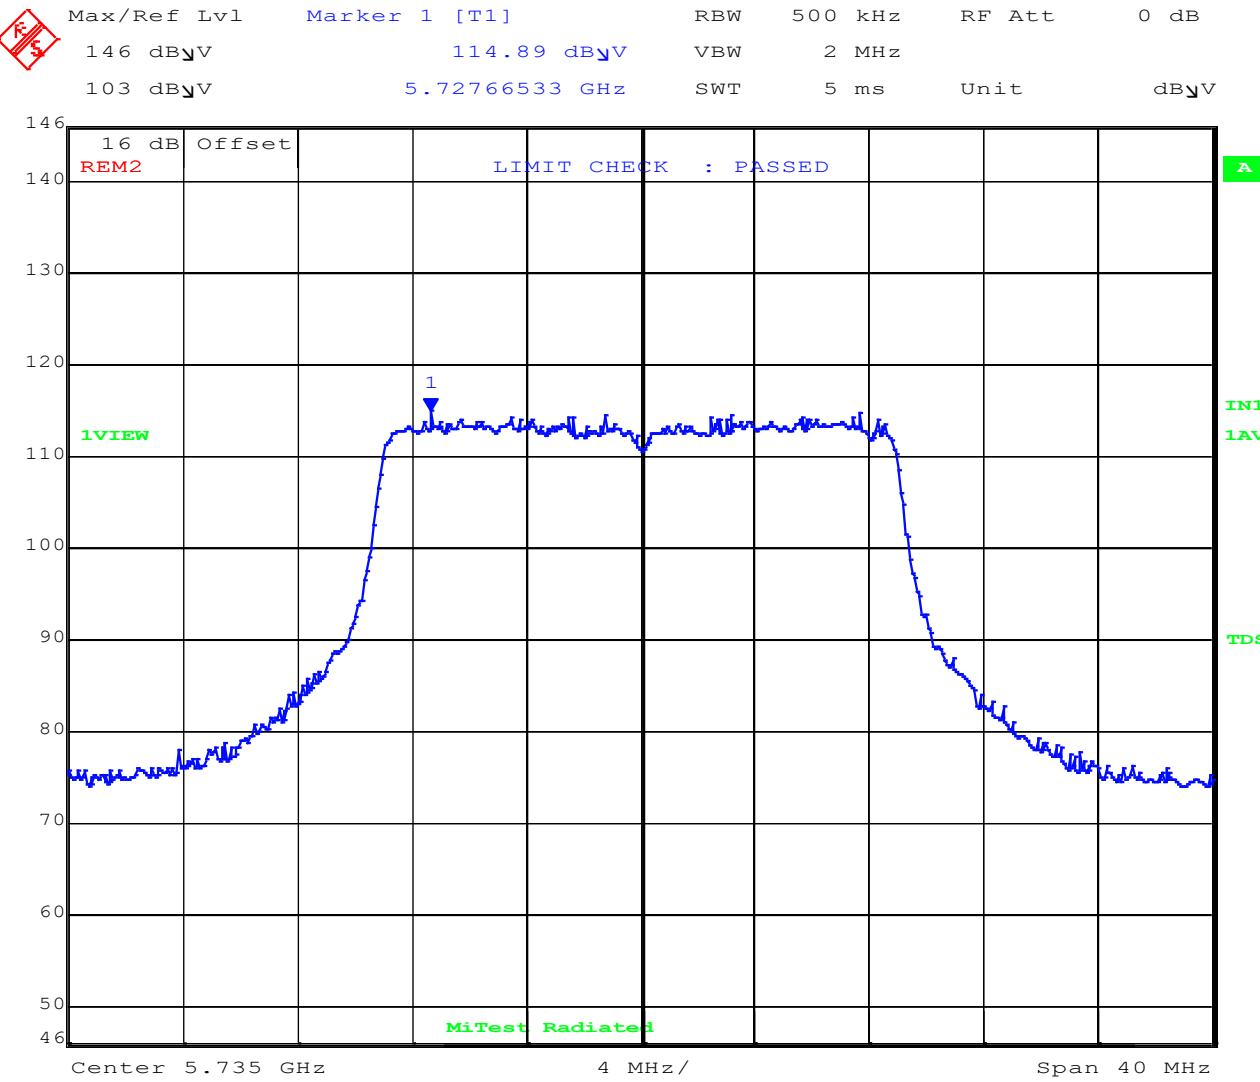

Date: 23.MAR.2021 08:36:52


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5727.66 MHz : 114.89 dB _u V/m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 20 MHz, Channel: 5735.00 MHz, Polarity V Temp: 20, Voltage: 48 Vdc

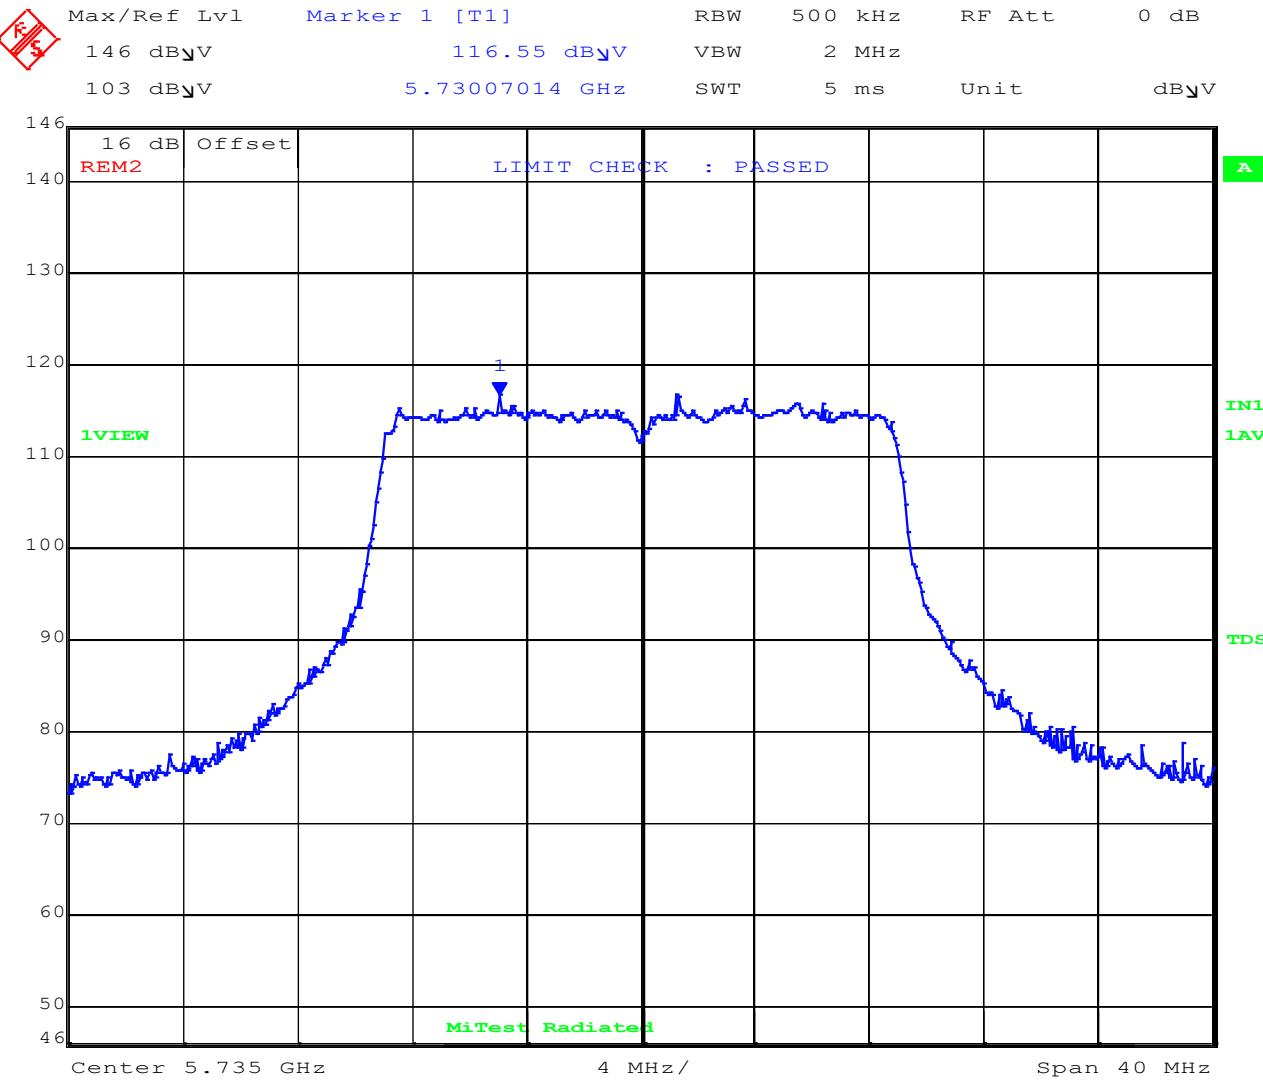

Date: 23.MAR.2021 08:37:58

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5730.07 MHz : 116.55 dB _u V/m	Limit: ≤ 25.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 20 MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

	Max/Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	0 dB
	146 dB _u V	115.73 dB _u V	VBW	2 MHz		
	103 dB _u V	5.77998998 GHz	SWT	5 ms	Unit	dB _u V

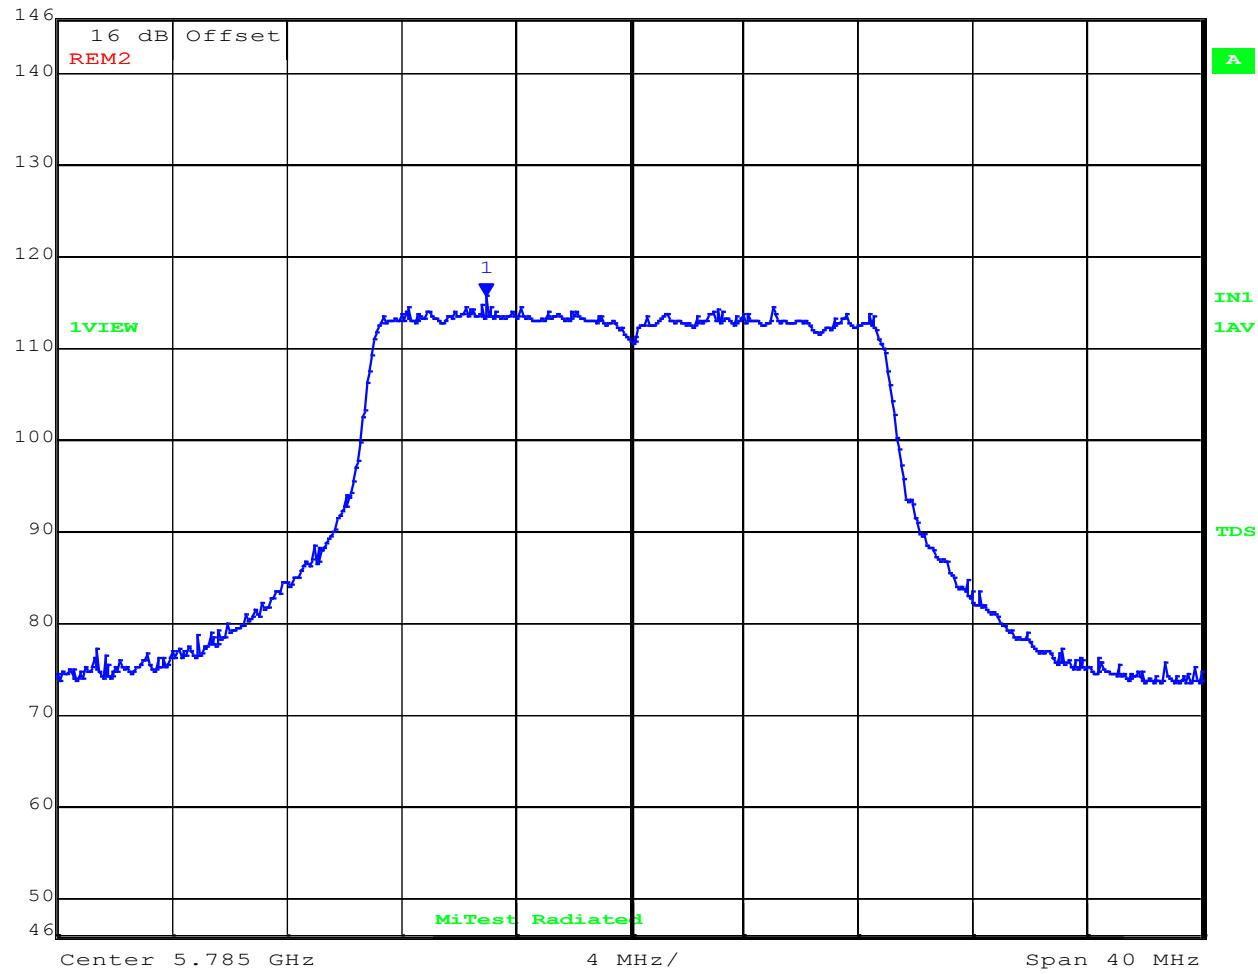

Date: 23.MAR.2021 08:34:39


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 57779.95 MHz : 15.73 dB _u V/m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY

MiTest
regulatory compliance in the cloud

Variant: 20 MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

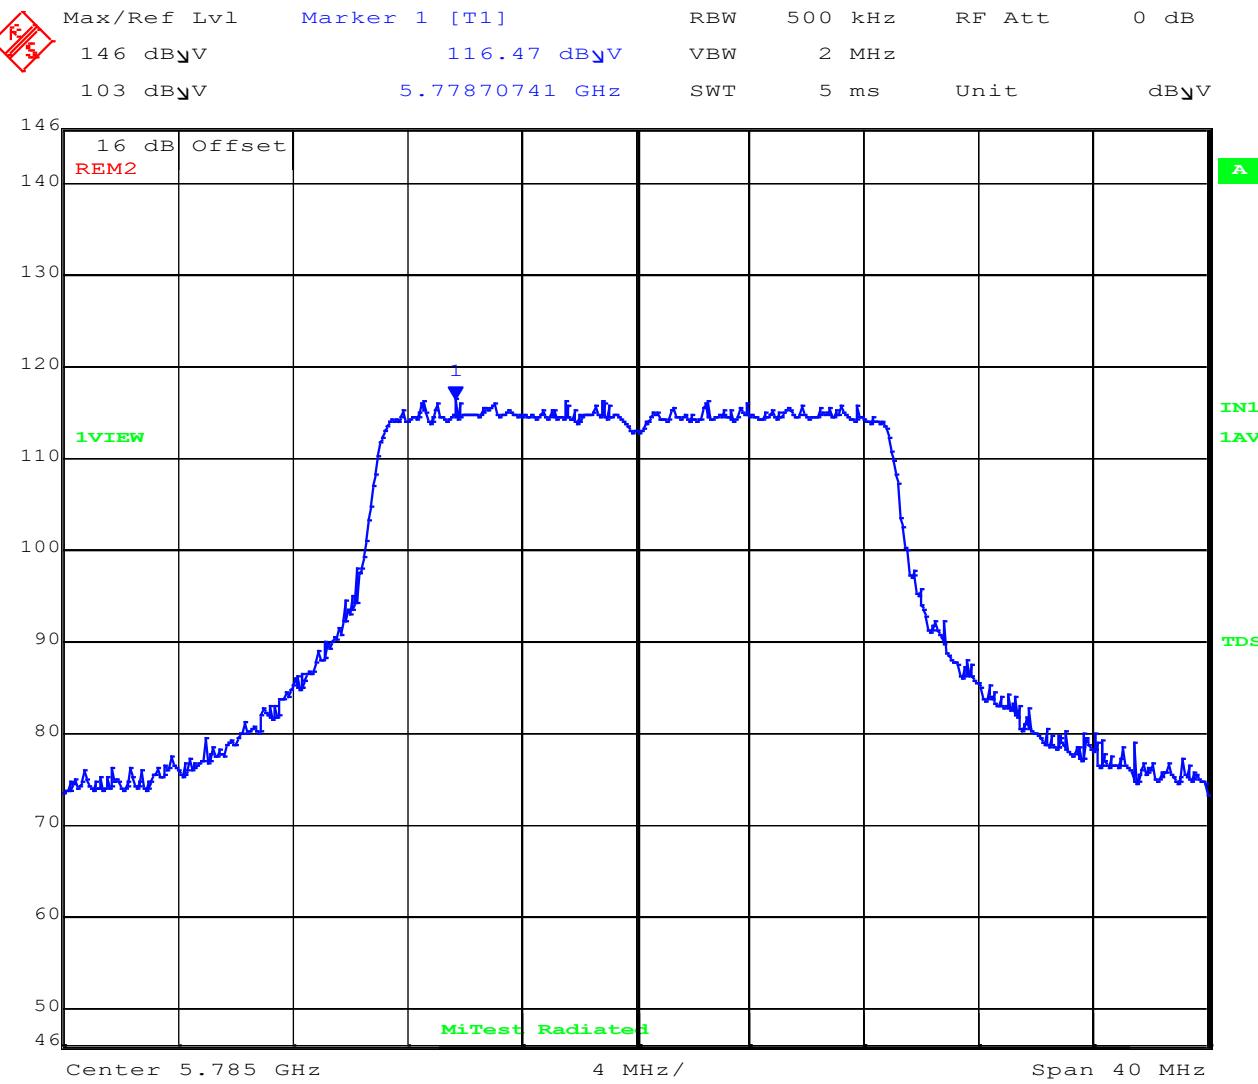

Date: 23.MAR.2021 08:33:37


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5778.70 MHz : 116.47 dB _u V/m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 20 MHz, Channel: 5840.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

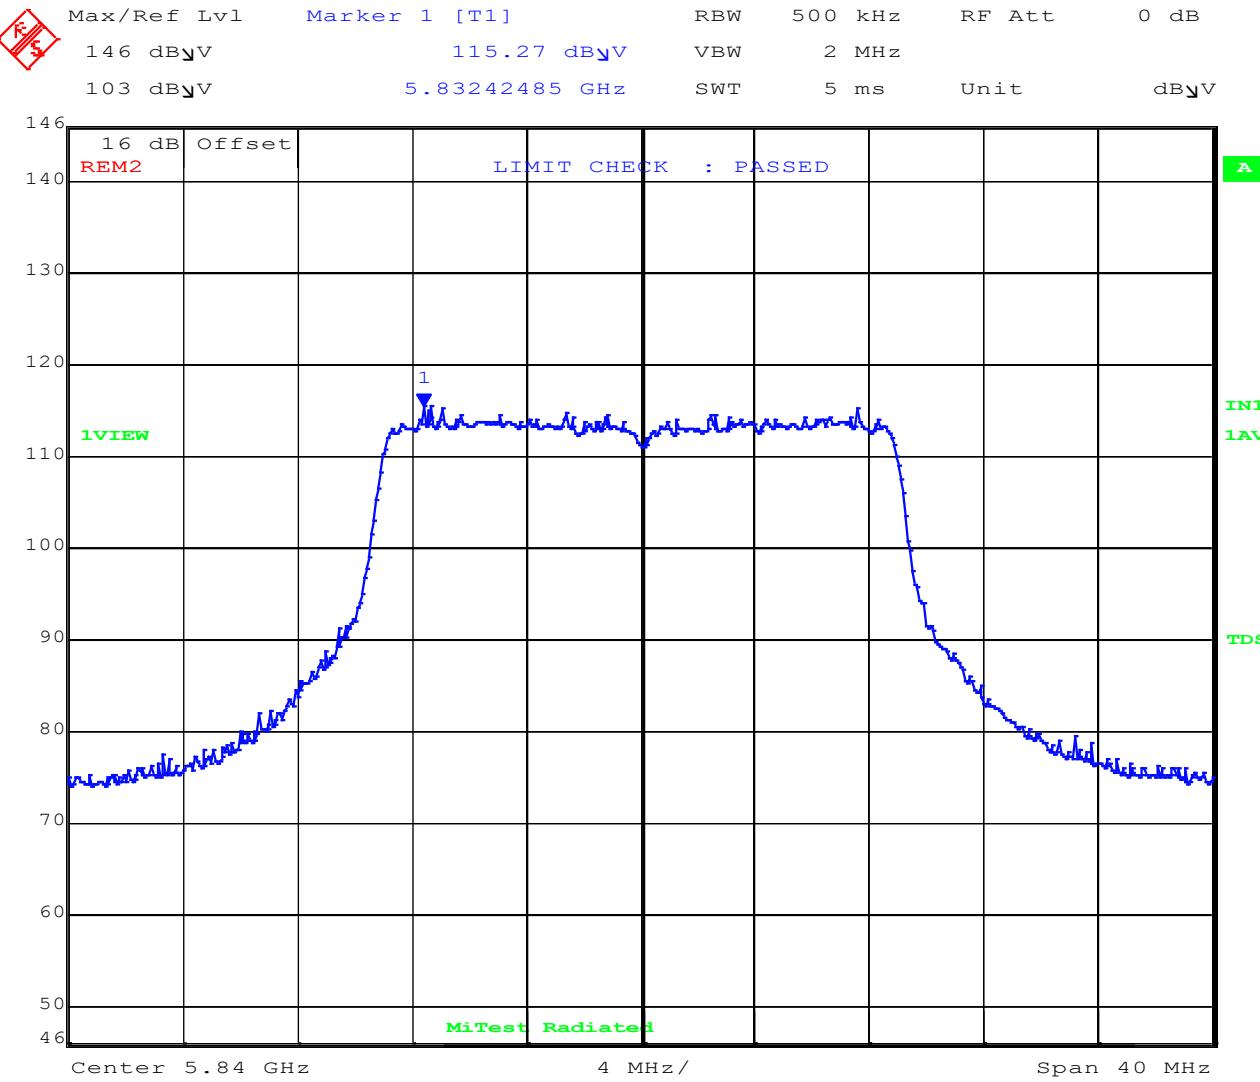

Date: 23.MAR.2021 08:30:58


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5832.42 MHz : 115.27 dB _u V/m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 20 MHz, Channel: 5840.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

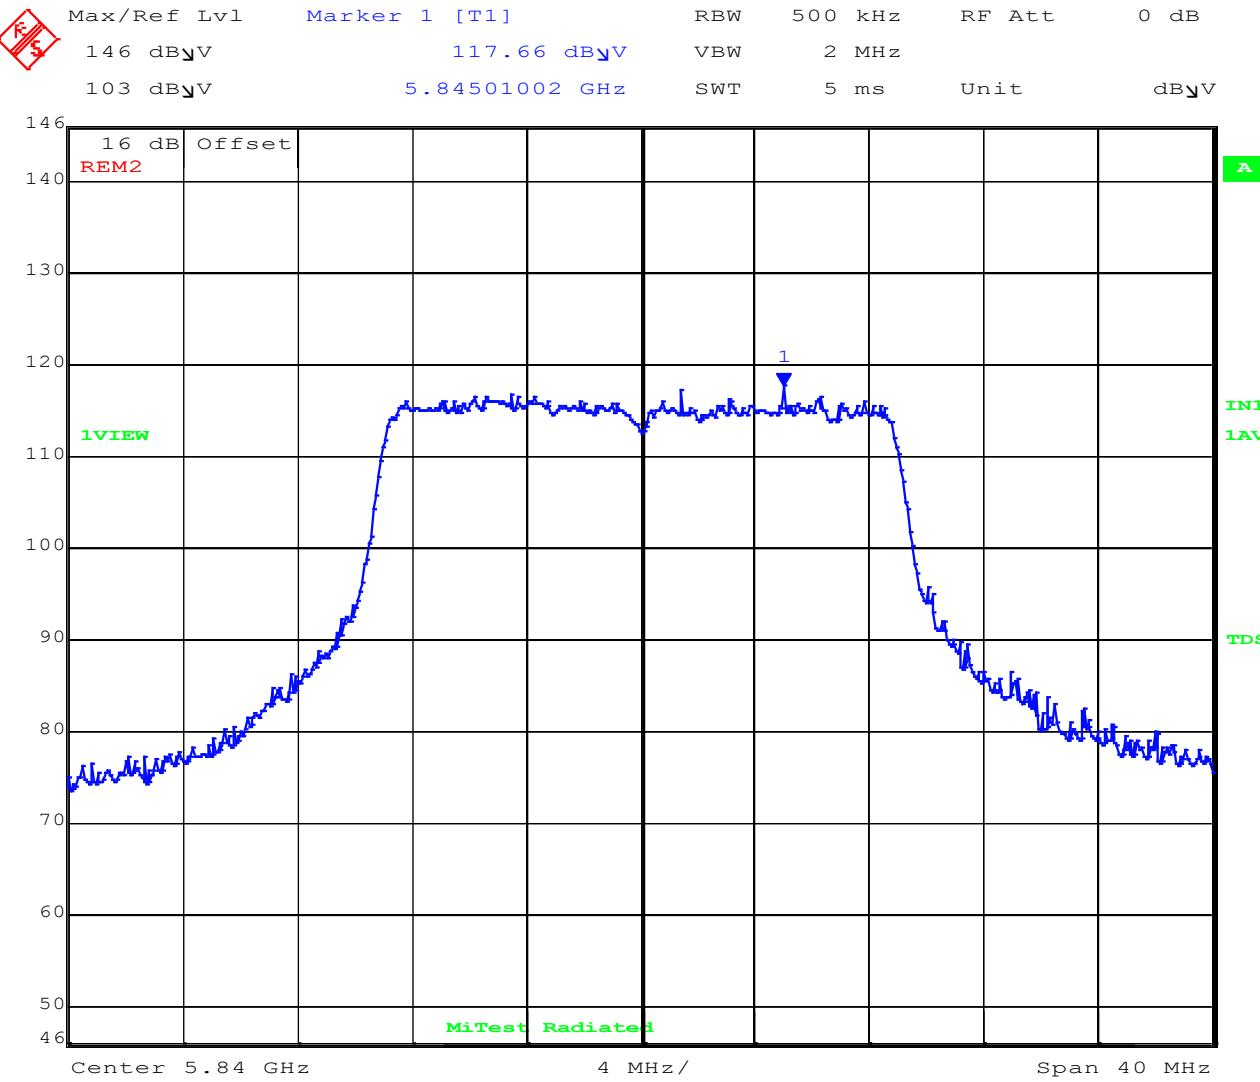

Date: 23.MAR.2021 08:32:07


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5845.01 MHz : 117.66 dB _V /m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5745.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

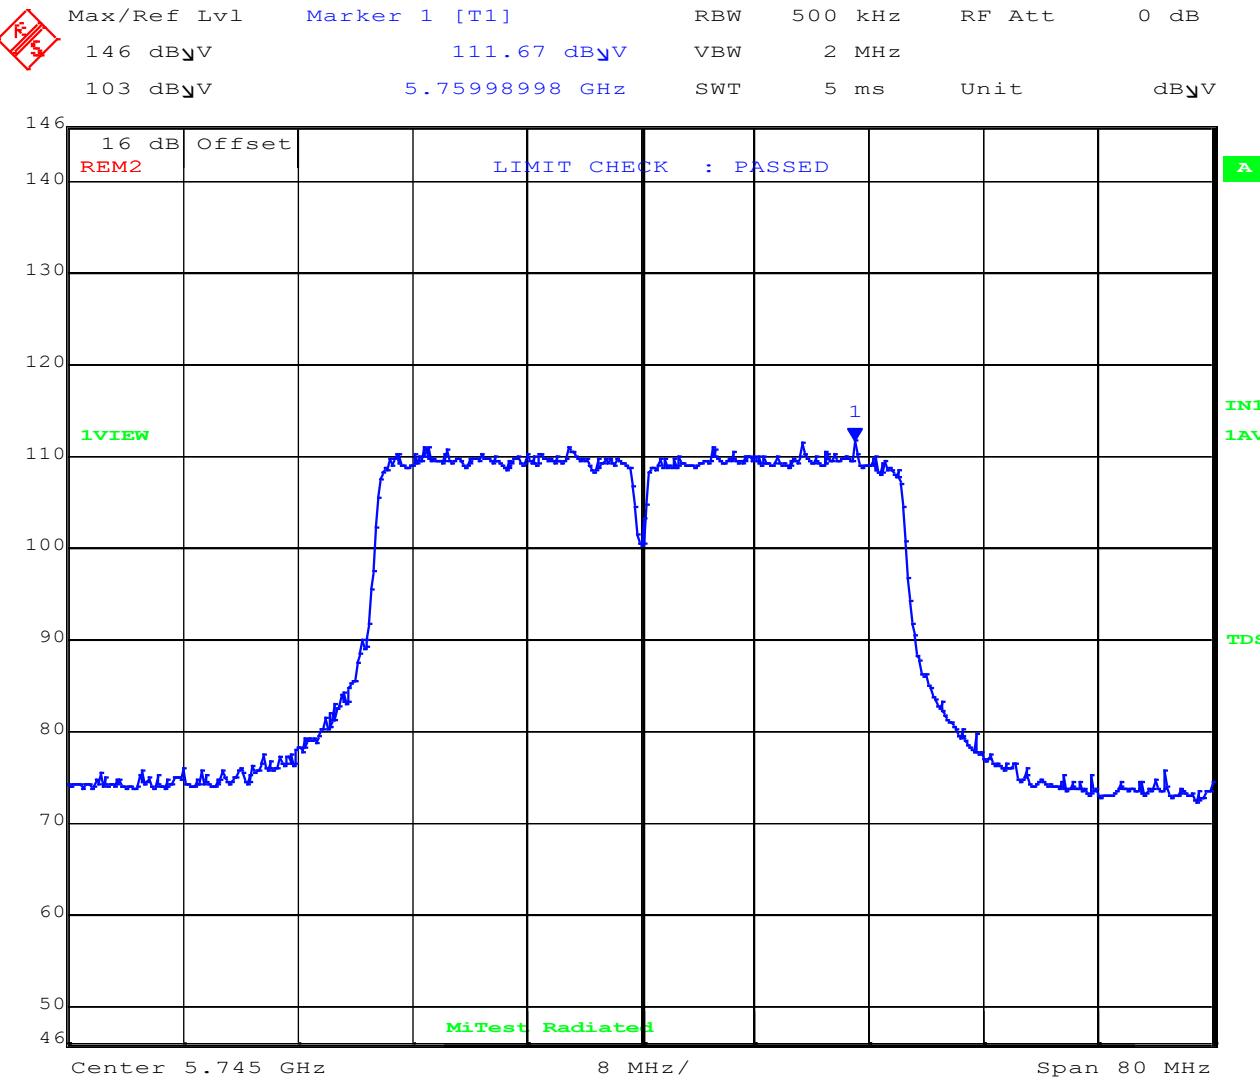

Date: 23.MAR.2021 08:45:18

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5759.98 MHz : 111.67 dB _u V/m	Limit: ≤ 25.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5745.00 MHz, Polarity V Temp: 20, Voltage: 48 Vdc

	Max/Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	0 dB
	146 dB _V	113.87 dB _V	VBW	2 MHz		
	103 dB _V	5.75389780 GHz	SWT	5 ms	Unit	dB _V

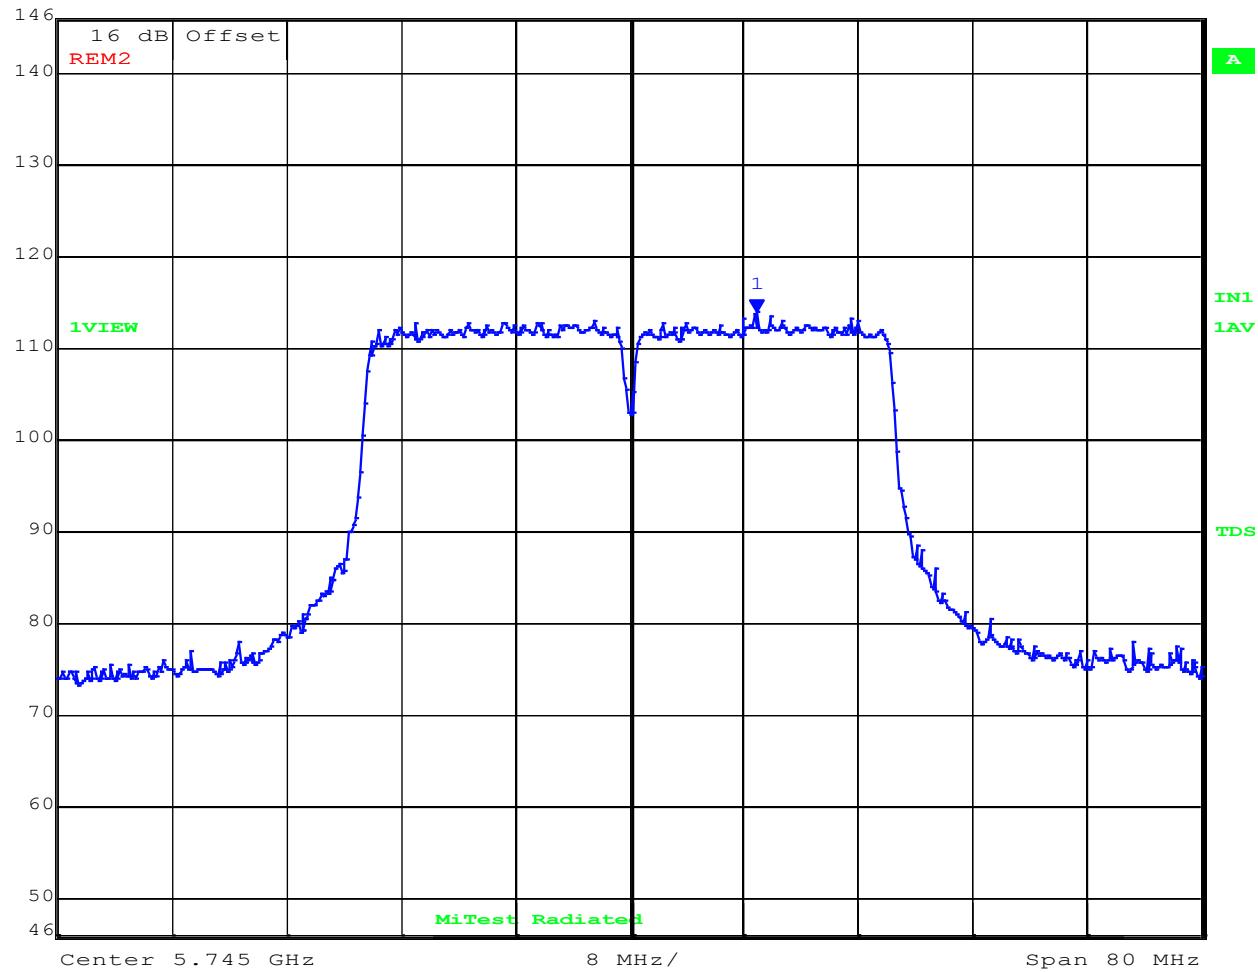

Date: 23.MAR.2021 08:43:57

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5753.89 MHz :113.87 dB _V /m	Limit: ≤ 25.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

	Max/Ref Lvl	Marker 1 [T1]	RBW 500 kHz	RF Att	0 dB
	146 dB _u V	111.99 dB _u V	VBW 2 MHz		
	103 dB _u V	5.78027054 GHz	SWT 5 ms	Unit	dB _u V

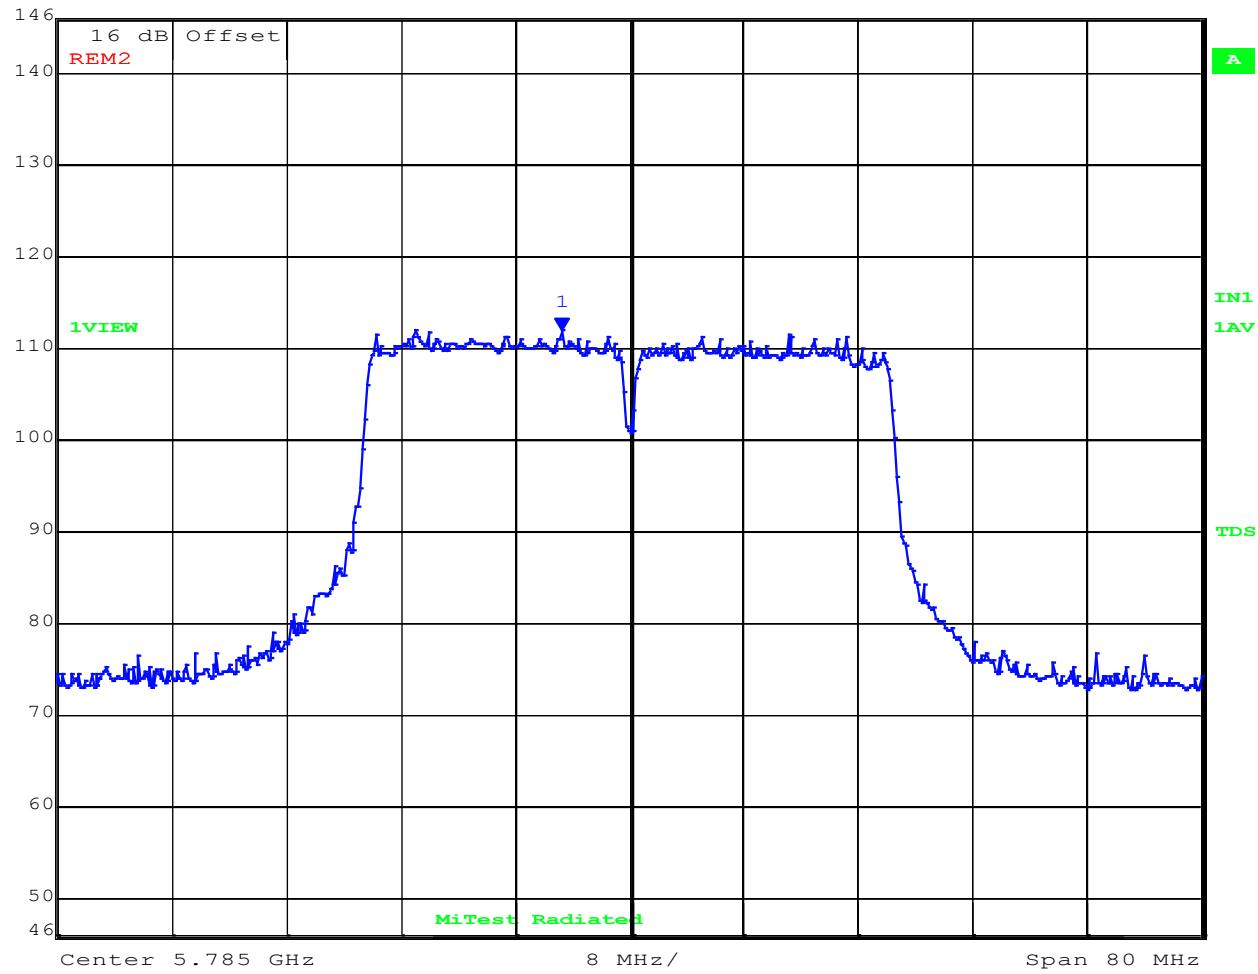

Date: 23.MAR.2021 08:47:35

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5780.27 MHz : 111.99 dB _u V/m	Limit: ≤ 25.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

	Max/Ref Lvl	Marker 1 [T1]	RBW 500 kHz	RF Att	0 dB
	146 dB _u V	114.20 dB _u V	VBW 2 MHz		
	103 dB _u V	5.83376754 GHz	SWT 5 ms	Unit	dB _u V

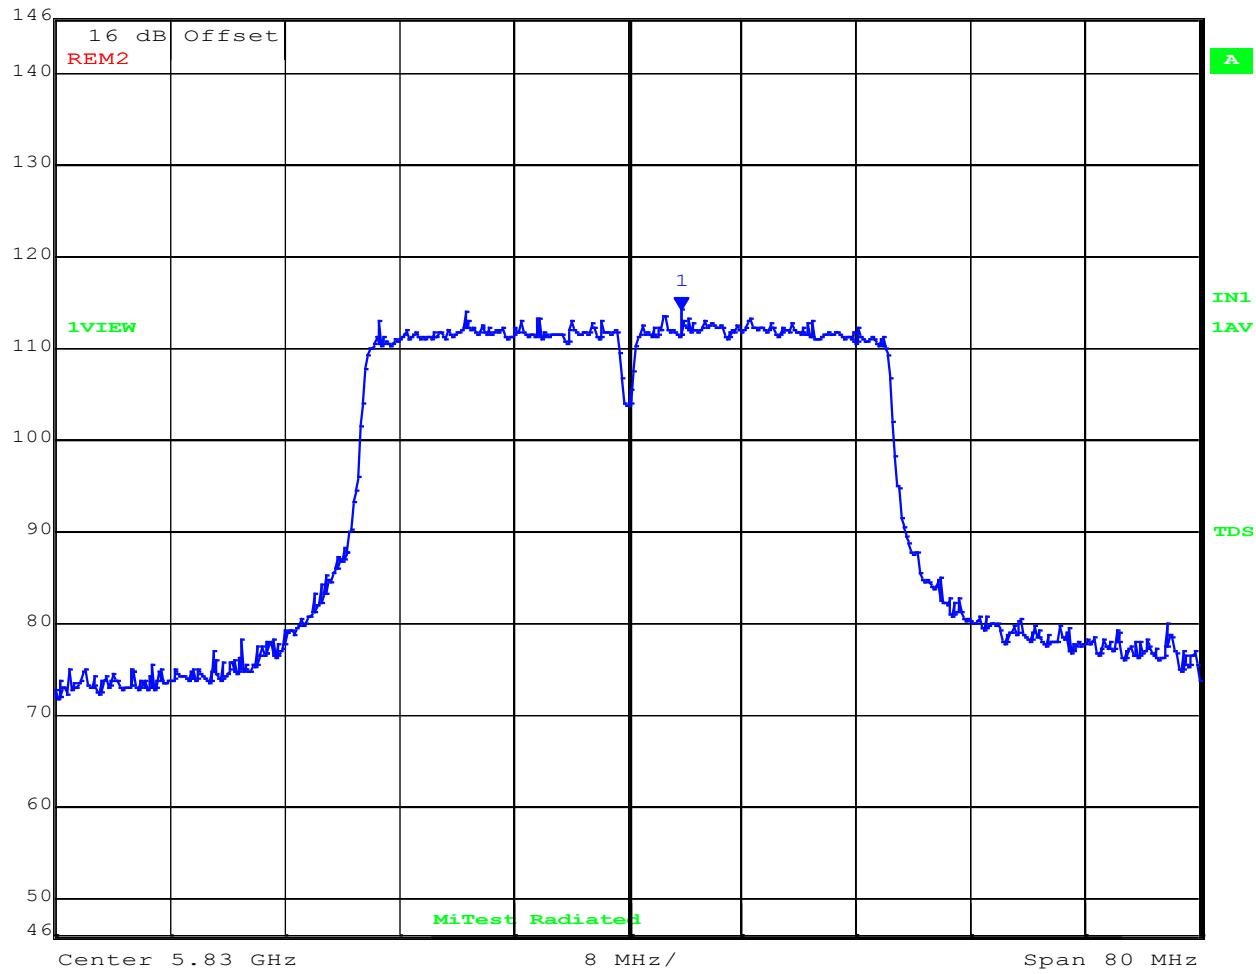

Date: 23.MAR.2021 08:49:58


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5833.76 MHz : 114.20 dB _u V/m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5830.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

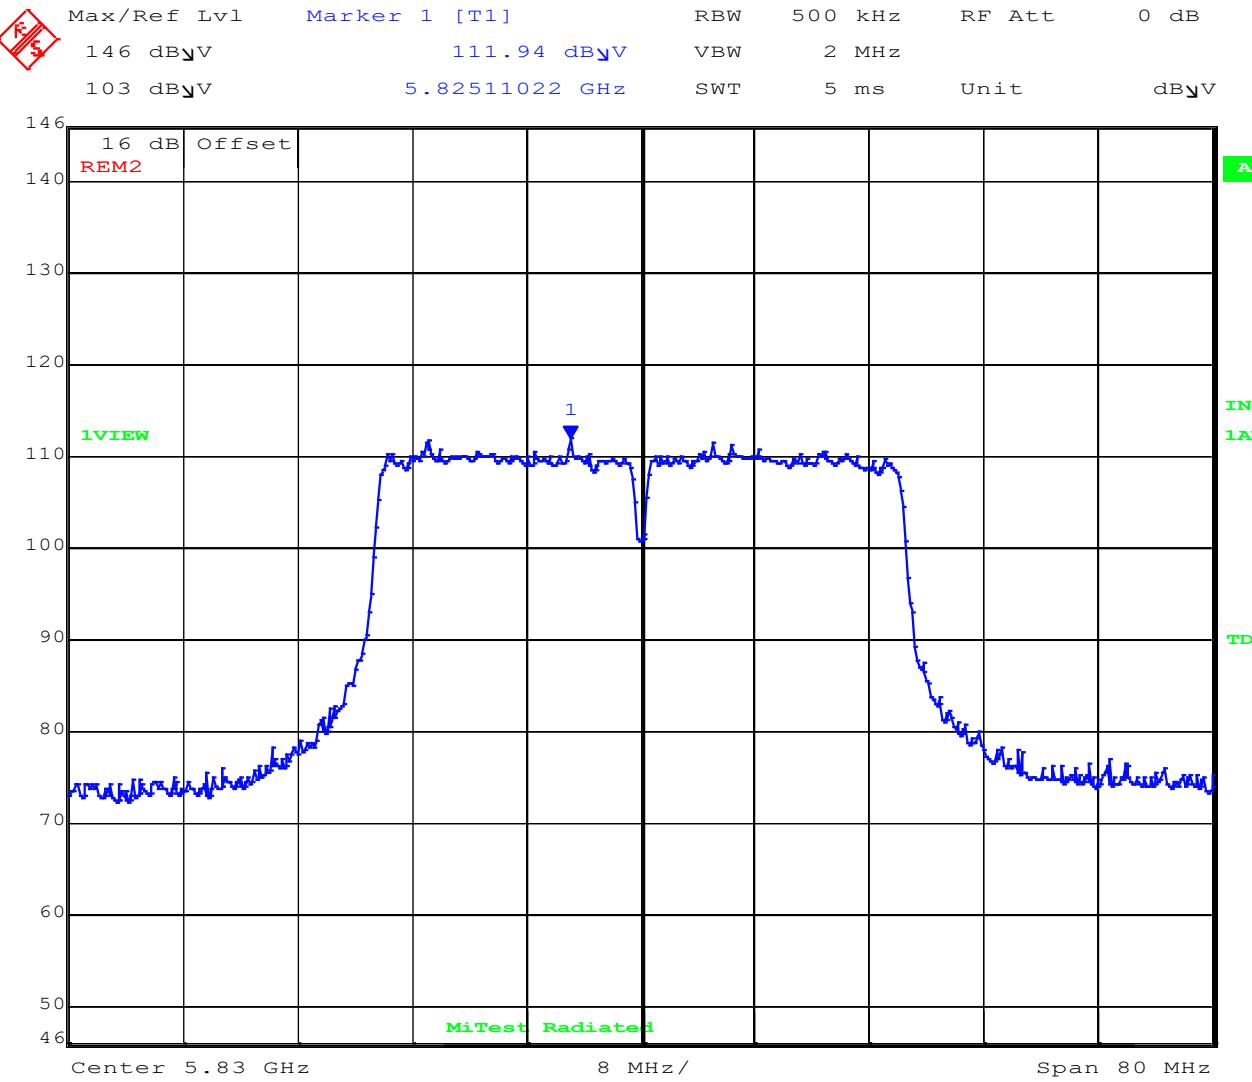

Date: 23.MAR.2021 08:51:47

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5825.11 MHz : 111.94 dB _u V/m	Limit: ≤ 25.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5830.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

 Max/Ref Lvl	Marker 1 [T1]	RBW 500 kHz	RF Att 0 dB
146 dB _V	114.73 dB _V	VBW 2 MHz	
103 dB _V	5.81885772 GHz	SWT 5 ms	Unit
			dB _V

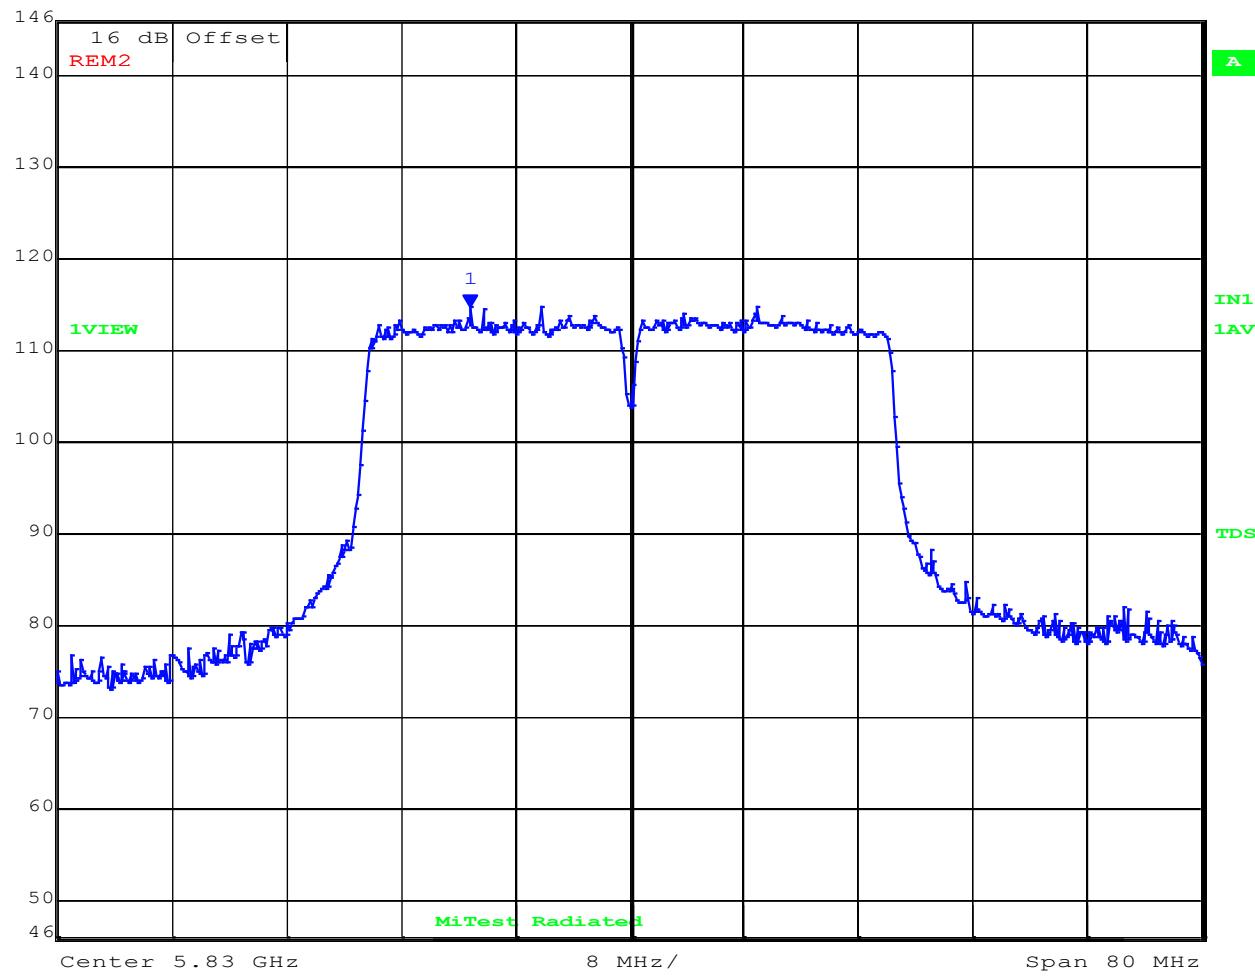

Date: 23.MAR.2021 08:50:43

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5818.85 MHz : 114.73 dB _V /m	Limit: ≤ 25.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5765.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

 Max/Ref Lvl	Marker 1 [T1]	RBW 500 kHz	RF Att 0 dB
146 dB _u V	108.63 dB _u V	VBW 2 MHz	
103 dB _u V	5.76259519 GHz	SWT 5 ms	Unit dB _u V

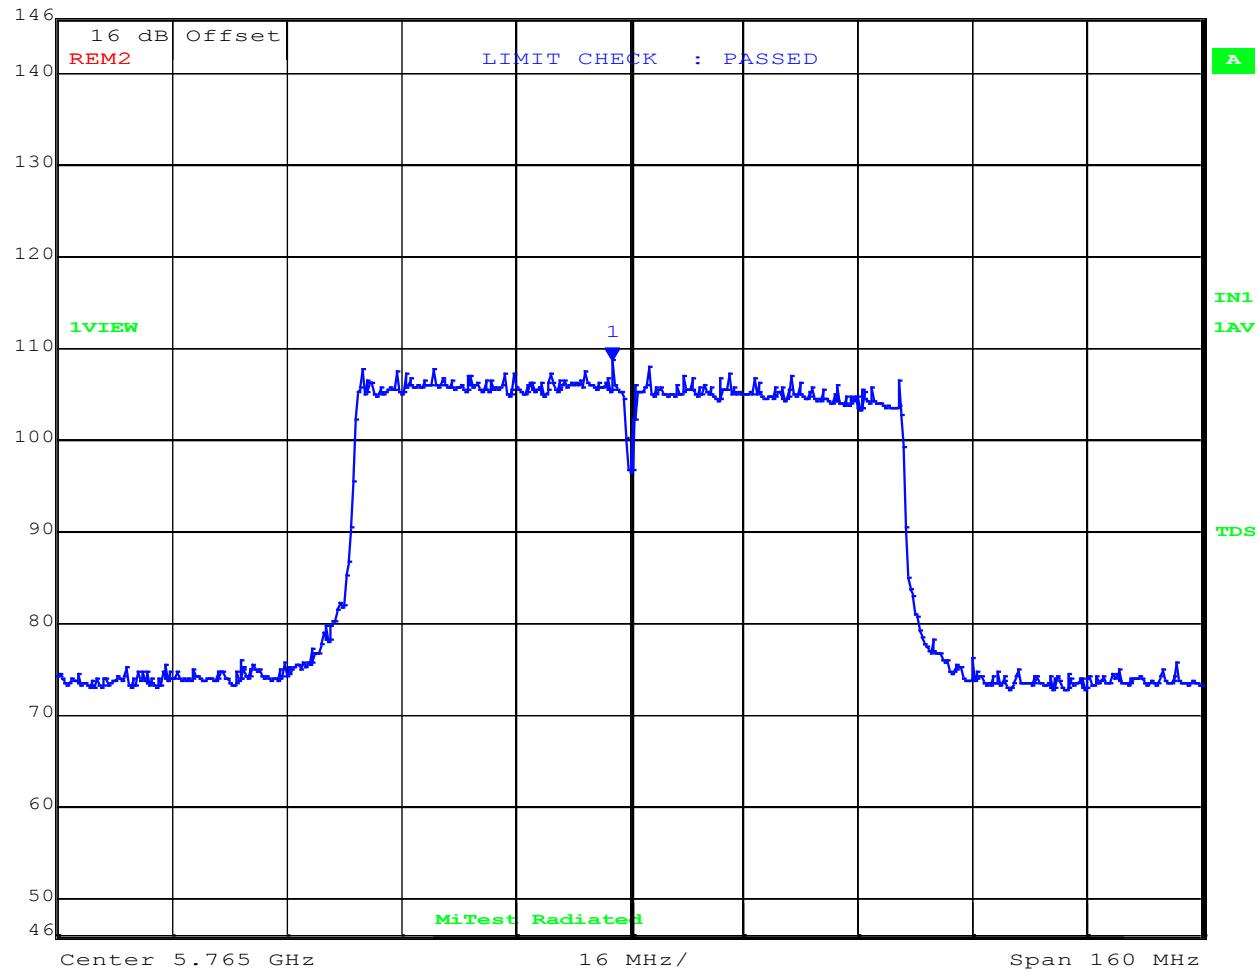

Date: 23.MAR.2021 08:59:59

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5762.59 MHz : 108.63 dB _u V/m	Limit: ≤ 25.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5765.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

 Max/Ref Lvl	Marker 1 [T1]	RBW 500 kHz	RF Att 0 dB
146 dB _u V	110.53 dB _u V	VBW 2 MHz	
103 dB _u V	5.77638277 GHz	SWT 5 ms	Unit

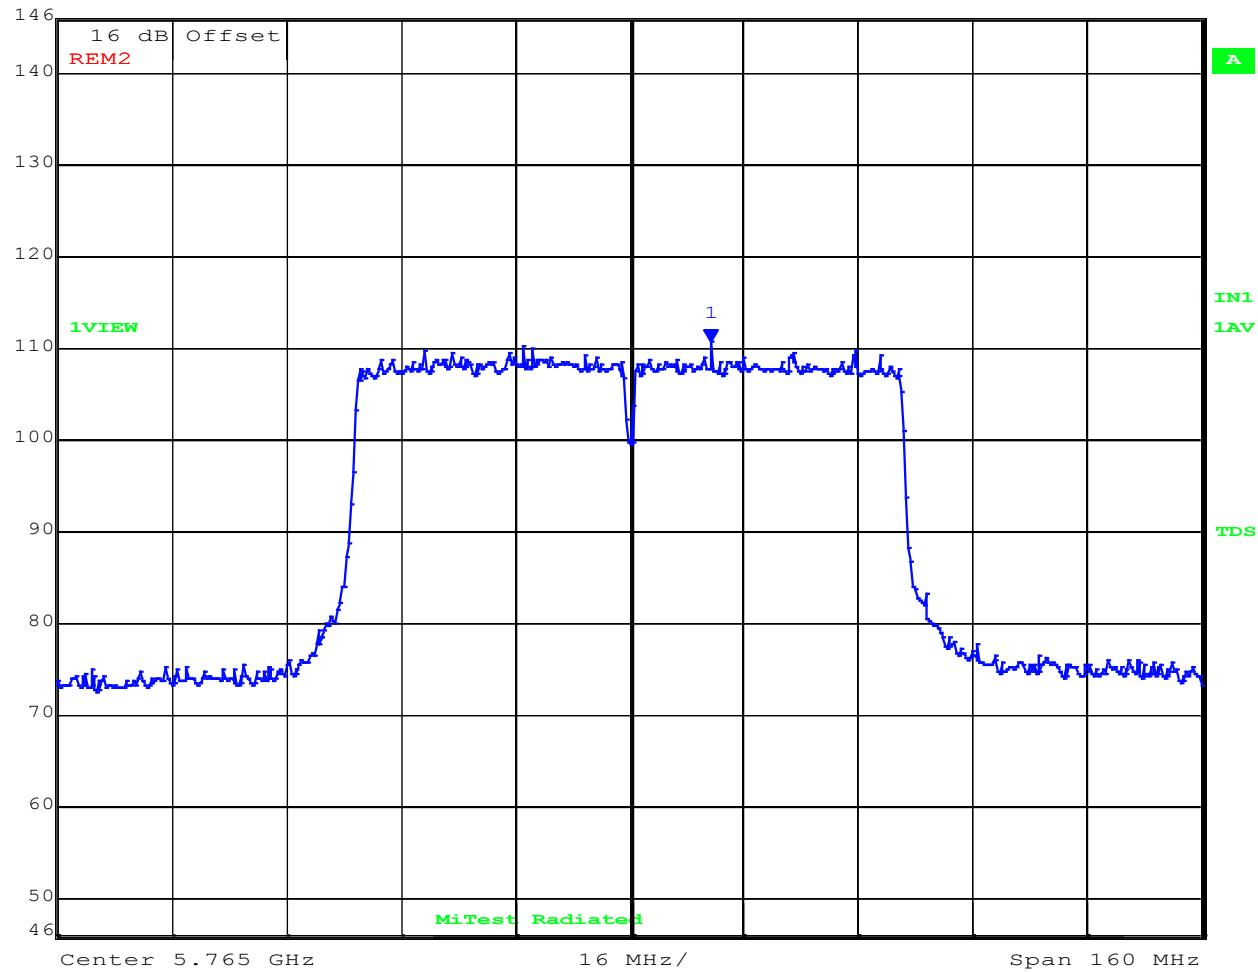

Date: 23.MAR.2021 09:00:53

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5776.38 MHz : 110.53 dB _u V/m	Limit: ≤ 25.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

	Max/Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	0 dB
	146 dB _u V	110.00 dB _u V	VBW	2 MHz		
	103 dB _u V	5.76015030 GHz	SWT	5 ms	Unit	dB _u V

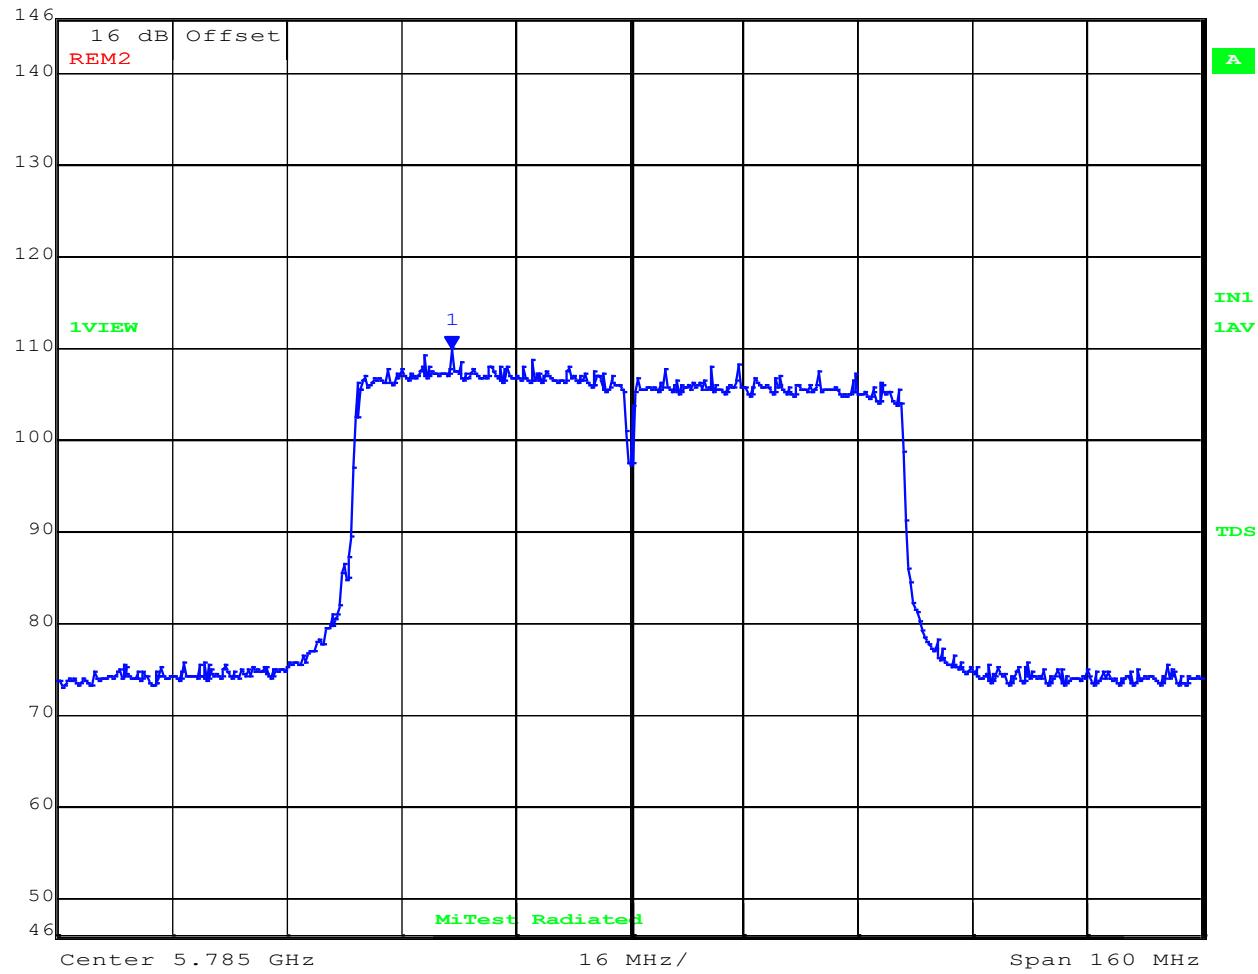

Date: 23.MAR.2021 08:58:35

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5760.15 MHz : 110.00 dB _u V/m	Limit: ≤ 25.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

	Max/Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	0 dB
	146 dB _u V	110.77 dB _u V	VBW	2 MHz		
	103 dB _u V	5.75373747 GHz	SWT	5 ms	Unit	dB _u V

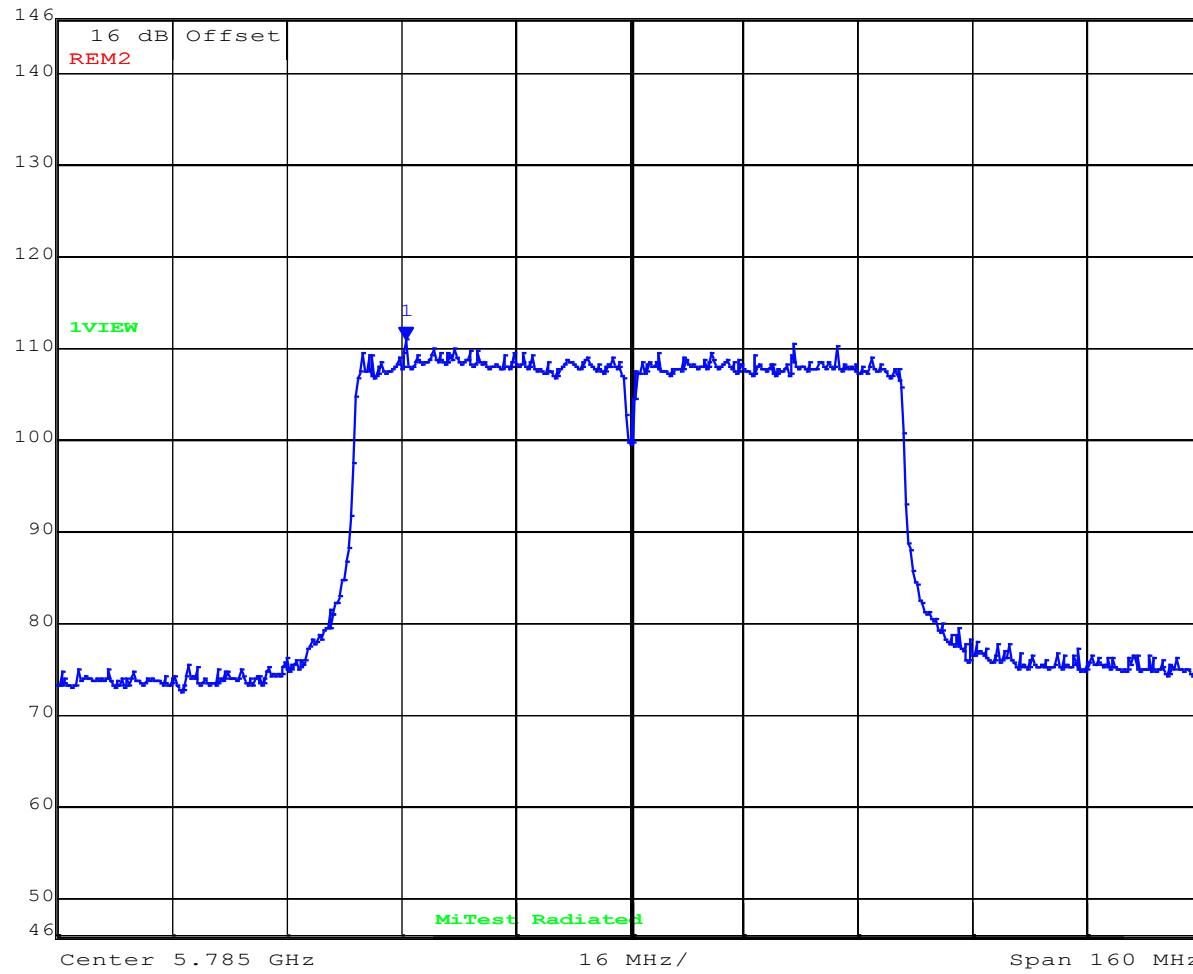

Date: 23.MAR.2021 08:57:35

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5753.73 MHz : 110.77 dB _u V/m	Limit: ≤ 25.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY

 MiTest
regulatory compliance in the cloud

Variant: 80 MHz, Channel: 5810.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

Max/Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	0 dB
146 dB _V	107.89 dB _V	VBW	2 MHz		
103 dB _V	5.79252505 GHz	SWT	5 ms	Unit	dB _V

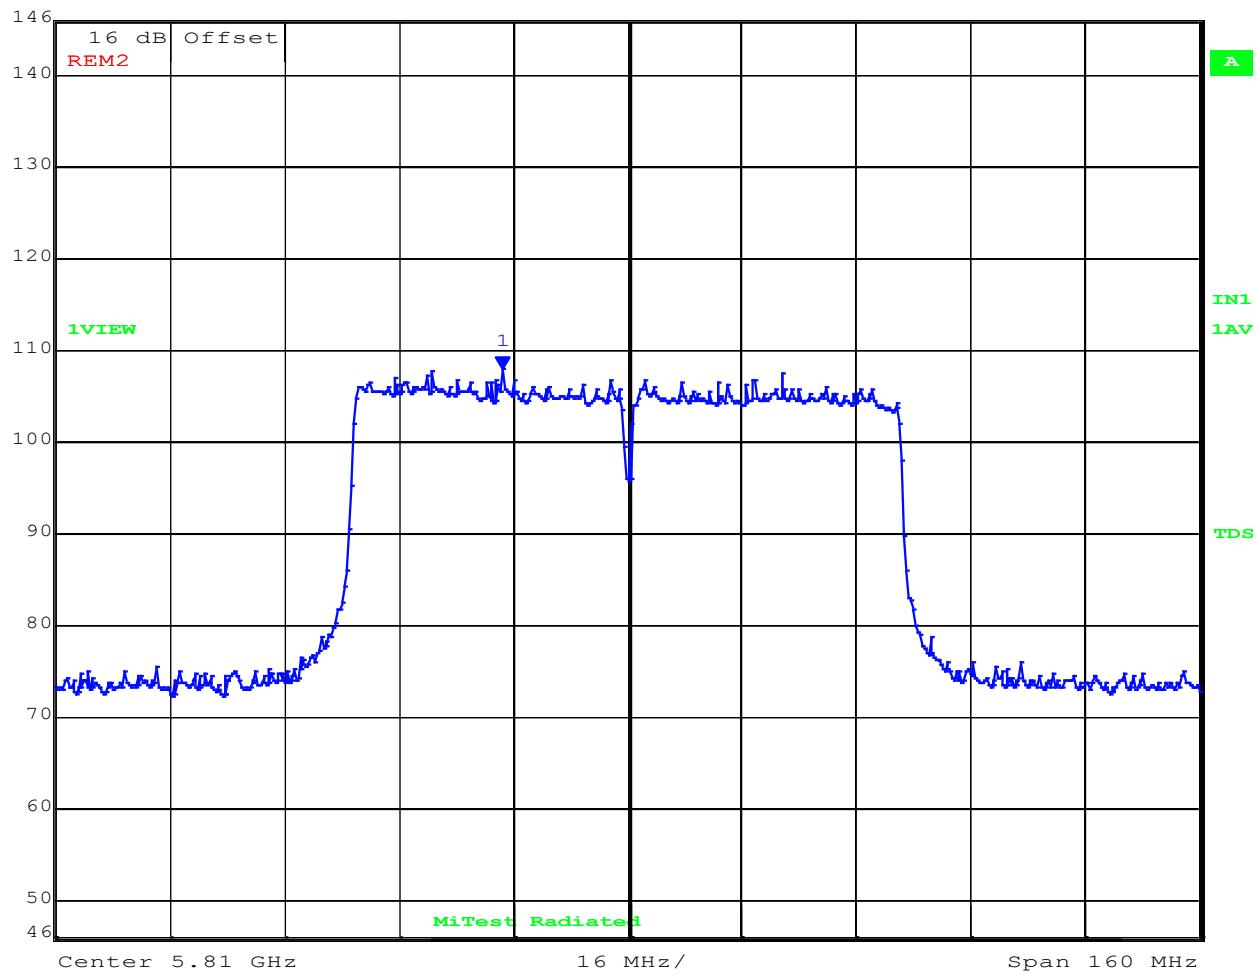

Date: 23.MAR.2021 08:53:45


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5792.52 MHz : 107.89 dBuV/m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5810.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

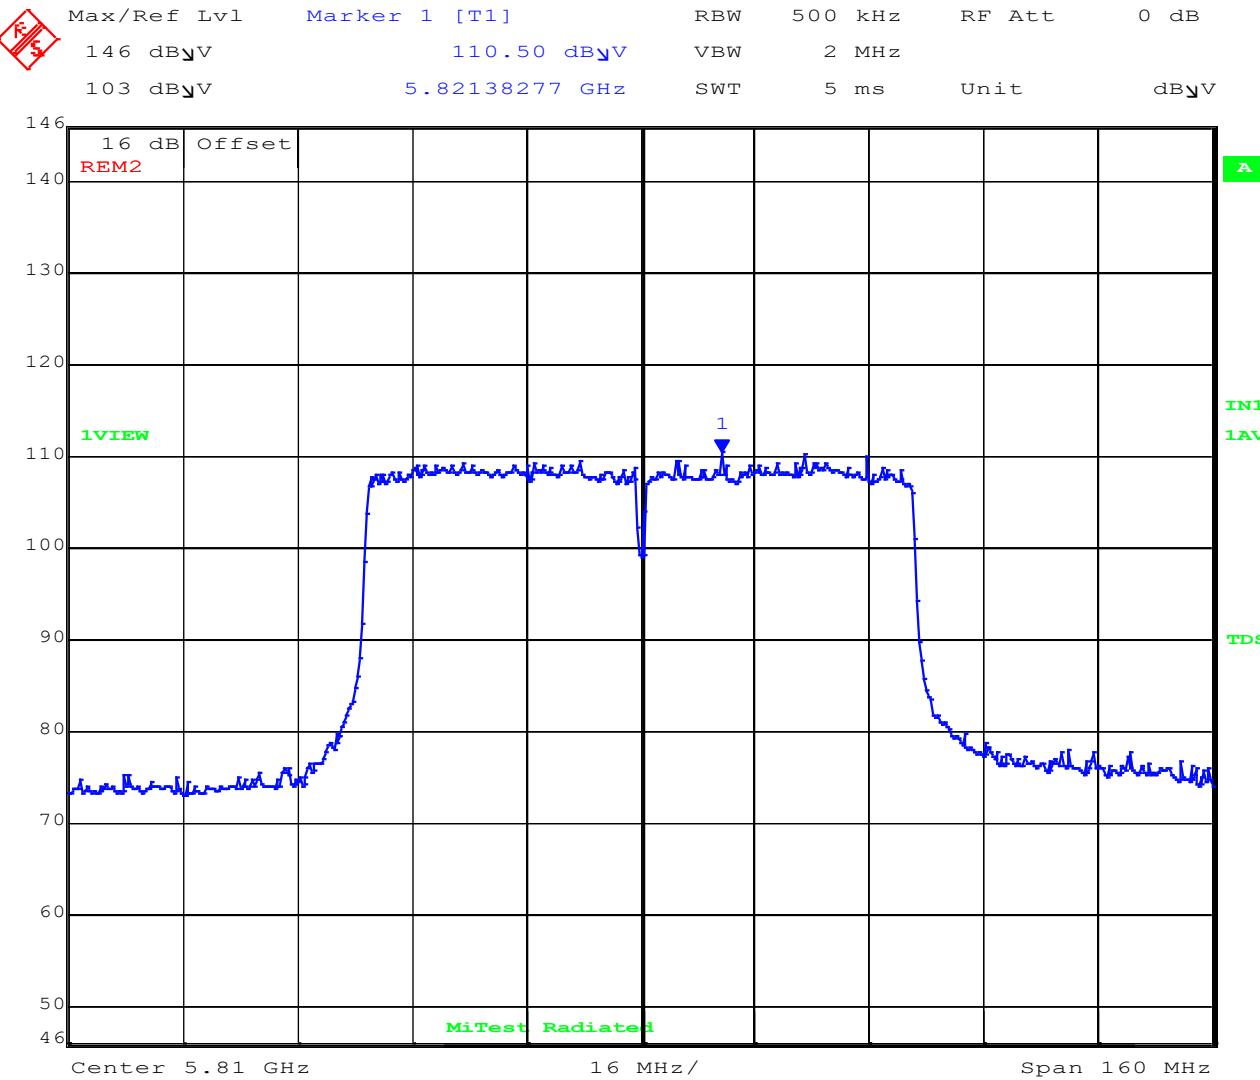


Date: 23.MAR.2021 08:56:03

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5821.38 MHz : 110.50 dB _u V/m	Limit: ≤ 25.00 dBm, Pass

[back to matrix](#)

A.2.2 Beamforming

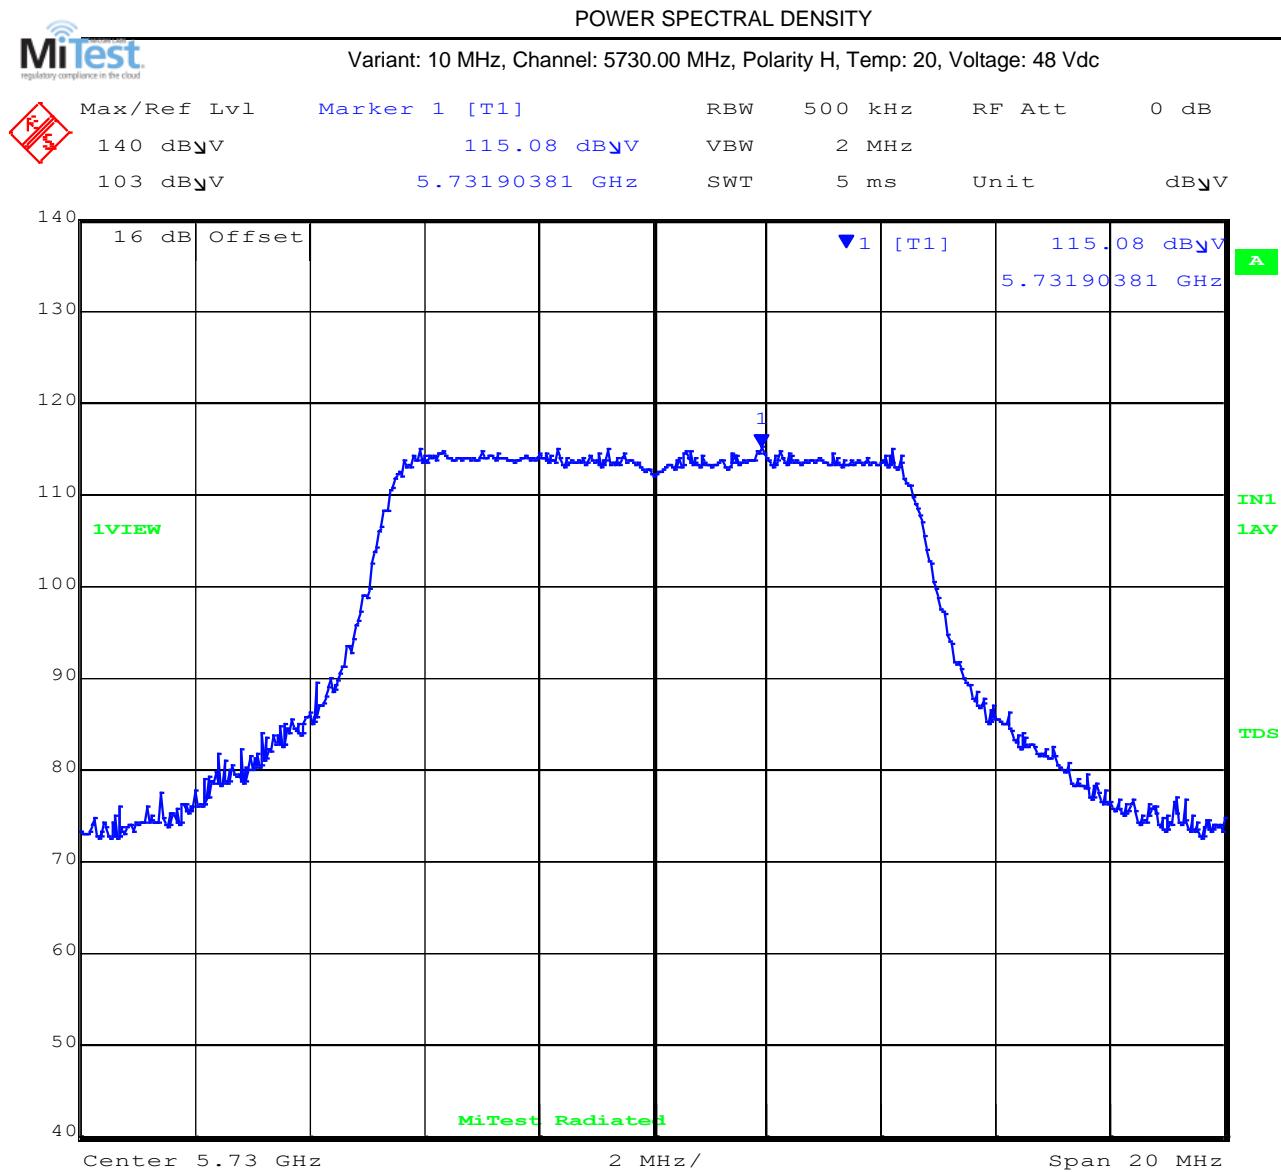

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5731.90 MHz : 115.08 dB _u V/m	Limit: ≤ 19.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY

 MiTest
regulatory compliance in the cloud

Variant: 10 MHz, Channel: 5730.00 MHz, Polarity V Temp: 20, Voltage: 48 Vdc

Max/Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	0 dB
140 dB _V	115.01 dB _V	VBW	2 MHz		
103 dB _V	5.73238477 GHz	SWT	5 ms	Unit	dB _V

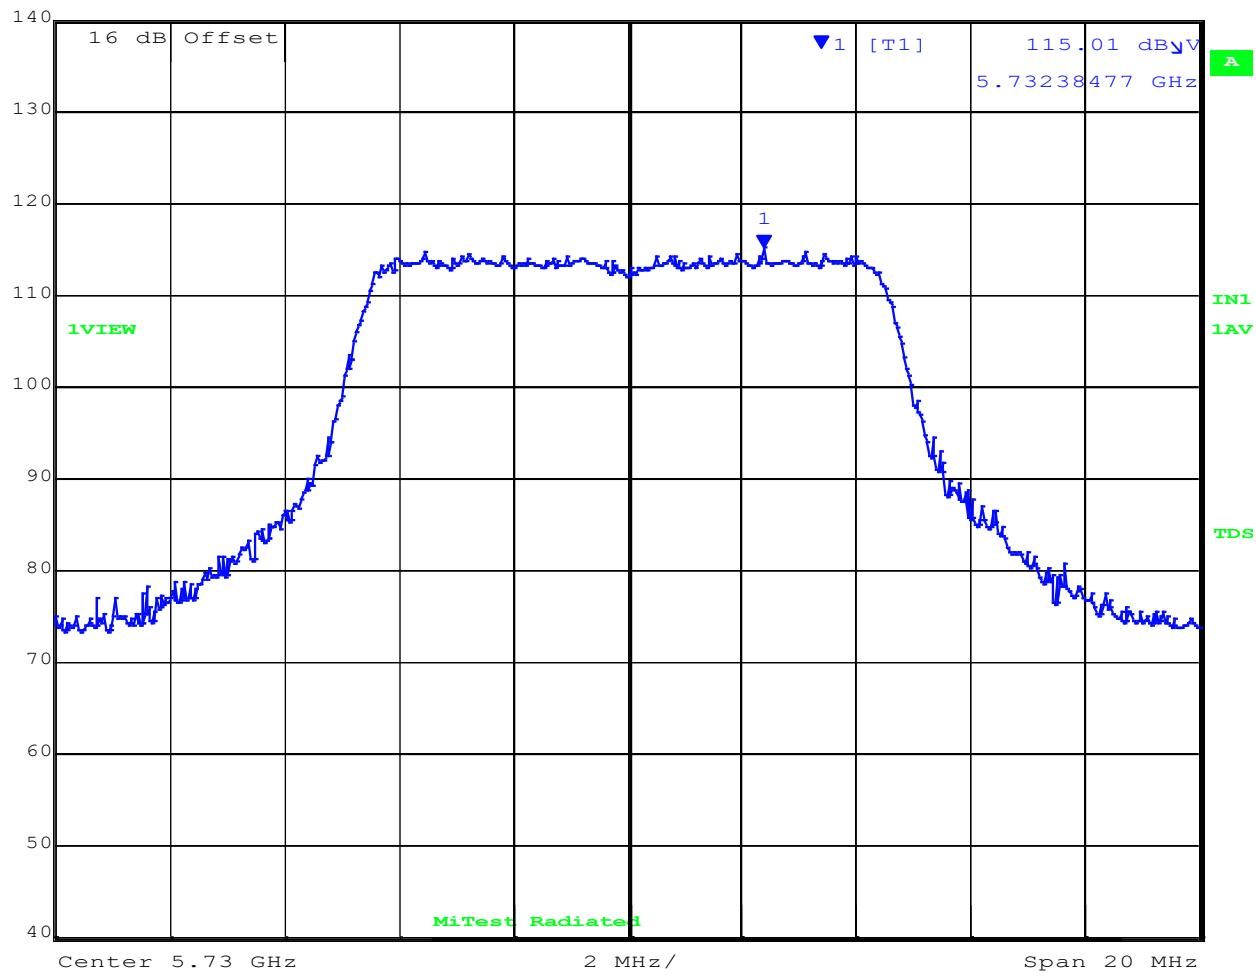

Date: 22.MAR.2021 11:35:55


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5732.28 MHz :115.01 dBuV/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 10 MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

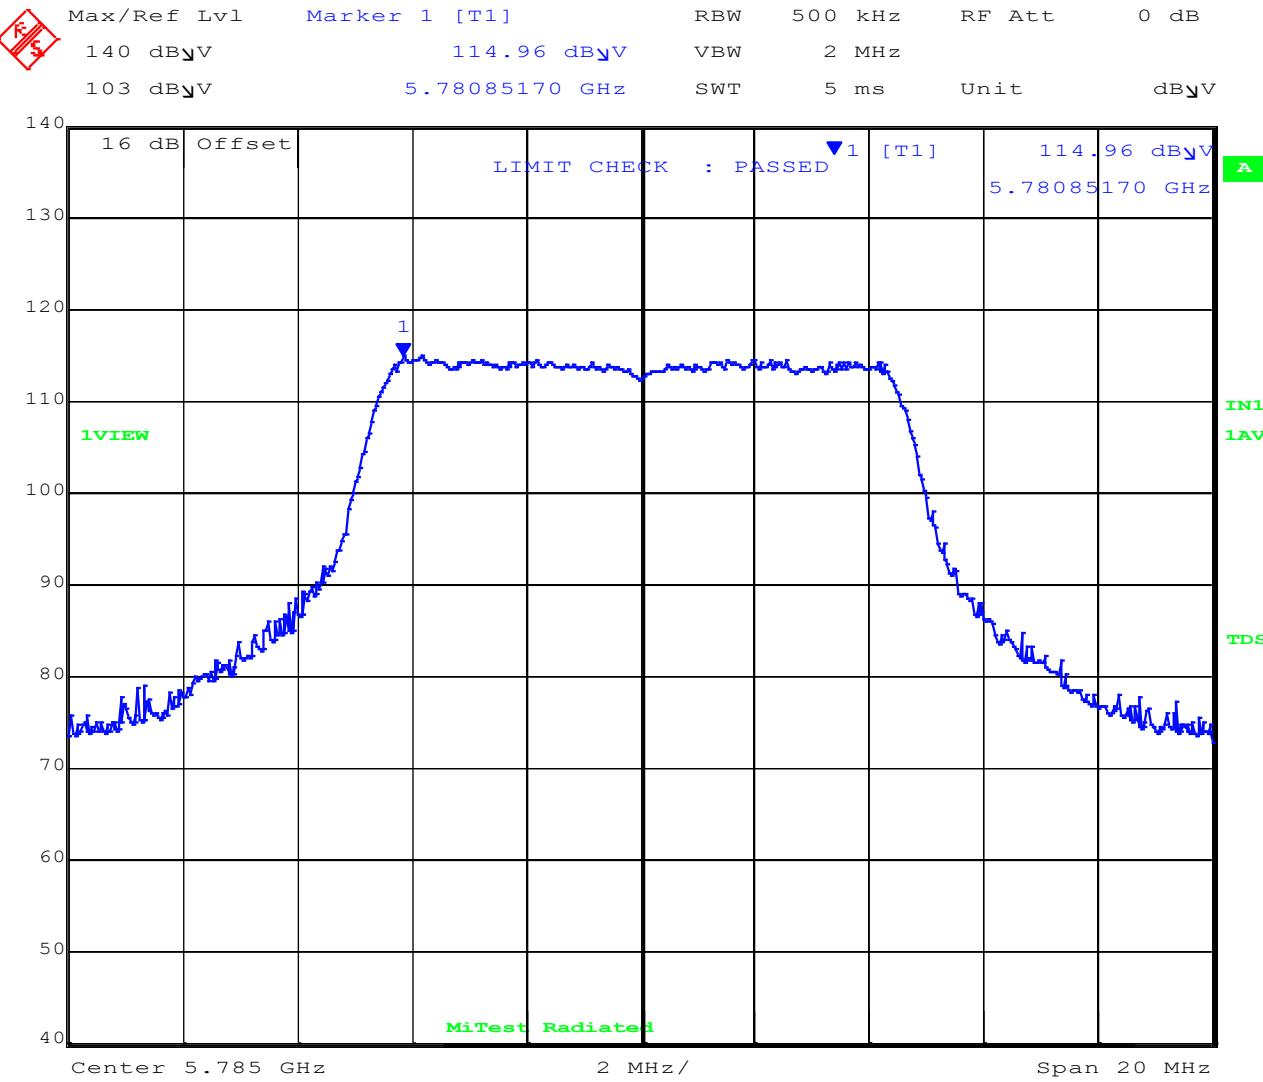

Date: 22.MAR.2021 11:41:22

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5780.85 MHz : 114.96 dB _u V/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY

 MiTest
regulatory compliance in the cloud

Variant: 10 MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

This figure is a spectral measurement plot from a network analyzer. The plot shows a signal with a peak at 5.78842685 GHz. The x-axis represents frequency, with labels 'Center 5.785 GHz', '2 MHz', and 'Span 20 MHz'. The y-axis represents power in dBm, ranging from 40 to 140. A blue line represents the measured signal. A red arrow points to a peak at 5.78842685 GHz, which is labeled '1'. A green arrow points to a peak at 5.785 GHz, labeled '2'. The plot includes a grid and several status indicators at the top:

- Max/Ref Lvl: 140 dBmV
- Marker 1 [T1]: 115.48 dBmV
- RBW: VBW
- 500 kHz
- RF Att: 0 dB
- 103 dBmV
- 5.78842685 GHz
- SWT
- 2 MHz
- 5 ms
- Unit
- dBmV

Below the plot, the text 'MiTest Radiated' is visible.

Date: 22.MAR.2021 11:42:07


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5788.42 MHz : 115.45 dBuV/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY

MiTest
regulatory compliance in the cloud

Variant: 10 MHz, Channel: 5845.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

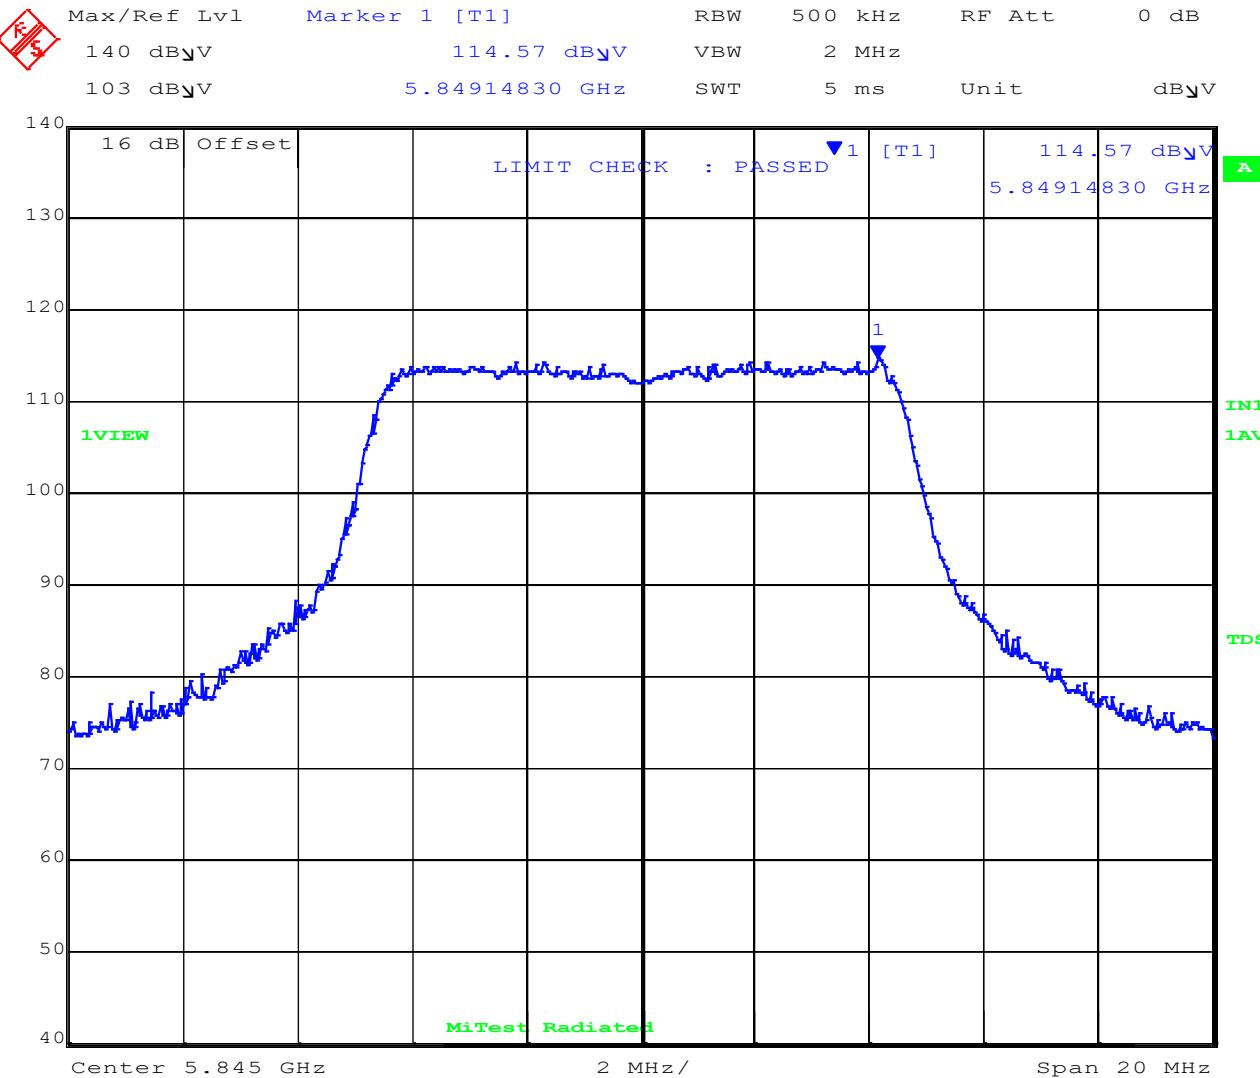

Date: 22.MAR.2021 11:46:24


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5849.14 MHz : 114.57 dB _u V/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 10 MHz, Channel: 5845.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

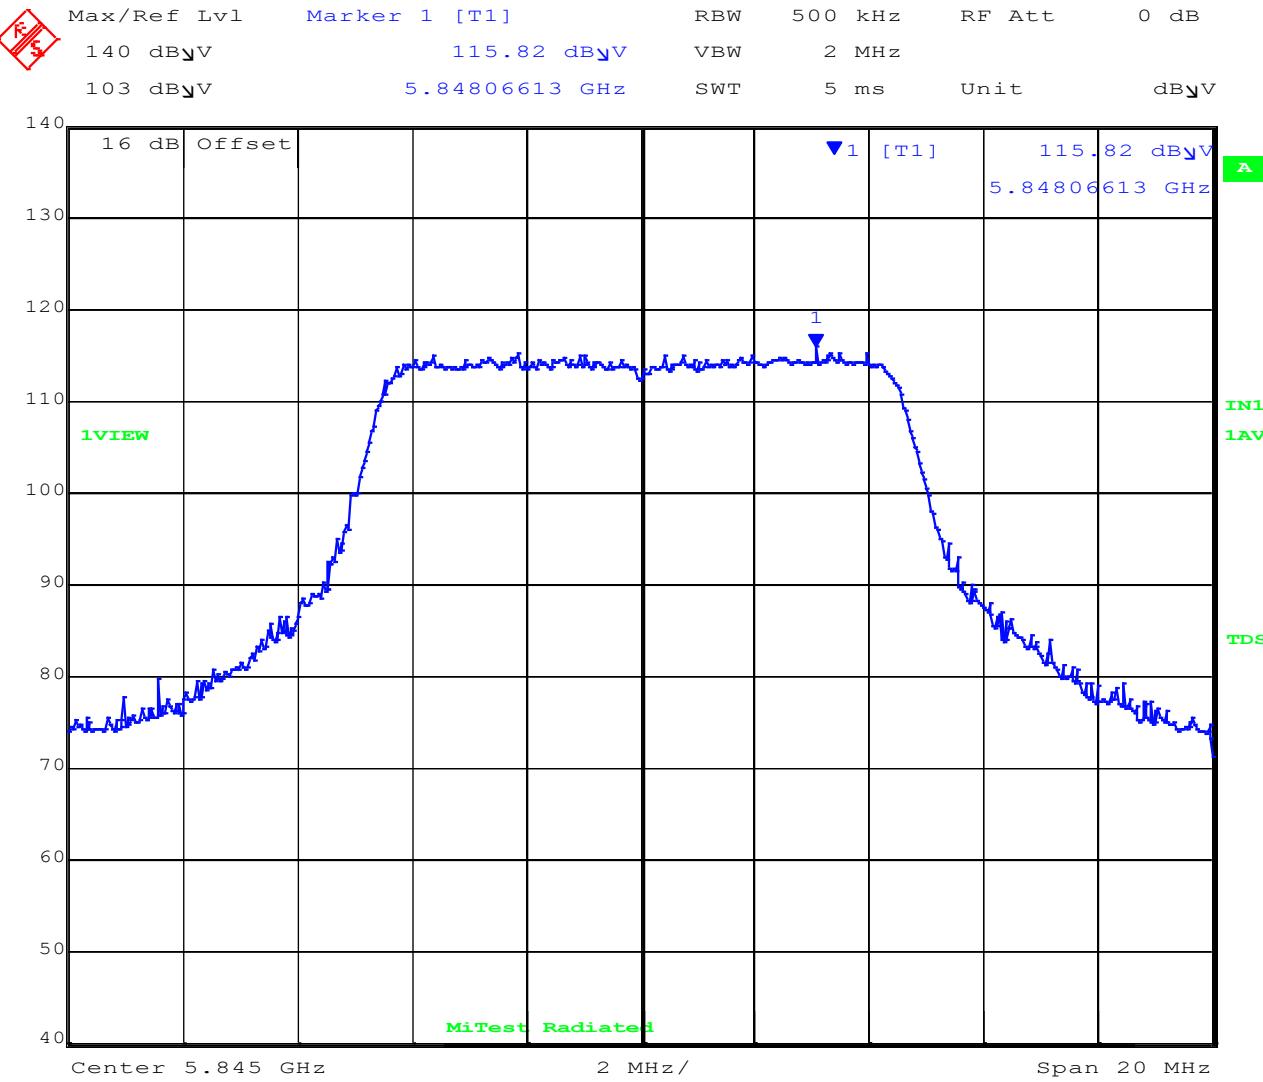

Date: 22.MAR.2021 11:47:22

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5848.06 MHz : 115.82 dB _u V/m	Limit: ≤ 19.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY

 MiTest
regulatory compliance in the cloud

Variant: 20 MHz, Channel: 5735.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

Max/Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	0 dB
140 dB _V	113.26 dB _V	VBW	2 MHz		
103 dB _V	5.72758517 GHz	SWT	5 ms	Unit	dB _V

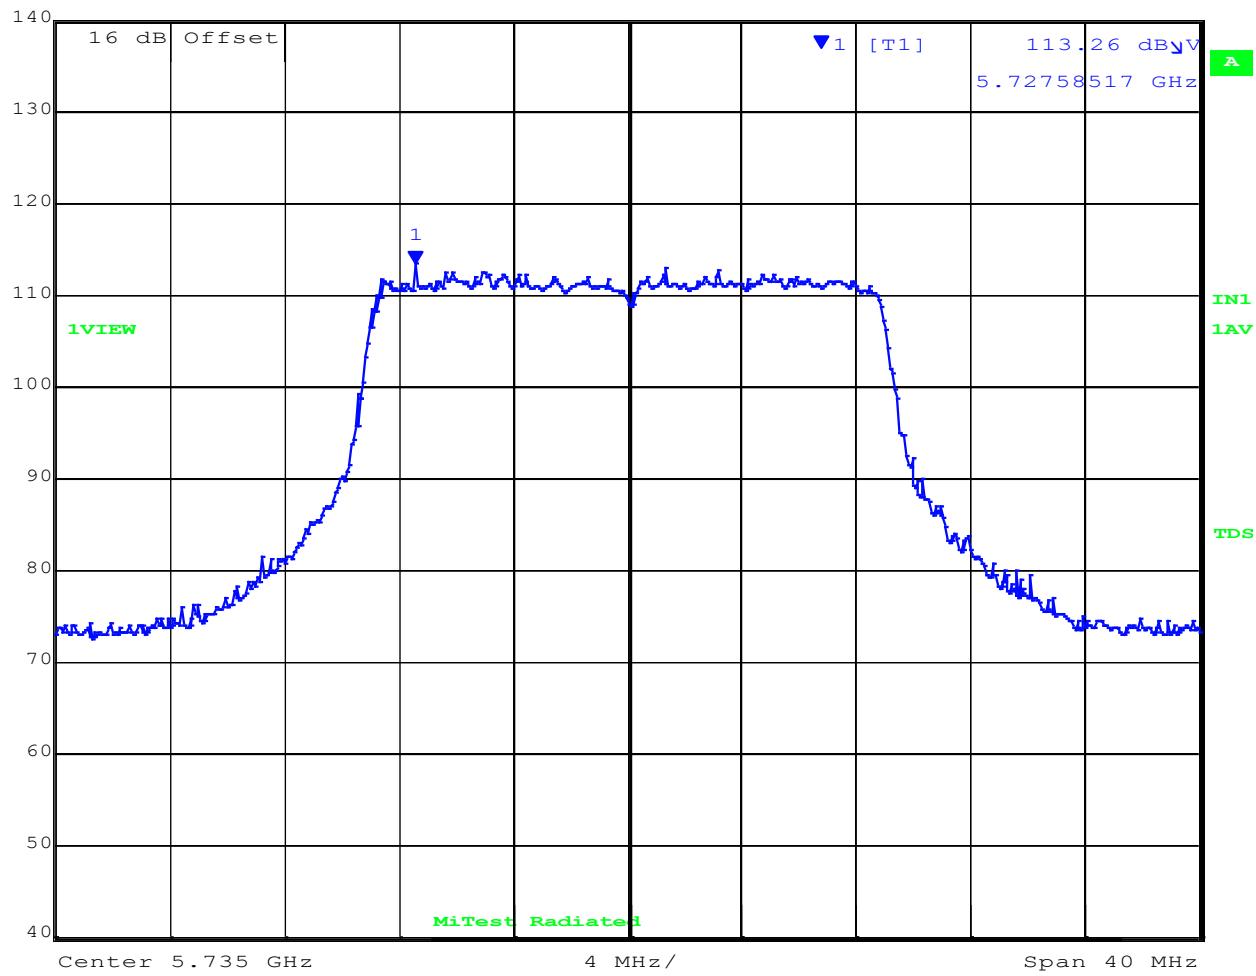

Date: 22.MAR.2021 11:56:37


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5727.58 MHz : 113.26 dBuV/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 20 MHz, Channel: 5735.00 MHz, Polarity V Temp: 20, Voltage: 48 Vdc

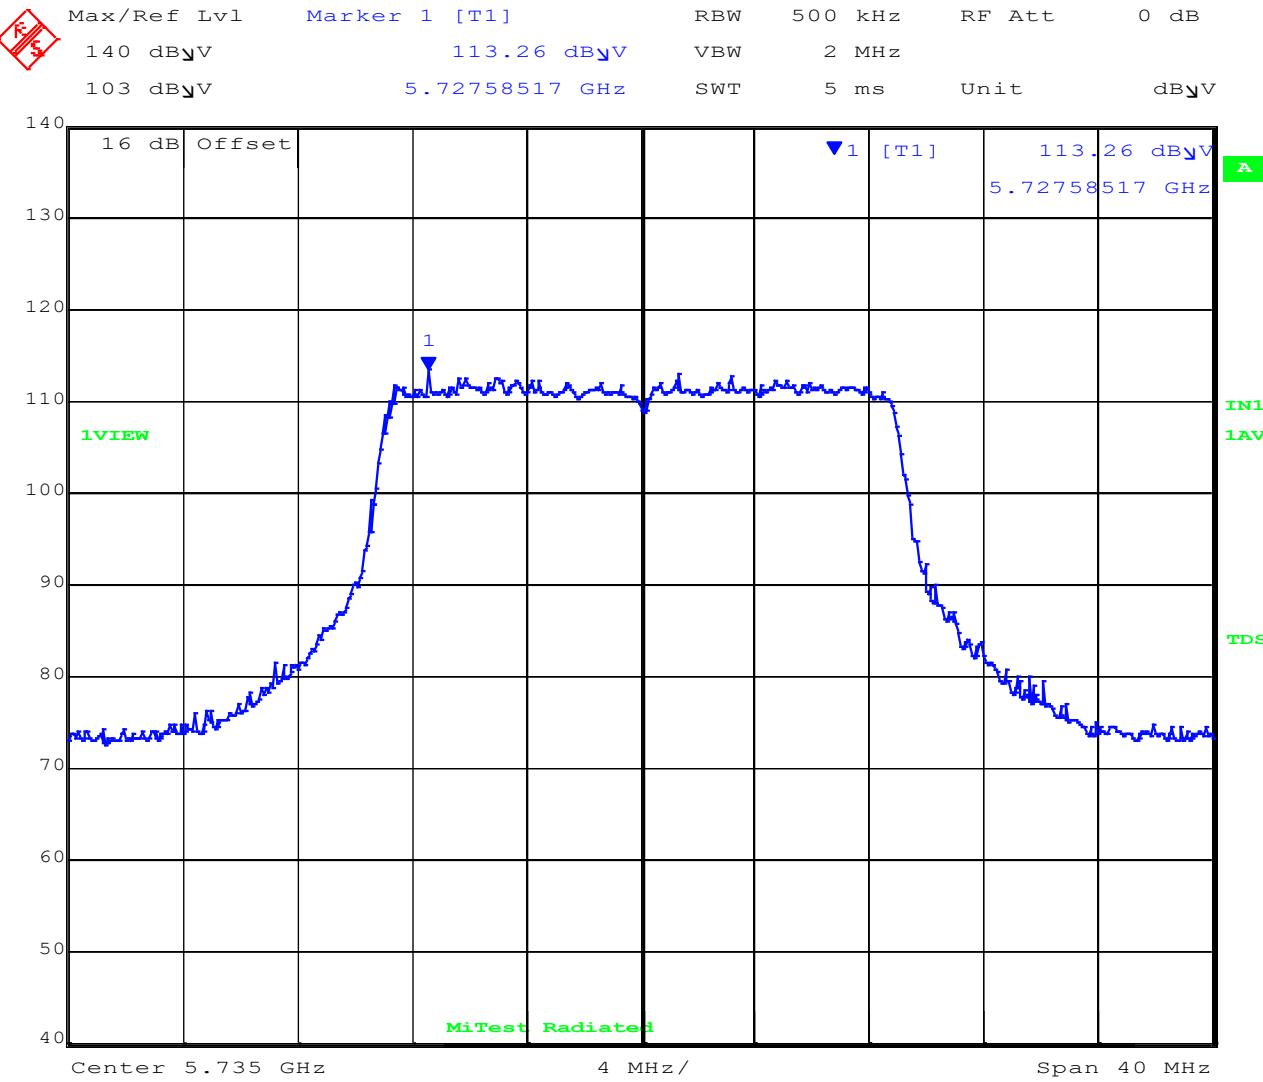

Date: 22.MAR.2021 11:56:37

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5727.58 MHz :113.26 dB _V /m	Limit: ≤ 19.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY

 MiTest
regulatory compliance in the cloud

Variant: 20 MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

Max/Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	0 dB
140 dB _V	112.95 dB _V	VBW	2 MHz		
103 dB _V	5.79009018 GHz	SWT	5 ms	Unit	dB _V

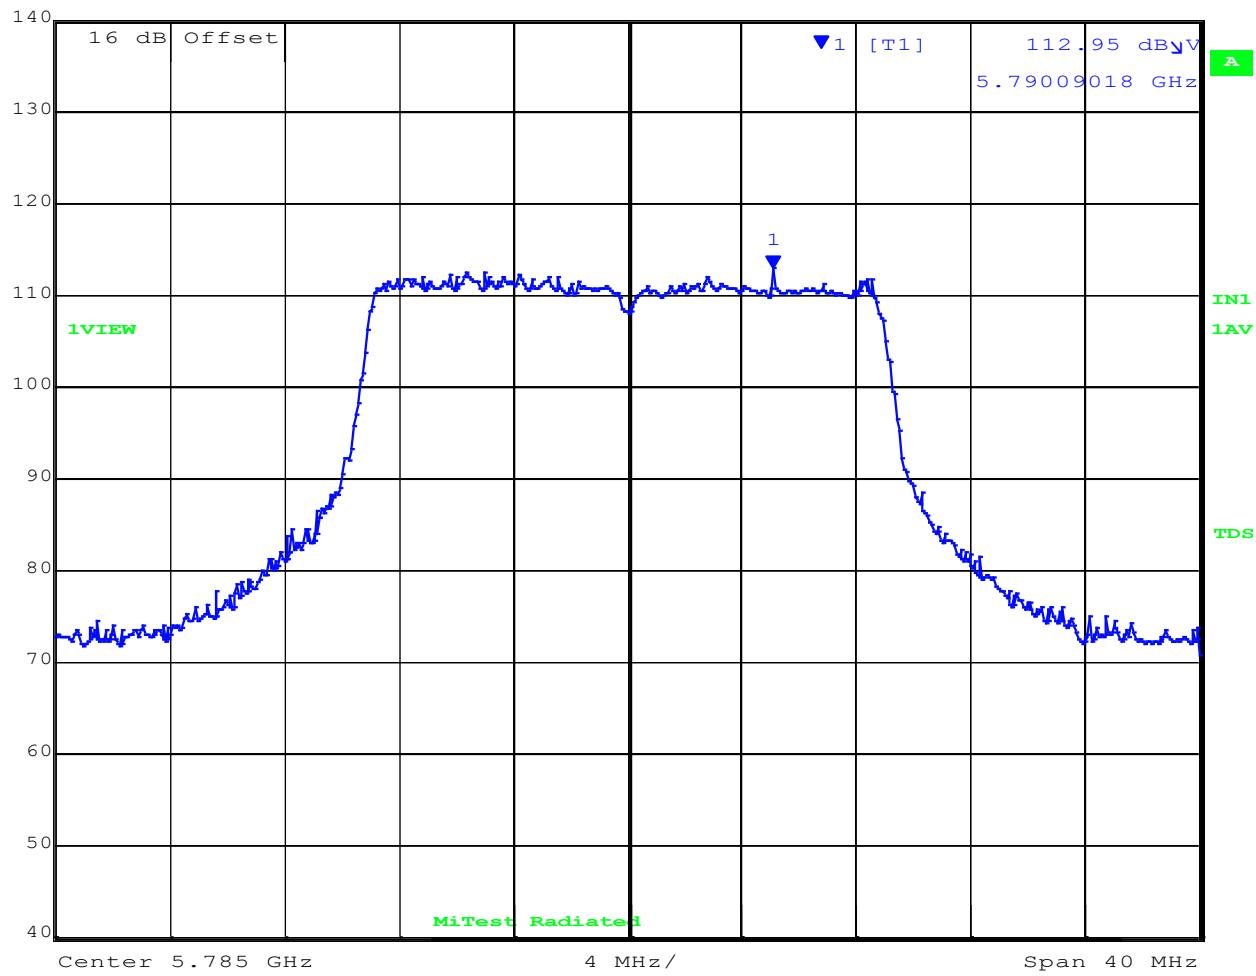

Date: 22.MAR.2021 11:53:23


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5790.90 MHz : 112.95 dBuV/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 20 MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

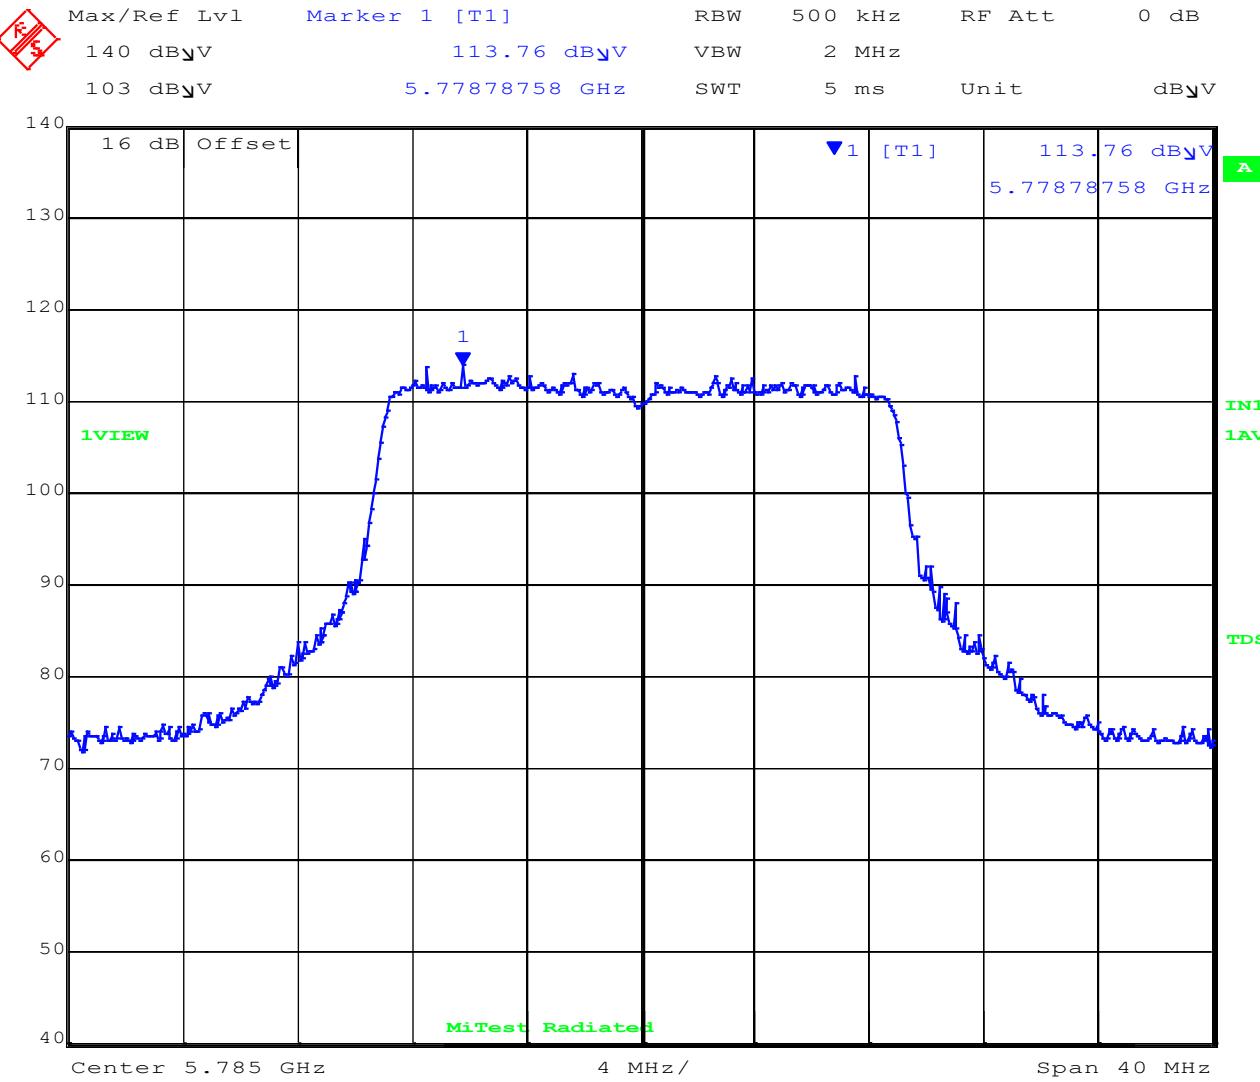

Date: 22.MAR.2021 11:54:08

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5778.78 MHz : 113.76 dB _u V/m	Limit: ≤ 19.00 dBm, Pass


[back to matrix](#)

POWER SPECTRAL DENSITY

 MiTest
regulatory compliance in the cloud

Variant: 20 MHz, Channel: 5840.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

Max/Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	0 dB
140 dB _V	112.50 dB _V	VBW	2 MHz		
103 dB _V	5.84837675 GHz	SWT	5 ms	Unit	dB _V

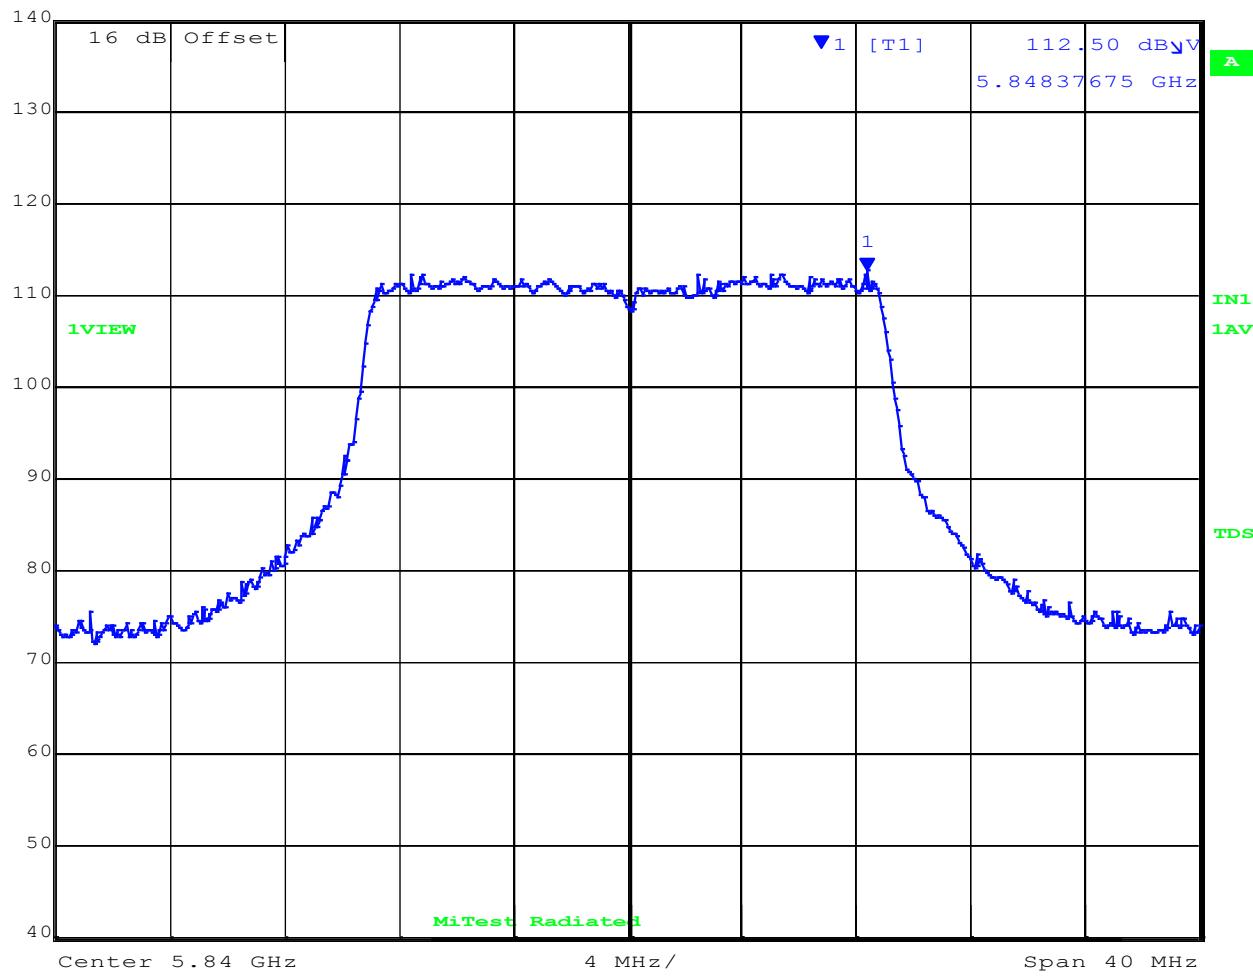

Date: 22.MAR.2021 11:51:36


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5848.37 MHz : 112.50 dBuV/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 20 MHz, Channel: 5840.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

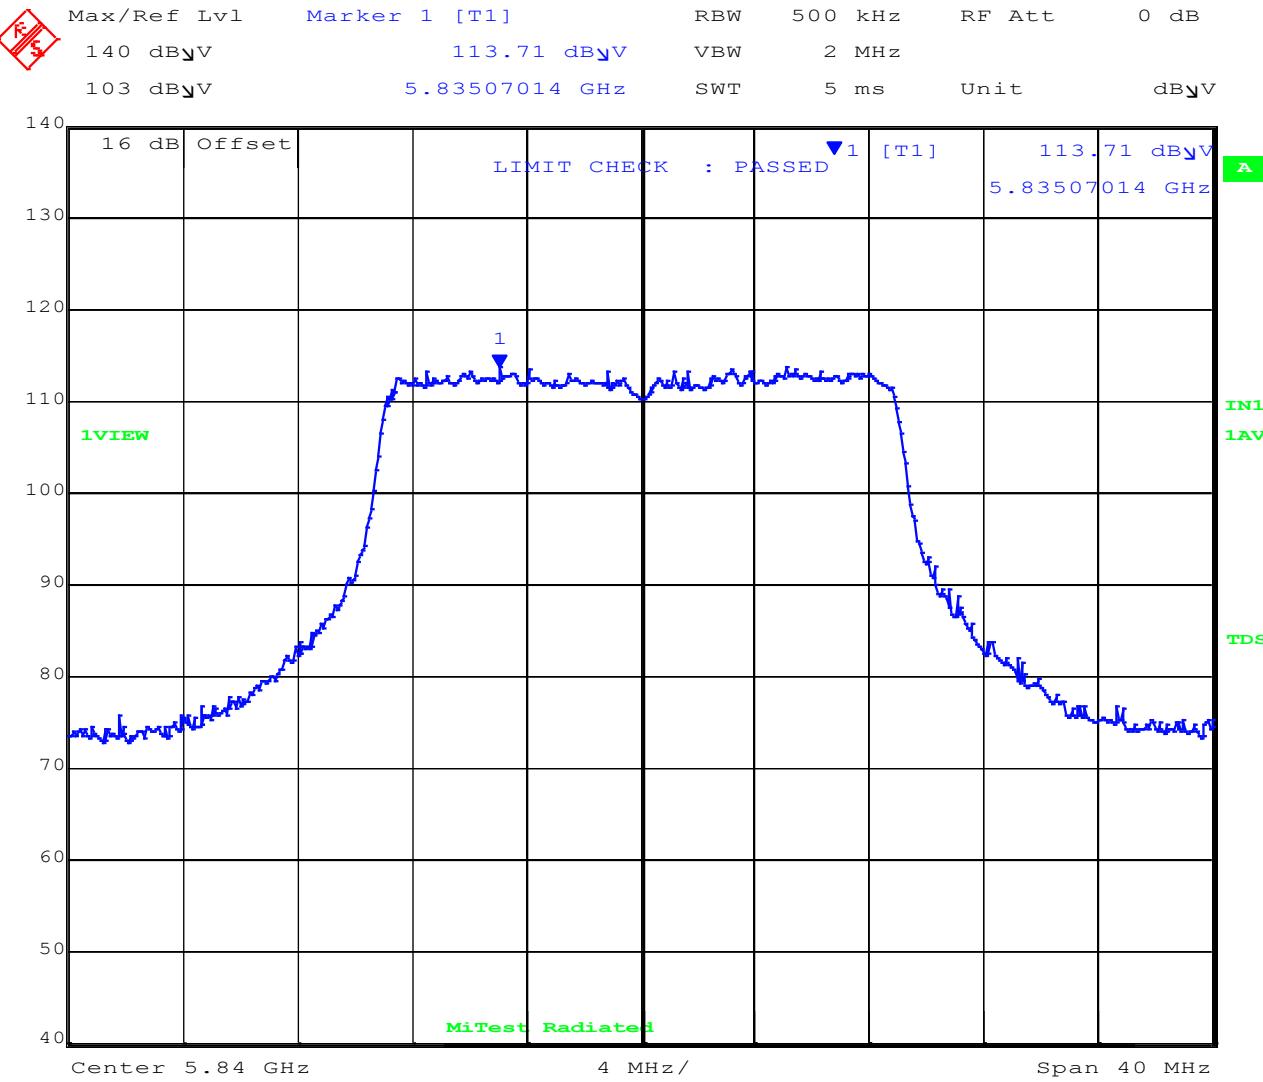

Date: 22.MAR.2021 11:50:04

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5835.07 MHz : 113.71 dB _u V/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY

 MiTest
regulatory compliance in the cloud

Variant: 40 MHz, Channel: 5745.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

Max/Ref Lvl 140 dBmV 103 dBmV

Marker 1 [T1] 110.72 dBmV 5.73626253 GHz

RBW 500 kHz

500 kHz 2 MHz

RF Att 0 dB

Offset 16 dB

SWT 5 ms

Unit dBmV

▼1 [T1] 110.72 dBmV 5.73626253 GHz

1VVIEW IN1 1AV

TDS

MiTest Radiated

Center 5.745 GHz Span 80 MHz

Date: 22.MAR.2021 12:00:16


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5736.26 MHz : 110.72 dBuV/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5745.00 MHz, Polarity V Temp: 20, Voltage: 48 Vdc

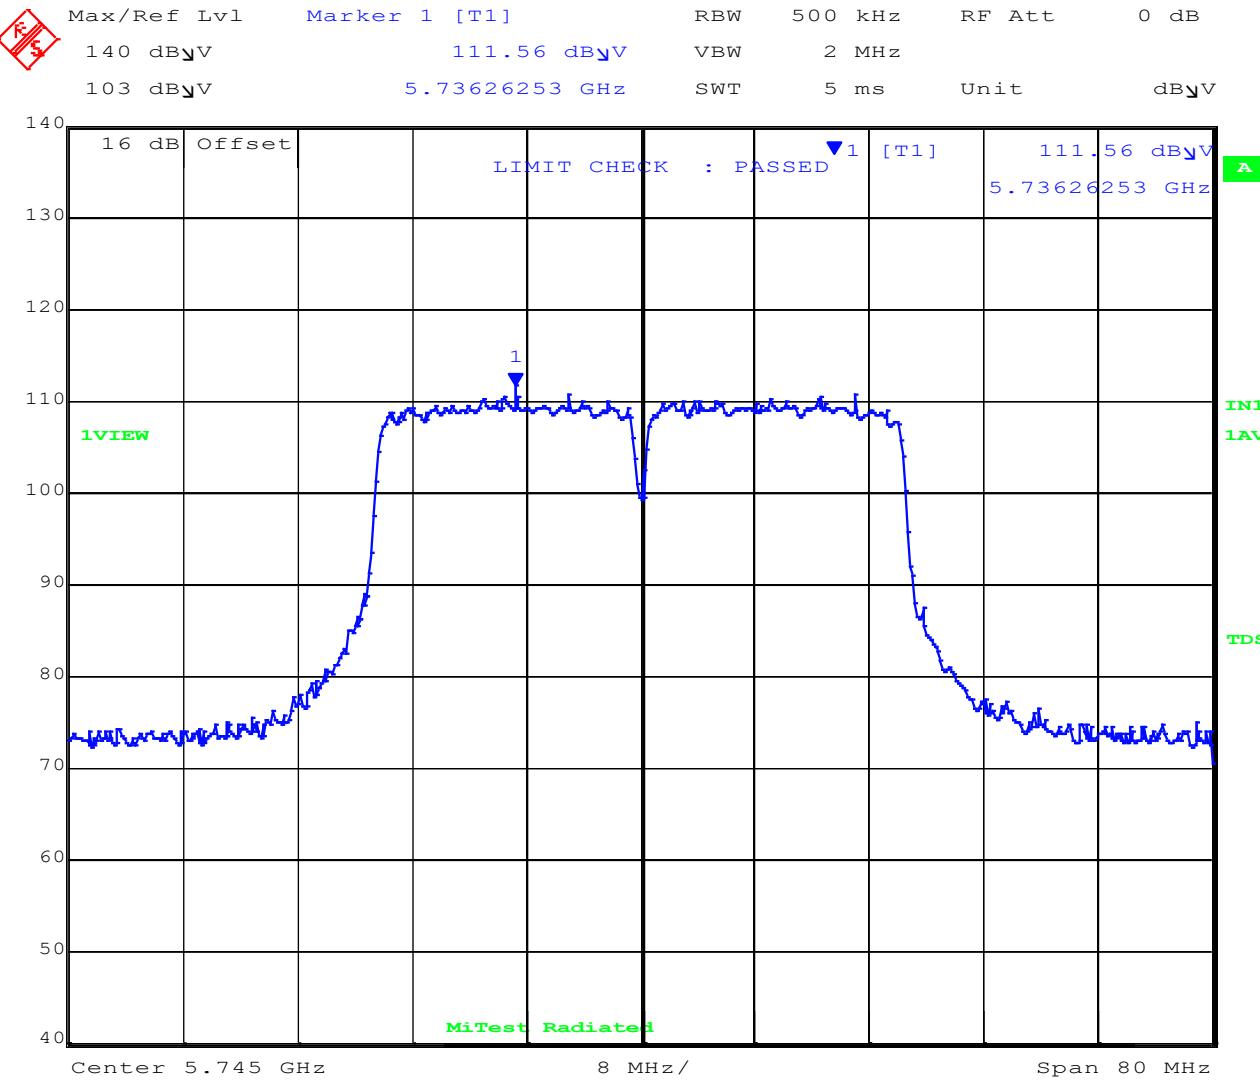

Date: 22.MAR.2021 12:01:20

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5736.26 MHz :111.56 dBuV/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY

 MiTest
regulatory compliance in the cloud

Variant: 40 MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

This figure is a spectral analysis plot from a signal generator. The plot shows a signal with a central frequency of 5.785 GHz. A marker is placed at 5.77994990 GHz, which is labeled as the 'Radiated' frequency. The plot includes a grid and a vertical reference line at 110 dB. The x-axis is labeled 'Center 5.785 GHz' and 'Span 80 MHz'. The y-axis ranges from 40 to 140 dB. The plot is titled 'Marker 1 [T1]' and includes parameters: Max/Ref Lvl 140 dB_V, Marker 1 [T1] 111.01 dB_V, RBW 500 kHz, RF Att 0 dB, 500 kHz, 2 MHz, Unit dB_V, 5 ms, and SWT.

Date: 22.MAR.2021 12:03:10


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5779.94 MHz : 111.01 dBuV/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

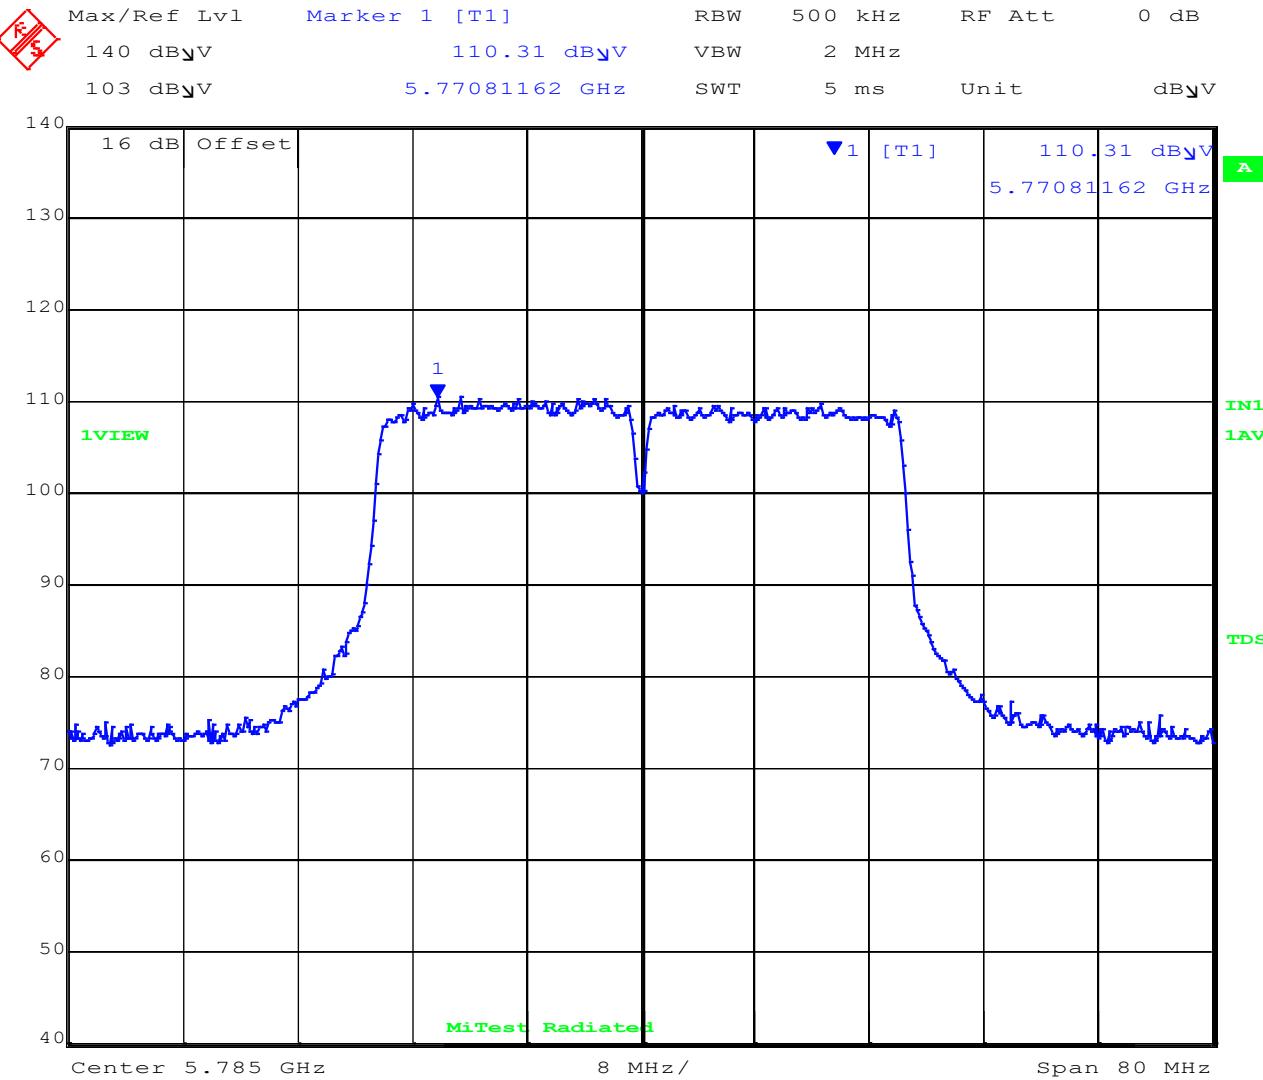

Date: 22.MAR.2021 12:02:31


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5770.81 MHz : 110.31 dB _u V/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 40 MHz, Channel: 5830.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

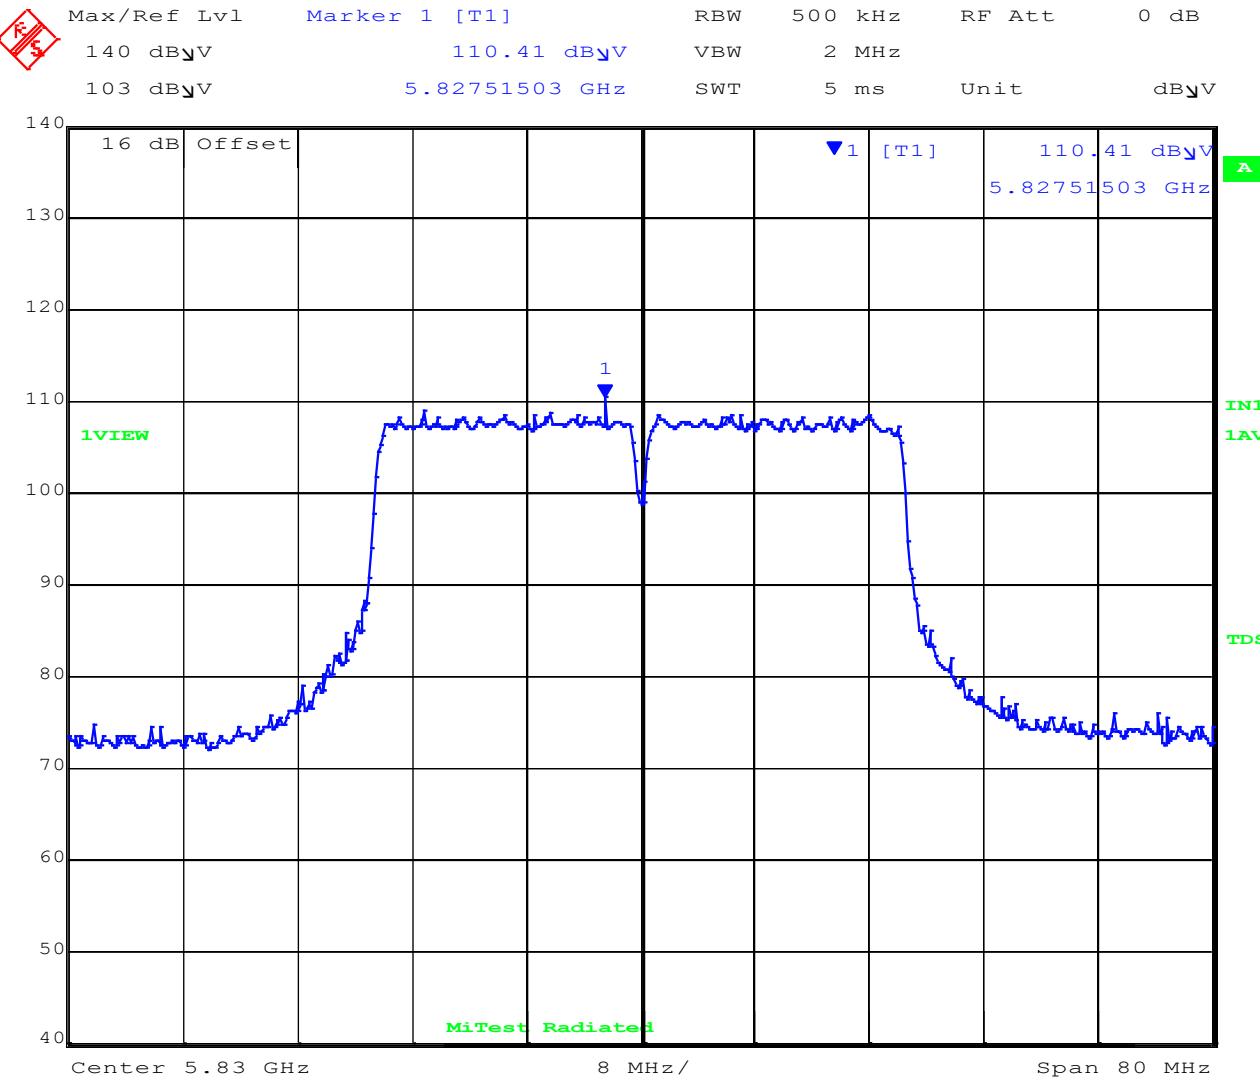

Date: 22.MAR.2021 12:05:25


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5827.51 MHz : 110.41 dB _u V/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY

MiTest
regulatory compliance in the cloud

Variant: 40 MHz, Channel: 5830.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

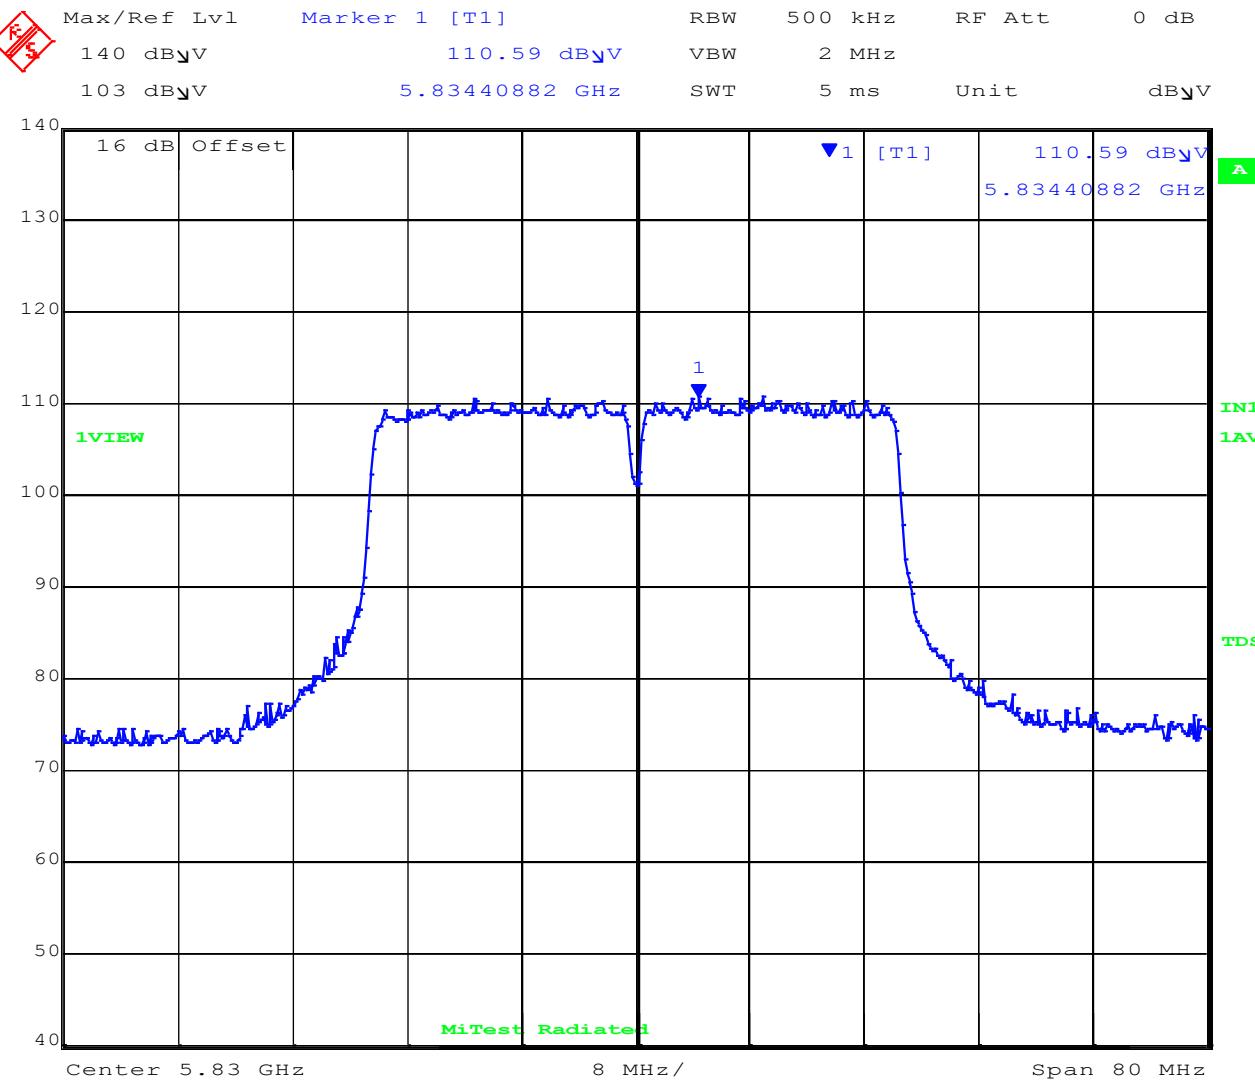

Date: 22.MAR.2021 12:18:18


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5834.40 MHz : 110.59 dB _u V/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5765.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

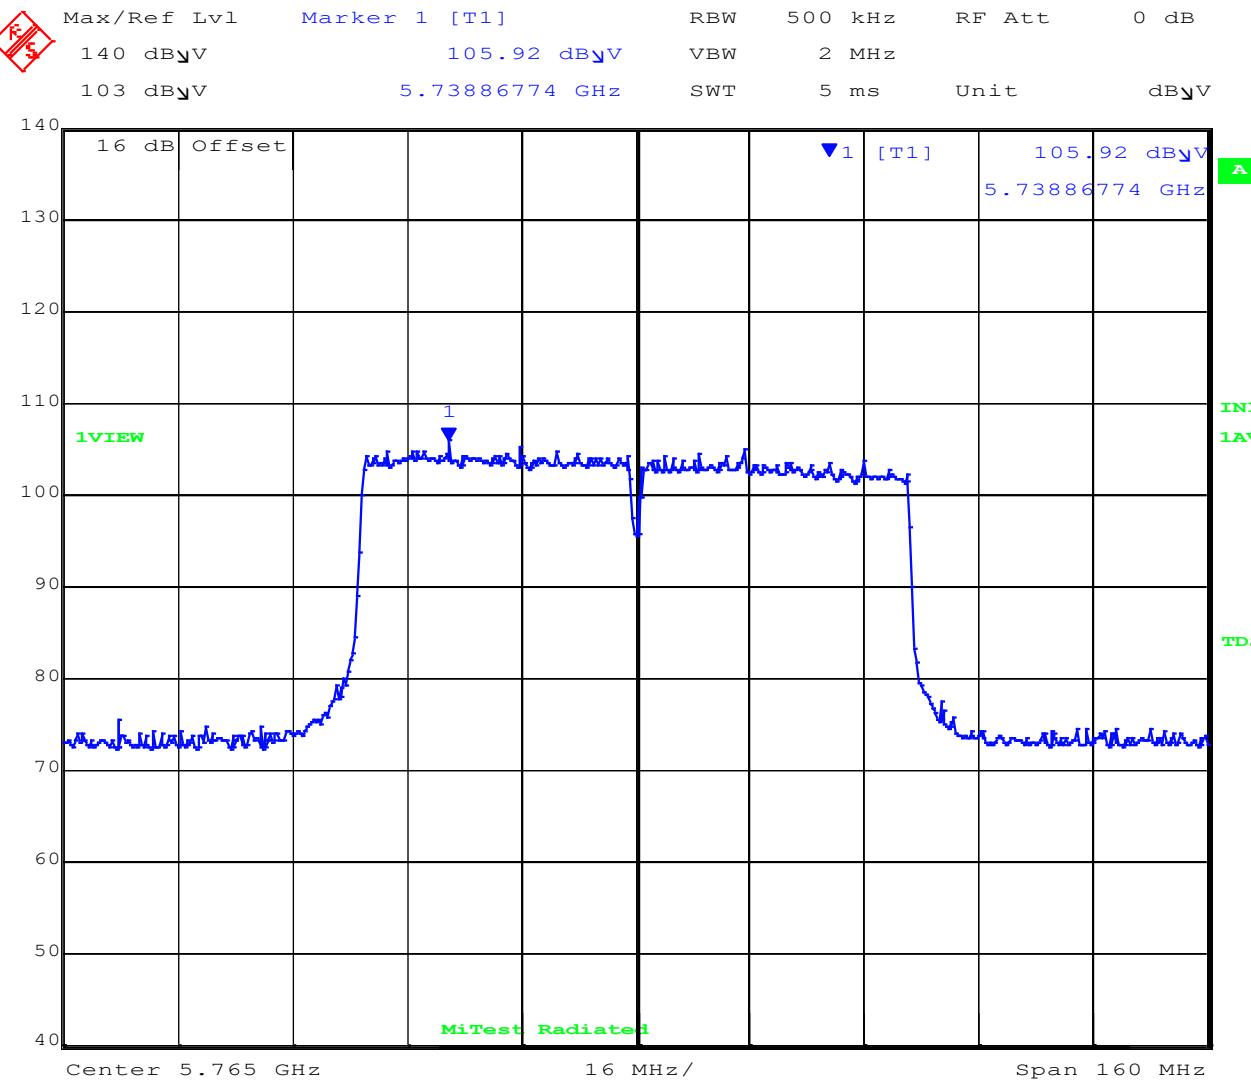

Date: 22.MAR.2021 12:14:42


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5738.86 MHz : 105.92 dB _{uV} /m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5765.00 MHz, Polarity V Temp: 20, Voltage: 48 Vdc

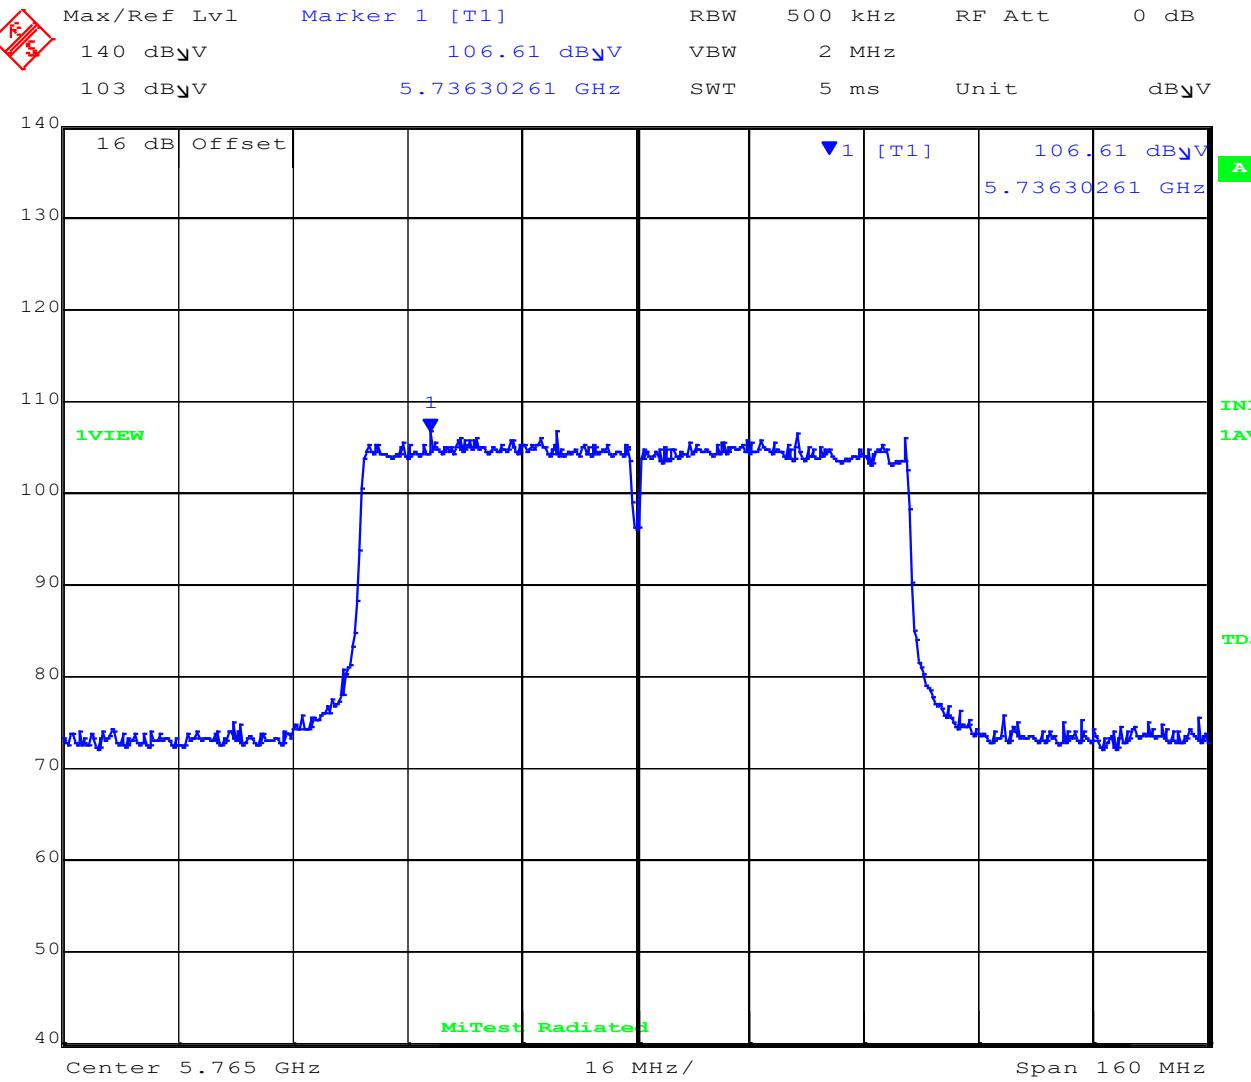

Date: 22.MAR.2021 12:13:52

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5736.30 MHz :106.61 dB _V /m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY

 MiTest
regulatory compliance in the cloud

Variant: 80 MHz, Channel: 5785.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

Max/Ref Lvl 140 dBm 103 dBm Marker 1 [T1] 108.00 dBm 5.75886774 GHz RBW VBW 500 kHz 2 MHz RF Att 0 dB

16 dB Offset LIMIT CHECK : PASSED ▼1 [T1] 108.00 dBm 5.75886774 GHz

140
130
120
110
100
90
80
70
60
50
40

1VIEW IN1 1AV TDS

Center 5.785 GHz 16 MHz / Span 160 MHz

MiTest Radiated

Date: 22.MAR.2021 12:11:34


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5758.86 MHz : 108.00 dBuV/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5785.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

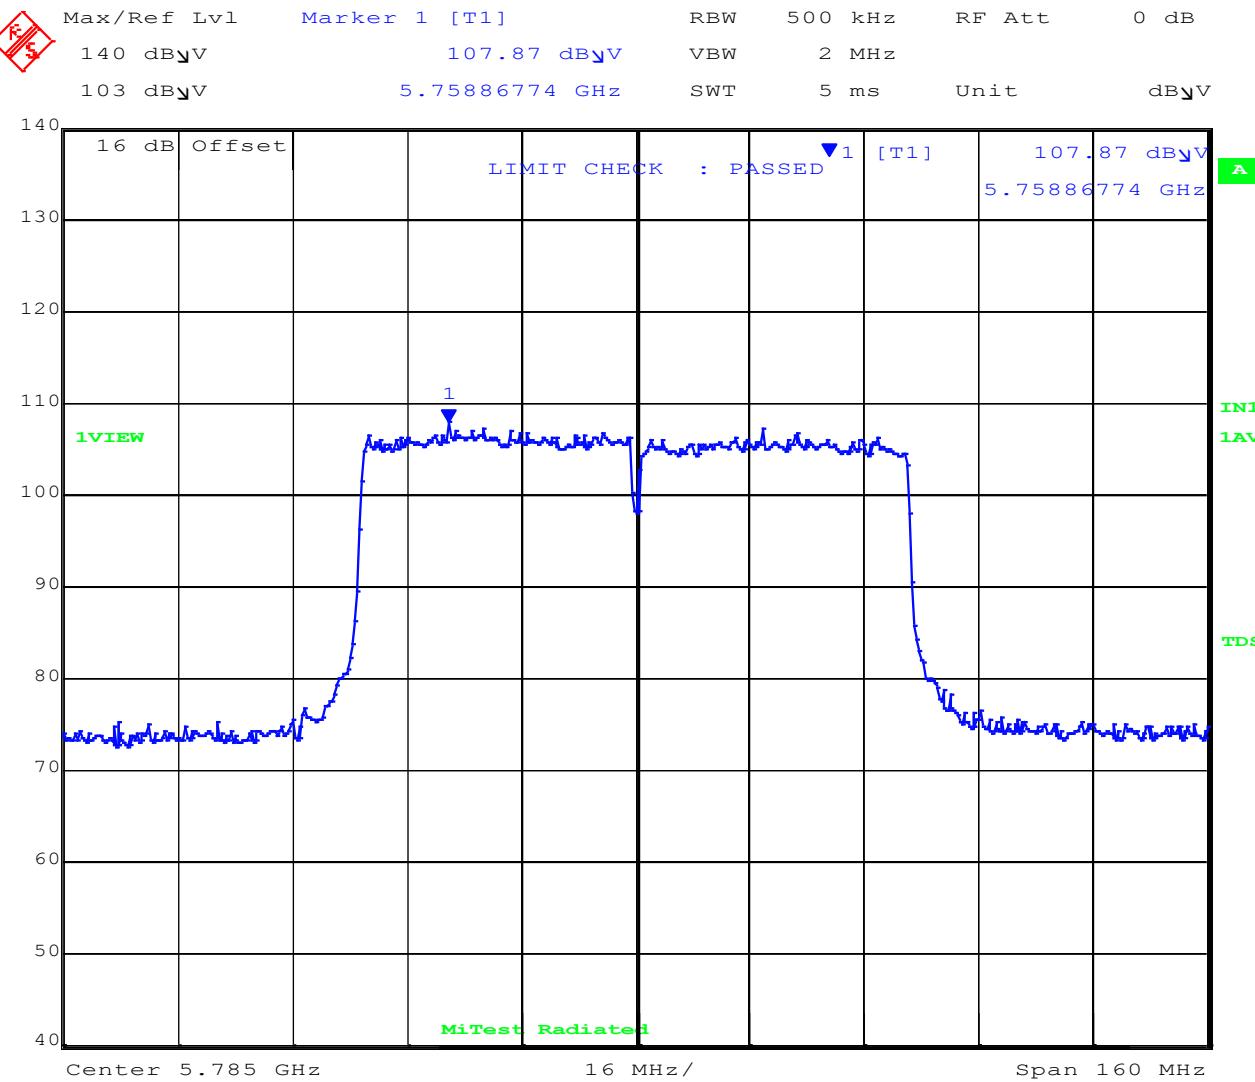

Date: 22.MAR.2021 12:12:13


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5758.86 MHz : 107.87 dB _u V/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5810.00 MHz, Polarity H, Temp: 20, Voltage: 48 Vdc

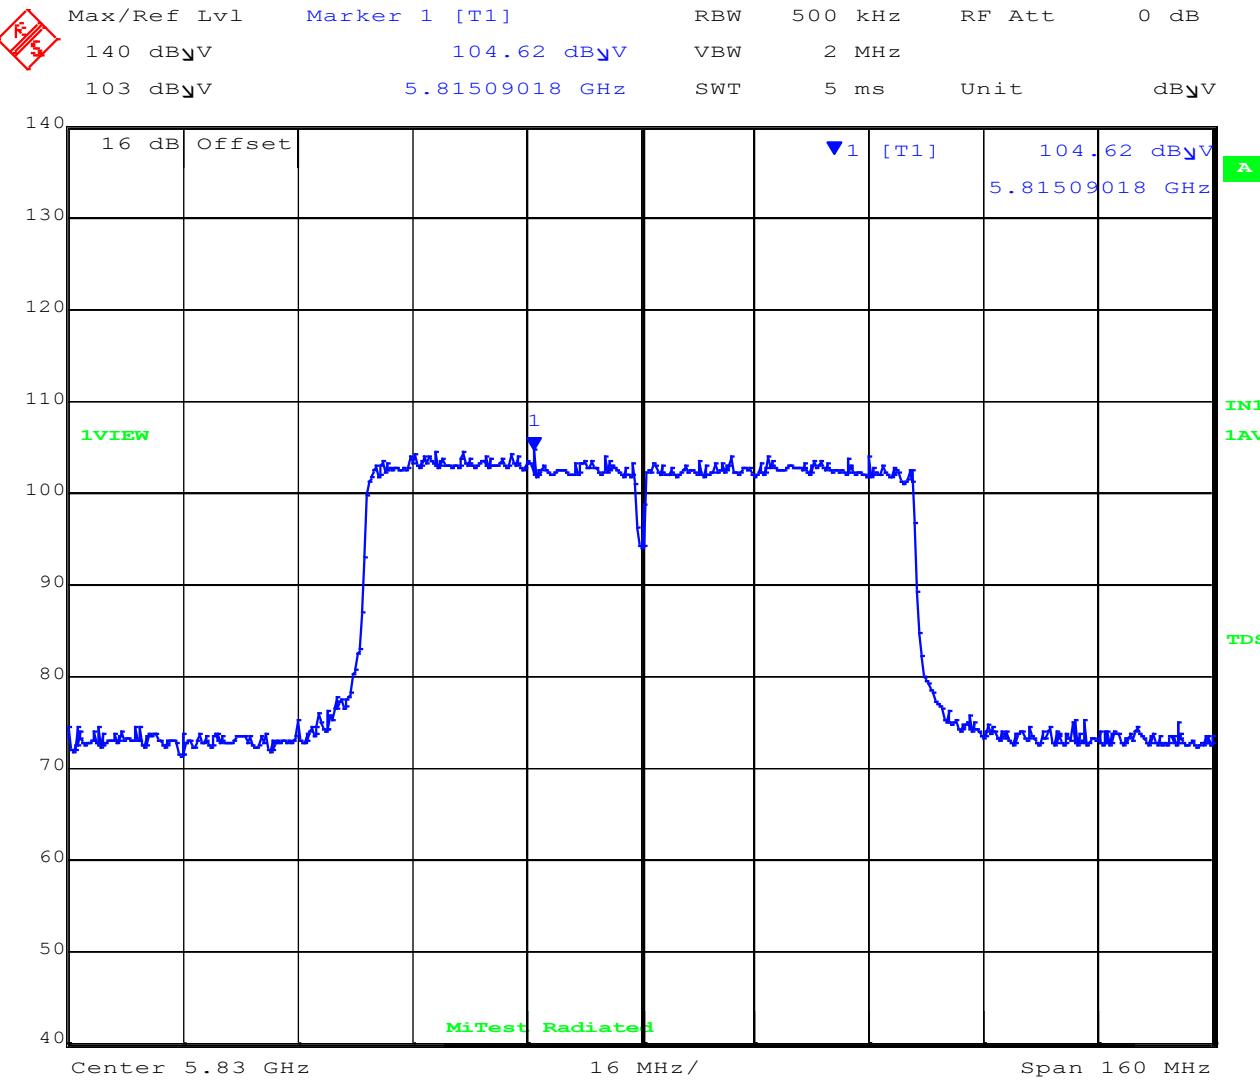

Date: 22.MAR.2021 12:09:36


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5815.09 MHz : 104.62 dB _u V/m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 80 MHz, Channel: 5810.00 MHz, Polarity V, Temp: 20, Voltage: 48 Vdc

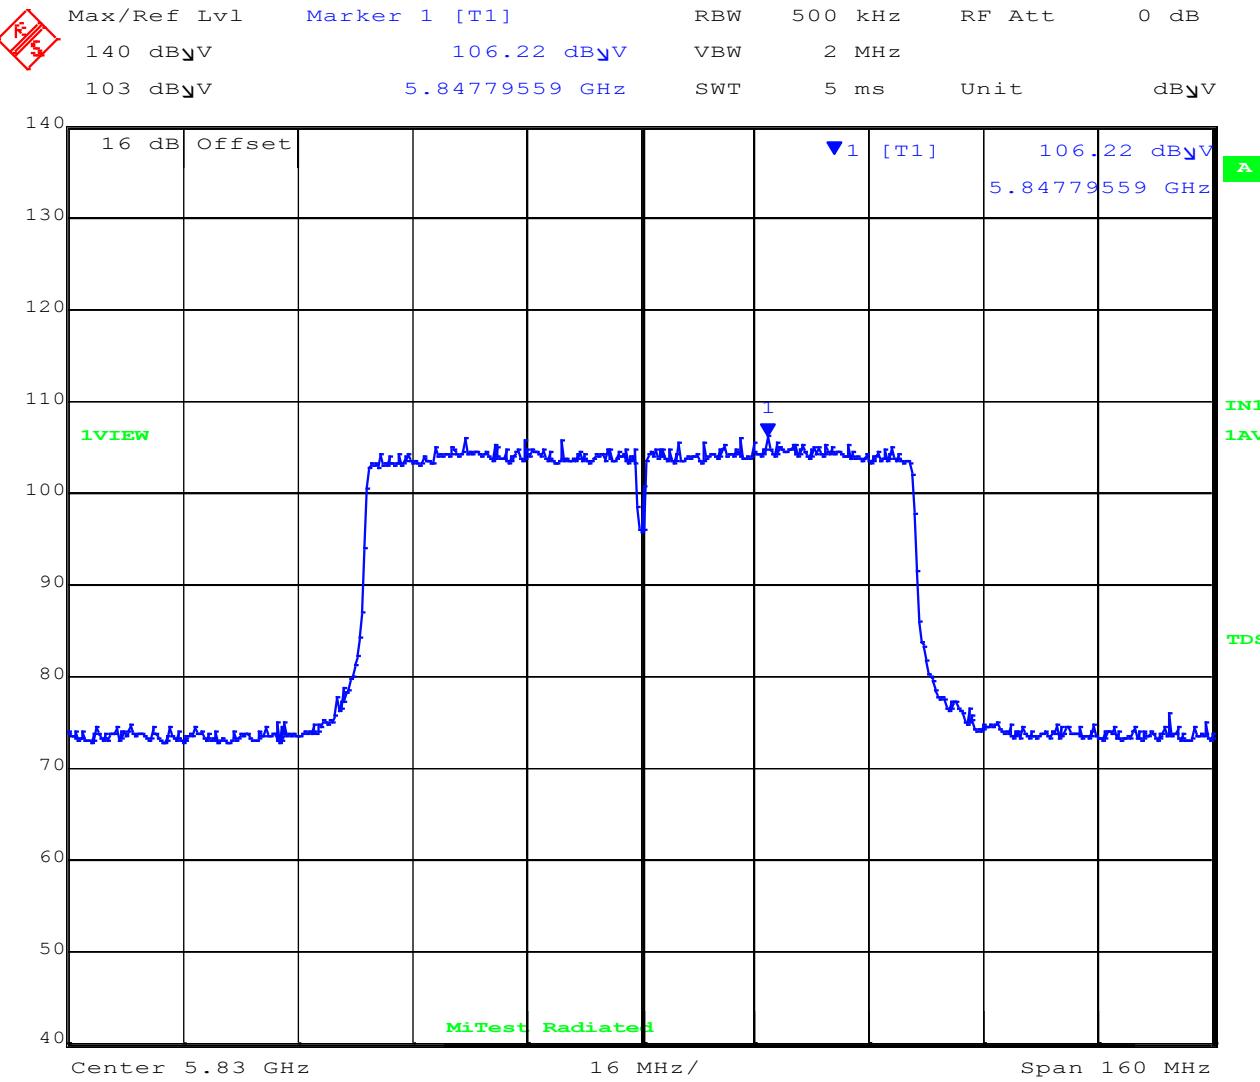

Date: 22.MAR.2021 12:08:38


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = Average Sweep Count = 100 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 5847.79 MHz : 106.22 dB _V /m	Limit: ≤ 19.00 dBm, Pass

[back to matrix](#)

A.3. Radiated

A.3.1. TX Spurious & Restricted Band Emissions

A.3.1.1. RADWIN MR0269440

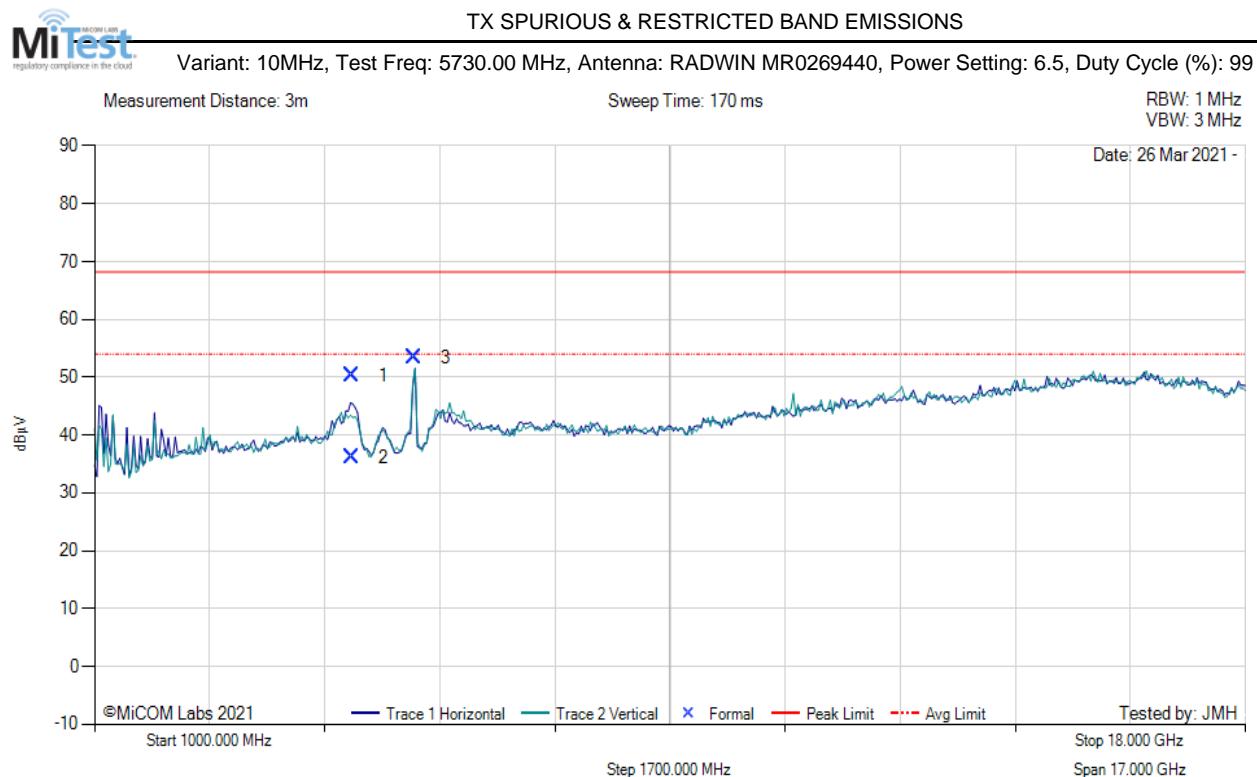

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	4809.74	59.91	2.85	-12.42	50.34	Max Peak	Horizontal	188	329	68.2	-17.9	Pass	
2	4809.74	45.75	2.85	-12.42	36.18	Max Avg	Horizontal	188	329	54.0	-17.8	Pass	
3	5726.62	61.48	3.17	-11.21	53.44	Fundamental	Vertical	200	0	--	--		

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS



1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	4808.30	61.30	2.85	-12.43	51.72	Max Peak	Horizontal	184	352	68.2	-16.5	Pass	
2	4808.30	47.35	2.85	-12.43	37.77	Max Avg	Horizontal	184	352	54.0	-16.2	Pass	
3	5786.18	63.50	3.14	-10.96	55.68	Fundamental	Vertical	200	0	--	--		
4	6250.18	52.52	3.25	-9.49	46.28	Peak (NRB)	Vertical	200	56	--	--	Pass	

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS




1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	4809.00	61.04	2.85	-12.42	51.47	Max Peak	Horizontal	183	0	68.2	-16.8	Pass	
2	4809.00	46.98	2.85	-12.42	37.41	Max Avg	Horizontal	183	0	54.0	-16.6	Pass	
3	5842.36	64.46	3.18	-10.75	56.89	Fundamental	Vertical	200	0	--	--		
4	6279.29	51.78	3.34	-9.42	45.70	Peak (NRB)	Vertical	200	48	--	--	Pass	

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

A.3.1.2. RADWIN MR0269440BF

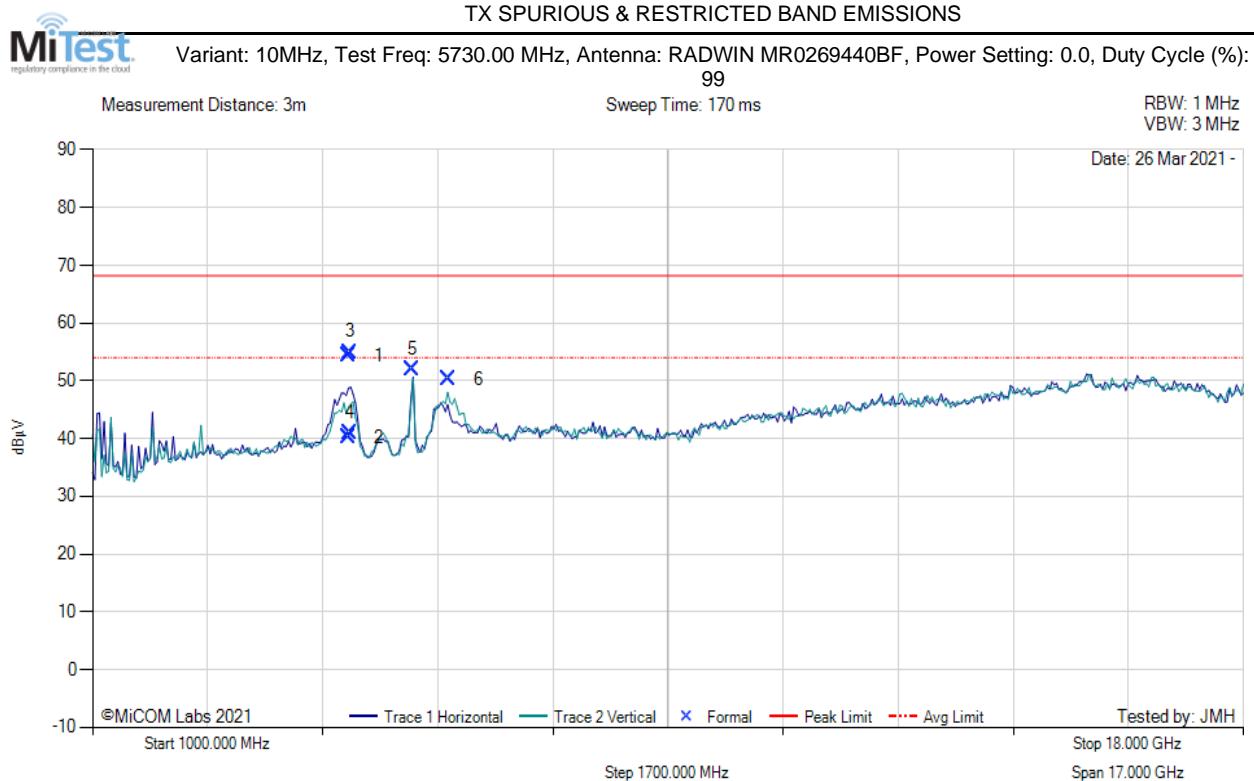

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	4774.45	63.84	2.92	-12.47	54.29	Max Peak	Horizontal	177	3	68.2	-13.9	Pass	
2	4774.45	49.70	2.92	-12.47	40.15	Max Avg	Horizontal	177	3	54.0	-13.9	Pass	
3	4810.30	64.56	2.85	-12.42	54.99	Max Peak	Horizontal	192	0	68.2	-13.2	Pass	
4	4810.30	50.49	2.85	-12.42	40.92	Max Avg	Horizontal	192	0	54.0	-13.1	Pass	
5	5728.25	59.94	3.16	-11.21	51.89	Fundamental	Horizontal	200	0	--	--		
6	6250.07	56.47	3.25	-9.49	50.23	Peak (NRB)	Vertical	200	0	--	--	Pass	

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.


[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS



Variant: 10MHz, Test Freq: 5785.00 MHz, Antenna: RADWIN MR0269440BF, Power Setting: 0.0, Duty Cycle (%):

99

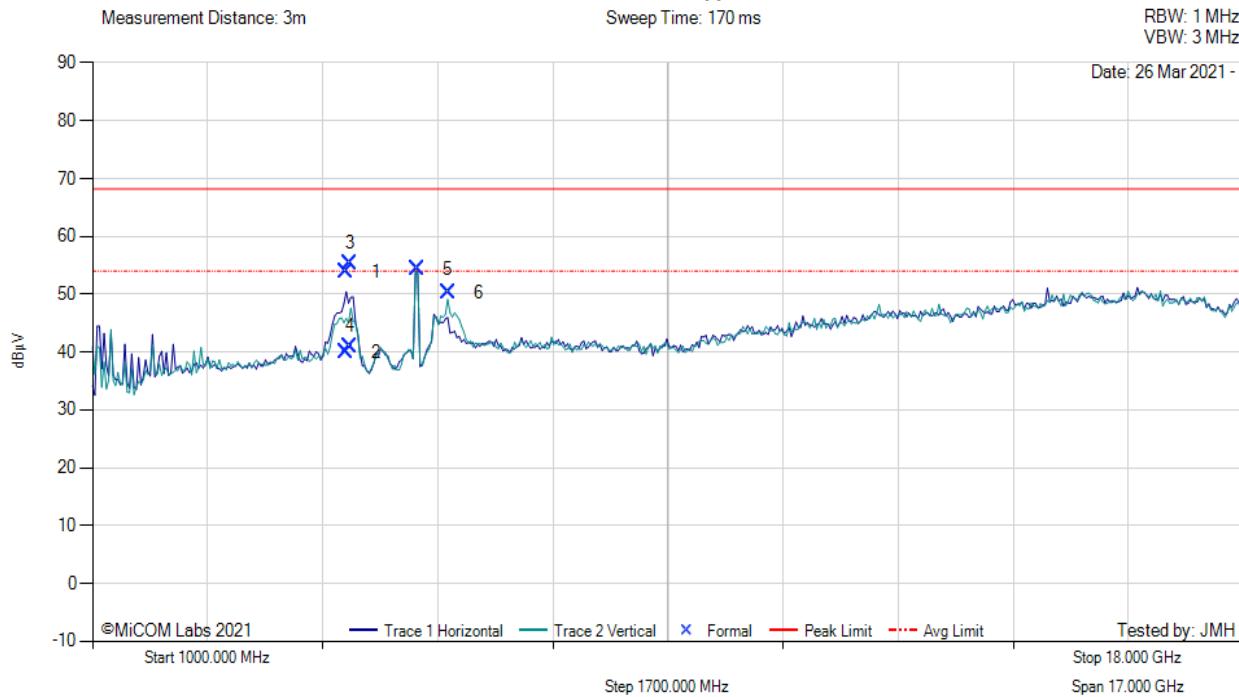

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	4749.38	63.38	2.83	-12.36	53.85	Max Peak	Horizontal	186	354	68.2	-14.4	Pass	
2	4749.38	49.48	2.83	-12.36	39.95	Max Avg	Horizontal	186	354	54.0	-14.1	Pass	
3	4809.53	64.83	2.85	-12.42	55.26	Max Peak	Horizontal	179	0	68.2	-13.0	Pass	
4	4809.53	50.59	2.85	-12.42	41.02	Max Avg	Horizontal	179	0	54.0	-13.0	Pass	
5	5788.66	62.15	3.14	-10.90	54.39	Fundamental	Vertical	200	0	--	--		
6	6249.75	56.48	3.25	-9.50	50.23	Peak (NRB)	Vertical	200	0	--	--	Pass	


Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS



Variant: 10MHz, Test Freq: 5845.00 MHz, Antenna: RADWIN MR0269440BF, Power Setting: 0.0, Duty Cycle (%): 99

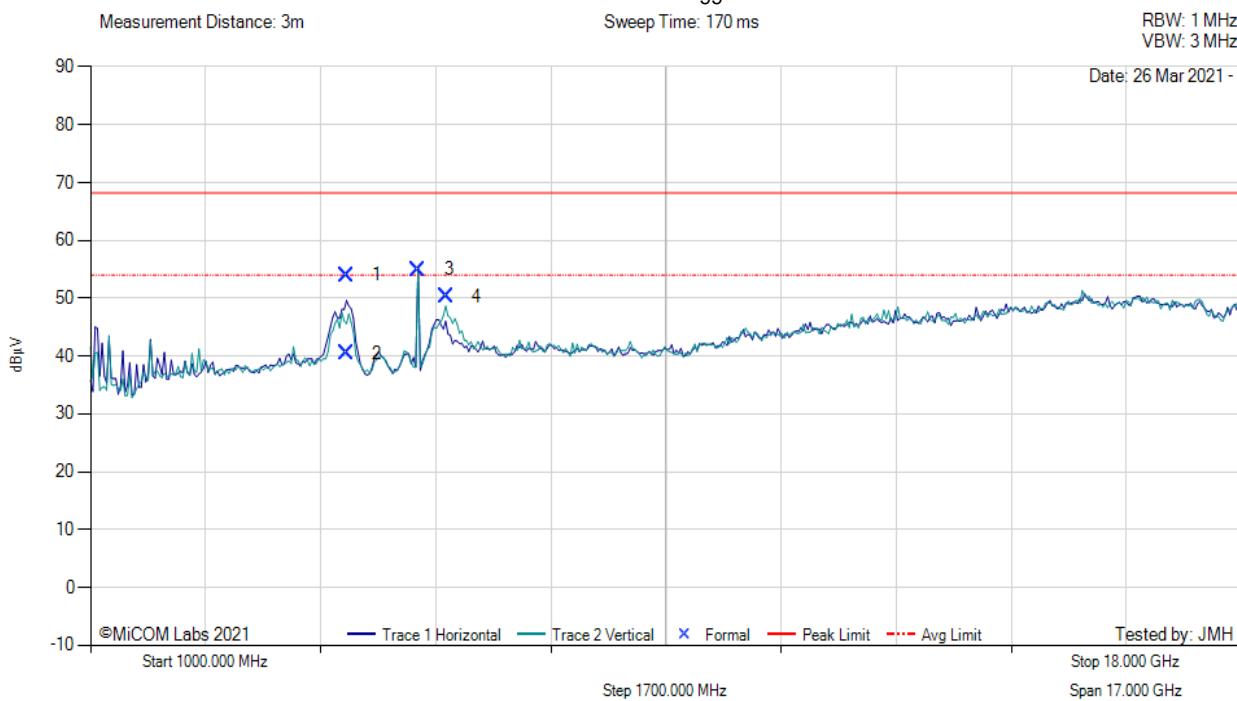


1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	4776.12	63.60	2.89	-12.46	54.03	Max Peak	Horizontal	178	6	68.2	-14.2	Pass	
2	4776.12	50.01	2.89	-12.46	40.44	Max Avg	Horizontal	178	6	54.0	-13.6	Pass	
3	5843.68	62.46	3.20	-10.74	54.92	Fundamental	Horizontal	200	0	--	--		
4	6250.11	56.49	3.25	-9.49	50.25	Peak (NRB)	Vertical	200	0	--	--	Pass	

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

A.3.2. Restricted Edge & Band-Edge Emissions

A.3.2.3. RADWIN MR0269440

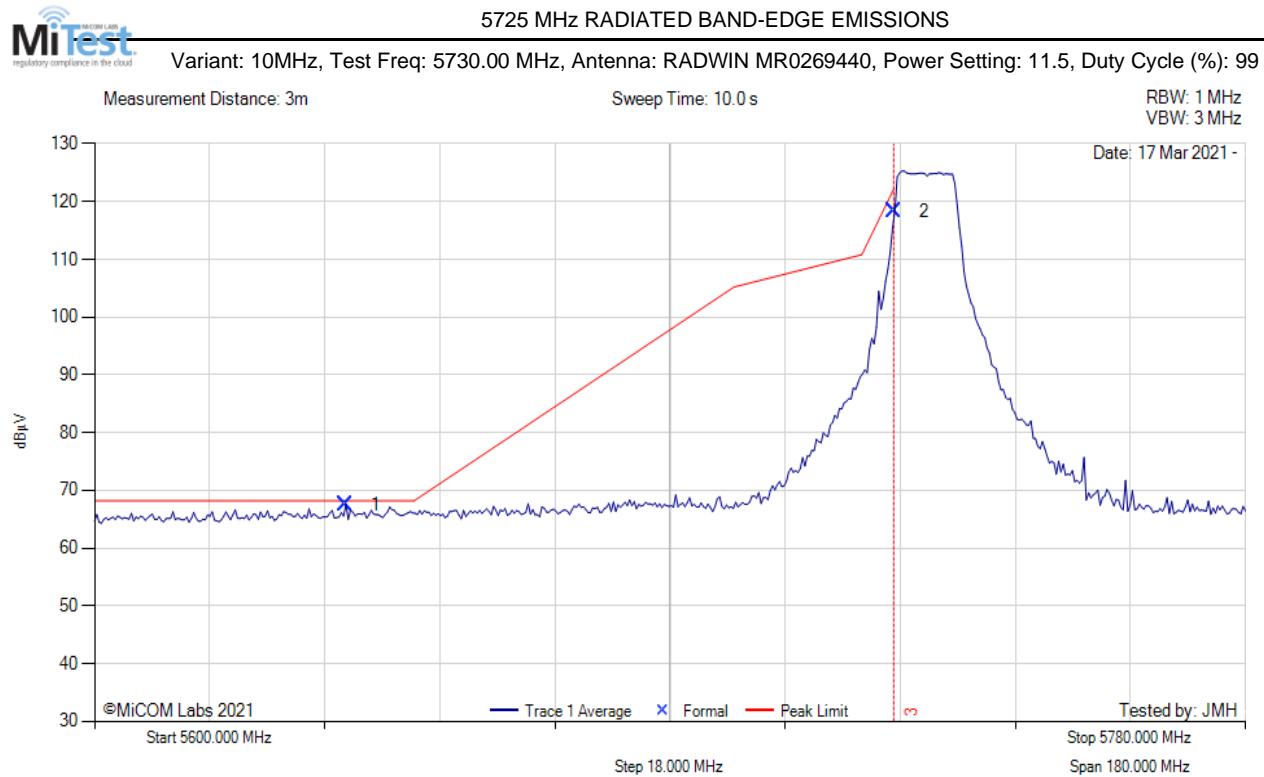


5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5639.25	29.85	3.11	34.64	67.60	Max Peak	Vertical	185	29	68.2	-0.6	Pass	
2	5725.00	80.43	3.19	34.72	118.34	Max Peak	Vertical	185	29	122.2	-3.9	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5725 MHz RADIATED BAND-EDGE EMISSIONS

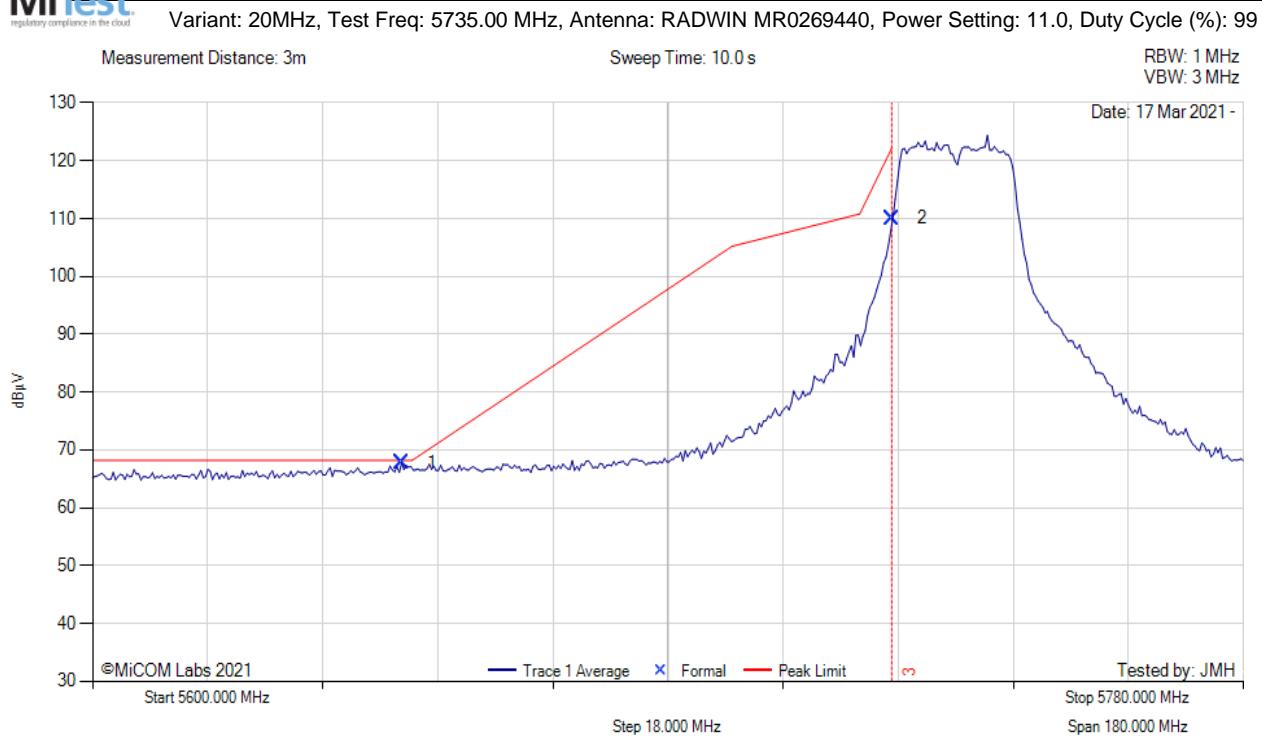


5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail	
1	5648.27	30.01	3.08	34.63	67.72	Max Peak	Vertical	185	29	68.2	-0.5	Pass	
2	5725.00	72.16	3.19	34.72	110.07	Max Peak	Vertical	185	29	122.2	-12.1	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5725 MHz RADIATED BAND-EDGE EMISSIONS

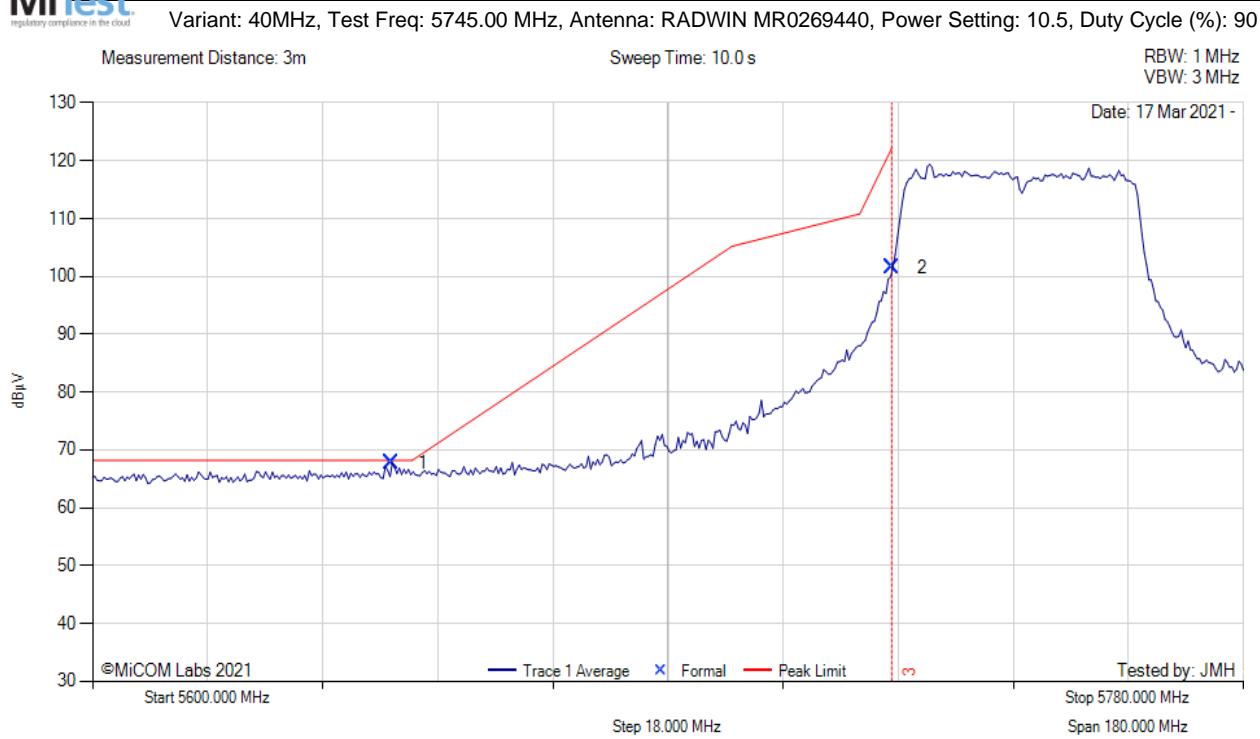


5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail	
1	5646.82	30.06	3.08	34.63	67.77	Max Peak	Vertical	185	29	68.2	-0.5	Pass	
2	5725.00	63.58	3.19	34.72	101.49	Max Peak	Vertical	185	29	122.2	-20.7	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5725 MHz RADIATED BAND-EDGE EMISSIONS

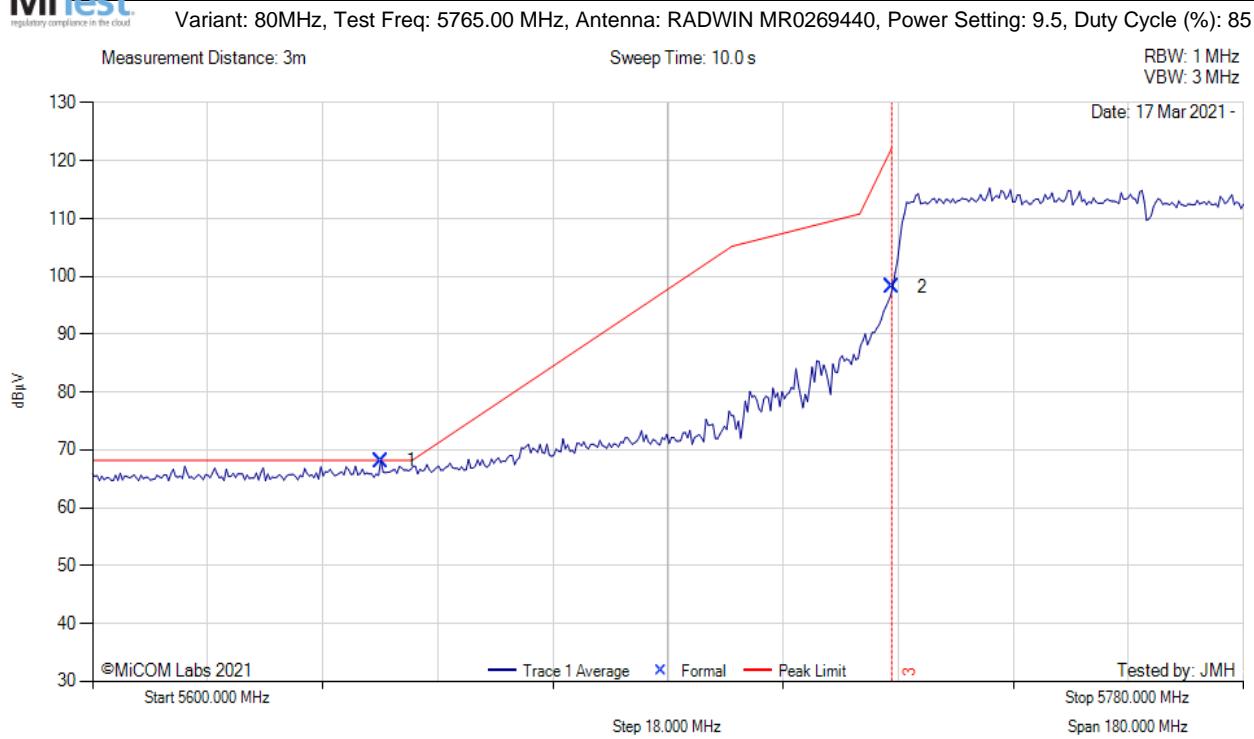


5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5645.02	30.45	3.08	34.63	68.16	Max Peak	Vertical	185	29	68.2	-0.1	Pass	
2	5725.00	60.25	3.19	34.72	98.16	Max Peak	Vertical	185	29	122.2	-24.0	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS

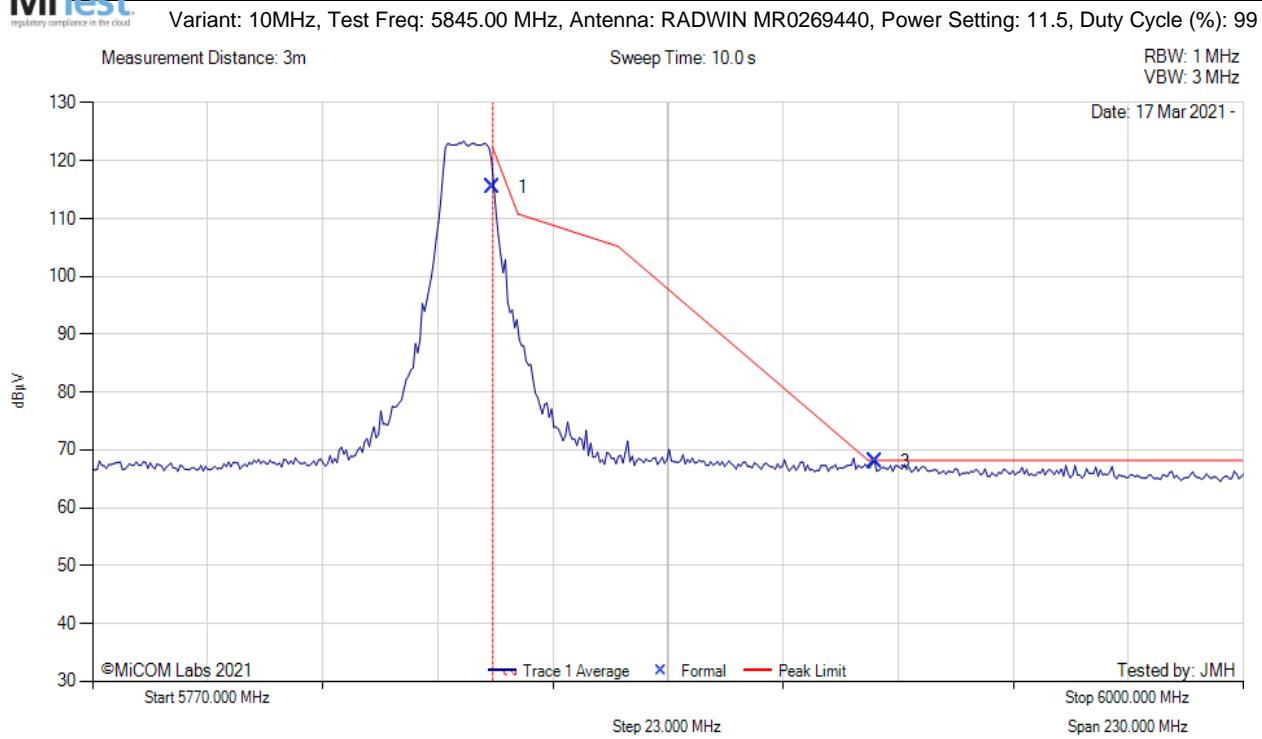


5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail	
1	5850.00	77.18	3.24	34.96	115.38	Max Peak	Vertical	185	29	122.2	-6.9	Pass	
3	5926.37	29.78	3.17	35.11	68.06	Max Peak	Vertical	185	29	68.2	-0.2	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS

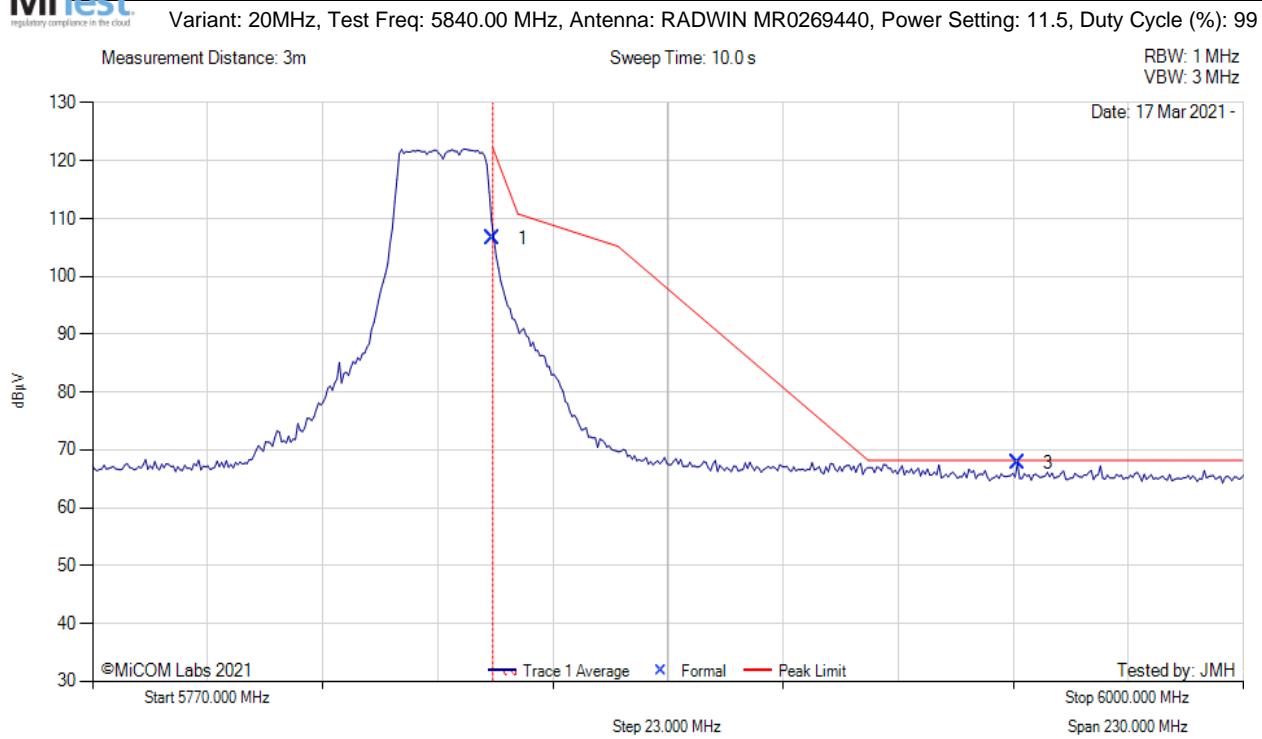


5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5850.00	68.35	3.24	34.96	106.55	Max Peak	Vertical	185	29	122.2	-15.7	Pass	
3	5954.95	29.37	3.21	35.13	67.71	Max Peak	Vertical	185	29	68.2	-0.5	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS

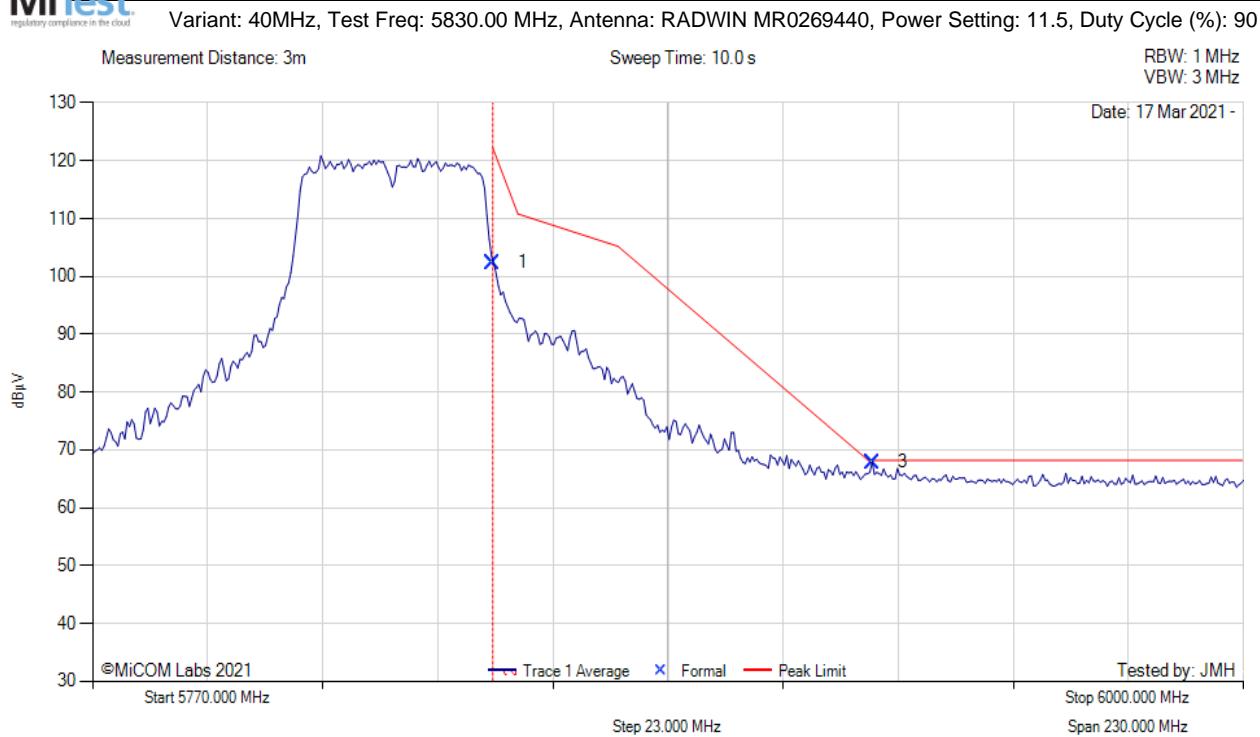


5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail	
1	5850.00	64.16	3.24	34.96	102.36	Max Peak	Vertical	185	29	122.2	-19.9	Pass	
3	5925.91	29.63	3.17	35.11	67.91	Max Peak	Vertical	185	29	68.2	-0.3	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS

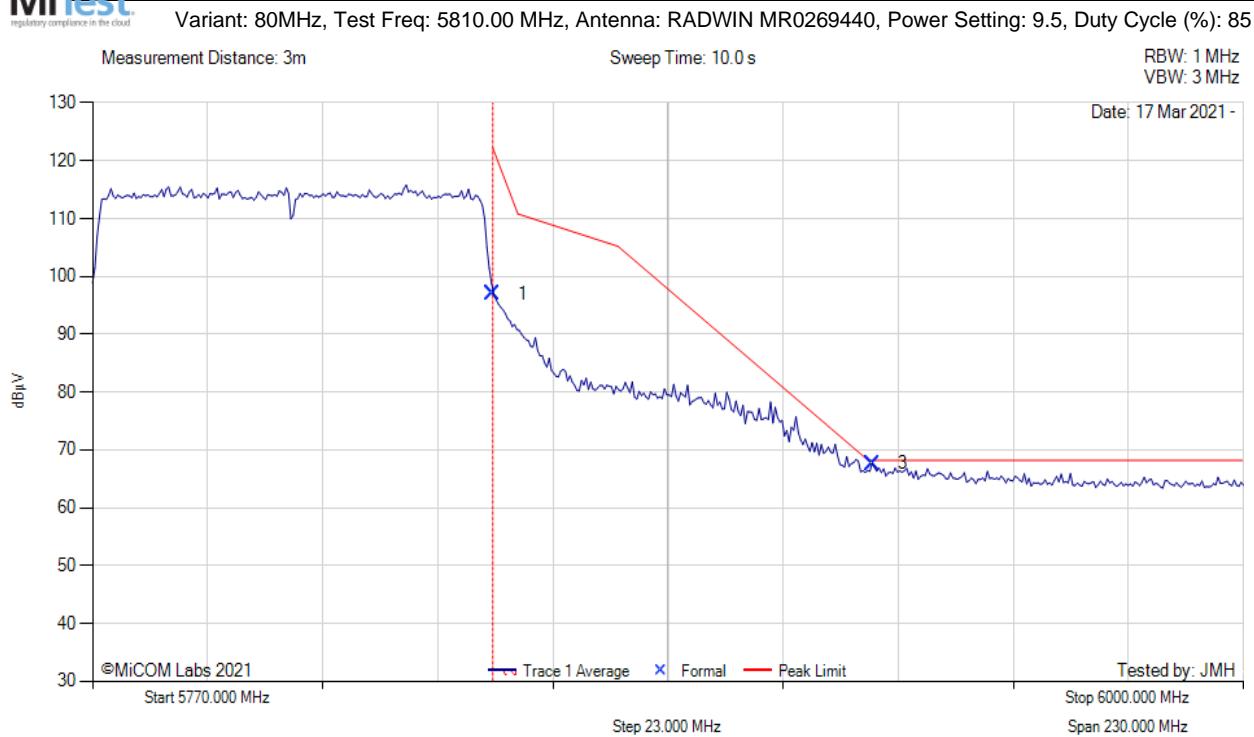


5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail	
1	5850.00	58.72	3.24	34.96	96.92	Max Peak	Vertical	185	29	122.2	-25.3	Pass	
3	5925.91	29.38	3.17	35.11	67.66	Max Peak	Vertical	185	29	68.2	-0.6	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

A.3.2.4. RADWIN MR0269440BF

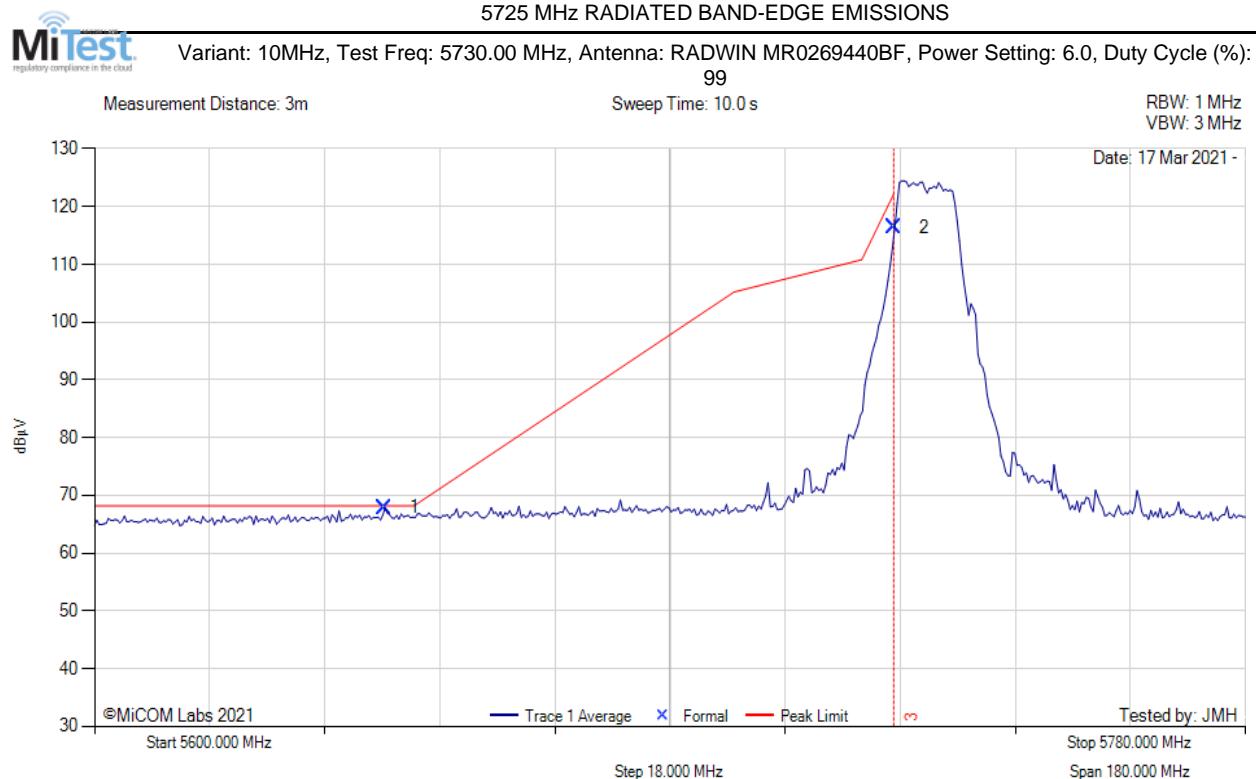

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5645.38	30.17	3.08	34.63	67.88	Max Peak	Vertical	186	359	68.2	-0.4	Pass	
2	5725.00	78.52	3.19	34.72	116.43	Max Peak	Vertical	186	359	122.2	-5.8	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	


Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 20MHz, Test Freq: 5735.00 MHz, Antenna: RADWIN MR0269440BF, Power Setting: 6.0, Duty Cycle (%): 99

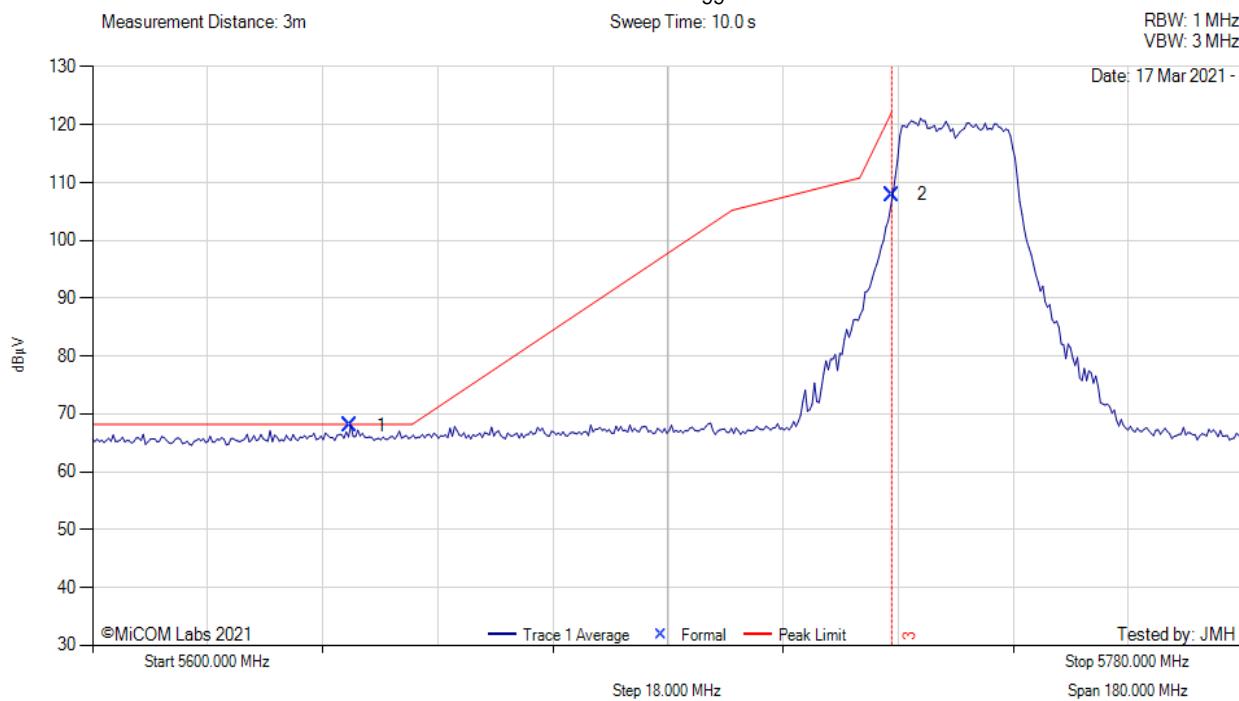

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5640.33	30.31	3.10	34.64	68.05	Max Peak	Vertical	186	359	68.2	-0.2	Pass	
2	5725.00	69.99	3.19	34.72	107.90	Max Peak	Vertical	186	359	122.2	-14.3	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	


Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 40MHz, Test Freq: 5745.00 MHz, Antenna: RADWIN MR0269440BF, Power Setting: 6.0, Duty Cycle (%): 90

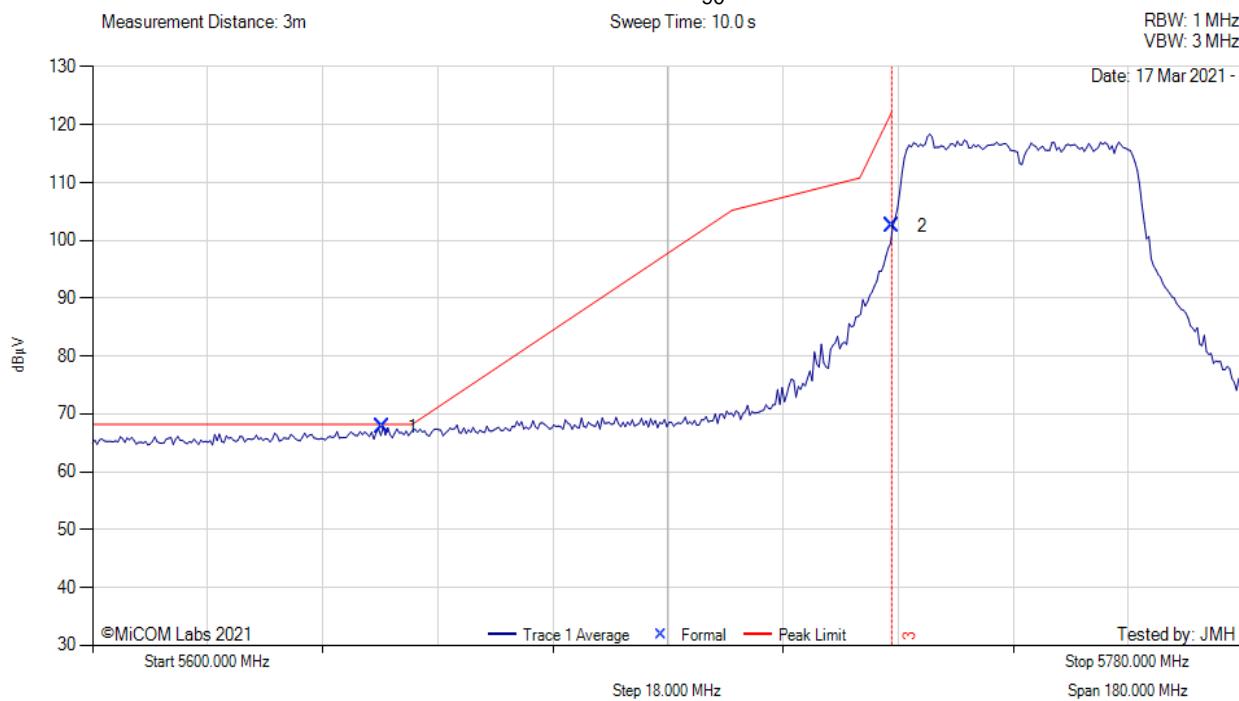

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5645.38	29.99	3.08	34.63	67.70	Max Peak	Vertical	186	359	68.2	-0.5	Pass	
2	5725.00	64.54	3.19	34.72	102.45	Max Peak	Vertical	186	359	122.2	-19.8	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	


Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 80MHz, Test Freq: 5765.00 MHz, Antenna: RADWIN MR0269440BF, Power Setting: 4.0, Duty Cycle (%): 85

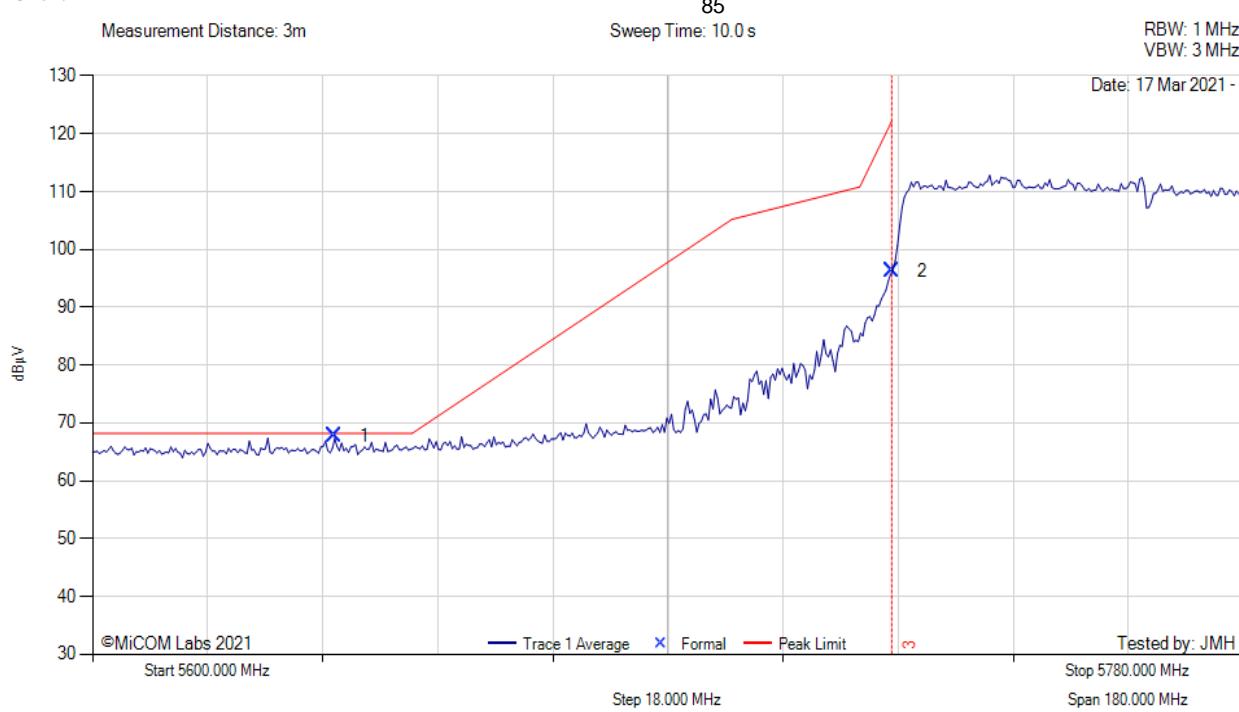

5600.00 - 5780.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5637.81	29.94	3.11	34.64	67.79	Max Peak	Vertical	186	359	68.2	-0.4	Pass	
2	5725.00	58.36	3.19	34.72	96.27	Max Peak	Vertical	186	359	122.2	-25.9	Pass	
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS




Variant: 10MHz, Test Freq: 5845.00 MHz, Antenna: RADWIN MR0269440BF, Power Setting: 6.0, Duty Cycle (%):

99

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

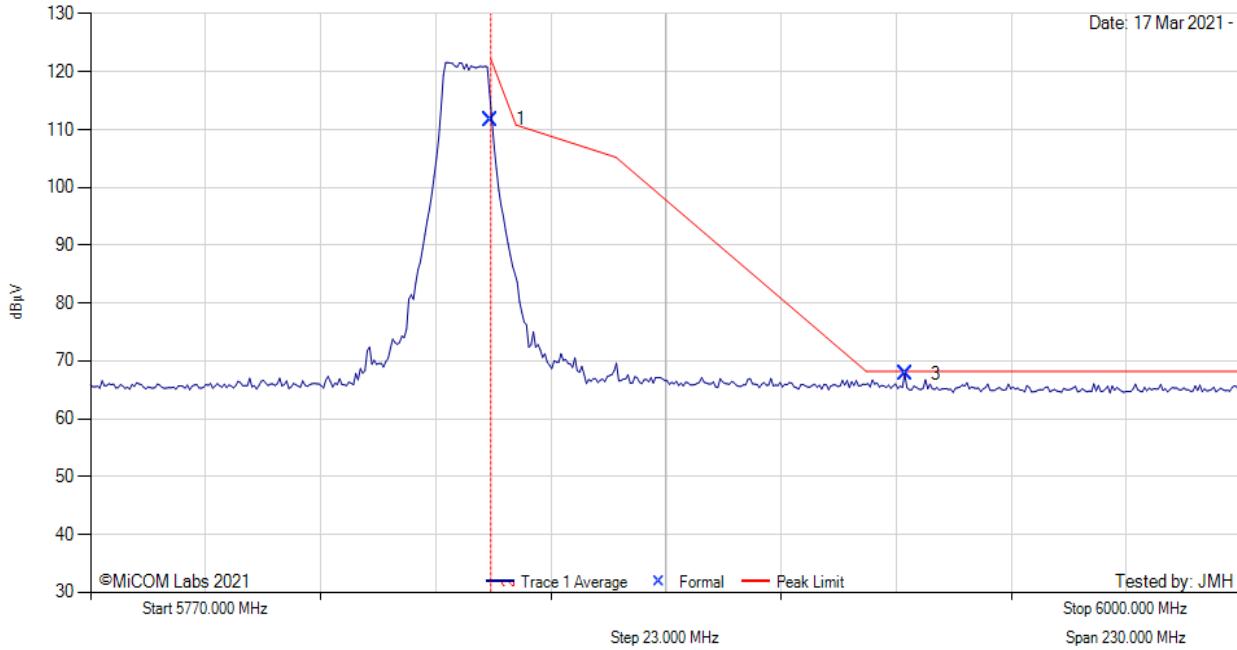

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail	
1	5850.00	73.55	3.24	34.96	111.75	Max Peak	Vertical	188	358	122.2	-10.5	Pass	
3	5932.83	29.42	3.21	35.11	67.74	Max Peak	Vertical	188	358	68.2	-0.5	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 20MHz, Test Freq: 5840.00 MHz, Antenna: RADWIN MR0269440BF, Power Setting: 6.0, Duty Cycle (%):


99

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

Date: 17 Mar 2021 -

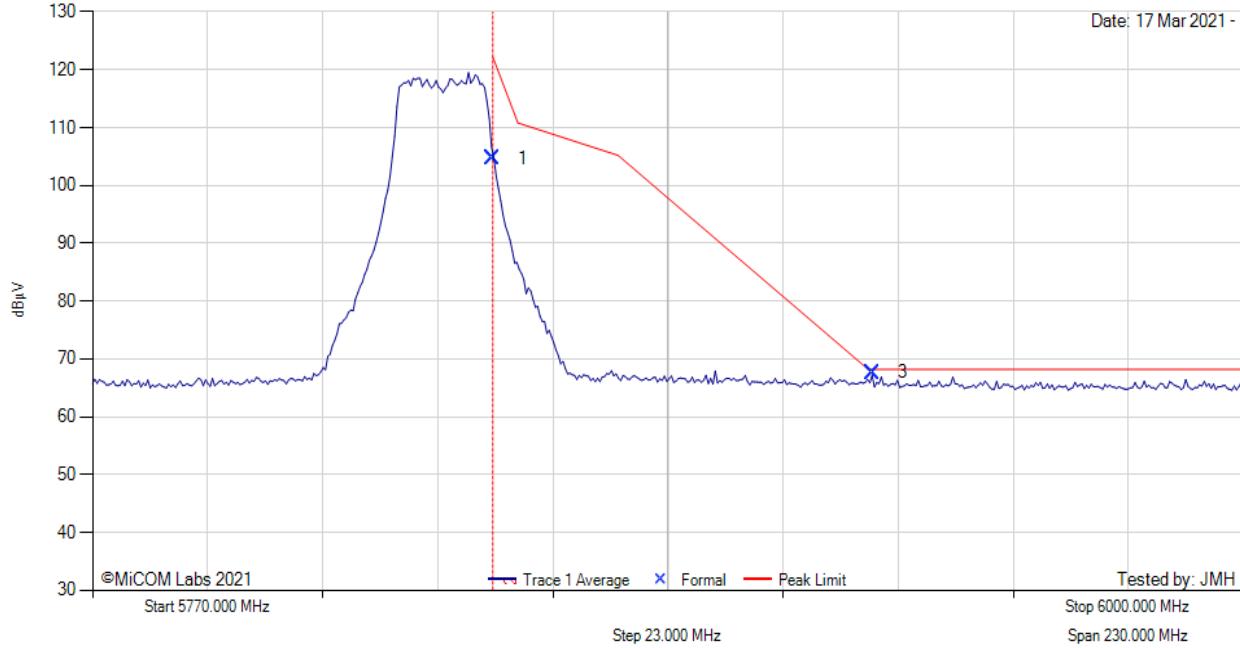

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail	
1	5850.00	66.53	3.24	34.96	104.73	Max Peak	Vertical	188	358	122.2	-17.5	Pass	
3	5925.91	29.39	3.17	35.11	67.67	Max Peak	Vertical	188	358	68.2	-0.6	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	


Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 40MHz, Test Freq: 5830.00 MHz, Antenna: RADWIN MR0269440BF, Power Setting: 6.0, Duty Cycle (%): 90

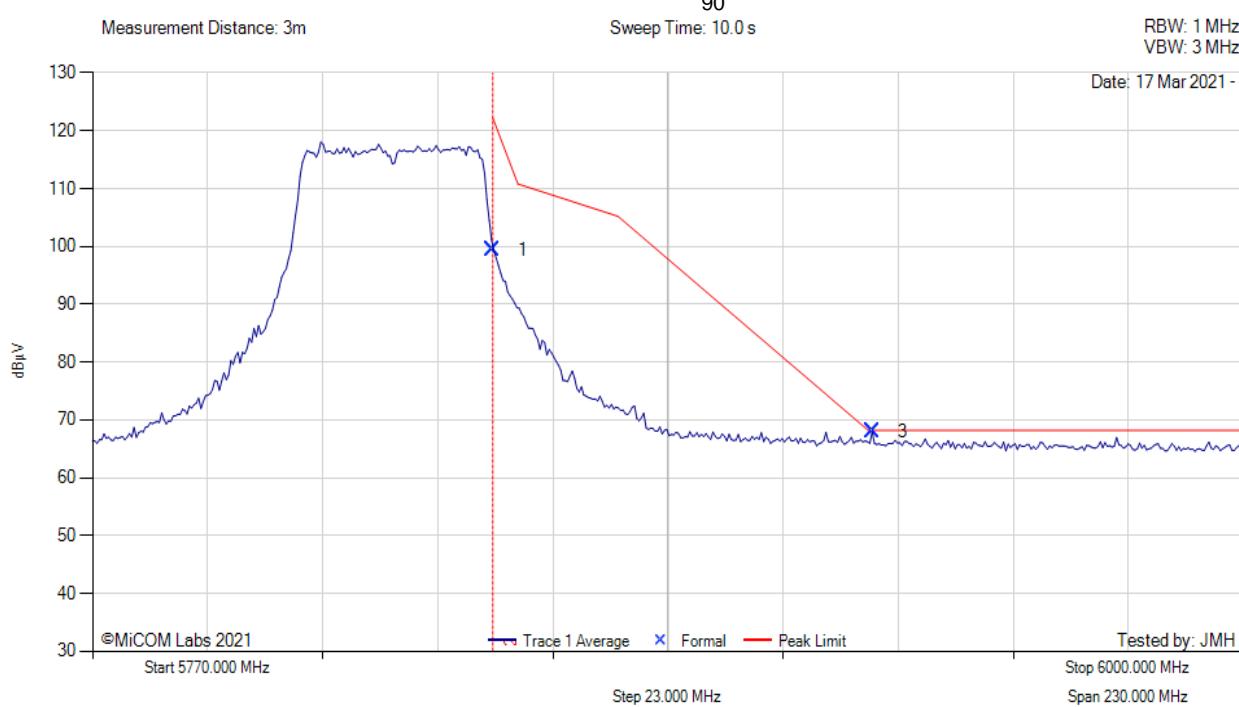

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5850.00	61.16	3.24	34.96	99.36	Max Peak	Vertical	188	358	122.2	-22.9	Pass	
3	5925.91	29.66	3.17	35.11	67.94	Max Peak	Vertical	188	358	68.2	-0.3	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	


Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 80MHz, Test Freq: 5810.00 MHz, Antenna: RADWIN MR0269440BF, Power Setting: 3.5, Duty Cycle (%): 85

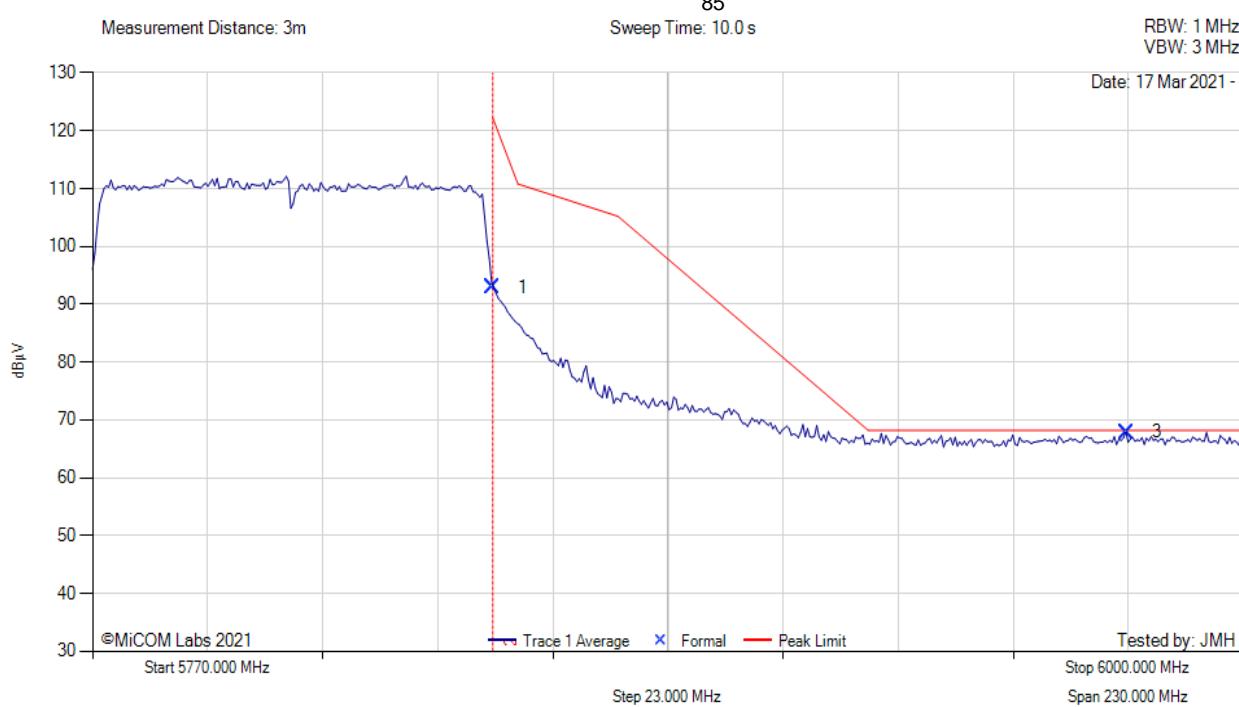

5770.00 - 6000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	5850.00	54.71	3.24	34.96	92.91	Max Peak	Vertical	188	358	122.2	-29.3	Pass	
3	5976.61	29.56	3.18	35.18	67.92	Max Peak	Vertical	188	358	68.2	-0.3	Pass	
2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--	

Test Notes: EUT powered by POE. Connected to laptop outside chamber.

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com