


Appendix B

Peak Output Power




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
25 dBm	-0.73 dBm	VBW	1 MHz		
	2.40196493 GHz	SWT	5 ms	Unit	dBm

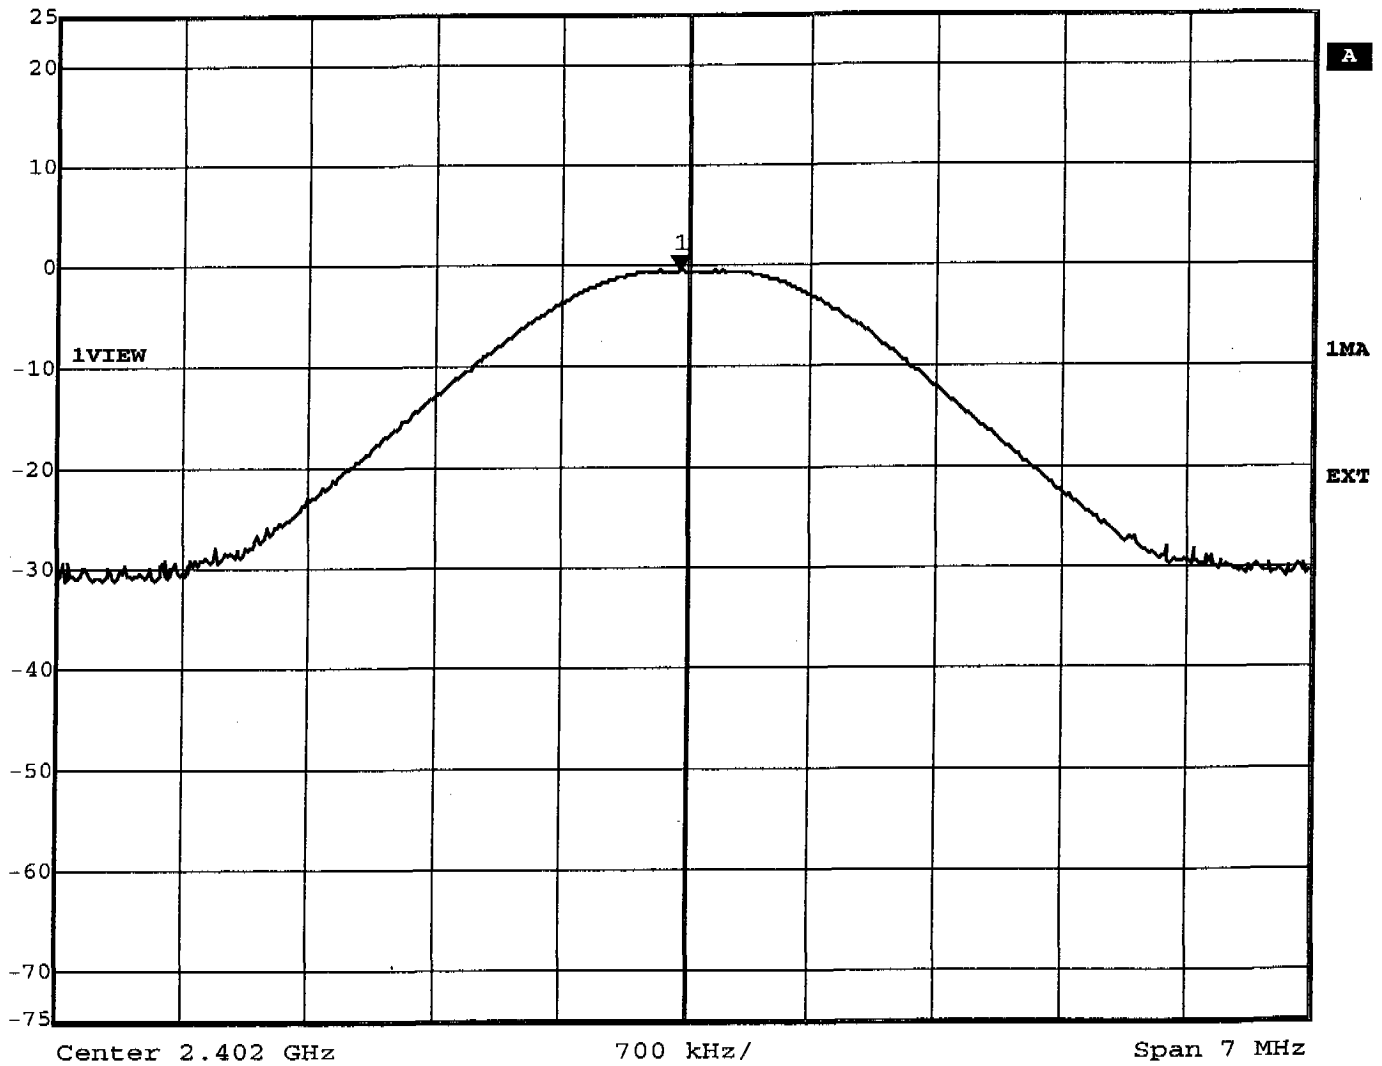

Title: Peak Output Power conducted Ch.: 0
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 27.MAR.2003 14:47:44




Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	-0.80 dBm	VBW	1 MHz	
25 dBm	2.44118938 GHz	SWT	5 ms	Unit dBm

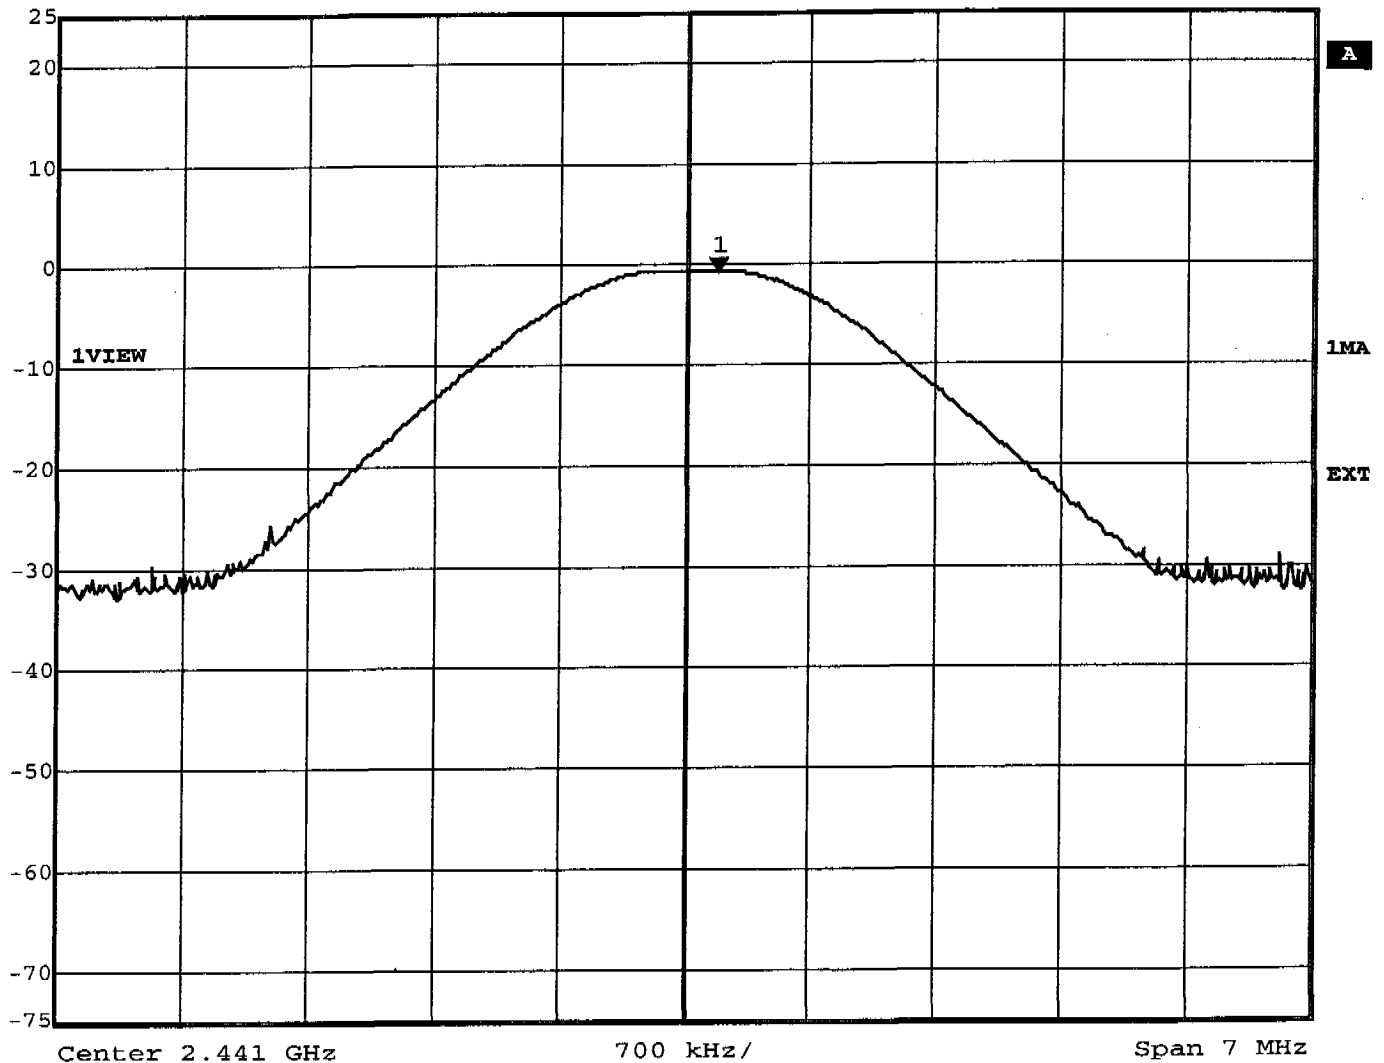

Title: Peak Output Power conducted Ch.: 39
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 27.MAR.2003 14:48:35




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
25 dBm	-1.43 dBm	VBW	1 MHz		
	2.47982465 GHz	SWT	5 ms	Unit	dBm

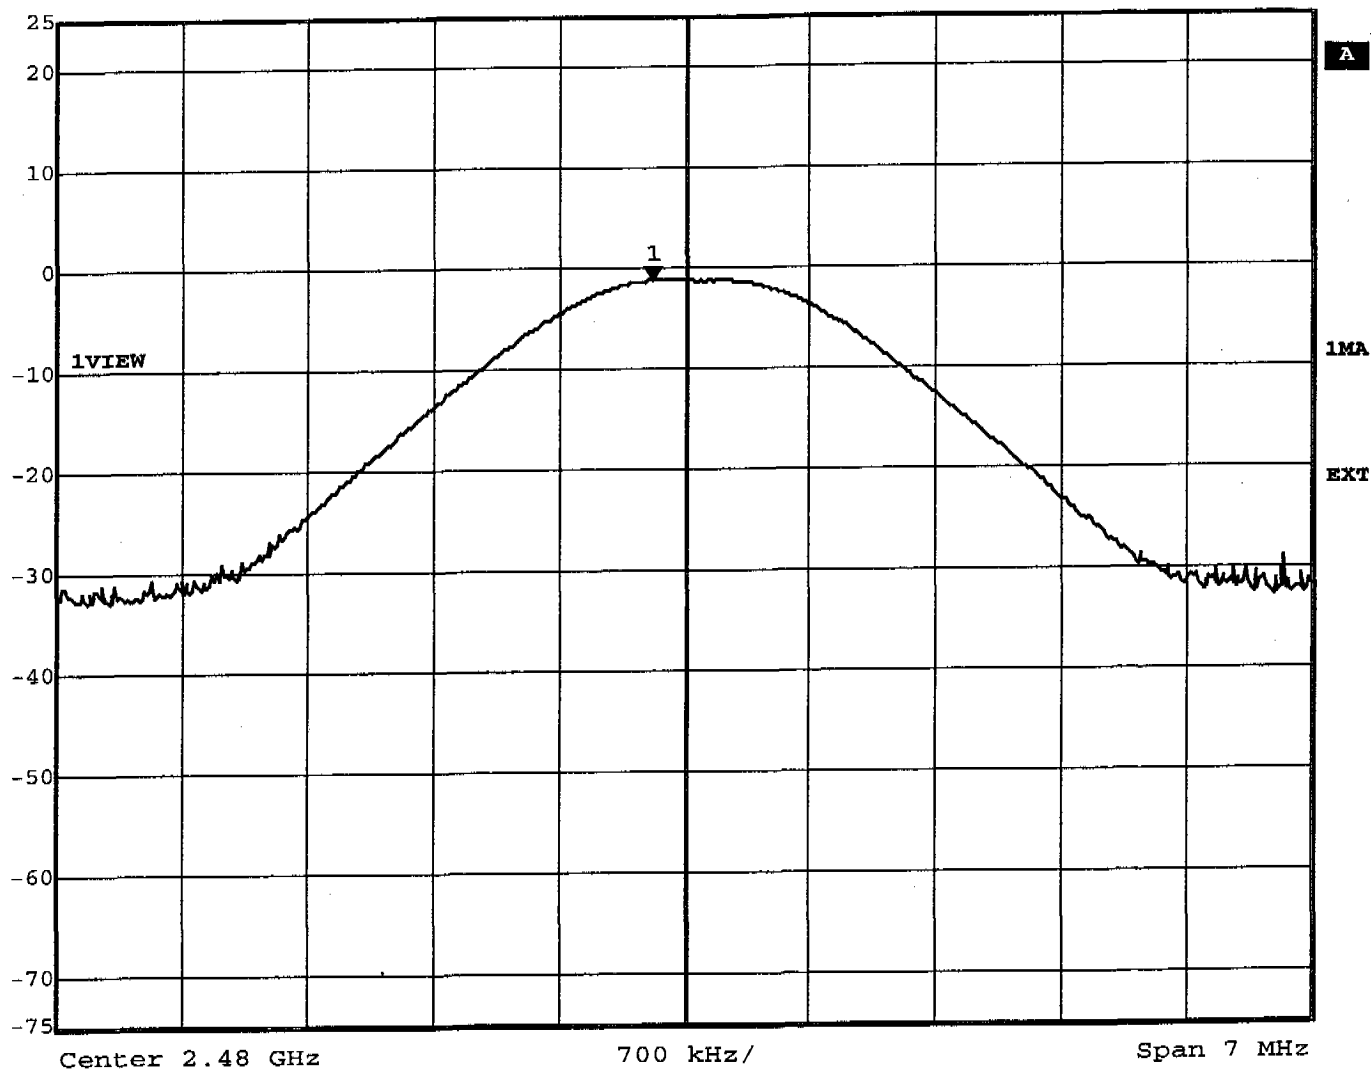

Title: Peak Output Power conducted Ch.: 78
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 27.MAR.2003 14:49:47


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom: 23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -9.25dBm, RBW: 5MHz

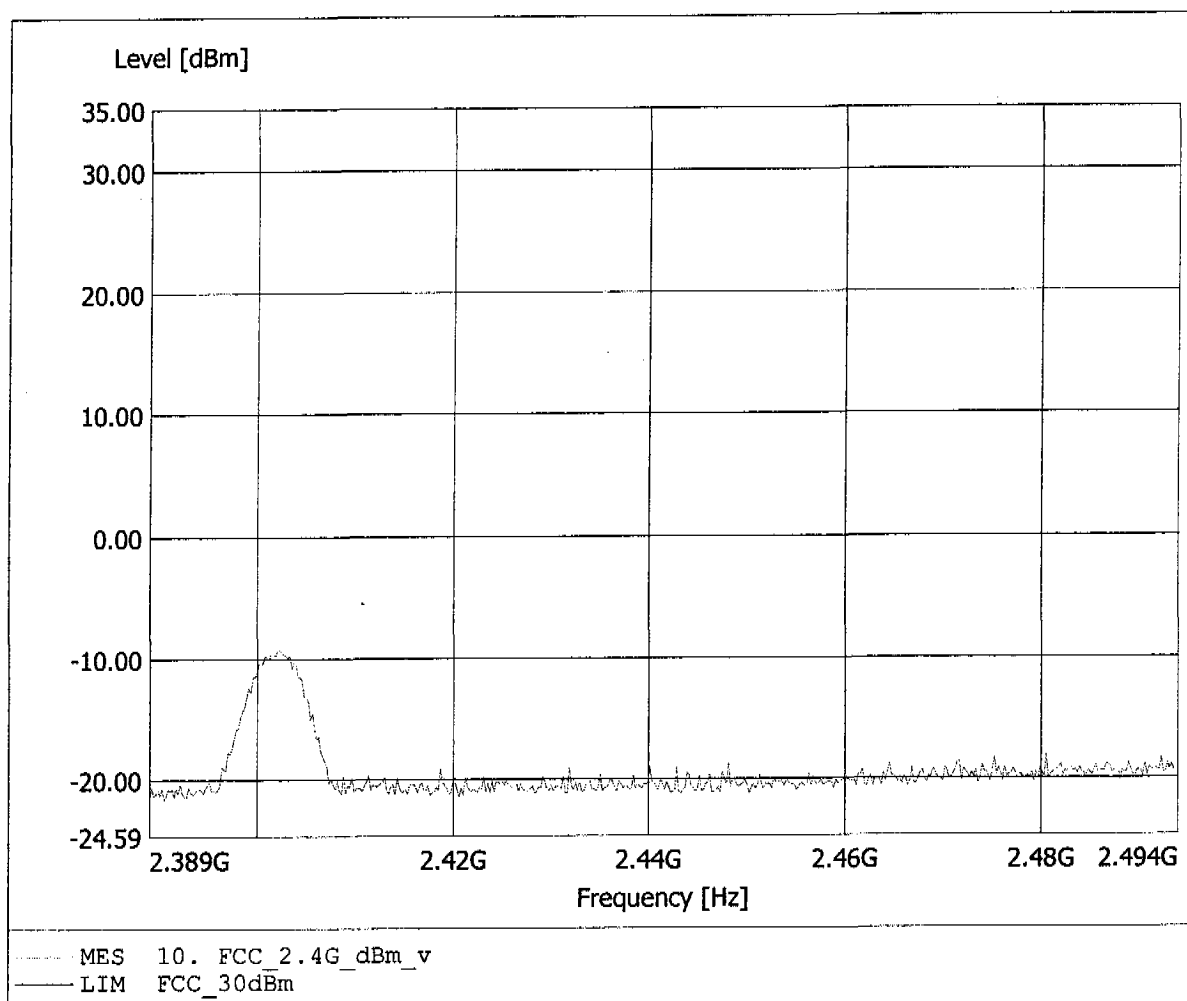


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 1.18dBm, RBW: 5MHz

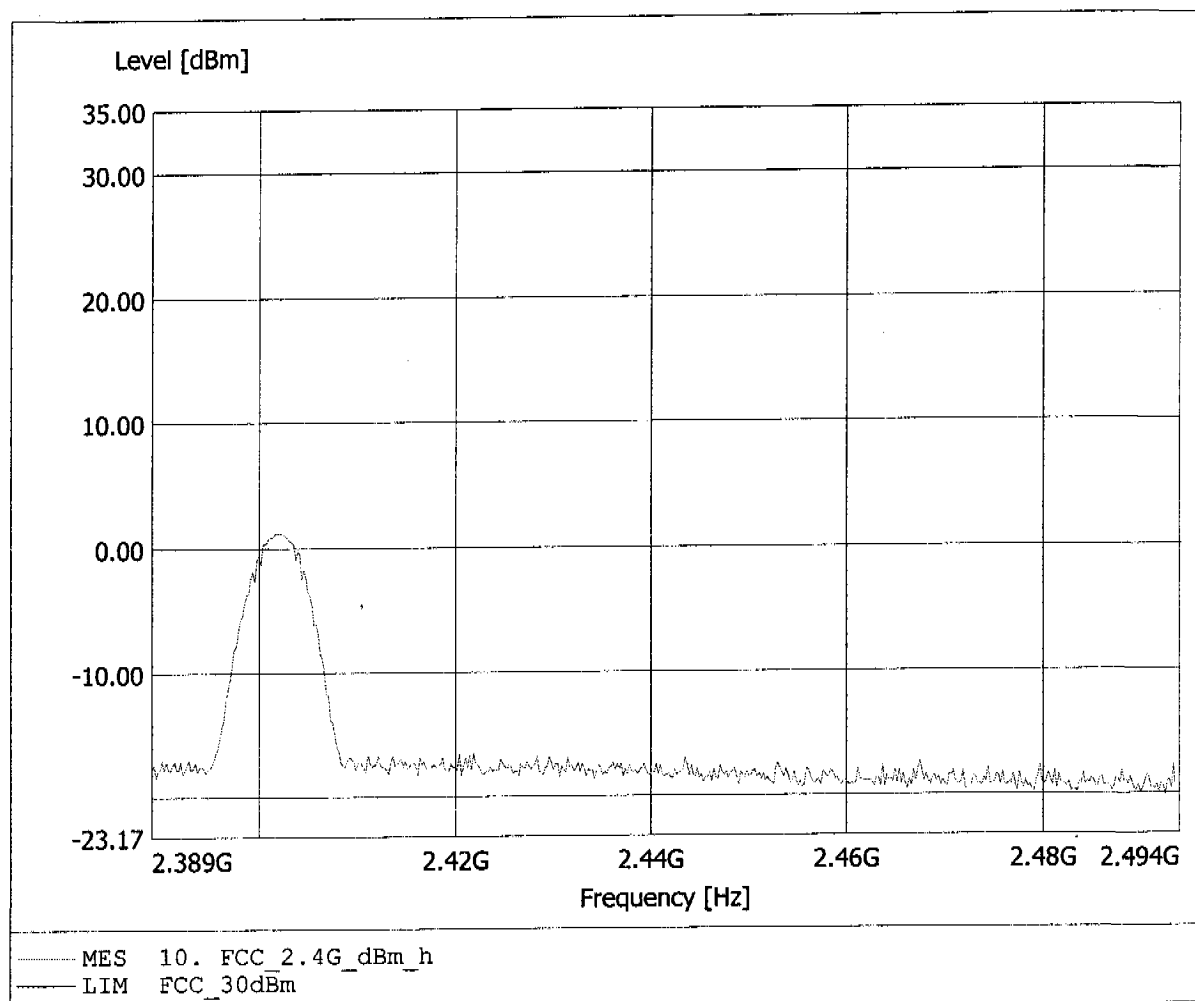


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom: 23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -8.38dBm, RBW: 5MHz

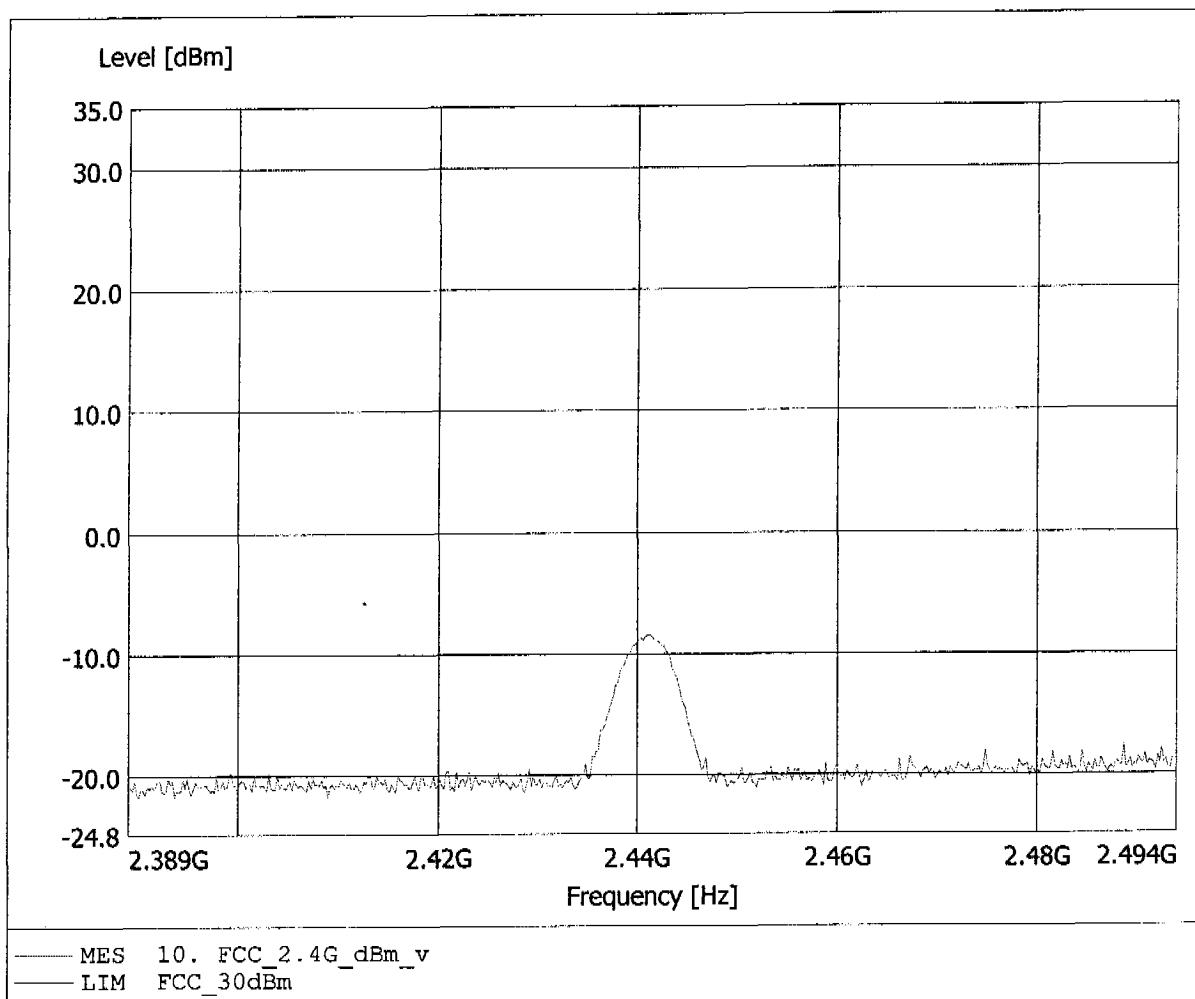


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 0.26dBm, RBW: 5MHz

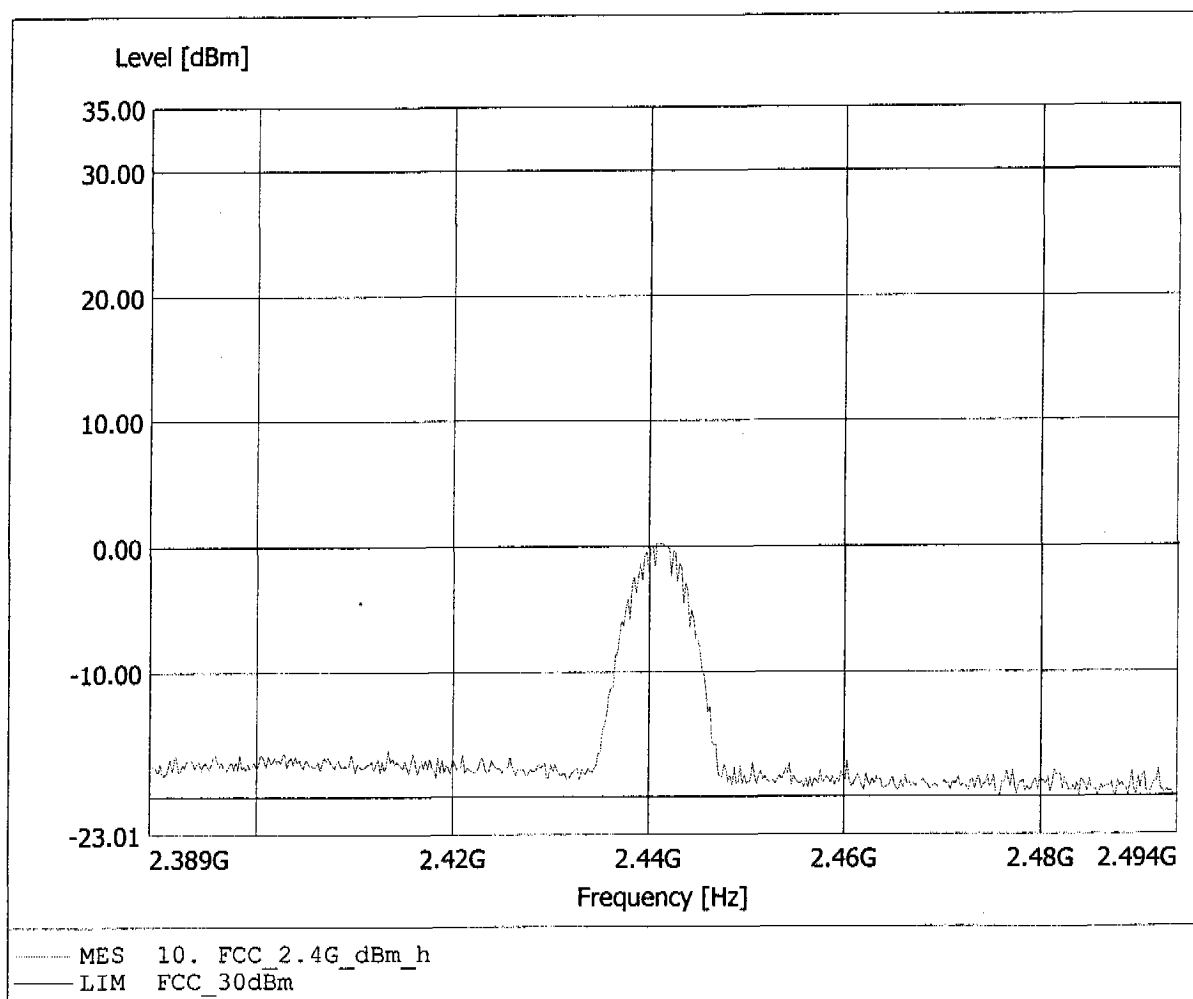


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom: 23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -5.61dBm, RBW: 5MHz

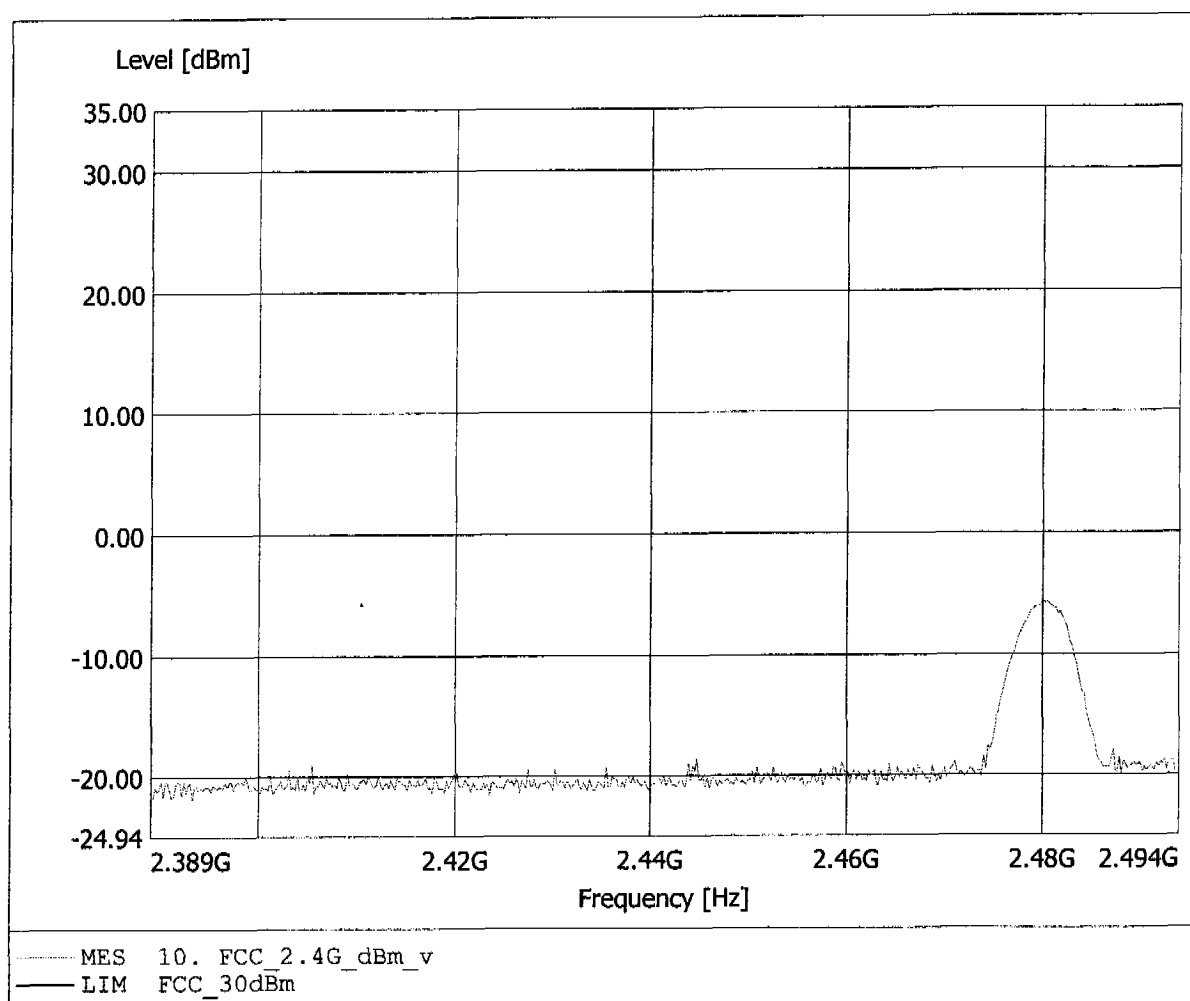


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 1.00dBm, RBW: 5MHz

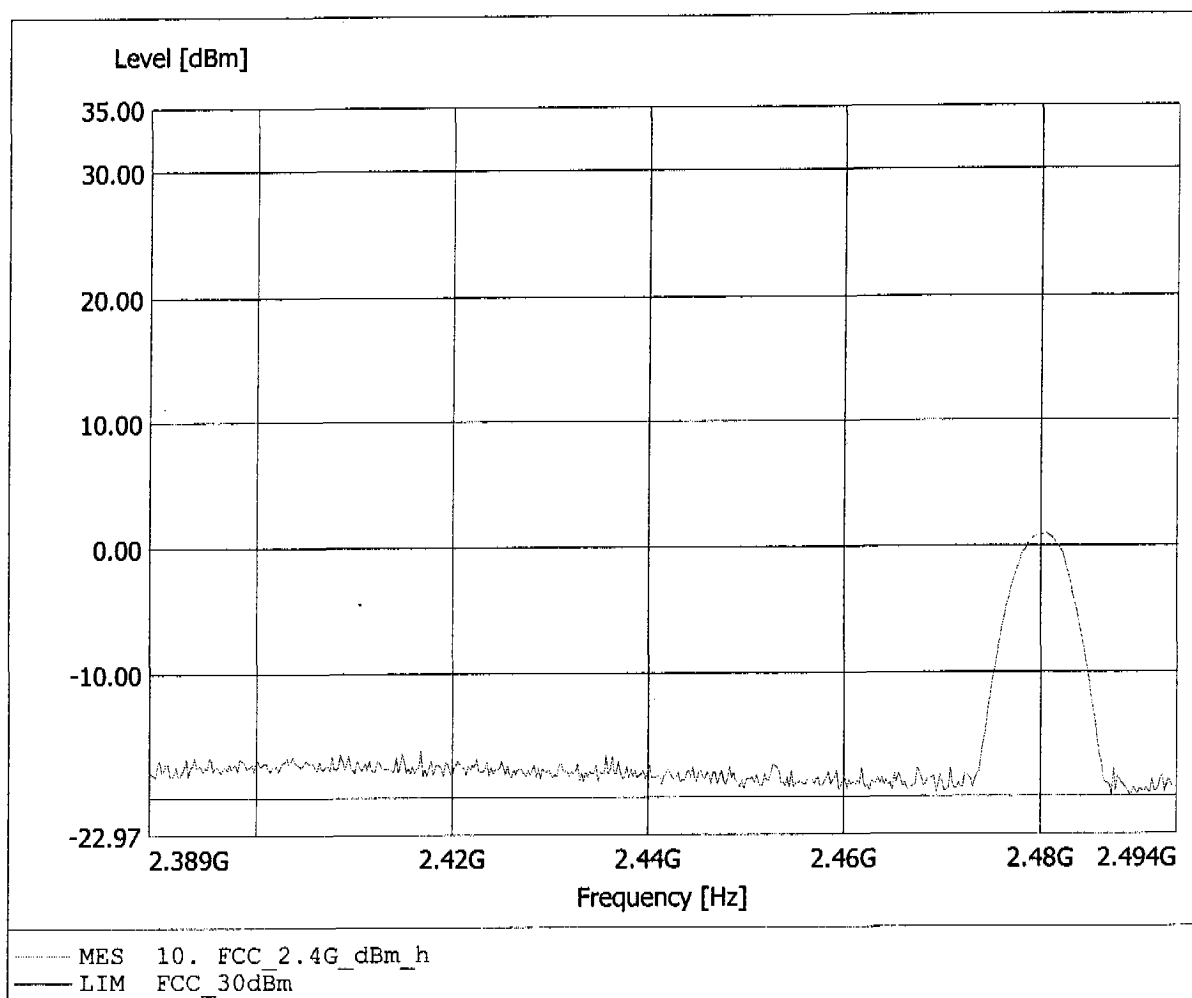


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom: 23°C / Unom - 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -9.32dBm, RBW: 5MHz

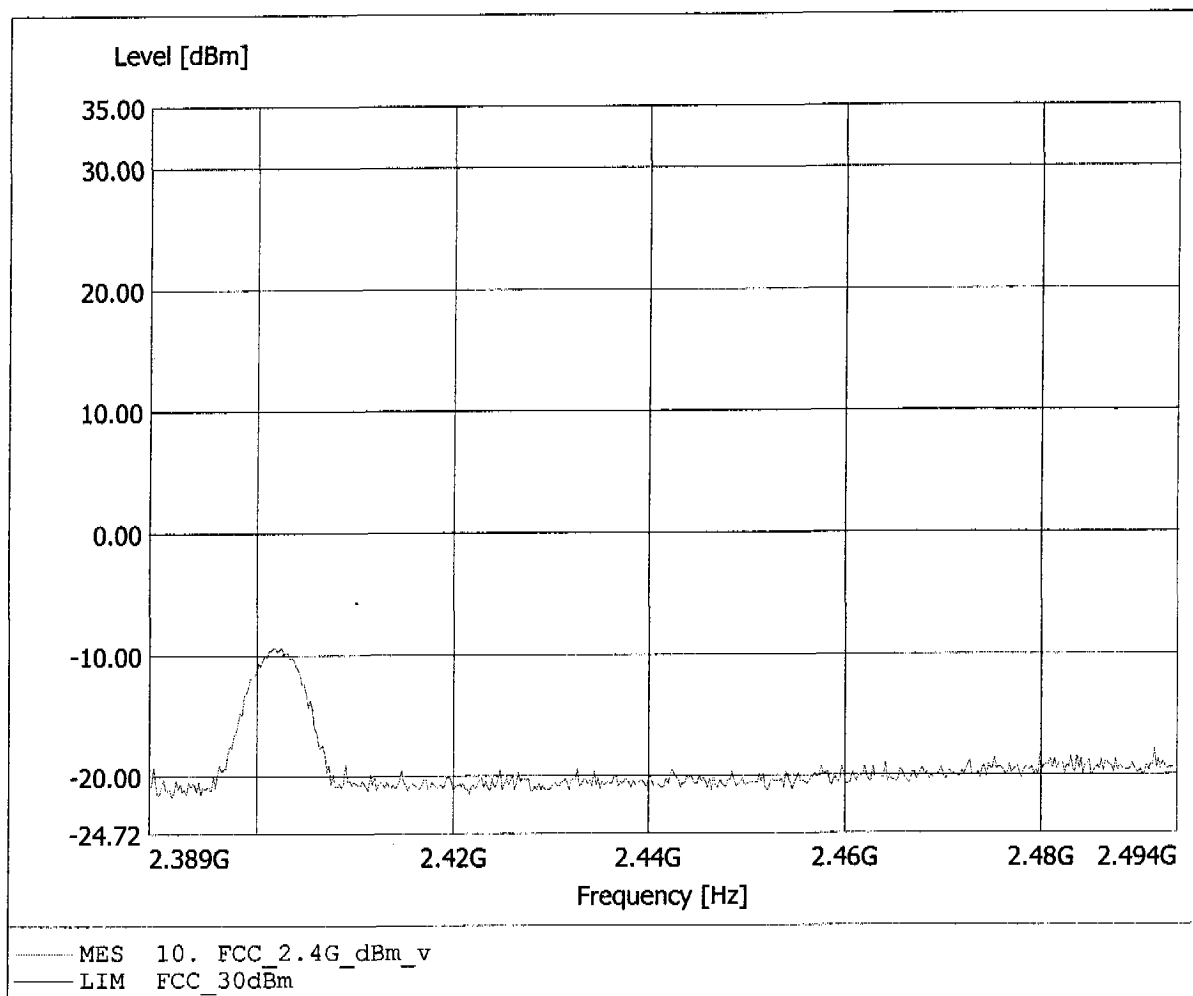


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom - 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 1.29dBm, RBW: 5MHz

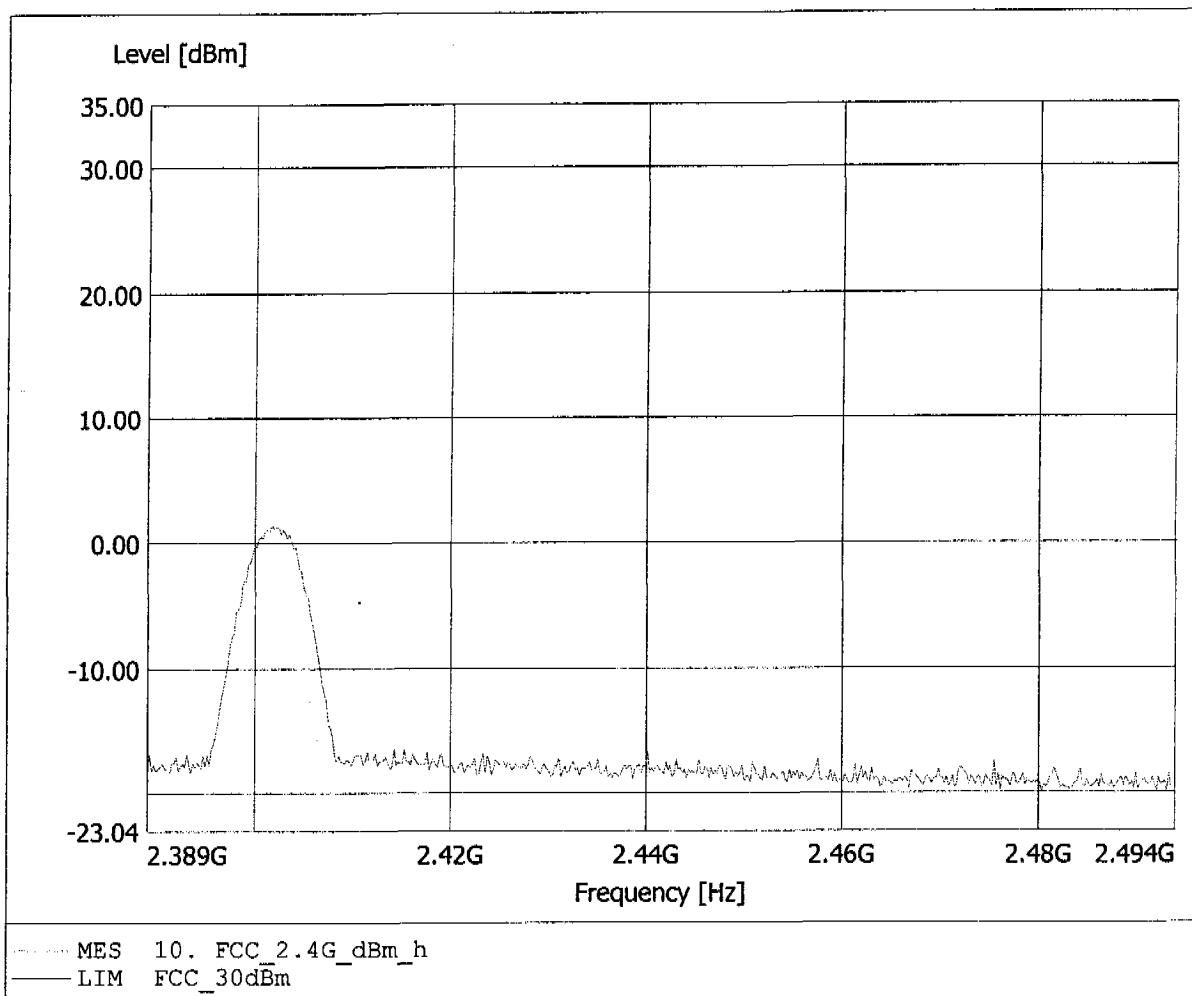


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom - 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -8.11dBm, RBW: 5MHz

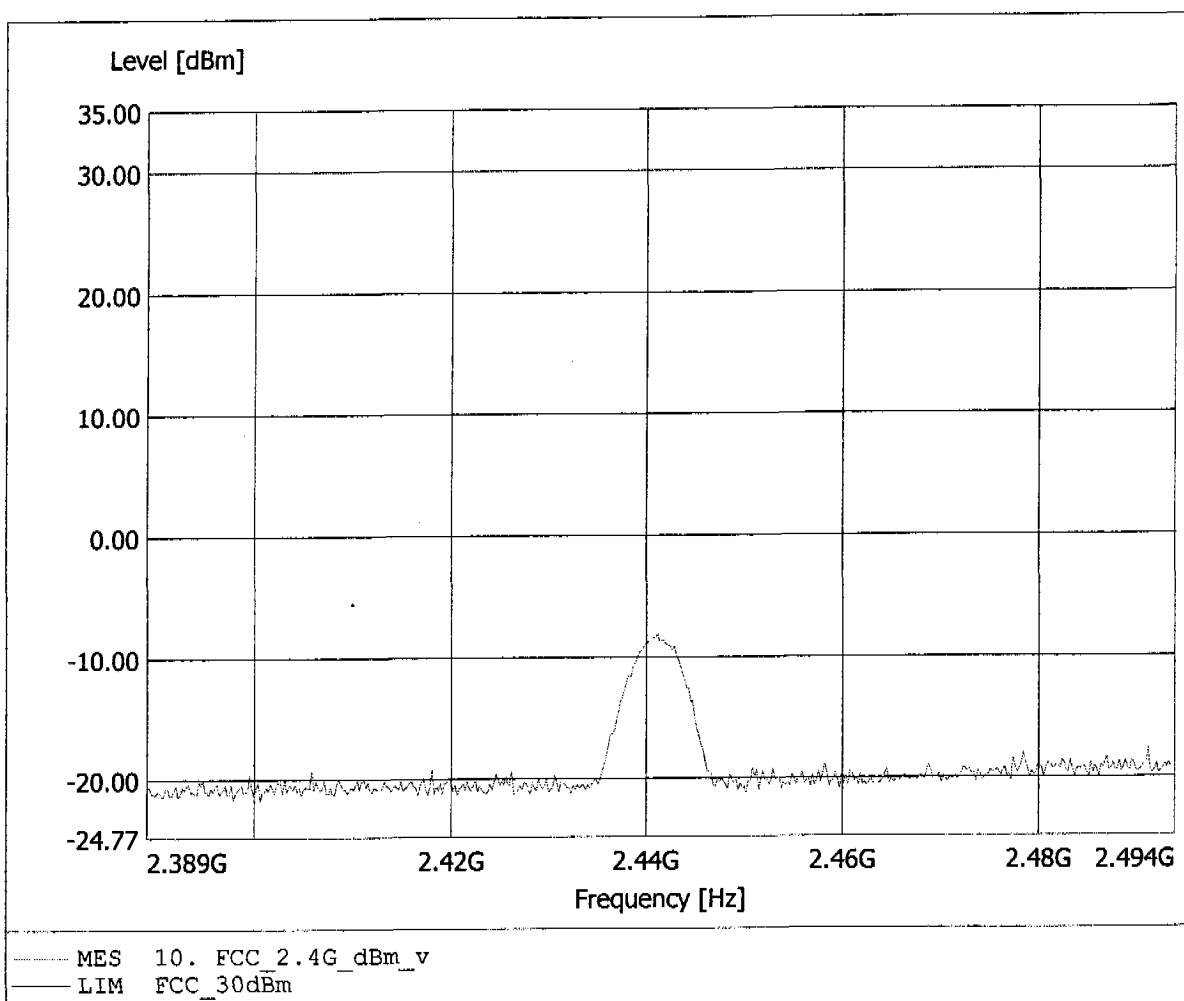


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom - 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 0.25dBm, RBW: 5MHz

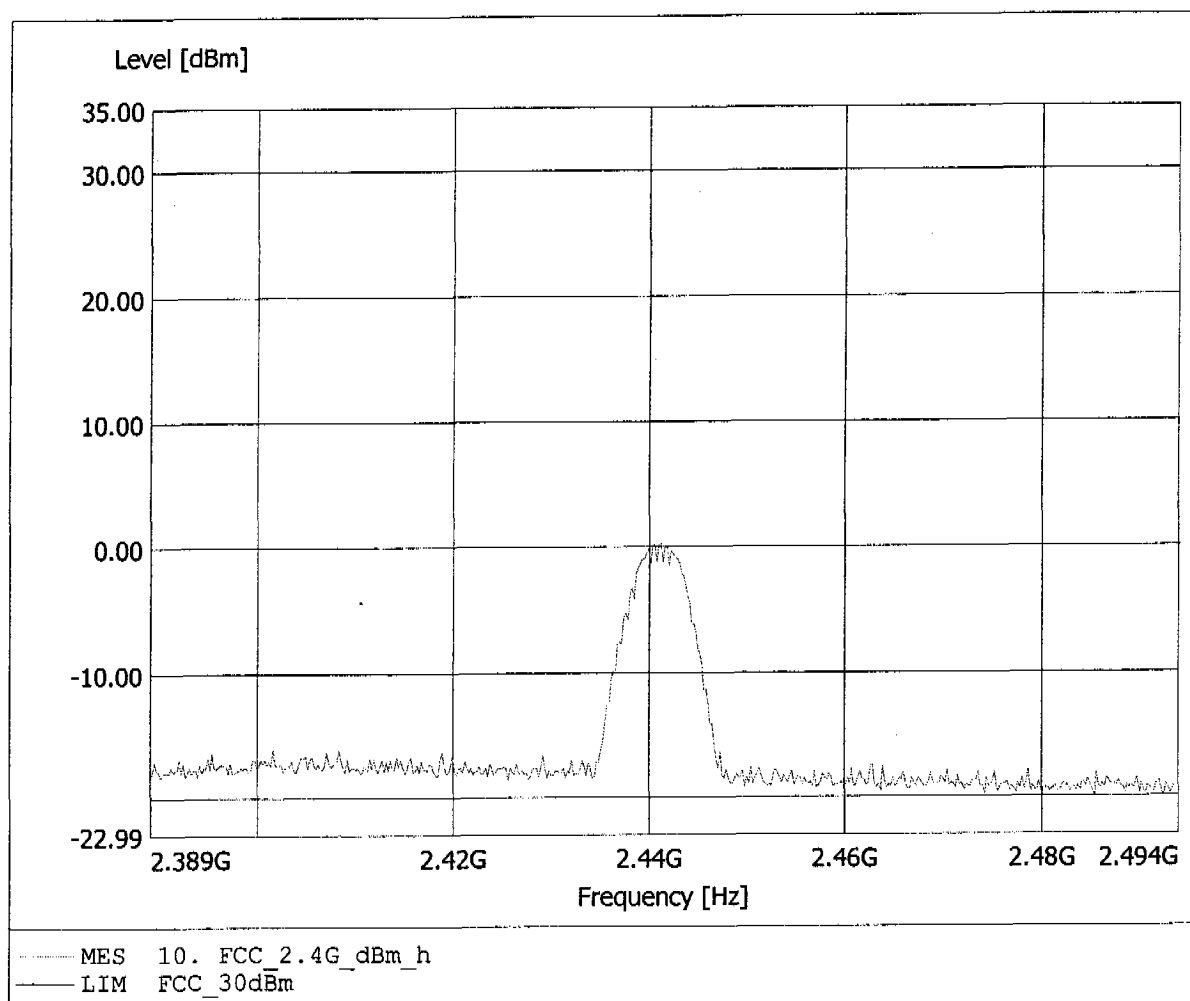


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom - 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -5.41dBm, RBW: 5MHz

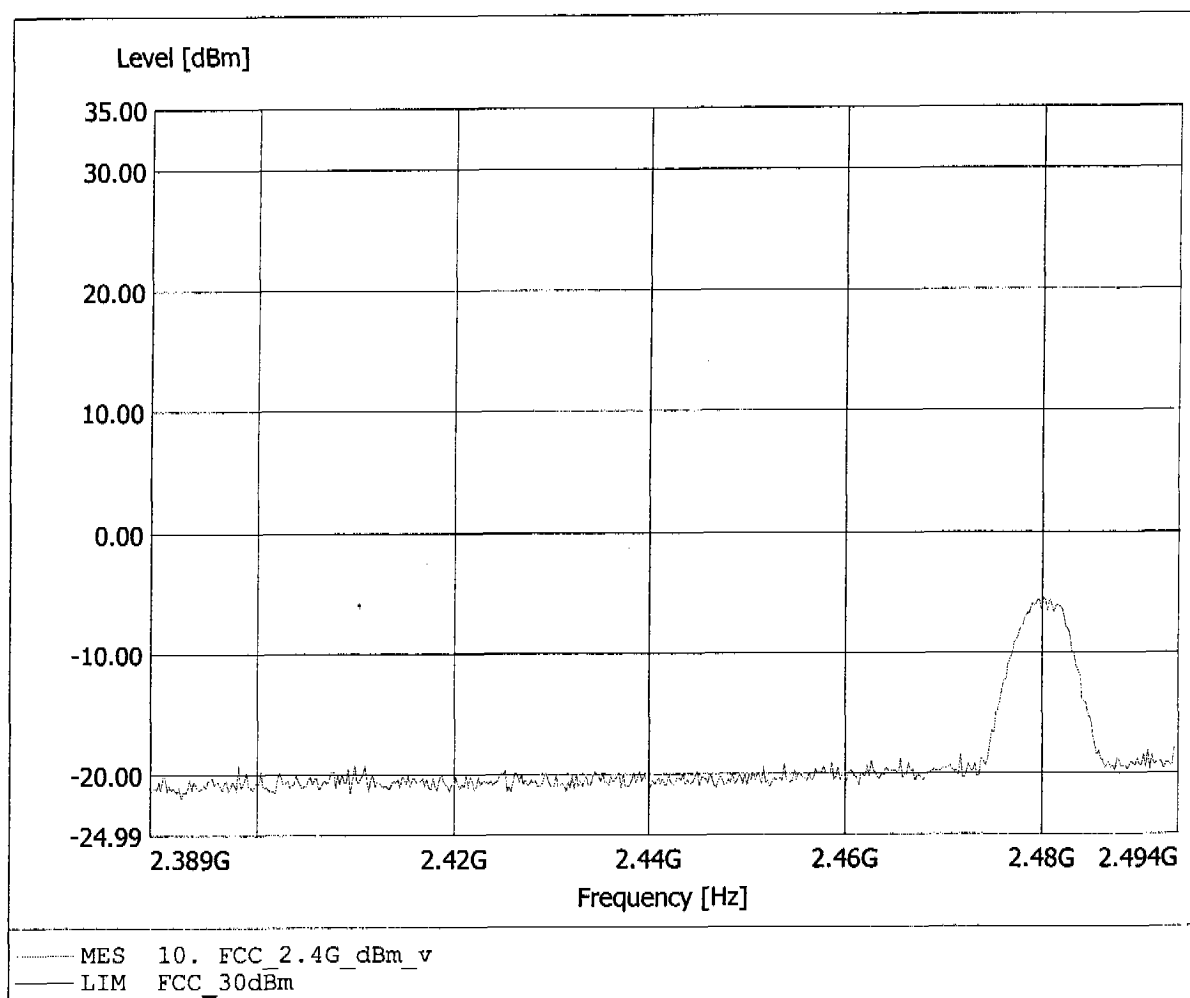


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom - 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 1.01dBm, RBW: 5MHz

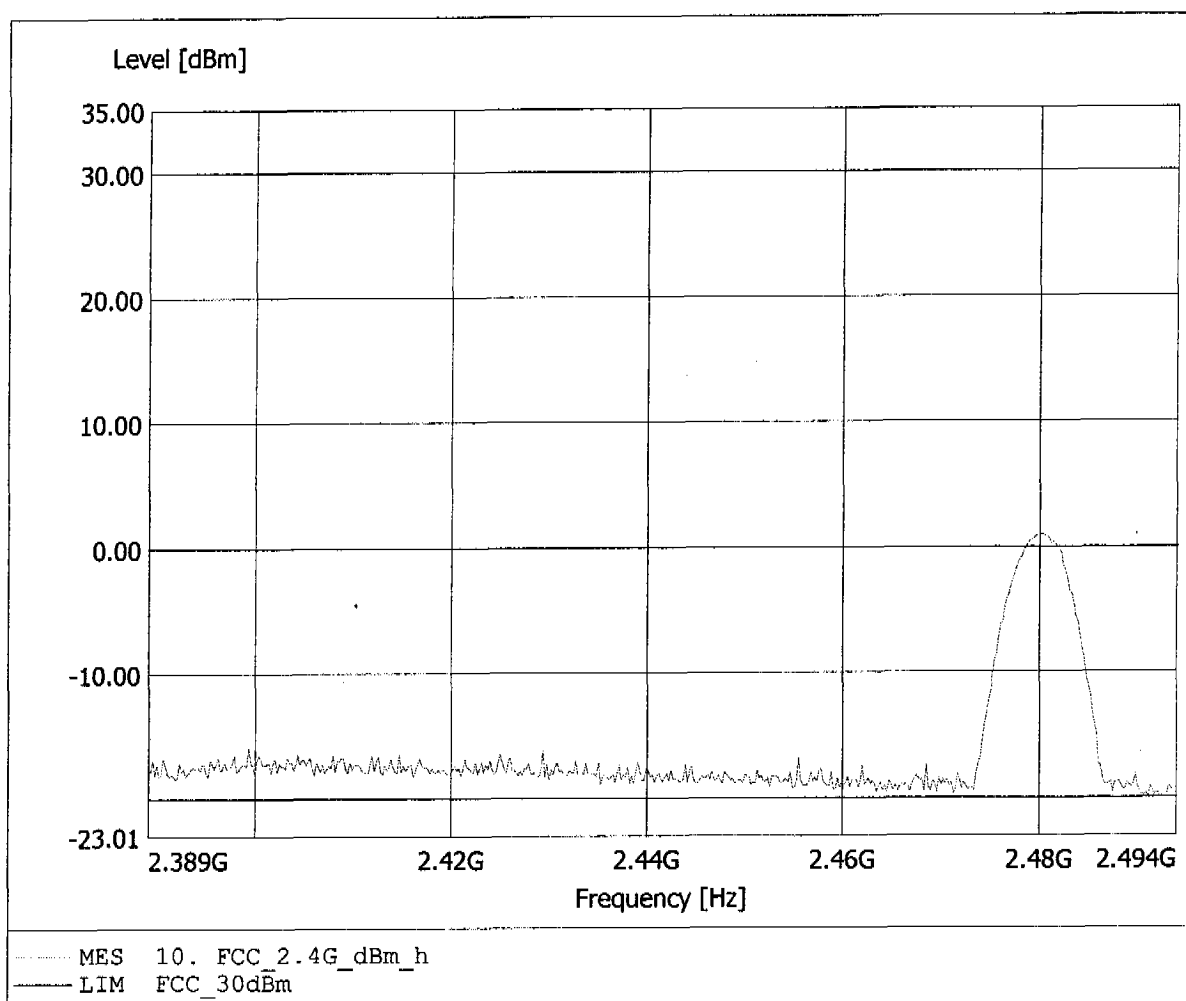


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom + 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: -9.46dBm, RBW: 5MHz

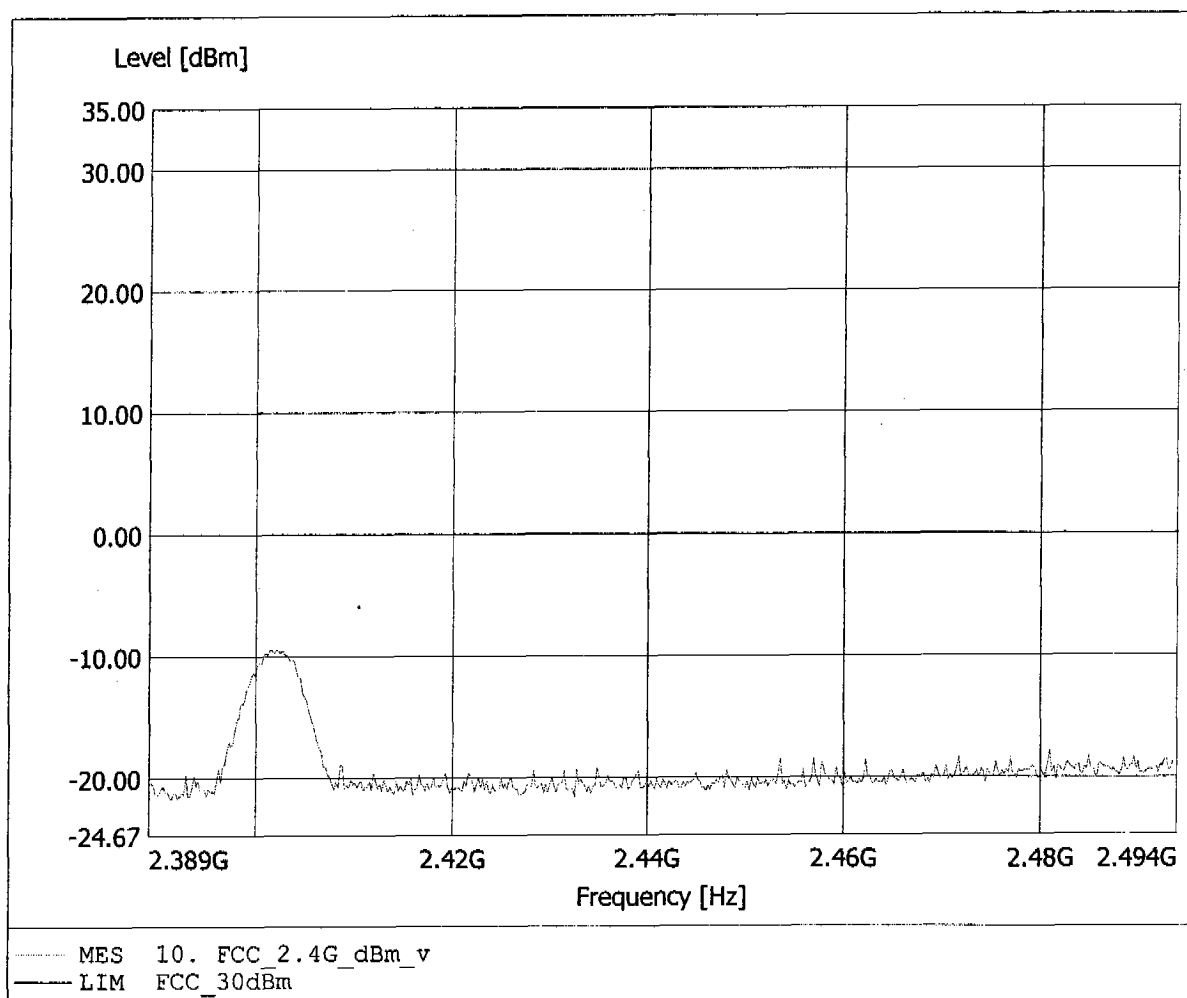


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom + 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 1.24dBm, RBW: 5MHz

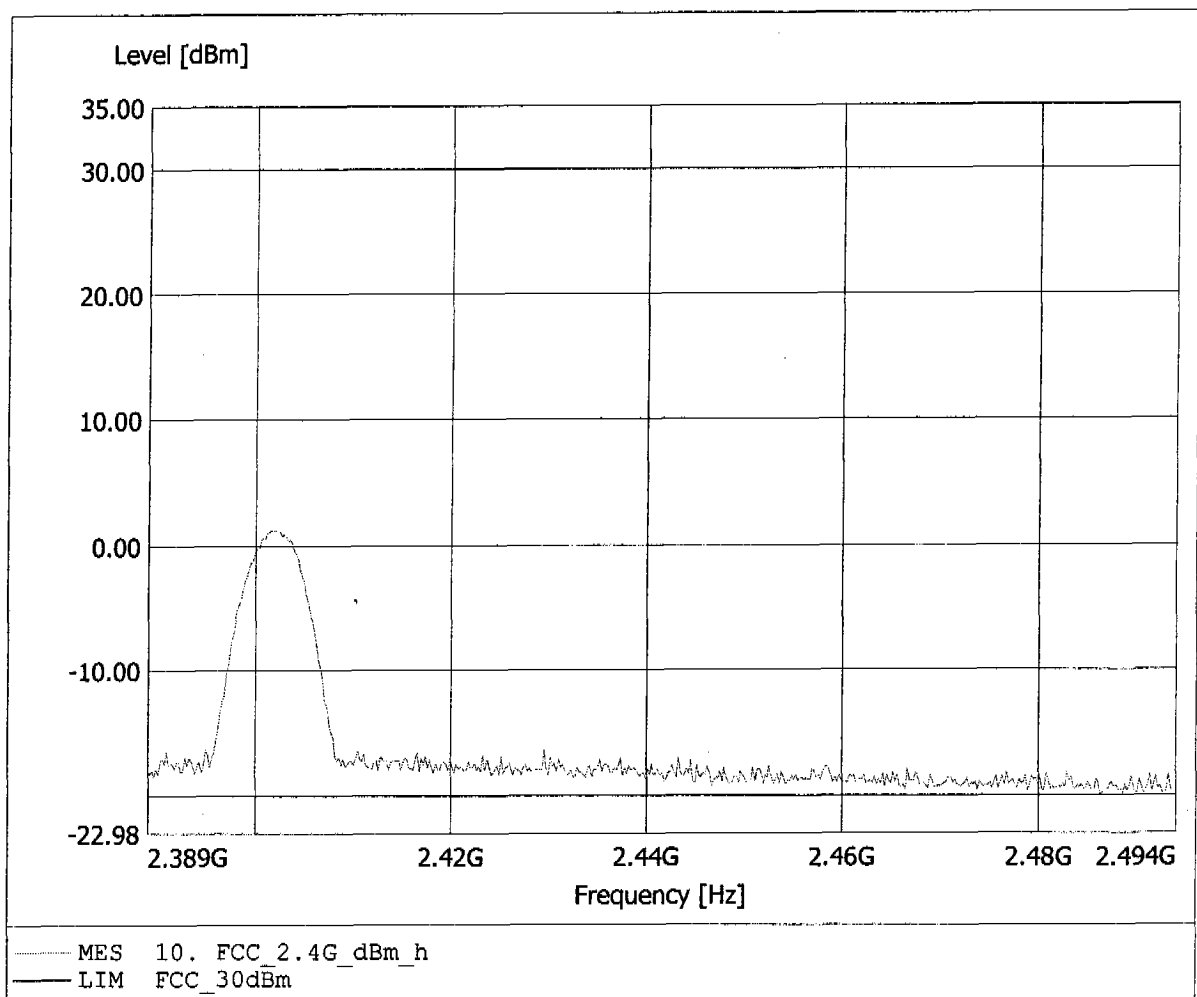


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom + 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -8.25dBm, RBW: 5MHz

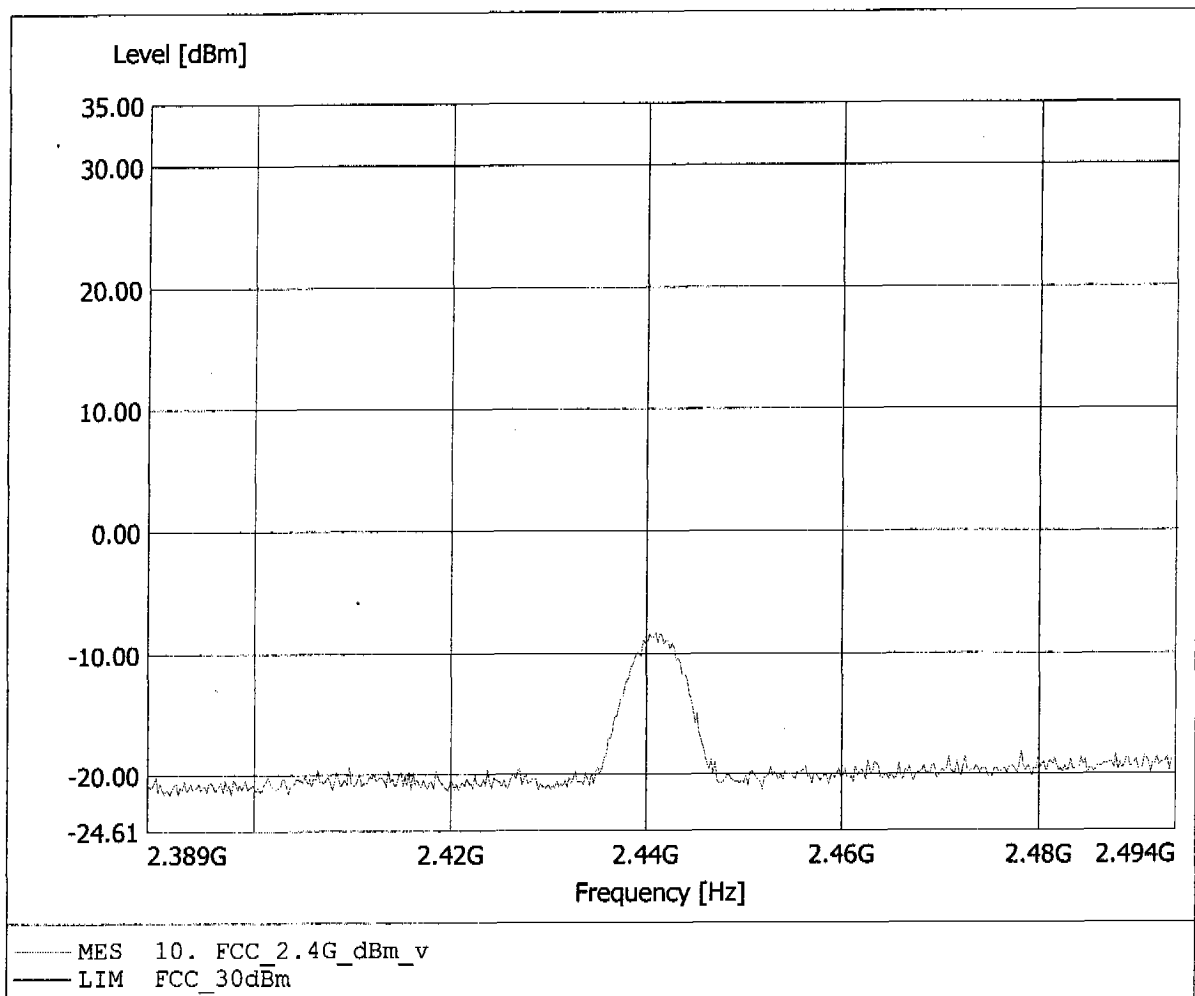


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom + 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.31dBm, RBW: 5MHz

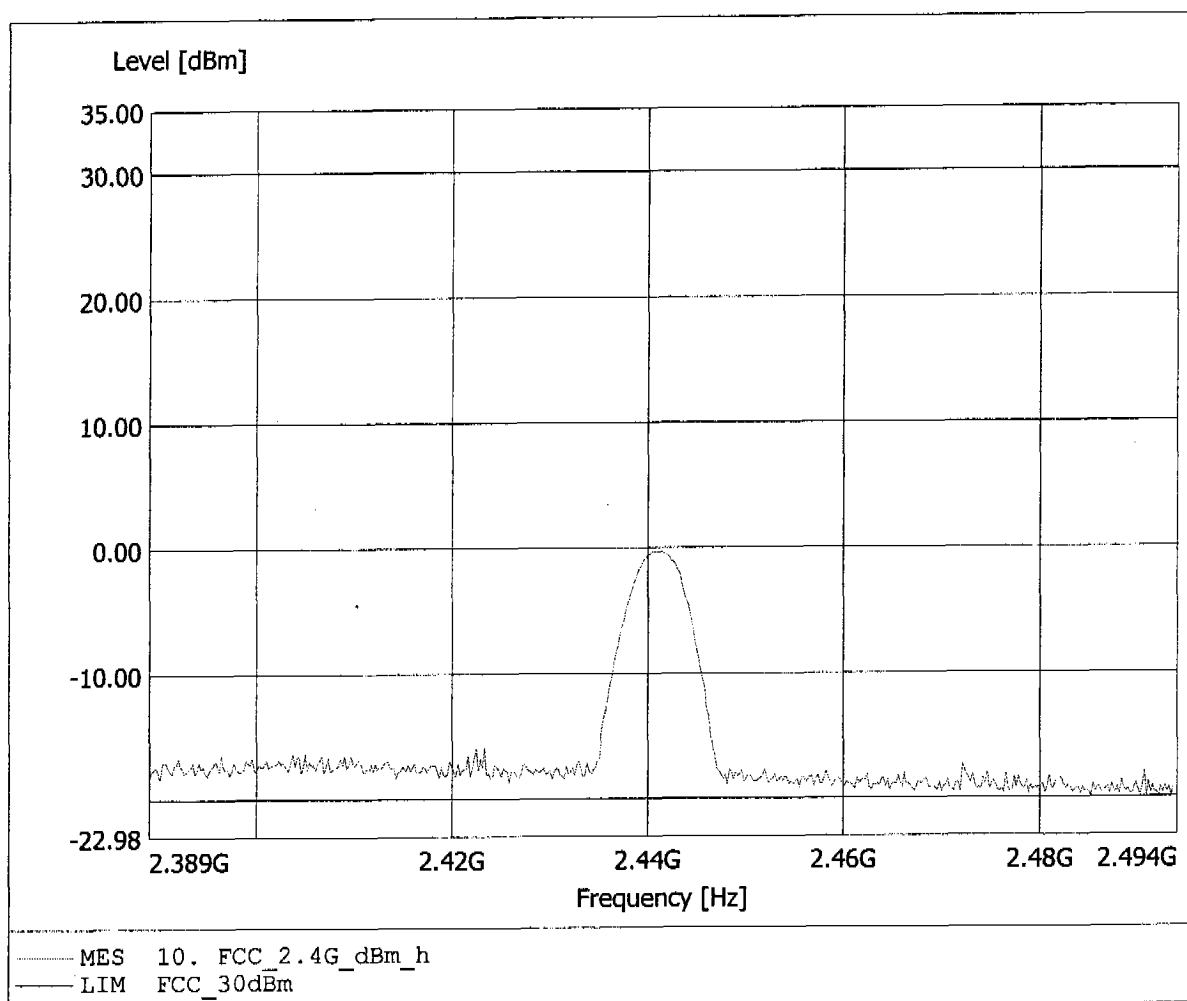


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom + 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -5.41dBm, RBW: 5MHz

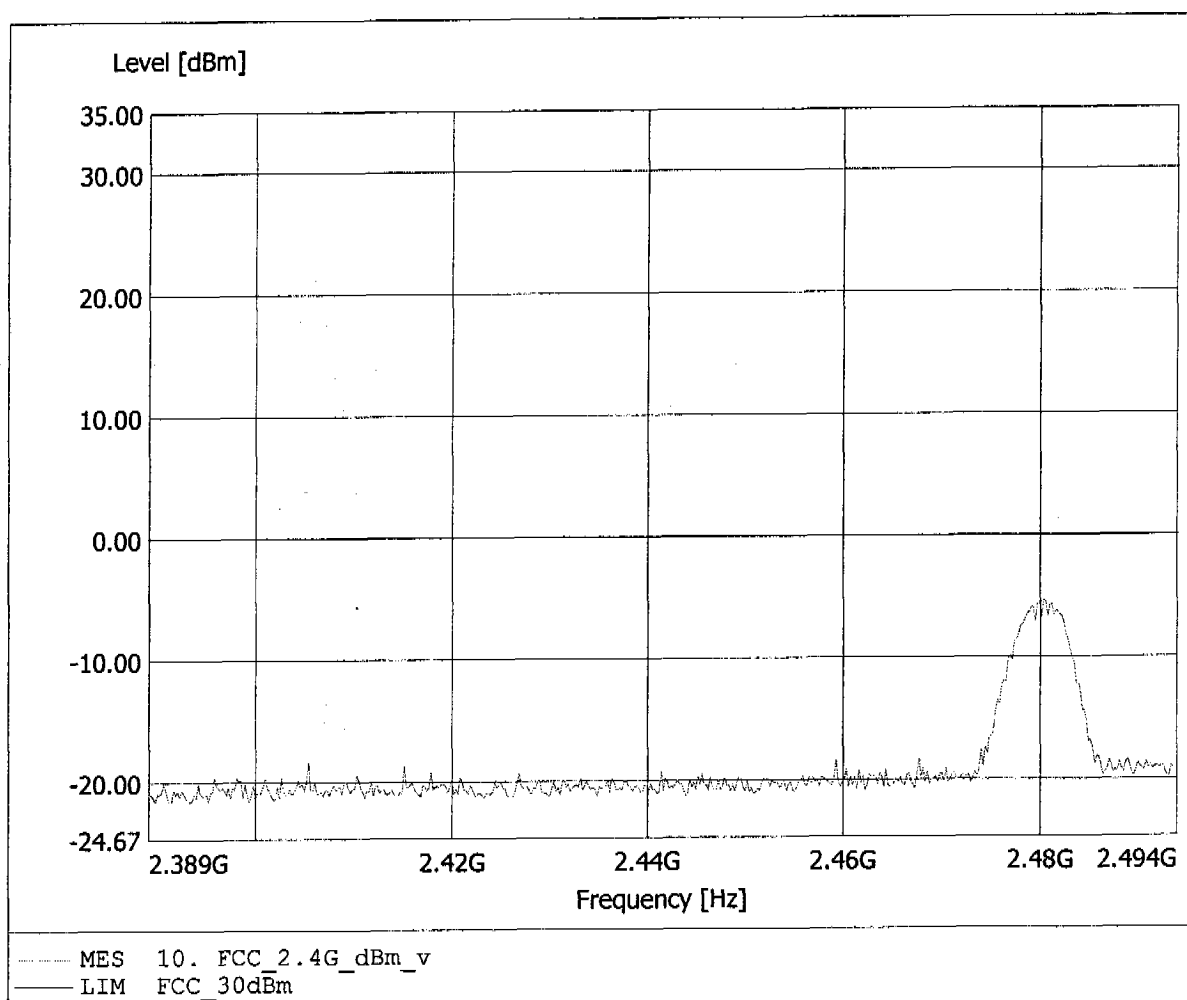

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom + 15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 1.01dBm, RBW: 5MHz

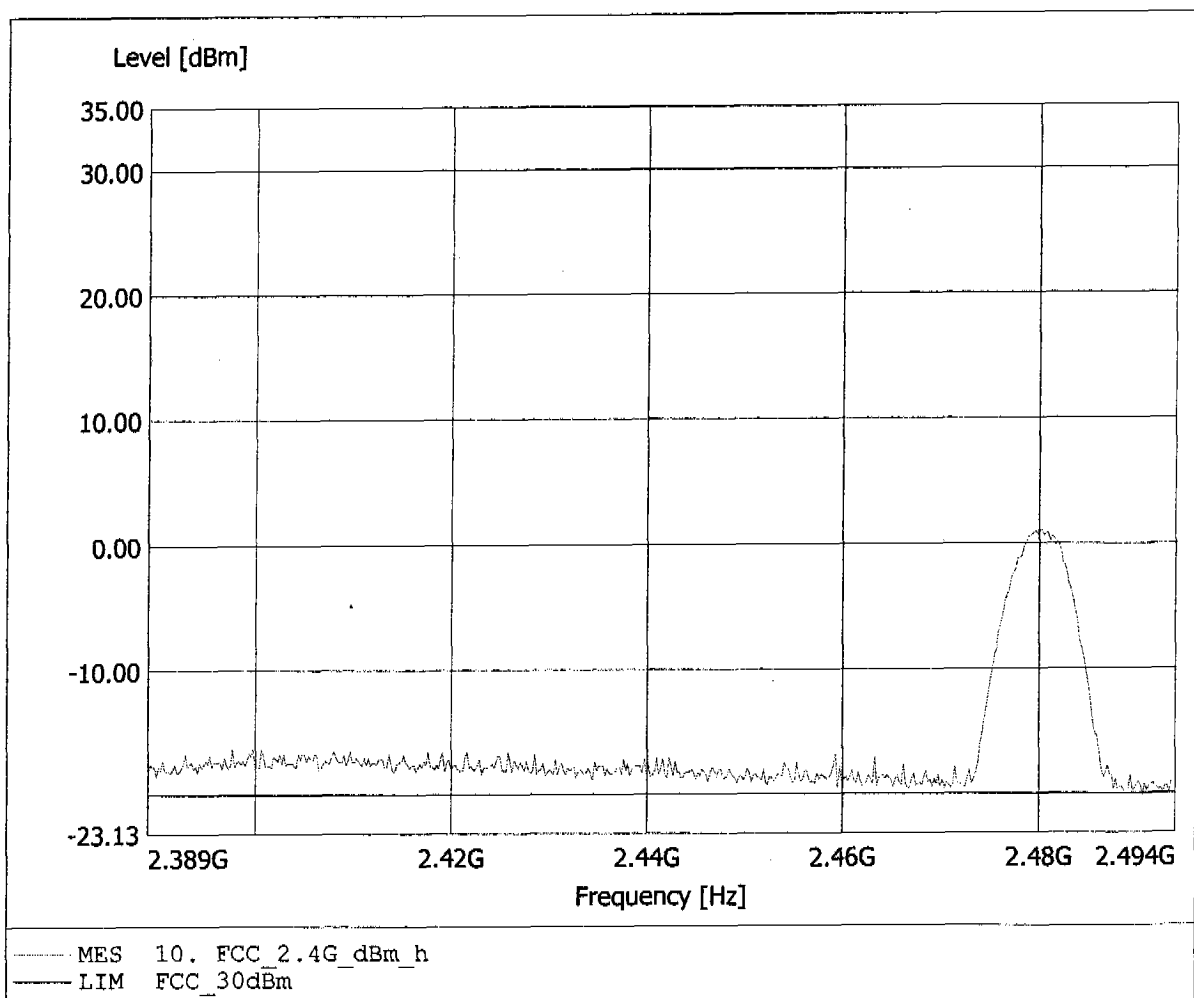


Appendix C

Spurious Emissions radiated - Transmitter operating


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.164MHz, Emax: 41.43dBµV/m, RBW: 100kHz

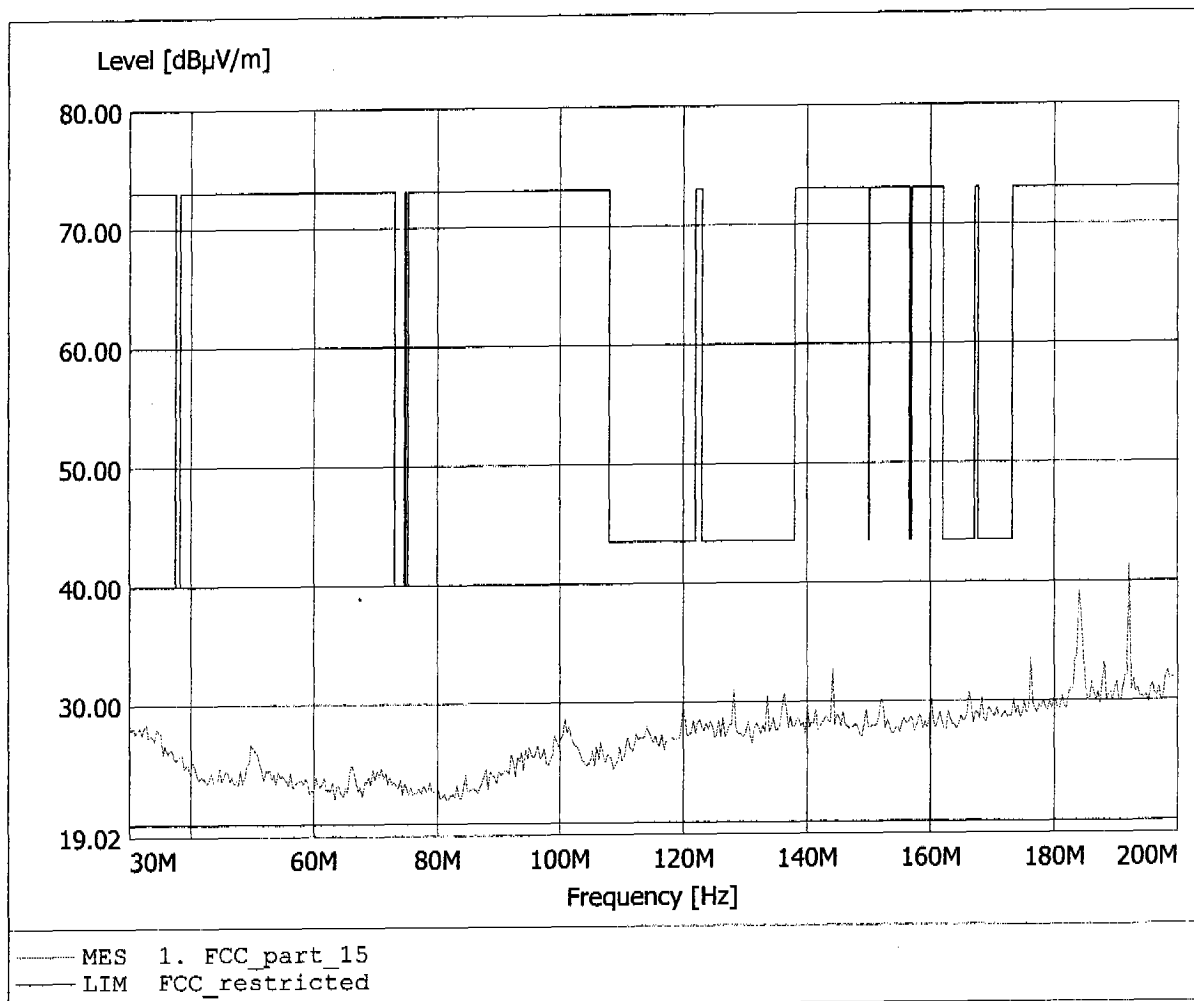


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.164MHz, Emax: 37.41dBµV/m, RBW: 100kHz

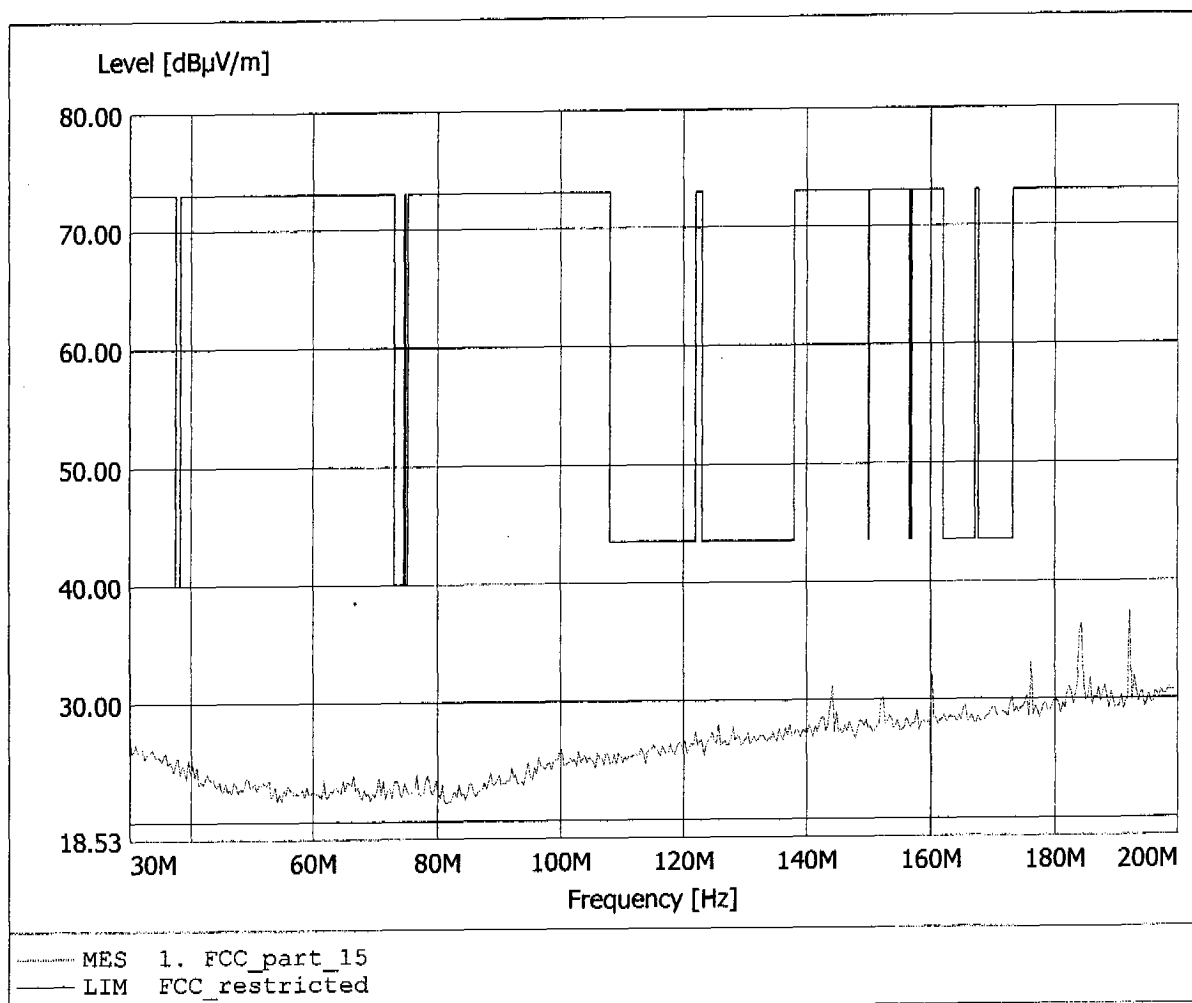


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 432.465MHz, Emax: 39.61dBµV/m, RBW: 100kHz

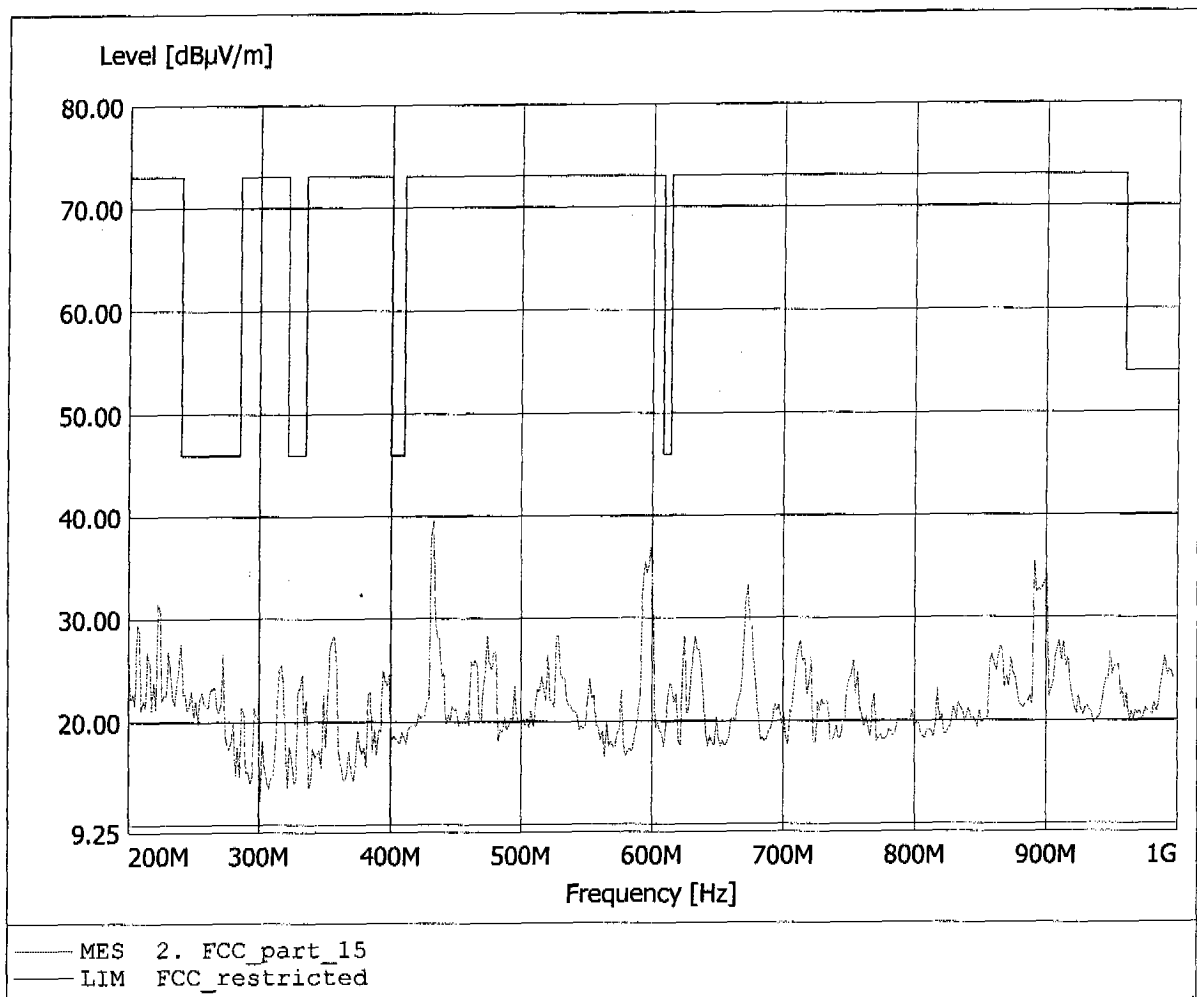


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 594.389MHz, Emax: 36.26dBµV/m, RBW: 100kHz

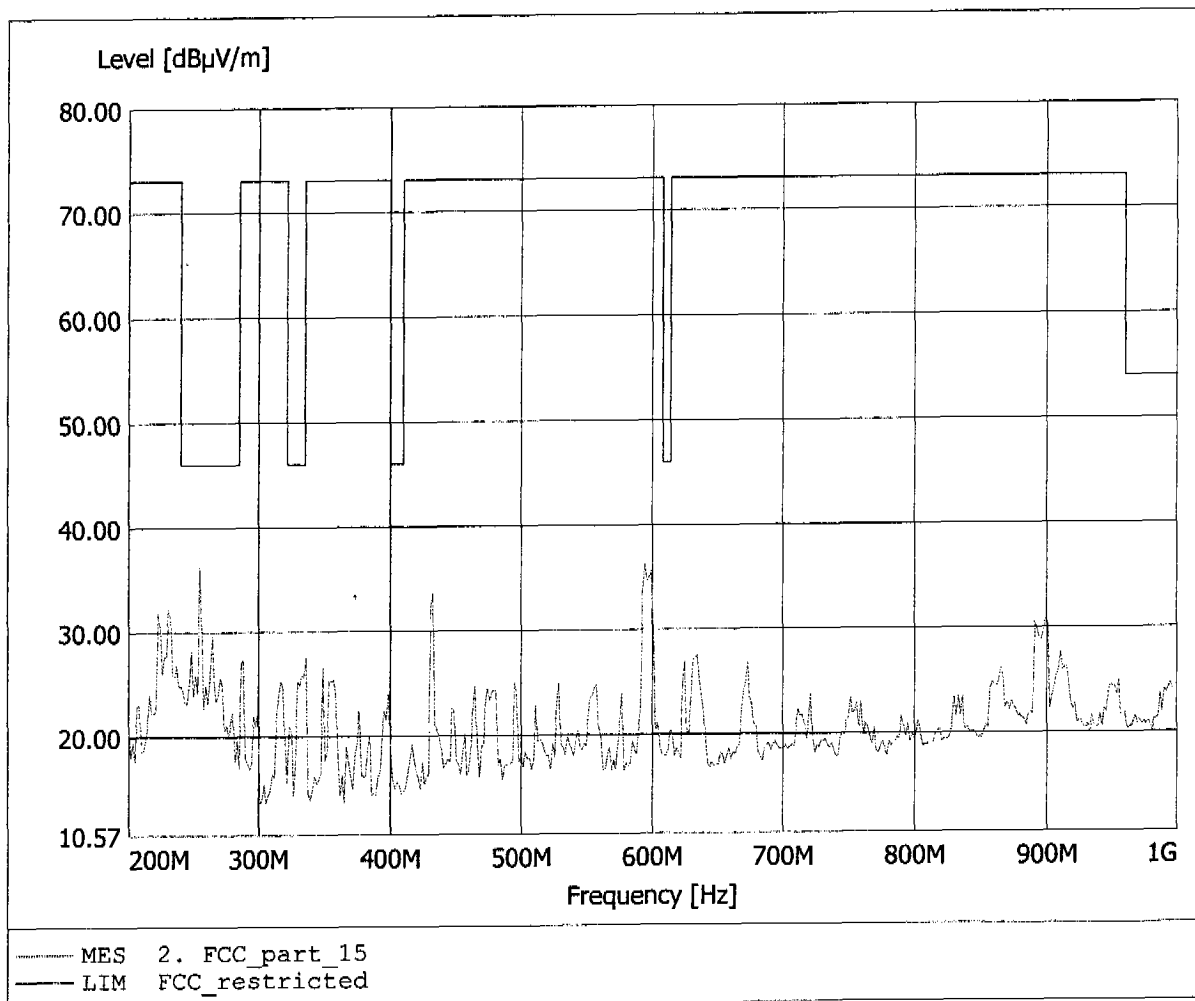


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.399GHz, Emax: 48.61dBμV/m, RBW: 1MHz

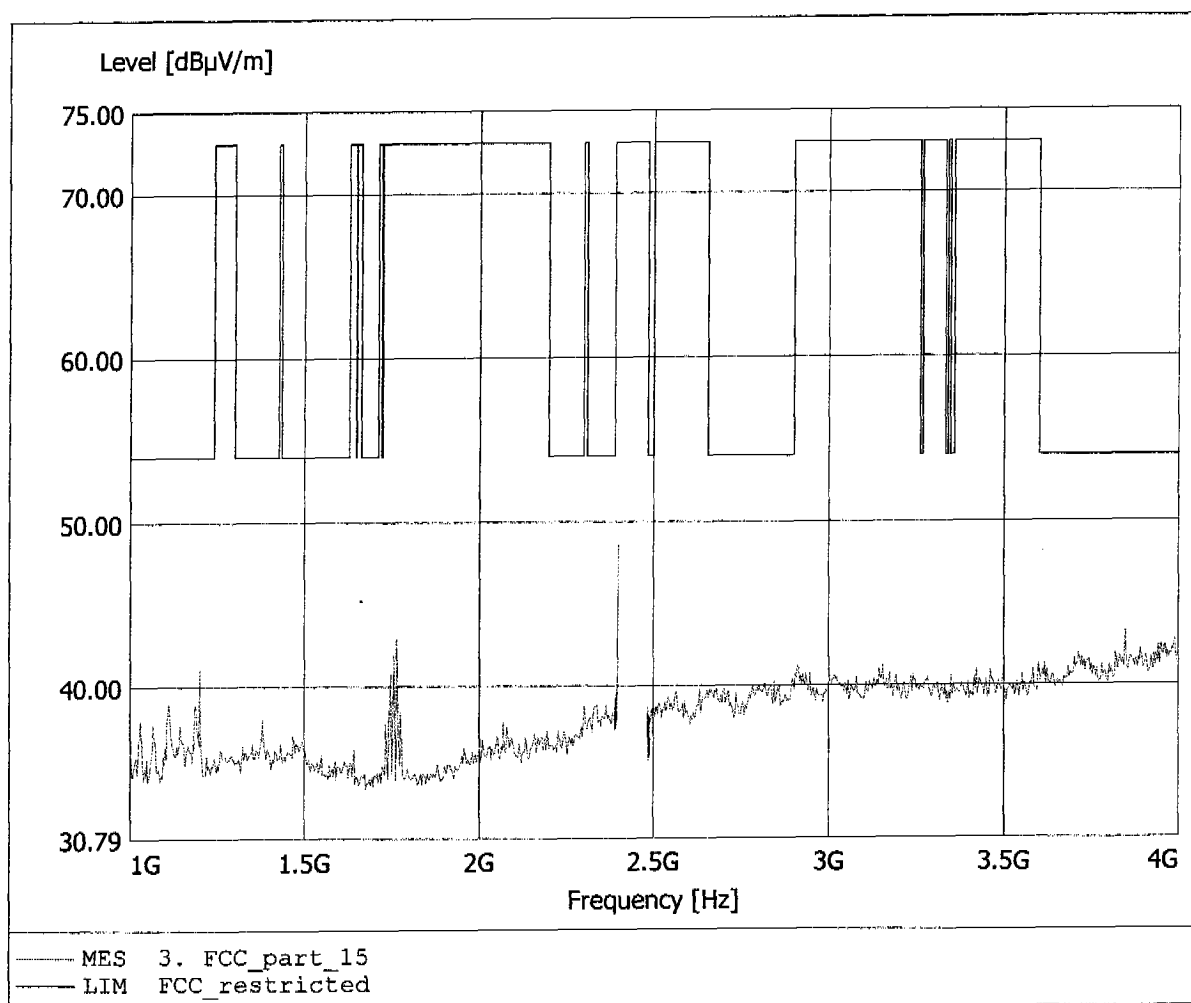


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom: 23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 56.32dBμV/m, RBW: 1MHz

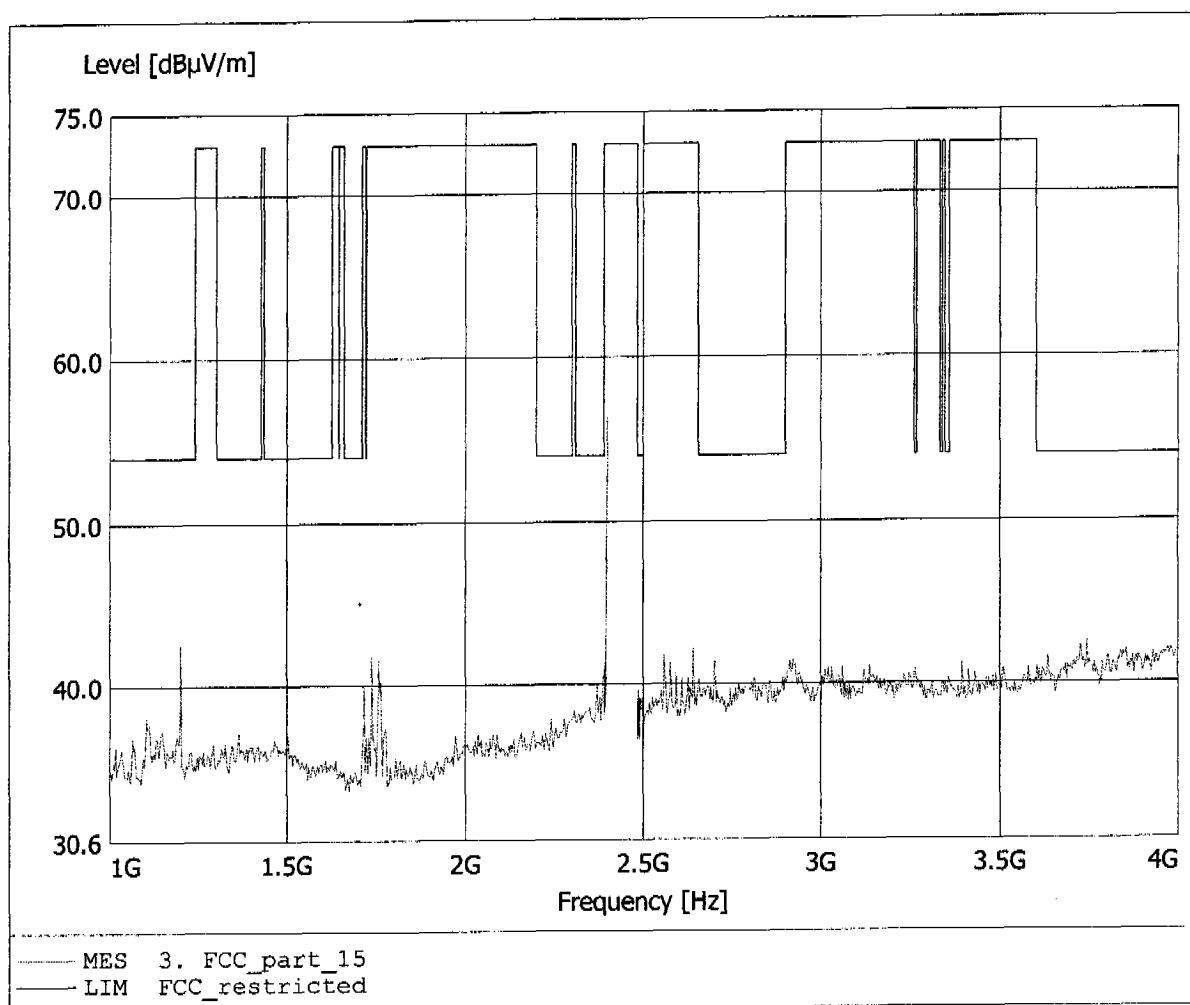


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom: 23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 56.32dBµV/m, RBW: 1MHz

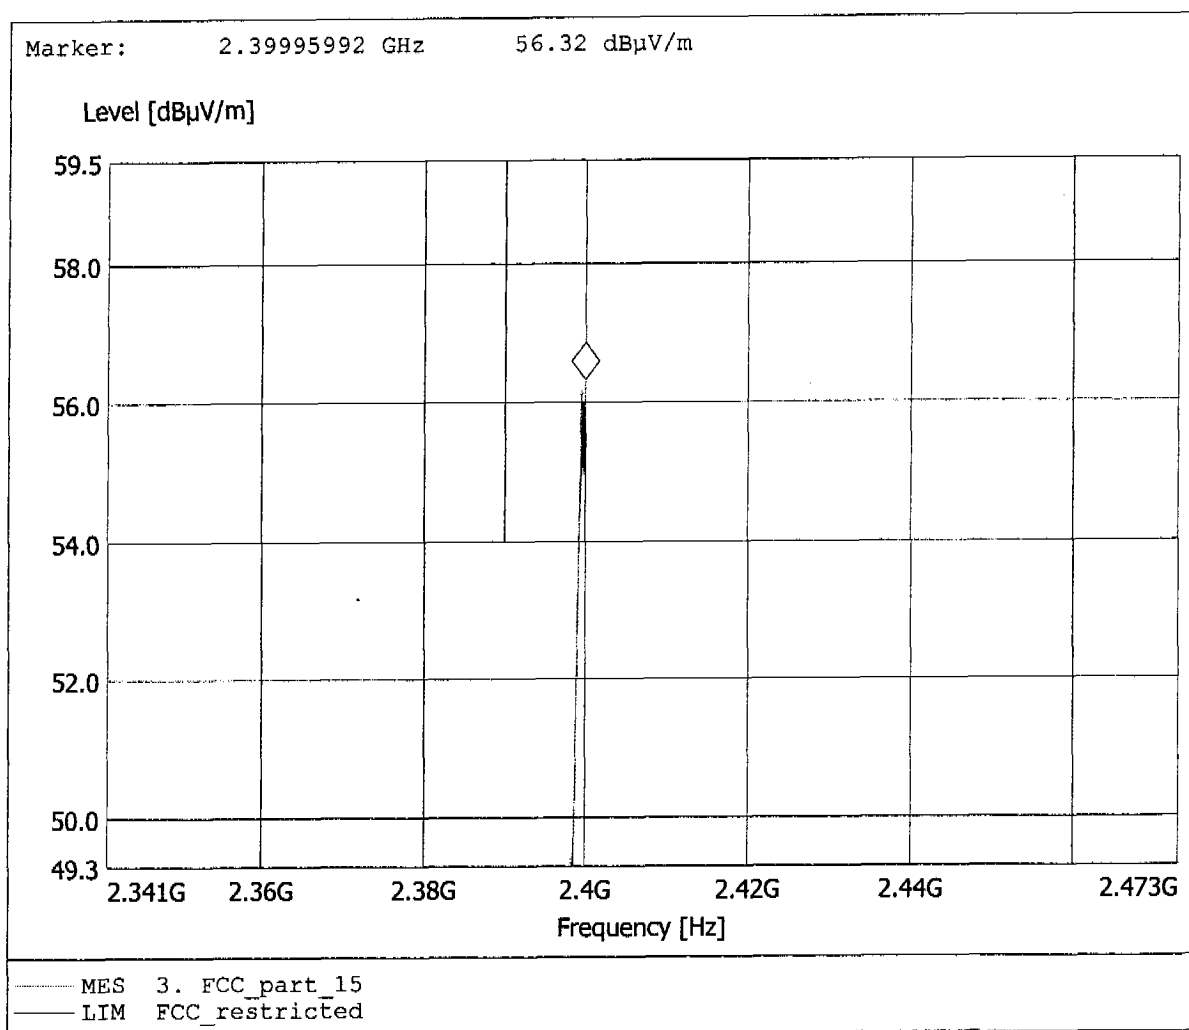


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom: 23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 6.894GHz, Emax: 36.08dBμV/m, RBW: 1MHz

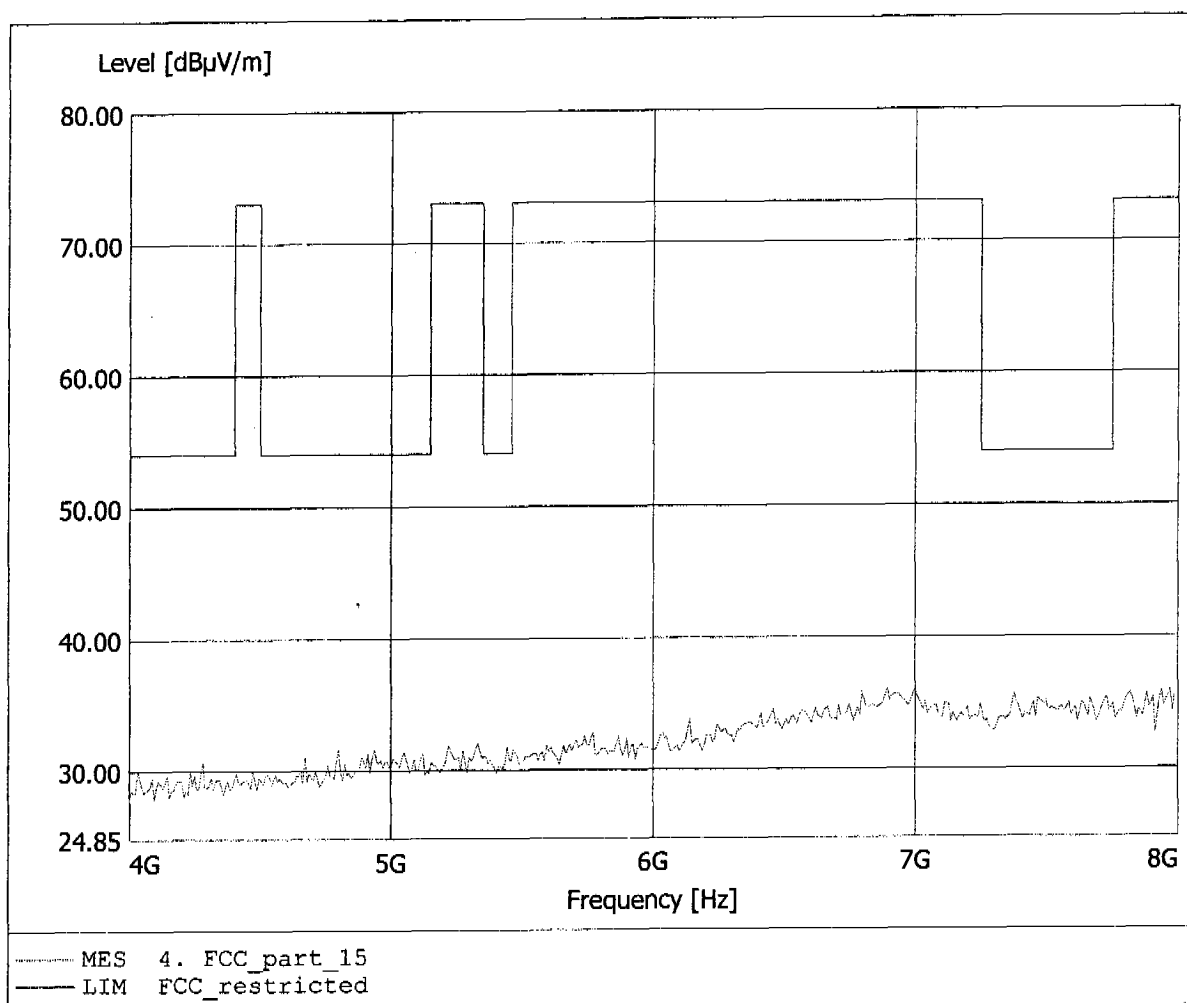


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 38.59dBµV/m, RBW: 1MHz

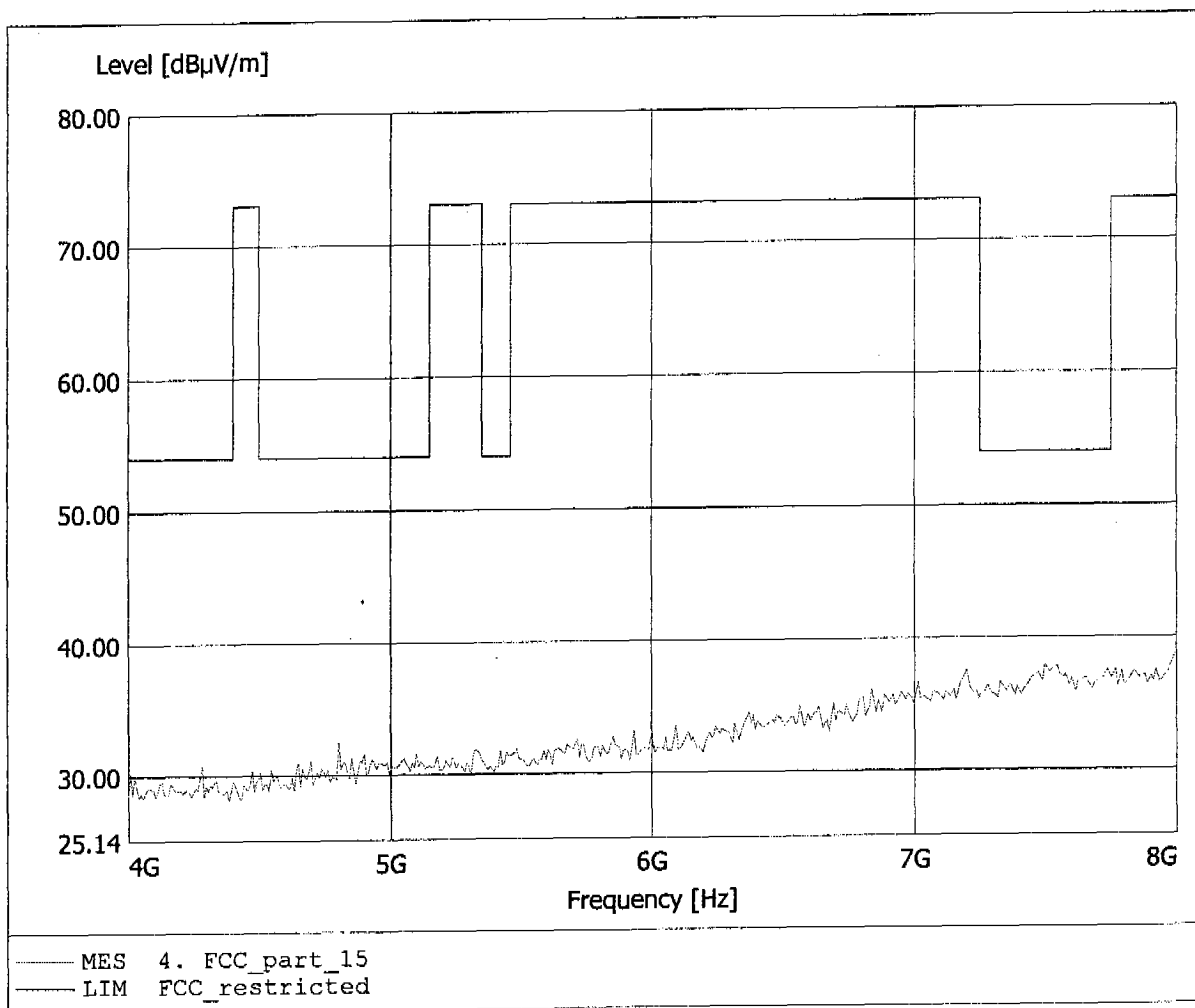


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
 Model: WF2003BT / Base
 Approval Holder: WORLD ELECTRON CO., LTD
 Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
 Comment 2: Freq: 11.246GHz, Emax: 41.97dBµV/m, RBW: 1MHz

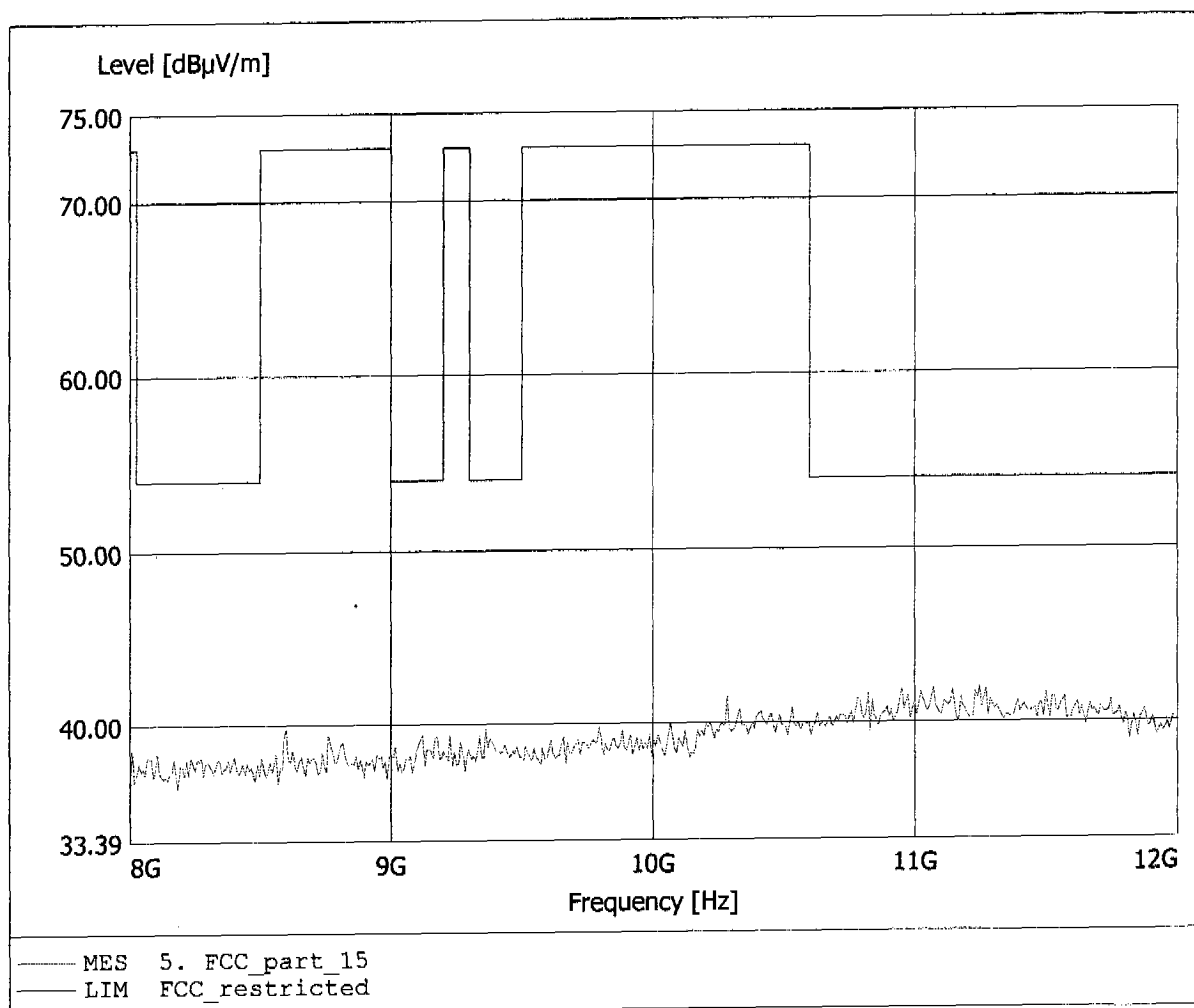


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.190GHz, Emax: 42.14dBµV/m, RBW: 1MHz

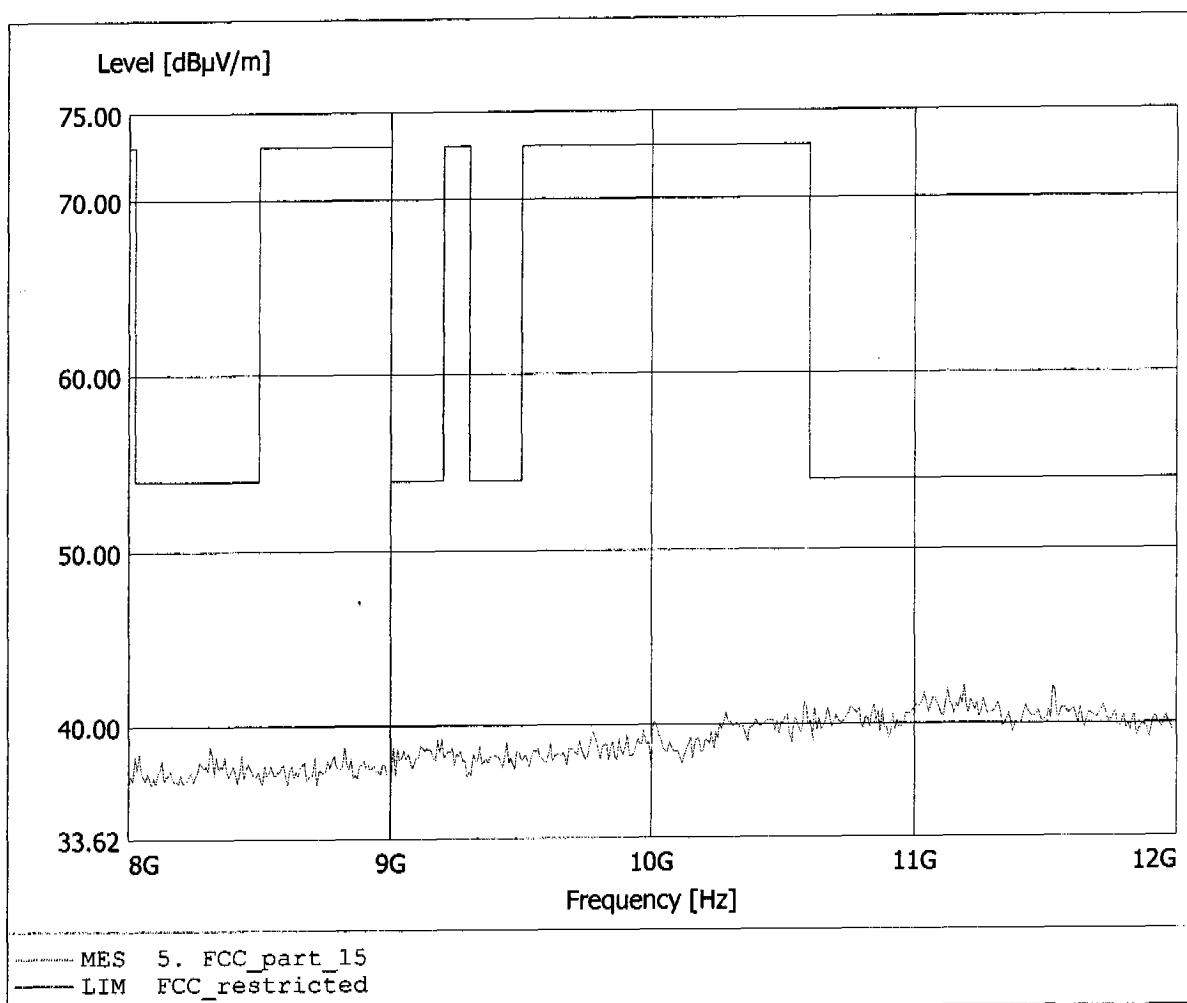


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.886GHz, Emax: 44.23dBµV/m, RBW: 1MHz

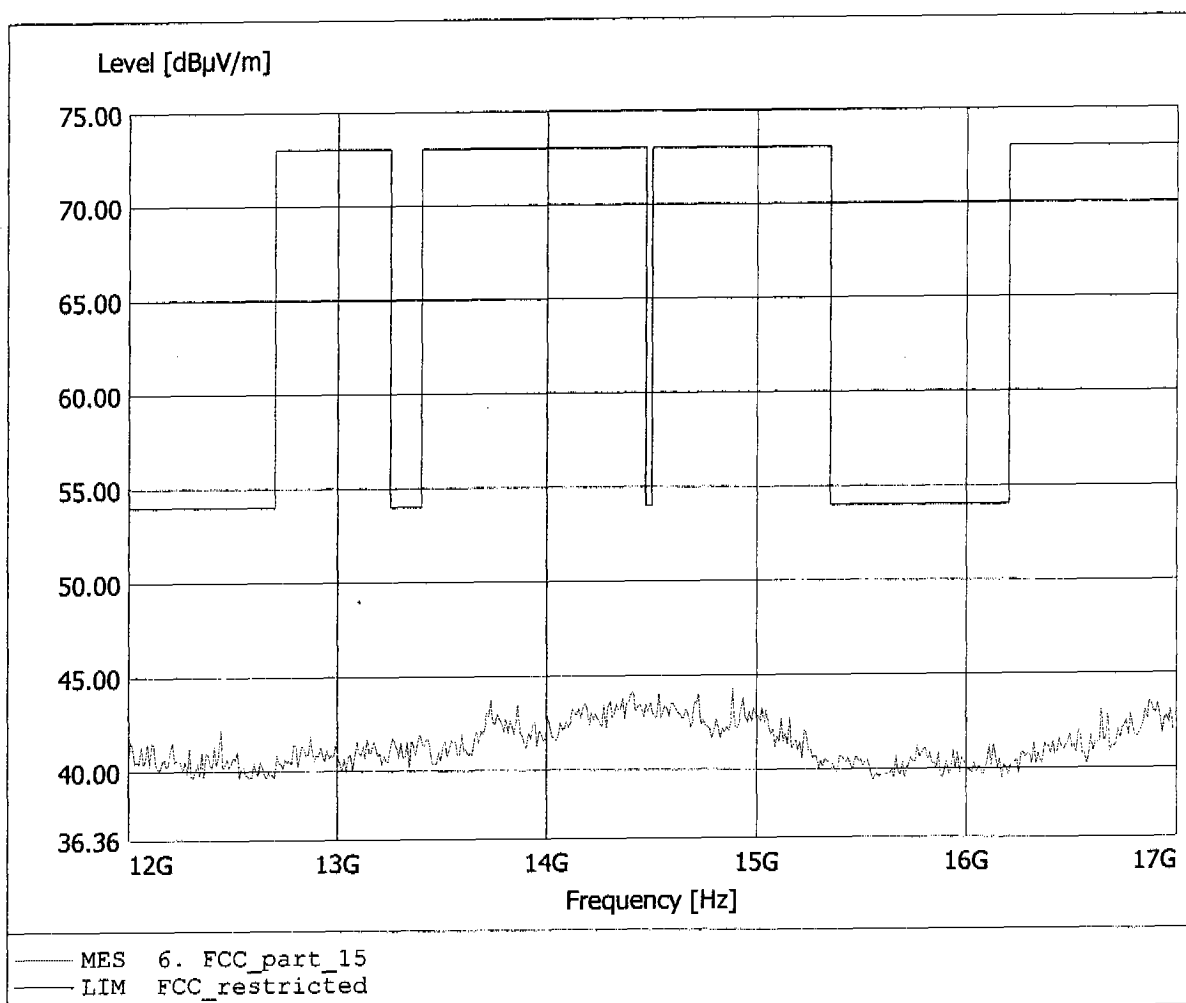


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 44.68dBμV/m, RBW: 1MHz

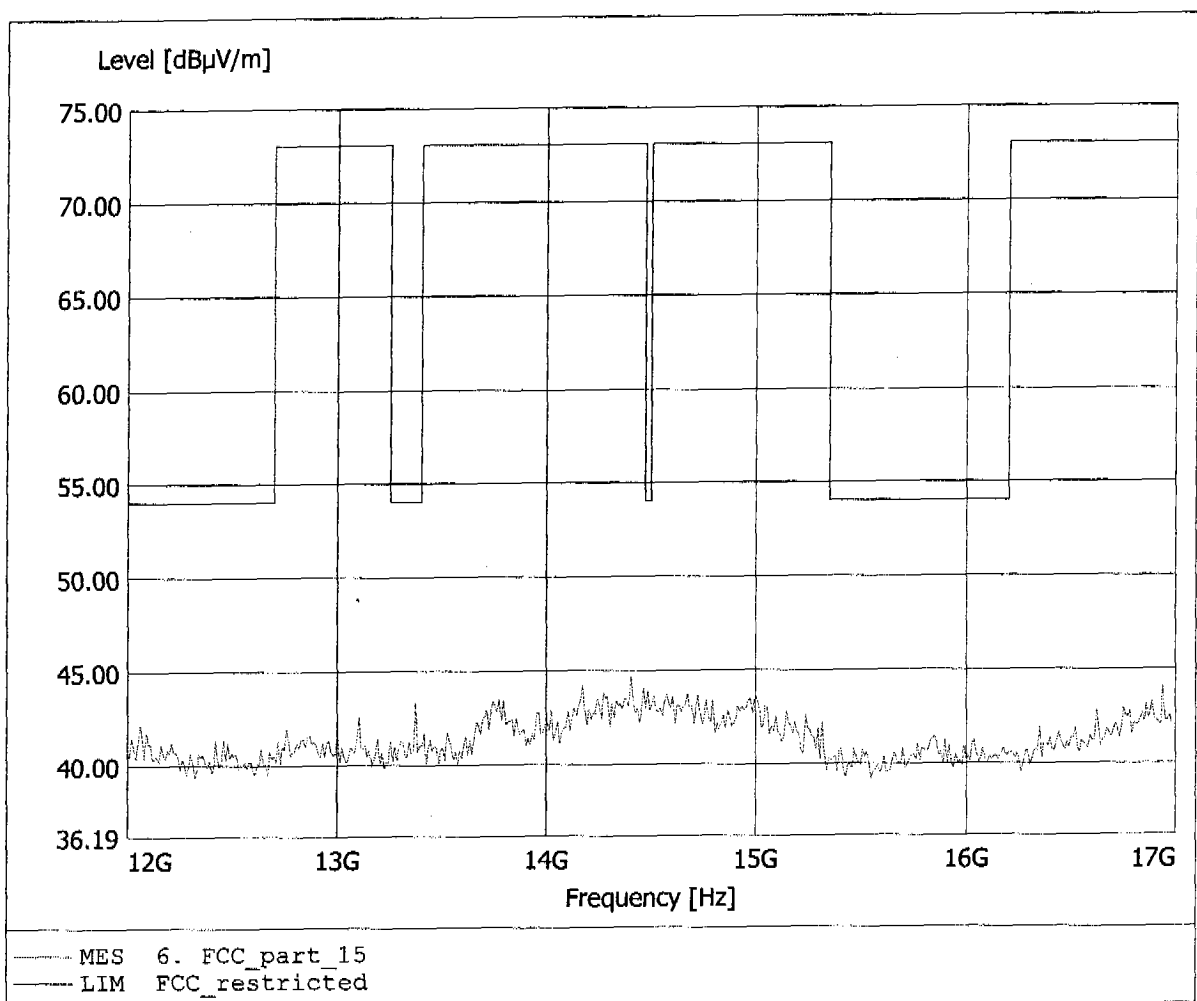


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom: 23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 45.97dBμV/m, RBW: 1MHz

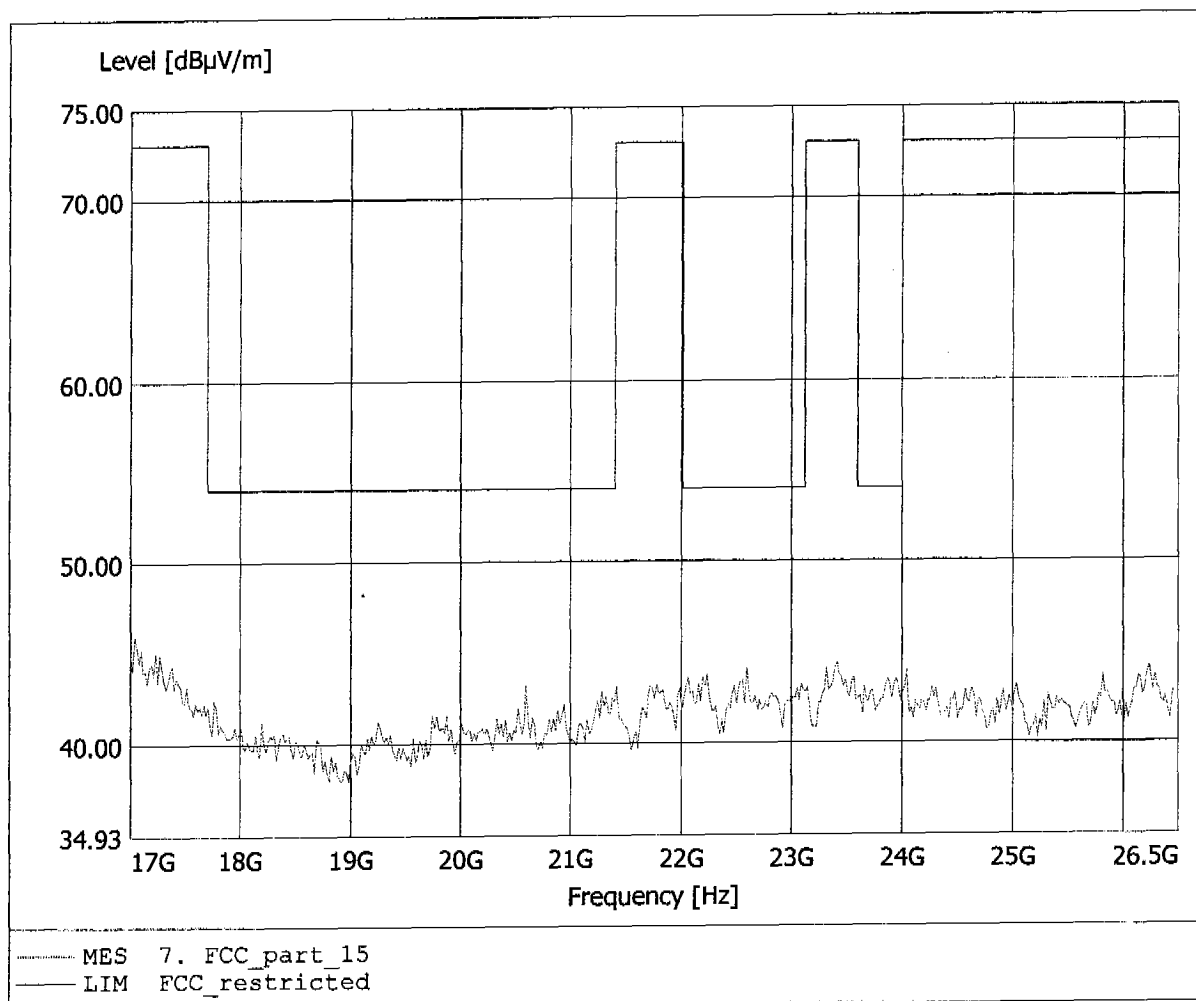


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2402 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.48dBμV/m, RBW: 1MHz

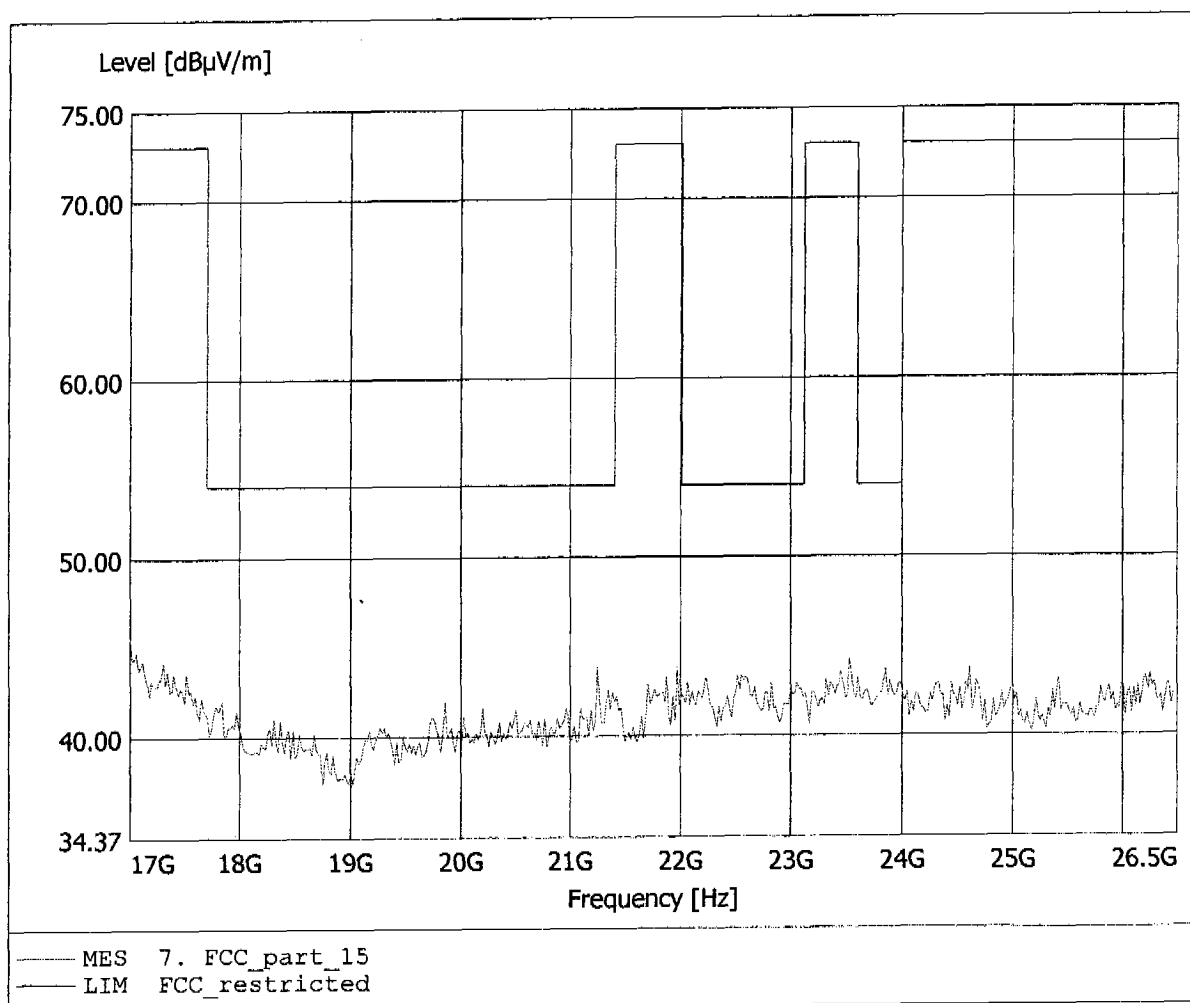


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.164MHz, Emax: 41.54dBµV/m, RBW: 100kHz

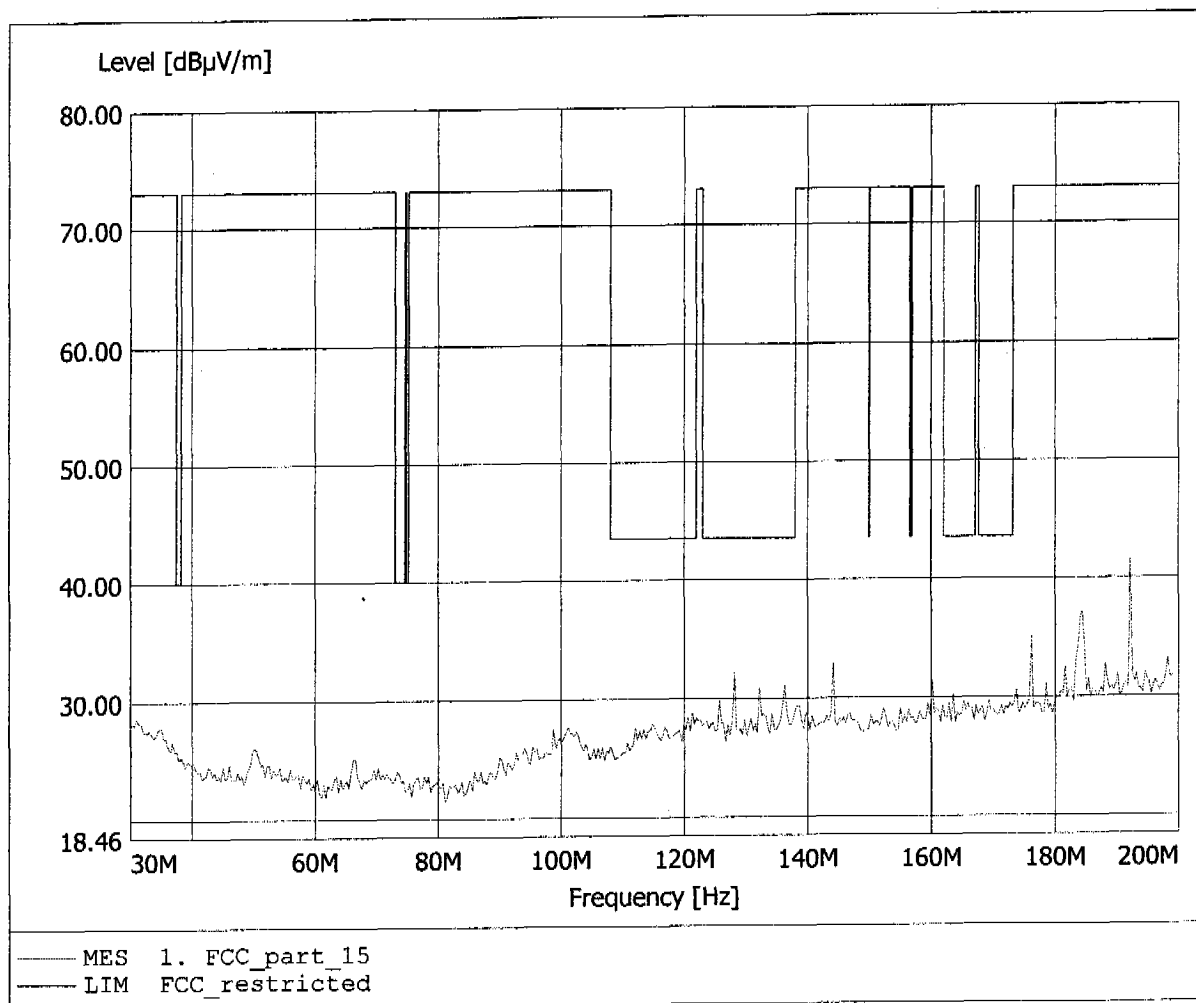


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 183.988MHz, Emax: 37.15dBµV/m, RBW: 100kHz

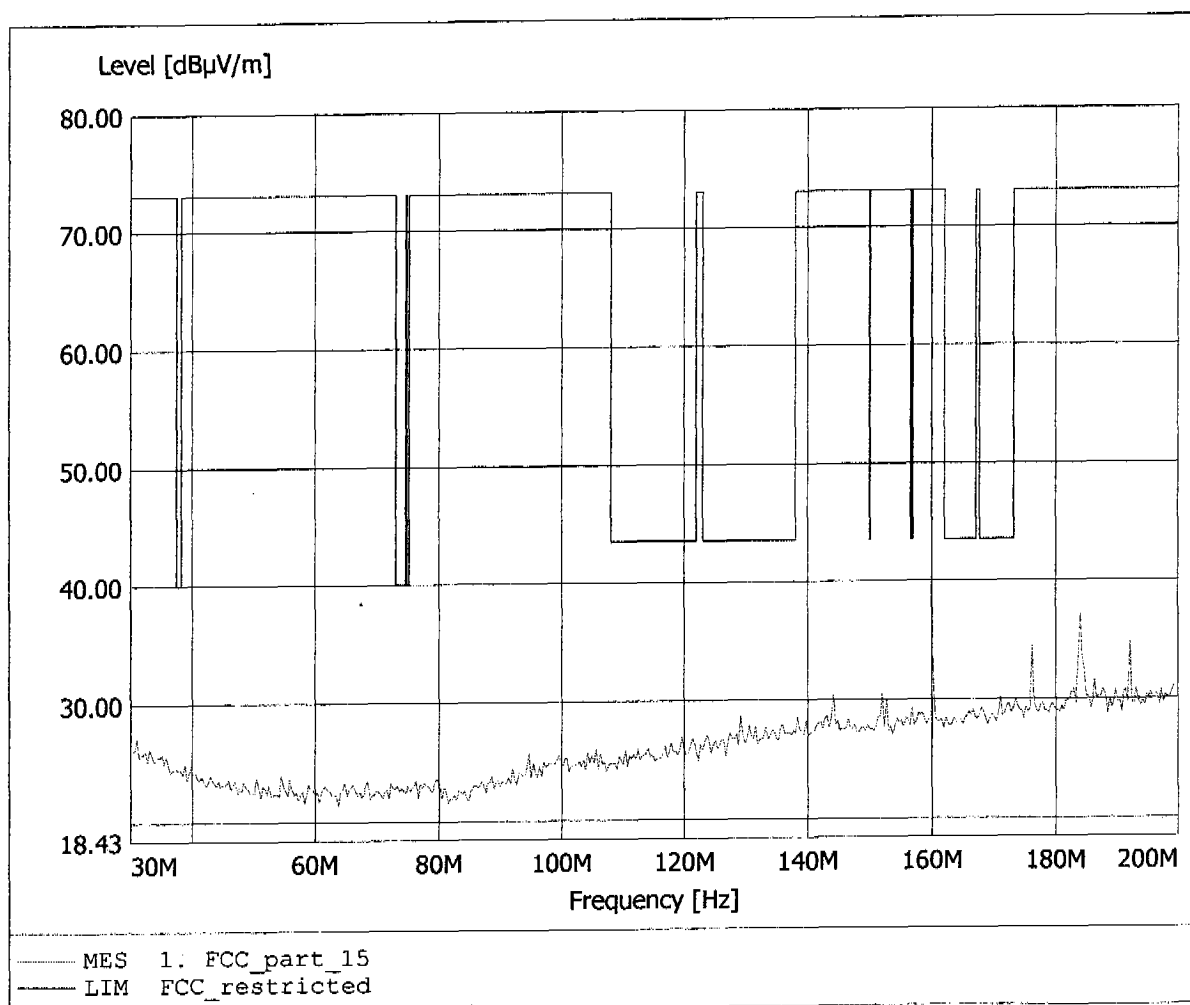


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 432.465MHz, Emax: 39.49dBµV/m, RBW: 100kHz

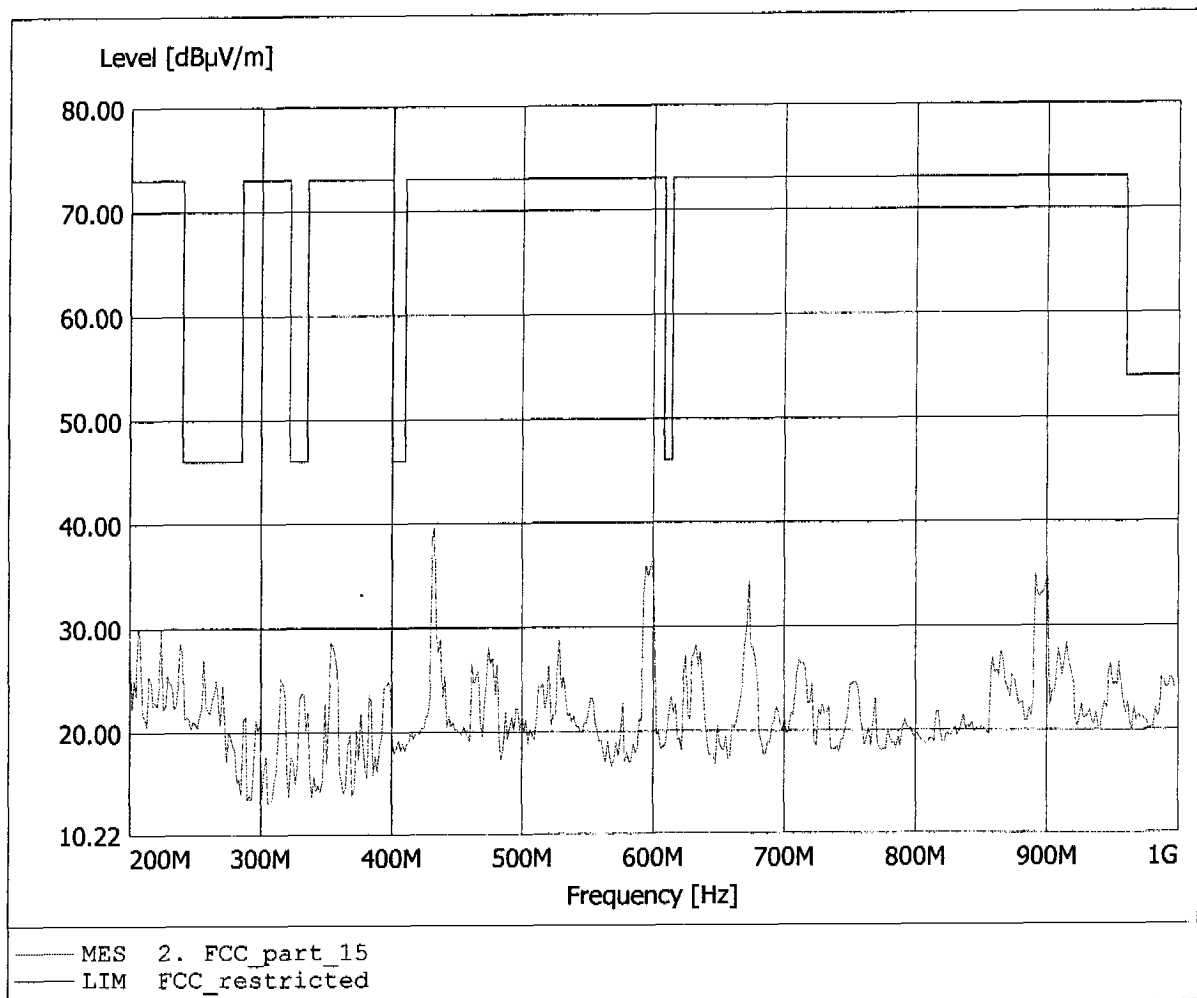


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 599.198MHz, Emax: 36.83dBµV/m, RBW: 100kHz

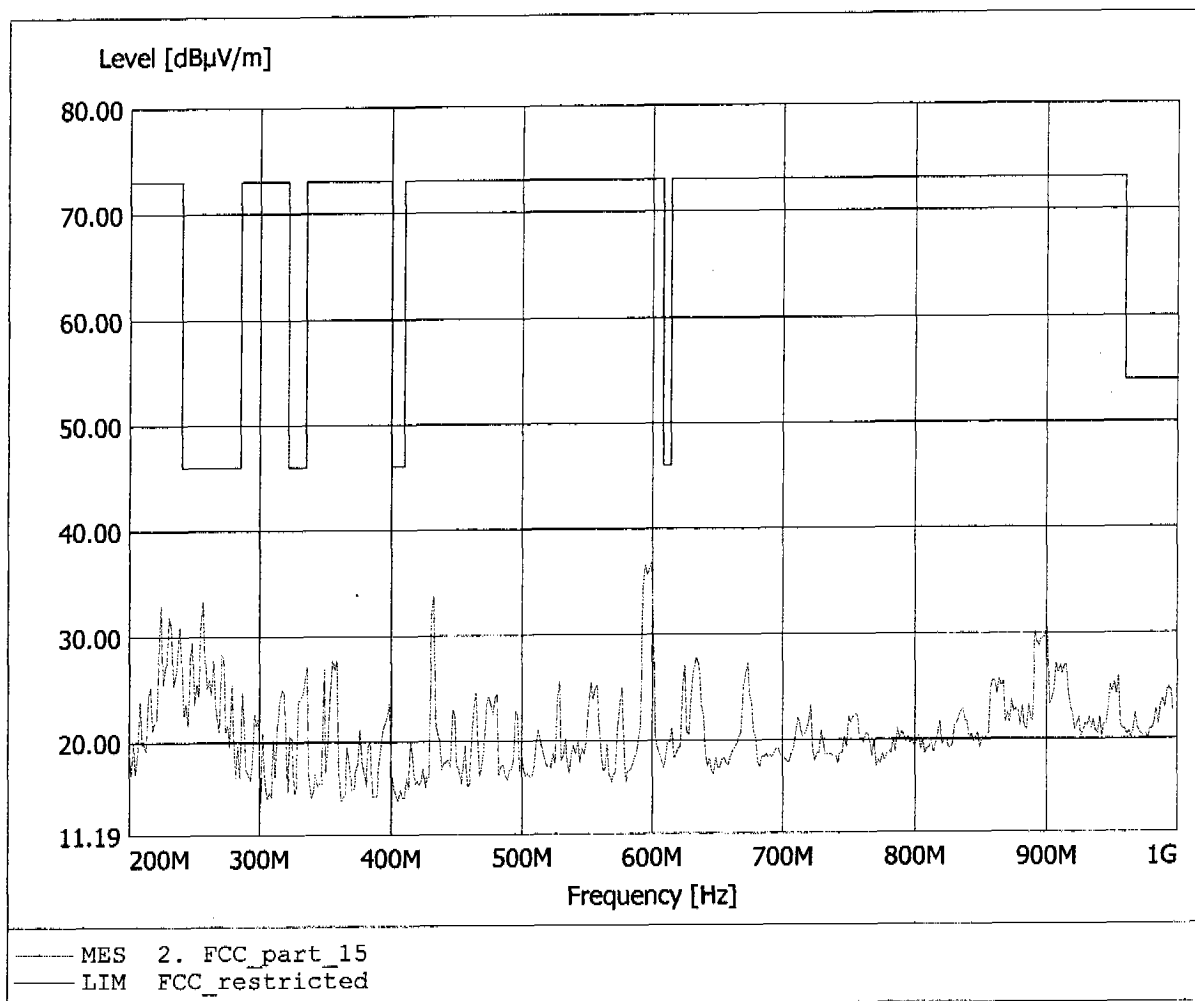


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 3.964GHz, Emax: 42.85dBμV/m, RBW: 1MHz

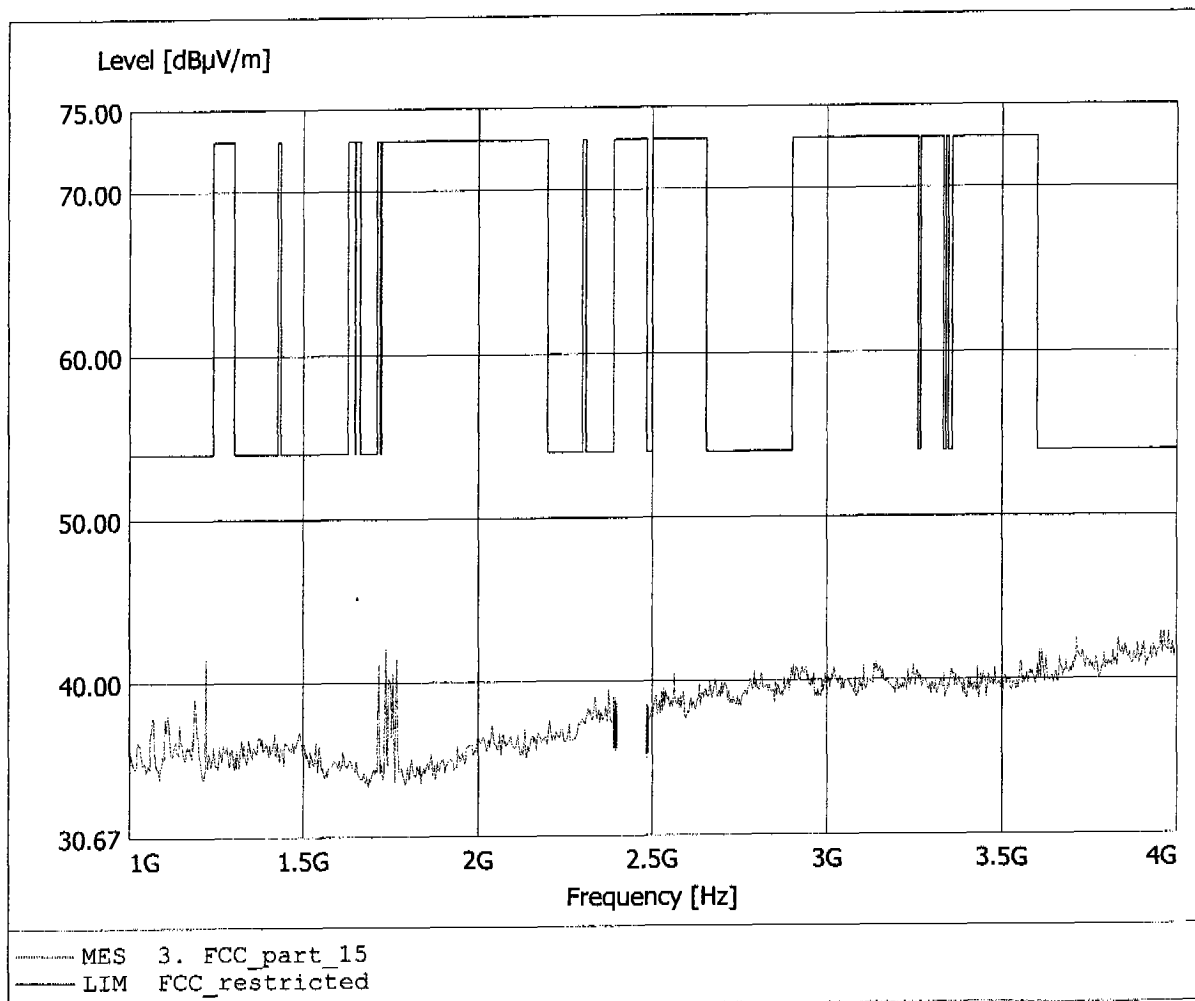


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 3.840GHz, Emax: 42.98dBµV/m, RBW: 1MHz

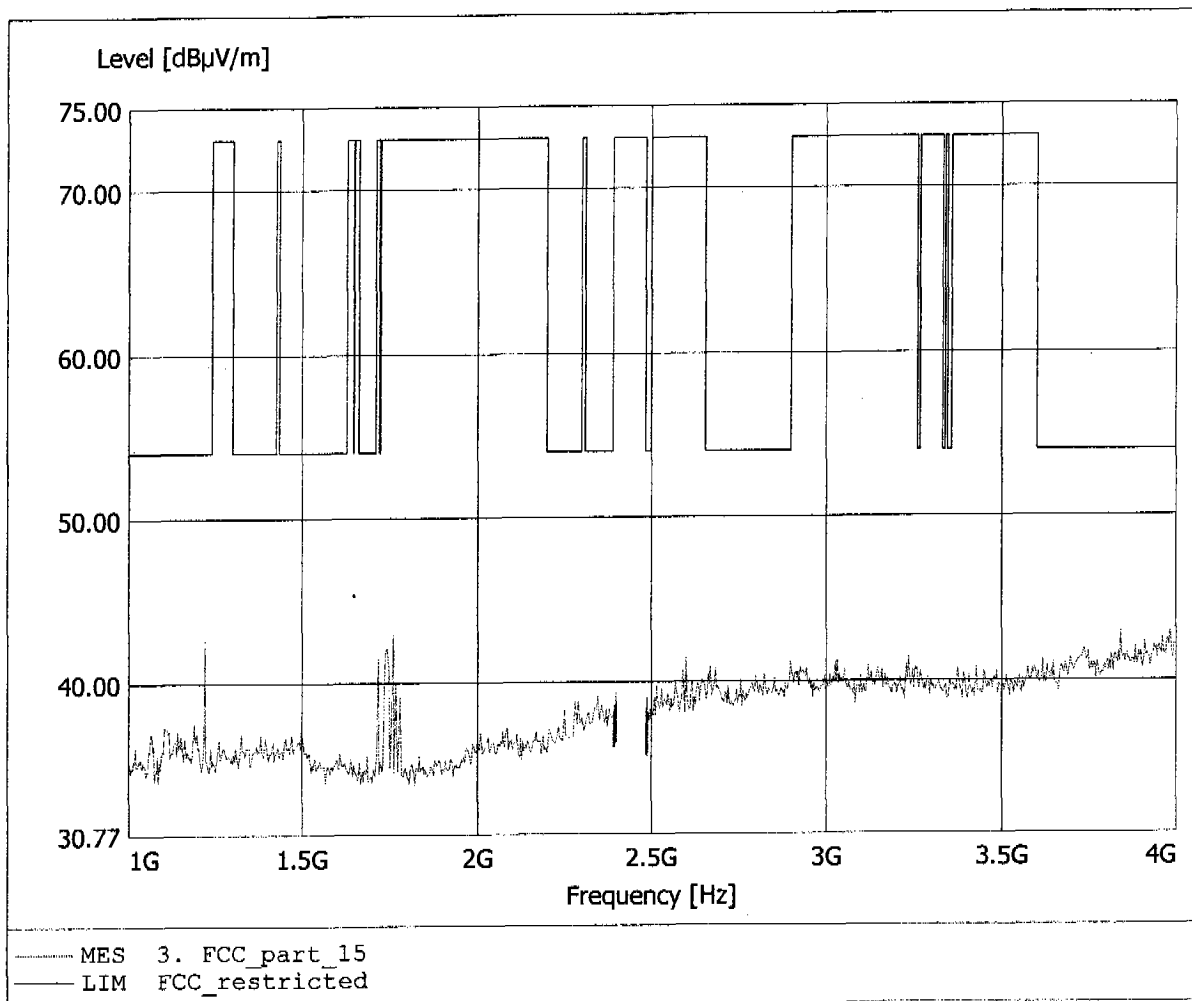


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.719GHz, Emax: 38.28dBμV/m, RBW: 1MHz

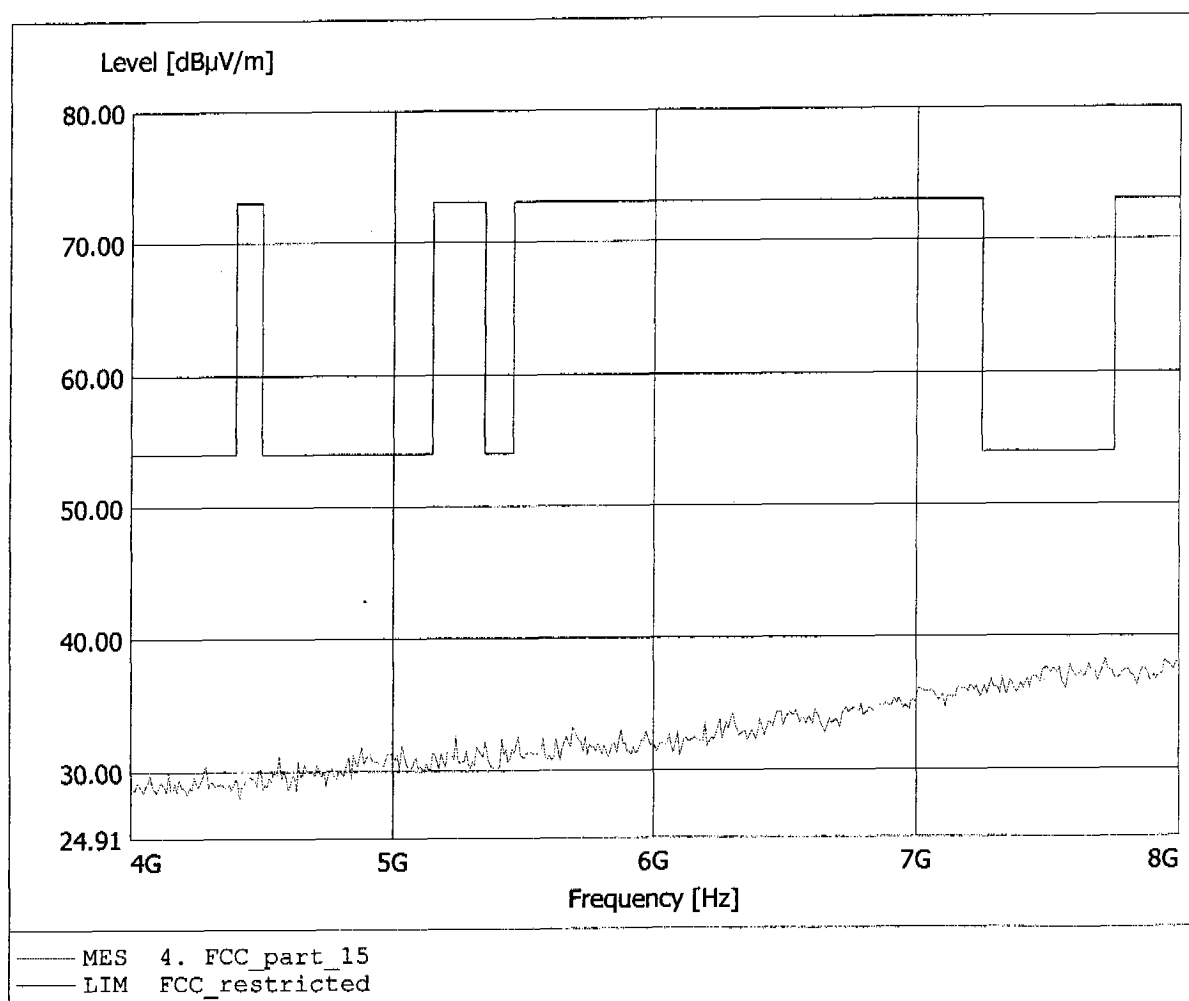


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 38.30dBµV/m, RBW: 1MHz

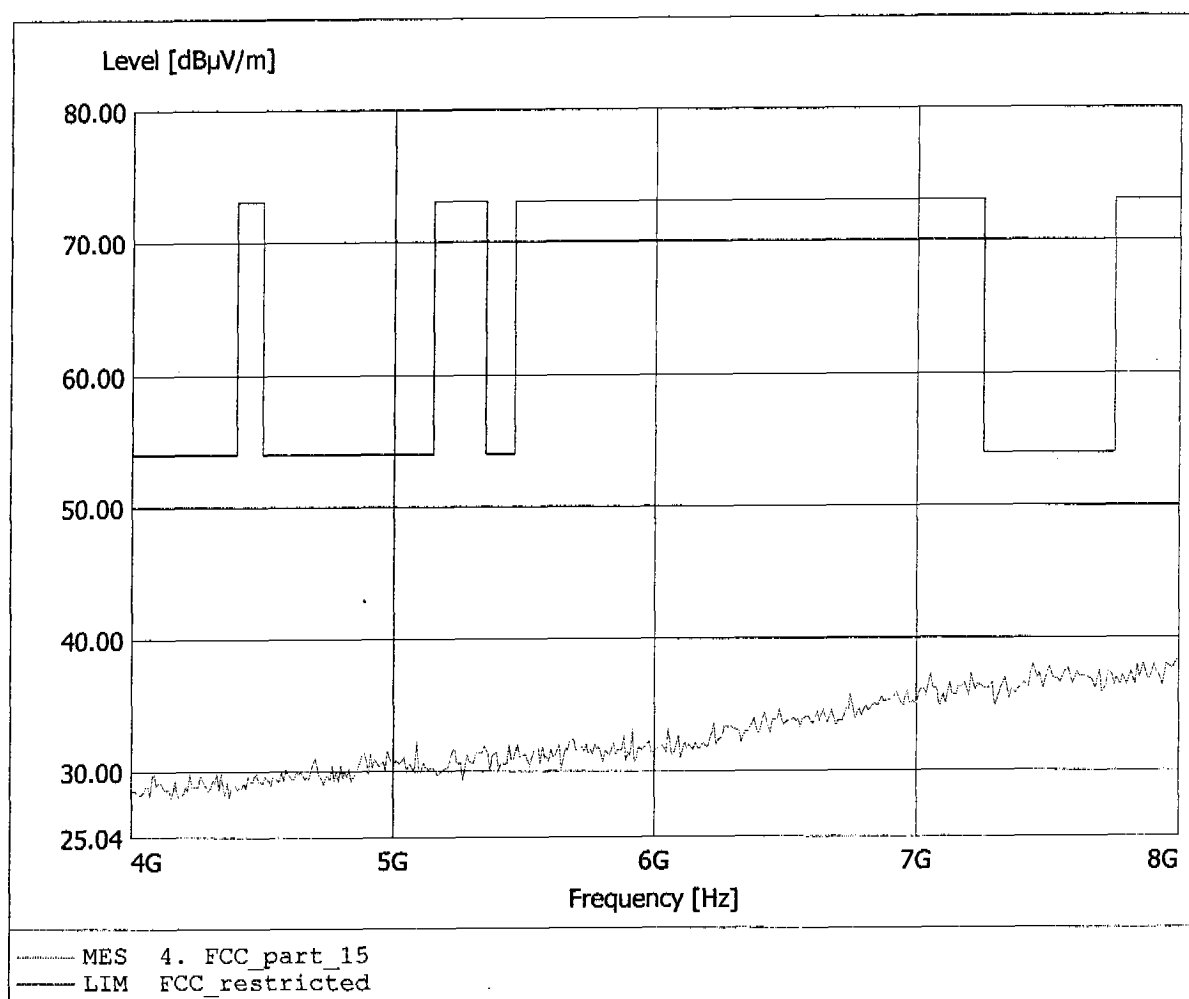


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.567GHz, Emax: 41.96dBμV/m, RBW: 1MHz

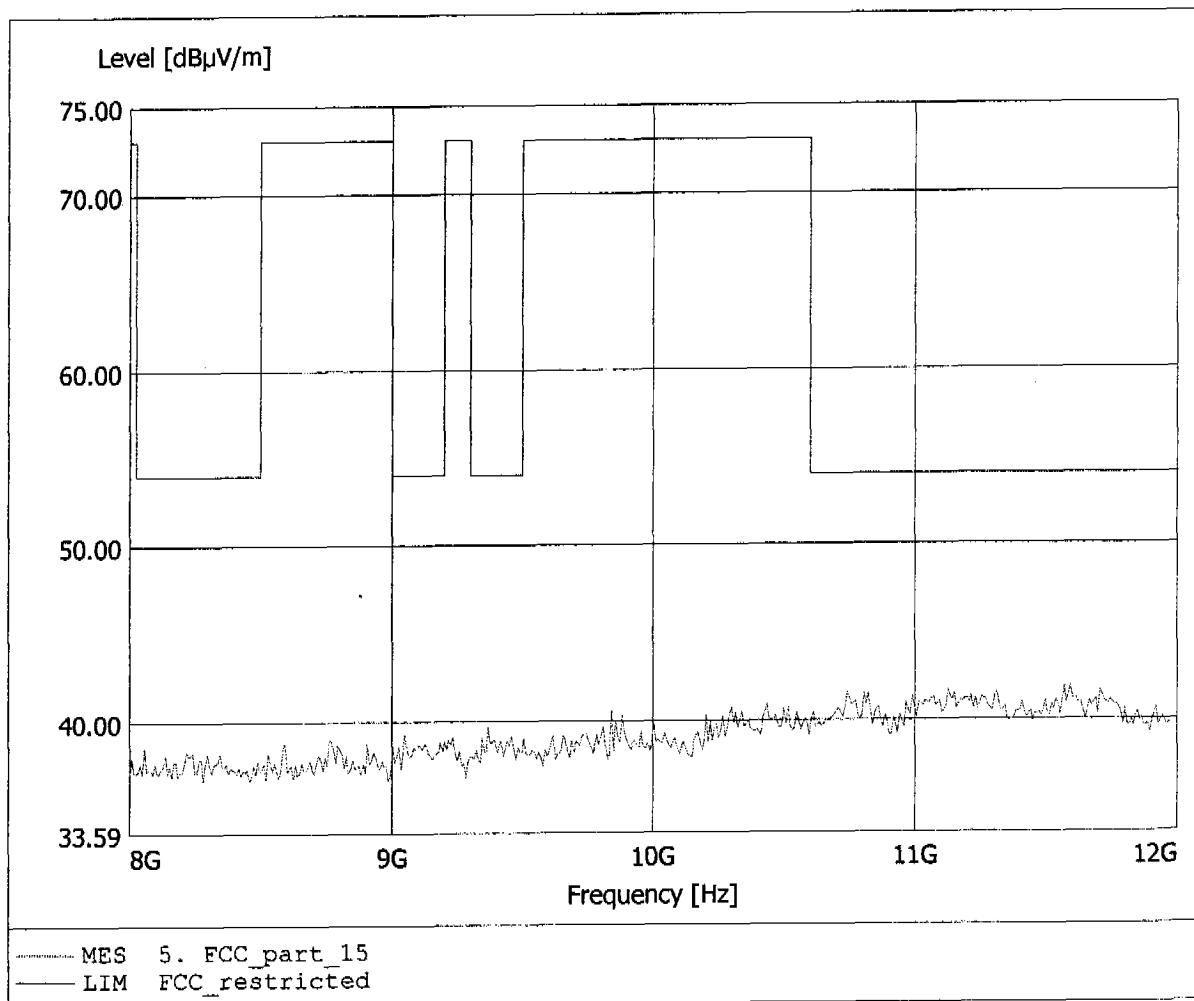


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.126GHz, Emax: 42.38dBμV/m, RBW: 1MHz

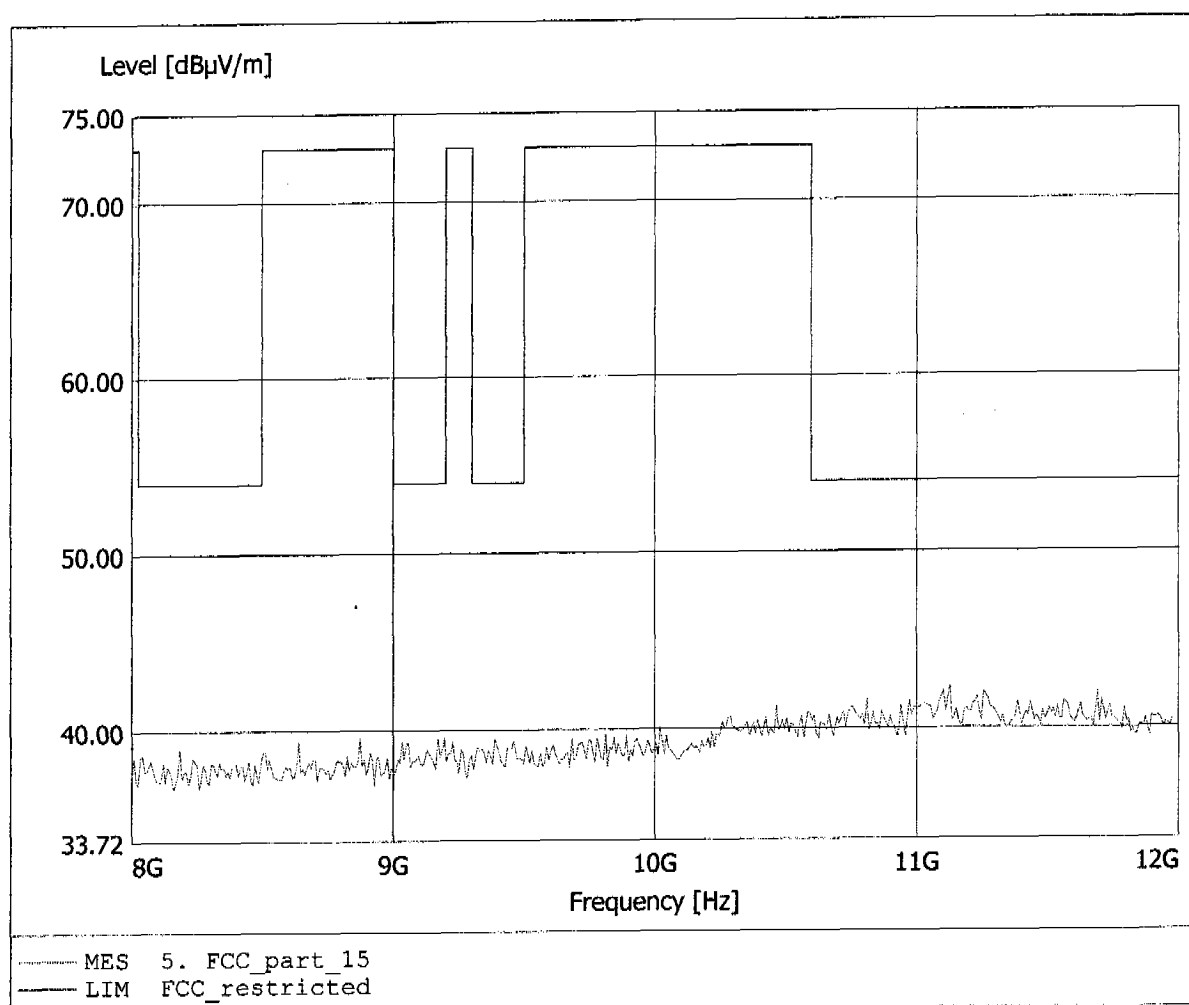


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.916GHz, Emax: 44.77dBµV/m, RBW: 1MHz

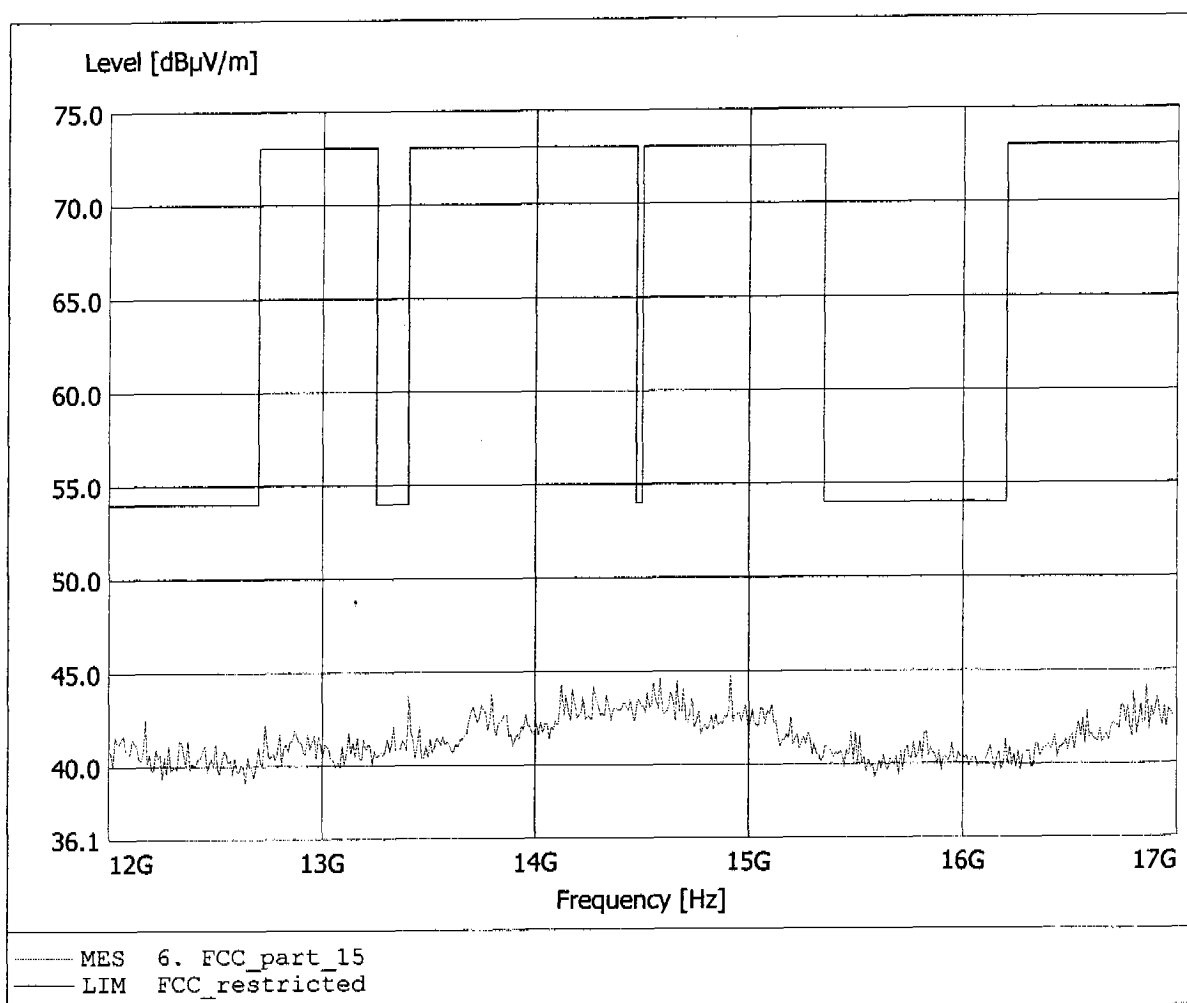


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.435GHz, Emax: 44.53dBµV/m, RBW: 1MHz

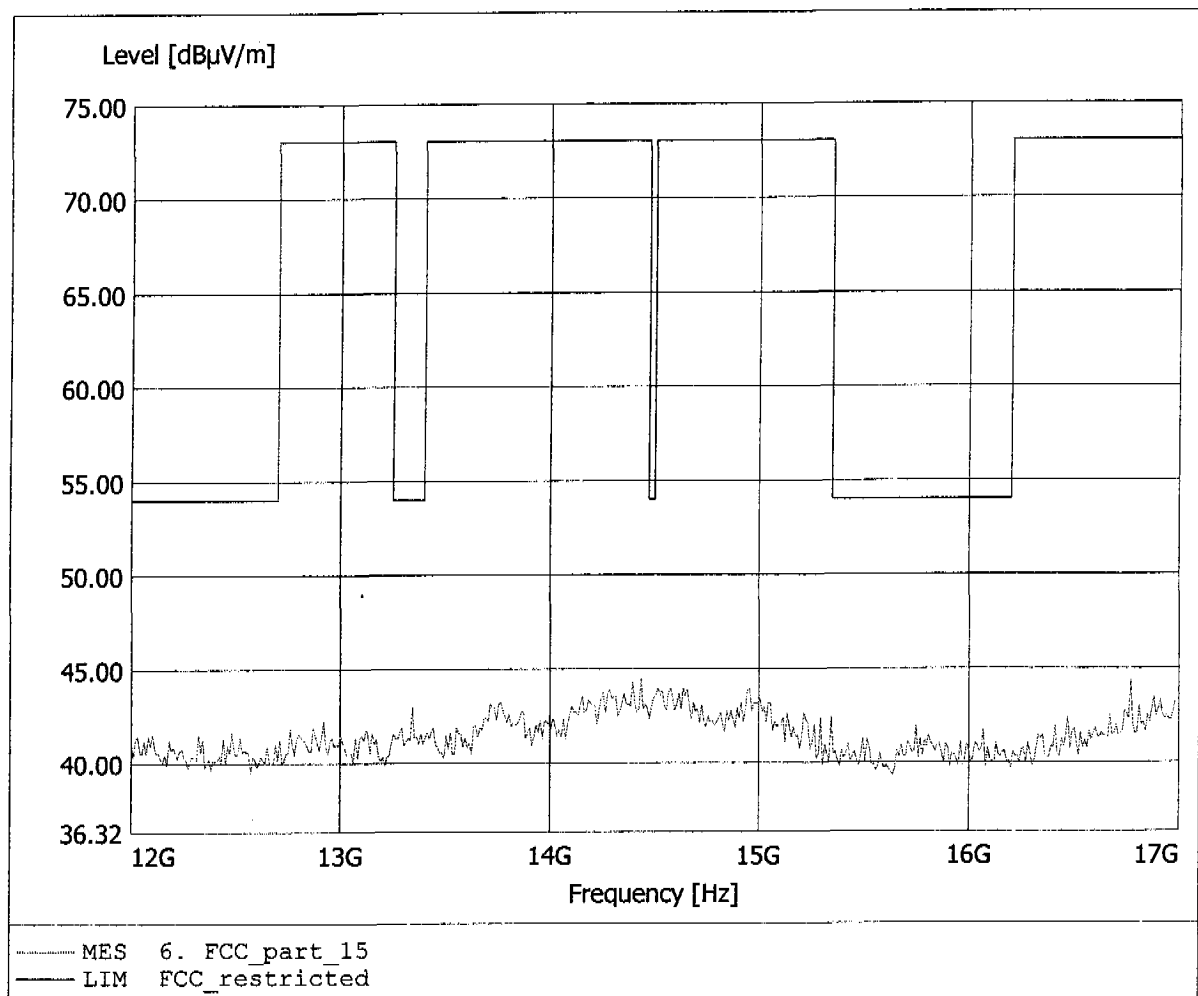


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 45.15dBµV/m, RBW: 1MHz

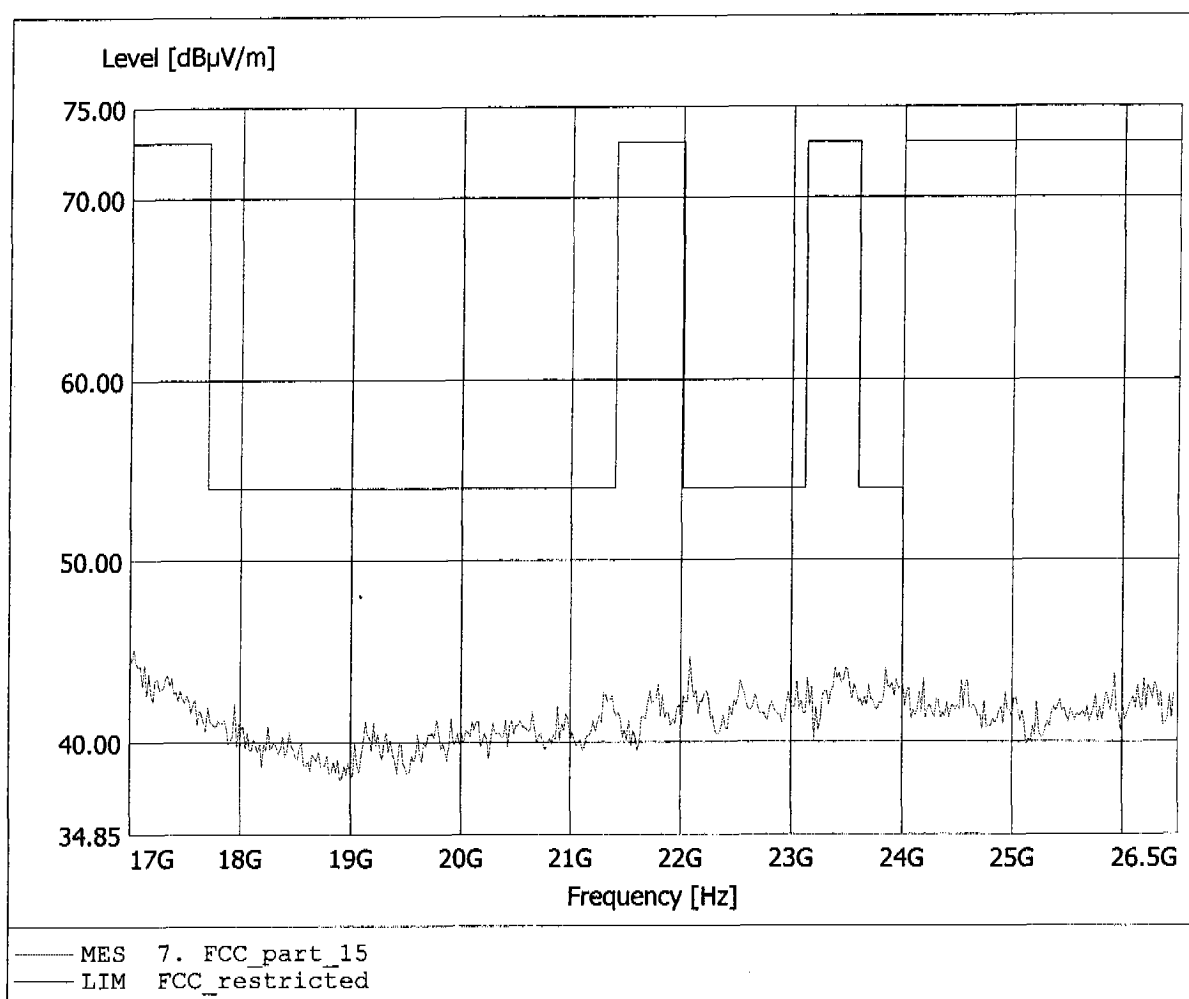


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2441 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 45.37dBµV/m, RBW: 1MHz

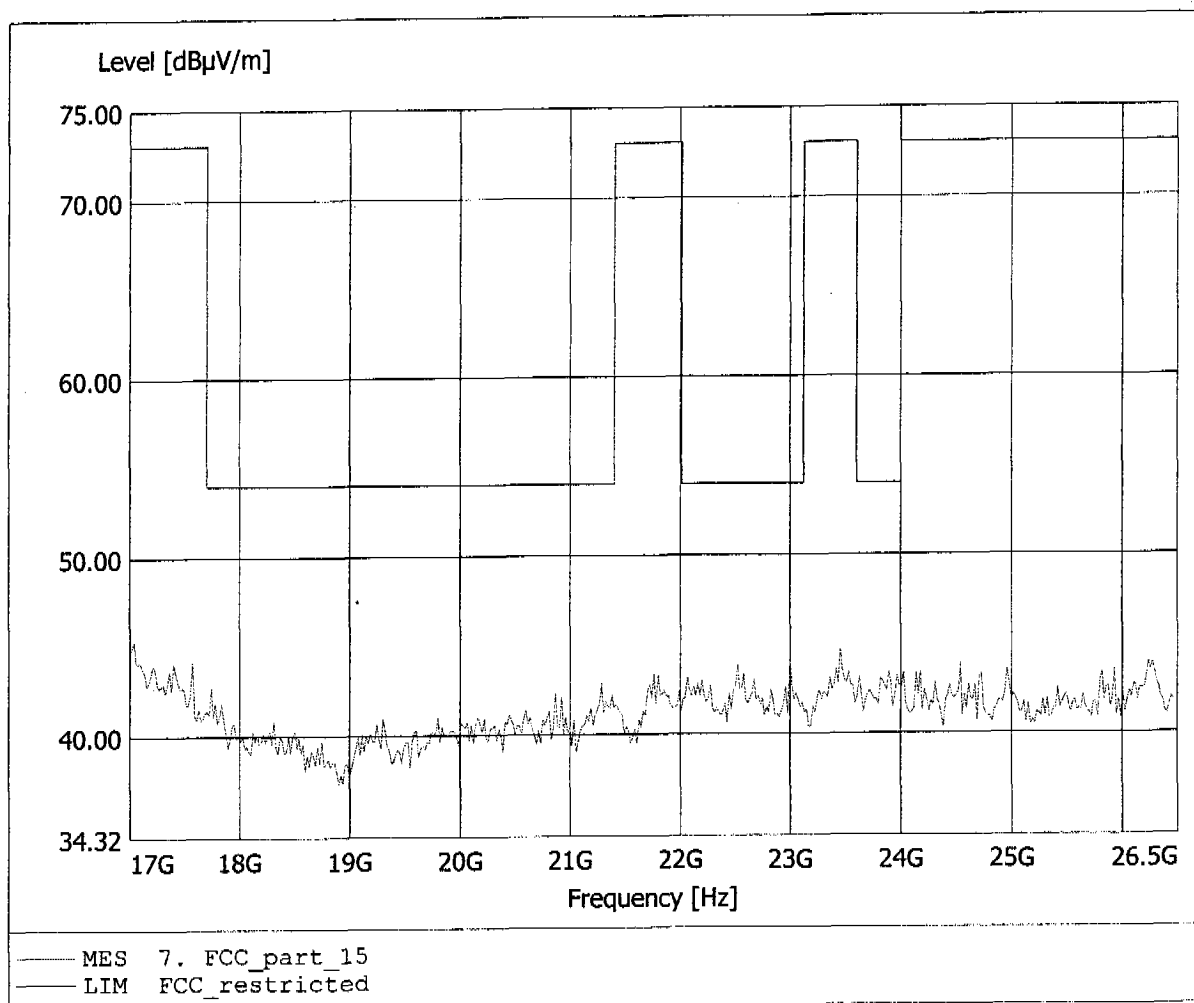


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.164MHz, Emax: 42.28dBµV/m, RBW: 100kHz

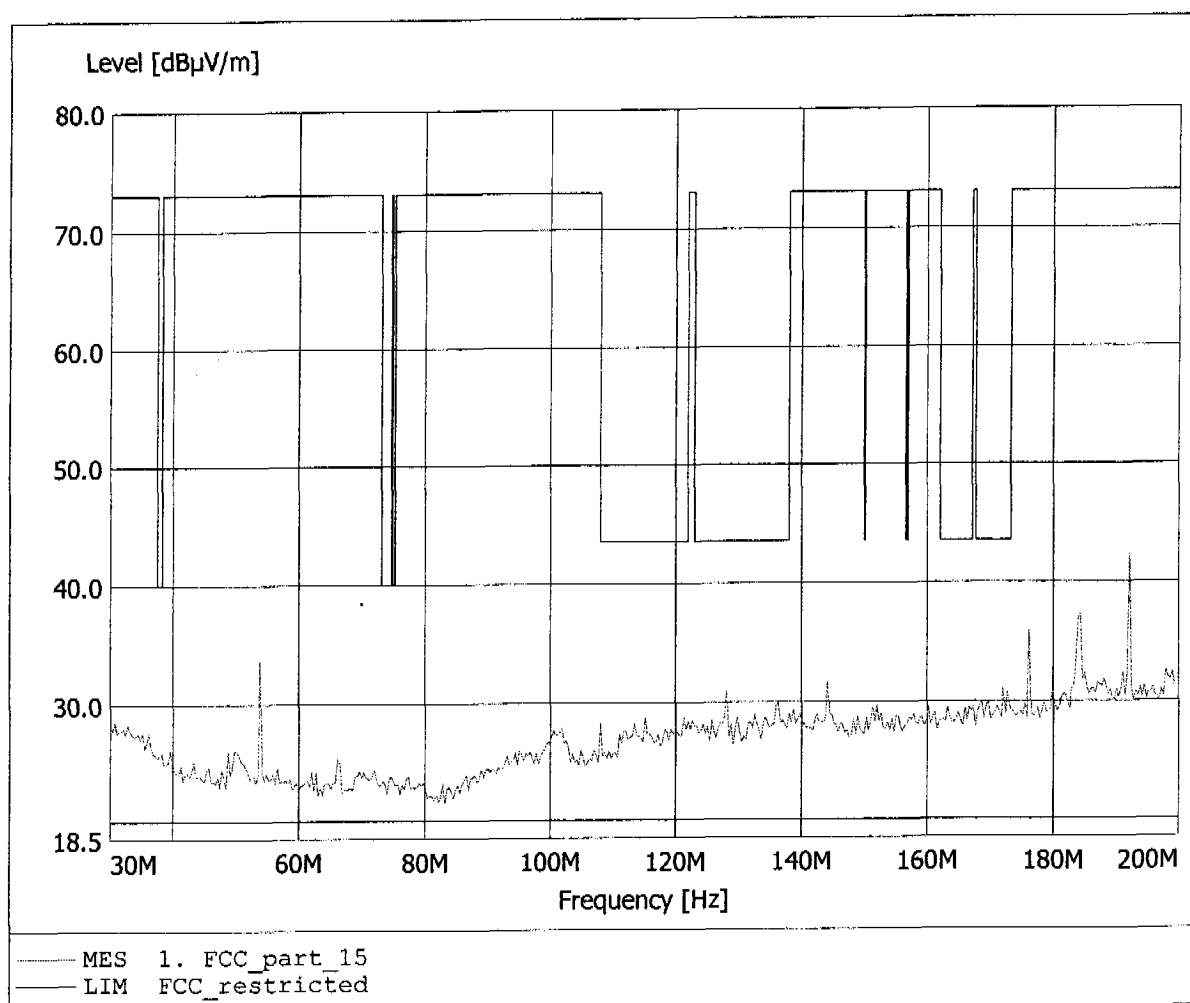


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.164MHz, Emax: 37.70dBµV/m, RBW: 100kHz

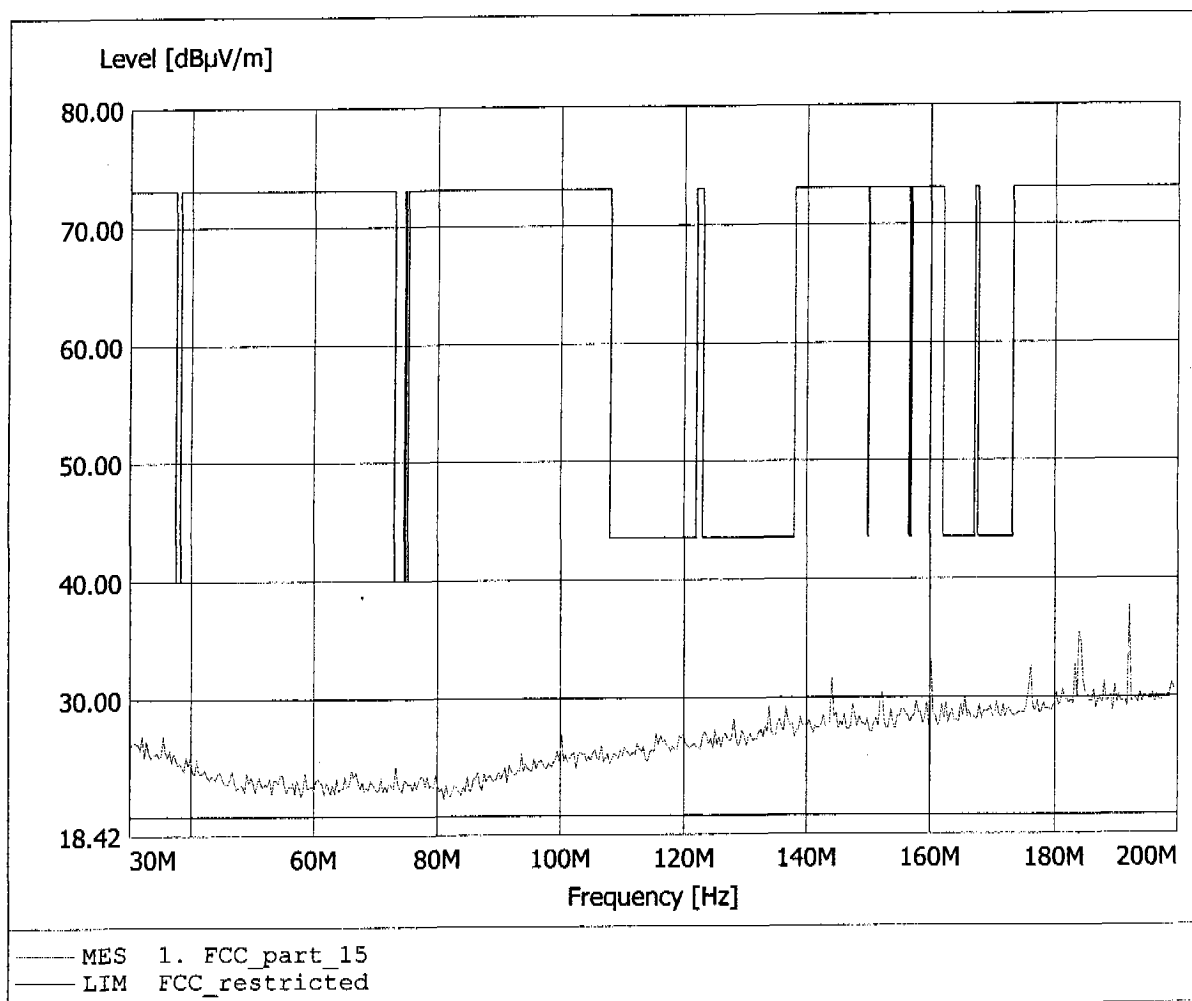


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 432.465MHz, Emax: 40.04dBµV/m, RBW: 100kHz

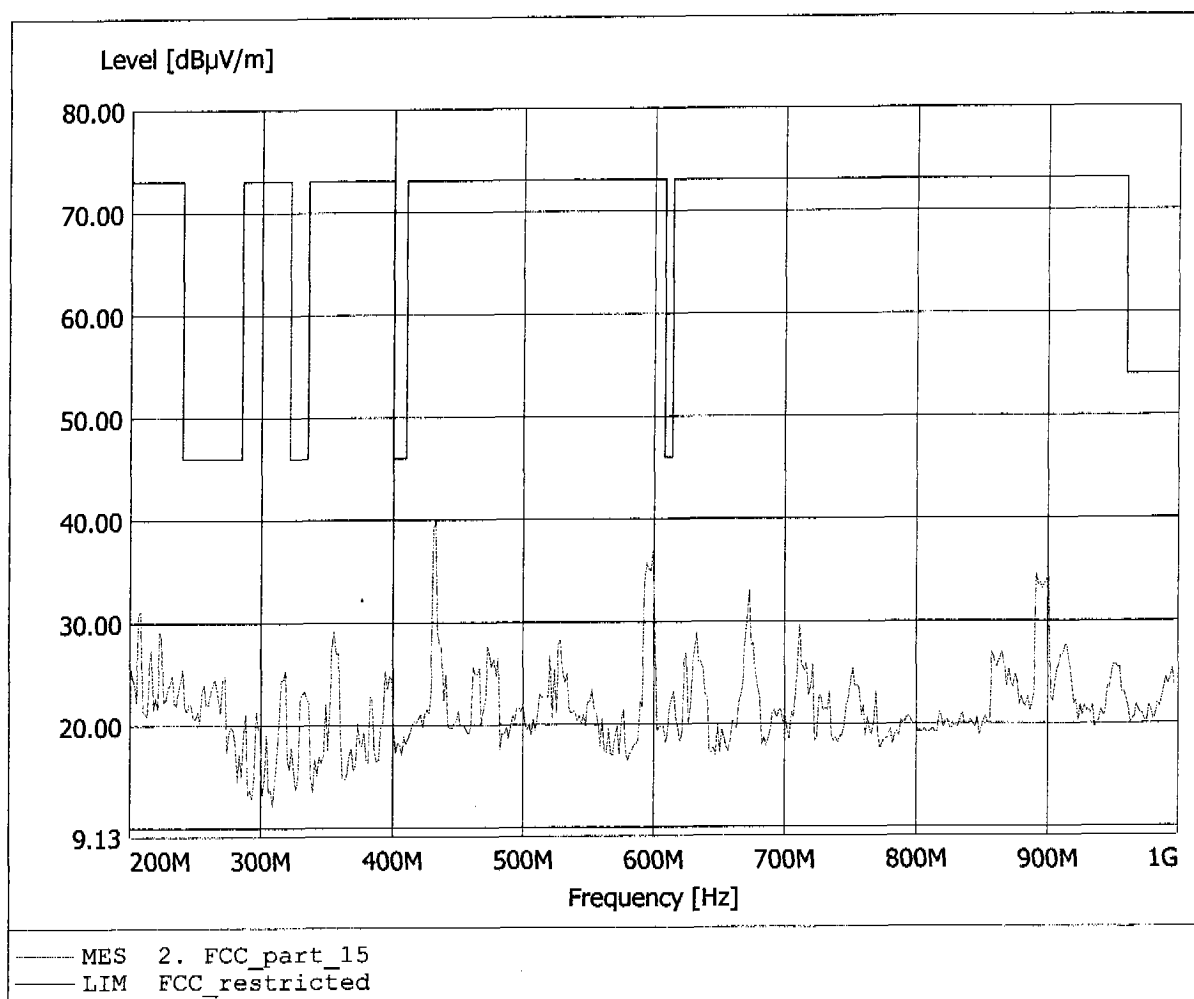


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 599.198MHz, Emax: 37.42dBµV/m, RBW: 100kHz

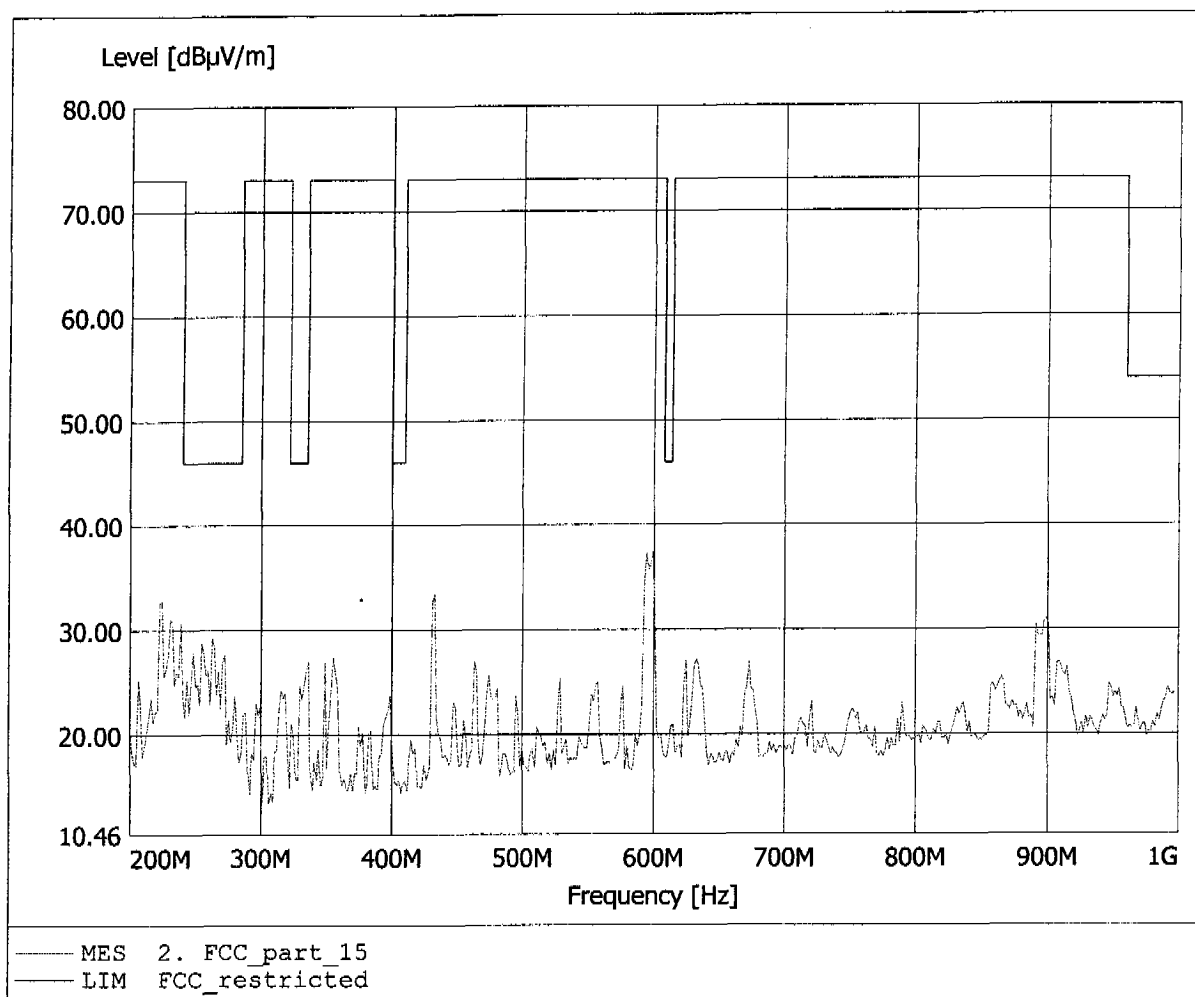


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 47.59dBμV/m, RBW: 1MHz

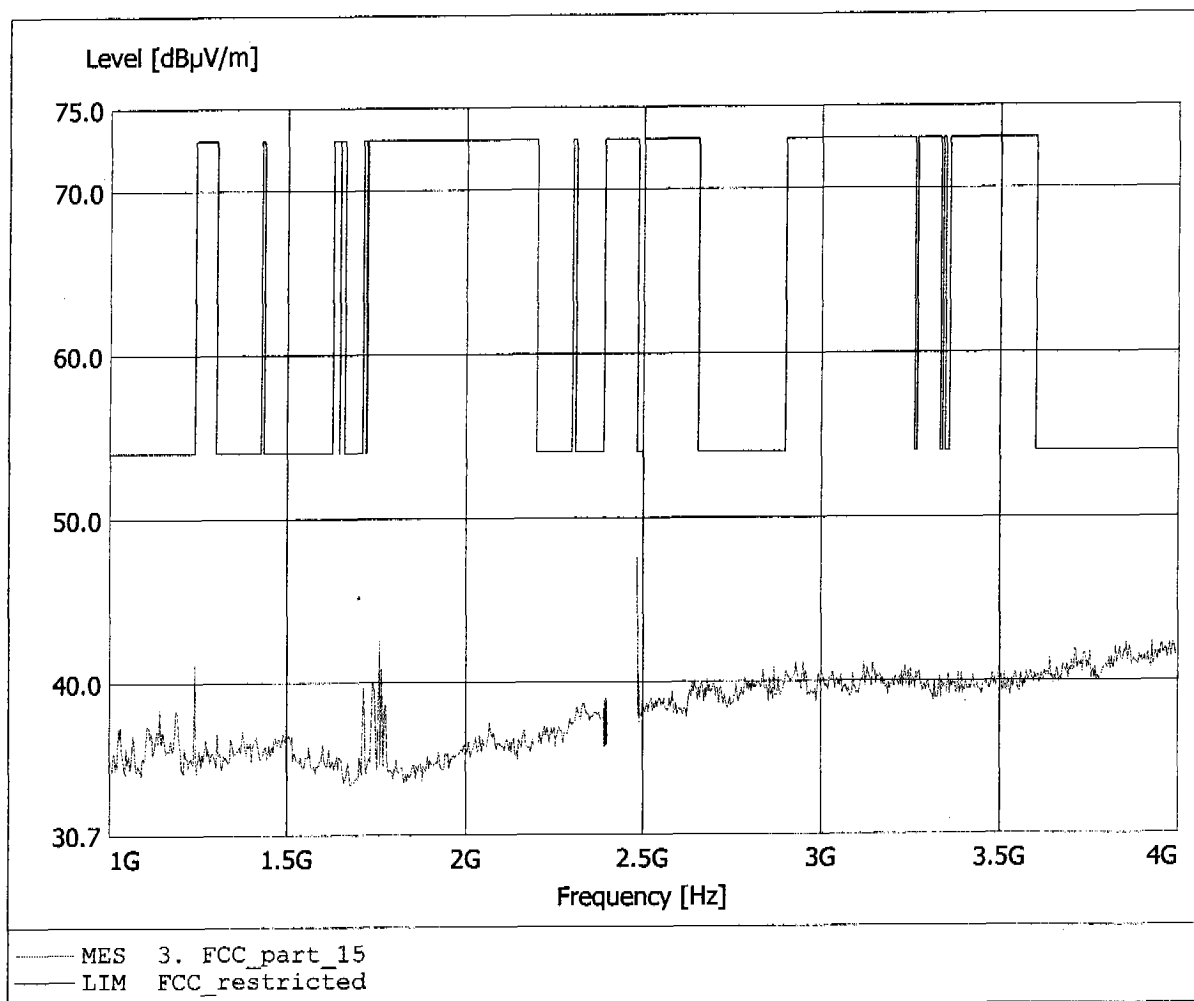


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 54.27dBµV/m, RBW: 1MHz

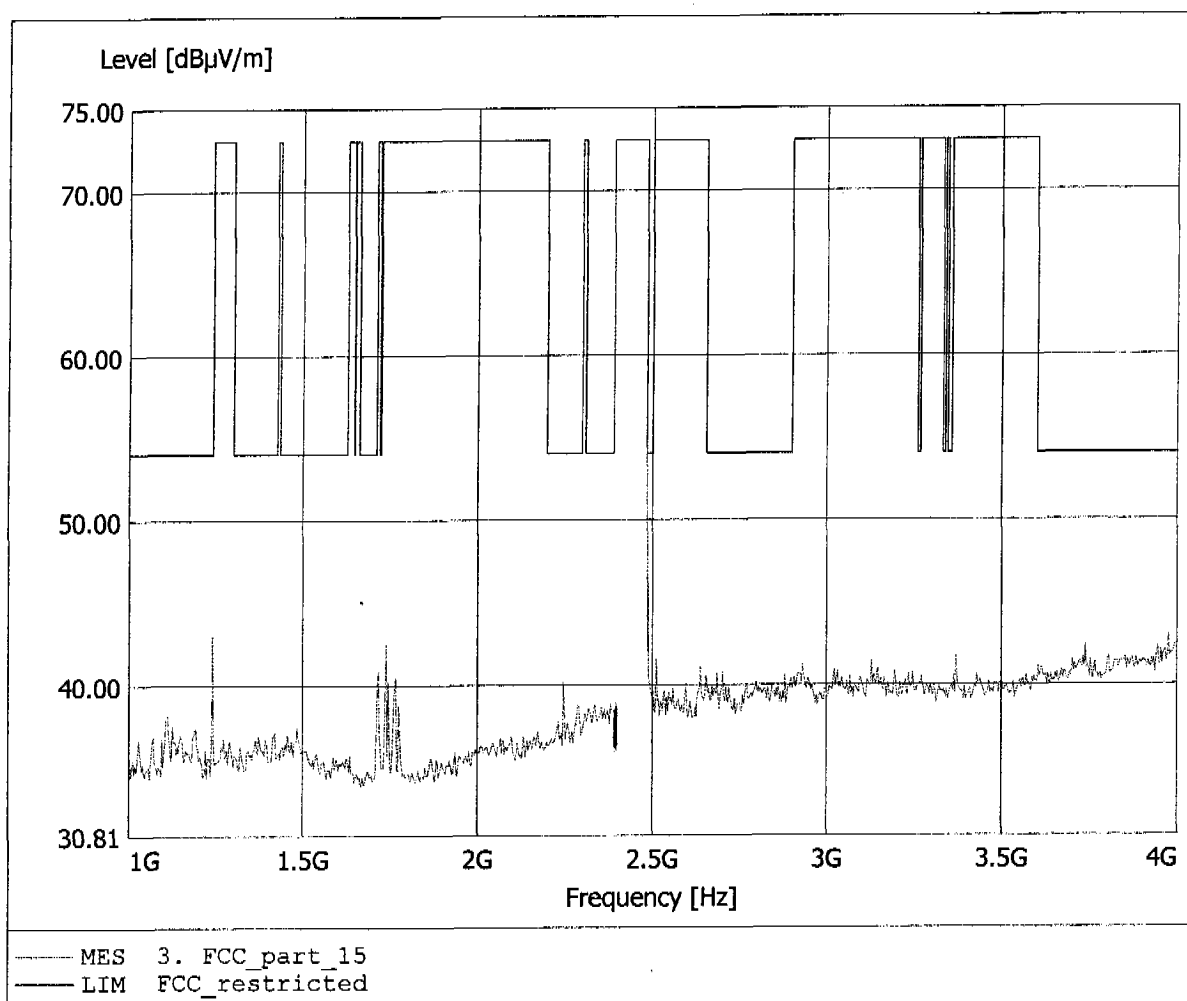


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 43.35dBμV/m, RBW: 1MHz

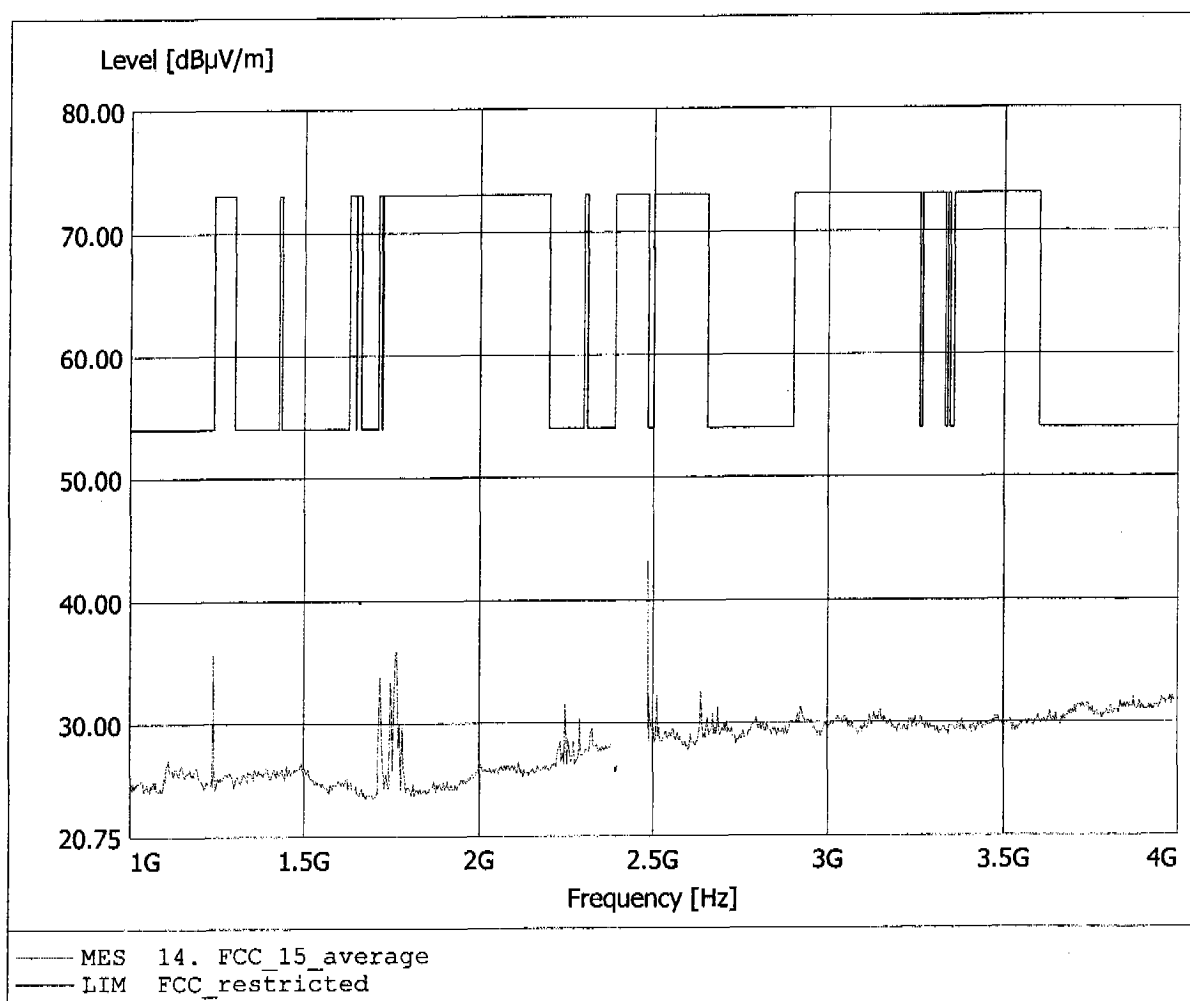


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.487GHz, Emax: 38.34dBμV/m, RBW: 1MHz

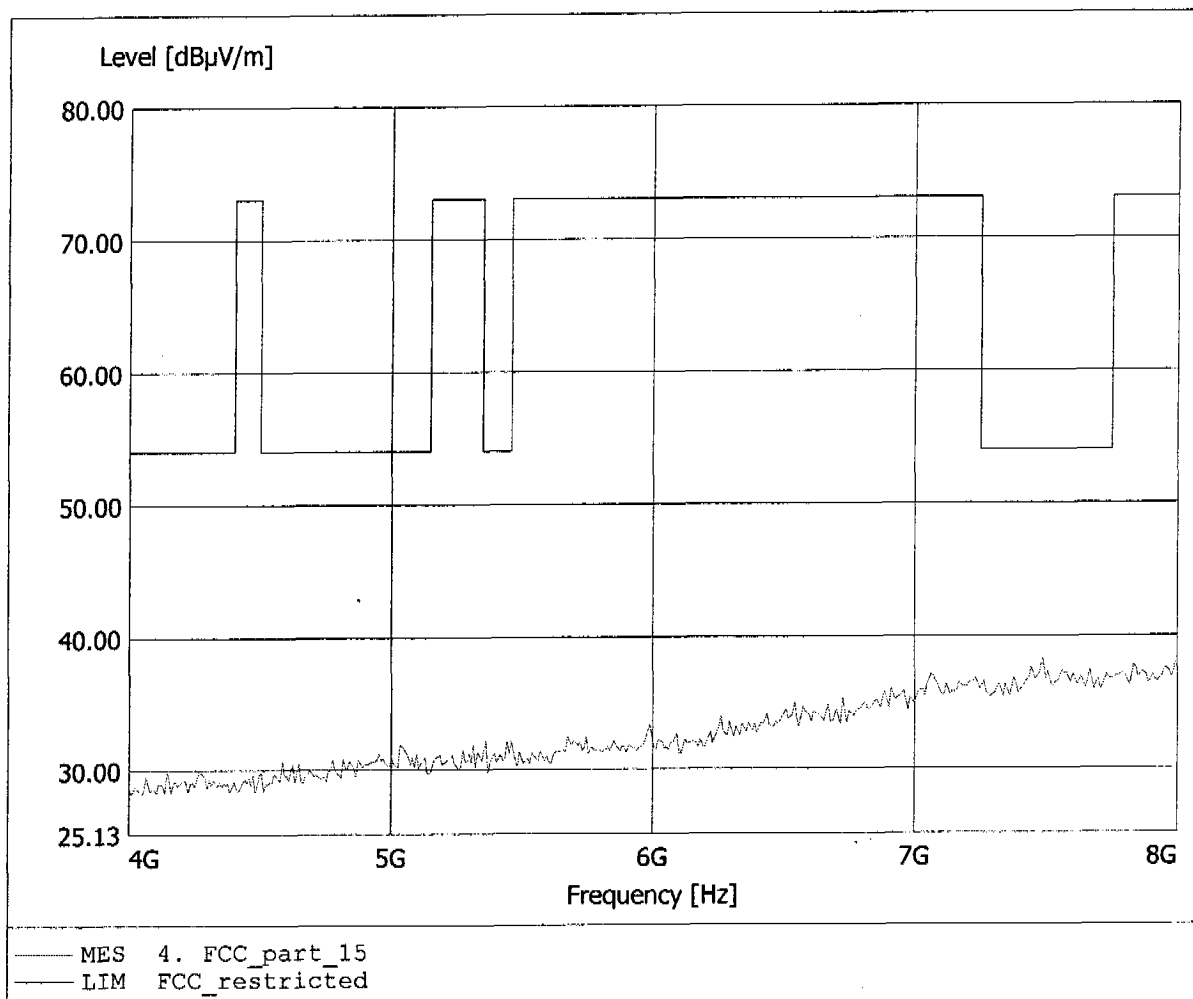


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 38.21dBµV/m, RBW: 1MHz

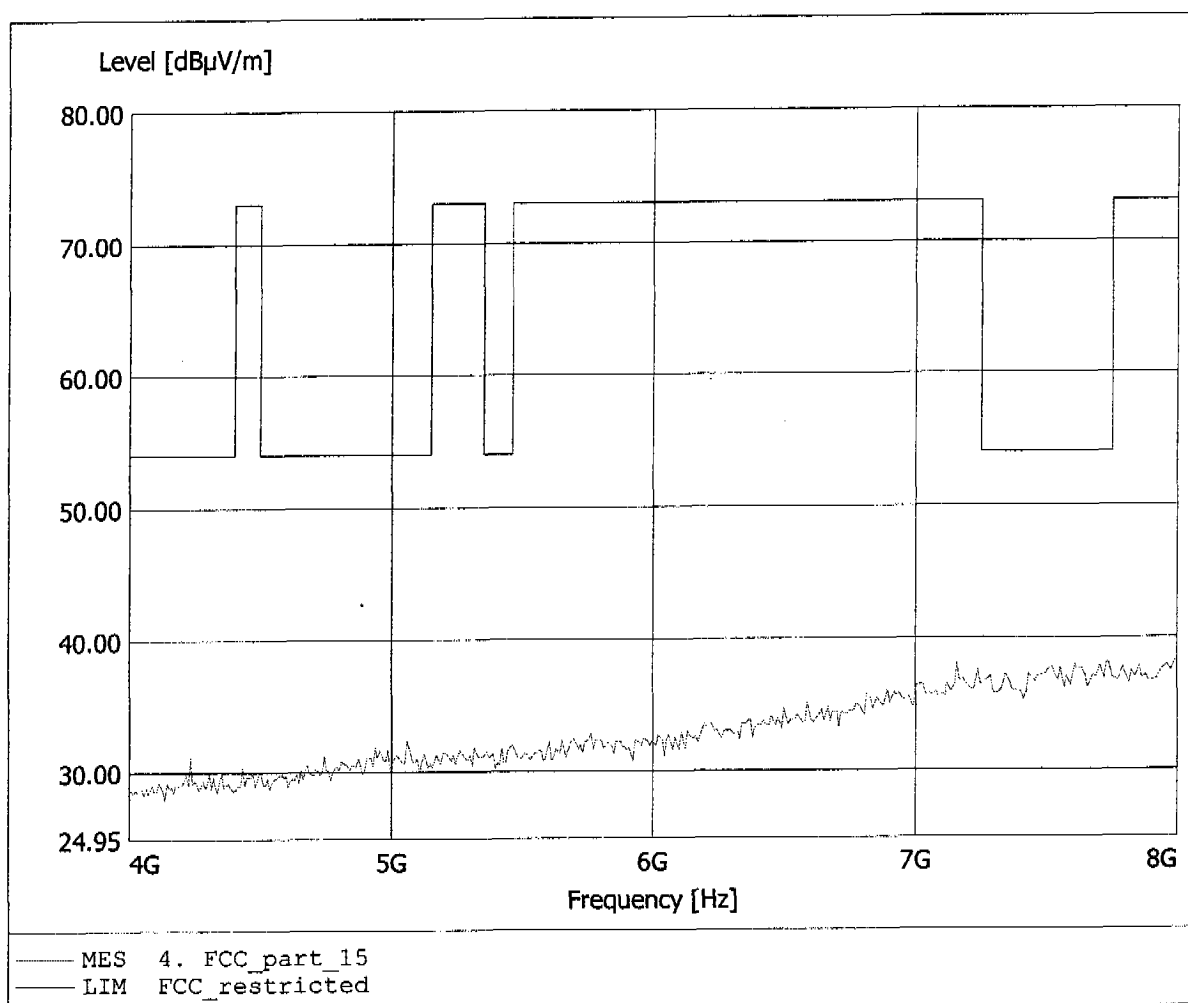


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.559GHz, Emax: 43.32dBμV/m, RBW: 1MHz

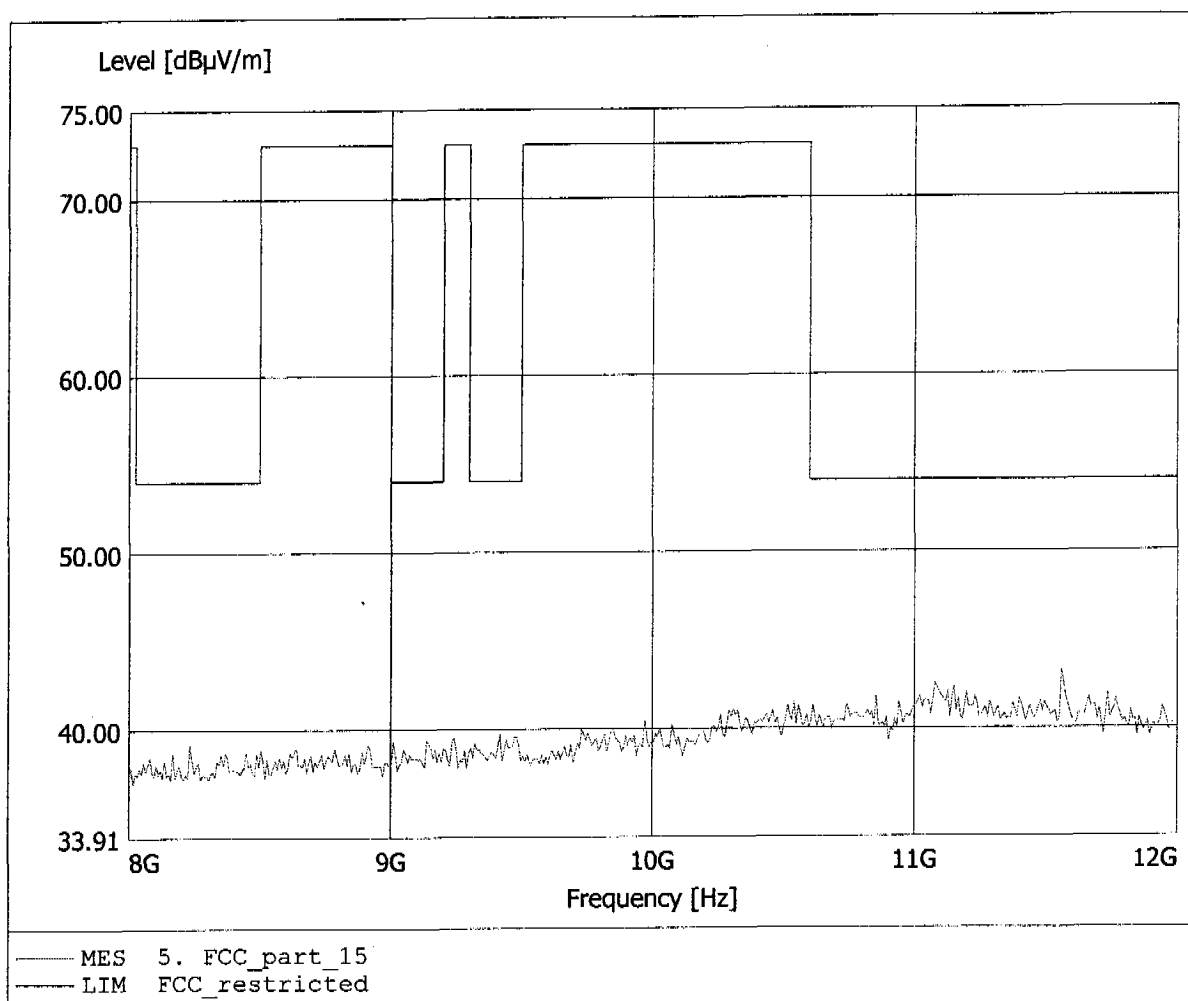


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.447GHz, Emax: 42.93dBµV/m, RBW: 1MHz

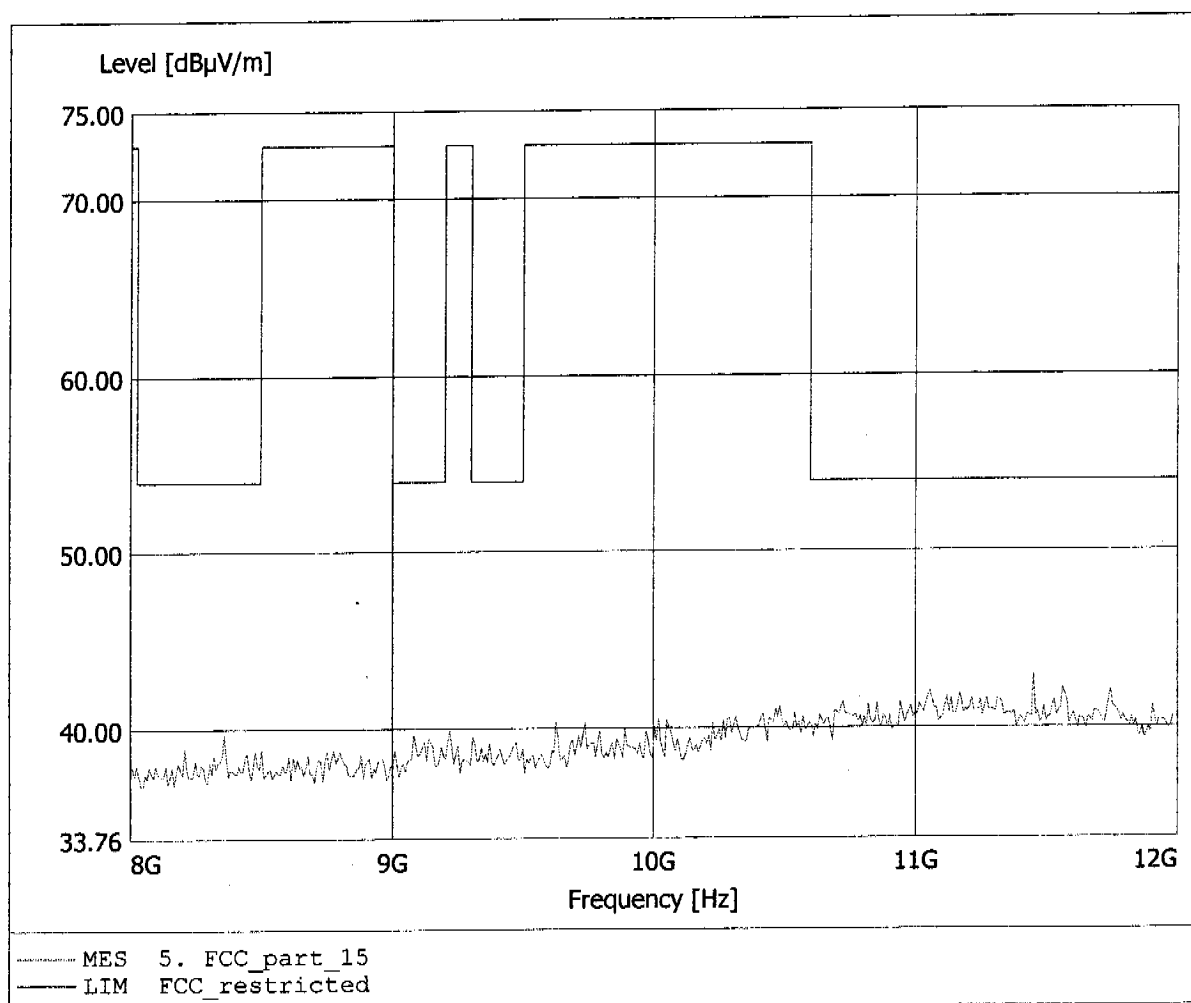


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.515GHz, Emax: 44.70dBµV/m, RBW: 1MHz

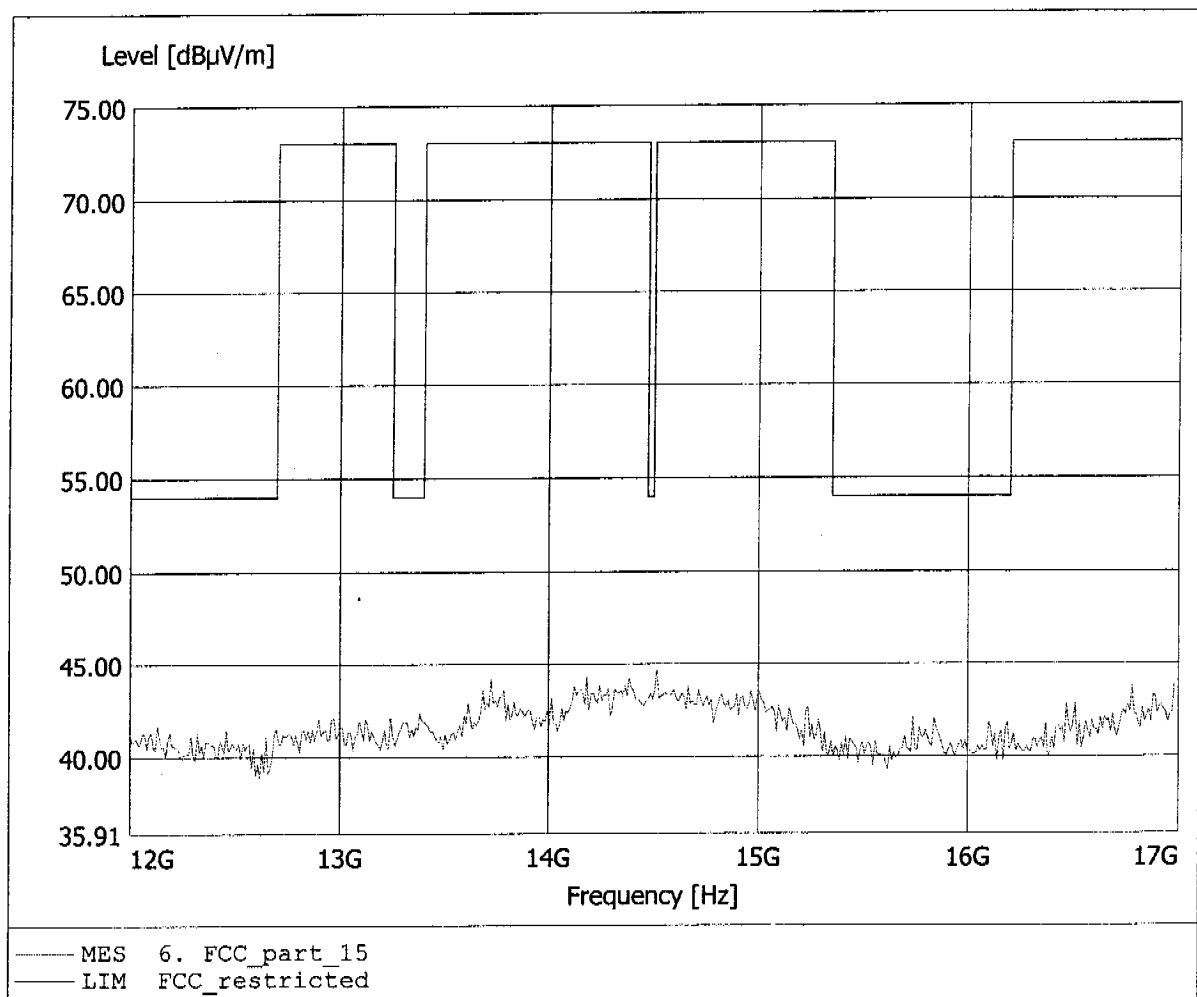


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.435GHz, Emax: 44.47dBμV/m, RBW: 1MHz

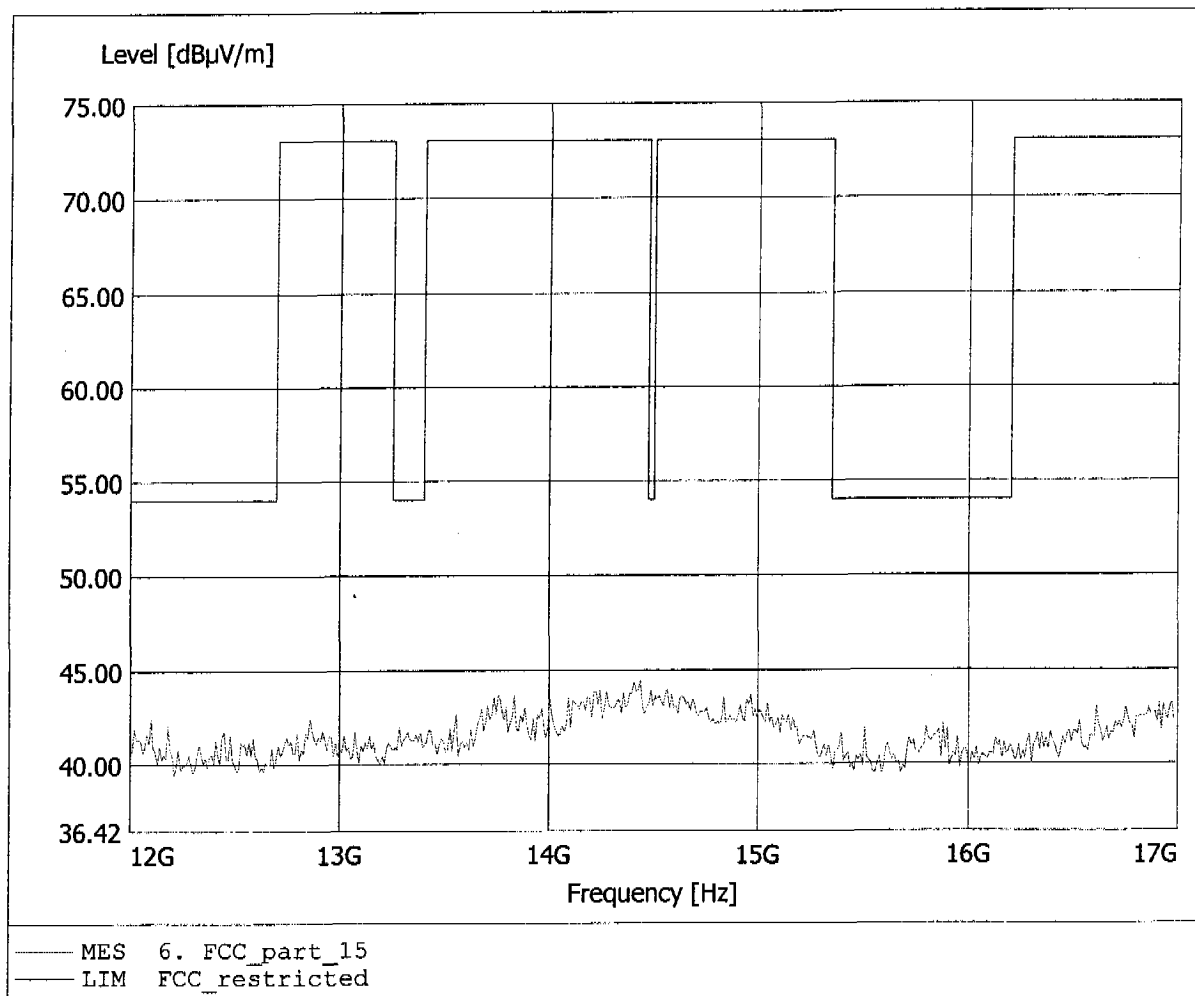


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom:23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 45.53dBμV/m, RBW: 1MHz

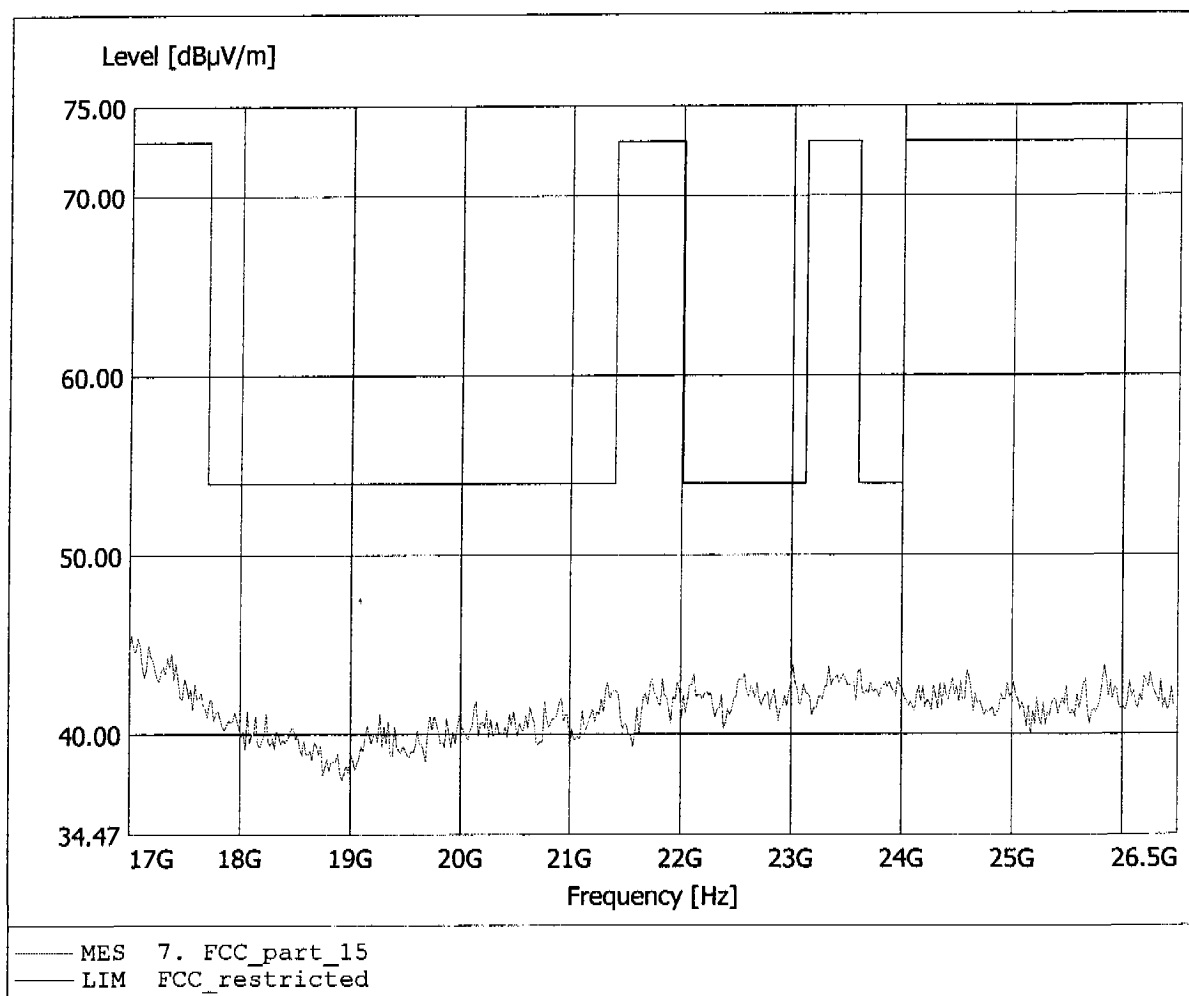

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Digital Wireless Hands Free and Telephone / 2480 MHz
Model: WF2003BT / Base
Approval Holder: WORLD ELECTRON CO., LTD
Operating Condition: Tnom: 23°C / Unom: 12 V DC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 45.59dBpV/m, RBW: 1MHz

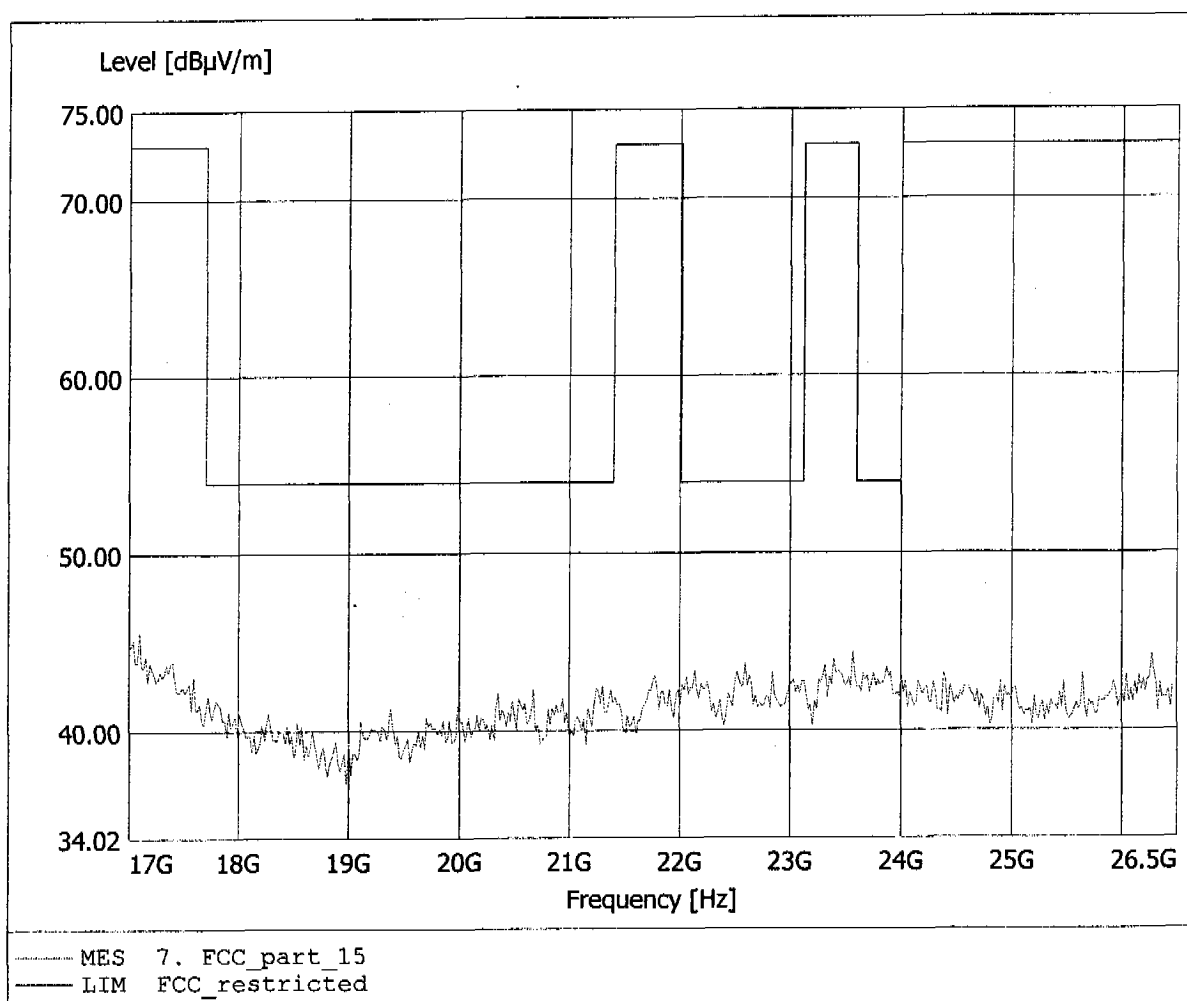

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -0.03 dB VBW 100 kHz
15 dBm 1.00521042 MHz SWT 5 ms Unit dBm

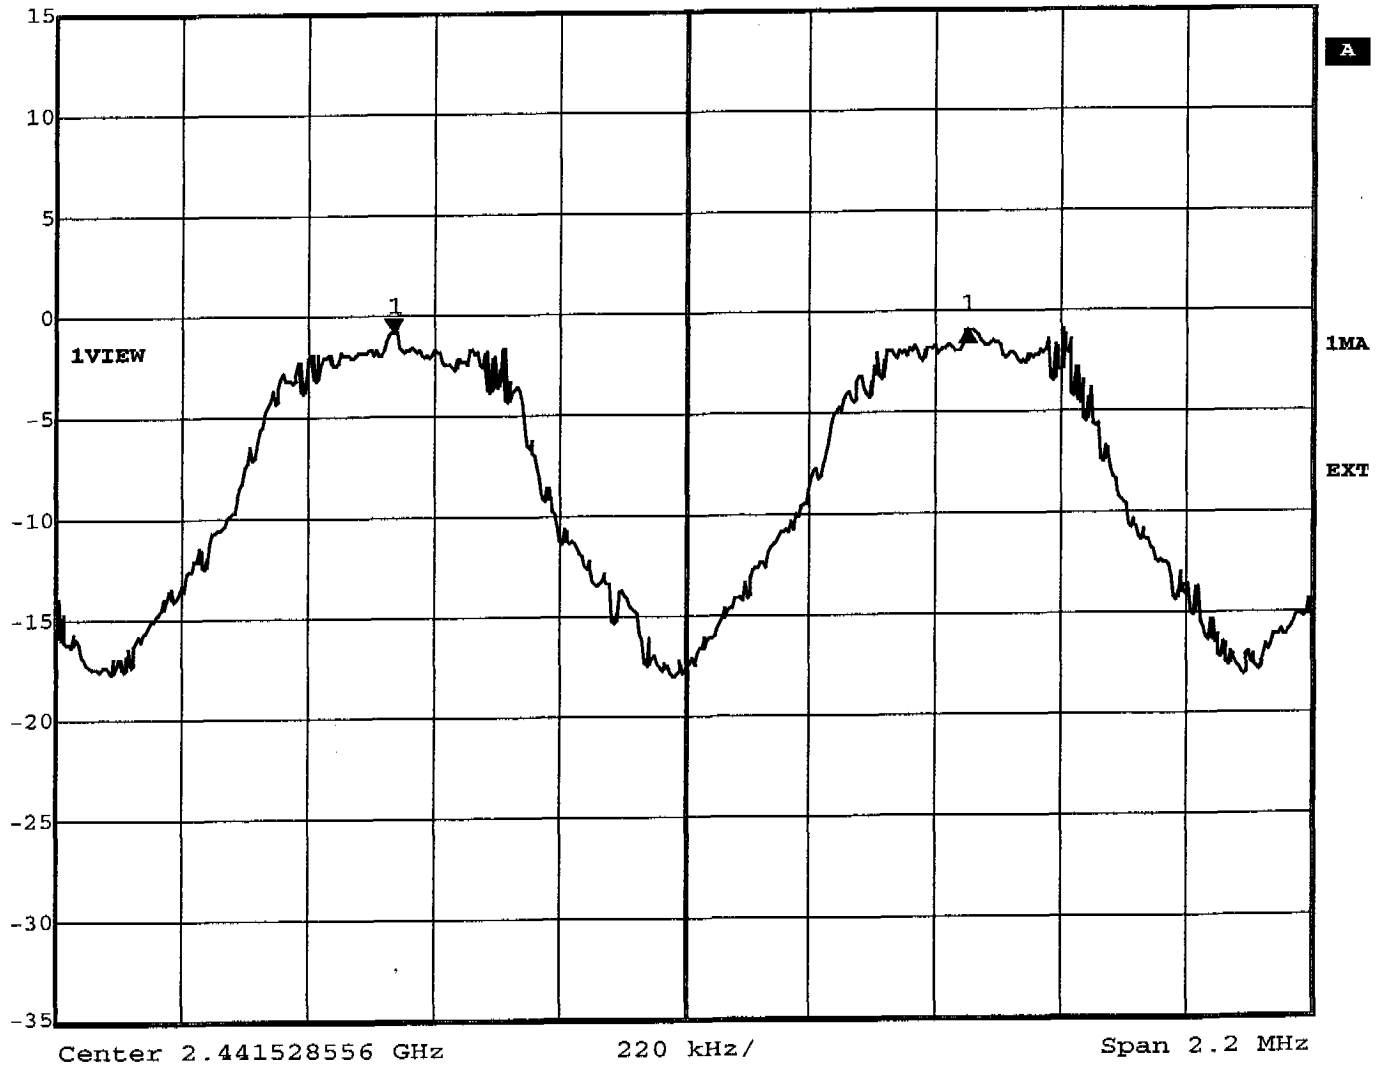


Title: Carrier Frequency Separation
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 08:23:12

Appendix F

Number of Hopping Frequencies




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -0.82 dBm VBW 300 kHz
25 dBm 2.41509920 GHz SWT 5 ms Unit dBm

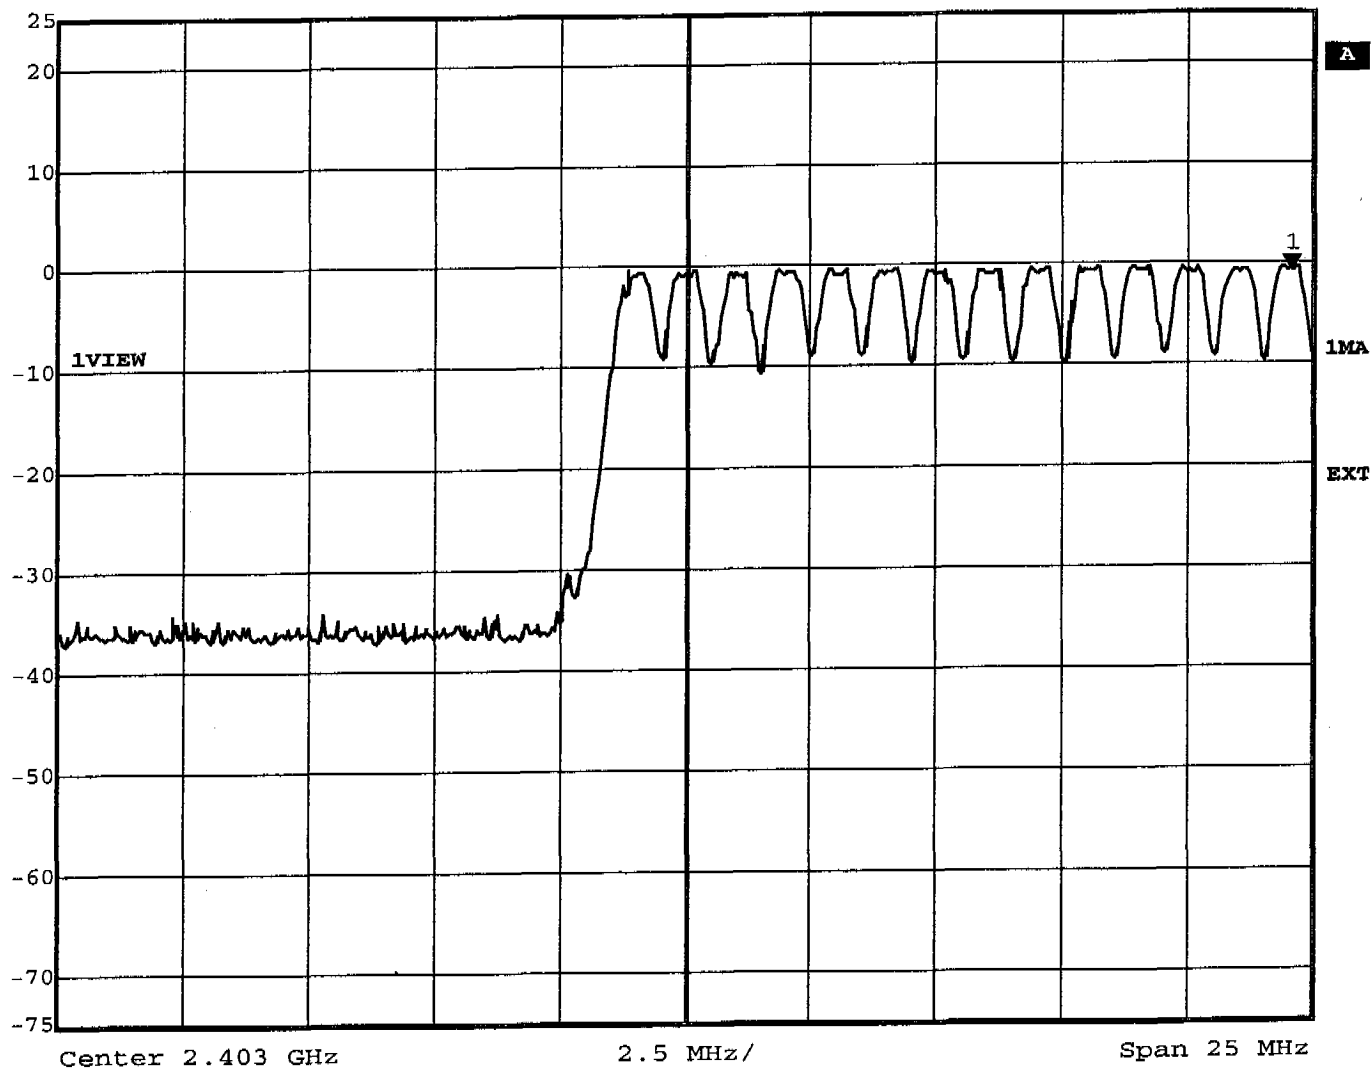

Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 08:25:03




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -1.09 dBm VBW 300 kHz
25 dBm 2.44004910 GHz SWT 5 ms Unit dBm

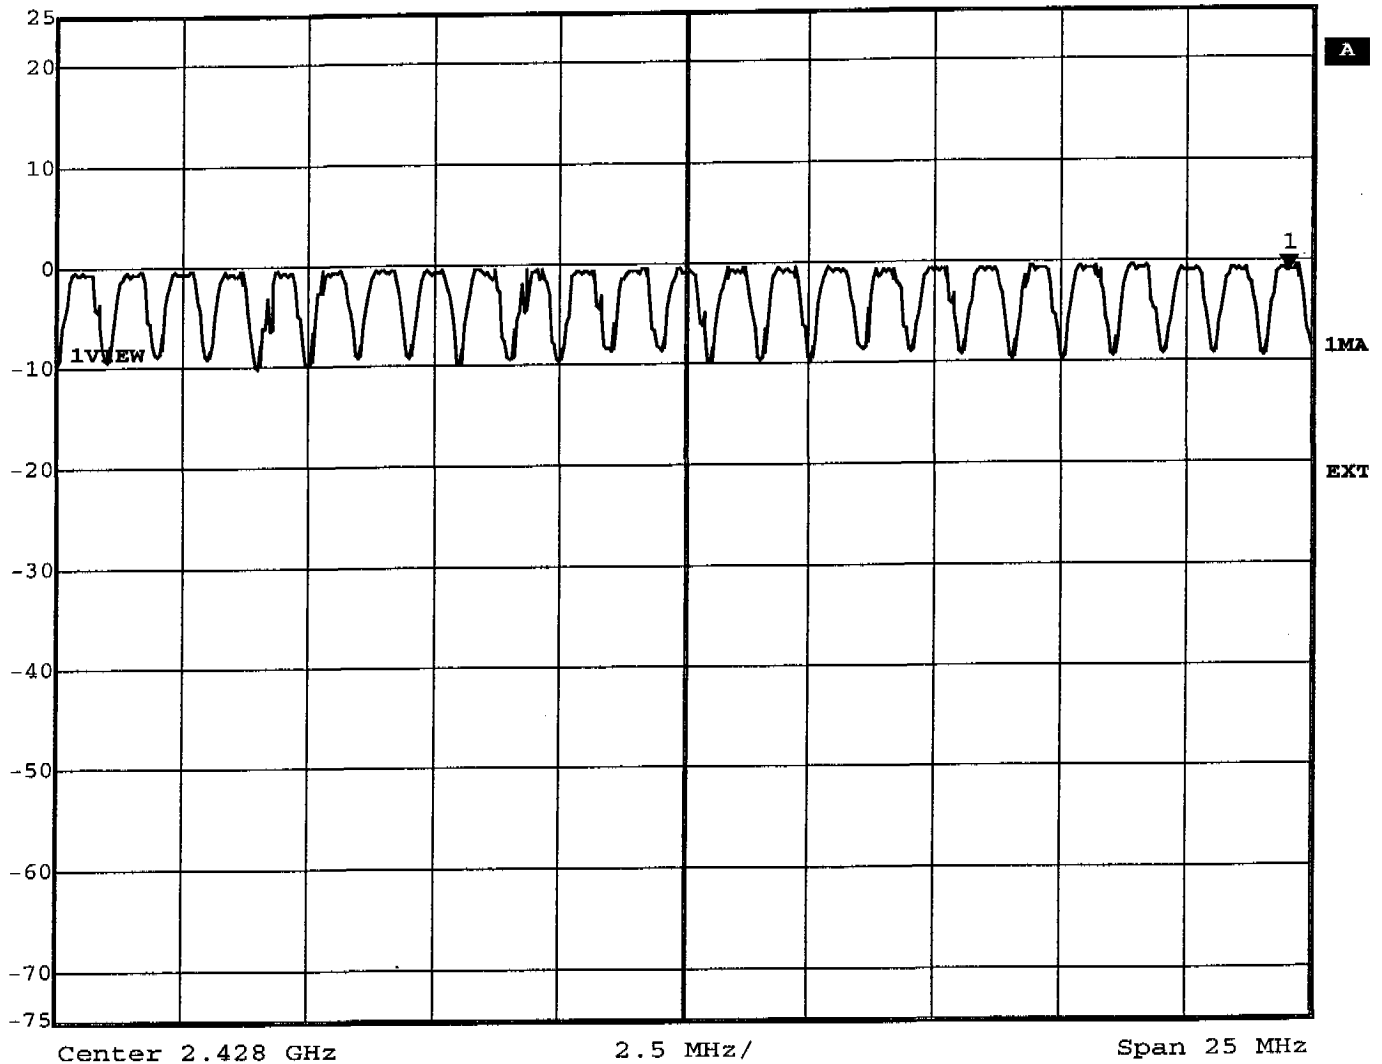

Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 08:30:16



Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -1.27 dBm VBW 300 kHz
25 dBm 2.46504910 GHz SWT 5 ms Unit dBm

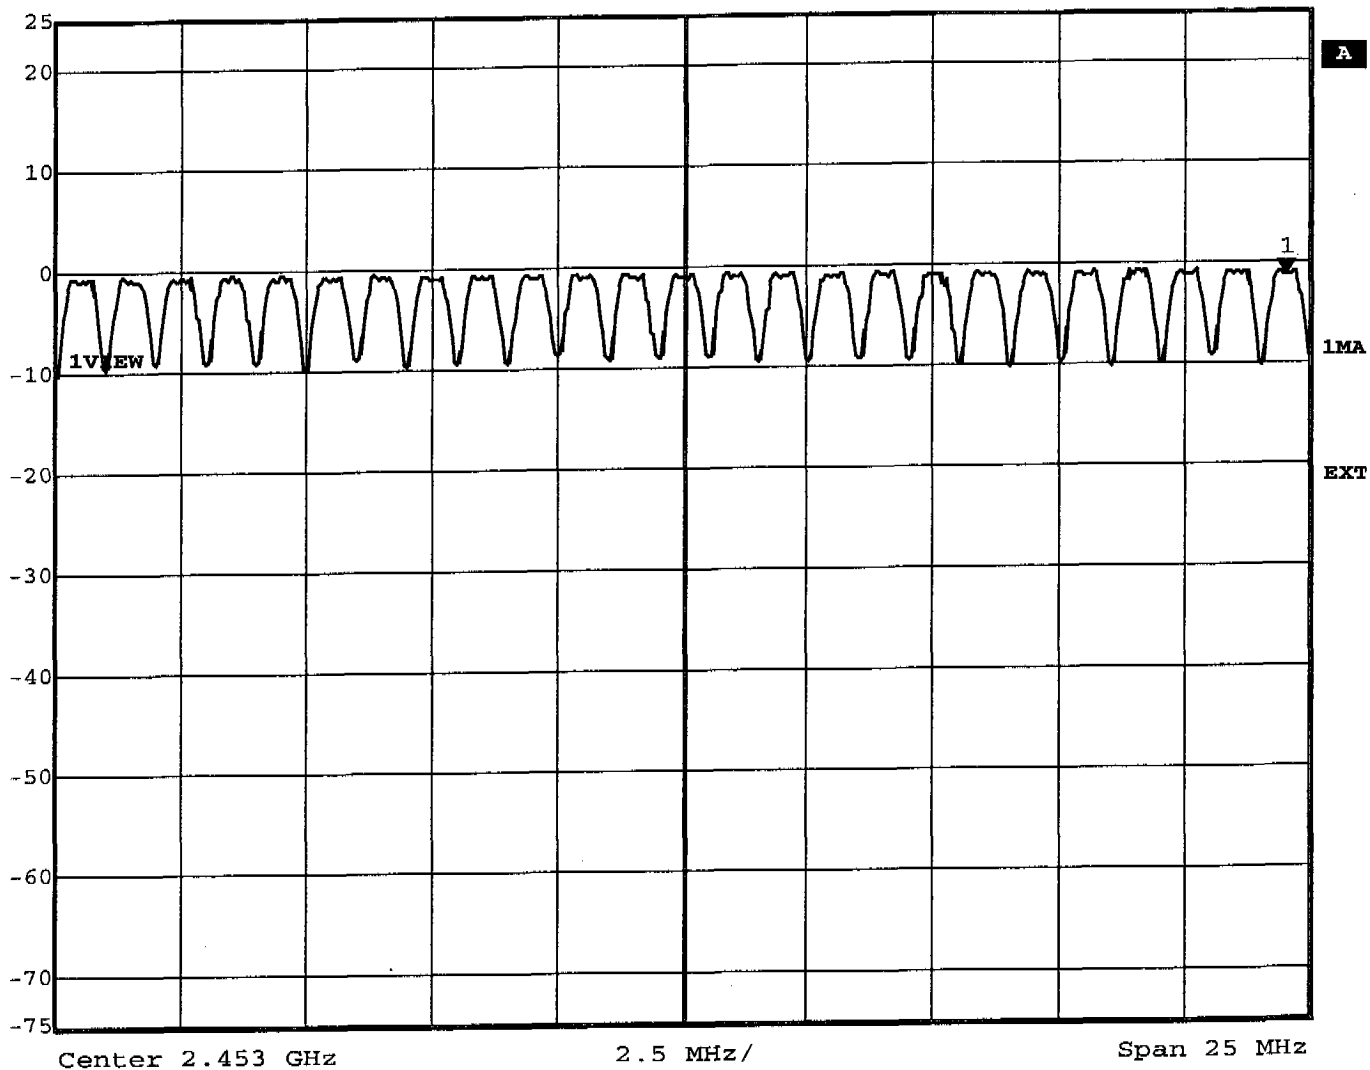


Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 08:28:43



Ref Lvl
25 dBm

Marker 1 [T1]
-1.00 dBm
2.46605110 GHz

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

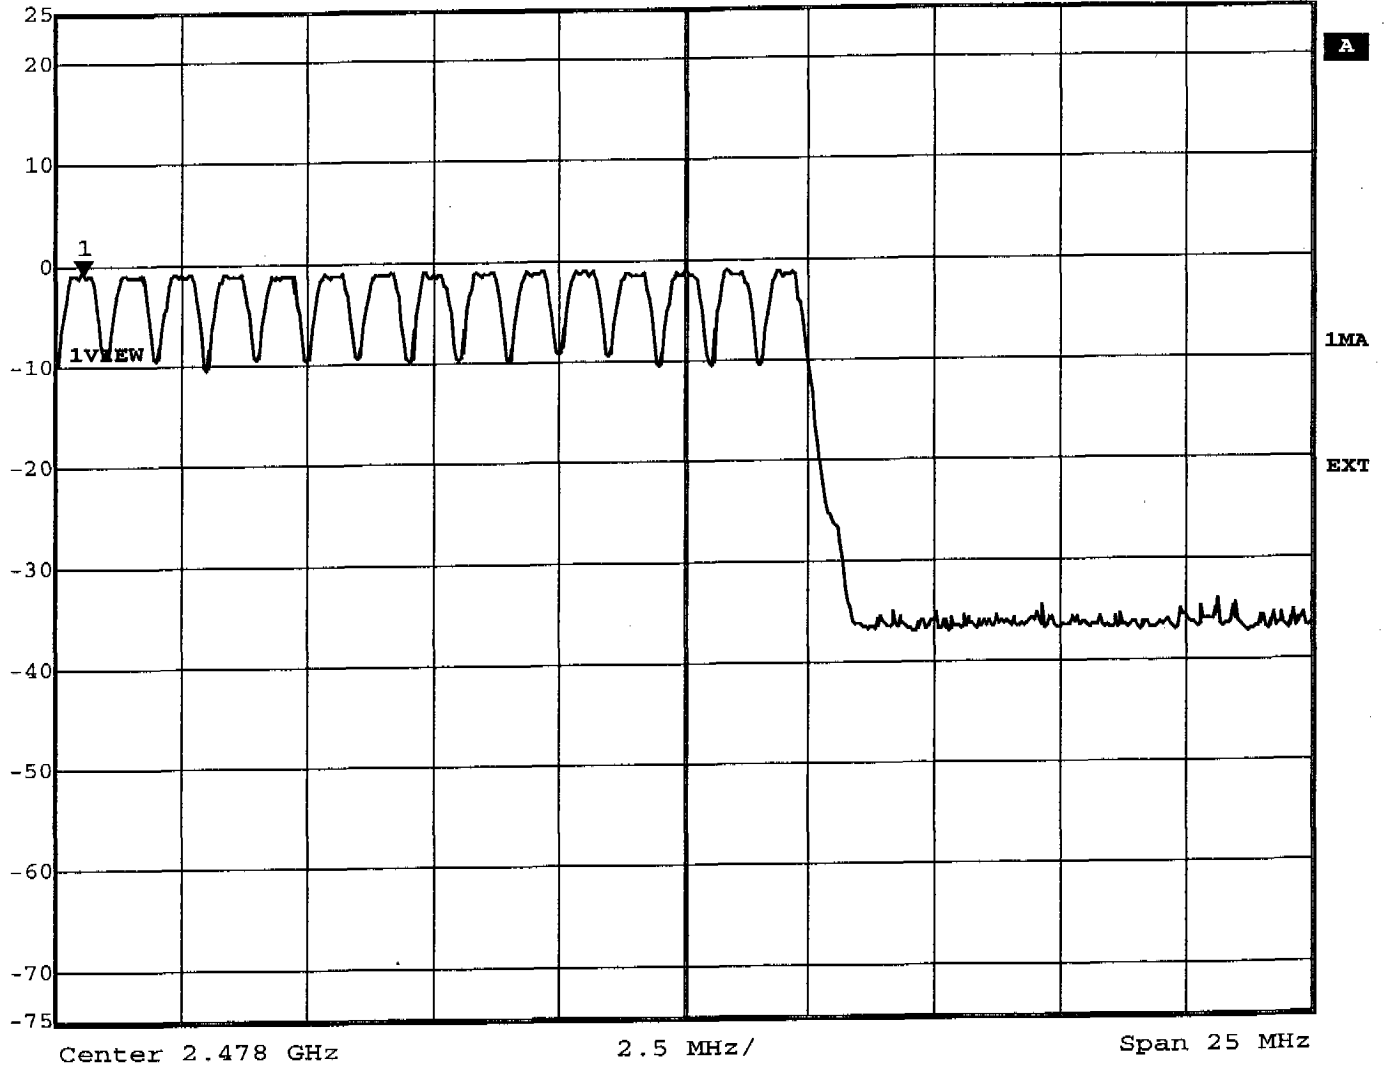


Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 08:32:12



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

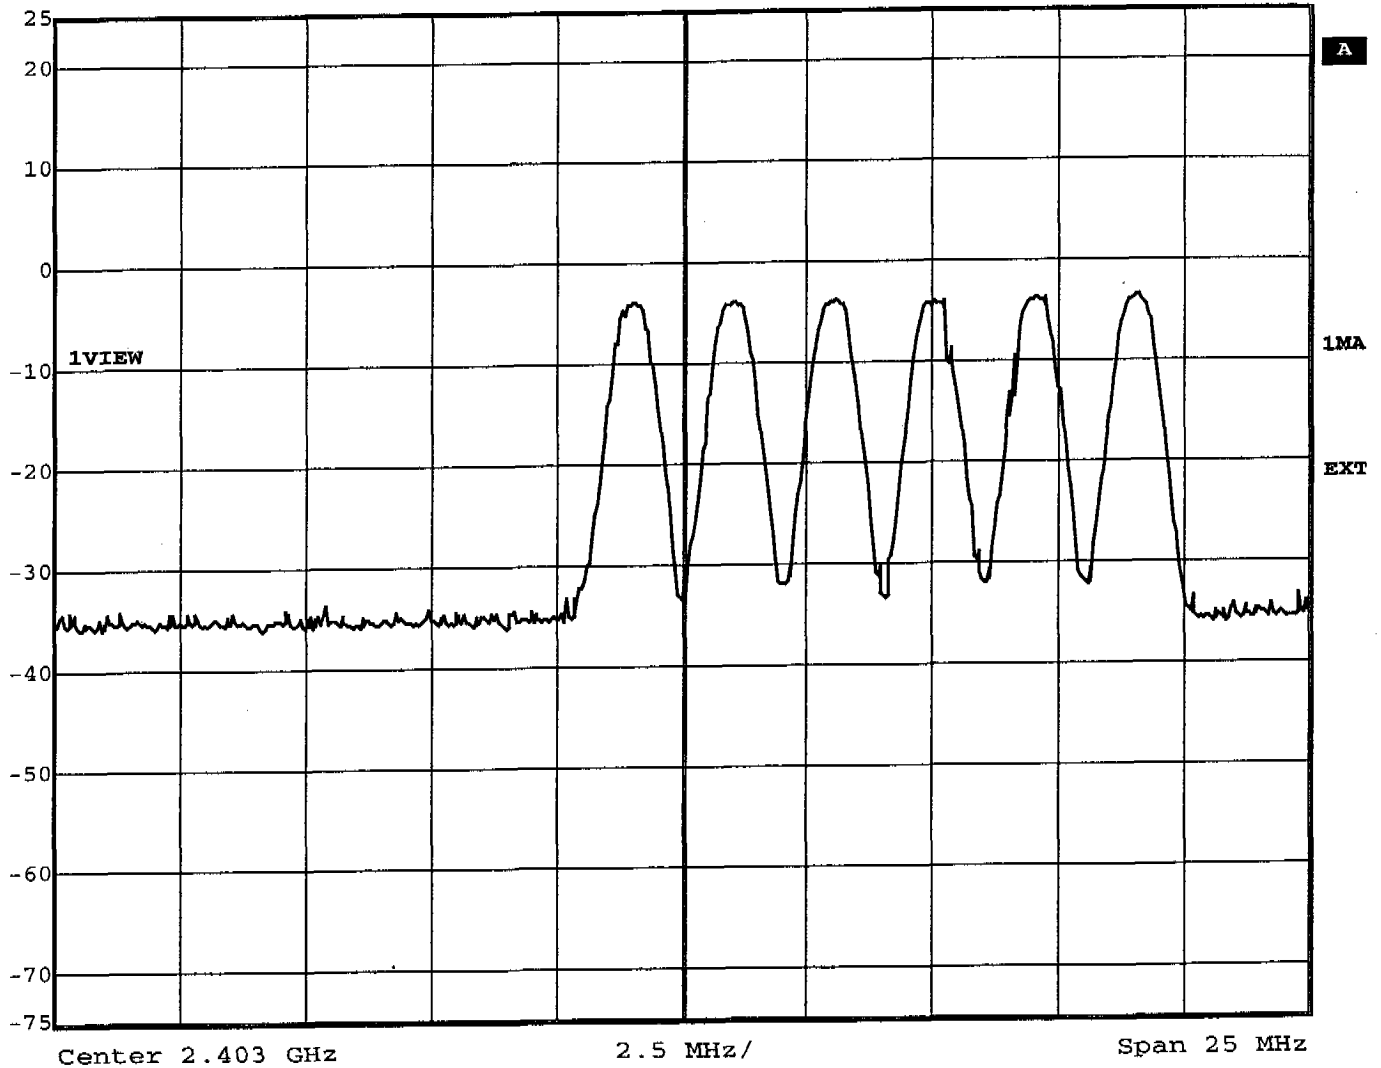


Title: Number of Hopping Frequencies (Inquiry Mode)
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 08:39:38



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

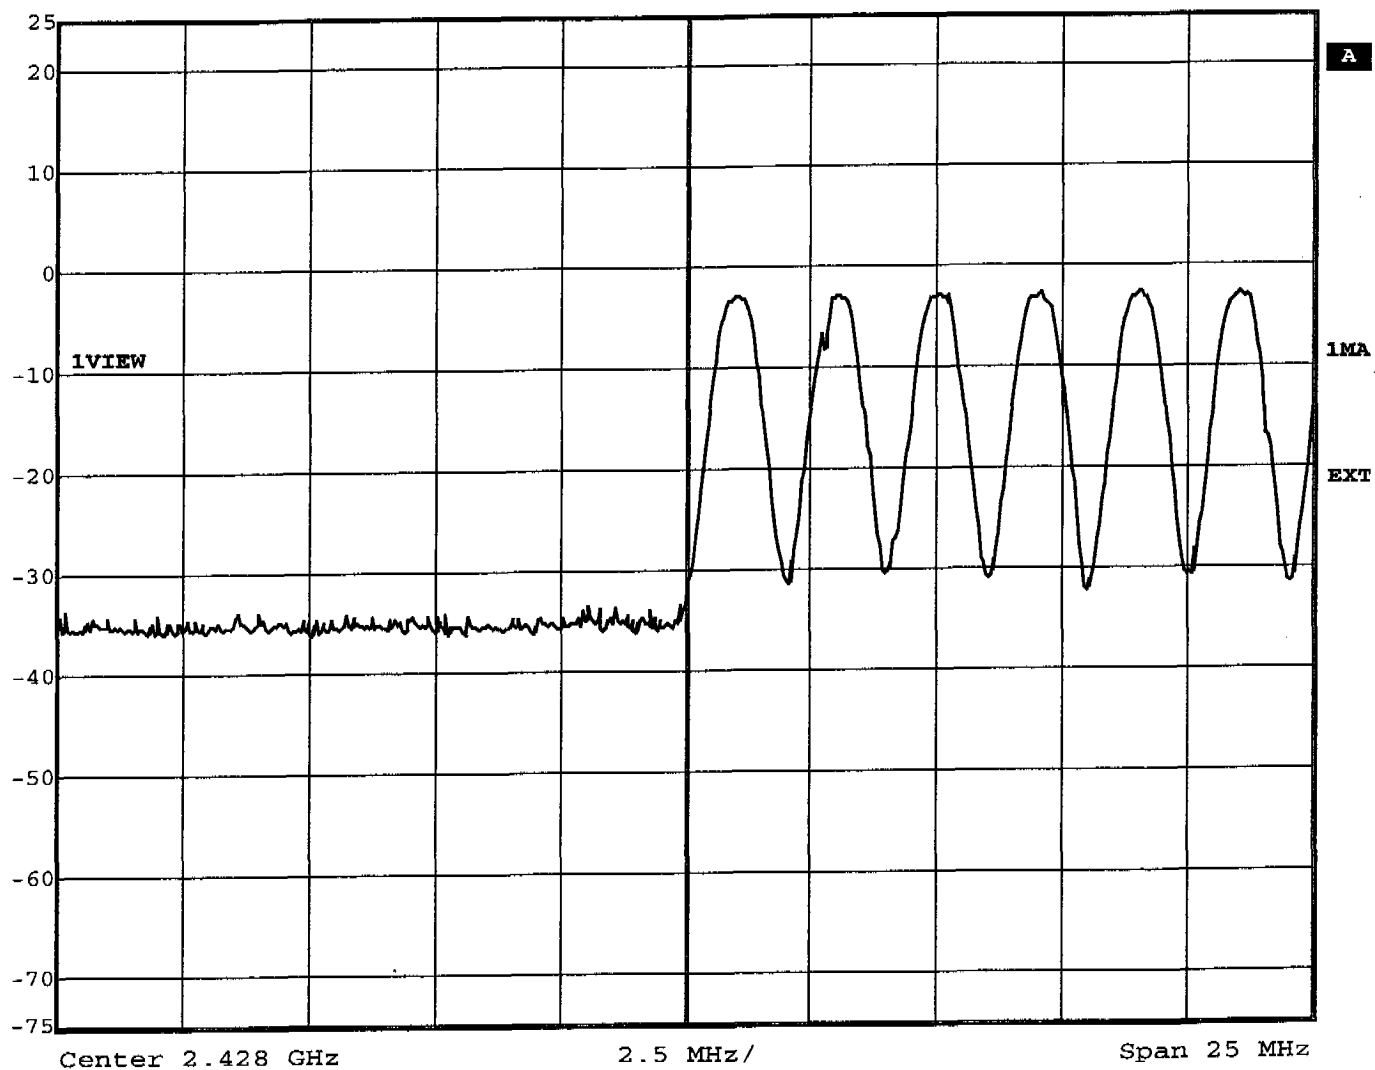


Title: Number of Hopping Frequencies (Inquiry Mode)
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 08:42:57



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

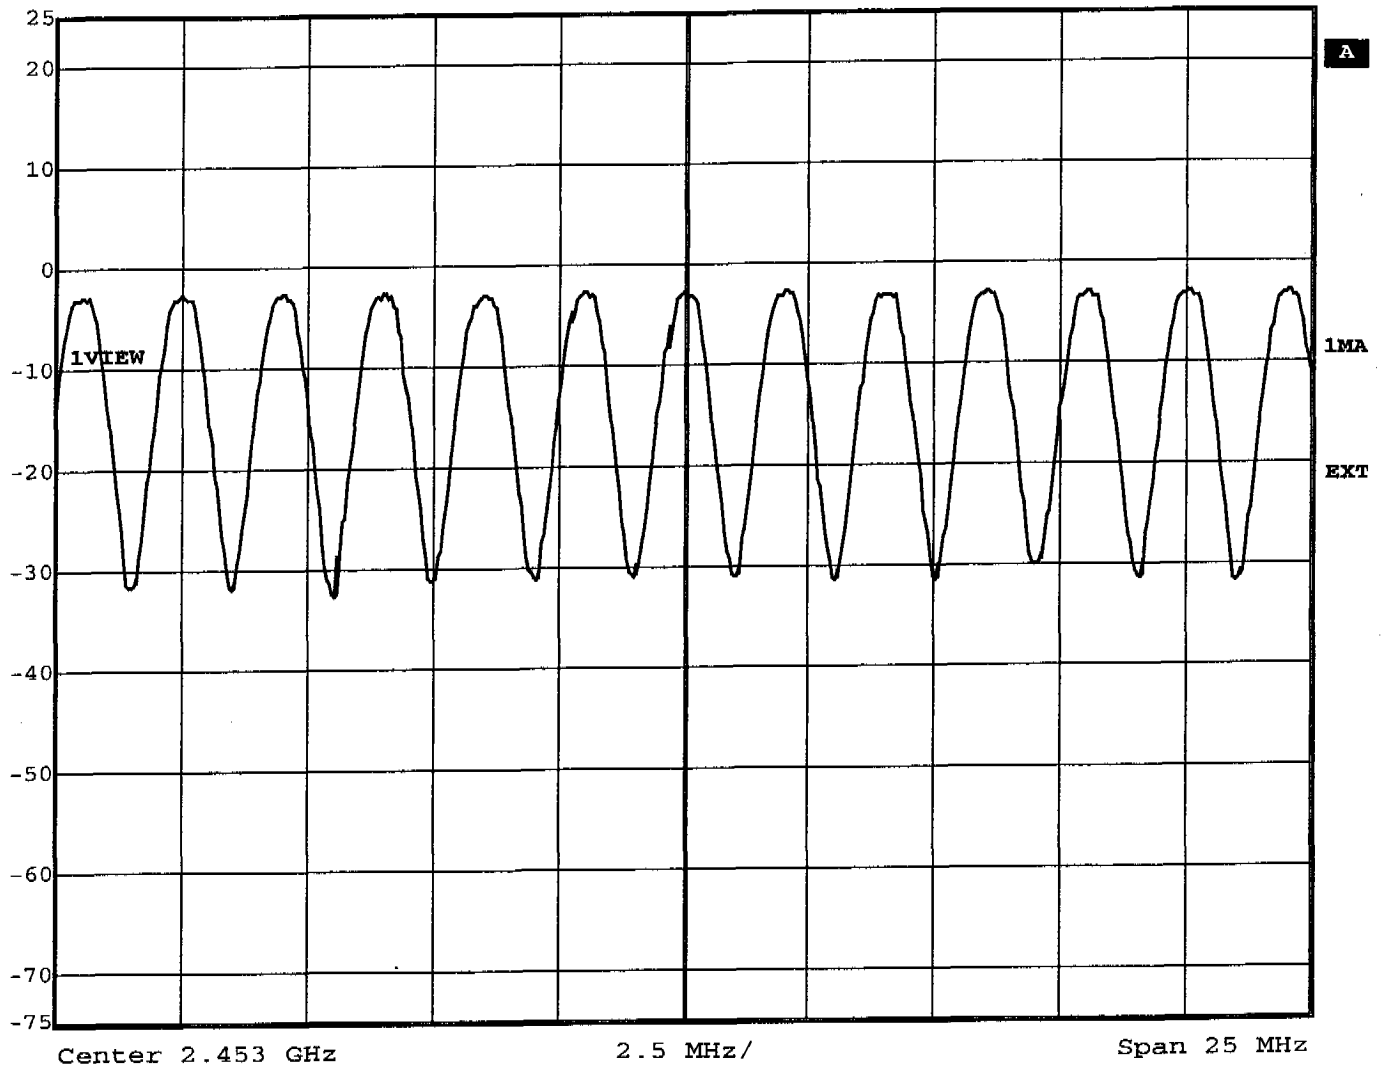


Title: Number of Hopping Frequencies (Inquiry Mode)
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 08:45:16



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

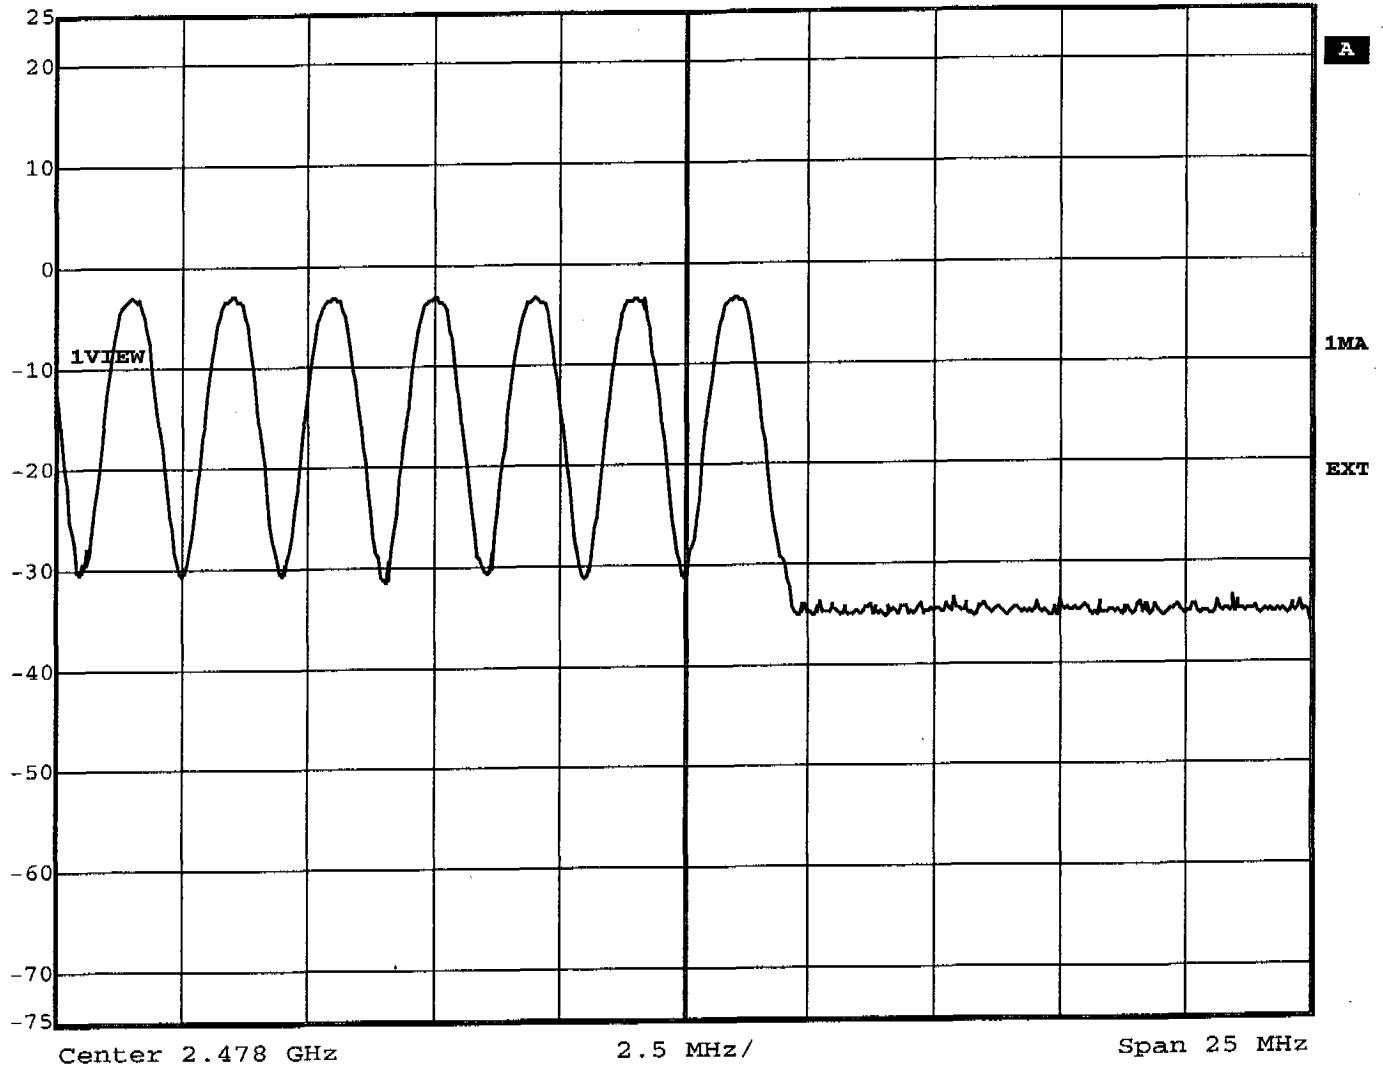


Title: Number of Hopping Frequencies (Inquiry Mode)
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 10:02:00

Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1]	RBW	1 MHz	RF Att	20 dB
Ref Lvl	-0.12 dB	VBW	1 MHz	
5 dBm	2.915832 ms	SWT	5 ms	Unit dBm

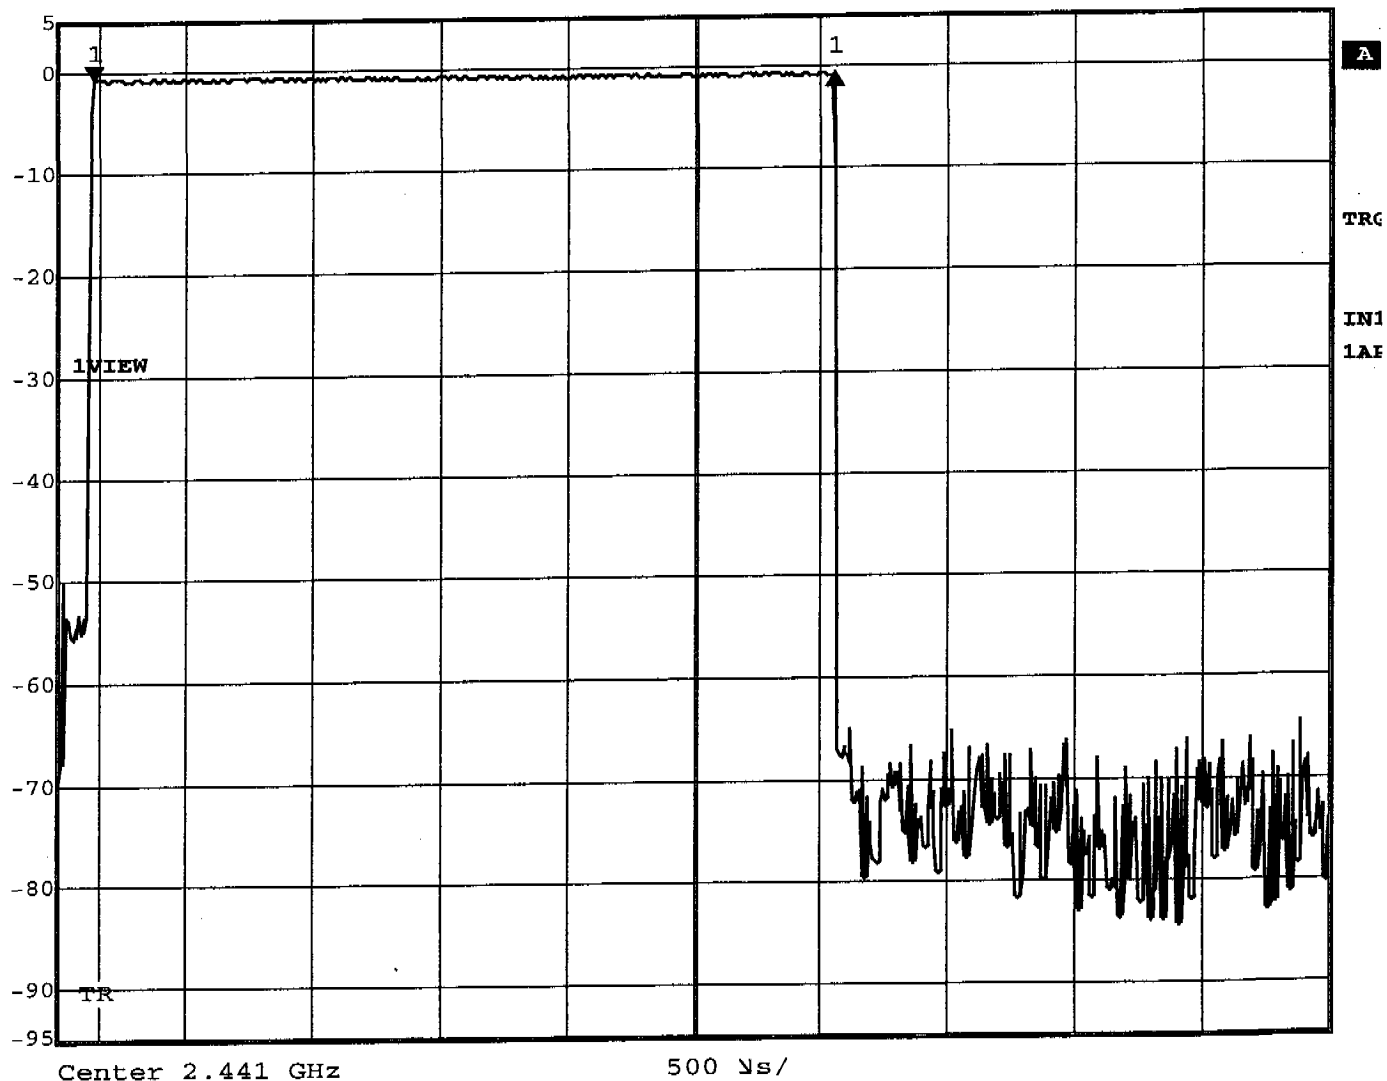

Title: Time of occupancy (Hopping DH5) 64 events*2.916ms=186.62ms
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 13:25:54



Delta 1 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl 0.04 dB VBW 1 MHz
5 dBm 119.038076 μ s SWT 300 μ s Unit dBm

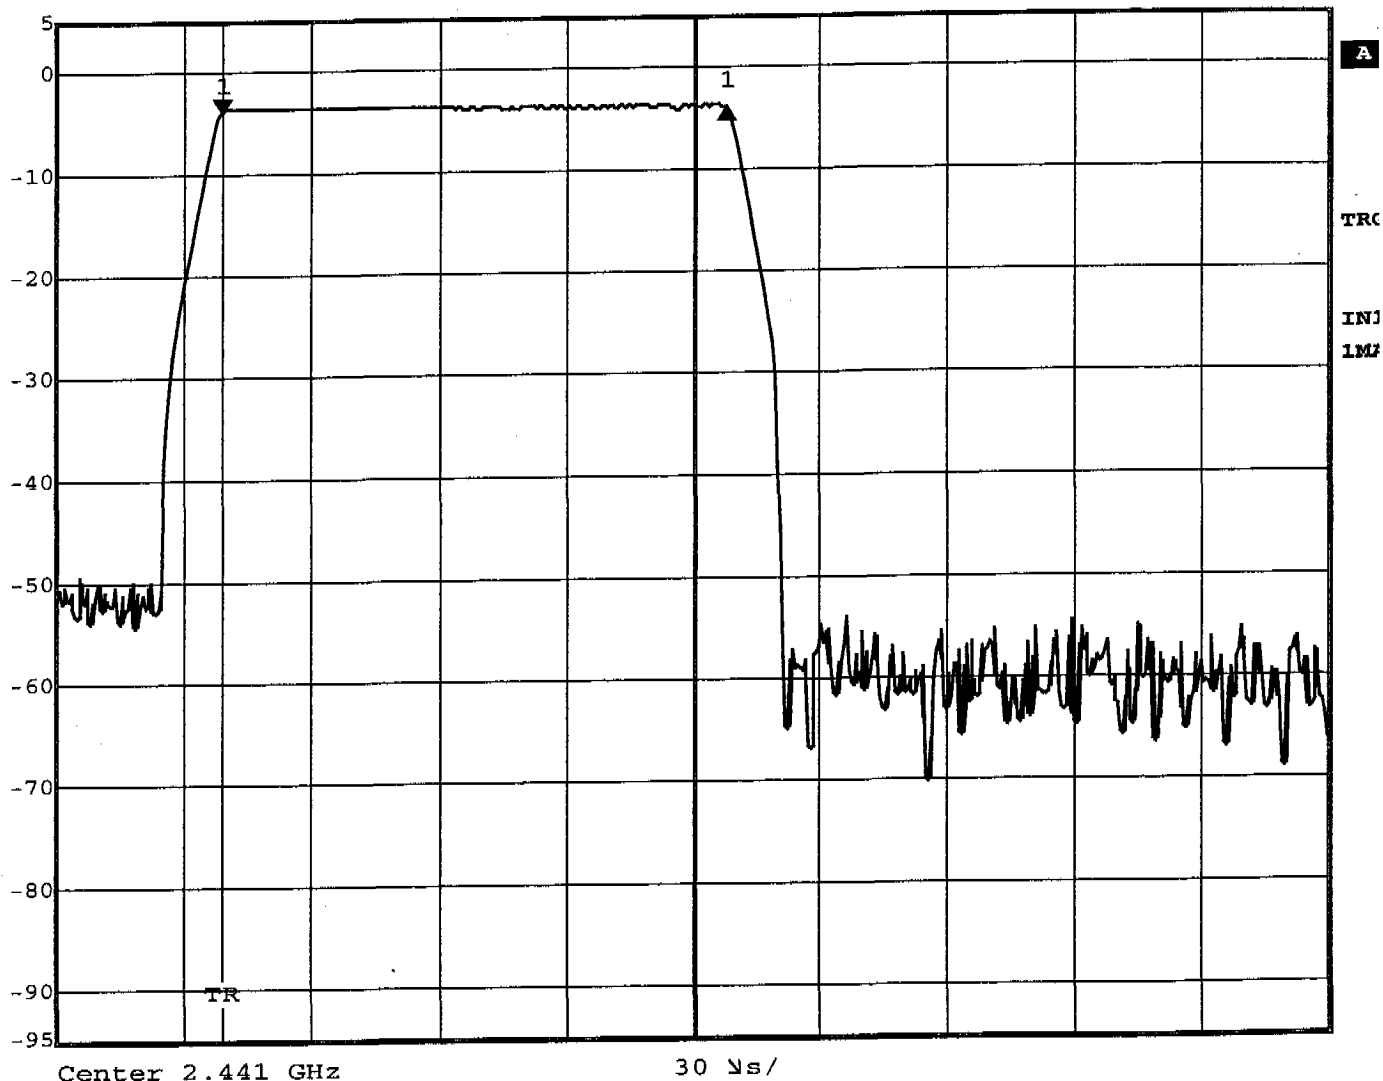

Title: Time of occupancy (Inquiry) 723 events*0.119038ms=86.31ms
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 11:44:18

Ref	Lvl
25	dBm

Delta 2 [T1]

-0.36 dB

6.266333 ms

RBW

1 MHz

RF Att

50 dB

VBW


1 MHz

SWT

11 ms

Unit

dBm

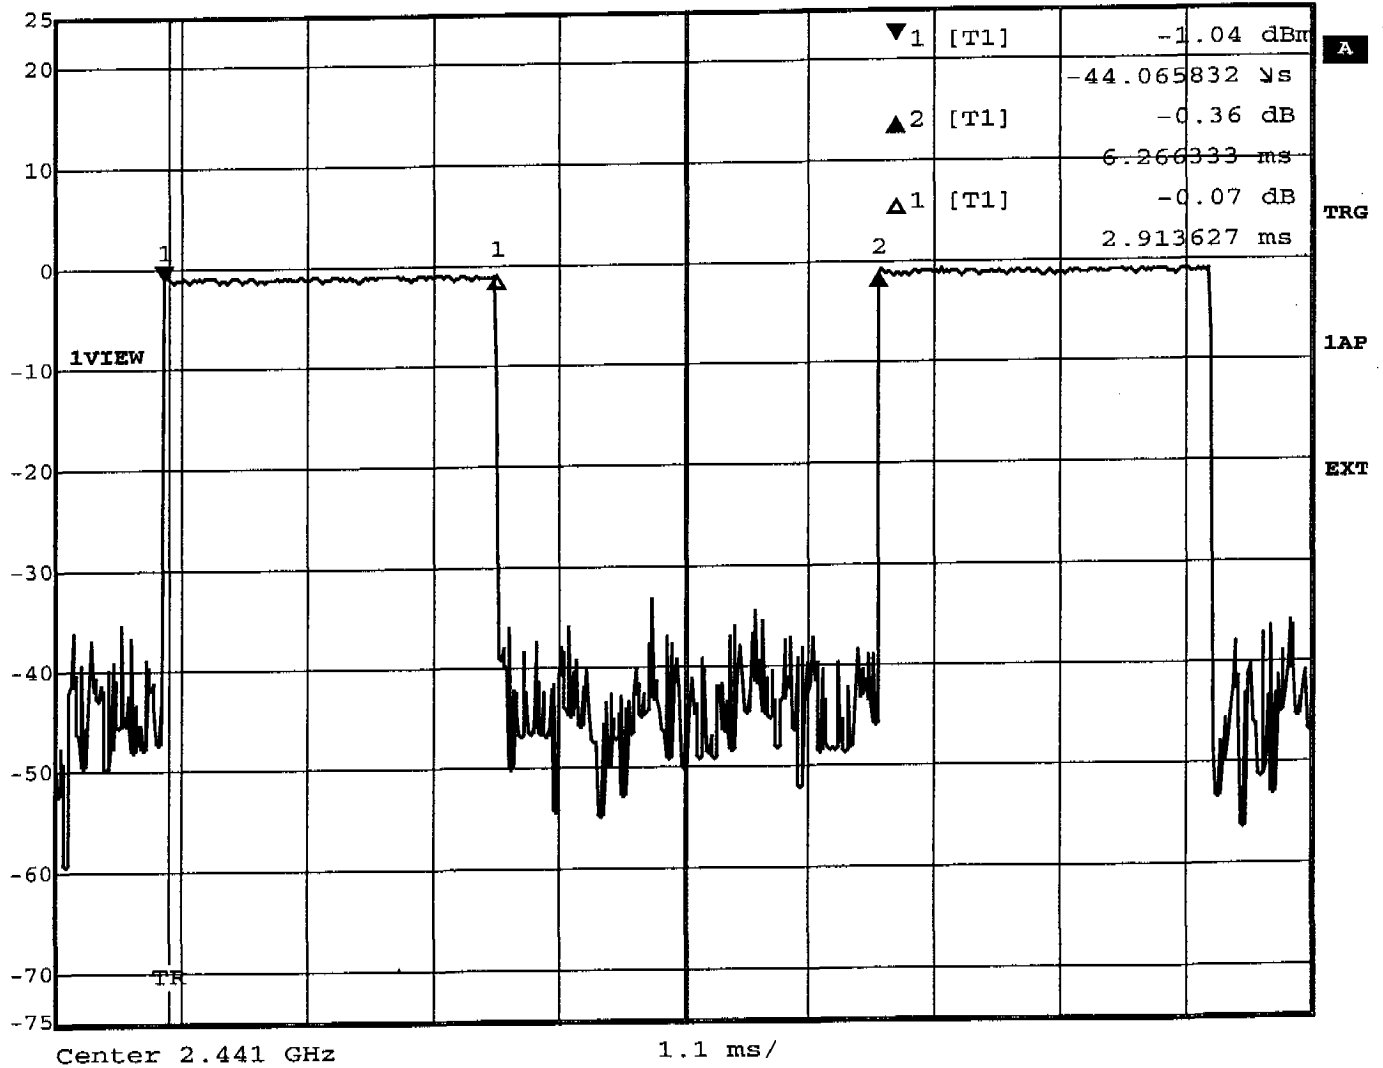

Title: Duty Cycle

Comment A: WORLD ELECTRON CO. WF2003BT Base


Date: 27.MAR.2003 15:09:54

Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.27 dB VBW 10 kHz
25 dBm 872.94589178 kHz SWT 56 ms Unit dBm

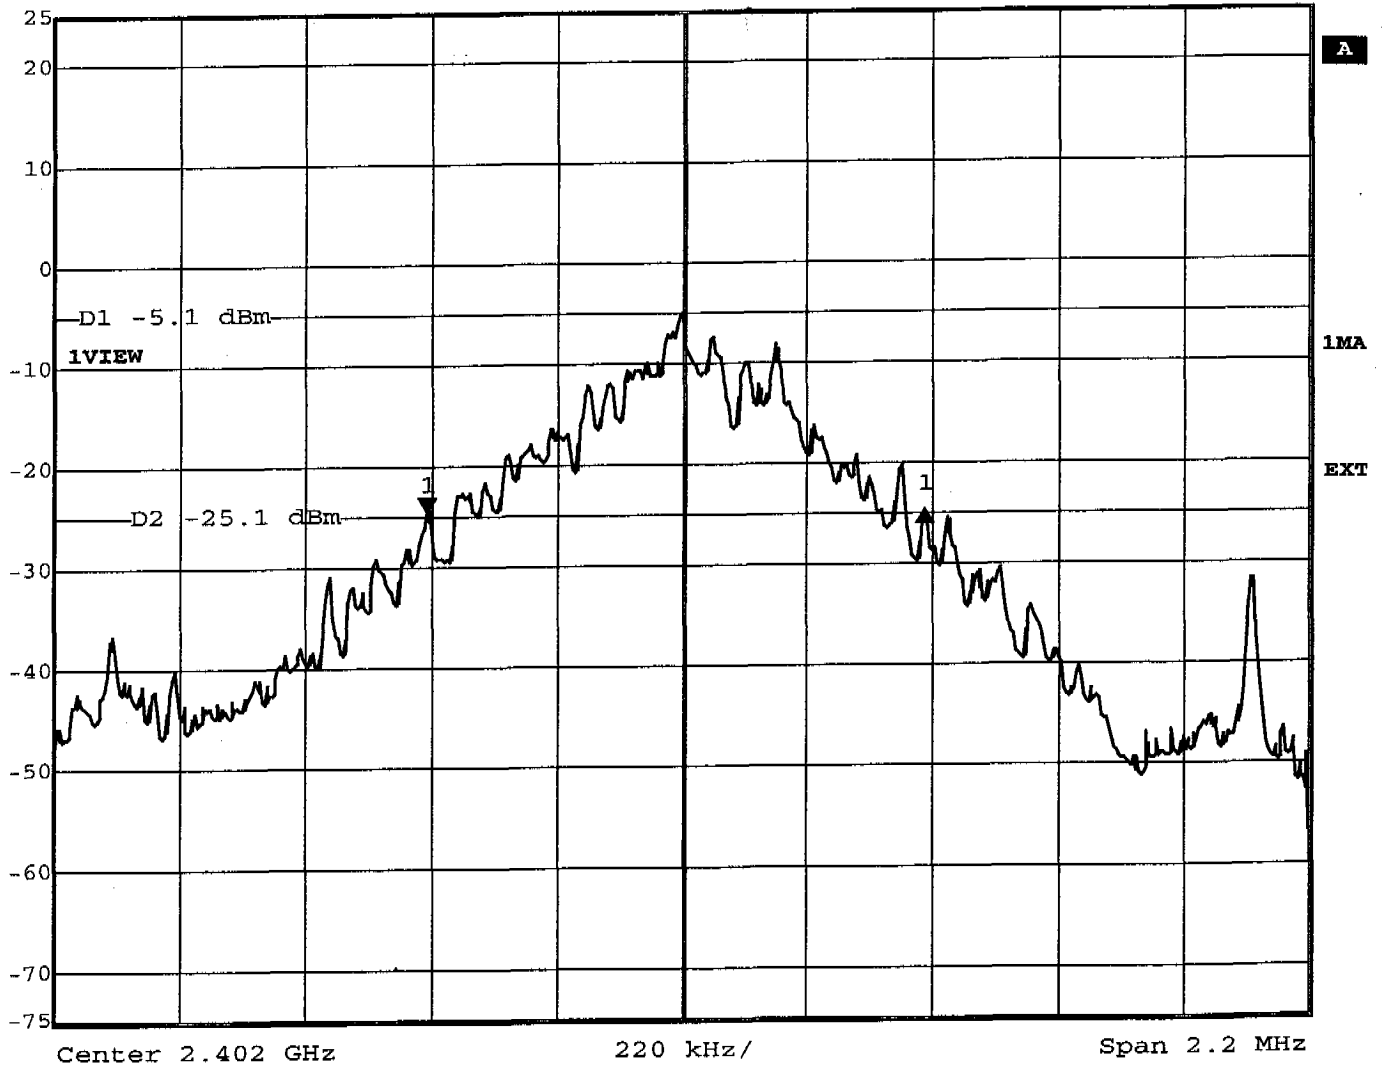

Title: -20dB Bandwidth Ch.: 0
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 27.MAR.2003 14:58:48




Delta 1 [T1]	RBW	10 kHz	RF Att	50 dB
Ref Lvl	-0.12 dB	VBW	10 kHz	
25 dBm	872.94589178 kHz	SWT	56 ms	Unit dBm

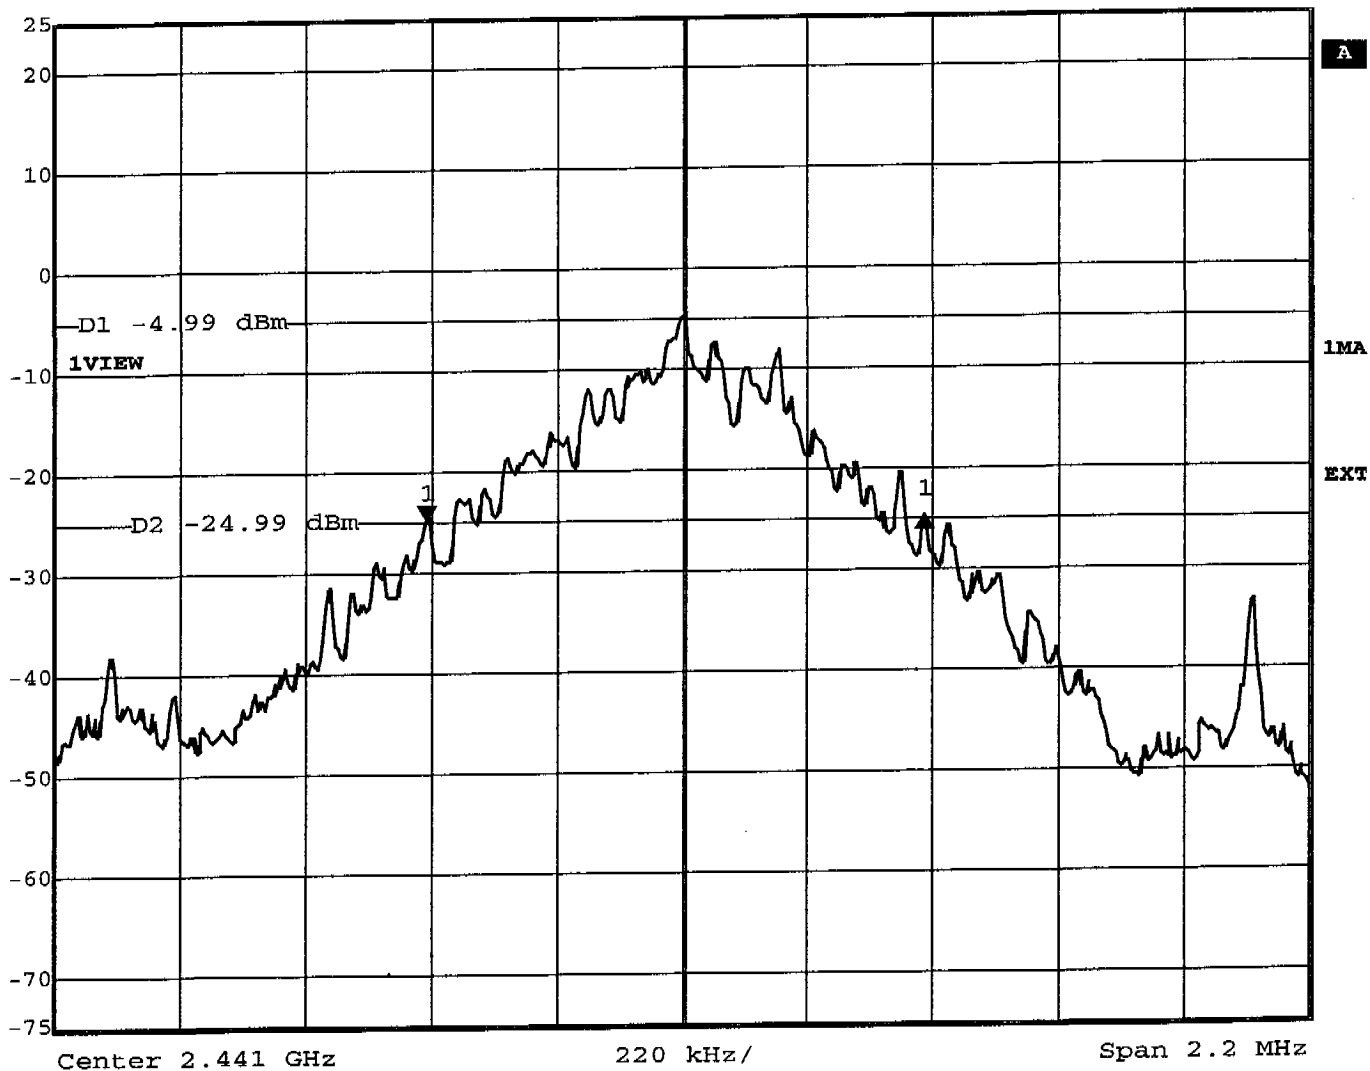

Title: -20dB Bandwidth Ch.: 39
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 27.MAR.2003 14:55:59



Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.07 dB VBW 10 kHz
25 dBm 872.94589178 kHz SWT 56 ms Unit dBm

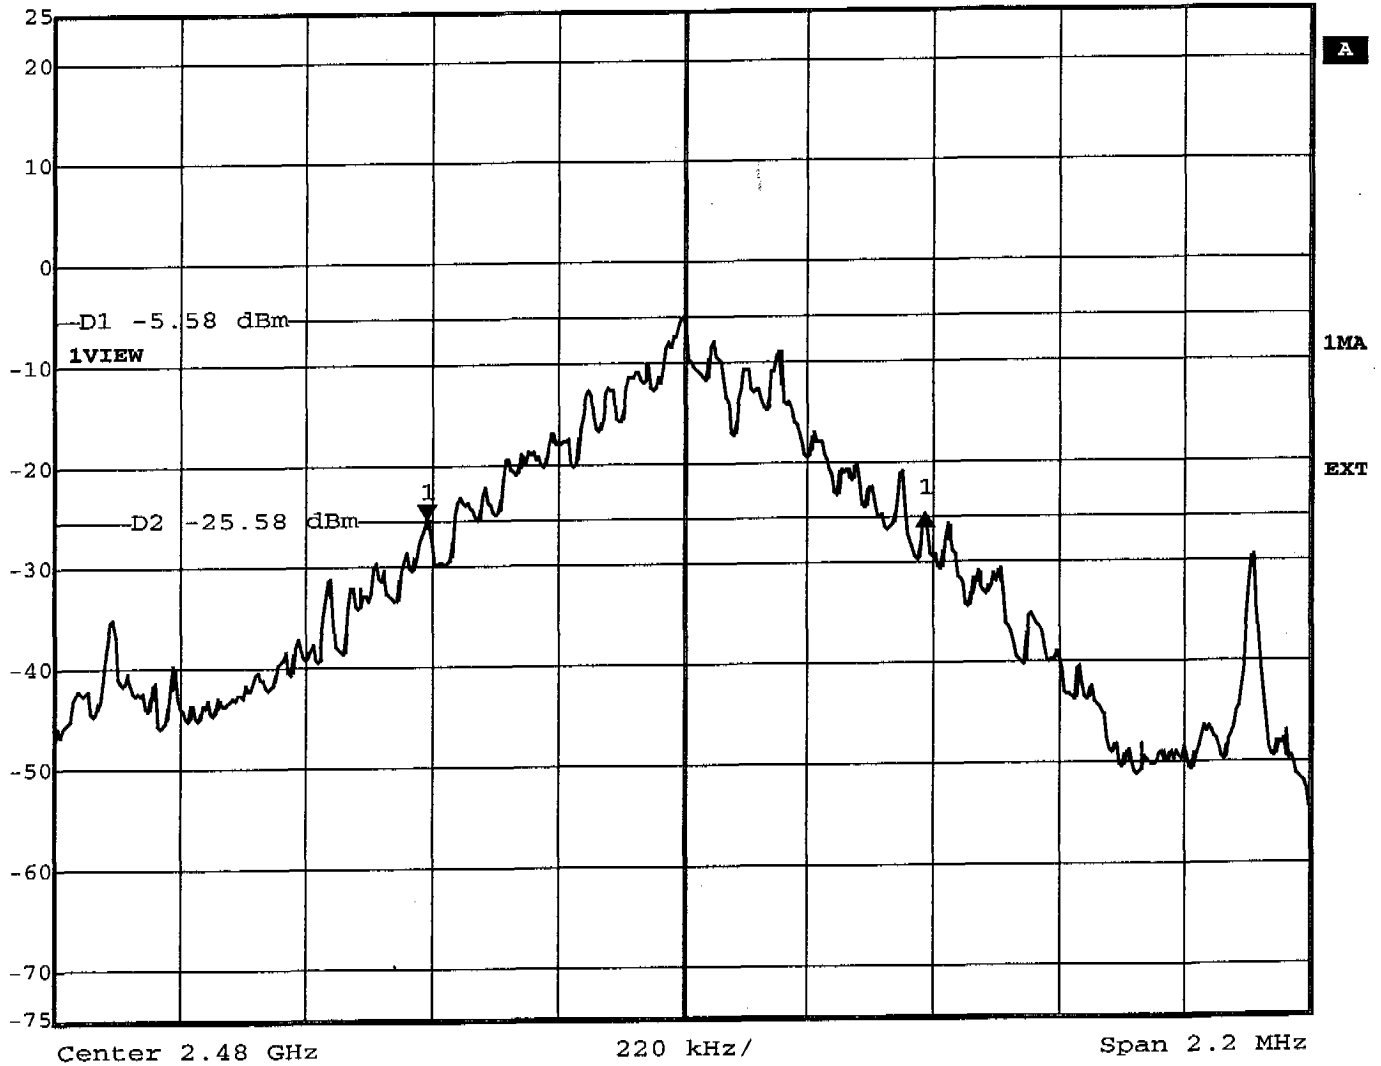


Title: -20dB Bandwidth Ch.: 78
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 27.MAR.2003 14:52:30

Appendix I

Band-edge Compliance of RF Emissions


	Marker 1 [T1]	RBW	50 kHz	RF Att	50 dB
Ref Lvl	-39.86 dBm	VBW	50 kHz		
25 dBm	2.40000802 GHz	SWT	5 ms	Unit	dBm

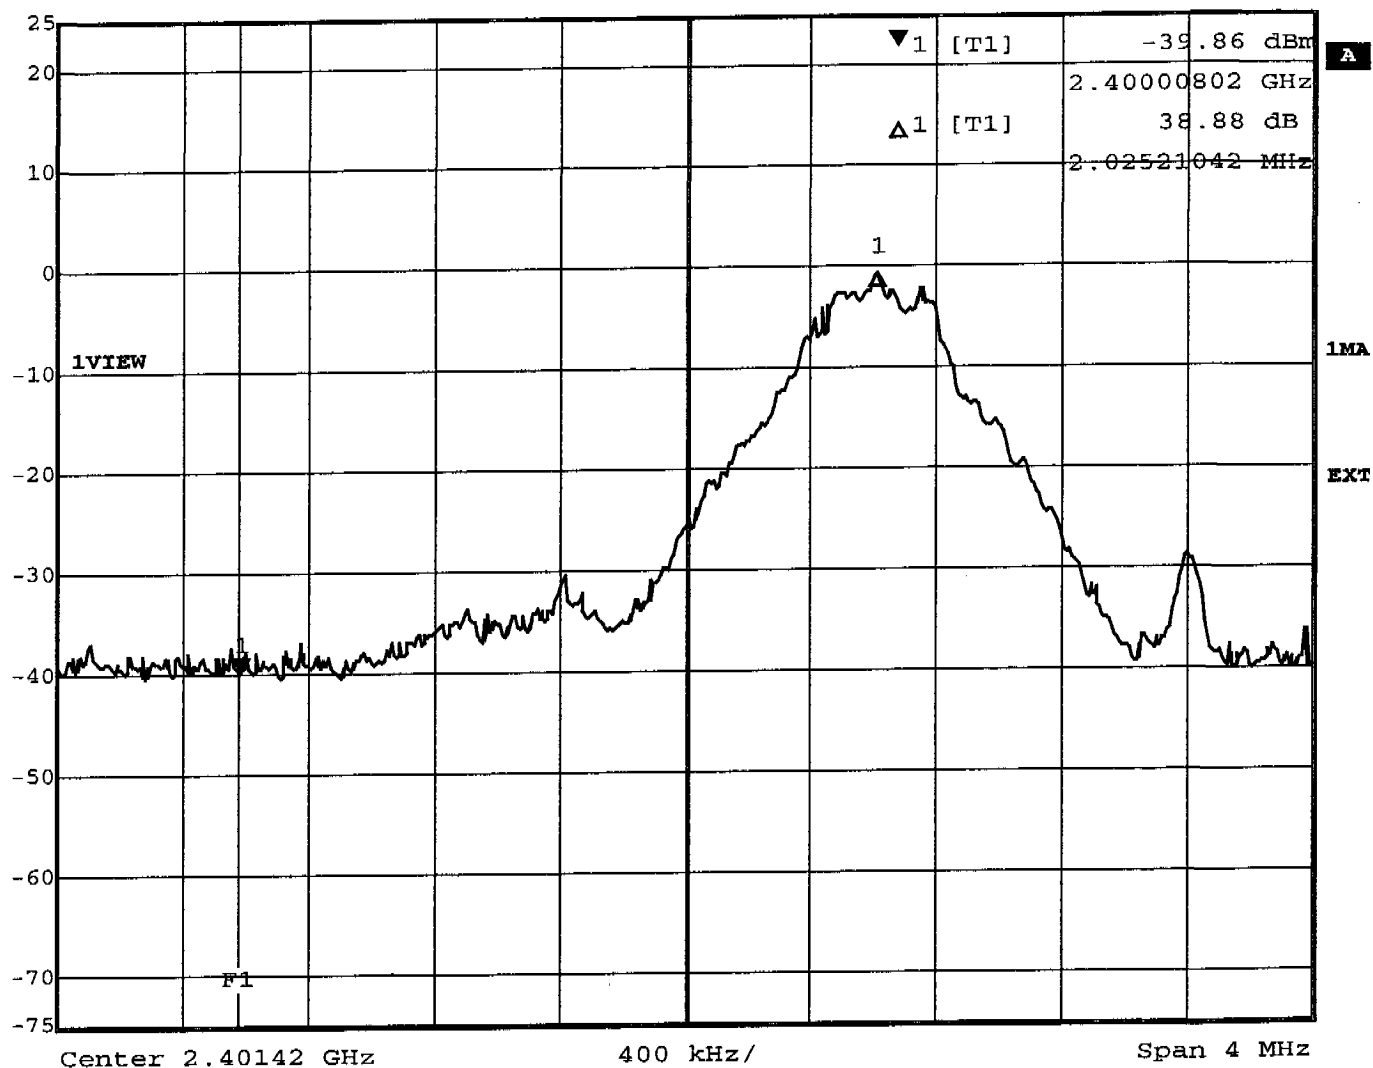

Title: Band-edge Compliance (conducted, single frequency)
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 27.MAR.2003 15:05:58




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 38.44 dB VBW 50 kHz
25 dBm -3.47895792 MHz SWT 5 ms Unit dBm

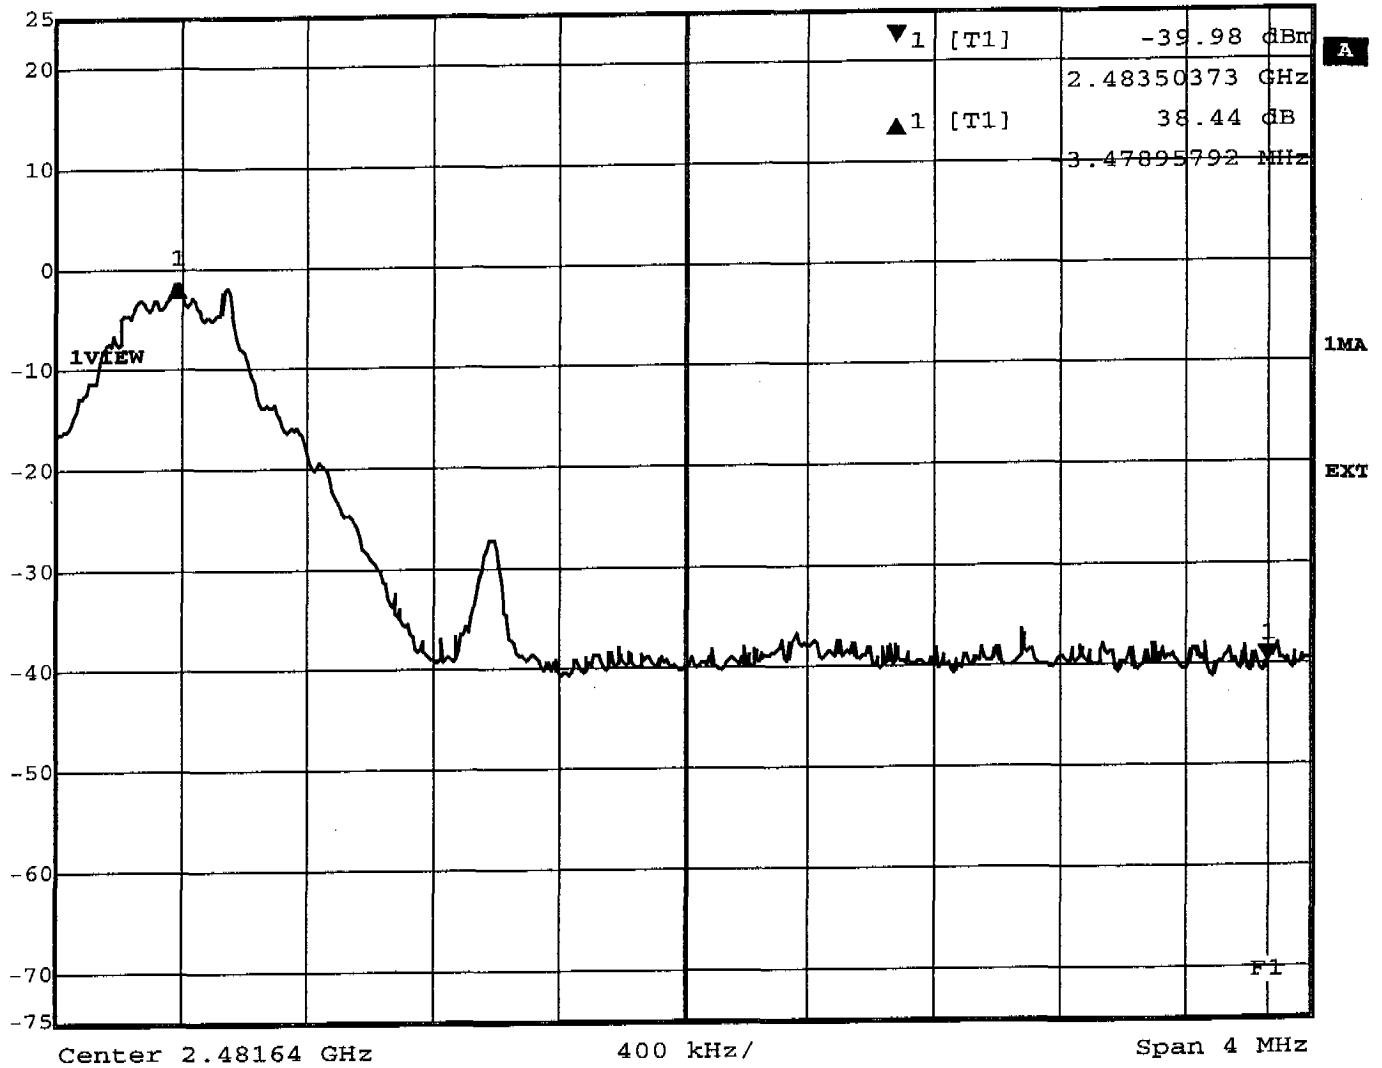

Title: Band-edge Compliance (conducted, single frequency)
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 27.MAR.2003 15:07:42




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 36.09 dB VBW 50 kHz
25 dBm 2.01799599 MHz SWT 5 ms Unit dBm

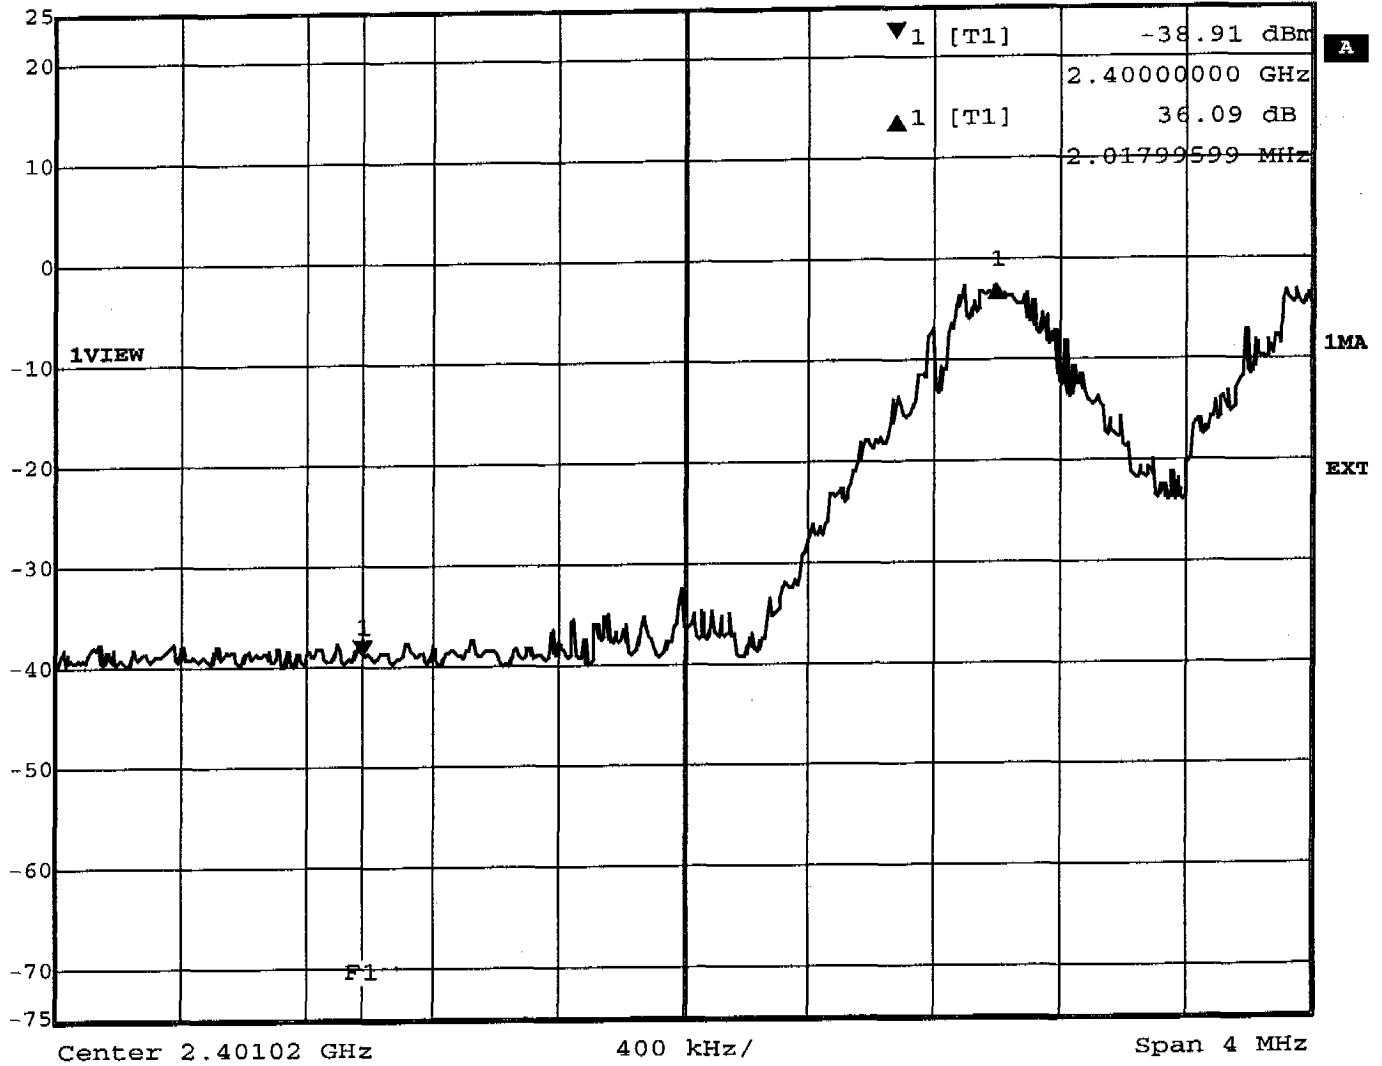

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 08:05:59



Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -39.77 dBm VBW 50 kHz
25 dBm 2.48350373 GHz SWT 5 ms Unit dBm

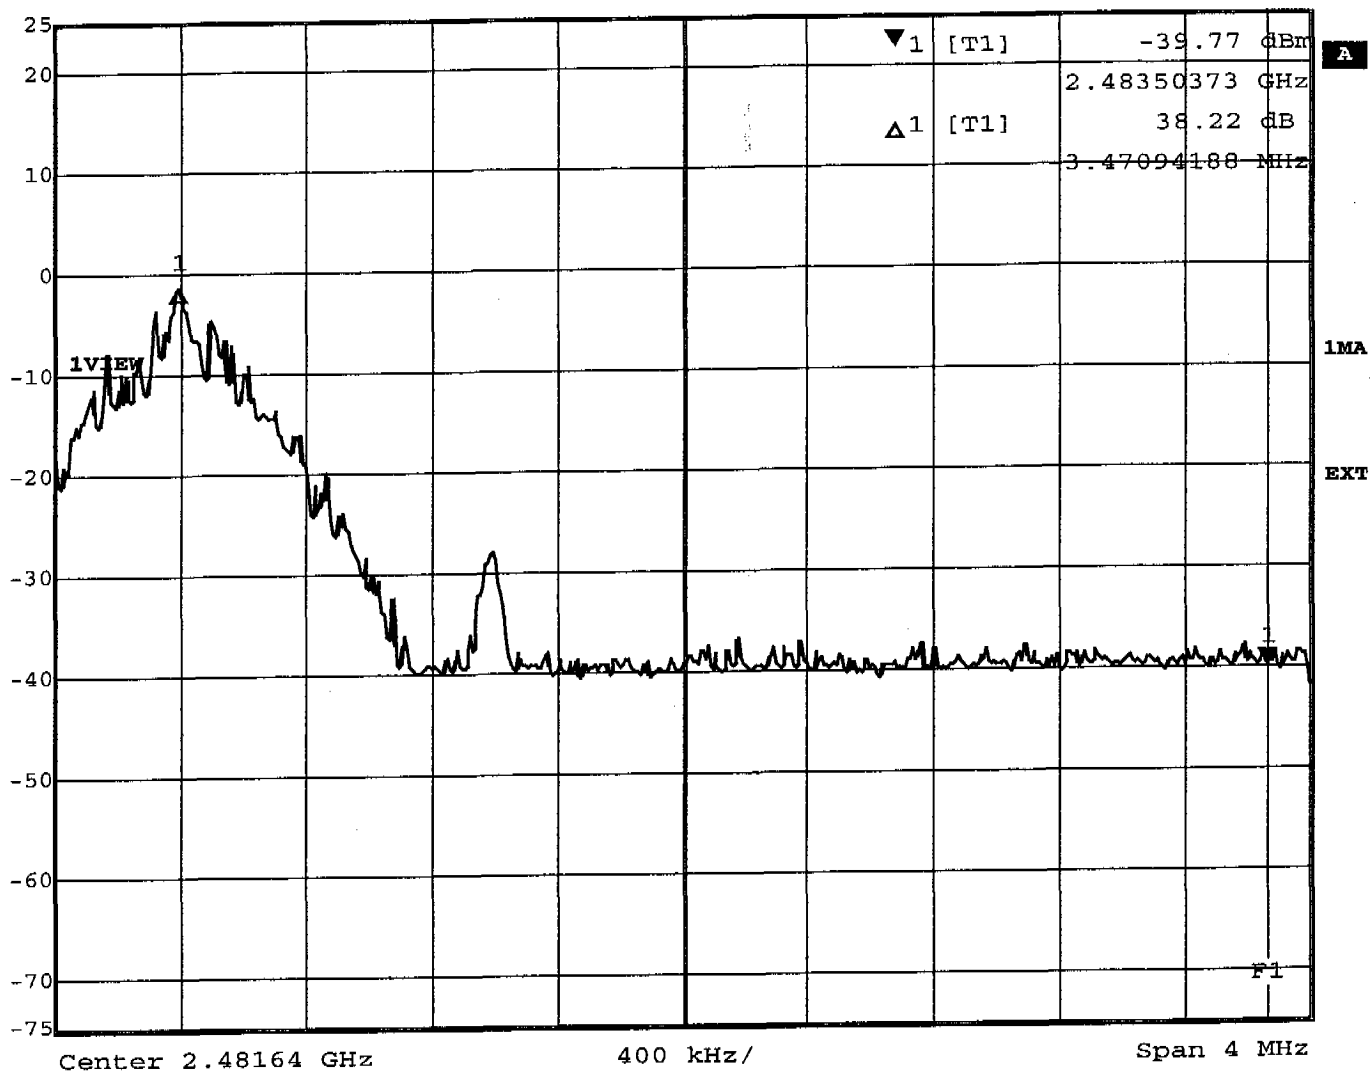


Title: Band-edge Compliance (conducted, hopping mode)
Comment A: WORLD ELECTRON CO. WF2003BT Base
Date: 28.MAR.2003 08:14:23

Appendix J

Conducted Measurement at (AC) Power Line


EMI voltage test in the ac-mains according to FCC part 15

EUT: DIGITAL WIRELESS HANDS FREE AND TELEPHONE
Manufacturer: WORLD ELECTRON CO., LTD.
Operating Condition: Unom: 120VAC, Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: WF2003BT mode: link

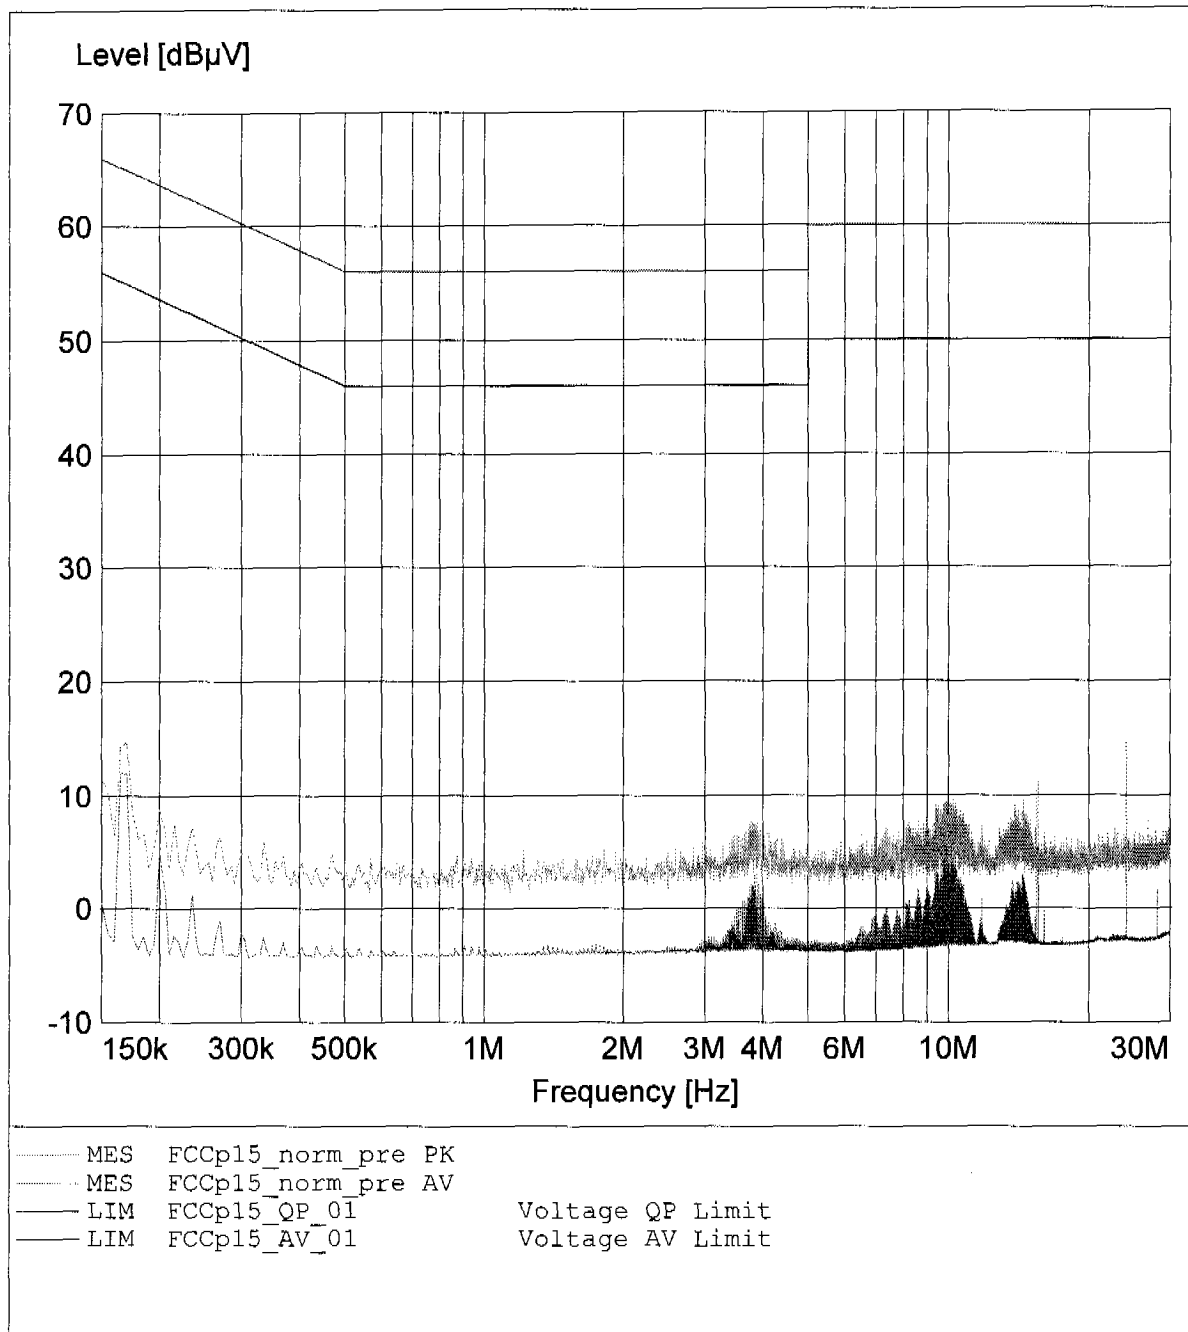


EMI voltage test in the ac-mains according to FCC part 15

EUT: DIGITAL WIRELESS HANDS FREE AND TELEPHONE
Manufacturer: WORLD ELECTRON CO., LTD.
Operating Condition: Unom: 120VAC, Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: WF2003BT mode: charging

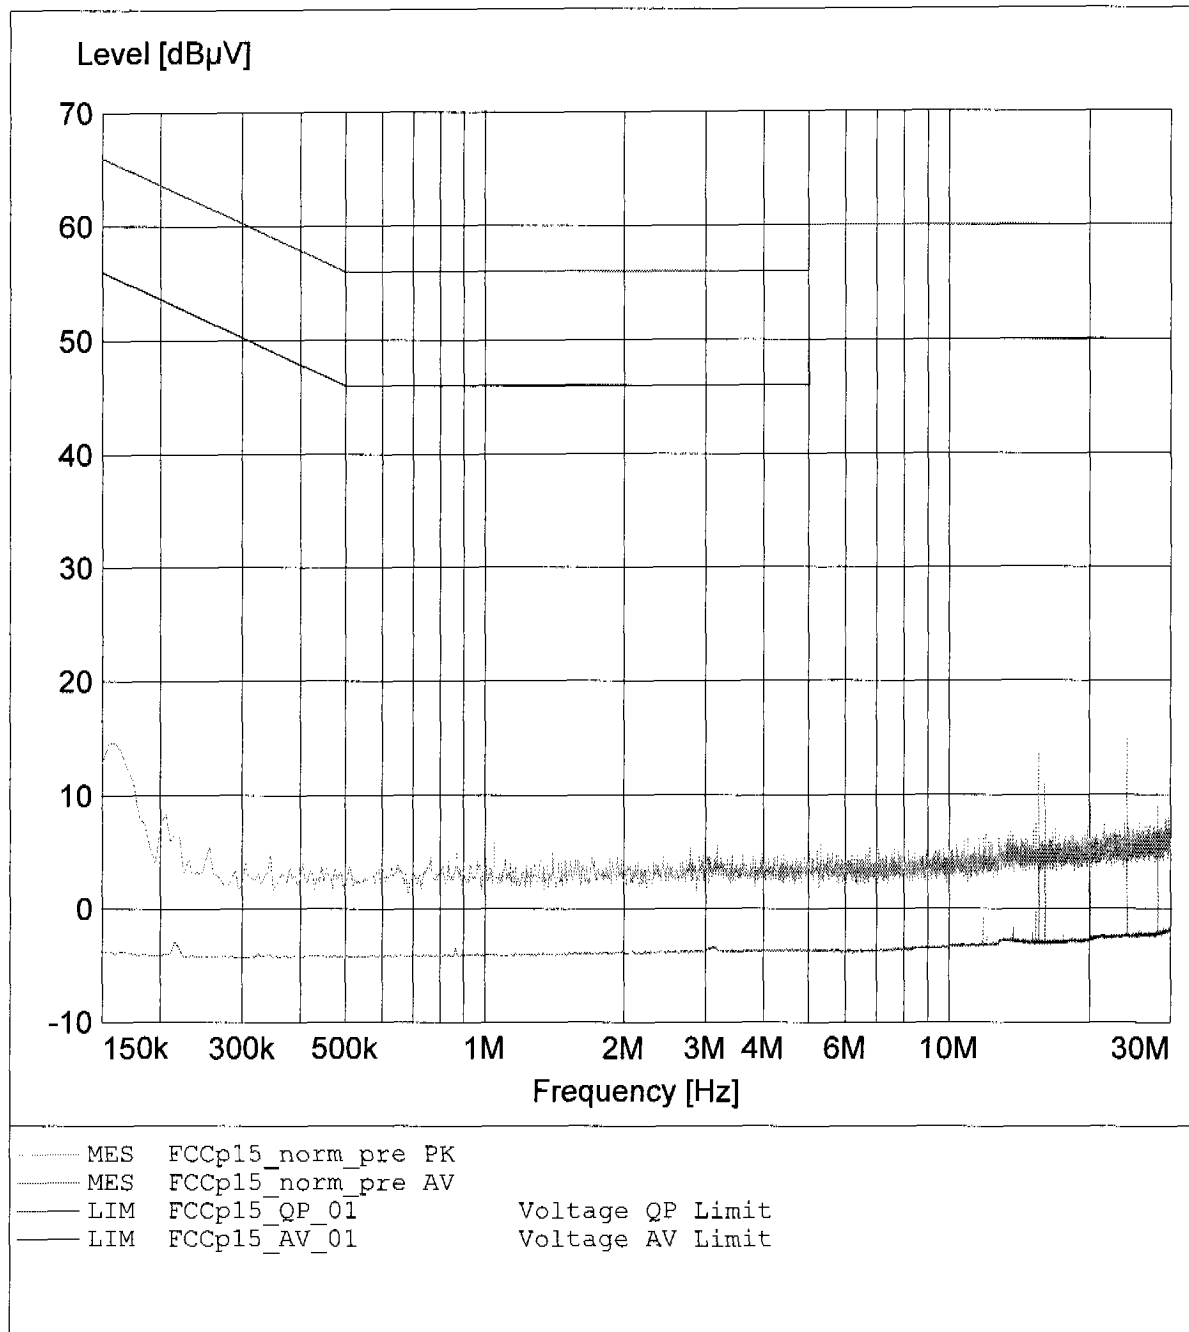

EMI voltage test in the ac-mains according to FCC part 15

EUT: DIGITAL WIRELESS HANDS FREE AND TELEPHONE
Manufacturer: WORLD ELECTRON CO., LTD.
Operating Condition: Unom: 120VAC, Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: WF2003BT mode: PP charging only

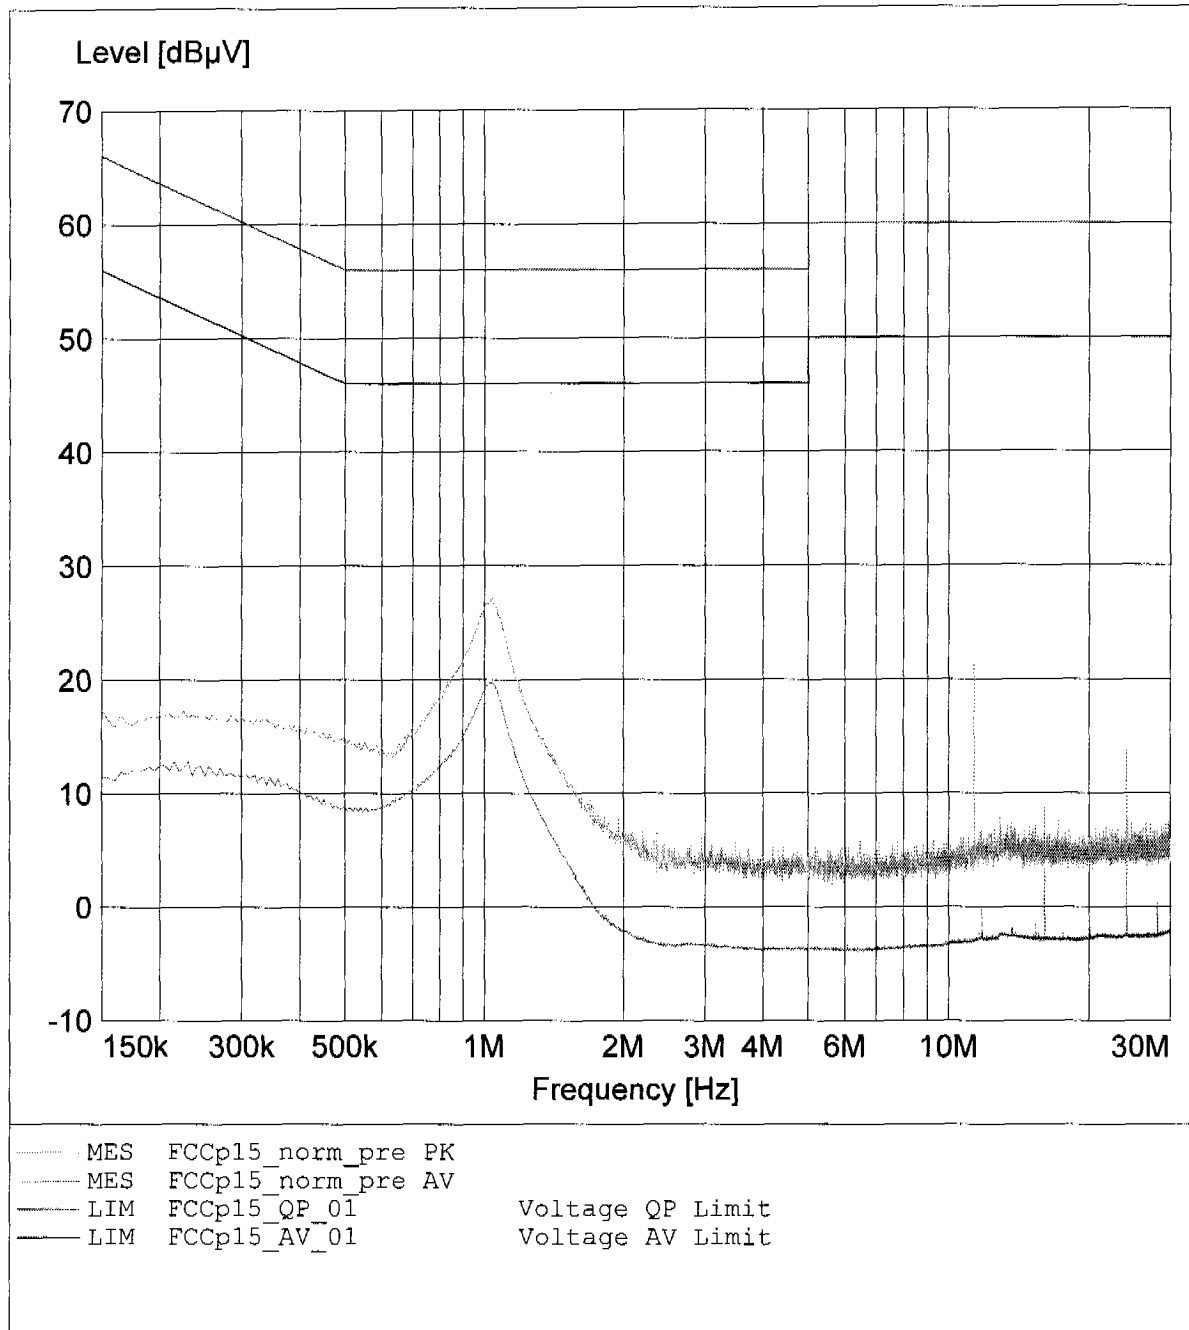

EMI voltage test in the ac-mains according to FCC part 15

EUT: DIGITAL WIRELESS HANDS FREE AND TELEPHONE
Manufacturer: WORLD ELECTRON CO., LTD.
Operating Condition: Unom: 120VAC, Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: WF2003BT mode: BASE charging only

