


(41) EUT Photo \_ M/N: PB-01S




(42) EUT Photo \_ M/N: PB-01S



(43) EUT Photo \_ M/N: PB-01S

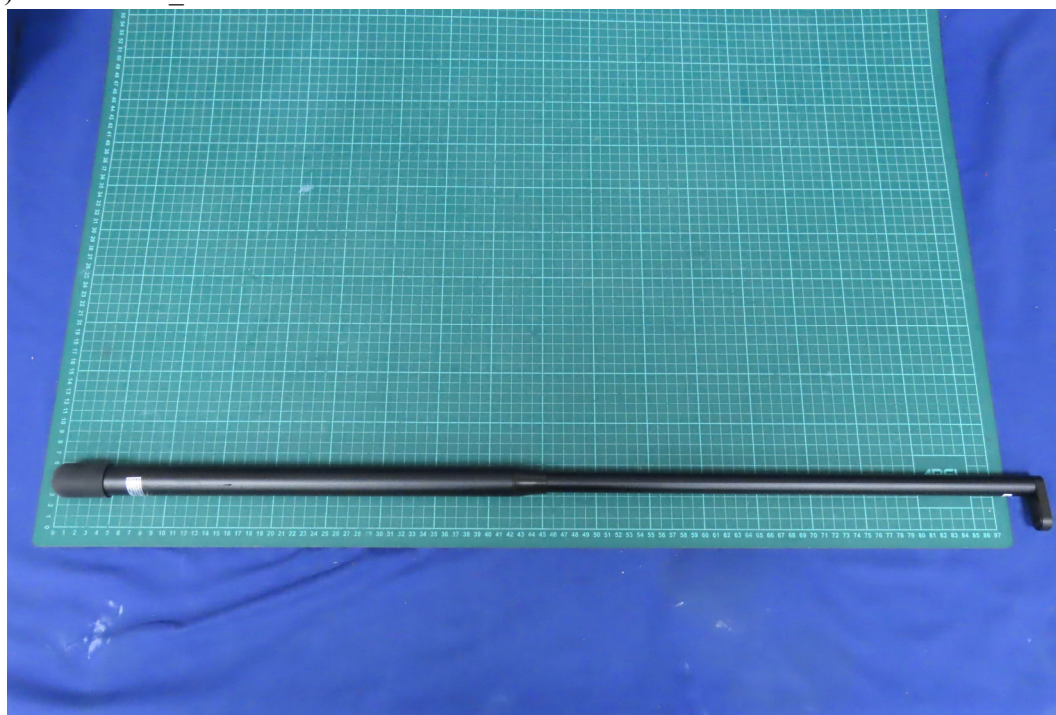

(44) EUT Photo \_ M/N: PB-01S

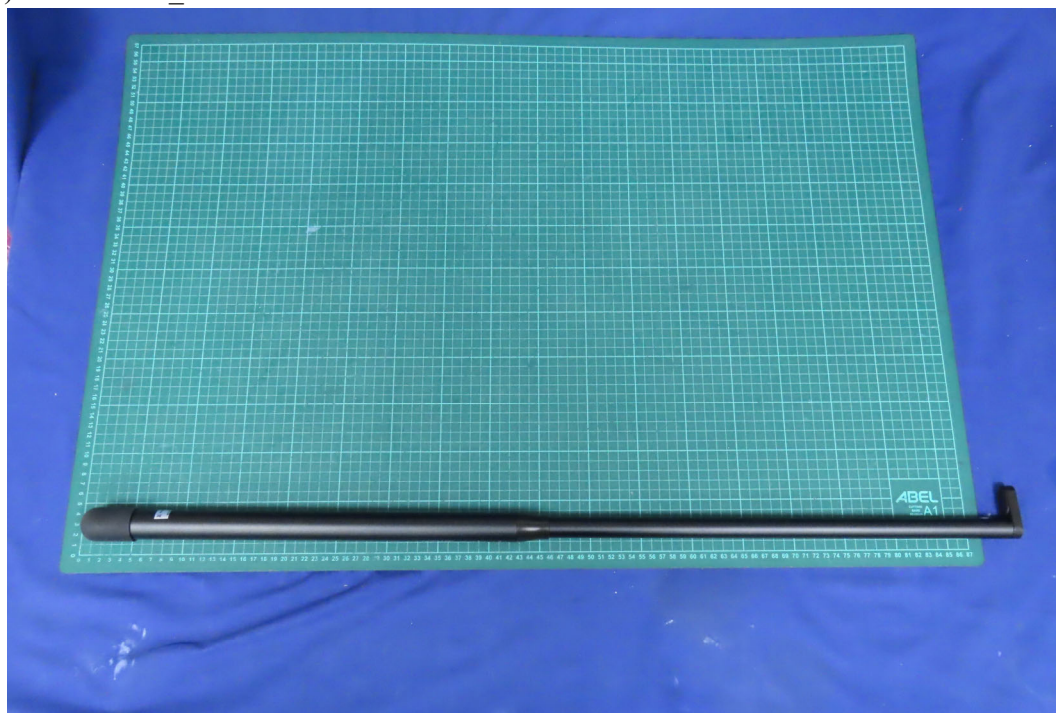



(45) EUT Photo \_ M/N: PB-01S



(46) EUT Photo \_ M/N: PB-01S



(47) EUT Photo \_M/N: DIAL01



(48) EUT Photo \_M/N: DIAL01






(49) EUT Photo \_M/N: RC-A01



(50) EUT Photo \_M/N: RC-A01



(51) EUT Photo \_M/N: RC-S01

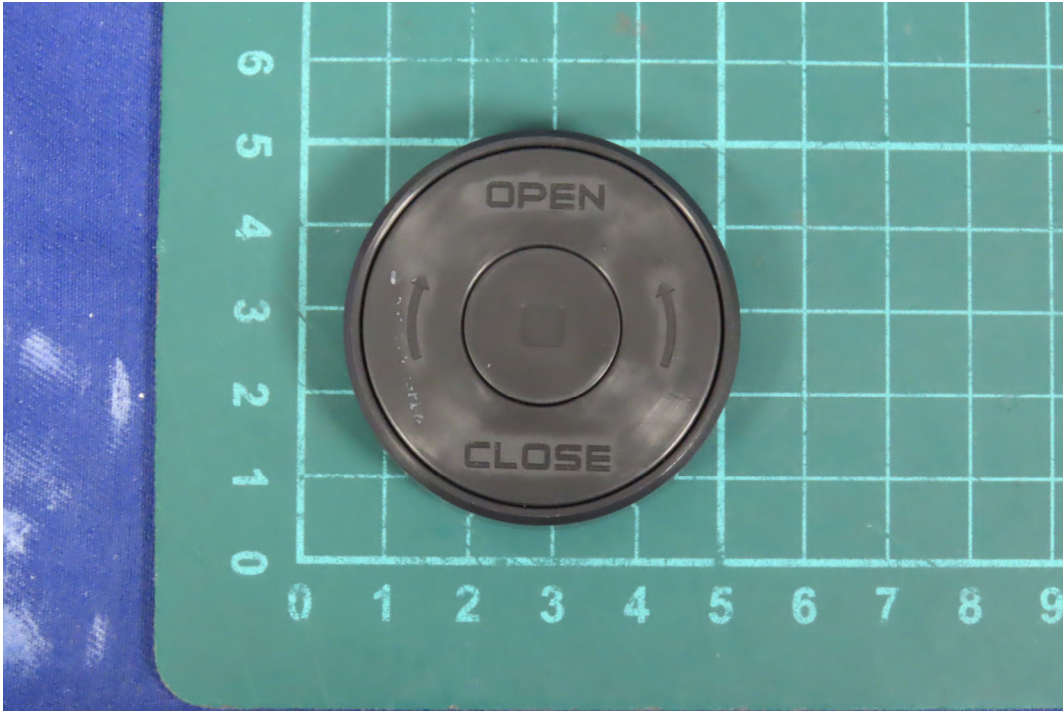

(52) EUT Photo \_M/N: RC-S01





(53) EUT Photo \_M/N: 84601-11725



(54) EUT Photo \_M/N: 35501-40108



(55) EUT Photo \_ M/N: 84601-11721



(56) EUT Photo \_ M/N: 84601-11734





A black power cable is coiled on a green grid background. The cable has a three-pronged plug on one end and a two-pronged plug on the other. The three-pronged plug is marked with 'MADE IN CHINA' and 'BS 1363'. The two-pronged plug is marked with 'MADE IN CHINA' and 'BS 1363'. The cable is marked with 'MADE IN CHINA' and 'BS 1363'. The background is a green grid with a ruler scale from 0 to 22 cm.

A black power cord is shown coiled on a green grid background. The cord has a three-pronged plug on one end and a two-pronged plug on the other. The cord is marked with "UL 1007" and "100% COTTON". The background is a green grid with numbers 0 to 22 on the x-axis and 0 to 14 on the y-axis.

(59) EUT Photo \_ M/N: UHVUU3036-240015SA (US)



(60) EUT Photo \_ M/N: UHVUU3036-240015SA (US)





(61) EUT Photo \_ M/N: UHVUU3036-240015SA (US)



(62) EUT Photo \_ M/N: UHVUU3036-240015SA (US)




A black, rectangular AC/DC power adapter is shown on a green grid background. The adapter has a standard two-prong AC power plug on the left side. A black cable is connected to the top of the adapter, featuring a small black cylindrical component near the plug and a barrel jack connector at the other end. The barrel jack has a silver-colored inner pin and a black outer sleeve. The adapter is positioned diagonally, with the cable coiled behind it.


UNIFIVE  Energy Verified 

(型號) Model No: UHVUU3036-240015SA  
(輸入) I/P: AC 100-240V ~ 50/60Hz 0.9A  
(輸出) O/P: DC 24.0V  1.5A 36.0W

 I/P: AC 100V 50/60Hz 70VA  
O/P: DC 24V 1.5A  
JET ノーマンジャパン株式会社  

    IP 20  
R51058 RoHS ta: 40 °C  
電源供應器

MADE IN CHINA  
I.T.E. 類電源 中國製造  
優源科技(深圳)有限公司

S/No. M11 



(65) EUT Photo \_ M/N: CHDZD3065-240027PA



(66) EUT Photo \_ M/N: CHDZD3065-240027PA



(67) EUT Photo \_ M/N: CHDZD3065-240027PA

