



Nemko Test Report: 23954RUS1

Applicant: Fiber-Span
111 Corporate Blvd.
Plainfield, NJ 07080
USA

Equipment Under Test: FS51C-85
(E.U.T.)

FCC Identifier: Q4VFS51C-85

In Accordance With: **CFR 47 Part 90, Subpart I**
Private Land Mobile Repeater

Tested By: Nemko USA Inc.
802 N. Kealy
Lewisville, TX 75057-3136

TESTED BY:



David Light, Senior Wireless Engineer

DATE: 16 April 2009

**APPROVED
BY:**



Tom Tidwell, Telecom Direct

DATE: 16 April 2009

Number of Pages: 28

Table of Contents

Section 1. Summary of Test Results	3
Section 2. General Equipment Specification	5
Section 3. RF Power Output.....	7
Section 4. Occupied Bandwidth.....	8
Section 5. Spurious Emissions at Antenna Terminals	13
Section 6. Field Strength of Spurious Emissions.....	19
Section 7. Test Equipment List.....	20
ANNEX A - TEST METHODOLOGIES.....	21
ANNEX B - TEST DIAGRAMS	26

Section 1. Summary of Test Results

Manufacturer: Fiber-Span

Model No.: FS51C-85

Serial No.: 2334-02-1

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with CFR Part 90, Subpart I.

<input checked="" type="checkbox"/>	New Submission	<input checked="" type="checkbox"/>	Production Unit
<input type="checkbox"/>	Class II Permissive Change	<input type="checkbox"/>	Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.
See "Summary of Test Data".



Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	RESULT
RF Power Output	90.205 / 90.635	1 kW	Complies
Occupied Bandwidth	90.210	Input/Output	Complies
Spurious Emissions at Antenna Terminals	90.210	Mask B	Complies
Field Strength of Spurious Emissions	90.210	Mask B	Complies
Frequency Stability	90.213	1.0 ppm	NA

Footnotes:

- (1) Since the E.U.T. does not contain modulation circuitry modulation testing was not performed.
- (2) Since the E.U.T. is not a keyed carrier system, Transient Frequency Behavior was not performed.

Section 2. General Equipment Specification**Supply Voltage Input:** 120 Vac**Frequency Range:** Downlink: 851-869 MHz**Frequency Range:** Uplink: 806-824 MHz**20 dB Bandwidth:** 88 kHz

Type of Modulation and Designator:	CDMA (G7W)	GSM (GXW)	NADC (DXW)	CDPD (F9W)	Analogue (F8W, F1D)
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

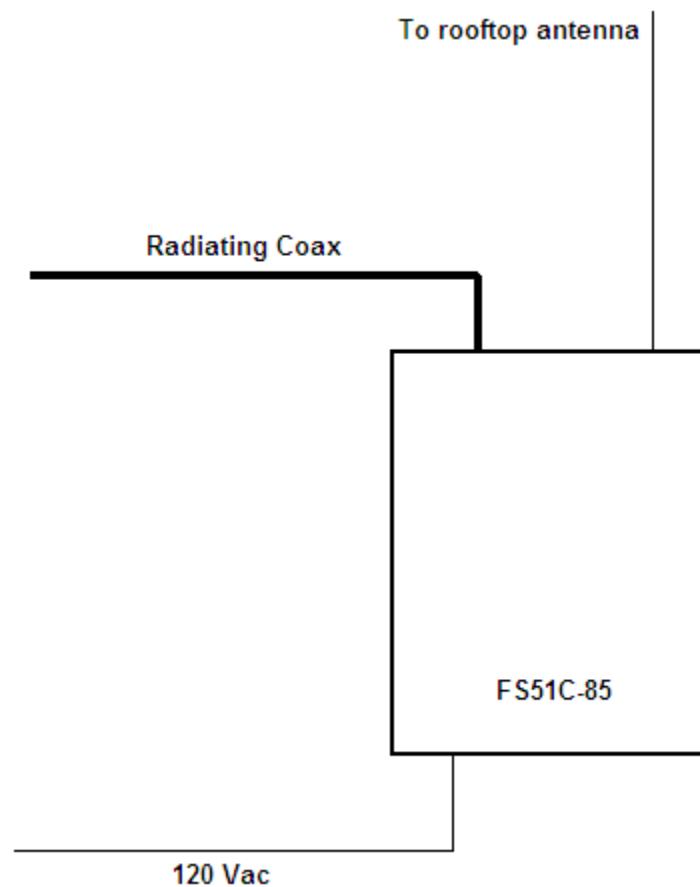
Output Impedance: 50 ohms**RF Output (Rated):** Downlink **Composite: 1 Watt (30 dBm)****RF Output (Rated):** Uplink **Composite: 1 Watt (30 dBm)**

Frequency Translation:	F1-F1	F1-F2	N/A
	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Band Selection:	Software	Duplexer Change	Full band Coverage
	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Description of EUT

The FS51C-85 is an eight channel, 800 MHz, bidirectional amplifier utilizing 16 channels of synchronized down-up conversions. The multi-channel booster is divided into two independent 8 channel systems for full duplex operation. Downlink signals are received at the rooftop antenna, 8 selected frequencies are processed and rebroadcast on radiating cable. Conversely, uplink signals induced onto radiating cable are similarly processed and rebroadcast on the rooftop antenna.

System Diagram

Section 3. RF Power Output

NAME OF TEST: RF Power Output	PARA. NO.: 2.985
TESTED BY: David Light	DATE: 14 April 2008

Test Results: Complies.**Measurement Data:**

Direction	Modulation	Output per Channel (dBm)	Composite Power (dBm)	Composite Power (W)
Uplink	Analog	27	30	1.0
Downlink	Analog	27	30	1.0

Equipment Used: 1663-1082-1472-1469**Measurement Uncertainty:** +/- 1.7 dB**Temperature:** 22 °C**Relative Humidity:** 35 %

Section 4. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.989
TESTED BY: David Light	DATE: 14 April 2009

Test Results: Complies.**Test Data:** See attached plot(s).**Equipment Used:** 1663-1472-1469-1082**Measurement Uncertainty:** 1X10⁻⁷ ppm**Temperature:** 22 °C**Relative Humidity:** 35 %

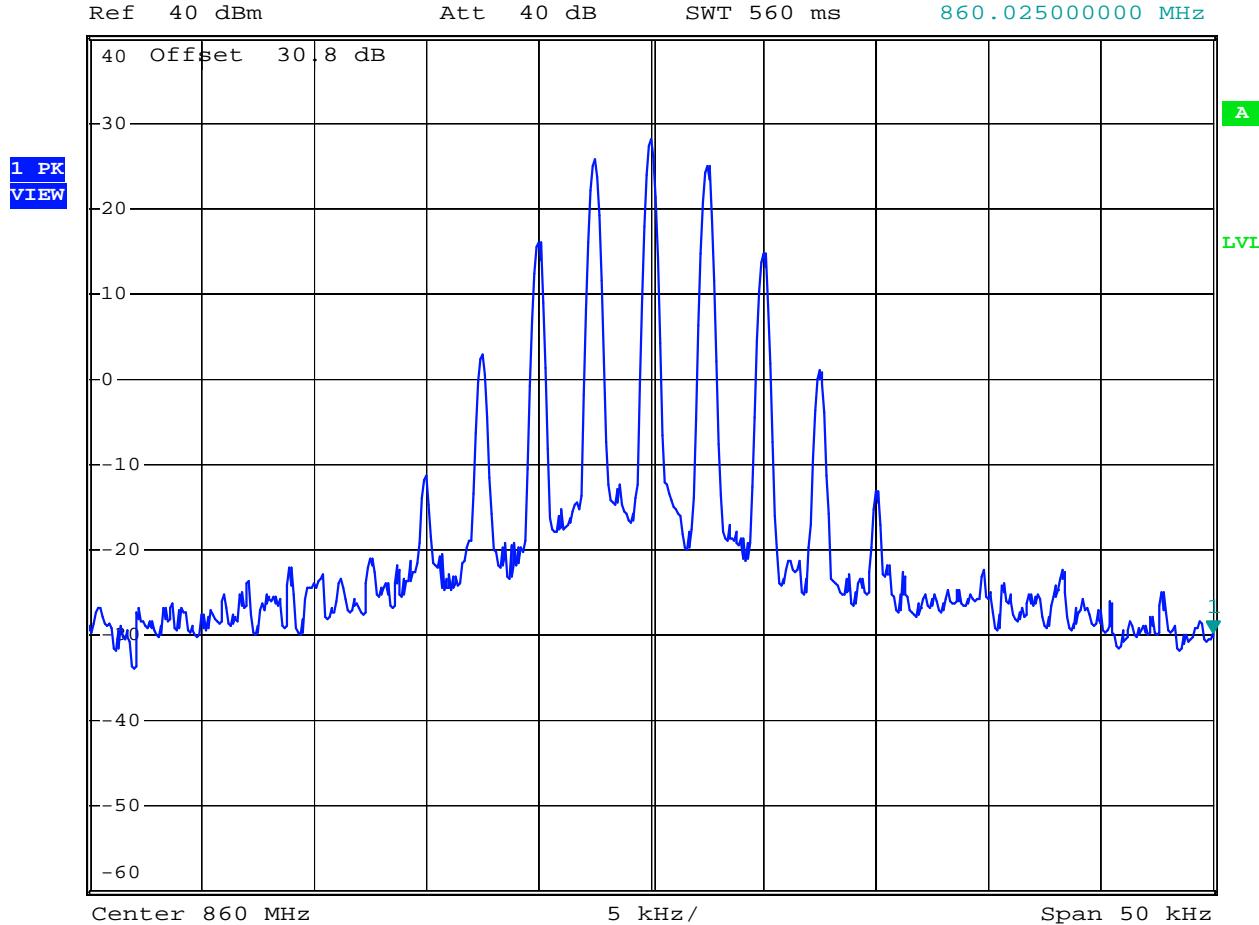
Test Data – Occupied Bandwidth

Downlink Output

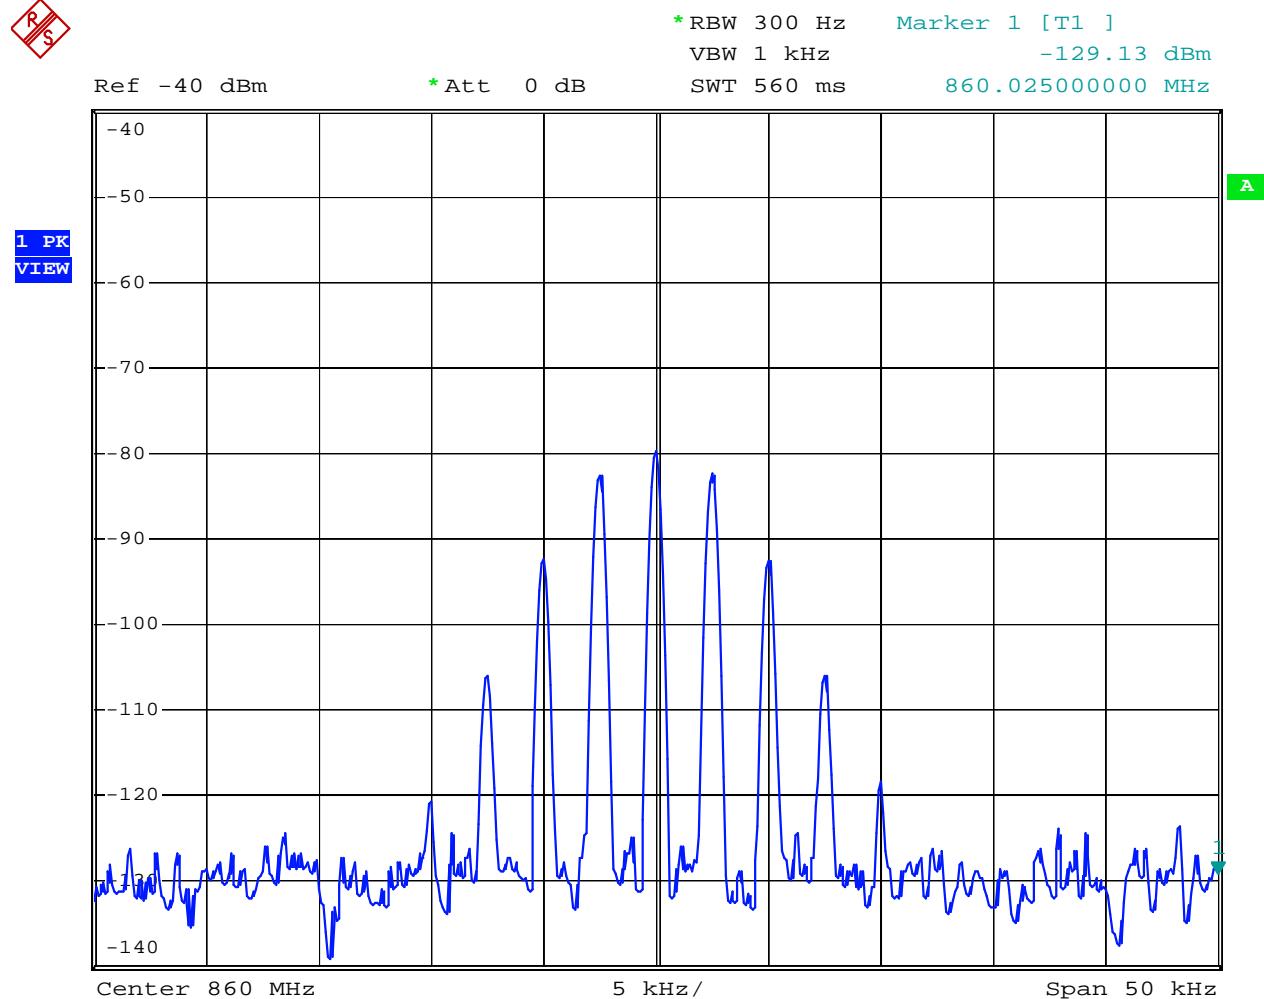
2.5 kHz Tone / 3 kHz deviation



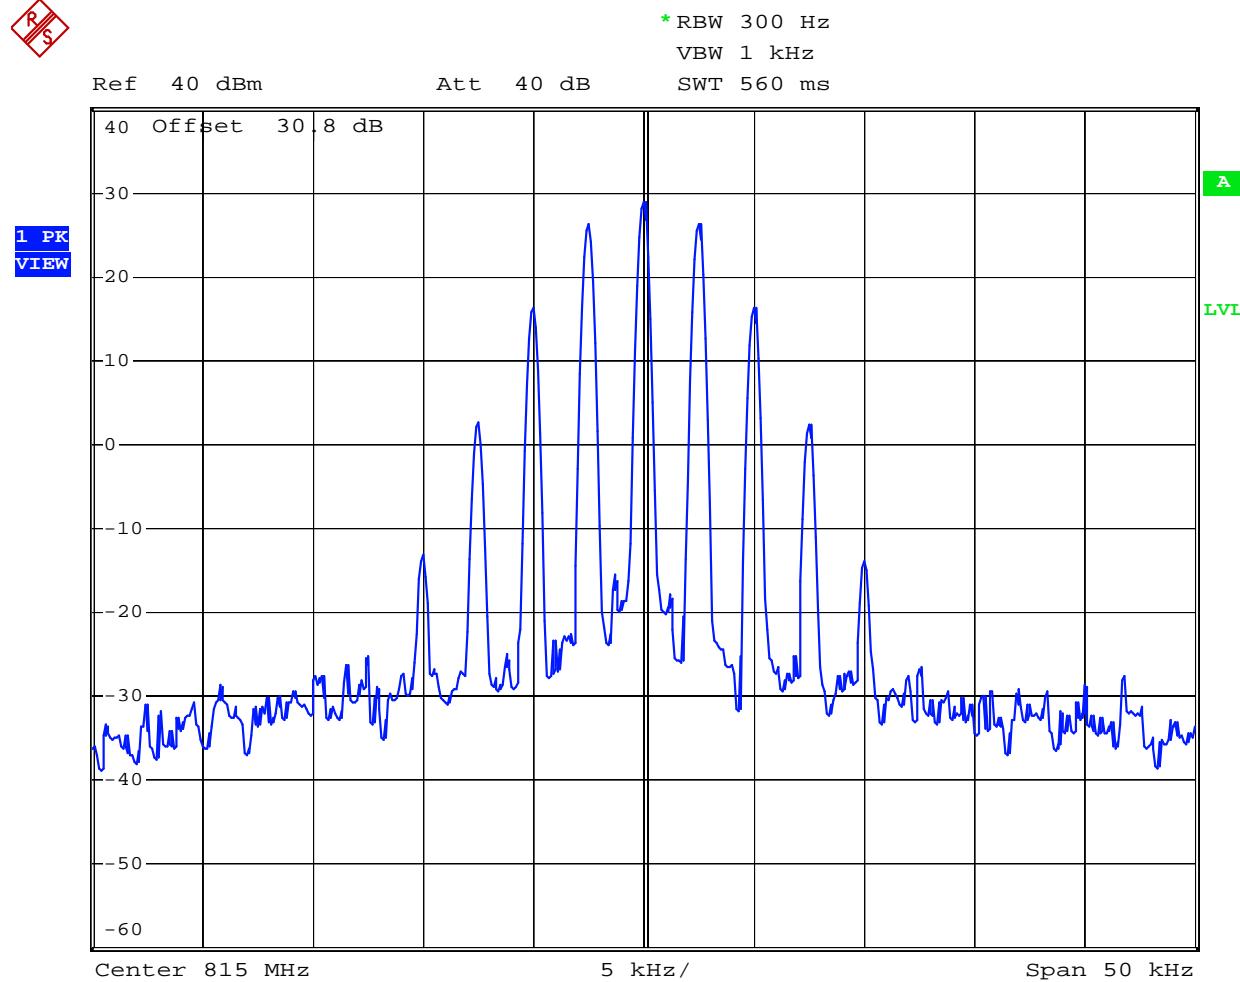
* RBW 300 Hz Marker 1 [T1]
VBW 1 kHz -29.74 dBm
SWT 560 ms 860.025000000 MHz



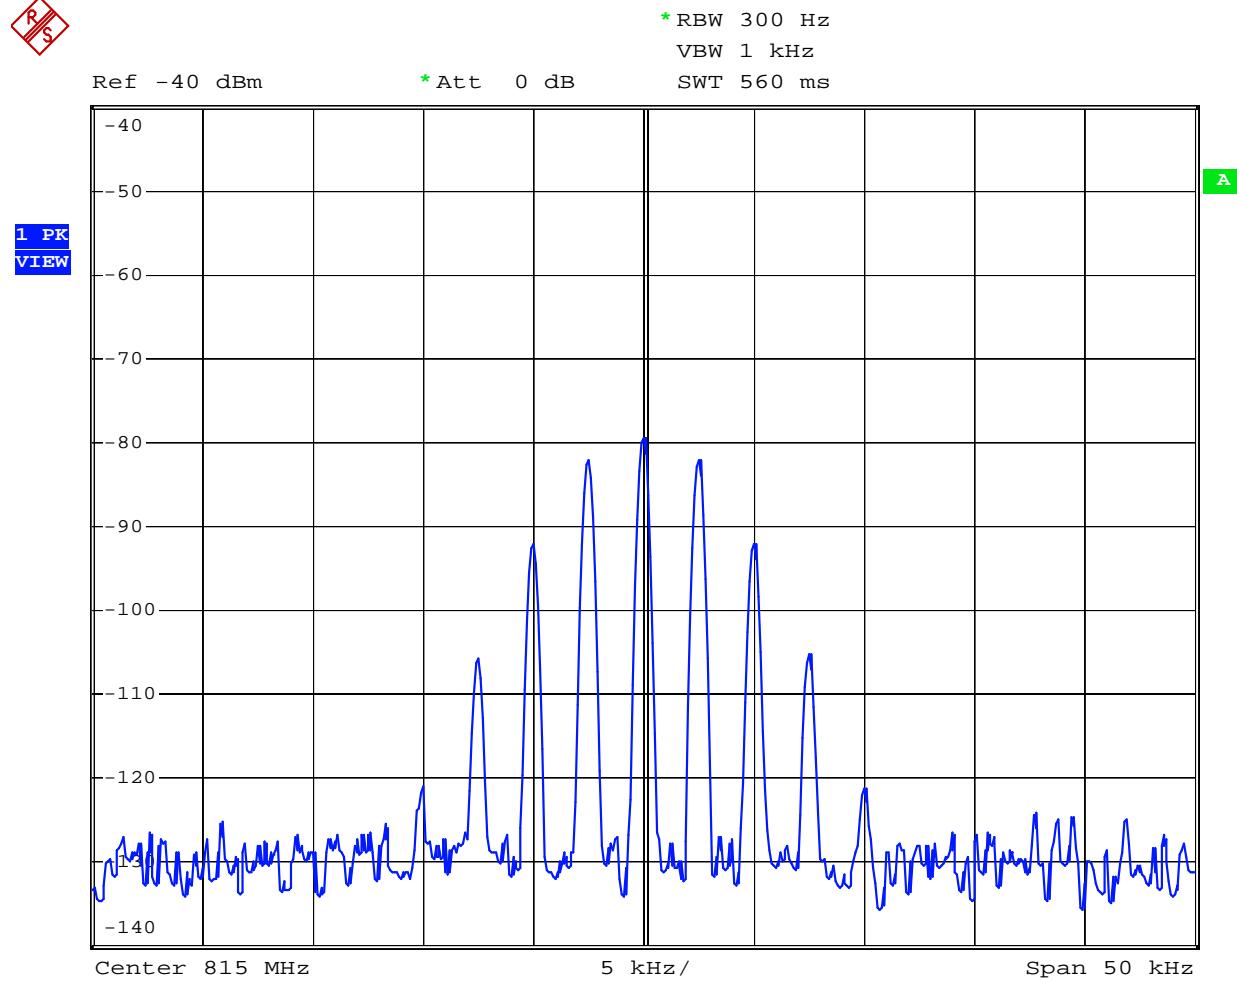
Date: 14.APR.2009 14:49:05

Test Data – Occupied Bandwidth**Downlink - Input**

Date: 14.APR.2009 14:51:10

Test Data – Occupied Bandwidth**Uplink - Output**

Date: 14.APR.2009 15:25:10

Test Data – Occupied Bandwidth**Uplink - Input**

Date: 14.APR.2009 16:10:12

Section 5. Spurious Emissions at Antenna Terminals

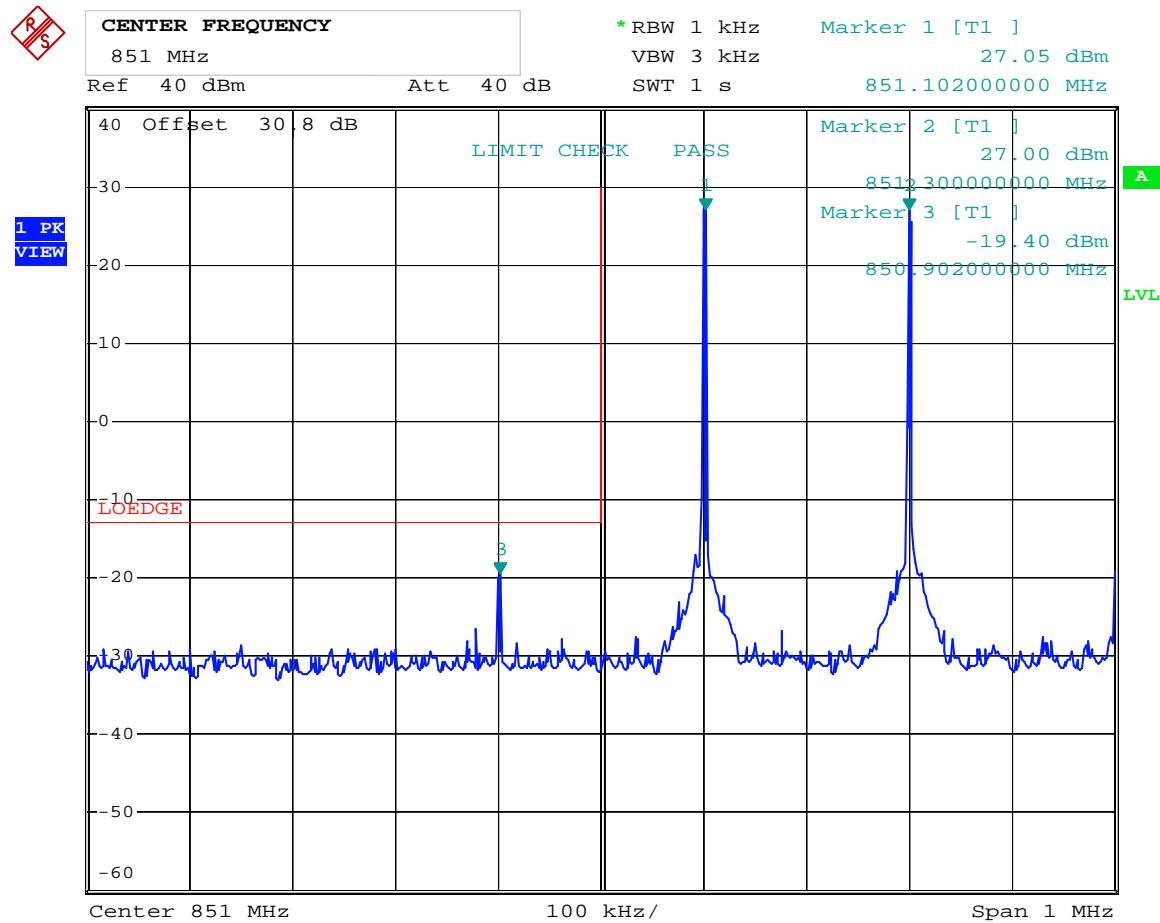
NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA. NO.: 2.991
TESTED BY: David Light	DATE: 14 April 2009

Test Results: Complies.**Test Data:** See attached plot(s).**Equipment Used:** 1663-1082-1472-1469-1464**Measurement Uncertainty:** +/- 1.7 dB**Temperature:** 22 °C**Relative Humidity:** 35 %

Test Data – Spurious Emissions at Antenna Terminals

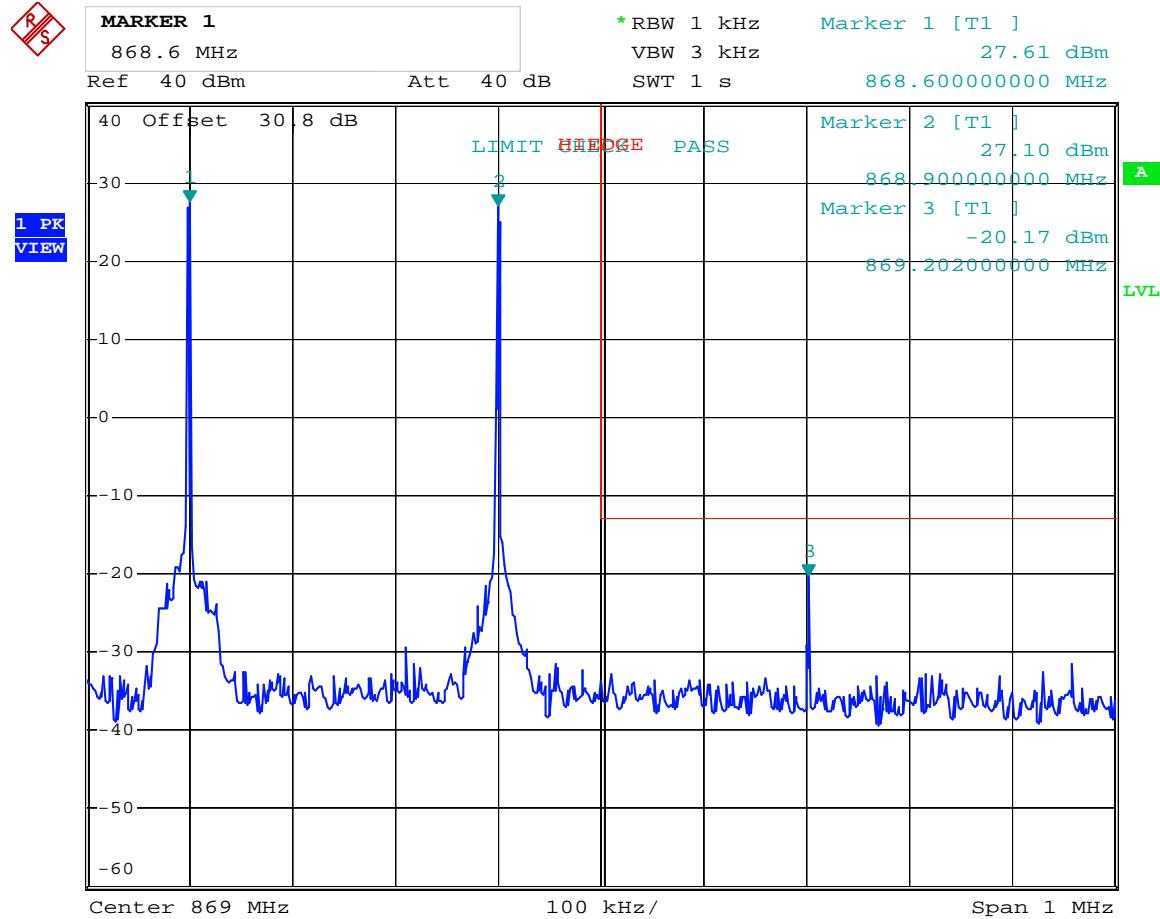
Lower Bandedge Intermodulation

Downlink



Date: 14.APR.2009 14:33:07

Test Data – Spurious Emissions at Antenna Terminals

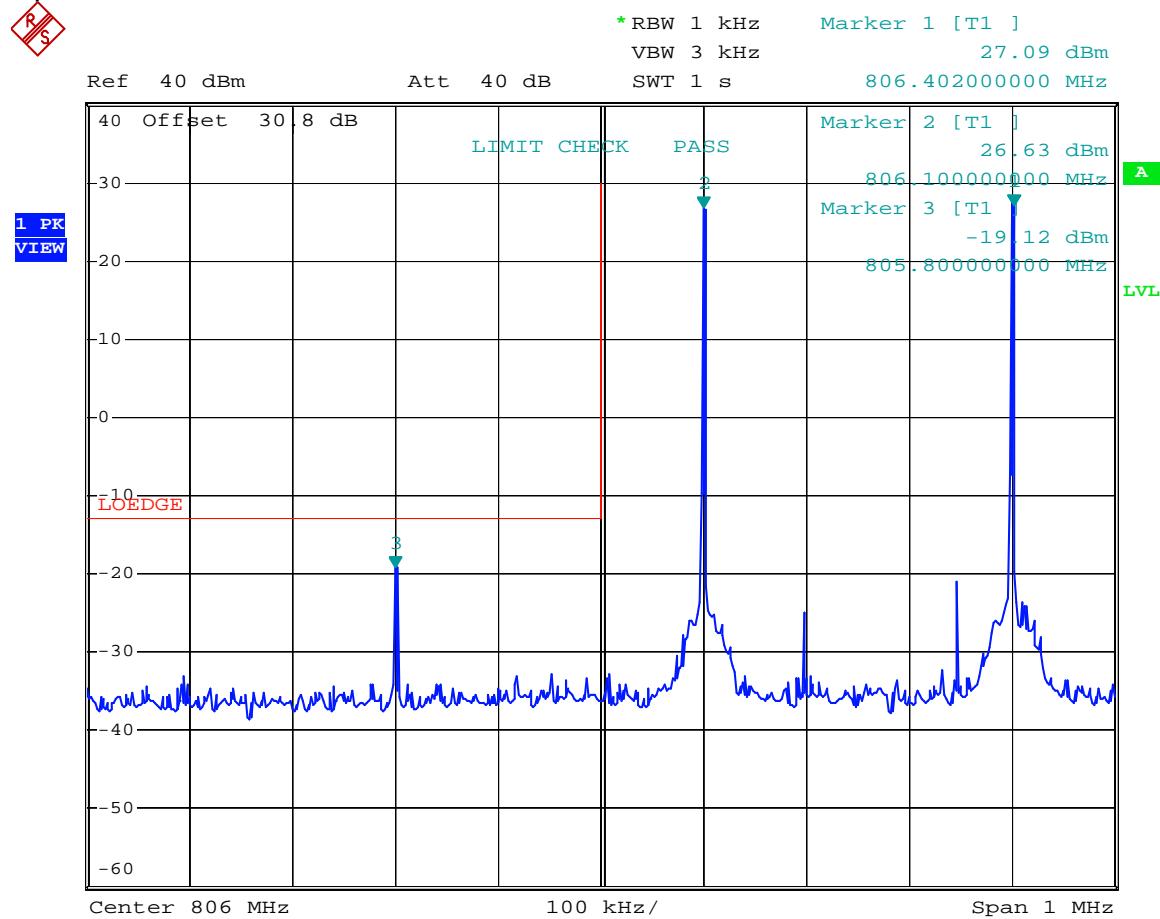
Upper Bandedge Intermodulation
Downlink

Date: 14.APR.2009 14:38:12

Test Data – Spurious Emissions at Antenna Terminals

Lower Bandedge Intermodulation

Uplink

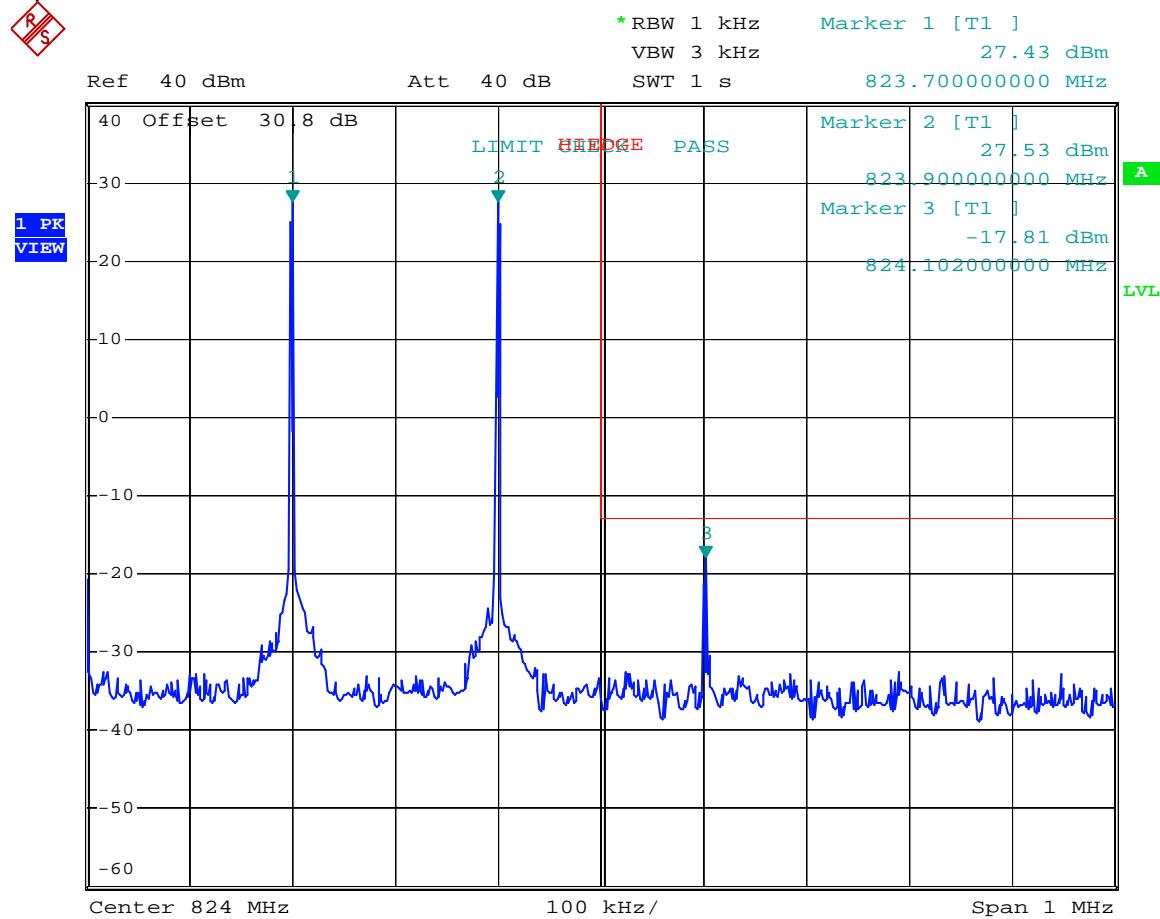


Date: 14.APR.2009 15:16:13

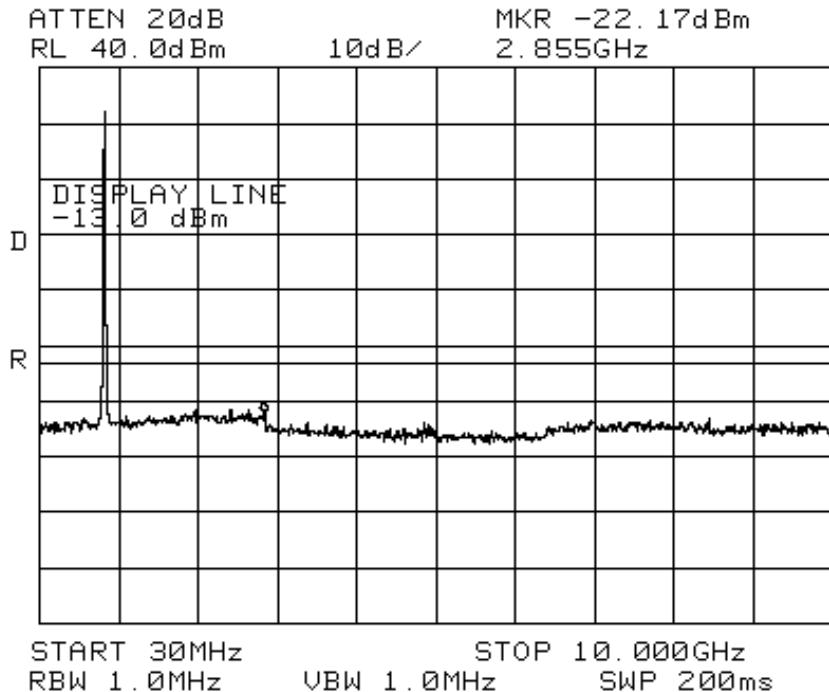
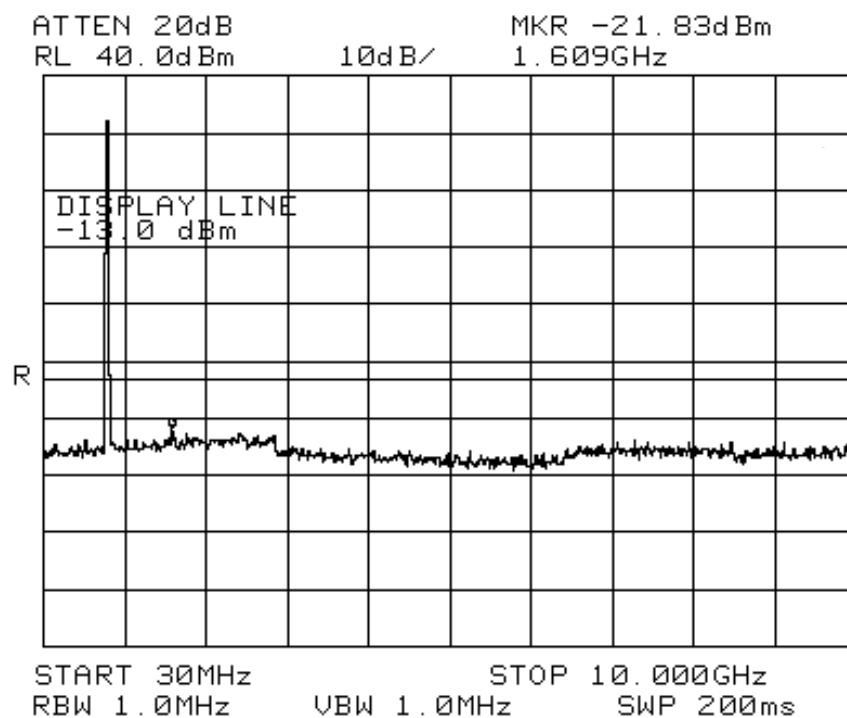
Test Data – Spurious Emissions at Antenna Terminals

Upper Bandedge Intermodulation

Uplink



Date: 14.APR.2009 15:22:38

Test Data – Spurious Emissions at Antenna Terminals**Spurs - Downlink****Spurs - Uplink**

Section 6. Field Strength of Spurious Emissions

NAME OF TEST: Field Strength of Spurious Emissions PARA. NO.: 2.993

TESTED BY: David Light DATE: 15 April 2009

Test Results: Complies.**Test Data:** The spectrum was searched from 30 MHz to the tenth harmonic of the carrier. There were no emissions detected above the noise floor which was at least 20 dB below the specification limit.RBW=VBW=100 kHz below 1000 MHz
RBW=VBW=1 MHz above 1000 MHz
Peak detector**Equipment Used:** 1763-1484-1485-1016-791-1767-993**Measurement Uncertainty:** +/-1.7 dB**Temperature:** 21 °C**Relative Humidity:** 30 %**Note:** See page A5 for applicable limit.

Section 7. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	02/27/09	02/28/11
1082	CABLE 2m	Astrolab 32027-2-29094-72TC	N/A	CBU	N/A
1472	20db Attenuator DC 18 Ghz	Omni Spectra 20600-20db	NONE	CBU	N/A
1469	10 db Attenuator DC 18 Ghz	MCL Inc. BW-S10W2 10db-2WDC	NONE	CBU	N/A
1663	Spectrum Analyzer	Rhode & Schwarz FSP3	100073	06/03/08	06/03/09
1767	MI Test Receiver 20Hz - 26.5 GHz - 150 - +30 dBm LC	ROHDE & SCHWARZ ESI26	837491/0002	09/20/07	09/20/09
1763	Bilog Antenna	Schaffner CBL 6111D	22926	11/04/08	11/04/09
1484	Cable	Storm PR90-010-072	N/A	05/07/08	05/07/09
1485	Cable	Storm PR90-010-216	N/A	05/07/08	05/07/09
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	05/07/08	05/07/09
791	PREAMP, 25dB	Nemko USA, Inc. LNA25	398	05/07/08	05/07/09
1767	EMI Test Receiver 20Hz - 26.5 GHz	ROHDE & SCHWARZ ESI26	837491/0002	09/20/07	09/20/09
993	Horn antenna	A.H. Systems SAS-200/571	XXX	08/31/07	08/31/09

Nemko USA, Inc.

EQUIPMENT: FS51C-85

CFR 47 PART 90, SUBPART I
PRIVATE LAND MOBILE REPEATER
REPORT NO.: 23594RUS1

ANNEX A - TEST METHODOLOGIES

NAME OF TEST: RF Power Output	PARA. NO.: 2.985
--------------------------------------	-------------------------

Minimum Standard: Para. No. 90.205(a). The maximum allowable station ERP is dependent upon the stations HAAT and required service area and will be authorized in accordance with Table 1 of 90.205(d).

Method Of Measurement:Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter. Power output is measured with the maximum rated input level.

Integral Antenna:

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic radiator.

NAME OF TEST: Spurious Emissions at Antenna Terminals	PARA. NO.: 2.991
--	-------------------------

Minimum Standard: 90.210, Table 1**Table 1**

Frequency Band (MHz)	Mask for equipment with Low Pass Filter	Mask for equipment without Low Pass Filter
Below 25	A or B	A or C
25 - 50	B	C
72 - 76	B	C
150 - 174	B, D or E	C, D or E
150 Paging only	B	C
220 - 222	F	F
421 - 512	B, D or E	C, D or E
450 paging only	B	H
806 - 821/ 851 - 866	B	G
821 - 824/ 866 - 869	B	H
896 - 901/ 935 - 940	I	J
902 - 928	K	K
929 - 930	B	G
Above 940	B	C
All other bands	B	C

MASK	Spurious Limit
A,B,C,G,H,I	-13dBm
D,J	-20dBm
E,F,K	-25dBm

Test Method: RBW: 1% of emission bandwidth in the 0 - 1 GHz range.
1 MHz at frequencies above 1 GHz.
VBW: \Rightarrow RBW

The spectrum is searched up to 10 times the fundamental frequency.

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.989
---	-------------------------

Minimum Standard: Not defined. Input/Output

Method Of Measurement:

Analog

Spectrum analyzer settings:
RBW=VBW=300 Hz

Span: 100 kHz
Sweep: Auto

iDEN

RBW=VBW= 300 Hz

Span: 100 kHz
Sweep: Auto

NAME OF TEST: Field Strength of Spurious	PARA. NO.: 2.993
---	-------------------------

Minimum Standard: Para. No. 90.210, see table 1 for applicable mask.

Method Of Measurement: TIA/EIA-603-1992

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic radiator.

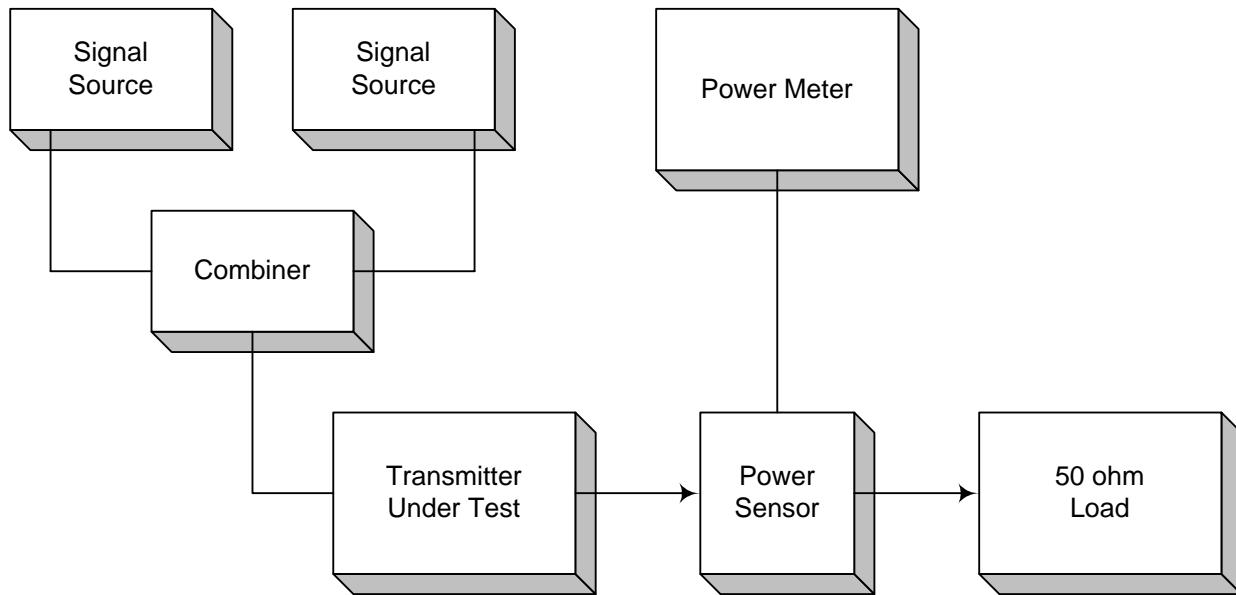
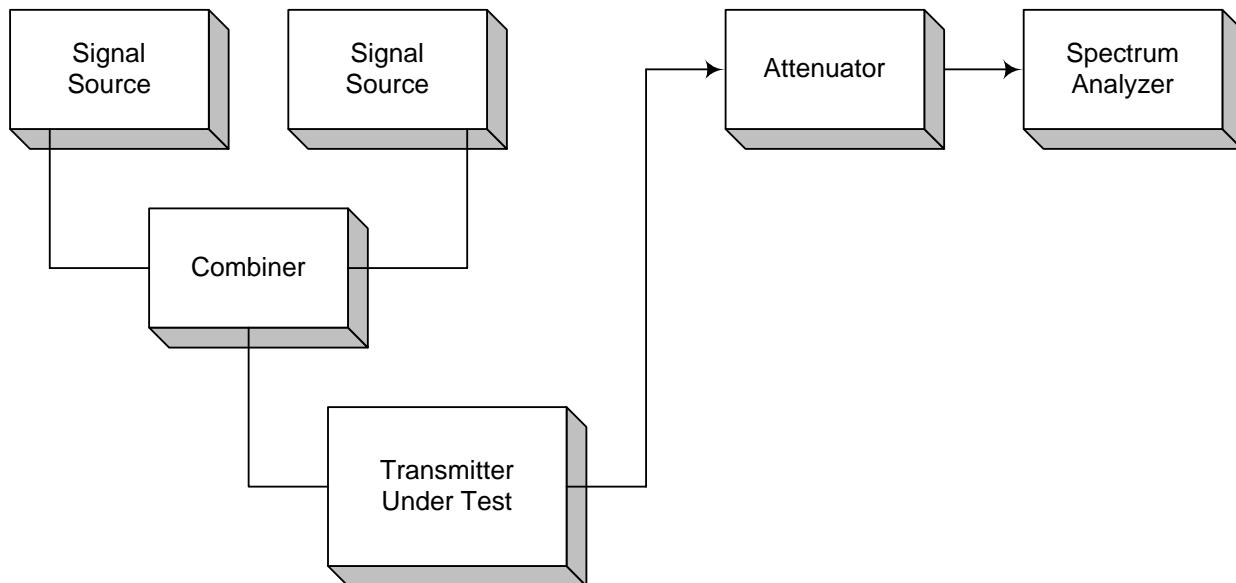
MASK	Spurious Limit
A,B,C,G,H,I	-13dBm
D,J	-20dBm
E,F,K	-25dBm

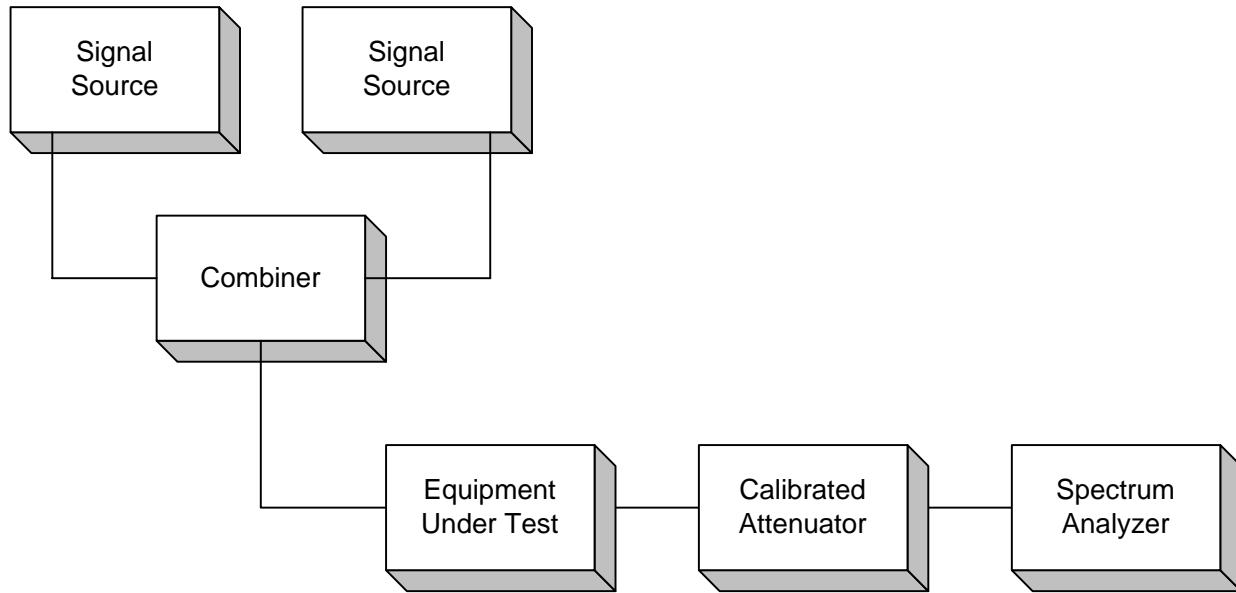
Nemko USA, Inc.

EQUIPMENT: FS51C-85

CFR 47 PART 90, SUBPART I
PRIVATE LAND MOBILE REPEATER
REPORT NO.: 23594RUS1

ANNEX B - TEST DIAGRAMS

Para. No. 2.985 - R.F. Power Output**Para. No. 2.989 - Occupied Bandwidth**

Para. No. 2.991 - Spurious Emissions at Antenna Terminals**Para. No. 2.993 - Field Strength of Spurious Radiation**