



FCC CFR47 PART 15 SUBPART C
FCC CFR47 PART 15 SUBPART B
INDUSTRY CANADA RSS-210 ISSUE 8
INDUSTRY CANADA RSS-GEN ISSUE 3

CERTIFICATION TEST REPORT

FOR

Wireless Card Reader

MODEL NUMBER: ViVOpay 8850

FCC ID: Q55VP8850

IC: 5141A-VP8850

REPORT NUMBER: 11U14111-1

ISSUE DATE: NOVEMBER 18, 2011

Prepared for

ViVOtech, Inc.

451 EL CAMINO REAL

SANTA CLARA, CA 95050, U.S.A.

Prepared by

COMPLIANCE CERTIFICATION SERVICES (UL CCS)

47173 BENICIA STREET

FREMONT, CA 94538, U.S.A.

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	11/18/11	Initial Issue	S. Leitner

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION.....	5
4.3. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT.....	6
5.2. MAXIMUM OUTPUT POWER.....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. SOFTWARE AND FIRMWARE	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	6
5.6. MODIFICATIONS	6
5.7. DESCRIPTION OF TEST SETUP.....	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. RADIATED EMISSION TEST RESULTS.....	10
7.1. LIMITS AND PROCEDURE	10
7.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz).....	12
7.3. TX SPURIOUS AND RADIATED EMISSIONS 30 TO 1000 MHz	13
8. AC MAINS LINE CONDUCTED EMISSIONS.....	18
9. FREQUENCY STABILITY.....	25
10. 99% BANDWIDTH.....	26
11. MAXIMUM PERMISSIBLE EXPOSURE	27
12. SETUP PHOTOS	30

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: ViVOtech, Inc.
451 EL CAMINO REAL
SANTA CLARA, CA 95050, U.S.A.

EUT DESCRIPTION: Wireless Card Reader

MODEL: ViVOpay 8850

SERIAL NUMBER: 540-2801-02

DATE TESTED: NOVEMBER 8-15, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Pass
FCC PART 15 SUBPART B	Pass
INDUSTRY CANADA RSS-210 Issue 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



STEVE LEITNER
EMC SUPERVISOR
UL CCS



TOM CHEN
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

ViVOpay 8850 is a Wireless Card Reader, operating at 13.56 MHz, intended for tabletop mounting. The EUT has an RJ-45 port labeled for connection to a cable terminated with either an RS-232 connector or a USB connector. The EUT also has an RJ-45 Ethernet port that the manufacturer states is currently not active or supported. Internally generated frequencies include 12 MHz, 24 MHz, and 27.12 MHz.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum E field as follows:

Frequency (MHz)	Mode	Fundamental E field @ 10m distance (dBuv/m)
13.56	Normal TX mode	55.49

The transmitter has a maximum E-field at 10m distance as follows:

EIRP = E field at 3m distance – 95.2

E field at 3m distance = E field at 10m distance + 20 = 55.49 + 20 = 75.49 dBμV/m

EIRP = 75.49 - 95.2 = **-19.71 dBm**

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The 13.56 MHz antenna is integrated inside the product, around the LCD area invisible to the user.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was version HG1AR-2.1.1 C04.

5.5. WORST-CASE CONFIGURATION AND MODE

The EUT was powered by the AC adapter and connected to laptop PC. A demo credit card together with proprietary software on the laptop was used to confirm normal operation.

5.6. MODIFICATIONS

A ferrite bead, Fair-Rite part number 0431164951, was added at the EUT end on the USB and RS-232 cables, as well as at the EUT end of the power supply cable. For the USB radiated emissions test, one turn was required on the ferrite added to the power supply cable.

5.7. DESCRIPTION OF TEST SETUP


SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number / Part Number	FCC ID
AC/DC adapter	Global Power	3A-161WP09	GPWAC-15-09-VT	N/A
Laptop PC	DELL	Latitude D610	CN-0U8082-48643-5CE-5546	DoC
AC/DC adapter	DELL	HA65NS1-00	CN-0HN662-47890-79I-C03L	N/A

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	Barrel	Unshielded	2 m	Ferrite at both ends. At EUT end, one turn was applied.
2	AC	1	2-blade	Unshielded	1 m	N/A
3	DC	1	Barrel	Unshielded	2 m	N/A
4	Serial/USB	1	RJ-45	Unshielded	USB 1.8 m RS232 1 m	Can be either RS-232 or USB connector at opposite end. Ferrite at EUT end.

TEST SETUP DIAGRAM

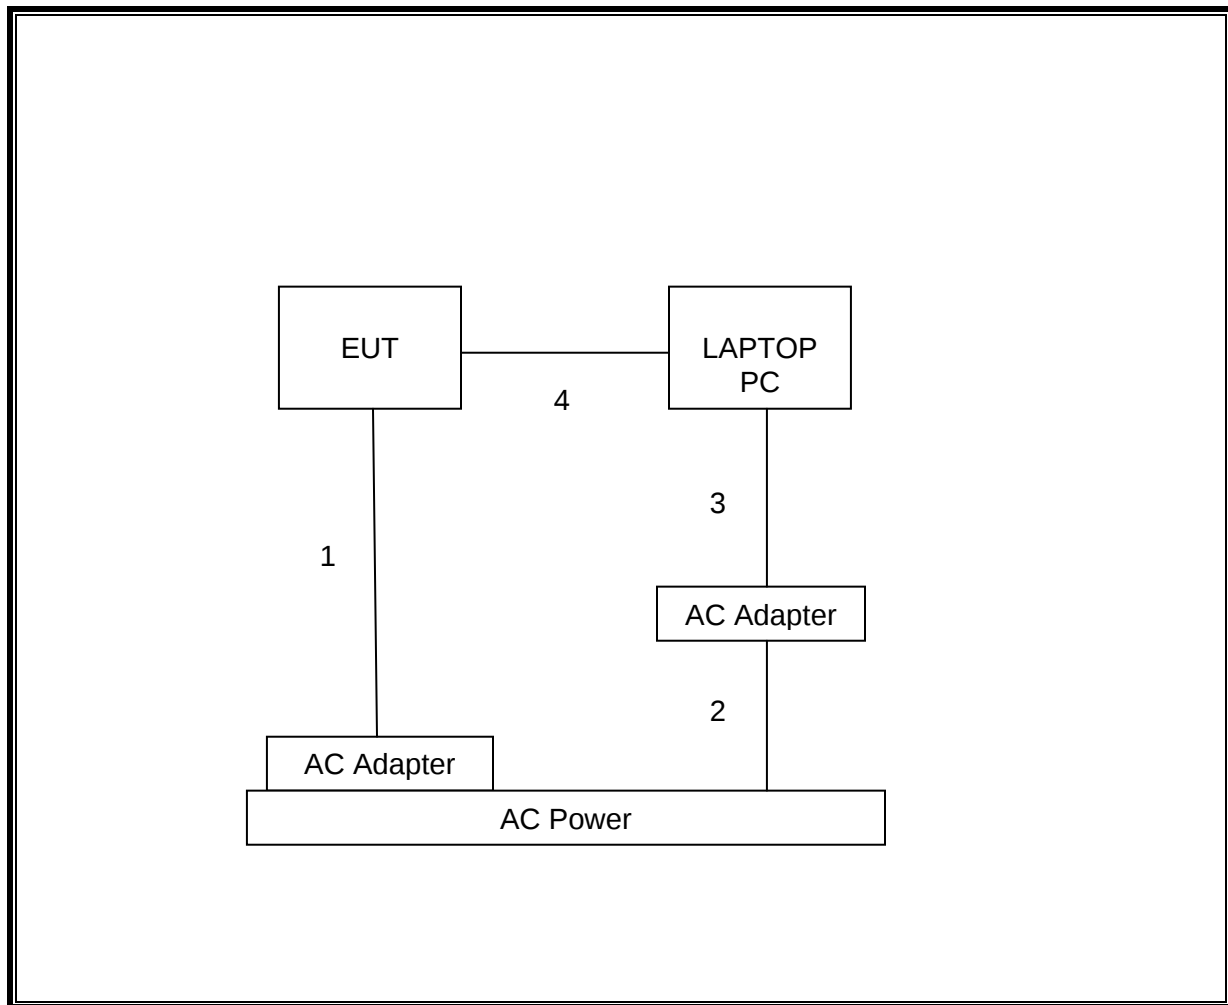

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	09/02/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	01/27/12
Antenna, Horn, 18 GHz	EMCO	3115	C00872	09/20/12
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01171	07/16/12
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01159	08/11/12
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	07/06/12
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/14/12
Antenna, Loop, 30 MHz	EMCO	6502	C00593	02/10/13
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	04/20/12

7. RADIATED EMISSION TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMIT

§15.225

IC RSS-210, Section 2.6 (Transmitter)

IC RSS-GEN, Section 6 (Receiver)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

The formula for converting the field strength from µV/m to dBµV/m is:

Limit (dBµV/m) = 20 log limit (µV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE

ANSI C63.4

§15.209 specifies that spurious emission are to be measured up to the tenth harmonic of the transmitter fundamental frequency. Thus, for this EUT spurious emissions were measured to 136 MHz ($10 \times$ the 13.56 MHz fundamental).

§15.209 also specifies that emissions that must be measured above the tenth harmonic applicable to an incorporated digital device are to comply with the general radiated emission limits in §15.109. As a digital device, with a highest frequency generated or used of 27.12 MHz (according to the manufacturer), radiated emissions were measured between 30 MHz and 1000 MHz.


The plots for spurious emissions show §15.209 limits applied to the range 30 MHz to 1000 MHz (equivalent to FCC Class B). The subsequent summary tables provide data for spurious emissions per §15.209 as wells as interpolated results applied to the limits for a Class A digital device per §15.109.

RESULTS


7.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)

FCC Part 15, Subpart B & C												10 Meter Distance Measurement At Open Field											
Company: Vivotech																							
Project #: 11U14111																							
Model #: ViVOpay 8850																							
Tester: Tom Chen																							
Date: 11/9/2011																							
Frequency	PK	QP	AV	AF	Distance	PK Corrected	AV Corrected	QP Limit	AV Limit	PK Margin	AV Margin	Notes											
(MHz)	(dBuV)	(dBuV)	(dBuV)	dB/m	Correction (dB)	Reading (dBuV/m)	Reading (dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	(dB)												
Loop Antenna Face On:																							
13.56	44.9		N/A	10.56	-19.08	36.37	N/A	84.00	N/A	-47.6	N/A	Fundamental @ 10m Dist											
13.41	20.52		N/A	10.54	-19.08	11.98	N/A	50.48	N/A	-38.5	N/A	13.41-13.553MHz Spurious @ 10m											
13.553	19.12		N/A	10.56	-19.08	10.59	N/A	50.48	N/A	-39.9	N/A	13.41-13.553MHz Spurious @ 10m											
13.567	42.32		N/A	10.56	-19.08	33.79	N/A	50.48	N/A	-16.7	N/A	13.567-13.710MHz Spurious @ 10m											
13.71	20.31		N/A	10.57	-19.08	11.80	N/A	50.48	N/A	-38.7	N/A	13.567-13.710MHz Spurious @ 10m											
13.11	15.36		N/A	10.51	-19.08	6.79	N/A	40.51	N/A	-33.7	N/A	13.110-13.410MHz Spurious @ 10m											
13.41	20.52		N/A	10.54	-19.08	11.98	N/A	40.51	N/A	-28.5	N/A	13.110-13.410MHz Spurious @ 10m											
13.71	20.31		N/A	10.57	-19.08	11.80	N/A	40.51	N/A	-28.7	N/A	13.710-14.010MHz Spurious @ 10m											
14.01	16.7		N/A	10.6	-19.08	8.22	N/A	40.51	N/A	-32.3	N/A	13.710-14.010MHz Spurious @ 10m											
27.145	30.06		N/A	9.043	-19.08	20.02	N/A	29.54	N/A	-9.5	N/A	14.010-30MHz Spurious @ 10m											
Loop Antenna Face Off:																							
13.56	64.02		N/A	10.56	-19.08	55.49	N/A	84.00	N/A	-28.5	N/A	Fundamental @ 10m Dist											
13.41	32.51		N/A	10.54	-19.08	23.97	N/A	50.48	N/A	-26.5	N/A	13.41-13.553MHz Sprious @ 10m											
13.553	48.94		N/A	10.56	-19.08	40.41	N/A	50.48	N/A	-10.1	N/A	13.41-13.553MHz Sprious @ 10m											
13.567	48.28		N/A	10.56	-19.08	39.75	N/A	50.48	N/A	-10.7	N/A	13.567-13.710MHz Spurious @ 10m											
13.71	31.35		N/A	10.57	-19.08	22.84	N/A	50.48	N/A	-27.6	N/A	13.567-13.710MHz Spurious @ 10m											
13.11	15.5		N/A	10.51	-19.08	6.93	N/A	40.51	N/A	-33.6	N/A	13.110-13.410MHz Spurious @ 10m											
13.41	32.51		N/A	10.54	-19.08	23.97	N/A	40.51	N/A	-16.5	N/A	13.110-13.410MHz Spurious @ 10m											
13.71	31.35		N/A	10.57	-19.08	22.84	N/A	40.51	N/A	-17.7	N/A	13.710-14.010MHz Spurious @ 10m											
14.01	17.17		N/A	10.6	-19.08	8.69	N/A	40.51	N/A	-31.8	N/A	13.710-14.010MHz Spurious @ 10m											
27.145	30.14		N/A	9.043	-19.08	20.10	N/A	29.54	N/A	-9.4	N/A	14.010-30MHz Spurious @ 10m											
* No more emissions were found up to 30MHz																							
Note: The emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 10000Mhz. Radiated emission limits in these three bands are based on measurements employing an average detector.																							
P.K. = Peak																							
Q.P. = Quasi Peak Readings																							
A.F. = Antenna factor																							

7.3. TX SPURIOUS AND RADIATED EMISSIONS 30 TO 1000 MHz

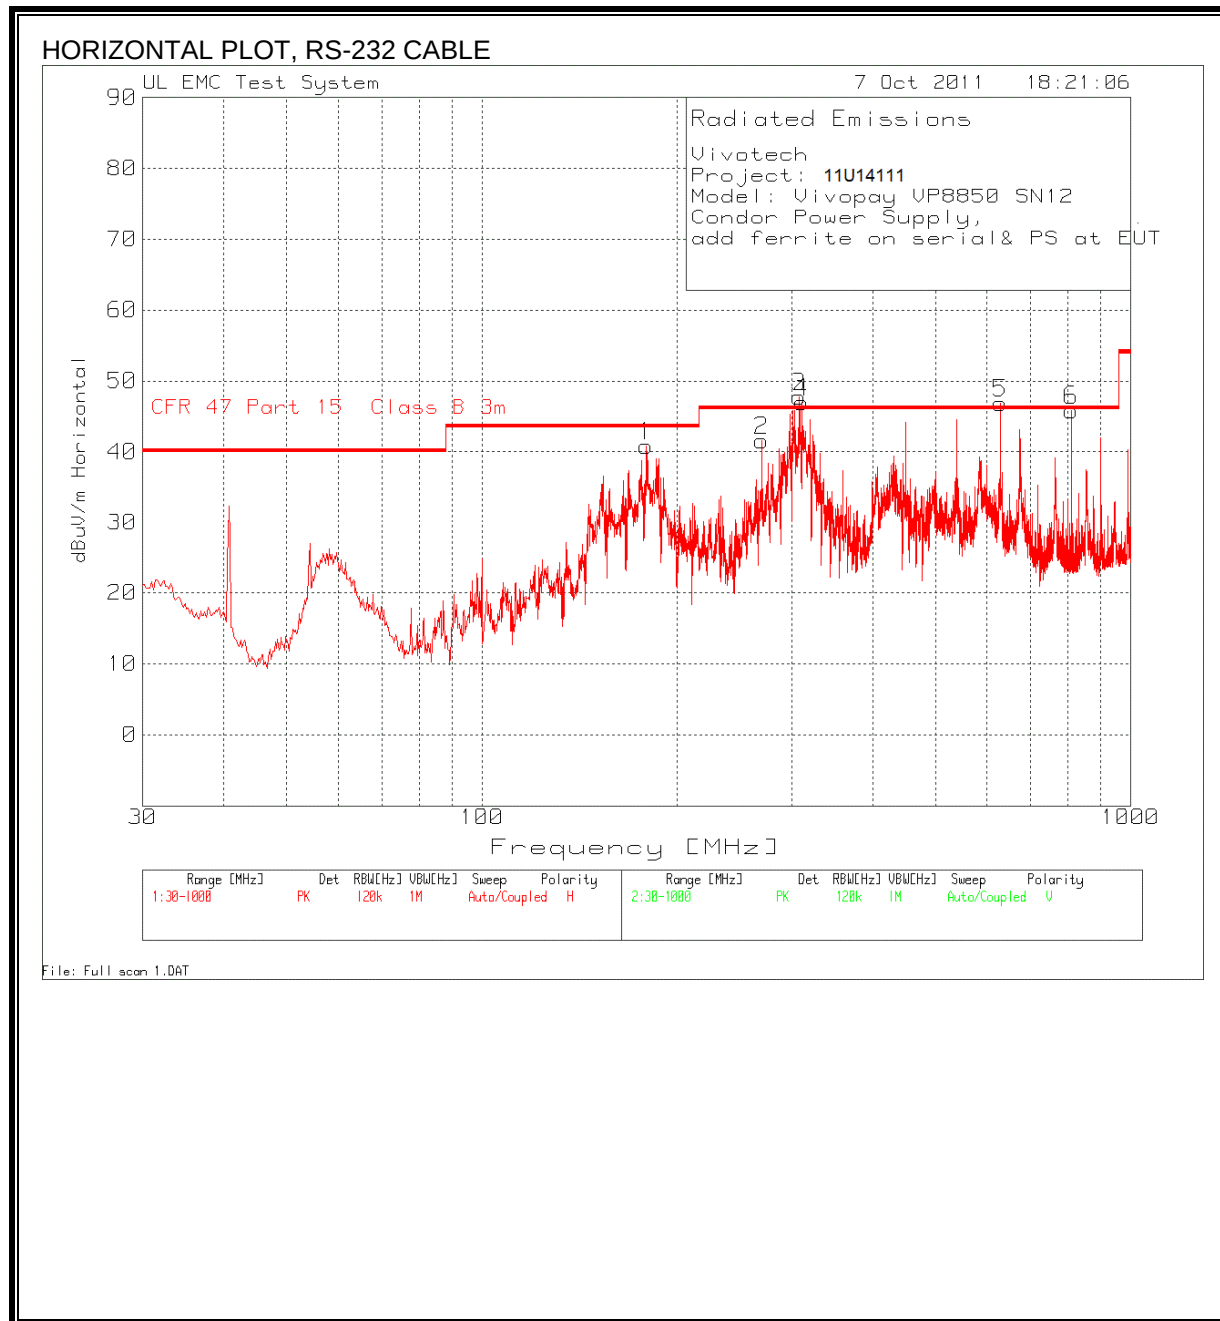

VERTICAL PLOT, RS-232 CABLE

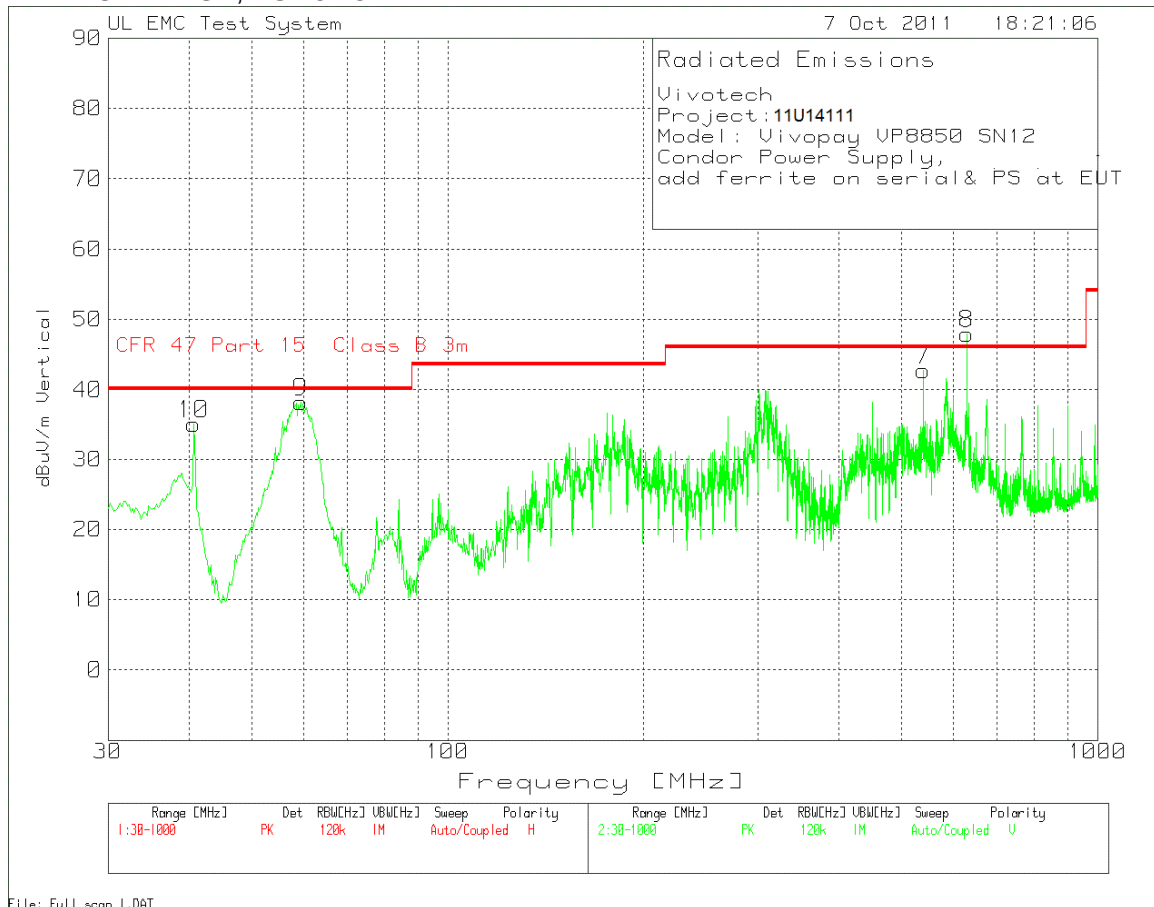

HORIZONTAL AND VERTICAL DATA, RS-232 CABLE

Vivotech
Project: 11U14111
Model: Vivopay VP8850 SN12
Condor Power Supply,
add ferrite on serial& PS at EUT
T. Nguyen

TX SPURIOUS EMISSIONS 30 MHz TO TENTH HARMONIC

Test Frequency	Meter Reading	Detector	Chamber 5B Cable [dB]	T10 PreAmp [dB]	T130 Bilog [dB]	Corrected dBuV/m	15.209 3m limit	15.209 QP Margin	Height [cm]	Polarity
40.6615	49.87	PK	0.9	-29.4	13.7	35.07	40	-4.93	100	Vert
59.4644	58.49	PK	1.2	-29.4	7.9	38.19	40	-1.81	100	Vert


RADIATED EMISSIONS 30 MHz TO 1000 MHz (CLASS A DIGITAL DEVICE)

Test Frequency	Meter Reading	Detector	Chamber 5B Cable [dB]	T10 PreAmp [dB]	T130 Bilog [dB]	10m to 3m Conversion	Corrected dBuV/m	Class A QP 10m limit	Class A QP Margin	Height [cm]	Polarity
179.2606	57.25	PK	1.8	-29	10.8	-10.5	30.35	43.5	-13.15	200	Horz
269.98	55.45	PK	2.3	-28.6	12.4	-10.5	31.05	46	-14.95	100	Horz
308.5552	60.47	PK	2.5	-28.6	13.4	-10.5	37.27	46	-8.73	100	Horz
810.2258	49.68	PK	4	-28.9	21.1	-10.5	35.38	46	-10.62	100	Horz
40.6615	49.87	PK	0.9	-29.4	13.7	-10.5	24.57	39	-14.43	100	Vert
59.4644	58.49	PK	1.2	-29.4	7.9	-10.5	27.69	39	-11.31	100	Vert
540.006	51.56	PK	3.2	-29.4	17.4	-10.5	32.26	46	-13.74	100	Vert
630.1439	55.25	PK	3.5	-29.3	18.5	-10.5	37.45	46	-8.55	100	Vert

PK - Peak detector

QP - Quasi-Peak detector

HORIZONTAL & VERTICAL PLOT, USB CABLE

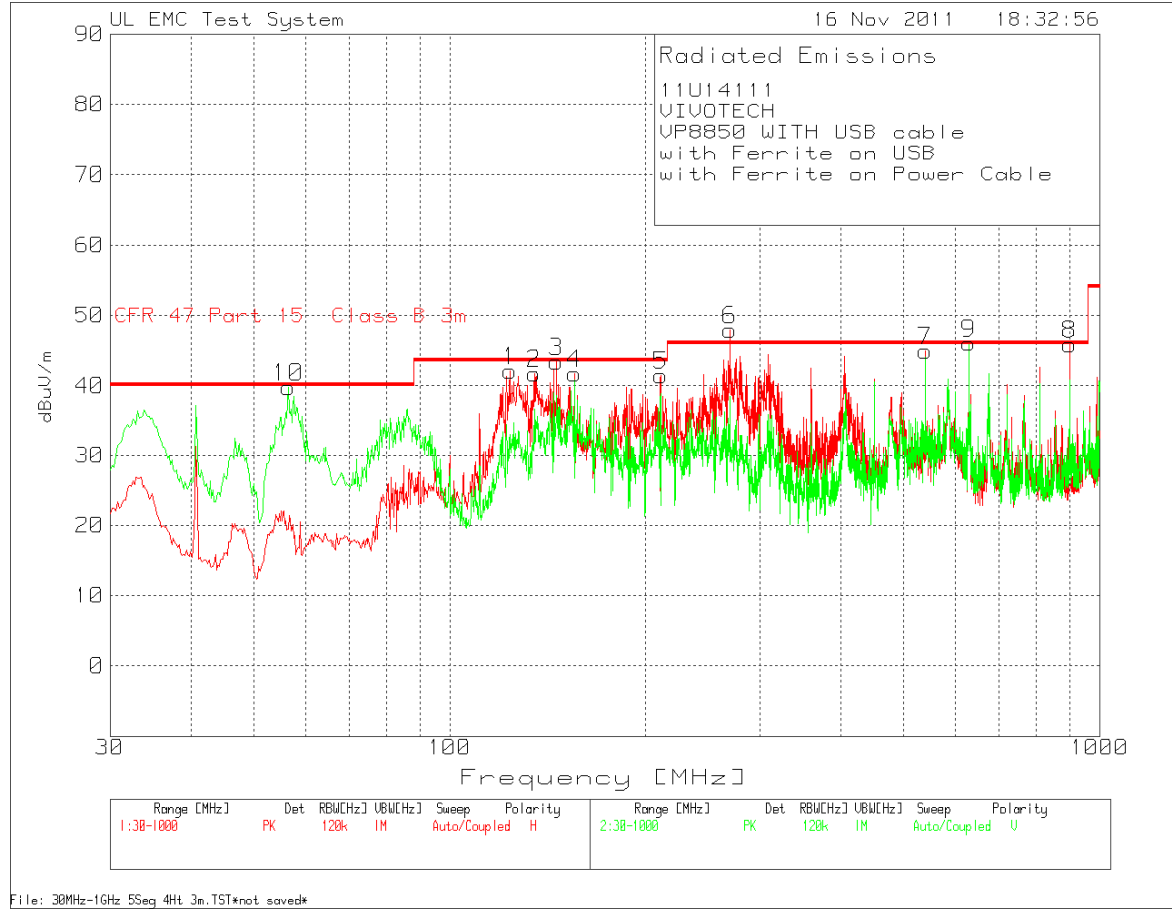

HORIZONTAL AND VERTICAL DATA, USB CABLE

11U14111									
VIVOTECH									
VP8850 WITH USB cable									
with Ferrite on USB									
with Ferrite on Power Cable									
D. Cieplik									

TX SPURIOUS EMISSIONS 30 MHz TO TENTH HARMONIC

Test Frequency	Meter Reading	Detector	Preamp and cable [dB]	5m A T122 Bilog [dB]	Corrected dBuV/m	FCC 15.209 3m limit	QP Margin	Height [cm]	Polarity
123.8209	55.15	PK	-26.7	13.7	42.15	43.5	-1.35	200	Horz
134.8701	55.06	PK	-26.7	13.4	41.76	43.5	-1.74	200	Horz
134.9164	50.59	QP	-26.7	13.4	37.29	43.5	-6.21	216	Horz
56.3629	58.95	PK	-27.3	8.1	39.75	40	-0.25	200	Vert
56.2219	48.17	QP	-27.3	8.1	28.97	40	-11.03	107	Vert

RADIATED EMISSIONS 30 MHz TO 1000 MHz (CLASS A DIGITAL DEVICE)

Test Frequency	Meter Reading	Detector	Preamp and cable [dB]	5m A T122 Bilog [dB]	10m to 3m Conversion	Corrected dBuV/m	Class A QP 10m limit	Class A QP Margin	Height [cm]	Polarity
123.8209	55.15	PK	-26.7	13.7	-10.5	31.65	43.5	-11.85	200	Horz
134.8701	55.06	PK	-26.7	13.4	-10.5	31.26	43.5	-12.24	200	Horz
134.9164	50.59	QP	-26.7	13.4	-10.5	26.79	43.5	-16.71	216	Horz
145.9193	57.1	PK	-26.6	12.9	-10.5	32.9	43.5	-10.6	200	Horz
155.4177	56.16	PK	-26.5	12.1	-10.5	31.26	43.5	-12.24	200	Horz
211.0512	55.52	PK	-26.1	12	-10.5	30.92	43.5	-12.58	100	Horz
263.3896	50.96	PK	-25.9	12.2	-10.5	26.76	46	-19.24	216	Horz
269.98	61.22	PK	-25.7	12.4	-10.5	37.42	46	-8.58	100	Horz
540.006	52	PK	-24.5	17.4	-10.5	34.4	46	-11.6	200	Horz
900.1699	47.36	PK	-23.4	21.9	-10.5	35.36	46	-10.64	100	Horz
900.0085	42.42	QP	-23.4	21.9	-10.5	30.42	46	-15.58	219	Horz
630.1439	51.05	PK	-23.8	18.8	-10.5	35.55	46	-10.45	100	Horz
56.3629	58.95	PK	-27.3	8.1	-10.5	29.25	39	-9.75	200	Vert

PK - Peak detector

QP - Quasi-Peak detector

Av - Average detector

8. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

IC RSS-GEN, Section 7.2.2

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

TEST PROCEDURE

ANSI C63.4


In accordance with ANSI C63.4, the antenna was detached from the EUT and replaced by a 50 Ω load (the load was specified by the manufacturer).

RESULTS


6 WORST EMISSIONS – RS-232 CABLE

11U14111							
Vivotech							
VIVOpay 8850							
with RS-232 Cable							
Line-L1 .15 - 30MHz							
Test Frequency	Meter Reading	Detector	dB[uVolts]	CISPR Class B QP Limit	QP Margin	CISPR Class B Av Limit	Av Margin
0.1815	50.96	PK	50.96	64.4	-13.44	54.4	-3.44
0.1815	33.84	Av	33.84			54.4	-20.56
0.2445	43.95	PK	43.95	61.9	-17.95	51.9	-7.95
0.2445	25.5	Av	25.5			51.9	-26.4
0.312	41.16	PK	41.16	59.9	-18.74	49.9	-8.74
0.312	27.29	Av	27.29			49.9	-22.61
Line-L2 .15 - 30MHz							
0.186	50.51	PK	50.51	64.2	-13.69	54.2	-3.69
0.186	35.5	Av	35.5			54.2	-18.7
0.2445	42.26	PK	42.26	61.9	-19.64	51.9	-9.64
0.2445	23.45	Av	23.45			51.9	-28.45
0.3165	39.36	PK	39.36	59.8	-20.44	49.8	-10.44
0.3165	27.82	Av	27.82			49.8	-21.98
PK - Peak detector							
QP - Quasi-Peak detector							
Av - Average detector							

LINE 1 RESULTS- RS-232 CABLE

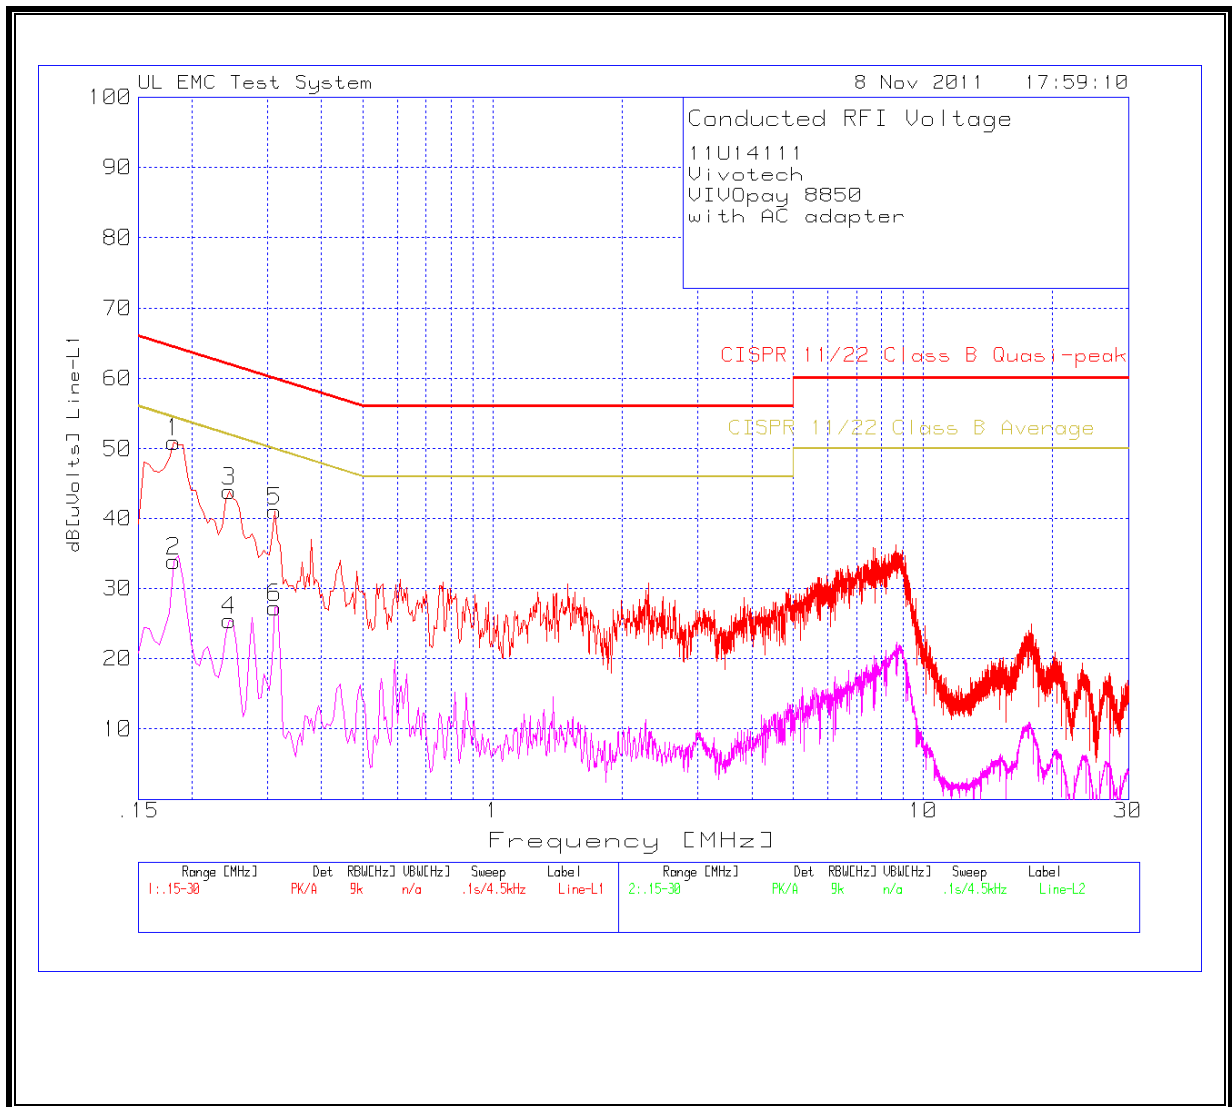


LINE 2 RESULTS- RS-232 CABLE

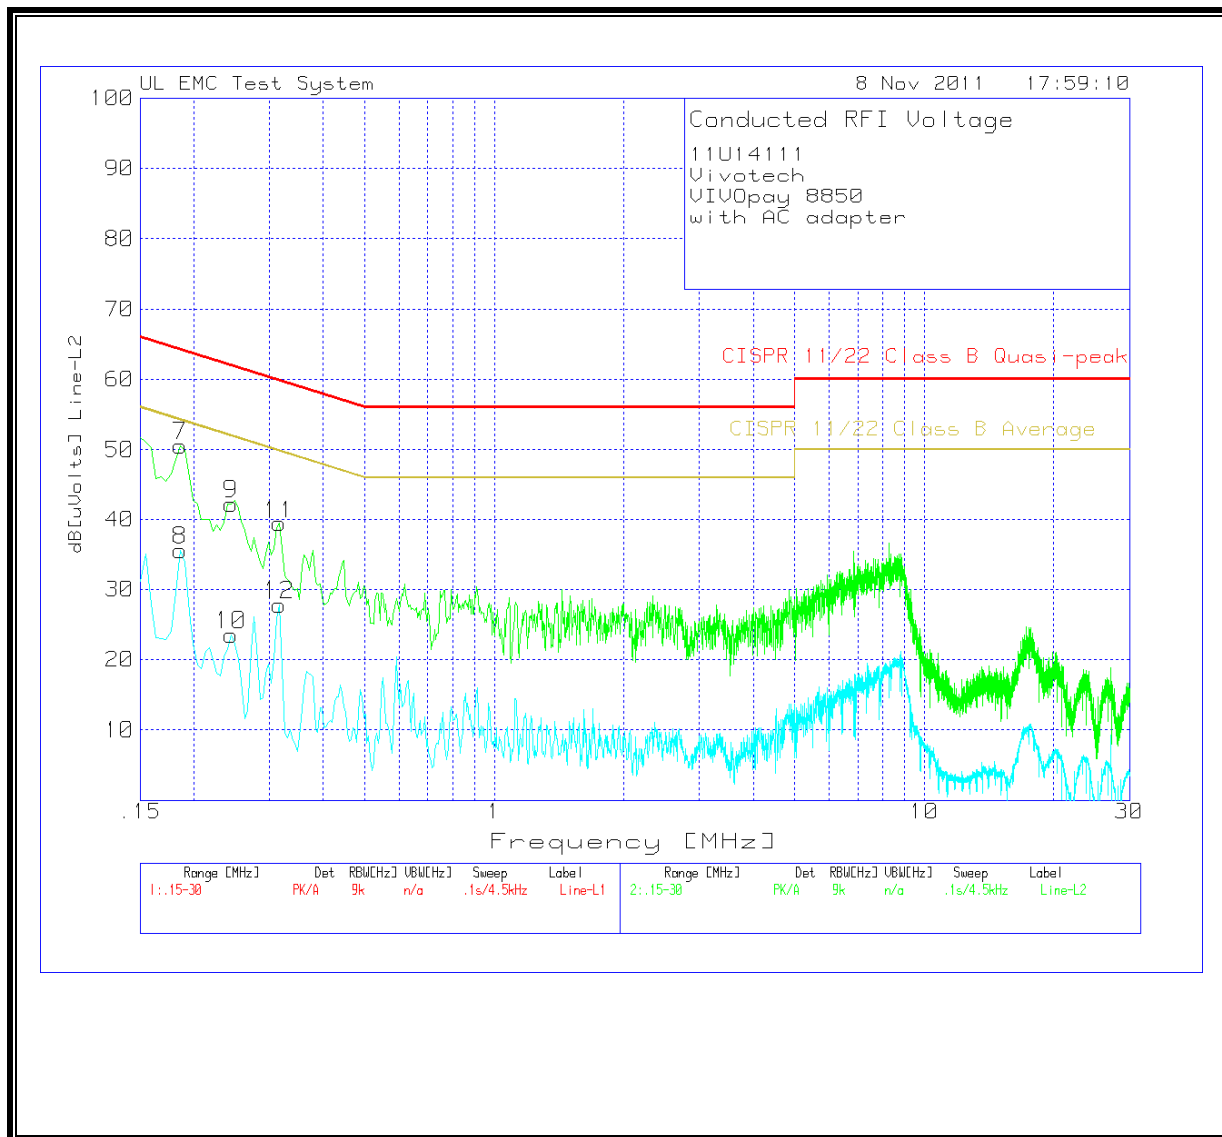


6 WORST EMISSIONS – USB CABLE

11U14111								
Vivotech								
VIVOpay 8850								
with USB adapter								
D. Cieplik								
Line-L1 .15 - 1MHz								
Test Frequency	Meter Reading	Detector	Lisn T25 Path Loss [dB]	Corrected dBuV	CISPR Class B QP Limit	QP Margin	CISPR Class B Av Limit	Av Margin
0.15212	51.64	PK	1.8	53.44	65.9	-12.46	55.9	-2.46
0.18285	51.15	PK	1.4	52.55	64.4	-11.85	54.4	-1.85
0.19785	46.3	PK	1.2	47.5	63.7	-16.2	53.7	-6.2
0.24316	43.48	PK	0.9	44.38	62	-17.62	52	-7.62
0.31649	37.27	PK	0.7	37.97	59.8	-21.83	49.8	-11.83
0.20507	44.66	PK	1.2	45.86	63.4	-17.54	53.4	-7.54
Line-L2 .15 - 1MHz								
0.15991	49.32	PK	1.8	51.12	65.5	-14.38	55.5	-4.38
0.182	50.7	PK	1.5	52.2	64.4	-12.2	54.4	-2.2
0.19955	43.66	PK	1.3	44.96	63.6	-18.64	53.6	-8.64
0.21796	44.46	PK	1.2	45.66	62.9	-17.24	52.9	-7.24
0.2433	43.55	PK	1	44.55	62	-17.45	52	-7.45
0.27487	41.06	PK	0.9	41.96	61	-19.04	51	-9.04
0.31989	38.51	PK	0.7	39.21	59.7	-20.49	49.7	-10.49
PK - Peak detector								
QP - Quasi-Peak detector								
Av - Average detector								

LINE 1 RESULTS – USB CABLE

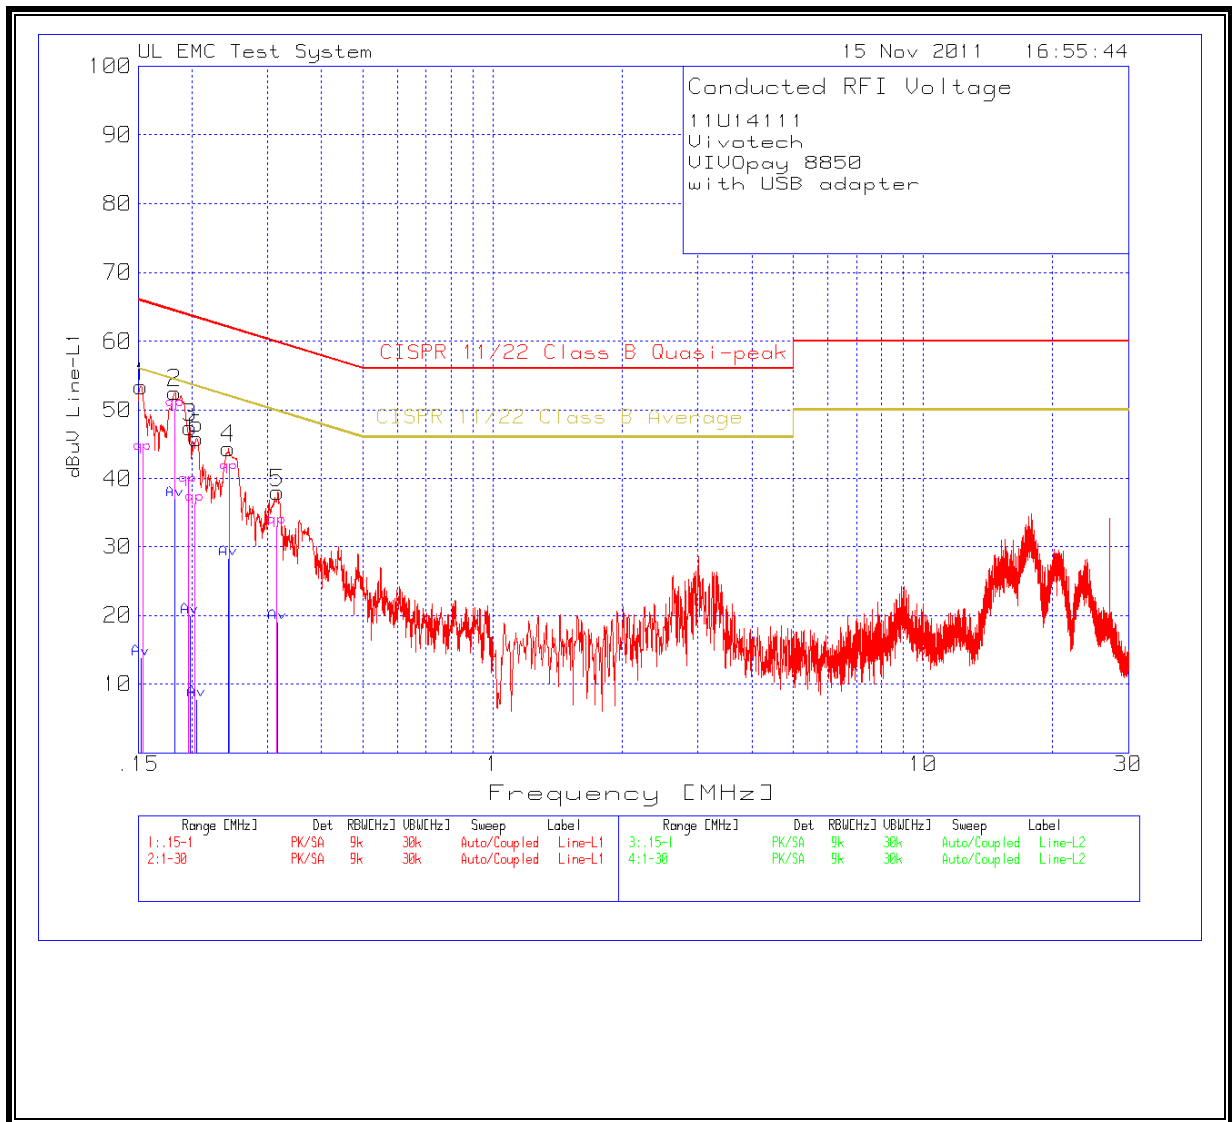

LINE 2 RESULTS – USB CABLE

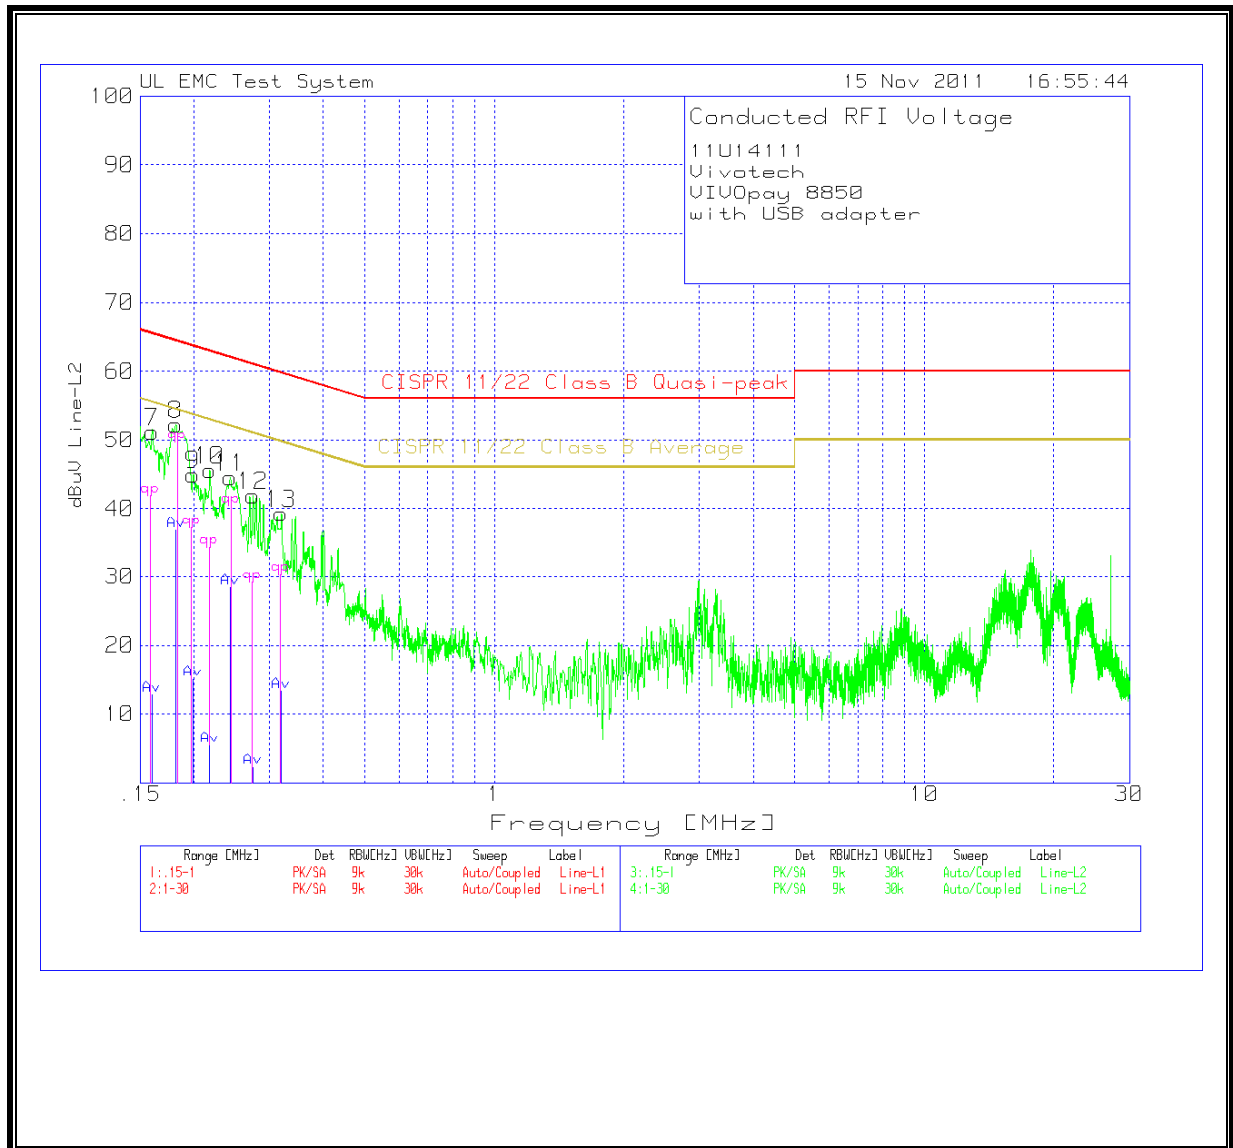

9. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.3.1 and 2.3.2

RESULTS

No non-compliance noted.

Reference Frequency: EUT Channel 13.56 MHz @ 20°C				
Limit: ± 100 ppm = 135.600 kHz				
Power Supply (Vac)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
115.00	50	13.5600000	0.000	± 100
115.00	40	13.5600000	0.000	± 100
115.00	30	13.5600000	0.000	± 100
115.00	20	13.5600000	0.000	± 100
115.00	10	13.5600000	0.000	± 100
115.00	0	13.5600000	0.000	± 100
115.00	-10	13.5603000	-0.221	± 100
115.00	-20	13.5603000	-0.221	± 100
97.15	20	13.5600000	0.000	± 100
132.25	20	13.5600000	0.000	± 100

10. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Frequency (MHz)	99% Bandwidth (kHz)
13.56	21.5277

99% BANDWIDTH

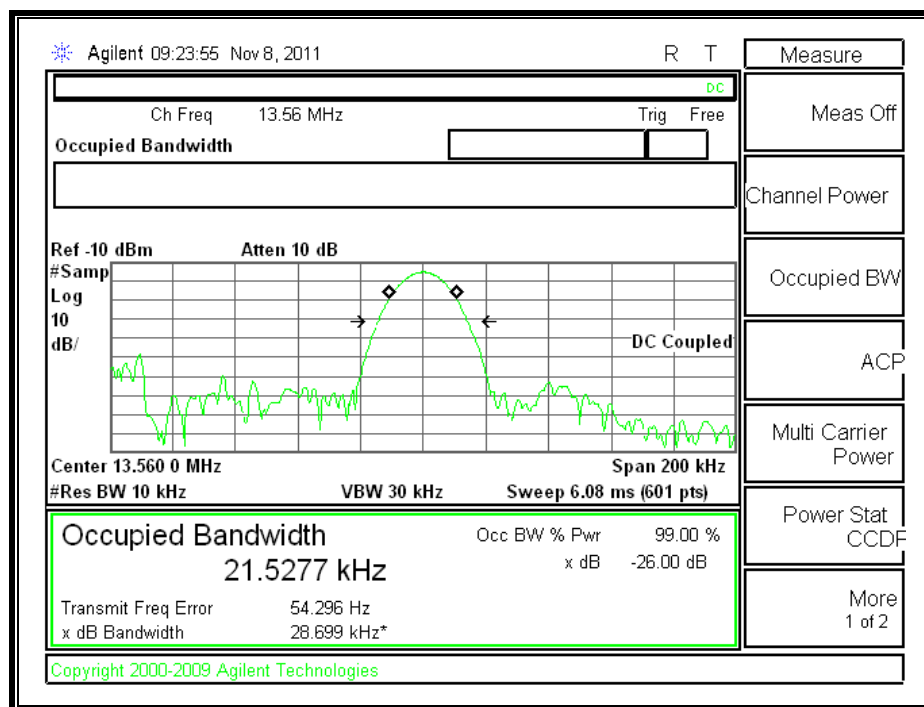

11. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classified As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes: 1. Frequency, *f*, is in MHz.
2. A power density of 10 W/m² is equivalent to 1 mW/cm².
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m²

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m² is converted to units of mW/cm² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \pi * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P_1 * G_1) + (P_2 * G_2) + \dots + (P_n * G_n)$$

where

Px = Power of transmitter x

Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

The transmitter has a maximum E-field at 10 m distance as follows:

EIRP = E field at 3m distance – 95.2

E field at 3m distance = E field at 10m distance + 20 = 55.49 + 20 = 75.49 dBμV/m

EIRP = 75.49 - 95.2 = **-19.71 dBm = 0.00001 W**, which is less than 2.5 W based on section 2.2 of RSS 210; therefore this test is not applicable.

12. SETUP PHOTOS

RADIATED EMISSIONS BELOW 30 MHz

RADIATED EMISSIONS BELOW 30MHz (FRONT)



RADIATED EMISSIONS BELOW 30MHz (BACK)




RADIATED EMISSION ABOVE 30 MHz

RADIATED EMISSIONS ABOVE 30 MHz (FRONT) – RS-232 CABLE



RADIATED EMISSIONS ABOVE 30 MHz (BACK) – RS-232 CABLE

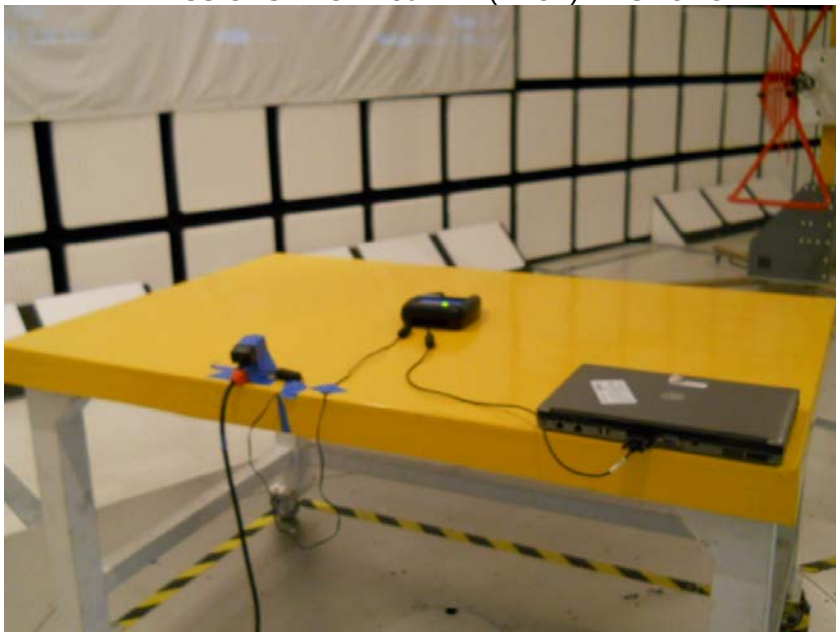

RADIATED EMISSION ABOVE 30 MHz



AC MAINS LINE CONDUCTED EMISSION

LINE CONDUCTED EMISSION (FRONT)



LINE CONDUCTED EMISSION (BACK) RS-232 CABLE



LINE CONDUCTED EMISSION (BACK) USB CABLE



FREQUENCY TOLERANCE OVER EXTREME CONDITIONS

FREQUENCY TOLERANCE OVER EXTREME CONDITIONS



END OF REPORT